



MEASUREMENT REPORT

FCC ID: XMR2023RG520NNA
Applicant: Quectel Wireless Solutions Co., Ltd
Product: 5G Sub-6 GHz LGA Module
Model No.: RG520N-NA
Brand Name: Quectel
FCC Rule Part(s): Part 2, 27
Result: Complies
Received Date: 2023-03-23
Test Date: 2023-03-23 ~ 2023-05-14

Reviewed By:

Sunny Sun

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2203RSU050-U1	Rev. 01	Initial Report	2023-04-24	Invalid
2203RSU050-U1	Rev. 02	Added some BWs of n41/66/77/78	2023-05-17	Valid

Note: This report is based on FCC ID: XMR2022RG520NNA increasing 5G NR n41/77/78 UL MIMO Power Class to PC 1.5 and add channel bandwidth via SW.

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Radio Specification under Testing.....	6
1.6. Description of Available Antennas.....	7
1.7. Test Methodology	7
1.8. Device Capabilities	8
2. Test Configuration	9
2.1. Test System Connection Diagram.....	9
2.2. Test Environment Condition	9
3. Measuring Instrument	10
4. Decision Rules and Measurement Uncertainty.....	11
4.1. Decision Rules	11
4.2. Measurement Uncertainty.....	11
5. Test Result	12
5.1. Summary.....	12
5.2. Occupied Bandwidth Measurement	13
5.2.1. Test Limit	13
5.2.2. Test Procedure	13
5.2.3. Test Setting	13
5.2.4. Test Setup	13
5.2.5. Test Result	14
5.3. Frequency Stability Measurement	15
5.3.1. Test Limit	15
5.3.2. Test Procedure	15
5.3.3. Test Setting	15
5.3.4. Test Setup	16
5.3.5. Test Result	16
5.4. Equivalent Isotropically Radiated Power Measurement	17
5.4.1. Test Limit	17
5.4.2. Test Procedure	17
5.4.3. Test Setting	17

5.4.4.	Test Setup	17
5.4.5.	Test Result	18
5.5.	Peak to Average Ratio Measurement	19
5.5.1.	Test Limit	19
5.5.2.	Test Procedure	19
5.5.3.	Test Setting	19
5.5.4.	Test Setup	19
5.5.5.	Test Result	19
5.6.	Band Edge Measurement	20
5.6.1.	Test Limit	20
5.6.2.	Test Procedure	20
5.6.3.	Test Setting	21
5.6.4.	Test Setup	21
5.6.5.	Test Result	21
5.7.	Conducted Spurious Emissions Measurement.....	22
5.7.1.	Test Limit	22
5.7.2.	Test Procedure	22
5.7.3.	Test Setting	22
5.7.4.	Test Setup	23
5.7.5.	Test Result	23
5.8.	Radiated Spurious Emissions Measurement.....	24
5.8.1.	Test Limit	24
5.8.2.	Test Procedure	24
5.8.3.	Test Setting	24
5.8.4.	Test Setup	25
5.8.5.	Test Result	25
Appendix A - Test Result		26
A.1	Occupied Bandwidth Test Result	26
A.2	Frequency Stability Test Result.....	56
A.3	Equivalent Isotropically Radiated Power Test Result.....	59
A.4	Peak to Average Ratio Test Result	221
A.5	Band Edge Test Result	224
A.6	Conducted Spurious Emissions Test Result	248
A.7	Radiated Spurious Emissions Test Result	273
Appendix B - Test Setup Photograph		276
Appendix C - EUT Photograph		277

1. General Information

1.1. Applicant

Quectel Wireless Solutions Co., Ltd

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

1.2. Manufacturer

Quectel Wireless Solutions Co., Ltd

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

1.3. Testing Facility

☒	Test Site - MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☐	Test Site - MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site - MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: L3261-190725 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	5G Sub-6 GHz LGA Module
Model No.	RG520N-NA
Brand Name	Quectel
IMEI	863109050057814
E-UTRA Single Band	Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 38, 41, 48, 66, 71
5G NR SA Band	n2, n5, n7, n12, n13, n14, n25, n26, n30, n38, n41, n48, n66, n71, n77, n78
SCS for NR cell	FDD Band: 15kHz; TDD Band: 30kHz
Operating Temperature	-30 ~ 75 °C
Supply Voltage	3.3 ~ 4.4Vdc, typical 3.8Vdc
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Testing

5G NR Specification	
TDD Frequency Range	n41: 2496 ~ 2690 MHz; n77: 3450 ~ 3550, 3700 ~ 3980MHz n78: 3450 ~ 3550, 3700 ~ 3800MHz
Support Bandwidth	n41: 10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100MHz n77, n78: 10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100MHz
Modulation	UL & DL up to 256QAM
Power Class	1.5

1.6. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
n41	2496 ~ 2690	Dipole	2.07
n77	3450 ~ 3550 3700 ~ 3980		0.58
n78	3450 ~ 3550 3700 ~ 3800		0.58

Note 1: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.

Note 2: The typical antennas used to calculate the ERP (EIRP).

1.7. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 2, Part 22, Part 24, Part 27
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP
- FCC KDB 662911 D01 v02r01: Multiple Transmitter Output

1.8. Device Capabilities

This device contains 5G NR SA & EN-DC the following capabilities:

Working on NR Band n2, n5, n7, n12, n13, n25, n26, n30, n38, n41, n66, n71, n77, n78.


n77 (3300 ~ 4200 MHz) overlaps the entire frequency range of n78 (3300 ~ 3800 MHz). Therefore, test data provided in this report covers n78 as well as n77.

PI/2 BPSK modulation applied for 5G NR band frequencies and has the same tune up power as QPSK modulations.

The worst-case scenario for all measurements is based on an engineering evaluation and QPSK was observed as the worst one and set for all conducted and radiated. Output power measurements were measured on DFT-s-OFDM PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM, and CP-OFDM QPSK modulations.

2. Test Configuration

2.1. Test System Connection Diagram

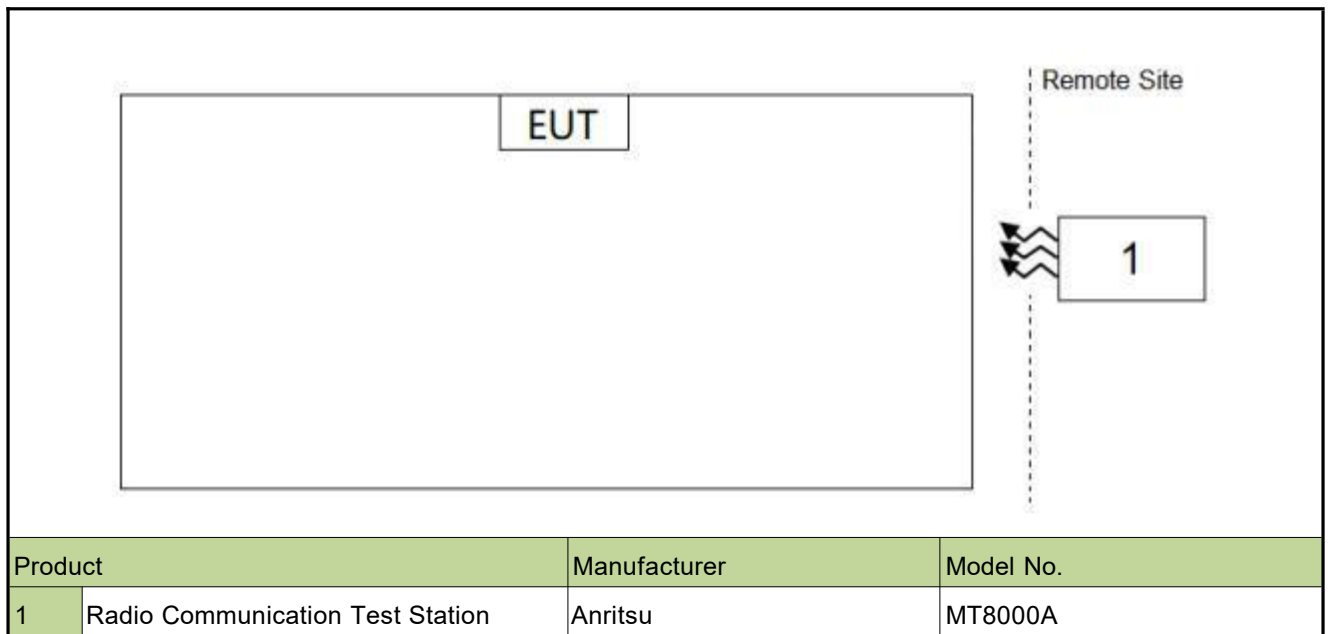

2.2. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Thermohygrometer	testo	608-H1	MRTSUE06362	1 year	2024-02-14	WZ-SR6
Shielding Room	HUAMING	WZ-SR6	MRTSUE06443	N/A	N/A	WZ-SR6
Signal Analyzer	Keysight	N9020B	MRTSUE06583	1 year	2023-10-08	WZ-SR6
Signal Generator	Keysight	N5173B	MRTSUE06606	1 year	2023-11-25	WZ-SR6
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06942	1 year	2024-02-29	WZ-SR6
Radio Communication Analyzer	Anritsu	MT8821C	MRTSUE06960	1 year	2023-07-08	WZ-SR6
Radio Communication Test Station	Anritsu	MT8000A	MRTSUE06961	1 year	2023-06-30	WZ-SR6
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2023-05-20	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2023-06-04	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2023-11-27	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2023-10-13	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2023-05-08	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2024-05-07	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2023-04-21	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2024-04-20	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11038	1 year	2023-11-01	WZ-AC2
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2023-10-08	WZ-TR3
Vibration Test System	DongLing	ES-1-150	MRTSUE06206	1 year	2023-07-07	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2023-06-06	WZ-TR3

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802	1.02	RE Antenna & Turntable

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Spurious Emissions
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
Conducted Spurious Emissions
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.13dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.28%
Frequency Stability
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 76.2Hz

5. Test Result

5.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Test Result
2.1049	Occupied Bandwidth	Conducted	Pass
2.1055, 27.54	Frequency Stability		
27.50(h)(2), (j)(3), (k)(3)	Equivalent Isotropic Radiated Power		
27.50(j), (k)(4)	Peak to Average Ratio		
2.1051, 27.53(m), (n), (l)(2)	Band Edge		
2.1051, 27.53(m), (n), (l)(2)	Spurious Emission	Radiated	Pass
2.1051, 27.53(m), (n), (l)(2)	Spurious Emissions		

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer.
The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected.
Therefore, the Frequency Stability, Channel Band Edge, Conducted & Radiated Spurious Emission were presented worst-case in the test report.
- 3) For radiated emission tests, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

5.2. Occupied Bandwidth Measurement

5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

5.2.4. Test Setup

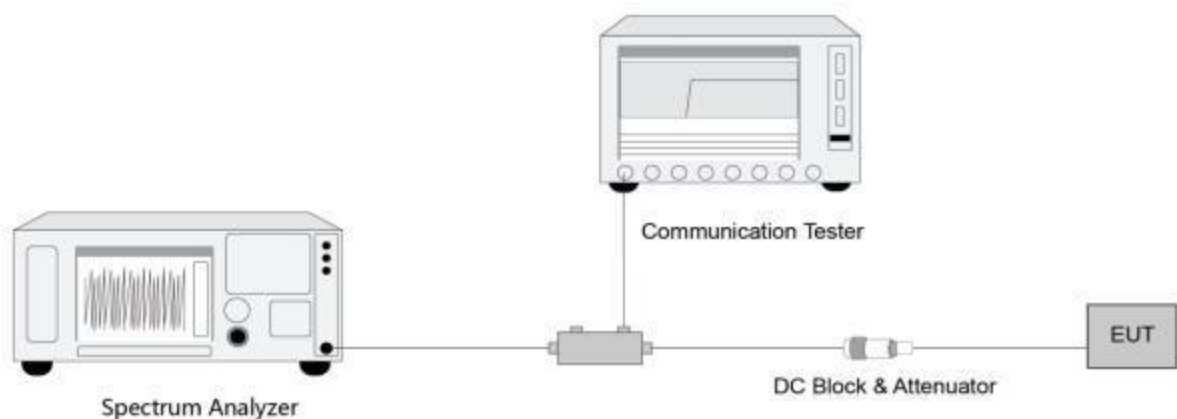

5.2.5. Test Result

Refer to Appendix A.1.

5.3. Frequency Stability Measurement

5.3.1. Test Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

5.3.2. Test Procedure

ANSI C63.26-2015 - Section 5.4 & 5.6

5.3.3. Test Setting

1. Use the occupied bandwidth function of the instrument and record the low edge for low channel occupancy bandwidth and the high edge for high channel occupancy bandwidth.
2. Change the temperature of equipment and repeat Steps 1.
3. Change the Voltage of equipment and repeat Steps 1.
4. Use the frequency error function of the instrument and record the frequency error.
5. Change the temperature of equipment and repeat Steps 4.
6. Change the Voltage of equipment and repeat Steps 4.

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

5.3.4. Test Setup

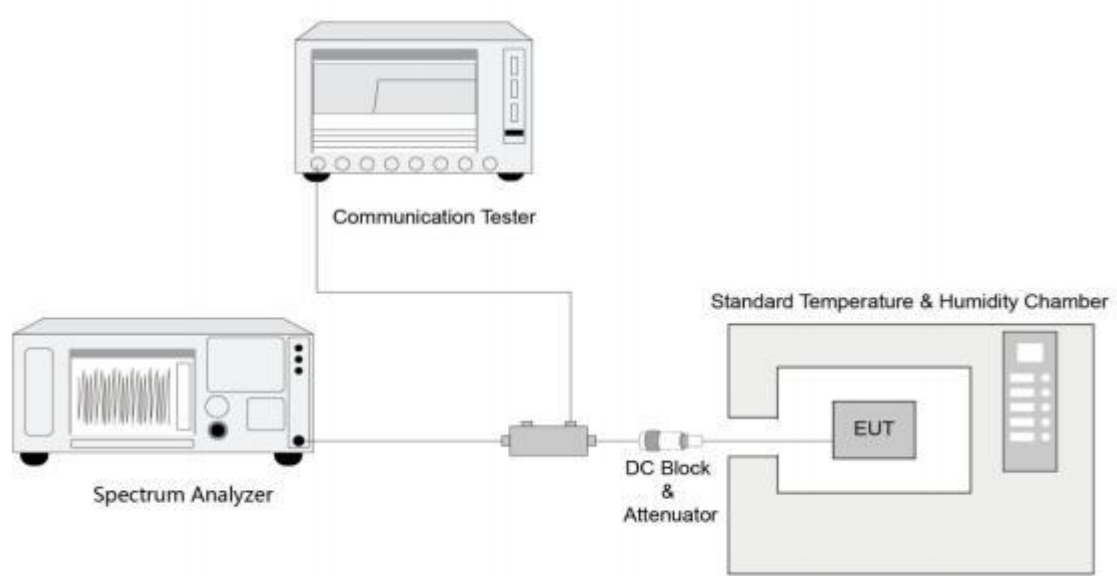

5.3.5. Test Result

Refer to Appendix A.2.

5.4. Equivalent Isotropically Radiated Power Measurement

5.4.1. Test Limit

The EIRP of mobile transmitters must not exceed 2 watts for n41 .

The EIRP of mobile transmitters must not exceed 1 watt for n77 & n78.

5.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.2

5.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

$$\text{ERP} = \text{EIRP} - 2.15$$

5.4.4. Test Setup

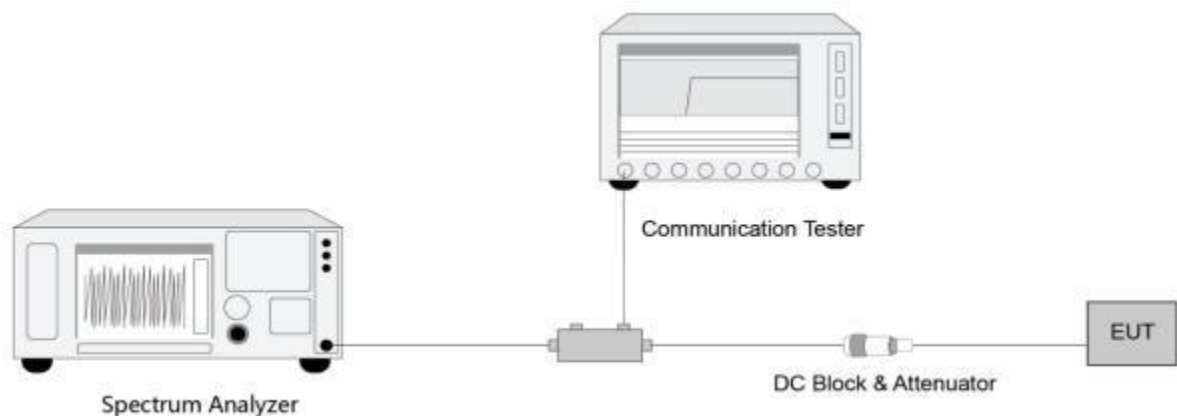

5.4.5. Test Result

Refer to Appendix A.3.

5.5. Peak to Average Ratio Measurement

5.5.1. Test Limit

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.


5.5.2. Test Procedure

ANSI C63.26-2015 - Section 5.2.3.4 (CCDF).

5.5.3. Test Setting

1. Set the resolution / measurement bandwidth $\geq$ signal's occupied bandwidth
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Record the maximum PARR level associated with a probability of 0.1%

5.5.4. Test Setup

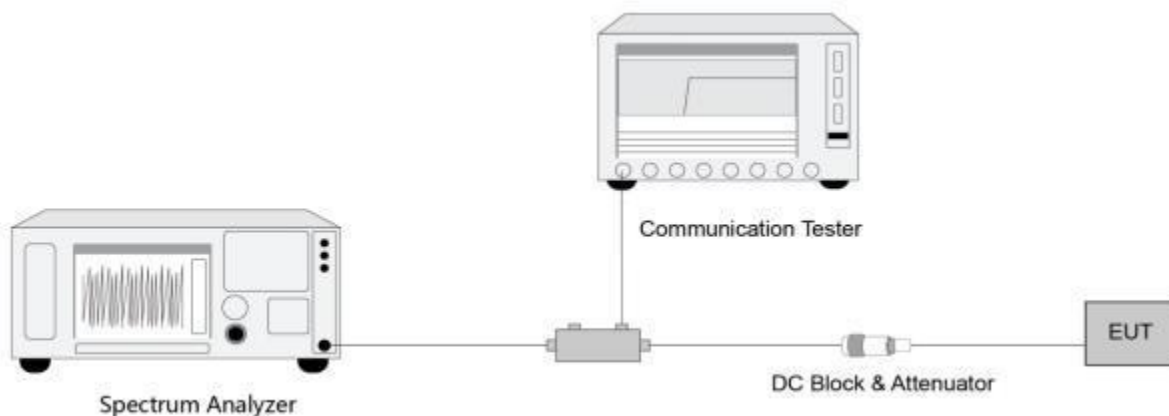

5.5.5. Test Result

Refer to Appendix A.4.

5.6. Band Edge Measurement

5.6.1. Test Limit

27.53 (n) (l)(2)

The FCC limit is $43 + 10\log_{10}(P_{\text{Watts}})$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth.

However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.


5.6.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

5.6.3. Test Setting

1. Set the analyzer frequency to low or high channel
2. $RBW \geq$ The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3. $VBW \geq 3 \cdot RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.6.4. Test Setup

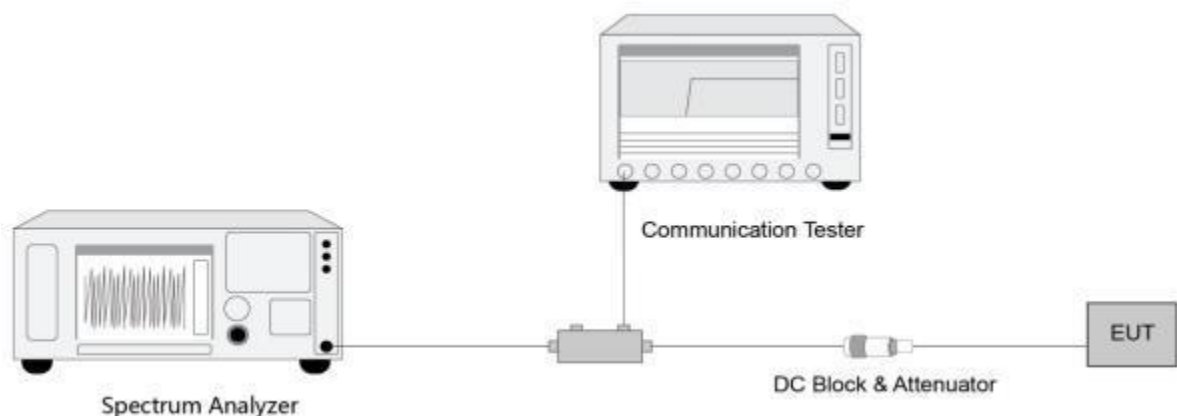

5.6.5. Test Result

Refer to Appendix A.5.

5.7. Conducted Spurious Emissions Measurement

5.7.1. Test Limit

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.


5.7.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

5.7.3. Test Setting

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW $\geq 3 \times$ RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.7.4. Test Setup

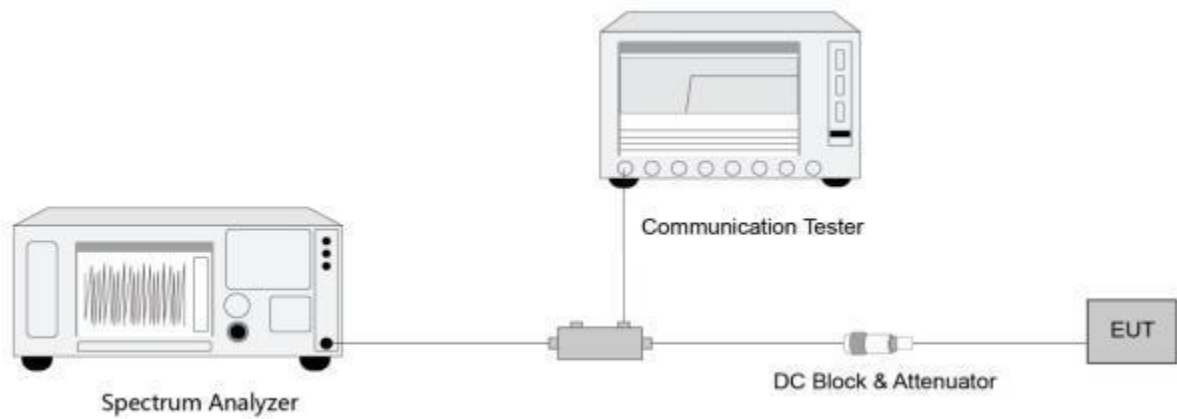

5.7.5. Test Result

Refer to Appendix A.6.

5.8. Radiated Spurious Emissions Measurement

5.8.1. Test Limit

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

$E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20 \log D + 104.8$; where D is the measurement distance in meters. The emission limit equal to 82.3dB μ V/m or 70.3dB μ V/m.

5.8.2. Test Procedure


ANSI C63.26-2015 - Section 5.2.7 & 5.5

5.8.3. Test Setting


1. RBW = 1MHz
2. VBW $\geq 3 \times$ RBW
3. Sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})$
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

5.8.4. Test Setup

Below 1GHz Test Setup:

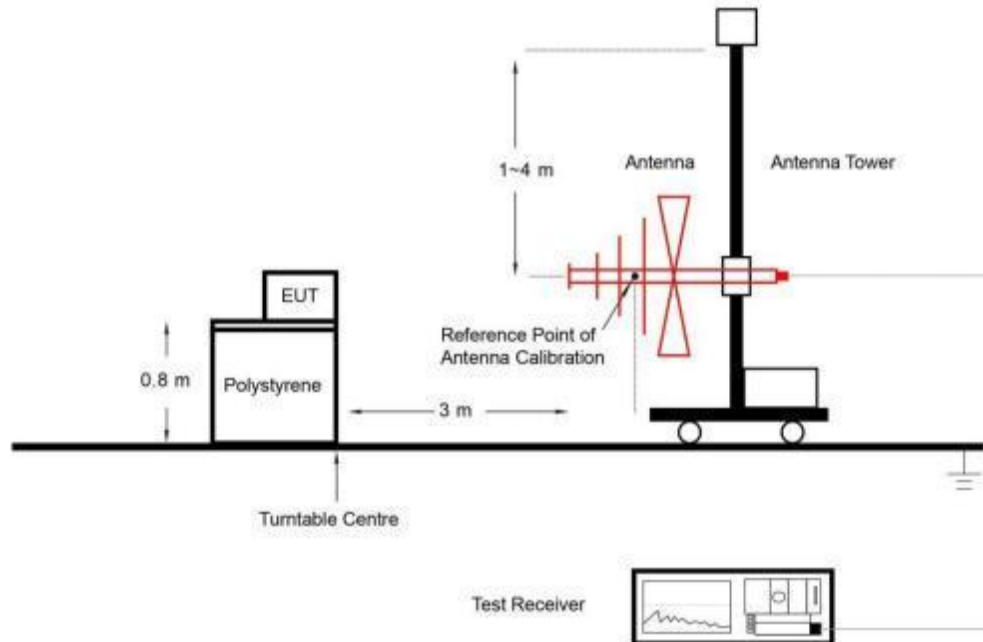

Above 1GHz Test Setup:

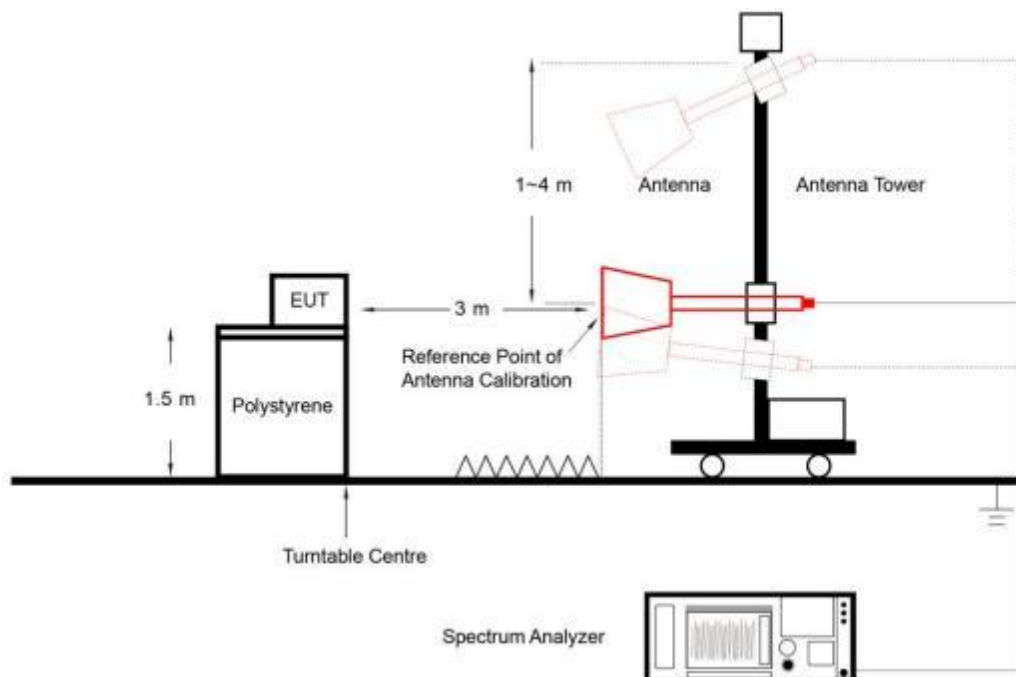

5.8.5. Test Result

Refer to Appendix A.7.

Appendix A - Test Result

A.1 Occupied Bandwidth Test Result


Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023-04-13 2023-05-10	Test Band	n41_UL MIMO

Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK		
2592.99	10	8.61
2592.99	15	13.57
2592.99	20	18.22
2592.99	30	27.83
2592.99	40	37.76
2592.99	50	47.43
2592.99	60	57.71
2592.99	70	67.36
2592.99	80	77.28
2592.99	90	87.34
2592.99	100	97.26
16QAM		
2592.99	10	8.59
2592.99	15	13.60
2592.99	20	18.22
2592.99	30	27.85
2592.99	40	38.01
2592.99	50	47.48
2592.99	60	57.71
2592.99	70	67.33
2592.99	80	77.37
2592.99	90	87.29
2592.99	100	97.30


64QAM		
2592.99	10	8.61
2592.99	15	13.57
2592.99	20	18.25
2592.99	30	27.86
2592.99	40	37.75
2592.99	50	47.51
2592.99	60	57.78
2592.99	70	67.39
2592.99	80	77.40
2592.99	90	87.31
2592.99	100	97.20
256QAM		
2592.99	10	8.56
2592.99	15	13.56
2592.99	20	18.19
2592.99	30	27.83
2592.99	40	37.75
2592.99	50	47.51
2592.99	60	57.78
2592.99	70	67.40
2592.99	80	77.32
2592.99	90	87.35
2592.99	100	97.40

99% Bandwidth - QPSK


10MHz Channel Bandwidth

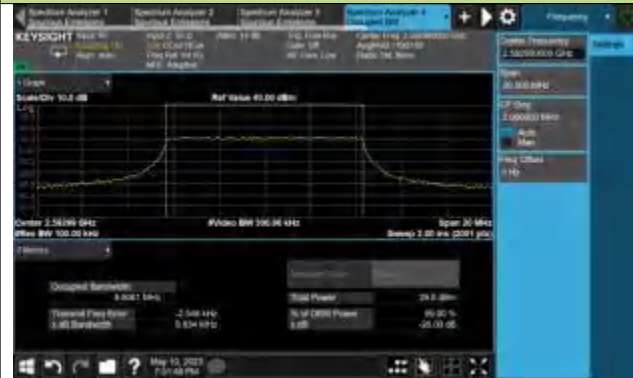


15MHz Channel Bandwidth

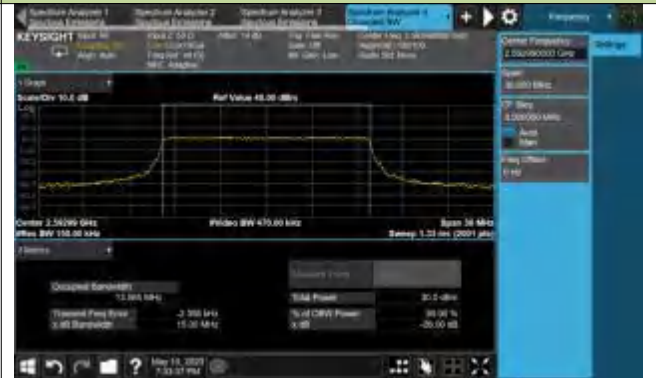

20MHz Channel Bandwidth

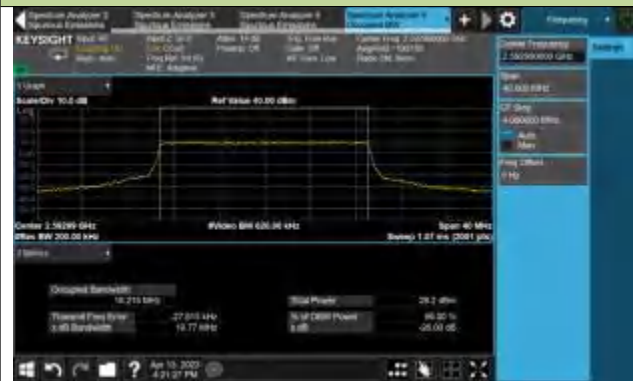

30MHz Channel Bandwidth

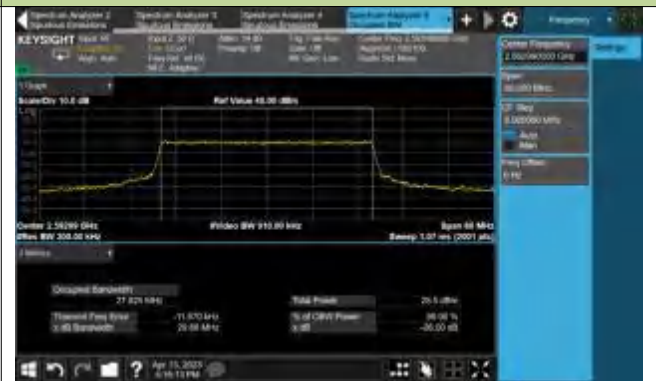

40MHz Channel Bandwidth



50MHz Channel Bandwidth




60MHz Channel Bandwidth




70MHz Channel Bandwidth



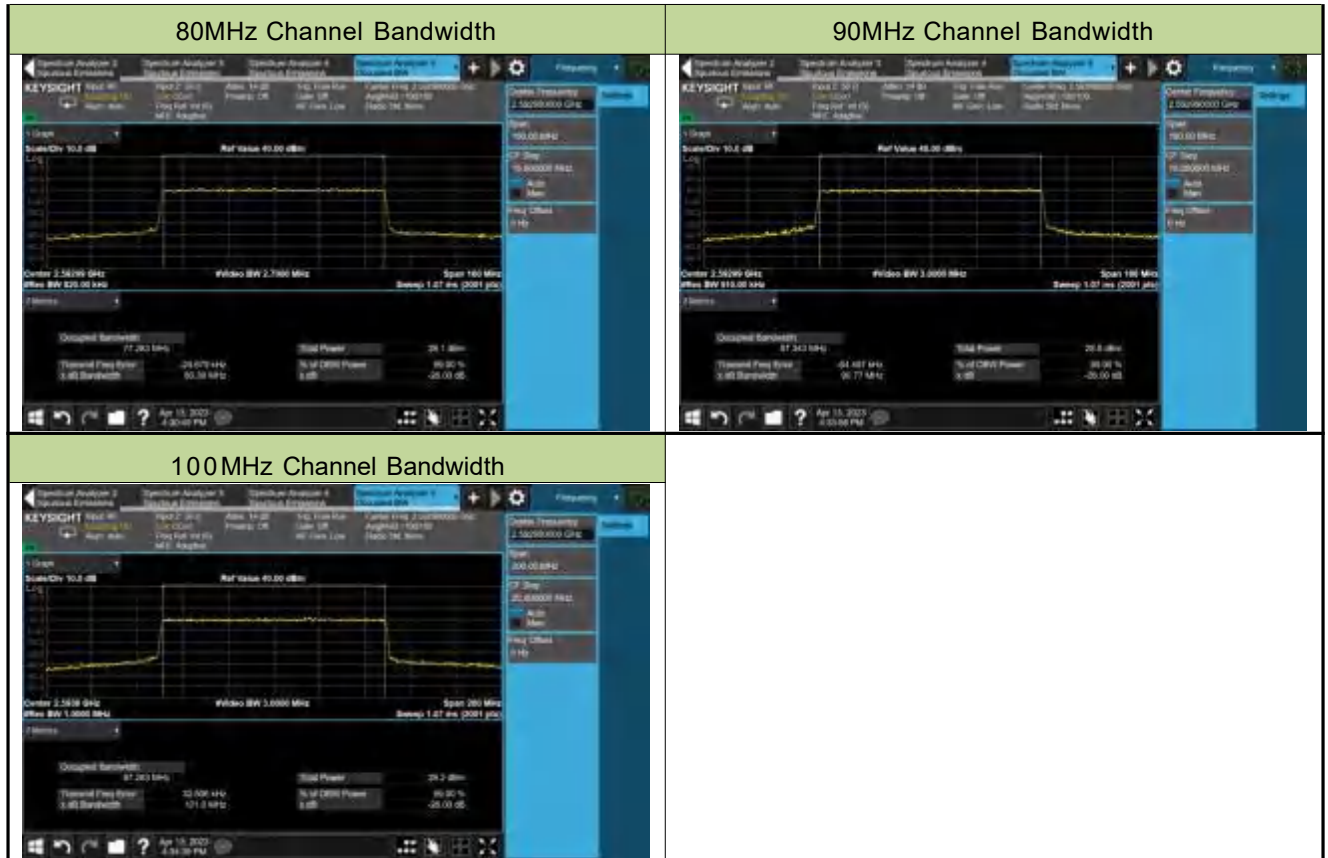


99% Bandwidth - 16QAM


10MHz Channel Bandwidth

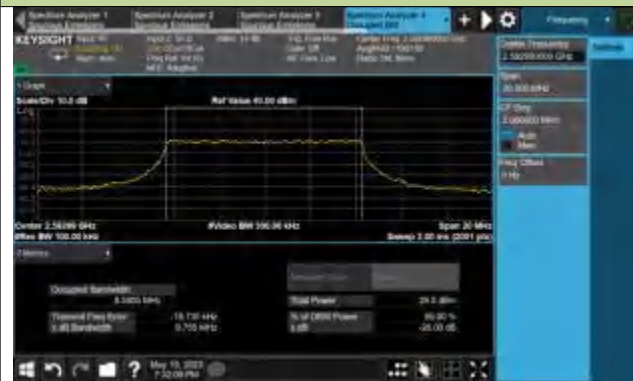

15MHz Channel Bandwidth

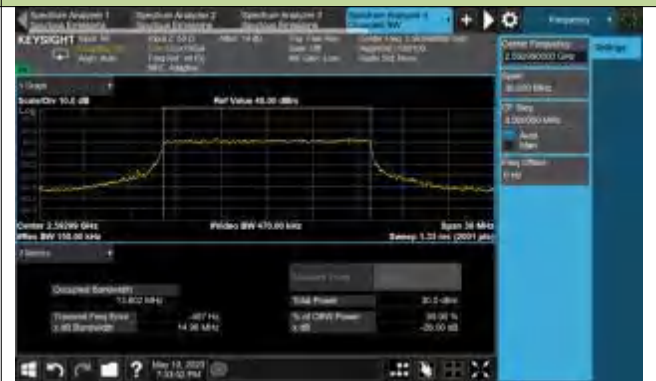

20MHz Channel Bandwidth

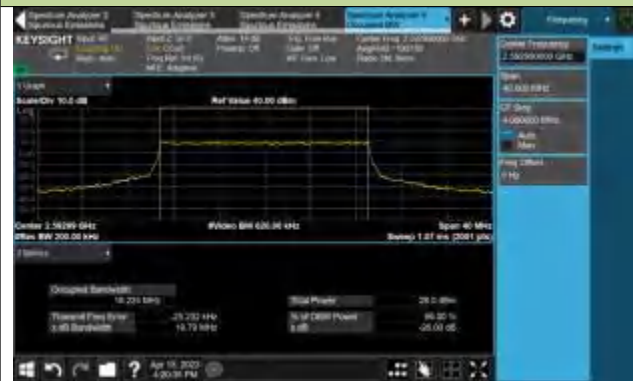

30MHz Channel Bandwidth



40MHz Channel Bandwidth



50MHz Channel Bandwidth




60MHz Channel Bandwidth




70MHz Channel Bandwidth



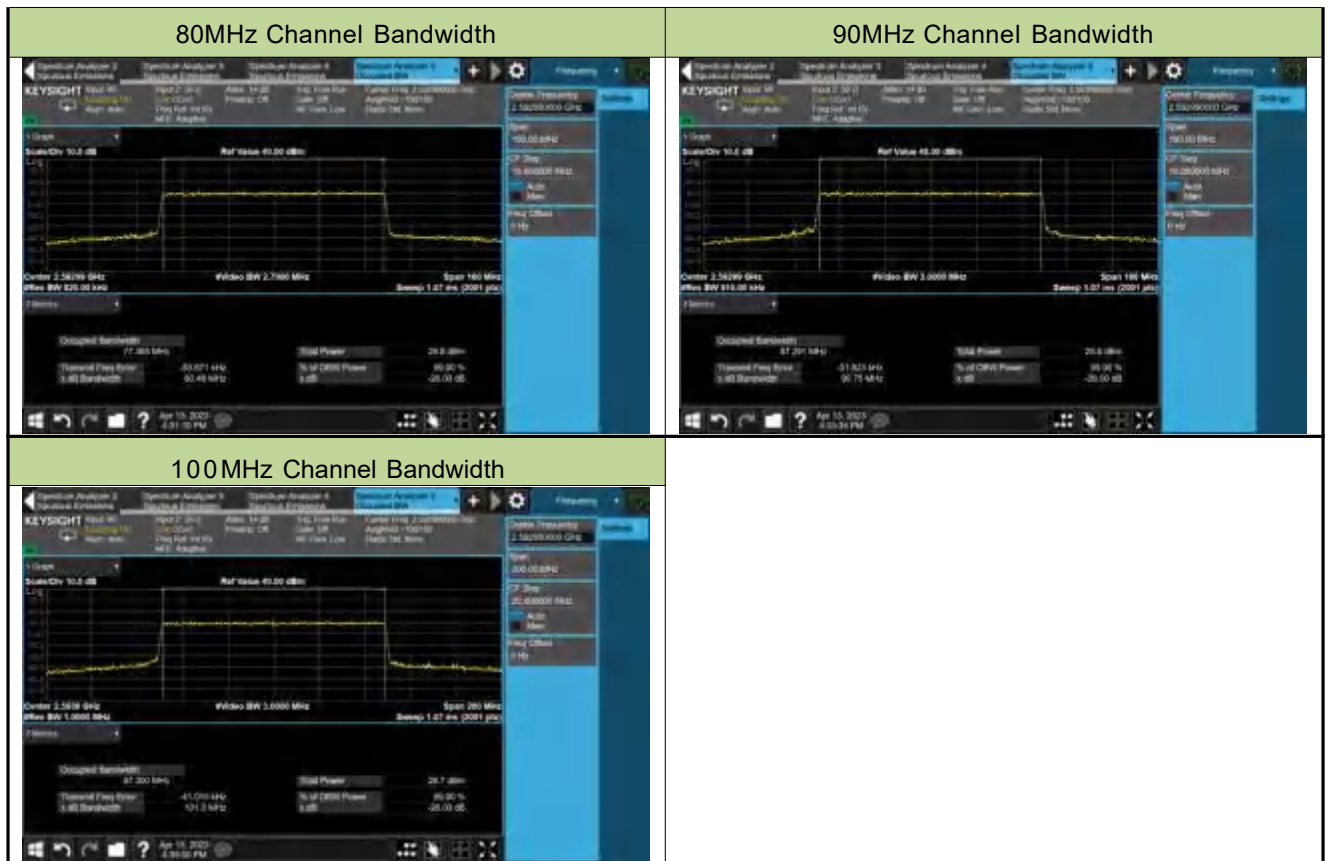


99% Bandwidth - 64QAM


10MHz Channel Bandwidth

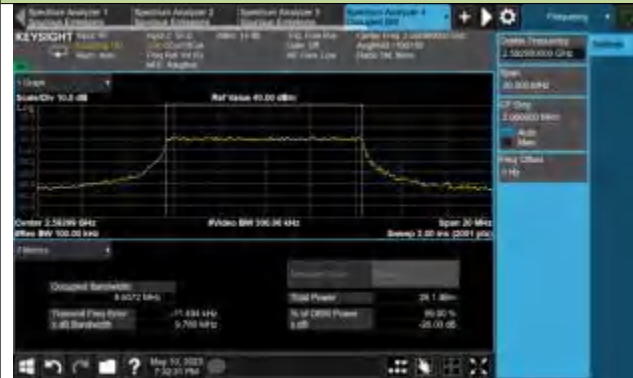

15MHz Channel Bandwidth

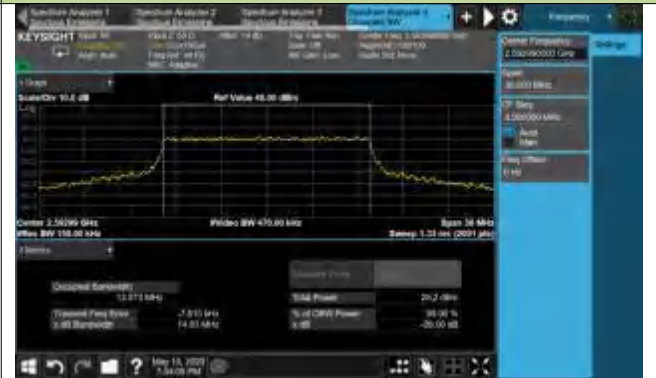


20MHz Channel Bandwidth

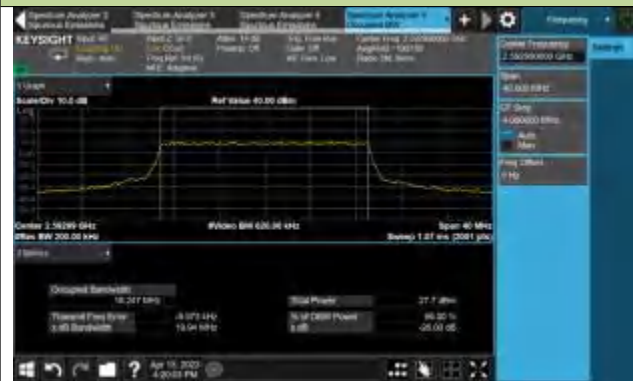


30MHz Channel Bandwidth



40MHz Channel Bandwidth

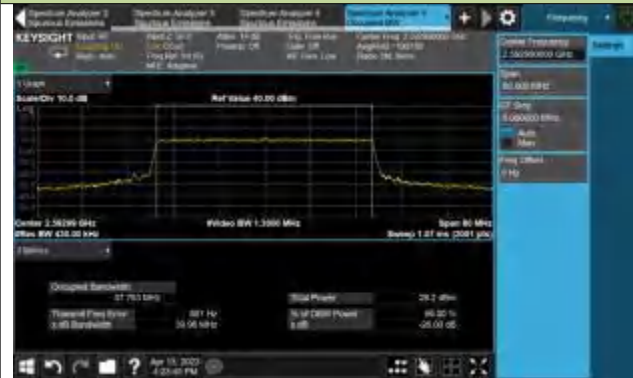

50MHz Channel Bandwidth

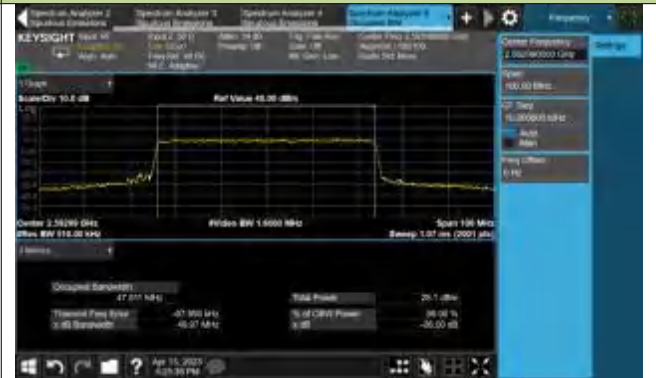


60MHz Channel Bandwidth




70MHz Channel Bandwidth



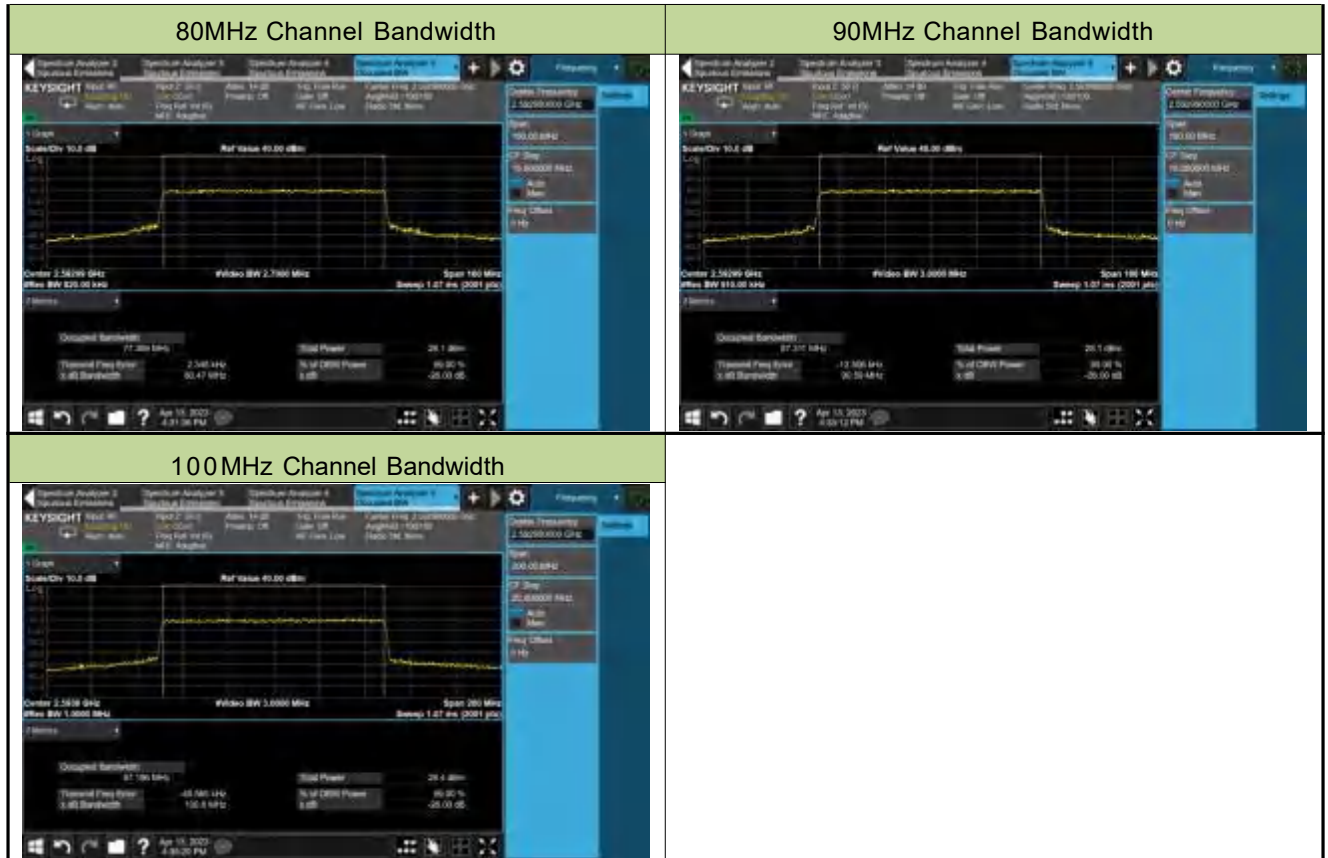

99% Bandwidth - 256QAM


10MHz Channel Bandwidth

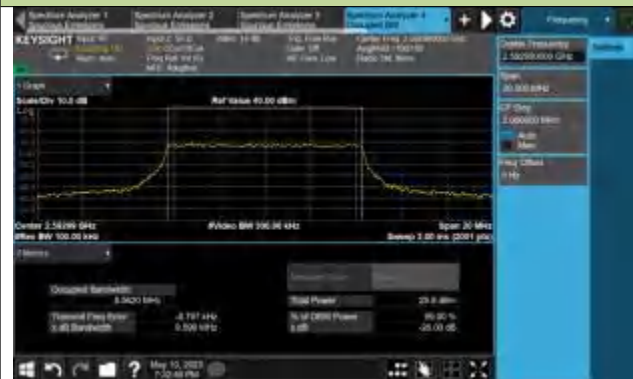

15MHz Channel Bandwidth



20MHz Channel Bandwidth

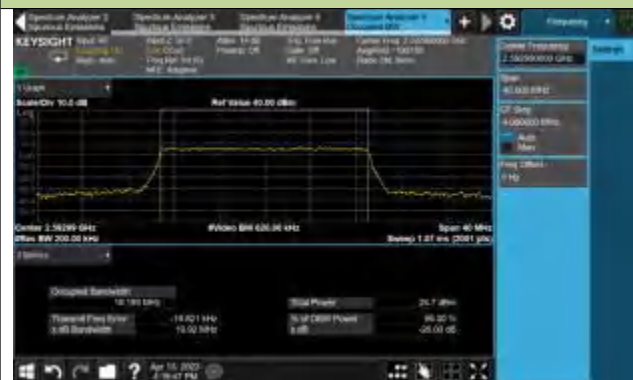

30MHz Channel Bandwidth



40MHz Channel Bandwidth



50MHz Channel Bandwidth




60MHz Channel Bandwidth



70MHz Channel Bandwidth



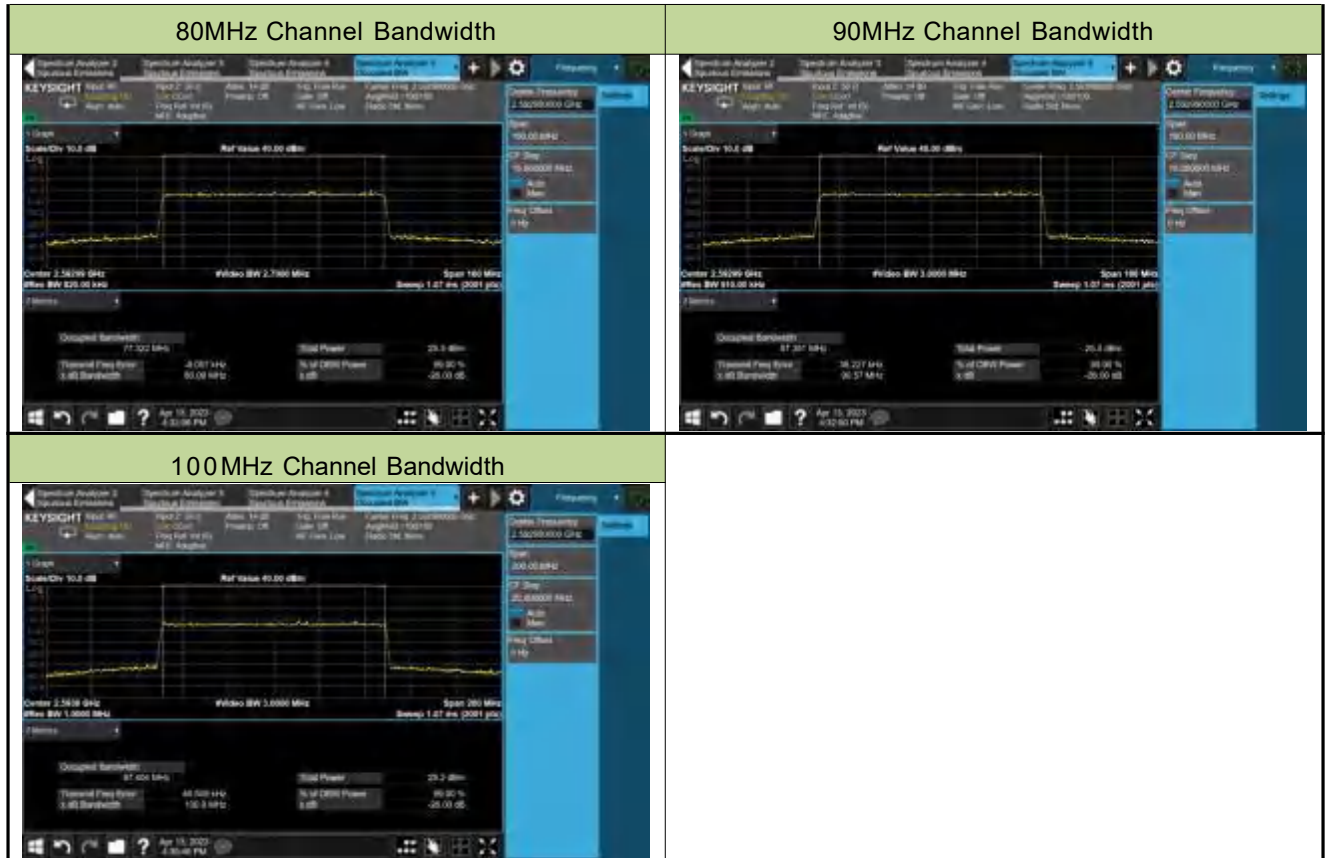


Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023-04-13 2023-05-10	Test Band	n77/n78_UL MIMO (3450 ~ 3550MHz)

Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK		
3500.01	10	8.62
3500.01	15	13.56
3500.01	20	18.23
3500.01	25	23.20
3500.01	30	27.85
3500.01	40	37.76
3500.01	50	47.38
3500.01	60	57.73
3500.01	70	67.43
3500.01	80	77.31
3500.01	90	87.40
3500.01	100	97.32
16QAM		
3500.01	10	8.62
3500.01	15	13.62
3500.01	20	18.21
3500.01	25	23.22
3500.01	30	27.83
3500.01	40	37.94
3500.01	50	47.42
3500.01	60	57.71
3500.01	70	67.39
3500.01	80	77.35
3500.01	90	87.31
3500.01	100	97.39


64QAM		
3500.01	10	8.65
3500.01	15	13.60
3500.01	20	18.21
3500.01	25	23.20
3500.01	30	27.86
3500.01	40	37.75
3500.01	50	47.49
3500.01	60	57.81
3500.01	70	67.35
3500.01	80	77.37
3500.01	90	87.33
3500.01	100	97.32
256QAM		
3500.01	10	8.59
3500.01	15	13.57
3500.01	20	18.17
3500.01	25	23.21
3500.01	30	27.84
3500.01	40	37.95
3500.01	50	47.48
3500.01	60	57.72
3500.01	70	67.42
3500.01	80	77.36
3500.01	90	87.46
3500.01	100	97.33

99% Bandwidth - QPSK

10MHz Channel Bandwidth

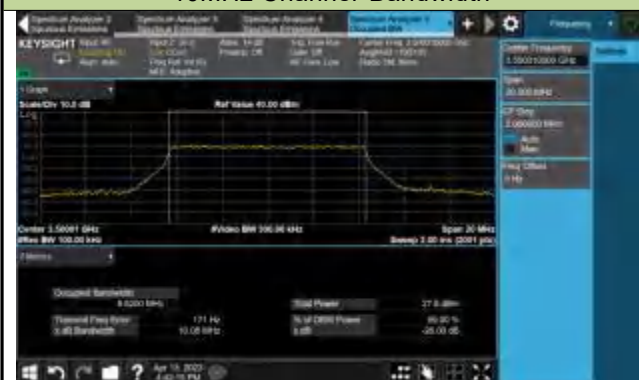

15MHz Channel Bandwidth

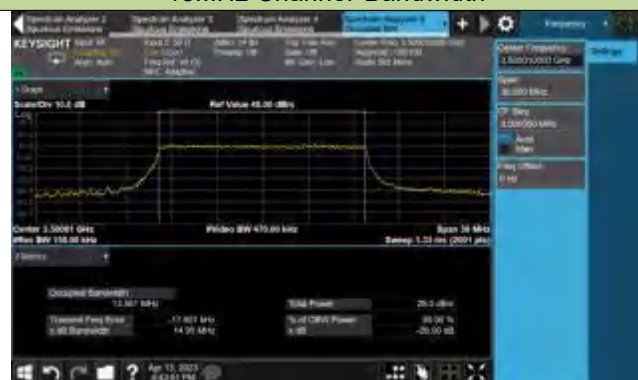


20MHz Channel Bandwidth



30MHz Channel Bandwidth



40MHz Channel Bandwidth

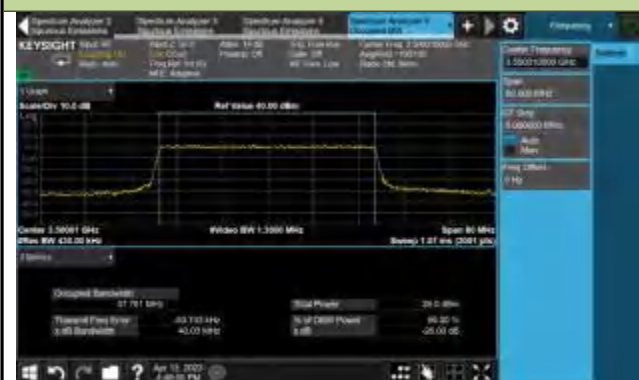

50MHz Channel Bandwidth



60MHz Channel Bandwidth




70MHz Channel Bandwidth





99% Bandwidth - 16QAM

10MHz Channel Bandwidth

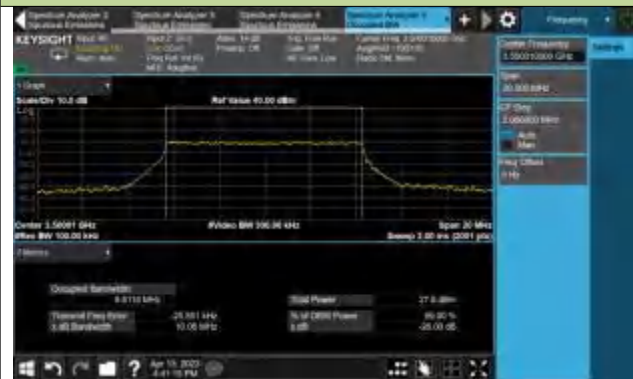

15MHz Channel Bandwidth




20MHz Channel Bandwidth



30MHz Channel Bandwidth




40MHz Channel Bandwidth

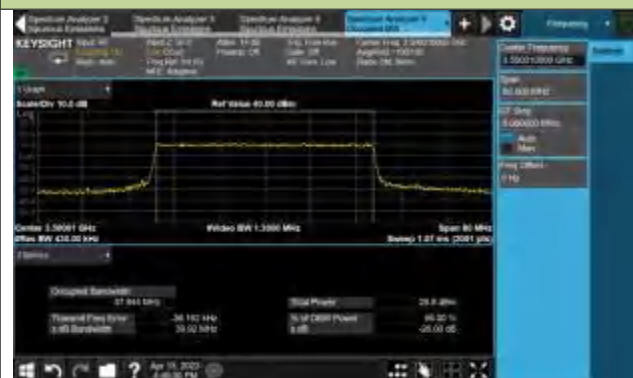

50MHz Channel Bandwidth



60MHz Channel Bandwidth

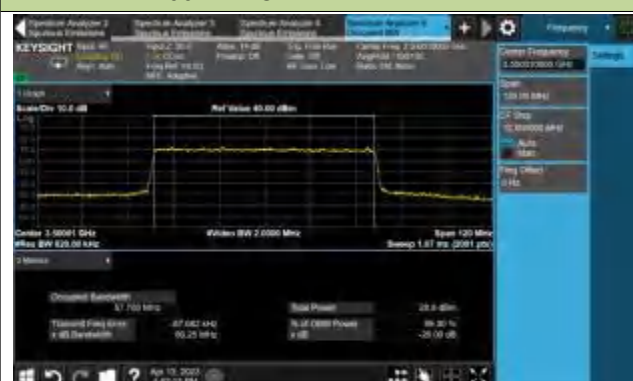


70MHz Channel Bandwidth





99% Bandwidth - 64QAM

10MHz Channel Bandwidth

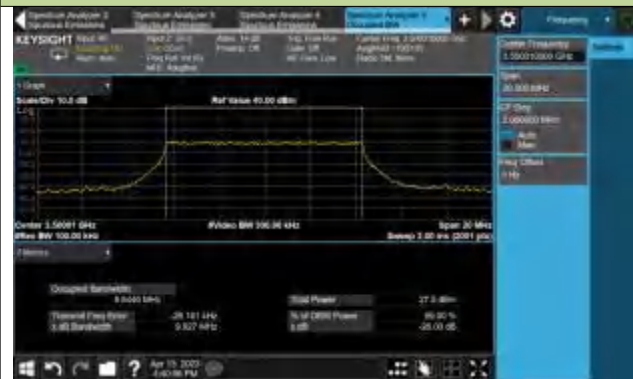

15MHz Channel Bandwidth



20MHz Channel Bandwidth



30MHz Channel Bandwidth




40MHz Channel Bandwidth



50MHz Channel Bandwidth



60MHz Channel Bandwidth

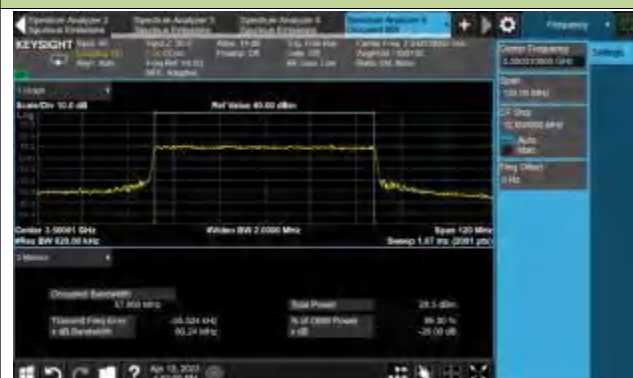


70MHz Channel Bandwidth






99% Bandwidth - 256QAM

10MHz Channel Bandwidth

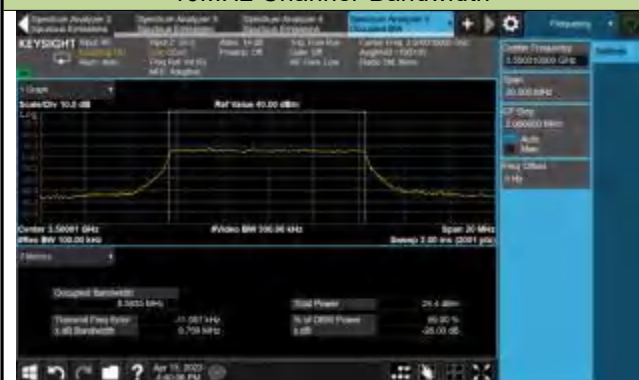

15MHz Channel Bandwidth

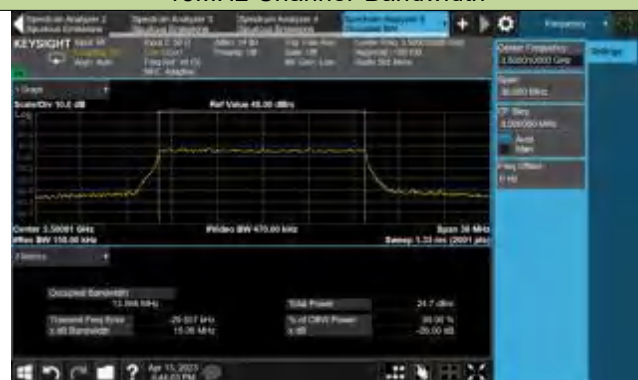

20MHz Channel Bandwidth



30MHz Channel Bandwidth



40MHz Channel Bandwidth



50MHz Channel Bandwidth



60MHz Channel Bandwidth



70MHz Channel Bandwidth






Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023-04-13 2023-05-11	Test Band	n77/n78_UL MIMO (3700 ~ 3980MHz)

Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK		
3840.00	10	8.60
3840.00	15	13.58
3840.00	20	18.21
3840.00	25	23.20
3840.00	30	27.85
3840.00	40	37.73
3840.00	50	47.40
3840.00	60	57.75
3840.00	70	67.35
3840.00	80	77.40
3840.00	90	87.35
3840.00	100	97.28
16QAM		
3840.00	10	8.57
3840.00	15	13.58
3840.00	20	18.17
3840.00	25	23.15
3840.00	30	28.83
3840.00	40	37.81
3840.00	50	47.49
3840.00	60	57.61
3840.00	70	67.38
3840.00	80	77.39
3840.00	90	87.20
3840.00	100	97.36


64QAM		
3840.00	10	8.58
3840.00	15	13.55
3840.00	20	18.20
3840.00	25	23.16
3840.00	30	27.81
3840.00	40	37.77
3840.00	50	47.53
3840.00	60	57.71
3840.00	70	67.42
3840.00	80	77.35
3840.00	90	87.31
3840.00	100	97.31
256QAM		
3840.00	10	8.59
3840.00	15	13.55
3840.00	20	18.17
3840.00	25	23.22
3840.00	30	27.83
3840.00	40	37.83
3840.00	50	47.31
3840.00	60	57.69
3840.00	70	67.39
3840.00	80	77.48
3840.00	90	87.47
3840.00	100	97.34

99% Bandwidth - QPSK


10MHz Channel Bandwidth

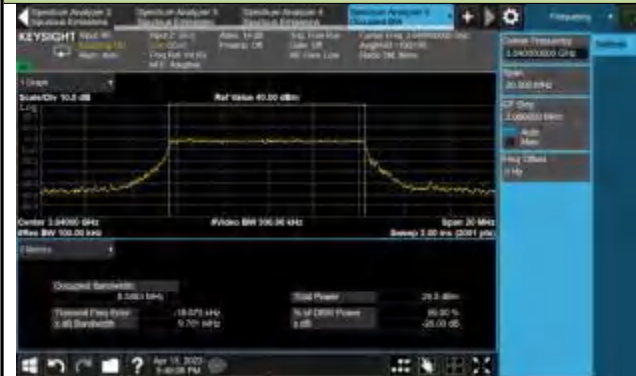

15MHz Channel Bandwidth

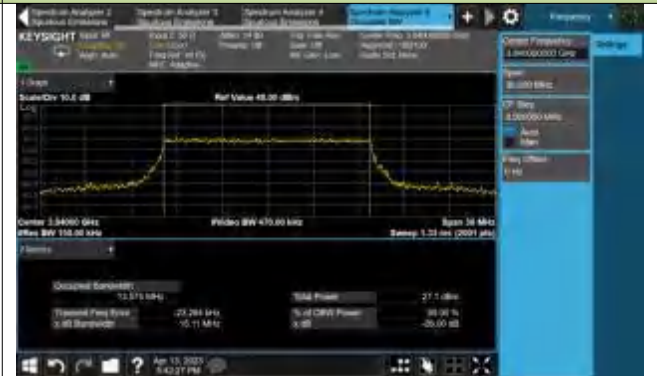


20MHz Channel Bandwidth

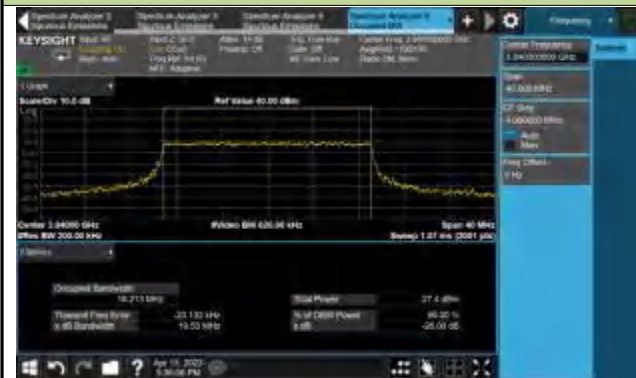

30MHz Channel Bandwidth




40MHz Channel Bandwidth

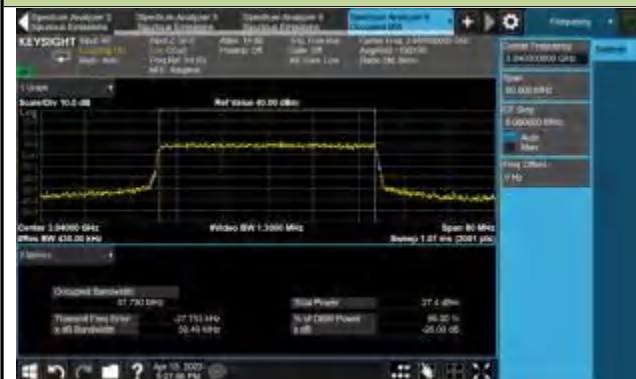


50MHz Channel Bandwidth



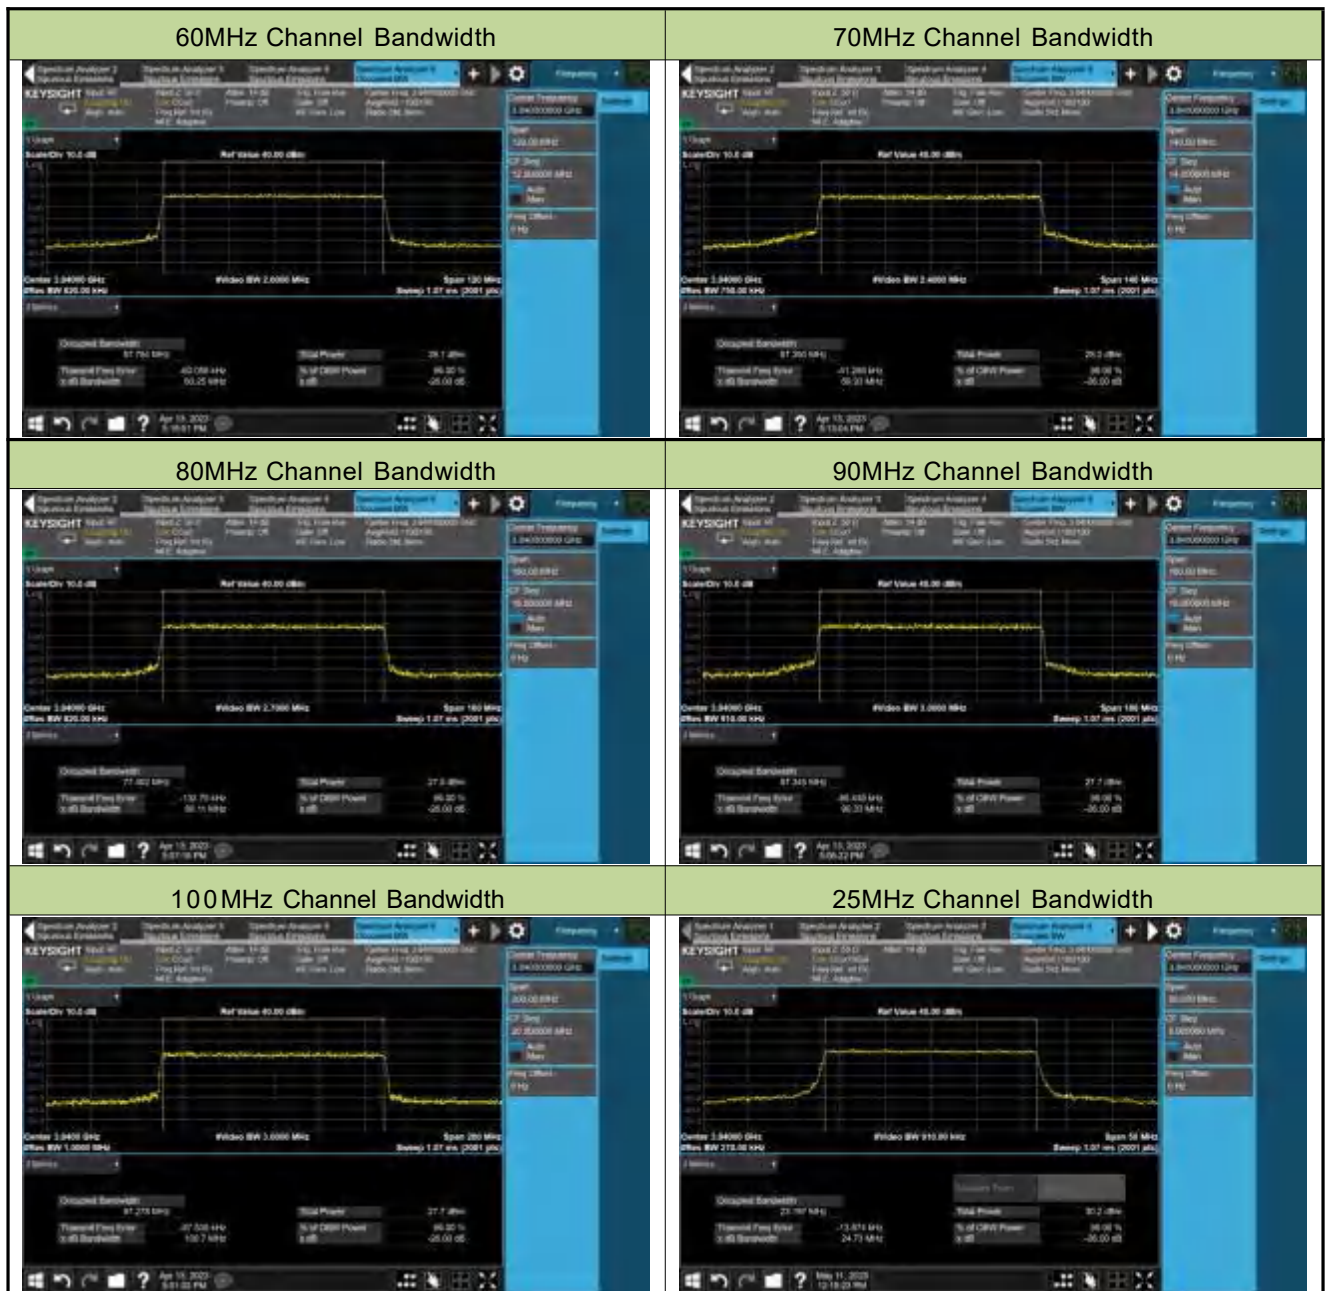


99% Bandwidth - 16QAM

10MHz Channel Bandwidth

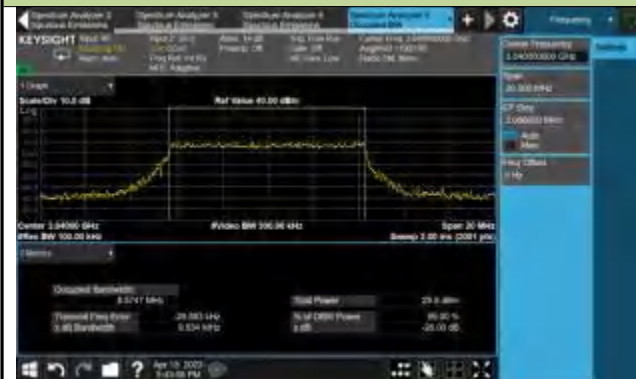

15MHz Channel Bandwidth

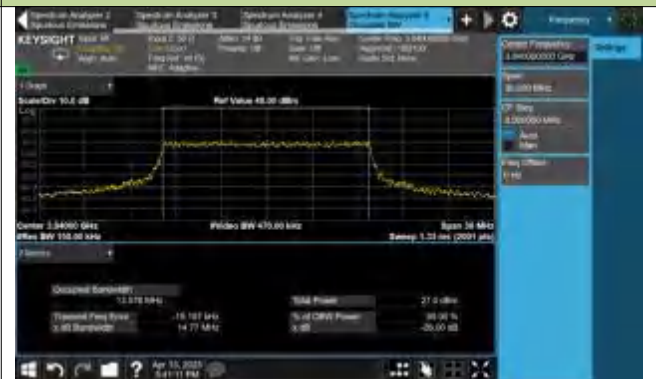


20MHz Channel Bandwidth



30MHz Channel Bandwidth




40MHz Channel Bandwidth

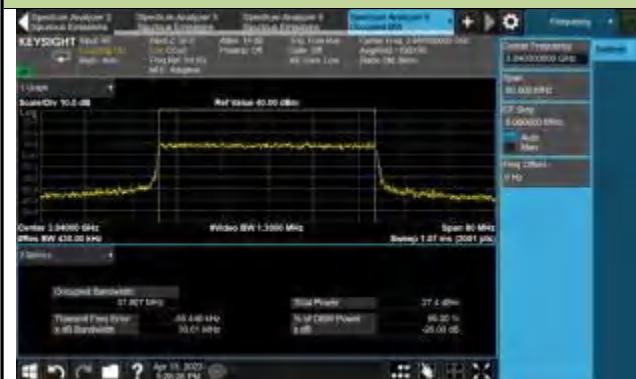


50MHz Channel Bandwidth



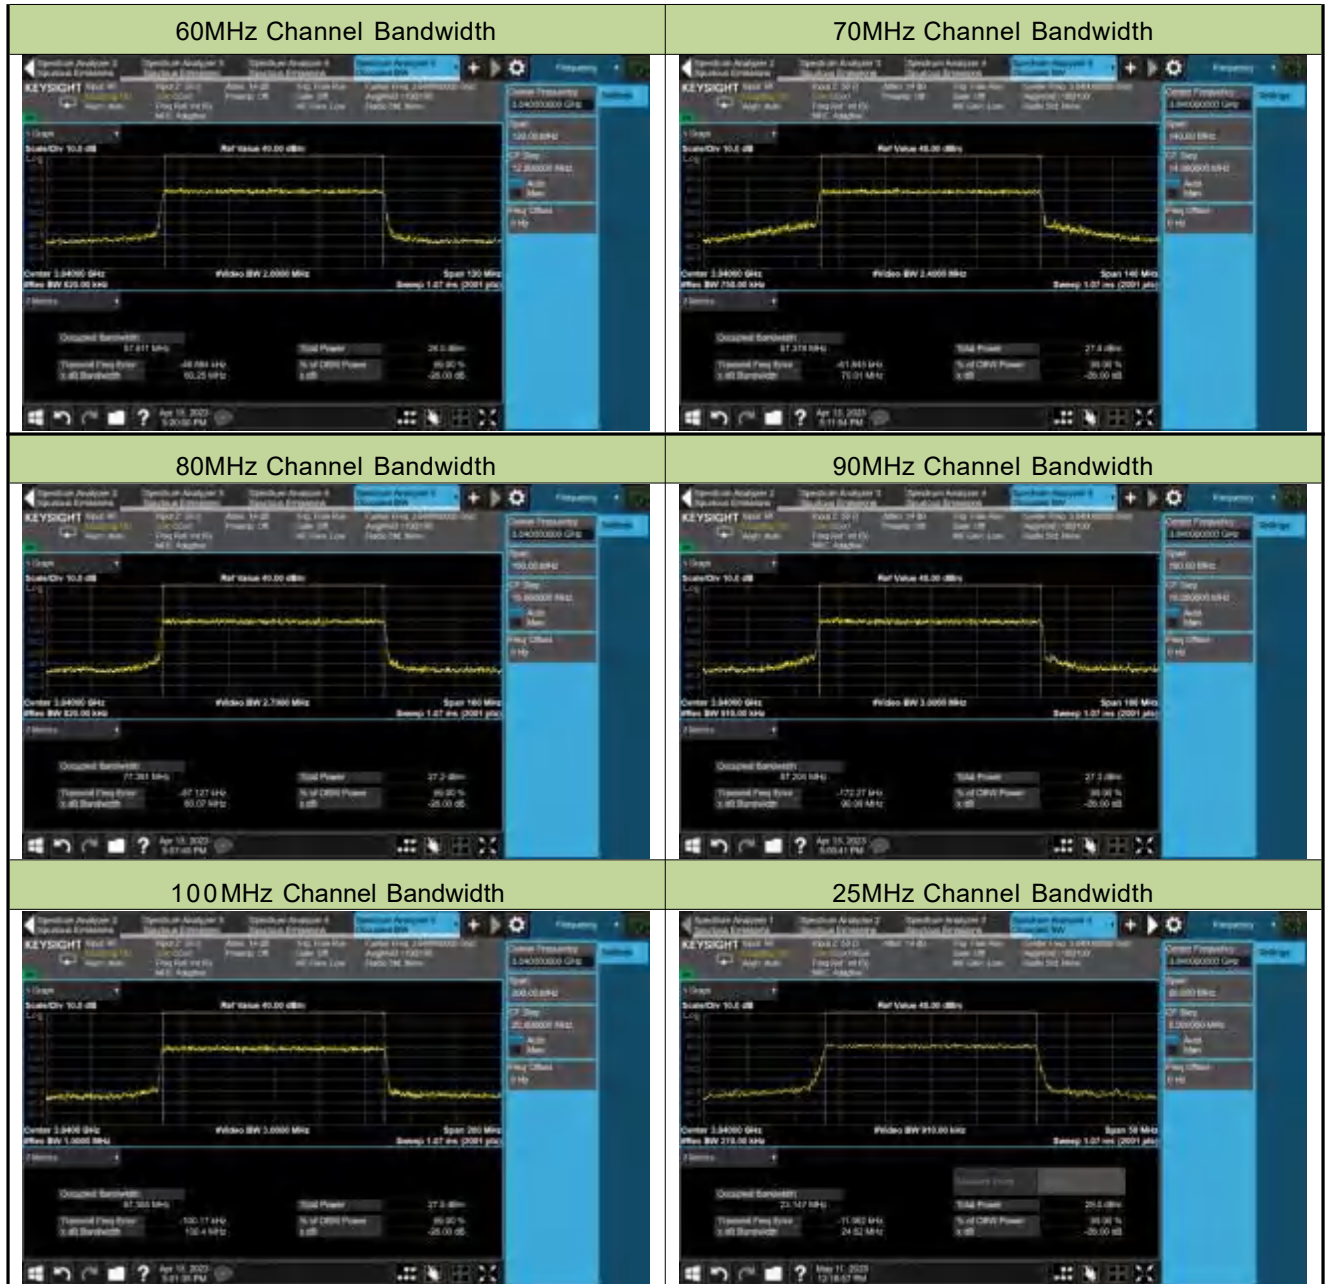


99% Bandwidth - 64QAM


10MHz Channel Bandwidth

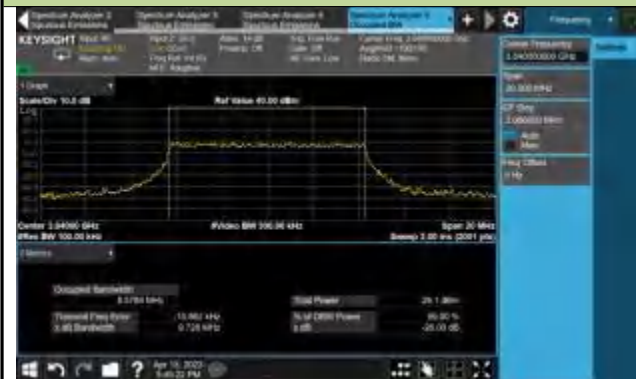

15MHz Channel Bandwidth

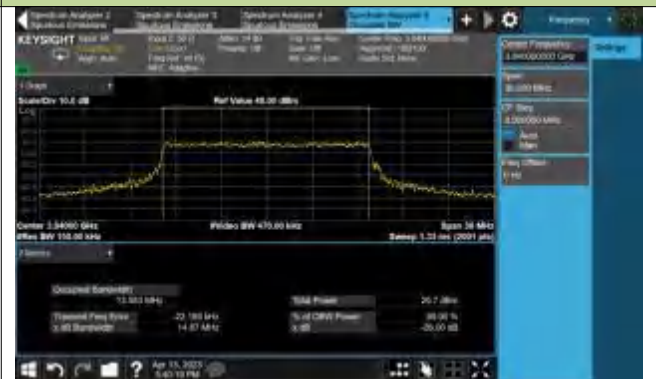

20MHz Channel Bandwidth

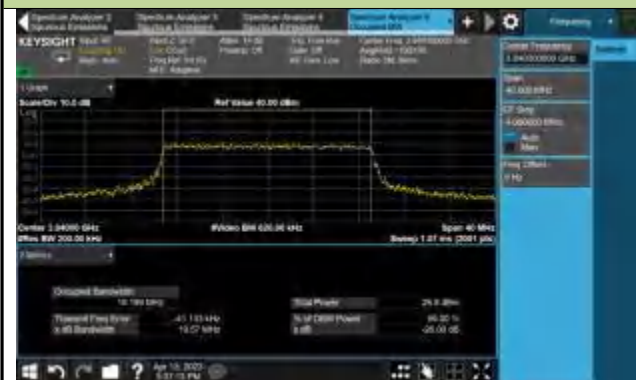

30MHz Channel Bandwidth




40MHz Channel Bandwidth




50MHz Channel Bandwidth



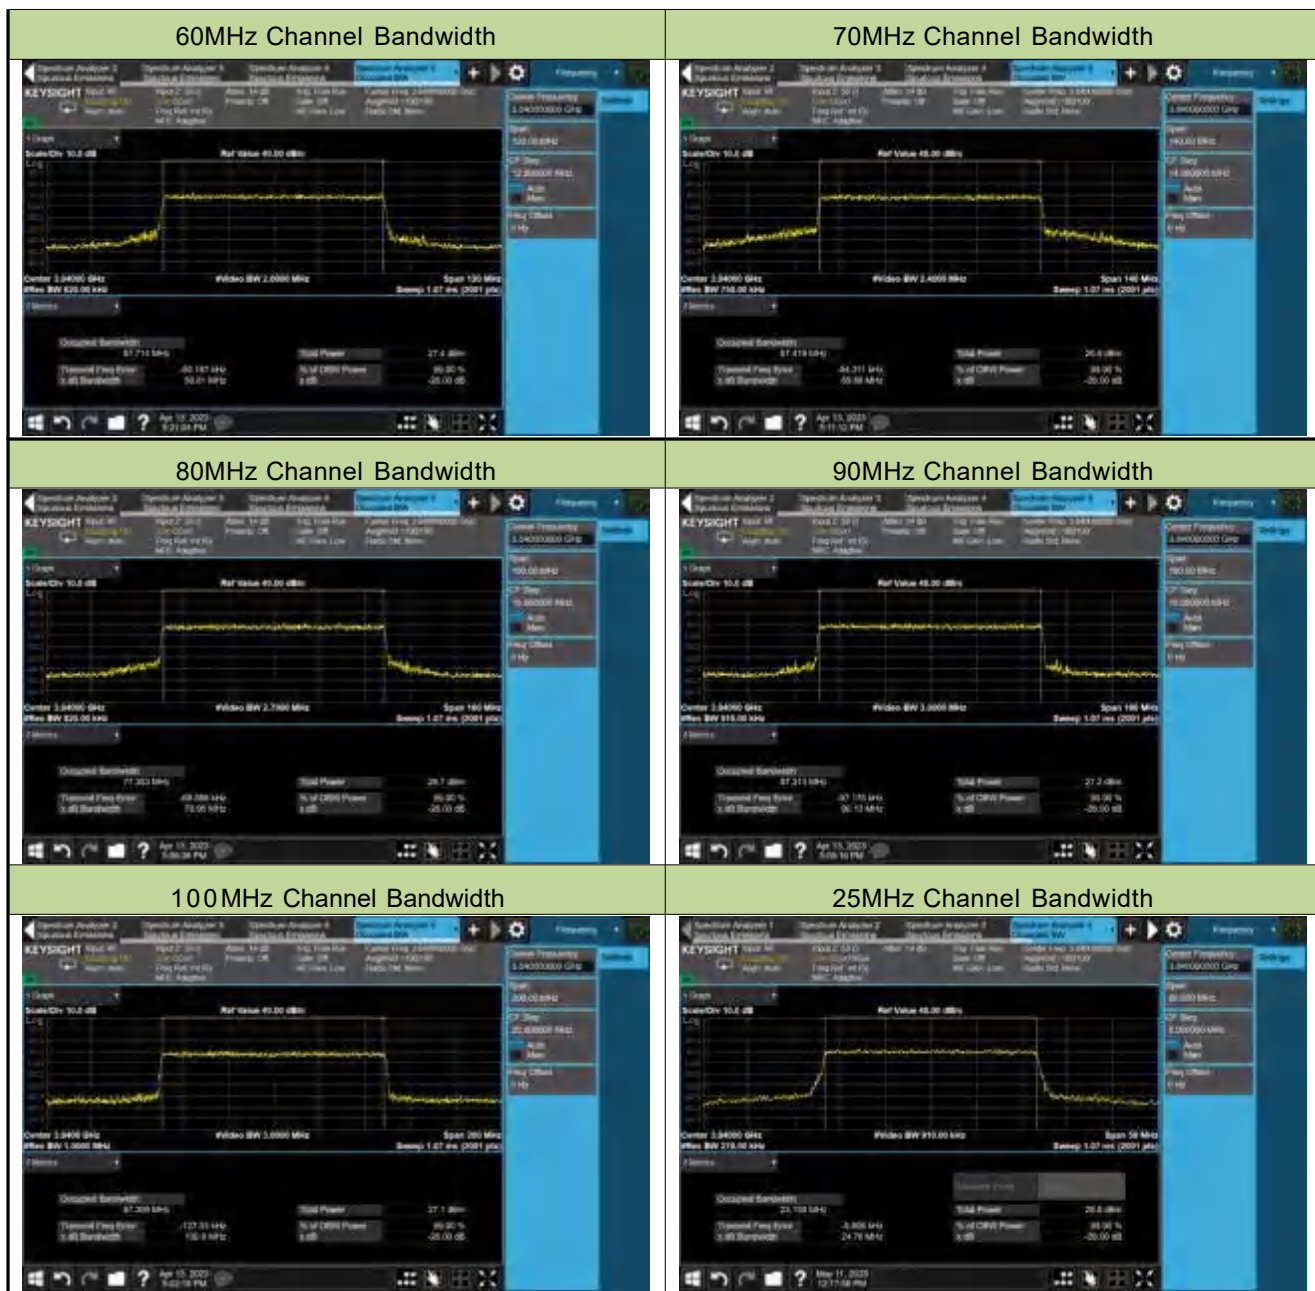


99% Bandwidth - 256QAM


10MHz Channel Bandwidth

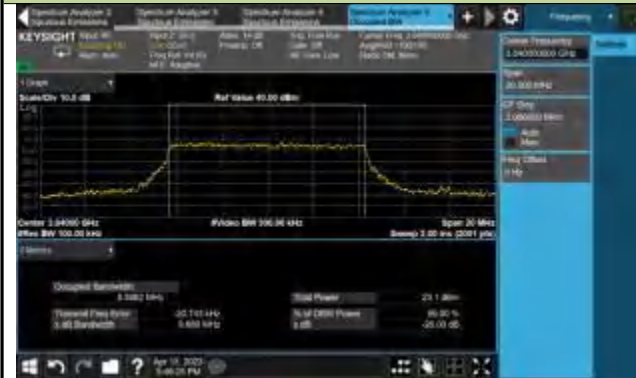

15MHz Channel Bandwidth

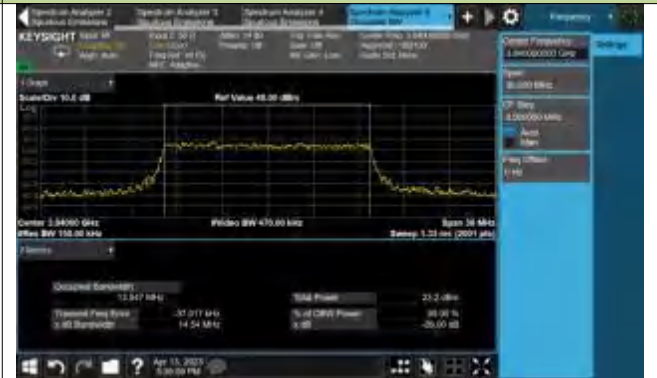

20MHz Channel Bandwidth

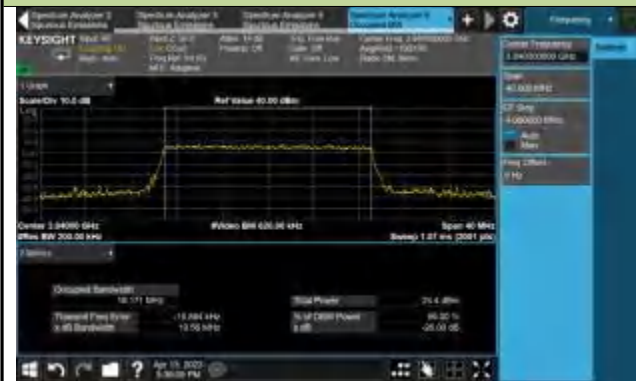

30MHz Channel Bandwidth




40MHz Channel Bandwidth



50MHz Channel Bandwidth



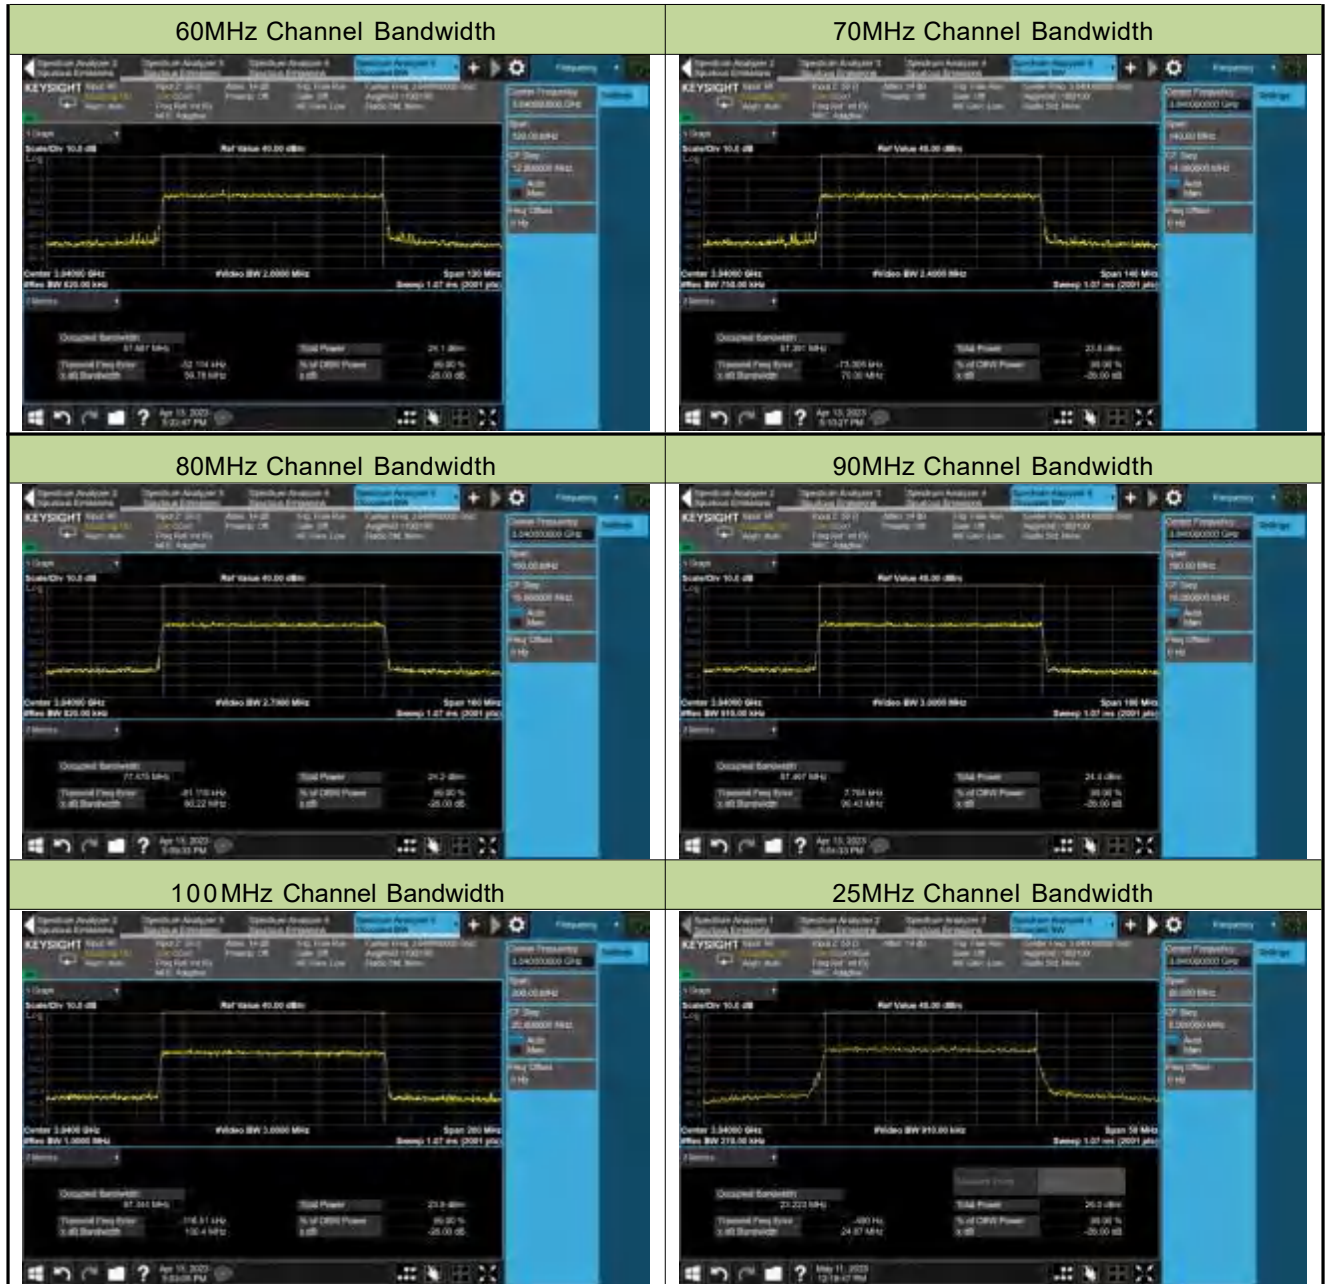

A.2 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Cloud Guo
Test Date	2023/04/13 ~ 2023/04/14	Test Band	n41_UL MIMO_Port 3

Voltage	Temp (°C)	Frequency Range (MHz)		Frequency stability (ppm)	Within Authorized Frequency Block
		2496	2690		
		f _L	f _H		
Normal	+ 20 (Ref)	2496.9170	2689.0837	0	Pass
	+ 50	2496.9315	2689.1047	0.0121	Pass
	+ 40	2496.9377	2689.0965	-0.0004	Pass
	+ 30	2496.9326	2689.1047	0.0000	Pass
	+ 10	2496.9246	2689.1063	-0.0035	Pass
	0	2496.9238	2689.1043	0.0004	Pass
	- 10	2496.9273	2689.1048	0.0000	Pass
	- 20	2496.9143	2689.0698	-0.0012	Pass
	- 30	2496.9129	2689.0788	0.0013	Pass
15%	+ 20	2496.9208	2689.0904	-0.0013	Pass
-15%	+ 20	2496.9279	2689.0922	-0.2389	Pass

Test Site	WZ-TR3	Test Engineer	Cloud Guo
Test Date	2023/04/13 ~ 2023/04/14	Test Band	n77/78_UL MIMO (3450~3550MHz) Port 0

Voltage	Temp (°C)	Frequency Range (MHz)		Frequency stability (ppm)	Within Authorized Frequency Block
		3450	3550		
		f _L	f _H		
Normal	+ 20 (Ref)	3450.6790	3549.2531	0	Pass
	+ 50	3450.6798	3549.2677	0.0003	Pass
	+ 40	3450.6863	3549.2632	-0.0004	Pass
	+ 30	3450.6888	3549.2572	0.0005	Pass
	+ 10	3450.6813	3549.2613	0.0013	Pass
	0	3450.6897	3549.2724	0.0015	Pass
	- 10	3450.6897	3549.2658	0.0011	Pass
	- 20	3450.6920	3549.2524	-0.0006	Pass
	- 30	3450.6855	3549.2563	0.0001	Pass
15%	+ 20	3450.6828	3549.2477	-0.0010	Pass
-15%	+ 20	3450.6824	3549.2598	-0.0153	Pass

Test Site	WZ-TR3	Test Engineer	Cloud Guo
Test Date	2023/04/13 ~ 2023/04/14	Test Band	n77/78_UL MIMO (3700~3980MHz) Port 0

Voltage	Temp (°C)	Frequency Range (MHz)		Frequency stability (ppm)	Within Authorized Frequency Block
		3700	3980		
		f _L	f _H		
Normal	+ 20 (Ref)	3700.6942	3979.2601	0	Pass
	+ 50	3700.6963	3979.2800	0.0263	Pass
	+ 40	3700.6961	3979.2730	0.0276	Pass
	+ 30	3700.7079	3979.2743	0.0263	Pass
	+ 10	3700.6930	3979.2753	0.0271	Pass
	0	3700.6909	3979.2789	0.0249	Pass
	- 10	3700.6930	3979.2816	0.0272	Pass
	- 20	3700.6671	3979.2720	0.0264	Pass
	- 30	3700.6859	3979.2643	0.0264	Pass
15%	+ 20	3700.6837	3979.2688	0.0269	Pass
-15%	+ 20	3700.6912	3979.2680	0.0239	Pass

A.3 Equivalent Isotropically Radiated Power Test Result

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/03/23 ~ 2023/03/27 2023/05/10 ~ 2023/05/12	Test Band	n41_UL MIMO

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
10	2501.01	12	6	26.38	25.65	29.04	31.11	< 33.01
		1	1	26.41	25.44	28.96	31.03	< 33.01
		1	22	26.41	25.73	29.09	31.16	< 33.01
		24	0	24.92	24.24	27.60	29.67	< 33.01
		1	0	20.38	19.66	23.05	25.12	< 33.01
		1	23	20.31	19.65	23.00	25.07	< 33.01
10	2592.99	12	6	26.55	25.69	29.15	31.22	< 33.01
		1	1	26.37	25.56	28.99	31.06	< 33.01
		1	22	26.50	25.69	29.12	31.19	< 33.01
		24	0	25.04	24.17	27.64	29.71	< 33.01
		1	0	20.49	19.65	23.10	25.17	< 33.01
		1	23	20.53	19.71	23.15	25.22	< 33.01
10	2685.00	12	6	26.58	25.77	29.20	31.27	< 33.01
		1	1	26.55	25.68	29.15	31.22	< 33.01
		1	22	26.59	25.84	29.24	31.31	< 33.01
		24	0	25.14	24.38	27.79	29.86	< 33.01
		1	0	20.63	19.81	23.25	25.32	< 33.01
		1	23	20.51	19.86	23.21	25.28	< 33.01
15	2503.50	18	9	26.45	25.66	29.08	31.15	< 33.01
		1	1	26.50	25.17	28.90	30.97	< 33.01
		1	36	26.45	25.58	29.05	31.12	< 33.01
		36	0	24.91	24.16	27.56	29.63	< 33.01
		1	0	20.45	19.67	23.09	25.16	< 33.01
		1	37	20.44	19.74	23.11	25.18	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
15	2592.99	18	9	26.47	25.65	29.09	31.16	< 33.01
		1	1	26.46	25.58	29.05	31.12	< 33.01
		1	36	26.61	25.61	29.15	31.22	< 33.01
		36	0	24.94	24.18	27.59	29.66	< 33.01
		1	0	20.48	19.67	23.10	25.17	< 33.01
		1	37	20.63	19.75	23.22	25.29	< 33.01
15	2682.48	18	9	26.48	25.72	29.13	31.20	< 33.01
		1	1	26.46	25.56	29.04	31.11	< 33.01
		1	36	26.48	25.72	29.13	31.20	< 33.01
		36	0	24.90	24.20	27.57	29.64	< 33.01
		1	0	20.52	19.72	23.15	25.22	< 33.01
		1	37	20.49	19.83	23.18	25.25	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
20	2506.02	25	12	26.89	26.17	29.56	31.63	< 33.01
		1	1	26.70	26.05	29.40	31.47	< 33.01
		1	49	26.77	26.11	29.46	31.53	< 33.01
		50	0	25.25	24.56	27.93	30.00	< 33.01
		1	0	20.78	19.99	23.41	25.48	< 33.01
		1	50	20.71	20.10	23.43	25.50	< 33.01
20	2592.99	25	12	26.65	26.18	29.43	31.50	< 33.01
		1	1	26.68	26.12	29.42	31.49	< 33.01
		1	49	26.74	26.20	29.49	31.56	< 33.01
		50	0	25.19	24.67	27.95	30.02	< 33.01
		1	0	20.78	20.23	23.52	25.59	< 33.01
		1	50	20.68	20.36	23.53	25.60	< 33.01
20	2679.99	25	12	24.66	26.16	28.48	30.55	< 33.01
		1	1	26.74	26.14	29.46	31.53	< 33.01
		1	49	26.66	26.28	29.48	31.55	< 33.01
		50	0	25.17	24.63	27.92	29.99	< 33.01
		1	0	20.72	20.26	23.51	25.58	< 33.01
		1	50	20.65	20.40	23.54	25.61	< 33.01
30	2511	36	18	26.81	26.14	29.50	31.57	< 33.01
		1	1	26.83	26.19	29.53	31.60	< 33.01
		1	76	26.80	26.25	29.54	31.61	< 33.01
		75	0	25.26	24.72	28.01	30.08	< 33.01
		1	0	20.81	20.04	23.45	25.52	< 33.01
		1	77	20.76	20.36	23.57	25.64	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
30	2592.99	36	18	26.74	26.16	29.47	31.54	< 33.01
		1	1	26.78	26.19	29.51	31.58	< 33.01
		1	76	26.79	26.35	29.59	31.66	< 33.01
		75	0	25.27	24.72	28.01	30.08	< 33.01
		1	0	20.82	20.27	23.56	25.63	< 33.01
		1	77	20.87	20.54	23.72	25.79	< 33.01
30	2674.98	36	18	26.78	26.14	29.48	31.55	< 33.01
		1	1	26.66	26.04	29.37	31.44	< 33.01
		1	76	26.76	26.35	29.57	31.64	< 33.01
		75	0	25.25	24.63	27.96	30.03	< 33.01
		1	0	20.78	20.23	23.52	25.59	< 33.01
		1	77	20.81	20.57	23.70	25.77	< 33.01
40	2516.01	50	25	26.89	26.36	29.64	31.71	< 33.01
		1	1	26.93	26.20	29.59	31.66	< 33.01
		1	104	26.79	26.25	29.54	31.61	< 33.01
		100	0	25.30	24.75	28.04	30.11	< 33.01
		1	0	20.86	20.12	23.52	25.59	< 33.01
		1	105	20.76	20.32	23.56	25.63	< 33.01
40	2592.99	50	25	26.42	25.98	29.22	31.29	< 33.01
		1	1	26.50	26.07	29.30	31.37	< 33.01
		1	104	26.56	26.23	29.41	31.48	< 33.01
		100	0	24.91	24.56	27.75	29.82	< 33.01
		1	0	20.65	19.98	23.34	25.41	< 33.01
		1	105	20.55	20.30	23.44	25.51	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
40	2670	50	25	26.44	26.05	29.26	31.33	< 33.01
		1	1	26.43	26.03	29.24	31.31	< 33.01
		1	104	26.45	26.21	29.34	31.41	< 33.01
		100	0	24.91	24.57	27.75	29.82	< 33.01
		1	0	20.59	20.07	23.35	25.42	< 33.01
		1	105	20.51	20.36	23.45	25.52	< 33.01
50	2521.02	64	32	26.65	26.41	29.54	31.61	< 33.01
		1	1	26.75	26.03	29.42	31.49	< 33.01
		1	131	26.43	26.27	29.36	31.43	< 33.01
		128	0	25.25	24.82	28.05	30.12	< 33.01
		1	0	20.87	20.18	23.55	25.62	< 33.01
		1	132	20.46	20.25	23.37	25.44	< 33.01
50	2592.99	64	32	26.70	26.14	29.44	31.51	< 33.01
		1	1	26.58	26.03	29.32	31.39	< 33.01
		1	131	26.66	26.33	29.51	31.58	< 33.01
		128	0	25.16	24.64	27.92	29.99	< 33.01
		1	0	20.79	19.93	23.39	25.46	< 33.01
		1	132	20.68	20.52	23.61	25.68	< 33.01
50	2664.99	64	32	26.52	26.18	29.36	31.43	< 33.01
		1	1	26.40	26.02	29.22	31.29	< 33.01
		1	131	26.50	26.24	29.38	31.45	< 33.01
		128	0	25.03	24.76	27.91	29.98	< 33.01
		1	0	20.59	19.98	23.31	25.38	< 33.01
		1	132	20.59	20.35	23.48	25.55	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
60	2526	81	40	26.75	26.47	29.62	31.69	< 33.01
		1	1	26.81	26.02	29.44	31.51	< 33.01
		1	160	26.45	26.33	29.40	31.47	< 33.01
		162	0	25.25	24.81	28.05	30.12	< 33.01
		1	0	20.94	20.02	23.51	25.58	< 33.01
		1	161	20.64	20.30	23.48	25.55	< 33.01
60	2592.99	81	40	26.75	26.14	29.47	31.54	< 33.01
		1	1	26.63	26.03	29.35	31.42	< 33.01
		1	160	26.83	26.35	29.61	31.68	< 33.01
		162	0	25.27	24.62	27.97	30.04	< 33.01
		1	0	20.87	19.87	23.41	25.48	< 33.01
		1	161	20.83	20.40	23.63	25.70	< 33.01
60	2659.98	81	40	26.69	26.28	29.50	31.57	< 33.01
		1	1	26.58	26.03	29.32	31.39	< 33.01
		1	160	26.56	26.30	29.44	31.51	< 33.01
		162	0	25.12	24.77	27.96	30.03	< 33.01
		1	0	20.65	19.92	23.31	25.38	< 33.01
		1	161	20.58	20.41	23.51	25.58	< 33.01
70	2531.01	90	45	26.76	26.23	29.51	31.58	< 33.01
		1	1	26.81	26.05	29.46	31.53	< 33.01
		1	187	26.60	26.35	29.49	31.56	< 33.01
		180	0	25.35	24.77	28.08	30.15	< 33.01
		1	0	21.01	19.90	23.50	25.57	< 33.01
		1	188	20.63	20.32	23.49	25.56	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
70	2592.99	90	45	26.74	26.09	29.44	31.51	< 33.01
		1	1	26.67	25.94	29.33	31.40	< 33.01
		1	187	26.74	26.24	29.51	31.58	< 33.01
		180	0	25.20	24.70	27.97	30.04	< 33.01
		1	0	20.87	19.84	23.40	25.47	< 33.01
		1	188	20.73	20.34	23.55	25.62	< 33.01
70	2655	90	45	26.63	26.15	29.41	31.48	< 33.01
		1	1	26.57	25.93	29.27	31.34	< 33.01
		1	187	26.61	26.22	29.43	31.50	< 33.01
		180	0	25.18	24.74	27.98	30.05	< 33.01
		1	0	20.83	19.90	23.40	25.47	< 33.01
		1	188	20.68	20.32	23.51	25.58	< 33.01
80	2536.02	108	54	26.75	26.34	29.56	31.63	< 33.01
		1	1	26.89	26.07	29.51	31.58	< 33.01
		1	215	26.71	26.49	29.61	31.68	< 33.01
		216	0	25.30	24.91	28.12	30.19	< 33.01
		1	0	21.05	19.89	23.52	25.59	< 33.01
		1	216	20.75	20.46	23.62	25.69	< 33.01
80	2592.99	108	54	26.65	25.98	29.34	31.41	< 33.01
		1	1	26.50	25.67	29.12	31.19	< 33.01
		1	215	26.73	26.24	29.50	31.57	< 33.01
		216	0	25.12	24.62	27.89	29.96	< 33.01
		1	0	20.73	19.58	23.20	25.27	< 33.01
		1	216	20.73	20.32	23.54	25.61	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
80	2649.99	108	54	26.53	26.17	29.36	31.43	< 33.01
		1	1	26.15	25.66	28.92	30.99	< 33.01
		1	215	26.47	26.19	29.34	31.41	< 33.01
		216	0	24.94	24.62	27.79	29.86	< 33.01
		1	0	20.46	19.57	23.05	25.12	< 33.01
		1	216	20.48	20.21	23.36	25.43	< 33.01
90	2541	120	60	26.65	26.13	29.41	31.48	< 33.01
		1	1	26.80	25.93	29.40	31.47	< 33.01
		1	243	26.57	26.40	29.50	31.57	< 33.01
		243	0	25.21	24.72	27.98	30.05	< 33.01
		1	0	20.84	19.68	23.31	25.38	< 33.01
		1	244	20.52	20.45	23.50	25.57	< 33.01
90	2592.99	120	60	26.69	26.03	29.38	31.45	< 33.01
		1	1	26.52	25.65	29.12	31.19	< 33.01
		1	243	26.67	26.27	29.48	31.55	< 33.01
		243	0	25.15	24.58	27.88	29.95	< 33.01
		1	0	20.75	19.72	23.28	25.35	< 33.01
		1	244	20.84	20.49	23.68	25.75	< 33.01
90	2644.98	120	60	26.68	26.12	29.42	31.49	< 33.01
		1	1	26.16	25.58	28.89	30.96	< 33.01
		1	243	26.60	26.24	29.43	31.50	< 33.01
		243	0	25.04	24.59	27.83	29.90	< 33.01
		1	0	20.62	19.53	23.12	25.19	< 33.01
		1	244	20.68	20.47	23.59	25.66	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
100	2546.01	135	67	26.58	26.23	29.42	31.49	< 33.01
		1	1	26.78	25.92	29.38	31.45	< 33.01
		1	271	26.41	26.51	29.47	31.54	< 33.01
		270	0	25.27	24.77	28.04	30.11	< 33.01
		1	0	20.84	19.53	23.24	25.31	< 33.01
		1	272	20.46	20.48	23.48	25.55	< 33.01
100	2592.99	135	67	26.68	26.10	29.41	31.48	< 33.01
		1	1	26.50	25.58	29.07	31.14	< 33.01
		1	271	26.93	26.43	29.70	31.77	< 33.01
		270	0	25.22	24.56	27.91	29.98	< 33.01
		1	0	20.78	19.56	23.22	25.29	< 33.01
		1	272	20.90	20.44	23.69	25.76	< 33.01
100	2640	135	67	26.70	26.12	29.43	31.50	< 33.01
		1	1	26.47	25.63	29.08	31.15	< 33.01
		1	271	26.70	26.34	29.53	31.60	< 33.01
		270	0	25.15	24.55	27.87	29.94	< 33.01
		1	0	20.71	19.38	23.11	25.18	< 33.01
		1	272	20.72	20.36	23.55	25.62	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
10	2501.01	12	6	26.36	25.64	29.03	31.10	< 33.01
		1	1	26.36	25.31	28.88	30.95	< 33.01
		1	22	26.39	25.64	29.04	31.11	< 33.01
		24	0	24.41	23.70	27.08	29.15	< 33.01
		1	0	19.90	19.18	22.57	24.64	< 33.01
		1	23	19.84	19.22	22.55	24.62	< 33.01
10	2592.99	12	6	26.57	25.61	29.13	31.20	< 33.01
		1	1	26.35	25.58	28.99	31.06	< 33.01
		1	22	26.48	25.58	29.06	31.13	< 33.01
		24	0	24.56	23.70	27.16	29.23	< 33.01
		1	0	19.94	19.11	22.56	24.63	< 33.01
		1	23	19.98	19.16	22.60	24.67	< 33.01
10	2685.00	12	6	26.57	25.78	29.20	31.27	< 33.01
		1	1	26.62	25.71	29.20	31.27	< 33.01
		1	22	26.55	25.82	29.21	31.28	< 33.01
		24	0	24.61	23.84	27.25	29.32	< 33.01
		1	0	20.08	19.26	22.70	24.77	< 33.01
		1	23	20.05	19.35	22.72	24.79	< 33.01
15	2503.50	18	9	26.43	25.36	28.94	31.01	< 33.01
		1	1	26.51	25.05	28.85	30.92	< 33.01
		1	36	26.48	25.63	29.09	31.16	< 33.01
		36	0	24.39	23.67	27.06	29.13	< 33.01
		1	0	19.91	19.10	22.53	24.60	< 33.01
		1	37	19.85	19.21	22.55	24.62	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
15	2592.99	18	9	26.53	25.61	29.10	31.17	< 33.01
		1	1	26.45	25.53	29.02	31.09	< 33.01
		1	36	26.57	25.60	29.12	31.19	< 33.01
		36	0	24.50	23.62	27.09	29.16	< 33.01
		1	0	19.98	19.17	22.60	24.67	< 33.01
		1	37	20.09	19.26	22.71	24.78	< 33.01
15	2682.48	18	9	26.52	25.73	29.15	31.22	< 33.01
		1	1	26.38	25.65	29.04	31.11	< 33.01
		1	36	26.59	25.72	29.19	31.26	< 33.01
		36	0	24.42	23.74	27.10	29.17	< 33.01
		1	0	120.05	19.16	120.05	122.12	< 33.01
		1	37	19.95	19.28	22.64	24.71	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
20	2506.02	25	12	26.82	26.13	29.50	31.57	< 33.01
		1	1	26.80	25.98	29.42	31.49	< 33.01
		1	49	26.71	26.03	29.39	31.46	< 33.01
		50	0	24.76	24.17	27.49	29.56	< 33.01
		1	0	20.18	19.39	22.81	24.88	< 33.01
		1	50	20.24	19.56	22.92	24.99	< 33.01
20	2592.99	25	12	26.70	26.11	29.43	31.50	< 33.01
		1	1	26.69	26.04	29.39	31.46	< 33.01
		1	49	26.72	26.13	29.45	31.52	< 33.01
		50	0	24.70	24.20	27.47	29.54	< 33.01
		1	0	20.15	19.58	22.88	24.95	< 33.01
		1	50	20.22	19.75	23.00	25.07	< 33.01
20	2679.99	25	12	26.59	26.15	29.39	31.46	< 33.01
		1	1	26.62	26.07	29.36	31.43	< 33.01
		1	49	26.69	26.25	29.49	31.56	< 33.01
		50	0	24.63	24.20	27.43	29.50	< 33.01
		1	0	20.26	19.77	23.03	25.10	< 33.01
		1	50	20.12	19.93	23.04	25.11	< 33.01
30	2511	36	18	26.82	26.19	29.53	31.60	< 33.01
		1	1	26.82	26.13	29.50	31.57	< 33.01
		1	76	26.81	26.27	29.56	31.63	< 33.01
		75	0	24.86	24.32	27.61	29.68	< 33.01
		1	0	20.27	19.60	22.96	25.03	< 33.01
		1	77	20.22	19.63	22.95	25.02	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
30	2592.99	36	18	26.76	26.20	29.50	31.57	< 33.01
		1	1	26.77	26.13	29.47	31.54	< 33.01
		1	76	26.84	26.35	29.61	31.68	< 33.01
		75	0	24.75	24.32	27.55	29.62	< 33.01
		1	0	20.31	19.73	23.04	25.11	< 33.01
		1	77	20.32	20.01	23.18	25.25	< 33.01
30	2674.98	36	18	26.72	26.20	29.48	31.55	< 33.01
		1	1	26.68	26.04	29.38	31.45	< 33.01
		1	76	26.73	26.30	29.53	31.60	< 33.01
		75	0	24.78	24.26	27.54	29.61	< 33.01
		1	0	20.24	19.61	22.95	25.02	< 33.01
		1	77	20.32	20.15	23.25	25.32	< 33.01
40	2516.01	50	25	26.85	26.24	29.57	31.64	< 33.01
		1	1	26.90	26.18	29.57	31.64	< 33.01
		1	104	26.85	26.23	29.56	31.63	< 33.01
		100	0	24.82	24.25	27.55	29.62	< 33.01
		1	0	20.41	19.64	23.05	25.12	< 33.01
		1	105	20.32	19.87	23.11	25.18	< 33.01
40	2592.99	50	25	26.32	25.91	29.13	31.20	< 33.01
		1	1	26.55	26.04	29.31	31.38	< 33.01
		1	104	26.59	26.21	29.41	31.48	< 33.01
		100	0	24.46	24.02	27.26	29.33	< 33.01
		1	0	20.15	19.53	22.86	24.93	< 33.01
		1	105	20.12	19.78	22.96	25.03	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
40	2670	50	25	26.42	26.15	29.30	31.37	< 33.01
		1	1	26.51	26.01	29.28	31.35	< 33.01
		1	104	26.55	26.22	29.40	31.47	< 33.01
		100	0	24.40	24.13	27.28	29.35	< 33.01
		1	0	20.12	19.53	22.85	24.92	< 33.01
		1	105	20.03	19.86	22.96	25.03	< 33.01
50	2521.02	64	32	26.63	26.21	29.44	31.51	< 33.01
		1	1	26.75	25.96	29.38	31.45	< 33.01
		1	131	26.55	26.31	29.44	31.51	< 33.01
		128	0	24.63	24.27	27.46	29.53	< 33.01
		1	0	20.27	19.61	22.96	25.03	< 33.01
		1	132	20.01	19.89	22.96	25.03	< 33.01
50	2592.99	64	32	26.64	26.02	29.35	31.42	< 33.01
		1	1	26.61	26.01	29.33	31.40	< 33.01
		1	131	26.70	26.32	29.52	31.59	< 33.01
		128	0	24.69	24.22	27.47	29.54	< 33.01
		1	0	20.32	19.35	22.87	24.94	< 33.01
		1	132	20.17	20.05	23.12	25.19	< 33.01
50	2664.99	64	32	26.45	26.13	29.30	31.37	< 33.01
		1	1	26.49	26.00	29.26	31.33	< 33.01
		1	131	26.43	26.23	29.34	31.41	< 33.01
		128	0	24.43	24.21	27.33	29.40	< 33.01
		1	0	19.99	19.46	22.74	24.81	< 33.01
		1	132	19.95	20.02	23.00	25.07	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
60	2526	81	40	26.83	26.34	29.60	31.67	< 33.01
		1	1	26.82	26.03	29.45	31.52	< 33.01
		1	160	26.51	26.32	29.43	31.50	< 33.01
		162	0	24.76	24.36	27.57	29.64	< 33.01
		1	0	20.49	19.75	23.15	25.22	< 33.01
		1	161	20.06	19.81	22.95	25.02	< 33.01
60	2592.99	81	40	26.78	26.06	29.45	31.52	< 33.01
		1	1	26.62	26.01	29.34	31.41	< 33.01
		1	160	26.78	26.42	29.61	31.68	< 33.01
		162	0	24.77	24.13	27.47	29.54	< 33.01
		1	0	20.36	19.34	22.89	24.96	< 33.01
		1	161	20.37	20.02	23.21	25.28	< 33.01
60	2659.98	81	40	26.82	26.27	29.56	31.63	< 33.01
		1	1	26.74	26.02	29.41	31.48	< 33.01
		1	160	26.75	26.41	29.59	31.66	< 33.01
		162	0	24.76	24.30	27.55	29.62	< 33.01
		1	0	20.31	19.51	22.94	25.01	< 33.01
		1	161	20.16	19.88	23.03	25.10	< 33.01
70	2531.01	90	45	26.74	26.22	29.50	31.57	< 33.01
		1	1	26.86	26.13	29.52	31.59	< 33.01
		1	187	26.59	26.32	29.47	31.54	< 33.01
		180	0	24.72	24.30	27.53	29.60	< 33.01
		1	0	20.40	19.53	23.00	25.07	< 33.01
		1	188	20.12	19.84	22.99	25.06	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
70	2592.99	90	45	26.68	26.13	29.42	31.49	< 33.01
		1	1	26.68	25.93	29.33	31.40	< 33.01
		1	187	26.76	26.32	29.56	31.63	< 33.01
		180	0	24.70	24.19	27.46	29.53	< 33.01
		1	0	20.39	19.45	22.96	25.03	< 33.01
		1	188	20.32	19.89	23.12	25.19	< 33.01
70	2655	90	45	26.68	26.18	29.45	31.52	< 33.01
		1	1	26.59	25.93	29.28	31.35	< 33.01
		1	187	26.63	26.23	29.44	31.51	< 33.01
		180	0	24.63	24.20	27.43	29.50	< 33.01
		1	0	20.12	19.27	22.73	24.80	< 33.01
		1	188	20.08	19.84	22.97	25.04	< 33.01
80	2536.02	108	54	26.74	26.34	29.55	31.62	< 33.01
		1	1	26.92	26.18	29.58	31.65	< 33.01
		1	215	26.64	26.42	29.54	31.61	< 33.01
		216	0	24.80	24.37	27.60	29.67	< 33.01
		1	0	20.46	19.47	23.00	25.07	< 33.01
		1	216	20.22	19.99	23.12	25.19	< 33.01
80	2592.99	108	54	26.60	26.09	29.36	31.43	< 33.01
		1	1	26.47	25.61	29.07	31.14	< 33.01
		1	215	26.67	26.34	29.52	31.59	< 33.01
		216	0	24.55	24.03	27.31	29.38	< 33.01
		1	0	20.20	19.24	22.76	24.83	< 33.01
		1	216	20.24	19.85	23.06	25.13	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
80	2649.99	108	54	26.59	26.06	29.34	31.41	< 33.01
		1	1	26.21	25.70	28.97	31.04	< 33.01
		1	215	26.43	26.20	29.33	31.40	< 33.01
		216	0	24.54	24.28	27.42	29.49	< 33.01
		1	0	20.01	19.04	22.56	24.63	< 33.01
		1	216	20.06	19.83	22.96	25.03	< 33.01
90	2541	120	60	26.63	26.08	29.37	31.44	< 33.01
		1	1	26.73	25.97	29.38	31.45	< 33.01
		1	243	26.47	26.28	29.39	31.46	< 33.01
		243	0	24.63	24.18	27.42	29.49	< 33.01
		1	0	20.33	19.22	22.82	24.89	< 33.01
		1	244	20.06	19.89	22.99	25.06	< 33.01
90	2592.99	120	60	26.68	26.06	29.39	31.46	< 33.01
		1	1	26.52	25.64	29.11	31.18	< 33.01
		1	243	26.75	26.32	29.55	31.62	< 33.01
		243	0	24.65	24.12	27.40	29.47	< 33.01
		1	0	20.28	19.21	22.79	24.86	< 33.01
		1	244	20.37	19.95	23.18	25.25	< 33.01
90	2644.98	120	60	26.62	26.05	29.35	31.42	< 33.01
		1	1	26.31	25.69	29.02	31.09	< 33.01
		1	243	26.58	26.21	29.41	31.48	< 33.01
		243	0	24.57	24.31	27.45	29.52	< 33.01
		1	0	20.03	18.95	22.53	24.60	< 33.01
		1	244	20.12	19.83	22.99	25.06	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
100	2546.01	135	67	26.61	26.22	29.43	31.50	< 33.01
		1	1	26.80	25.98	29.42	31.49	< 33.01
		1	271	26.48	26.49	29.50	31.57	< 33.01
		270	0	24.79	24.28	27.55	29.62	< 33.01
		1	0	20.37	19.45	22.94	25.01	< 33.01
		1	272	19.95	20.08	23.03	25.10	< 33.01
100	2592.99	135	67	26.68	26.02	29.37	31.44	< 33.01
		1	1	26.54	25.73	29.16	31.23	< 33.01
		1	271	26.78	26.45	29.63	31.70	< 33.01
		270	0	24.68	24.00	27.36	29.43	< 33.01
		1	0	20.26	19.07	22.72	24.79	< 33.01
		1	272	20.39	19.95	23.19	25.26	< 33.01
100	2640	135	67	26.69	26.10	29.42	31.49	< 33.01
		1	1	26.48	25.73	29.13	31.20	< 33.01
		1	271	26.72	26.36	29.55	31.62	< 33.01
		270	0	24.53	24.13	27.34	29.41	< 33.01
		1	0	20.24	18.90	22.63	24.70	< 33.01
		1	272	20.20	19.86	23.04	25.11	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
10	2501.01	12	6	25.30	24.61	27.98	30.05	< 33.01
		1	1	25.41	24.39	27.94	30.01	< 33.01
		1	22	25.46	24.80	28.15	30.22	< 33.01
		24	0	23.47	22.82	26.17	28.24	< 33.01
		1	0	19.93	19.24	22.61	24.68	< 33.01
		1	23	19.88	19.29	22.61	24.68	< 33.01
10	2592.99	12	6	25.48	24.67	28.10	30.17	< 33.01
		1	1	25.52	24.59	28.09	30.16	< 33.01
		1	22	25.51	24.64	28.11	30.18	< 33.01
		24	0	23.54	22.71	26.16	28.23	< 33.01
		1	0	19.98	19.10	22.57	24.64	< 33.01
		1	23	19.95	19.16	22.58	24.65	< 33.01
10	2685.00	12	6	25.54	24.79	28.19	30.26	< 33.01
		1	1	25.48	24.54	28.05	30.12	< 33.01
		1	22	25.52	24.67	28.13	30.20	< 33.01
		24	0	23.65	22.90	26.30	28.37	< 33.01
		1	0	20.05	19.19	22.65	24.72	< 33.01
		1	23	20.05	19.31	22.71	24.78	< 33.01
15	2503.50	18	9	25.41	24.43	27.96	30.03	< 33.01
		1	1	25.36	24.01	27.75	29.82	< 33.01
		1	36	25.22	24.51	27.89	29.96	< 33.01
		36	0	23.39	22.64	26.04	28.11	< 33.01
		1	0	19.91	19.08	22.53	24.60	< 33.01
		1	37	19.68	19.01	22.37	24.44	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
15	2592.99	18	9	25.44	24.59	28.05	30.12	< 33.01
		1	1	25.38	24.48	27.96	30.03	< 33.01
		1	36	25.52	24.58	28.09	30.16	< 33.01
		36	0	23.49	22.67	26.11	28.18	< 33.01
		1	0	19.88	19.01	22.48	24.55	< 33.01
		1	37	20.14	19.31	22.76	24.83	< 33.01
15	2682.48	18	9	25.46	24.68	28.10	30.17	< 33.01
		1	1	25.39	24.61	28.03	30.10	< 33.01
		1	36	25.46	24.68	28.10	30.17	< 33.01
		36	0	23.40	22.70	26.07	28.14	< 33.01
		1	0	19.81	18.91	22.39	24.46	< 33.01
		1	37	19.84	19.16	22.52	24.59	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
20	2506.02	25	12	25.75	25.16	28.48	30.55	< 33.01
		1	1	25.53	24.93	28.25	30.32	< 33.01
		1	49	25.56	24.92	28.26	30.33	< 33.01
		50	0	23.77	23.10	26.46	28.53	< 33.01
		1	0	20.23	19.49	22.89	24.96	< 33.01
		1	50	19.96	19.35	22.68	24.75	< 33.01
20	2592.99	25	12	25.73	25.13	28.45	30.52	< 33.01
		1	1	25.69	25.03	28.38	30.45	< 33.01
		1	49	25.78	25.23	28.52	30.59	< 33.01
		50	0	23.67	23.15	26.43	28.50	< 33.01
		1	0	20.14	19.55	22.87	24.94	< 33.01
		1	50	20.21	19.89	23.06	25.13	< 33.01
20	2679.99	25	12	25.70	25.17	28.45	30.52	< 33.01
		1	1	25.48	24.84	28.18	30.25	< 33.01
		1	49	25.30	25.08	28.20	30.27	< 33.01
		50	0	23.58	23.29	26.45	28.52	< 33.01
		1	0	20.05	19.66	22.87	24.94	< 33.01
		1	50	20.01	19.64	22.84	24.91	< 33.01
30	2511	36	18	25.82	25.14	28.50	30.57	< 33.01
		1	1	25.72	25.00	28.39	30.46	< 33.01
		1	76	25.57	25.11	28.36	30.43	< 33.01
		75	0	23.90	23.23	26.59	28.66	< 33.01
		1	0	20.21	19.56	22.91	24.98	< 33.01
		1	77	20.26	19.74	23.02	25.09	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
30	2592.99	36	18	25.73	25.22	28.49	30.56	< 33.01
		1	1	25.68	25.08	28.40	30.47	< 33.01
		1	76	25.76	25.33	28.56	30.63	< 33.01
		75	0	23.80	23.35	26.59	28.66	< 33.01
		1	0	20.27	19.72	23.01	25.08	< 33.01
		1	77	20.28	20.02	23.16	25.23	< 33.01
30	2674.98	36	18	25.73	25.17	28.47	30.54	< 33.01
		1	1	25.49	25.01	28.27	30.34	< 33.01
		1	76	25.67	25.32	28.51	30.58	< 33.01
		75	0	23.80	23.23	26.53	28.60	< 33.01
		1	0	20.06	19.40	22.75	24.82	< 33.01
		1	77	20.01	19.83	22.93	25.00	< 33.01
40	2516.01	50	25	25.76	25.22	28.51	30.58	< 33.01
		1	1	25.82	25.13	28.50	30.57	< 33.01
		1	104	25.77	25.28	28.54	30.61	< 33.01
		100	0	23.79	23.24	26.53	28.60	< 33.01
		1	0	20.42	19.57	23.03	25.10	< 33.01
		1	105	20.29	19.88	23.10	25.17	< 33.01
40	2592.99	50	25	25.76	25.18	28.49	30.56	< 33.01
		1	1	25.68	25.17	28.44	30.51	< 33.01
		1	104	26.00	25.48	28.76	30.83	< 33.01
		100	0	23.82	23.37	26.61	28.68	< 33.01
		1	0	20.34	19.62	23.01	25.08	< 33.01
		1	105	20.35	20.00	23.19	25.26	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
40	2670	50	25	25.41	25.12	28.28	30.35	< 33.01
		1	1	25.52	25.05	28.30	30.37	< 33.01
		1	104	25.56	25.34	28.46	30.53	< 33.01
		100	0	23.41	23.12	26.28	28.35	< 33.01
		1	0	19.82	19.30	22.58	24.65	< 33.01
		1	105	19.77	19.57	22.68	24.75	< 33.01
50	2521.02	64	32	25.68	25.18	28.45	30.52	< 33.01
		1	1	25.46	24.82	28.16	30.23	< 33.01
		1	131	25.22	25.02	28.13	30.20	< 33.01
		128	0	23.70	23.33	26.53	28.60	< 33.01
		1	0	20.09	19.22	22.69	24.76	< 33.01
		1	132	19.65	19.45	22.56	24.63	< 33.01
50	2592.99	64	32	25.66	25.07	28.39	30.46	< 33.01
		1	1	25.52	24.82	28.19	30.26	< 33.01
		1	131	25.55	25.27	28.42	30.49	< 33.01
		128	0	23.70	23.14	26.44	28.51	< 33.01
		1	0	20.34	19.33	22.87	24.94	< 33.01
		1	132	20.23	20.12	23.19	25.26	< 33.01
50	2664.99	64	32	25.44	25.16	28.31	30.38	< 33.01
		1	1	25.27	25.05	28.17	30.24	< 33.01
		1	131	25.34	25.26	28.31	30.38	< 33.01
		128	0	23.48	23.19	26.35	28.42	< 33.01
		1	0	19.96	19.33	22.67	24.74	< 33.01
		1	132	19.86	19.76	22.82	24.89	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
60	2526	81	40	25.73	25.33	28.54	30.61	< 33.01
		1	1	25.65	24.83	28.27	30.34	< 33.01
		1	160	25.34	25.18	28.27	30.34	< 33.01
		162	0	23.77	23.29	26.55	28.62	< 33.01
		1	0	20.21	19.51	22.88	24.95	< 33.01
		1	161	19.75	19.63	22.70	24.77	< 33.01
60	2592.99	81	40	25.68	25.13	28.42	30.49	< 33.01
		1	1	25.58	24.86	28.25	30.32	< 33.01
		1	160	25.70	25.34	28.53	30.60	< 33.01
		162	0	23.80	23.14	26.49	28.56	< 33.01
		1	0	20.28	19.25	22.81	24.88	< 33.01
		1	161	20.15	19.83	23.00	25.07	< 33.01
60	2659.98	81	40	25.81	25.38	28.61	30.68	< 33.01
		1	1	25.69	25.14	28.43	30.50	< 33.01
		1	160	25.63	25.21	28.44	30.51	< 33.01
		162	0	23.76	23.40	26.59	28.66	< 33.01
		1	0	20.21	19.49	22.88	24.95	< 33.01
		1	161	20.19	20.01	23.11	25.18	< 33.01
70	2531.01	90	45	25.70	25.28	28.51	30.58	< 33.01
		1	1	25.76	25.02	28.42	30.49	< 33.01
		1	187	25.51	25.25	28.39	30.46	< 33.01
		180	0	23.76	23.24	26.52	28.59	< 33.01
		1	0	20.36	19.46	22.94	25.01	< 33.01
		1	188	20.01	19.84	22.94	25.01	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
70	2592.99	90	45	25.75	25.06	28.43	30.50	< 33.01
		1	1	25.61	24.86	28.26	30.33	< 33.01
		1	187	25.75	25.26	28.52	30.59	< 33.01
		180	0	23.74	23.13	26.46	28.53	< 33.01
		1	0	20.36	19.26	22.86	24.93	< 33.01
		1	188	20.33	19.83	23.10	25.17	< 33.01
70	2655	90	45	25.67	25.16	28.43	30.50	< 33.01
		1	1	25.34	24.77	28.07	30.14	< 33.01
		1	187	25.47	25.04	28.27	30.34	< 33.01
		180	0	23.67	23.21	26.46	28.53	< 33.01
		1	0	19.94	18.93	22.47	24.54	< 33.01
		1	188	19.88	19.53	22.72	24.79	< 33.01
80	2536.02	108	54	25.80	25.36	28.60	30.67	< 33.01
		1	1	25.72	25.03	28.40	30.47	< 33.01
		1	215	25.47	25.26	28.38	30.45	< 33.01
		216	0	23.90	23.37	26.65	28.72	< 33.01
		1	0	20.52	19.47	23.04	25.11	< 33.01
		1	216	20.21	20.06	23.15	25.22	< 33.01
80	2592.99	108	54	25.64	25.09	28.38	30.45	< 33.01
		1	1	25.30	24.49	27.92	29.99	< 33.01
		1	215	25.65	25.17	28.43	30.50	< 33.01
		216	0	23.62	23.21	26.43	28.50	< 33.01
		1	0	19.99	18.92	22.50	24.57	< 33.01
		1	216	19.93	19.57	22.76	24.83	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
80	2649.99	108	54	25.51	25.07	28.31	30.38	< 33.01
		1	1	25.03	24.54	27.80	29.87	< 33.01
		1	215	25.38	24.98	28.19	30.26	< 33.01
		216	0	23.48	23.12	26.31	28.38	< 33.01
		1	0	19.80	18.97	22.42	24.49	< 33.01
		1	216	19.93	19.70	22.83	24.90	< 33.01
90	2541	120	60	25.57	25.12	28.36	30.43	< 33.01
		1	1	25.56	24.68	28.15	30.22	< 33.01
		1	243	25.38	25.29	28.35	30.42	< 33.01
		243	0	23.59	23.27	26.44	28.51	< 33.01
		1	0	20.07	18.86	22.52	24.59	< 33.01
		1	244	19.77	19.62	22.71	24.78	< 33.01
90	2592.99	120	60	25.72	25.04	28.40	30.47	< 33.01
		1	1	25.42	24.48	27.99	30.06	< 33.01
		1	243	25.59	25.17	28.40	30.47	< 33.01
		243	0	23.68	23.09	26.41	28.48	< 33.01
		1	0	20.30	19.17	22.78	24.85	< 33.01
		1	244	20.41	20.06	23.25	25.32	< 33.01
90	2644.98	120	60	25.61	25.07	28.36	30.43	< 33.01
		1	1	25.18	24.69	27.95	30.02	< 33.01
		1	243	25.52	25.28	28.41	30.48	< 33.01
		243	0	23.52	23.17	26.36	28.43	< 33.01
		1	0	20.11	19.06	22.63	24.70	< 33.01
		1	244	20.21	19.84	23.04	25.11	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
100	2546.01	135	67	25.58	25.20	28.40	30.47	< 33.01
		1	1	25.78	24.93	28.39	30.46	< 33.01
		1	271	25.42	25.37	28.41	30.48	< 33.01
		270	0	23.63	23.42	26.54	28.61	< 33.01
		1	0	20.12	18.98	22.60	24.67	< 33.01
		1	272	19.73	19.79	22.77	24.84	< 33.01
100	2592.99	135	67	25.67	25.06	28.39	30.46	< 33.01
		1	1	25.43	24.56	28.03	30.10	< 33.01
		1	271	25.74	25.26	28.52	30.59	< 33.01
		270	0	23.67	23.05	26.38	28.45	< 33.01
		1	0	20.15	18.98	22.61	24.68	< 33.01
		1	272	20.30	19.75	23.04	25.11	< 33.01
100	2640	135	67	25.66	25.09	28.39	30.46	< 33.01
		1	1	25.31	24.43	27.90	29.97	< 33.01
		1	271	25.54	25.13	28.35	30.42	< 33.01
		270	0	23.63	23.10	26.38	28.45	< 33.01
		1	0	19.99	18.64	22.38	24.45	< 33.01
		1	272	20.25	19.86	23.07	25.14	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
10	2501.01	12	6	23.34	22.74	26.06	28.13	< 33.01
		1	1	23.46	22.73	26.12	28.19	< 33.01
		1	22	23.40	22.72	26.08	28.15	< 33.01
		24	0	22.96	22.29	25.65	27.72	< 33.01
		1	0	20.05	19.29	22.70	24.77	< 33.01
		1	23	19.99	19.37	22.70	24.77	< 33.01
10	2592.99	12	6	23.51	22.68	26.13	28.20	< 33.01
		1	1	23.39	22.67	26.06	28.13	< 33.01
		1	22	25.56	22.82	27.41	29.48	< 33.01
		24	0	23.08	22.21	25.68	27.75	< 33.01
		1	0	20.19	19.36	22.81	24.88	< 33.01
		1	23	20.22	19.39	22.84	24.91	< 33.01
10	2685.00	12	6	23.65	22.83	26.27	28.34	< 33.01
		1	1	23.57	22.82	26.22	28.29	< 33.01
		1	22	23.46	22.73	26.12	28.19	< 33.01
		24	0	23.13	22.40	25.79	27.86	< 33.01
		1	0	20.23	19.46	22.87	24.94	< 33.01
		1	23	20.23	19.50	22.89	24.96	< 33.01
15	2503.50	18	9	23.41	22.67	26.07	28.14	< 33.01
		1	1	23.35	22.47	25.94	28.01	< 33.01
		1	36	23.30	22.55	25.95	28.02	< 33.01
		36	0	22.99	22.20	25.62	27.69	< 33.01
		1	0	19.95	19.20	22.60	24.67	< 33.01
		1	37	19.93	19.24	22.61	24.68	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
15	2592.99	18	9	23.45	22.65	26.08	28.15	< 33.01
		1	1	23.34	22.51	25.96	28.03	< 33.01
		1	36	23.59	22.62	26.14	28.21	< 33.01
		36	0	23.02	22.22	25.65	27.72	< 33.01
		1	0	20.19	19.33	22.79	24.86	< 33.01
		1	37	20.25	19.44	22.87	24.94	< 33.01
15	2682.48	18	9	23.49	22.71	26.13	28.20	< 33.01
		1	1	23.56	22.84	26.23	28.30	< 33.01
		1	36	23.37	22.69	26.05	28.12	< 33.01
		36	0	22.97	22.25	25.64	27.71	< 33.01
		1	0	20.05	19.16	22.64	24.71	< 33.01
		1	37	20.14	19.47	22.83	24.90	< 33.01
Note 1: Total Power (dBm) = 10*log{10 ^{^(Port 0 Output Power / 10)} + 10 ^{^(Port 1 Output Power / 10)} }								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
20	2506.02	25	12	23.73	23.18	26.47	28.54	< 33.01
		1	1	23.63	22.98	26.33	28.40	< 33.01
		1	49	23.59	23.01	26.32	28.39	< 33.01
		50	0	23.27	22.63	25.97	28.04	< 33.01
		1	0	20.08	19.39	22.76	24.83	< 33.01
		1	50	20.20	19.65	22.94	25.01	< 33.01
20	2592.99	25	12	23.72	23.24	26.50	28.57	< 33.01
		1	1	23.69	23.09	26.41	28.48	< 33.01
		1	49	23.73	23.23	26.50	28.57	< 33.01
		50	0	23.27	22.69	26.00	28.07	< 33.01
		1	0	20.33	19.83	23.10	25.17	< 33.01
		1	50	20.37	20.11	23.25	25.32	< 33.01
20	2679.99	25	12	23.59	23.17	26.40	28.47	< 33.01
		1	1	23.79	23.37	26.60	28.67	< 33.01
		1	49	23.53	23.20	26.38	28.45	< 33.01
		50	0	23.18	22.81	26.01	28.08	< 33.01
		1	0	20.05	19.60	22.84	24.91	< 33.01
		1	50	20.20	20.04	23.13	25.20	< 33.01
30	2511	36	18	23.85	23.19	26.54	28.61	< 33.01
		1	1	23.73	23.18	26.47	28.54	< 33.01
		1	76	23.70	23.28	26.51	28.58	< 33.01
		75	0	23.39	22.79	26.11	28.18	< 33.01
		1	0	20.41	19.78	23.12	25.19	< 33.01
		1	77	20.22	19.84	23.04	25.11	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
30	2592.99	36	18	23.83	23.22	26.55	28.62	< 33.01
		1	1	23.90	23.29	26.62	28.69	< 33.01
		1	76	23.87	23.47	26.68	28.75	< 33.01
		75	0	23.28	22.87	26.09	28.16	< 33.01
		1	0	20.54	20.02	23.30	25.37	< 33.01
		1	77	20.25	19.89	23.08	25.15	< 33.01
30	2674.98	36	18	23.68	23.19	26.45	28.52	< 33.01
		1	1	23.70	23.29	26.51	28.58	< 33.01
		1	76	23.77	23.38	26.59	28.66	< 33.01
		75	0	23.26	22.80	26.05	28.12	< 33.01
		1	0	20.30	19.58	22.97	25.04	< 33.01
		1	77	20.27	19.94	23.12	25.19	< 33.01
40	2516.01	50	25	23.84	23.38	26.63	28.70	< 33.01
		1	1	23.95	23.25	26.62	28.69	< 33.01
		1	104	23.85	23.51	26.69	28.76	< 33.01
		100	0	23.41	22.81	26.13	28.20	< 33.01
		1	0	20.50	19.73	23.14	25.21	< 33.01
		1	105	20.31	19.91	23.12	25.19	< 33.01
40	2592.99	50	25	23.79	23.22	26.52	28.59	< 33.01
		1	1	23.88	23.35	26.63	28.70	< 33.01
		1	104	24.11	23.70	26.92	28.99	< 33.01
		100	0	23.33	22.84	26.10	28.17	< 33.01
		1	0	20.25	19.58	22.94	25.01	< 33.01
		1	105	20.41	19.94	23.19	25.26	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
40	2670	50	25	23.39	23.06	26.24	28.31	< 33.01
		1	1	23.41	23.07	26.25	28.32	< 33.01
		1	104	23.50	23.26	26.39	28.46	< 33.01
		100	0	23.01	22.65	25.84	27.91	< 33.01
		1	0	19.97	19.49	22.75	24.82	< 33.01
		1	105	20.14	19.81	22.99	25.06	< 33.01
50	2521.02	64	32	23.66	23.27	26.48	28.55	< 33.01
		1	1	23.72	23.07	26.42	28.49	< 33.01
		1	131	23.48	23.31	26.41	28.48	< 33.01
		128	0	23.17	22.77	25.98	28.05	< 33.01
		1	0	20.30	19.48	22.92	24.99	< 33.01
		1	132	19.81	19.67	22.75	24.82	< 33.01
50	2592.99	64	32	23.68	23.08	26.40	28.47	< 33.01
		1	1	23.66	23.08	26.39	28.46	< 33.01
		1	131	23.64	23.38	26.52	28.59	< 33.01
		128	0	23.16	22.69	25.94	28.01	< 33.01
		1	0	20.52	19.66	23.12	25.19	< 33.01
		1	132	20.40	20.14	23.28	25.35	< 33.01
50	2664.99	64	32	23.49	23.18	26.35	28.42	< 33.01
		1	1	23.57	23.23	26.41	28.48	< 33.01
		1	131	23.55	23.47	26.52	28.59	< 33.01
		128	0	22.90	22.65	25.79	27.86	< 33.01
		1	0	19.95	19.30	22.65	24.72	< 33.01
		1	132	19.85	19.75	22.81	24.88	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
60	2526	81	40	23.76	23.46	26.62	28.69	< 33.01
		1	1	24.04	23.11	26.61	28.68	< 33.01
		1	160	23.51	23.26	26.40	28.47	< 33.01
		162	0	23.33	22.81	26.09	28.16	< 33.01
		1	0	20.42	19.68	23.08	25.15	< 33.01
		1	161	20.10	19.89	23.01	25.08	< 33.01
60	2592.99	81	40	23.74	23.12	26.45	28.52	< 33.01
		1	1	23.73	23.14	26.46	28.53	< 33.01
		1	160	23.89	23.74	26.83	28.90	< 33.01
		162	0	23.19	22.72	25.97	28.04	< 33.01
		1	0	20.19	19.24	22.75	24.82	< 33.01
		1	161	20.36	20.14	23.26	25.33	< 33.01
60	2659.98	81	40	23.82	23.50	26.67	28.74	< 33.01
		1	1	23.73	23.25	26.51	28.58	< 33.01
		1	160	23.74	23.44	26.60	28.67	< 33.01
		162	0	23.32	23.03	26.19	28.26	< 33.01
		1	0	20.43	19.66	23.07	25.14	< 33.01
		1	161	20.42	20.21	23.33	25.40	< 33.01
70	2531.01	90	45	23.73	23.28	26.52	28.59	< 33.01
		1	1	23.96	23.16	26.59	28.66	< 33.01
		1	187	23.77	23.43	26.61	28.68	< 33.01
		180	0	23.26	22.81	26.05	28.12	< 33.01
		1	0	20.48	19.41	22.99	25.06	< 33.01
		1	188	20.30	20.13	23.23	25.30	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
70	2592.99	90	45	23.74	23.15	26.47	28.54	< 33.01
		1	1	23.60	23.12	26.38	28.45	< 33.01
		1	187	23.84	23.46	26.66	28.73	< 33.01
		180	0	23.30	22.69	26.02	28.09	< 33.01
		1	0	20.59	19.40	23.05	25.12	< 33.01
		1	188	20.46	20.07	23.28	25.35	< 33.01
70	2655	90	45	23.64	23.24	26.45	28.52	< 33.01
		1	1	23.64	23.18	26.43	28.50	< 33.01
		1	187	23.59	23.20	26.41	28.48	< 33.01
		180	0	23.16	22.91	26.05	28.12	< 33.01
		1	0	20.24	19.45	22.87	24.94	< 33.01
		1	188	20.12	19.84	22.99	25.06	< 33.01
80	2536.02	108	54	23.73	23.30	26.53	28.60	< 33.01
		1	1	23.87	23.17	26.54	28.61	< 33.01
		1	215	23.61	23.40	26.52	28.59	< 33.01
		216	0	23.29	22.94	26.13	28.20	< 33.01
		1	0	20.50	19.53	23.05	25.12	< 33.01
		1	216	20.27	19.98	23.14	25.21	< 33.01
80	2592.99	108	54	23.65	23.02	26.36	28.43	< 33.01
		1	1	23.45	22.70	26.10	28.17	< 33.01
		1	215	23.62	23.24	26.44	28.51	< 33.01
		216	0	23.12	22.54	25.85	27.92	< 33.01
		1	0	20.22	19.12	22.72	24.79	< 33.01
		1	216	20.16	19.83	23.01	25.08	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
80	2649.99	108	54	23.56	23.09	26.34	28.41	< 33.01
		1	1	23.02	22.75	25.90	27.97	< 33.01
		1	215	23.49	23.32	26.42	28.49	< 33.01
		216	0	23.02	22.62	25.83	27.90	< 33.01
		1	0	20.13	19.30	22.75	24.82	< 33.01
		1	216	20.22	20.12	23.18	25.25	< 33.01
90	2541	120	60	23.63	23.22	26.44	28.51	< 33.01
		1	1	23.91	23.13	26.55	28.62	< 33.01
		1	243	23.62	23.53	26.59	28.66	< 33.01
		243	0	23.17	22.72	25.96	28.03	< 33.01
		1	0	20.43	19.44	22.97	25.04	< 33.01
		1	244	20.08	19.89	23.00	25.07	< 33.01
90	2592.99	120	60	23.70	23.13	26.43	28.50	< 33.01
		1	1	23.55	22.70	26.16	28.23	< 33.01
		1	243	23.75	23.22	26.50	28.57	< 33.01
		243	0	23.25	22.54	25.92	27.99	< 33.01
		1	0	20.44	19.37	22.95	25.02	< 33.01
		1	244	20.59	20.29	23.45	25.52	< 33.01
90	2644.98	120	60	23.63	23.28	26.47	28.54	< 33.01
		1	1	23.04	22.60	25.84	27.91	< 33.01
		1	243	23.54	23.13	26.35	28.42	< 33.01
		243	0	23.03	22.63	25.84	27.91	< 33.01
		1	0	19.89	18.83	22.40	24.47	< 33.01
		1	244	20.05	19.68	22.88	24.95	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
100	2546.01	135	67	23.57	23.24	26.42	28.49	< 33.01
		1	1	23.78	23.04	26.44	28.51	< 33.01
		1	271	23.45	23.38	26.43	28.50	< 33.01
		270	0	23.31	22.87	26.11	28.18	< 33.01
		1	0	20.30	19.22	22.80	24.87	< 33.01
		1	272	19.78	19.95	22.88	24.95	< 33.01
100	2592.99	135	67	23.67	23.09	26.40	28.47	< 33.01
		1	1	23.68	22.82	26.28	28.35	< 33.01
		1	271	23.78	23.28	26.55	28.62	< 33.01
		270	0	23.14	22.58	25.88	27.95	< 33.01
		1	0	20.14	18.96	22.60	24.67	< 33.01
		1	272	20.52	20.13	23.34	25.41	< 33.01
100	2640	135	67	23.65	23.16	26.42	28.49	< 33.01
		1	1	23.27	22.54	25.93	28.00	< 33.01
		1	271	23.79	23.47	26.64	28.71	< 33.01
		270	0	23.18	22.61	25.91	27.98	< 33.01
		1	0	20.11	18.83	22.53	24.60	< 33.01
		1	272	20.12	19.77	22.96	25.03	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
10	2501.01	12	6	20.95	20.32	23.66	25.73	< 33.01
		1	1	20.93	20.17	23.58	25.65	< 33.01
		1	22	20.96	20.34	23.67	25.74	< 33.01
		24	0	20.87	20.18	23.55	25.62	< 33.01
		1	0	19.86	19.20	22.55	24.62	< 33.01
		1	23	19.90	19.22	22.58	24.65	< 33.01
10	2592.99	12	6	21.05	20.25	23.68	25.75	< 33.01
		1	1	21.03	20.28	23.68	25.75	< 33.01
		1	22	20.88	20.05	23.50	25.57	< 33.01
		24	0	20.99	20.12	23.59	25.66	< 33.01
		1	0	19.93	19.13	22.56	24.63	< 33.01
		1	23	19.84	19.06	22.48	24.55	< 33.01
10	2685.00	12	6	21.18	20.42	23.83	25.90	< 33.01
		1	1	21.13	20.43	23.80	25.87	< 33.01
		1	22	21.09	20.41	23.77	25.84	< 33.01
		24	0	21.08	20.32	23.73	25.80	< 33.01
		1	0	20.03	9.14	20.37	22.44	< 33.01
		1	23	20.06	19.38	22.74	24.81	< 33.01
15	2503.50	18	9	21.01	20.23	23.65	25.72	< 33.01
		1	1	21.07	20.33	23.73	25.80	< 33.01
		1	36	21.05	20.34	23.72	25.79	< 33.01
		36	0	20.89	20.19	23.56	25.63	< 33.01
		1	0	20.05	19.21	22.66	24.73	< 33.01
		1	37	19.98	19.32	22.67	24.74	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
15	2592.99	18	9	21.80	20.25	24.10	26.17	< 33.01
		1	1	21.09	20.31	23.73	25.80	< 33.01
		1	36	21.06	20.27	23.69	25.76	< 33.01
		36	0	20.98	20.19	23.61	25.68	< 33.01
		1	0	20.03	19.11	22.60	24.67	< 33.01
		1	37	20.19	19.43	22.84	24.91	< 33.01
15	2682.48	18	9	20.98	20.24	23.64	25.71	< 33.01
		1	1	20.97	20.40	23.70	25.77	< 33.01
		1	36	20.91	20.30	23.63	25.70	< 33.01
		36	0	21.00	20.21	23.63	25.70	< 33.01
		1	0	19.97	19.13	22.58	24.65	< 33.01
		1	37	19.94	19.25	22.62	24.69	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
20	2506.02	25	12	21.38	20.69	24.06	26.13	< 33.01
		1	1	21.31	20.56	23.96	26.03	< 33.01
		1	49	21.25	20.67	23.98	26.05	< 33.01
		50	0	21.25	20.58	23.94	26.01	< 33.01
		1	0	20.20	19.45	22.85	24.92	< 33.01
		1	50	20.31	19.78	23.06	25.13	< 33.01
20	2592.99	25	12	21.25	20.81	24.05	26.12	< 33.01
		1	1	21.06	20.52	23.81	25.88	< 33.01
		1	49	21.11	20.70	23.92	25.99	< 33.01
		50	0	21.18	20.85	24.03	26.10	< 33.01
		1	0	20.12	19.53	22.85	24.92	< 33.01
		1	50	20.13	19.68	22.92	24.99	< 33.01
20	2679.99	25	12	21.16	20.92	24.05	26.12	< 33.01
		1	1	21.24	20.93	24.10	26.17	< 33.01
		1	49	21.18	20.99	24.10	26.17	< 33.01
		50	0	21.18	20.80	24.00	26.07	< 33.01
		1	0	20.16	19.72	22.96	25.03	< 33.01
		1	50	20.15	19.93	23.05	25.12	< 33.01
30	2511	36	18	21.25	20.67	23.98	26.05	< 33.01
		1	1	21.42	20.69	24.08	26.15	< 33.01
		1	76	21.19	20.67	23.95	26.02	< 33.01
		75	0	21.36	20.75	24.08	26.15	< 33.01
		1	0	20.25	19.44	22.87	24.94	< 33.01
		1	77	20.28	19.96	23.13	25.20	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
30	2592.99	36	18	21.19	20.85	24.03	26.10	< 33.01
		1	1	21.19	20.83	24.02	26.09	< 33.01
		1	76	21.25	20.92	24.10	26.17	< 33.01
		75	0	21.26	20.88	24.08	26.15	< 33.01
		1	0	20.30	19.75	23.04	25.11	< 33.01
		1	77	20.40	20.08	23.25	25.32	< 33.01
30	2674.98	36	18	21.17	20.75	23.98	26.05	< 33.01
		1	1	21.31	20.84	24.09	26.16	< 33.01
		1	76	21.16	20.89	24.04	26.11	< 33.01
		75	0	21.27	20.81	24.06	26.13	< 33.01
		1	0	20.20	19.58	22.91	24.98	< 33.01
		1	77	20.34	20.10	23.23	25.30	< 33.01
40	2516.01	50	25	21.33	20.72	24.05	26.12	< 33.01
		1	1	21.53	20.91	24.24	26.31	< 33.01
		1	104	21.45	21.07	24.27	26.34	< 33.01
		100	0	21.39	20.87	24.15	26.22	< 33.01
		1	0	20.44	19.73	23.11	25.18	< 33.01
		1	105	20.40	19.94	23.19	25.26	< 33.01
40	2592.99	50	25	21.25	20.90	24.09	26.16	< 33.01
		1	1	21.37	20.94	24.17	26.24	< 33.01
		1	104	21.34	20.97	24.17	26.24	< 33.01
		100	0	21.35	21.00	24.19	26.26	< 33.01
		1	0	20.38	19.66	23.05	25.12	< 33.01
		1	105	20.61	20.22	23.43	25.50	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
40	2670	50	25	20.89	20.55	23.73	25.80	< 33.01
		1	1	21.03	20.61	23.84	25.91	< 33.01
		1	104	21.09	20.89	24.00	26.07	< 33.01
		100	0	20.95	20.71	23.84	25.91	< 33.01
		1	0	20.12	19.67	22.91	24.98	< 33.01
		1	105	19.94	19.82	22.89	24.96	< 33.01
50	2521.02	64	32	21.18	20.66	23.94	26.01	< 33.01
		1	1	21.26	20.65	23.98	26.05	< 33.01
		1	131	20.96	20.84	23.91	25.98	< 33.01
		128	0	21.18	20.69	23.95	26.02	< 33.01
		1	0	20.45	19.61	23.06	25.13	< 33.01
		1	132	19.83	19.70	22.78	24.85	< 33.01
50	2592.99	64	32	21.20	20.63	23.93	26.00	< 33.01
		1	1	21.09	20.52	23.82	25.89	< 33.01
		1	131	21.11	20.90	24.02	26.09	< 33.01
		128	0	21.23	20.63	23.95	26.02	< 33.01
		1	0	20.19	19.41	22.83	24.90	< 33.01
		1	132	20.11	19.87	23.00	25.07	< 33.01
50	2664.99	64	32	20.93	20.73	23.84	25.91	< 33.01
		1	1	20.98	20.76	23.88	25.95	< 33.01
		1	131	20.98	20.84	23.92	25.99	< 33.01
		128	0	20.94	20.71	23.84	25.91	< 33.01
		1	0	20.13	19.72	22.94	25.01	< 33.01
		1	132	20.03	19.92	22.99	25.06	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
60	2526	81	40	21.28	20.87	24.09	26.16	< 33.01
		1	1	21.53	20.74	24.16	26.23	< 33.01
		1	160	21.16	20.99	24.09	26.16	< 33.01
		162	0	21.28	20.89	24.10	26.17	< 33.01
		1	0	20.45	19.68	23.09	25.16	< 33.01
		1	161	20.04	19.93	23.00	25.07	< 33.01
60	2592.99	81	40	21.22	20.59	23.93	26.00	< 33.01
		1	1	21.18	20.63	23.92	25.99	< 33.01
		1	160	21.13	20.80	23.98	26.05	< 33.01
		162	0	21.25	20.72	24.00	26.07	< 33.01
		1	0	20.39	19.51	22.98	25.05	< 33.01
		1	161	20.18	19.82	23.01	25.08	< 33.01
60	2659.98	81	40	21.30	20.88	24.11	26.18	< 33.01
		1	1	21.25	20.68	23.98	26.05	< 33.01
		1	160	21.28	20.99	24.15	26.22	< 33.01
		162	0	21.28	21.01	24.16	26.23	< 33.01
		1	0	20.32	19.52	22.95	25.02	< 33.01
		1	161	20.15	19.89	23.03	25.10	< 33.01
70	2531.01	90	45	21.20	20.73	23.98	26.05	< 33.01
		1	1	21.19	20.42	23.83	25.90	< 33.01
		1	187	20.92	20.59	23.77	25.84	< 33.01
		180	0	21.31	20.78	24.06	26.13	< 33.01
		1	0	20.48	19.46	23.01	25.08	< 33.01
		1	188	20.12	19.82	22.98	25.05	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
70	2592.99	90	45	21.29	20.66	24.00	26.07	< 33.01
		1	1	21.29	20.54	23.94	26.01	< 33.01
		1	187	21.11	20.70	23.92	25.99	< 33.01
		180	0	21.27	20.62	23.97	26.04	< 33.01
		1	0	20.31	19.31	22.85	24.92	< 33.01
		1	188	20.26	19.83	23.06	25.13	< 33.01
70	2655	90	45	21.19	20.81	24.01	26.08	< 33.01
		1	1	20.98	20.52	23.77	25.84	< 33.01
		1	187	21.12	20.68	23.92	25.99	< 33.01
		180	0	21.15	20.73	23.96	26.03	< 33.01
		1	0	20.17	19.36	22.79	24.86	< 33.01
		1	188	20.10	19.76	22.94	25.01	< 33.01
80	2536.02	108	54	21.09	20.62	23.87	25.94	< 33.01
		1	1	21.28	20.61	23.97	26.04	< 33.01
		1	215	20.96	20.72	23.85	25.92	< 33.01
		216	0	21.25	20.63	23.96	26.03	< 33.01
		1	0	20.19	19.28	22.77	24.84	< 33.01
		1	216	20.06	19.86	22.97	25.04	< 33.01
80	2592.99	108	54	21.06	20.54	23.82	25.89	< 33.01
		1	1	21.03	20.26	23.67	25.74	< 33.01
		1	215	21.06	20.67	23.88	25.95	< 33.01
		216	0	21.08	20.47	23.80	25.87	< 33.01
		1	0	20.14	19.08	22.65	24.72	< 33.01
		1	216	20.12	19.82	22.98	25.05	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
80	2649.99	108	54	21.07	20.69	23.89	25.96	< 33.01
		1	1	20.59	20.12	23.37	25.44	< 33.01
		1	215	21.10	20.84	23.98	26.05	< 33.01
		216	0	20.95	20.73	23.85	25.92	< 33.01
		1	0	19.81	19.00	22.43	24.50	< 33.01
		1	216	19.89	19.68	22.80	24.87	< 33.01
90	2541	120	60	21.08	20.67	23.89	25.96	< 33.01
		1	1	21.37	20.64	24.03	26.10	< 33.01
		1	243	21.12	21.03	24.09	26.16	< 33.01
		243	0	21.09	20.76	23.94	26.01	< 33.01
		1	0	20.29	19.26	22.82	24.89	< 33.01
		1	244	19.98	19.99	23.00	25.07	< 33.01
90	2592.99	120	60	21.20	20.57	23.91	25.98	< 33.01
		1	1	20.99	20.08	23.57	25.64	< 33.01
		1	243	21.16	20.84	24.01	26.08	< 33.01
		243	0	21.16	20.72	23.96	26.03	< 33.01
		1	0	20.26	19.19	22.77	24.84	< 33.01
		1	244	20.28	19.94	23.12	25.19	< 33.01
90	2644.98	120	60	21.13	20.63	23.90	25.97	< 33.01
		1	1	20.50	19.95	23.24	25.31	< 33.01
		1	243	20.91	20.51	23.72	25.79	< 33.01
		243	0	21.09	20.57	23.85	25.92	< 33.01
		1	0	20.00	19.03	22.55	24.62	< 33.01
		1	244	20.10	19.85	22.99	25.06	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
100	2546.01	135	67	21.17	20.76	23.98	26.05	< 33.01
		1	1	21.28	20.52	23.93	26.00	< 33.01
		1	271	21.00	21.14	24.08	26.15	< 33.01
		270	0	21.14	20.77	23.97	26.04	< 33.01
		1	0	20.18	19.02	22.65	24.72	< 33.01
		1	272	19.86	19.98	22.93	25.00	< 33.01
100	2592.99	135	67	21.18	20.65	23.93	26.00	< 33.01
		1	1	20.89	20.17	23.56	25.63	< 33.01
		1	271	21.27	20.78	24.04	26.11	< 33.01
		270	0	21.16	20.56	23.88	25.95	< 33.01
		1	0	20.35	19.16	22.81	24.88	< 33.01
		1	272	20.42	20.06	23.25	25.32	< 33.01
100	2640	135	67	21.21	20.74	23.99	26.06	< 33.01
		1	1	20.94	20.12	23.56	25.63	< 33.01
		1	271	21.41	20.98	24.21	26.28	< 33.01
		270	0	21.12	20.58	23.87	25.94	< 33.01
		1	0	20.35	18.98	22.73	24.80	< 33.01
		1	272	20.37	20.04	23.22	25.29	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
10	2501.01	12	6	25.03	24.10	27.60	29.67	< 33.01
		1	1	25.05	24.01	27.57	29.64	< 33.01
		1	22	25.10	24.36	27.76	29.83	< 33.01
		24	0	22.53	21.84	25.21	27.28	< 33.01
		1	0	20.08	19.29	22.71	24.78	< 33.01
		1	23	20.06	19.39	22.75	24.82	< 33.01
10	2592.99	12	6	25.12	24.25	27.72	29.79	< 33.01
		1	1	25.06	24.09	27.61	29.68	< 33.01
		1	22	25.21	24.27	27.78	29.85	< 33.01
		24	0	22.57	21.76	25.19	27.26	< 33.01
		1	0	20.09	19.28	22.71	24.78	< 33.01
		1	23	20.08	19.28	22.71	24.78	< 33.01
10	2685.00	12	6	25.18	24.50	27.86	29.93	< 33.01
		1	1	25.30	24.23	27.81	29.88	< 33.01
		1	22	25.16	24.42	27.82	29.89	< 33.01
		24	0	22.64	21.82	25.26	27.33	< 33.01
		1	0	20.24	19.43	22.86	24.93	< 33.01
		1	23	20.16	19.42	22.82	24.89	< 33.01
15	2503.50	19	9	24.98	24.05	27.55	29.62	< 33.01
		1	1	24.90	23.70	27.35	29.42	< 33.01
		1	36	25.19	24.20	27.73	29.80	< 33.01
		38	0	22.51	21.71	25.14	27.21	< 33.01
		1	0	20.14	19.32	22.76	24.83	< 33.01
		1	37	20.09	19.38	22.76	24.83	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
15	2592.99	19	9	24.98	24.15	27.60	29.67	< 33.01
		1	1	24.92	23.95	27.47	29.54	< 33.01
		1	36	25.24	24.41	27.86	29.93	< 33.01
		38	0	22.62	21.66	25.18	27.25	< 33.01
		1	0	20.08	19.09	22.62	24.69	< 33.01
		1	37	20.22	19.32	22.80	24.87	< 33.01
15	2682.48	19	9	25.03	24.22	27.65	29.72	< 33.01
		1	1	25.14	24.18	27.70	29.77	< 33.01
		1	36	25.03	24.38	27.73	29.80	< 33.01
		38	0	22.44	21.79	25.14	27.21	< 33.01
		1	0	20.32	19.39	22.89	24.96	< 33.01
		1	37	20.19	19.42	22.83	24.90	< 33.01
Note 1: Total Power (dBm) = 10*log{10 ^{^(Port 0 Output Power / 10)} + 10 ^{^(Port 1 Output Power / 10)} }								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
20	2506.02	25	12	25.27	24.67	27.99	30.06	< 33.01
		1	1	25.18	24.53	27.88	29.95	< 33.01
		1	49	25.14	24.54	27.86	29.93	< 33.01
		51	0	22.78	22.18	25.50	27.57	< 33.01
		1	0	20.19	19.49	22.86	24.93	< 33.01
		1	50	20.26	19.74	23.02	25.09	< 33.01
20	2592.99	25	12	25.13	24.68	27.92	29.99	< 33.01
		1	1	25.21	24.60	27.93	30.00	< 33.01
		1	49	25.26	24.74	28.02	30.09	< 33.01
		51	0	22.65	22.24	25.46	27.53	< 33.01
		1	0	20.41	19.84	23.14	25.21	< 33.01
		1	50	20.34	20.04	23.20	25.27	< 33.01
20	2679.99	25	12	25.14	24.64	27.91	29.98	< 33.01
		1	1	25.22	24.76	28.01	30.08	< 33.01
		1	49	25.18	24.93	28.07	30.14	< 33.01
		51	0	22.71	22.26	25.50	27.57	< 33.01
		1	0	20.22	19.82	23.03	25.10	< 33.01
		1	50	20.32	20.13	23.24	25.31	< 33.01
30	2511	39	19	25.28	24.57	27.95	30.02	< 33.01
		1	1	25.44	24.63	28.06	30.13	< 33.01
		1	76	25.48	24.73	28.13	30.20	< 33.01
		78	0	22.81	22.26	25.55	27.62	< 33.01
		1	0	20.47	19.72	23.12	25.19	< 33.01
		1	77	20.41	19.96	23.20	25.27	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
30	2592.99	39	19	25.19	24.65	27.94	30.01	< 33.01
		1	1	25.36	24.76	28.08	30.15	< 33.01
		1	76	25.43	25.19	28.32	30.39	< 33.01
		78	0	22.73	22.27	25.52	27.59	< 33.01
		1	0	20.29	19.96	23.14	25.21	< 33.01
		1	77	20.47	20.30	23.40	25.47	< 33.01
30	2674.98	39	19	25.23	24.67	27.97	30.04	< 33.01
		1	1	25.24	24.64	27.96	30.03	< 33.01
		1	76	25.30	25.27	28.30	30.37	< 33.01
		78	0	22.79	22.25	25.54	27.61	< 33.01
		1	0	20.35	19.78	23.08	25.15	< 33.01
		1	77	20.34	20.03	23.20	25.27	< 33.01
40	2516.01	53	26	25.24	24.74	28.01	30.08	< 33.01
		1	1	25.31	24.58	27.97	30.04	< 33.01
		1	104	25.23	24.79	28.03	30.10	< 33.01
		106	0	22.83	22.30	25.58	27.65	< 33.01
		1	0	20.50	19.79	23.17	25.24	< 33.01
		1	105	20.52	20.21	23.38	25.45	< 33.01
40	2592.99	53	26	24.91	24.53	27.73	29.80	< 33.01
		1	1	25.10	24.68	27.91	29.98	< 33.01
		1	104	25.03	24.65	27.85	29.92	< 33.01
		106	0	22.52	22.04	25.30	27.37	< 33.01
		1	0	20.30	19.80	23.07	25.14	< 33.01
		1	105	20.24	19.99	23.13	25.20	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
40	2670	53	26	24.84	24.54	27.70	29.77	< 33.01
		1	1	25.04	24.57	27.82	29.89	< 33.01
		1	104	25.05	24.72	27.90	29.97	< 33.01
		106	0	22.41	22.13	25.28	27.35	< 33.01
		1	0	19.99	19.62	22.82	24.89	< 33.01
		1	105	20.15	19.86	23.02	25.09	< 33.01
50	2521.02	67	33	25.07	24.73	27.91	29.98	< 33.01
		1	1	25.28	24.54	27.94	30.01	< 33.01
		1	131	25.10	24.84	27.98	30.05	< 33.01
		133	0	22.68	22.23	25.47	27.54	< 33.01
		1	0	20.37	19.81	23.11	25.18	< 33.01
		1	132	20.01	19.84	22.94	25.01	< 33.01
50	2592.99	67	33	25.13	24.48	27.83	29.90	< 33.01
		1	1	24.84	24.32	27.60	29.67	< 33.01
		1	131	25.01	24.73	27.88	29.95	< 33.01
		133	0	22.59	22.02	25.32	27.39	< 33.01
		1	0	20.35	19.55	22.98	25.05	< 33.01
		1	132	20.25	19.94	23.11	25.18	< 33.01
50	2664.99	67	33	24.91	24.55	27.74	29.81	< 33.01
		1	1	25.01	24.59	27.82	29.89	< 33.01
		1	131	25.02	24.76	27.90	29.97	< 33.01
		133	0	22.48	22.18	25.34	27.41	< 33.01
		1	0	20.23	19.68	22.97	25.04	< 33.01
		1	132	20.08	19.84	22.97	25.04	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
60	2526	81	40	25.24	24.82	28.05	30.12	< 33.01
		1	1	25.42	24.58	28.03	30.10	< 33.01
		1	160	25.14	24.92	28.04	30.11	< 33.01
		162	0	22.78	22.32	25.57	27.64	< 33.01
		1	0	20.53	19.65	23.12	25.19	< 33.01
		1	161	20.22	20.02	23.13	25.20	< 33.01
60	2592.99	81	40	25.27	24.59	27.95	30.02	< 33.01
		1	1	25.25	24.63	27.96	30.03	< 33.01
		1	160	25.34	24.96	28.16	30.23	< 33.01
		162	0	22.82	22.17	25.52	27.59	< 33.01
		1	0	20.60	19.56	23.12	25.19	< 33.01
		1	161	20.42	19.97	23.21	25.28	< 33.01
60	2659.98	81	40	25.16	24.71	27.95	30.02	< 33.01
		1	1	25.05	24.79	27.93	30.00	< 33.01
		1	160	25.12	24.85	28.00	30.07	< 33.01
		162	0	22.68	22.30	25.50	27.57	< 33.01
		1	0	20.29	19.52	22.93	25.00	< 33.01
		1	161	20.25	19.97	23.12	25.19	< 33.01
70	2531.01	95	47	25.26	24.74	28.02	30.09	< 33.01
		1	1	25.30	24.46	27.91	29.98	< 33.01
		1	187	25.46	24.93	28.21	30.28	< 33.01
		189	0	22.73	22.33	25.54	27.61	< 33.01
		1	0	20.53	19.86	23.22	25.29	< 33.01
		1	188	20.17	19.86	23.03	25.10	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
70	2592.99	95	47	25.17	24.56	27.89	29.96	< 33.01
		1	1	25.21	24.51	27.88	29.95	< 33.01
		1	187	25.28	25.25	28.28	30.35	< 33.01
		189	0	22.71	22.16	25.45	27.52	< 33.01
		1	0	20.36	19.51	22.97	25.04	< 33.01
		1	188	20.38	19.83	23.12	25.19	< 33.01
70	2655	95	47	25.29	24.67	28.00	30.07	< 33.01
		1	1	25.19	24.45	27.85	29.92	< 33.01
		1	187	25.32	25.09	28.22	30.29	< 33.01
		189	0	22.73	22.20	25.48	27.55	< 33.01
		1	0	20.32	19.73	23.05	25.12	< 33.01
		1	188	20.31	19.89	23.12	25.19	< 33.01
80	2536.02	109	54	25.28	24.87	28.09	30.16	< 33.01
		1	1	25.39	24.65	28.05	30.12	< 33.01
		1	215	25.32	25.19	28.27	30.34	< 33.01
		217	0	22.75	22.37	25.57	27.64	< 33.01
		1	0	20.68	19.62	23.19	25.26	< 33.01
		1	216	20.35	20.17	23.27	25.34	< 33.01
80	2592.99	109	54	25.10	24.47	27.81	29.88	< 33.01
		1	1	25.07	24.13	27.64	29.71	< 33.01
		1	215	25.36	24.95	28.17	30.24	< 33.01
		217	0	22.65	22.05	25.37	27.44	< 33.01
		1	0	20.23	19.24	22.77	24.84	< 33.01
		1	216	20.28	19.91	23.11	25.18	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
80	2649.99	109	54	24.99	24.51	27.77	29.84	< 33.01
		1	1	24.73	24.25	27.51	29.58	< 33.01
		1	215	25.17	24.79	28.00	30.07	< 33.01
		217	0	22.51	22.09	25.32	27.39	< 33.01
		1	0	20.04	19.22	22.66	24.73	< 33.01
		1	216	20.18	19.88	23.04	25.11	< 33.01
90	2541	123	61	25.04	24.61	27.84	29.91	< 33.01
		1	1	25.32	24.56	27.97	30.04	< 33.01
		1	243	24.95	24.67	27.82	29.89	< 33.01
		245	0	22.60	22.18	25.41	27.48	< 33.01
		1	0	20.40	19.37	22.93	25.00	< 33.01
		1	244	20.00	19.89	22.96	25.03	< 33.01
90	2592.99	123	61	25.18	24.50	27.86	29.93	< 33.01
		1	1	25.09	24.25	27.70	29.77	< 33.01
		1	243	25.34	24.98	28.17	30.24	< 33.01
		245	0	22.63	22.12	25.39	27.46	< 33.01
		1	0	20.28	19.22	22.79	24.86	< 33.01
		1	244	20.53	20.09	23.33	25.40	< 33.01
90	2644.98	123	61	25.03	24.61	27.84	29.91	< 33.01
		1	1	24.74	24.11	27.45	29.52	< 33.01
		1	243	25.07	24.74	27.92	29.99	< 33.01
		245	0	22.54	22.17	25.37	27.44	< 33.01
		1	0	20.13	19.09	22.65	24.72	< 33.01
		1	244	20.29	19.86	23.09	25.16	< 33.01
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
100	2546.01	137	68	25.07	24.70	27.90	29.97	< 33.01
		1	1	25.40	24.65	28.05	30.12	< 33.01
		1	271	24.96	24.86	27.92	29.99	< 33.01
		273	0	22.67	22.21	25.46	27.53	< 33.01
		1	0	20.45	19.41	22.97	25.04	< 33.01
		1	272	20.12	20.14	23.14	25.21	< 33.01
100	2592.99	137	68	25.14	24.48	27.83	29.90	< 33.01
		1	1	25.12	24.16	27.68	29.75	< 33.01
		1	271	25.52	24.85	28.21	30.28	< 33.01
		273	0	22.71	22.12	25.44	27.51	< 33.01
		1	0	20.40	19.28	22.89	24.96	< 33.01
		1	272	20.50	19.96	23.25	25.32	< 33.01
100	2640	137	68	25.17	24.57	27.89	29.96	< 33.01
		1	1	25.00	24.24	27.65	29.72	< 33.01
		1	271	25.27	24.86	28.08	30.15	< 33.01
		273	0	22.63	22.13	25.40	27.47	< 33.01
		1	0	20.39	19.08	22.79	24.86	< 33.01
		1	272	20.42	19.96	23.21	25.28	< 33.01

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/04/03 ~ 2023/04/08 2023/05/10 ~ 2023/05/12	Test Band	n77/n78_UL MIMO (3450 ~ 3550MHz)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
10	3455.01	12	6	25.43	24.63	28.06	28.64	< 30.00
		1	1	25.36	24.62	28.02	28.60	< 30.00
		1	22	25.32	24.57	27.97	28.55	< 30.00
		24	0	23.97	23.24	26.63	27.21	< 30.00
		1	0	19.54	18.86	22.22	22.80	< 30.00
		1	23	19.53	18.88	22.23	22.81	< 30.00
10	3500.01	12	6	25.44	24.68	28.09	28.67	< 30.00
		1	1	24.39	24.89	27.66	28.24	< 30.00
		1	22	25.42	24.68	28.08	28.66	< 30.00
		24	0	24.01	23.24	26.65	27.23	< 30.00
		1	0	19.57	18.84	22.23	22.81	< 30.00
		1	23	19.45	18.73	22.12	22.70	< 30.00
10	3544.98	12	6	25.47	24.76	28.14	28.72	< 30.00
		1	1	25.46	24.64	28.08	28.66	< 30.00
		1	22	25.32	24.60	27.99	28.57	< 30.00
		24	0	23.89	23.22	26.58	27.16	< 30.00
		1	0	19.52	18.75	22.16	22.74	< 30.00
		1	23	19.52	18.73	22.15	22.73	< 30.00
15	3457.50	18	9	25.73	24.91	28.35	28.93	< 30.00
		1	1	25.72	24.91	28.34	28.92	< 30.00
		1	36	25.76	24.90	28.36	28.94	< 30.00
		36	0	24.25	23.45	26.88	27.46	< 30.00
		1	0	19.78	19.03	22.43	23.01	< 30.00
		1	37	19.84	19.06	22.48	23.06	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
15	3500.01	18	9	25.70	24.97	28.36	28.94	< 30.00
		1	1	25.72	24.94	28.36	28.94	< 30.00
		1	36	25.65	24.92	28.31	28.89	< 30.00
		36	0	24.27	23.46	26.89	27.47	< 30.00
		1	0	19.86	19.04	22.48	23.06	< 30.00
		1	37	19.80	19.01	22.43	23.01	< 30.00
15	3542.49	18	9	25.72	24.91	28.34	28.92	< 30.00
		1	1	25.72	24.89	28.34	28.92	< 30.00
		1	36	25.73	24.83	28.31	28.89	< 30.00
		36	0	24.27	23.46	26.89	27.47	< 30.00
		1	0	19.85	19.10	22.50	23.08	< 30.00
		1	37	19.85	18.90	22.41	22.99	< 30.00
20	3460.02	25	12	25.93	25.07	28.53	29.11	< 30.00
		1	1	25.84	25.06	28.48	29.06	< 30.00
		1	49	25.90	25.02	28.49	29.07	< 30.00
		50	0	24.48	23.62	27.08	27.66	< 30.00
		1	0	19.96	19.15	22.58	23.16	< 30.00
		1	50	20.01	19.13	22.60	23.18	< 30.00
20	3500.01	25	12	25.83	25.11	28.50	29.08	< 30.00
		1	1	25.84	25.13	28.51	29.09	< 30.00
		1	49	25.74	25.05	28.42	29.00	< 30.00
		50	0	23.90	23.18	26.57	27.15	< 30.00
		1	0	19.52	18.71	22.14	22.72	< 30.00
		1	50	19.32	18.57	21.97	22.55	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
20	3540.00	25	12	25.87	25.08	28.50	29.08	< 30.00
		1	1	25.83	25.09	28.49	29.07	< 30.00
		1	49	25.83	24.99	28.44	29.02	< 30.00
		50	0	24.41	23.64	27.05	27.63	< 30.00
		1	0	20.04	19.19	22.65	23.23	< 30.00
		1	50	19.88	19.09	22.51	23.09	< 30.00
25	3462.51	32	16	25.92	25.24	28.60	29.18	< 30.00
		1	1	25.84	25.26	28.57	29.15	< 30.00
		1	63	25.86	25.12	28.52	29.10	< 30.00
		64	0	24.39	23.70	27.07	27.65	< 30.00
		1	0	19.95	19.31	22.65	23.23	< 30.00
		1	64	19.97	19.17	22.60	23.18	< 30.00
25	3500.01	32	16	25.85	25.09	28.50	29.08	< 30.00
		1	1	25.93	25.13	28.56	29.14	< 30.00
		1	63	25.75	25.11	28.45	29.03	< 30.00
		64	0	24.34	23.62	27.01	27.59	< 30.00
		1	0	19.99	19.24	22.64	23.22	< 30.00
		1	64	19.83	19.14	22.51	23.09	< 30.00
25	3537.48	32	16	25.88	25.10	28.52	29.10	< 30.00
		1	1	25.91	25.13	28.55	29.13	< 30.00
		1	63	25.85	25.03	28.47	29.05	< 30.00
		64	0	24.32	23.71	27.04	27.62	< 30.00
		1	0	19.93	19.32	22.65	23.23	< 30.00
		1	64	19.74	19.19	22.48	23.06	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
30	3465.00	36	18	25.91	25.17	28.57	29.15	< 30.00
		1	1	25.89	25.13	28.54	29.12	< 30.00
		1	76	25.82	25.13	28.50	29.08	< 30.00
		75	0	24.55	23.79	27.20	27.78	< 30.00
		1	0	20.09	19.39	22.76	23.34	< 30.00
		1	77	20.06	19.28	22.70	23.28	< 30.00
30	3500.01	36	18	25.88	25.19	28.56	29.14	< 30.00
		1	1	26.05	25.21	28.66	29.24	< 30.00
		1	76	25.82	25.13	28.50	29.08	< 30.00
		75	0	24.49	23.72	27.13	27.71	< 30.00
		1	0	20.16	19.30	22.76	23.34	< 30.00
		1	77	19.90	19.31	22.63	23.21	< 30.00
30	3534.99	36	18	25.82	25.08	28.48	29.06	< 30.00
		1	1	25.86	25.24	28.57	29.15	< 30.00
		1	76	25.77	25.06	28.44	29.02	< 30.00
		75	0	24.44	23.74	27.11	27.69	< 30.00
		1	0	19.86	19.43	22.66	23.24	< 30.00
		1	77	19.95	19.25	22.62	23.20	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
40	3470.01	50	25	25.98	25.24	28.64	29.22	< 30.00
		1	1	25.92	25.28	28.62	29.20	< 30.00
		1	104	25.87	25.26	28.59	29.17	< 30.00
		100	0	24.53	23.83	27.20	27.78	< 30.00
		1	0	20.05	19.54	22.81	23.39	< 30.00
		1	105	20.01	19.38	22.72	23.30	< 30.00
40	3500.01	50	25	25.92	25.20	28.59	29.17	< 30.00
		1	1	26.07	25.18	28.66	29.24	< 30.00
		1	104	25.83	25.11	28.50	29.08	< 30.00
		100	0	24.50	23.84	27.19	27.77	< 30.00
		1	0	20.23	19.53	22.90	23.48	< 30.00
		1	105	20.05	19.32	22.71	23.29	< 30.00
40	3529.98	50	25	25.84	25.14	28.51	29.09	< 30.00
		1	1	25.93	25.24	28.61	29.19	< 30.00
		1	104	25.83	25.14	28.51	29.09	< 30.00
		100	0	24.43	23.73	27.10	27.68	< 30.00
		1	0	20.09	19.48	22.81	23.39	< 30.00
		1	105	19.99	19.26	22.65	23.23	< 30.00
50	3475.02	64	32	25.78	25.04	28.44	29.02	< 30.00
		1	1	25.78	25.10	28.46	29.04	< 30.00
		1	131	25.52	24.79	28.18	28.76	< 30.00
		128	0	24.30	23.56	26.96	27.54	< 30.00
		1	0	19.90	19.23	22.59	23.17	< 30.00
		1	132	19.56	18.88	22.24	22.82	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
50	3500.01	64	32	25.81	24.94	28.41	28.99	< 30.00
		1	1	25.97	25.15	28.59	29.17	< 30.00
		1	131	25.53	24.72	28.15	28.73	< 30.00
		128	0	24.31	23.46	26.92	27.50	< 30.00
		1	0	20.12	19.21	22.70	23.28	< 30.00
		1	132	19.64	18.87	22.28	22.86	< 30.00
50	3525.00	64	32	25.75	24.88	28.35	28.93	< 30.00
		1	1	25.77	24.91	28.37	28.95	< 30.00
		1	131	25.51	24.62	28.10	28.68	< 30.00
		128	0	24.28	23.45	26.90	27.48	< 30.00
		1	0	19.98	19.18	22.61	23.19	< 30.00
		1	132	19.70	18.85	22.31	22.89	< 30.00
60	3480.00	81	40	25.70	24.73	28.25	28.83	< 30.00
		1	1	25.69	24.79	28.27	28.85	< 30.00
		1	160	25.29	24.51	27.93	28.51	< 30.00
		162	0	24.08	23.29	26.71	27.29	< 30.00
		1	0	19.65	18.93	22.32	22.90	< 30.00
		1	161	19.46	18.75	22.13	22.71	< 30.00
60	3500.01	81	40	25.64	24.81	28.26	28.84	< 30.00
		1	1	25.84	24.90	28.41	28.99	< 30.00
		1	160	25.40	24.60	28.03	28.61	< 30.00
		162	0	24.17	23.29	26.76	27.34	< 30.00
		1	0	19.86	18.96	22.44	23.02	< 30.00
		1	161	19.47	18.71	22.12	22.70	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
60	3519.99	81	40	25.68	24.79	28.27	28.85	< 30.00
		1	1	25.80	24.79	28.33	28.91	< 30.00
		1	160	25.42	24.47	27.98	28.56	< 30.00
		162	0	24.14	23.27	26.74	27.32	< 30.00
		1	0	19.85	18.79	22.36	22.94	< 30.00
		1	161	19.46	18.59	22.06	22.64	< 30.00
70	3485.01	90	45	25.52	24.63	28.11	28.69	< 30.00
		1	1	25.67	24.85	28.29	28.87	< 30.00
		1	187	25.29	24.55	27.95	28.53	< 30.00
		180	0	24.10	23.27	26.72	27.30	< 30.00
		1	0	19.68	19.14	22.43	23.01	< 30.00
		1	188	19.24	18.53	21.91	22.49	< 30.00
70	3500.01	90	45	25.56	24.71	28.17	28.75	< 30.00
		1	1	25.73	24.86	28.33	28.91	< 30.00
		1	187	25.28	24.49	27.91	28.49	< 30.00
		180	0	24.07	23.27	26.70	27.28	< 30.00
		1	0	19.77	19.04	22.43	23.01	< 30.00
		1	188	19.23	18.55	21.91	22.49	< 30.00
70	3514.98	90	45	25.53	24.69	28.14	28.72	< 30.00
		1	1	25.71	24.84	28.31	28.89	< 30.00
		1	187	25.23	24.40	27.85	28.43	< 30.00
		180	0	24.05	23.23	26.67	27.25	< 30.00
		1	0	19.78	18.96	22.40	22.98	< 30.00
		1	188	19.36	18.51	21.97	22.55	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
80	3490.02	108	54	25.66	24.72	28.23	28.81	< 30.00
		1	1	25.64	24.77	28.24	28.82	< 30.00
		1	215	25.31	24.52	27.94	28.52	< 30.00
		216	0	24.01	23.29	26.68	27.26	< 30.00
		1	0	19.67	19.09	22.40	22.98	< 30.00
		1	216	19.36	18.58	22.00	22.58	< 30.00
80	3500.01	108	54	25.58	24.78	28.21	28.79	< 30.00
		1	1	25.74	24.90	28.35	28.93	< 30.00
		1	215	25.32	24.50	27.94	28.52	< 30.00
		216	0	24.15	23.27	26.74	27.32	< 30.00
		1	0	19.82	19.02	22.45	23.03	< 30.00
		1	216	19.33	18.60	21.99	22.57	< 30.00
80	3510.00	108	54	25.57	24.74	28.19	28.77	< 30.00
		1	1	25.76	24.75	28.29	28.87	< 30.00
		1	215	25.32	24.50	27.94	28.52	< 30.00
		216	0	24.06	23.25	26.68	27.26	< 30.00
		1	0	19.88	18.87	22.41	22.99	< 30.00
		1	216	19.27	18.51	21.92	22.50	< 30.00
90	3495.00	120	60	25.58	24.75	28.20	28.78	< 30.00
		1	1	25.67	24.73	28.24	28.82	< 30.00
		1	243	25.34	24.54	27.97	28.55	< 30.00
		243	0	24.09	23.31	26.73	27.31	< 30.00
		1	0	19.64	19.05	22.37	22.95	< 30.00
		1	244	19.37	18.64	22.03	22.61	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
90	3500.01	120	60	25.57	24.88	28.25	28.83	< 30.00
		1	1	25.69	24.91	28.33	28.91	< 30.00
		1	243	25.41	24.58	28.03	28.61	< 30.00
		243	0	24.12	23.36	26.77	27.35	< 30.00
		1	0	19.74	19.02	22.41	22.99	< 30.00
		1	244	19.30	18.73	22.03	22.61	< 30.00
90	3504.99	120	60	25.61	24.84	28.25	28.83	< 30.00
		1	1	25.85	24.97	28.44	29.02	< 30.00
		1	243	25.41	24.55	28.01	28.59	< 30.00
		243	0	24.18	23.32	26.78	27.36	< 30.00
		1	0	19.94	19.07	22.54	23.12	< 30.00
		1	244	19.44	18.69	22.09	22.67	< 30.00
100	3500.01	135	67	25.57	24.82	28.22	28.80	< 30.00
		1	1	25.65	24.95	28.32	28.90	< 30.00
		1	271	25.45	24.65	28.08	28.66	< 30.00
		270	0	24.11	23.34	26.75	27.33	< 30.00
		1	0	19.68	19.03	22.38	22.96	< 30.00
		1	272	19.43	18.62	22.05	22.63	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
10	3455.01	12	6	25.41	24.63	28.05	28.63	< 30.00
		1	1	25.39	24.57	28.01	28.59	< 30.00
		1	22	25.32	24.60	27.99	28.57	< 30.00
		24	0	23.40	22.75	26.10	26.68	< 30.00
		1	0	18.94	18.23	21.61	22.19	< 30.00
		1	23	18.95	18.22	21.61	22.19	< 30.00
10	3500.01	12	6	25.46	24.66	28.09	28.67	< 30.00
		1	1	25.41	24.66	28.06	28.64	< 30.00
		1	22	24.37	24.67	27.53	28.11	< 30.00
		24	0	23.52	22.72	26.15	26.73	< 30.00
		1	0	18.98	18.26	21.65	22.23	< 30.00
		1	23	18.90	18.20	21.57	22.15	< 30.00
10	3544.98	12	6	25.46	24.59	28.06	28.64	< 30.00
		1	1	25.41	24.62	28.04	28.62	< 30.00
		1	22	24.35	24.63	27.50	28.08	< 30.00
		24	0	23.39	22.71	26.07	26.65	< 30.00
		1	0	19.05	18.24	21.67	22.25	< 30.00
		1	23	18.95	18.27	21.63	22.21	< 30.00
15	3457.50	18	9	25.74	24.87	28.34	28.92	< 30.00
		1	1	25.73	24.87	28.33	28.91	< 30.00
		1	36	25.77	24.82	28.33	28.91	< 30.00
		36	0	23.75	22.95	26.38	26.96	< 30.00
		1	0	19.26	18.52	21.92	22.50	< 30.00
		1	37	19.32	18.44	21.91	22.49	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
15	3500.01	18	9	25.71	24.96	28.36	28.94	< 30.00
		1	1	25.77	24.94	28.39	28.97	< 30.00
		1	36	25.74	24.95	28.37	28.95	< 30.00
		36	0	23.76	22.95	26.38	26.96	< 30.00
		1	0	19.36	18.51	21.97	22.55	< 30.00
		1	37	19.19	18.43	21.84	22.42	< 30.00
15	3542.49	18	9	25.75	24.91	28.36	28.94	< 30.00
		1	1	25.65	24.84	28.27	28.85	< 30.00
		1	36	25.78	24.85	28.35	28.93	< 30.00
		36	0	23.79	22.92	26.39	26.97	< 30.00
		1	0	19.29	18.51	21.93	22.51	< 30.00
		1	37	19.13	18.36	21.77	22.35	< 30.00
20	3460.02	25	12	25.92	25.09	28.54	29.12	< 30.00
		1	1	25.92	25.04	28.51	29.09	< 30.00
		1	49	25.89	25.06	28.51	29.09	< 30.00
		50	0	23.94	23.12	26.56	27.14	< 30.00
		1	0	19.42	18.68	22.08	22.66	< 30.00
		1	50	19.47	18.63	22.08	22.66	< 30.00
20	3500.01	25	12	25.82	25.11	28.49	29.07	< 30.00
		1	1	25.90	25.14	28.55	29.13	< 30.00
		1	49	25.74	24.96	28.38	28.96	< 30.00
		50	0	23.90	23.19	26.57	27.15	< 30.00
		1	0	19.44	18.65	22.07	22.65	< 30.00
		1	50	19.26	18.59	21.95	22.53	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
20	3540.00	25	12	25.82	25.01	28.44	29.02	< 30.00
		1	1	25.84	25.10	28.50	29.08	< 30.00
		1	49	25.80	24.96	28.41	28.99	< 30.00
		50	0	23.93	23.12	26.55	27.13	< 30.00
		1	0	19.52	18.74	22.16	22.74	< 30.00
		1	50	19.40	18.61	22.03	22.61	< 30.00
25	3462.51	32	16	25.91	25.17	28.57	29.15	< 30.00
		1	1	25.84	25.28	28.58	29.16	< 30.00
		1	63	25.87	25.16	28.54	29.12	< 30.00
		64	0	23.89	23.20	26.57	27.15	< 30.00
		1	0	19.29	18.74	22.03	22.61	< 30.00
		1	64	19.43	18.67	22.08	22.66	< 30.00
25	3500.01	32	16	25.87	25.12	28.52	29.10	< 30.00
		1	1	25.93	25.14	28.56	29.14	< 30.00
		1	63	25.79	25.09	28.46	29.04	< 30.00
		64	0	23.85	23.11	26.51	27.09	< 30.00
		1	0	20.40	18.74	22.66	23.24	< 30.00
		1	64	19.25	18.65	21.97	22.55	< 30.00
25	3537.48	32	16	25.83	25.05	28.47	29.05	< 30.00
		1	1	25.87	25.17	28.54	29.12	< 30.00
		1	63	25.78	25.06	28.45	29.03	< 30.00
		64	0	23.81	23.18	26.52	27.10	< 30.00
		1	0	19.39	18.69	22.06	22.64	< 30.00
		1	64	19.20	18.61	21.93	22.51	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
30	3465.00	36	18	25.94	25.20	28.60	29.18	< 30.00
		1	1	25.97	25.19	28.61	29.19	< 30.00
		1	76	25.86	25.07	28.49	29.07	< 30.00
		75	0	24.06	23.28	26.70	27.28	< 30.00
		1	0	19.47	18.85	22.18	22.76	< 30.00
		1	77	19.42	18.64	22.06	22.64	< 30.00
30	3500.01	36	18	25.84	25.11	28.50	29.08	< 30.00
		1	1	26.04	25.20	28.65	29.23	< 30.00
		1	76	25.87	25.14	28.53	29.11	< 30.00
		75	0	23.98	23.20	26.62	27.20	< 30.00
		1	0	19.70	18.91	22.33	22.91	< 30.00
		1	77	19.37	18.74	22.08	22.66	< 30.00
30	3534.99	36	18	25.83	25.12	28.50	29.08	< 30.00
		1	1	25.90	25.17	28.56	29.14	< 30.00
		1	76	25.80	25.04	28.45	29.03	< 30.00
		75	0	23.97	23.28	26.65	27.23	< 30.00
		1	0	19.57	18.87	22.24	22.82	< 30.00
		1	77	19.39	18.66	22.05	22.63	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
40	3470.01	50	25	25.97	25.20	28.61	29.19	< 30.00
		1	1	25.98	25.33	28.68	29.26	< 30.00
		1	104	25.82	25.32	28.59	29.17	< 30.00
		100	0	24.04	23.33	26.71	27.29	< 30.00
		1	0	19.59	18.99	22.31	22.89	< 30.00
		1	105	19.49	18.90	22.22	22.80	< 30.00
40	3500.01	50	25	25.99	25.25	28.65	29.23	< 30.00
		1	1	26.13	25.29	28.74	29.32	< 30.00
		1	104	25.83	25.17	28.52	29.10	< 30.00
		100	0	23.98	23.31	26.67	27.25	< 30.00
		1	0	19.70	18.98	22.37	22.95	< 30.00
		1	105	19.40	18.82	22.13	22.71	< 30.00
40	3529.98	50	25	25.87	25.15	28.54	29.12	< 30.00
		1	1	25.83	25.30	28.58	29.16	< 30.00
		1	104	25.84	25.18	28.53	29.11	< 30.00
		100	0	23.93	23.21	26.60	27.18	< 30.00
		1	0	19.48	18.88	22.20	22.78	< 30.00
		1	105	19.44	18.72	22.11	22.69	< 30.00
50	3475.02	64	32	25.79	24.98	28.41	28.99	< 30.00
		1	1	25.78	25.22	28.52	29.10	< 30.00
		1	131	25.43	24.77	28.12	28.70	< 30.00
		128	0	23.81	23.04	26.45	27.03	< 30.00
		1	0	19.34	18.64	22.01	22.59	< 30.00
		1	132	19.05	18.30	21.70	22.28	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
50	3500.01	64	32	25.77	24.92	28.38	28.96	< 30.00
		1	1	25.91	25.05	28.51	29.09	< 30.00
		1	131	25.57	24.70	28.17	28.75	< 30.00
		128	0	23.81	23.02	26.44	27.02	< 30.00
		1	0	19.52	18.63	22.11	22.69	< 30.00
		1	132	19.10	18.39	21.77	22.35	< 30.00
50	3525.00	64	32	25.72	24.89	28.34	28.92	< 30.00
		1	1	25.74	24.98	28.39	28.97	< 30.00
		1	131	25.51	24.63	28.10	28.68	< 30.00
		128	0	23.83	22.98	26.44	27.02	< 30.00
		1	0	19.40	18.64	22.05	22.63	< 30.00
		1	132	19.16	18.22	21.73	22.31	< 30.00
60	3480.00	81	40	25.67	24.73	28.24	28.82	< 30.00
		1	1	25.68	24.79	28.27	28.85	< 30.00
		1	160	25.33	24.53	27.96	28.54	< 30.00
		162	0	23.64	22.76	26.23	26.81	< 30.00
		1	0	19.17	18.45	21.84	22.42	< 30.00
		1	161	18.85	18.16	21.53	22.11	< 30.00
60	3500.01	81	40	25.60	24.75	28.21	28.79	< 30.00
		1	1	25.74	24.81	28.31	28.89	< 30.00
		1	160	25.34	24.60	28.00	28.58	< 30.00
		162	0	23.66	22.76	26.24	26.82	< 30.00
		1	0	19.31	18.34	21.86	22.44	< 30.00
		1	161	18.86	18.05	21.48	22.06	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
60	3519.99	81	40	25.63	24.81	28.25	28.83	< 30.00
		1	1	25.71	24.82	28.30	28.88	< 30.00
		1	160	25.43	24.39	27.95	28.53	< 30.00
		162	0	23.68	22.70	26.23	26.81	< 30.00
		1	0	19.24	18.32	21.81	22.39	< 30.00
		1	161	18.98	17.99	21.52	22.10	< 30.00
70	3485.01	90	45	25.47	24.70	28.11	28.69	< 30.00
		1	1	25.66	24.77	28.25	28.83	< 30.00
		1	187	25.20	24.53	27.89	28.47	< 30.00
		180	0	23.59	22.79	26.22	26.80	< 30.00
		1	0	19.12	18.43	21.80	22.38	< 30.00
		1	188	18.71	18.02	21.39	21.97	< 30.00
70	3500.01	90	45	25.59	24.71	28.18	28.76	< 30.00
		1	1	25.83	24.89	28.40	28.98	< 30.00
		1	187	25.26	24.47	27.89	28.47	< 30.00
		180	0	23.54	22.82	26.21	26.79	< 30.00
		1	0	19.16	18.47	21.84	22.42	< 30.00
		1	188	18.81	17.93	21.40	21.98	< 30.00
70	3514.98	90	45	25.55	24.72	28.17	28.75	< 30.00
		1	1	25.68	24.74	28.25	28.83	< 30.00
		1	187	25.22	24.61	27.94	28.52	< 30.00
		180	0	23.51	22.70	26.13	26.71	< 30.00
		1	0	19.26	18.44	21.88	22.46	< 30.00
		1	188	18.82	17.99	21.44	22.02	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
80	3490.02	108	54	25.56	24.77	28.19	28.77	< 30.00
		1	1	25.68	24.73	28.24	28.82	< 30.00
		1	215	25.28	24.54	27.94	28.52	< 30.00
		216	0	23.51	22.79	26.18	26.76	< 30.00
		1	0	19.15	18.45	21.82	22.40	< 30.00
		1	216	18.73	18.07	21.42	22.00	< 30.00
80	3500.01	108	54	25.54	24.73	28.16	28.74	< 30.00
		1	1	25.79	24.79	28.33	28.91	< 30.00
		1	215	25.37	24.40	27.92	28.50	< 30.00
		216	0	23.67	22.76	26.25	26.83	< 30.00
		1	0	19.24	18.43	21.86	22.44	< 30.00
		1	216	18.87	17.92	21.43	22.01	< 30.00
80	3510.00	108	54	25.50	24.72	28.14	28.72	< 30.00
		1	1	25.70	24.71	28.24	28.82	< 30.00
		1	215	25.33	24.47	27.93	28.51	< 30.00
		216	0	23.56	22.74	26.18	26.76	< 30.00
		1	0	19.27	18.40	21.87	22.45	< 30.00
		1	216	18.79	18.01	21.43	22.01	< 30.00
90	3495.00	120	60	25.60	24.74	28.20	28.78	< 30.00
		1	1	25.62	24.88	28.28	28.86	< 30.00
		1	243	25.34	24.50	27.95	28.53	< 30.00
		243	0	23.56	22.80	26.21	26.79	< 30.00
		1	0	19.15	18.48	21.84	22.42	< 30.00
		1	244	18.91	18.10	21.53	22.11	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
90	3500.01	120	60	25.57	24.82	28.22	28.80	< 30.00
		1	1	25.71	24.86	28.32	28.90	< 30.00
		1	243	25.36	24.63	28.02	28.60	< 30.00
		243	0	23.61	22.86	26.26	26.84	< 30.00
		1	0	19.18	18.50	21.86	22.44	< 30.00
		1	244	18.90	17.98	21.47	22.05	< 30.00
90	3504.99	120	60	25.63	24.83	28.26	28.84	< 30.00
		1	1	25.84	24.91	28.41	28.99	< 30.00
		1	243	25.42	24.62	28.05	28.63	< 30.00
		243	0	23.74	22.83	26.32	26.90	< 30.00
		1	0	19.42	18.53	22.01	22.59	< 30.00
		1	244	19.10	18.14	21.66	22.24	< 30.00
100	3500.01	135	67	25.56	24.86	28.23	28.81	< 30.00
		1	1	25.68	24.86	28.30	28.88	< 30.00
		1	271	25.47	24.60	28.07	28.65	< 30.00
		270	0	23.57	22.82	26.22	26.80	< 30.00
		1	0	19.14	18.49	21.84	22.42	< 30.00
		1	272	18.86	18.11	21.51	22.09	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
10	3455.01	12	6	24.42	23.67	27.07	27.65	< 30.00
		1	1	24.38	23.65	27.04	27.62	< 30.00
		1	22	24.28	23.57	26.95	27.53	< 30.00
		24	0	22.49	21.80	25.17	25.75	< 30.00
		1	0	18.94	18.06	21.53	22.11	< 30.00
		1	23	18.91	18.23	21.59	22.17	< 30.00
10	3500.01	12	6	24.36	23.59	27.00	27.58	< 30.00
		1	1	24.44	23.61	27.06	27.64	< 30.00
		1	22	24.28	23.45	26.90	27.48	< 30.00
		24	0	22.59	21.78	25.21	25.79	< 30.00
		1	0	18.98	18.22	21.63	22.21	< 30.00
		1	23	18.90	18.04	21.50	22.08	< 30.00
10	3544.98	12	6	24.42	23.60	27.04	27.62	< 30.00
		1	1	24.46	23.57	27.05	27.63	< 30.00
		1	22	24.27	23.51	26.92	27.50	< 30.00
		24	0	22.53	21.75	25.17	25.75	< 30.00
		1	0	19.06	18.25	21.68	22.26	< 30.00
		1	23	18.93	18.11	21.55	22.13	< 30.00
15	3457.50	18	9	24.72	23.90	27.34	27.92	< 30.00
		1	1	24.70	23.89	27.32	27.90	< 30.00
		1	36	24.63	23.70	27.20	27.78	< 30.00
		36	0	22.83	21.99	25.44	26.02	< 30.00
		1	0	19.15	18.36	21.78	22.36	< 30.00
		1	37	19.30	18.49	21.92	22.50	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
15	3500.01	18	9	24.69	23.91	27.33	27.91	< 30.00
		1	1	24.55	23.78	27.19	27.77	< 30.00
		1	36	24.52	23.81	27.19	27.77	< 30.00
		36	0	22.79	21.99	25.42	26.00	< 30.00
		1	0	19.18	18.48	21.85	22.43	< 30.00
		1	37	19.08	18.34	21.74	22.32	< 30.00
15	3542.49	18	9	24.69	23.84	27.30	27.88	< 30.00
		1	1	24.51	23.82	27.19	27.77	< 30.00
		1	36	24.51	23.66	27.12	27.70	< 30.00
		36	0	22.81	21.97	25.42	26.00	< 30.00
		1	0	19.20	18.38	21.82	22.40	< 30.00
		1	37	19.16	18.33	21.78	22.36	< 30.00
20	3460.02	25	12	24.90	24.10	27.53	28.11	< 30.00
		1	1	24.67	23.88	27.30	27.88	< 30.00
		1	49	24.90	24.05	27.51	28.09	< 30.00
		50	0	23.02	22.21	25.64	26.22	< 30.00
		1	0	19.32	18.52	21.95	22.53	< 30.00
		1	50	19.39	18.60	22.02	22.60	< 30.00
20	3500.01	25	12	24.88	24.12	27.53	28.11	< 30.00
		1	1	24.84	24.07	27.48	28.06	< 30.00
		1	49	24.52	23.95	27.25	27.83	< 30.00
		50	0	22.92	22.17	25.57	26.15	< 30.00
		1	0	19.34	18.54	21.97	22.55	< 30.00
		1	50	19.30	18.50	21.93	22.51	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
20	3540.00	25	12	24.85	24.06	27.48	28.06	< 30.00
		1	1	24.95	24.14	27.57	28.15	< 30.00
		1	49	24.81	24.05	27.46	28.04	< 30.00
		50	0	22.95	22.14	25.57	26.15	< 30.00
		1	0	19.31	18.57	21.97	22.55	< 30.00
		1	50	19.27	18.44	21.89	22.47	< 30.00
25	3462.51	32	16	24.91	24.15	27.56	28.14	< 30.00
		1	1	24.78	24.16	27.49	28.07	< 30.00
		1	63	24.83	24.15	27.51	28.09	< 30.00
		64	0	22.89	22.18	25.56	26.14	< 30.00
		1	0	19.42	18.78	22.12	22.70	< 30.00
		1	64	19.38	18.61	22.02	22.60	< 30.00
25	3500.01	32	16	24.85	24.12	27.51	28.09	< 30.00
		1	1	24.96	24.06	27.54	28.12	< 30.00
		1	63	24.76	24.06	27.43	28.01	< 30.00
		64	0	22.81	22.11	25.48	26.06	< 30.00
		1	0	19.37	18.75	22.08	22.66	< 30.00
		1	64	19.23	18.53	21.90	22.48	< 30.00
25	3537.48	32	16	24.86	24.11	27.51	28.09	< 30.00
		1	1	24.80	24.00	27.43	28.01	< 30.00
		1	63	24.71	24.04	27.40	27.98	< 30.00
		64	0	22.84	22.17	25.53	26.11	< 30.00
		1	0	19.36	18.69	22.05	22.63	< 30.00
		1	64	19.17	18.39	21.81	22.39	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
30	3465.00	36	18	24.95	24.21	27.61	28.19	< 30.00
		1	1	24.97	24.28	27.65	28.23	< 30.00
		1	76	24.69	23.97	27.36	27.94	< 30.00
		75	0	23.10	22.33	25.74	26.32	< 30.00
		1	0	19.45	18.82	22.16	22.74	< 30.00
		1	77	19.38	18.72	22.07	22.65	< 30.00
30	3500.01	36	18	24.86	24.11	27.51	28.09	< 30.00
		1	1	24.96	24.20	27.61	28.19	< 30.00
		1	76	24.65	23.95	27.32	27.90	< 30.00
		75	0	23.08	22.24	25.69	26.27	< 30.00
		1	0	19.58	18.87	22.25	22.83	< 30.00
		1	77	19.41	18.71	22.08	22.66	< 30.00
30	3534.99	36	18	24.87	24.08	27.50	28.08	< 30.00
		1	1	24.69	23.99	27.36	27.94	< 30.00
		1	76	24.75	24.09	27.44	28.02	< 30.00
		75	0	22.99	22.31	25.67	26.25	< 30.00
		1	0	19.38	18.85	22.13	22.71	< 30.00
		1	77	19.36	18.54	21.98	22.56	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
40	3470.01	50	25	25.00	24.24	27.65	28.23	< 30.00
		1	1	24.86	24.28	27.59	28.17	< 30.00
		1	104	24.91	24.26	27.61	28.19	< 30.00
		100	0	23.02	22.35	25.71	26.29	< 30.00
		1	0	19.54	18.96	22.27	22.85	< 30.00
		1	105	19.54	18.95	22.27	22.85	< 30.00
40	3500.01	50	25	24.94	24.16	27.58	28.16	< 30.00
		1	1	25.19	24.27	27.76	28.34	< 30.00
		1	104	24.84	24.21	27.55	28.13	< 30.00
		100	0	23.04	22.31	25.70	26.28	< 30.00
		1	0	19.75	19.02	22.41	22.99	< 30.00
		1	105	19.31	18.71	22.03	22.61	< 30.00
40	3529.98	50	25	24.89	24.14	27.54	28.12	< 30.00
		1	1	24.98	24.26	27.65	28.23	< 30.00
		1	104	24.74	24.14	27.46	28.04	< 30.00
		100	0	22.93	22.25	25.61	26.19	< 30.00
		1	0	19.62	18.91	22.29	22.87	< 30.00
		1	105	19.56	18.83	22.22	22.80	< 30.00
50	3475.02	64	32	14.81	23.97	24.47	25.05	< 30.00
		1	1	24.60	23.81	27.23	27.81	< 30.00
		1	131	24.47	23.67	27.10	27.68	< 30.00
		128	0	22.84	22.06	25.48	26.06	< 30.00
		1	0	19.23	18.57	21.92	22.50	< 30.00
		1	132	18.99	18.31	21.67	22.25	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
50	3500.01	64	32	24.74	23.98	27.39	27.97	< 30.00
		1	1	24.95	24.02	27.52	28.10	< 30.00
		1	131	24.32	23.52	26.95	27.53	< 30.00
		128	0	22.82	22.07	25.47	26.05	< 30.00
		1	0	19.60	18.70	22.18	22.76	< 30.00
		1	132	19.21	18.31	21.79	22.37	< 30.00
50	3525.00	64	32	24.75	23.89	27.35	27.93	< 30.00
		1	1	24.53	23.82	27.20	27.78	< 30.00
		1	131	24.50	23.65	27.11	27.69	< 30.00
		128	0	22.83	22.02	25.45	26.03	< 30.00
		1	0	19.26	18.46	21.89	22.47	< 30.00
		1	132	19.03	18.19	21.64	22.22	< 30.00
60	3480.00	81	40	24.63	23.66	27.18	27.76	< 30.00
		1	1	24.66	23.76	27.24	27.82	< 30.00
		1	160	24.18	23.40	26.82	27.40	< 30.00
		162	0	22.66	21.77	25.25	25.83	< 30.00
		1	0	19.10	18.31	21.73	22.31	< 30.00
		1	161	18.76	17.97	21.39	21.97	< 30.00
60	3500.01	81	40	24.55	23.72	27.17	27.75	< 30.00
		1	1	24.68	23.78	27.26	27.84	< 30.00
		1	160	24.36	23.34	26.89	27.47	< 30.00
		162	0	22.67	21.77	25.25	25.83	< 30.00
		1	0	19.23	18.29	21.80	22.38	< 30.00
		1	161	18.87	18.01	21.47	22.05	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
60	3519.99	81	40	24.62	23.69	27.19	27.77	< 30.00
		1	1	24.72	23.77	27.28	27.86	< 30.00
		1	160	24.34	23.40	26.91	27.49	< 30.00
		162	0	22.68	21.71	25.23	25.81	< 30.00
		1	0	19.19	18.25	21.76	22.34	< 30.00
		1	161	18.85	17.96	21.44	22.02	< 30.00
70	3485.01	90	45	24.51	23.74	27.15	27.73	< 30.00
		1	1	24.53	23.78	27.18	27.76	< 30.00
		1	187	24.26	23.51	26.91	27.49	< 30.00
		180	0	22.58	21.78	25.21	25.79	< 30.00
		1	0	19.04	18.30	21.70	22.28	< 30.00
		1	188	18.68	17.97	21.35	21.93	< 30.00
70	3500.01	90	45	24.52	23.70	27.14	27.72	< 30.00
		1	1	24.81	23.73	27.31	27.89	< 30.00
		1	187	24.04	23.25	26.67	27.25	< 30.00
		180	0	22.54	21.80	25.20	25.78	< 30.00
		1	0	19.22	18.41	21.84	22.42	< 30.00
		1	188	18.82	17.97	21.43	22.01	< 30.00
70	3514.98	90	45	24.47	23.66	27.09	27.67	< 30.00
		1	1	24.61	23.76	27.22	27.80	< 30.00
		1	187	24.18	23.32	26.78	27.36	< 30.00
		180	0	22.55	21.69	25.15	25.73	< 30.00
		1	0	19.19	18.28	21.77	22.35	< 30.00
		1	188	18.66	17.91	21.31	21.89	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
80	3490.02	108	54	24.54	23.72	27.16	27.74	< 30.00
		1	1	24.69	23.75	27.26	27.84	< 30.00
		1	215	24.02	23.23	26.65	27.23	< 30.00
		216	0	22.55	21.78	25.19	25.77	< 30.00
		1	0	19.15	18.55	21.87	22.45	< 30.00
		1	216	18.74	18.11	21.45	22.03	< 30.00
80	3500.01	108	54	24.50	23.78	27.17	27.75	< 30.00
		1	1	24.74	23.78	27.30	27.88	< 30.00
		1	215	24.38	23.49	26.97	27.55	< 30.00
		216	0	22.66	21.76	25.24	25.82	< 30.00
		1	0	19.18	18.32	21.78	22.36	< 30.00
		1	216	18.84	17.96	21.43	22.01	< 30.00
80	3510.00	108	54	24.50	23.73	27.14	27.72	< 30.00
		1	1	24.69	23.70	27.23	27.81	< 30.00
		1	215	24.28	23.33	26.84	27.42	< 30.00
		216	0	22.57	21.74	25.19	25.77	< 30.00
		1	0	19.20	18.30	21.78	22.36	< 30.00
		1	216	18.69	17.86	21.31	21.89	< 30.00
90	3495.00	120	60	24.59	23.72	27.19	27.77	< 30.00
		1	1	24.63	23.81	27.25	27.83	< 30.00
		1	243	24.36	23.58	27.00	27.58	< 30.00
		243	0	22.63	21.86	25.27	25.85	< 30.00
		1	0	19.03	18.25	21.67	22.25	< 30.00
		1	244	18.82	18.01	21.44	22.02	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
90	3500.01	120	60	24.61	23.82	27.24	27.82	< 30.00
		1	1	24.87	23.82	27.39	27.97	< 30.00
		1	243	24.35	23.56	26.98	27.56	< 30.00
		243	0	22.66	21.90	25.31	25.89	< 30.00
		1	0	19.11	18.43	21.79	22.37	< 30.00
		1	244	18.83	18.06	21.47	22.05	< 30.00
90	3504.99	120	60	24.67	23.82	27.28	27.86	< 30.00
		1	1	24.71	23.82	27.30	27.88	< 30.00
		1	243	24.31	23.45	26.91	27.49	< 30.00
		243	0	22.70	21.84	25.30	25.88	< 30.00
		1	0	19.61	18.37	22.04	22.62	< 30.00
		1	244	19.10	18.22	21.69	22.27	< 30.00
100	3500.01	135	67	24.55	23.83	27.22	27.80	< 30.00
		1	1	24.62	23.79	27.24	27.82	< 30.00
		1	271	24.31	23.58	26.97	27.55	< 30.00
		270	0	22.61	21.83	25.25	25.83	< 30.00
		1	0	19.15	18.40	21.80	22.38	< 30.00
		1	272	18.80	18.06	21.46	22.04	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
10	3455.01	12	6	22.58	21.75	25.20	25.78	< 30.00
		1	1	22.63	21.79	25.24	25.82	< 30.00
		1	22	22.45	21.77	25.13	25.71	< 30.00
		24	0	22.05	21.31	24.71	25.29	< 30.00
		1	0	19.09	18.33	21.74	22.32	< 30.00
		1	23	18.90	18.21	21.58	22.16	< 30.00
10	3500.01	12	6	22.57	21.76	25.19	25.77	< 30.00
		1	1	22.66	21.86	25.29	25.87	< 30.00
		1	22	22.53	21.97	25.27	25.85	< 30.00
		24	0	22.00	21.21	24.63	25.21	< 30.00
		1	0	19.10	18.38	21.77	22.35	< 30.00
		1	23	19.01	18.33	21.69	22.27	< 30.00
10	3544.98	12	6	22.51	21.75	25.16	25.74	< 30.00
		1	1	22.45	21.66	25.08	25.66	< 30.00
		1	22	22.52	21.75	25.16	25.74	< 30.00
		24	0	22.02	21.27	24.67	25.25	< 30.00
		1	0	19.08	18.28	21.71	22.29	< 30.00
		1	23	19.13	18.36	21.77	22.35	< 30.00
15	3457.50	18	9	22.80	21.97	25.42	26.00	< 30.00
		1	1	22.79	22.13	25.48	26.06	< 30.00
		1	36	22.89	21.99	25.47	26.05	< 30.00
		36	0	22.38	21.52	24.98	25.56	< 30.00
		1	0	19.16	18.37	21.79	22.37	< 30.00
		1	37	19.33	18.37	21.89	22.47	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
15	3500.01	18	9	22.78	22.01	25.42	26.00	< 30.00
		1	1	22.81	22.03	25.45	26.03	< 30.00
		1	36	22.82	22.08	25.48	26.06	< 30.00
		36	0	22.29	21.48	24.91	25.49	< 30.00
		1	0	19.58	18.78	22.21	22.79	< 30.00
		1	37	19.34	18.73	22.06	22.64	< 30.00
15	3542.49	18	9	22.83	21.95	25.42	26.00	< 30.00
		1	1	22.73	22.02	25.40	25.98	< 30.00
		1	36	22.75	21.95	25.38	25.96	< 30.00
		36	0	22.36	21.48	24.95	25.53	< 30.00
		1	0	19.57	18.88	22.25	22.83	< 30.00
		1	37	19.24	18.39	21.85	22.43	< 30.00
20	3460.02	25	12	22.92	22.14	25.56	26.14	< 30.00
		1	1	22.89	22.08	25.51	26.09	< 30.00
		1	49	23.10	22.15	25.66	26.24	< 30.00
		50	0	22.52	21.70	25.14	25.72	< 30.00
		1	0	19.41	18.64	22.05	22.63	< 30.00
		1	50	19.35	18.50	21.96	22.54	< 30.00
20	3500.01	25	12	22.87	22.15	25.54	26.12	< 30.00
		1	1	22.88	22.14	25.54	26.12	< 30.00
		1	49	22.77	22.16	25.49	26.07	< 30.00
		50	0	22.50	21.70	25.13	25.71	< 30.00
		1	0	19.37	18.51	21.97	22.55	< 30.00
		1	50	19.25	18.49	21.90	22.48	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
20	3540.00	25	12	22.88	22.13	25.53	26.11	< 30.00
		1	1	22.82	22.17	25.52	26.10	< 30.00
		1	49	23.01	22.23	25.65	26.23	< 30.00
		50	0	22.43	21.63	25.06	25.64	< 30.00
		1	0	19.42	18.61	22.04	22.62	< 30.00
		1	50	19.21	18.39	21.83	22.41	< 30.00
25	3462.51	32	16	22.89	22.22	25.58	26.16	< 30.00
		1	1	22.78	22.21	25.51	26.09	< 30.00
		1	63	22.87	22.17	25.54	26.12	< 30.00
		64	0	22.47	21.74	25.13	25.71	< 30.00
		1	0	19.51	18.84	22.20	22.78	< 30.00
		1	64	19.56	18.74	22.18	22.76	< 30.00
25	3500.01	32	16	22.75	22.11	25.45	26.03	< 30.00
		1	1	22.82	22.05	25.46	26.04	< 30.00
		1	63	22.80	22.06	25.46	26.04	< 30.00
		64	0	22.40	21.64	25.05	25.63	< 30.00
		1	0	19.74	19.12	22.45	23.03	< 30.00
		1	64	19.25	18.73	22.01	22.59	< 30.00
25	3537.48	32	16	22.88	22.16	25.55	26.13	< 30.00
		1	1	22.70	22.23	25.48	26.06	< 30.00
		1	63	22.68	21.98	25.35	25.93	< 30.00
		64	0	22.38	21.68	25.05	25.63	< 30.00
		1	0	19.30	18.75	22.04	22.62	< 30.00
		1	64	19.43	18.85	22.16	22.74	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
30	3465.00	36	18	23.02	22.29	25.68	26.26	< 30.00
		1	1	23.04	22.34	25.71	26.29	< 30.00
		1	76	23.20	22.45	25.85	26.43	< 30.00
		75	0	22.61	21.84	25.25	25.83	< 30.00
		1	0	19.45	18.81	22.15	22.73	< 30.00
		1	77	19.56	18.72	22.17	22.75	< 30.00
30	3500.01	36	18	22.94	22.23	25.61	26.19	< 30.00
		1	1	23.14	22.35	25.77	26.35	< 30.00
		1	76	22.96	22.27	25.64	26.22	< 30.00
		75	0	22.58	21.80	25.22	25.80	< 30.00
		1	0	19.71	19.02	22.39	22.97	< 30.00
		1	77	19.44	18.79	22.14	22.72	< 30.00
30	3534.99	36	18	22.93	22.17	25.58	26.16	< 30.00
		1	1	23.08	22.35	25.74	26.32	< 30.00
		1	76	22.96	22.30	25.65	26.23	< 30.00
		75	0	22.49	21.82	25.18	25.76	< 30.00
		1	0	19.49	18.85	22.19	22.77	< 30.00
		1	77	19.27	18.54	21.93	22.51	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
40	3470.01	50	25	23.04	22.34	25.71	26.29	< 30.00
		1	1	23.02	22.36	25.71	26.29	< 30.00
		1	104	23.08	22.40	25.76	26.34	< 30.00
		100	0	22.55	21.93	25.26	25.84	< 30.00
		1	0	19.63	19.01	22.34	22.92	< 30.00
		1	105	19.49	18.94	22.23	22.81	< 30.00
40	3500.01	50	25	22.98	22.16	25.60	26.18	< 30.00
		1	1	23.20	22.37	25.82	26.40	< 30.00
		1	104	23.03	22.29	25.69	26.27	< 30.00
		100	0	22.58	21.85	25.24	25.82	< 30.00
		1	0	19.89	19.14	22.54	23.12	< 30.00
		1	105	19.33	18.71	22.04	22.62	< 30.00
40	3529.98	50	25	22.93	22.25	25.61	26.19	< 30.00
		1	1	23.11	22.50	25.83	26.41	< 30.00
		1	104	23.03	22.42	25.75	26.33	< 30.00
		100	0	22.52	21.83	25.20	25.78	< 30.00
		1	0	19.53	18.83	22.20	22.78	< 30.00
		1	105	19.39	18.74	22.09	22.67	< 30.00
50	3475.02	64	32	22.82	22.09	25.48	26.06	< 30.00
		1	1	22.96	22.32	25.66	26.24	< 30.00
		1	131	22.76	21.94	25.38	25.96	< 30.00
		128	0	22.28	21.54	24.94	25.52	< 30.00
		1	0	19.27	18.65	21.98	22.56	< 30.00
		1	132	18.95	18.24	21.62	22.20	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
50	3500.01	64	32	22.81	22.04	25.45	26.03	< 30.00
		1	1	23.18	22.35	25.80	26.38	< 30.00
		1	131	22.64	21.89	25.29	25.87	< 30.00
		128	0	22.30	21.51	24.93	25.51	< 30.00
		1	0	19.54	18.63	22.12	22.70	< 30.00
		1	132	19.05	18.35	21.72	22.30	< 30.00
50	3525.00	64	32	22.79	21.94	25.40	25.98	< 30.00
		1	1	23.07	22.23	25.68	26.26	< 30.00
		1	131	22.54	21.72	25.16	25.74	< 30.00
		128	0	22.30	21.46	24.91	25.49	< 30.00
		1	0	19.38	18.59	22.01	22.59	< 30.00
		1	132	19.25	18.38	21.85	22.43	< 30.00
60	3480.00	81	40	22.67	21.78	25.26	25.84	< 30.00
		1	1	22.85	21.92	25.42	26.00	< 30.00
		1	160	22.46	21.67	25.09	25.67	< 30.00
		162	0	22.13	21.29	24.74	25.32	< 30.00
		1	0	19.21	18.38	21.83	22.41	< 30.00
		1	161	18.85	18.04	21.47	22.05	< 30.00
60	3500.01	81	40	22.67	21.82	25.28	25.86	< 30.00
		1	1	23.05	22.11	25.62	26.20	< 30.00
		1	160	22.56	21.67	25.15	25.73	< 30.00
		162	0	22.15	21.30	24.76	25.34	< 30.00
		1	0	19.23	18.20	21.76	22.34	< 30.00
		1	161	18.82	17.98	21.43	22.01	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
60	3519.99	81	40	22.65	21.77	25.24	25.82	< 30.00
		1	1	22.78	21.85	25.35	25.93	< 30.00
		1	160	22.55	21.48	25.06	25.64	< 30.00
		162	0	22.20	21.19	24.73	25.31	< 30.00
		1	0	19.50	18.65	22.11	22.69	< 30.00
		1	161	19.04	18.02	21.57	22.15	< 30.00
70	3485.01	90	45	22.52	21.75	25.16	25.74	< 30.00
		1	1	22.93	21.90	25.46	26.04	< 30.00
		1	187	22.41	21.72	25.09	25.67	< 30.00
		180	0	22.16	21.31	24.77	25.35	< 30.00
		1	0	19.28	18.37	21.86	22.44	< 30.00
		1	188	18.78	18.08	21.45	22.03	< 30.00
70	3500.01	90	45	22.55	21.79	25.20	25.78	< 30.00
		1	1	22.92	21.96	25.48	26.06	< 30.00
		1	187	22.56	21.65	25.14	25.72	< 30.00
		180	0	22.10	21.31	24.73	25.31	< 30.00
		1	0	19.14	18.34	21.77	22.35	< 30.00
		1	188	18.82	18.01	21.44	22.02	< 30.00
70	3514.98	90	45	22.56	21.76	25.19	25.77	< 30.00
		1	1	22.82	21.87	25.38	25.96	< 30.00
		1	187	22.48	21.65	25.10	25.68	< 30.00
		180	0	22.10	21.25	24.71	25.29	< 30.00
		1	0	19.11	18.34	21.75	22.33	< 30.00
		1	188	18.68	17.87	21.30	21.88	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
80	3490.02	108	54	22.61	21.76	25.22	25.80	< 30.00
		1	1	22.69	21.96	25.35	25.93	< 30.00
		1	215	22.50	21.63	25.10	25.68	< 30.00
		216	0	22.05	21.36	24.73	25.31	< 30.00
		1	0	18.99	18.37	21.70	22.28	< 30.00
		1	216	18.69	17.98	21.36	21.94	< 30.00
80	3500.01	108	54	22.54	21.75	25.17	25.75	< 30.00
		1	1	22.98	22.10	25.57	26.15	< 30.00
		1	215	22.35	21.55	24.98	25.56	< 30.00
		216	0	22.16	21.31	24.77	25.35	< 30.00
		1	0	19.48	18.58	22.06	22.64	< 30.00
		1	216	19.04	18.21	21.66	22.24	< 30.00
80	3510.00	108	54	22.51	21.71	25.14	25.72	< 30.00
		1	1	22.84	21.92	25.41	25.99	< 30.00
		1	215	22.25	21.51	24.91	25.49	< 30.00
		216	0	22.03	21.23	24.66	25.24	< 30.00
		1	0	19.52	18.68	22.13	22.71	< 30.00
		1	216	19.09	18.25	21.70	22.28	< 30.00
90	3495.00	120	60	22.66	21.82	25.27	25.85	< 30.00
		1	1	22.71	22.00	25.38	25.96	< 30.00
		1	243	22.50	21.64	25.10	25.68	< 30.00
		243	0	22.10	21.36	24.76	25.34	< 30.00
		1	0	19.20	18.49	21.87	22.45	< 30.00
		1	244	19.14	18.37	21.78	22.36	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
90	3500.01	120	60	22.65	21.89	25.30	25.88	< 30.00
		1	1	22.96	22.08	25.55	26.13	< 30.00
		1	243	22.58	21.84	25.24	25.82	< 30.00
		243	0	22.13	21.37	24.78	25.36	< 30.00
		1	0	19.25	18.53	21.92	22.50	< 30.00
		1	244	18.86	18.07	21.49	22.07	< 30.00
90	3504.99	120	60	22.66	21.92	25.32	25.90	< 30.00
		1	1	23.02	22.04	25.57	26.15	< 30.00
		1	243	22.58	21.68	25.16	25.74	< 30.00
		243	0	22.19	21.37	24.81	25.39	< 30.00
		1	0	19.46	18.62	22.07	22.65	< 30.00
		1	244	19.10	18.12	21.65	22.23	< 30.00
100	3500.01	135	67	22.62	21.82	25.25	25.83	< 30.00
		1	1	22.81	21.97	25.42	26.00	< 30.00
		1	271	22.50	21.61	25.09	25.67	< 30.00
		270	0	22.13	21.33	24.76	25.34	< 30.00
		1	0	19.36	18.70	22.05	22.63	< 30.00
		1	272	18.96	18.23	21.62	22.20	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
10	3455.01	12	6	20.33	19.66	23.02	23.60	< 30.00
		1	1	20.07	19.36	22.74	23.32	< 30.00
		1	22	20.10	19.45	22.80	23.38	< 30.00
		24	0	20.16	19.45	22.83	23.41	< 30.00
		1	0	19.09	18.39	21.76	22.34	< 30.00
		1	23	19.04	18.40	21.74	22.32	< 30.00
10	3500.01	12	6	20.29	19.59	22.96	23.54	< 30.00
		1	1	20.18	18.51	22.44	23.02	< 30.00
		1	22	20.54	19.59	23.10	23.68	< 30.00
		24	0	20.18	19.51	22.87	23.45	< 30.00
		1	0	19.09	18.46	21.80	22.38	< 30.00
		1	23	18.99	18.44	21.73	22.31	< 30.00
10	3544.98	12	6	20.21	19.41	22.84	23.42	< 30.00
		1	1	20.10	19.48	22.81	23.39	< 30.00
		1	22	20.10	19.45	22.80	23.38	< 30.00
		24	0	20.23	19.41	22.85	23.43	< 30.00
		1	0	19.21	18.54	21.90	22.48	< 30.00
		1	23	19.04	18.38	21.73	22.31	< 30.00
15	3457.50	18	9	20.48	19.74	23.14	23.72	< 30.00
		1	1	20.30	19.63	22.99	23.57	< 30.00
		1	36	20.45	19.81	23.15	23.73	< 30.00
		36	0	20.34	19.50	22.95	23.53	< 30.00
		1	0	18.37	18.58	21.49	22.07	< 30.00
		1	37	19.30	18.48	21.92	22.50	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
15	3500.01	18	9	20.39	19.61	23.03	23.61	< 30.00
		1	1	20.24	19.46	22.88	23.46	< 30.00
		1	36	20.17	19.42	22.82	23.40	< 30.00
		36	0	20.30	19.52	22.94	23.52	< 30.00
		1	0	19.21	18.42	21.84	22.42	< 30.00
		1	37	19.34	18.53	21.96	22.54	< 30.00
15	3542.49	18	9	20.34	19.51	22.96	23.54	< 30.00
		1	1	20.27	19.50	22.91	23.49	< 30.00
		1	36	20.34	19.52	22.96	23.54	< 30.00
		36	0	20.25	19.44	22.87	23.45	< 30.00
		1	0	19.23	18.44	21.86	22.44	< 30.00
		1	37	19.33	18.47	21.93	22.51	< 30.00
20	3460.02	25	12	20.51	19.74	23.15	23.73	< 30.00
		1	1	20.25	19.46	22.88	23.46	< 30.00
		1	49	20.52	19.70	23.14	23.72	< 30.00
		50	0	20.47	19.69	23.11	23.69	< 30.00
		1	0	19.17	18.48	21.85	22.43	< 30.00
		1	50	19.32	18.46	21.92	22.50	< 30.00
20	3500.01	25	12	20.47	19.74	23.13	23.71	< 30.00
		1	1	20.58	19.81	23.22	23.80	< 30.00
		1	49	20.51	19.74	23.15	23.73	< 30.00
		50	0	20.43	19.65	23.07	23.65	< 30.00
		1	0	19.57	18.83	22.23	22.81	< 30.00
		1	50	19.44	18.70	22.10	22.68	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
20	3540.00	25	12	20.41	19.62	23.04	23.62	< 30.00
		1	1	20.43	19.71	23.10	23.68	< 30.00
		1	49	20.47	19.66	23.09	23.67	< 30.00
		50	0	20.45	19.67	23.09	23.67	< 30.00
		1	0	19.58	18.76	22.20	22.78	< 30.00
		1	50	19.25	18.40	21.86	22.44	< 30.00
25	3462.51	32	16	20.49	19.75	23.15	23.73	< 30.00
		1	1	20.60	19.88	23.27	23.85	< 30.00
		1	63	20.36	19.58	23.00	23.58	< 30.00
		64	0	20.47	19.76	23.14	23.72	< 30.00
		1	0	19.46	18.91	22.20	22.78	< 30.00
		1	64	19.59	18.73	22.19	22.77	< 30.00
25	3500.01	32	16	20.36	19.67	23.04	23.62	< 30.00
		1	1	20.51	19.86	23.21	23.79	< 30.00
		1	63	20.24	19.66	22.97	23.55	< 30.00
		64	0	20.38	19.74	23.08	23.66	< 30.00
		1	0	19.44	18.89	22.18	22.76	< 30.00
		1	64	19.11	18.58	21.86	22.44	< 30.00
25	3537.48	32	16	20.30	19.64	22.99	23.57	< 30.00
		1	1	20.45	19.83	23.16	23.74	< 30.00
		1	63	20.37	19.66	23.04	23.62	< 30.00
		64	0	20.34	19.69	23.04	23.62	< 30.00
		1	0	19.65	18.93	22.32	22.90	< 30.00
		1	64	19.21	18.56	21.91	22.49	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
30	3465.00	36	18	20.46	19.75	23.13	23.71	< 30.00
		1	1	20.47	19.89	23.20	23.78	< 30.00
		1	76	20.41	19.73	23.09	23.67	< 30.00
		75	0	20.56	19.82	23.22	23.80	< 30.00
		1	0	19.55	18.89	22.24	22.82	< 30.00
		1	77	19.52	18.75	22.16	22.74	< 30.00
30	3500.01	36	18	20.41	19.73	23.09	23.67	< 30.00
		1	1	20.71	20.09	23.42	24.00	< 30.00
		1	76	20.48	19.82	23.17	23.75	< 30.00
		75	0	20.47	19.83	23.17	23.75	< 30.00
		1	0	19.42	18.74	22.10	22.68	< 30.00
		1	77	19.39	18.82	22.12	22.70	< 30.00
30	3534.99	36	18	20.38	19.71	23.07	23.65	< 30.00
		1	1	20.60	20.04	23.34	23.92	< 30.00
		1	76	20.44	19.74	23.11	23.69	< 30.00
		75	0	20.41	19.81	23.13	23.71	< 30.00
		1	0	19.32	18.79	22.07	22.65	< 30.00
		1	77	19.17	18.57	21.89	22.47	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
40	3470.01	50	25	20.53	19.83	23.20	23.78	< 30.00
		1	1	20.47	19.86	23.19	23.77	< 30.00
		1	104	20.28	19.79	23.05	23.63	< 30.00
		100	0	20.56	19.85	23.23	23.81	< 30.00
		1	0	19.48	18.86	22.19	22.77	< 30.00
		1	105	19.40	18.77	22.11	22.69	< 30.00
40	3500.01	50	25	20.47	19.79	23.15	23.73	< 30.00
		1	1	20.61	19.82	23.24	23.82	< 30.00
		1	104	20.35	19.73	23.06	23.64	< 30.00
		100	0	20.59	19.82	23.23	23.81	< 30.00
		1	0	19.79	19.09	22.46	23.04	< 30.00
		1	105	19.51	18.88	22.22	22.80	< 30.00
40	3529.98	50	25	20.45	19.72	23.11	23.69	< 30.00
		1	1	20.36	19.81	23.10	23.68	< 30.00
		1	104	20.39	19.68	23.06	23.64	< 30.00
		100	0	20.49	19.75	23.15	23.73	< 30.00
		1	0	19.57	19.03	22.32	22.90	< 30.00
		1	105	19.30	18.65	22.00	22.58	< 30.00
50	3475.02	64	32	20.45	19.58	23.05	23.63	< 30.00
		1	1	20.50	19.85	23.20	23.78	< 30.00
		1	131	20.30	19.49	22.92	23.50	< 30.00
		128	0	20.43	19.62	23.05	23.63	< 30.00
		1	0	19.30	18.60	21.97	22.55	< 30.00
		1	132	19.20	18.47	21.86	22.44	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
50	3500.01	64	32	20.39	19.44	22.95	23.53	< 30.00
		1	1	20.61	19.67	23.18	23.76	< 30.00
		1	131	20.19	19.40	22.82	23.40	< 30.00
		128	0	20.18	19.36	22.80	23.38	< 30.00
		1	0	19.72	18.75	22.27	22.85	< 30.00
		1	132	19.05	18.20	21.66	22.24	< 30.00
50	3525.00	64	32	20.32	19.50	22.94	23.52	< 30.00
		1	1	20.19	19.32	22.79	23.37	< 30.00
		1	131	20.18	19.26	22.75	23.33	< 30.00
		128	0	20.34	19.52	22.96	23.54	< 30.00
		1	0	19.26	18.53	21.92	22.50	< 30.00
		1	132	19.20	18.42	21.84	22.42	< 30.00
60	3480.00	81	40	20.33	19.42	22.91	23.49	< 30.00
		1	1	20.43	19.56	23.03	23.61	< 30.00
		1	160	20.03	19.31	22.70	23.28	< 30.00
		162	0	20.34	19.39	22.90	23.48	< 30.00
		1	0	19.36	18.55	21.98	22.56	< 30.00
		1	161	19.05	18.26	21.68	22.26	< 30.00
60	3500.01	81	40	20.29	19.36	22.86	23.44	< 30.00
		1	1	20.46	19.43	22.99	23.57	< 30.00
		1	160	20.09	19.03	22.60	23.18	< 30.00
		162	0	20.30	19.32	22.85	23.43	< 30.00
		1	0	19.37	18.50	21.97	22.55	< 30.00
		1	161	19.06	18.05	21.59	22.17	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
60	3519.99	81	40	20.26	19.31	22.82	23.40	< 30.00
		1	1	20.18	19.14	22.70	23.28	< 30.00
		1	160	20.13	19.18	22.69	23.27	< 30.00
		162	0	20.27	19.33	22.84	23.42	< 30.00
		1	0	19.14	18.26	21.73	22.31	< 30.00
		1	161	19.15	18.13	21.68	22.26	< 30.00
70	3485.01	90	45	20.10	19.27	22.72	23.30	< 30.00
		1	1	20.26	19.45	22.88	23.46	< 30.00
		1	187	19.59	19.03	22.33	22.91	< 30.00
		180	0	20.10	19.29	22.72	23.30	< 30.00
		1	0	19.22	18.52	21.89	22.47	< 30.00
		1	188	18.51	17.92	21.24	21.82	< 30.00
70	3500.01	90	45	20.09	19.22	22.69	23.27	< 30.00
		1	1	20.38	19.44	22.95	23.53	< 30.00
		1	187	19.66	18.81	22.27	22.85	< 30.00
		180	0	20.14	19.30	22.75	23.33	< 30.00
		1	0	19.28	18.37	21.86	22.44	< 30.00
		1	188	18.87	18.14	21.53	22.11	< 30.00
70	3514.98	90	45	20.08	19.29	22.71	23.29	< 30.00
		1	1	20.17	19.20	22.72	23.30	< 30.00
		1	187	19.73	18.77	22.29	22.87	< 30.00
		180	0	20.11	19.29	22.73	23.31	< 30.00
		1	0	19.33	18.52	21.95	22.53	< 30.00
		1	188	18.67	17.80	21.27	21.85	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
80	3490.02	108	54	20.21	19.34	22.81	23.39	< 30.00
		1	1	20.25	19.42	22.87	23.45	< 30.00
		1	215	20.01	19.21	22.64	23.22	< 30.00
		216	0	20.20	19.34	22.80	23.38	< 30.00
		1	0	19.41	18.58	22.03	22.61	< 30.00
		1	216	19.02	18.16	21.62	22.20	< 30.00
80	3500.01	108	54	20.19	19.35	22.80	23.38	< 30.00
		1	1	20.31	19.37	22.88	23.46	< 30.00
		1	215	19.86	19.07	22.49	23.07	< 30.00
		216	0	20.19	19.37	22.81	23.39	< 30.00
		1	0	19.19	18.35	21.80	22.38	< 30.00
		1	216	19.06	18.11	21.62	22.20	< 30.00
80	3510.00	108	54	20.10	19.21	22.69	23.27	< 30.00
		1	1	20.22	19.27	22.78	23.36	< 30.00
		1	215	19.80	18.84	22.36	22.94	< 30.00
		216	0	20.17	19.21	22.73	23.31	< 30.00
		1	0	19.25	18.31	21.82	22.40	< 30.00
		1	216	18.71	17.83	21.30	21.88	< 30.00
90	3495.00	120	60	20.19	19.34	22.80	23.38	< 30.00
		1	1	20.17	19.31	22.77	23.35	< 30.00
		1	243	19.94	19.08	22.54	23.12	< 30.00
		243	0	20.21	19.34	22.81	23.39	< 30.00
		1	0	19.09	18.34	21.74	22.32	< 30.00
		1	244	18.94	18.25	21.62	22.20	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
90	3500.01	120	60	20.20	19.36	22.81	23.39	< 30.00
		1	1	20.40	19.47	22.97	23.55	< 30.00
		1	243	20.06	19.11	22.62	23.20	< 30.00
		243	0	20.26	19.34	22.83	23.41	< 30.00
		1	0	19.33	18.55	21.97	22.55	< 30.00
		1	244	18.89	18.02	21.49	22.07	< 30.00
90	3504.99	120	60	20.21	19.32	22.80	23.38	< 30.00
		1	1	20.49	19.53	23.05	23.63	< 30.00
		1	243	20.04	19.24	22.67	23.25	< 30.00
		243	0	20.19	19.31	22.78	23.36	< 30.00
		1	0	19.38	18.60	22.02	22.60	< 30.00
		1	244	19.02	18.25	21.66	22.24	< 30.00
100	3500.01	135	67	20.22	19.37	22.83	23.41	< 30.00
		1	1	20.27	19.45	22.89	23.47	< 30.00
		1	271	20.01	19.17	22.62	23.20	< 30.00
		270	0	20.21	19.28	22.78	23.36	< 30.00
		1	0	19.25	18.45	21.88	22.46	< 30.00
		1	272	18.98	18.20	21.62	22.20	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
10	3455.01	12	6	24.41	23.58	27.03	27.61	< 30.00
		1	1	24.29	23.55	26.95	27.53	< 30.00
		1	22	24.44	23.56	27.03	27.61	< 30.00
		24	0	21.86	21.05	24.48	25.06	< 30.00
		1	0	19.46	18.64	22.08	22.66	< 30.00
		1	23	19.36	18.74	22.07	22.65	< 30.00
10	3500.01	12	6	24.27	23.52	26.92	27.50	< 30.00
		1	1	24.37	23.67	27.04	27.62	< 30.00
		1	22	24.46	23.70	27.11	27.69	< 30.00
		24	0	21.88	21.07	24.50	25.08	< 30.00
		1	0	19.28	18.56	21.95	22.53	< 30.00
		1	23	19.40	18.77	22.11	22.69	< 30.00
10	3544.98	12	6	24.47	23.57	27.05	27.63	< 30.00
		1	1	24.38	23.50	26.97	27.55	< 30.00
		1	22	24.41	23.50	26.99	27.57	< 30.00
		24	0	21.85	20.91	24.42	25.00	< 30.00
		1	0	19.47	18.61	22.07	22.65	< 30.00
		1	23	19.39	18.56	22.01	22.59	< 30.00
15	3457.50	19	9	24.47	23.60	27.07	27.65	< 30.00
		1	1	24.43	23.62	27.05	27.63	< 30.00
		1	36	24.71	23.90	27.33	27.91	< 30.00
		38	0	22.05	21.11	24.62	25.20	< 30.00
		1	0	19.57	18.82	22.22	22.80	< 30.00
		1	37	19.85	18.68	22.31	22.89	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
15	3500.01	19	9	24.43	23.55	27.02	27.60	< 30.00
		1	1	24.39	23.81	27.12	27.70	< 30.00
		1	36	24.37	23.53	26.98	27.56	< 30.00
		38	0	21.93	21.12	24.55	25.13	< 30.00
		1	0	19.63	18.77	22.23	22.81	< 30.00
		1	37	19.45	18.68	22.09	22.67	< 30.00
15	3542.49	19	9	24.47	23.48	27.01	27.59	< 30.00
		1	1	24.70	23.66	27.22	27.80	< 30.00
		1	36	24.63	23.59	27.15	27.73	< 30.00
		38	0	21.96	21.08	24.55	25.13	< 30.00
		1	0	19.55	18.78	22.19	22.77	< 30.00
		1	37	19.60	18.67	22.17	22.75	< 30.00
20	3460.02	25	12	24.56	23.73	27.18	27.76	< 30.00
		1	1	24.59	23.67	27.16	27.74	< 30.00
		1	49	24.47	23.70	27.11	27.69	< 30.00
		51	0	22.13	21.11	24.66	25.24	< 30.00
		1	0	19.52	18.68	22.13	22.71	< 30.00
		1	50	19.68	18.60	22.18	22.76	< 30.00
20	3500.01	25	12	24.43	23.56	27.03	27.61	< 30.00
		1	1	24.54	23.57	27.09	27.67	< 30.00
		1	49	24.57	23.63	27.14	27.72	< 30.00
		51	0	21.95	21.11	24.56	25.14	< 30.00
		1	0	19.72	18.90	22.34	22.92	< 30.00
		1	50	19.66	18.87	22.29	22.87	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
20	3540.00	25	12	24.47	23.60	27.07	27.65	< 30.00
		1	1	24.49	23.65	27.10	27.68	< 30.00
		1	49	24.56	23.58	27.11	27.69	< 30.00
		51	0	21.99	21.13	24.59	25.17	< 30.00
		1	0	19.56	18.80	22.21	22.79	< 30.00
		1	50	19.56	18.59	22.11	22.69	< 30.00
25	3462.51	33	16	24.51	23.73	27.15	27.73	< 30.00
		1	1	24.60	23.98	27.31	27.89	< 30.00
		1	63	24.43	23.54	27.02	27.60	< 30.00
		65	0	21.97	21.32	24.67	25.25	< 30.00
		1	0	19.68	18.85	22.30	22.88	< 30.00
		1	64	19.57	18.72	22.18	22.76	< 30.00
25	3500.01	33	16	24.39	23.75	27.09	27.67	< 30.00
		1	1	24.62	23.83	27.25	27.83	< 30.00
		1	63	23.80	23.59	26.71	27.29	< 30.00
		65	0	21.91	21.24	24.60	25.18	< 30.00
		1	0	19.67	19.00	22.36	22.94	< 30.00
		1	64	19.38	18.68	22.05	22.63	< 30.00
25	3537.48	33	16	24.37	23.69	27.05	27.63	< 30.00
		1	1	24.57	23.82	27.22	27.80	< 30.00
		1	63	24.29	23.71	27.02	27.60	< 30.00
		65	0	21.92	21.25	24.61	25.19	< 30.00
		1	0	19.68	18.97	22.35	22.93	< 30.00
		1	64	19.46	18.73	22.12	22.70	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
30	3465.00	39	19	24.59	23.68	27.17	27.75	< 30.00
		1	1	24.76	23.91	27.37	27.95	< 30.00
		1	76	24.59	23.57	27.12	27.70	< 30.00
		78	0	22.08	21.25	24.70	25.28	< 30.00
		1	0	19.60	18.89	22.27	22.85	< 30.00
		1	77	19.71	18.92	22.34	22.92	< 30.00
30	3500.01	39	19	24.43	23.63	27.06	27.64	< 30.00
		1	1	24.69	24.01	27.37	27.95	< 30.00
		1	76	24.70	24.02	27.38	27.96	< 30.00
		78	0	22.02	21.23	24.65	25.23	< 30.00
		1	0	19.74	19.09	22.44	23.02	< 30.00
		1	77	19.52	18.75	22.16	22.74	< 30.00
30	3534.99	39	19	24.43	23.72	27.10	27.68	< 30.00
		1	1	24.66	24.02	27.36	27.94	< 30.00
		1	76	24.48	23.77	27.15	27.73	< 30.00
		78	0	22.03	21.27	24.68	25.26	< 30.00
		1	0	19.70	19.08	22.41	22.99	< 30.00
		1	77	19.61	18.78	22.23	22.81	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
40	3470.01	53	26	24.56	23.75	27.18	27.76	< 30.00
		1	1	24.68	24.01	27.37	27.95	< 30.00
		1	104	24.58	23.77	27.20	27.78	< 30.00
		106	0	22.08	21.30	24.72	25.30	< 30.00
		1	0	19.74	19.09	22.44	23.02	< 30.00
		1	105	19.58	18.86	22.25	22.83	< 30.00
40	3500.01	53	26	24.42	23.71	27.09	27.67	< 30.00
		1	1	24.90	24.06	27.51	28.09	< 30.00
		1	104	24.54	23.80	27.20	27.78	< 30.00
		106	0	22.04	21.31	24.70	25.28	< 30.00
		1	0	19.77	18.02	21.99	22.57	< 30.00
		1	105	19.52	18.86	22.21	22.79	< 30.00
40	3529.98	53	26	24.41	23.62	27.04	27.62	< 30.00
		1	1	24.47	23.82	27.17	27.75	< 30.00
		1	104	24.54	23.83	27.21	27.79	< 30.00
		106	0	21.93	21.23	24.60	25.18	< 30.00
		1	0	19.55	19.07	22.33	22.91	< 30.00
		1	105	19.51	18.72	22.14	22.72	< 30.00
50	3475.02	67	33	24.23	23.45	26.87	27.45	< 30.00
		1	1	24.48	23.71	27.12	27.70	< 30.00
		1	131	24.14	23.40	26.80	27.38	< 30.00
		133	0	21.90	21.01	24.49	25.07	< 30.00
		1	0	19.55	18.85	22.22	22.80	< 30.00
		1	132	19.25	18.38	21.85	22.43	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
50	3500.01	67	33	24.31	23.45	26.91	27.49	< 30.00
		1	1	24.62	23.66	27.18	27.76	< 30.00
		1	131	24.22	23.24	26.77	27.35	< 30.00
		133	0	21.92	21.08	24.53	25.11	< 30.00
		1	0	19.67	18.66	22.20	22.78	< 30.00
		1	132	19.31	18.24	21.82	22.40	< 30.00
50	3525.00	67	33	24.29	23.34	26.85	27.43	< 30.00
		1	1	24.41	23.47	26.98	27.56	< 30.00
		1	131	24.34	23.31	26.87	27.45	< 30.00
		133	0	21.85	20.94	24.43	25.01	< 30.00
		1	0	19.51	18.69	22.13	22.71	< 30.00
		1	132	19.23	18.28	21.79	22.37	< 30.00
60	3480.00	81	40	24.43	23.46	26.98	27.56	< 30.00
		1	1	24.49	23.64	27.10	27.68	< 30.00
		1	160	24.26	23.35	26.84	27.42	< 30.00
		162	0	21.98	21.02	24.54	25.12	< 30.00
		1	0	19.54	18.58	22.10	22.68	< 30.00
		1	161	19.25	18.43	21.87	22.45	< 30.00
60	3500.01	81	40	24.38	23.44	26.95	27.53	< 30.00
		1	1	24.55	23.57	27.10	27.68	< 30.00
		1	160	24.38	23.38	26.92	27.50	< 30.00
		162	0	21.98	21.08	24.56	25.14	< 30.00
		1	0	19.63	18.78	22.24	22.82	< 30.00
		1	161	19.39	18.46	21.96	22.54	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
60	3519.99	81	40	24.38	24.32	27.36	27.94	< 30.00
		1	1	24.54	23.56	27.09	27.67	< 30.00
		1	160	24.30	23.33	26.85	27.43	< 30.00
		162	0	21.95	20.94	24.48	25.06	< 30.00
		1	0	19.76	18.70	22.27	22.85	< 30.00
		1	161	19.31	18.37	21.88	22.46	< 30.00
70	3485.01	95	47	24.23	23.40	26.85	27.43	< 30.00
		1	1	24.41	23.54	27.01	27.59	< 30.00
		1	187	24.13	23.19	26.70	27.28	< 30.00
		189	0	21.76	20.89	24.36	24.94	< 30.00
		1	0	19.36	18.70	22.05	22.63	< 30.00
		1	188	19.01	18.18	21.63	22.21	< 30.00
70	3500.01	95	47	24.17	23.31	26.77	27.35	< 30.00
		1	1	24.38	23.59	27.01	27.59	< 30.00
		1	187	24.22	23.40	26.84	27.42	< 30.00
		189	0	21.74	20.94	24.37	24.95	< 30.00
		1	0	19.62	18.55	22.13	22.71	< 30.00
		1	188	19.18	18.29	21.77	22.35	< 30.00
70	3514.98	95	47	24.22	23.40	26.84	27.42	< 30.00
		1	1	24.54	23.48	27.05	27.63	< 30.00
		1	187	24.25	23.27	26.80	27.38	< 30.00
		189	0	21.79	20.91	24.38	24.96	< 30.00
		1	0	19.59	18.67	22.16	22.74	< 30.00
		1	188	19.22	18.16	21.73	22.31	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
80	3490.02	109	54	24.19	23.38	26.81	27.39	< 30.00
		1	1	24.46	23.39	26.97	27.55	< 30.00
		1	215	24.18	23.27	26.76	27.34	< 30.00
		217	0	21.63	20.94	24.31	24.89	< 30.00
		1	0	19.32	18.72	22.04	22.62	< 30.00
		1	216	19.02	18.27	21.67	22.25	< 30.00
80	3500.01	109	54	24.22	23.36	26.82	27.40	< 30.00
		1	1	24.50	23.53	27.05	27.63	< 30.00
		1	215	24.06	23.34	26.73	27.31	< 30.00
		217	0	21.67	20.90	24.31	24.89	< 30.00
		1	0	19.51	18.74	22.15	22.73	< 30.00
		1	216	19.01	18.21	21.64	22.22	< 30.00
80	3510.00	109	54	24.08	23.28	26.71	27.29	< 30.00
		1	1	24.48	23.50	27.03	27.61	< 30.00
		1	215	24.17	23.26	26.75	27.33	< 30.00
		217	0	21.77	20.84	24.34	24.92	< 30.00
		1	0	19.42	18.52	22.00	22.58	< 30.00
		1	216	19.13	18.12	21.66	22.24	< 30.00
90	3495.00	123	61	24.10	23.34	26.75	27.33	< 30.00
		1	1	24.47	23.65	27.09	27.67	< 30.00
		1	243	24.05	23.30	26.70	27.28	< 30.00
		245	0	21.64	20.89	24.29	24.87	< 30.00
		1	0	19.33	18.70	22.04	22.62	< 30.00
		1	244	19.07	18.32	21.72	22.30	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
90	3500.01	123	61	24.19	23.22	26.74	27.32	< 30.00
		1	1	24.25	23.52	26.91	27.49	< 30.00
		1	243	23.97	23.26	26.64	27.22	< 30.00
		245	0	21.67	20.90	24.31	24.89	< 30.00
		1	0	19.37	18.71	22.06	22.64	< 30.00
		1	244	19.14	18.25	21.73	22.31	< 30.00
90	3504.99	123	61	24.14	23.37	26.78	27.36	< 30.00
		1	1	24.53	23.46	27.04	27.62	< 30.00
		1	243	23.91	23.18	26.57	27.15	< 30.00
		245	0	21.76	20.89	24.36	24.94	< 30.00
		1	0	19.54	18.62	22.11	22.69	< 30.00
		1	244	19.20	18.26	21.77	22.35	< 30.00
100	3500.01	137	68	24.15	23.21	26.72	27.30	< 30.00
		1	1	24.32	23.36	26.88	27.46	< 30.00
		1	271	24.03	23.15	26.62	27.20	< 30.00
		273	0	21.75	20.81	24.32	24.90	< 30.00
		1	0	19.47	18.60	22.07	22.65	< 30.00
		1	272	19.01	18.19	21.63	22.21	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/04/03 ~ 2023/04/08 2023/05/10 ~ 2023/05/12	Test Band	n77/n78_UL MIMO (3700 ~ 3980MHz)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
10	3705.00	12	6	25.70	25.03	28.39	28.97	< 30.00
		1	1	25.63	24.82	28.25	28.83	< 30.00
		1	22	25.66	24.97	28.34	28.92	< 30.00
		24	0	24.21	23.42	26.84	27.42	< 30.00
		1	0	19.62	18.91	22.29	22.87	< 30.00
		1	23	19.66	19.02	22.36	22.94	< 30.00
10	3840.00	12	6	25.40	25.01	28.22	28.80	< 30.00
		1	1	25.38	24.92	28.17	28.75	< 30.00
		1	22	25.33	24.90	28.13	28.71	< 30.00
		24	0	23.88	23.49	26.70	27.28	< 30.00
		1	0	19.42	18.95	22.20	22.78	< 30.00
		1	23	19.42	18.89	22.17	22.75	< 30.00
10	3975.00	12	6	25.76	25.01	28.41	28.99	< 30.00
		1	1	25.77	24.94	28.39	28.97	< 30.00
		1	22	25.73	25.04	28.41	28.99	< 30.00
		24	0	24.26	23.59	26.95	27.53	< 30.00
		1	0	19.73	19.01	22.40	22.98	< 30.00
		1	23	19.65	18.95	22.32	22.90	< 30.00
15	3707.52	18	9	25.61	24.76	28.22	28.80	< 30.00
		1	1	25.49	24.73	28.14	28.72	< 30.00
		1	36	25.61	24.78	28.23	28.81	< 30.00
		36	0	24.02	23.27	26.67	27.25	< 30.00
		1	0	19.63	18.73	22.21	22.79	< 30.00
		1	37	19.57	18.87	22.24	22.82	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
15	3840.00	18	9	25.68	25.23	28.47	29.05	< 30.00
		1	1	25.60	25.19	28.41	28.99	< 30.00
		1	36	25.74	25.24	28.51	29.09	< 30.00
		36	0	24.21	23.74	26.99	27.57	< 30.00
		1	0	19.74	19.25	22.51	23.09	< 30.00
		1	37	19.68	19.20	22.46	23.04	< 30.00
15	3972.48	18	9	25.94	25.08	28.54	29.12	< 30.00
		1	1	25.87	25.10	28.51	29.09	< 30.00
		1	36	25.91	25.09	28.53	29.11	< 30.00
		36	0	24.42	23.61	27.04	27.62	< 30.00
		1	0	19.89	19.07	22.51	23.09	< 30.00
		1	37	19.91	19.05	22.51	23.09	< 30.00
20	3710.01	25	12	25.64	24.80	28.25	28.83	< 30.00
		1	1	25.59	24.73	28.19	28.77	< 30.00
		1	49	25.62	24.88	28.28	28.86	< 30.00
		50	0	24.13	23.32	26.75	27.33	< 30.00
		1	0	19.56	18.73	22.18	22.76	< 30.00
		1	50	19.60	18.91	22.28	22.86	< 30.00
20	3840.00	25	12	25.82	25.33	28.59	29.17	< 30.00
		1	1	25.65	25.22	28.45	29.03	< 30.00
		1	49	25.74	25.29	28.53	29.11	< 30.00
		50	0	24.28	23.86	27.09	27.67	< 30.00
		1	0	19.77	19.31	22.56	23.14	< 30.00
		1	50	19.76	19.24	22.52	23.10	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
20	3969.99	25	12	25.93	25.20	28.59	29.17	< 30.00
		1	1	25.93	25.12	28.55	29.13	< 30.00
		1	49	25.98	25.18	28.61	29.19	< 30.00
		50	0	24.50	23.70	27.13	27.71	< 30.00
		1	0	19.98	19.12	22.58	23.16	< 30.00
		1	50	19.96	19.17	22.59	23.17	< 30.00
25	3712.50	32	16	25.83	25.23	28.55	29.13	< 30.00
		1	1	25.65	25.13	28.41	28.99	< 30.00
		1	63	25.67	25.35	28.52	29.10	< 30.00
		64	0	24.21	23.69	26.97	27.55	< 30.00
		1	0	19.81	19.12	22.49	23.07	< 30.00
		1	64	19.68	19.33	22.52	23.10	< 30.00
25	3840.00	32	16	25.91	25.65	28.79	29.37	< 30.00
		1	1	25.77	25.59	28.69	29.27	< 30.00
		1	63	25.96	25.57	28.78	29.36	< 30.00
		64	0	24.44	24.20	27.33	27.91	< 30.00
		1	0	19.93	19.73	22.84	23.42	< 30.00
		1	64	19.91	19.61	22.77	23.35	< 30.00
25	3967.50	32	16	26.15	25.58	28.88	29.46	< 30.00
		1	1	26.14	25.52	28.85	29.43	< 30.00
		1	63	25.99	25.62	28.82	29.40	< 30.00
		64	0	24.61	24.07	27.36	27.94	< 30.00
		1	0	20.23	19.53	22.90	23.48	< 30.00
		1	64	20.06	19.65	22.87	23.45	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
30	3715.02	36	18	25.74	24.87	28.34	28.92	< 30.00
		1	1	25.60	24.84	28.25	28.83	< 30.00
		1	76	25.72	25.07	28.42	29.00	< 30.00
		75	0	24.25	23.45	26.88	27.46	< 30.00
		1	0	19.74	18.85	22.33	22.91	< 30.00
		1	77	19.76	19.08	22.44	23.02	< 30.00
30	3840.00	36	18	25.78	25.36	28.59	29.17	< 30.00
		1	1	25.73	25.30	28.53	29.11	< 30.00
		1	76	25.74	25.28	28.53	29.11	< 30.00
		75	0	24.32	23.88	27.12	27.70	< 30.00
		1	0	19.82	19.40	22.63	23.21	< 30.00
		1	77	19.79	19.28	22.55	23.13	< 30.00
30	3964.98	36	18	25.93	25.20	28.59	29.17	< 30.00
		1	1	26.00	25.13	28.60	29.18	< 30.00
		1	76	25.92	25.22	28.59	29.17	< 30.00
		75	0	24.48	23.75	27.14	27.72	< 30.00
		1	0	20.02	19.25	22.66	23.24	< 30.00
		1	77	19.95	19.20	22.60	23.18	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
40	3720.00	50	25	25.36	24.60	28.01	28.59	< 30.00
		1	1	25.45	24.58	28.05	28.63	< 30.00
		1	104	25.46	24.76	28.13	28.71	< 30.00
		100	0	23.98	23.19	26.61	27.19	< 30.00
		1	0	19.55	18.75	22.18	22.76	< 30.00
		1	105	19.55	18.82	22.21	22.79	< 30.00
40	3840.00	50	25	25.63	25.12	28.39	28.97	< 30.00
		1	1	25.63	25.29	28.47	29.05	< 30.00
		1	104	25.53	25.09	28.33	28.91	< 30.00
		100	0	24.10	23.68	26.91	27.49	< 30.00
		1	0	19.77	19.41	22.60	23.18	< 30.00
		1	105	19.61	19.23	22.43	23.01	< 30.00
40	3960.00	50	25	25.91	25.14	28.55	29.13	< 30.00
		1	1	26.01	25.16	28.62	29.20	< 30.00
		1	104	25.95	25.27	28.63	29.21	< 30.00
		100	0	24.42	23.62	27.05	27.63	< 30.00
		1	0	20.08	19.18	22.66	23.24	< 30.00
		1	105	19.90	19.23	22.59	23.17	< 30.00
50	3720.00	64	32	25.72	24.98	28.38	28.96	< 30.00
		1	1	25.54	24.75	28.17	28.75	< 30.00
		1	131	25.62	24.94	28.30	28.88	< 30.00
		128	0	24.16	23.42	26.82	27.40	< 30.00
		1	0	19.54	18.71	22.16	22.74	< 30.00
		1	132	19.37	18.71	22.06	22.64	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
50	3840.00	64	32	25.60	25.23	28.43	29.01	< 30.00
		1	1	25.51	25.13	28.33	28.91	< 30.00
		1	131	25.47	25.02	28.26	28.84	< 30.00
		128	0	24.04	23.65	26.86	27.44	< 30.00
		1	0	19.61	19.27	22.45	23.03	< 30.00
		1	132	19.58	19.13	22.37	22.95	< 30.00
50	3954.99	64	32	25.78	24.98	28.41	28.99	< 30.00
		1	1	25.94	24.92	28.47	29.05	< 30.00
		1	131	25.65	25.02	28.36	28.94	< 30.00
		128	0	24.30	23.59	26.97	27.55	< 30.00
		1	0	19.90	18.99	22.48	23.06	< 30.00
		1	132	19.68	19.03	22.38	22.96	< 30.00
60	3730.02	81	40	25.43	24.72	28.10	28.68	< 30.00
		1	1	25.30	24.51	27.93	28.51	< 30.00
		1	160	25.36	24.74	28.07	28.65	< 30.00
		162	0	23.96	23.23	26.62	27.20	< 30.00
		1	0	19.47	18.67	22.10	22.68	< 30.00
		1	161	19.44	18.74	22.11	22.69	< 30.00
60	3840.00	81	40	25.65	25.23	28.46	29.04	< 30.00
		1	1	25.55	25.20	28.39	28.97	< 30.00
		1	160	25.49	25.08	28.30	28.88	< 30.00
		162	0	24.16	23.77	26.98	27.56	< 30.00
		1	0	19.62	19.30	22.47	23.05	< 30.00
		1	161	19.58	19.13	22.37	22.95	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
60	3949.98	81	40	25.55	25.04	28.31	28.89	< 30.00
		1	1	25.78	25.10	28.46	29.04	< 30.00
		1	160	25.47	25.05	28.28	28.86	< 30.00
		162	0	24.12	23.60	26.88	27.46	< 30.00
		1	0	19.76	19.07	22.44	23.02	< 30.00
		1	161	19.37	19.07	22.23	22.81	< 30.00
70	3735.00	90	45	25.54	24.84	28.21	28.79	< 30.00
		1	1	25.35	24.62	28.01	28.59	< 30.00
		1	187	25.38	24.76	28.09	28.67	< 30.00
		180	0	23.94	23.32	26.65	27.23	< 30.00
		1	0	19.60	18.74	22.20	22.78	< 30.00
		1	188	19.35	18.73	22.06	22.64	< 30.00
70	3840.00	90	45	25.56	25.07	28.33	28.91	< 30.00
		1	1	25.45	25.12	28.30	28.88	< 30.00
		1	187	25.31	24.84	28.09	28.67	< 30.00
		180	0	23.95	23.68	26.83	27.41	< 30.00
		1	0	19.46	19.36	22.42	23.00	< 30.00
		1	188	19.29	18.97	22.14	22.72	< 30.00
70	3945.00	90	45	25.69	25.10	28.42	29.00	< 30.00
		1	1	25.82	25.02	28.45	29.03	< 30.00
		1	187	25.34	25.01	28.19	28.77	< 30.00
		180	0	24.10	23.63	26.88	27.46	< 30.00
		1	0	19.84	19.16	22.52	23.10	< 30.00
		1	188	19.37	19.06	22.23	22.81	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
80	3740.01	108	54	25.55	24.91	28.25	28.83	< 30.00
		1	1	25.33	24.56	27.97	28.55	< 30.00
		1	215	25.41	24.77	28.11	28.69	< 30.00
		216	0	24.01	23.25	26.66	27.24	< 30.00
		1	0	19.52	18.67	22.13	22.71	< 30.00
		1	216	19.37	18.71	22.06	22.64	< 30.00
80	3840.00	108	54	25.51	25.08	28.31	28.89	< 30.00
		1	1	25.40	25.11	28.27	28.85	< 30.00
		1	215	25.44	24.97	28.22	28.80	< 30.00
		216	0	24.03	23.61	26.84	27.42	< 30.00
		1	0	19.52	19.20	22.37	22.95	< 30.00
		1	216	19.43	18.94	22.20	22.78	< 30.00
80	3939.99	108	54	25.57	25.09	28.35	28.93	< 30.00
		1	1	25.73	25.01	28.40	28.98	< 30.00
		1	215	25.33	25.04	28.20	28.78	< 30.00
		216	0	24.19	23.58	26.91	27.49	< 30.00
		1	0	19.79	19.14	22.49	23.07	< 30.00
		1	216	19.26	19.04	22.16	22.74	< 30.00
90	3745.02	120	60	25.56	24.89	28.25	28.83	< 30.00
		1	1	25.26	24.58	27.94	28.52	< 30.00
		1	243	25.53	24.82	28.20	28.78	< 30.00
		243	0	24.03	23.29	26.69	27.27	< 30.00
		1	0	19.62	18.88	22.28	22.86	< 30.00
		1	244	19.52	18.86	22.21	22.79	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
90	3840.00	120	60	25.49	25.09	28.30	28.88	< 30.00
		1	1	25.30	25.04	28.18	28.76	< 30.00
		1	243	25.54	24.96	28.27	28.85	< 30.00
		243	0	24.07	23.72	26.91	27.49	< 30.00
		1	0	19.42	19.23	22.34	22.92	< 30.00
		1	244	19.53	19.01	22.29	22.87	< 30.00
90	3934.98	120	60	25.72	25.07	28.42	29.00	< 30.00
		1	1	25.71	24.99	28.38	28.96	< 30.00
		1	243	25.35	25.02	28.20	28.78	< 30.00
		243	0	24.15	23.61	26.90	27.48	< 30.00
		1	0	19.88	19.14	22.54	23.12	< 30.00
		1	244	19.40	19.07	22.25	22.83	< 30.00
100	3750.00	135	67	25.59	24.91	28.27	28.85	< 30.00
		1	1	25.28	24.59	27.96	28.54	< 30.00
		1	271	25.64	24.95	28.32	28.90	< 30.00
		270	0	24.07	23.31	26.72	27.30	< 30.00
		1	0	19.57	18.82	22.22	22.80	< 30.00
		1	272	19.59	18.89	22.26	22.84	< 30.00
100	3840.00	135	67	25.59	25.16	28.39	28.97	< 30.00
		1	1	25.36	25.09	28.24	28.82	< 30.00
		1	271	25.52	25.03	28.29	28.87	< 30.00
		270	0	24.03	23.60	26.83	27.41	< 30.00
		1	0	19.40	19.13	22.28	22.86	< 30.00
		1	272	19.52	18.99	22.27	22.85	< 30.00
100	3930.00	135	67	25.69	25.14	28.43	29.01	< 30.00
		1	1	25.71	25.03	28.39	28.97	< 30.00
		1	271	25.41	25.22	28.33	28.91	< 30.00
		270	0	24.21	23.58	26.92	27.50	< 30.00
		1	0	19.90	19.08	22.52	23.10	< 30.00
		1	272	19.41	19.16	22.30	22.88	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
10	3705.00	12	6	25.73	24.94	28.36	28.94	< 30.00
		1	1	25.60	24.84	28.25	28.83	< 30.00
		1	22	25.62	24.99	28.33	28.91	< 30.00
		24	0	23.74	22.90	26.35	26.93	< 30.00
		1	0	19.18	18.46	21.85	22.43	< 30.00
		1	23	19.17	18.50	21.86	22.44	< 30.00
10	3840.00	12	6	25.40	24.93	28.18	28.76	< 30.00
		1	1	25.35	24.91	28.15	28.73	< 30.00
		1	22	25.36	24.89	28.14	28.72	< 30.00
		24	0	23.39	22.97	26.20	26.78	< 30.00
		1	0	18.88	18.42	21.67	22.25	< 30.00
		1	23	18.95	18.36	21.68	22.26	< 30.00
10	3975.00	12	6	25.74	25.04	28.41	28.99	< 30.00
		1	1	25.71	24.89	28.33	28.91	< 30.00
		1	22	25.63	25.02	28.35	28.93	< 30.00
		24	0	23.74	23.09	26.44	27.02	< 30.00
		1	0	19.21	18.45	21.86	22.44	< 30.00
		1	23	19.13	18.39	21.79	22.37	< 30.00
15	3707.52	18	9	25.55	24.74	28.17	28.75	< 30.00
		1	1	25.48	24.74	28.14	28.72	< 30.00
		1	36	25.62	24.80	28.24	28.82	< 30.00
		36	0	23.50	22.75	26.15	26.73	< 30.00
		1	0	19.09	18.22	21.69	22.27	< 30.00
		1	37	19.05	18.36	21.73	22.31	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
15	3840.00	18	9	25.67	25.17	28.44	29.02	< 30.00
		1	1	25.58	25.18	28.39	28.97	< 30.00
		1	36	25.71	25.25	28.50	29.08	< 30.00
		36	0	23.76	23.28	26.54	27.12	< 30.00
		1	0	19.09	18.64	21.88	22.46	< 30.00
		1	37	19.12	18.64	21.90	22.48	< 30.00
15	3972.48	18	9	25.87	25.08	28.50	29.08	< 30.00
		1	1	25.82	25.04	28.46	29.04	< 30.00
		1	36	25.78	25.11	28.47	29.05	< 30.00
		36	0	23.91	23.11	26.54	27.12	< 30.00
		1	0	19.38	18.53	21.99	22.57	< 30.00
		1	37	19.41	18.60	22.03	22.61	< 30.00
20	3710.01	25	12	25.61	24.82	28.24	28.82	< 30.00
		1	1	25.57	24.67	28.15	28.73	< 30.00
		1	49	25.64	24.91	28.30	28.88	< 30.00
		50	0	23.69	22.79	26.27	26.85	< 30.00
		1	0	19.09	18.33	21.74	22.32	< 30.00
		1	50	19.11	18.41	21.78	22.36	< 30.00
20	3840.00	25	12	25.75	25.31	28.55	29.13	< 30.00
		1	1	25.78	25.30	28.56	29.14	< 30.00
		1	49	25.75	25.25	28.52	29.10	< 30.00
		50	0	23.75	23.29	26.54	27.12	< 30.00
		1	0	19.24	18.78	22.03	22.61	< 30.00
		1	50	19.20	18.69	21.96	22.54	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
20	3969.99	25	12	25.91	25.22	28.59	29.17	< 30.00
		1	1	25.94	25.06	28.53	29.11	< 30.00
		1	49	25.88	25.23	28.58	29.16	< 30.00
		50	0	23.93	23.26	26.62	27.20	< 30.00
		1	0	19.42	18.63	22.05	22.63	< 30.00
		1	50	19.36	18.70	22.05	22.63	< 30.00
25	3712.50	32	16	25.62	25.28	28.46	29.04	< 30.00
		1	1	25.65	25.12	28.40	28.98	< 30.00
		1	63	25.63	25.37	28.51	29.09	< 30.00
		64	0	23.71	23.24	26.49	27.07	< 30.00
		1	0	19.24	18.66	21.97	22.55	< 30.00
		1	64	19.04	18.81	21.94	22.52	< 30.00
25	3840.00	32	16	25.91	25.65	28.79	29.37	< 30.00
		1	1	25.69	25.65	28.68	29.26	< 30.00
		1	63	25.85	25.61	28.74	29.32	< 30.00
		64	0	23.93	23.67	26.81	27.39	< 30.00
		1	0	20.31	19.17	22.79	23.37	< 30.00
		1	64	19.35	19.06	22.22	22.80	< 30.00
25	3967.50	32	16	26.09	25.51	28.82	29.40	< 30.00
		1	1	26.17	25.57	28.89	29.47	< 30.00
		1	63	26.01	25.72	28.88	29.46	< 30.00
		64	0	24.08	23.54	26.83	27.41	< 30.00
		1	0	19.60	19.00	22.32	22.90	< 30.00
		1	64	19.59	19.04	22.33	22.91	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
30	3715.02	36	18	25.70	24.91	28.33	28.91	< 30.00
		1	1	25.59	24.83	28.24	28.82	< 30.00
		1	76	25.78	25.04	28.44	29.02	< 30.00
		75	0	23.76	22.93	26.38	26.96	< 30.00
		1	0	19.31	18.41	21.89	22.47	< 30.00
		1	77	19.31	18.60	21.98	22.56	< 30.00
30	3840.00	36	18	25.74	25.34	28.55	29.13	< 30.00
		1	1	25.72	25.28	28.52	29.10	< 30.00
		1	76	25.71	25.23	28.49	29.07	< 30.00
		75	0	23.81	23.35	26.60	27.18	< 30.00
		1	0	19.27	18.90	22.10	22.68	< 30.00
		1	77	19.22	18.68	21.97	22.55	< 30.00
30	3964.98	36	18	25.92	25.17	28.57	29.15	< 30.00
		1	1	26.01	25.14	28.61	29.19	< 30.00
		1	76	25.90	25.16	28.56	29.14	< 30.00
		75	0	23.95	23.22	26.61	27.19	< 30.00
		1	0	19.44	18.67	22.08	22.66	< 30.00
		1	77	19.43	18.65	22.07	22.65	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
40	3720.00	50	25	25.33	24.53	27.96	28.54	< 30.00
		1	1	25.44	24.55	28.03	28.61	< 30.00
		1	104	25.47	24.72	28.12	28.70	< 30.00
		100	0	23.48	22.69	26.11	26.69	< 30.00
		1	0	19.05	18.25	21.68	22.26	< 30.00
		1	105	19.06	18.30	21.71	22.29	< 30.00
40	3840.00	50	25	25.58	25.12	28.37	28.95	< 30.00
		1	1	25.67	25.23	28.47	29.05	< 30.00
		1	104	25.54	25.09	28.33	28.91	< 30.00
		100	0	23.63	23.17	26.42	27.00	< 30.00
		1	0	19.24	18.85	22.06	22.64	< 30.00
		1	105	19.11	18.64	21.89	22.47	< 30.00
40	3960.00	50	25	25.79	25.13	28.48	29.06	< 30.00
		1	1	25.97	25.12	28.58	29.16	< 30.00
		1	104	25.89	25.26	28.60	29.18	< 30.00
		100	0	23.90	23.16	26.56	27.14	< 30.00
		1	0	19.50	18.63	22.10	22.68	< 30.00
		1	105	19.42	18.68	22.08	22.66	< 30.00
50	3720.00	64	32	25.70	24.95	28.35	28.93	< 30.00
		1	1	25.53	24.75	28.17	28.75	< 30.00
		1	131	25.62	24.95	28.31	28.89	< 30.00
		128	0	23.67	22.94	26.33	26.91	< 30.00
		1	0	18.98	18.13	21.59	22.17	< 30.00
		1	132	18.81	18.17	21.51	22.09	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
50	3840.00	64	32	25.56	25.18	28.38	28.96	< 30.00
		1	1	25.57	25.12	28.36	28.94	< 30.00
		1	131	25.42	25.06	28.25	28.83	< 30.00
		128	0	23.52	23.14	26.34	26.92	< 30.00
		1	0	19.04	18.67	21.87	22.45	< 30.00
		1	132	19.04	18.61	21.84	22.42	< 30.00
50	3954.99	64	32	25.80	24.98	28.42	29.00	< 30.00
		1	1	25.77	24.92	28.38	28.96	< 30.00
		1	131	25.61	25.03	28.34	28.92	< 30.00
		128	0	23.73	23.11	26.44	27.02	< 30.00
		1	0	19.34	18.37	21.89	22.47	< 30.00
		1	132	19.12	18.49	21.83	22.41	< 30.00
60	3730.02	81	40	25.40	24.73	28.09	28.67	< 30.00
		1	1	23.34	24.49	26.96	27.54	< 30.00
		1	160	25.37	24.72	28.07	28.65	< 30.00
		162	0	23.44	22.73	26.11	26.69	< 30.00
		1	0	18.98	18.17	21.60	22.18	< 30.00
		1	161	18.82	18.20	21.53	22.11	< 30.00
60	3840.00	81	40	25.62	25.19	28.42	29.00	< 30.00
		1	1	25.54	25.16	28.36	28.94	< 30.00
		1	160	25.51	25.06	28.30	28.88	< 30.00
		162	0	23.66	23.24	26.47	27.05	< 30.00
		1	0	19.08	18.80	21.95	22.53	< 30.00
		1	161	19.05	18.62	21.85	22.43	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
60	3949.98	81	40	25.56	25.03	28.31	28.89	< 30.00
		1	1	25.70	25.10	28.42	29.00	< 30.00
		1	160	25.39	25.08	28.25	28.83	< 30.00
		162	0	23.60	23.11	26.37	26.95	< 30.00
		1	0	19.25	18.58	21.94	22.52	< 30.00
		1	161	18.88	18.54	21.72	22.30	< 30.00
70	3735.00	90	45	25.51	24.80	28.18	28.76	< 30.00
		1	1	25.29	24.55	27.95	28.53	< 30.00
		1	187	25.36	24.74	28.07	28.65	< 30.00
		180	0	23.43	22.80	26.14	26.72	< 30.00
		1	0	19.04	18.24	21.67	22.25	< 30.00
		1	188	18.84	18.27	21.57	22.15	< 30.00
70	3840.00	90	45	25.50	25.05	28.29	28.87	< 30.00
		1	1	25.38	25.09	28.25	28.83	< 30.00
		1	187	25.33	24.81	28.09	28.67	< 30.00
		180	0	23.44	23.19	26.33	26.91	< 30.00
		1	0	18.94	18.76	21.86	22.44	< 30.00
		1	188	18.82	18.43	21.64	22.22	< 30.00
70	3945.00	90	45	25.56	25.10	28.35	28.93	< 30.00
		1	1	25.84	25.04	28.47	29.05	< 30.00
		1	187	25.25	24.97	28.12	28.70	< 30.00
		180	0	23.65	23.10	26.39	26.97	< 30.00
		1	0	19.32	18.67	22.02	22.60	< 30.00
		1	188	18.82	18.53	21.69	22.27	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
80	3740.01	108	54	25.51	24.78	28.17	28.75	< 30.00
		1	1	25.26	24.56	27.93	28.51	< 30.00
		1	215	25.44	24.78	28.13	28.71	< 30.00
		216	0	23.52	22.75	26.16	26.74	< 30.00
		1	0	18.97	18.22	21.62	22.20	< 30.00
		1	216	18.88	18.24	21.58	22.16	< 30.00
80	3840.00	108	54	25.56	25.08	28.34	28.92	< 30.00
		1	1	25.40	25.08	28.25	28.83	< 30.00
		1	215	25.41	25.00	28.22	28.80	< 30.00
		216	0	23.54	23.10	26.34	26.92	< 30.00
		1	0	18.98	18.67	21.84	22.42	< 30.00
		1	216	18.91	18.43	21.69	22.27	< 30.00
80	3939.99	108	54	25.61	25.11	28.38	28.96	< 30.00
		1	1	25.72	25.04	28.40	28.98	< 30.00
		1	215	25.39	25.12	28.27	28.85	< 30.00
		216	0	23.68	23.04	26.38	26.96	< 30.00
		1	0	19.28	18.56	21.95	22.53	< 30.00
		1	216	18.82	18.48	21.66	22.24	< 30.00
90	3745.02	120	60	25.56	24.96	28.28	28.86	< 30.00
		1	1	25.34	24.59	27.99	28.57	< 30.00
		1	243	25.54	24.80	28.20	28.78	< 30.00
		243	0	23.53	22.79	26.19	26.77	< 30.00
		1	0	19.01	18.31	21.68	22.26	< 30.00
		1	244	19.04	18.33	21.71	22.29	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
90	3840.00	120	60	25.58	25.14	28.38	28.96	< 30.00
		1	1	25.34	25.01	28.19	28.77	< 30.00
		1	243	25.44	24.97	28.22	28.80	< 30.00
		243	0	23.45	23.18	26.33	26.91	< 30.00
		1	0	18.87	18.70	21.80	22.38	< 30.00
		1	244	19.01	18.52	21.78	22.36	< 30.00
90	3934.98	120	60	25.62	25.03	28.35	28.93	< 30.00
		1	1	25.68	24.91	28.32	28.90	< 30.00
		1	243	25.32	25.07	28.21	28.79	< 30.00
		243	0	23.57	23.10	26.35	26.93	< 30.00
		1	0	19.34	18.65	22.02	22.60	< 30.00
		1	244	18.85	18.57	21.72	22.30	< 30.00
100	3750.00	135	67	25.52	24.92	28.24	28.82	< 30.00
		1	1	25.33	24.55	27.97	28.55	< 30.00
		1	271	25.63	24.95	28.31	28.89	< 30.00
		270	0	23.57	22.82	26.22	26.80	< 30.00
		1	0	19.04	18.28	21.69	22.27	< 30.00
		1	272	19.04	18.36	21.72	22.30	< 30.00
100	3840.00	135	67	25.58	25.19	28.40	28.98	< 30.00
		1	1	25.32	25.04	28.19	28.77	< 30.00
		1	271	25.51	25.04	28.29	28.87	< 30.00
		270	0	25.51	23.07	27.47	28.05	< 30.00
		1	0	18.85	18.63	21.75	22.33	< 30.00
		1	272	19.01	18.48	21.76	22.34	< 30.00
100	3930.00	135	67	25.66	25.05	28.38	28.96	< 30.00
		1	1	25.70	25.02	28.38	28.96	< 30.00
		1	271	25.45	25.15	28.31	28.89	< 30.00
		270	0	23.70	23.05	26.40	26.98	< 30.00
		1	0	19.36	18.67	22.04	22.62	< 30.00
		1	272	18.86	18.62	21.75	22.33	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
10	3705.00	12	6	24.67	23.86	27.29	27.87	< 30.00
		1	1	24.45	23.66	27.08	27.66	< 30.00
		1	22	24.67	23.97	27.34	27.92	< 30.00
		24	0	22.76	21.96	25.39	25.97	< 30.00
		1	0	19.23	18.52	21.90	22.48	< 30.00
		1	23	19.12	18.37	21.77	22.35	< 30.00
10	3840.00	12	6	24.35	23.92	27.15	27.73	< 30.00
		1	1	24.36	23.89	27.14	27.72	< 30.00
		1	22	24.14	23.68	26.93	27.51	< 30.00
		24	0	22.47	22.02	25.26	25.84	< 30.00
		1	0	18.85	18.42	21.65	22.23	< 30.00
		1	23	19.95	18.34	22.23	22.81	< 30.00
10	3975.00	12	6	24.68	23.95	27.34	27.92	< 30.00
		1	1	24.65	23.94	27.32	27.90	< 30.00
		1	22	24.67	23.92	27.32	27.90	< 30.00
		24	0	22.81	22.08	25.47	26.05	< 30.00
		1	0	19.10	18.33	21.74	22.32	< 30.00
		1	23	19.06	18.34	21.73	22.31	< 30.00
15	3707.52	18	9	24.51	23.68	27.13	27.71	< 30.00
		1	1	24.44	23.54	27.02	27.60	< 30.00
		1	36	24.54	23.70	27.15	27.73	< 30.00
		36	0	22.51	21.74	25.15	25.73	< 30.00
		1	0	19.02	18.16	21.62	22.20	< 30.00
		1	37	19.07	18.27	21.70	22.28	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
15	3840.00	18	9	24.65	24.25	27.46	28.04	< 30.00
		1	1	24.58	24.05	27.33	27.91	< 30.00
		1	36	24.58	24.11	27.36	27.94	< 30.00
		36	0	22.77	22.28	25.54	26.12	< 30.00
		1	0	19.10	18.62	21.88	22.46	< 30.00
		1	37	19.04	18.59	21.83	22.41	< 30.00
15	3972.48	18	9	24.84	24.04	27.47	28.05	< 30.00
		1	1	24.77	23.96	27.39	27.97	< 30.00
		1	36	24.66	23.97	27.34	27.92	< 30.00
		36	0	22.87	22.09	25.51	26.09	< 30.00
		1	0	19.39	18.57	22.01	22.59	< 30.00
		1	37	19.45	18.67	22.09	22.67	< 30.00
20	3710.01	25	12	24.66	23.79	27.26	27.84	< 30.00
		1	1	24.56	23.61	27.12	27.70	< 30.00
		1	49	24.58	23.87	27.25	27.83	< 30.00
		50	0	22.66	21.82	25.27	25.85	< 30.00
		1	0	19.14	18.26	21.73	22.31	< 30.00
		1	50	19.01	18.30	21.68	22.26	< 30.00
20	3840.00	25	12	24.76	24.29	27.54	28.12	< 30.00
		1	1	24.62	24.19	27.42	28.00	< 30.00
		1	49	24.58	24.11	27.36	27.94	< 30.00
		50	0	22.73	22.27	25.52	26.10	< 30.00
		1	0	19.10	18.63	21.88	22.46	< 30.00
		1	50	19.05	18.56	21.82	22.40	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
20	3969.99	25	12	24.90	24.22	27.58	28.16	< 30.00
		1	1	24.78	23.99	27.41	27.99	< 30.00
		1	49	24.95	24.09	27.55	28.13	< 30.00
		50	0	22.90	22.24	25.59	26.17	< 30.00
		1	0	19.43	18.68	22.08	22.66	< 30.00
		1	50	19.46	18.67	22.09	22.67	< 30.00
25	3712.50	32	16	24.65	24.21	27.45	28.03	< 30.00
		1	1	24.60	24.08	27.36	27.94	< 30.00
		1	63	24.43	24.09	27.27	27.85	< 30.00
		64	0	22.69	22.19	25.46	26.04	< 30.00
		1	0	19.29	18.65	21.99	22.57	< 30.00
		1	64	19.17	18.82	22.01	22.59	< 30.00
25	3840.00	32	16	24.97	24.71	27.85	28.43	< 30.00
		1	1	24.61	24.52	27.58	28.16	< 30.00
		1	63	24.75	24.48	27.63	28.21	< 30.00
		64	0	22.94	22.68	25.82	26.40	< 30.00
		1	0	19.34	19.18	22.27	22.85	< 30.00
		1	64	19.29	19.06	22.19	22.77	< 30.00
25	3967.50	32	16	25.09	24.56	27.84	28.42	< 30.00
		1	1	25.02	24.29	27.68	28.26	< 30.00
		1	63	24.86	24.57	27.73	28.31	< 30.00
		64	0	23.08	22.52	25.82	26.40	< 30.00
		1	0	19.75	18.96	22.38	22.96	< 30.00
		1	64	19.47	19.05	22.28	22.86	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
30	3715.02	36	18	24.67	23.88	27.30	27.88	< 30.00
		1	1	24.48	23.68	27.11	27.69	< 30.00
		1	76	24.70	23.92	27.34	27.92	< 30.00
		75	0	22.78	21.89	25.37	25.95	< 30.00
		1	0	19.07	18.24	21.69	22.27	< 30.00
		1	77	19.26	18.43	21.88	22.46	< 30.00
30	3840.00	36	18	24.74	24.29	27.53	28.11	< 30.00
		1	1	24.54	24.09	27.33	27.91	< 30.00
		1	76	24.56	24.11	27.35	27.93	< 30.00
		75	0	22.83	22.37	25.62	26.20	< 30.00
		1	0	19.30	18.84	22.09	22.67	< 30.00
		1	77	19.18	18.70	21.96	22.54	< 30.00
30	3964.98	36	18	24.98	24.19	27.61	28.19	< 30.00
		1	1	24.96	24.04	27.53	28.11	< 30.00
		1	76	24.83	24.07	27.48	28.06	< 30.00
		75	0	22.95	22.24	25.62	26.20	< 30.00
		1	0	19.49	18.73	22.14	22.72	< 30.00
		1	77	19.57	18.77	22.20	22.78	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
40	3720.00	50	25	24.33	23.58	26.98	27.56	< 30.00
		1	1	24.40	23.46	26.97	27.55	< 30.00
		1	104	24.51	23.68	27.13	27.71	< 30.00
		100	0	22.46	21.70	25.11	25.69	< 30.00
		1	0	19.13	18.34	21.76	22.34	< 30.00
		1	105	19.10	18.34	21.75	22.33	< 30.00
40	3840.00	50	25	24.54	24.13	27.35	27.93	< 30.00
		1	1	24.60	24.16	27.40	27.98	< 30.00
		1	104	24.49	24.02	27.27	27.85	< 30.00
		100	0	22.66	22.20	25.45	26.03	< 30.00
		1	0	19.28	18.91	22.11	22.69	< 30.00
		1	105	19.12	18.65	21.90	22.48	< 30.00
40	3960.00	50	25	24.82	24.08	27.48	28.06	< 30.00
		1	1	24.87	24.05	27.49	28.07	< 30.00
		1	104	24.87	24.13	27.53	28.11	< 30.00
		100	0	22.90	22.13	25.54	26.12	< 30.00
		1	0	19.47	18.62	22.08	22.66	< 30.00
		1	105	19.39	18.79	22.11	22.69	< 30.00
50	3720.00	64	32	24.70	23.94	27.35	27.93	< 30.00
		1	1	24.30	23.45	26.91	27.49	< 30.00
		1	131	24.35	23.67	27.03	27.61	< 30.00
		128	0	22.71	21.96	25.36	25.94	< 30.00
		1	0	18.94	18.08	21.54	22.12	< 30.00
		1	132	18.73	18.06	21.42	22.00	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
50	3840.00	64	32	24.55	24.09	27.34	27.92	< 30.00
		1	1	24.46	24.10	27.29	27.87	< 30.00
		1	131	24.46	23.99	27.24	27.82	< 30.00
		128	0	22.58	22.15	25.38	25.96	< 30.00
		1	0	19.03	18.70	21.88	22.46	< 30.00
		1	132	18.93	18.52	21.74	22.32	< 30.00
50	3954.99	64	32	24.82	24.02	27.45	28.03	< 30.00
		1	1	24.91	23.85	27.42	28.00	< 30.00
		1	131	24.51	23.93	27.24	27.82	< 30.00
		128	0	22.75	22.05	25.42	26.00	< 30.00
		1	0	19.34	18.51	21.96	22.54	< 30.00
		1	132	19.28	18.58	21.95	22.53	< 30.00
60	3730.02	81	40	24.36	23.71	27.06	27.64	< 30.00
		1	1	24.36	23.48	26.95	27.53	< 30.00
		1	160	24.22	23.56	26.91	27.49	< 30.00
		162	0	22.46	21.74	25.13	25.71	< 30.00
		1	0	18.93	18.19	21.59	22.17	< 30.00
		1	161	18.82	18.21	21.54	22.12	< 30.00
60	3840.00	81	40	24.63	24.22	27.44	28.02	< 30.00
		1	1	24.56	24.18	27.38	27.96	< 30.00
		1	160	24.34	23.87	27.12	27.70	< 30.00
		162	0	22.66	22.26	25.47	26.05	< 30.00
		1	0	19.19	18.69	21.96	22.54	< 30.00
		1	161	19.12	18.71	21.93	22.51	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
60	3949.98	81	40	24.54	24.04	27.31	27.89	< 30.00
		1	1	24.79	24.09	27.46	28.04	< 30.00
		1	160	24.29	24.00	27.16	27.74	< 30.00
		162	0	22.59	22.09	25.36	25.94	< 30.00
		1	0	19.23	18.52	21.90	22.48	< 30.00
		1	161	18.85	18.47	21.67	22.25	< 30.00
70	3735.00	90	45	24.49	23.90	27.22	27.80	< 30.00
		1	1	24.26	23.53	26.92	27.50	< 30.00
		1	187	24.25	23.65	26.97	27.55	< 30.00
		180	0	22.44	21.85	25.17	25.75	< 30.00
		1	0	19.05	18.13	21.62	22.20	< 30.00
		1	188	18.85	18.24	21.57	22.15	< 30.00
70	3840.00	90	45	24.52	24.10	27.33	27.91	< 30.00
		1	1	24.38	24.07	27.24	27.82	< 30.00
		1	187	24.12	23.71	26.93	27.51	< 30.00
		180	0	22.48	22.14	25.32	25.90	< 30.00
		1	0	18.99	18.77	21.89	22.47	< 30.00
		1	188	18.81	18.35	21.60	22.18	< 30.00
70	3945.00	90	45	24.61	24.07	27.36	27.94	< 30.00
		1	1	24.93	24.11	27.55	28.13	< 30.00
		1	187	24.29	23.99	27.15	27.73	< 30.00
		180	0	22.64	22.15	25.41	25.99	< 30.00
		1	0	19.26	18.58	21.94	22.52	< 30.00
		1	188	18.72	18.41	21.58	22.16	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
80	3740.01	108	54	24.45	23.77	27.13	27.71	< 30.00
		1	1	24.21	23.47	26.87	27.45	< 30.00
		1	215	24.23	23.56	26.92	27.50	< 30.00
		216	0	22.54	21.79	25.19	25.77	< 30.00
		1	0	19.01	18.14	21.61	22.19	< 30.00
		1	216	18.92	18.24	21.60	22.18	< 30.00
80	3840.00	108	54	24.49	24.09	27.30	27.88	< 30.00
		1	1	24.36	24.03	27.21	27.79	< 30.00
		1	215	24.33	24.00	27.18	27.76	< 30.00
		216	0	22.53	22.15	25.35	25.93	< 30.00
		1	0	19.00	18.65	21.84	22.42	< 30.00
		1	216	18.78	18.33	21.57	22.15	< 30.00
80	3939.99	108	54	24.61	24.11	27.38	27.96	< 30.00
		1	1	24.77	24.01	27.42	28.00	< 30.00
		1	215	24.37	24.05	27.22	27.80	< 30.00
		216	0	22.68	22.07	25.40	25.98	< 30.00
		1	0	19.23	18.51	21.90	22.48	< 30.00
		1	216	18.76	18.41	21.60	22.18	< 30.00
90	3745.02	120	60	24.53	23.92	27.25	27.83	< 30.00
		1	1	24.24	23.50	26.90	27.48	< 30.00
		1	243	24.34	23.68	27.03	27.61	< 30.00
		243	0	22.59	21.83	25.24	25.82	< 30.00
		1	0	18.99	18.32	21.68	22.26	< 30.00
		1	244	19.00	18.22	21.64	22.22	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
90	3840.00	120	60	24.53	24.10	27.33	27.91	< 30.00
		1	1	24.24	24.03	27.15	27.73	< 30.00
		1	243	24.47	23.93	27.22	27.80	< 30.00
		243	0	22.45	22.19	25.33	25.91	< 30.00
		1	0	18.84	18.65	21.76	22.34	< 30.00
		1	244	18.91	18.40	21.67	22.25	< 30.00
90	3934.98	120	60	24.61	24.07	27.36	27.94	< 30.00
		1	1	24.60	23.95	27.30	27.88	< 30.00
		1	243	24.34	24.02	27.19	27.77	< 30.00
		243	0	22.66	22.14	25.42	26.00	< 30.00
		1	0	19.27	18.51	21.92	22.50	< 30.00
		1	244	18.71	18.47	21.60	22.18	< 30.00
100	3750.00	135	67	24.53	23.93	27.25	27.83	< 30.00
		1	1	24.27	23.49	26.91	27.49	< 30.00
		1	271	24.57	23.89	27.25	27.83	< 30.00
		270	0	22.57	21.82	25.22	25.80	< 30.00
		1	0	18.91	18.23	21.59	22.17	< 30.00
		1	272	18.99	18.33	21.68	22.26	< 30.00
100	3840.00	135	67	24.56	24.18	27.38	27.96	< 30.00
		1	1	24.33	23.93	27.14	27.72	< 30.00
		1	271	24.52	23.97	27.26	27.84	< 30.00
		270	0	22.55	22.11	25.35	25.93	< 30.00
		1	0	18.87	18.57	21.73	22.31	< 30.00
		1	272	18.88	18.40	21.66	22.24	< 30.00
100	3930.00	135	67	24.70	24.05	27.40	27.98	< 30.00
		1	1	24.66	23.96	27.33	27.91	< 30.00
		1	271	24.27	24.02	27.16	27.74	< 30.00
		270	0	22.67	22.08	25.40	25.98	< 30.00
		1	0	19.34	18.61	22.00	22.58	< 30.00
		1	272	18.85	18.63	21.75	22.33	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
10	3705.00	12	6	22.78	22.01	25.42	26.00	< 30.00
		1	1	22.68	21.85	25.30	25.88	< 30.00
		1	22	22.85	22.08	25.49	26.07	< 30.00
		24	0	22.34	21.52	24.96	25.54	< 30.00
		1	0	19.14	18.44	21.81	22.39	< 30.00
		1	23	19.03	18.36	21.72	22.30	< 30.00
10	3840.00	12	6	22.43	21.95	25.21	25.79	< 30.00
		1	1	22.42	21.93	25.19	25.77	< 30.00
		1	22	22.54	22.02	25.30	25.88	< 30.00
		24	0	21.97	21.53	24.77	25.35	< 30.00
		1	0	18.93	18.50	21.73	22.31	< 30.00
		1	23	18.92	18.32	21.64	22.22	< 30.00
10	3975.00	12	6	22.73	22.05	25.41	25.99	< 30.00
		1	1	22.75	22.01	25.41	25.99	< 30.00
		1	22	22.65	22.05	25.37	25.95	< 30.00
		24	0	22.27	21.55	24.94	25.52	< 30.00
		1	0	19.39	18.55	22.00	22.58	< 30.00
		1	23	19.18	18.41	21.82	22.40	< 30.00
15	3707.52	18	9	22.58	21.74	25.19	25.77	< 30.00
		1	1	22.42	21.62	25.05	25.63	< 30.00
		1	36	22.60	21.81	25.23	25.81	< 30.00
		36	0	22.06	21.32	24.72	25.30	< 30.00
		1	0	19.10	18.23	21.70	22.28	< 30.00
		1	37	19.19	18.62	21.92	22.50	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
15	3840.00	18	9	22.63	22.27	25.46	26.04	< 30.00
		1	1	22.56	22.14	25.37	25.95	< 30.00
		1	36	22.71	22.22	25.48	26.06	< 30.00
		36	0	22.29	21.82	25.07	25.65	< 30.00
		1	0	19.22	18.79	22.02	22.60	< 30.00
		1	37	19.14	18.62	21.90	22.48	< 30.00
15	3972.48	18	9	22.91	22.06	25.52	26.10	< 30.00
		1	1	22.91	22.02	25.50	26.08	< 30.00
		1	36	22.90	22.21	25.58	26.16	< 30.00
		36	0	22.41	21.66	25.06	25.64	< 30.00
		1	0	19.39	18.55	22.00	22.58	< 30.00
		1	37	19.42	18.61	22.04	22.62	< 30.00
20	3710.01	25	12	22.66	21.80	25.26	25.84	< 30.00
		1	1	22.55	21.82	25.21	25.79	< 30.00
		1	49	22.54	21.81	25.20	25.78	< 30.00
		50	0	22.16	21.36	24.79	25.37	< 30.00
		1	0	18.99	18.22	21.63	22.21	< 30.00
		1	50	19.11	18.39	21.78	22.36	< 30.00
20	3840.00	25	12	22.74	22.32	25.55	26.13	< 30.00
		1	1	22.63	22.22	25.44	26.02	< 30.00
		1	49	22.52	22.07	25.31	25.89	< 30.00
		50	0	22.26	21.79	25.04	25.62	< 30.00
		1	0	19.28	18.85	22.08	22.66	< 30.00
		1	50	19.21	18.66	21.95	22.53	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
20	3969.99	25	12	22.88	22.19	25.56	26.14	< 30.00
		1	1	22.85	22.01	25.46	26.04	< 30.00
		1	49	23.04	22.22	25.66	26.24	< 30.00
		50	0	22.44	21.71	25.10	25.68	< 30.00
		1	0	19.42	18.61	22.04	22.62	< 30.00
		1	50	19.52	18.70	22.14	22.72	< 30.00
25	3712.50	32	16	22.66	22.25	25.47	26.05	< 30.00
		1	1	22.81	22.31	25.58	26.16	< 30.00
		1	63	22.73	22.45	25.60	26.18	< 30.00
		64	0	22.21	21.79	25.02	25.60	< 30.00
		1	0	19.35	18.79	22.09	22.67	< 30.00
		1	64	19.33	18.94	22.15	22.73	< 30.00
25	3840.00	32	16	22.92	22.66	25.80	26.38	< 30.00
		1	1	22.85	22.70	25.79	26.37	< 30.00
		1	63	23.06	22.71	25.90	26.48	< 30.00
		64	0	22.49	22.17	25.34	25.92	< 30.00
		1	0	19.44	19.36	22.41	22.99	< 30.00
		1	64	19.36	19.01	22.20	22.78	< 30.00
25	3967.50	32	16	23.09	22.52	25.82	26.40	< 30.00
		1	1	23.12	22.51	25.84	26.42	< 30.00
		1	63	23.32	22.83	26.09	26.67	< 30.00
		64	0	22.60	22.03	25.33	25.91	< 30.00
		1	0	19.87	19.10	22.51	23.09	< 30.00
		1	64	19.46	19.06	22.27	22.85	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
30	3715.02	36	18	22.73	21.85	25.32	25.90	< 30.00
		1	1	22.66	21.88	25.30	25.88	< 30.00
		1	76	22.85	22.16	25.53	26.11	< 30.00
		75	0	22.25	21.47	24.89	25.47	< 30.00
		1	0	19.20	18.33	21.80	22.38	< 30.00
		1	77	19.10	18.41	21.78	22.36	< 30.00
30	3840.00	36	18	22.82	22.39	25.62	26.20	< 30.00
		1	1	22.90	22.43	25.68	26.26	< 30.00
		1	76	22.85	22.42	25.65	26.23	< 30.00
		75	0	22.33	21.87	25.12	25.70	< 30.00
		1	0	19.38	19.01	22.21	22.79	< 30.00
		1	77	19.30	18.77	22.05	22.63	< 30.00
30	3964.98	36	18	23.06	22.18	25.65	26.23	< 30.00
		1	1	22.98	22.11	25.58	26.16	< 30.00
		1	76	22.89	22.14	25.54	26.12	< 30.00
		75	0	22.47	21.70	25.11	25.69	< 30.00
		1	0	19.60	18.75	22.21	22.79	< 30.00
		1	77	19.48	18.73	22.13	22.71	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
40	3720.00	50	25	22.37	21.56	24.99	25.57	< 30.00
		1	1	22.29	21.47	24.91	25.49	< 30.00
		1	104	22.49	21.73	25.14	25.72	< 30.00
		100	0	21.99	21.23	24.64	25.22	< 30.00
		1	0	19.14	18.33	21.76	22.34	< 30.00
		1	105	19.15	18.36	21.78	22.36	< 30.00
40	3840.00	50	25	22.64	22.17	25.42	26.00	< 30.00
		1	1	22.67	22.20	25.45	26.03	< 30.00
		1	104	22.56	22.06	25.33	25.91	< 30.00
		100	0	22.20	21.69	24.96	25.54	< 30.00
		1	0	19.32	18.87	22.11	22.69	< 30.00
		1	105	19.21	18.71	21.98	22.56	< 30.00
40	3960.00	50	25	22.80	22.09	25.47	26.05	< 30.00
		1	1	22.90	22.07	25.52	26.10	< 30.00
		1	104	22.98	22.25	25.64	26.22	< 30.00
		100	0	22.40	21.65	25.05	25.63	< 30.00
		1	0	19.50	18.62	22.09	22.67	< 30.00
		1	105	19.35	18.71	22.05	22.63	< 30.00
50	3720.00	64	32	22.75	22.02	25.41	25.99	< 30.00
		1	1	22.67	21.81	25.27	25.85	< 30.00
		1	131	22.66	22.01	25.36	25.94	< 30.00
		128	0	22.16	21.39	24.80	25.38	< 30.00
		1	0	18.85	18.02	21.47	22.05	< 30.00
		1	132	18.80	18.11	21.48	22.06	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
50	3840.00	64	32	22.56	22.11	25.35	25.93	< 30.00
		1	1	22.68	22.23	25.47	26.05	< 30.00
		1	131	22.43	22.02	25.24	25.82	< 30.00
		128	0	22.06	21.60	24.85	25.43	< 30.00
		1	0	19.05	18.68	21.88	22.46	< 30.00
		1	132	19.11	18.72	21.93	22.51	< 30.00
50	3954.99	64	32	22.81	22.03	25.45	26.03	< 30.00
		1	1	22.89	22.07	25.51	26.09	< 30.00
		1	131	22.91	22.28	25.62	26.20	< 30.00
		128	0	22.25	21.52	24.91	25.49	< 30.00
		1	0	19.28	18.51	21.92	22.50	< 30.00
		1	132	19.20	18.47	21.86	22.44	< 30.00
60	3730.02	81	40	22.44	21.78	25.13	25.71	< 30.00
		1	1	22.55	21.76	25.18	25.76	< 30.00
		1	160	22.64	21.91	25.30	25.88	< 30.00
		162	0	21.97	21.25	24.64	25.22	< 30.00
		1	0	18.85	18.08	21.49	22.07	< 30.00
		1	161	18.87	18.23	21.57	22.15	< 30.00
60	3840.00	81	40	22.68	22.23	25.47	26.05	< 30.00
		1	1	22.53	22.19	25.37	25.95	< 30.00
		1	160	22.65	22.19	25.44	26.02	< 30.00
		162	0	22.15	21.74	24.96	25.54	< 30.00
		1	0	19.06	18.73	21.91	22.49	< 30.00
		1	161	18.98	18.47	21.74	22.32	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
60	3949.98	81	40	22.60	22.06	25.35	25.93	< 30.00
		1	1	22.80	22.14	25.49	26.07	< 30.00
		1	160	22.47	22.15	25.32	25.90	< 30.00
		162	0	22.09	21.58	24.85	25.43	< 30.00
		1	0	19.17	18.51	21.86	22.44	< 30.00
		1	161	18.85	18.48	21.68	22.26	< 30.00
70	3735.00	90	45	22.60	21.86	25.26	25.84	< 30.00
		1	1	22.38	21.78	25.10	25.68	< 30.00
		1	187	22.51	21.94	25.24	25.82	< 30.00
		180	0	21.98	21.41	24.71	25.29	< 30.00
		1	0	19.01	18.15	21.61	22.19	< 30.00
		1	188	18.85	18.23	21.56	22.14	< 30.00
70	3840.00	90	45	22.52	22.13	25.34	25.92	< 30.00
		1	1	22.62	22.22	25.43	26.01	< 30.00
		1	187	22.57	22.05	25.33	25.91	< 30.00
		180	0	21.98	21.59	24.80	25.38	< 30.00
		1	0	18.86	18.63	21.76	22.34	< 30.00
		1	188	18.77	18.32	21.56	22.14	< 30.00
70	3945.00	90	45	22.64	22.11	25.39	25.97	< 30.00
		1	1	22.90	22.17	25.56	26.14	< 30.00
		1	187	22.52	22.18	25.36	25.94	< 30.00
		180	0	22.21	21.68	24.96	25.54	< 30.00
		1	0	19.65	18.90	22.30	22.88	< 30.00
		1	188	18.98	18.55	21.78	22.36	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
80	3740.01	108	54	22.55	21.81	25.21	25.79	< 30.00
		1	1	22.35	21.54	24.97	25.55	< 30.00
		1	215	22.55	21.95	25.27	25.85	< 30.00
		216	0	22.04	21.29	24.69	25.27	< 30.00
		1	0	18.90	18.13	21.54	22.12	< 30.00
		1	216	18.82	18.13	21.50	22.08	< 30.00
80	3840.00	108	54	22.53	22.07	25.32	25.90	< 30.00
		1	1	22.36	22.11	25.25	25.83	< 30.00
		1	215	22.40	22.03	25.23	25.81	< 30.00
		216	0	22.03	21.61	24.84	25.42	< 30.00
		1	0	18.96	18.64	21.81	22.39	< 30.00
		1	216	18.89	18.49	21.70	22.28	< 30.00
80	3939.99	108	54	22.60	22.06	25.35	25.93	< 30.00
		1	1	22.79	21.96	25.41	25.99	< 30.00
		1	215	22.51	22.12	25.33	25.91	< 30.00
		216	0	22.18	21.56	24.89	25.47	< 30.00
		1	0	19.43	18.75	22.11	22.69	< 30.00
		1	216	19.11	18.66	21.90	22.48	< 30.00
90	3745.02	120	60	22.62	21.98	25.32	25.90	< 30.00
		1	1	22.46	21.60	25.06	25.64	< 30.00
		1	243	22.73	22.06	25.42	26.00	< 30.00
		243	0	22.03	21.35	24.71	25.29	< 30.00
		1	0	18.94	18.21	21.60	22.18	< 30.00
		1	244	18.96	18.29	21.65	22.23	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
90	3840.00	120	60	22.59	22.14	25.38	25.96	< 30.00
		1	1	22.30	22.02	25.17	25.75	< 30.00
		1	243	22.43	22.03	25.24	25.82	< 30.00
		243	0	22.01	21.65	24.84	25.42	< 30.00
		1	0	19.21	19.04	22.14	22.72	< 30.00
		1	244	19.14	18.69	21.93	22.51	< 30.00
90	3934.98	120	60	22.63	22.09	25.38	25.96	< 30.00
		1	1	22.80	22.07	25.46	26.04	< 30.00
		1	243	22.41	22.18	25.31	25.89	< 30.00
		243	0	22.18	21.62	24.92	25.50	< 30.00
		1	0	19.49	18.74	22.14	22.72	< 30.00
		1	244	18.80	18.62	21.72	22.30	< 30.00
100	3750.00	135	67	22.54	21.91	25.25	25.83	< 30.00
		1	1	22.34	21.70	25.04	25.62	< 30.00
		1	271	22.74	22.04	25.41	25.99	< 30.00
		270	0	22.11	21.32	24.74	25.32	< 30.00
		1	0	19.17	18.42	21.82	22.40	< 30.00
		1	272	19.23	18.55	21.91	22.49	< 30.00
100	3840.00	135	67	22.61	22.12	25.38	25.96	< 30.00
		1	1	22.42	22.15	25.30	25.88	< 30.00
		1	271	22.54	22.01	25.29	25.87	< 30.00
		270	0	22.04	21.63	24.85	25.43	< 30.00
		1	0	19.08	18.72	21.91	22.49	< 30.00
		1	272	19.02	18.49	21.77	22.35	< 30.00
100	3930.00	135	67	22.65	22.21	25.45	26.03	< 30.00
		1	1	22.74	22.07	25.43	26.01	< 30.00
		1	271	22.65	22.41	25.54	26.12	< 30.00
		270	0	22.05	21.58	24.83	25.41	< 30.00
		1	0	19.24	18.59	21.94	22.52	< 30.00
		1	272	18.86	18.57	21.73	22.31	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
10	3705.00	12	6	20.24	19.52	22.91	23.49	< 30.00
		1	1	20.15	19.43	22.82	23.40	< 30.00
		1	22	20.13	19.51	22.84	23.42	< 30.00
		24	0	20.19	19.49	22.86	23.44	< 30.00
		1	0	19.26	18.57	21.94	22.52	< 30.00
		1	23	19.29	18.60	21.97	22.55	< 30.00
10	3840.00	12	6	20.01	19.56	22.80	23.38	< 30.00
		1	1	19.98	19.47	22.74	23.32	< 30.00
		1	22	19.94	19.45	22.71	23.29	< 30.00
		24	0	19.95	19.45	22.72	23.30	< 30.00
		1	0	19.02	18.55	21.80	22.38	< 30.00
		1	23	18.90	18.45	21.69	22.27	< 30.00
10	3975.00	12	6	20.24	19.46	22.88	23.46	< 30.00
		1	1	20.03	19.23	22.66	23.24	< 30.00
		1	22	20.19	19.46	22.85	23.43	< 30.00
		24	0	20.18	19.47	22.85	23.43	< 30.00
		1	0	19.02	18.41	21.74	22.32	< 30.00
		1	23	19.09	18.49	21.81	22.39	< 30.00
15	3707.52	18	9	20.12	19.28	22.73	23.31	< 30.00
		1	1	20.01	19.05	22.57	23.15	< 30.00
		1	36	20.09	19.40	22.77	23.35	< 30.00
		36	0	20.03	19.21	22.65	23.23	< 30.00
		1	0	19.02	18.13	21.61	22.19	< 30.00
		1	37	19.02	18.34	21.70	22.28	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
15	3840.00	18	9	20.24	19.76	23.02	23.60	< 30.00
		1	1	20.14	19.77	22.97	23.55	< 30.00
		1	36	20.24	19.71	22.99	23.57	< 30.00
		36	0	20.18	19.68	22.95	23.53	< 30.00
		1	0	19.17	18.74	21.97	22.55	< 30.00
		1	37	19.15	18.59	21.89	22.47	< 30.00
15	3972.48	18	9	20.42	19.60	23.04	23.62	< 30.00
		1	1	20.45	19.53	23.02	23.60	< 30.00
		1	36	20.36	19.47	22.95	23.53	< 30.00
		36	0	20.39	19.54	23.00	23.58	< 30.00
		1	0	19.30	18.54	21.95	22.53	< 30.00
		1	37	19.33	18.61	22.00	22.58	< 30.00
20	3710.01	25	12	20.19	19.31	22.78	23.36	< 30.00
		1	1	20.11	19.26	22.72	23.30	< 30.00
		1	49	20.17	19.48	22.85	23.43	< 30.00
		50	0	20.21	19.32	22.80	23.38	< 30.00
		1	0	18.98	18.21	21.62	22.20	< 30.00
		1	50	19.11	18.46	21.81	22.39	< 30.00
20	3840.00	25	12	20.29	19.84	23.08	23.66	< 30.00
		1	1	20.07	19.63	22.87	23.45	< 30.00
		1	49	20.18	19.69	22.95	23.53	< 30.00
		50	0	20.25	19.78	23.03	23.61	< 30.00
		1	0	19.28	18.83	22.07	22.65	< 30.00
		1	50	19.17	18.77	21.98	22.56	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
20	3969.99	25	12	20.52	19.65	23.12	23.70	< 30.00
		1	1	20.43	19.72	23.10	23.68	< 30.00
		1	49	20.45	19.74	23.12	23.70	< 30.00
		50	0	20.50	19.69	23.12	23.70	< 30.00
		1	0	19.49	18.63	22.09	22.67	< 30.00
		1	50	19.56	18.80	22.21	22.79	< 30.00
25	3712.50	32	16	20.21	19.67	22.96	23.54	< 30.00
		1	1	19.95	19.55	22.76	23.34	< 30.00
		1	63	20.25	19.95	23.11	23.69	< 30.00
		64	0	20.14	19.74	22.95	23.53	< 30.00
		1	0	19.11	18.51	21.83	22.41	< 30.00
		1	64	18.97	18.69	21.84	22.42	< 30.00
25	3840.00	32	16	20.37	20.13	23.26	23.84	< 30.00
		1	1	20.22	20.15	23.20	23.78	< 30.00
		1	63	20.39	20.10	23.26	23.84	< 30.00
		64	0	20.41	19.13	22.83	23.41	< 30.00
		1	0	19.34	19.29	22.33	22.91	< 30.00
		1	64	19.40	19.34	22.38	22.96	< 30.00
25	3967.50	32	16	20.59	20.07	23.35	23.93	< 30.00
		1	1	20.39	19.78	23.11	23.69	< 30.00
		1	63	20.35	19.91	23.15	23.73	< 30.00
		64	0	20.68	20.06	23.39	23.97	< 30.00
		1	0	19.46	18.86	22.18	22.76	< 30.00
		1	64	19.32	18.86	22.11	22.69	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
30	3715.02	36	18	20.19	19.39	22.82	23.40	< 30.00
		1	1	20.15	19.42	22.81	23.39	< 30.00
		1	76	20.39	19.70	23.07	23.65	< 30.00
		75	0	20.28	19.45	22.90	23.48	< 30.00
		1	0	19.16	18.33	21.78	22.36	< 30.00
		1	77	19.23	18.54	21.91	22.49	< 30.00
30	3840.00	36	18	20.22	19.81	23.03	23.61	< 30.00
		1	1	20.29	19.88	23.10	23.68	< 30.00
		1	76	20.13	19.65	22.91	23.49	< 30.00
		75	0	20.31	19.84	23.09	23.67	< 30.00
		1	0	19.34	18.88	22.13	22.71	< 30.00
		1	77	19.27	18.72	22.01	22.59	< 30.00
30	3964.98	36	18	20.46	19.65	23.08	23.66	< 30.00
		1	1	20.52	19.64	23.11	23.69	< 30.00
		1	76	20.36	19.64	23.03	23.61	< 30.00
		75	0	20.52	19.69	23.14	23.72	< 30.00
		1	0	19.62	18.69	22.19	22.77	< 30.00
		1	77	19.55	18.77	22.19	22.77	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
40	3720.00	50	25	20.04	19.28	22.69	23.27	< 30.00
		1	1	20.12	19.21	22.70	23.28	< 30.00
		1	104	20.06	19.31	22.71	23.29	< 30.00
		100	0	20.03	19.34	22.71	23.29	< 30.00
		1	0	19.23	18.32	21.81	22.39	< 30.00
		1	105	19.08	18.40	21.76	22.34	< 30.00
40	3840.00	50	25	20.14	19.58	22.88	23.46	< 30.00
		1	1	20.13	19.78	22.97	23.55	< 30.00
		1	104	20.02	19.58	22.82	23.40	< 30.00
		100	0	20.10	19.64	22.89	23.47	< 30.00
		1	0	19.28	18.85	22.08	22.66	< 30.00
		1	105	19.13	18.72	21.94	22.52	< 30.00
40	3960.00	50	25	20.34	19.64	23.01	23.59	< 30.00
		1	1	20.31	19.47	22.92	23.50	< 30.00
		1	104	20.40	19.68	23.07	23.65	< 30.00
		100	0	20.50	19.68	23.12	23.70	< 30.00
		1	0	19.51	18.70	22.13	22.71	< 30.00
		1	105	19.46	18.81	22.16	22.74	< 30.00
50	3720.00	64	32	19.94	19.15	22.57	23.15	< 30.00
		1	1	19.67	19.06	22.39	22.97	< 30.00
		1	131	19.74	19.11	22.45	23.03	< 30.00
		128	0	19.95	19.20	22.60	23.18	< 30.00
		1	0	18.83	18.05	21.47	22.05	< 30.00
		1	132	18.89	18.30	21.62	22.20	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
50	3840.00	64	32	20.11	19.69	22.92	23.50	< 30.00
		1	1	20.19	19.84	23.03	23.61	< 30.00
		1	131	19.97	19.59	22.79	23.37	< 30.00
		128	0	20.14	19.72	22.95	23.53	< 30.00
		1	0	19.01	18.78	21.91	22.49	< 30.00
		1	132	18.94	18.63	21.80	22.38	< 30.00
50	3954.99	64	32	20.30	19.51	22.93	23.51	< 30.00
		1	1	20.49	19.62	23.09	23.67	< 30.00
		1	131	20.20	19.62	22.93	23.51	< 30.00
		128	0	20.36	19.52	22.97	23.55	< 30.00
		1	0	19.32	18.44	21.91	22.49	< 30.00
		1	132	19.12	18.55	21.85	22.43	< 30.00
60	3730.02	81	40	19.94	19.25	22.62	23.20	< 30.00
		1	1	19.69	19.00	22.37	22.95	< 30.00
		1	160	19.90	19.25	22.60	23.18	< 30.00
		162	0	19.96	19.27	22.64	23.22	< 30.00
		1	0	19.98	18.21	22.19	22.77	< 30.00
		1	161	18.92	18.11	21.54	22.12	< 30.00
60	3840.00	81	40	20.16	19.70	22.95	23.53	< 30.00
		1	1	19.97	19.73	22.86	23.44	< 30.00
		1	160	19.98	19.55	22.78	23.36	< 30.00
		162	0	20.13	19.62	22.89	23.47	< 30.00
		1	0	18.94	18.64	21.80	22.38	< 30.00
		1	161	18.73	18.35	21.55	22.13	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
60	3949.98	81	40	20.11	19.56	22.85	23.43	< 30.00
		1	1	20.16	19.62	22.91	23.49	< 30.00
		1	160	20.17	19.55	22.88	23.46	< 30.00
		162	0	20.12	19.56	22.86	23.44	< 30.00
		1	0	19.09	18.41	21.77	22.35	< 30.00
		1	161	18.89	18.48	21.70	22.28	< 30.00
70	3735.00	90	45	20.03	19.32	22.70	23.28	< 30.00
		1	1	19.92	19.17	22.57	23.15	< 30.00
		1	187	20.00	19.31	22.68	23.26	< 30.00
		180	0	20.04	19.27	22.68	23.26	< 30.00
		1	0	19.05	18.17	21.64	22.22	< 30.00
		1	188	19.02	18.32	21.69	22.27	< 30.00
70	3840.00	90	45	20.07	19.64	22.87	23.45	< 30.00
		1	1	20.01	19.71	22.87	23.45	< 30.00
		1	187	19.87	19.44	22.67	23.25	< 30.00
		180	0	20.03	19.62	22.84	23.42	< 30.00
		1	0	19.10	18.69	21.91	22.49	< 30.00
		1	188	19.05	18.53	21.81	22.39	< 30.00
70	3945.00	90	45	20.17	19.61	22.91	23.49	< 30.00
		1	1	20.27	19.65	22.98	23.56	< 30.00
		1	187	19.89	19.52	22.72	23.30	< 30.00
		180	0	20.13	19.61	22.89	23.47	< 30.00
		1	0	19.38	18.58	22.01	22.59	< 30.00
		1	188	18.79	18.38	21.60	22.18	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
80	3740.01	108	54	20.02	19.27	22.67	23.25	< 30.00
		1	1	19.85	19.06	22.48	23.06	< 30.00
		1	215	20.07	19.27	22.70	23.28	< 30.00
		216	0	20.01	19.25	22.66	23.24	< 30.00
		1	0	18.94	18.32	21.65	22.23	< 30.00
		1	216	18.96	18.18	21.60	22.18	< 30.00
80	3840.00	108	54	20.01	19.60	22.82	23.40	< 30.00
		1	1	19.89	19.59	22.75	23.33	< 30.00
		1	215	19.94	19.50	22.74	23.32	< 30.00
		216	0	20.03	19.62	22.84	23.42	< 30.00
		1	0	18.93	18.60	21.78	22.36	< 30.00
		1	216	18.92	18.52	21.73	22.31	< 30.00
80	3939.99	108	54	20.15	19.59	22.89	23.47	< 30.00
		1	1	20.37	19.58	23.00	23.58	< 30.00
		1	215	19.83	19.57	22.71	23.29	< 30.00
		216	0	20.17	19.63	22.92	23.50	< 30.00
		1	0	19.30	18.58	21.97	22.55	< 30.00
		1	216	18.80	18.54	21.68	22.26	< 30.00
90	3745.02	120	60	20.05	19.44	22.77	23.35	< 30.00
		1	1	19.93	19.08	22.54	23.12	< 30.00
		1	243	20.20	19.43	22.84	23.42	< 30.00
		243	0	20.05	19.29	22.70	23.28	< 30.00
		1	0	19.07	18.32	21.72	22.30	< 30.00
		1	244	19.01	18.35	21.70	22.28	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
90	3840.00	120	60	20.06	19.64	22.87	23.45	< 30.00
		1	1	19.84	19.55	22.71	23.29	< 30.00
		1	243	19.96	19.36	22.68	23.26	< 30.00
		243	0	20.02	19.62	22.83	23.41	< 30.00
		1	0	18.93	18.70	21.83	22.41	< 30.00
		1	244	18.98	18.55	21.78	22.36	< 30.00
90	3934.98	120	60	20.10	19.55	22.84	23.42	< 30.00
		1	1	20.24	19.49	22.89	23.47	< 30.00
		1	243	19.83	19.49	22.67	23.25	< 30.00
		243	0	20.12	19.57	22.86	23.44	< 30.00
		1	0	19.25	18.60	21.95	22.53	< 30.00
		1	244	18.89	18.61	21.76	22.34	< 30.00
100	3750.00	135	67	20.09	19.48	22.81	23.39	< 30.00
		1	1	19.88	19.10	22.52	23.10	< 30.00
		1	271	20.15	19.39	22.80	23.38	< 30.00
		270	0	20.06	19.30	22.71	23.29	< 30.00
		1	0	19.10	18.26	21.71	22.29	< 30.00
		1	272	19.12	18.35	21.76	22.34	< 30.00
100	3840.00	135	67	20.09	19.67	22.90	23.48	< 30.00
		1	1	19.77	19.54	22.67	23.25	< 30.00
		1	271	19.93	19.45	22.71	23.29	< 30.00
		270	0	20.04	19.59	22.83	23.41	< 30.00
		1	0	18.91	18.60	21.77	22.35	< 30.00
		1	272	19.01	18.46	21.75	22.33	< 30.00
100	3930.00	135	67	20.19	19.67	22.95	23.53	< 30.00
		1	1	20.21	19.49	22.88	23.46	< 30.00
		1	271	19.82	19.62	22.73	23.31	< 30.00
		270	0	20.14	19.62	22.90	23.48	< 30.00
		1	0	19.20	18.56	21.90	22.48	< 30.00
		1	272	18.79	18.53	21.67	22.25	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
10	3705.00	12	6	24.21	23.43	26.85	27.43	< 30.00
		1	1	24.15	23.30	26.76	27.34	< 30.00
		1	22	24.23	23.49	26.89	27.47	< 30.00
		24	0	21.73	20.90	24.35	24.93	< 30.00
		1	0	19.22	18.46	21.87	22.45	< 30.00
		1	23	19.21	18.57	21.91	22.49	< 30.00
10	3840.00	12	6	24.23	23.76	27.01	27.59	< 30.00
		1	1	24.05	23.70	26.89	27.47	< 30.00
		1	22	24.14	23.73	26.95	27.53	< 30.00
		24	0	21.64	21.19	24.43	25.01	< 30.00
		1	0	19.19	18.78	22.00	22.58	< 30.00
		1	23	19.21	18.84	22.04	22.62	< 30.00
10	3975.00	12	6	24.55	23.83	27.22	27.80	< 30.00
		1	1	24.46	23.77	27.14	27.72	< 30.00
		1	22	24.49	23.85	27.19	27.77	< 30.00
		24	0	21.93	21.23	24.60	25.18	< 30.00
		1	0	19.51	18.90	22.23	22.81	< 30.00
		1	23	19.52	18.76	22.17	22.75	< 30.00
15	3707.52	19	9	24.27	23.42	26.88	27.46	< 30.00
		1	1	24.39	23.55	27.00	27.58	< 30.00
		1	36	24.41	23.70	27.08	27.66	< 30.00
		38	0	21.79	20.94	24.40	24.98	< 30.00
		1	0	19.34	18.61	22.00	22.58	< 30.00
		1	37	19.37	18.68	22.05	22.63	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
15	3840.00	19	9	24.39	23.95	27.19	27.77	< 30.00
		1	1	24.42	24.08	27.26	27.84	< 30.00
		1	36	24.44	23.94	27.21	27.79	< 30.00
		38	0	21.89	21.42	24.67	25.25	< 30.00
		1	0	19.47	19.09	22.29	22.87	< 30.00
		1	37	19.40	19.02	22.22	22.80	< 30.00
15	3972.48	19	9	24.60	23.81	27.23	27.81	< 30.00
		1	1	24.72	24.02	27.39	27.97	< 30.00
		1	36	24.71	24.14	27.44	28.02	< 30.00
		38	0	22.12	21.26	24.72	25.30	< 30.00
		1	0	19.76	18.87	22.35	22.93	< 30.00
		1	37	19.77	18.95	22.39	22.97	< 30.00
20	3710.01	25	12	24.35	23.51	26.96	27.54	< 30.00
		1	1	24.28	23.51	26.92	27.50	< 30.00
		1	49	24.29	23.69	27.01	27.59	< 30.00
		51	0	21.80	21.06	24.46	25.04	< 30.00
		1	0	19.40	18.56	22.01	22.59	< 30.00
		1	50	19.43	18.75	22.11	22.69	< 30.00
20	3840.00	25	12	24.43	24.01	27.24	27.82	< 30.00
		1	1	24.41	24.11	27.28	27.86	< 30.00
		1	49	24.48	23.99	27.25	27.83	< 30.00
		51	0	21.91	21.49	24.72	25.30	< 30.00
		1	0	19.45	19.09	22.28	22.86	< 30.00
		1	50	19.48	19.01	22.26	22.84	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
20	3969.99	25	12	24.54	23.93	27.26	27.84	< 30.00
		1	1	24.64	23.89	27.29	27.87	< 30.00
		1	49	24.67	23.95	27.34	27.92	< 30.00
		51	0	22.16	21.38	24.80	25.38	< 30.00
		1	0	19.70	18.91	22.33	22.91	< 30.00
		1	50	19.88	19.10	22.52	23.10	< 30.00
25	3712.50	33	16	24.07	23.58	26.84	27.42	< 30.00
		1	1	24.21	23.67	26.96	27.54	< 30.00
		1	63	24.09	23.80	26.96	27.54	< 30.00
		65	0	21.62	21.15	24.40	24.98	< 30.00
		1	0	19.30	18.75	22.04	22.62	< 30.00
		1	64	19.13	18.87	22.01	22.59	< 30.00
25	3840.00	33	16	24.24	24.06	27.16	27.74	< 30.00
		1	1	24.32	24.25	27.30	27.88	< 30.00
		1	63	24.26	23.95	27.12	27.70	< 30.00
		65	0	21.77	21.54	24.67	25.25	< 30.00
		1	0	19.39	19.24	22.33	22.91	< 30.00
		1	64	19.40	18.94	22.19	22.77	< 30.00
25	3967.50	33	16	24.46	24.05	27.27	27.85	< 30.00
		1	1	24.71	24.12	27.44	28.02	< 30.00
		1	63	24.60	24.06	27.35	27.93	< 30.00
		65	0	22.03	21.54	24.80	25.38	< 30.00
		1	0	19.67	18.95	22.34	22.92	< 30.00
		1	64	19.46	19.16	22.32	22.90	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
30	3715.02	39	19	24.35	23.53	26.97	27.55	< 30.00
		1	1	24.34	23.58	26.99	27.57	< 30.00
		1	76	24.34	23.65	27.02	27.60	< 30.00
		78	0	21.96	21.11	24.57	25.15	< 30.00
		1	0	19.52	18.70	22.14	22.72	< 30.00
		1	77	19.54	18.77	22.18	22.76	< 30.00
30	3840.00	39	19	24.38	23.94	27.18	27.76	< 30.00
		1	1	24.61	24.15	27.40	27.98	< 30.00
		1	76	24.73	24.92	27.84	28.42	< 30.00
		78	0	21.97	21.50	24.75	25.33	< 30.00
		1	0	19.69	19.20	22.46	23.04	< 30.00
		1	77	19.58	19.05	22.33	22.91	< 30.00
30	3964.98	39	19	24.59	23.87	27.26	27.84	< 30.00
		1	1	24.79	23.94	27.40	27.98	< 30.00
		1	76	24.66	23.97	27.34	27.92	< 30.00
		78	0	22.08	21.39	24.76	25.34	< 30.00
		1	0	19.77	18.95	22.39	22.97	< 30.00
		1	77	19.67	18.94	22.33	22.91	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
40	3720.00	53	26	24.39	23.62	27.03	27.61	< 30.00
		1	1	24.50	23.73	27.14	27.72	< 30.00
		1	104	24.63	23.86	27.27	27.85	< 30.00
		106	0	21.93	21.21	24.60	25.18	< 30.00
		1	0	19.70	18.96	22.36	22.94	< 30.00
		1	105	19.62	18.91	22.29	22.87	< 30.00
40	3840.00	53	26	24.42	23.98	27.22	27.80	< 30.00
		1	1	24.50	24.13	27.33	27.91	< 30.00
		1	104	24.45	24.11	27.29	27.87	< 30.00
		106	0	21.94	21.49	24.73	25.31	< 30.00
		1	0	19.72	19.33	22.54	23.12	< 30.00
		1	105	19.55	19.05	22.32	22.90	< 30.00
40	3960.00	53	26	24.62	23.87	27.27	27.85	< 30.00
		1	1	24.97	24.11	27.57	28.15	< 30.00
		1	104	24.77	24.21	27.51	28.09	< 30.00
		106	0	22.17	21.37	24.80	25.38	< 30.00
		1	0	19.99	19.08	22.57	23.15	< 30.00
		1	105	19.88	19.14	22.54	23.12	< 30.00
50	3720.00	67	33	24.21	23.45	26.86	27.44	< 30.00
		1	1	24.12	23.24	26.71	27.29	< 30.00
		1	131	24.10	23.45	26.80	27.38	< 30.00
		133	0	21.67	20.99	24.35	24.93	< 30.00
		1	0	19.45	18.49	22.01	22.59	< 30.00
		1	132	19.33	18.59	21.99	22.57	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
50	3840.00	67	33	24.25	23.80	27.04	27.62	< 30.00
		1	1	24.31	23.92	27.13	27.71	< 30.00
		1	131	24.28	23.76	27.04	27.62	< 30.00
		133	0	21.74	21.32	24.55	25.13	< 30.00
		1	0	19.36	19.06	22.22	22.80	< 30.00
		1	132	19.29	18.95	22.13	22.71	< 30.00
50	3954.99	67	33	24.42	23.74	27.10	27.68	< 30.00
		1	1	24.61	23.81	27.24	27.82	< 30.00
		1	131	24.35	23.68	27.04	27.62	< 30.00
		133	0	21.98	21.23	24.63	25.21	< 30.00
		1	0	19.72	18.87	22.33	22.91	< 30.00
		1	132	19.54	18.83	22.21	22.79	< 30.00
60	3730.02	81	40	24.09	23.40	26.77	27.35	< 30.00
		1	1	24.04	23.27	26.68	27.26	< 30.00
		1	160	24.10	23.42	26.78	27.36	< 30.00
		162	0	21.61	20.91	24.28	24.86	< 30.00
		1	0	19.25	18.45	21.88	22.46	< 30.00
		1	161	19.20	18.48	21.87	22.45	< 30.00
60	3840.00	81	40	24.26	23.80	27.05	27.63	< 30.00
		1	1	24.38	23.92	27.17	27.75	< 30.00
		1	160	24.19	23.76	26.99	27.57	< 30.00
		162	0	21.74	21.28	24.53	25.11	< 30.00
		1	0	19.33	18.99	22.17	22.75	< 30.00
		1	161	19.42	18.80	22.13	22.71	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
60	3949.98	81	40	24.14	23.71	26.94	27.52	< 30.00
		1	1	24.35	23.73	27.06	27.64	< 30.00
		1	160	24.08	23.64	26.88	27.46	< 30.00
		162	0	21.73	21.15	24.46	25.04	< 30.00
		1	0	19.42	18.79	22.13	22.71	< 30.00
		1	161	19.29	18.77	22.05	22.63	< 30.00
70	3735.00	95	47	23.65	22.95	26.32	26.90	< 30.00
		1	1	23.50	22.84	26.19	26.77	< 30.00
		1	187	23.76	23.08	26.44	27.02	< 30.00
		189	0	21.14	20.44	23.81	24.39	< 30.00
		1	0	18.90	18.12	21.54	22.12	< 30.00
		1	188	18.70	18.10	21.42	22.00	< 30.00
70	3840.00	95	47	23.68	23.15	26.43	27.01	< 30.00
		1	1	23.60	23.24	26.43	27.01	< 30.00
		1	187	23.55	23.41	26.49	27.07	< 30.00
		189	0	21.10	20.74	23.93	24.51	< 30.00
		1	0	18.91	18.42	21.68	22.26	< 30.00
		1	188	18.56	18.21	21.40	21.98	< 30.00
70	3945.00	95	47	23.68	23.24	26.48	27.06	< 30.00
		1	1	24.03	23.44	26.76	27.34	< 30.00
		1	187	23.83	23.40	26.63	27.21	< 30.00
		189	0	21.24	20.70	23.99	24.57	< 30.00
		1	0	19.22	18.44	21.86	22.44	< 30.00
		1	188	18.57	18.38	21.49	22.07	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								


Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
80	3740.01	109	54	23.58	22.84	26.24	26.82	< 30.00
		1	1	23.62	22.82	26.25	26.83	< 30.00
		1	215	23.68	23.03	26.38	26.96	< 30.00
		217	0	21.12	20.42	23.79	24.37	< 30.00
		1	0	18.78	18.10	21.46	22.04	< 30.00
		1	216	18.73	17.98	21.38	21.96	< 30.00
80	3840.00	109	54	23.64	23.25	26.46	27.04	< 30.00
		1	1	23.53	23.24	26.40	26.98	< 30.00
		1	215	23.62	23.29	26.47	27.05	< 30.00
		217	0	21.10	20.72	23.92	24.50	< 30.00
		1	0	18.70	18.43	21.58	22.16	< 30.00
		1	216	18.62	18.31	21.48	22.06	< 30.00
80	3939.99	109	54	23.72	23.22	26.49	27.07	< 30.00
		1	1	24.01	23.25	26.66	27.24	< 30.00
		1	215	23.56	23.28	26.43	27.01	< 30.00
		217	0	21.21	20.77	24.01	24.59	< 30.00
		1	0	18.94	18.34	21.66	22.24	< 30.00
		1	216	18.61	18.24	21.44	22.02	< 30.00
90	3745.02	123	61	23.65	23.13	26.41	26.99	< 30.00
		1	1	23.52	22.70	26.14	26.72	< 30.00
		1	243	23.69	23.06	26.40	26.98	< 30.00
		245	0	21.17	20.46	23.84	24.42	< 30.00
		1	0	18.65	18.06	21.38	21.96	< 30.00
		1	244	18.88	18.19	21.56	22.14	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
90	3840.00	123	61	23.63	23.29	26.47	27.05	< 30.00
		1	1	23.59	23.29	26.45	27.03	< 30.00
		1	243	23.77	23.32	26.56	27.14	< 30.00
		245	0	21.17	20.80	24.00	24.58	< 30.00
		1	0	18.79	18.44	21.63	22.21	< 30.00
		1	244	18.70	18.24	21.49	22.07	< 30.00
90	3934.98	123	61	23.74	23.25	26.51	27.09	< 30.00
		1	1	23.95	23.28	26.64	27.22	< 30.00
		1	243	23.45	23.27	26.37	26.95	< 30.00
		245	0	21.28	20.76	24.04	24.62	< 30.00
		1	0	19.13	18.34	21.76	22.34	< 30.00
		1	244	18.71	18.53	21.63	22.21	< 30.00
100	3750.00	137	68	23.65	23.11	26.40	26.98	< 30.00
		1	1	23.67	22.91	26.32	26.90	< 30.00
		1	271	23.88	23.23	26.58	27.16	< 30.00
		273	0	21.22	20.49	23.88	24.46	< 30.00
		1	0	18.91	18.11	21.54	22.12	< 30.00
		1	272	18.92	18.22	21.59	22.17	< 30.00
100	3840.00	137	68	23.62	23.28	26.46	27.04	< 30.00
		1	1	23.55	23.45	26.51	27.09	< 30.00
		1	271	23.69	23.22	26.47	27.05	< 30.00
		273	0	21.16	20.80	23.99	24.57	< 30.00
		1	0	18.70	18.48	21.60	22.18	< 30.00
		1	272	18.78	18.28	21.55	22.13	< 30.00
100	3930.00	137	68	23.75	23.31	26.55	27.13	< 30.00
		1	1	23.96	23.33	26.67	27.25	< 30.00
		1	271	23.57	23.50	26.55	27.13	< 30.00
		273	0	21.20	20.82	24.02	24.60	< 30.00
		1	0	18.94	18.39	21.68	22.26	< 30.00
		1	272	18.56	18.35	21.47	22.05	< 30.00
Note 1: Total Power (dBm) = 10*log{10^(Port 0 Output Power / 10) + 10^(Port 1 Output Power / 10)}								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

A.4 Peak to Average Ratio Test Result


Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023-04-12	Test Band	n41_UL MIMO_Port 3

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
2592.99	100	7.07	≤ 13.00	Pass
16QAM				
2592.99	100	7.09	≤ 13.00	Pass
64QAM				
2592.99	100	7.71	≤ 13.00	Pass
256QAM				
2592.99	100	8.76	≤ 13.00	Pass

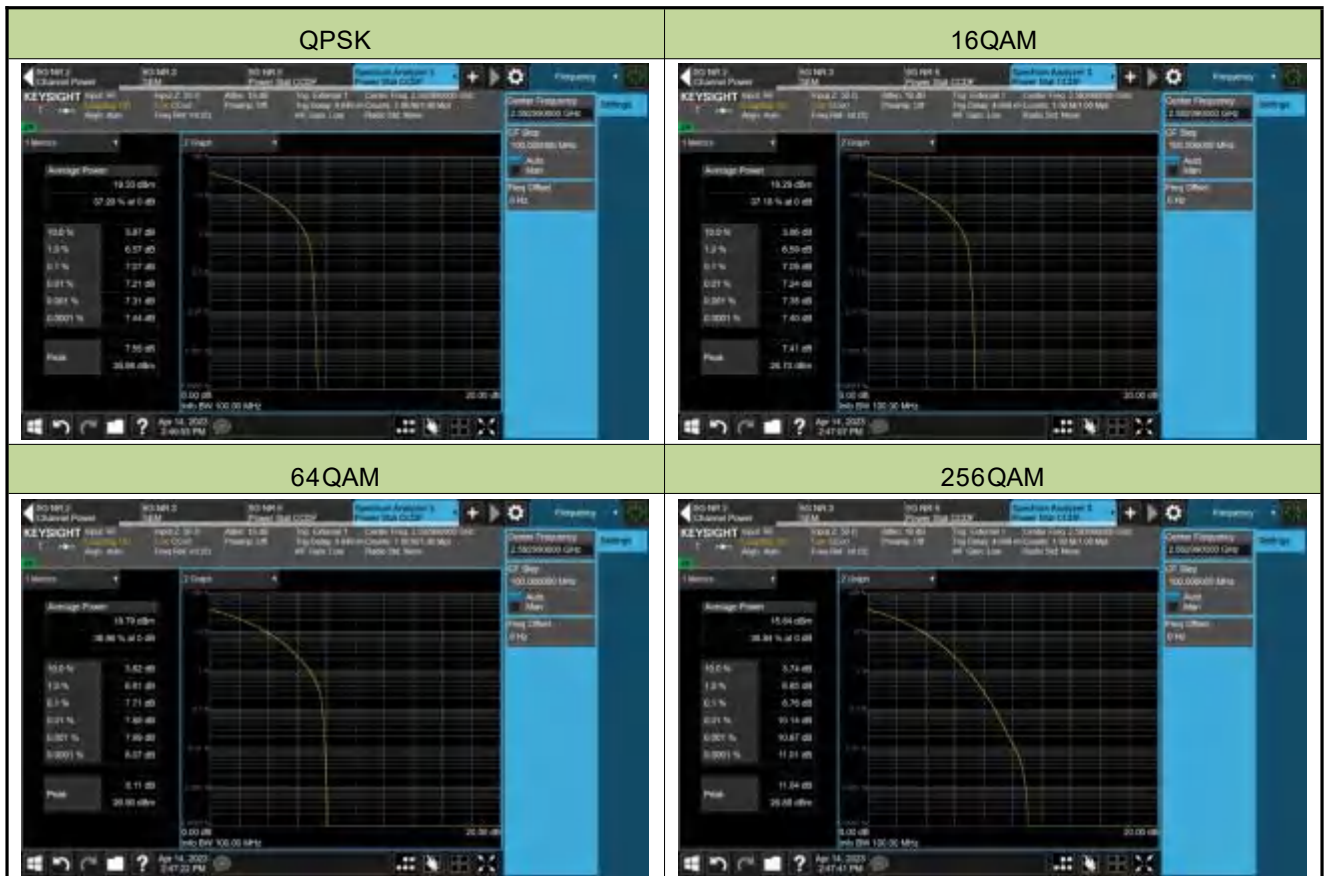


Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023-04-12	Test Band	n77/n78_UL MIMO (3450~3550MHz) Port 0

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
3500.01	100	7.07	≤ 13.00	Pass
16QAM				
3500.01	100	7.07	≤ 13.00	Pass
64QAM				
3500.01	100	7.64	≤ 13.00	Pass
256QAM				
3500.01	100	8.68	≤ 13.00	Pass

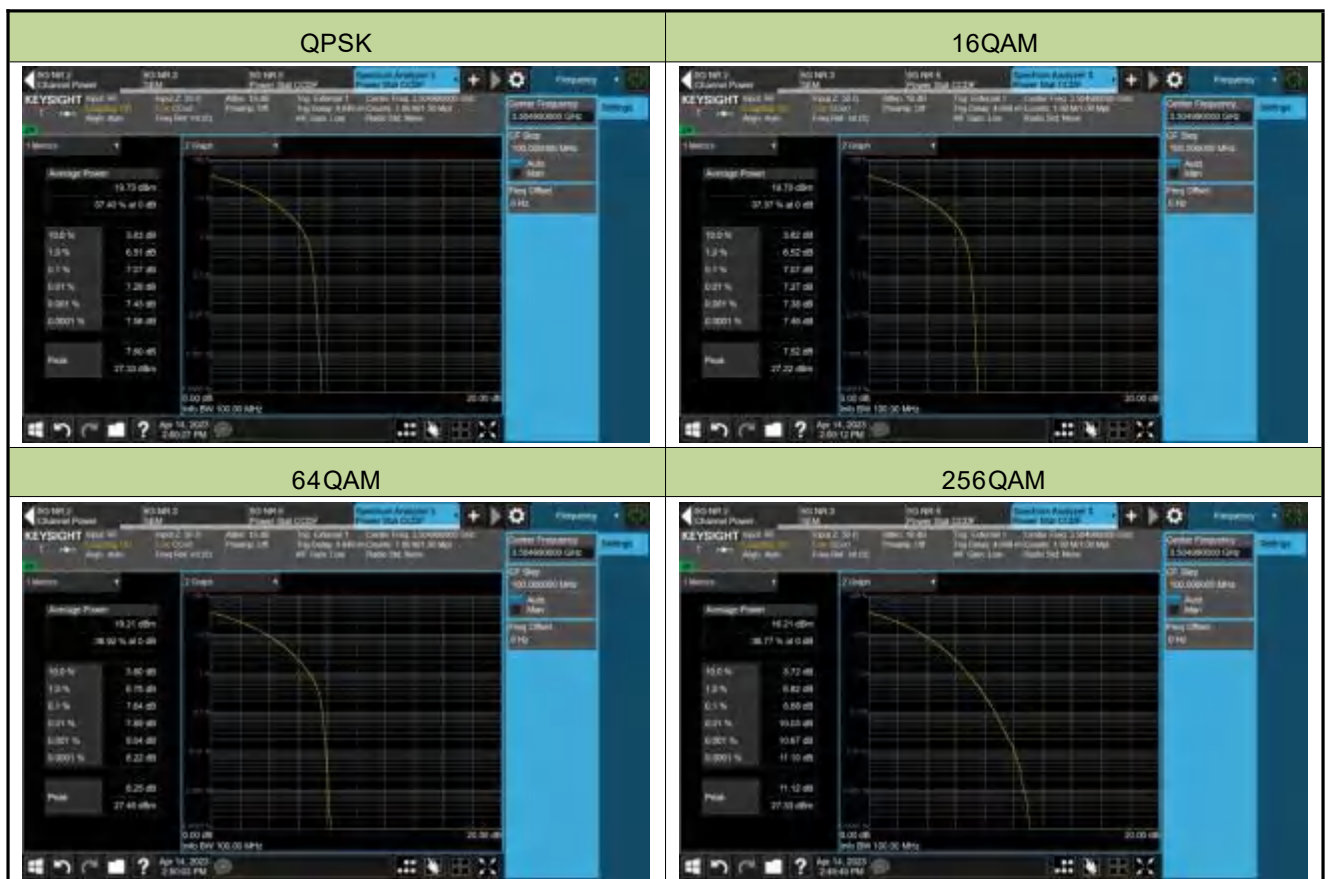

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023-04-14	Test Band	n77/n78_UL MIMO (3700~3980MHz) Port 0

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
3840.00	100	6.71	≤ 13.00	Pass
16QAM				
3840.00	100	6.64	≤ 13.00	Pass
64QAM				
3840.00	100	7.27	≤ 13.00	Pass
256QAM				
3840.00	100	8.57	≤ 13.00	Pass

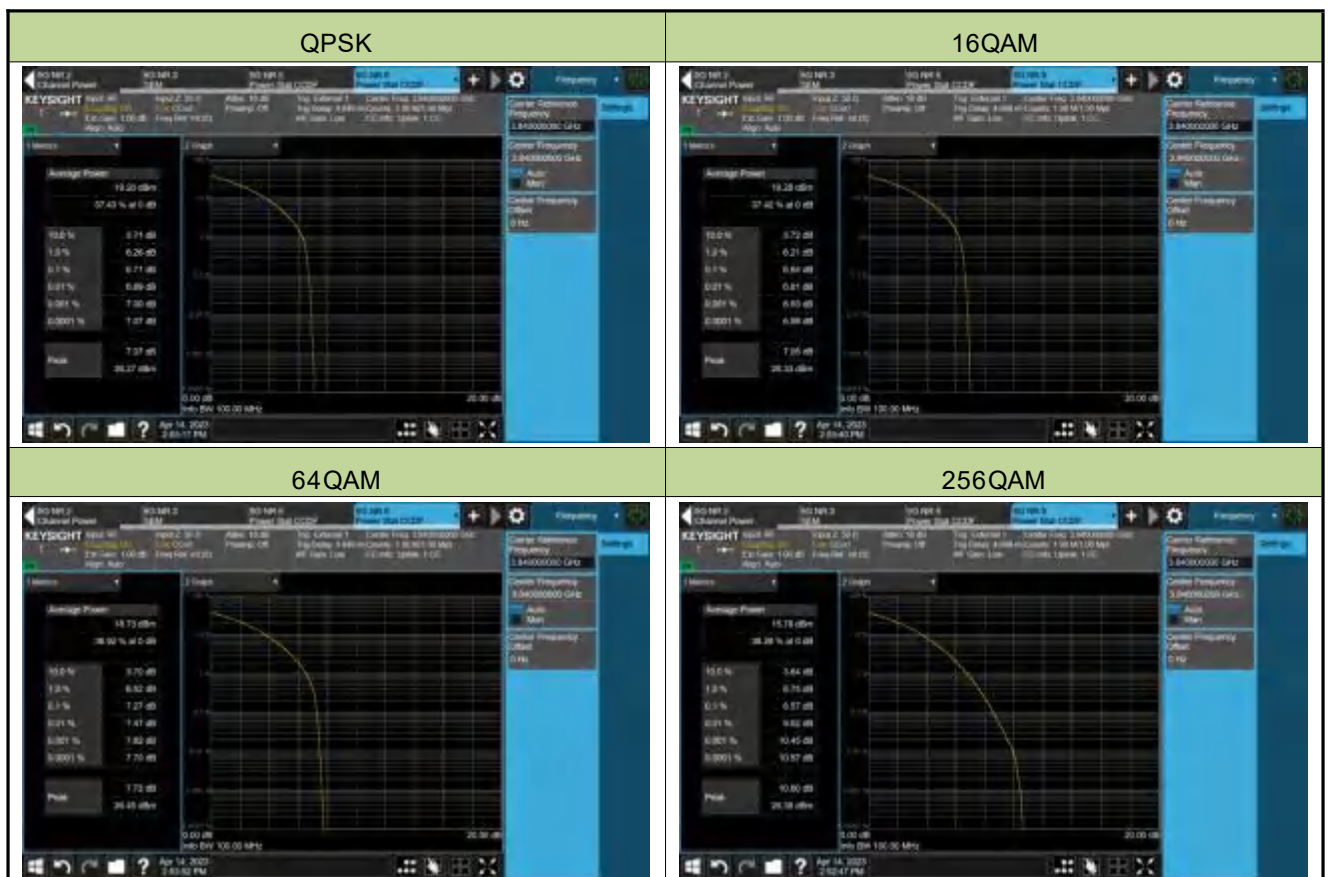

A.5 Band Edge Test Result

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/03/24 2023/05/10	Test Band	n41_MIMO (Port 3)

10MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



15MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



20MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



30MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge




40MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge

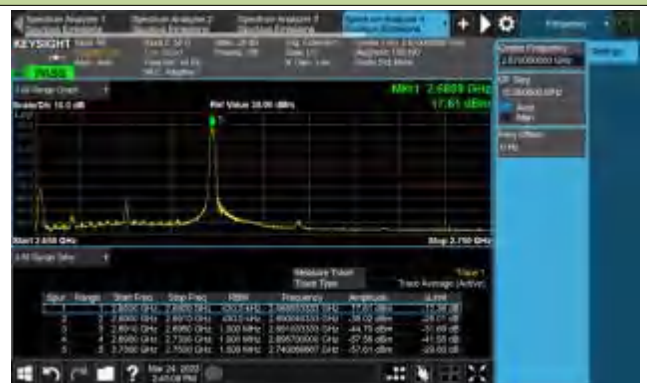

50MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



60MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



70MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



80MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



90MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



100MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



10MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



15MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



20MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



30 MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



40 MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



50 MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



60MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



70MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



80MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



90MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



100MHz Channel Bandwidth - Full RB


Lower Band Edge



Upper Band Edge



Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/04/10 2023/05/10	Test Band	n77/n78_MIMO (Port 0) (3450 ~ 3550MHz)

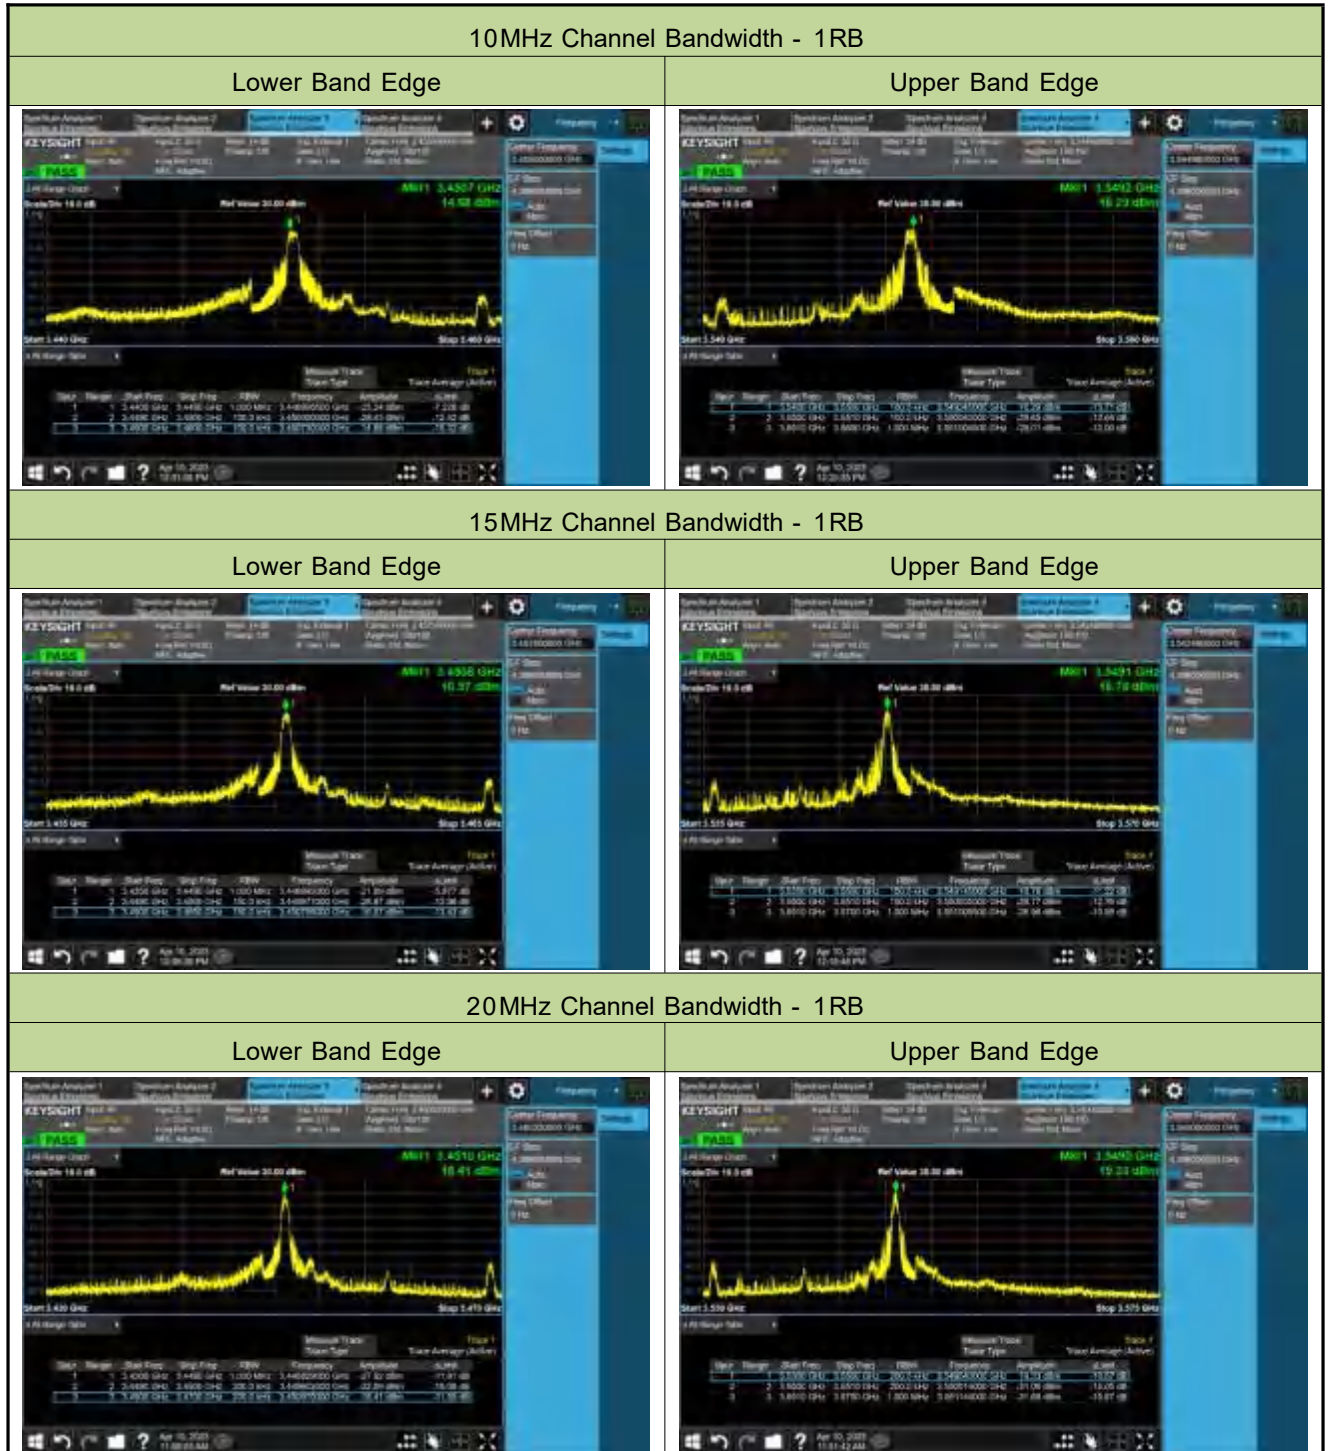

25MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



30MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



40MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



50MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



60MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



70MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



80MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



90MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



100MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



10MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



15MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



20MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



25MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



30MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



40MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



50MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



60MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



70MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



80MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



90MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



100MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/04/11 2023/05/11	Test Band	n77/n78_MIMO (Port 0) (3700 ~ 3980MHz)

10MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



15MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



20MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



25MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



30MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



40MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



50MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



60MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



70MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



80MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



90MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



100MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge



10MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



15MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



20MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



25MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



30MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



40MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



50MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



60MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



70MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



80MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



90MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



100MHz Channel Bandwidth - Full RB

Lower Band Edge



Upper Band Edge



A.6 Conducted Spurious Emissions Test Result


Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/03/26 2023/05/10	Test Band	n41_MIMO (Port 3)

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
10	2501.01	30 ~ 27000	-30.62	≤ -28.01	Pass
10	2592.99	30 ~ 27000	-30.59	≤ -28.01	Pass
10	2685.00	30 ~ 27000	-30.42	≤ -28.01	Pass
15	2503.50	30 ~ 27000	-30.92	≤ -28.01	Pass
15	2592.99	30 ~ 27000	-31.23	≤ -28.01	Pass
15	2682.48	30 ~ 27000	-30.80	≤ -28.01	Pass
20	2506.02	30 ~ 27000	-29.36	≤ -28.01	Pass
20	2592.99	30 ~ 27000	-29.62	≤ -28.01	Pass
20	2679.99	30 ~ 27000	-29.60	≤ -28.01	Pass
30	2511.00	30 ~ 27000	-29.46	≤ -28.01	Pass
30	2592.99	30 ~ 27000	-29.91	≤ -28.01	Pass
30	2674.98	30 ~ 27000	-30.02	≤ -28.01	Pass
40	2516.01	30 ~ 27000	-29.27	≤ -28.01	Pass
40	2592.99	30 ~ 27000	-29.75	≤ -28.01	Pass
40	2670.00	30 ~ 27000	-29.87	≤ -28.01	Pass
50	2521.02	30 ~ 27000	-29.80	≤ -28.01	Pass
50	2592.99	30 ~ 27000	-30.05	≤ -28.01	Pass
50	2664.99	30 ~ 27000	-29.41	≤ -28.01	Pass
60	2526.00	30 ~ 27000	-29.13	≤ -28.01	Pass
60	2592.99	30 ~ 27000	-30.01	≤ -28.01	Pass
60	2659.98	30 ~ 27000	-29.77	≤ -28.01	Pass
70	2531.01	30 ~ 27000	-29.75	≤ -28.01	Pass
70	2592.99	30 ~ 27000	-29.55	≤ -28.01	Pass
70	2655.00	30 ~ 27000	-29.59	≤ -28.01	Pass
80	2536.02	30 ~ 27000	-29.44	≤ -28.01	Pass
80	2592.99	30 ~ 27000	-29.69	≤ -28.01	Pass
80	2649.99	30 ~ 27000	-29.90	≤ -28.01	Pass
90	2541.00	30 ~ 27000	-29.10	≤ -28.01	Pass
90	2592.99	30 ~ 27000	-29.70	≤ -28.01	Pass

90	2644.98	30 ~ 27000	-29.48	≤ -28.01	Pass
100	2546.01	30 ~ 27000	-29.68	≤ -28.01	Pass
100	2592.99	30 ~ 27000	-28.94	≤ -28.01	Pass
100	2640.00	30 ~ 27000	-29.55	≤ -28.01	Pass

10MHz Channel Bandwidth

Low Channel

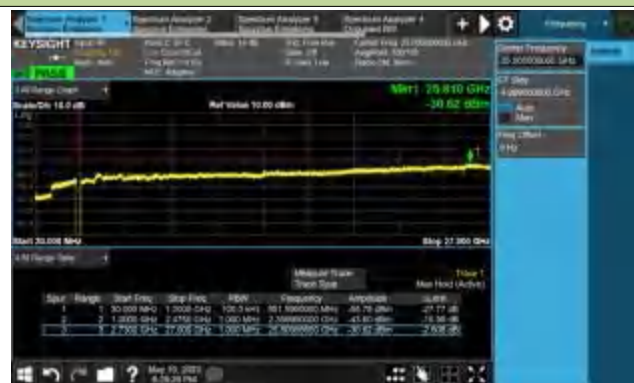

Middle Channel



High Channel



15MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



20MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



30MHz Channel Bandwidth


Low Channel



Middle Channel




High Channel

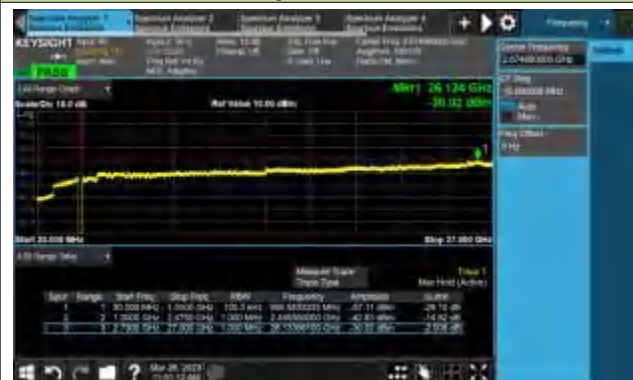

40MHz Channel Bandwidth


Low Channel

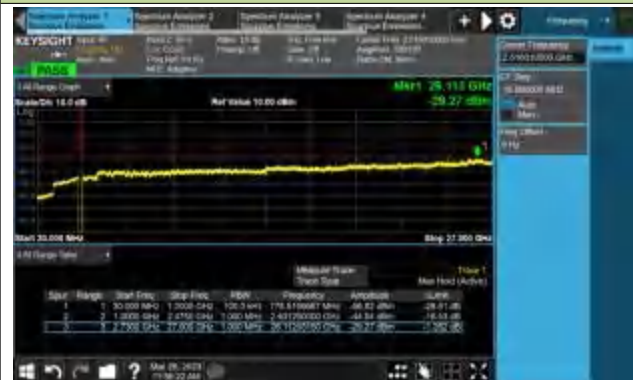

Middle Channel




High Channel

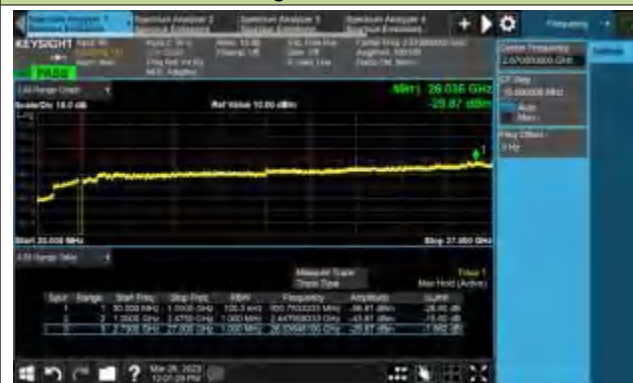

50MHz Channel Bandwidth


Low Channel

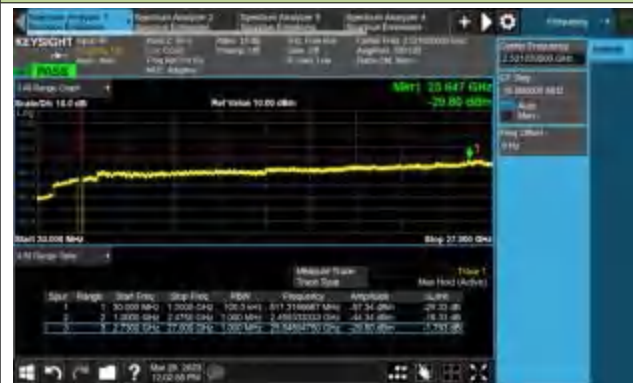

Middle Channel



High Channel

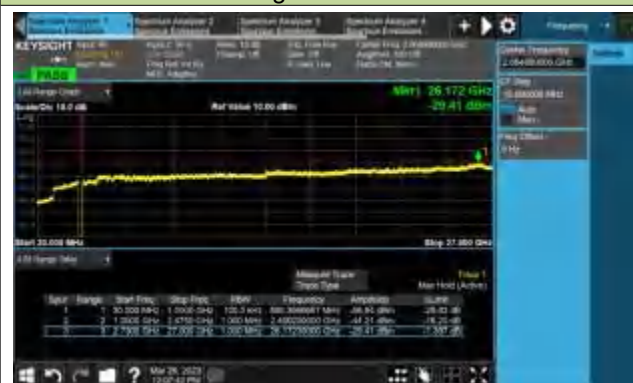

60MHz Channel Bandwidth

Low Channel



Middle Channel




High Channel



70MHz Channel Bandwidth

Low Channel

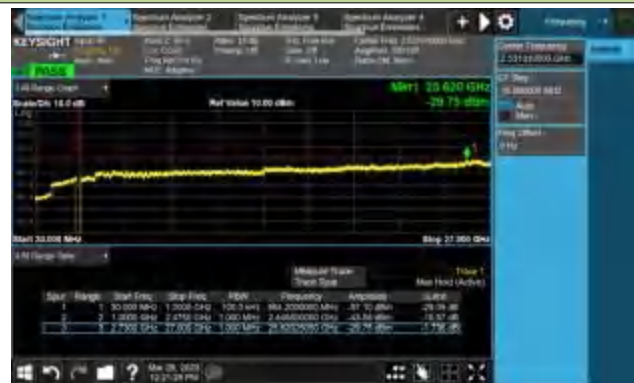

Middle Channel




High Channel



80MHz Channel Bandwidth

Low Channel

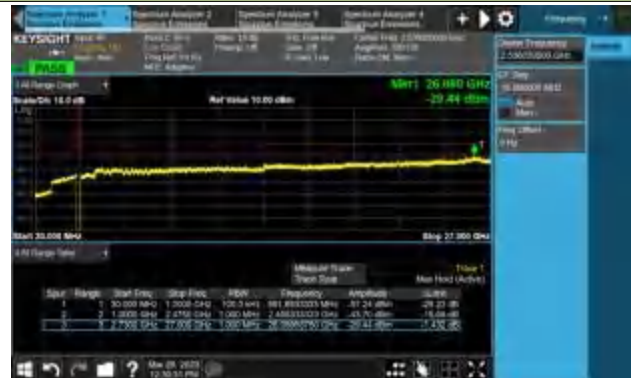

Middle Channel




High Channel



90MHz Channel Bandwidth


Low Channel

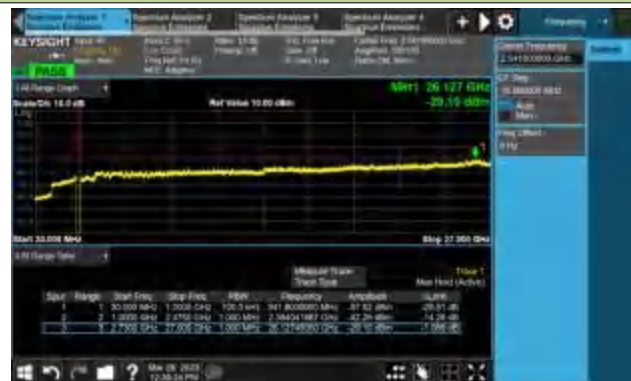

Middle Channel



High Channel

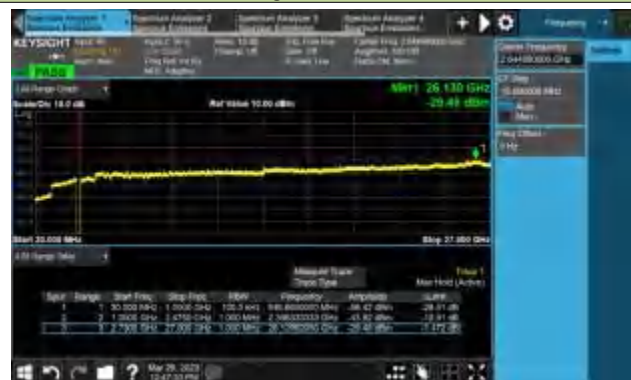

100MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/04/12 2023/05/10	Test Band	n77/n78_MIMO (Port 0) (3450 ~ 3550MHz)

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
10	3455.01	30 ~ 36000	-24.12	≤ -16.01	Pass
10	3500.01	30 ~ 36000	-23.96	≤ -16.01	Pass
10	3544.98	30 ~ 36000	-24.67	≤ -16.01	Pass
15	3457.50	30 ~ 36000	-24.07	≤ -16.01	Pass
15	3500.01	30 ~ 36000	-24.15	≤ -16.01	Pass
15	3542.49	30 ~ 36000	-23.78	≤ -16.01	Pass
20	3460.02	30 ~ 36000	-23.77	≤ -16.01	Pass
20	3500.01	30 ~ 36000	-24.08	≤ -16.01	Pass
20	3540.00	30 ~ 36000	-24.09	≤ -16.01	Pass
25	3462.51	30 ~ 36000	-26.84	≤ -16.01	Pass
25	3500.01	30 ~ 36000	-26.62	≤ -16.01	Pass
25	3537.48	30 ~ 36000	-26.51	≤ -16.01	Pass
30	3465.00	30 ~ 36000	-24.00	≤ -16.01	Pass
30	3500.01	30 ~ 36000	-23.63	≤ -16.01	Pass
30	3534.99	30 ~ 36000	-23.75	≤ -16.01	Pass
40	3470.01	30 ~ 36000	-24.12	≤ -16.01	Pass
40	3500.01	30 ~ 36000	-23.90	≤ -16.01	Pass
40	3529.98	30 ~ 36000	-24.44	≤ -16.01	Pass
50	3475.02	30 ~ 36000	-24.66	≤ -16.01	Pass
50	3500.01	30 ~ 36000	-23.89	≤ -16.01	Pass
50	3525.00	30 ~ 36000	-24.39	≤ -16.01	Pass
60	3480.00	30 ~ 36000	-24.29	≤ -16.01	Pass
60	3500.01	30 ~ 36000	-24.50	≤ -16.01	Pass
60	3519.99	30 ~ 36000	-23.20	≤ -16.01	Pass
70	3485.01	30 ~ 36000	-23.58	≤ -16.01	Pass
70	3500.01	30 ~ 36000	-23.86	≤ -16.01	Pass
70	3514.98	30 ~ 36000	-24.22	≤ -16.01	Pass
80	3490.02	30 ~ 36000	-23.98	≤ -16.01	Pass
80	3500.01	30 ~ 36000	-24.15	≤ -16.01	Pass
80	3510.00	30 ~ 36000	-23.37	≤ -16.01	Pass
90	3495.00	30 ~ 36000	-24.10	≤ -16.01	Pass

90	3500.01	30 ~ 36000	-23.85	≤ -16.01	Pass
90	3504.99	30 ~ 36000	-24.16	≤ -16.01	Pass
100	3500.01	30 ~ 36000	-23.75	≤ -16.01	Pass

10MHz Channel Bandwidth

Low Channel



Middle Channel




High Channel



15MHz Channel Bandwidth

Low Channel

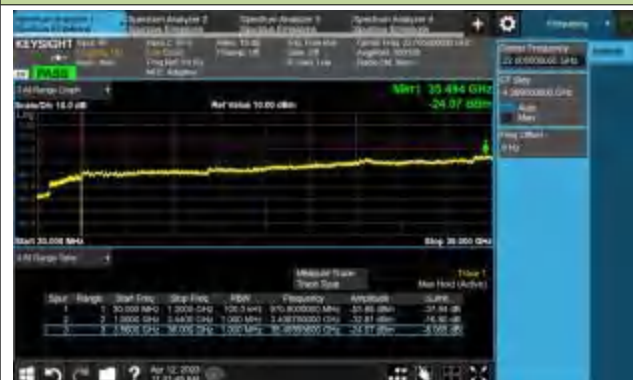

Middle Channel



High Channel



20MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



25MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



30MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



40MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



50MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



60MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



70MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



80MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



90MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



100MHz Channel Bandwidth

Middle Channel



Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/04/12 2023/05/11	Test Band	n77/n78_MIMO (Port 0) (3700 ~ 3980MHz)

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
10	3705.00	30 ~ 40000	-21.62	≤ -16.01	Pass
10	3840.00	30 ~ 40000	-21.97	≤ -16.01	Pass
10	3975.00	30 ~ 40000	-21.83	≤ -16.01	Pass
15	3707.52	30 ~ 40000	-21.40	≤ -16.01	Pass
15	3840.00	30 ~ 40000	-21.57	≤ -16.01	Pass
15	3972.48	30 ~ 40000	-22.17	≤ -16.01	Pass
20	3710.01	30 ~ 40000	-21.96	≤ -16.01	Pass
20	3840.00	30 ~ 40000	-21.97	≤ -16.01	Pass
20	3869.99	30 ~ 40000	-21.11	≤ -16.01	Pass
25	3712.50	30 ~ 40000	-23.31	≤ -16.01	Pass
25	3840.00	30 ~ 40000	-24.36	≤ -16.01	Pass
25	3667.50	30 ~ 40000	-24.32	≤ -16.01	Pass
30	3715.02	30 ~ 40000	-21.09	≤ -16.01	Pass
30	3840.00	30 ~ 40000	-21.85	≤ -16.01	Pass
30	3964.98	30 ~ 40000	-22.10	≤ -16.01	Pass
40	3720.00	30 ~ 40000	-21.65	≤ -16.01	Pass
40	3840.00	30 ~ 40000	-21.60	≤ -16.01	Pass
40	3960.00	30 ~ 40000	-22.14	≤ -16.01	Pass
50	3725.01	30 ~ 40000	-22.29	≤ -16.01	Pass
50	3840.00	30 ~ 40000	-22.10	≤ -16.01	Pass
50	3954.99	30 ~ 40000	-21.34	≤ -16.01	Pass
60	3730.02	30 ~ 40000	-21.86	≤ -16.01	Pass
60	3840.00	30 ~ 40000	-21.37	≤ -16.01	Pass
60	3949.98	30 ~ 40000	-21.74	≤ -16.01	Pass
70	3735.00	30 ~ 40000	-22.05	≤ -16.01	Pass
70	3840.00	30 ~ 40000	-21.87	≤ -16.01	Pass
70	3945.00	30 ~ 40000	-22.28	≤ -16.01	Pass
80	3740.01	30 ~ 40000	-21.47	≤ -16.01	Pass
80	3840.00	30 ~ 40000	-21.31	≤ -16.01	Pass
80	3939.99	30 ~ 40000	-22.07	≤ -16.01	Pass
90	3745.02	30 ~ 40000	-21.67	≤ -16.01	Pass

90	3840.00	30 ~ 40000	-20.85	≤ -16.01	Pass
90	3934.98	30 ~ 40000	-21.12	≤ -16.01	Pass
100	3750.00	30 ~ 40000	-22.14	≤ -16.01	Pass
100	3840.00	30 ~ 40000	-21.92	≤ -16.01	Pass
100	3930.00	30 ~ 40000	-22.09	≤ -16.01	Pass

10MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



15MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



20MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



25MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



30MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



40MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



50MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



60MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



70MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



80MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



90MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



100MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



A.7 Radiated Spurious Emissions Test Result

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023/05/09~2023/05/13	Test Band	n41_MIMO, 10MHz Bandwidth 1RB, QPSK

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
48.4	1.8	18.4	20.2	70.3	-50.1	Peak	Horizontal
59.1	2.5	17.7	20.2	70.3	-50.1	Peak	Horizontal
38.2	8.7	18.2	26.9	70.3	-43.4	Peak	Vertical
58.6	12.6	17.7	30.3	70.3	-40.0	Peak	Vertical
5743.0	47.4	5.1	52.5	70.3	-17.8	Peak	Horizontal
10367.0	32.7	15.2	47.9	70.3	-22.4	Peak	Horizontal
5301.0	39.5	3.2	42.7	70.3	-27.6	Peak	Vertical
11582.5	31.2	17.7	48.9	70.3	-21.4	Peak	Vertical
Middle Channel							
53.3	3.1	18.1	21.2	70.3	-49.1	Peak	Horizontal
59.1	3.8	17.7	21.5	70.3	-48.8	Peak	Horizontal
38.2	8.3	18.2	26.5	70.3	-43.8	Peak	Vertical
52.3	10.5	18.2	28.7	70.3	-41.6	Peak	Vertical
5173.5	36.8	3.5	40.3	70.3	-30.0	Peak	Horizontal
11140.5	32.8	16.8	49.6	70.3	-20.7	Peak	Horizontal
5258.5	39.8	3.2	43.0	70.3	-27.3	Peak	Vertical
10783.5	32.4	16.3	48.7	70.3	-21.6	Peak	Vertical
High Channel							
50.9	2.2	18.3	20.5	70.3	-49.8	Peak	Horizontal
135.7	2.5	17.4	19.9	70.3	-50.4	Peak	Horizontal
58.6	12.9	17.7	30.6	70.3	-39.7	Peak	Vertical
77.5	10.6	14.9	25.5	70.3	-44.8	Peak	Vertical
5360.5	40.9	3.5	44.4	70.3	-25.9	Peak	Horizontal
8029.5	32.8	12.1	44.9	70.3	-25.4	Peak	Horizontal
7944.5	32.7	12.0	44.7	70.3	-25.6	Peak	Vertical
11472.0	32.0	16.9	48.9	70.3	-21.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023/04/11	Test Band	n77/n78_(3450 ~ 3550MHz) 10MHz Bandwidth, 1RB, QPSK

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
134.275	17.0	15.2	32.2	82.3	-50.1	Peak	Horizontal
779.325	3.7	29.3	33.0	82.3	-49.3	Peak	Horizontal
56.190	15.5	20.1	35.6	82.3	-46.7	Peak	Vertical
135.730	39.0	15.2	54.2	82.3	-28.1	Peak	Vertical
6899.000	42.5	9.3	51.8	82.3	-30.5	Peak	Horizontal
10350.000	36.1	15.3	51.4	82.3	-30.9	Peak	Horizontal
6899.000	37.0	9.3	46.3	82.3	-36.0	Peak	Vertical
14804.000	32.1	20.7	52.8	82.3	-29.5	Peak	Vertical
Middle Channel							
133.790	19.5	15.3	34.8	82.3	-47.5	Peak	Horizontal
704.635	4.7	28.5	33.2	82.3	-49.1	Peak	Horizontal
135.245	39.6	15.2	54.8	82.3	-27.5	Peak	Vertical
901.060	4.3	31.2	35.5	82.3	-46.8	Peak	Vertical
6992.500	42.9	10.2	53.1	82.3	-29.2	Peak	Horizontal
10486.000	37.2	15.5	52.7	82.3	-29.6	Peak	Horizontal
6992.500	40.2	10.2	50.4	82.3	-31.9	Peak	Vertical
14404.500	31.7	20.0	51.7	82.3	-30.6	Peak	Vertical
High Channel							
60.070	11.1	19.6	30.7	82.3	-51.6	Peak	Horizontal
133.790	21.4	15.3	36.7	82.3	-45.6	Peak	Horizontal
56.190	16.2	20.1	36.3	82.3	-46.0	Peak	Vertical
134.275	37.2	15.2	52.4	82.3	-29.9	Peak	Vertical
7094.500	46.1	10.9	57.0	82.3	-25.3	Peak	Horizontal
10647.500	40.2	15.7	55.9	82.3	-26.4	Peak	Horizontal
7094.500	42.0	10.9	52.9	82.3	-29.4	Peak	Vertical
14175.000	31.3	20.7	52.0	82.3	-30.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023/04/11	Test Band	n77/n78_(3700 ~ 3980MHz) 10MHz Bandwidth, 1RB, QPSK

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
135.730	18.7	15.2	33.9	82.3	-48.4	Peak	Horizontal
742.465	4.3	29.2	33.5	82.3	-48.8	Peak	Horizontal
135.245	37.1	15.2	52.3	82.3	-30.0	Peak	Vertical
917.065	4.7	31.2	35.9	82.3	-46.4	Peak	Vertical
7400.500	48.1	11.5	59.6	82.3	-22.7	Peak	Horizontal
11106.500	35.4	16.9	52.3	82.3	-30.0	Peak	Horizontal
7400.500	48.6	11.5	60.1	82.3	-22.2	Peak	Vertical
14268.500	32.4	20.1	52.5	82.3	-29.8	Peak	Vertical
Middle Channel							
134.275	20.4	15.2	35.6	82.3	-46.7	Peak	Horizontal
893.785	4.3	31.1	35.4	82.3	-46.9	Peak	Horizontal
56.190	16.3	20.1	36.4	82.3	-45.9	Peak	Vertical
134.760	37.7	15.2	52.9	82.3	-29.4	Peak	Vertical
7672.500	53.4	11.2	64.6	82.3	-17.7	Peak	Horizontal
11506.000	40.5	17.7	58.2	82.3	-24.1	Peak	Horizontal
7672.500	46.6	11.2	57.8	82.3	-24.5	Peak	Vertical
11506.000	38.1	17.7	55.8	82.3	-26.5	Peak	Vertical
High Channel							
134.760	18.7	15.2	33.9	82.3	-48.4	Peak	Horizontal
772.535	4.4	29.3	33.7	82.3	-48.6	Peak	Horizontal
55.705	16.2	20.2	36.4	82.3	-45.9	Peak	Vertical
135.245	38.4	15.2	53.6	82.3	-28.7	Peak	Vertical
7961.500	47.1	11.8	58.9	82.3	-23.4	Peak	Horizontal
11939.500	40.2	17.1	57.3	82.3	-25.0	Peak	Horizontal
7961.500	43.6	11.8	55.4	82.3	-26.9	Peak	Vertical
11939.500	39.5	17.1	56.6	82.3	-25.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Appendix B - Test Setup Photograph

Refer to “2305RSU050-UT” file.

Appendix C - EUT Photograph

Refer to “2305RSU050-UE” file.