

Ultr-thin 360° Rotation Bluetooth® Keyboard User Guide

For iPhone4/4S/5/5S

➤ Congratulations on your purchase of the wireless bluetooth keyboard, please read this instruction book first



content in this guide is subject to change without prior notice

➤ Packing contents:

- Wireless Bluetooth Keyboard
- USB Power Charging Cable
- User Guide

➤ Product Features:

- Built-in Wireless Bluetooth 3.0 keyboard. Easy typing and call, portable, auto-sleep and long standby time
- Backlight used at night without lights environment

- Stylish folding function designed for iPhone5 display stand for easying place and viewing
- Rechargeable lithium battery lasts for approximately 30 days per charge.
- Special home screen key for one-touch access to variety of applications.
- The game features specifically designed to facilitate playing games on the iPhone5
- Specially designed CapsLock lamp can prevent the password when compared with casing error
- The backlight used to dark environment for typing, make the product can be used in all weather conditions
- Energy saving keyboard sleep mode

Bluetooth Keyboard Specification and Pairing Instruction

➤ Keyboard Specification

- Operating Distance : 10 meters
- Modulation System: GFSK 2.4G
- Operating Voltage: 3.0-5.0
- Working Current : <3.0 mA
- Standby Current : 1.5 mA
- Sleeping Current: <200 μA
- Charging Current :>100 mA
- Standby time : 30 days
- Uninterrupted working time: 100 hours
- Lithium Battery Life : 5 years
- Charging time : 3.5-4 hours
- Key Life : 2 million strokes
- Operating Temperature : -10 °C ~ +55 °C



Micro USB Charge Port Power & Blue Tooth Link Switch



Caps Lock Light Power/Link Light


- Step3: Turn on and unlock iPhone. In home screen, open **Settings** menu, touch "Settings" icon




➤ Bluetooth Keyboard Pairing

- Step1: Press the power button for 3 seconds after power light will be bright the power on (Then if you want to turn off the power, can press the power button for 3 seconds to turn off the power)
- Step2: At the same time the power light blinking into the code wait state, and keyboard is now ready to be connected to iPhone.

- Step 4: In the General tab, select Bluetooth. If the Bluetooth off by default, slide open switch. Then iPhone began to search for Bluetooth devices within the established framework. Bluetooth Wireless Device; later appears below Keyboard.

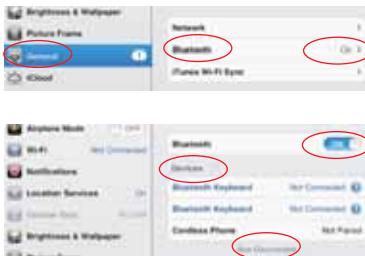

- Step 5: The implementation of Tap Bluetooth Wireless Keyboard connection. Arabic on-screen prompts for the code, click on the Enter key to connection.

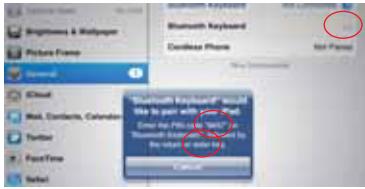

Here the Arabic numerals (eg:6657), is to connect a Bluetooth keyboard to enter the password. Enter the connection and click the Enter key to success!

- Step 6: Wireless Bluetooth Keyboard connected successfully .the connection indicator light will be off ,But the power indicator light will stay on until the keyboard is power off



Keyboard connected successfully

➤ Energy Saving Sleep mode

The keyboard will kick into Sleep mode when it is inactive for 15 minutes, and the keyboard power indicator light will go off. To activate from sleep mode, just press any key and wait 3 seconds ,the keyboard will come back on.

➤ Safety Caution

- Keep the item away from sharp the keyboard.
- Do not place heavy object on top of the keyboard.
- Do not Microwave the the keyboard.
- Do not force or distorted the keyboard.
- Keep away from oil, chemical or any other organic liquid.

➤ Special keys on the iPhone

□ Home	● Back light and key
⌘ Command	↔ Link light and key
🔍 Search	🔋 Charge light
⌨ Keyboard Change	⌚ Power light
🔒 Lockscreen	🔇 Mute
⇪ CapsLock	⬇ Volume Down
🎮 Game function	⬆ Volume Up
⏯ PLAY/PAUSE	⏮ PREV
fn Function key	⏭ NEXT

Use the "fn +" above "green char" turn in to function key.

Use the "command" + "space" to switch between various languages.

➤ Troubleshooting

Unable to connect

- Make Sure the power switch is on.
- Make Sure the keyboard is button the operating distance.
- Make sure the battery is charged.
- Make sure iPhone Bluetooth is activate.
- Make sure the Wireless Keyboard is connected to iPhone.
- Make sure the wireless keyboard has been paired with to iPhone.

Unable to Charge keyboard

- Make Sure the USB power cable is connected properly to the keyboard and the power source.

FCC Certification Requirements

Caution: Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.**
- Increase the separation between the equipment and receiver.**
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.**
- Consult the dealer or an experienced radio/TV technician for help.**