



FCC TEST REPORT

FCC ID: 2AATL-6251C-PUB

On Behalf of

FN-LINK TECHNOLOGY LIMITED

Wi-Fi/BT module

Model No.: 6251C-PUB

Prepared for : FN-LINK TECHNOLOGY LIMITED
Address : No.8, Litong Road, Liuyang Economic & Technical Development
Zone, Changsha, Hunan, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2408107-C01-R10
Date of Receipt : August 19, 2024
Date of Test : August 19, 2024 – September 27, 2024
Date of Report : October 12, 2024
Version Number : V0
Result **Pass**

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary of Standards And Results -----	6
1.1. Description of Standards and Results -----	6
2. General Information -----	7
2.1. Description of Device (EUT) -----	7
2.2. Accessories of Device (EUT) -----	8
2.3. Tested Supporting System Details-----	8
2.4. Block Diagram of connection between EUT and simulators-----	8
2.5. Test Mode Description -----	9
2.6. Test Conditions -----	9
2.7. Test Facility -----	10
2.8. Measurement Uncertainty -----	10
2.9. Test Equipment List-----	11
3. Spurious Emission -----	12
3.1. Test Limits-----	12
3.2. Test Procedure-----	14
3.3. Test Setup-----	14
3.4. Test Results-----	15
4. Power line Conducted Emission -----	42
4.1. Test Limits-----	42
4.2. Test Procedure-----	42
4.3. Test Setup-----	42
4.4. Test Results-----	43
5. Conducted Maximum Output Power -----	45
5.1. Test limits-----	45
5.2. Test Procedure-----	45
5.3. Test Setup-----	45
5.4. Test Results-----	45
6. Peak Power Spectral Density -----	47
6.1. Test limits-----	47
6.2. Test Procedure-----	47
6.3. Test Setup-----	47
6.4. Test Results-----	48
7. Bandwidth -----	67
7.1. Test limits-----	67
7.2. Test Procedure-----	67
7.3. Test Setup-----	67
7.4. Test Results-----	67
8. Band Edge Check -----	87
8.1. Test limits-----	87
8.2. Test Procedure-----	87
8.3. Test Setup-----	87
8.4. Test Results-----	87
9. Antenna Requirement -----	103

9.1. Standard Requirement-----	103
9.2. Antenna Connected Construction -----	103
9.3. Results-----	103
10. Test setup photo-----	104
10.1. Photo of Radiated Emission test-----	104
10.2. Photo of Conducted Emission test -----	105

TEST REPORT DECLARATION

Applicant : FN-LINK TECHNOLOGY LIMITED
Address : No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, China
Manufacturer : FN-LINK TECHNOLOGY LIMITED
Address : No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, China
EUT Description : Wi-Fi/BT module
(A) Model No. : 6251C-PUB
(B) Trademark :  欧智通

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247,
ANSI C63.10:2013, CISPR 16-1-4:2010

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen
Project Engineer



Approved by (name + signature).....: Jack Xu
Project Manager



Date of issue.....: October 12, 2024

Revision History

Revision	Issue Date	Revisions	Revised By
V0	October 12, 2024	Initial released Issue	Yannis Wen

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Conducted Emission	FCC Part 15: 15.207 ANSI C63.10 :2013	P
6dB Bandwidth	FCC PART 15:15.247(a)(2) ANSI C63.10 :2013	P
Output Power	FCC Part 15: 15.247(b)(3) ANSI C63.10 :2013	P
Radiated Spurious Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Conducted Spurious & Band Edge Emission	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Spectral Density	FCC PART 15:15.247(e) ANSI C63.10 :2013	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Antenna Requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. Decision rules for the conclusion of this test report: decision by actual test data without considering measurement uncertainty.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description/PMN : Wi-Fi/BT module

Model :
Number/HVIN(s) : 6251C-PUB
Diff. : N/A

Test Voltage : DC 3.3V from USB adapter board

Radio Technology : 2.4G WIFI

Operation frequency : 2412MHz-2462MHz for IEEE 802.11 b, g, n/HT20, ax20,
2422MHz~2452MHz for IEEE802.11n/HT40, ax40

Channel No. : 802.11b/802.11g /802.11n(HT20)/802.11ax20: 11
802.11(HT40)/802.11ax40: 7

Modulation type : IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK)
IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11n :OFDM(64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ax : OFDMA
(64QAM, 16QAM, QPSK, BPSK, 256QAM, 1024QAM)

Antenna Type : PIFA antenna 1, max gain 3.39dBi
PIFA antenna 2, max gain 3.39dBi
(Antenna information is provided by applicant.)

Software Version : V1.0

Hardware version/FVIN : V1.0

Note: Both antenna 1 and antenna 2 have transmissions and can only be transmitted separately. They do not support MIMO.


2.2. Accessories of Device (EUT)

Accessories : /
Manufacturer : /
Model : /
Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1	Notebook PC	Lenovo	Thinkpad E14	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Duty cycle :100%Keeping TX			
Mode	Data rate (Mbps)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n/HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11 n/HT40	13	Low :CH3	2422
	13	Middle: CH6	2437
	13	High: CH9	2452
IEEE 802.11 ax 20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11 ax 40	13	Low :CH3	2422
	13	Middle: CH6	2437
	13	High: CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate. So those data rate were used for all test.			

Channel list:					
For IEEE 802.11b, g, n/HT20, ax20, n/HT40, ax40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

Designation Number: CN1236

July 15, 2019 Certificated by IC

Registration Number: 12135A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.18	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2024.08.08	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2024.08.08	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2024.08.08	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2024.08.08	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2024.08.08	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2024.08.08	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2024.08.08	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2024.08.08	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2024.08.08	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2024.08.08	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2024.08.08	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	2Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2024.08.08	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2024.08.08	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2024.08.08	1 Year
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2024.08.11	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2024.08.08	1 Year
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. SPURIOUS EMISSION

3.1. Test Limits

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	
Note 1: The peak limit is 20 dB higher than the average limit			
Note 2: Peak limit applies (AVG limit + 20 dB) as well as RSS-247 Section 5.5			

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A}/\text{m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

3.2. Test Procedure

The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz.

The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above 1GHz testing, the table was rotated 360 degrees to determine the position of the highest radiation


The Test antenna shall vary between 1m and 4m, both Horizontal and Vertical antenna are set of make measurement.

The initial step in collecting radiated emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Quasi Peak Detector mode premeasured


If Peak value comply with QP limit below 1GHz, the EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test configuration, please see the test setup photo.


3.3. Test Setup

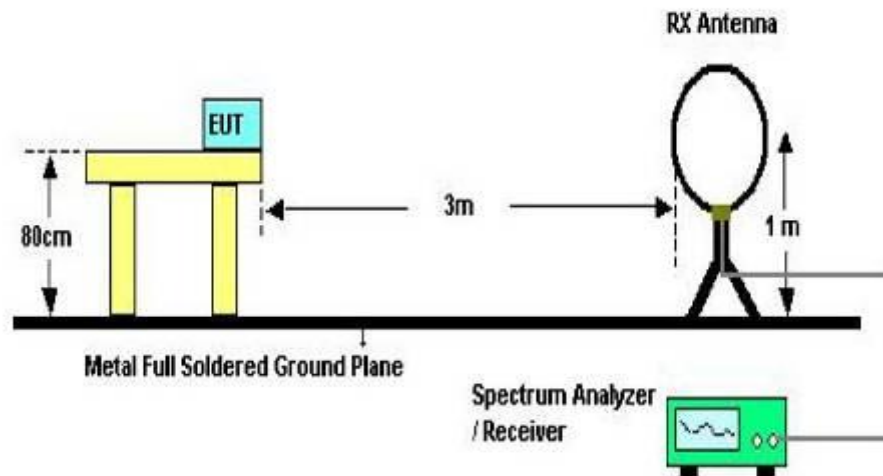

Below 30MHz Test Setup

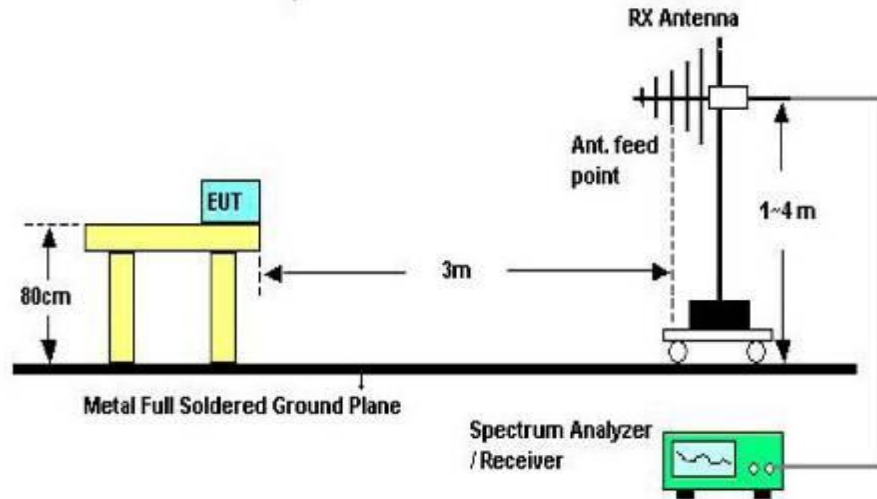

Above 30MHz Test Setup

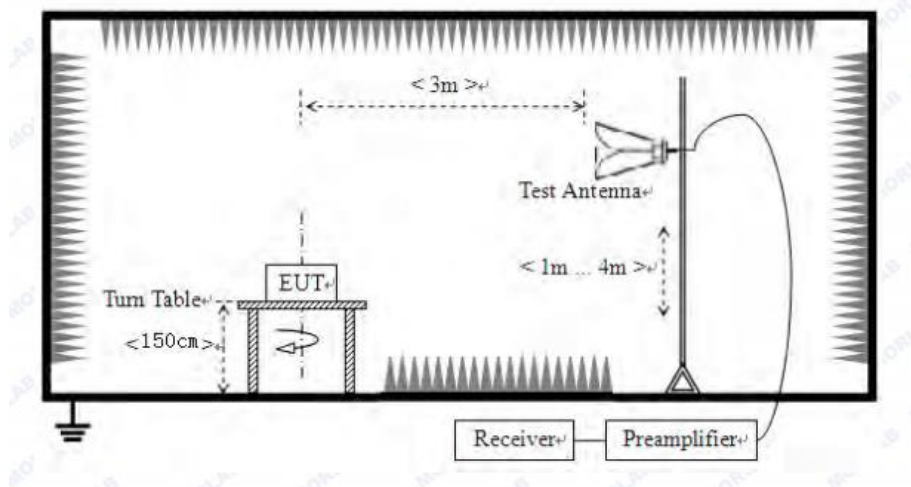

Above 1GHz Test Setup

3.4. Test Results

Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHZ~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

We have scanned the EUT from 9kHz up to the 10th harmonic of the fundamental.

Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: PASS

Note: 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2. All antennas have been tested, only the worst data of each pattern is reflected.


Test result for 802.11b (High Channel)

Vertical:

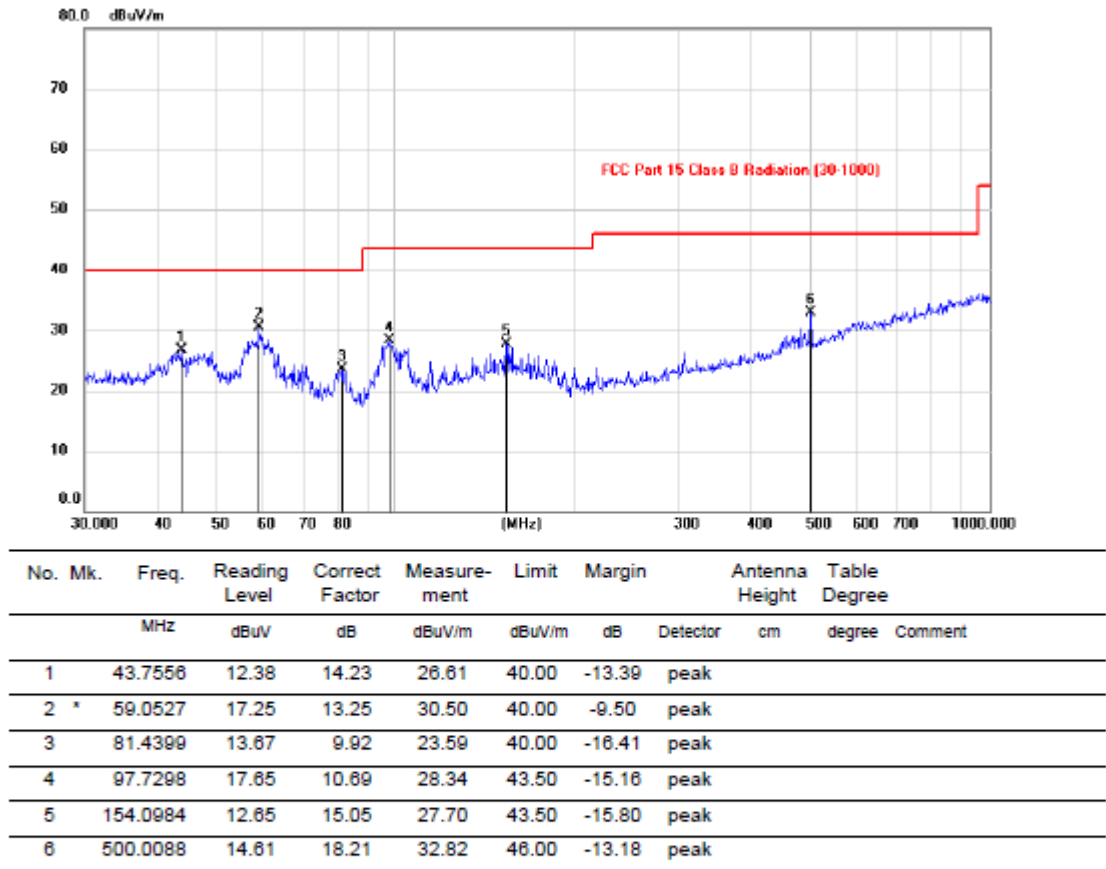

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

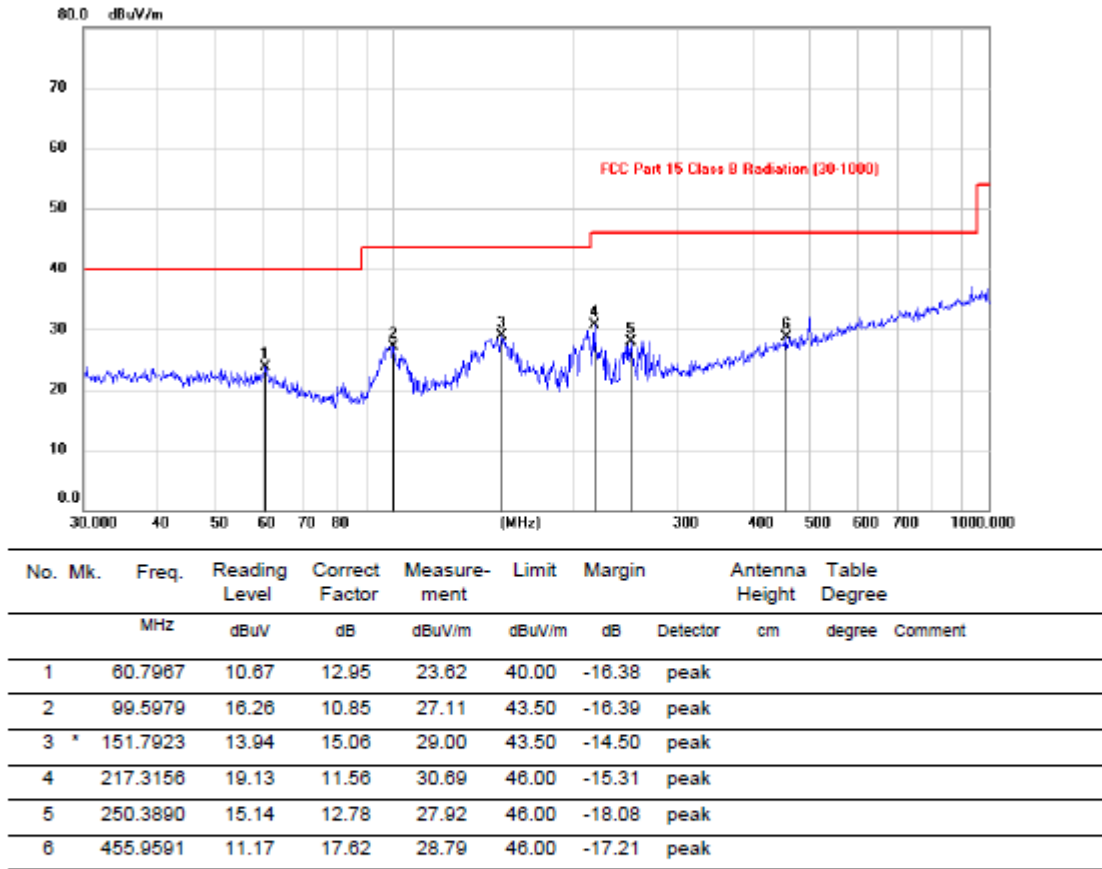Horizontal:

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

Notes: Above is below 1GHz test data. This report only shall the worst case mode for b 2412MHz.

Test Mode: IEEE 802.11b TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	42.94	V	33.95	10.18	34.26	52.81	74	-21.19	PK
4824	34.13	V	33.95	10.18	34.26	44.00	54	-10.00	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
4824	42.93	H	33.95	10.18	34.26	52.80	74	-21.20	PK
4824	33.53	H	33.95	10.18	34.26	43.40	54	-10.60	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11b TX Mid									
4874	46.55	V	33.93	10.2	34.29	56.39	74	-17.61	PK
4874	33.91	V	33.93	10.2	34.29	43.75	54	-10.25	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	45.87	H	33.93	10.2	34.29	55.71	74	-18.29	PK
4874	35.02	H	33.93	10.2	34.29	44.86	54	-9.14	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11b TX High									
4924	46.30	V	33.98	10.22	34.25	56.25	74	-17.75	PK
4924	37.04	V	33.98	10.22	34.25	46.99	54	-7.01	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
4924	45.93	H	33.98	10.22	34.25	55.88	74	-18.12	PK
4924	35.77	H	33.98	10.22	34.25	45.72	54	-8.28	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Note:

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.


Note:

Note:


Conducted RF Spurious Emission

Note: 1. All antennas have been tested, and antenna 1 is the worst data.


Tx. Spurious NVNT ax20 2412MHz Ant1 Ref

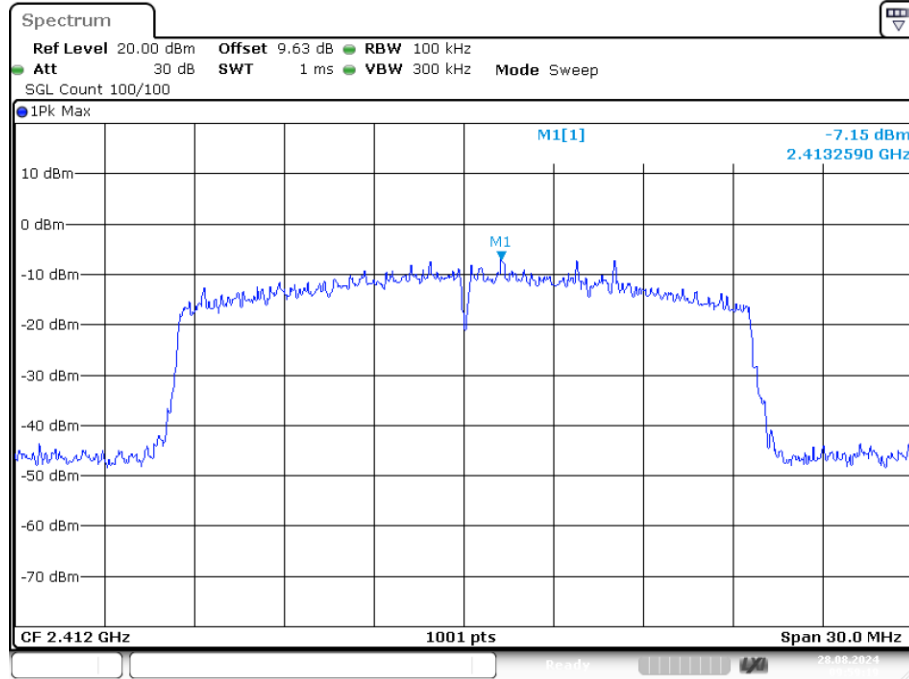

Tx. Spurious NVNT ax20 2412MHz Ant1 Emission

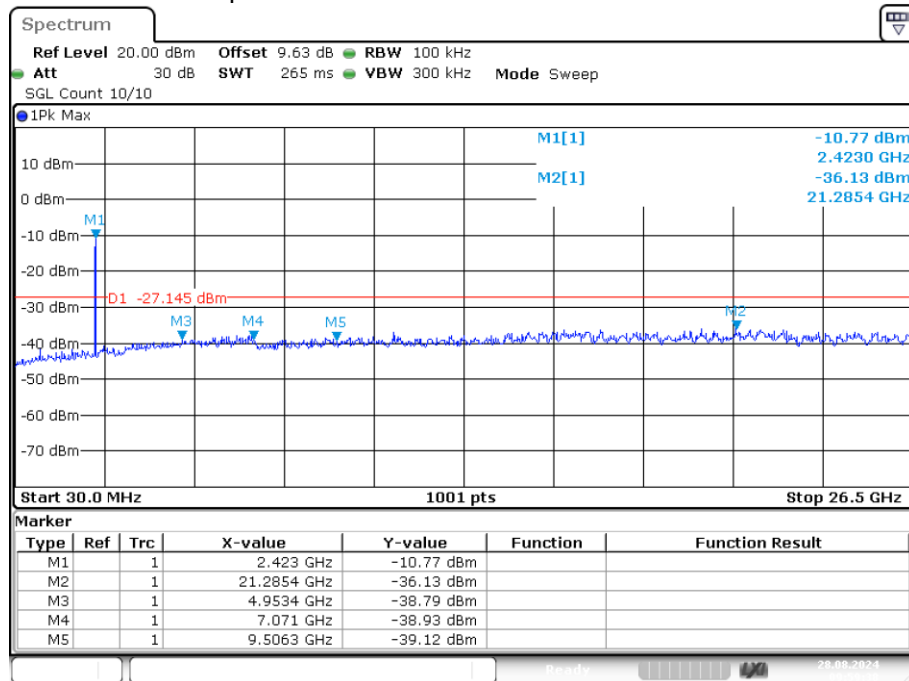


Tx. Spurious NVNT ax20 2437MHz Ant1 Ref

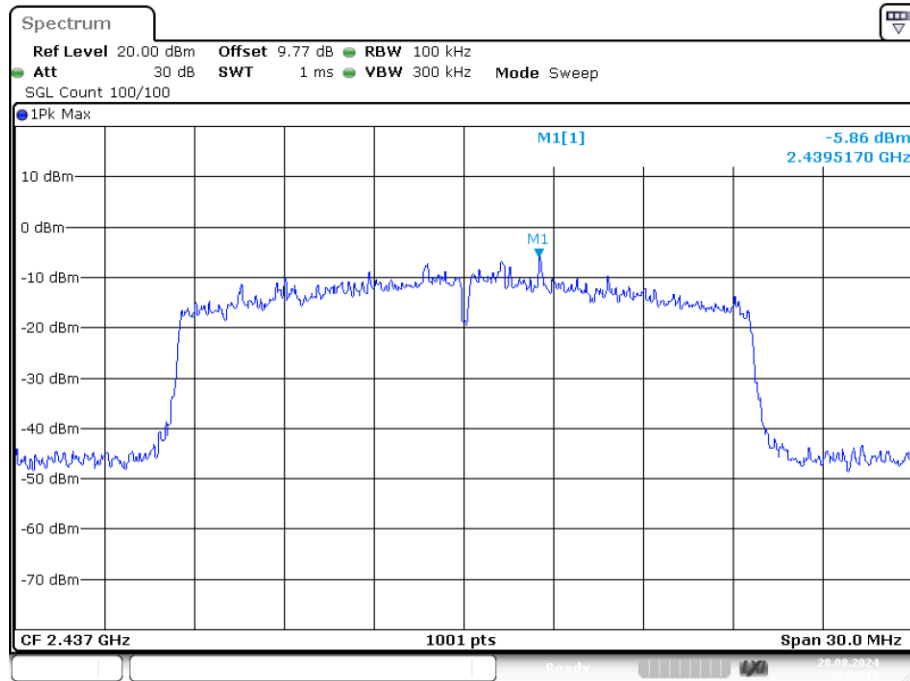


Date: 28.AUG.2024 10:02:16

Tx. Spurious NVNT ax20 2437MHz Ant1 Emission

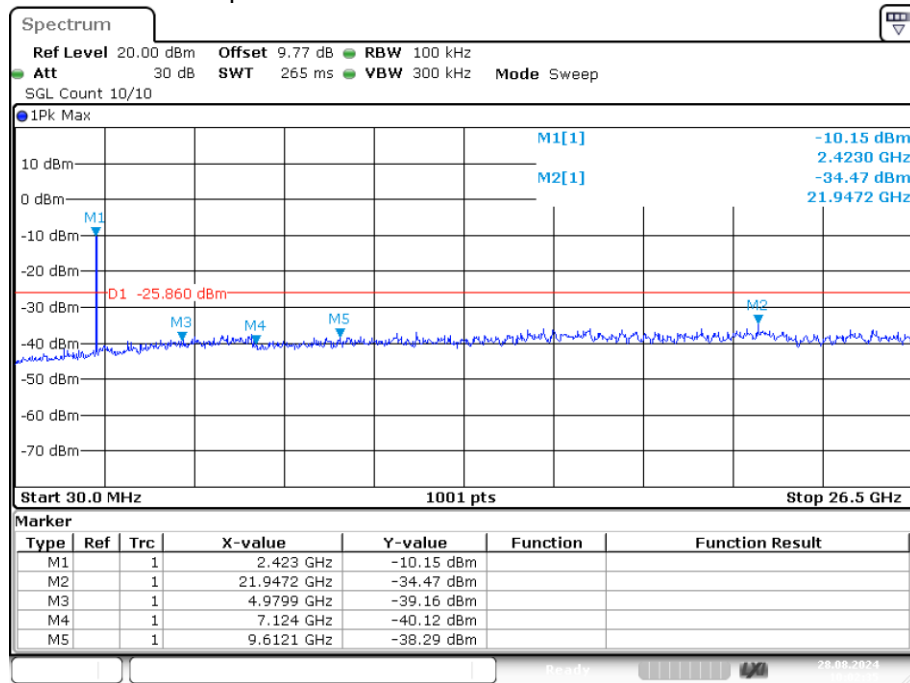


Date: 28.AUG.2024 10:02:34

Tx. Spurious NVNT ax20 2462MHz Ant1 Ref

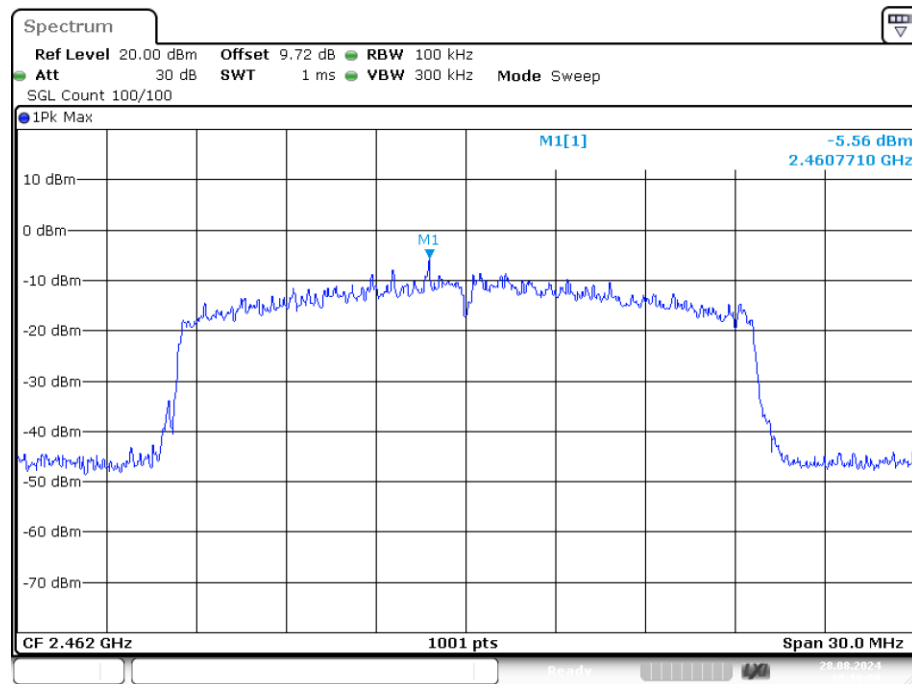


Date: 28.AUG.2024 10:10:00

Tx. Spurious NVNT ax20 2462MHz Ant1 Emission

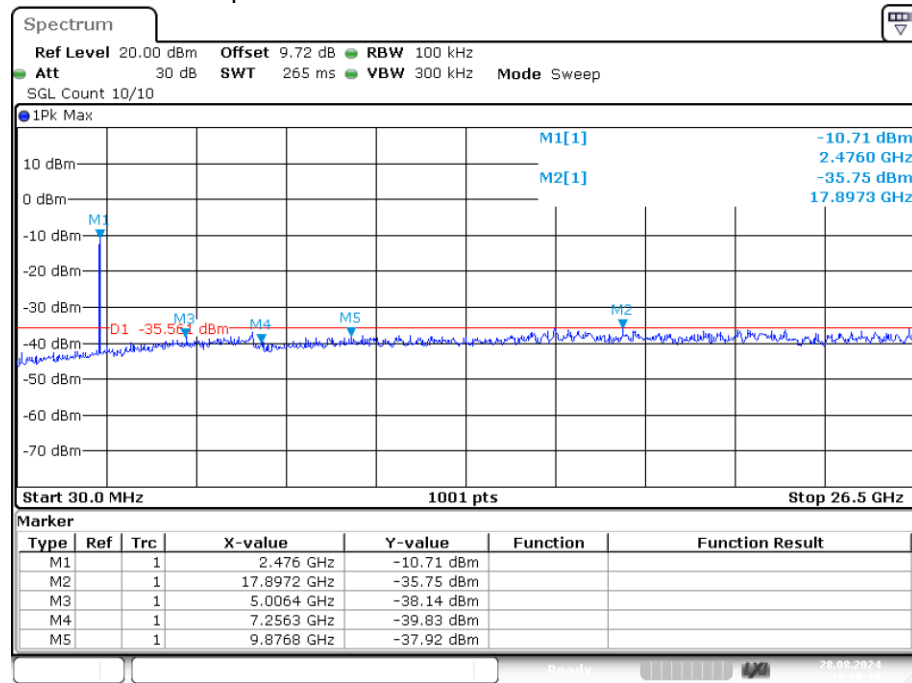


Date: 28.AUG.2024 10:10:18

Tx. Spurious NVNT ax40 2422MHz Ant1 Ref

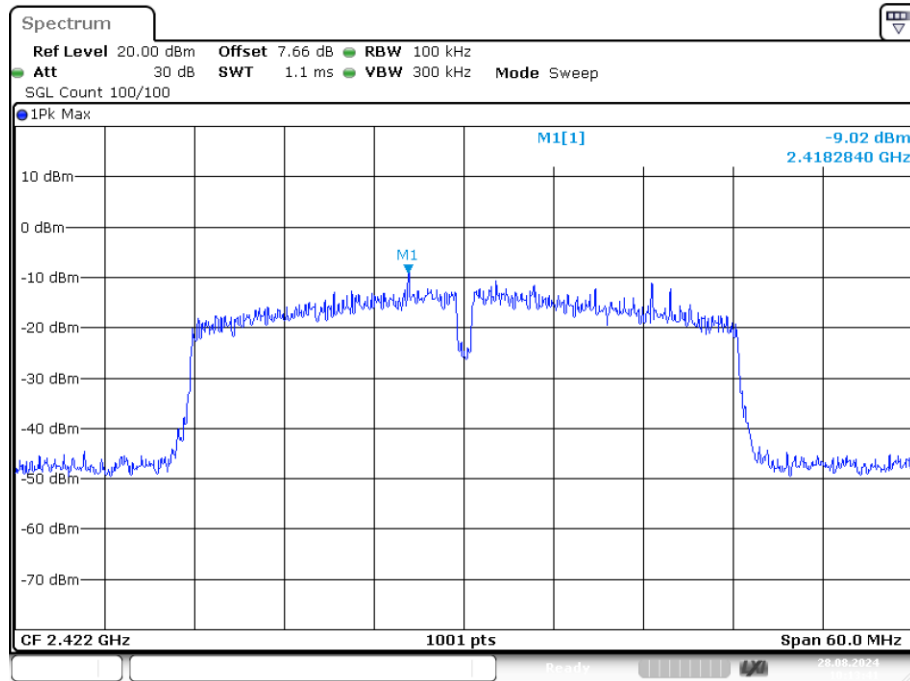


Date: 28.AUG.2024 10:13:41

Tx. Spurious NVNT ax40 2422MHz Ant1 Emission

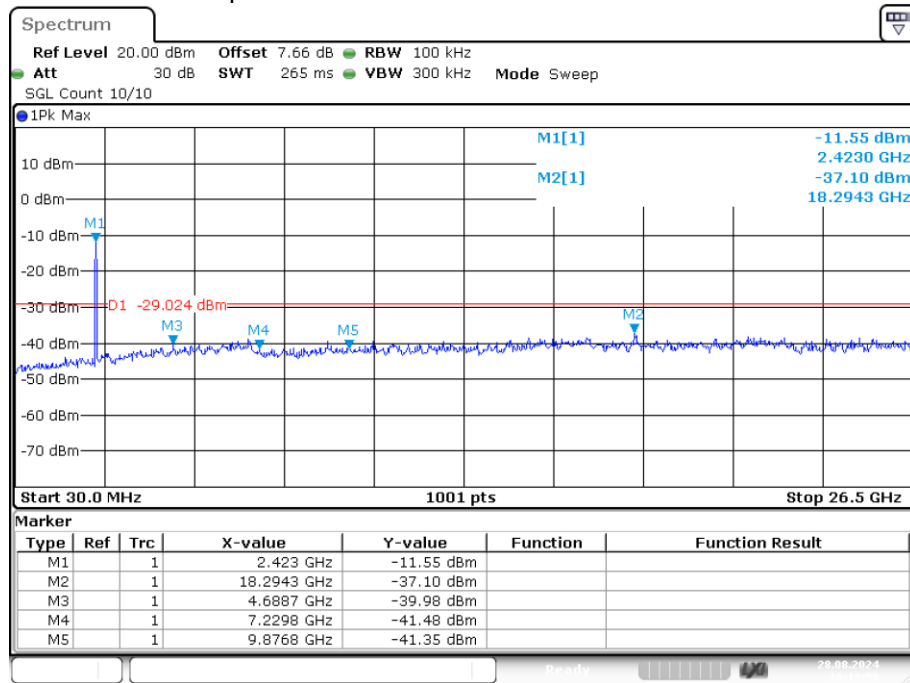


Date: 28.AUG.2024 10:13:59

Tx. Spurious NVNT ax40 2437MHz Ant1 Ref

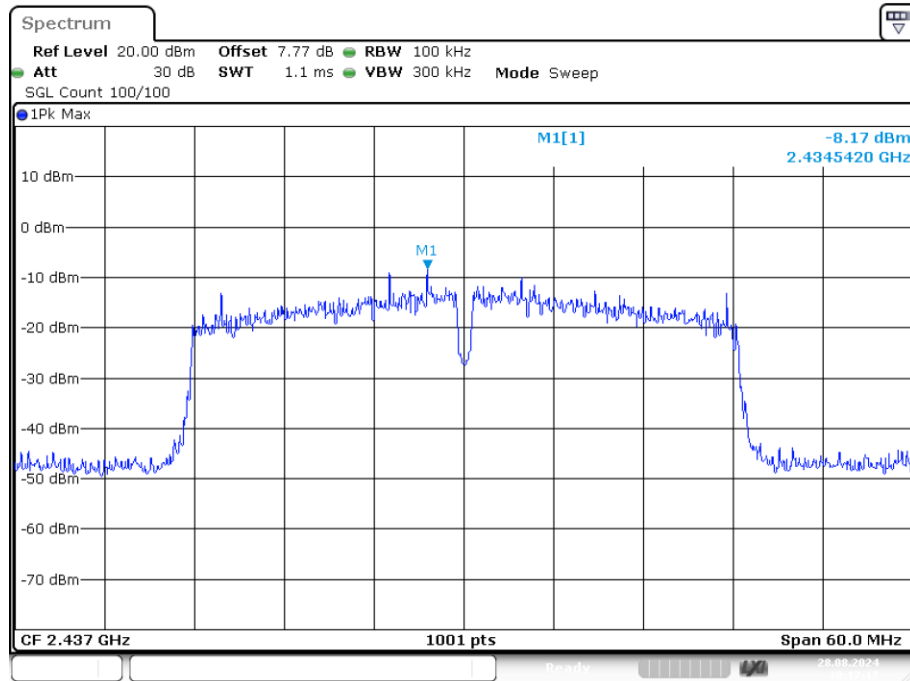


Date: 28.AUG.2024 10:17:17

Tx. Spurious NVNT ax40 2437MHz Ant1 Emission

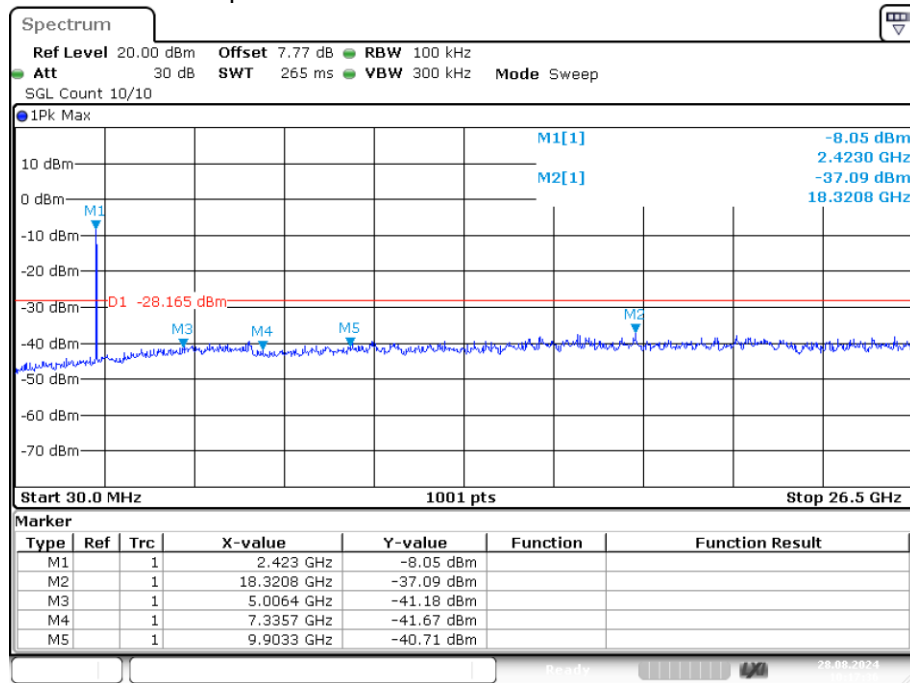


Date: 28.AUG.2024 10:17:35

Tx. Spurious NVNT ax40 2452MHz Ant1 Ref

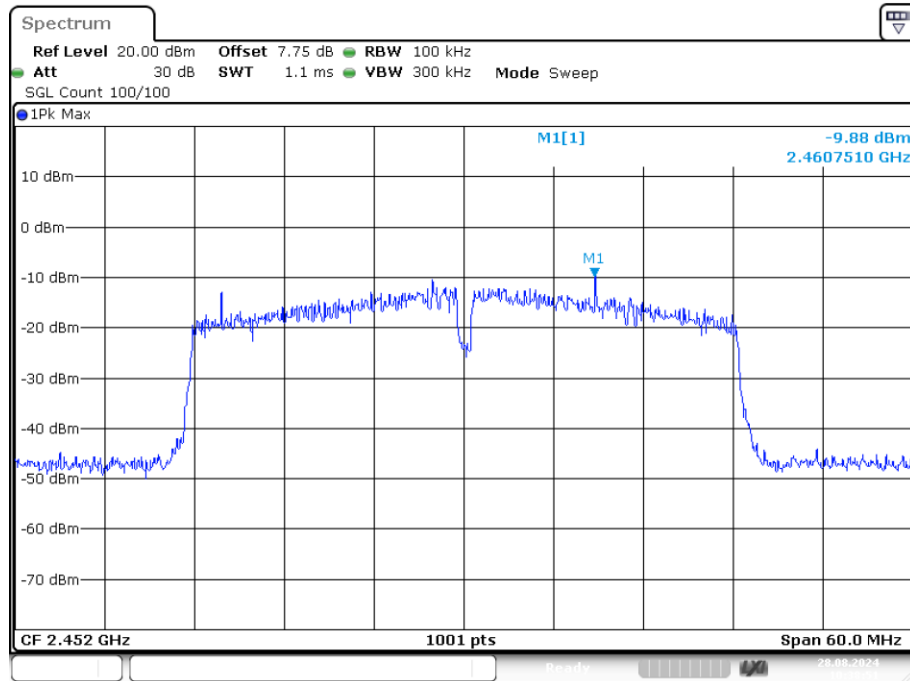


Date: 28.AUG.2024 10:38:52

Tx. Spurious NVNT ax40 2452MHz Ant1 Emission

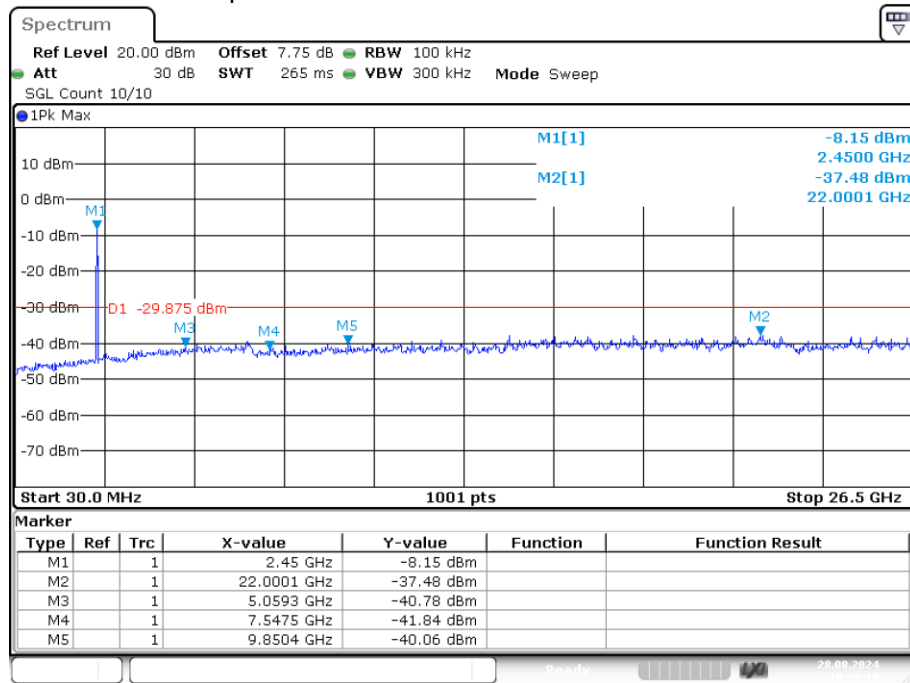


Date: 28.AUG.2024 10:39:10

Tx. Spurious NVNT b 2412MHz Ant1 Ref

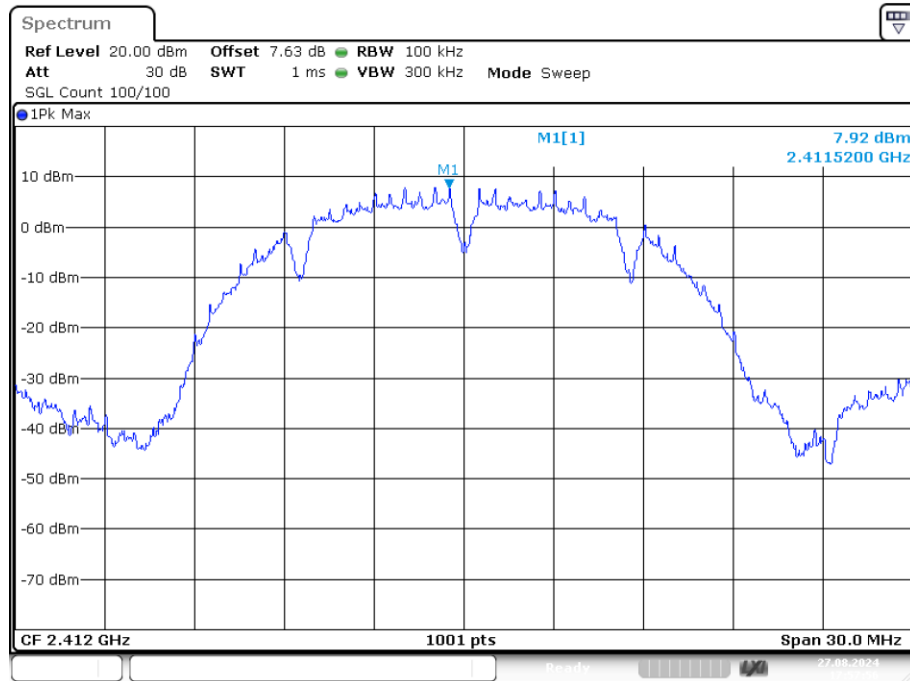


Date: 27.AUG.2024 17:57:57

Tx. Spurious NVNT b 2412MHz Ant1 Emission

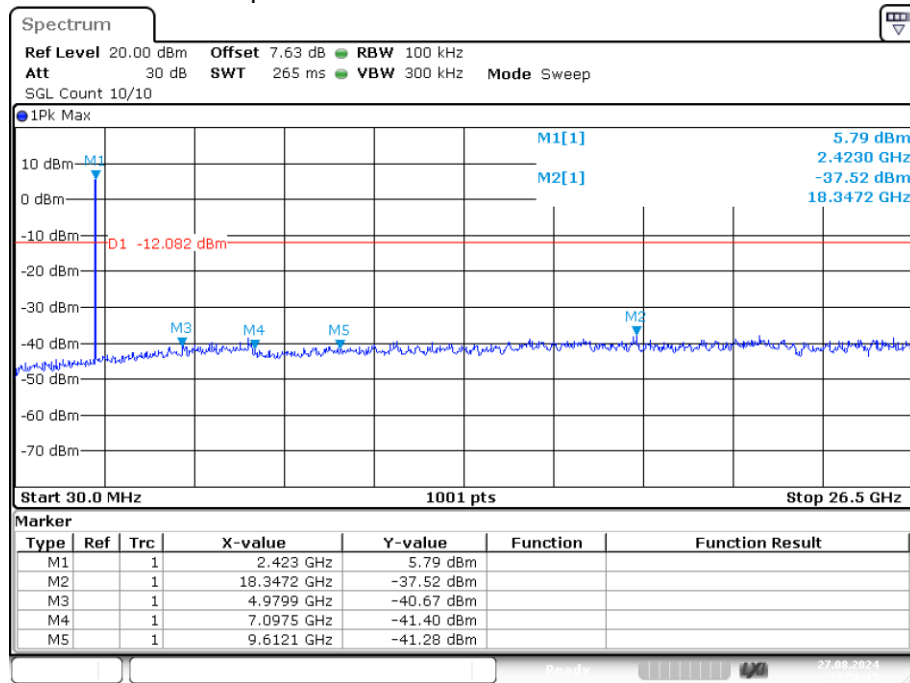


Date: 27.AUG.2024 17:58:15

Tx. Spurious NVNT b 2437MHz Ant1 Ref

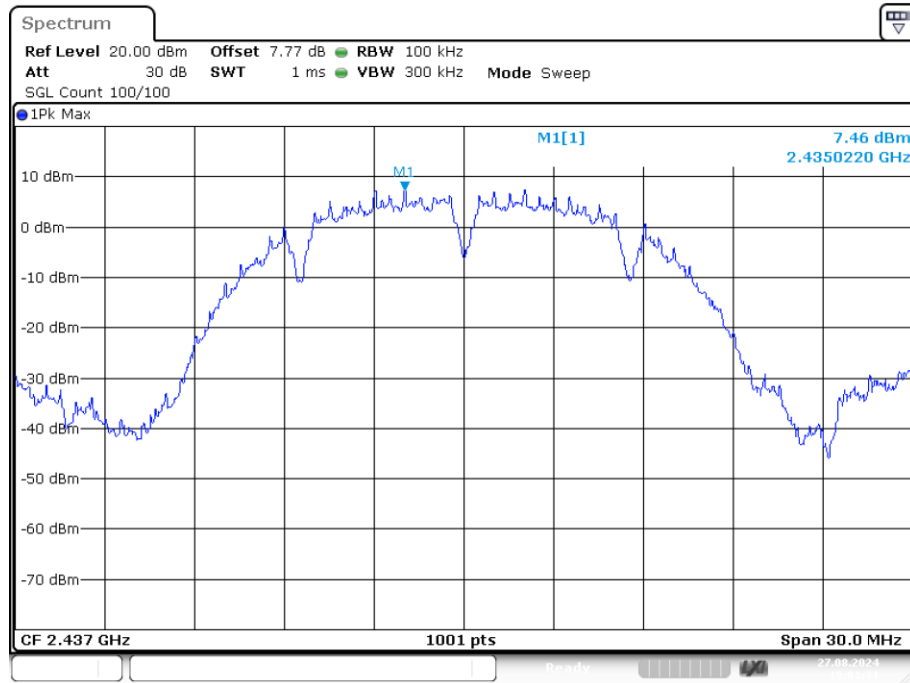


Date: 27.AUG.2024 18:01:31

Tx. Spurious NVNT b 2437MHz Ant1 Emission

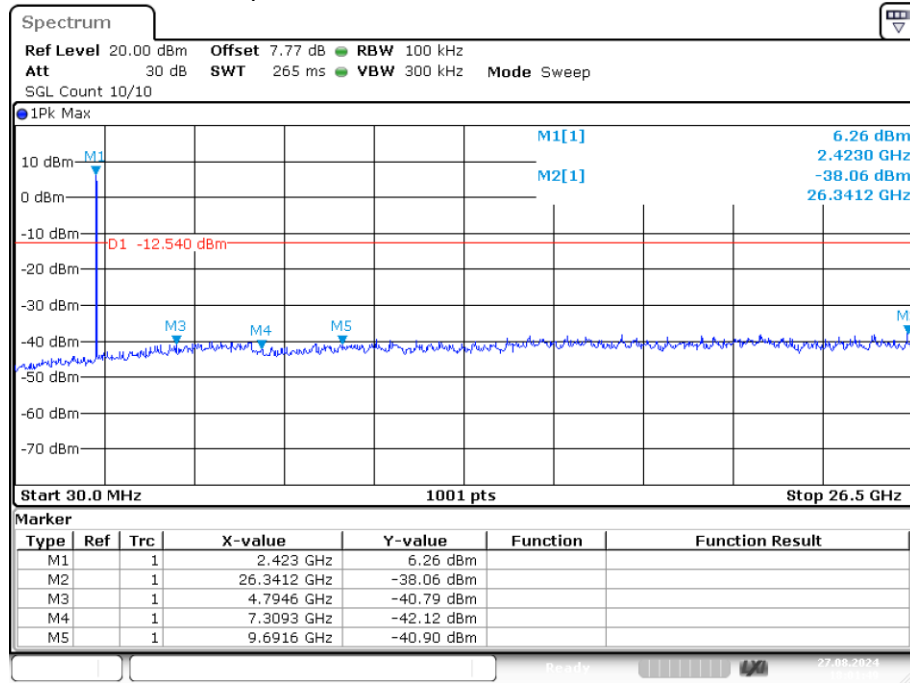


Date: 27.AUG.2024 18:01:49

Tx. Spurious NVNT b 2462MHz Ant1 Ref

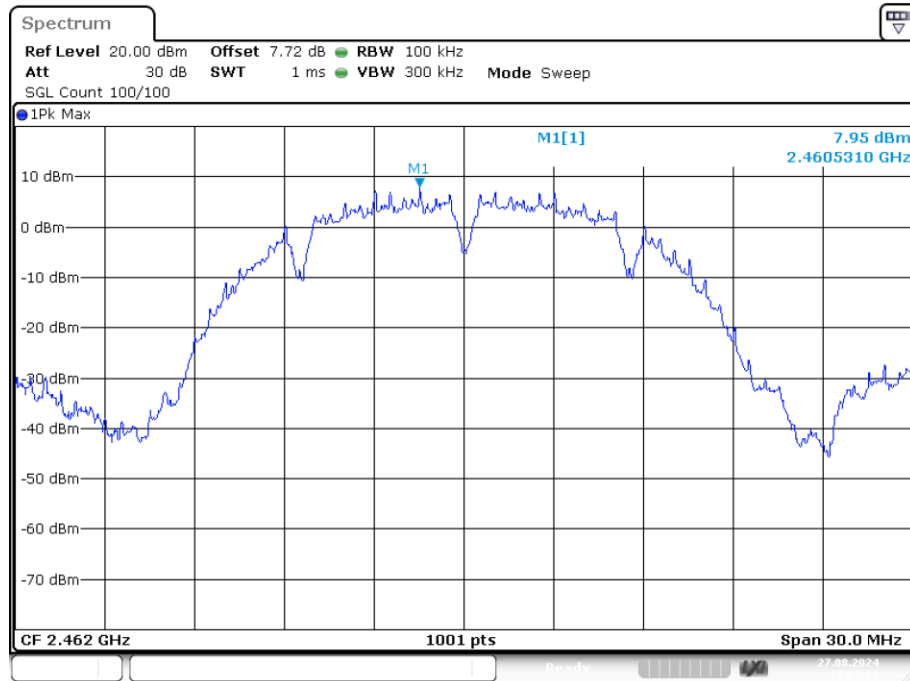


Date: 27.AUG.2024 18:05:01

Tx. Spurious NVNT b 2462MHz Ant1 Emission

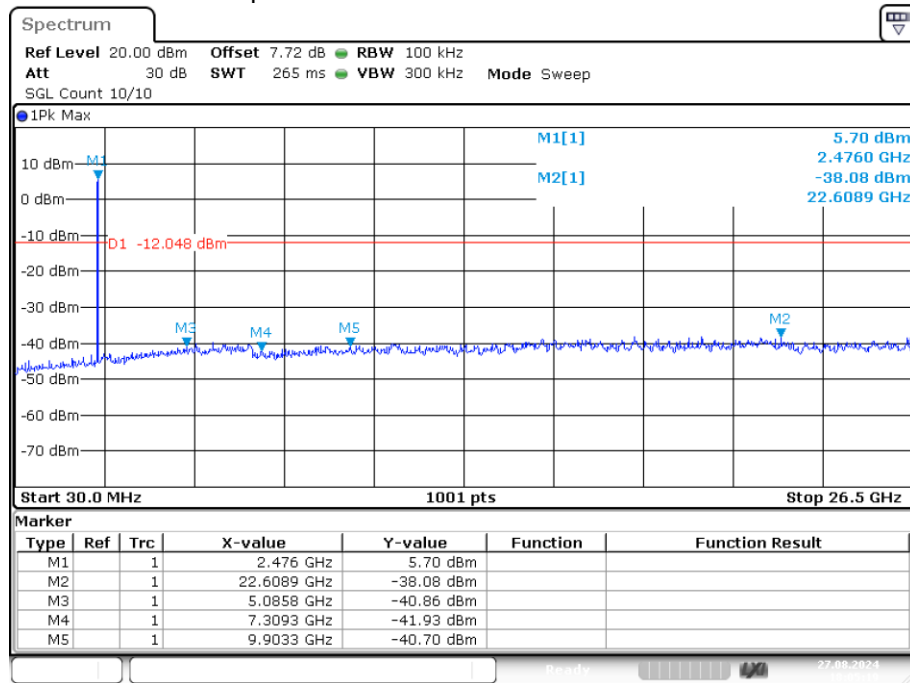


Date: 27.AUG.2024 18:05:19

Tx. Spurious NVNT g 2412MHz Ant1 Ref

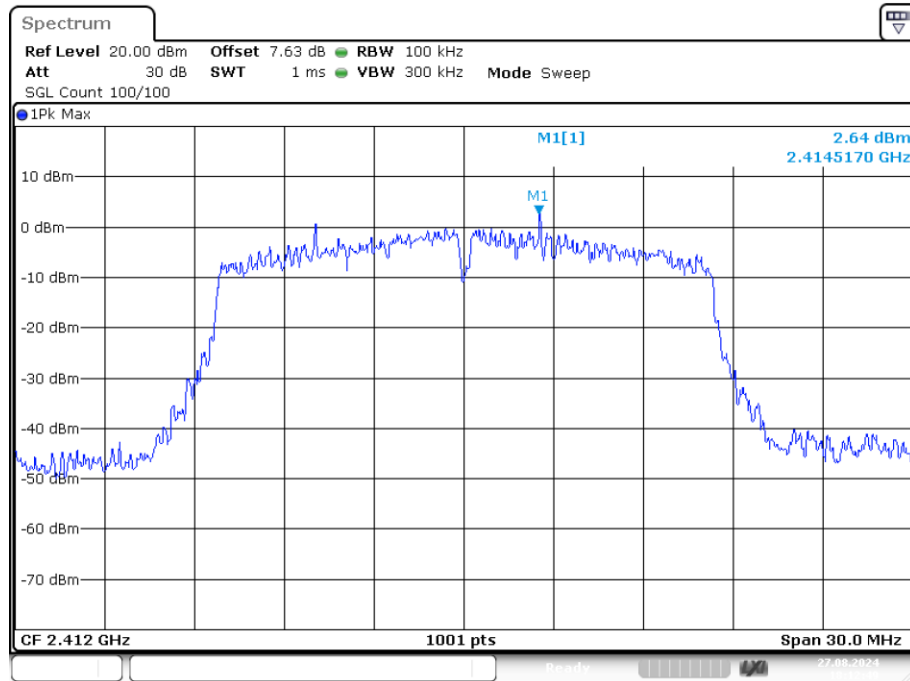


Date: 27.AUG.2024 18:12:49

Tx. Spurious NVNT g 2412MHz Ant1 Emission

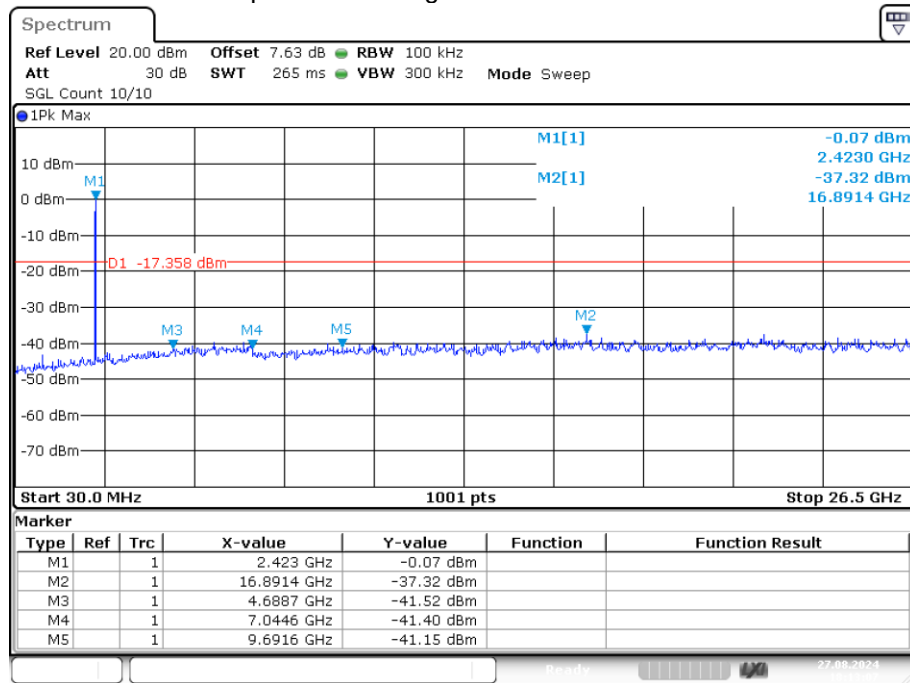


Date: 27.AUG.2024 18:13:07

Tx. Spurious NVNT g 2437MHz Ant1 Ref

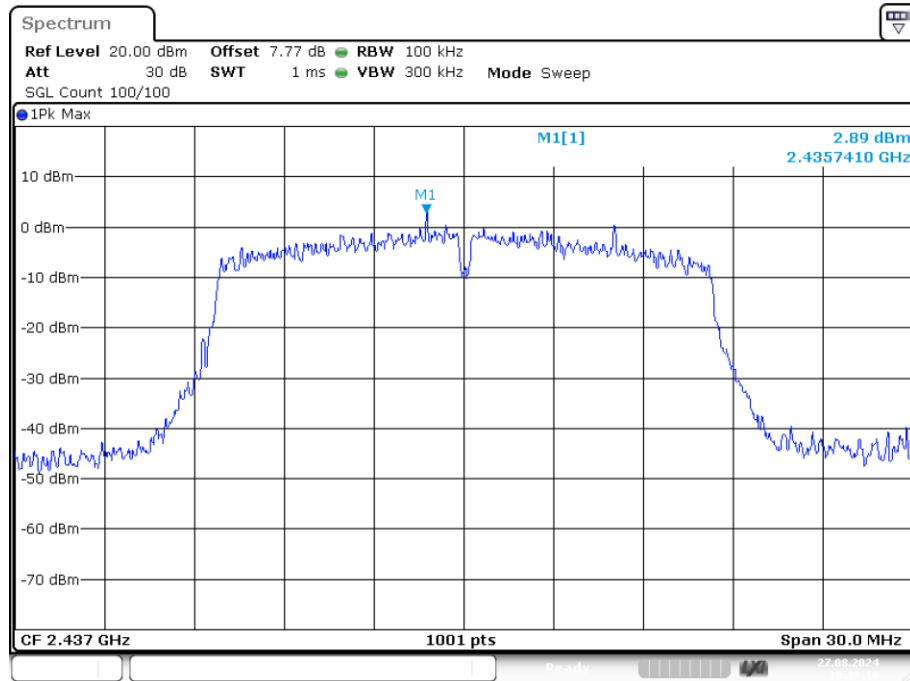


Date: 27.AUG.2024 18:18:10

Tx. Spurious NVNT g 2437MHz Ant1 Emission

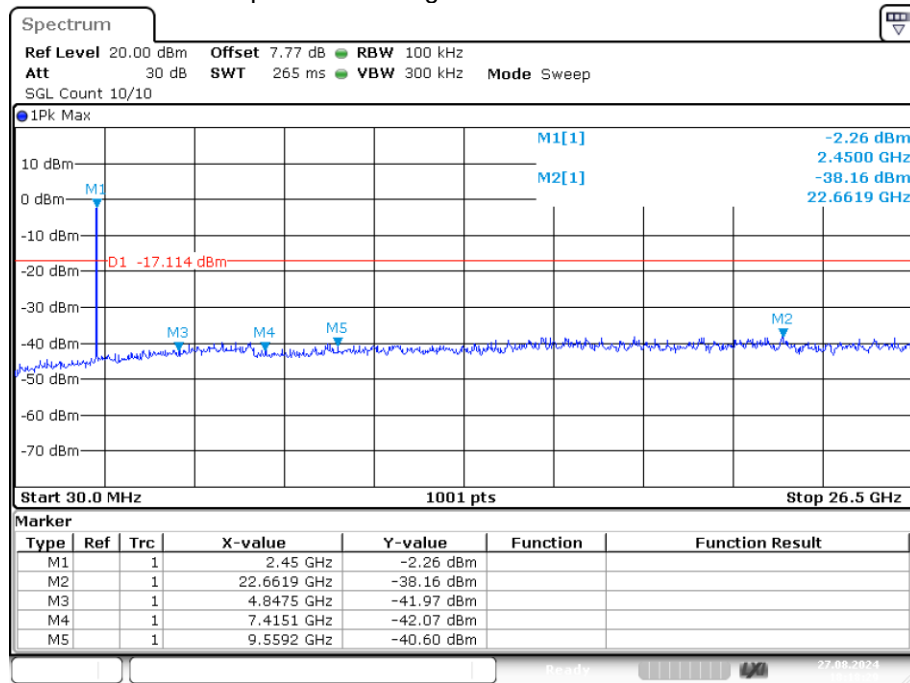


Date: 27.AUG.2024 18:18:28

Tx. Spurious NVNT g 2462MHz Ant1 Ref

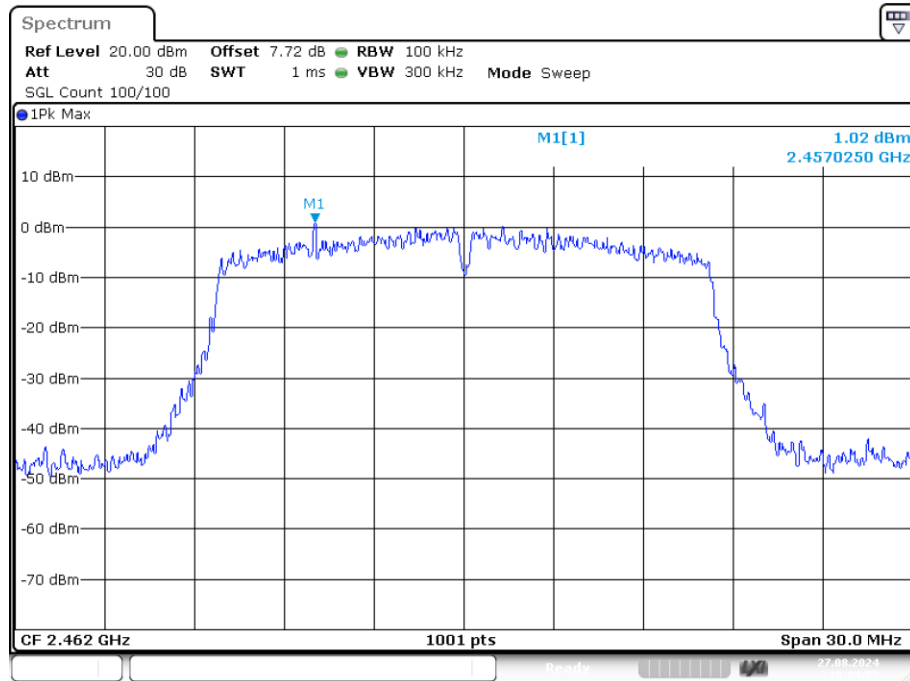


Date: 27.AUG.2024 18:24:53

Tx. Spurious NVNT g 2462MHz Ant1 Emission

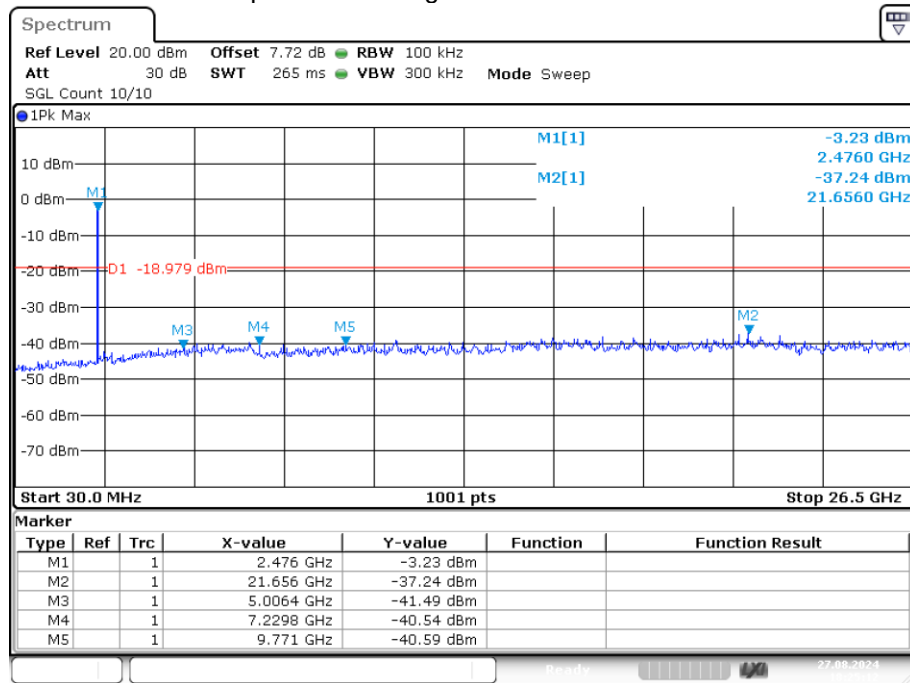


Date: 27.AUG.2024 18:25:11

Tx. Spurious NVNT n20 2412MHz Ant1 Ref

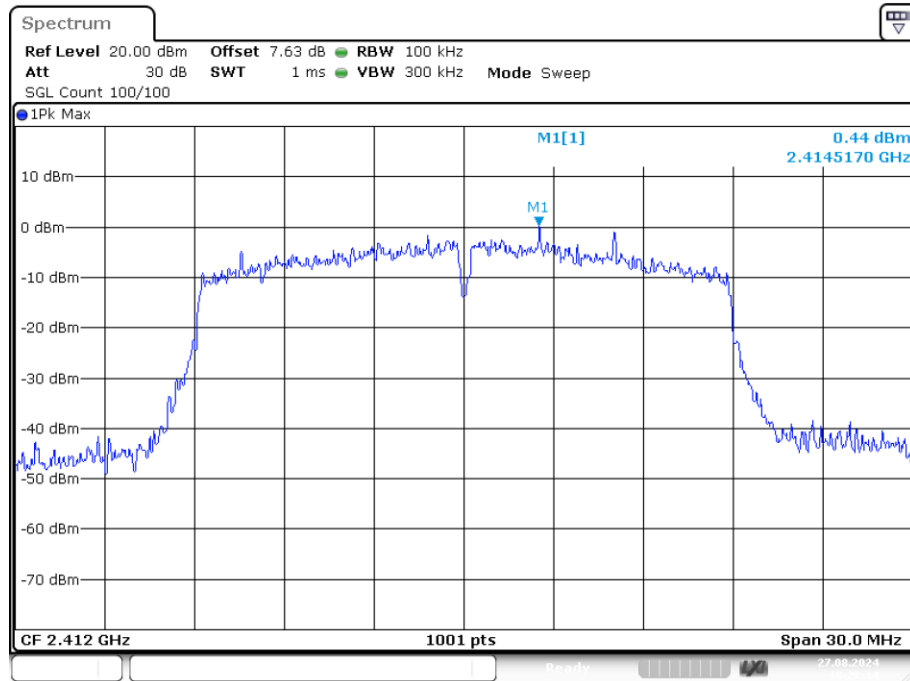


Date: 27.AUG.2024 18:28:14

Tx. Spurious NVNT n20 2412MHz Ant1 Emission

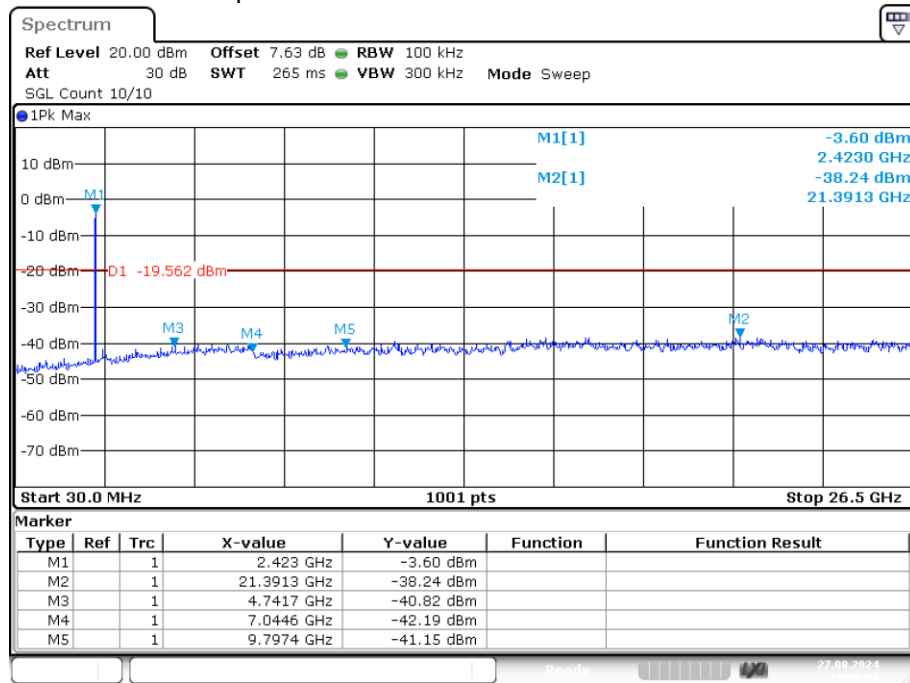


Date: 27.AUG.2024 18:28:32

Tx. Spurious NVNT n20 2437MHz Ant1 Ref

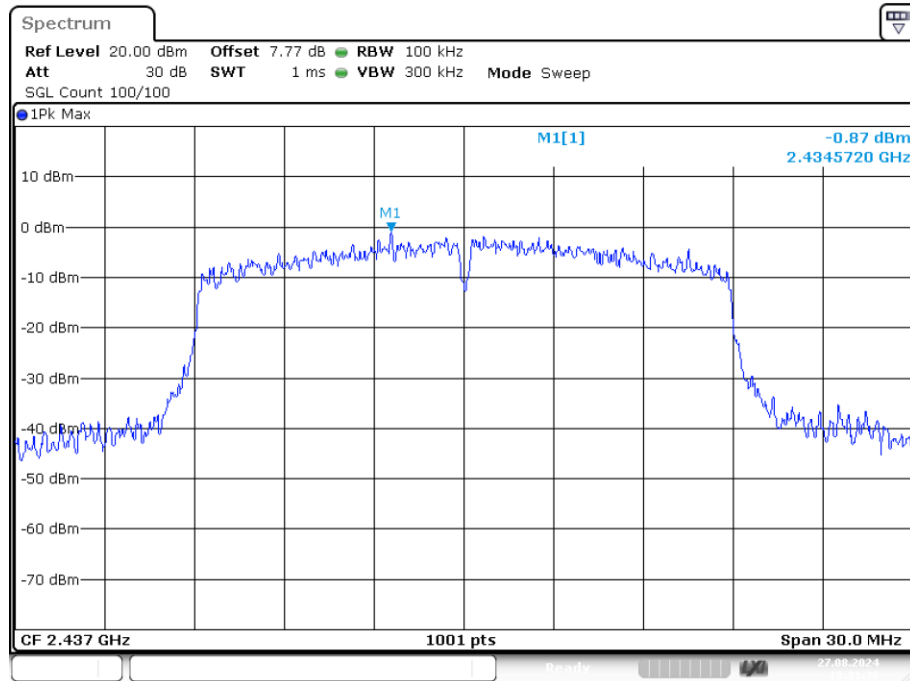


Date: 27.AUG.2024 18:31:39

Tx. Spurious NVNT n20 2437MHz Ant1 Emission

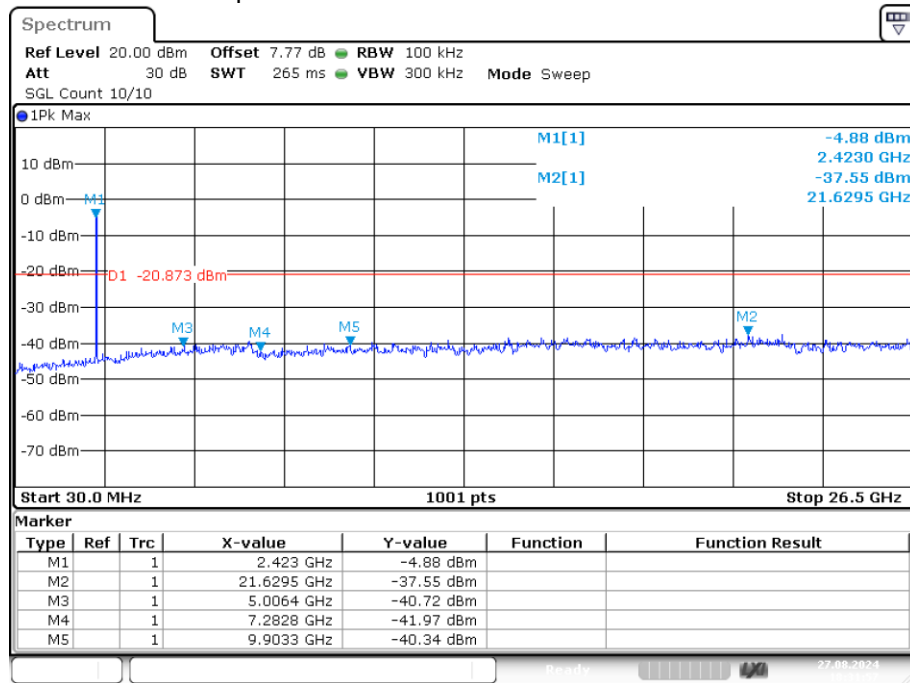


Date: 27.AUG.2024 18:31:56

Tx. Spurious NVNT n20 2462MHz Ant1 Ref

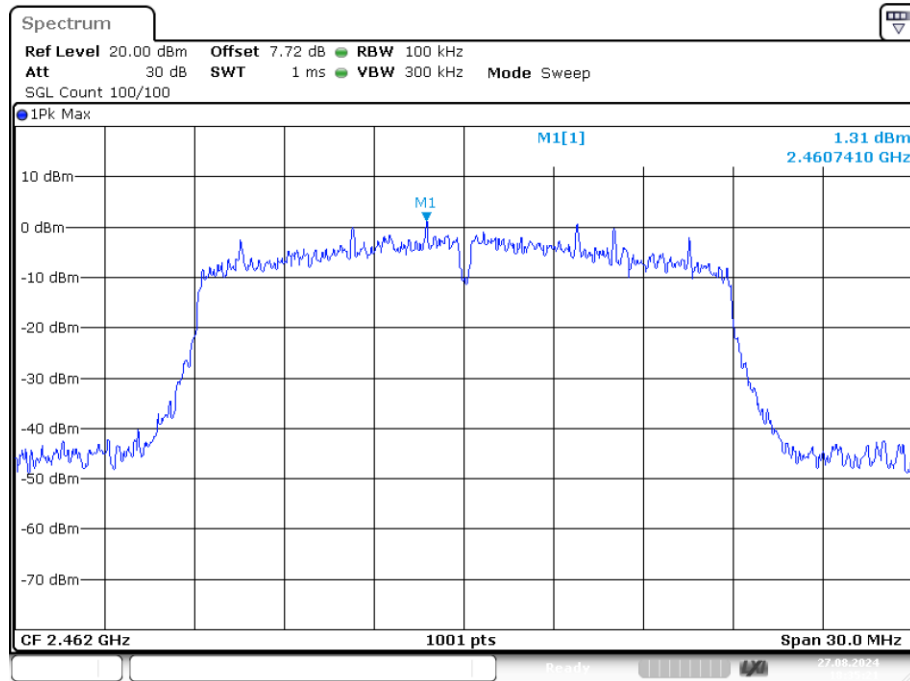


Date: 27.AUG.2024 18:35:21

Tx. Spurious NVNT n20 2462MHz Ant1 Emission

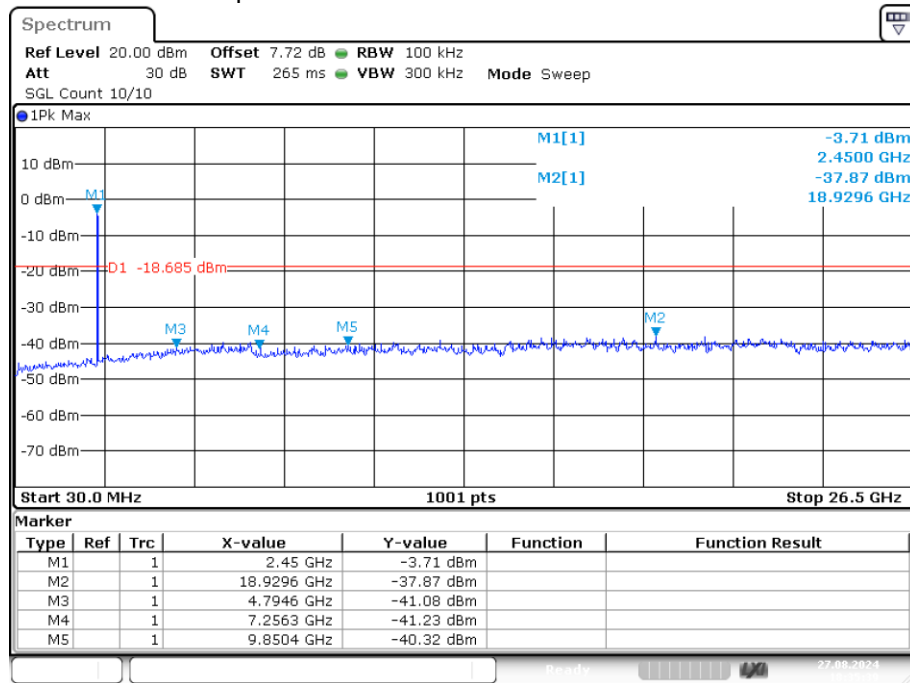


Date: 27.AUG.2024 18:35:39

Tx. Spurious NVNT n40 2422MHz Ant1 Ref

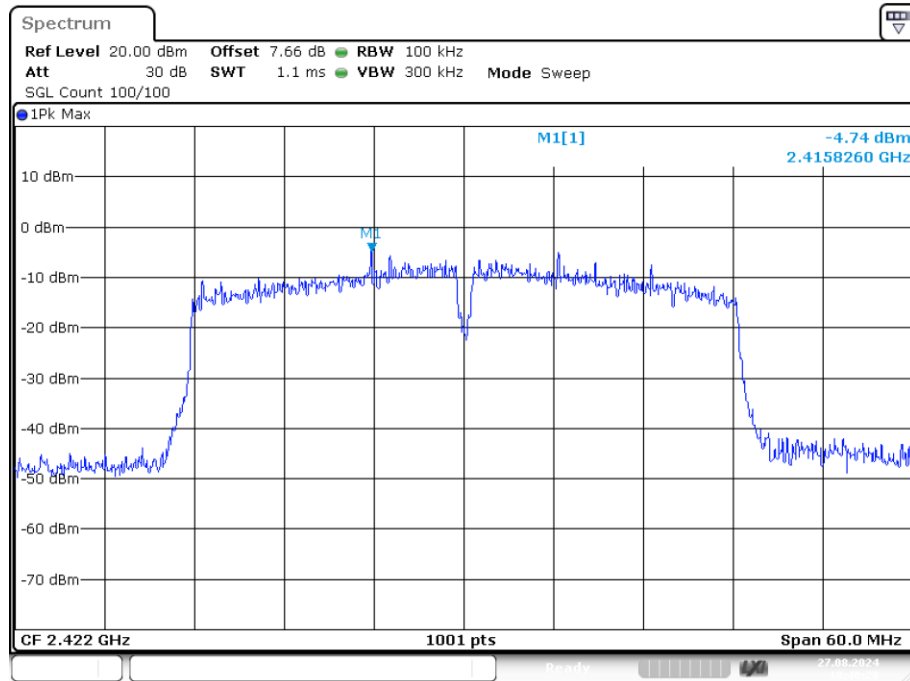


Date: 27.AUG.2024 18:40:27

Tx. Spurious NVNT n40 2422MHz Ant1 Emission

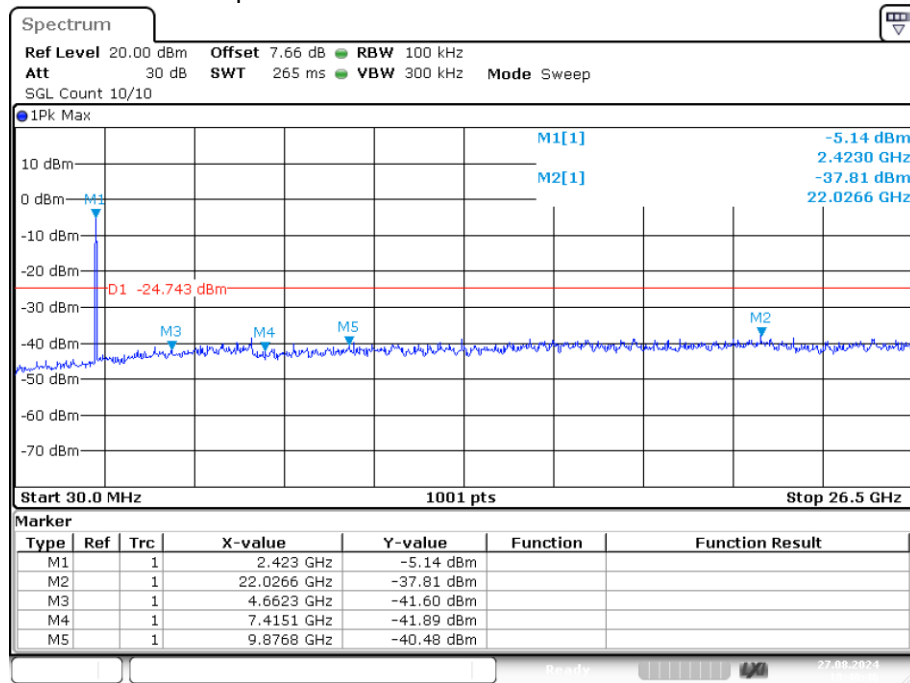


Date: 27.AUG.2024 18:40:45

Tx. Spurious NVNT n40 2437MHz Ant1 Ref

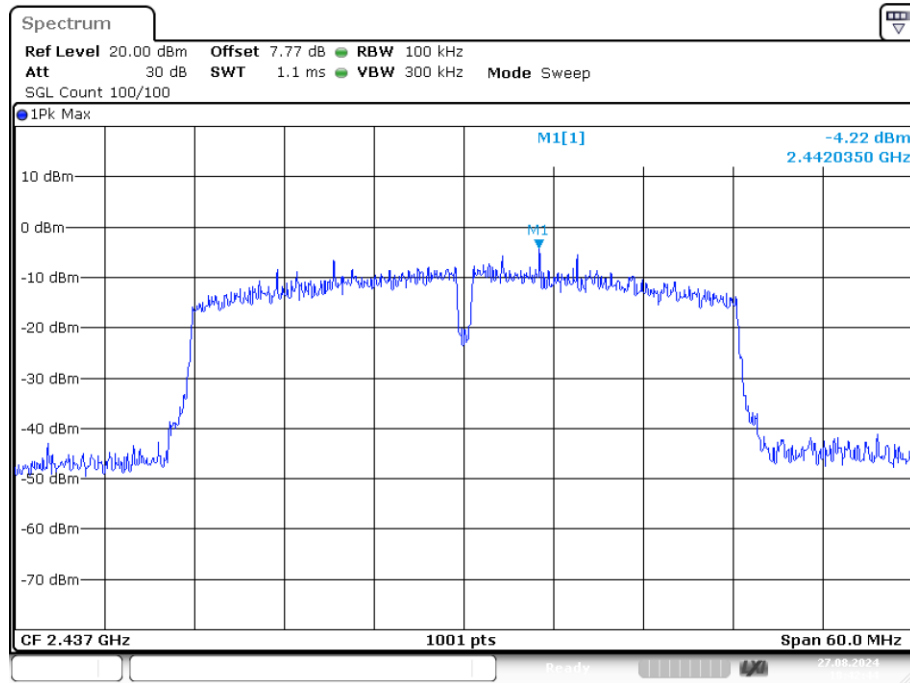


Date: 27.AUG.2024 18:42:44

Tx. Spurious NVNT n40 2437MHz Ant1 Emission

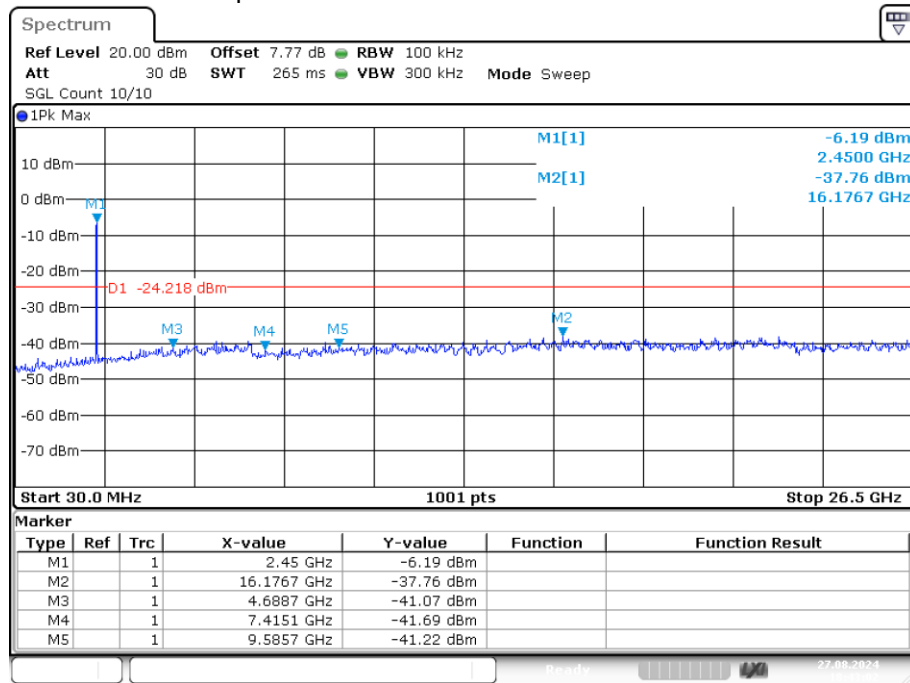


Date: 27.AUG.2024 18:43:02

Tx. Spurious NVNT n40 2452MHz Ant1 Ref

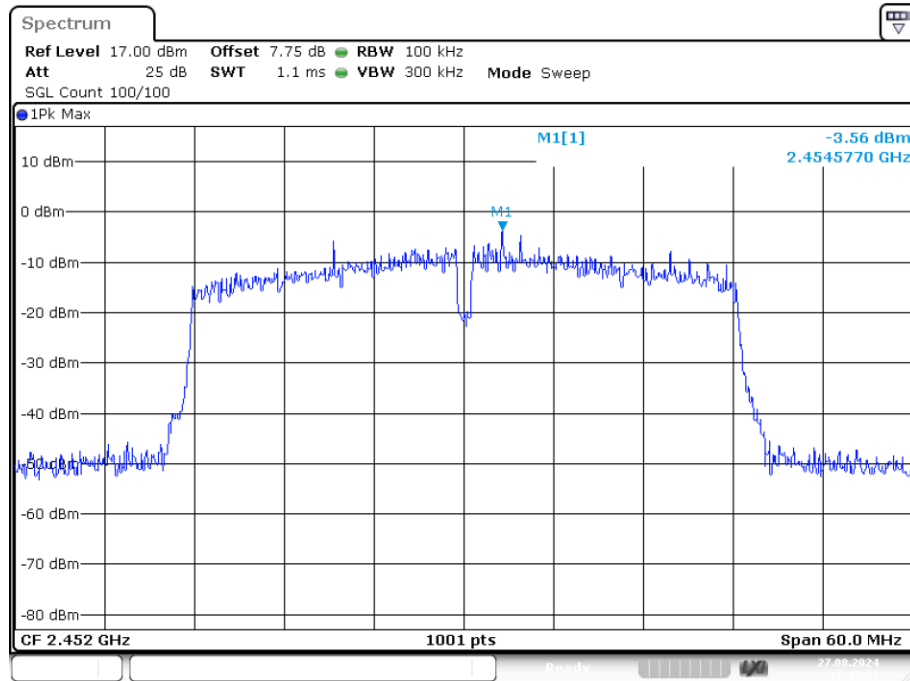

Date: 27.AUG.2024 18:45:33

Tx. Spurious NVNT n40 2452MHz Ant1 Emission

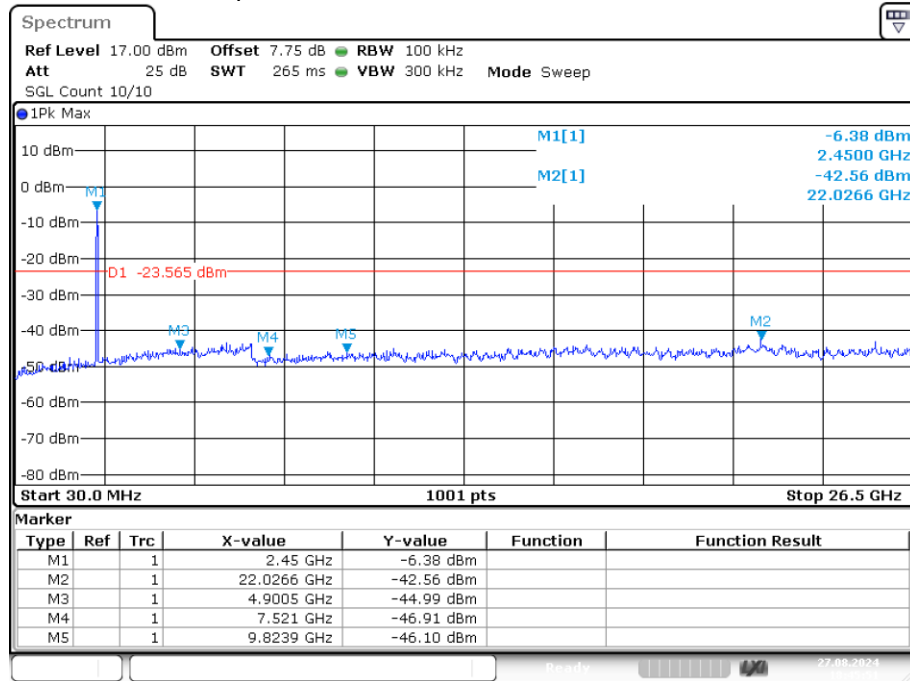

Date: 27.AUG.2024 18:45:51

4. POWER LINE CONDUCTED EMISSION

4.1. Test Limits

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.


4.3. Test Setup

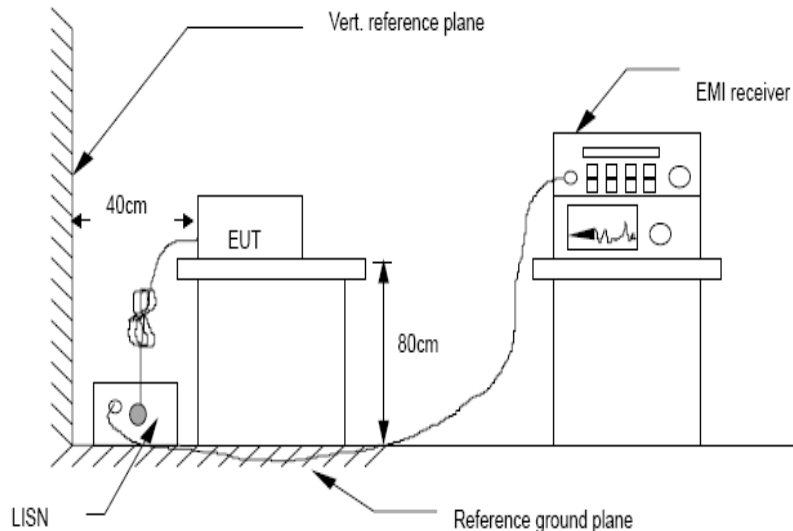

4.4. Test Results

Test result for 802.11b (2412MHz)

Line:

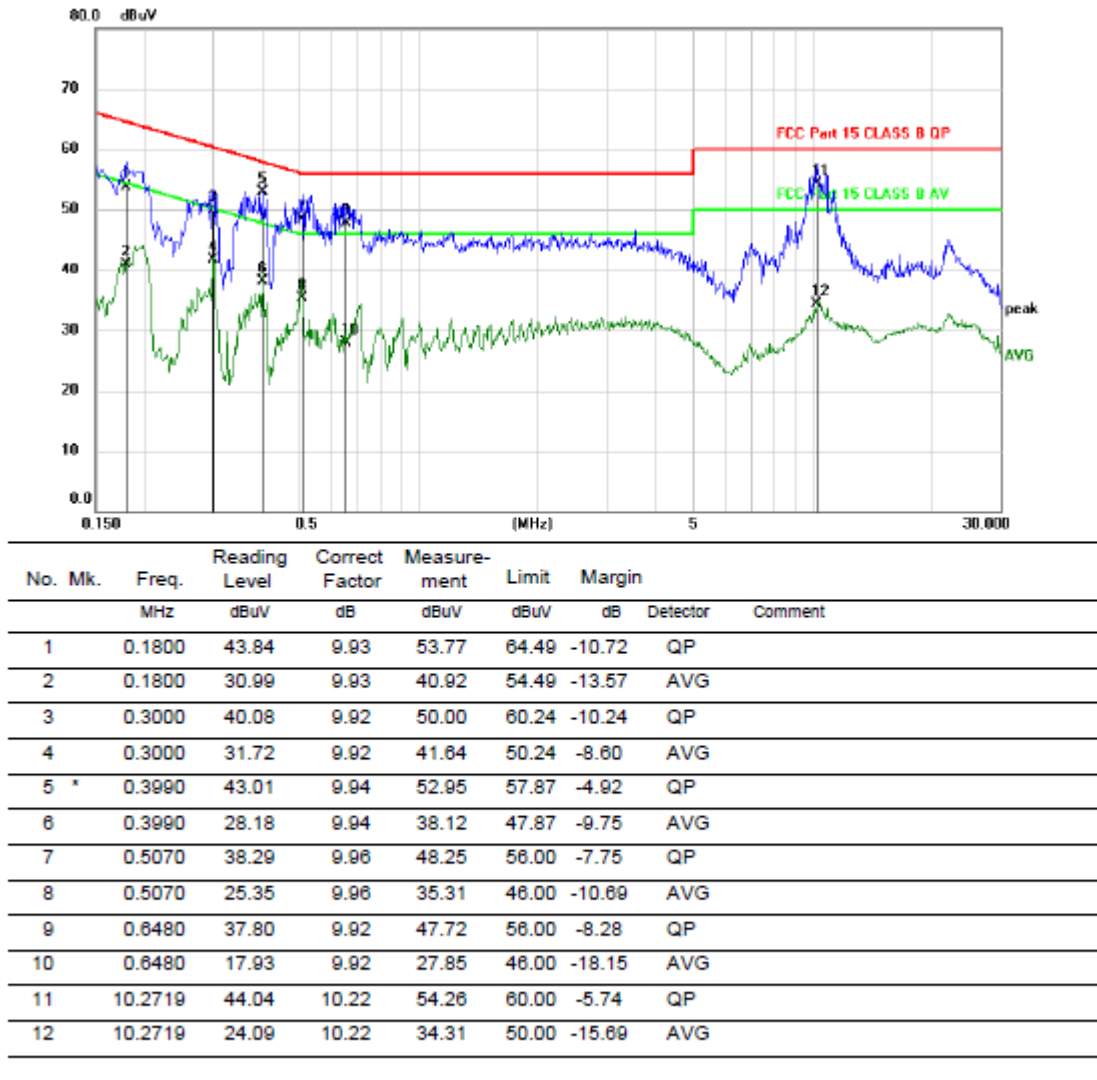


*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Neutral:

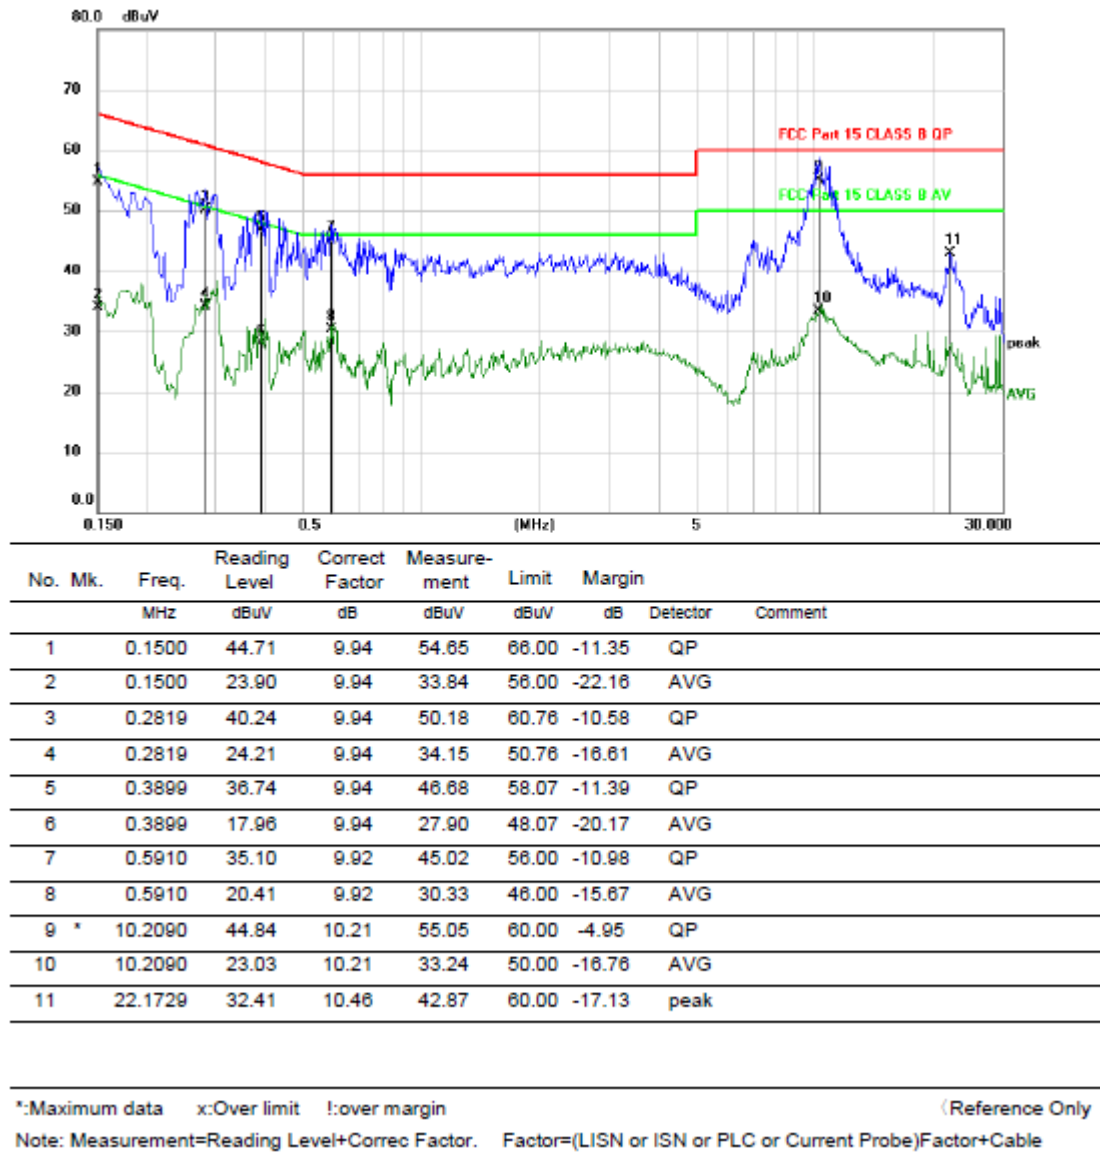

Notes: This report only shall the worst case mode for b 2412MHz.

5. CONDUCTED MAXIMUM OUTPUT POWER

5.1. Test limits

Please refer FCC PART 15: 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1W(30dBm).

5.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02


5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Connected the EUT's antenna port to peak power meter by 20dB attenuator.

5.2.3 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.3. Test Setup

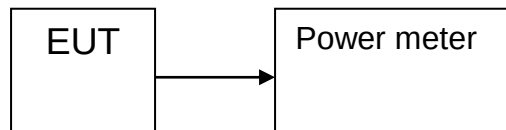

5.4. Test Results

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	ax20	2412	Ant1	13.395	30	Pass
NVNT	ax20	2437	Ant1	13.016	30	Pass
NVNT	ax20	2462	Ant1	12.645	30	Pass
NVNT	ax40	2422	Ant1	12.59	30	Pass
NVNT	ax40	2437	Ant1	12.407	30	Pass
NVNT	ax40	2452	Ant1	12.642	30	Pass
NVNT	b	2412	Ant1	19.027	30	Pass
NVNT	b	2437	Ant1	19.488	30	Pass
NVNT	b	2462	Ant1	19.31	30	Pass
NVNT	g	2412	Ant1	18.246	30	Pass
NVNT	g	2437	Ant1	18.498	30	Pass
NVNT	g	2462	Ant1	18.193	30	Pass
NVNT	n20	2412	Ant1	16.883	30	Pass
NVNT	n20	2437	Ant1	16.8	30	Pass
NVNT	n20	2462	Ant1	17.615	30	Pass
NVNT	n40	2422	Ant1	17.36	30	Pass
NVNT	n40	2437	Ant1	17.103	30	Pass
NVNT	n40	2452	Ant1	17.569	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	ax20	2412	Ant2	13.61	30	Pass
NVNT	ax20	2437	Ant2	13.802	30	Pass
NVNT	ax20	2462	Ant2	13.489	30	Pass
NVNT	ax40	2422	Ant2	13.525	30	Pass
NVNT	ax40	2437	Ant2	13.591	30	Pass
NVNT	ax40	2452	Ant2	13.885	30	Pass
NVNT	b	2412	Ant2	18.922	30	Pass
NVNT	b	2437	Ant2	19.15	30	Pass
NVNT	b	2462	Ant2	19.12	30	Pass
NVNT	g	2412	Ant2	18.019	30	Pass
NVNT	g	2437	Ant2	18.522	30	Pass
NVNT	g	2462	Ant2	18.386	30	Pass
NVNT	n20	2412	Ant2	17.142	30	Pass
NVNT	n20	2437	Ant2	16.793	30	Pass
NVNT	n20	2462	Ant2	16.445	30	Pass
NVNT	n40	2422	Ant2	17.089	30	Pass
NVNT	n40	2437	Ant2	16.53	30	Pass
NVNT	n40	2452	Ant2	17.289	30	Pass

6. PEAK POWER SPECTRAL DENSITY

6.1. Test limits

6.1.1 Please refer FCC PART 15: 15.247.

6.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Set the spectrum analyzer as RBW = 3kHz(Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.), VBW = 10kHz(Set the $\text{VBW} \geq 3 \times \text{RBW}$), span $\geq 1.5 \times \text{DTS bandwidth}$., detail see the test plot.

6.2.4 Record the max reading.

6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.

6.3. Test Setup

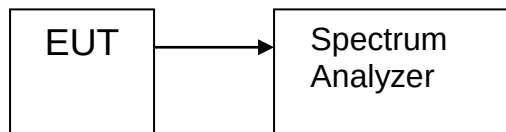


6.4. Test Results

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	ax20	2412	Ant1	-12.15	8	Pass
NVNT	ax20	2437	Ant1	-12.584	8	Pass
NVNT	ax20	2462	Ant1	-12.008	8	Pass
NVNT	ax40	2422	Ant1	-15.761	8	Pass
NVNT	ax40	2437	Ant1	-15.671	8	Pass
NVNT	ax40	2452	Ant1	-15.222	8	Pass
NVNT	b	2412	Ant1	0.576	8	Pass
NVNT	b	2437	Ant1	0.766	8	Pass
NVNT	b	2462	Ant1	0.629	8	Pass
NVNT	g	2412	Ant1	-0.417	8	Pass
NVNT	g	2437	Ant1	-5.143	8	Pass
NVNT	g	2462	Ant1	-4.815	8	Pass
NVNT	n20	2412	Ant1	-7.056	8	Pass
NVNT	n20	2437	Ant1	-6.243	8	Pass
NVNT	n20	2462	Ant1	-6.109	8	Pass
NVNT	n40	2422	Ant1	-13.575	8	Pass
NVNT	n40	2437	Ant1	-13.837	8	Pass
NVNT	n40	2452	Ant1	-13.419	8	Pass


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	ax20	2412	Ant2	-9.754	8	Pass
NVNT	ax20	2437	Ant2	-10.052	8	Pass
NVNT	ax20	2462	Ant2	-10.158	8	Pass
NVNT	ax40	2422	Ant2	-15.405	8	Pass
NVNT	ax40	2437	Ant2	-15.749	8	Pass
NVNT	ax40	2452	Ant2	-14.835	8	Pass
NVNT	b	2412	Ant2	0.444	8	Pass
NVNT	b	2437	Ant2	0.799	8	Pass
NVNT	b	2462	Ant2	0.674	8	Pass
NVNT	g	2412	Ant2	0.066	8	Pass
NVNT	g	2437	Ant2	-4.569	8	Pass
NVNT	g	2462	Ant2	-4.775	8	Pass
NVNT	n20	2412	Ant2	-6.494	8	Pass
NVNT	n20	2437	Ant2	-6.399	8	Pass
NVNT	n20	2462	Ant2	-6.78	8	Pass
NVNT	n40	2422	Ant2	-13.616	8	Pass
NVNT	n40	2437	Ant2	-14.334	8	Pass
NVNT	n40	2452	Ant2	-13.409	8	Pass

PSD NVNT ax20 2412MHz Ant1

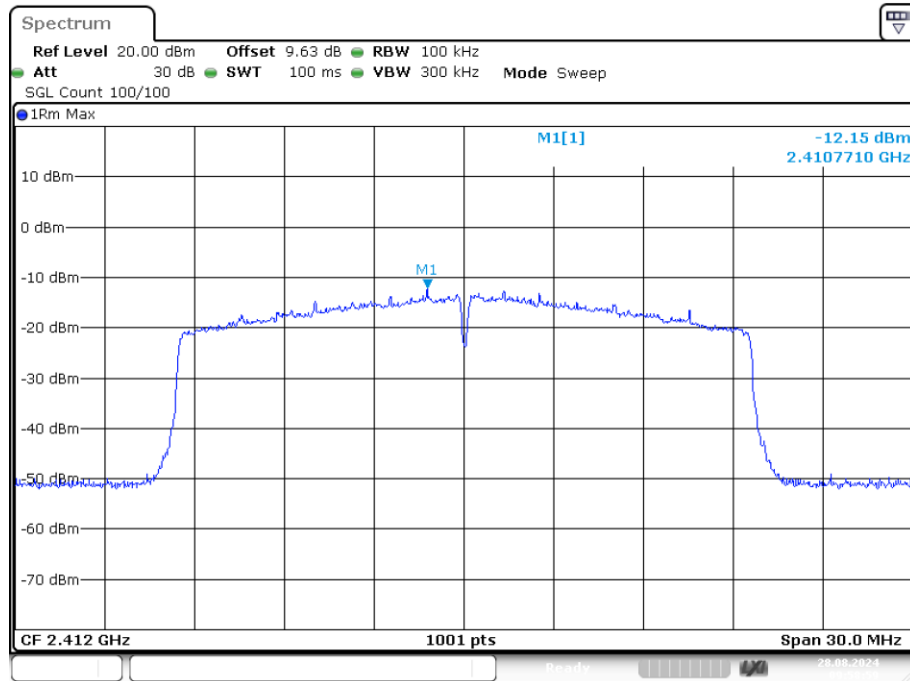


Date: 28.AUG.2024 09:58:58

PSD NVNT ax20 2437MHz Ant1

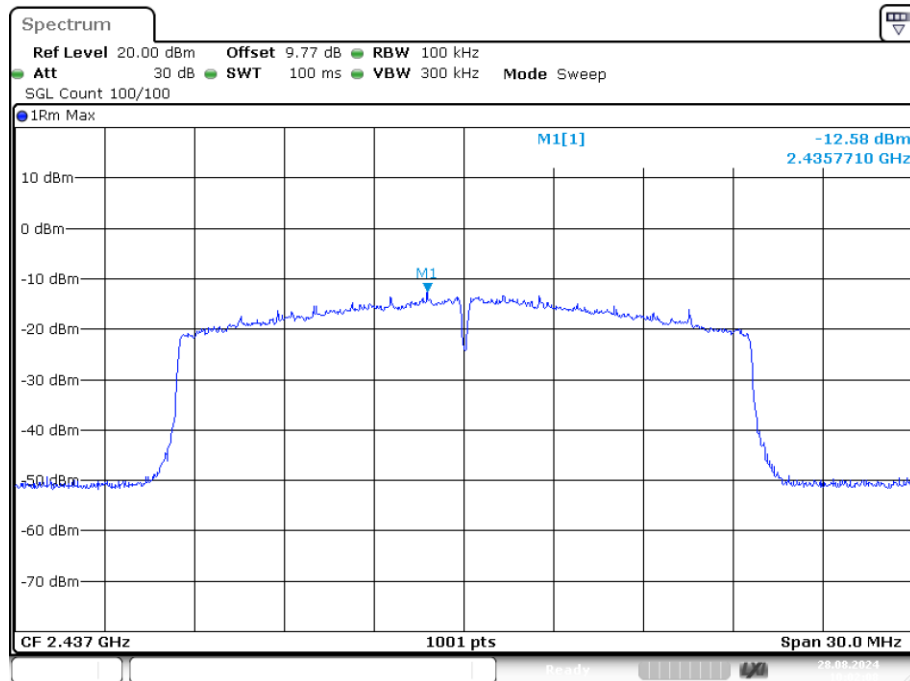


Date: 28.AUG.2024 10:02:08

PSD NVNT ax20 2462MHz Ant1

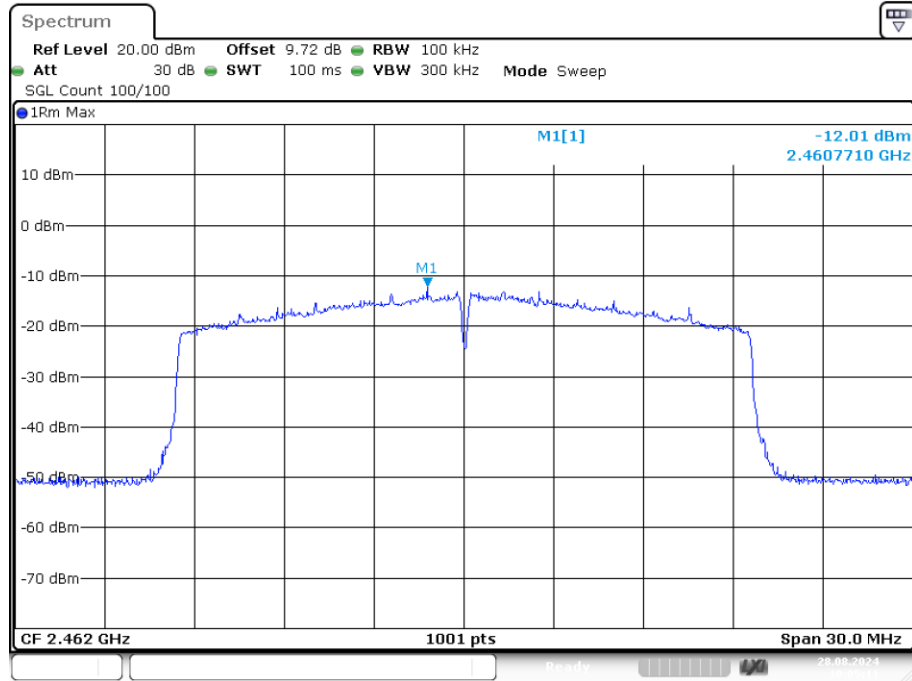


Date: 28.AUG.2024 10:05:11

PSD NVNT ax40 2422MHz Ant1

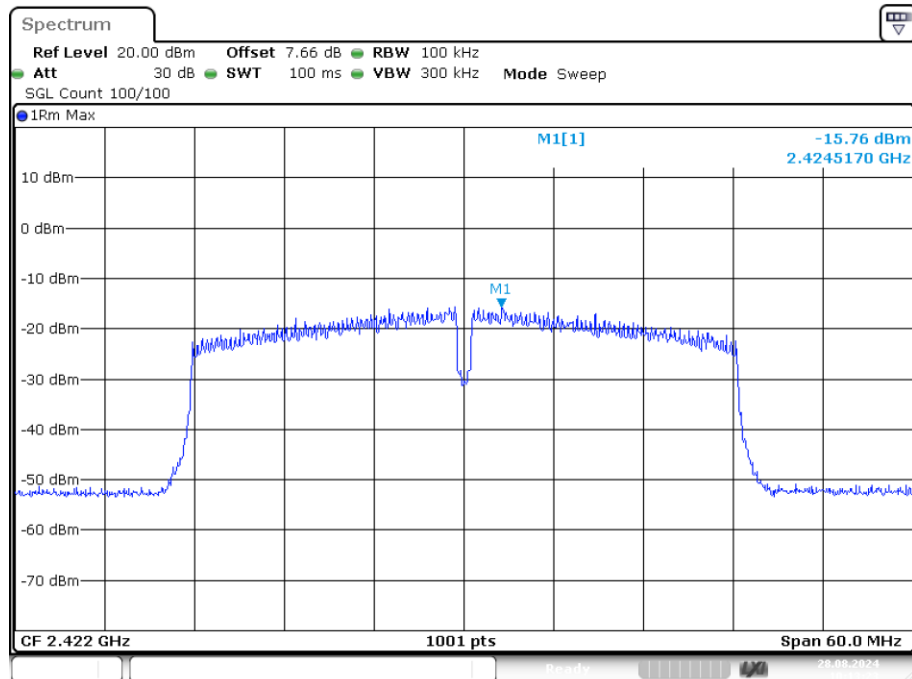


Date: 28.AUG.2024 10:13:23

PSD NVNT ax40 2437MHz Ant1

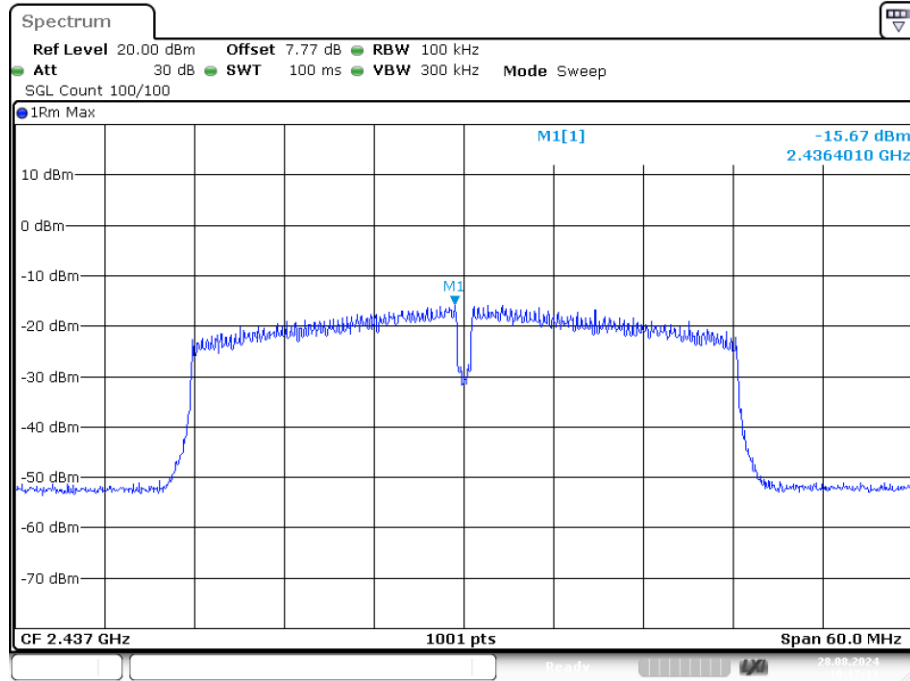


Date: 28.AUG.2024 10:17:11

PSD NVNT ax40 2452MHz Ant1

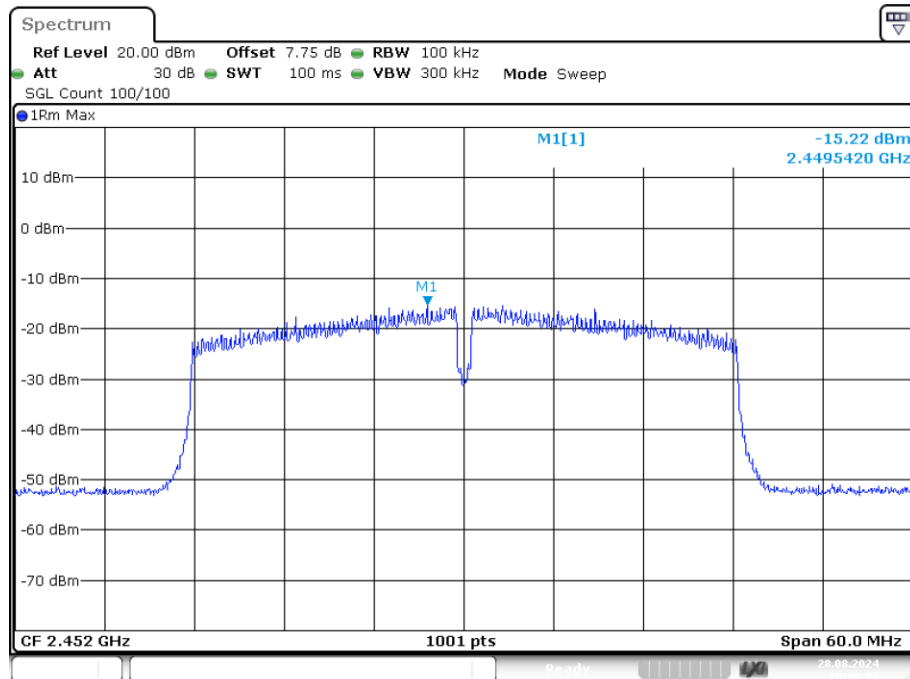


Date: 28.AUG.2024 10:38:35

PSD NVNT b 2412MHz Ant1

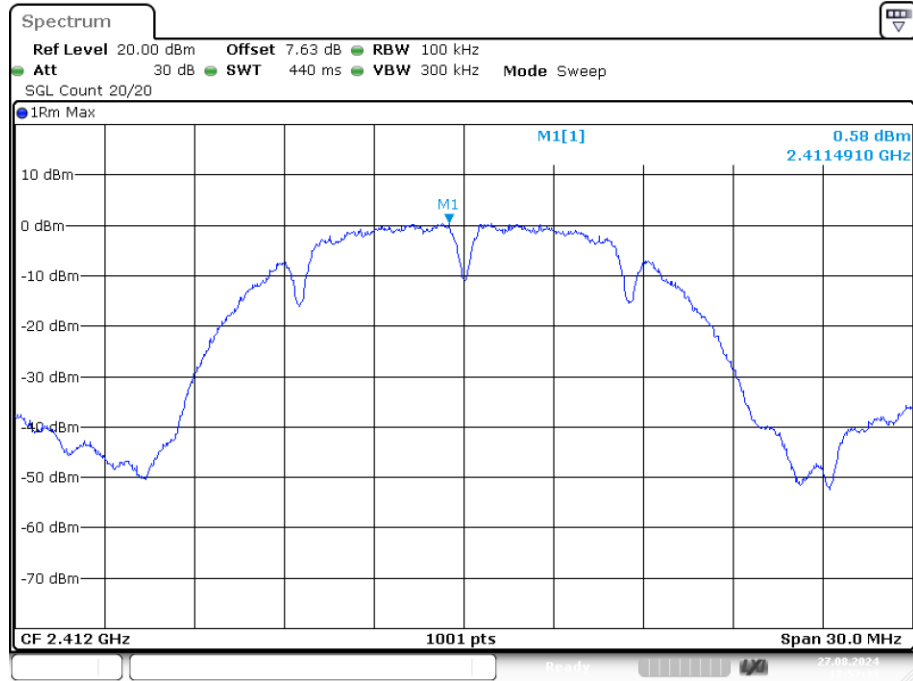


Date: 27.AUG.2024 17:57:33

PSD NVNT b 2437MHz Ant1

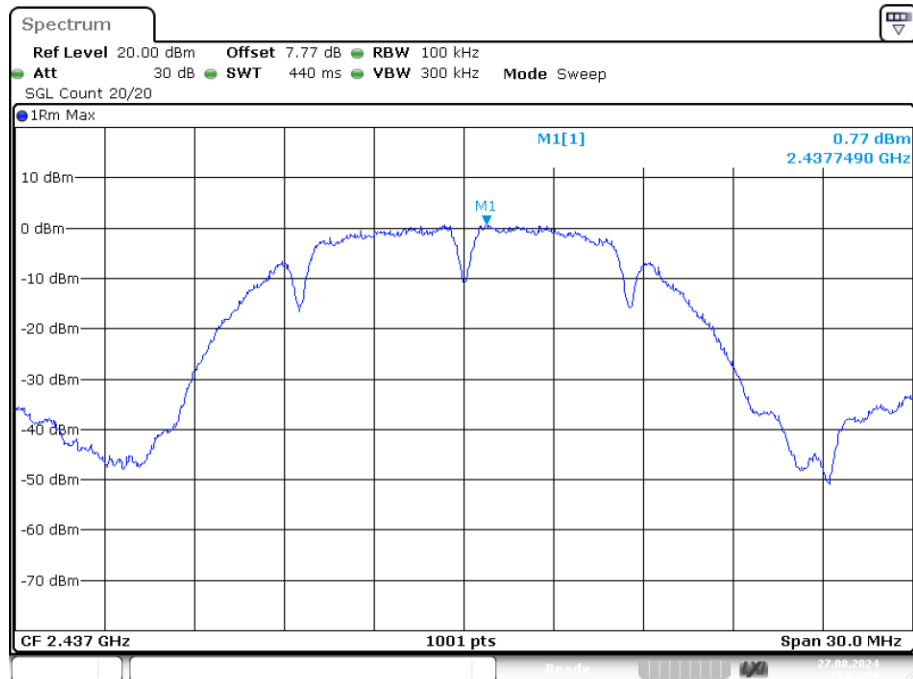


Date: 27.AUG.2024 18:01:22

PSD NVNT b 2462MHz Ant1

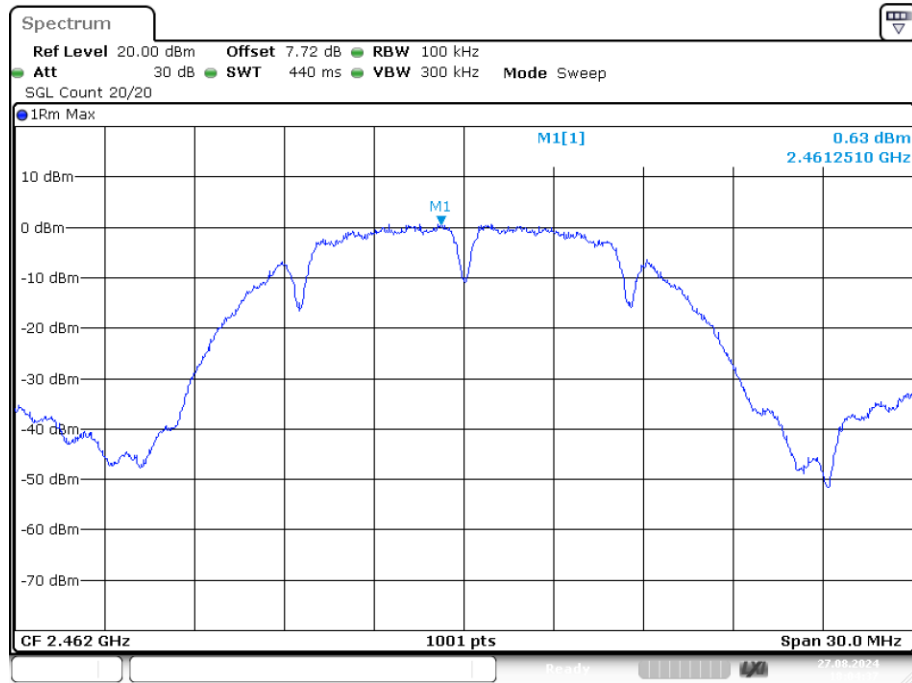


Date: 27.AUG.2024 18:04:37

PSD NVNT g 2412MHz Ant1

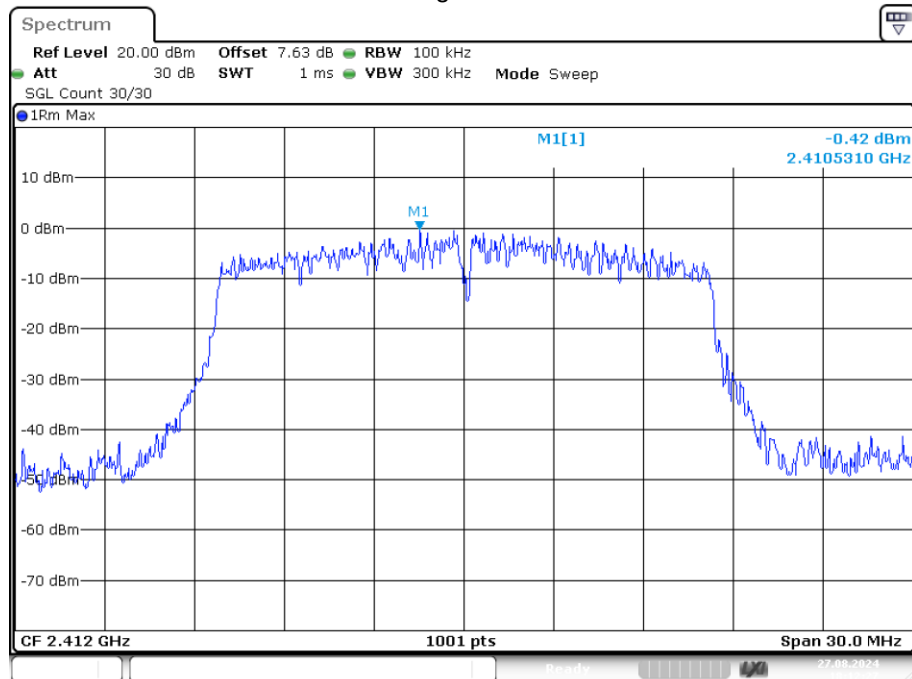


Date: 27.AUG.2024 18:12:28

PSD NVNT g 2437MHz Ant1

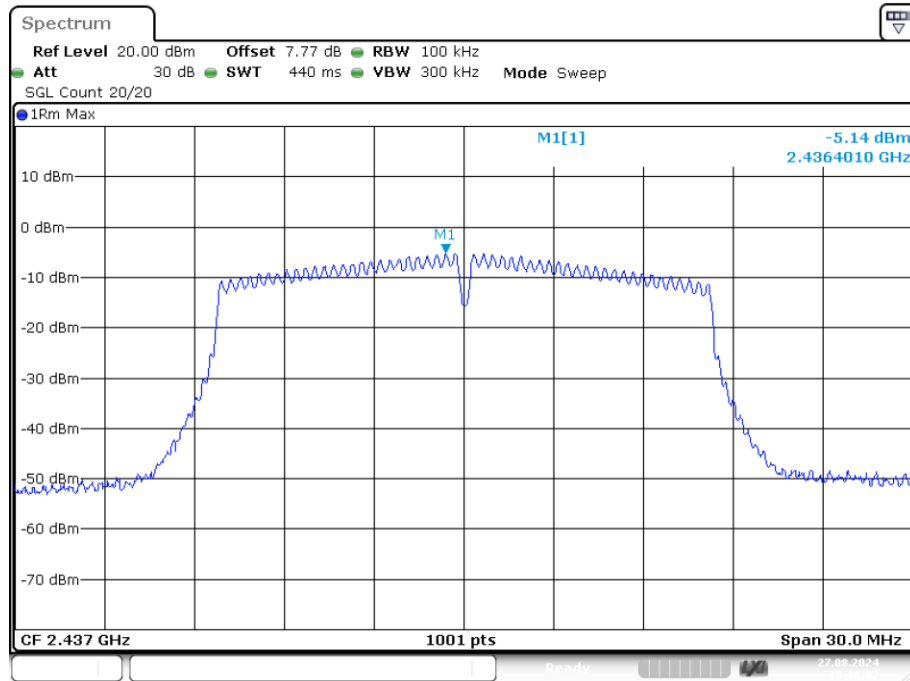


Date: 27.AUG.2024 18:18:02

PSD NVNT g 2462MHz Ant1

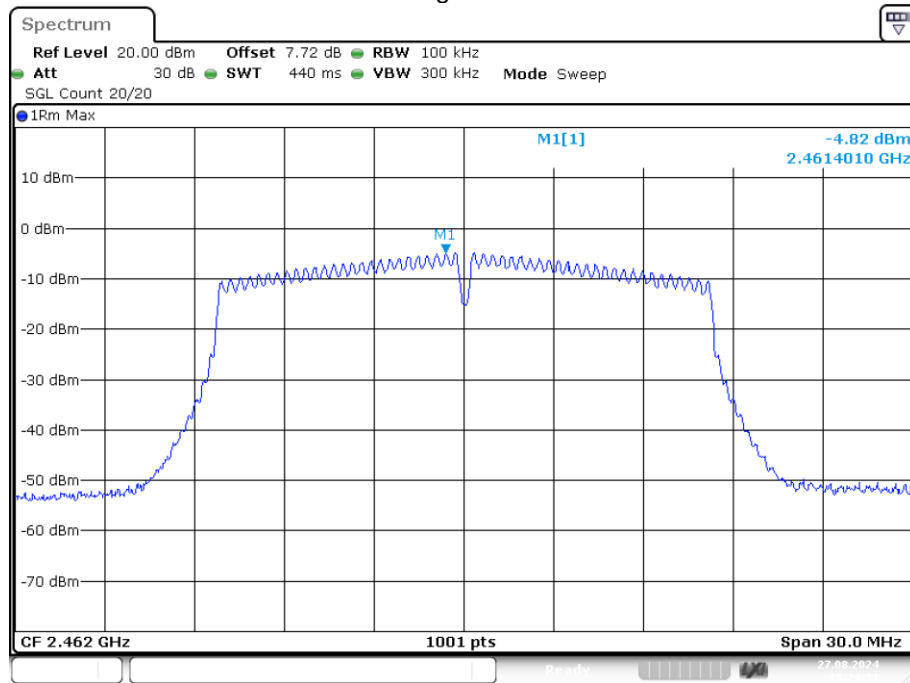


Date: 27.AUG.2024 18:24:31

PSD NVNT n20 2412MHz Ant1

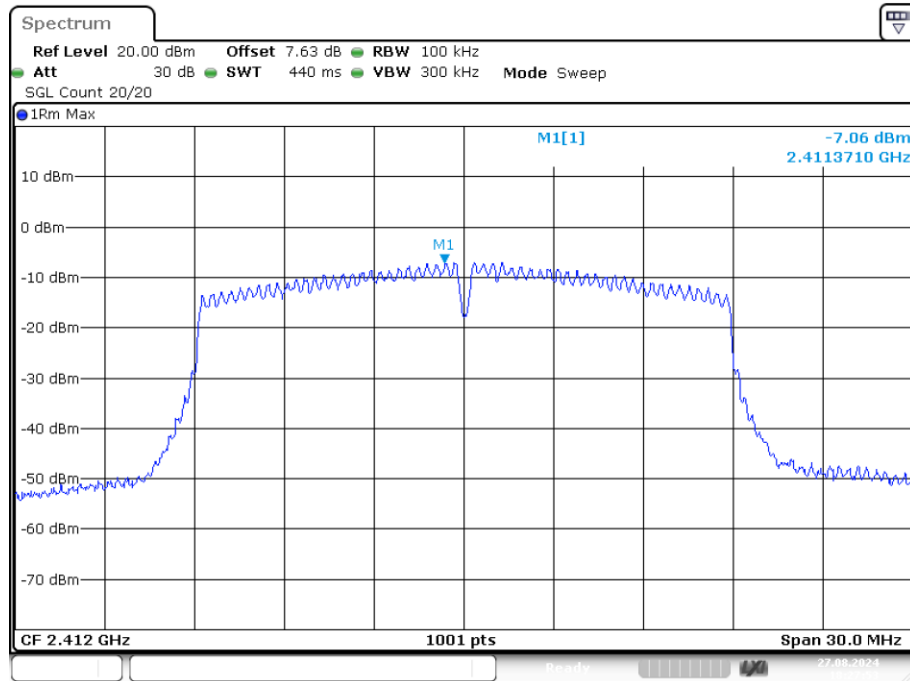


Date: 27.AUG.2024 18:27:53

PSD NVNT n20 2437MHz Ant1

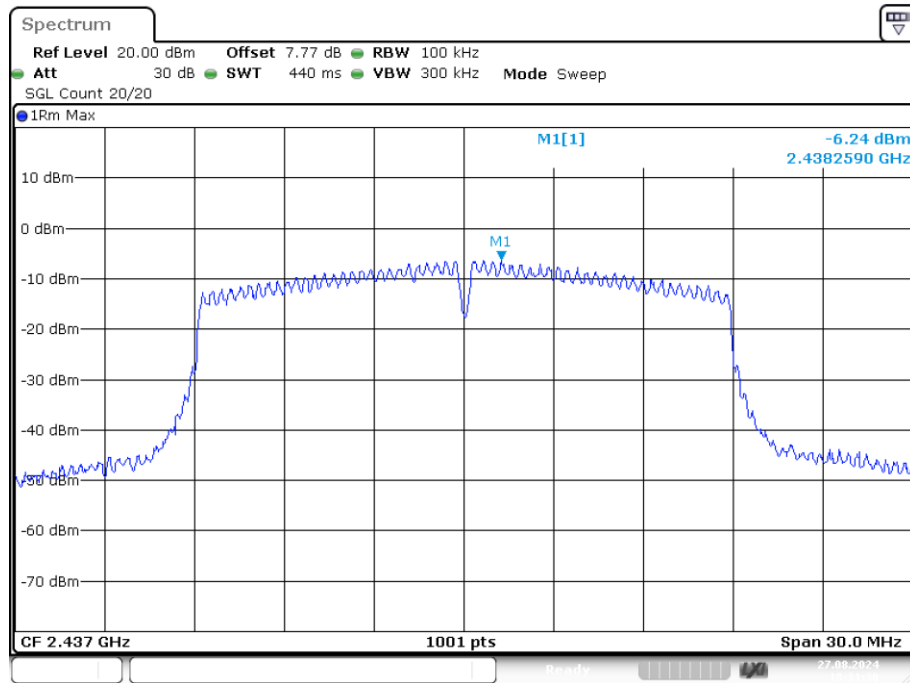


Date: 27.AUG.2024 18:31:30

PSD NVNT n20 2462MHz Ant1

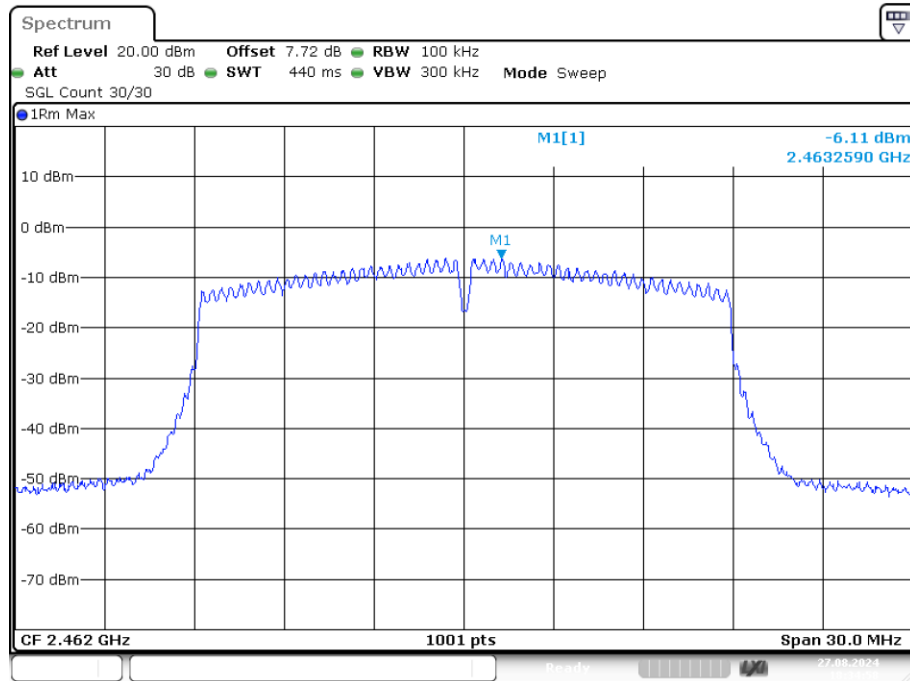


Date: 27.AUG.2024 18:34:59

PSD NVNT n40 2422MHz Ant1

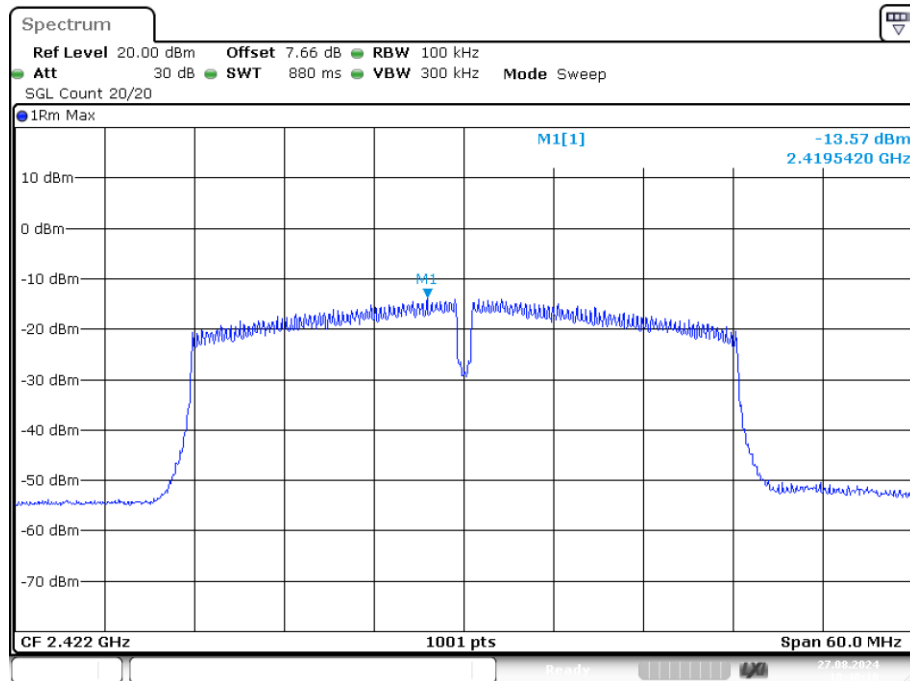


Date: 27.AUG.2024 18:40:10

PSD NVNT n40 2437MHz Ant1

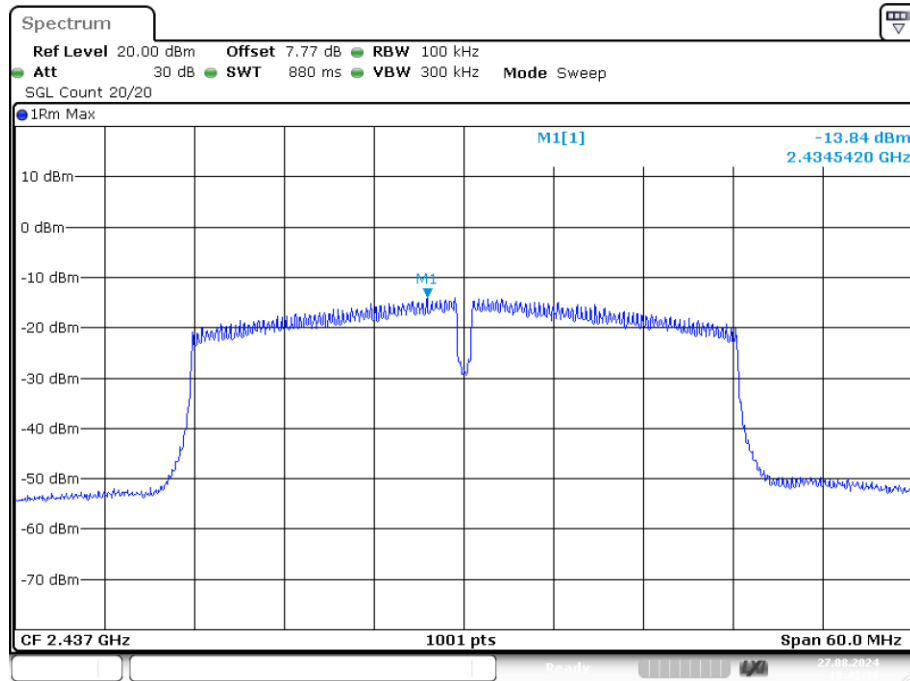


Date: 27.AUG.2024 18:42:38

PSD NVNT n40 2452MHz Ant1

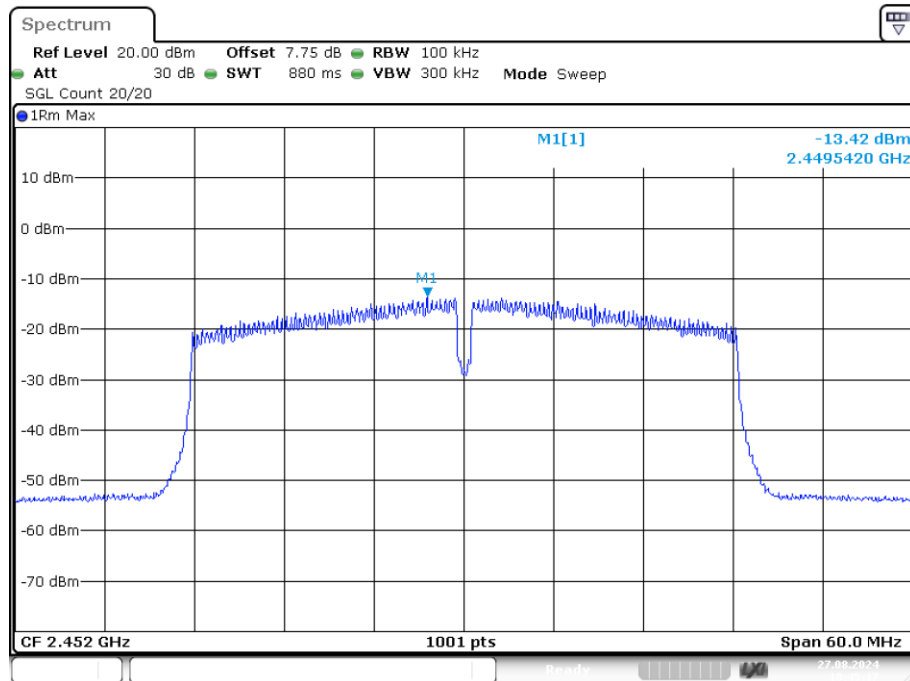


Date: 27.AUG.2024 18:45:16

PSD NVNT ax20 2412MHz Ant2

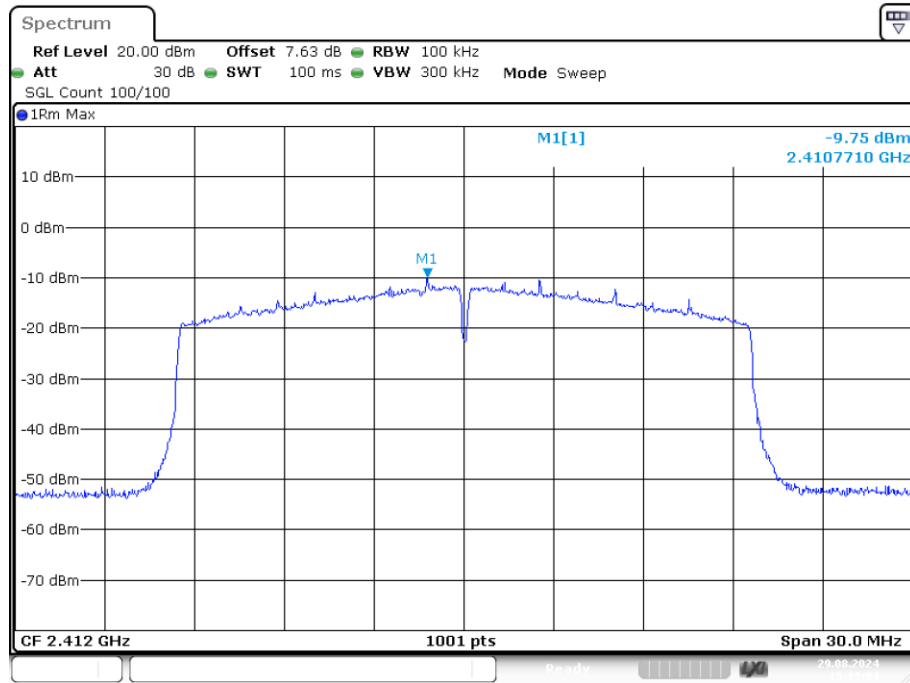


Date: 29.AUG.2024 15:13:04

PSD NVNT ax20 2437MHz Ant2

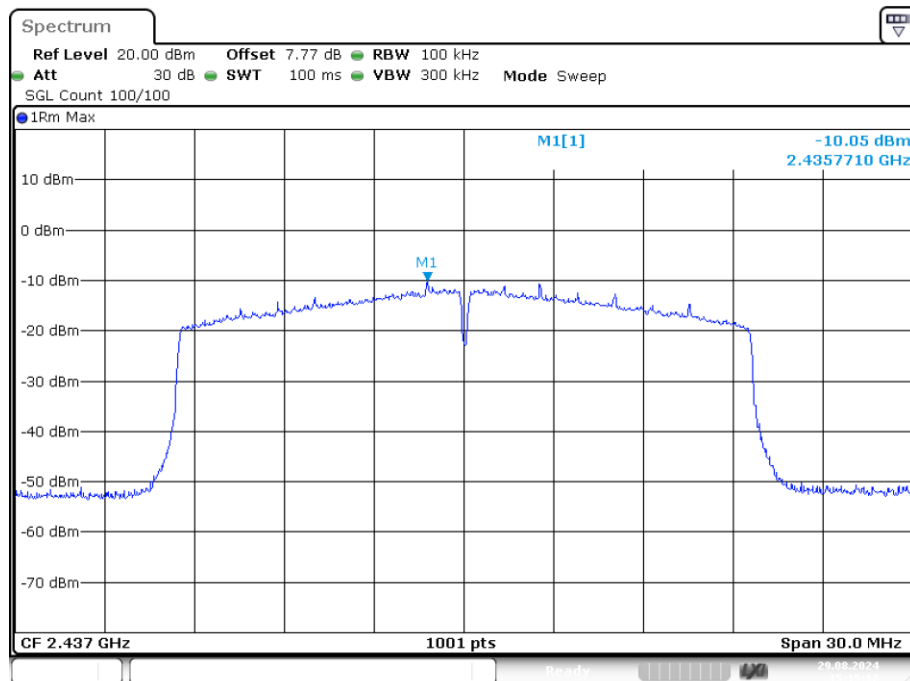


Date: 29.AUG.2024 15:15:12

PSD NVNT ax20 2462MHz Ant2

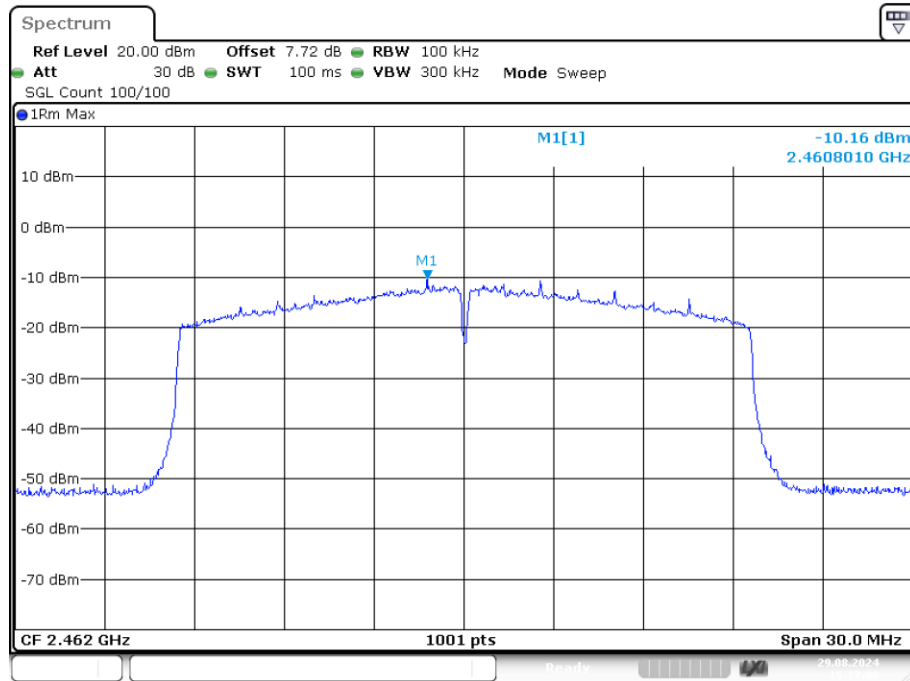


Date: 29.AUG.2024 15:17:00

PSD NVNT ax40 2422MHz Ant2

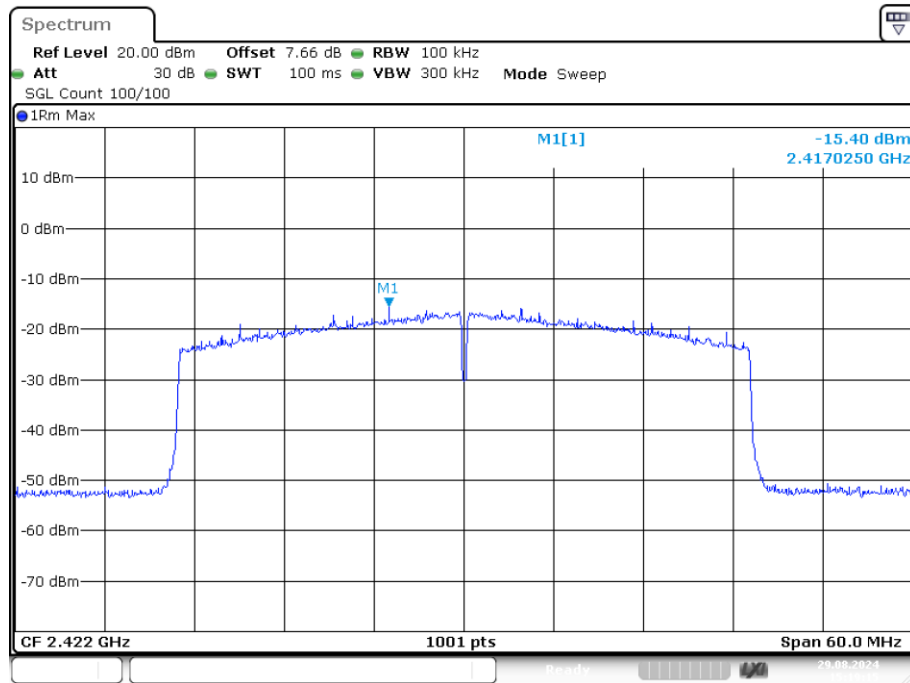


Date: 29.AUG.2024 15:19:15

PSD NVNT ax40 2437MHz Ant2

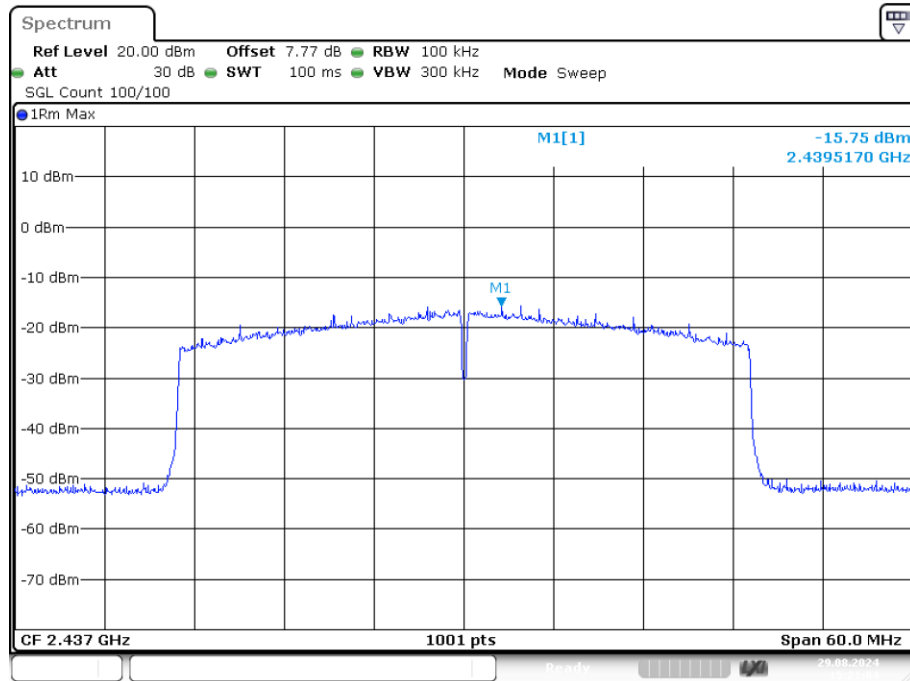


Date: 29.AUG.2024 15:21:04

PSD NVNT ax40 2452MHz Ant2

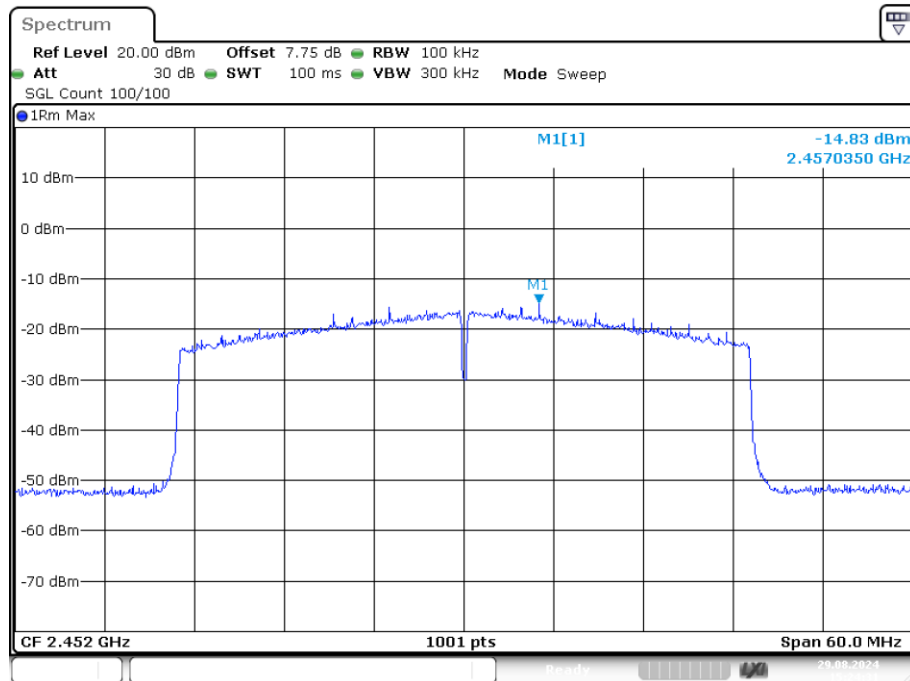


Date: 29.AUG.2024 15:24:32

PSD NVNT b 2412MHz Ant2

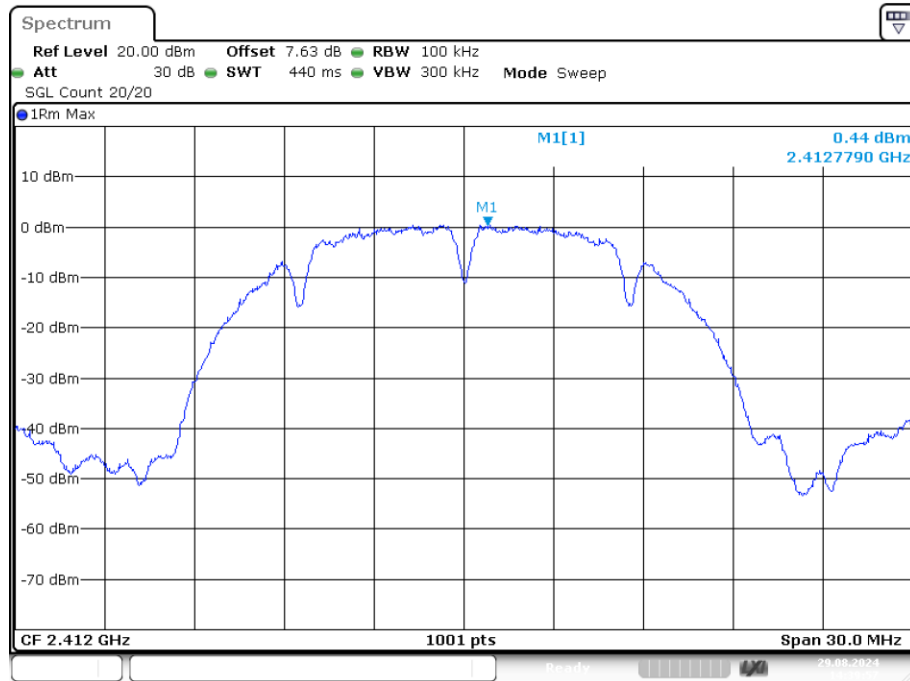


Date: 29.AUG.2024 14:39:57

PSD NVNT b 2437MHz Ant2

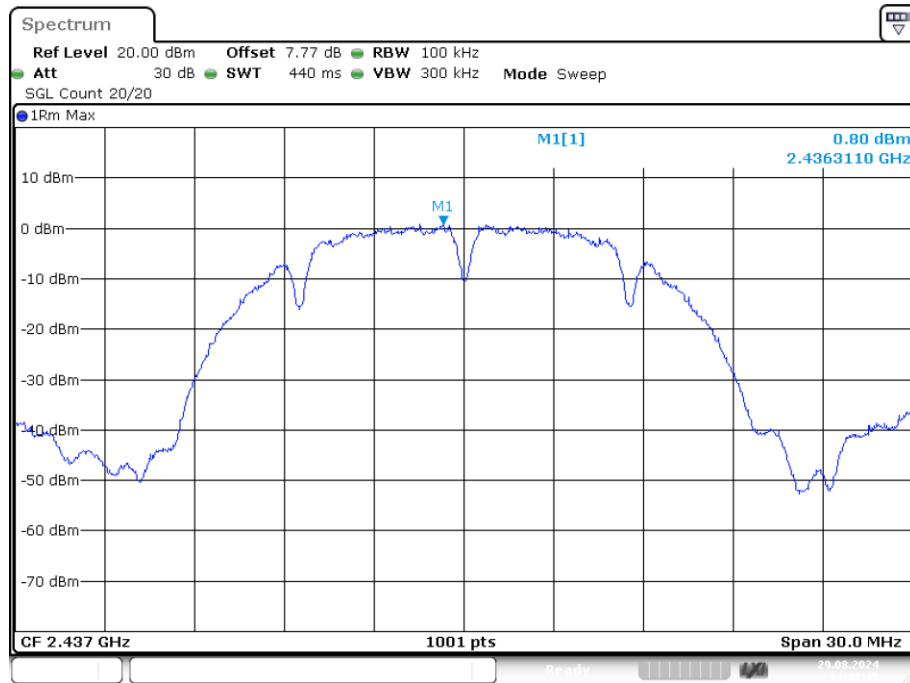


Date: 29.AUG.2024 14:42:45

PSD NVNT b 2462MHz Ant2

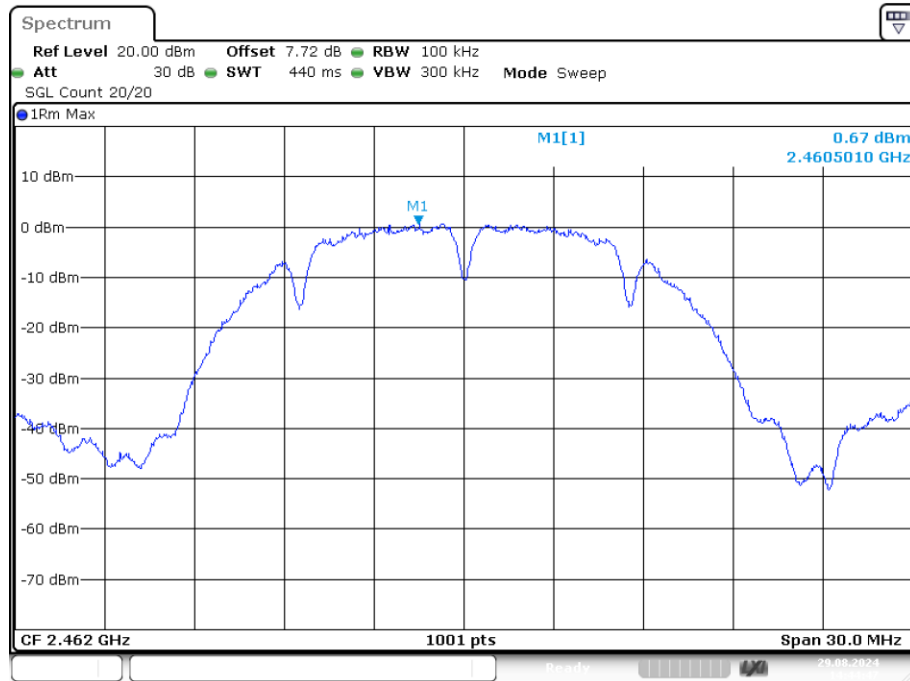


Date: 29.AUG.2024 14:44:47

PSD NVNT g 2412MHz Ant2

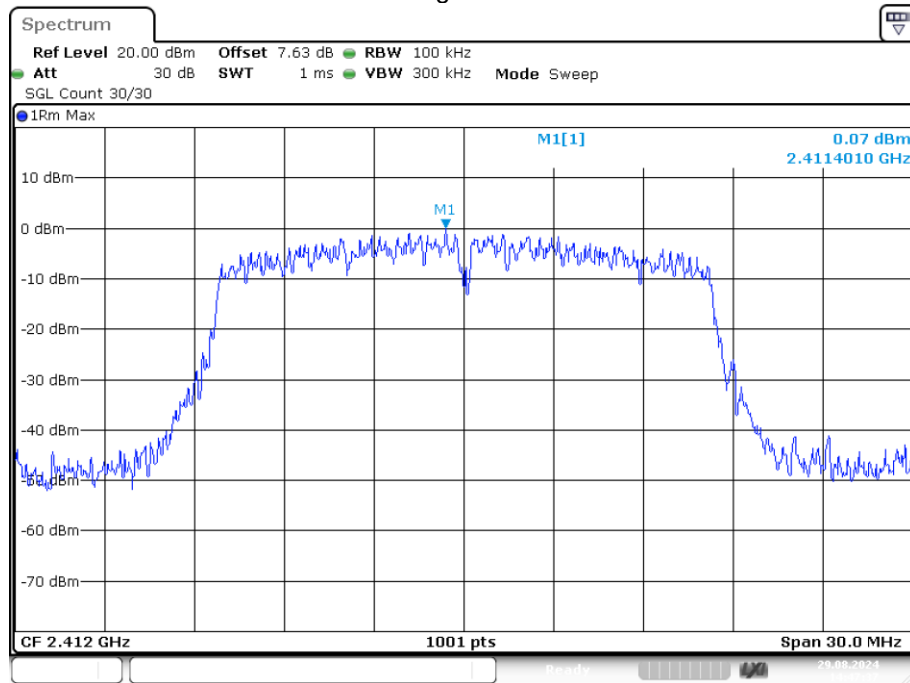


Date: 29.AUG.2024 14:47:37

PSD NVNT g 2437MHz Ant2

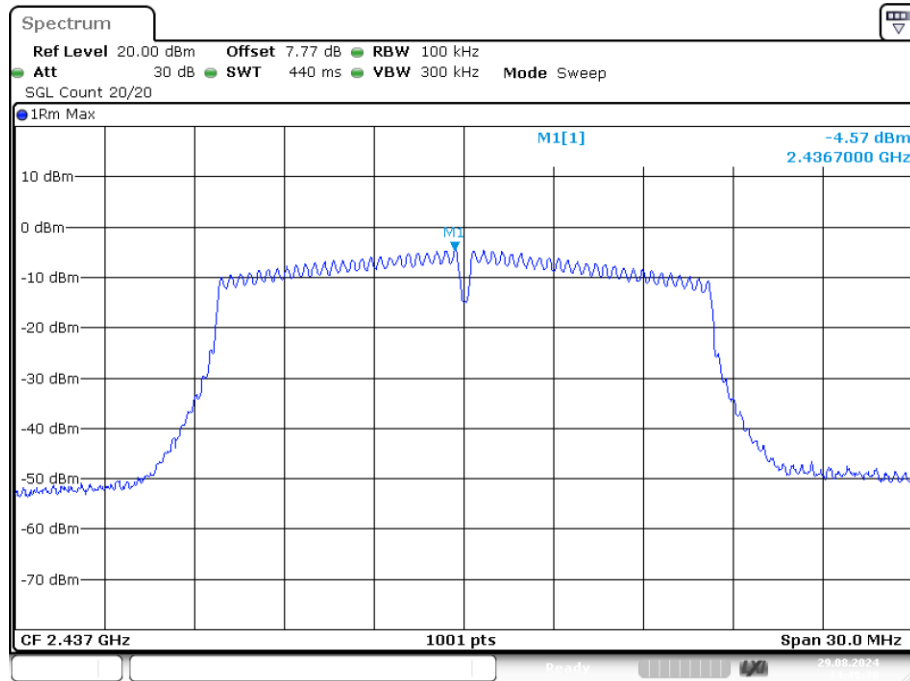


Date: 29.AUG.2024 14:49:30

PSD NVNT g 2462MHz Ant2

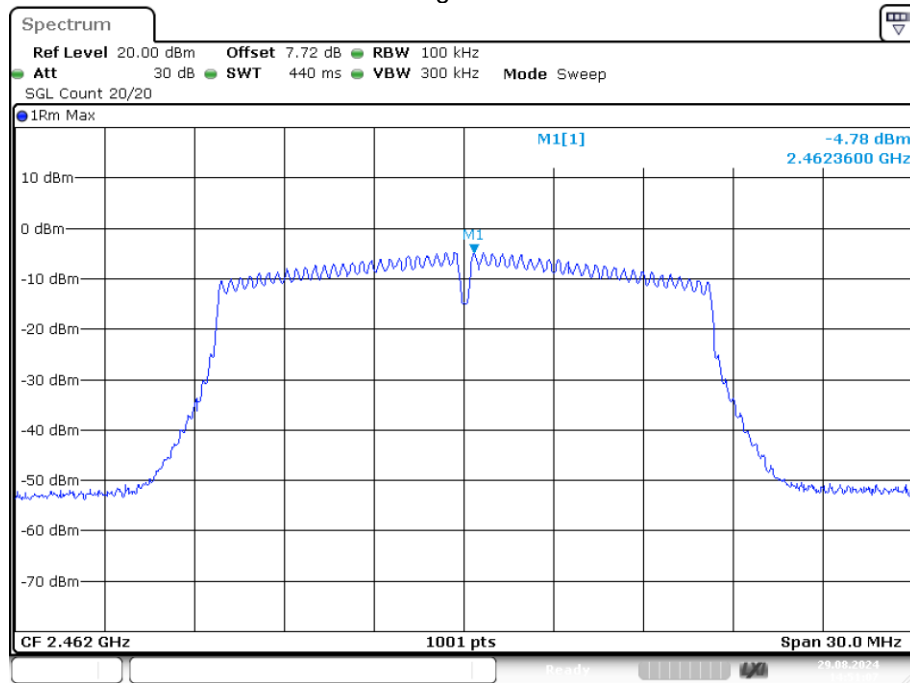


Date: 29.AUG.2024 14:51:08

PSD NVNT n20 2412MHz Ant2

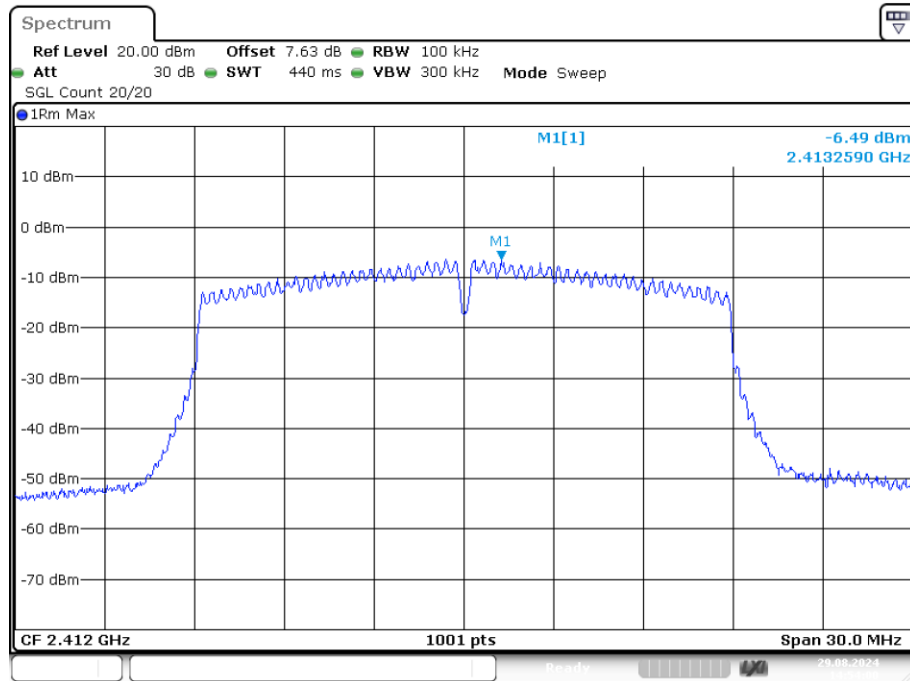


Date: 29.AUG.2024 14:54:00

PSD NVNT n20 2437MHz Ant2

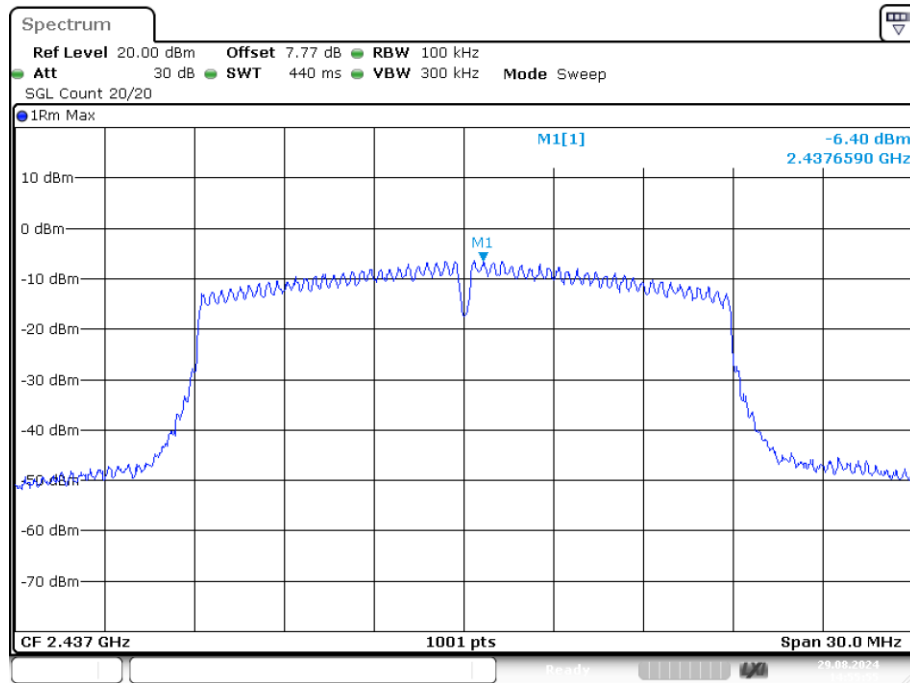


Date: 29.AUG.2024 14:55:55

PSD NVNT n20 2462MHz Ant2

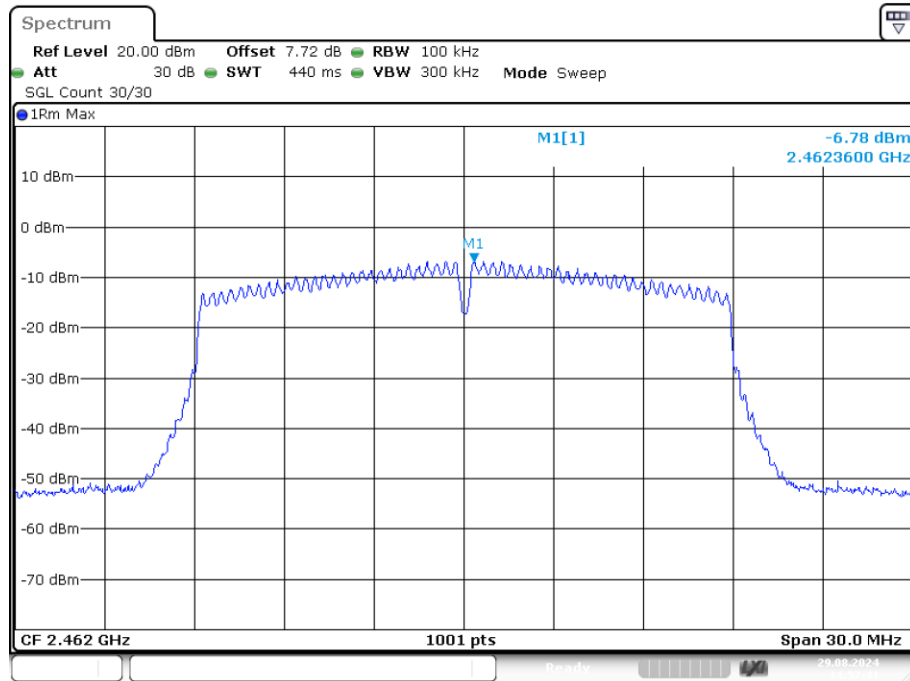

Date: 29.AUG.2024 14:57:40

PSD NVNT n40 2422MHz Ant2

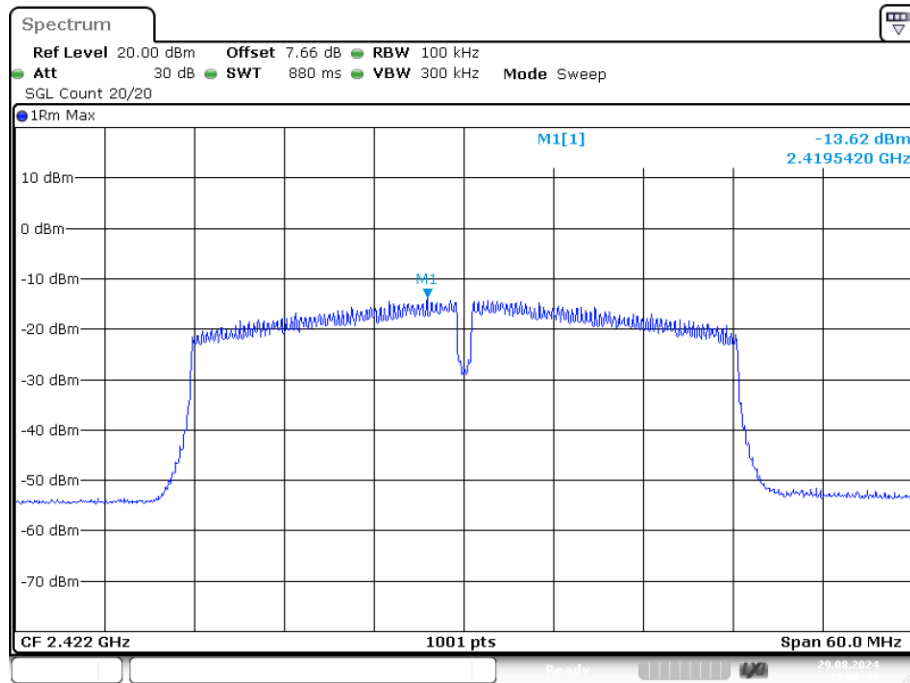

Date: 29.AUG.2024 15:06:34

PSD NVNT n40 2437MHz Ant2