

TEST REPORT

Product : WisePad 2
Trade mark : BBPOS
Model/Type reference : WisePad 2
Serial Number : N/A
Report Number : EED32I00208203
FCC ID : 2AB7X-WISEPAD2
Date of Issue : Aug. 25, 2016
Test Standards : 47 CFR Part 15 Subpart C (2015)
Test result : PASS

Prepared for:

BBPOS International Limited
Suite 1602, 16/F, Tower 2, Nina Tower, No. 8 Yeung Uk Road,
Tsuen Wan, N.T. HK, Hong Kong

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Tom-chen

Compiled by:

Tom Yang

Reviewed by:

Tom chen (Test Project)

Kevin yang (Project Engineer)

Sheek, Luo

Approved by:

Sheek Luo (Lab supervisor)

Sheek Luo (Reviewer)

Check No.: 2384397829

Aug. 25, 2016




Report No. : EED32I00208205

Page 2 of 71

2 Version

Version No.	Date	Description
00	Aug. 25, 2016	Original

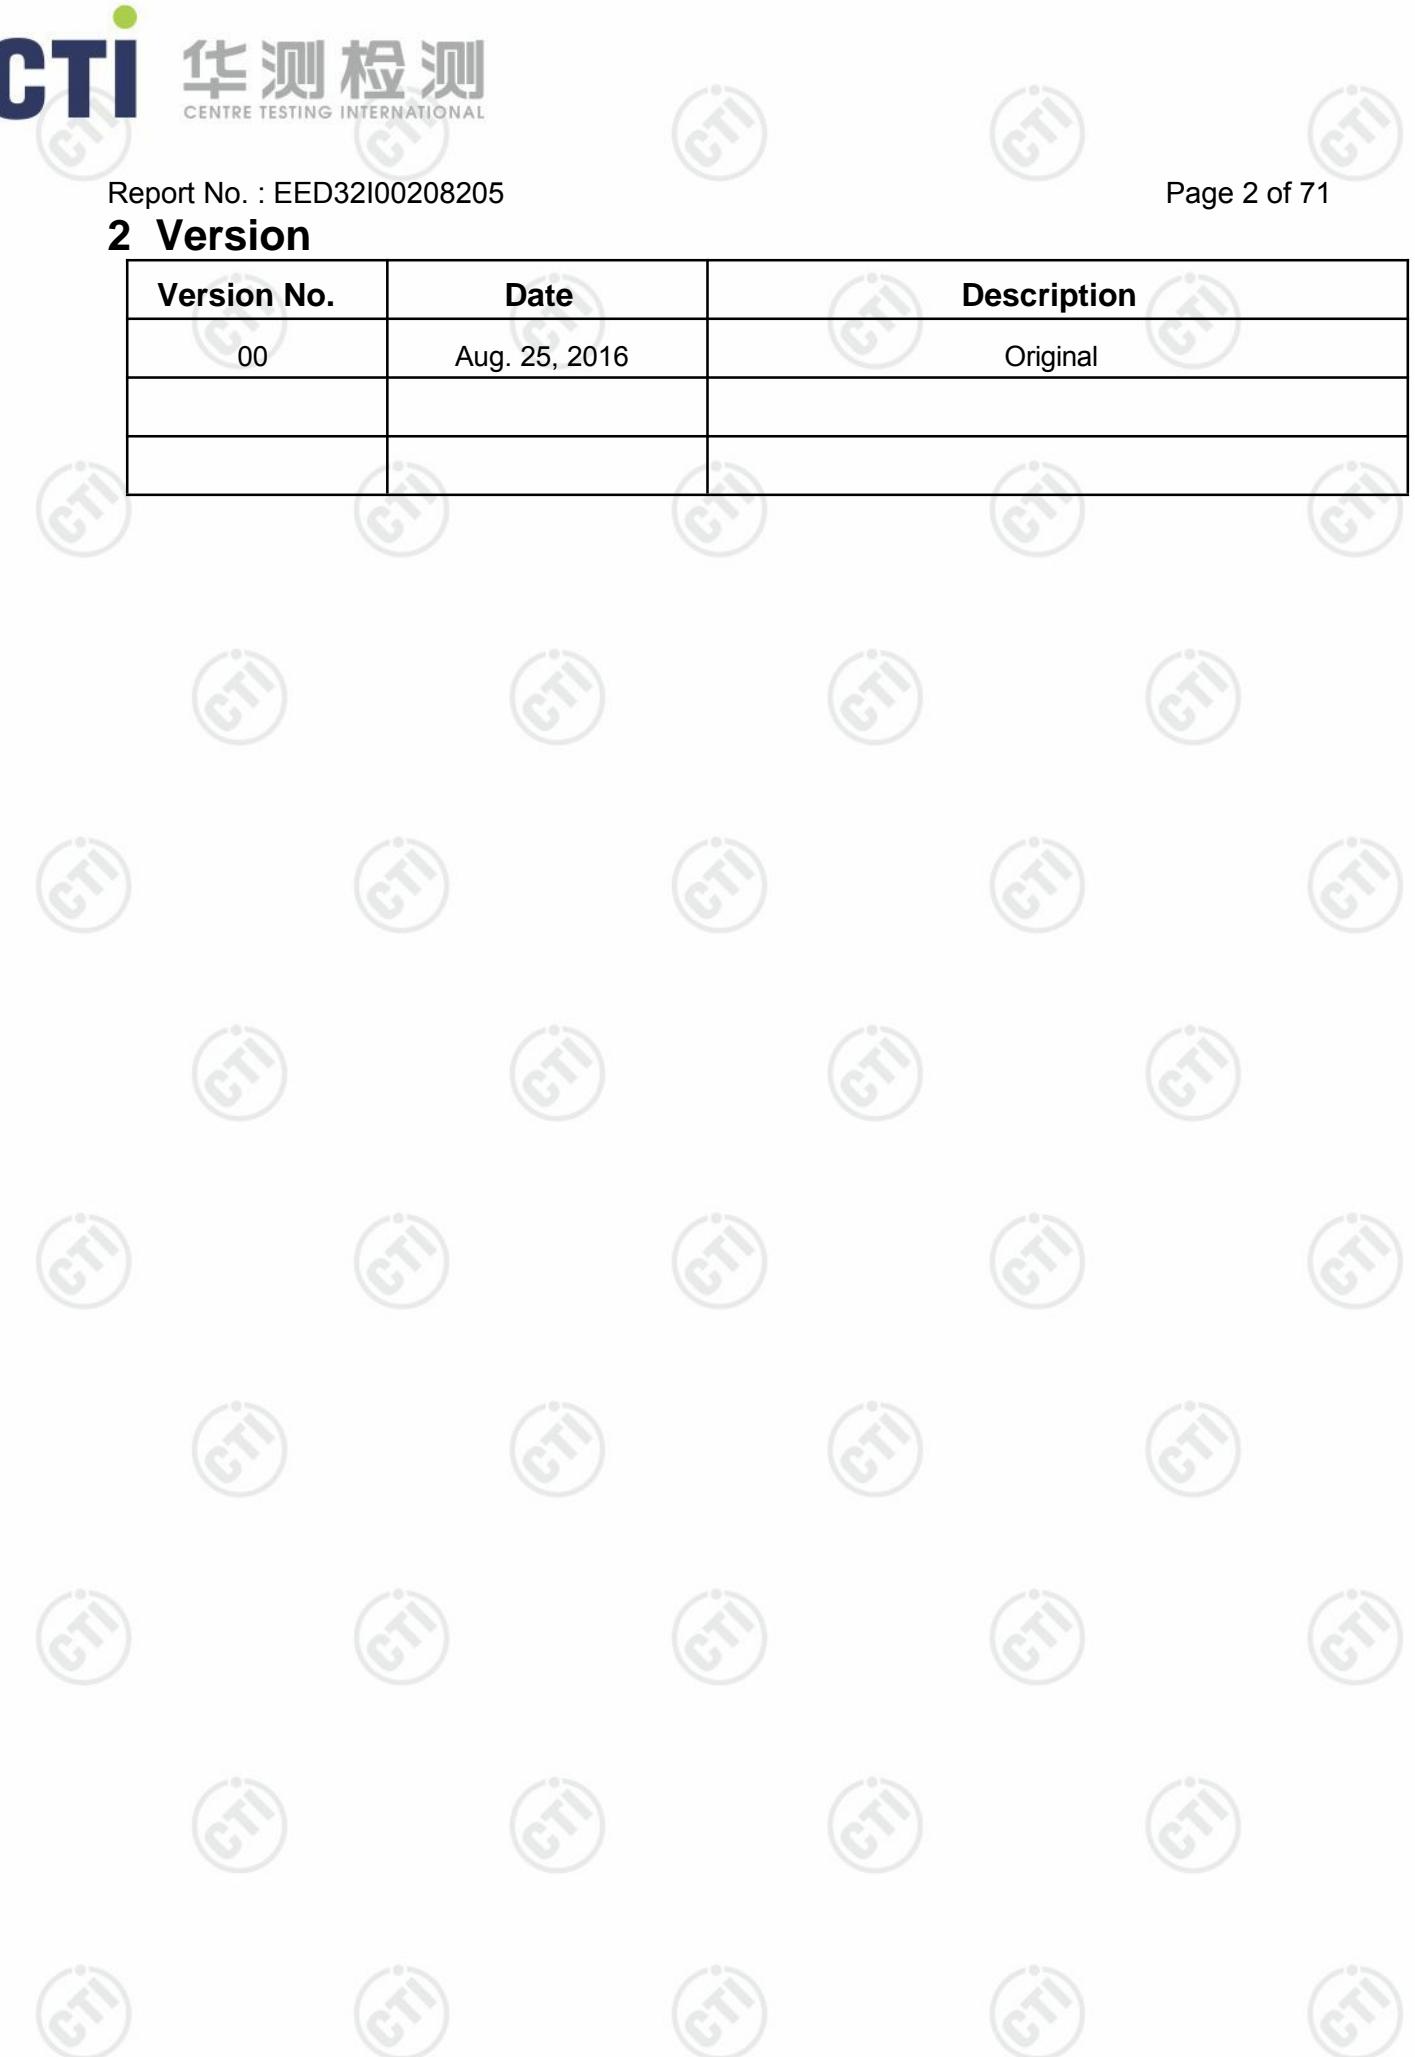

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample and the sample information are provided by the client.


4 Content

2 VERSION.....	1
3 TEST SUMMARY.....	2
4 CONTENT.....	3
5 TEST REQUIREMENT.....	4
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION.....	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 TEST FACILITY.....	8
6.7 DEVIATION FROM STANDARDS.....	9
6.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
7 EQUIPMENT LIST.....	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....	12
Appendix A): 20dB Occupied Bandwidth.....	13
Appendix B): Carrier Frequency Separation.....	17
Appendix C): Dwell Time.....	21
Appendix D): Hopping Channel Number.....	25
Appendix E): Conducted Peak Output Power.....	27
Appendix F): Band-edge for RF Conducted Emissions.....	31
Appendix G): RF Conducted Spurious Emissions.....	36
Appendix H): Pseudorandom Frequency Hopping Sequence.....	43
Appendix I): Antenna Requirement.....	44
Appendix J): AC Power Line Conducted Emission.....	45
Appendix K): Restricted bands around fundamental frequency (Radiated).....	48
Appendix L): Radiated Spurious Emissions.....	56
PHOTOGRAPHS OF TEST SETUP.....	64
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....	66

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

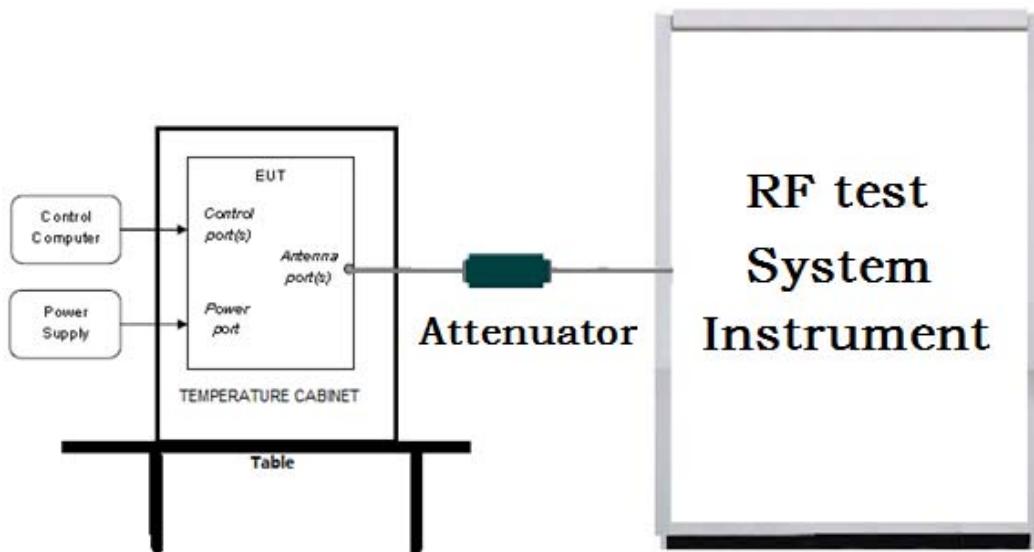

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

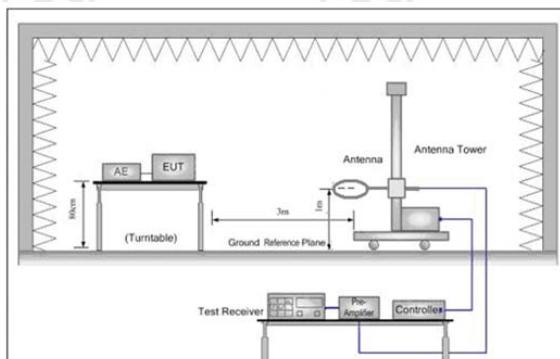


Figure 1. Below 30MHz

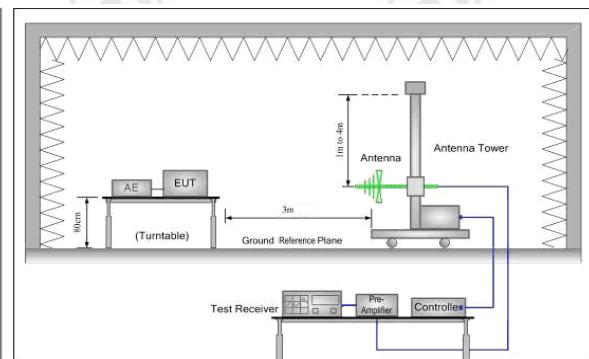


Figure 2. 30MHz to 1GHz


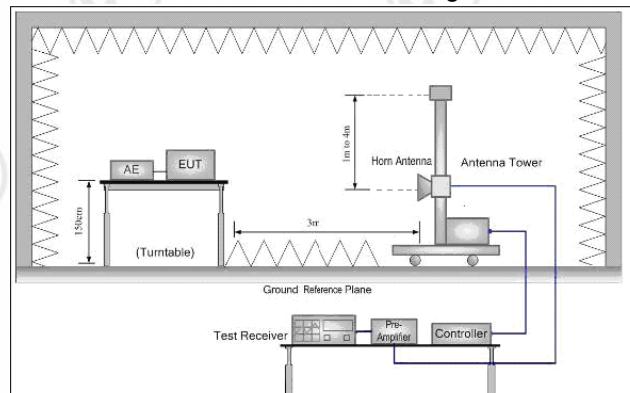


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

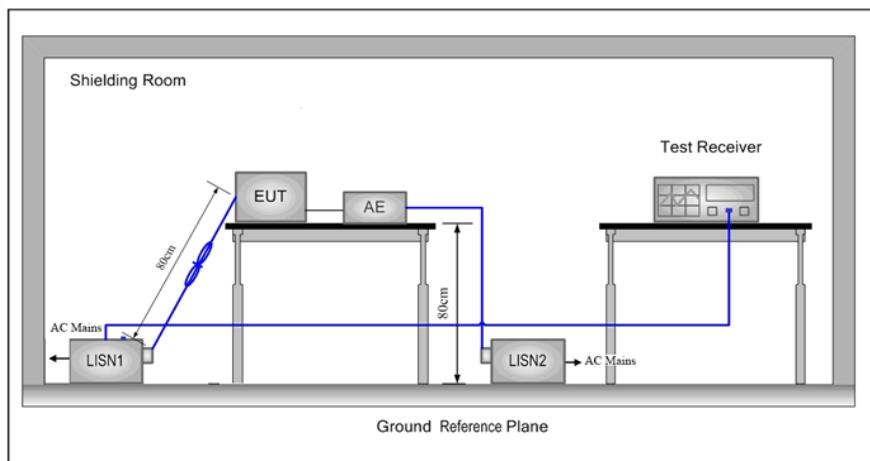

5.2 Test Environment

Operating Environment:

Temperature:	21 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK/ 8DPSK(DH1,DH3,DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel 79
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

Test mode:

Pre-scan under all rate at lowest channel 1

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
Power(dBm)	7.388	7.550	7.552

Mode	π/4DQPSK		
packets	2-DH1	2-DH3	2-DH5
Power(dBm)	8.349	8.351	8.352
Mode	8DPSK		
packets	3-DH1	3-DH3	3-DH5
Power(dBm)	7.899	7.907	7.909

Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of π/4DQPSK, 3-DH5 packet the power is the worst case of 8DPSK,

6 General Information

6.1 Client Information

Applicant:	BBPOS International Limited
Address of Applicant:	Suite 1602, 16/F, Tower 2, Nina Tower, No. 8 Yeung Uk Road, Tsuen Wan, N.T. HK, Hong Kong
Manufacturer:	BBPOS International Limited
Address of Manufacturer:	Suite 1602, 16/F, Tower 2, Nina Tower, No. 8 Yeung Uk Road, Tsuen Wan, N.T. HK, Hong Kong

6.2 General Description of EUT

Product Name:	WisePad 2
Mode No.(EUT):	WisePad 2
Trade Mark:	BBPOS
EUT Supports Radios application:	BT 2.1(2402MHz-2480MHz), BT 4.0(2402MHz-2480MHz), NFC(13.56MHz), WiFi b/g/n(HT20)(2412MHz-2462MHz), 2G(850MHz/1900MHz)
Power Supply:	DC 3.7V by Battery DC 5V by USB port
Battery:	Li-polymer 3.7V, 750mAh
Sample Received Date:	Jul. 26. 2016
Sample tested Date:	Jul. 26. 2016 to Aug. 25, 2016

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	2.1+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Portable production
Antenna Type:	Integral
Test Power Grade:	N/A
Test Software of EUT:	BBPOS_Transaction
Antenna Gain:	1dBi
Test Voltage:	AC 120V/50Hz

Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz

8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
laptop	LENOVO	E46L	FCC DOC	CTI
Mouse	LENOVO	LXH-EMS-10ZA	FCC DOC	CTI

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 886427

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 886427.

IC-Registration No.: 7408A-2

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A-2 .

IC-Registration No.: 7408B-1

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B-1.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 & 10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)

4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Communication test set test set	Agilent	N4010A	MY51400230	04-01-2016	03-31-2017
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2016	03-31-2017
Signal Generator	Keysight	N5182B	MY53051549	04-01-2016	03-31-2017
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-12-2016	01-11-2017
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-12-2016	01-11-2017
DC Power	Keysight	E3642A	MY54436035	04-01-2016	03-31-2017
PC-1	Lenovo	R4960d	---	04-01-2016	03-31-2017
power meter & power sensor	R&S	OSP120	101374	04-01-2016	03-31-2017
RF control unit	JS Tonscend	JS0806-2	158060006	04-01-2016	03-31-2017
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	04-01-2016	03-31-2017

Conducted disturbance Test					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	06-16-2016	06-15-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
Communication test set	Agilent	E5515C	GB47050534	04-01-2016	03-31-2017
Communication test set	R&S	CMW500	152394	04-01-2016	03-31-2017
LISN	R&S	ENV216	100098	06-16-2016	06-15-2017
LISN	schwarzbeck	NNLK8121	8121-529	06-16-2016	06-15-2017
Voltage Probe	R&S	ESH2-Z3	--	07-09-2014	07-07-2017
Current Probe	R&S	EZ17	100106	06-16-2016	06-15-2017
ISN	TESEQ GmbH	ISN T800	30297	01-29-2015	01-27-2017

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-484	05-23-2016	05-22-2017
Microwave Preamplifier	Agilent	8449B	3008A02425	02-04-2016	02-03-2017
Horn Antenna	ETS-LINDGREN	3117	00057410	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574	374	06-30-2015	06-28-2018
Loop Antenna	ETS	6502	00071730	07-30-2015	07-28-2017
Spectrum Analyzer	R&S	FSP40	100416	06-16-2016	06-15-2017
Receiver	R&S	ESCI	100435	06-16-2016	06-15-2017
Multi device Controller	maturo	NCD/070/1071 1112	---	01-12-2016	01-11-2017
LISN	schwarzbeck	NNBM8125	81251547	06-16-2016	06-15-2017
LISN	schwarzbeck	NNBM8125	81251548	06-16-2016	06-15-2017
Signal Generator	Agilent	E4438C	MY45095744	04-01-2016	03-31-2017
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
Communication test set	Agilent	E5515C	GB47050534	04-01-2016	03-31-2017
Cable line	Fulai(7M)	SF106	5219/6A	01-12-2016	01-11-2017
Cable line	Fulai(6M)	SF106	5220/6A	01-12-2016	01-11-2017
Cable line	Fulai(3M)	SF106	5216/6A	01-12-2016	01-11-2017
Cable line	Fulai(3M)	SF106	5217/6A	01-12-2016	01-11-2017
Communication test set	R&S	CMW500	152394	04-01-2016	03-31-2017
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-12-2016	01-11-2017
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-12-2016	01-11-2017

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2015)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:


Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)



Appendix A): 20dB Occupied Bandwidth

Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
GFSK	LCH	0.9701	0.87928	PASS	Peak detector
GFSK	MCH	0.9678	0.89363	PASS	
GFSK	HCH	0.9943	0.89468	PASS	
$\pi/4$ DQPSK	LCH	1.279	1.1623	PASS	
$\pi/4$ DQPSK	MCH	1.285	1.1633	PASS	
$\pi/4$ DQPSK	HCH	1.278	1.1615	PASS	
8DPSK	LCH	1.265	1.1584	PASS	
8DPSK	MCH	1.263	1.1606	PASS	
8DPSK	HCH	1.264	1.1605	PASS	

Test Graph

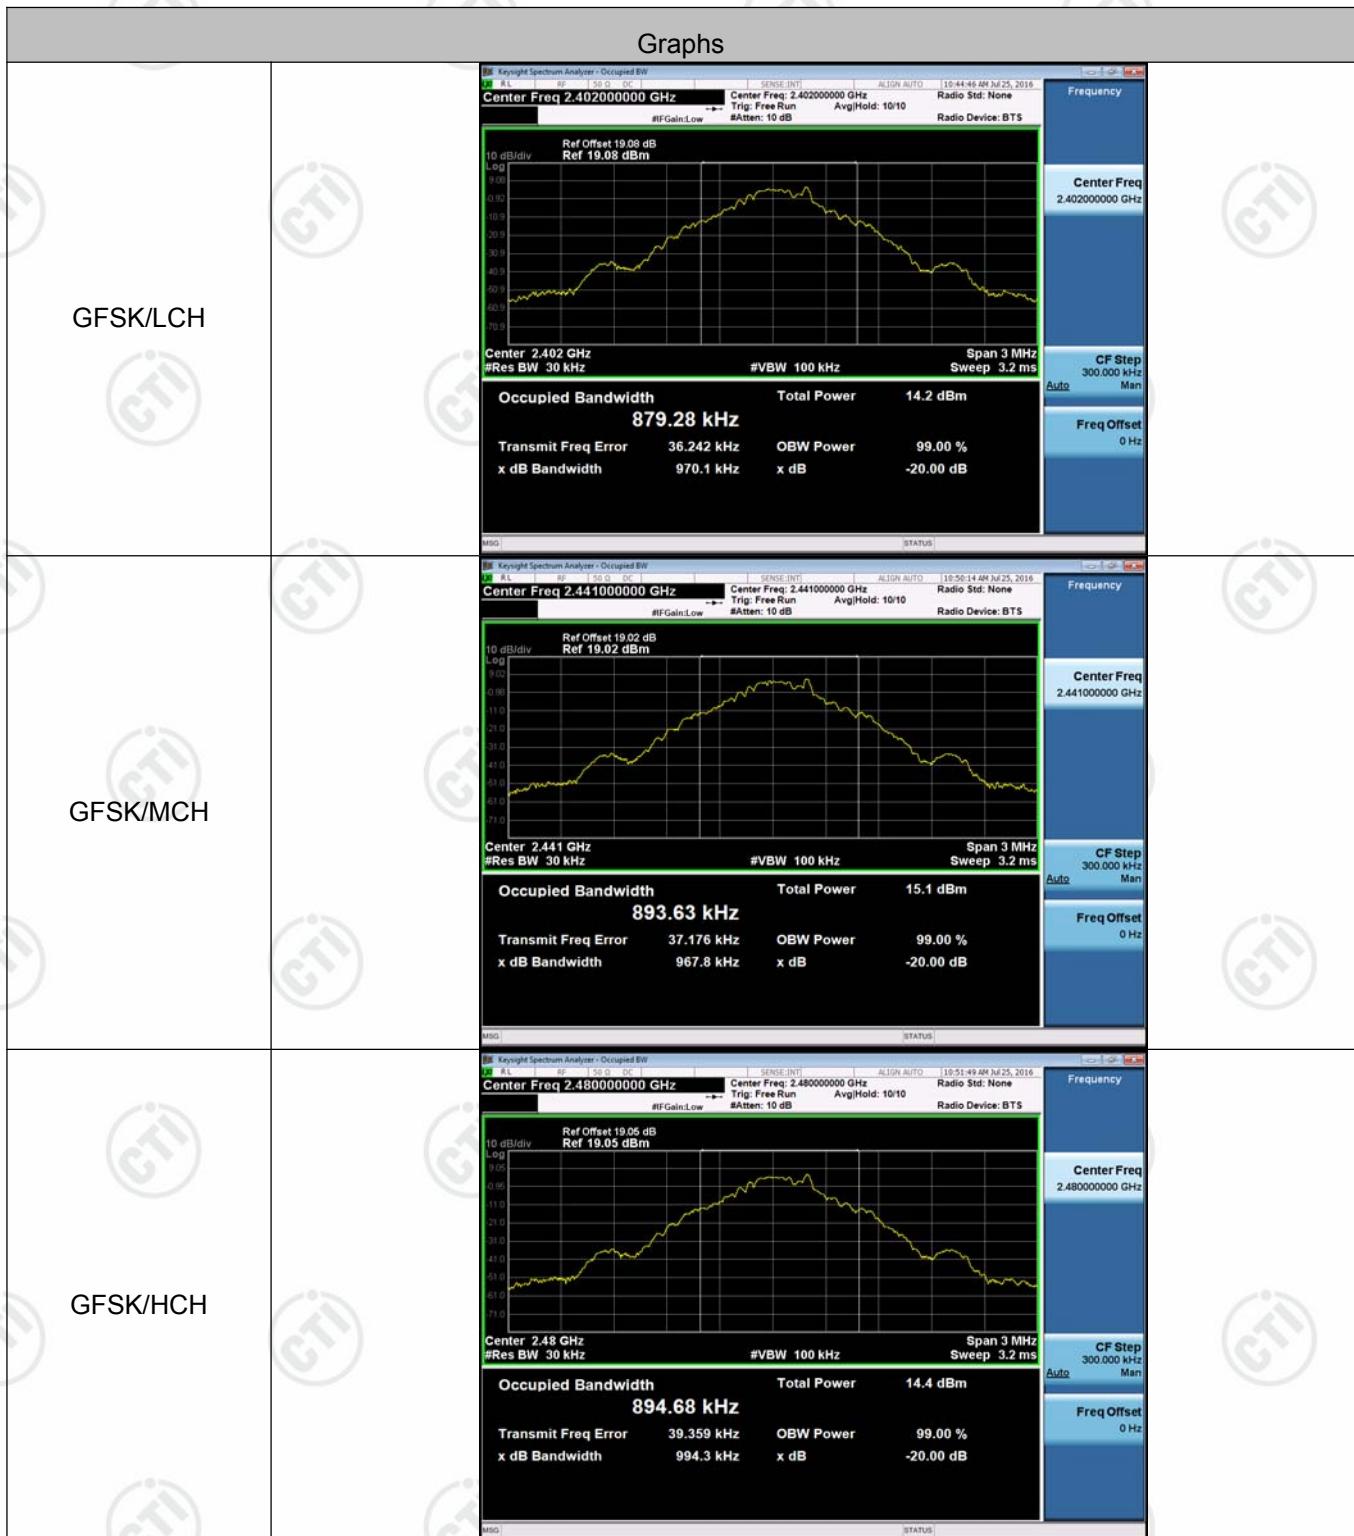

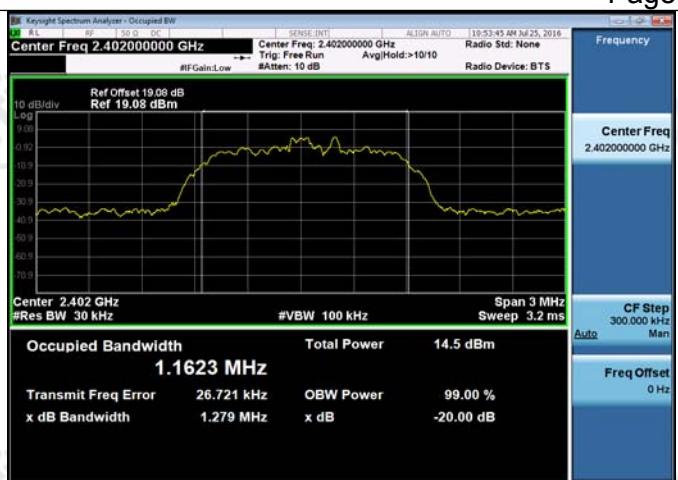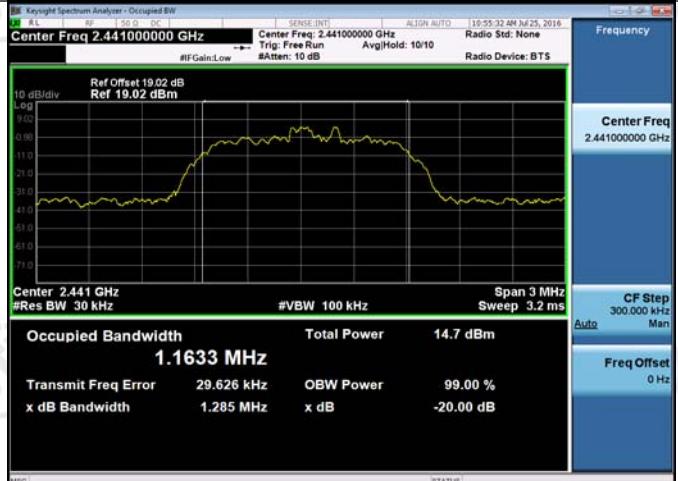TT/4DQPSK/LCH	
TT/4DQPSK/MCH	
TT/4DQPSK/HCH	



Report No. : EED32I00208205


Page 17 of 71

Appendix B): Carrier Frequency Separation

Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.008	PASS
GFSK	MCH	1.002	PASS
GFSK	HCH	1.004	PASS
$\pi/4$ DQPSK	LCH	1.000	PASS
$\pi/4$ DQPSK	MCH	1.016	PASS
$\pi/4$ DQPSK	HCH	0.980	PASS
8DPSK	LCH	0.990	PASS
8DPSK	MCH	0.990	PASS
8DPSK	HCH	0.994	PASS

Test Graph

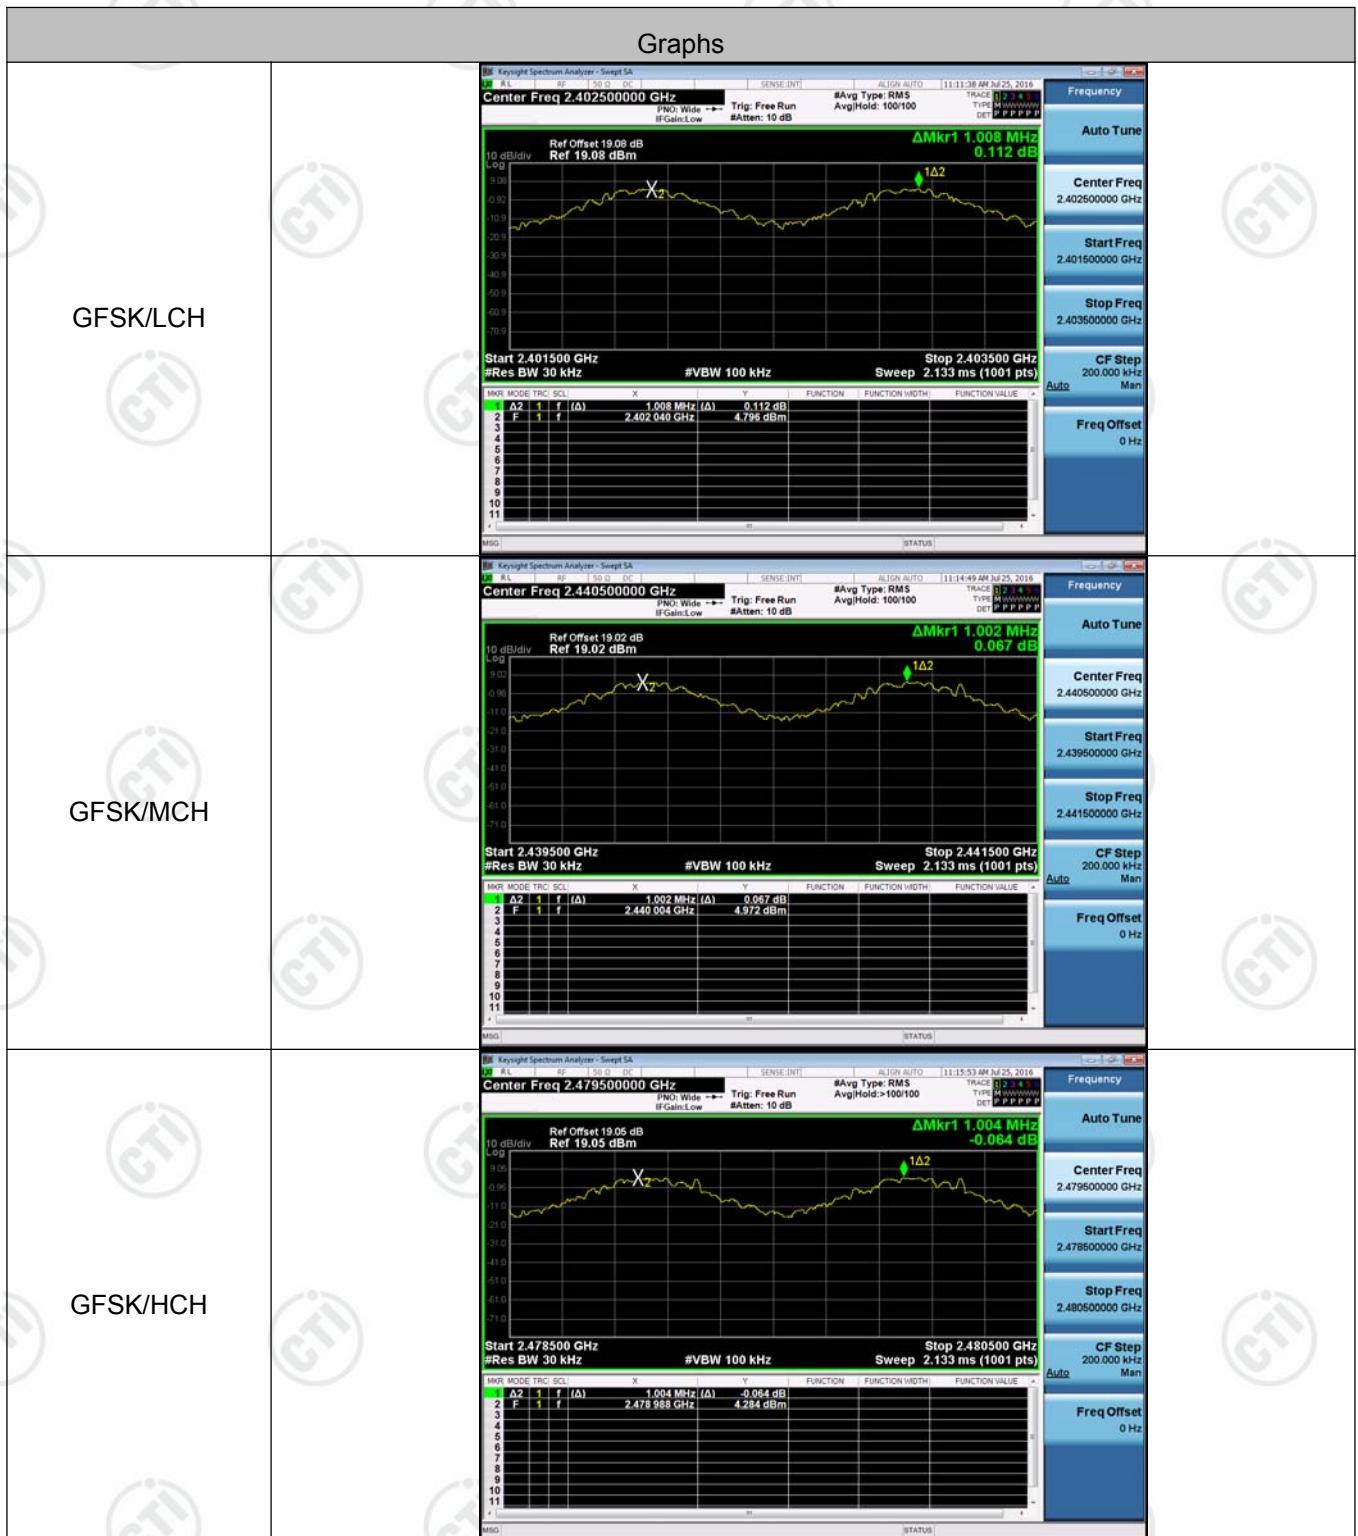






Appendix C): Dwell Time

Result Table


Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.381267	320	0.122	0.30	PASS
GFSK	DH1	MCH	0.381266	320	0.122	0.30	PASS
GFSK	DH1	HCH	0.381266	320	0.122	0.30	PASS
GFSK	DH3	LCH	1.63653	160	0.262	0.65	PASS
GFSK	DH3	MCH	1.6378	160	0.262	0.66	PASS
GFSK	DH3	HCH	1.6378	160	0.262	0.66	PASS
GFSK	DH5	LCH	2.885467	106.7	0.308	0.77	PASS
GFSK	DH5	MCH	2.88547	106.7	0.308	0.77	PASS
GFSK	DH5	HCH	2.88547	106.7	0.308	0.77	PASS

Remark : All modes are tested, only the worst mode GFSK is reported.


Test Graph

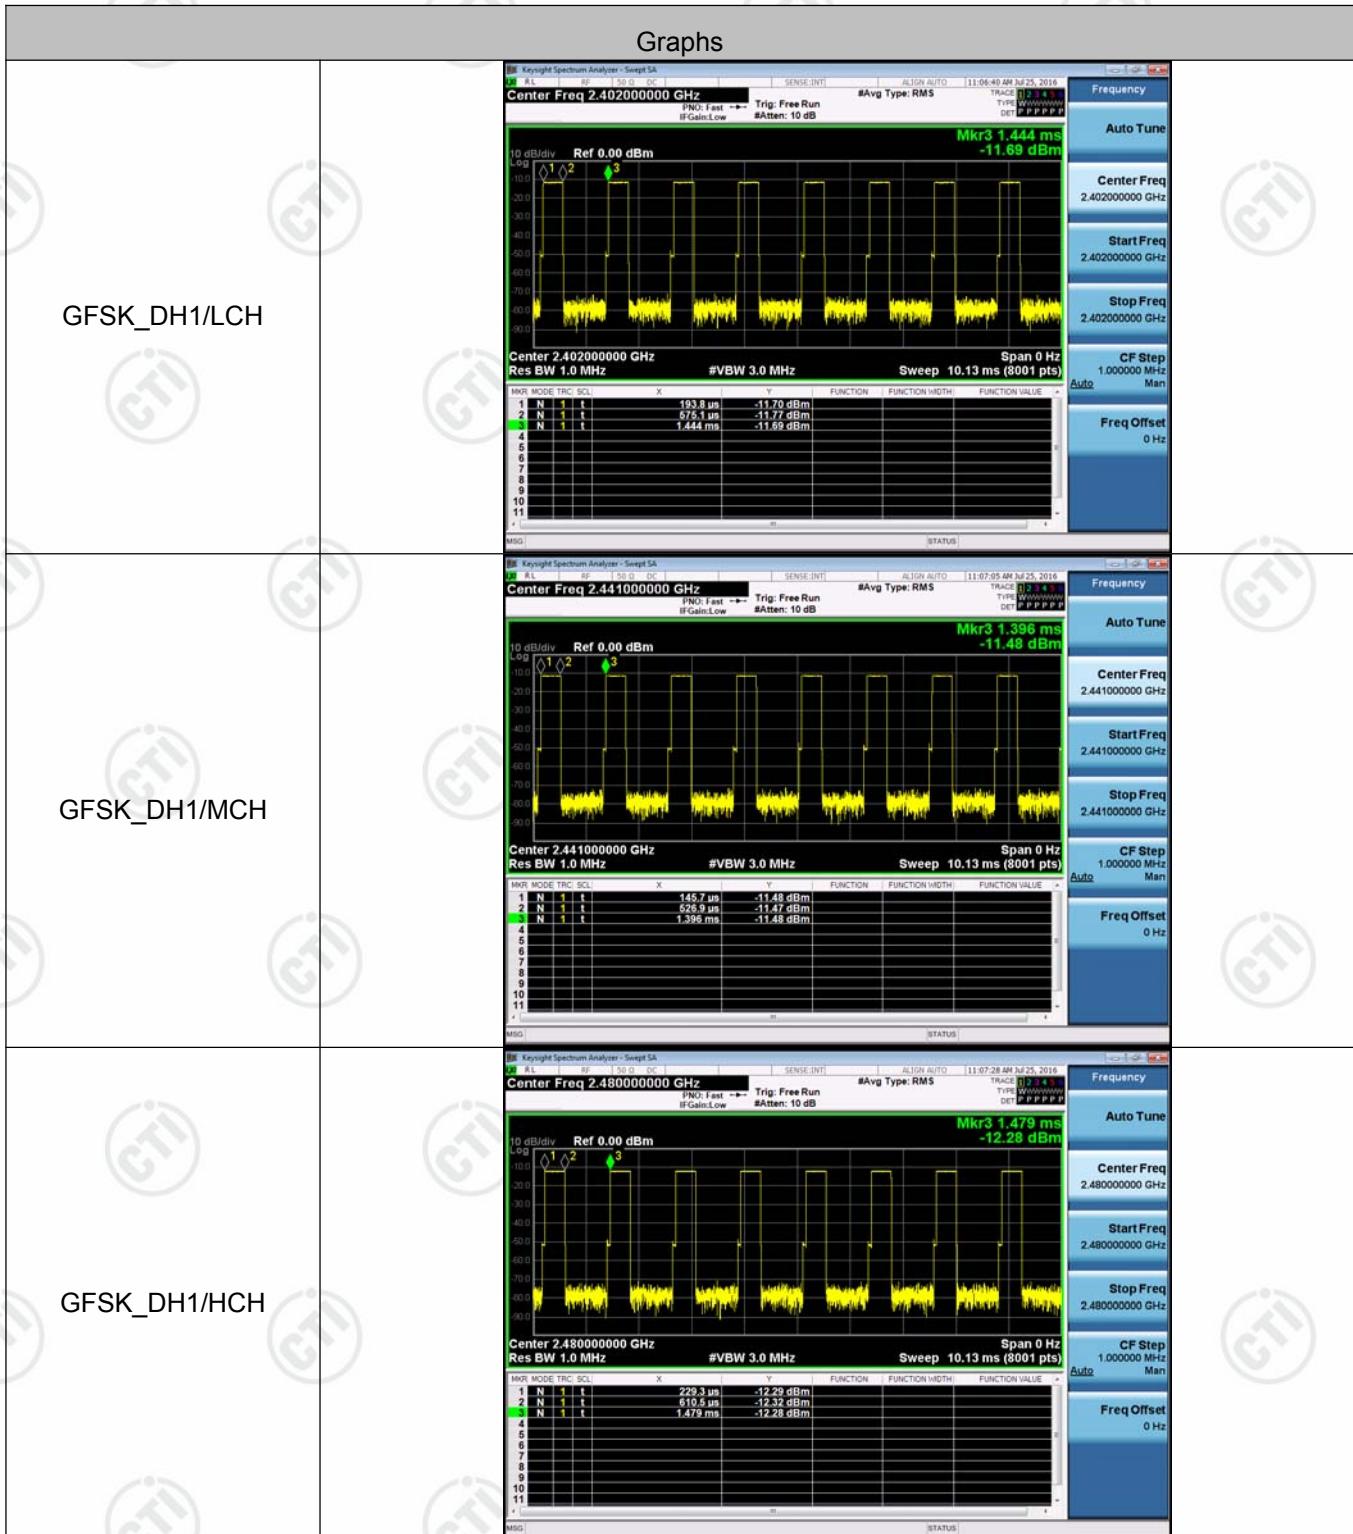


GFSK_DH3/LCH

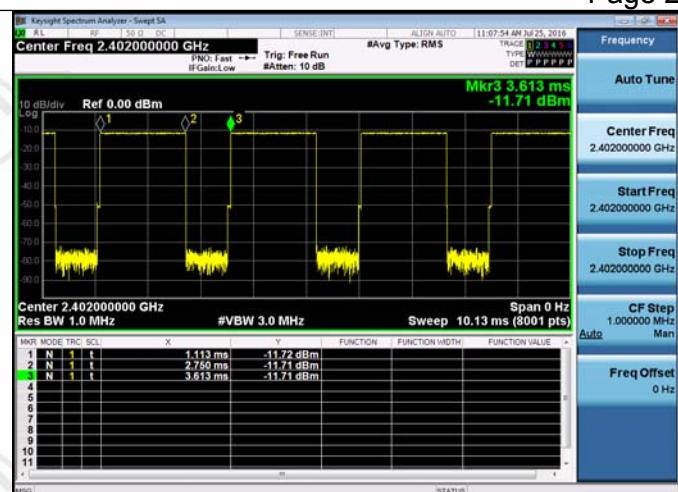


GFSK_DH3/MCH

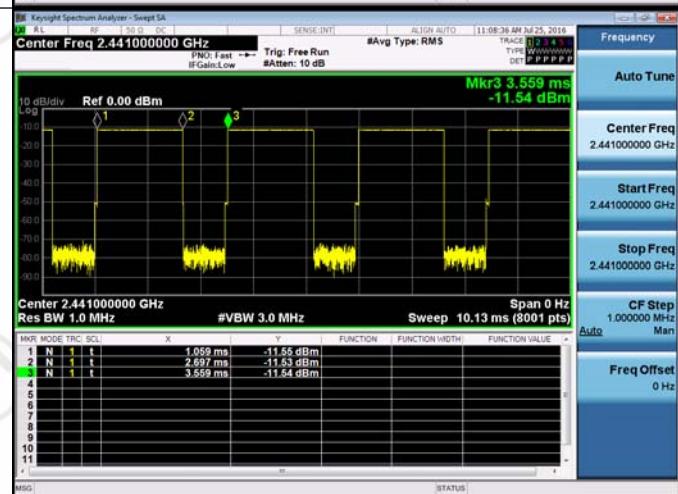


GFSK_DH3/HCH

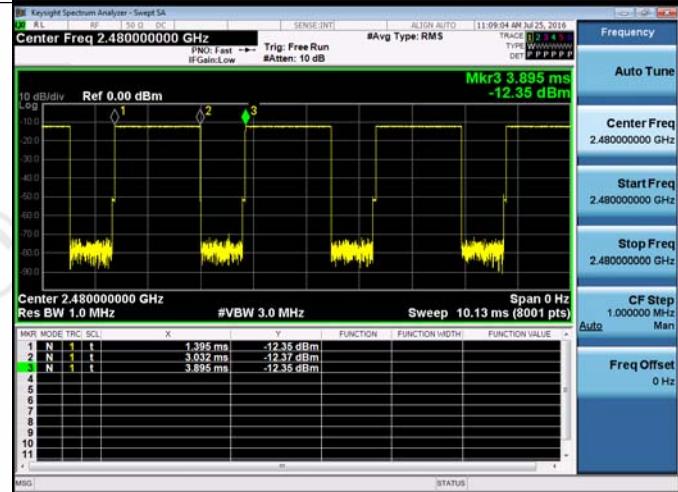


GFSK_DH5/LCH

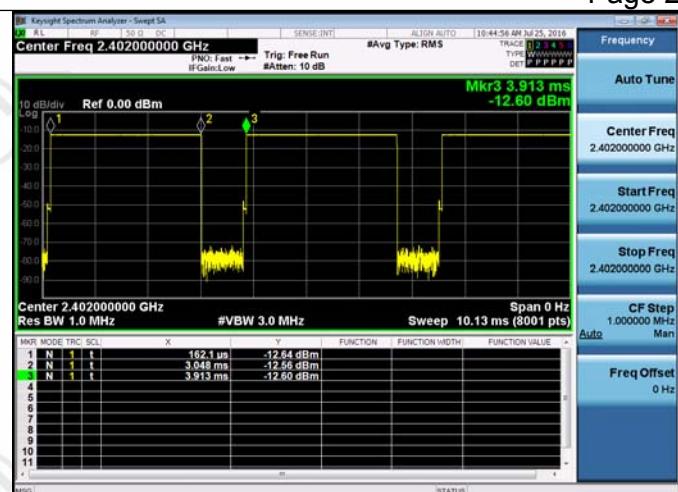

GFSK_DH5/MCH

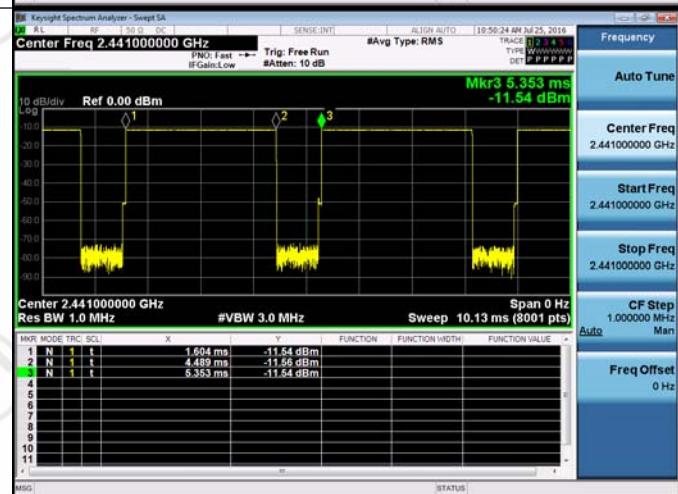

GFSK_DH5/HCH

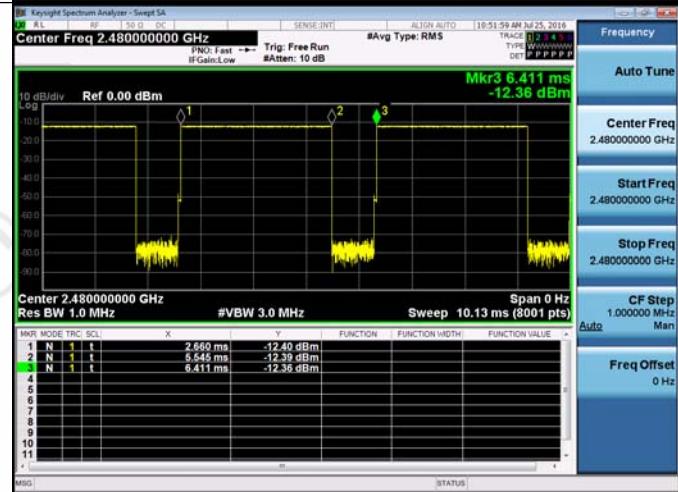


Report No. : EED32100208205

Page 25 of 71

Appendix D): Hopping Channel Number**Result Table**

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS


Test Graph

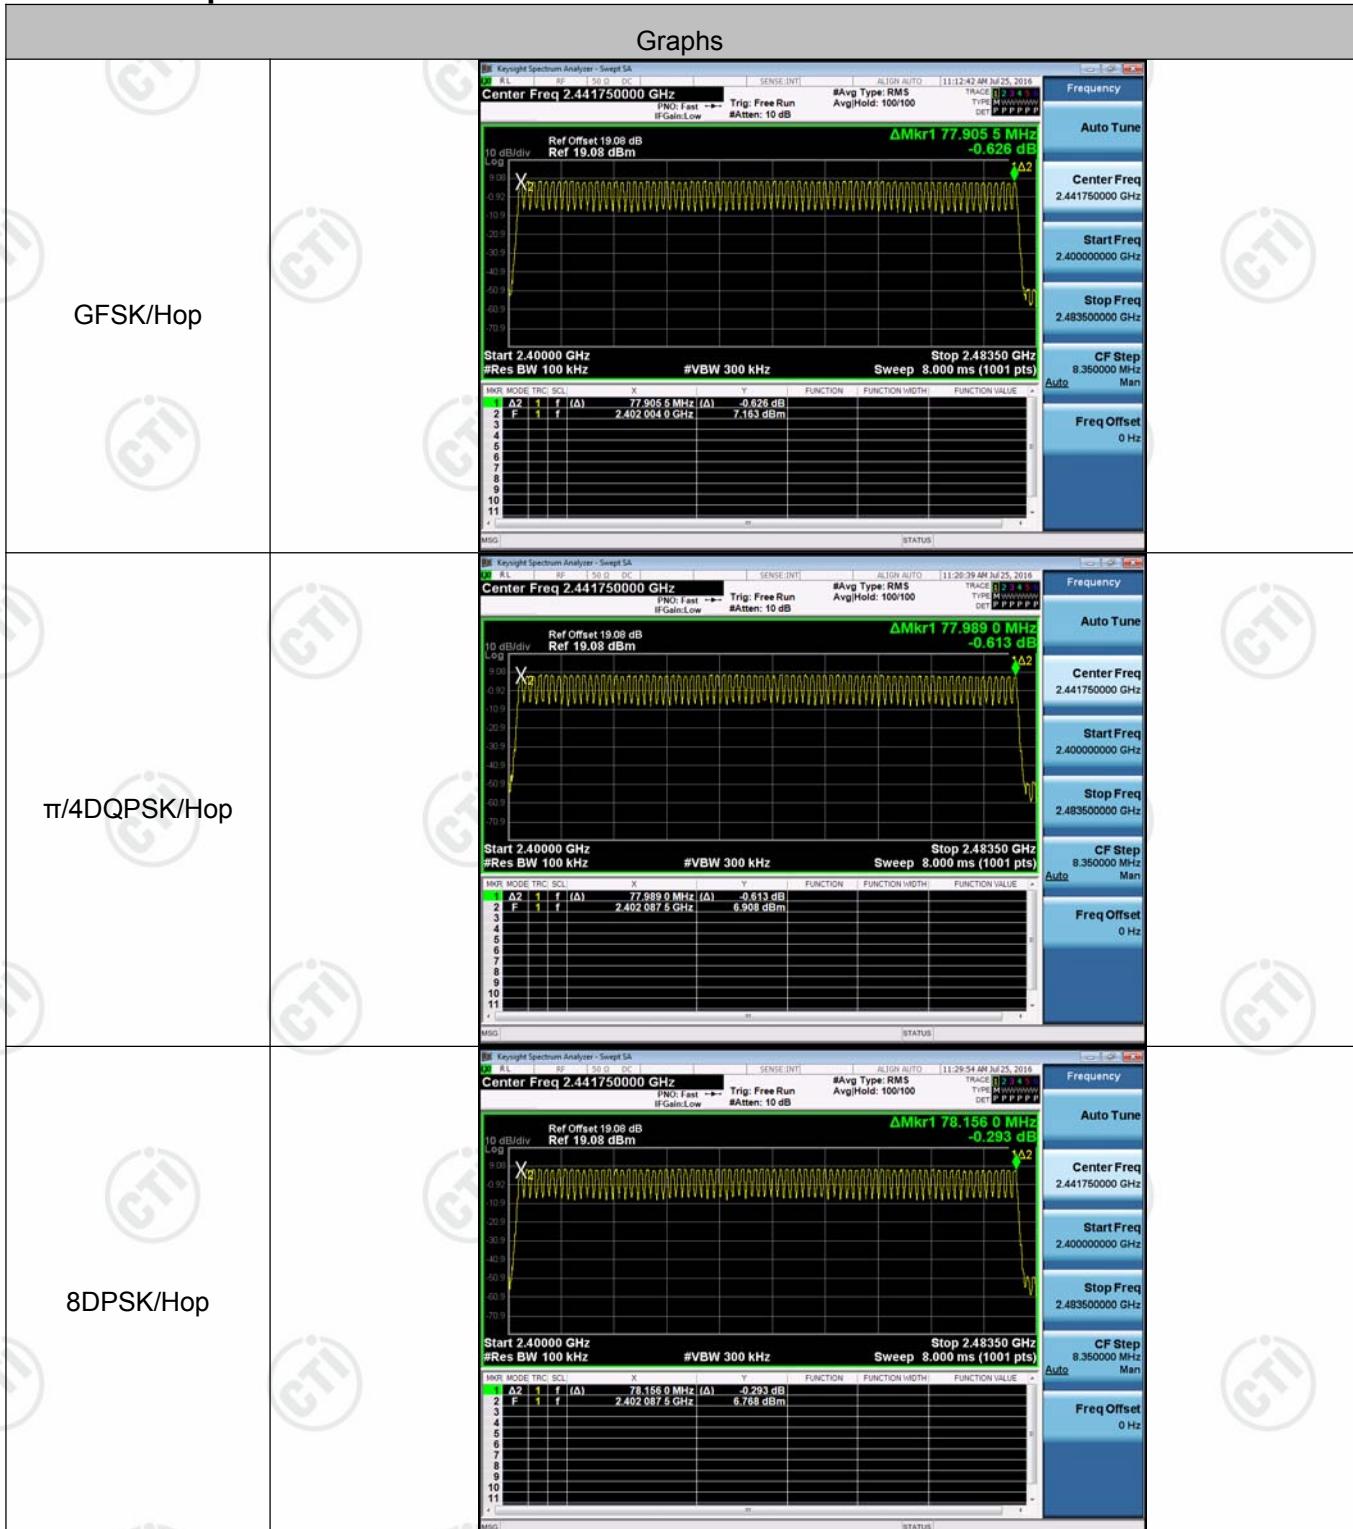


Appendix E): Conducted Peak Output Power
Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	7.552	PASS
GFSK	MCH	7.688	PASS
GFSK	HCH	6.905	PASS
$\pi/4$ DQPSK	LCH	8.352	PASS
$\pi/4$ DQPSK	MCH	8.486	PASS
$\pi/4$ DQPSK	HCH	7.698	PASS
8DPSK	LCH	7.909	PASS
8DPSK	MCH	8.817	PASS
8DPSK	HCH	8.064	PASS

Test Graph

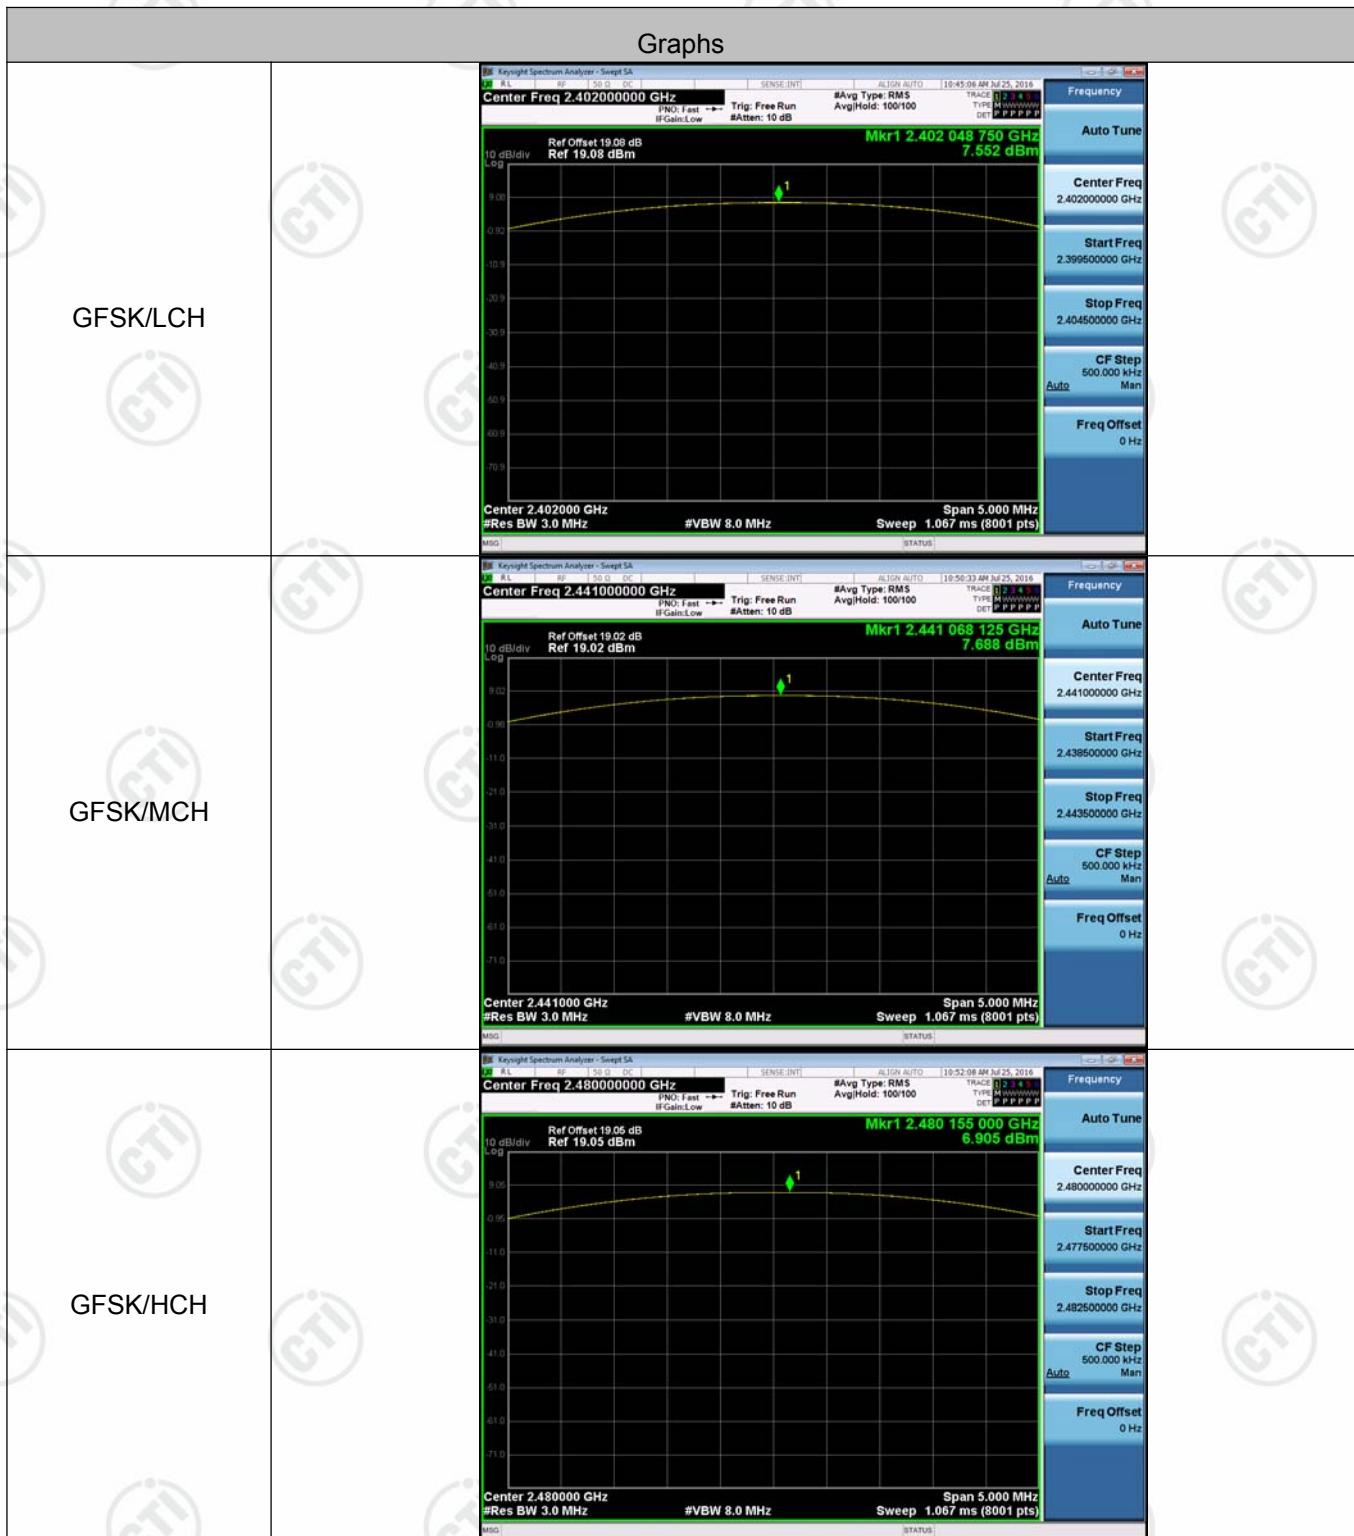

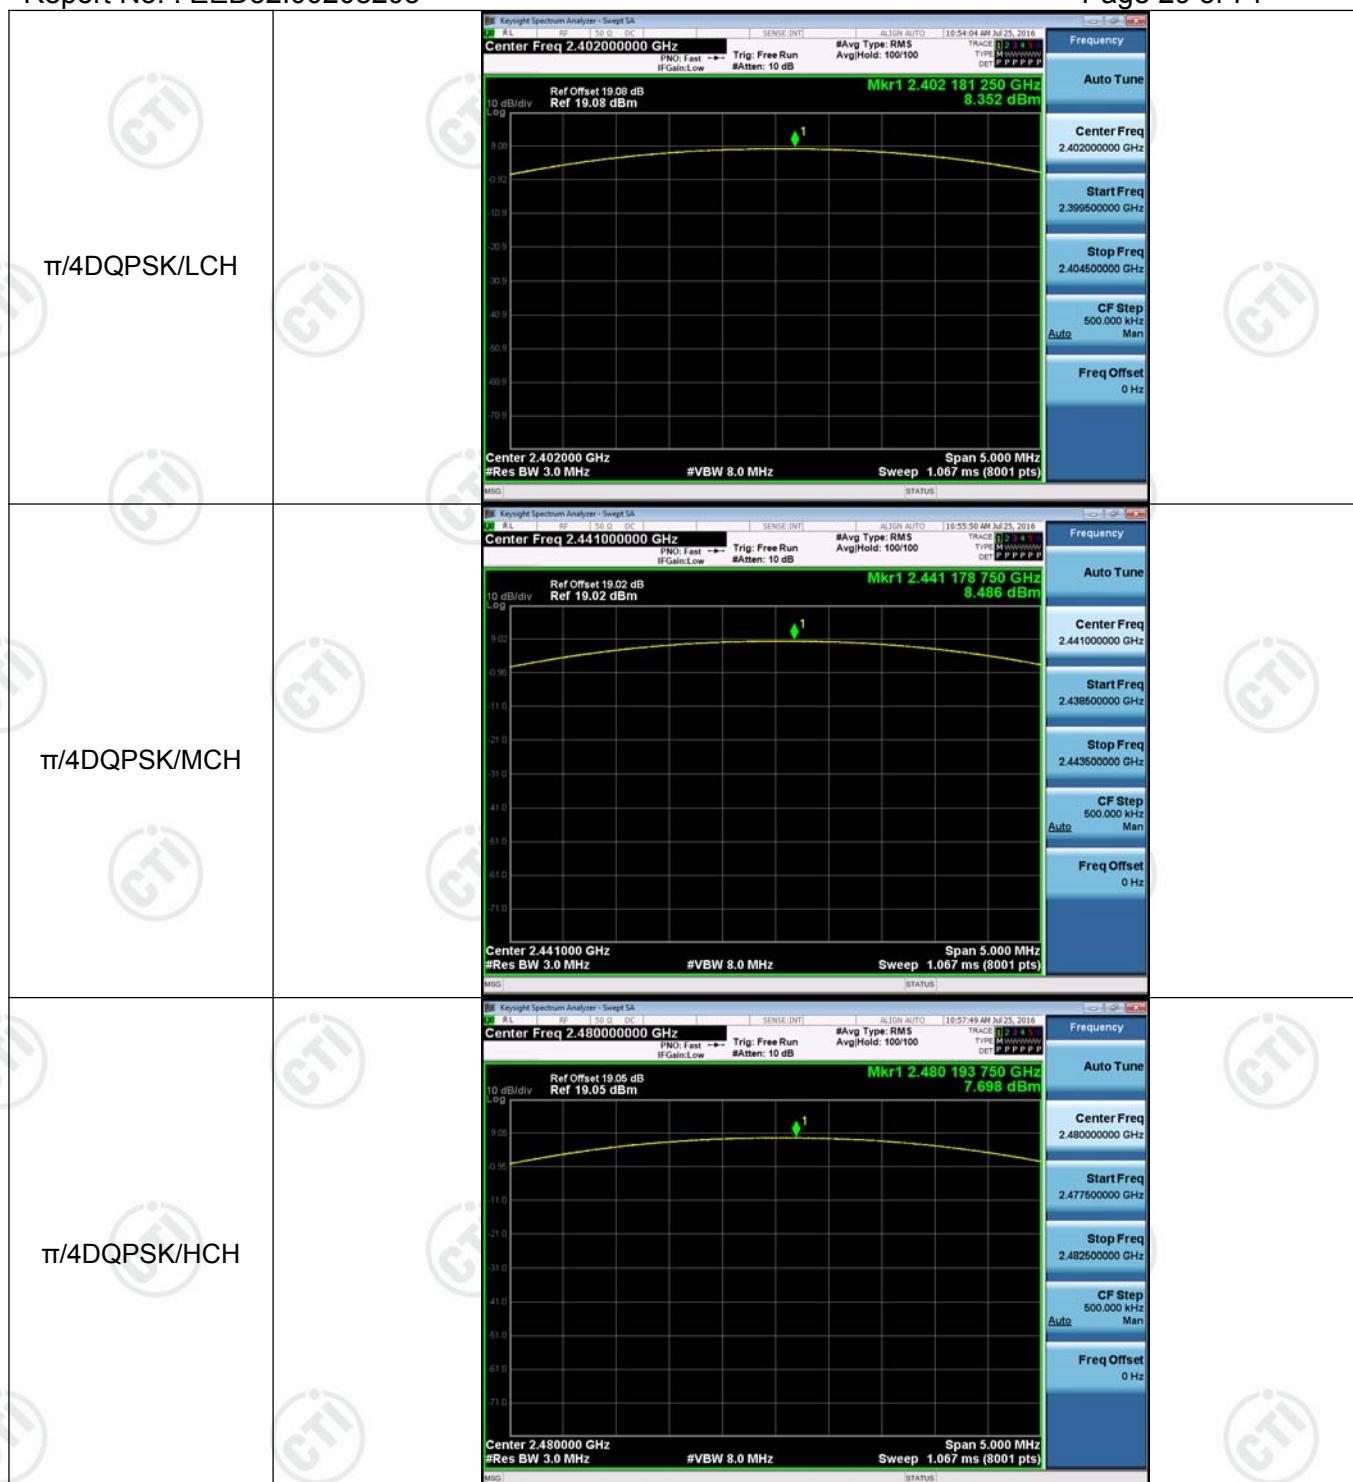





Appendix F): Band-edge for RF Conducted Emissions
Result Table

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	7.447	Off	-49.295	-12.55	PASS
			6.025	On	-51.121	-13.98	PASS
GFSK	HCH	2480	6.715	Off	-49.615	-13.29	PASS
			6.142	On	-50.245	-13.86	PASS
$\pi/4$ DQPSK	LCH	2402	7.357	Off	-50.222	-12.64	PASS
			7.436	On	-49.939	-12.56	PASS
$\pi/4$ DQPSK	HCH	2480	6.727	Off	-49.441	-13.27	PASS
			7.589	On	-49.522	-12.41	PASS
8DPSK	LCH	2402	7.530	Off	-49.979	-12.47	PASS
			7.497	On	-49.903	-12.5	PASS
8DPSK	HCH	2480	6.825	Off	-49.846	-13.18	PASS
			7.620	On	-49.529	-12.38	PASS


Test Graph

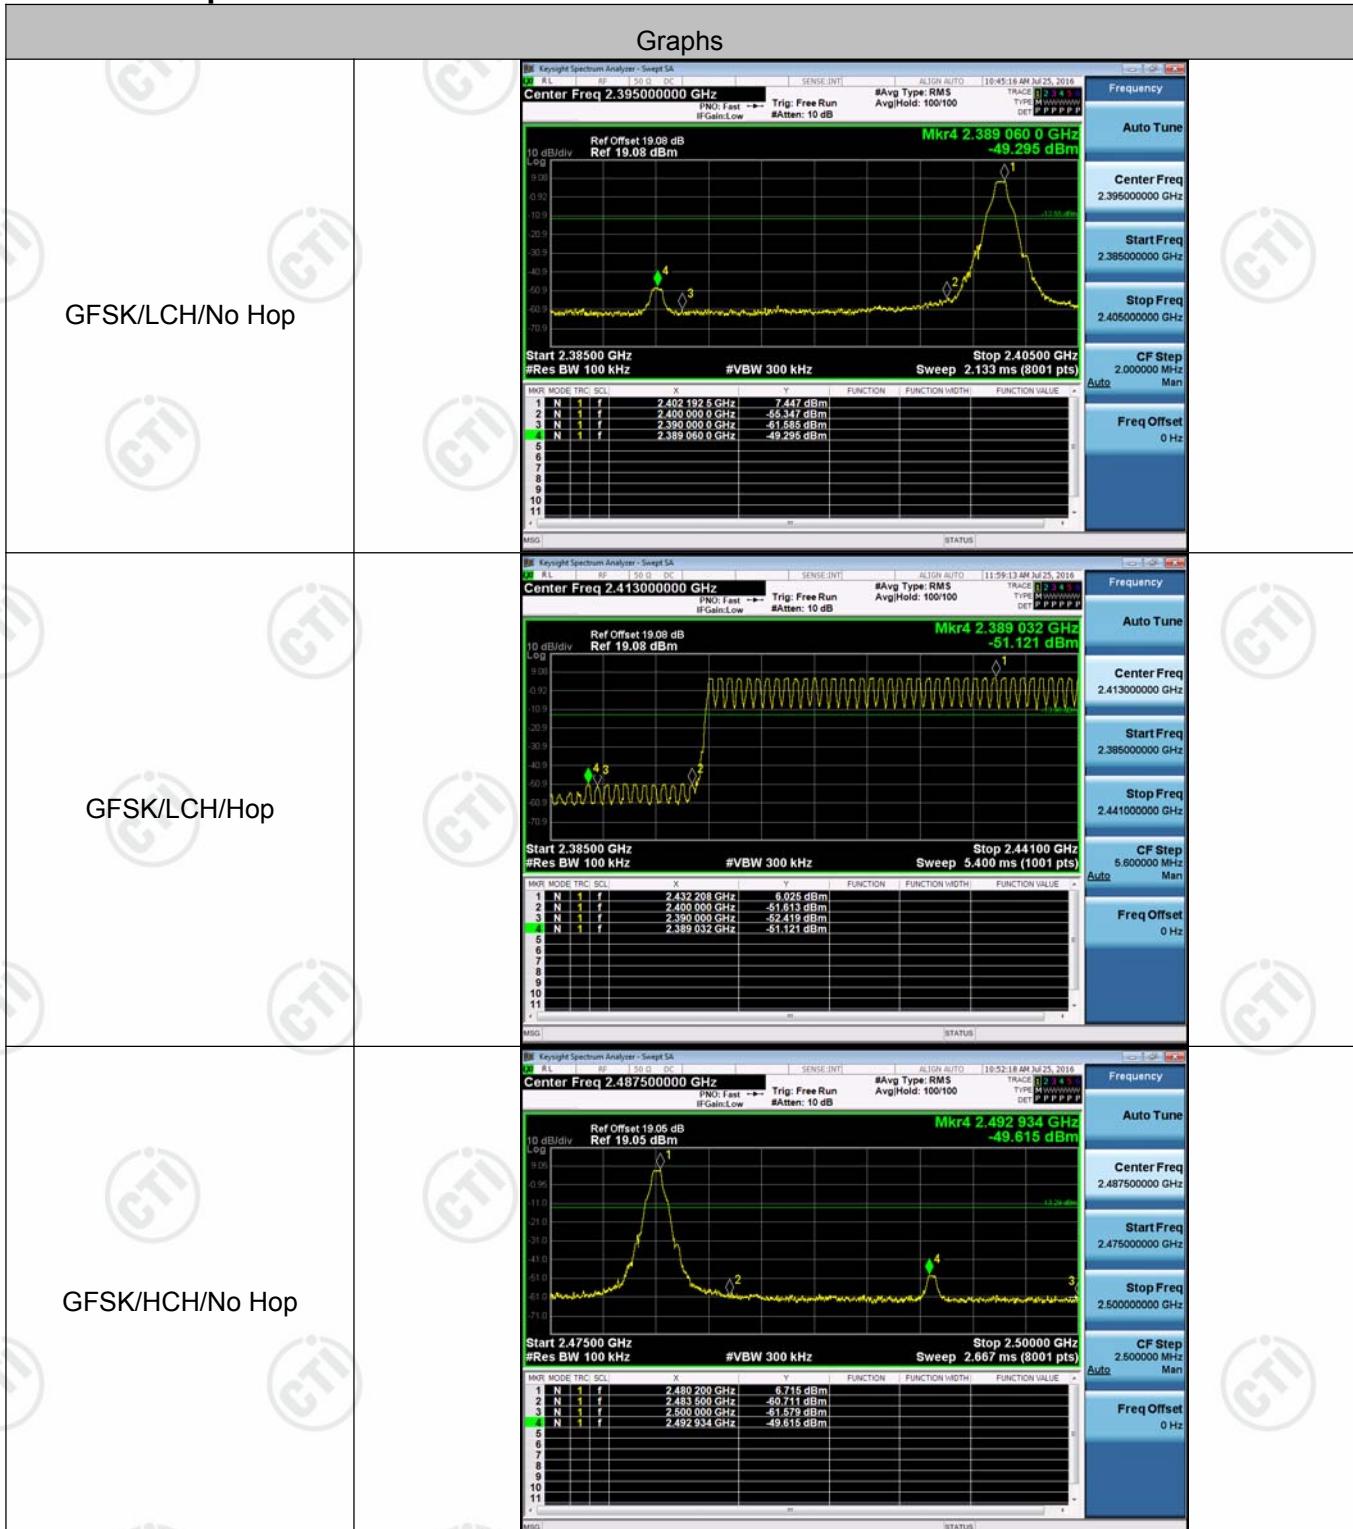


GFSK/HCH/Hop

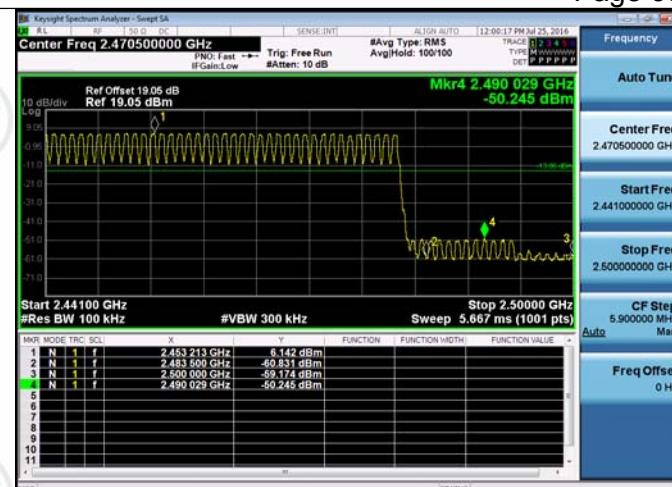


π/4DQPSK/LCH/No Hop

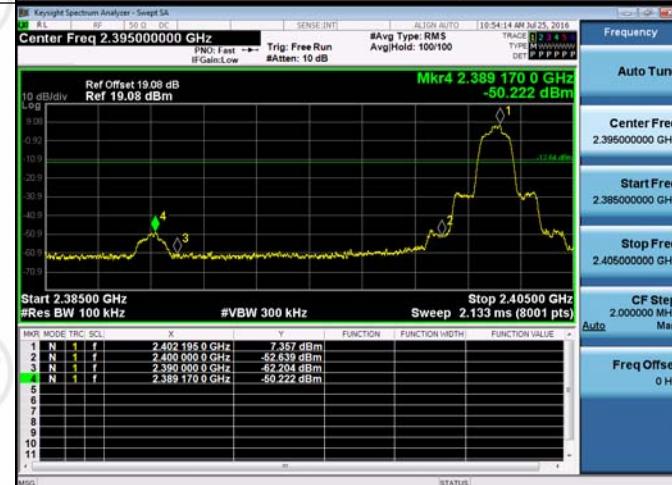


π/4DQPSK/LCH/Hop

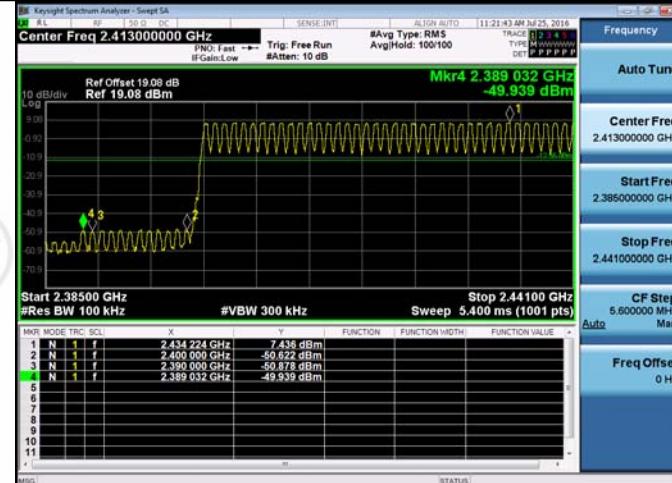


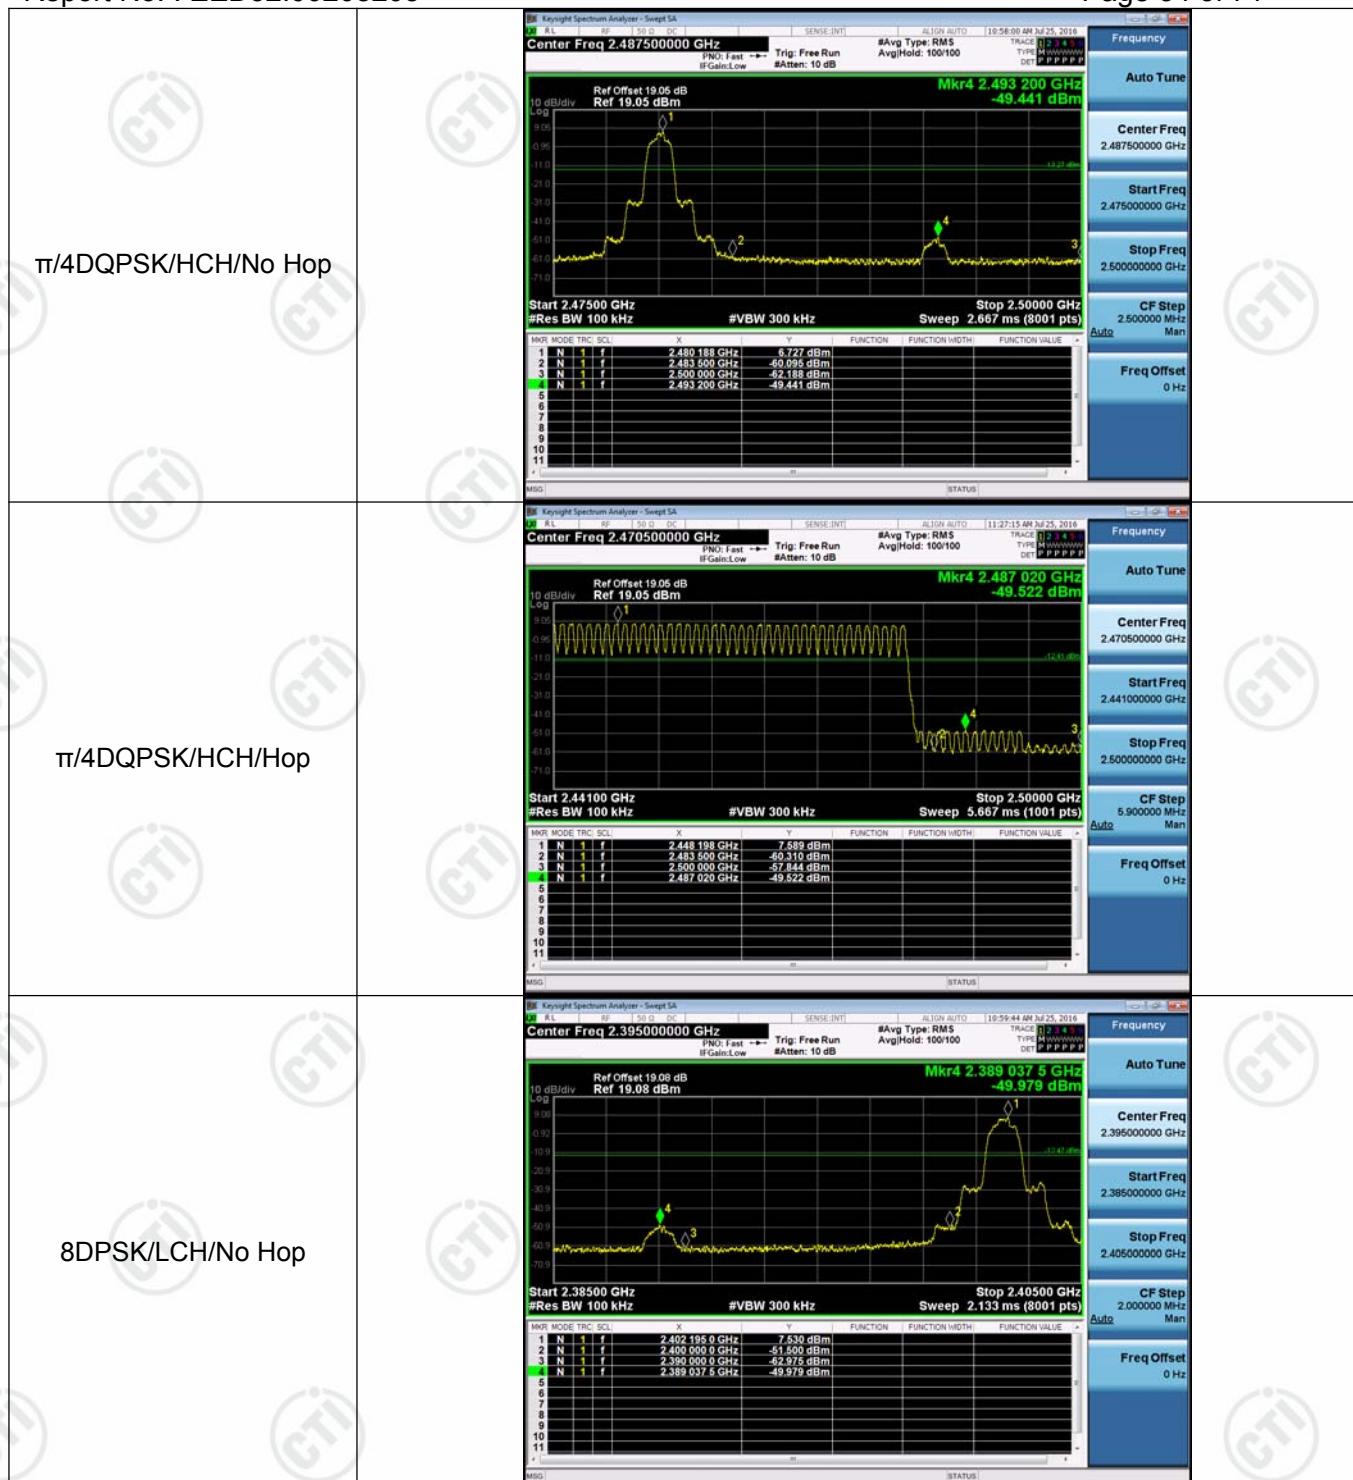


8DPSK/LCH/Hop

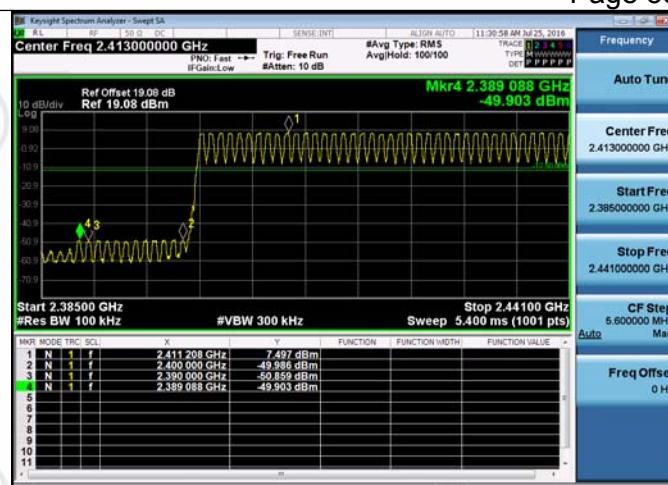

8DPSK/HCH/No Hop

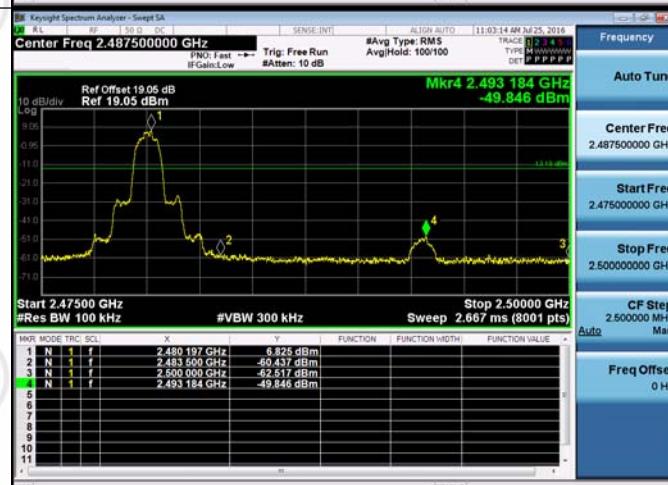

8DPSK/HCH/Hop

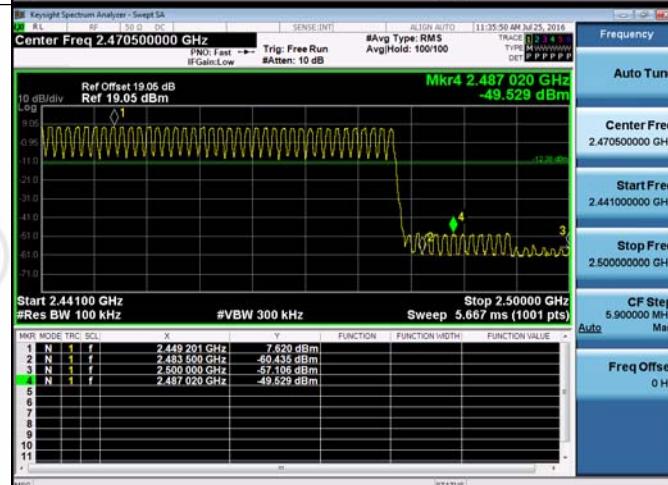




Appendix G): RF Conducted Spurious Emissions

Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	7.371	<Limit	PASS
GFSK	MCH	7.466	<Limit	PASS
GFSK	HCH	6.69	<Limit	PASS
$\pi/4$ DQPSK	LCH	6.971	<Limit	PASS
$\pi/4$ DQPSK	MCH	7.17	<Limit	PASS
$\pi/4$ DQPSK	HCH	6.556	<Limit	PASS
8DPSK	LCH	7.47	<Limit	PASS
8DPSK	MCH	7.467	<Limit	PASS
8DPSK	HCH	6.8	<Limit	PASS

Test Graph

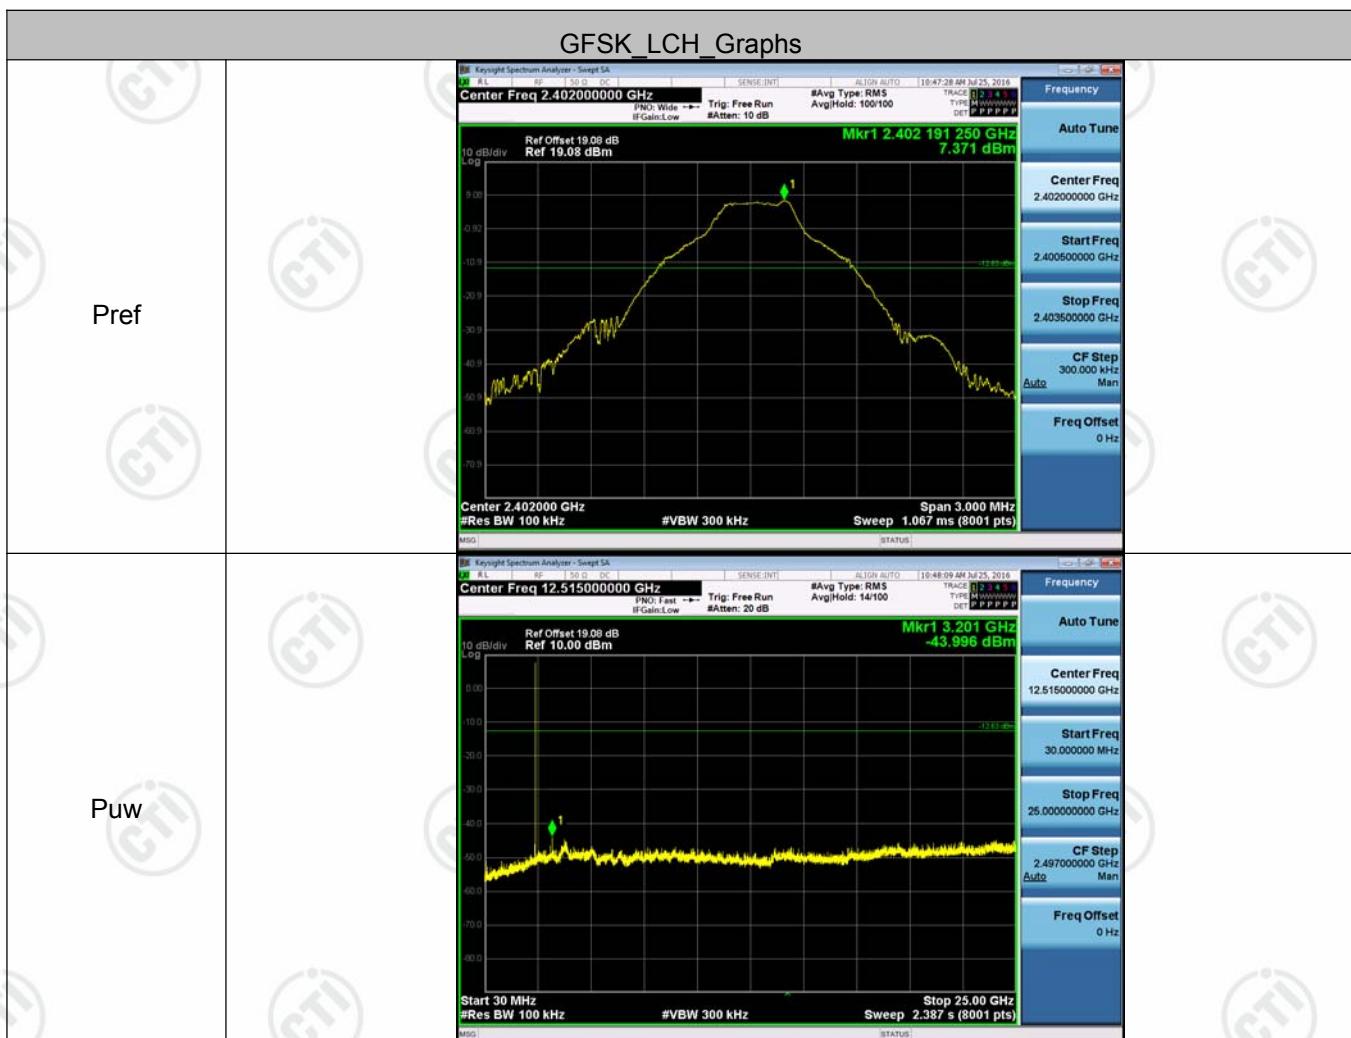

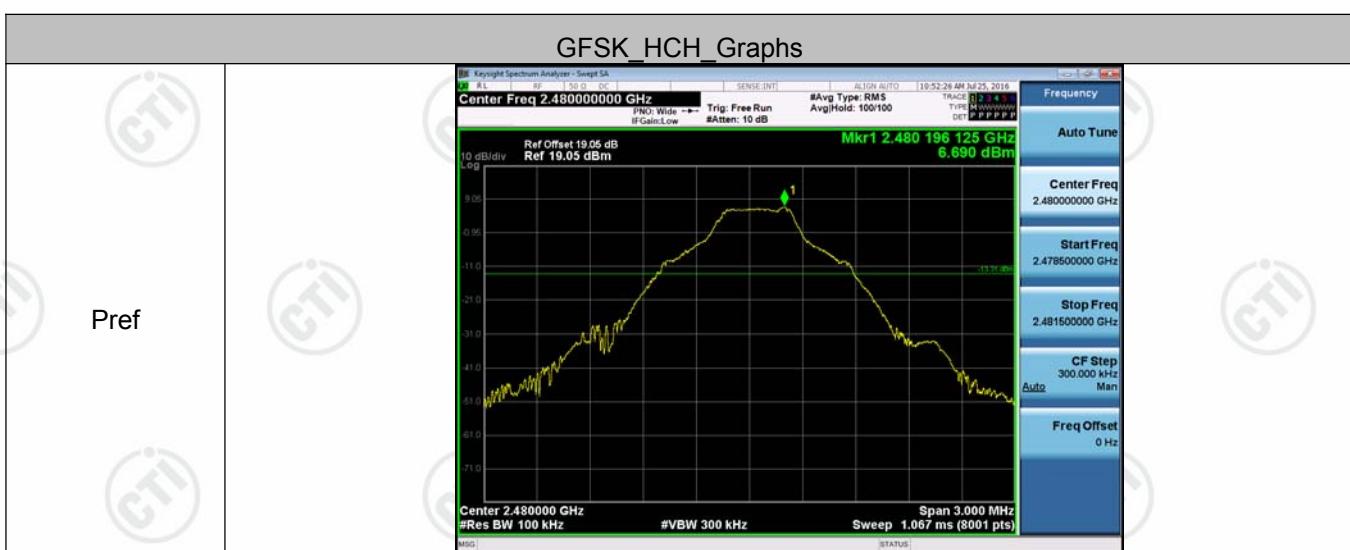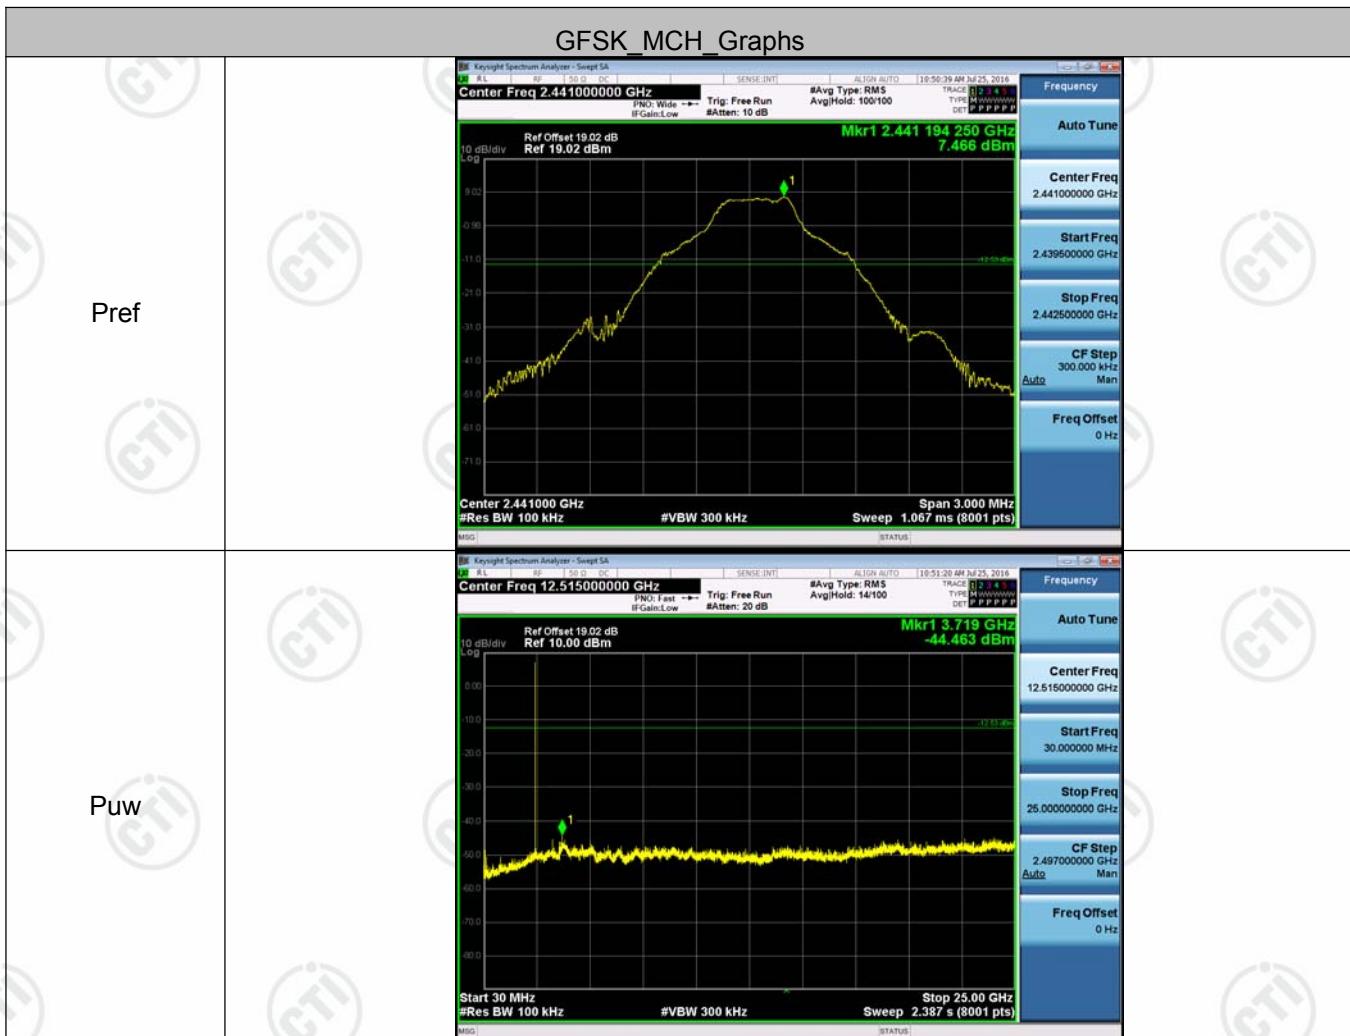

Puw

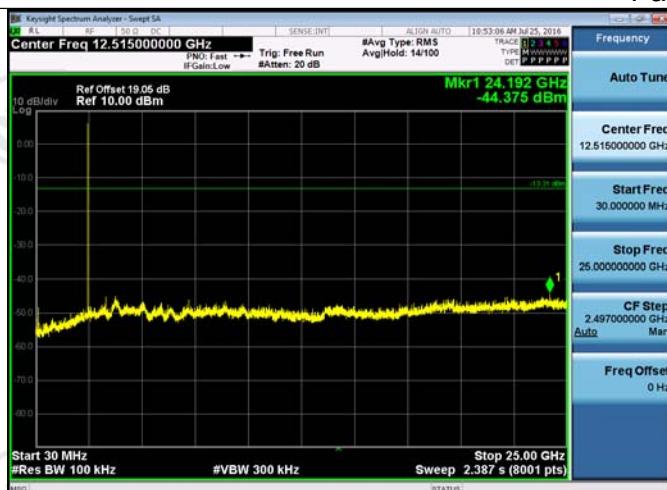


Pref




Puw



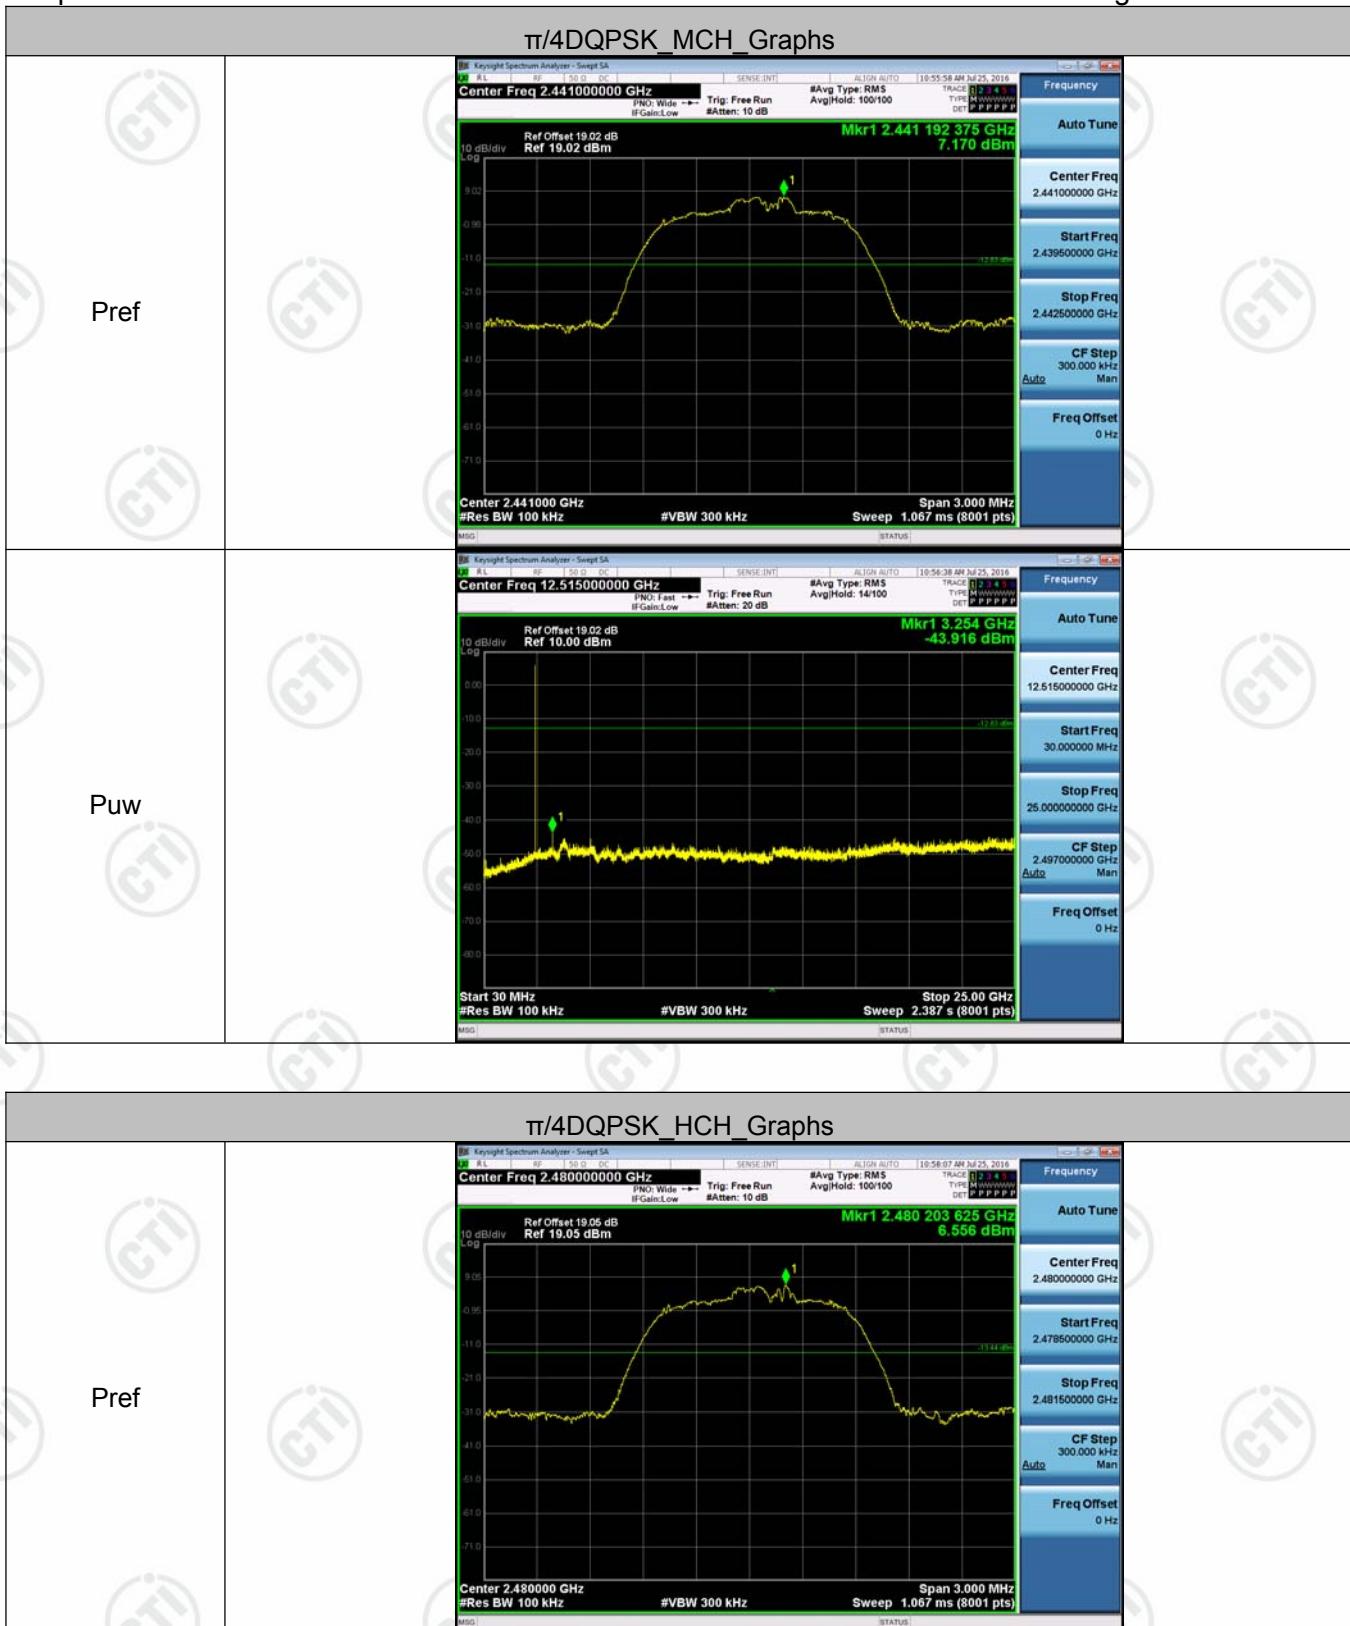

Puw

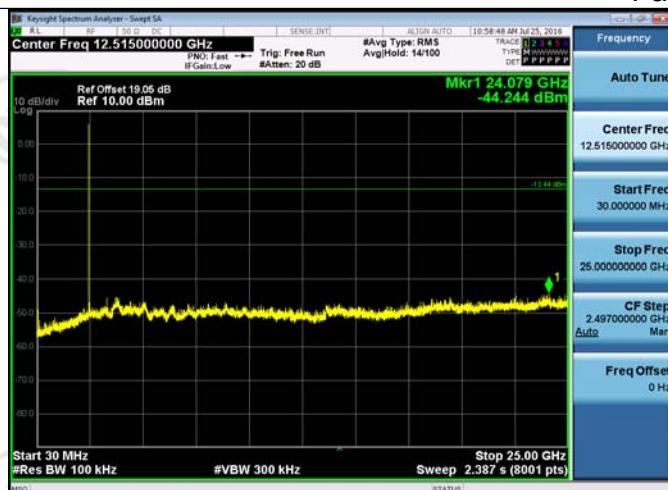

Pref




Puw







Appendix H): Pseudorandom Frequency Hopping Sequence

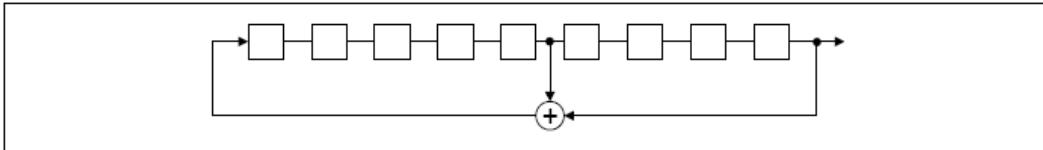Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:																						
	<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>																						
EUT Pseudorandom Frequency Hopping Sequence																							
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> Number of shift register stages: 9 Length of pseudo-random sequence: $2^9 - 1 = 511$ bits Longest sequence of zeros: 8 (non-inverted signal) 																							
 <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <table border="1"> <tr> <td>20</td> <td>62</td> <td>46</td> <td>77</td> <td>7</td> <td>64</td> <td>8</td> <td>73</td> <td>16</td> <td>75</td> <td>1</td> </tr> <tr> <td> </td> </tr> </table> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p> <p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>		20	62	46	77	7	64	8	73	16	75	1											
20	62	46	77	7	64	8	73	16	75	1													

Appendix I): Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1dBi.



Appendix J): AC Power Line Conducted Emission

Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:


80.0 dBuV

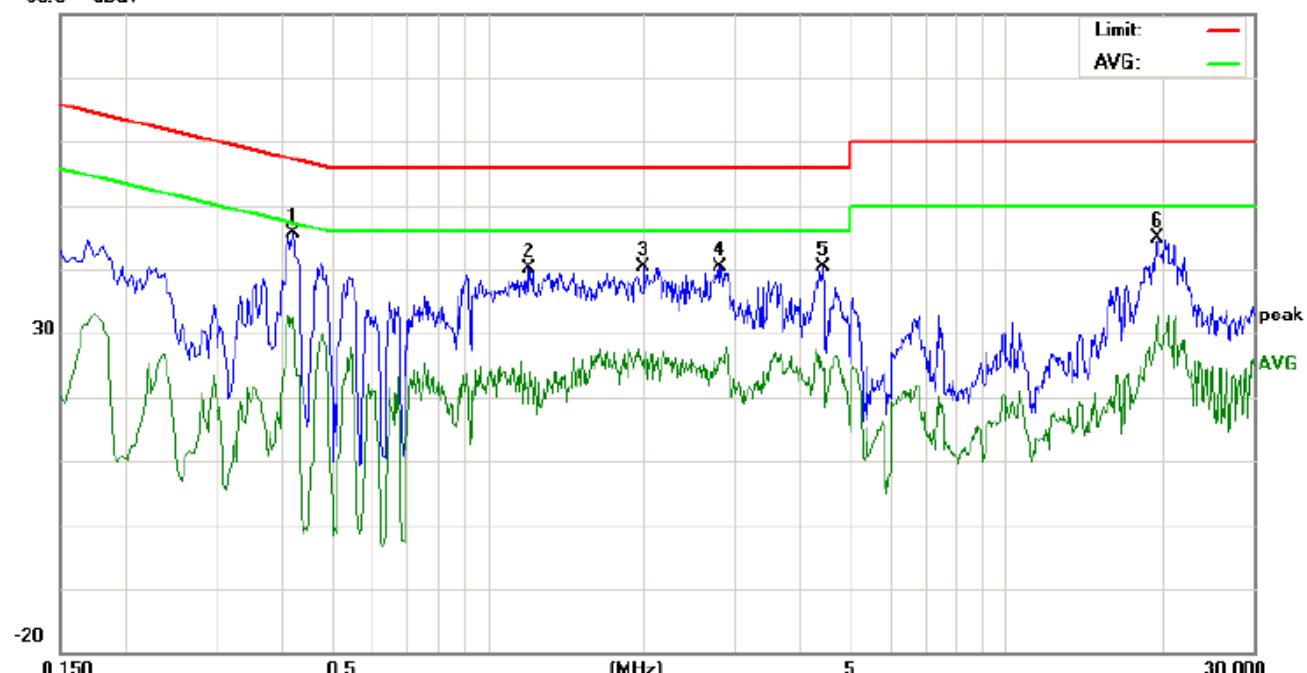

No.	Freq.	Reading_Level (dBuV)			Correct Factor		Measurement (dBuV)			Limit (dBuV)		Margin (dB)		
		MHz	Peak	QP	Avg	dB	peak	QP	Avg	QP	Avg	QP	Avg	P/F
1	0.4218	35.72	31.40	22.57	9.90	45.62	41.30	32.47	57.41	47.41	-16.11	-14.94	P	
2	1.2016	30.13	27.40	11.42	10.00	40.13	37.40	21.42	56.00	46.00	-18.60	-24.58	P	
3	2.0059	30.39	26.00	14.73	10.00	40.39	36.00	24.73	56.00	46.00	-20.00	-21.27	P	
4	2.8220	30.43	26.10	16.09	10.00	40.43	36.10	26.09	56.00	46.00	-19.90	-19.91	P	
5	4.4378	30.36	25.30	14.04	10.00	40.36	35.30	24.04	56.00	46.00	-20.70	-21.96	P	
6	19.5536	34.43	30.00	21.84	10.46	44.89	40.46	32.30	60.00	50.00	-19.54	-17.70	P	

Neutral line:

80.0 dBuV

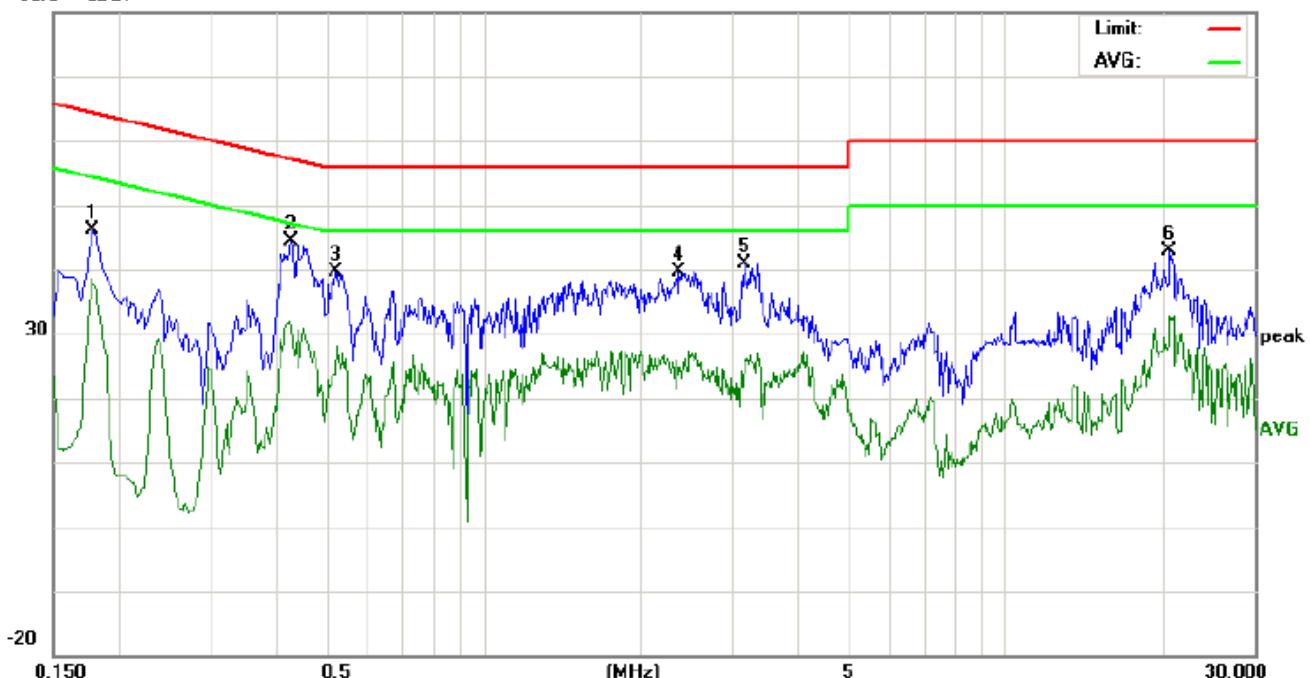

No.	Freq. MHz	Reading Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		
		Peak	QP	AVG		peak	QP	Avg	QP	Avg	QP	Avg	P/F
1	0.1779	36.43	32.40	28.78	9.80	46.23	42.20	38.58	64.58	54.58	-22.38	-16.00	P
2	0.4299	34.55	31.50	21.28	9.90	44.45	41.40	31.18	57.25	47.25	-15.85	-16.07	P
3	0.5220	29.68	24.60	13.73	9.90	39.58	34.50	23.63	56.00	46.00	-21.50	-22.37	P
4	2.3780	29.67	25.00	14.91	10.00	39.67	35.00	24.91	56.00	46.00	-21.00	-21.09	P
5	3.1699	30.94	26.30	15.86	10.00	40.94	36.30	25.86	56.00	46.00	-19.70	-20.14	P
6	20.6060	32.30	28.00	22.45	10.49	42.79	38.49	32.94	60.00	50.00	-21.51	-17.06	P

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

Appendix K): Restricted bands around fundamental frequency (Radiated)


Receiver Setup:	Frequency	Detector	RBW	VBW	Remark	
Test Procedure:	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	
	Above 1GHz	Peak	1MHz	3MHz	Peak	
		Peak	1MHz	10Hz	Average	
Below 1GHz test procedure as below:						
<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel 						
Above 1GHz test procedure as below: <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 						
Limit:		Frequency	Limit (dB μ V/m @3m)	Remark		
		30MHz-88MHz	40.0	Quasi-peak Value		
		88MHz-216MHz	43.5	Quasi-peak Value		
		216MHz-960MHz	46.0	Quasi-peak Value		
		960MHz-1GHz	54.0	Quasi-peak Value		
		Above 1GHz	54.0	Average Value		
			74.0	Peak Value		

Test plot as follows:

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

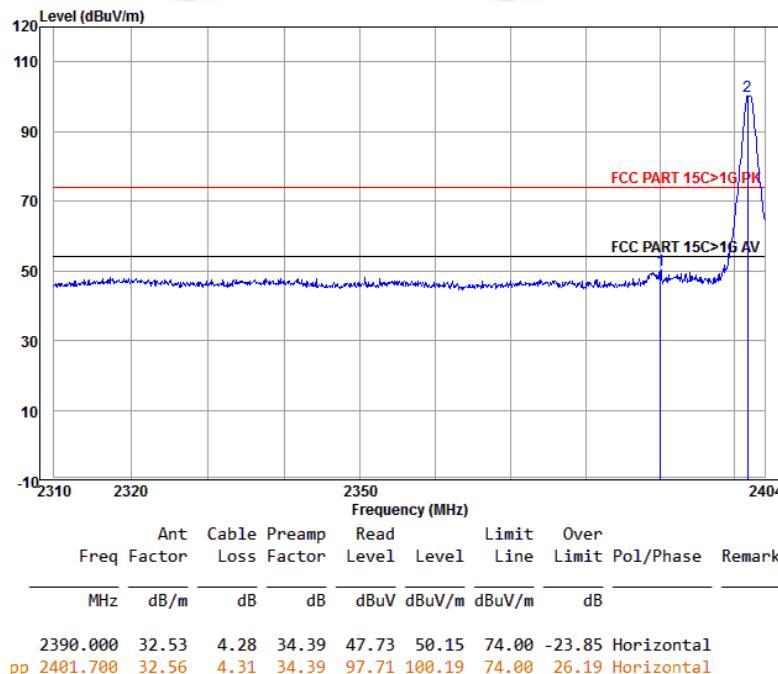


Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

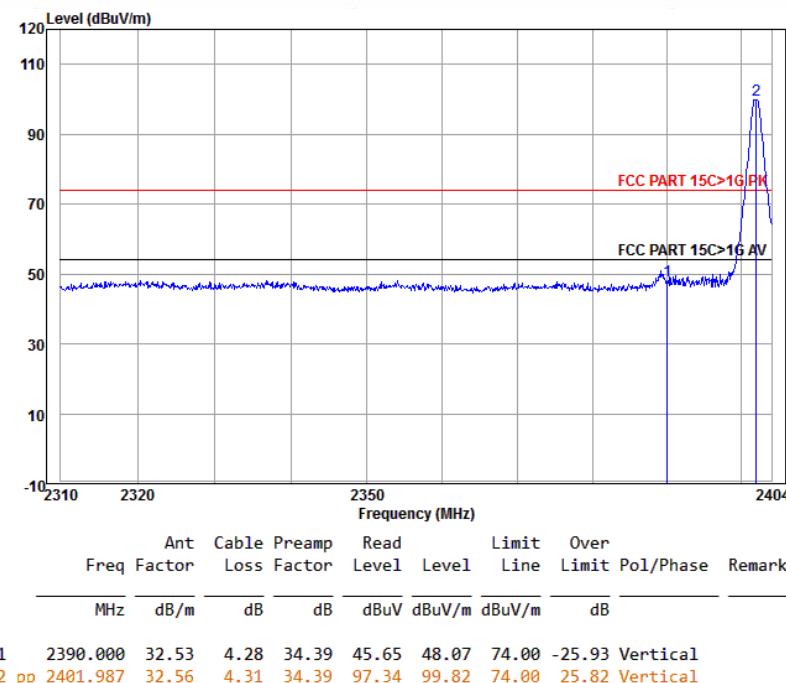

Report No. : EED32I00208205


Page 50 of 71

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

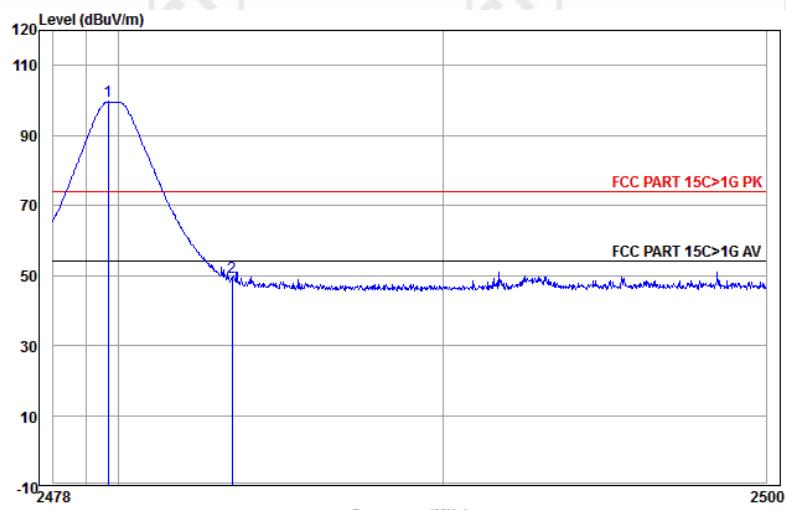

Freq	Ant Factor	Cable Loss Factor	Preamp	Read Level	Limit		Over Line Limit	Over Pol/Phase	Remark	
					MHz	dB/m	dB	dB	dBuV	dBuV/m
1	pp	2479.687	32.71	4.50	34.41	96.84	99.64	74.00	25.64	Horizontal
2		2483.500	32.71	4.51	34.41	46.63	49.44	74.00	-24.56	Horizontal

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

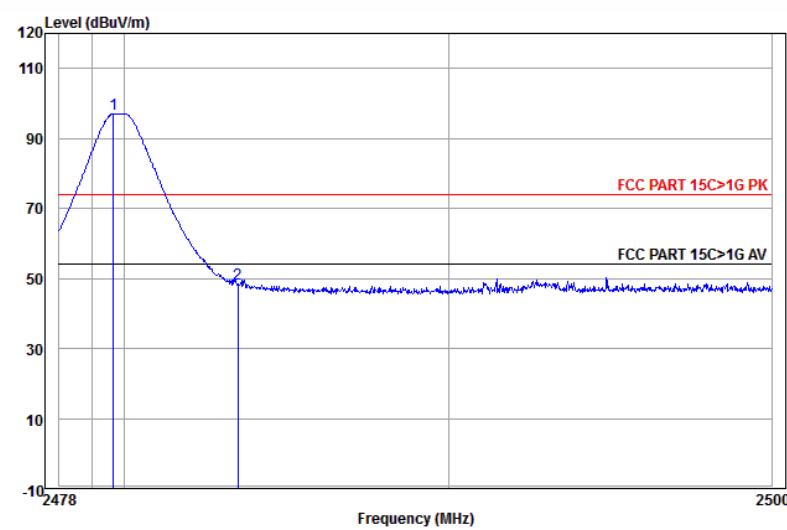


Freq	Ant Factor	Cable Loss Factor	Preamp	Read Level	Limit		Over Line Limit	Over Pol/Phase	Remark	
					MHz	dB/m	dB	dB	dBuV	dBuV/m
1	pp	2479.665	32.71	4.50	34.41	94.33	97.13	74.00	23.13	Vertical
2		2483.500	32.71	4.51	34.41	45.63	48.44	74.00	-25.56	Vertical

Report No. : EED32I00208205


Page 51 of 71

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

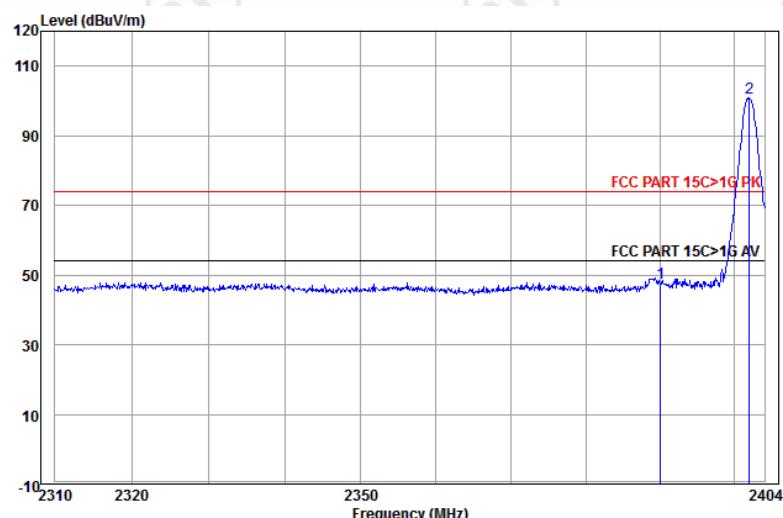

Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level		Limit Line	Over Limit	Over Line	Pol/Phase	Remark
				Level	Level					
MHz	dB/m			dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	32.53	4.28	34.39	45.18	47.60	74.00	-26.40		Horizontal	
2 pp 2401.987	32.56	4.31	34.39	98.47	100.95	74.00	26.95		Horizontal	

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

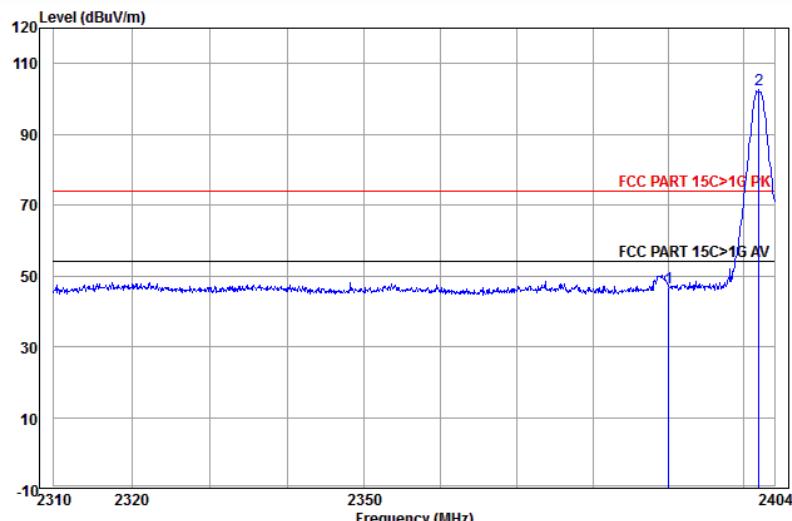


Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level		Limit Line	Over Limit	Over Line	Pol/Phase	Remark
				Level	Level					
MHz	dB/m			dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	32.53	4.28	34.39	44.25	46.67	74.00	-27.33		Vertical	
2 pp 2401.987	32.56	4.31	34.39	100.10	102.58	74.00	28.58		Vertical	

Report No. : EED32I00208205


Page 52 of 71

Worse case mode:	$\pi/4$ DQPSK(2-DH5)	
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal

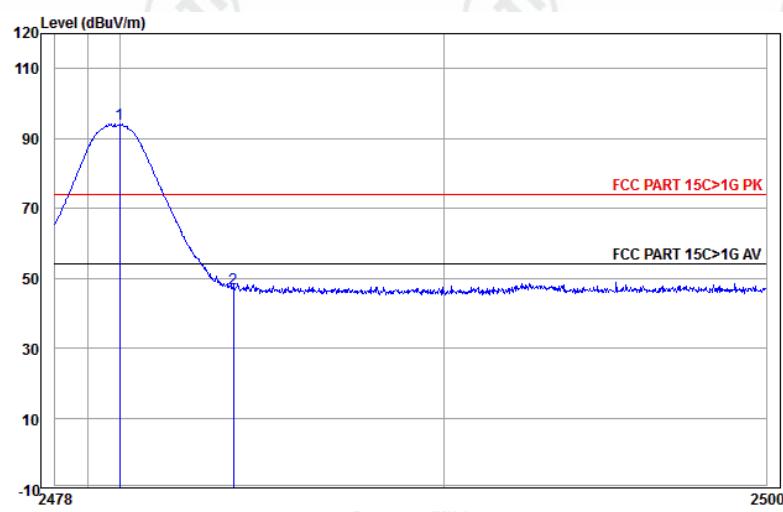

Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Over Line Limit	Pol/Phase	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		
1 pp	2479.994	32.71	4.50	34.41	91.39	94.19	74.00	20.19	Horizontal	
2	2483.500	32.71	4.51	34.41	44.32	47.13	74.00	-26.87	Horizontal	

Worse case mode:	$\pi/4$ DQPSK(2-DH5)	
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical

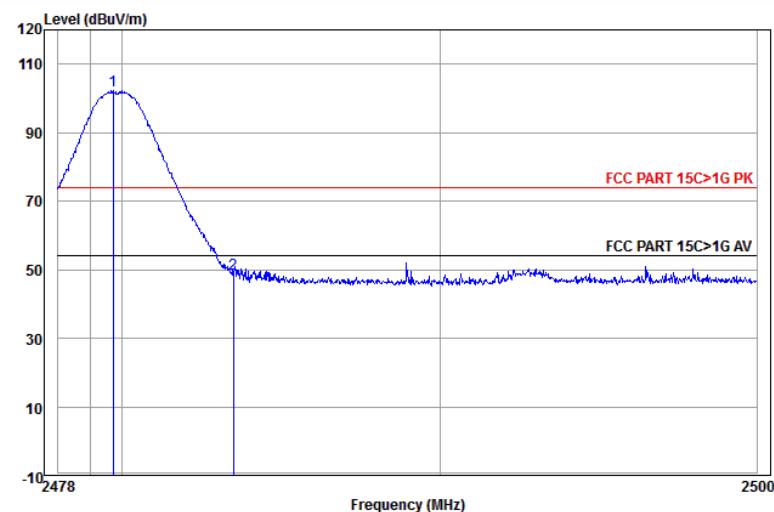


Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Over Line Limit	Pol/Phase	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		
1 pp	2479.731	32.71	4.50	34.41	99.45	102.25	74.00	28.25	Vertical	
2	2483.500	32.71	4.51	34.41	46.15	48.96	74.00	-25.04	Vertical	

Report No. : EED32I00208205


Page 53 of 71

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

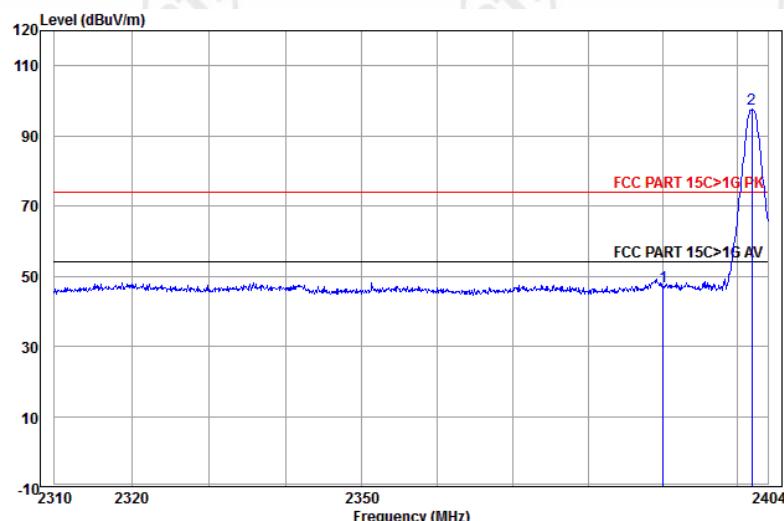

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Line Limit	Over Line Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	34.39	44.46	46.88	74.00	-27.12	Horizontal
2 pp	2401.891	32.56	4.31	34.39	95.18	97.66	74.00	23.66	Horizontal

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

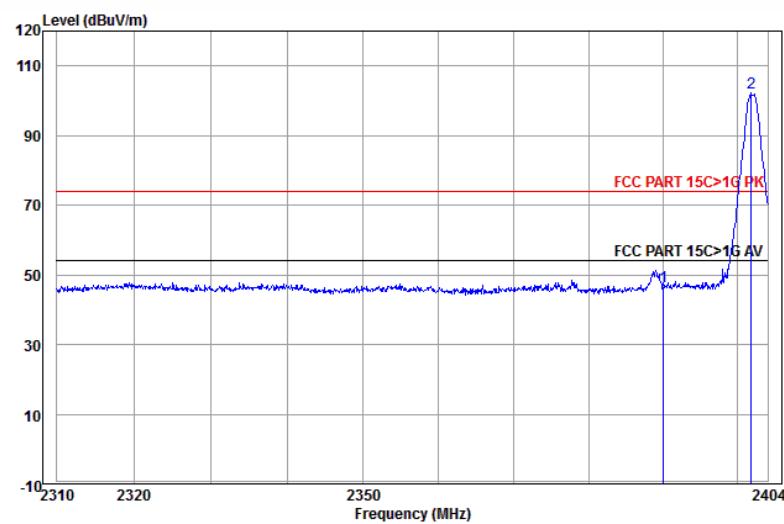


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Line Limit	Over Line Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	34.39	44.37	46.79	74.00	-27.21	Vertical
2 pp	2401.796	32.56	4.31	34.39	99.68	102.16	74.00	28.16	Vertical

Report No. : EED32I00208205

Page 54 of 71

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

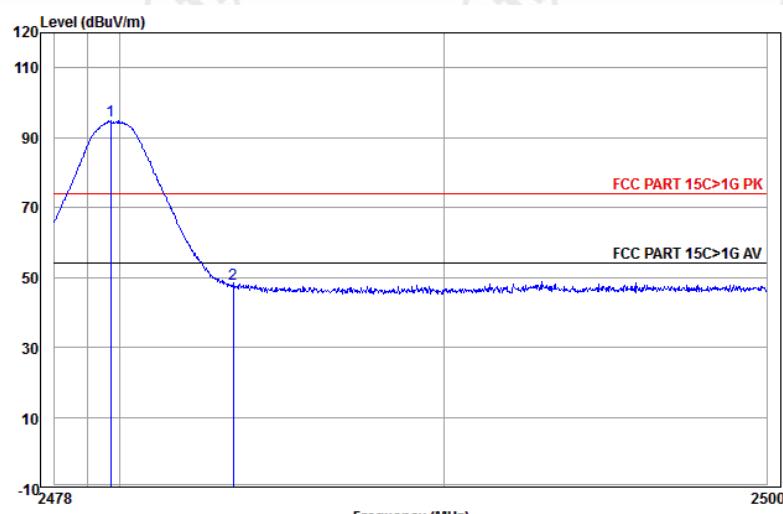


Freq	Ant	Cable	Preamp	Read	Limit	Over	Remark
	Freq	Factor	Loss	Factor	Level	Line	
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2479.731	32.71	4.50	34.41	91.93	94.73	74.00 20.73 Horizontal
2	2483.500	32.71	4.51	34.41	45.38	48.19	74.00 -25.81 Horizontal

1 pp 2479.731 32.71 4.50 34.41 91.93 94.73 74.00 20.73 Horizontal

2 2483.500 32.71 4.51 34.41 45.38 48.19 74.00 -25.81 Horizontal

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

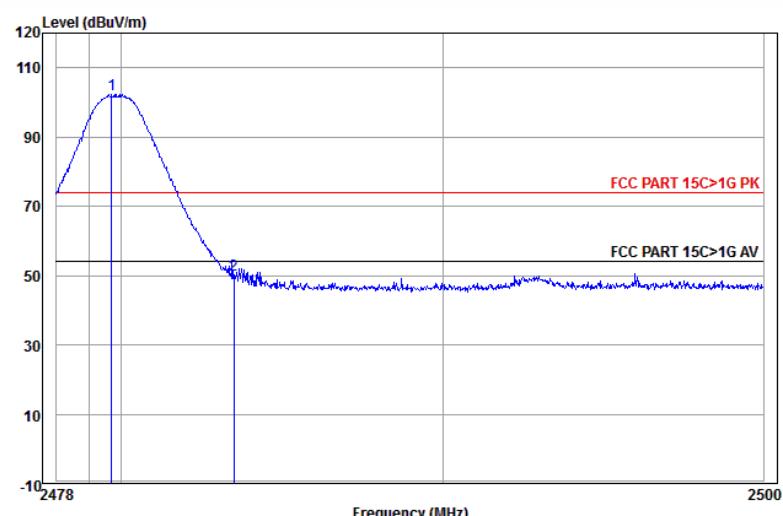

Freq	Ant	Cable	Preamp	Read	Limit	Over	Remark
	Freq	Factor	Loss	Factor	Level	Line	
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2479.709	32.71	4.50	34.41	99.53	102.33	74.00 28.33 Vertical
2	2483.500	32.71	4.51	34.41	47.27	50.08	74.00 -23.92 Vertical

1 pp 2479.709 32.71 4.50 34.41 99.53 102.33 74.00 28.33 Vertical

2 2483.500 32.71 4.51 34.41 47.27 50.08 74.00 -23.92 Vertical

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Report No. : EED32I00208205

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

Page 55 of 71



Appendix L): Radiated Spurious Emissions


Receiver Setup:		Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak		
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average		
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak		
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak		
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average		
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak		
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak		
Above 1GHz	Peak	1MHz	3MHz	Peak		
	Peak	1MHz	10Hz	Average		
Test Procedure:						
Below 1GHz test procedure as below:						
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.						
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.						
c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.						
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.						
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.						
f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.						
Above 1GHz test procedure as below:						
g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).						
h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel						
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which is worse case.						
j. Repeat above procedures until all frequencies measured was complete.						
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)	
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300	
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30	
	1.705MHz-30MHz	30	-	-	30	
	30MHz-88MHz	100	40.0	Quasi-peak	3	
	88MHz-216MHz	150	43.5	Quasi-peak	3	
	216MHz-960MHz	200	46.0	Quasi-peak	3	
	960MHz-1GHz	500	54.0	Quasi-peak	3	
	Above 1GHz	500	54.0	Average	3	
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Report No. : EED32100208205

Page 57 of 71


**Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz**

30MHz~1GHz (QP)		
Test mode:	Transmitting	Horizontal

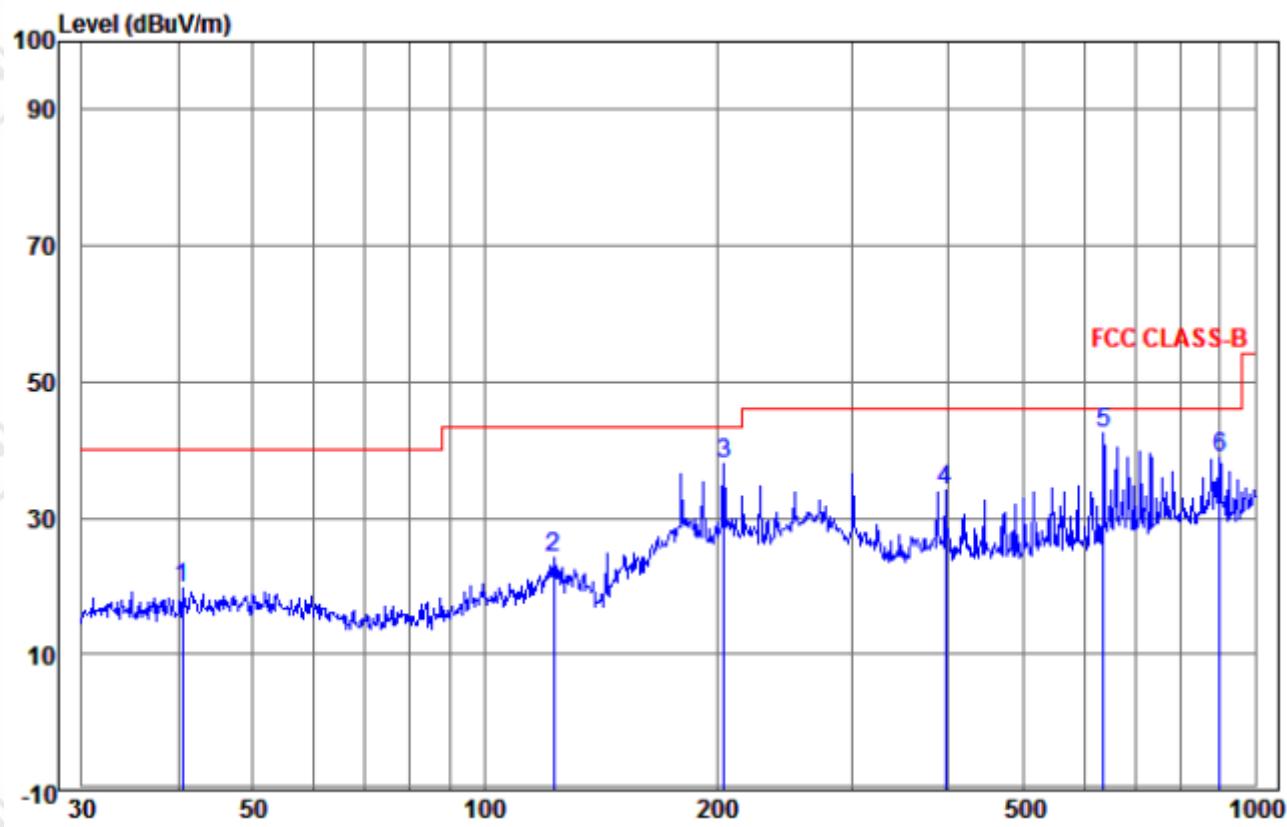

Freq	Ant Factor	Cable Loss	Read Level	Limit		Over Line	Over Limit	Pol/Phase	Remark
				MHz	dBuV	dBuV/m	dBuV/m	dB	
1	40.559	14.26	0.58	4.80	19.64	40.00	-20.36	Horizontal	
2	122.834	11.42	1.58	11.16	24.16	43.50	-19.34	Horizontal	
3	204.238	11.68	2.22	24.19	38.09	43.50	-5.41	Horizontal	
4	396.242	16.19	2.79	14.98	33.96	46.00	-12.04	Horizontal	
5 pp	636.134	19.38	3.55	19.55	42.48	46.00	-3.52	Horizontal	
6	900.147	22.40	4.34	12.07	38.81	46.00	-7.19	Horizontal	

Test mode:	Transmitting	Vertical
------------	--------------	----------

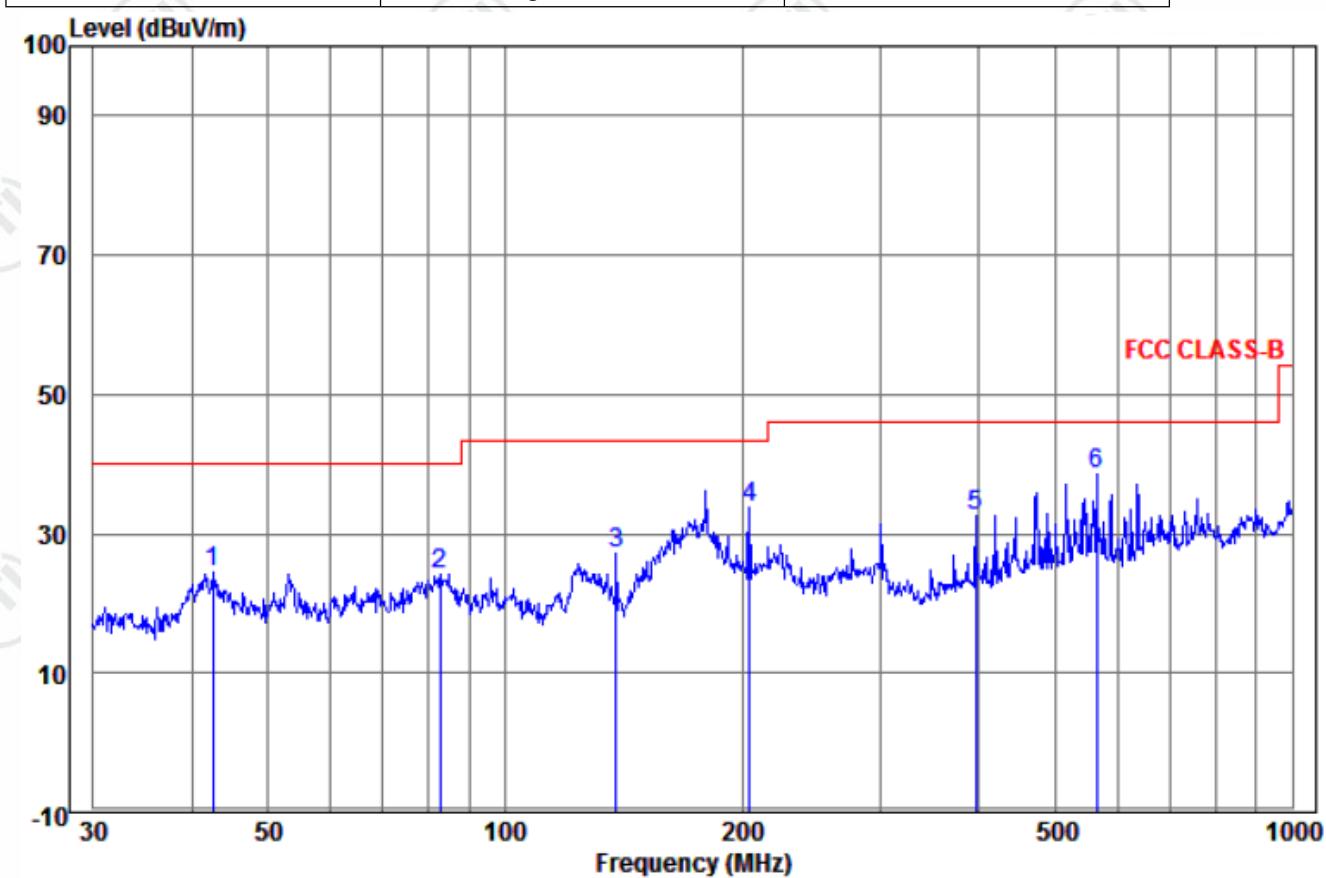

Freq	Ant Factor	Cable Loss	Read Level	Limit		Over Line Limit	Over Pol/Phase	Remark
				MHz	dB/m	dB	dBuV	dBuV/m
1	42.600	14.45	0.78	9.20	24.43	40.00	-15.57	Vertical
2	82.648	9.32	1.58	13.29	24.19	40.00	-15.81	Vertical
3	138.387	10.40	1.58	15.06	27.04	43.50	-16.46	Vertical
4	204.238	11.68	2.22	19.80	33.70	43.50	-9.80	Vertical
5	396.242	16.19	2.79	13.68	32.66	46.00	-13.34	Vertical
6 pp	564.639	18.66	3.30	16.57	38.53	46.00	-7.47	Vertical

Transmitter Emission above 1GHz

Worse case mode:		GFSK(1-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1235.257	30.31	2.56	34.93	44.96	42.90	74	-31.10	Pass	H
1800.416	31.40	3.08	34.44	44.18	44.22	74	-29.78	Pass	H
3445.704	33.21	5.53	34.55	41.97	46.16	74	-27.84	Pass	H
4804.000	34.69	5.11	34.35	41.42	46.87	74	-27.13	Pass	H
7206.000	36.42	6.66	34.90	40.70	48.88	74	-25.12	Pass	H
9608.000	37.88	7.73	35.08	37.35	47.88	74	-26.12	Pass	H
1156.150	30.12	2.46	35.01	45.03	42.60	74	-31.40	Pass	V
1938.352	31.61	3.19	34.34	44.24	44.70	74	-29.30	Pass	V
2957.654	33.53	5.54	34.49	43.09	47.67	74	-26.33	Pass	V
4804.000	34.69	5.11	34.35	42.21	47.66	74	-26.34	Pass	V
7206.000	36.42	6.66	34.90	40.88	49.06	74	-24.94	Pass	V
9608.000	37.88	7.73	35.08	36.89	47.42	74	-26.58	Pass	V

Worse case mode:		GFSK(1-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1153.210	30.11	2.46	35.01	44.45	42.01	74	-31.99	Pass	H
1800.416	31.40	3.08	34.44	45.11	45.15	74	-28.85	Pass	H
2942.635	33.51	5.51	34.49	43.90	48.43	74	-25.57	Pass	H
4882.000	34.85	5.08	34.33	42.00	47.60	74	-26.40	Pass	H
7323.000	36.43	6.77	34.90	39.87	48.17	74	-25.83	Pass	H
9764.000	38.05	7.60	35.05	37.95	48.55	74	-25.45	Pass	H
1303.086	30.46	2.63	34.86	44.70	42.93	74	-31.07	Pass	V
2092.175	31.91	3.50	34.32	43.30	44.39	74	-29.61	Pass	V
3128.013	33.48	5.59	34.51	44.40	48.96	74	-25.04	Pass	V
4882.000	34.85	5.08	34.33	41.46	47.06	74	-26.94	Pass	V
7323.000	36.43	6.77	34.90	41.15	49.45	74	-24.55	Pass	V
9764.000	38.05	7.60	35.05	38.55	49.15	74	-24.85	Pass	V

Worse case mode:		GFSK(1-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1257.465	30.36	2.58	34.90	48.02	46.06	74	-27.94	Pass	H
1741.812	31.30	3.04	34.48	45.32	45.18	74	-28.82	Pass	H
3728.625	33.00	5.48	34.58	45.02	48.92	74	-25.08	Pass	H
4960.000	35.02	5.05	34.31	41.83	47.59	74	-26.41	Pass	H
7440.000	36.45	6.88	34.90	40.34	48.77	74	-25.23	Pass	H
9920.000	38.22	7.47	35.02	38.26	48.93	74	-25.07	Pass	H
1232.117	30.30	2.55	34.93	43.80	41.72	74	-32.28	Pass	V
1655.354	31.15	2.97	34.55	44.15	43.72	74	-30.28	Pass	V
3072.770	33.53	5.61	34.51	44.19	48.82	74	-25.18	Pass	V
4960.000	35.02	5.05	34.31	40.98	46.74	74	-27.26	Pass	V
7440.000	36.45	6.88	34.90	39.89	48.32	74	-25.68	Pass	V
9920.000	38.22	7.47	35.02	37.53	48.20	74	-25.80	Pass	V

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1165.013	30.14	2.47	35.00	44.75	42.36	74	-31.64	Pass	H
1795.839	31.39	3.08	34.44	43.94	43.97	74	-30.03	Pass	H
3160.026	33.46	5.59	34.52	44.02	48.55	74	-25.45	Pass	H
4804.000	34.69	5.11	34.35	42.33	47.78	74	-26.22	Pass	H
7206.000	36.42	6.66	34.90	40.87	49.05	74	-24.95	Pass	H
9608.000	37.88	7.73	35.08	38.01	48.54	74	-25.46	Pass	H
1132.844	30.06	2.43	35.04	45.72	43.17	74	-30.83	Pass	V
1832.785	31.45	3.11	34.41	44.68	44.83	74	-29.17	Pass	V
3216.838	33.41	5.58	34.52	44.98	49.45	74	-24.55	Pass	V
4804.000	34.69	5.11	34.35	42.96	48.41	74	-25.59	Pass	V
7206.000	36.42	6.66	34.90	41.15	49.33	74	-24.67	Pass	V
9608.000	37.88	7.73	35.08	37.93	48.46	74	-25.54	Pass	V

Report No. : EED32I00208205

Page 61 of 71

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1204.210	30.24	2.52	34.96	45.96	43.76	74	-30.24	Pass	H
1659.574	31.16	2.97	34.54	43.50	43.09	74	-30.91	Pass	H
3472.118	33.19	5.53	34.55	43.59	47.76	74	-26.24	Pass	H
4882.000	34.85	5.08	34.33	42.28	47.88	74	-26.12	Pass	H
7323.000	36.43	6.77	34.90	40.63	48.93	74	-25.07	Pass	H
9764.000	38.05	7.60	35.05	37.42	48.02	74	-25.98	Pass	H
1296.469	30.45	2.62	34.86	44.02	42.23	74	-31.77	Pass	V
1923.606	31.59	3.18	34.35	44.04	44.46	74	-29.54	Pass	V
3376.244	33.27	5.55	34.54	43.17	47.45	74	-26.55	Pass	V
4882.000	34.85	5.08	34.33	41.87	47.47	74	-26.53	Pass	V
7323.000	36.43	6.77	34.90	40.90	49.20	74	-24.80	Pass	V
9764.000	38.05	7.60	35.05	37.45	48.05	74	-25.95	Pass	V

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1176.935	30.17	2.49	34.99	44.18	41.85	74	-32.15	Pass	H
1818.842	31.43	3.10	34.42	44.52	44.63	74	-29.37	Pass	H
3579.815	33.11	5.51	34.56	43.32	47.38	74	-26.62	Pass	H
4960.000	35.02	5.05	34.31	41.29	47.05	74	-26.95	Pass	H
7440.000	36.45	6.88	34.90	41.17	49.60	74	-24.40	Pass	H
9920.000	38.22	7.47	35.02	38.20	48.87	74	-25.13	Pass	H
1216.534	30.27	2.53	34.95	44.46	42.31	74	-31.69	Pass	V
1759.638	31.33	3.05	34.47	43.52	43.43	74	-30.57	Pass	V
3428.206	33.23	5.54	34.55	41.99	46.21	74	-27.79	Pass	V
4960.000	35.02	5.05	34.31	42.88	48.64	74	-25.36	Pass	V
7440.000	36.45	6.88	34.90	40.02	48.45	74	-25.55	Pass	V
9920.000	38.22	7.47	35.02	37.98	48.65	74	-25.35	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1388.708	30.65	2.72	34.77	44.40	43.00	74	-31.00	Pass	H
1837.456	31.46	3.11	34.41	44.56	44.72	74	-29.28	Pass	H
3266.346	33.36	5.57	34.53	44.24	48.64	74	-25.36	Pass	H
4804.000	34.69	5.11	34.35	42.31	47.76	74	-26.24	Pass	H
7206.000	36.42	6.66	34.90	39.93	48.11	74	-25.89	Pass	H
9608.000	37.88	7.73	35.08	37.27	47.80	74	-26.20	Pass	H
1260.670	30.37	2.58	34.90	48.90	46.95	74	-27.05	Pass	V
1617.862	31.09	2.93	34.58	46.37	45.81	74	-28.19	Pass	V
3283.018	33.35	5.56	34.53	43.85	48.23	74	-25.77	Pass	V
4804.000	34.69	5.11	34.35	42.61	48.06	74	-25.94	Pass	V
7206.000	36.42	6.66	34.90	40.93	49.11	74	-24.89	Pass	V
9608.000	37.88	7.73	35.08	37.74	48.27	74	-25.73	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1207.279	30.24	2.52	34.96	44.90	42.70	74	-31.30	Pass	H
1768.619	31.35	3.06	34.46	44.64	44.59	74	-29.41	Pass	H
3160.026	33.46	5.59	34.52	44.20	48.73	74	-25.27	Pass	H
4882.000	34.85	5.08	34.33	42.52	48.12	74	-25.88	Pass	H
7323.000	36.43	6.77	34.90	39.98	48.28	74	-25.72	Pass	H
9764.000	38.05	7.60	35.05	38.14	48.74	74	-25.26	Pass	H
1219.635	30.27	2.54	34.94	45.17	43.04	74	-30.96	Pass	V
1933.424	31.60	3.18	34.34	44.55	44.99	74	-29.01	Pass	V
3653.463	33.05	5.50	34.57	43.21	47.19	74	-26.81	Pass	V
4882.000	34.85	5.08	34.33	43.11	48.71	74	-25.29	Pass	V
7323.000	36.43	6.77	34.90	41.30	49.60	74	-24.40	Pass	V
9764.000	38.05	7.60	35.05	37.53	48.13	74	-25.87	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1107.186	29.99	2.40	35.07	44.78	42.10	74	-31.90	Pass	H
1973.201	31.66	3.21	34.32	43.30	43.85	74	-30.15	Pass	H
3973.622	32.82	5.44	34.60	41.73	45.39	74	-28.61	Pass	H
4960.000	35.02	5.05	34.31	40.03	45.79	74	-28.21	Pass	H
7440.000	36.45	6.88	34.90	39.10	47.53	74	-26.47	Pass	H
9920.000	38.22	7.47	35.02	36.65	47.32	74	-26.68	Pass	H
1198.095	30.22	2.51	34.97	48.42	46.18	74	-27.82	Pass	V
1630.264	31.11	2.94	34.57	43.34	42.82	74	-31.18	Pass	V
3653.463	33.05	5.50	34.57	42.25	46.23	74	-27.77	Pass	V
4960.000	35.02	5.05	34.31	40.64	46.40	74	-27.60	Pass	V
7440.000	36.45	6.88	34.90	39.06	47.49	74	-26.51	Pass	V
9920.000	38.22	7.47	35.02	36.68	47.35	74	-26.65	Pass	V

Note:

1) Pre-scan transmitting mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP

Test mode No.: WisePad 2

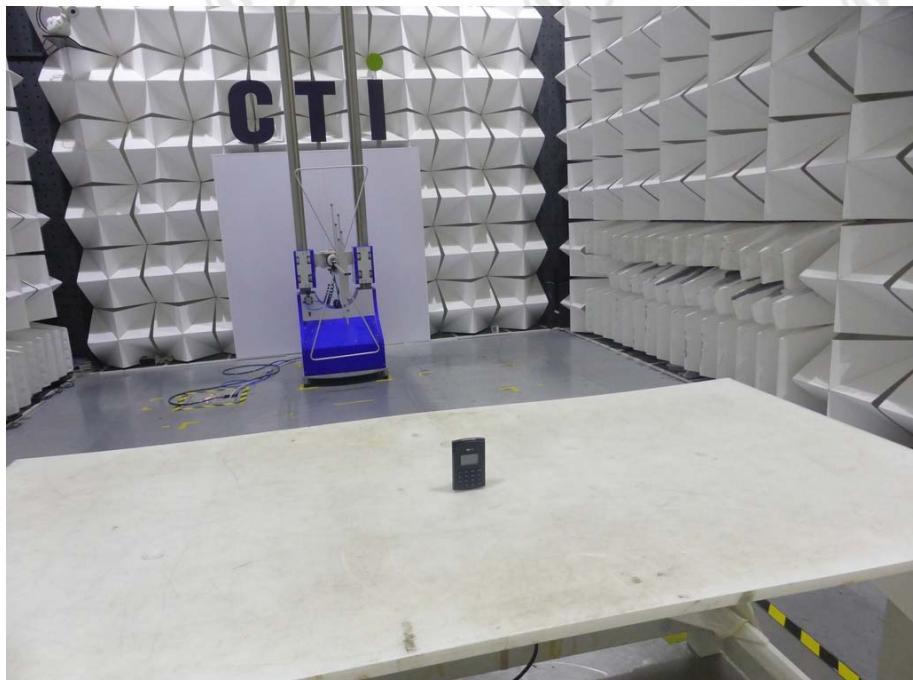

Radiated spurious emission Test Setup-1(Below 1GHz)



Radiated spurious emission Test Setup-2(Above 1GHz)



Conducted Emissions Test Setup

PHOTOGRAPHS OF EUT Constructional Details


Test model No.: WisePad 2



View of Product-2



View of Product-2

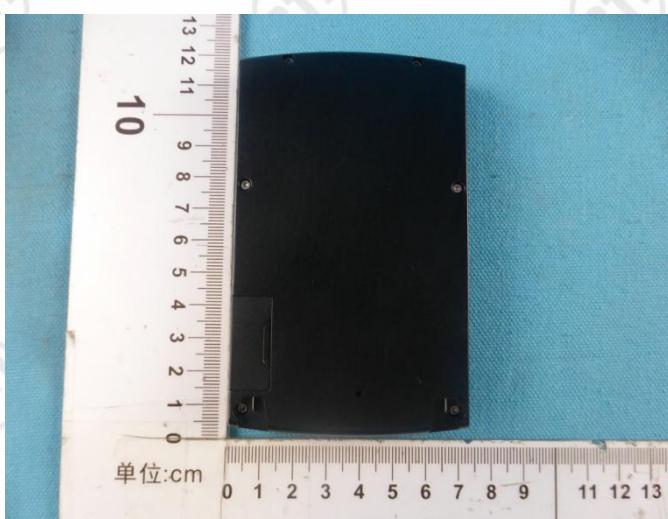

View of Product-3



View of Product-4



View of Product-5



View of Product-6



View of Product-7




View of Product-8




View of Product-9



View of Product-10

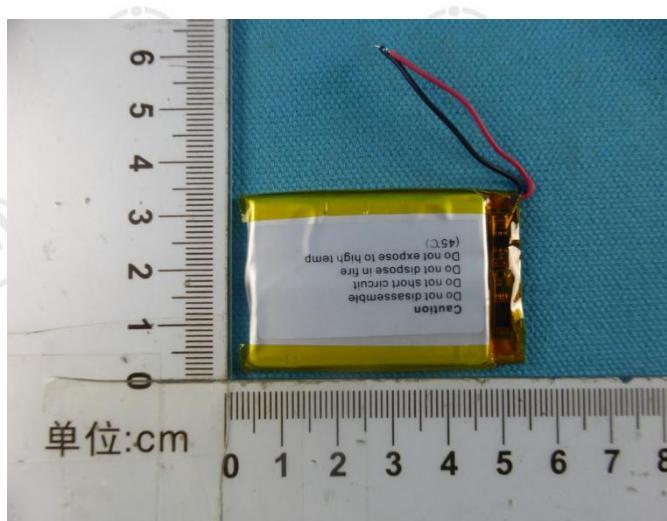


View of Product-11

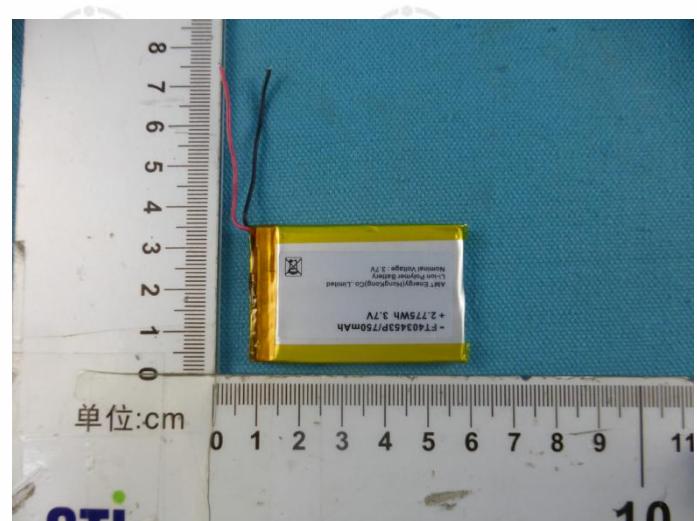


View of Product-12




View of Product-13

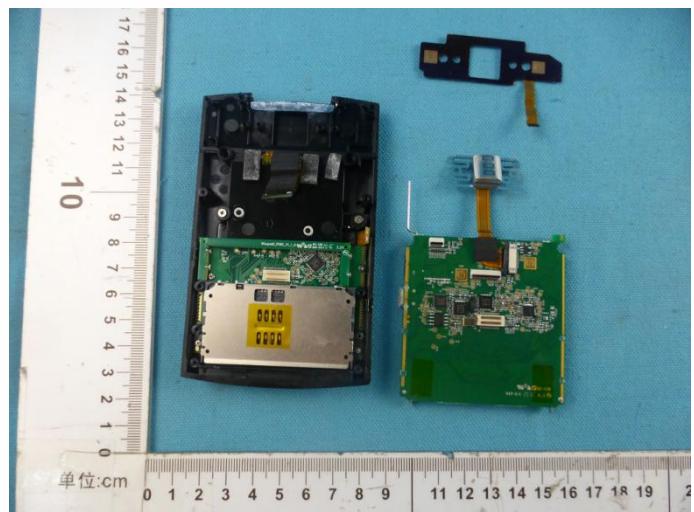

View of Product-14

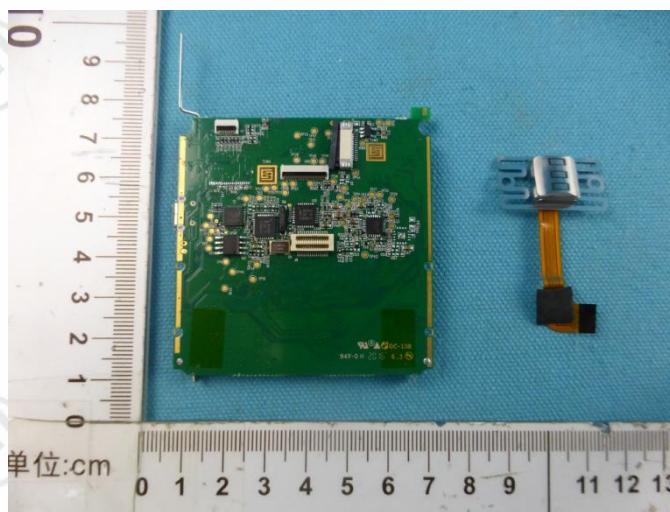


View of Product-15

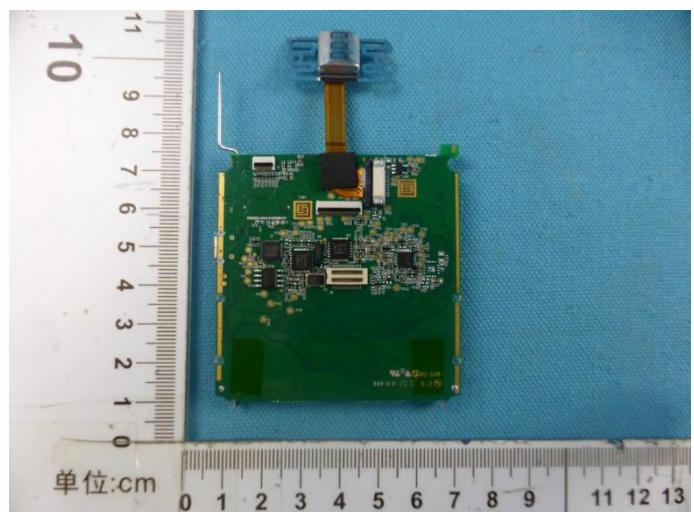

View of Product-16



View of Product-17

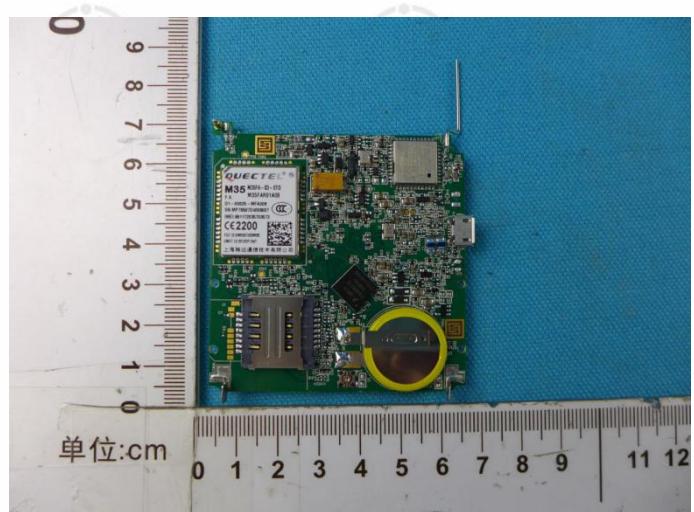

View of Product-18

Report No. : EED32I00208205


Page 69 of 71




View of Product-19




View of Product-20

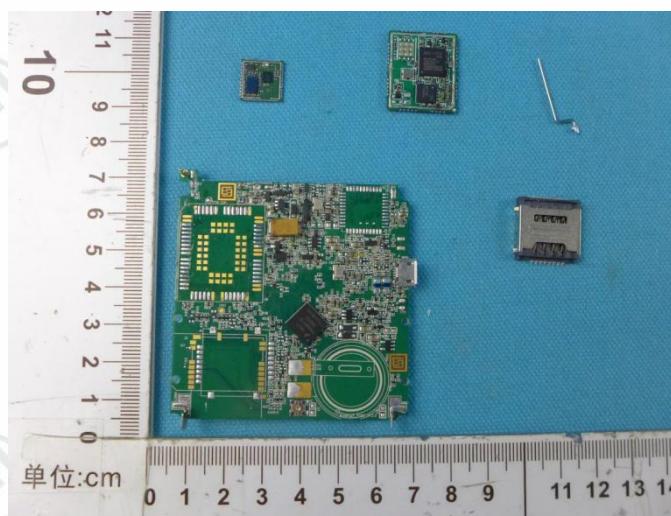


View of Product-21

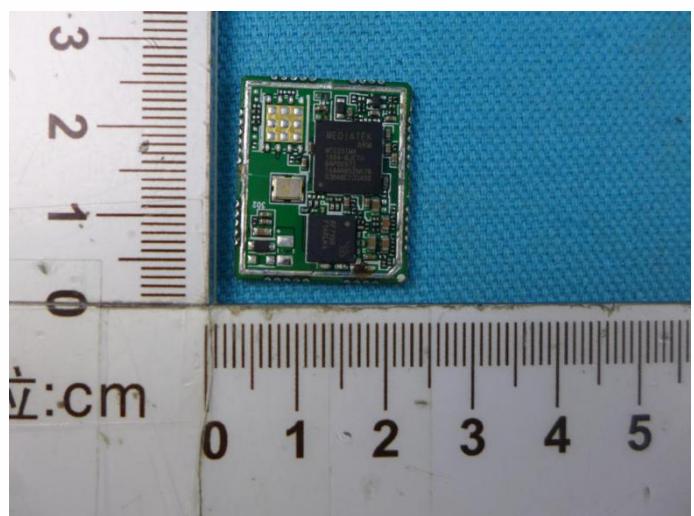

View of Product-22

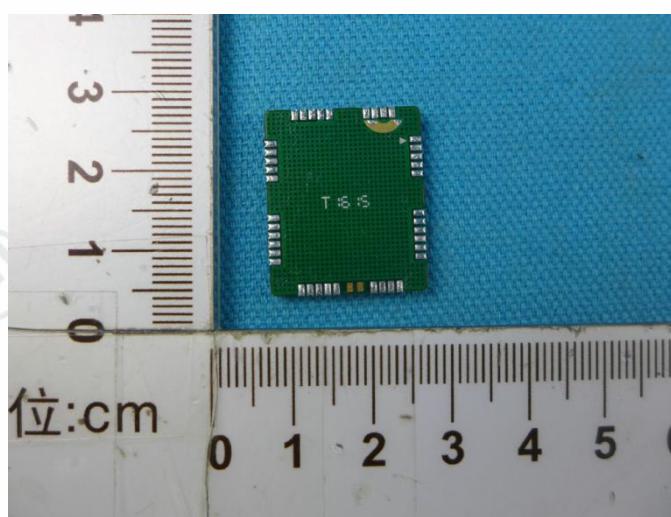


View of Product-23

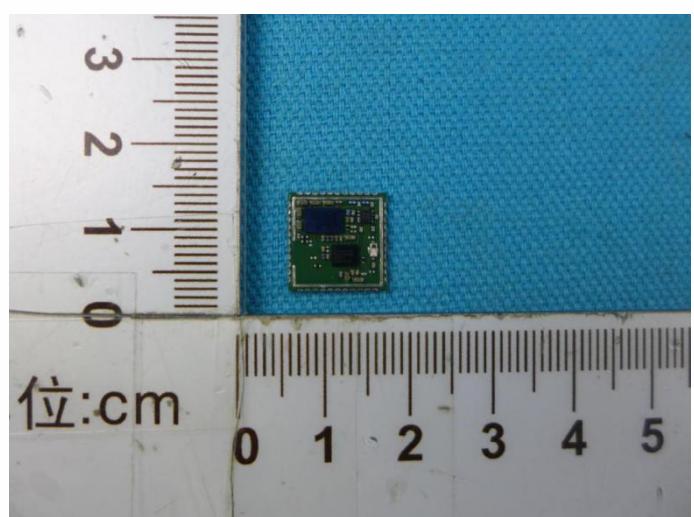


View of Product-24

Report No. : EED32100208205

Page 70 of 71

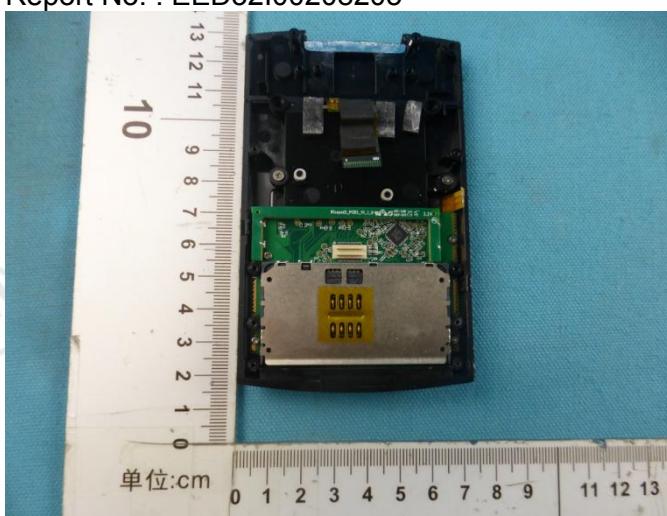

View of Product-25

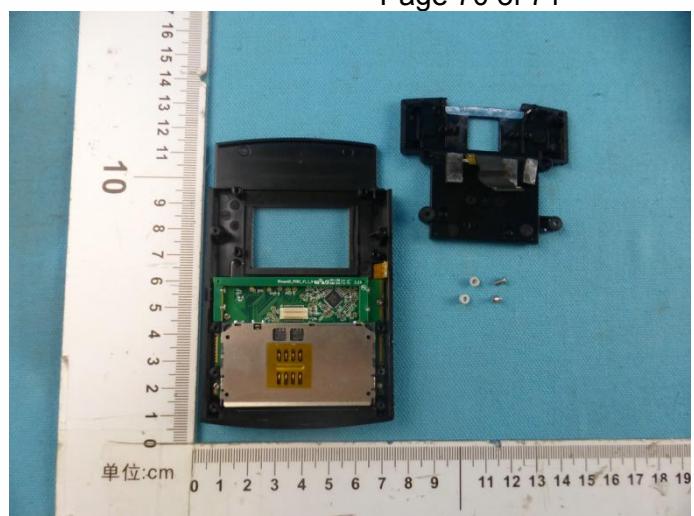


View of Product-26




View of Product-27




View of Product-28

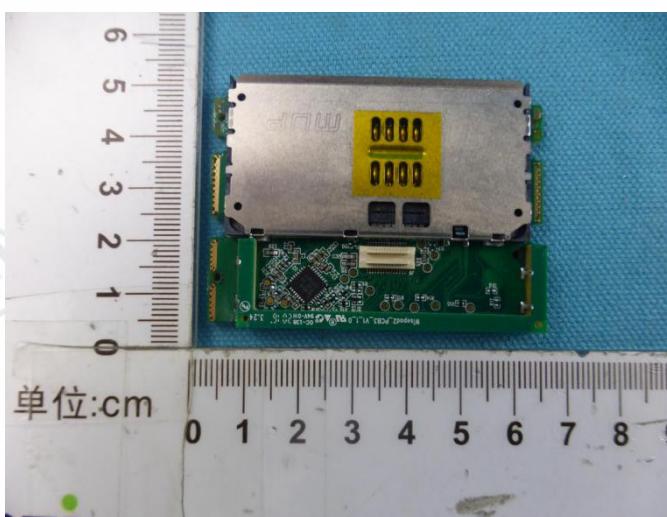


View of Product-29

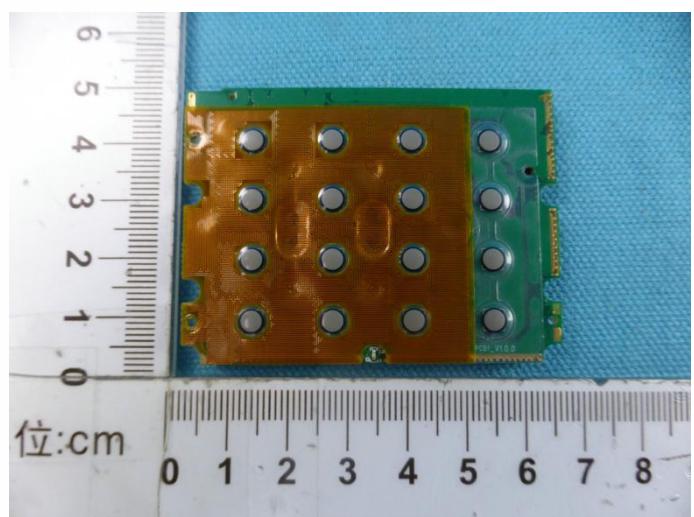


View of Product-30

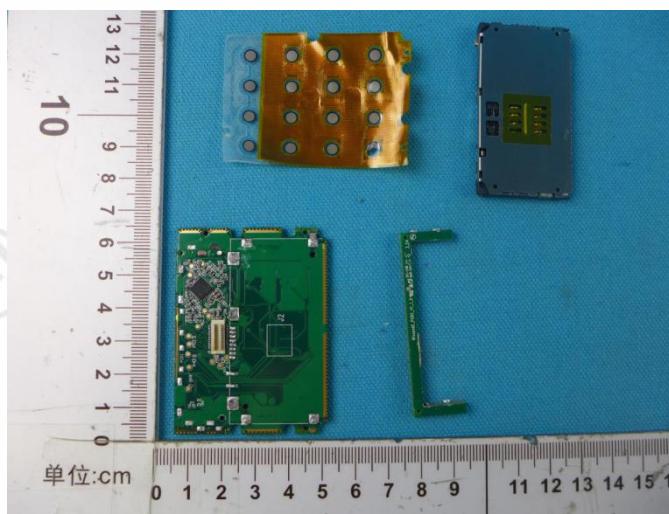

View of Product-31

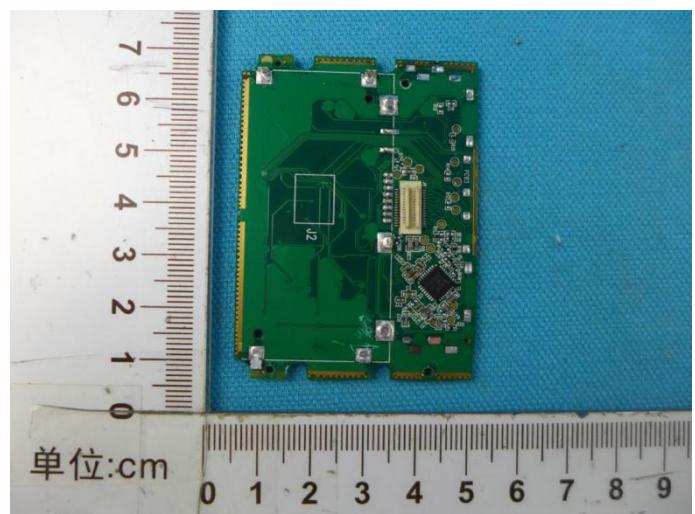

View of Product-32

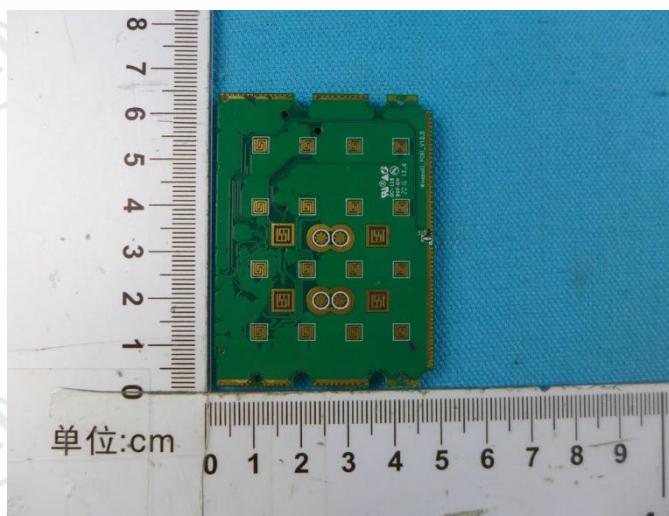

View of Product-33

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.