

FCC RADIO TEST REPORT FCC ID: 2ABBCHM7006

Product: 7" Tablet PC

Trade Name: HT XIII

Model Number: Handxom-T1

Serial Model: HM7006

Report No.: BZT131120012F1

Prepared for


Handxom, S.A.

3 Delmas 105, Petion Ville, Haiti

Prepared by

BZT Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen P.R. China





TEST RESULT CERTIFICATION

Applicant's name	Handxom, S.A.		
Address:	3 Delmas 105,Petion Ville,Haiti		
Manufacture's Name	Handxom, S.A.		
Address	3 Delmas 105,Petion Ville,Haiti		
Product name:	7" Tablet PC		
Model and/or type reference:	Handxom-T1		
Serial Model:	HM7006		
Standards	FCC Part 22H and 24E		
Test procedure:	ANSI C63.4-2003		
	een tested by BZT, and the test results show that the equipment ith the FCC requirements. And it is applicable only to the tested		
·	except in full, without the written approval of BZT, this document rsonal only, and shall be noted in the revision of the document.		
Date of Test			
Date of Test Date (s) of performance of tests Date of Issue	01 Nov 2013 ~27 Nov 2013		
Date (s) of performance of tests	01 Nov 2013 ~27 Nov 2013 27 Nov 2013		
Date (s) of performance of tests Date of Issue	01 Nov 2013 ~27 Nov 2013 27 Nov 2013		
Date (s) of performance of tests Date of Issue Test Result	01 Nov 2013 ~27 Nov 2013 27 Nov 2013 Pass		
Date (s) of performance of tests Date of Issue Test Result	01 Nov 2013 ~27 Nov 2013 27 Nov 2013 Pass : Apple Huang		
Date (s) of performance of tests Date of Issue Test Result Testing Engineer	01 Nov 2013 ~27 Nov 2013 27 Nov 2013 Pass : Apple Huang (Apple Huang)		
Date (s) of performance of tests Date of Issue Test Result Testing Engineer	01 Nov 2013 ~27 Nov 2013 27 Nov 2013 Pass : Apple Huang (Apple Huang) : Tom 2hang		
Date (s) of performance of tests Date of Issue Test Result Testing Engineer Technical Manager	01 Nov 2013 ~27 Nov 2013 27 Nov 2013 Pass : Apple Huang (Apple Huang) : Tom 2hang		



TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	
1.2 RELATED SUBMITTAL(S) / GRANT (S)	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
1.5 MEASUREMENT INSTRUMENTS	6
1.6 SPECIAL ACCESSORIES	6
1.7 EQUIPMENT MODIFICATIONS	6
2. SYSTEM TEST CONFIGURATION	7
2.1 EUT CONFIGURATION	
2.2 EUT EXERCISE	
2.3 GENERAL TECHNICAL REQUIREMENTS	
2.4 CONFIGURATION OF EUT SYSTEM	
3. SUMMARY OF TEST RESULTS	a
4. DESCRIPTION OF TEST MODES	9
5. OUTPUT POWER	10
5.1 Conducted Output Power	10
5.2 Radiated Output Power	16
6. SPURIOUS EMISSION	20
6.1 CONDUCTED SPURIOUS EMISSION	
6.2 Radiated Spurious Emission	
7. FREQUENCY STABILITY	
7.1 MEASUREMENT METHOD	
7.1 MEASUREMENT METHOD	
7.2 PROVISIONS APPLICABLE	26



7.3 MEASUREMENT RESULT	
8. OCCUPIED BANDWIDTH	31
8.1 MEASUREMENT METHOD	31
8.2 PROVISIONS APPLICABLE	31
8.3 MEASUREMENT RESULT	31
9. EMISSION BANDWIDTH	33
9.1 MEASUREMENT METHOD	33
9.2 PROVISIONS APPLICABLE	
9.3 MEASUREMENT RESULT	
10. BAND EDGE	35
10.1 MEASUREMENT METHOD	35
10.2 PROVISIONS APPLICABLE	
10.3 MEASUREMENT RESULT	
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION	36
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)	46
EMISSION BANDWIDTH (-26DBC)	46
APPENDIX III	52
TEST PLOTS FOR BAND EDGES	52
APPENDIX IV	56
 PHOTOGRAPHS OF TEST SETUP	56



1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

	<u> </u>		
Product Designation:	7" Tablet PC		
Hardware version:			
Software version:			
FCC ID:	2ABBCHM7006		
Frequency Bands:	☐GSM 850 ☐PCS 1900 (U.S. Bands) ☐GSM 900 ☐DCS 1800 (Non-U.S. Bands) U.S. Bands: ☐UMTS FDD Band II ☐UMTS FDD Band V Non-U.S. Bands: ☐UMTS FDD Band I ☐UMTS FDD Band VIII		
Bluetooth	Frequency:2402 – 2480 MHz Modulation:GFSK Output Power: 0.895dBm		
Wifi	Frequency:2412 – 2462 MHz Modulation: CCK/OFDM/DBPSK/DAPSK Output Power: 9.45 dBm		
Antenna:	Integrated Antenna		
Antenna gain:	1.0dBi		
Power Supply:	DC 3.7V by battery or DC 5.0V supplied by adapter		
Battery parameter:	DC 3.7V/2800mAh		
Adapter Input:	AC100-240V, 50-60Hz		
Adapter Output:	DC 5.0V, 2A		
GPRS/EDGE Class	Multi-Class12		
Extreme Vol. Limits:	DC3.4 V to 4.2 V (Nominal DC3.7 V)		
Extreme Temp. Tolerance	-10℃ to +50℃		
** Note: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer. The FLIT			

^{**} Note: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.





Max. Conducted Power **MODE** (dBm) 32.27 GSM850 **GPRS 850** 32.19 **EDGE 850** 25.69 GSM1900 29.49 **GPRS 1900** 29.49 EDGE1900 24.76 UMTS BAND II 23.23



Report No.: BZT131120012F1

Page 6 of 56

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ABBCHM7006** filing to comply with the FCC Part 22H&24E.

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

BZT Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.

FCC Registration No.: 701733

1.5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	NEXT CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2015.6.26
TEST RECEIVER	R&S	ESCI	A0304218	2015.6.26
COMMUNICATION TESTER	AGILENT	8960	3104A03367	2015.7.21
COMMUNICATION TESTER	R&S	CMU200	A0304247	2015.7.21
TEST RECEIVER	R&S	FCKL1528	A0304230	2015.6.26
LISN	SCHWARZBECK	NSLK8127	A0304233	2015.6.26
CLIMATE CHAMBER	ALBATROSS			2015.6.26
Loop Antenna	Daze	ZN30900N	SEL0097	2015.6.26
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	N/A	2015.4.26
Horn Antenna	EM	EM-AH-10180	N/A	2015.4.26

1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
4	Output	Conducted output power	22.042(a) / 24.222 (b)
'	Power	Radiated output power	22.913(a) / 24.232 (b)
	Spurious	Conducted	
2	Spurious Emission	spurious emission	2.1051 / 22.917 / 24.238
Emission	Emission	Radiated spurious emission	
3	Frequency Stability		2.1055 /24.235
4	Occupied Bandwidth		2.1049 (h)(i)
5	Emission Bandwidth		22.917(b) / 24.238 (b)
6	Band Edge		22.917(b) / 24.238 (b)



Report No.: BZT131120012F1

Page 8 of 56

2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System

EUT

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	7" Tablet PC	Handxom-T1	FCC ID: 2ABBCHM7006	EUT

Note: All the accessories have been used during the test. the following "EUT" in setup diagram means EUT system.



3. SUMMARY OF TEST RESULTS

Item Number	Item	Description	FCC Rules	Result	
		Conducted			
1	Output	Output Power	22.913(a) / 24.232 (b)	Pass	
Į.	Power	Radiated	22.913(a) / 24.232 (b)	F 033	
		Output Power			
		Conducted			
2	Spurious	Spurious Emission	2.1051 / 22.917 / 24.238	Pass	
	Emission	Radiated	2.1051/22.917/24.230	Pa55	
		Spurious Emission			
3	Mains Conducted Emission		15.107 / 15.207	Pass	
4	Frequency Stability		2.1055 /24.235	Pass	
5	Occupied Bandwidth		2.1049 (h)(i)	Pass	
6	Emission Bandwidth		22.917(b) / 24.238 (b)	Pass	
7	Band Edge		22.917(b) / 24.238 (b)	Pass	

4. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS/EDGES850, GSM/GPRS/EDGE1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V modes have been tested during the test.

the worst condition (GPRS/EDGE 850) be recorded in the test report if no other modes test data.



5. OUTPUT POWER

5.1 Conducted Output Power

5.1.1 MEASUREMENT METHOD


The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GPRS/EDGE850, GPRS/EDGE1900, HSDPA band II) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

5.1.2 MEASUREMENT RESULT

Conducted Output Power Limits for GSM 850 MHZ			
Mode Nominal Peak Power Tolerance(dB)			
GSM850	32 dBm	+/- 1	

Conducted Output Power Limits for PCS 1900 MHZ			
Mode Nominal Peak Power Tolerance(dB)			
GSM1900	29dBm	+/- 1	

Conducted Output Power Limits for WCDMA band II			
Mode Nominal Peak Power Tolerance(dB)			
WCDMA band II	22.5 dBm	+/- 1	






GSM 850:

Mode	Frequency	Peak Power
	(MHz)	
	824.2	32.23
GSM850	836.6	32.27
	848.8	32.22
CDDCoro	824.2	32.19
GPRS850	836.6	32.12
(1 Slot)	848.8	32.09
CDDCoco	824.2	29.55
GPRS850	836.6	29.46
(2 Slot)	848.8	29.41
CDDCoco	824.2	27.49
GPRS850	836.6	27.41
(3 Slot)	848.8	27.23
CDDC050	824.2	25.32
GPRS850	836.6	25.47
(4 Slot)	848.8	25.65

PCS 1900:

Mode	Frequency (MHz)	Peak Power
	1850.2	29.47
GSM1900	1880	29.49
	1909.8	29.40
CDDS1000	1850.2	29.49
GPRS1900	1880	29.30
(1 Slot)	1909.8	29.37
CDDC1000	1850.2	26.46
GPRS1900	1880	26.40
(2 Slot)	1909.8	26.33
CDDC1000	1850.2	24.85
GPRS1900	1880	24.56
(3 Slot)	1909.8	24.77
CDDS1000	1850.2	23.41
GPRS1900	1880	23.56
(4 Slot)	1909.8	23.72





EDGE 850:

Mode	Frequency	Peak Power
	(MHz)	
EGPRS850	824.2	25.02
	836.6	25.69
(1 Slot)	848.8	25.26
FORDCOFO	824.2	24.34
EGPRS850	836.6	24.33
(2 Slot)	848.8	24.39
	824.2	22.24
EGPRS850	836.6	22.51
(3 Slot)	848.8	22.25
EODDO050	824.2	21.16
EGPRS850	836.6	21.44
(4 Slot)	848.8	21.87

EDGE 1900:

Mode	Frequency (MHz)	Peak Power
EGPRS1900	1850.2	24.76
	1880	24.29
(1 Slot)	1909.8	24.30
ECDDS4000	1850.2	23.41
EGPRS1900	1880	23.23
(2 Slot)	1909.8	23.20
ECDB \$4000	1850.2	21.83
EGPRS1900 (3 Slot)	1880	21.72
(3 3101)	1909.8	21.28
ECDD \$1000	1850.2	20.38
EGPRS1900	1880	20.39
(4 Slot)	1909.8	20.35



UMTS BAND II

Mode	Frequency (MHz)	Peak Power
\\(\text{\tinc{\text{\tin}\text{\tin}\text{\tin}\tint{\text{\text{\tin}\text{\text{\text{\text{\text{\tex{\tex	1852.4	23.23
WCDMA 1900	1880	23.18
RMC	1907.6	23.15
WODIM 4000	1852.4	23.15
WCDMA 1900	1880	22.12
AMR	1907.6	22.09
LIODEA	1852.4	21.19
HSDPA	1880	21.1
Subtest 1	1907.6	21.14
HODDA	1852.4	21.08
HSDPA	1880	21.12
Subtest 2	1907.6	21.08
LIODEA	1852.4	21.09
HSDPA	1880	21.07
Subtest 3	1907.6	21.15
110004	1852.4	21.13
HSDPA	1880	21.11
Subtest 4	1907.6	21.19
LIOLIDA	1852.4	21.09
HSUPA	1880	21.1
Subtest 1	1907.6	21.01
LIOLIDA	1852.4	21.05
HSUPA	1880	21.04
Subtest 2	1907.6	21.03
LIOLIDA	1852.4	21.02
HSUPA	1880	21.23
Subtest 3	1907.6	21.18
LICUDA	1852.4	21.15
HSUPA	1880	21.15
Subtest 4	1907.6	21.12
LICLIDA	1852.4	21.09
HSUPA	1880	21.19
Subtest 5	1907.6	21.1



Report No.: BZT131120012F1

Page 14 of 56

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH	0≤ CM≤3.5	MAX(CM-1,0)
HS-DPDCH,E-DPDCH and E-DPCCH	05 CIVIS3.5	IVIAA(CIVI-1,0)

Note: CM=1 for β_c/β_d =12/15, β_{hs}/β_c =24/15.For all other combinations of DPDCH, DPCCH,

HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.



Report No.: BZT131120012F1

Page 15 of 56

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



5.2 Radiated Output Power

5.2.1 MEASUREMENT METHOD


The measurements procedures specified in TIA-603C-2004 were applied.

- In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. The ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi..
- 9. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850	<=38.45 dBm (7W)
PCS 1900	<=33 dBm (2W)
UMTS BAND II	<=38.45 dBm (7W)





5.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850 MHZ				
		Result		
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion
		(dBm)	Of Max. ERP	
	824.2	29.64	Horizontal	Pass
	824.2	27.43	Vertical	Pass
CCMOTO	836.6	29.87	Horizontal	Pass
GSM850	836.6	28.82	Vertical	Pass
	848.8	30.11	Horizontal	Pass
	848.8	29.32	Vertical	Pass

Radiated Power (ERP) for GPRS 850 MHZ				
		Result		
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion
		(dBm)	Of Max. ERP	
	824.2	28.22	Horizontal	Pass
	824.2	27.13	Vertical	Pass
GPRS850	836.6	28.65	Horizontal	Pass
GFRS650	836.6	28.10	Vertical	Pass
	848.8	28.76	Horizontal	Pass
	848.8	27.31	Vertical	Pass

Radiated Power (ERP) for EDGE 850 MHZ				
		Result		
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion
		(dBm)	Of Max. ERP	
	824.2	22.75	Horizontal	Pass
	824.2	21.18	Vertical	Pass
EDGE850	836.6	22.11	Horizontal	Pass
EDGE830	836.6	21.20	Vertical	Pass
	848.8	22.25	Horizontal	Pass
	848.8	22.03	Vertical	Pass





Radiated Power (E.I.R.P) for PCS 1900 MHZ Result Frequency Max. Peak **Polarization** Conclusion Mode E.I.R.P.(dBm) Of Max. E.I.R.P. Pass 1850.2 21.35 Horizontal Pass 1850.2 22.61 Vertical 1880.0 21.98 Horizontal **Pass** PCS1900 1880.0 21.42 Vertical Pass Horizontal 1909.8 22.07 Pass Vertical Pass 1909.8 21.13

	Radiated Power (E.I.R.P) for GPRS 1900 MHZ			
		Result		
Mode	Frequency	Max. Peak	Polarization	Conclusion
		E.I.R.P.(dBm)	Of Max. E.I.R.P.	
	1850.2	27.42	Horizontal	Pass
	1850.2	26.12	Vertical	Pass
GPRS	1880.0	27.23	Horizontal	Pass
1900	1880.0	25.87	Vertical	Pass
	1909.8	28.01	Horizontal	Pass
	1909.8	26.03	Vertical	Pass

Radiated Power (E.I.R.P) for EDGE 1900 MHZ				
	Result			
Mode	Frequency	Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	Conclusion
	1850.2	27.43	Horizontal	Pass
	1850.2	26.13	Vertical	Pass
EDGE	1880.0	27.24	Horizontal	Pass
1900	1880.0	25.43	Vertical	Pass
	1909.8	27.99	Horizontal	Pass
	1909.8	26.14	Vertical	Pass



Radiated Power (E.I.R.P) for UMTS band II Result **Frequency** Max. Peak **Polarization** Conclusion Mode E.I.R.P.(dBm) Of Max. E.I.R.P. 1852.4 20.45 Horizontal Pass 1880 19.06 Vertical Pass Pass **RMC** 1907.6 21.01 Horizontal Vertical Pass 12.2kbps 1852.4 20.18 1880 21.68 Horizontal **Pass** 1907.6 20.19 Vertical Pass

NOTE 1: in the part, result the worst case GPRS 1slot for GSM 850 and PCS1900, and RMC 12.2kbps for band II.



6. SPURIOUS EMISSION

6.1 CONDUCTED SPURIOUS EMISSION

6.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the FUT

- 1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
- 2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM/GPRS/EDGE 850 MHz		
Channel	Frequency (MHz)	
128	824.2	
190	836.6	
251	848.8	

Typical Channels for testing of PCS/ GPRS/EDGE 1900 MHz		
Channel	Frequency (MHz)	
512	1850.2	
661	1880.0	
810	1909.8	

Typical Channels for testing of UMTS band II		
Channel Frequency (MHz)		
9662	1852.4	
9800	1880	
9938	1907.6	



Report No.: BZT131120012F1

Page 21 of 56

6.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

6.1.3 MEASUREMENT RESULT

PLEASE REFER TO: APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

Note: 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.




6.2 Radiated Spurious Emission

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS850, GPRS1900, HSDPA band II,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The procedure of radiated spurious emissions is as follows:


a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, RSE=Rx (dBuV) +CL (dB) +SA (dB) +Gain (dBi) -107 (dBuV to dBm) The SA is calibrated using following setup.

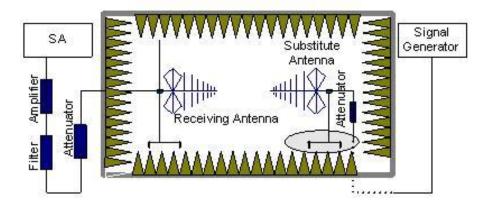

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.





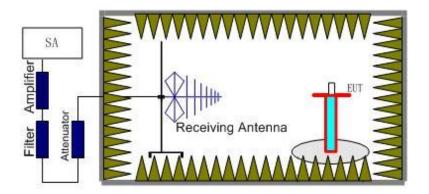


Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) ,GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band II(1852.4MHz, 1880MHz, 1907.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power=P_{Mea}+A_{Rpl}

6.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode:






6.2.3 MEASUREMENT RESULT

GSM 850:

	The Worst Test Results for Channel 251/848.8 MHz				
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit(dBm)	Polarity
1365.23	-36.28	-4.97	-41.26	-13.00	Horizontal
1365.23	-37.25	-4.97	-42.22	-13.00	Vertical
2230.45	-36.25	-2.10	-38.36	-13.00	Vertical
2230.45	-38.18	-2.10	-40.28	-13.00	Horizontal
3641.32	-36.38	3.69	-32.70	-13.00	Vertical
3641.32	-37.44	3.69	-33.75	-13.00	Horizontal
4563.58	-38.67	2.92	-35.75	-13.00	Horizontal
4563.58	-40.24	2.92	-37.32	-13.00	Vertical

PCS 1900:

	The Worst Test Results for Channel 810/1909.8MHz				
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
1429.36	-36.05	9.9	-26.15	-13.00	Vertical
1429.36	-38.45	9.9	-28.55	-13.00	Horizontal
2341.66	-32.40	11.8	-20.6	-13.00	Vertical
2341.66	-35.56	11.8	-23.76	-13.00	Horizontal
5530.42	-41.26	15.0	-26.26	-13.00	Horizontal
5530.42	-43.43	15.0	-28.43	-13.00	Vertical
7512.46	-36.93	14.9	-22.03	-13.00	Vertical
7512.46	-38.45	14.9	-23.55	-13.00	Horizontal
9656.23	-37.80	18.7	-19.1	-13.00	Horizontal
9656.23	-40.40	18.7	-21.7	-13.00	Vertical





UMTS band II:

	The Worst Test Results for Channel 9938/1907.6MHz				
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	Р _{меа} (dВm)	Limit (dBm)	Polarity
2000.00	-45.74	9.7	-36.04	-13.00	Vertical
9548.50	-46.63	11.6	-35.03	-13.00	Horizontal
13367.40	-42.63	14.89	-27.74	-13.00	Horizontal
15277.80	-40.61	13.87	-26.74	-13.00	Vertical
17931.60	-48.58	19.76	-28.82	-13.00	Horizontal

Note: Below 30MHZ no Spurious found and The GPRS/EDGE modes is the worst condition.

7. FREQUENCY STABILITY

7.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10℃.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10 $^{\circ}$ C increments from -10 $^{\circ}$ C to +50 $^{\circ}$ C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10° C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

7.2 PROVISIONS APPLICABLE

7.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.





7.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.


7.3 MEASUREMENT RESULT

Frequency Error Against Voltage for GSM 850 band			
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)	
6.3	31	0.037	
7.4	23	0.028	
8.5	29	0.035	

Frequency	Frequency Error Against Temperature for GSMS850 band			
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)		
-10	49	0.059		
0	38	0.045		
10	30	0.036		
20	30	0.036		
30	32	0.038		
40	36	0.043		
50	43	0.051		

Frequency Error Against Voltage for GPRS850 band			
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)	
6.3	28	0.033	
7.4	23	0.028	
8.5	27	0.032	

Frequency	Frequency Error Against Temperature for GPRS850 band			
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)		
-10	42	0.050		
0	33	0.039		
10	27	0.032		
20	27	0.032		
30	30	0.036		
40	35	0.042		
50	41	0.049		






Frequency Error Against Voltage for EGPRS850 band			
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)	
3.4	37	0.044	
3.7	35	0.042	
4.2	31	0.037	

Frequency	Frequency Error Against Temperature for EGPRS850 band			
$temperature(^{\circ}C)$	Frequency error(Hz)	Frequency error(ppm)		
-10	38	0.045		
0	35	0.042		
10	29	0.035		
20	27	0.032		
30	34	0.041		
40	29	0.035		
50	41	0.049		

Note: The EUT doesn't work below -10 $^{\circ}\mathrm{C}$

Frequency Error Against Voltage for GSM1900 band			
Voltage(V) Frequency error(Hz) Frequency error(ppm)			
3.4	45	0.024	
3.7	43	0.023	
4.2	60	0.032	

Frequency Error Against Temperature for GPRS1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	58	0.031
0	54	0.029
10	47	0.025
20	45	0.024
30	39	0.021
40	41	0.022
50	38	0.020






Frequency Error Against Voltage for GPRS1900 band			
Voltage(V) Frequency error(Hz) Frequency error(ppm)			
3.4	41	0.022	
3.7	41	0.022	
4.2	62	0.033	

Frequency Error Against Temperature for GPRS1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	61	0.032
0	52	0.028
10	43	0.023
20	42	0.022
30	36	0.019
40	44	0.023
50	39	0.021

Frequency Error Against Voltage for EDGE1900 band			
Voltage(V) Frequency error(Hz) Frequency error(ppm)			
3.4	44	0.023	
3.7	37	0.020	
4.2	48	0.026	

Frequency Error Against Temperature for EDGE1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	55	0.029
0	47	0.025
10	36	0.019
20	32	0.017
30	37	0.020
40	45	0.024
50	51	0.027

Note: The EUT doesn't work below -10°C





Frequency Error Against Voltage for UMTS band II		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	37	0.044
3.7	28	0.034
4.2	30	0.036

Frequency Error Against Temperature for UMTS band II		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	49	0.059
0	42	0.050
10	39	0.047
20	29	0.035
30	29	0.035
40	31	0.037
50	40	0.048

Note: The EUT doesn't work below -10°C



8. OCCUPIED BANDWIDTH

8.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

8.2 PROVISIONS APPLICABLE


The occupied bandwidth (99%) shall not exceed 300 KHz.

8.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 band			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
Low Channel	824.2	247.85	
Middle Channel	836.6	246.22	
High Channel	848.8	245.21	

Occupied Bandwidth (99%) for GPRS 850 band			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
Low Channel	824.2	245.43	
Middle Channel	836.6	242.32	
High Channel	848.8	243.11	

Occupied Bandwidth (99%) for EGPRS 850 band			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
Low Channel	824.2	245.42	
Middle Channel	836.6	242.31	
High Channel	848.8	243.10	





Occupied Bandwidth (99%) for GSM1900 band		
Mode Frequency(MHz) Occupied Bandwidth (99%)(kHz)		
Low Channel	1850.2	249.36
Middle Channel	1880.0	248.34
High Channel	1909.8	247.56

Occupied Bandwidth (99%) for GPRS1900 band			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
Low Channel	1850.2	249.24	
Middle Channel	1880.0	248.11	
High Channel	1909.8	247.15	

Occupied Bandwidth (99%) for EDGE1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	243.43
Middle Channel	1880.0	248.12
High Channel	1909.8	245.09

Occupied Bandwidth (99%) for UMTS band II		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	1852.4	4.15
Middle Channel	1880	4.17
High Channel	1907.6	4.17



9. EMISSION BANDWIDTH

9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

9.2 PROVISIONS APPLICABLE


The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

9.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	321.93
Middle Channel	836.6	312.82
High Channel	848.8	311.23

Emission Bandwidth (-26dBc) for GPRS850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	321.87
Middle Channel	836.6	312.56
High Channel	848.8	311.87

Emission Bandwidth (-26dBc) for EDGE850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	311.34
Middle Channel	836.6	310.67
High Channel	848.8	309.22





Emission Bandwidth (-26dBc) for GSM1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	309.77
Middle Channel	1880.0	313.61
High Channel	1909.8	309.34

Emission Bandwidth (-26dBc) for GPRS1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	309.19
Middle Channel	1880.0	313.32
High Channel	1909.8	309.10

Emission Bandwidth (-26dBc) for EDGE1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	312.09
Middle Channel	1880.0	313.31
High Channel	1909.8	307.40

Emission Bandwidth (-26dBc) for UMTS band II		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	1852.4	4.63
Middle Channel	1880	4.62
High Channel	1907.6	4.63



Report No.: BZT131120012F1

Page 35 of 56

10. BAND EDGE

10.1 MEASUREMENT METHOD


The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

10.2 PROVISIONS APPLICABLE

as Specified in FCC rules of 22.917(b) and 24.238(b)

10.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges







APPENDIX I
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION



CONDUCTED EMISSION IN GSM 850 BAND Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz

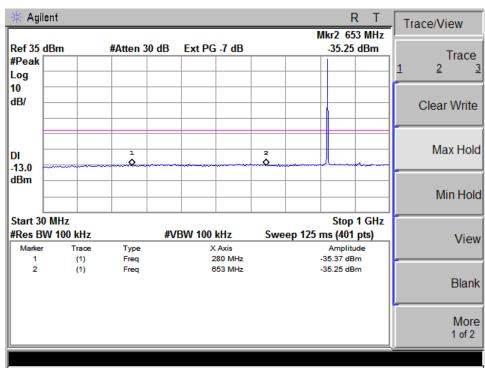


Conducted Emission Transmitting Mode CH 128 1GHz - 9GHz

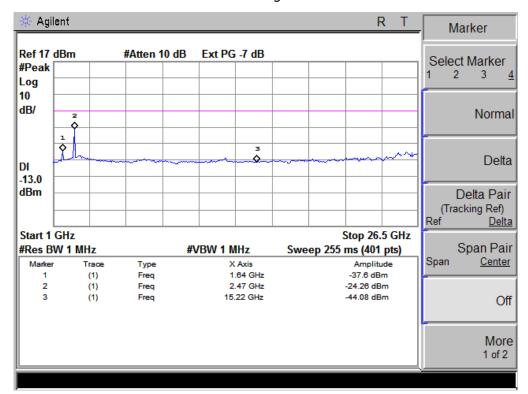




Conducted Emission Transmitting Mode CH 190 30MHz - 1GHz

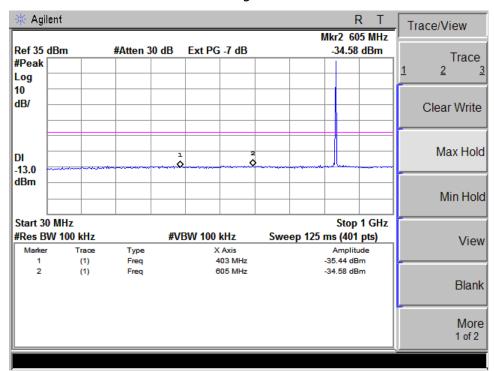


Conducted Emission Transmitting Mode CH 190 1GHz - 9GHz

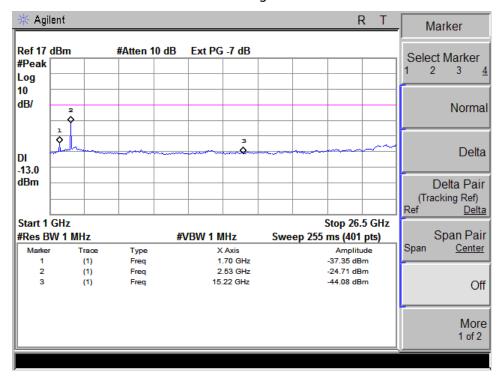





Conducted Emission Transmitting Mode CH 251 30MHz - 1GHz

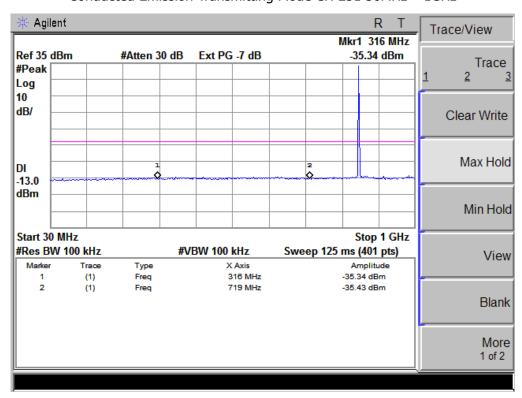


Conducted Emission Transmitting Mode CH 251 1GHz - 9GHz

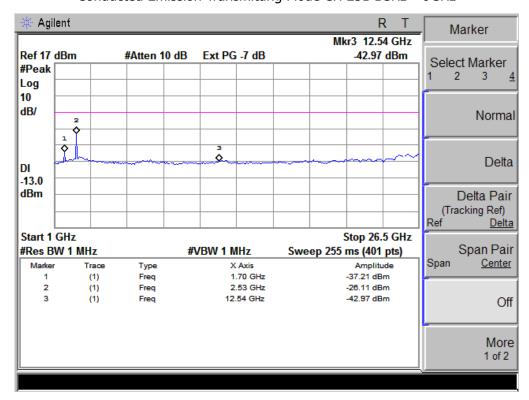






CONDUCTED EMISSION IN GSM1900 BAND
Conducted Emission Transmitting Mode CH 512 30MHz – 1GHz

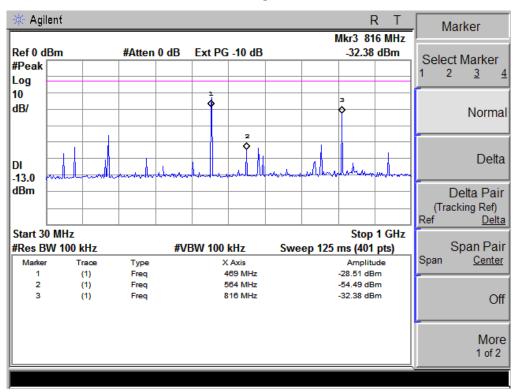


Conducted Emission Transmitting Mode CH 512 1GHz - 20GHz

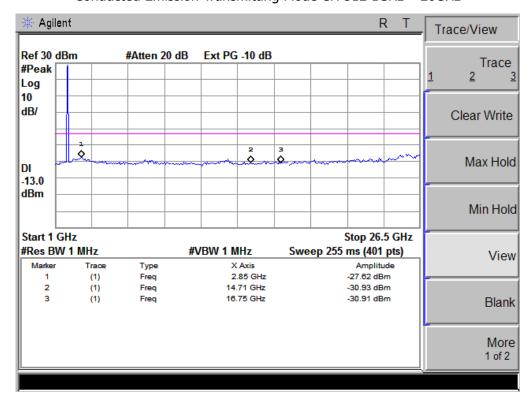




Conducted Emission Transmitting Mode CH 661 30MHz - 1GHz

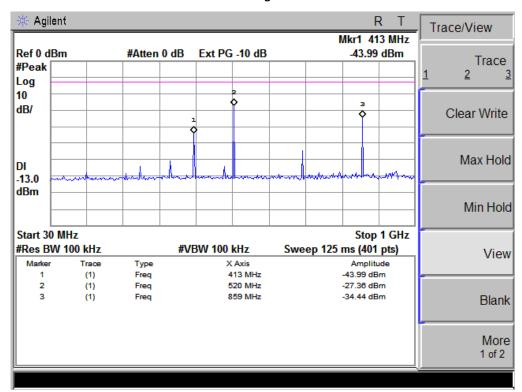


Conducted Emission Transmitting Mode CH 661 1GHz - 20GHz

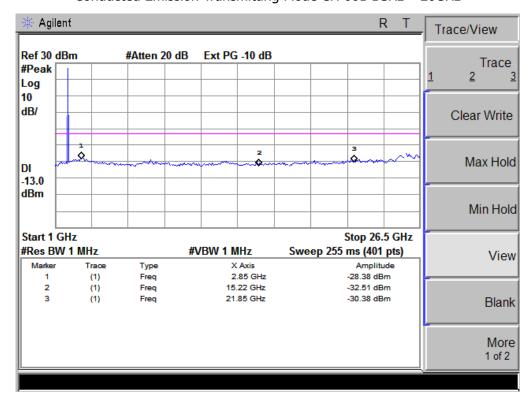




Conducted Emission Transmitting Mode CH 810 30MHz - 1GHz

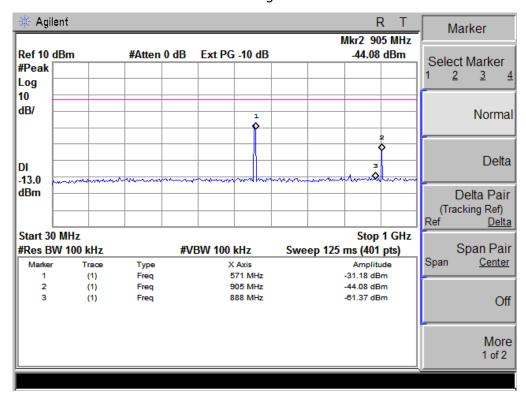


Conducted Emission Transmitting Mode CH 810 1GHz - 20GHz

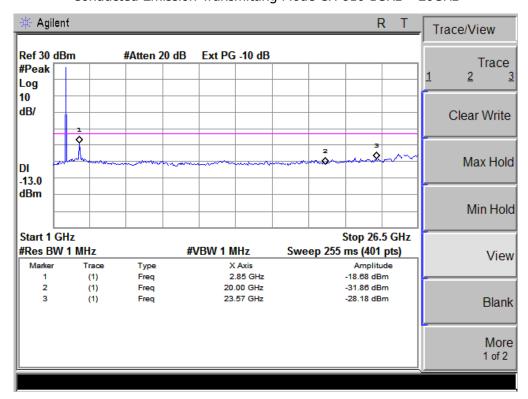




CONDUCTED EMISSION IN UMTS band II
Conducted Emission Transmitting Mode CH 9662 30MHz – 1GHz

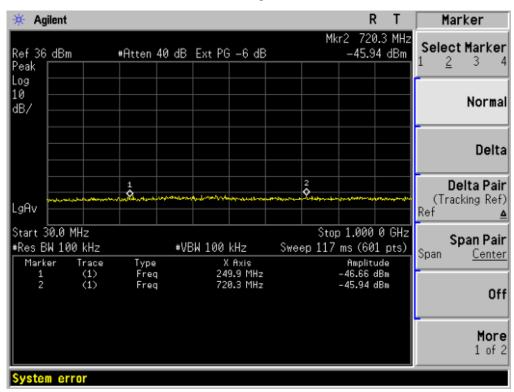


Conducted Emission Transmitting Mode CH 9662 1GHz - 20GHz

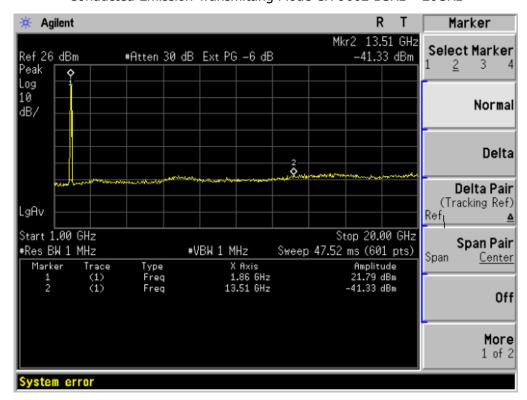





Conducted Emission Transmitting Mode CH 9800 30MHz - 1GHz

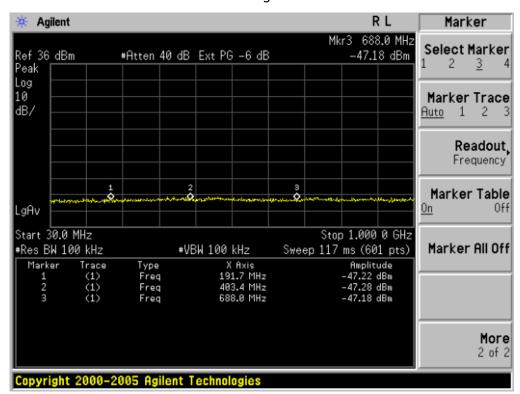


Conducted Emission Transmitting Mode CH 9800 1GHz - 20GHz

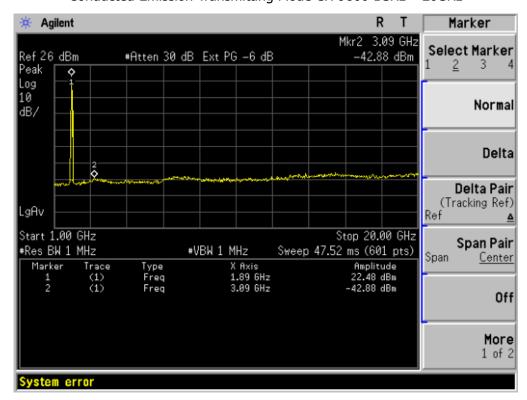







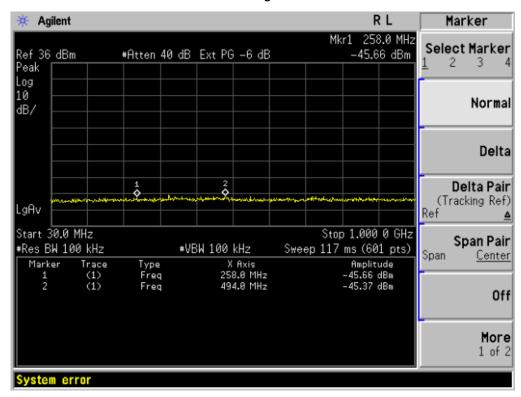

Conducted Emission Transmitting Mode CH 9938 1GHz - 20GHz

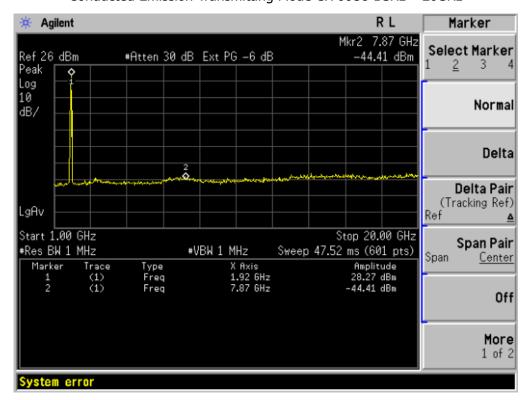





APPENDIX II TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) EMISSION BANDWIDTH (-26dBC)







Occupied Bandwidth (99%) GSM 850 BAND CH 128




Occupied Bandwidth (99%) GSM 850 BAND CH 190

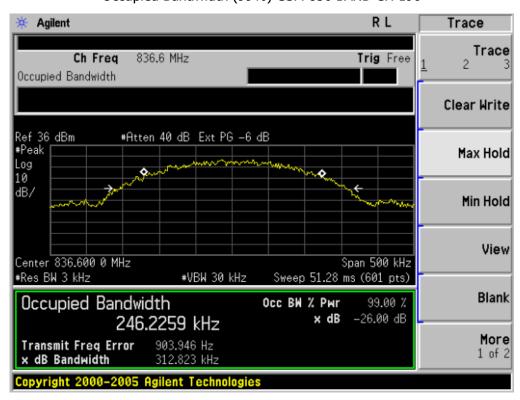












Occupied Bandwidth (99%) PCS 1900 BAND CH 512

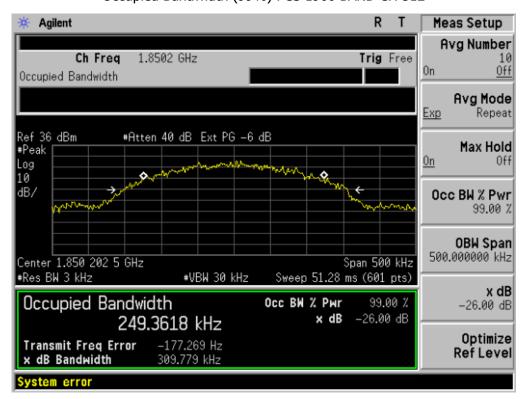








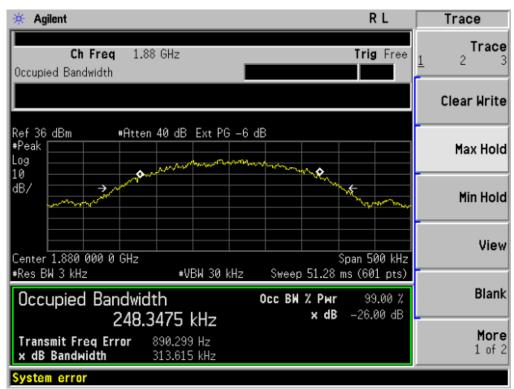


Occupied Bandwidth (99%) PCS 1900 BAND CH 810

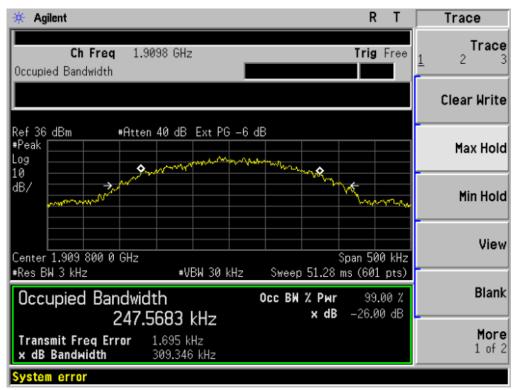




Occupied Bandwidth (99%) UMTS BAND II CH 9662

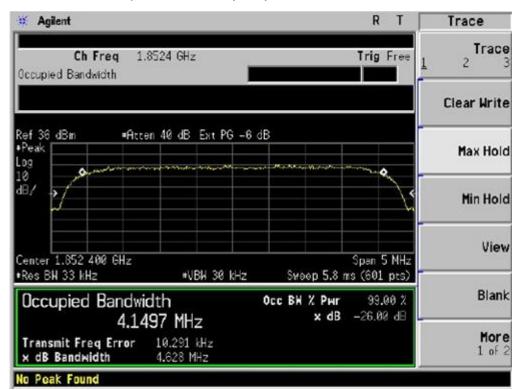



Occupied Bandwidth (99%) UMTS BAND II CH 9800

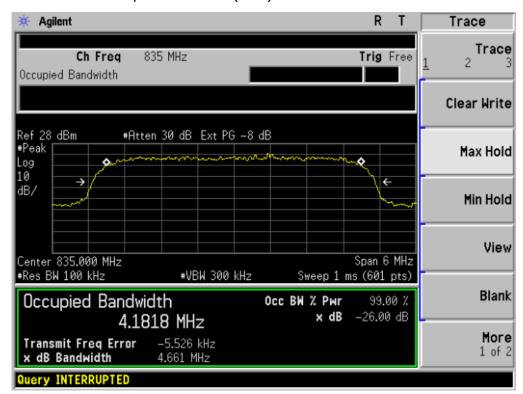




Occupied Bandwidth (99%) UMTS BAND II CH 9938

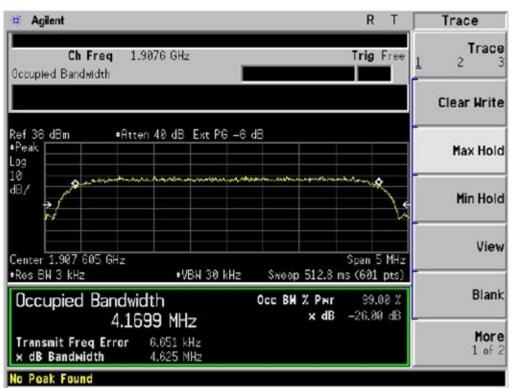

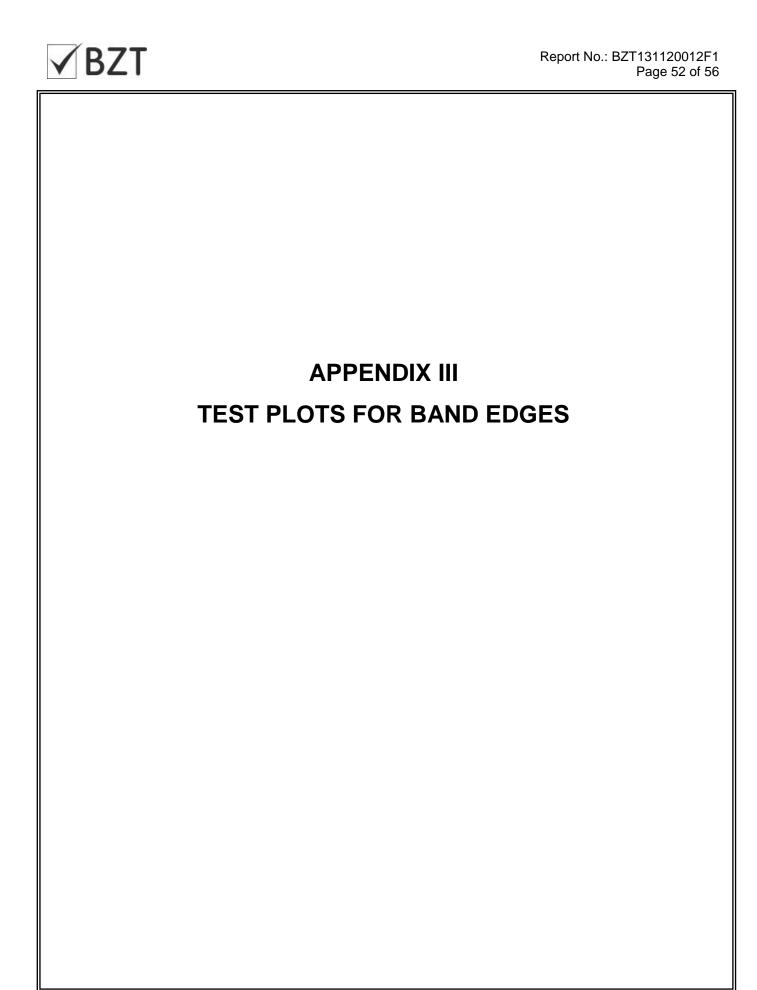




Low Band Edge GSM 850 BAND CH 128

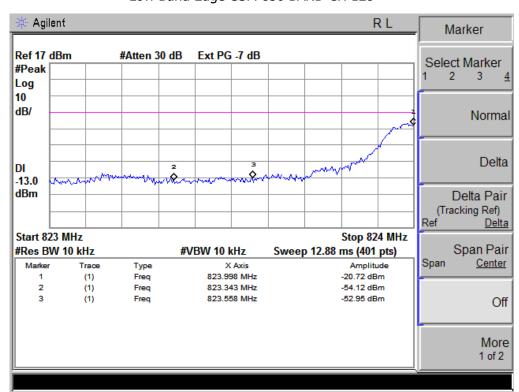


High Band Edge GSM 850 BAND CH 251

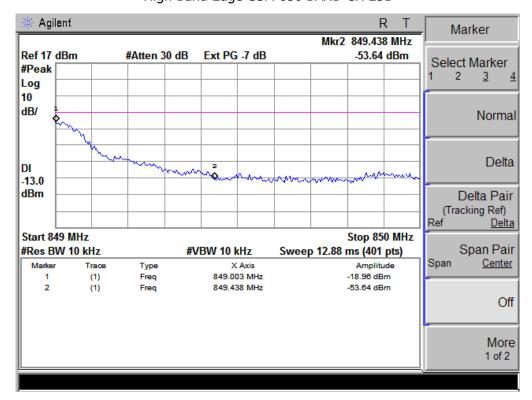




Low Band Edge PCS 1900 BAND CH 512

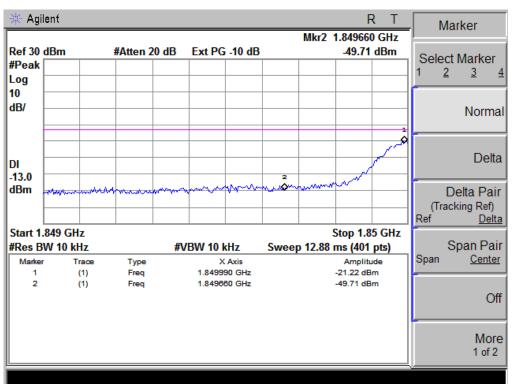


High Band Edge PCS 1900 BAND CH 810

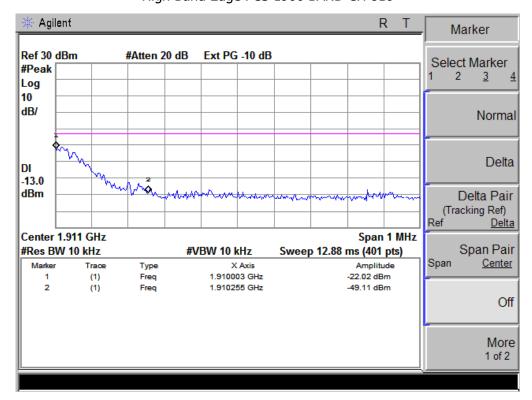




Low Band Edge UMTS BAND II CH 9662

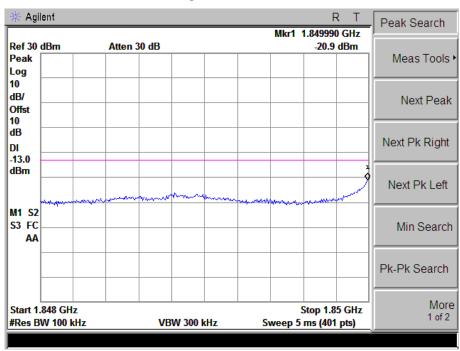

High Band Edge UMTS BAND II CH 9938

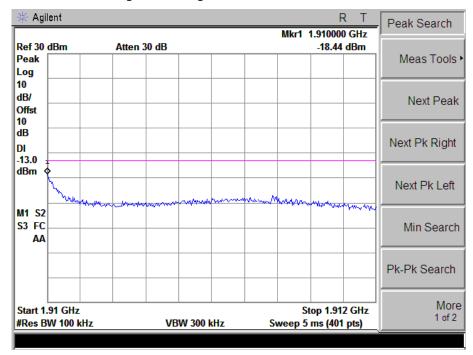


Report No.: BZT131120012F1 Page 56 of 56



APPENDIX IV PHOTOGRAPHS OF TEST SETUP

RADIATED SPURIOUS EMISSION

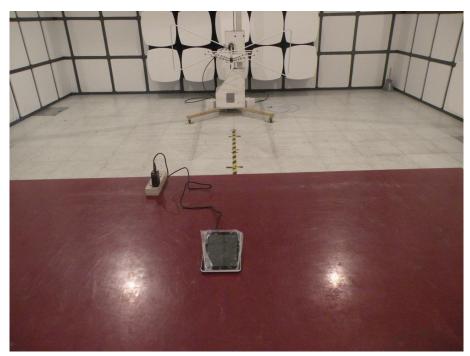



----END OF REPORT----