


Ethernet jack. If needed, you can extend the length of power cable and Ethernet cable by yourself, but we recommend that you extend the AC power cord length instead of DC power cord length. All cables, plugs, jacks, connecters, and outlets must be waterproofed if these components are placed at outside environment. The blue LED light will be on when the device is powered. Wait for it to start flashing before beginning installation. After power-on, it will take 25 seconds to

* CAUTION: You must wait the lamp cooling if you would like to remove it.



* CAUTION: When fixing the device to the socket, DO NOT APPLY EXCESSIVE FORCE WHEN INSTALLING, otherwise, it might cause damage to the device and the light bulb socket.

Fig.1. Screw in the device by placing it into socket then gently turn clockwise until it is secure.

Fig.2. Rotate in a counterclockwise direction to the desired viewing angle Do not overpower the stopper when the device rotates to the end.

Fig.3. Please use the included clips to secure your light bulb socket if needed.

* Firstly, you must wait the lamp cooling if you would like to remove it.

* Turn on the light switch, after which the blue LED light will turn on indicating it is powered on. Wait for it to start flashing before beginning the installation. After power-on, it will take 25 seconds to start calibration cycle.

Fig.3. Screw in the Deluxe in a clockwise motion till it is fixed.

Fig.4. Rotate in a counterclockwise direction to the desired viewing angle.

Do not overpower the stopper when the device rotates to the end. Fig. 5. Please use the included clips to secure your light bulb socket if needed.

* Turn on the light switch, after which the blue LED light will turn on indicating it is powered on. Wait for it to start flashing before beginning the installation. After power-on, it will take 25 seconds to start calibration cycle.

Fig.1. Connect the micro USB cable to the device. Align the device to the holder

through the four hooks.


Fig.2. Secure the device to the holder with a screw as shown.


ATOM AR3/ATOM AR3S/ATOM AR2/iCamPRO Deluxe

O Auto detection (Recommended)

Clockwise

rotation Turn off the light switch. This will prevent you from being electrocuted.
 CAUTION: When fixing the device to the socket, DO NOT APPLY EXCESSIVE FORCE WHEN INSTALLING, otherwise, it might cause damage to the device and the light bulb socket.







- O Direct Wi-Fi installation (Recommended)
- O Ethernet installation
- Setup using QR code

Setup using WPS

- ATOM AR3/ATOM AR2/iCamPRO Deluxe O Direct Wi-Fi installation (Recommended)
- O Setup using QR code
- Setup using WPS

ATOM/iCamPRO FHD/KOOVA/iSensor/Patio/iCam/iBabi/iCare

- O Setup using QR code (Recommended)

Setup Ethernet installation

O Direct Wi-Fi installation

O Setup using WPS

10

13

ATOM/iCamPRO FHD/KOOVA/iSensor/Patio/iCam/iBabi/iCare O Setup using QR code (Recommended)

O Auto detection

Setup using WPS

Power on

Setup using WPS

Setup Android system

Setup using QR code

11

17

Counterclockwise

Vertical


Alignment rotation

Setup Direct Wi-Fi installation

- 1. Switch on your phone's Wi-Fi. Connect your phone to a router. 2. Select an Amaryllo device to install.
- 3. Enter the password of your Wi-Fi router.
- 4. Automatically skip to the Wi-Fi setting of your phone by selecting "Amaryllo-xxxxxxxx" that is the AMID of this device. You can find the AMID information on the spec label which is on the body of the device.
- 5. Click "back to Amaryllo" on the screen to continue setup for iOS 9 and above.
- 6. If your mobile device is using iOS 8 or prior version, click the nome key of your phone continue setup. Settings







2. Enter the password of your Wi-Fi router.




Wi-Fi @

12

Setup Setup using QR code ATOM AR2/iCamPRO Deluxe

Follow few steps below when you are asked to scan QR code. 1. Your device will automatically generate a QR code.

2. Place the device 4" ~11.8" (10~30 cm) in front of the smartphone's QR code or $7.8" \sim 11.8"$ (20~30 cm) in front of tablet's QR code. Please wait for a beep to confirm reception. After you hear a beep, you can put the phone down






Follow few steps below when you are asked to scan QR code.


1. Your device will automatically generate a QR code. 2. Place the device 4" ~11.8" (10~30 cm) in front of the smartphone's QR code or 7.8" \sim 11.8" (20 \sim 30 cm) in front of tablet's QR code. Please wait for a beep to confirm reception. After you hear a beep, you can put the phone down.



Make sure your portable device and the device are parallel to each other



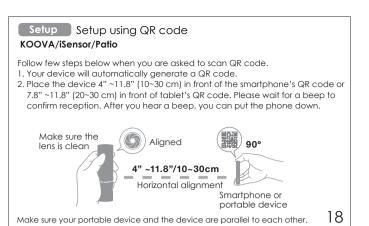

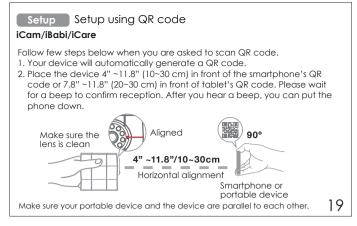



Amaryllo app will generate QR code like ones shown above. When establishing connection, a busy indicator will appear. Should an error occur, the device will advise you of what the issue is with an audio message.



• The device setup is complete. You will hear two beeps when the device setup completes.

KOOVA/

iBabi/ iCamPRO iSensor/

ATOM/







ATOM AR2/





ATOM

24

27

ATOM





By sliding your screen

Reset

iCam/

iBabi/

ATOM/

iCamPRO

KOOVA/

iSensor/

- * Remotely pan and tilt the device anywhere by sliding your smartphone screen in the direction you want the device to turn.
- * Please visit our website www.amaryllo.eu to learn more about the settings.



ATOM

AR3

ATOM

AR2



ATOM

AR3S

28



By sliding your screen left or right

Control device

KOOVA/iSensor/Patio

- *Remotely pan the device anywhere by sliding your smartphone screen in the direction you want the device to turn.
- * Please visit our website www.amaryllo.eu to learn more about the settings.

23

LED indication


iCam

Blue LED:

- The LED is stable when you power on the device.
- The LED flashes once per second when the QR scan is in progress. • When LED is flashing twice per second, the device is in use and someone is actively viewing it.
- When LED is flashing 3 times per second, the setup process was successful.


Green LED:

- When LED is flashing once per second, the device is trying to connect to a Wi-Fi AP router.
- When LED is constant, the device is connected to Wi-Fi and working properly.



There is a small RESET hole. Press and hold for about 5 seconds until the blue LED flashes. All settings of previously stored in the device will be erased, and it will be restored to the factory default.

After 25 seconds, the device will start a calibration mode by rotating itself. (for remote models) 25




- 1. Connect your phone to your router.
- 2. Press and hold the router's WPS button.
- 3. Press and hold WPS "" button on the device for 5 seconds or longer. When the green LED flashes, it indicates that the device has entered WPS mode
- 4. Please follow App instructions step-by-step.
- Note: You need to press WPS " " button of the device and Wi-Fi AP router within 60 seconds.


26

Operating temperature









How to remove the holder.

Fig.1. Rotate anticlockwise to remove the device from the light socket.

Fig.2. Loosen the screw.

Fig.3. Push the holder away from the "Amaryllo" sign and speaker to remove the device from its holder.


[Installation Instructions]

ATOM/iCamPRO

Fig.1. Choose a location that will offer you the best viewing angle. Make sure that an electric outlet is within 2 meters. Use a pencil to mark the hole locations. Make sure holes are slightly smaller than anchors. Insert anchors to wall and secure

Fig.2. Align the device to the holder through the four hooks. Secure the device to the holder with a screw as shown.

Fig.3. Adjust the angle of the holder and then tighten the hinge screw.





Installation Instructions

KOOVA/iSensor

KOOVA/iSensor


- Choose a location that will offer you the best viewing angle. Make sure that an
- 2. Use a pencil to mark the hole locations. Make sure holes are slightly smaller than anchors.
- Insert anchors to wall and secure holder to wall with screws.






Installation Instructions

- 1. Choose a location that will offer you the best viewing angle. Make sure that an electric outlet is within 2 meters.
- 2. Use a pencil to mark the hole locations. Make sure holes are slightly smaller than
- anchors.






Prolonged exposure to direct sun and moisture is not recommended.





Patio

Prolonged exposure to direct sun and moisture is not recommended.



How to use iCare remote control

iCare

- Fig.1. When an emergency occurs, press and hold the button until you hear a beep. This will send out urgent notification alert. You must be within 10 meters to enable the urgent call alert. Wait 3 seconds to press and hold the button again to disable
- Fig.2. For best transmitting range, don't let your fingers block the antenna on the



If connection fails

Please check:

- 1. Is the device powered on?
- 2. Is the device's Wi-Fi connected? (Green LED should be lit)
- 3. Is a new Wi-Fi router required? (Press " 🔭 ")
- * Warranty is voided if product is open.
- * Please visit our website www.amaryllo.eu to view our warranty policy.
- * Please visit our website www.amaryllo.eu to learn more about the setting.

35