

**Above 1GHz****RADIATED EMISSION TEST**

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	59.58	-3.64	55.94	74	-18.06	peak
4824	46.44	-3.64	42.8	54	-11.2	AVG
7236	56.28	-0.95	55.33	74	-18.67	peak
7236	44.05	-0.95	43.1	54	-10.9	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	59.18	-3.64	55.54	74	-18.46	peak
4824	44.44	-3.64	40.8	54	-13.2	AVG
7236	56.31	-0.95	55.36	74	-18.64	peak
7236	42.29	-0.82	41.47	54	-12.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	57.43	-3.51	53.92	74	-20.08	peak
4874	44.63	-3.51	41.12	54	-12.88	AVG
7311	56.25	-0.82	55.43	74	-18.57	peak
7311	41.65	-0.82	40.83	54	-13.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	57.32	-3.51	53.81	74	-20.19	peak
4874	45.59	-3.51	42.08	54	-11.92	AVG
7311	55.86	-0.82	55.04	74	-18.96	peak
7311	40.53	-0.82	39.71	54	-14.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	58.14	-3.43	54.71	74	-19.29	peak
4924	43.48	-3.43	40.05	54	-13.95	AVG
7386	54.05	-0.75	53.3	74	-20.7	peak
7386	43.29	-0.75	42.54	54	-11.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	57.68	-3.43	54.25	74	-19.75	peak
4924	44.61	-3.43	41.18	54	-12.82	AVG
7386	55.86	-0.75	55.11	74	-18.89	peak
7386	41.03	-0.75	40.28	54	-13.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.

(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.

(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

(7) All modes of operation were investigated and the worst-case emissions of ANT.1 are reported.



LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	58.63	-3.64	54.99	74	-19.01	peak
4824	42.04	-3.64	38.4	54	-15.6	AVG
7236	53.66	-0.95	52.71	74	-21.29	peak
7236	42.46	-0.95	41.51	54	-12.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	58.46	-3.64	54.82	74	-19.18	peak
4824	43.77	-3.64	40.13	54	-13.87	AVG
7236	58.07	-0.95	57.12	74	-16.88	peak
7236	46.05	-0.95	45.1	54	-8.9	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	58.21	-3.51	54.7	74	-19.3	peak
4874	44.39	-3.51	40.88	54	-13.12	AVG
7311	57.57	-0.82	56.75	74	-17.25	peak
7311	42.82	-0.82	42	54	-12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	57.46	-3.51	53.95	74	-20.05	peak
4874	44.33	-3.51	40.82	54	-13.18	AVG
7311	54.88	-0.82	54.06	74	-19.94	peak
7311	43.93	-0.82	43.11	54	-10.89	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	58.61	-3.43	55.18	74	-18.82	peak
4924	44.38	-3.43	40.95	54	-13.05	AVG
7386	56.22	-0.75	55.47	74	-18.53	peak
7386	41.26	-0.75	40.51	54	-13.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	58.05	-3.43	54.62	74	-19.38	peak
4924	46.16	-3.43	42.73	54	-11.27	AVG
7386	54.92	-0.75	54.17	74	-19.83	peak
7386	41.39	-0.75	40.64	54	-13.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions of ANT.1 are reported.



LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	58.91	-3.64	55.27	74	-18.73	peak
4824	44.31	-3.64	40.67	54	-13.33	AVG
7236	57.68	-0.95	56.73	74	-17.27	peak
7236	41.65	-0.95	40.7	54	-13.3	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	57.77	-3.64	54.13	74	-19.87	peak
4824	45.77	-3.64	42.13	54	-11.87	AVG
7236	57.42	-0.95	56.47	74	-17.53	peak
7236	43.02	-0.95	42.07	54	-11.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	58.61	-3.51	55.10	74.00	-18.90	peak
4874.00	44.91	-3.51	41.40	54.00	-12.60	AVG
7311.00	55.72	-0.82	54.90	74.00	-19.10	peak
7311.00	42.76	-0.82	41.94	54.00	-12.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	58.02	-3.51	54.51	74.00	-19.49	peak
4874.00	44.52	-3.51	41.01	54.00	-12.99	AVG
7311.00	54.78	-0.82	53.96	74.00	-20.04	peak
7311.00	43.82	-0.82	43.00	54.00	-11.00	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	58.11	-3.43	54.68	74	-19.32	peak
4924	44.68	-3.43	41.25	54	-12.75	AVG
7386	55.54	-0.75	54.79	74	-19.21	peak
7386	41.53	-0.75	40.78	54	-13.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	57.25	-3.43	53.82	74	-20.18	peak
4924	44.19	-3.43	40.76	54	-13.24	AVG
7386	55.26	-0.75	54.51	74	-19.49	peak
7386	40.26	-0.75	39.51	54	-14.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	59.21	-3.63	55.58	74	-18.42	peak
4844	43.78	-3.63	40.15	54	-13.85	AVG
7266	54.49	-0.94	53.55	74	-20.45	peak
7266	44.38	-0.94	43.44	54	-10.56	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	58.55	-3.63	54.92	74	-19.08	peak
4844	45.03	-3.63	41.4	54	-12.6	AVG
7266	53.93	-0.94	52.99	74	-21.01	peak
7266	39.91	-0.94	38.97	54	-15.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	57.64	-3.51	54.13	74	-19.87	peak
4874	45.31	-3.51	41.8	54	-12.2	AVG
7311	53.83	-0.82	53.01	74	-20.99	peak
7311	43.96	-0.82	43.14	54	-10.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	59.46	-3.51	55.95	74	-18.05	peak
4874	45.28	-3.51	41.77	54	-12.23	AVG
7311	55.44	-0.82	54.62	74	-19.38	peak
7311	40.85	-0.82	40.03	54	-13.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	60.75	-3.43	57.32	74	-16.68	peak
4904	47.51	-3.43	44.08	54	-9.92	AVG
7356	54.36	-0.75	53.61	74	-20.39	peak
7356	38.75	-0.75	38	54	-16	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	57.73	-3.43	54.3	74	-19.7	peak
4904	42.41	-3.43	38.98	54	-15.02	AVG
7356	55.43	-0.75	54.68	74	-19.32	peak
7356	40.85	-0.75	40.1	54	-13.9	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions of MIMO are reported.



LOW CH1 (TX ac/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	58.55	-3.64	54.91	74	-19.09	peak
4824	42.83	-3.64	39.19	54	-14.81	AVG
7236	55.37	-0.95	54.42	74	-19.58	peak
7236	41.86	-0.95	40.91	54	-13.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	58.49	-3.64	54.85	74	-19.15	peak
4824	42.06	-3.64	38.42	54	-15.58	AVG
7236	56.25	-0.95	55.3	74	-18.7	peak
7236	41.19	-0.95	40.24	54	-13.76	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH6 (TX ac/H2O Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	58.11	-3.51	54.60	74.00	-19.40	peak
4874.00	44.05	-3.51	40.54	54.00	-13.46	AVG
7311.00	59.18	-0.82	58.36	74.00	-15.64	peak
7311.00	42.64	-0.82	41.82	54.00	-12.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	58.61	-3.51	55.10	74.00	-18.90	peak
4874.00	46.24	-3.51	42.73	54.00	-11.27	AVG
7311.00	54.53	-0.82	53.71	74.00	-20.29	peak
7311.00	41.62	-0.82	40.80	54.00	-13.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH11 (TX ac/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	59.69	-3.43	56.26	74	-17.74	peak
4924	46.25	-3.43	42.82	54	-11.18	AVG
7386	54.65	-0.75	53.9	74	-20.1	peak
7386	41.23	-0.75	40.48	54	-13.52	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	58.57	-3.43	55.14	74	-18.86	peak
4924	42.17	-3.43	38.74	54	-15.26	AVG
7386	55.83	-0.75	55.08	74	-18.92	peak
7386	42.93	-0.75	42.18	54	-11.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



LOW CH3 (TX ac/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	59.23	-3.63	55.6	74	-18.4	peak
4844	43.45	-3.63	39.82	54	-14.18	AVG
7266	55.65	-0.94	54.71	74	-19.29	peak
7266	41.91	-0.94	40.97	54	-13.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	57.88	-3.63	54.25	74	-19.75	peak
4844	46.35	-3.63	42.72	54	-11.28	AVG
7266	54.85	-0.94	53.91	74	-20.09	peak
7266	40.58	-0.94	39.64	54	-14.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH6 (TX ac/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	59.12	-3.51	55.61	74	-18.39	peak
4874	42.39	-3.51	38.88	54	-15.12	AVG
7311	55.24	-0.82	54.42	74	-19.58	peak
7311	41.27	-0.82	40.45	54	-13.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	57.33	-3.51	53.82	74	-20.18	peak
4874	44.01	-3.51	40.5	54	-13.5	AVG
7311	57.28	-0.82	56.46	74	-17.54	peak
7311	41.19	-0.82	40.37	54	-13.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH9 (TX ac/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	58.95	-3.43	55.52	74	-18.48	peak
4904	44.16	-3.43	40.73	54	-13.27	AVG
7356	54.99	-0.75	54.24	74	-19.76	peak
7356	41.19	-0.75	40.44	54	-13.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	58.18	-3.43	54.75	74	-19.25	peak
4904	42.14	-3.43	38.71	54	-15.29	AVG
7356	55.97	-0.75	55.22	74	-18.78	peak
7356	42.25	-0.75	41.5	54	-12.5	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions of MIMO are reported.



LOW CH1 (802.11ax/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	58.64	-3.64	55	74	-19	peak
4824	42.35	-3.64	38.71	54	-15.29	AVG
7236	55.07	-0.95	54.12	74	-19.88	peak
7236	41.52	-0.95	40.57	54	-13.43	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	57.85	-3.64	54.21	74	-19.79	peak
4824	43.03	-3.64	39.39	54	-14.61	AVG
7236	56.83	-0.95	55.88	74	-18.12	peak
7236	41.88	-0.95	40.93	54	-13.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH6 (802.11ax/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	58.69	-3.51	55.18	74.00	-18.82	peak
4874.00	44.03	-3.51	40.52	54.00	-13.48	AVG
7311.00	55.71	-0.82	54.89	74.00	-19.11	peak
7311.00	41.59	-0.82	40.77	54.00	-13.23	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	58.86	-3.51	55.35	74.00	-18.65	peak
4874.00	45.59	-3.51	42.08	54.00	-11.92	AVG
7311.00	55.19	-0.82	54.37	74.00	-19.63	peak
7311.00	41.91	-0.82	41.09	54.00	-12.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH11 (802.11ax/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	60.34	-3.43	56.91	74	-17.09	peak
4924	44.98	-3.43	41.55	54	-12.45	AVG
7386	55.57	-0.75	54.82	74	-19.18	peak
7386	38.69	-0.75	37.94	54	-16.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	57.73	-3.43	54.3	74	-19.7	peak
4924	42.87	-3.43	39.44	54	-14.56	AVG
7386	54.22	-0.75	53.47	74	-20.53	peak
7386	44.06	-0.75	43.31	54	-10.69	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



LOW CH3 (802.11ax/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	57.45	-3.63	53.82	74	-20.18	peak
4844	43.42	-3.63	39.79	54	-14.21	AVG
7266	55.46	-0.94	54.52	74	-19.48	peak
7266	41.16	-0.94	40.22	54	-13.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	58.56	-3.63	54.93	74	-19.07	peak
4844	45.51	-3.63	41.88	54	-12.12	AVG
7266	54.18	-0.94	53.24	74	-20.76	peak
7266	39.22	-0.94	38.28	54	-15.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH6 (802.11ax/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	59.47	-3.51	55.96	74	-18.04	peak
4874	43.75	-3.51	40.24	54	-13.76	AVG
7311	55.31	-0.82	54.49	74	-19.51	peak
7311	42.46	-0.82	41.64	54	-12.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	57.89	-3.51	54.38	74	-19.62	peak
4874	43.58	-3.51	40.07	54	-13.93	AVG
7311	55.88	-0.82	55.06	74	-18.94	peak
7311	41.59	-0.82	40.77	54	-13.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH9 (802.11ax/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	57.96	-3.43	54.53	74	-19.47	peak
4904	45.63	-3.43	42.2	54	-11.8	AVG
7356	55.12	-0.75	54.37	74	-19.63	peak
7356	40.91	-0.75	40.16	54	-13.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	58.83	-3.43	55.4	74	-18.6	peak
4904	42.58	-3.43	39.15	54	-14.85	AVG
7356	55.67	-0.75	54.92	74	-19.08	peak
7356	43.16	-0.75	42.41	54	-11.59	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions of MIMO are reported.

**Test Result of Radiated Spurious at Band edges**

All modes of operation were investigated and the worst-case of MIMO are reported.

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	58.29	-5.81	52.48	74	-21.52	peak
2310	/	-5.81	/	54	/	AVG
2390	57.63	-5.84	51.79	74	-22.21	peak
2390	/	-5.84	/	54	/	AVG
2400	56.28	-5.84	50.44	74	-23.56	peak
2400	/	-5.84	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	57.26	-5.81	51.45	74	-22.55	peak
2310	/	-5.81	/	54	/	AVG
2390	57.73	-5.84	51.89	74	-22.11	peak
2390	/	-5.84	/	54	/	AVG
2400	56.33	-5.84	50.49	74	-23.51	peak
2400	/	-5.84	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	58.98	-5.65	53.33	74	-20.67	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	57.27	-5.65	51.62	74	-22.38	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	58.41	-5.65	52.76	74	-21.24	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	57.69	-5.65	52.04	74	-21.96	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						



Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	58.54	-5.81	52.73	74	-21.27	peak
2310	/	-5.81	/	54	/	AVG
2390	58.26	-5.84	52.42	74	-21.58	peak
2390	/	-5.84	/	54	/	AVG
2400	57.39	-5.84	51.55	74	-22.45	peak
2400	/	-5.84	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	57.49	-5.81	51.68	74	-22.32	peak
2310	/	-5.81	/	54	/	AVG
2390	56.28	-5.84	50.44	74	-23.56	peak
2390	/	-5.84	/	54	/	AVG
2400	55.33	-5.84	49.49	74	-24.51	peak
2400	/	-5.84	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	59.17	-5.65	53.52	74	-20.48	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	56.69	-5.65	51.04	74	-22.96	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.87	-5.65	52.22	74	-21.78	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	55.26	-5.65	49.61	74	-24.39	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						



Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.82	-5.81	52.01	74	-21.99	peak
2310	/	-5.81	/	54	/	AVG
2390	56.42	-5.84	50.58	74	-23.42	peak
2390	/	-5.84	/	54	/	AVG
2400	56.05	-5.84	50.21	74	-23.79	peak
2400	/	-5.84	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.31	-5.81	51.5	74	-22.5	peak
2310	/	-5.81	/	54	/	AVG
2390	57.17	-5.84	51.33	74	-22.67	peak
2390	/	-5.84	/	54	/	AVG
2400	54.75	-5.84	48.91	74	-25.09	peak
2400	/	-5.84	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.26	-5.65	51.61	74	-22.39	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	53.98	-5.65	48.33	74	-25.67	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.27	-5.65	51.62	74	-22.38	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	55.66	-5.65	50.01	74	-23.99	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						



Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	59.16	-5.81	53.35	74	-20.65	peak
2310	/	-5.81	/	54	/	AVG
2390	58.54	-5.84	52.7	74	-21.3	peak
2390	/	-5.84	/	54	/	AVG
2400	57.31	-5.84	51.47	74	-22.53	peak
2400	/	-5.84	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	58.24	-5.81	52.43	74	-21.57	peak
2310	/	-5.81	/	54	/	AVG
2390	57.13	-5.84	51.29	74	-22.71	peak
2390	/	-5.84	/	54	/	AVG
2400	56.88	-5.84	51.04	74	-22.96	peak
2400	/	-5.84	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.43	-5.65	51.78	74	-22.22	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	56.29	-5.65	50.64	74	-23.36	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.11	-5.65	51.46	74	-22.54	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	54.95	-5.65	49.3	74	-24.7	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						



Operation Mode: 802.11ax/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.18	-5.81	51.37	74	-22.63	peak
2310	/	-5.81	/	54	/	AVG
2390	56.75	-5.84	50.91	74	-23.09	peak
2390	/	-5.84	/	54	/	AVG
2400	54.22	-5.84	48.38	74	-25.62	peak
2400	/	-5.84	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.16	-5.81	51.35	74	-22.65	peak
2310	/	-5.81	/	54	/	AVG
2390	56.28	-5.84	50.44	74	-23.56	peak
2390	/	-5.84	/	54	/	AVG
2400	55.96	-5.84	50.12	74	-23.88	peak
2400	/	-5.84	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	58.15	-5.65	52.5	74	-21.5	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	57.42	-5.65	51.77	74	-22.23	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.22	-5.65	51.57	74	-22.43	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	54.97	-5.65	49.32	74	-24.68	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						



Operation Mode: 802.11ax/H40 Mode TX CH Low (2422MHz)

All modes of operation were investigated and the worst-case of MIMO are reported.

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	58.08	-5.81	52.27	74	-21.73	peak
2310	/	-5.81	/	54	/	AVG
2390	57.12	-5.84	51.28	74	-22.72	peak
2390	/	-5.84	/	54	/	AVG
2400	57.65	-5.84	51.81	74	-22.19	peak
2400	/	-5.84	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	58.12	-5.81	52.31	74	-21.69	peak
2310	/	-5.81	/	54	/	AVG
2390	57.37	-5.84	51.53	74	-22.47	peak
2390	/	-5.84	/	54	/	AVG
2400	57.45	-5.84	51.61	74	-22.39	peak
2400	/	-5.84	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.12	-5.65	50.47	74	-23.53	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	53.85	-5.65	48.2	74	-25.8	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.23	-5.65	50.58	74	-23.42	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	53.88	-5.65	48.23	74	-25.77	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						



4.7. ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a Internal Antenna, which permanently attached. It conforms to the standard requirements. And the best case gain of the antenna is Antenna port 1:3dBi and Antenna port 2:3dBi.



WIFI ANTENNA

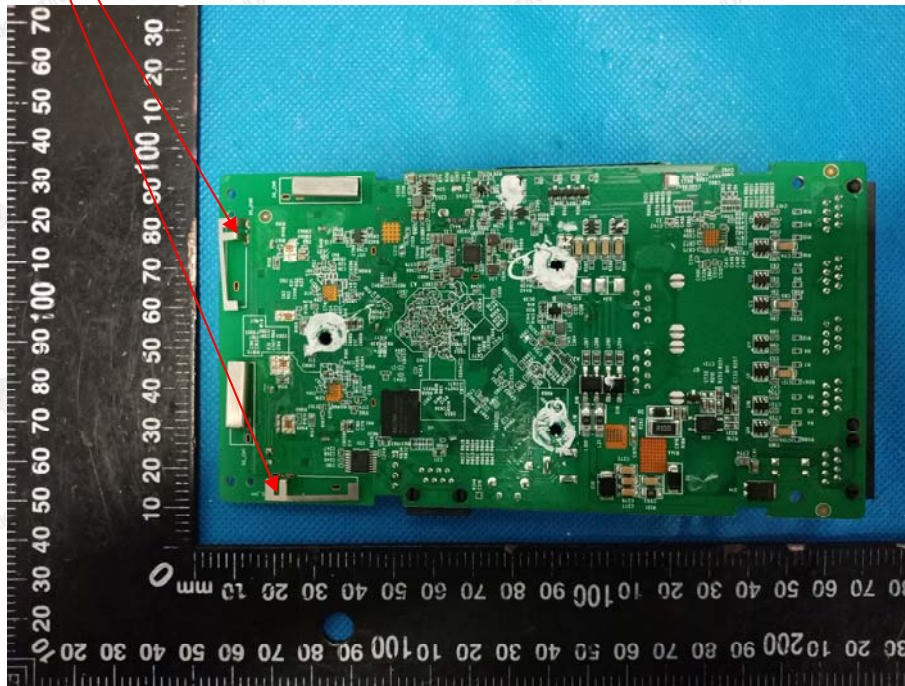



5. PHOTOGRAPH OF TEST

Radiated Emission

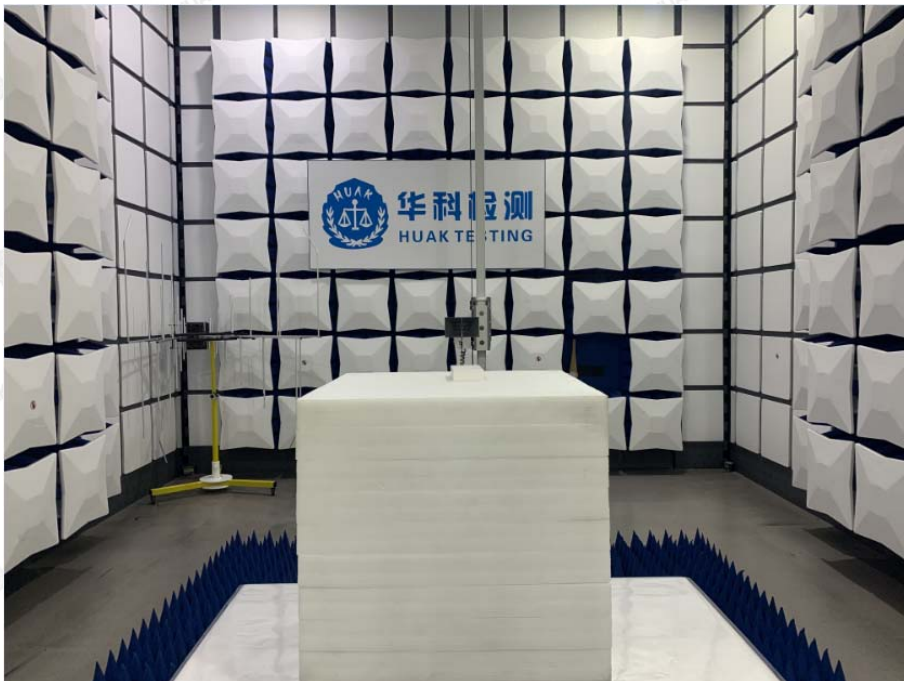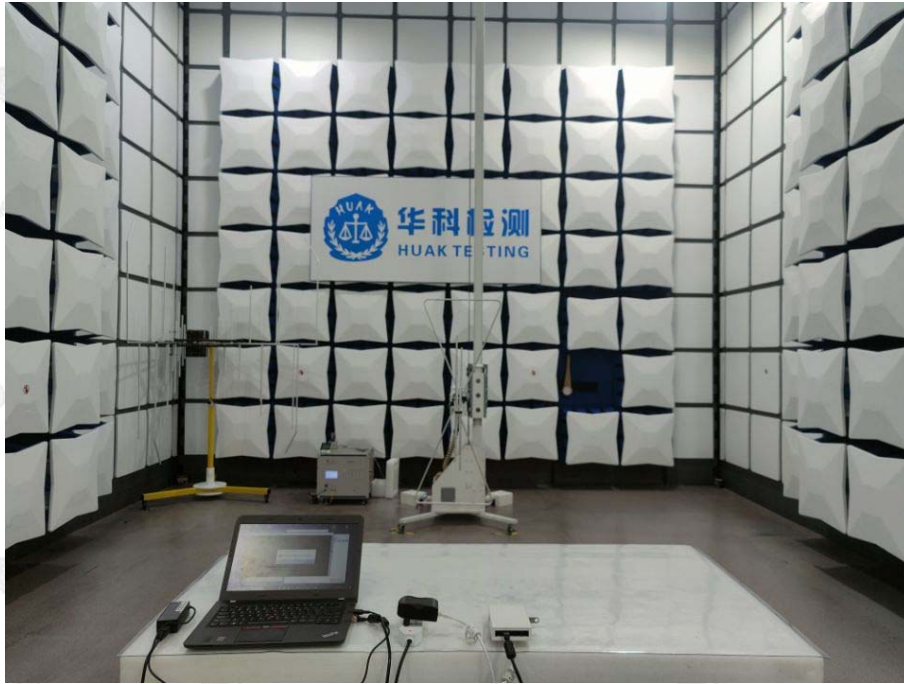


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

HUAKE Testing Lab TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Conducted Emission

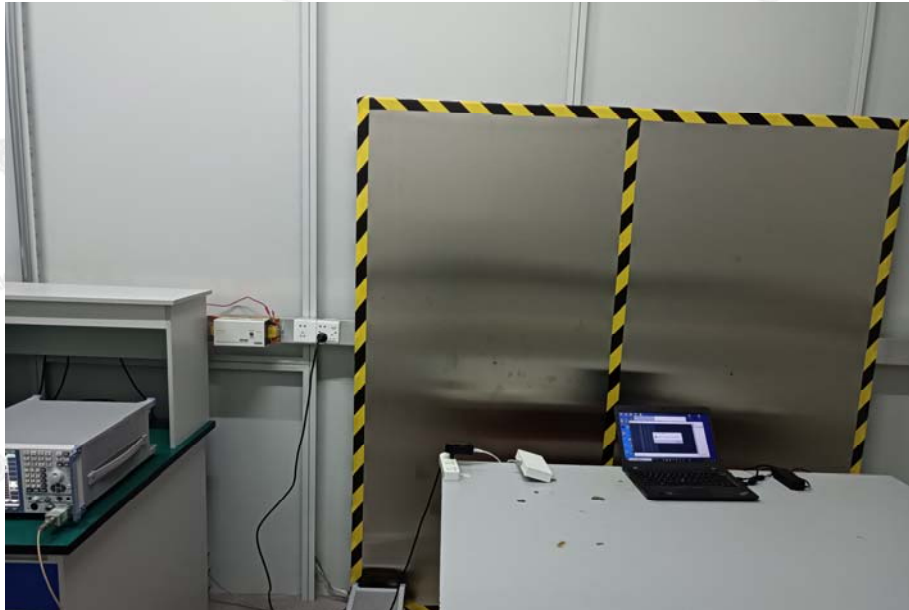

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

HUAKE Testing Lab TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



6. PHOTOS OF THE EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos

-----End of test report-----

