

# RF EXPOSURE REPORT

## FCC ID: 2A3AX-PW401

Report Reference No. .... : 22EFSS06081 05631

Date Sample(s) Received .... : 2022-06-22

Date of Tested .... : From 2022-06-24 to 2022-06-29

Date of issue .... : 2022-06-29

Applicant's name .... : Vinci Brands LLC

Address .... : 1775 Flight Way, Suite 300, Tustin, CA 92782

Manufacturer .... : Vinci Brands LLC

Equipment .... : Wireless Charger Speaker with Lamp

**INCIPIO**  **GRIFFIN**™

Model .... : PW-401, PW-401-GRY

Ratings .... : Input: 5V---2.1A/9V---2A

Output: Wireless charger Power: 5W/7.5W/10W/15W

Testing Laboratory .... : DongGuan ShuoXin Electronic Technology Co., Ltd.

Address .... : Zone A, 1F, No. 6, XinGang Road YuanGang Street,  
XinAn District, ChangAn Town, DongGuan City,  
GuangDong, China

According .... : FCC CFR 47 part1,1.1310 KDB680106 D01v03R01

Test Engineer:




Blue Qiu

Responsible Engineer :



Smile Wang

Authorized Signatory:



King Wang

**1,GENERAL DESCRIPTION OF EUT**

Equipment	Wireless Charger Speaker with Lamp	
Brand Name	<b>INCIPIO</b>  <b>GRIFFIN</b> ™	
Test Model	PW-401,PW-401-GRY	
Series Model	/	
Model Difference(s)	/	
Hardware Version	V1.0	
Software Version	V1.0	
PowerSource	5V==2.1A/9V==2A	
Operation Frequency	110.5kHz-205kHz	
Modulation Technology	FSK	
Antenna Information	Antenna Type:Coil	Maximum Peak Gain: 0dBi

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain(dBi)	Note
1	N/A	PW-401	Coil	N/A	0	

**1.1, MEASUREMENT UNCERTAINTY**

Test Item	Uncertainty
H-filed	±1.3µT
E-filed	±12%

## 2. MAXIMUM PERMISSIBLE EXPOSURE

### 2.1 EQUIPMENT LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Electromagnetic field strength analyzer	Narda	ELT-400	L-0019	2022.11.23
2	Three-dimensional omnidirectional electric and magnetic field combo probe	Narda	ELT	N/A	2022.11.23

### 2.2 MAXIMUM PERMISSIBLE EXPOSURE

#### Limit of Maximum Permissible Exposure

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E ^2,  H ^2 or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E ^2,  H ^2 or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

Note 1: f = frequency in MHz ; \*Plane-wave equivalent power density

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.


Note 4: The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

### **2.3 TEST PROCEDURE**

a. For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 20 cm(Top) and 15cm(Edge). E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 20 cm(Top) and 15cm(Edge) measured from the center of the probe(s) to the edge of the device.

Test mode: Worse case wireless output power: 15W

## 2.4 TEST SETUP

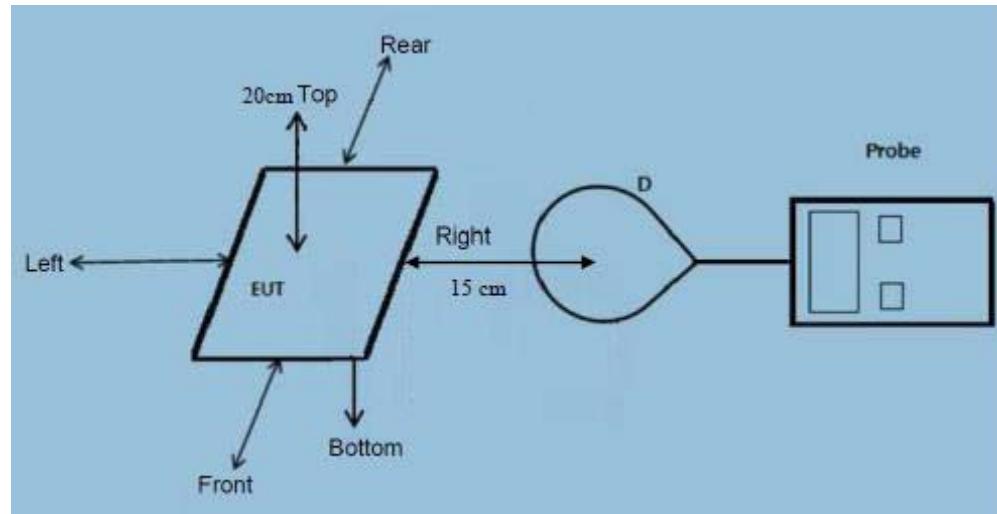

## 2.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
AE1	iphone 11	Apple	/	/

## 2.6 TEST RESULTS

The EUT does comply with item 5 KDB680106 D01 v03.

(1) Power transfer frequency is less than 1 MHz.

(Conform)

(2) Output power from each primary coil is less than or equal to 15 watts.

(Conform)

(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.

(Conform)

(4) Client device is placed directly in contact with the transmitter.

(Conform)

(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

(Conform)

(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

(Conform)

## 2.7 MAXIMUM PERMISSIBLE EXPOSURE

Maximum Permissible Exposure				
Charging	Separation	Probe from EUT Side	E-field (V/m)	H-field (A/m)
< 1% Battery	15cm	Front	5.122	0.122
< 1% Battery	15cm	Rear	5.224	0.122
< 1% Battery	15cm	Left	5.114	0.145
< 1% Battery	15cm	Right	5.314	0.152
< 1% Battery	20cm	Top	5.311	0.154
Limit			614	1.63
Margin Limit (%)			0.87%	10.80%

Maximum Permissible Exposure				
Charging	Separation	Probe from EUT Side	E-field (V/m)	H-field (A/m)
50% Battery	15cm	Front	5.441	0.161
50% Battery	15cm	Rear	5.424	0.134
50% Battery	15cm	Left	5.611	0.146
50% Battery	15cm	Right	5.714	0.145
50% Battery	20cm	Top	5.911	0.147
Limit			614	1.63
Margin Limit (%)			0.98%	8.77%

Maximum Permissible Exposure				
Charging	Separation	Probe from EUT Side	E-field (V/m)	H-field (A/m)
>99% Battery	15cm	Front	5.641	0.142
>99% Battery	15cm	Rear	5.711	0.124
>99% Battery	15cm	Left	5.401	0.111
>99% Battery	15cm	Right	5.611	0.142
>99% Battery	20cm	Top	5.241	0.121
Limit			614	1.63
Margin Limit (%)			0.87%	8.16%

## MPE SETUP PHOTO



END OF REPORT