

Appendix A. Test Result of Maximum E.I.R.P. Power

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Total Output Power (dBm)	Max Ant Gain (dBi)	EIRP Output Power (dBm)	EIRP limit
							(dBm)
802.11a (20 MHz)	5845	13.90	14.38	17.16	2.05	19.21	30
	5865	14.21	14.62	17.43	2.05	19.48	30
	5885	13.84	14.51	17.20	2.05	19.25	30

Note:

1. Output Power Value (dBm) = $10 \cdot \log (\text{Chain A(mW)} + \text{Chain B(mW)})$
2. The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Total Output Power (dBm)	Max Ant Gain (dBi)	EIRP Output Power (dBm)	EIRP limit
							(dBm)
802.11n (20 MHz)	5845	14.31	14.24	17.29	2.05	19.34	30
	5865	14.42	14.66	17.55	2.05	19.60	30
	5885	14.00	14.33	17.18	2.05	19.23	30

Note:

1. Output Power Value (dBm) = $10 \cdot \log (\text{Chain A(mW)} + \text{Chain B(mW)})$
2. The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Total Output Power (dBm)	Max Ant Gain (dBi)	EIRP Output Power (dBm)	EIRP limit
							(dBm)
802.11n (40 MHz)	5835	14.41	14.69	17.56	2.05	19.61	30
	5875	14.61	15.08	17.86	2.05	19.91	30

Note:

1. Output Power Value (dBm) = $10 \cdot \log (\text{Chain A(mW)} + \text{Chain B(mW)})$
2. The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Total Output Power (dBm)	Max Ant Gain (dBi)	EIRP Output Power (dBm)	EIRP limit
							(dBm)
802.11ac (20 MHz)	5845	14.21	14.33	17.28	2.05	19.33	30
	5865	14.48	14.74	17.62	2.05	19.67	30
	5885	14.13	14.32	17.24	2.05	19.29	30

Note:

1. Output Power Value (dBm) = $10 \cdot \log (\text{Chain A(mW)} + \text{Chain B(mW)})$
2. The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Total Output Power (dBm)	Max Ant Gain (dBi)	EIRP Output Power (dBm)	EIRP limit
							(dBm)
802.11ac (40 MHz)	5835	14.31	14.55	17.44	2.05	19.49	30
	5875	14.31	14.73	17.54	2.05	19.59	30

Note:

1. Output Power Value (dBm) = $10 \cdot \log (\text{Chain A(mW)} + \text{Chain B(mW)})$
2. The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Total Output Power (dBm)	Max Ant Gain (dBi)	EIRP Output Power (dBm)	EIRP limit
							(dBm)
802.11ac (80 MHz)	5855	14.48	14.76	17.63	2.05	19.68	30

Note:

1. Output Power Value (dBm) = $10 \cdot \log (\text{Chain A(mW)} + \text{Chain B(mW)})$
2. The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Total Output Power (dBm)	Max Ant Gain (dBi)	EIRP Output Power (dBm)	EIRP limit
							(dBm)
802.11ac (160 MHz)	5815	14.43	14.61	17.53	2.05	19.58	30

Note:

1. Output Power Value (dBm) = $10 \cdot \log (\text{Chain A(mW)} + \text{Chain B(mW)})$
2. The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Modulation	Frequency (MHz)	RU Config	Chain A Power (dBm)	Chain B Power (dBm)	Total Output Power (dBm)	Max Ant Gain (dBi)	EIRP Output Power (dBm)	EIRP limit
								(dBm)
802.11ax (20 MHz)	5845	26/0	3.73	5.02	7.43	2.01	9.44	30
		52/37	3.85	4.70	7.31	2.01	9.32	30
		106/53	4.12	5.24	7.73	2.01	9.74	30
		242/61	14.04	14.19	17.13	2.01	19.14	30
	5865	26/0	4.03	4.79	7.44	2.01	9.45	30
		52/37	3.51	5.32	7.52	2.01	9.53	30
		106/53	4.13	5.46	7.86	2.01	9.87	30
		242/61	14.53	15.06	17.81	2.01	19.82	30
	5885	26/0	0.04	2.00	4.14	2.01	6.15	30
		52/37	2.89	4.05	6.52	2.01	8.53	30
		106/53	2.95	4.28	6.68	2.01	8.69	30
		242/61	9.08	9.32	12.21	2.01	14.22	30

Note:

1. Output Power Value (dBm) = $10 \cdot \log (\text{Chain A(mW)} + \text{Chain B(mW)})$
2. The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Modulation	Frequency (MHz)	RU Config	Chain A Power (dBm)	Chain B Power (dBm)	Total Output Power (dBm)	Max Ant Gain (dBi)	EIRP Output Power (dBm)	EIRP limit (dBm)
802.11ax (40 MHz)	5835	26/0	4.48	4.88	7.69	2.01	9.70	30
		52/37	4.77	5.16	7.98	2.01	9.99	30
		106/53	5.02	5.55	8.30	2.01	10.31	30
		242/61	4.25	5.04	7.67	2.01	9.68	30
		484/65	14.07	14.39	17.24	2.01	19.25	30
	5875	26/0	3.89	5.12	7.56	2.01	9.57	30
		52/37	4.22	5.14	7.71	2.01	9.72	30
		106/53	4.62	5.65	8.18	2.01	10.19	30
		242/61	4.23	5.80	8.10	2.01	10.11	30
		484/65	14.23	15.02	17.65	2.01	19.66	30

Note:

1. Output Power Value (dBm) = $10 \cdot \log (\text{Chain A(mW)} + \text{Chain B(mW)})$
2. The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Modulation	Frequency (MHz)	RU Config	Chain A Power (dBm)	Chain B Power (dBm)	Total Output Power (dBm)	Max Ant Gain (dBi)	EIRP Output Power (dBm)	EIRP limit (dBm)
802.11ax (80 MHz)	5855	26/0	4.38	4.87	7.64	2.01	9.65	30
		52/37	4.27	5.04	7.68	2.01	9.69	30
		106/53	4.70	5.73	8.26	2.01	10.27	30
		242/61	4.93	5.71	8.35	2.01	10.36	30
		484/65	4.20	5.31	7.80	2.01	9.81	30
		996/67	14.31	14.66	17.50	2.01	19.51	30

Note:

1. Output Power Value (dBm) = $10 \cdot \log (\text{Chain A(mW)} + \text{Chain B(mW)})$
2. The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.


Modulation	Frequency (MHz)	RU Config	Chain A Power (dBm)	Chain B Power (dBm)	Total Output Power (dBm)	Max Ant Gain (dBi)	EIRP Output Power (dBm)	EIRP limit
								(dBm)
802.11ax (160 MHz)	5815	26/0	5.52	5.11	8.33	2.01	10.34	30
		52/37	4.88	4.76	7.83	2.01	9.84	30
		106/53	5.57	4.89	8.25	2.01	10.26	30
		242/61	5.63	5.20	8.43	2.01	10.44	30
		484/65	5.29	4.86	8.09	2.01	10.10	30
		996/67	5.38	4.73	8.08	2.01	10.09	30
		2x996/68	11.52	11.44	14.49	2.01	16.50	30

Note:

1. Output Power Value (dBm) = $10 \cdot \log (\text{Chain A(mW)} + \text{Chain B(mW)})$
2. The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Appendix B. Test Result of Transmitter Radiated Spurious Emission

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5845MHz
Test by :Rock

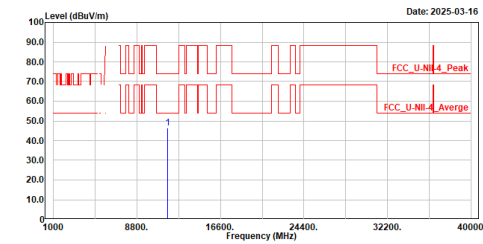


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11690.000	46.47	74.00	-27.53	42.08	4.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5845MHz
Test by :Rock

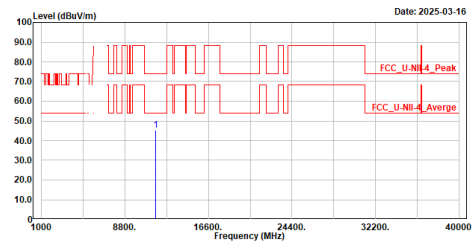


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11690.000	45.33	74.00	-28.67	40.94	4.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5865MHz
Test by :Rock

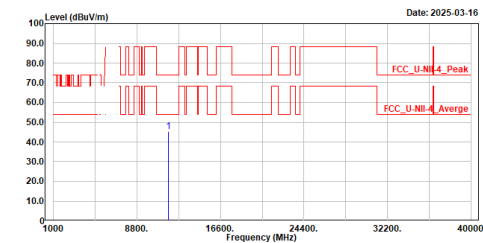


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11730.000	45.31	74.00	-28.69	40.84	4.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5865MHz
Test by :Rock

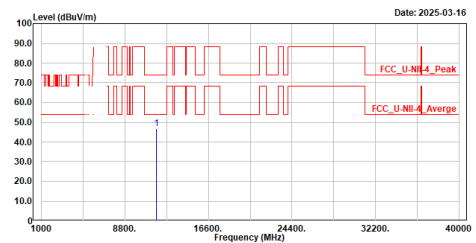


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11730.000	46.87	74.00	-27.13	42.40	4.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5885MHz
Test by :Rock

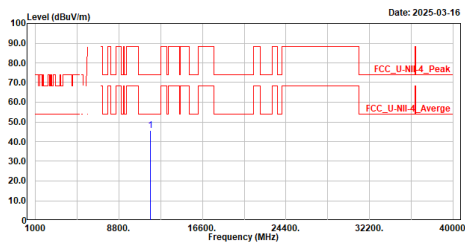


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11770.000	45.84	74.00	-28.16	41.23	4.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5885MHz
Test by :Rock

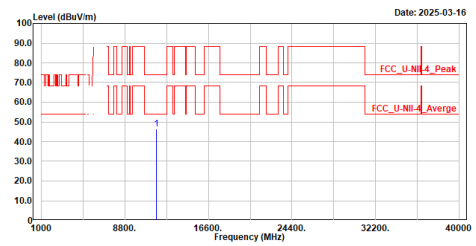


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11770.000	46.33	74.00	-27.67	41.72	4.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5845MHz
Test by :Rock

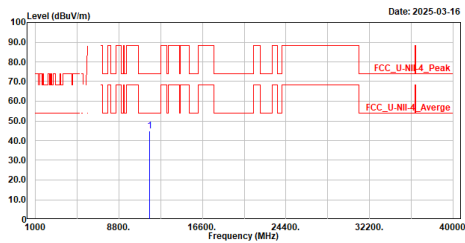


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11690.000	45.02	74.00	-28.98	40.63	4.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5845MHz
Test by :Rock

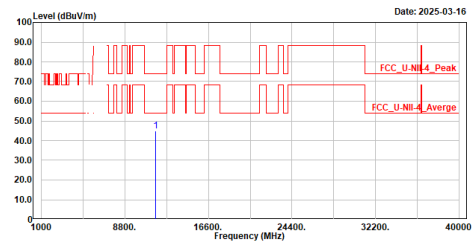


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11690.000	45.04	74.00	-28.96	40.65	4.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5865MHz
Test by :Rock

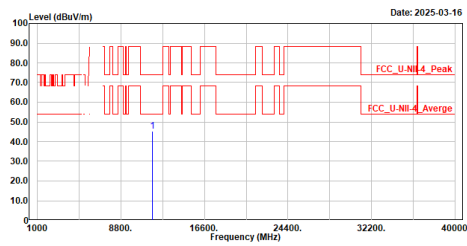


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11730.000	45.26	74.00	-28.74	40.79	4.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5865MHz
Test by :Rock

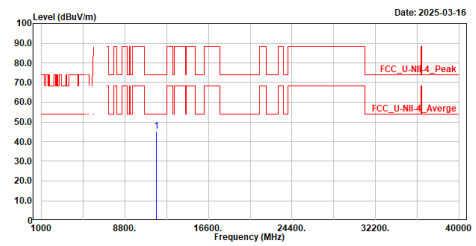


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11730.000	45.39	74.00	-28.61	40.92	4.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5885MHz
Test by :Rock

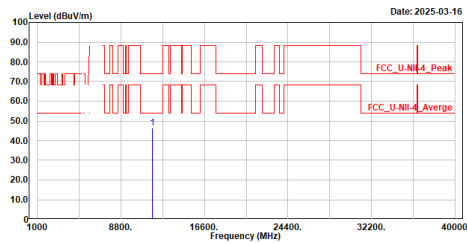


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11770.000	46.29	74.00	-27.71	41.68	4.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5885MHz
Test by :Rock

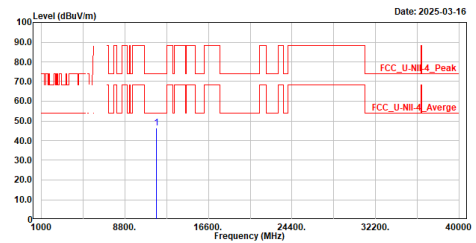


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11770.000	46.31	74.00	-27.69	41.70	4.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_5835MHz
Test by :Rock

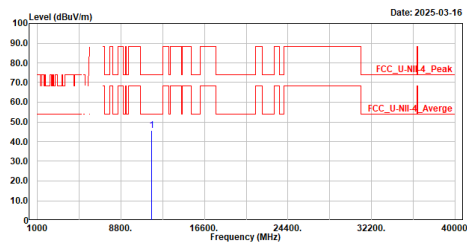


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11670.000	45.54	74.00	-28.46	41.10	4.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_5835MHz
Test by :Rock

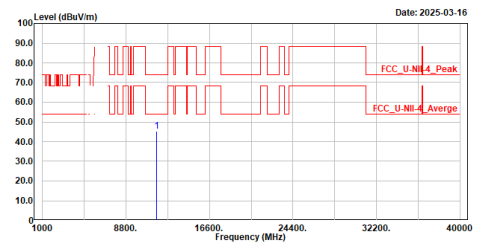


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11670.000	45.27	74.00	-28.73	40.83	4.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_5875MHz
Test by :Rock

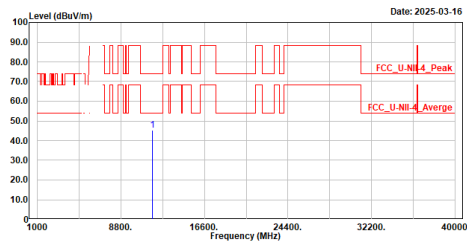


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11750.000	45.28	74.00	-28.72	40.72	4.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_5875MHz
Test by :Rock

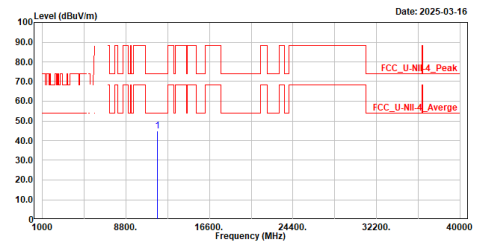


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11750.000	44.73	74.00	-29.27	40.17	4.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac20_5845MHz
Test by :Rock

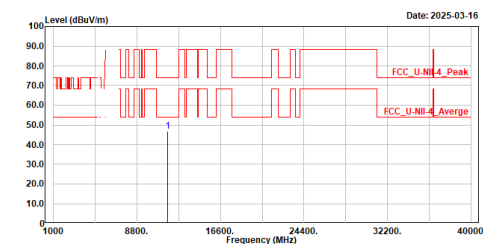


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11690.000	46.81	74.00	-27.19	42.42	4.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac20_5845MHz
Test by :Rock

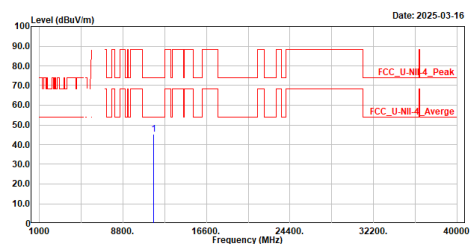


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11690.000	45.44	74.00	-28.56	41.05	4.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac20_5865MHz
Test by :Rock

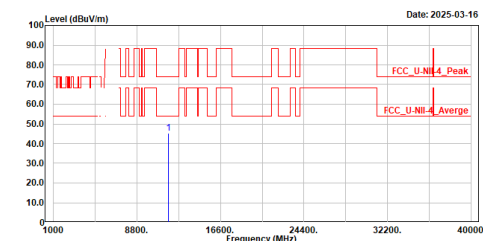


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11730.000	45.14	74.00	-28.86	40.67	4.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac20_5865MHz
Test by :Rock

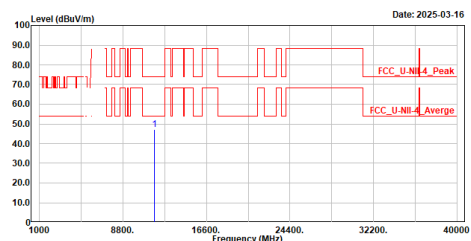


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11730.000	47.11	74.00	-26.89	42.64	4.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac20_5885MHz
Test by :Rock

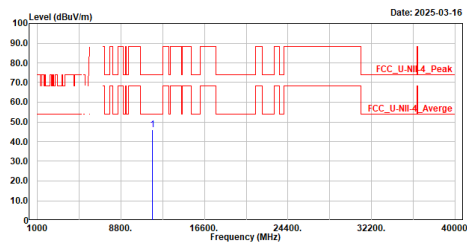


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11770.000	46.08	74.00	-27.92	41.47	4.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac20_5885MHz
Test by :Rock

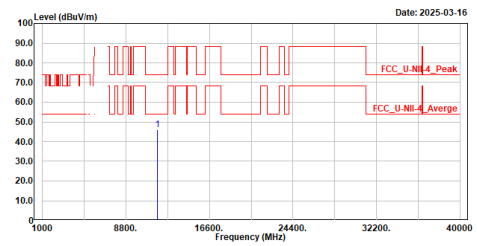


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11770.000	46.17	74.00	-27.83	41.56	4.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac40_5835MHz
Test by :Rock

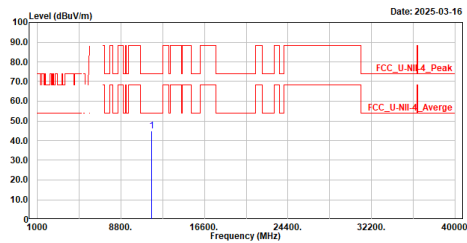


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11670.000	44.79	74.00	-29.21	40.35	4.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac40_5835MHz
Test by :Rock

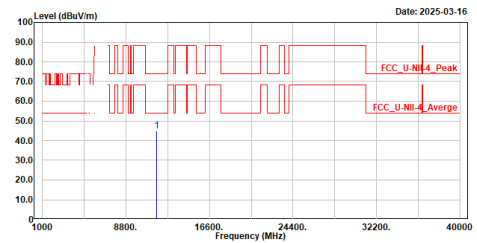


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11670.000	44.84	74.00	-29.16	40.40	4.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac40_5875MHz
Test by :Rock

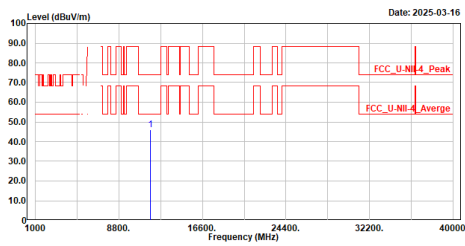


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11750.000	46.04	74.00	-27.96	41.48	4.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac40_5875MHz
Test by :Rock

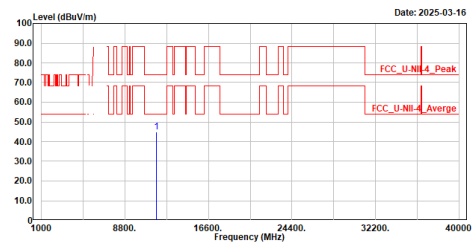


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11750.000	44.96	74.00	-29.04	40.40	4.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac80_5855MHz
Test by :Rock

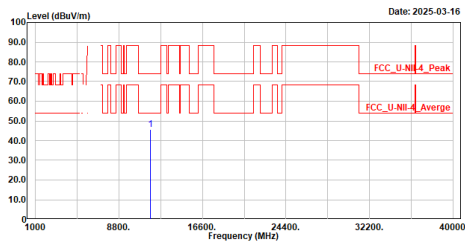


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11710.000	45.80	74.00	-28.20	41.42	4.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac80_5855MHz
Test by :Rock

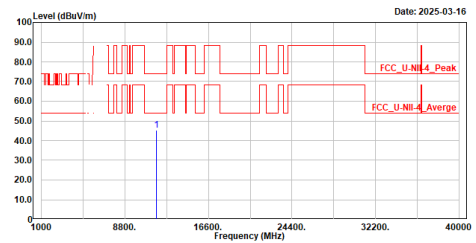


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11710.000	45.40	74.00	-28.60	41.02	4.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac160_5815MHz
Test by :Rock

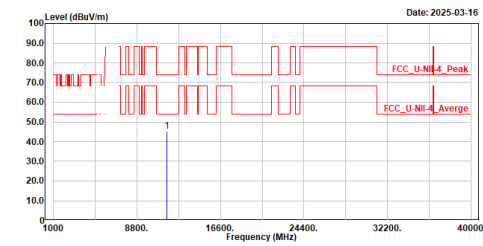


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	11630.000	45.11	74.00	-28.89	40.60	4.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac160_5815MHz
Test by :Rock

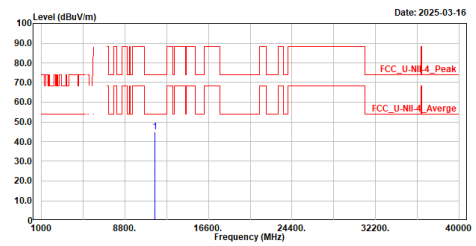


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	11630.000	44.75	74.00	-29.25	40.24	4.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac160_5815MHz
Test by :Caster

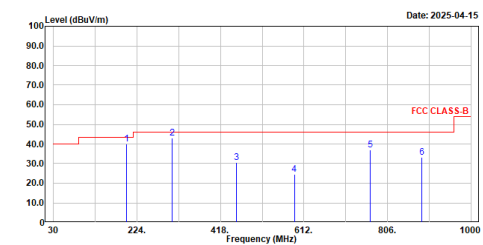


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	199.750	39.97	43.50	-3.53	67.41	-27.44	QP
2	305.480	43.06	46.00	-2.94	66.65	-23.59	QP
3	455.830	30.61	46.00	-15.39	49.94	-19.33	QP
4	589.690	24.54	46.00	-21.46	40.95	-16.41	QP
5	765.260	37.16	46.00	-8.84	50.72	-13.56	QP
6	885.540	33.15	46.00	-12.85	45.73	-12.58	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac160_5815MHz
Test by :Caster

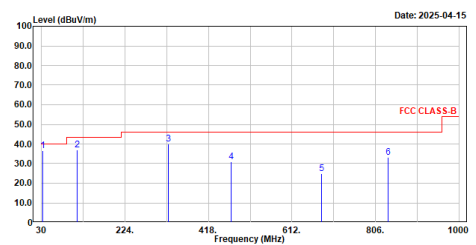


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	32.910	36.43	40.00	-3.57	62.07	-25.64	QP
2	112.450	36.84	43.50	-6.66	64.26	-27.42	QP
3	324.880	39.88	46.00	-6.12	62.70	-22.82	QP
4	471.350	30.84	46.00	-15.16	49.97	-19.13	QP
5	680.870	24.87	46.00	-21.13	40.03	-15.16	QP
6	836.070	33.12	46.00	-12.88	46.09	-12.97	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Partial RU


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5845MHz_RU 242 61
Test by :Rock

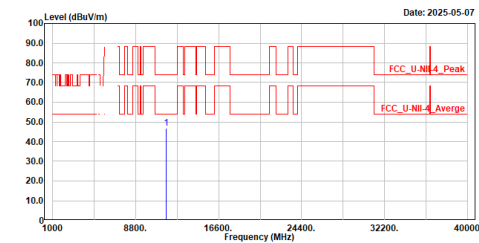

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11690.000	46.87	74.00	-27.13	42.48	4.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5845MHz_RU 242 61
Test by :Rock

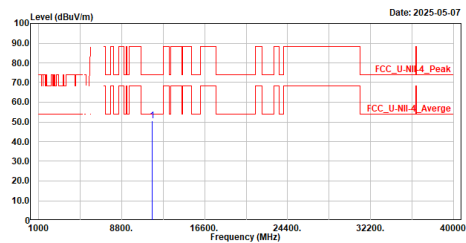

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11690.000	50.40	74.00	-23.60	46.01	4.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5865MHz_RU 242 61
Test by :Rock

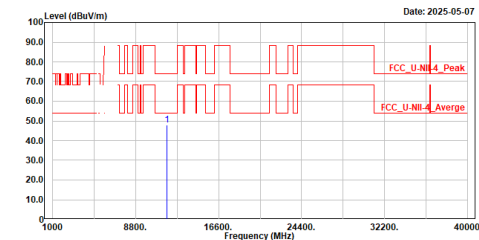

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11730.000	47.91	74.00	-26.09	43.44	4.47	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5865MHz_RU 242 61
Test by :Rock

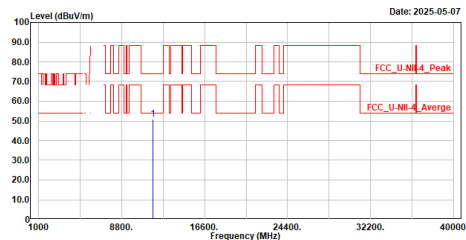

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11730.000	50.80	74.00	-23.20	46.33	4.47	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5885MHz_RU 242 61
Test by :Rock

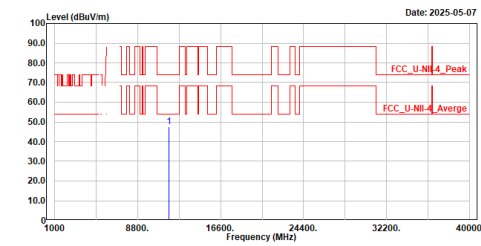


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11770.000	47.73	74.00	-26.27	43.12	4.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5885MHz_RU 242 61
Test by :Rock

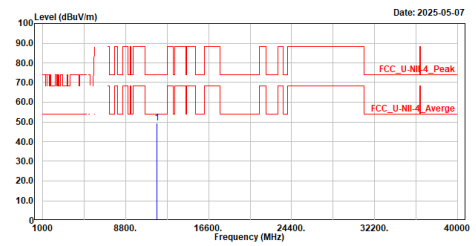


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11770.000	49.33	74.00	-24.67	44.72	4.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_5835MHz_RU 484 65
Test by :Rock

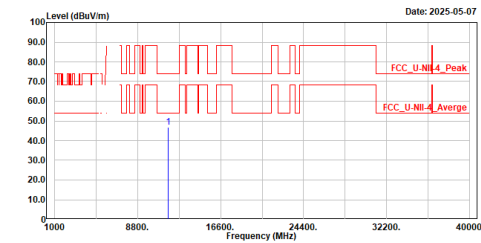


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11670.000	46.68	74.00	-27.32	42.24	4.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_5835MHz_RU 484 65
Test by :Rock

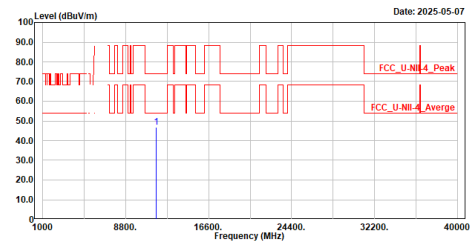


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11670.000	46.87	74.00	-27.13	42.43	4.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_5875MHz_RU 484 65
Test by :Caster

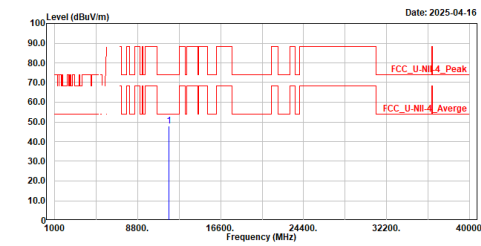


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11750.000	48.03	74.00	-25.97	43.47	4.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_5875MHz_RU 484 65
Test by :Caster

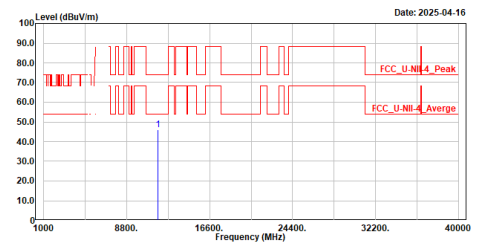


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11750.000	46.01	74.00	-27.99	41.45	4.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax80_5855MHz_RU 996 67
Test by :Rock

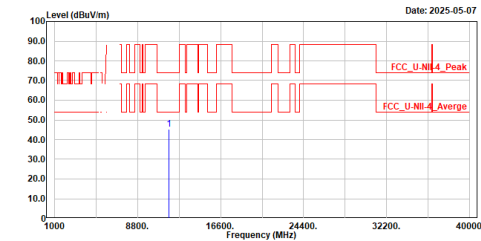


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11710.000	45.27	74.00	-28.73	40.89	4.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax80_5855MHz_RU 996 67
Test by :Rock

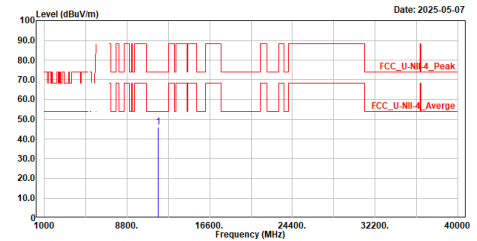


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11710.000	45.98	74.00	-28.02	41.60	4.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax160_5815MHz_RU 2x996 68
Test by :Rock

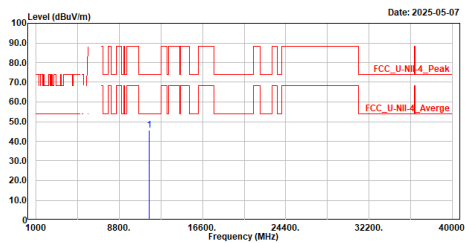


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11630.000	45.56	74.00	-28.44	41.05	4.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax160_5815MHz_RU 2x996 68
Test by :Rock

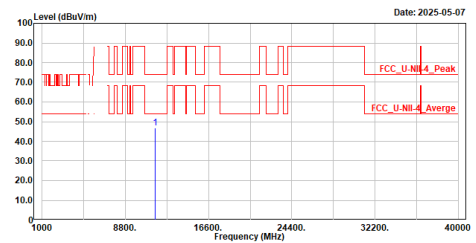


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11630.000	46.77	74.00	-27.23	42.26	4.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax160_5815MHz_RU 2x996 68
Test by :Caster

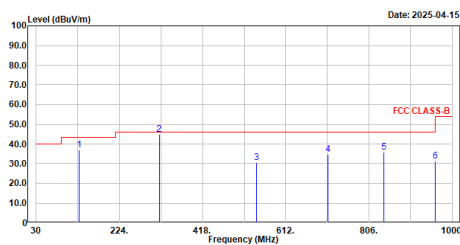


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	130.880	37.17	43.50	-6.33	62.94	-25.77	QP
2	317.120	44.98	46.00	-1.02	68.11	-23.13	QP
3	544.100	30.70	46.00	-15.30	48.69	-17.99	QP
4	710.940	34.85	46.00	-11.15	49.40	-14.55	QP
5	840.920	35.88	46.00	-10.12	48.74	-12.86	QP
6	960.230	31.34	54.00	-22.66	42.87	-11.53	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax160_5815MHz_RU 2x996 68
Test by :Caster

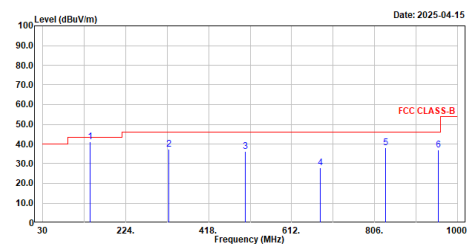


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	141.550	41.03	43.50	-2.47	65.90	-24.87	QP
2	324.880	37.26	46.00	-8.74	60.08	-22.82	QP
3	504.330	36.07	46.00	-9.93	54.65	-18.58	QP
4	679.900	28.97	46.00	-17.93	43.26	-15.19	QP
5	832.190	38.06	46.00	-7.94	51.10	-13.04	QP
6	955.380	36.94	46.00	-9.06	48.38	-11.44	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5845MHz
Test by :Rock

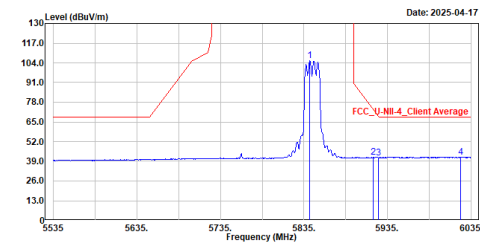


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5842.000	105.27	-----	-----	88.86	16.41	Average
2	5918.000	41.67	73.33	-31.66	24.97	16.70	Average
3	5924.000	41.39	68.93	-27.54	24.66	16.73	Average
4	6022.500	41.81	68.20	-26.39	25.08	16.73	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5845MHz
Test by :Rock

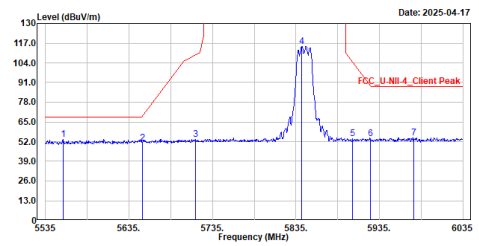


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5556.000	53.67	68.20	-14.53	38.35	15.32	Peak
2	5651.000	51.17	68.95	-17.78	35.38	15.79	Peak
3	5714.500	53.40	109.26	-55.86	37.06	16.34	Peak
4	5842.000	115.02	-----	-----	98.61	16.41	Peak
5	5903.000	53.92	104.33	-50.41	37.28	16.64	Peak
6	5924.000	53.78	88.93	-35.15	37.05	16.73	Peak
7	5976.500	54.57	88.20	-33.63	37.85	16.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5845MHz
Test by :Rock

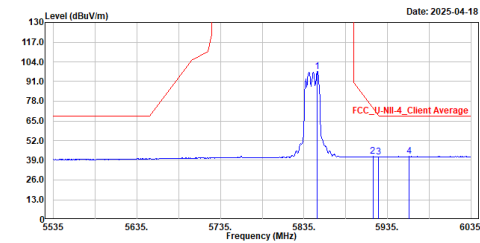


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5851.000	97.77	-----	-----	81.35	16.42	Average
2	5917.500	41.46	73.70	-32.24	24.76	16.70	Average
3	5924.000	41.17	68.93	-27.76	24.44	16.73	Average
4	5960.500	41.61	68.20	-26.59	24.89	16.72	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5845MHz
Test by :Rock

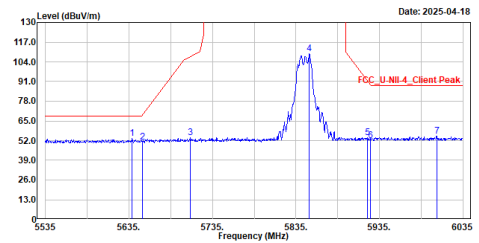


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5639.000	53.53	68.20	-14.67	37.84	15.69	Peak
2	5651.000	51.25	68.95	-17.70	35.46	15.79	Peak
3	5708.500	53.76	107.58	-53.82	37.46	16.30	Peak
4	5851.000	109.41	-----	-----	92.99	16.42	Peak
5	5920.500	54.05	91.50	-37.45	37.34	16.71	Peak
6	5924.000	52.02	88.93	-36.91	35.29	16.73	Peak
7	6003.500	54.73	88.20	-33.47	38.03	16.70	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5885MHz
Test by :Rock

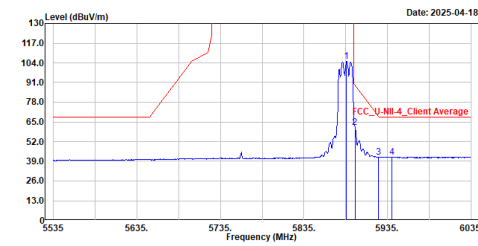

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5886.000	104.89	-----	-----	88.33	16.56	Average
2	5896.000	61.55	89.47	-27.92	44.94	16.61	Average
3	5924.000	41.80	68.93	-27.13	25.07	16.73	Average
4	5940.000	41.80	68.20	-26.40	25.06	16.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5885MHz
Test by :Rock

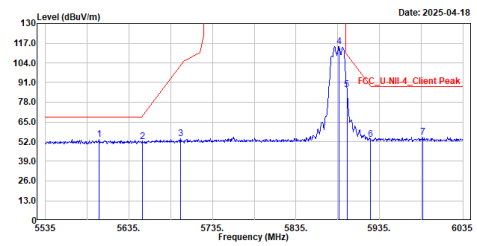

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5599.000	53.71	68.20	-14.49	38.33	15.38	Peak
2	5651.000	51.89	68.95	-17.06	36.10	15.79	Peak
3	5696.500	53.75	102.61	-48.86	37.53	16.22	Peak
4	5886.500	114.67	-----	-----	98.10	16.57	Peak
5	5896.000	86.45	109.47	-23.02	69.84	16.61	Peak
6	5924.000	53.33	88.93	-35.60	36.60	16.73	Peak
7	5986.500	55.17	88.20	-33.03	38.47	16.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5885MHz
Test by :Rock

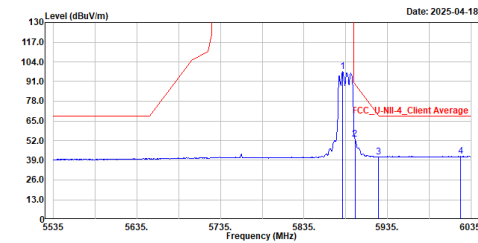

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5881.500	97.40	-----	-----	80.85	16.55	Average
2	5896.000	53.14	89.47	-36.33	36.53	16.61	Average
3	5924.000	41.22	68.93	-27.71	24.49	16.73	Average
4	6022.500	41.62	68.20	-26.58	24.89	16.73	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5885MHz
Test by :Rock

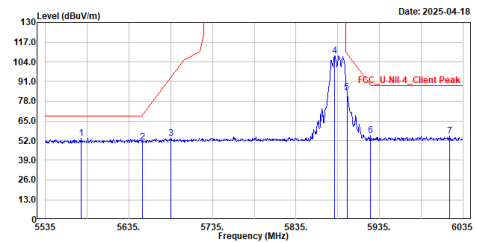

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5577.500	53.49	68.20	-14.71	38.16	15.33	Peak
2	5651.000	51.05	68.95	-17.90	35.26	15.79	Peak
3	5685.000	53.66	94.10	-40.44	37.54	16.12	Peak
4	5881.500	108.01	-----	-----	91.46	16.55	Peak
5	5896.000	83.89	109.47	-25.58	67.28	16.61	Peak
6	5924.000	55.37	88.93	-33.56	38.64	16.73	Peak
7	6019.000	54.94	88.20	-33.26	38.22	16.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_5845MHz
Test by :Rock

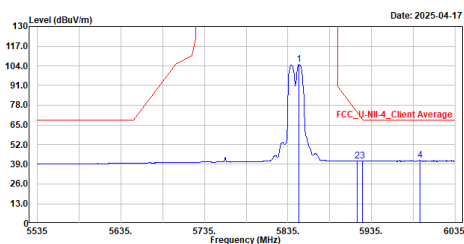


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5848.000	105.04	-----	-----	88.63	16.41	Average
2	5918.000	41.20	73.33	-32.13	24.50	16.70	Average
3	5924.000	41.08	68.93	-27.85	24.35	16.73	Average
4	5993.500	41.61	68.20	-26.59	24.90	16.71	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_5845MHz
Test by :Rock

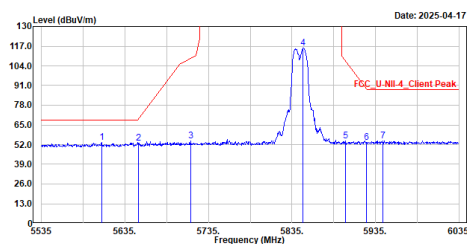


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5607.000	53.61	68.20	-14.59	38.18	15.43	Peak
2	5651.000	52.91	68.95	-16.04	37.12	15.79	Peak
3	5713.500	54.22	108.98	-54.76	37.89	16.33	Peak
4	5848.500	115.63	-----	-----	99.22	16.41	Peak
5	5899.500	54.46	106.90	-52.44	37.83	16.63	Peak
6	5924.000	53.45	88.93	-35.48	36.72	16.73	Peak
7	5944.000	54.48	88.20	-33.72	37.74	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_5845MHz
Test by :Rock

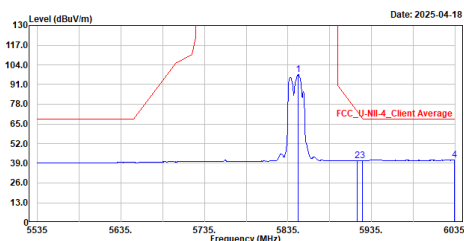


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5847.500	97.63	-----	-----	81.21	16.42	Average
2	5918.000	40.94	73.33	-32.39	24.24	16.70	Average
3	5924.000	40.84	68.93	-28.09	24.11	16.73	Average
4	6034.000	41.03	68.20	-27.17	24.25	16.78	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_5845MHz
Test by :Rock

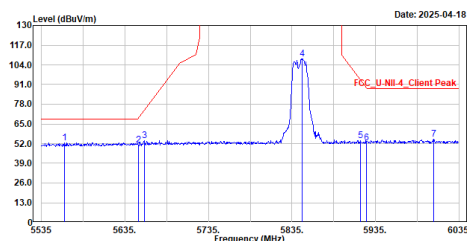


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5563.000	52.66	68.20	-15.54	37.33	15.33	Peak
2	5651.000	51.06	68.95	-17.89	35.27	15.79	Peak
3	5658.000	53.79	74.13	-20.34	37.93	15.86	Peak
4	5847.000	108.03	-----	-----	91.61	16.42	Peak
5	5917.000	54.03	94.07	-40.04	37.33	16.70	Peak
6	5924.000	52.55	88.93	-36.38	35.82	16.73	Peak
7	6004.500	54.75	88.20	-33.45	38.05	16.70	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_5885MHz
Test by :Rock

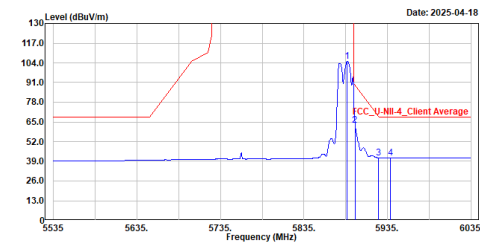

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5887.000	105.01	-----	-----	88.44	16.57	Average
2	5896.000	62.96	89.47	-26.51	46.35	16.61	Average
3	5924.000	41.33	68.93	-27.60	24.60	16.73	Average
4	5938.500	41.36	68.20	-26.84	24.62	16.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_5885MHz
Test by :Rock

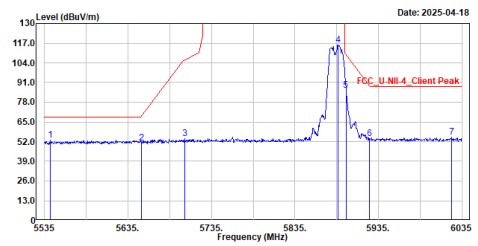

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5542.000	53.08	68.20	-15.12	37.78	15.30	Peak
2	5651.000	58.92	68.95	-18.03	35.13	15.79	Peak
3	5703.500	53.77	106.18	-52.41	37.49	16.28	Peak
4	5886.500	115.60	-----	-----	99.03	16.57	Peak
5	5896.000	85.89	109.47	-23.58	69.28	16.61	Peak
6	5924.000	53.76	88.93	-35.17	37.03	16.73	Peak
7	6023.000	54.73	88.20	-33.47	37.99	16.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_5885MHz
Test by :Rock

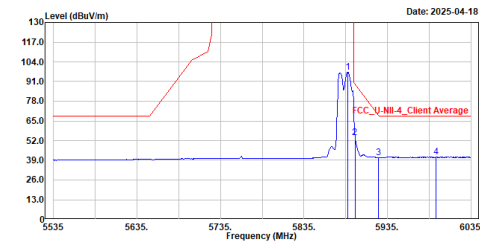

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5887.500	97.13	-----	-----	80.56	16.57	Average
2	5896.000	53.96	89.47	-35.51	37.35	16.61	Average
3	5924.000	40.85	68.93	-28.08	24.12	16.73	Average
4	5993.000	41.36	68.20	-26.84	24.65	16.71	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_5885MHz
Test by :Rock

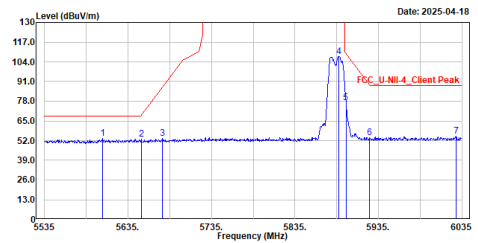

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5605.000	53.36	68.20	-14.84	37.94	15.42	Peak
2	5651.000	52.87	68.95	-16.08	37.08	15.79	Peak
3	5676.500	53.57	87.81	-34.24	37.54	16.03	Peak
4	5887.500	107.46	-----	-----	90.89	16.57	Peak
5	5896.000	76.86	109.47	-32.61	60.25	16.61	Peak
6	5924.000	53.98	88.93	-34.95	37.25	16.73	Peak
7	6028.000	54.81	88.20	-33.39	38.05	16.76	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_5835MHz
Test by :Rock

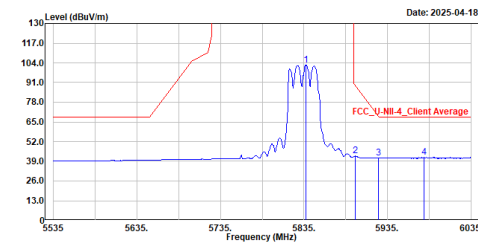


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5837.500	102.71	-----	-----	86.28	16.43	Average
2	5896.500	42.46	89.10	-46.64	25.85	16.61	Average
3	5924.000	41.17	68.93	-27.76	24.44	16.73	Average
4	5979.000	41.69	68.20	-26.51	24.98	16.71	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_5835MHz
Test by :Rock

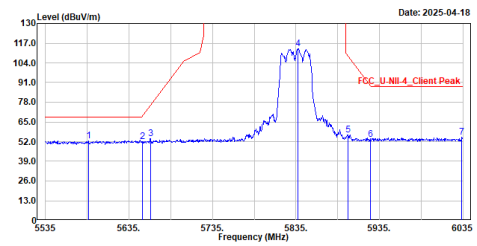


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5586.500	52.61	68.20	-15.59	37.26	15.35	Peak
2	5651.000	51.75	68.95	-17.20	35.96	15.79	Peak
3	5661.000	54.01	76.35	-22.34	38.12	15.89	Peak
4	5837.500	113.29	-----	-----	96.86	16.43	Peak
5	5897.000	56.59	108.73	-52.14	39.97	16.62	Peak
6	5924.000	53.65	88.93	-35.28	36.92	16.73	Peak
7	6033.500	55.04	88.20	-33.16	38.26	16.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_5835MHz
Test by :Rock

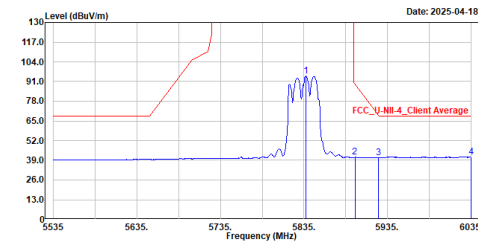


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5837.000	94.54	-----	-----	78.11	16.43	Average
2	5896.000	40.97	89.47	-48.50	24.36	16.61	Average
3	5924.000	40.87	68.93	-28.06	24.14	16.73	Average
4	6035.000	41.07	68.20	-27.13	24.29	16.78	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_5835MHz
Test by :Rock

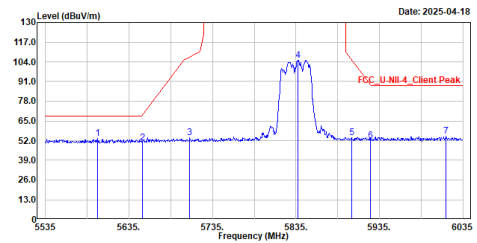


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5597.500	53.29	68.20	-14.91	37.92	15.37	Peak
2	5651.000	50.61	68.95	-18.34	34.82	15.79	Peak
3	5708.000	54.02	107.44	-53.42	37.72	16.30	Peak
4	5837.000	105.11	-----	-----	88.68	16.43	Peak
5	5901.500	53.93	105.43	-51.50	37.30	16.63	Peak
6	5924.000	51.88	88.93	-37.05	35.15	16.73	Peak
7	6015.000	55.03	88.20	-33.17	38.32	16.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_5875MHz
Test by :Rock

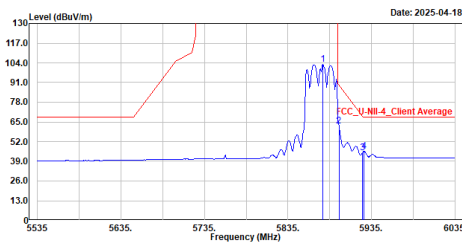

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5876.500	103.18	-----	-----	86.65	16.53	Average
2	5896.000	62.53	89.47	-26.94	45.92	16.61	Average
3	5924.000	44.50	68.93	-24.43	27.77	16.73	Average
4	5926.000	45.52	68.20	-22.68	28.79	16.73	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_5875MHz
Test by :Rock

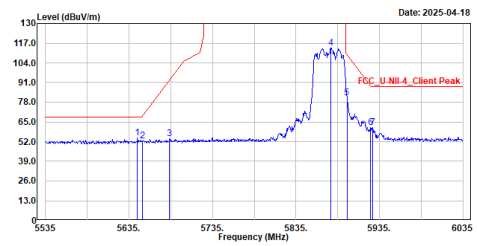

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5645.000	54.26	68.20	-13.94	38.52	15.74	Peak
2	5651.000	52.26	68.95	-16.69	36.47	15.79	Peak
3	5683.500	54.00	92.99	-38.99	37.89	16.11	Peak
4	5876.500	113.74	-----	-----	97.21	16.53	Peak
5	5896.000	81.19	109.47	-28.28	64.58	16.61	Peak
6	5924.000	61.40	88.93	-27.53	44.67	16.73	Peak
7	5926.500	61.28	88.20	-26.92	44.54	16.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_5875MHz
Test by :Rock

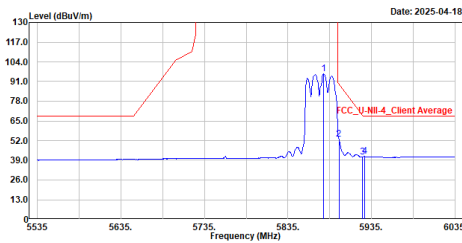

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5877.500	95.99	-----	-----	79.46	16.53	Average
2	5896.000	53.00	89.47	-36.47	36.39	16.61	Average
3	5924.000	41.12	68.93	-27.81	24.39	16.73	Average
4	5926.500	41.48	68.20	-26.72	24.74	16.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_5875MHz
Test by :Rock

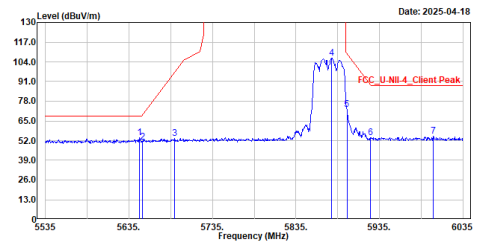

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5648.000	53.87	68.20	-14.33	38.11	15.76	Peak
2	5651.000	51.00	68.95	-17.95	35.21	15.79	Peak
3	5689.500	53.25	97.43	-44.18	37.09	16.16	Peak
4	5878.000	106.56	-----	-----	90.03	16.53	Peak
5	5896.000	72.43	109.47	-37.04	55.82	16.61	Peak
6	5924.000	53.85	88.93	-35.08	37.12	16.73	Peak
7	5999.500	54.85	88.20	-33.35	38.15	16.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac20_5845MHz
Test by :Rock

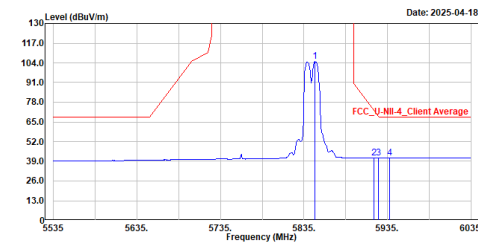


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5848.500	104.93	-----	-----	88.52	16.41	Average
2	5919.000	41.22	72.60	-31.38	24.51	16.71	Average
3	5924.000	41.10	68.93	-27.83	24.37	16.73	Average
4	5938.000	41.25	68.20	-26.95	24.51	16.74	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac20_5845MHz
Test by :Rock

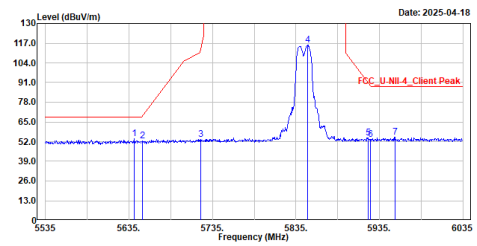


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5641.500	54.17	68.20	-14.03	38.46	15.71	Peak
2	5651.000	52.53	68.95	-16.42	36.74	15.79	Peak
3	5721.000	53.51	113.08	-59.57	37.15	16.36	Peak
4	5849.000	115.91	-----	-----	99.49	16.42	Peak
5	5921.500	54.57	90.77	-36.20	37.85	16.72	Peak
6	5924.000	53.46	88.93	-35.47	36.73	16.73	Peak
7	5953.500	54.83	88.20	-33.37	38.10	16.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac20_5845MHz
Test by :Rock

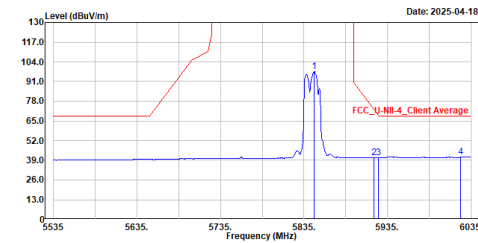


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5847.500	97.62	-----	-----	81.20	16.42	Average
2	5918.500	40.95	72.97	-32.02	24.24	16.71	Average
3	5924.000	40.86	68.93	-28.07	24.13	16.73	Average
4	6023.000	41.20	68.20	-27.00	24.46	16.74	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac20_5845MHz
Test by :Rock

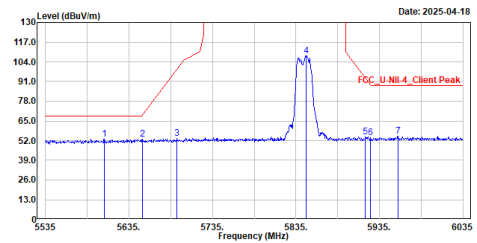


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5605.500	52.97	68.20	-15.23	37.55	15.42	Peak
2	5651.000	53.11	68.95	-15.84	37.32	15.79	Peak
3	5692.500	53.36	99.65	-46.29	37.17	16.19	Peak
4	5847.000	108.13	-----	-----	91.71	16.42	Peak
5	5918.000	54.68	93.33	-38.65	37.98	16.70	Peak
6	5924.000	53.73	88.93	-35.20	37.00	16.73	Peak
7	5957.000	55.00	88.20	-33.20	38.27	16.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac20_5885MHz
Test by :Rock

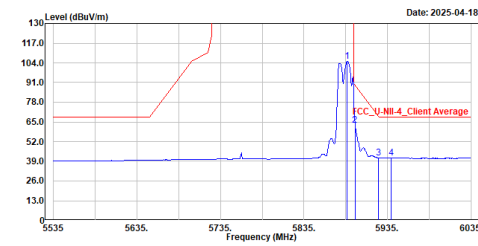

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5887.000	105.00	-----	-----	88.43	16.57	Average
2	5896.000	63.00	89.47	-26.47	46.39	16.61	Average
3	5924.000	41.34	68.93	-27.59	24.61	16.73	Average
4	5939.000	41.35	68.20	-26.85	24.61	16.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac20_5885MHz
Test by :Rock

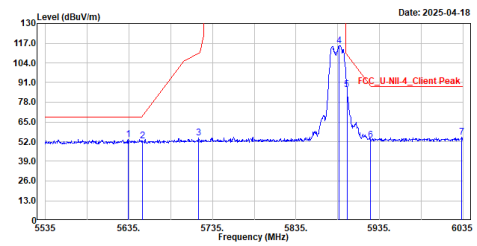

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5634.000	53.36	68.20	-14.84	37.71	15.65	Peak
2	5651.000	52.58	68.95	-16.37	36.79	15.79	Peak
3	5718.000	54.42	110.24	-55.82	38.07	16.35	Peak
4	5887.000	115.41	-----	-----	98.84	16.57	Peak
5	5896.000	86.44	109.47	-23.03	69.83	16.61	Peak
6	5924.000	53.15	88.93	-35.78	36.42	16.73	Peak
7	6033.500	54.98	88.20	-33.22	38.20	16.78	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac20_5885MHz
Test by :Rock

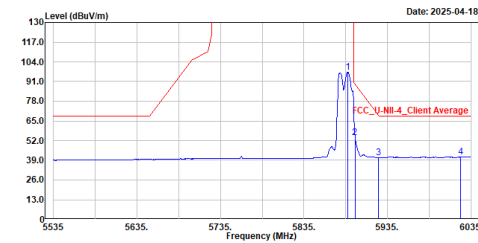

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5887.500	97.15	-----	-----	80.58	16.57	Average
2	5896.000	54.00	89.47	-35.47	37.39	16.61	Average
3	5924.000	40.82	68.93	-28.11	24.09	16.73	Average
4	6023.000	41.05	68.20	-27.15	24.31	16.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac20_5885MHz
Test by :Rock

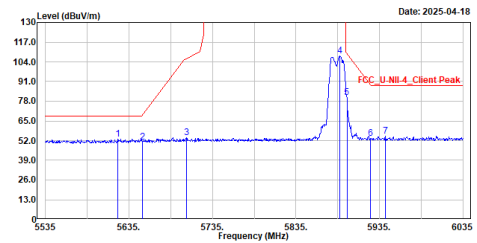

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5622.000	53.12	68.20	-15.08	37.56	15.56	Peak
2	5651.000	50.94	68.95	-18.01	35.15	15.79	Peak
3	5704.000	53.92	106.32	-52.40	37.63	16.29	Peak
4	5887.500	107.69	-----	-----	91.12	16.57	Peak
5	5896.000	80.33	109.47	-29.14	63.72	16.61	Peak
6	5924.000	53.33	88.93	-35.60	36.60	16.73	Peak
7	5942.000	54.79	88.20	-33.41	38.04	16.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac40_5835MHz
Test by :Rock

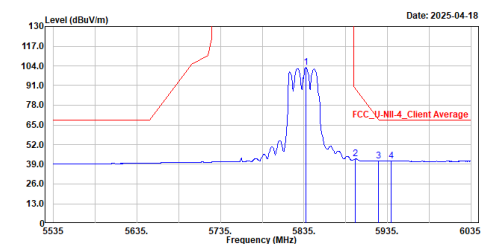


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5837.500	102.84	-----	-----	86.41	16.43	Average
2	5896.500	42.52	89.10	-46.58	25.91	16.61	Average
3	5924.000	41.11	68.93	-27.82	24.38	16.73	Average
4	5939.000	41.32	68.20	-26.88	24.58	16.74	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac40_5835MHz
Test by :Rock

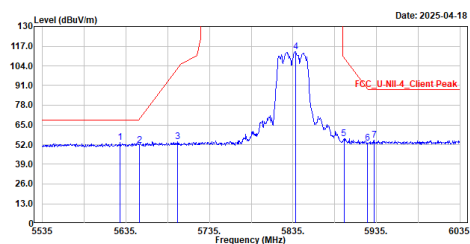


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5628.000	53.31	68.20	-14.89	37.71	15.60	Peak
2	5651.000	51.48	68.95	-17.47	35.69	15.79	Peak
3	5696.500	54.20	102.61	-48.41	37.98	16.22	Peak
4	5838.000	113.41	-----	-----	96.99	16.42	Peak
5	5896.000	56.05	109.47	-53.42	39.44	16.61	Peak
6	5924.000	52.77	88.93	-36.16	36.04	16.73	Peak
7	5932.000	55.15	88.20	-33.05	38.40	16.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac40_5835MHz
Test by :Rock

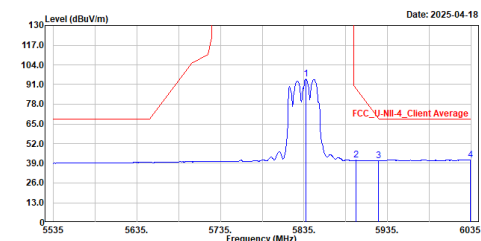


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5837.000	94.59	-----	-----	78.16	16.43	Average
2	5897.000	40.99	88.73	-47.74	24.37	16.62	Average
3	5924.000	40.83	68.93	-28.10	24.10	16.73	Average
4	6034.000	41.05	68.20	-27.15	24.27	16.78	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac40_5835MHz
Test by :Rock

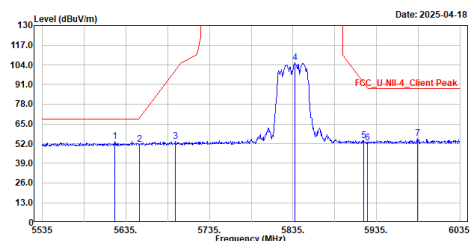


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5622.000	53.31	68.20	-14.89	37.75	15.56	Peak
2	5651.000	51.63	68.95	-17.32	35.84	15.79	Peak
3	5694.000	53.32	100.76	-47.44	37.12	16.20	Peak
4	5837.500	105.53	-----	-----	89.10	16.43	Peak
5	5919.500	53.98	92.23	-38.25	37.27	16.71	Peak
6	5924.000	52.27	88.93	-36.66	35.54	16.73	Peak
7	5984.000	55.21	88.20	-32.99	38.50	16.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac40_5875MHz
Test by :Rock

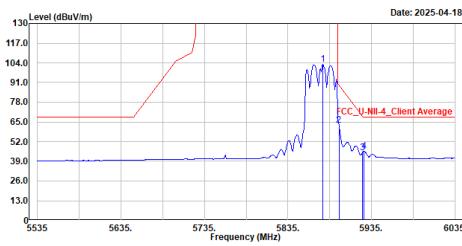

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5876.500	103.24	-----	-----	86.71	16.53	Average
2	5896.000	62.74	89.47	-26.73	46.13	16.61	Average
3	5924.000	44.60	68.93	-24.33	27.87	16.73	Average
4	5926.000	45.55	68.20	-22.65	28.82	16.73	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac40_5875MHz
Test by :Rock

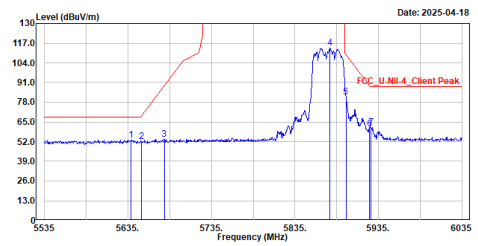

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5639.000	53.06	68.20	-15.14	37.37	15.69	Peak
2	5651.000	52.05	68.95	-16.90	36.26	15.79	Peak
3	5678.500	53.66	89.29	-35.63	37.61	16.05	Peak
4	5876.500	113.72	-----	-----	97.19	16.53	Peak
5	5896.000	81.20	109.47	-28.27	64.59	16.61	Peak
6	5924.000	60.47	88.93	-28.46	43.74	16.73	Peak
7	5926.000	61.47	88.20	-26.73	44.74	16.73	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac40_5875MHz
Test by :Rock

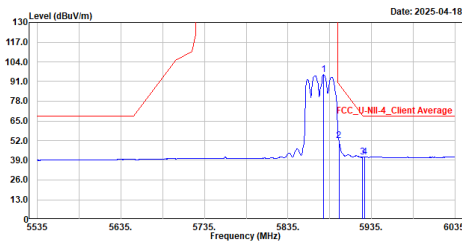

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5877.500	95.43	-----	-----	78.90	16.53	Average
2	5896.000	51.92	89.47	-37.55	35.31	16.61	Average
3	5924.000	41.00	68.93	-27.93	24.27	16.73	Average
4	5927.000	41.18	68.20	-27.02	24.44	16.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac40_5875MHz
Test by :Rock

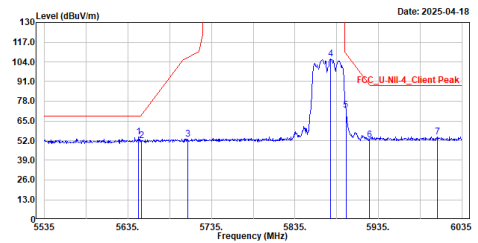

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5648.000	54.24	68.20	-13.96	38.48	15.76	Peak
2	5651.000	52.24	68.95	-16.71	36.45	15.79	Peak
3	5707.000	53.15	107.16	-54.01	36.85	16.30	Peak
4	5877.500	106.02	-----	-----	89.49	16.53	Peak
5	5896.000	72.10	109.47	-37.37	55.49	16.61	Peak
6	5924.000	52.71	88.93	-36.22	35.98	16.73	Peak
7	6005.500	54.63	88.20	-33.57	37.93	16.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac80_5855MHz
Test by :Rock

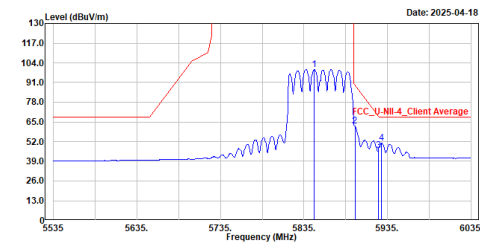


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5847.500	99.59	-----	-----	83.17	16.42	Average
2	5896.000	62.09	89.47	-27.38	45.48	16.61	Average
3	5924.000	46.34	68.93	-22.59	29.61	16.73	Average
4	5928.000	51.02	68.20	-17.18	34.28	16.74	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac80_5855MHz
Test by :Rock

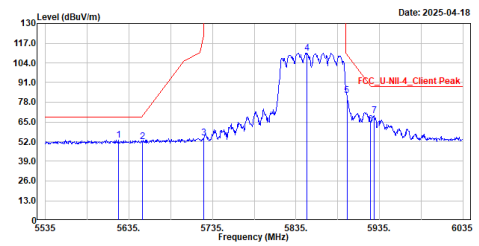


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5622.500	53.22	68.20	-14.98	37.66	15.56	Peak
2	5651.000	52.13	68.95	-16.82	36.34	15.79	Peak
3	5724.500	54.27	121.06	-66.79	37.88	16.39	Peak
4	5848.000	110.36	-----	-----	93.95	16.41	Peak
5	5896.000	82.35	109.47	-27.12	65.74	16.61	Peak
6	5924.000	63.12	88.93	-25.81	46.39	16.73	Peak
7	5928.500	69.39	88.20	-18.81	52.65	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac80_5855MHz
Test by :Rock

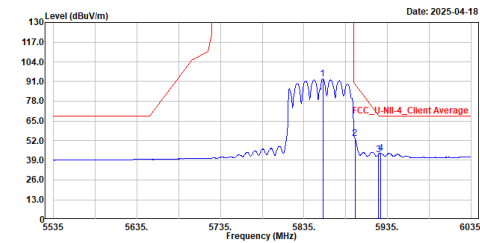


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5857.500	92.62	-----	-----	76.17	16.45	Average
2	5896.000	53.44	89.47	-36.03	36.83	16.61	Average
3	5924.000	42.75	68.93	-26.18	26.02	16.73	Average
4	5926.500	43.89	68.20	-24.31	27.15	16.74	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac80_5855MHz
Test by :Rock

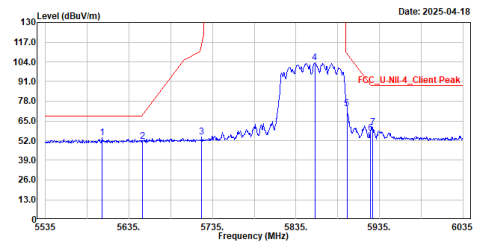


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5602.500	53.97	68.20	-14.23	38.56	15.41	Peak
2	5651.000	51.42	68.95	-17.53	35.63	15.79	Peak
3	5722.000	54.28	115.36	-61.08	37.91	16.37	Peak
4	5857.500	103.32	-----	-----	86.87	16.45	Peak
5	5896.000	73.14	109.47	-36.33	56.53	16.61	Peak
6	5924.000	56.89	88.93	-32.04	40.16	16.73	Peak
7	5927.000	61.04	88.20	-27.16	44.30	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac160_5815MHz
Test by :Rock

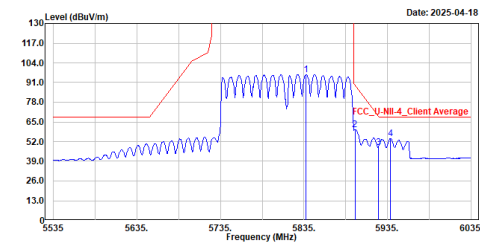


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5837.500	96.30	-----	-----	79.87	16.43	Average
2	5896.000	60.09	89.47	-29.38	43.48	16.61	Average
3	5924.000	48.23	68.93	-20.70	31.50	16.73	Average
4	5938.500	54.03	68.20	-14.17	37.29	16.74	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac160_5815MHz
Test by :Rock

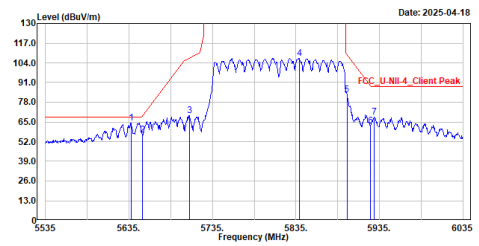


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5637.500	64.41	68.20	-3.79	48.73	15.68	Peak
2	5651.000	56.26	68.95	-12.69	40.47	15.79	Peak
3	5708.000	69.35	107.44	-38.09	53.05	16.30	Peak
4	5839.000	107.19	-----	-----	90.77	16.42	Peak
5	5896.000	83.08	109.47	-26.39	66.47	16.61	Peak
6	5924.000	62.38	88.93	-26.55	45.65	16.73	Peak
7	5928.500	68.03	88.20	-20.17	51.29	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac160_5815MHz
Test by :Rock

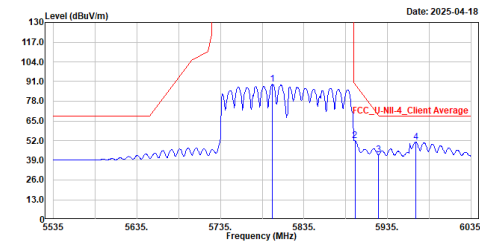


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5797.500	89.20	-----	-----	72.69	16.51	Average
2	5896.000	51.83	89.47	-37.64	35.22	16.61	Average
3	5924.000	42.53	68.93	-26.40	25.80	16.73	Average
4	5969.000	51.12	68.20	-17.08	34.40	16.72	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac160_5815MHz
Test by :Rock

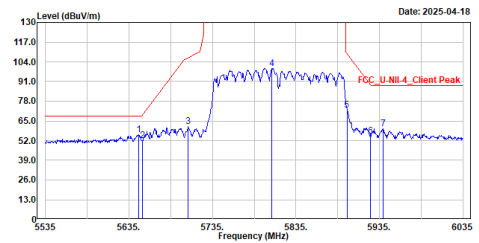


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5647.000	55.74	68.20	-12.46	39.99	15.75	Peak
2	5651.000	51.90	68.95	-17.05	36.11	15.79	Peak
3	5706.000	61.23	106.88	-45.65	44.94	16.29	Peak
4	5806.000	99.68	-----	-----	83.17	16.51	Peak
5	5896.000	72.16	109.47	-37.31	55.55	16.61	Peak
6	5924.000	54.99	88.93	-33.94	38.26	16.73	Peak
7	5939.000	59.88	88.20	-28.32	43.14	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Partial RU


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_5845MHz_RU 242 61
Test by :Rock

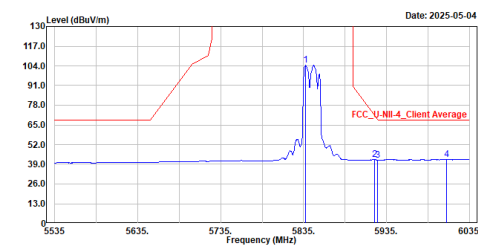

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5837.500	104.27	-----	-----	87.84	16.43	Average
2	5920.500	41.99	71.50	-29.51	25.28	16.71	Average
3	5924.000	41.92	68.93	-27.01	25.19	16.73	Average
4	6007.500	42.10	68.20	-26.10	25.40	16.70	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_5845MHz_RU 242 61
Test by :Rock

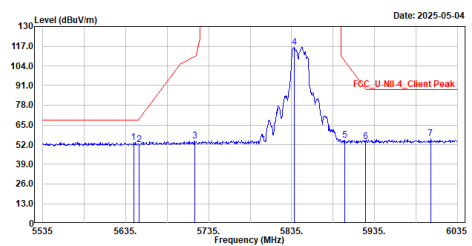

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5644.500	53.65	68.20	-14.55	37.91	15.74	Peak
2	5651.000	52.19	68.95	-16.76	36.40	15.79	Peak
3	5718.000	54.43	110.24	-55.81	38.08	16.35	Peak
4	5838.000	116.50	-----	-----	100.08	16.42	Peak
5	5899.000	54.86	107.27	-52.41	38.24	16.62	Peak
6	5924.000	54.20	88.93	-34.73	37.47	16.73	Peak
7	6002.500	55.75	88.20	-32.45	39.05	16.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_5845MHz_RU 242 61
Test by :Nova

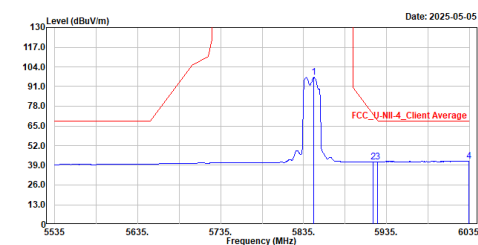

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5847.500	97.32	-----	-----	80.90	16.42	Average
2	5919.000	41.42	72.60	-31.18	24.71	16.71	Average
3	5924.000	41.33	68.93	-27.60	24.60	16.73	Average
4	6034.000	41.60	68.20	-26.60	24.82	16.78	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_5845MHz_RU 242 61
Test by :Nova

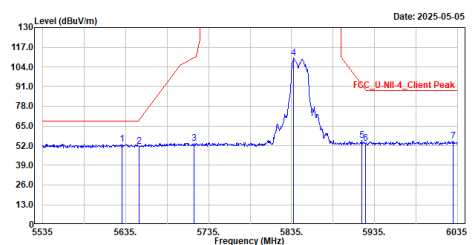

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5631.000	52.92	68.20	-15.28	37.28	15.64	Peak
2	5651.000	51.37	68.95	-17.58	35.58	15.79	Peak
3	5717.500	53.69	110.10	-56.41	37.34	16.35	Peak
4	5837.500	109.71	-----	-----	93.28	16.43	Peak
5	5920.000	55.39	91.87	-36.48	38.68	16.71	Peak
6	5924.000	53.48	88.93	-35.45	36.75	16.73	Peak
7	6030.000	55.07	88.20	-33.13	38.31	16.76	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_5885MHz_RU 242 61
Test by :Rock

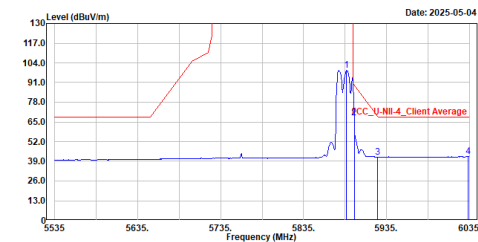


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5887.000	98.99	-----	-----	82.42	16.57	Average
2	5896.000	67.57	89.47	-21.90	50.96	16.61	Average
3	5924.000	41.84	68.93	-27.09	25.11	16.73	Average
4	6033.500	42.03	68.20	-26.17	25.25	16.78	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_5885MHz_RU 242 61
Test by :Rock

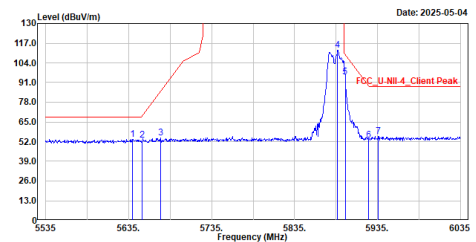


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5640.000	53.71	68.20	-14.49	38.01	15.70	Peak
2	5651.000	52.94	68.95	-16.01	37.15	15.79	Peak
3	5673.500	54.50	85.59	-31.09	38.49	16.01	Peak
4	5887.000	112.19	-----	-----	95.62	16.57	Peak
5	5896.000	94.72	109.47	-14.75	78.11	16.61	Peak
6	5924.000	52.87	88.93	-36.06	36.14	16.73	Peak
7	5936.000	55.67	88.20	-32.53	38.93	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_5885MHz_RU 242 61
Test by :Nova

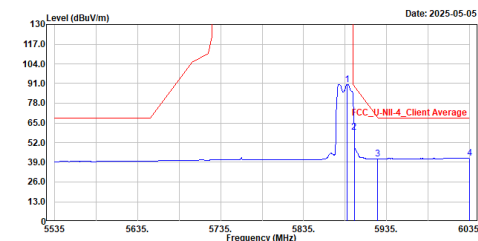


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5887.500	90.46	-----	-----	73.89	16.57	Average
2	5896.000	58.87	89.47	-30.60	42.26	16.61	Average
3	5924.000	41.28	68.93	-27.65	24.55	16.73	Average
4	6035.000	41.60	68.20	-26.60	24.82	16.78	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_5885MHz_RU 242 61
Test by :Nova

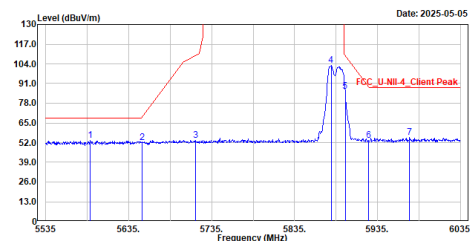


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5588.500	53.26	68.20	-14.94	37.91	15.35	Peak
2	5651.000	51.91	68.95	-17.04	36.12	15.79	Peak
3	5715.500	53.63	109.54	-55.91	37.29	16.34	Peak
4	5879.000	102.92	-----	-----	86.38	16.54	Peak
5	5896.000	85.66	109.47	-23.81	69.05	16.61	Peak
6	5924.000	53.48	88.93	-35.45	36.75	16.73	Peak
7	5973.500	55.27	88.20	-32.93	38.55	16.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5835MHz_RU 484 65
Test by :Rock

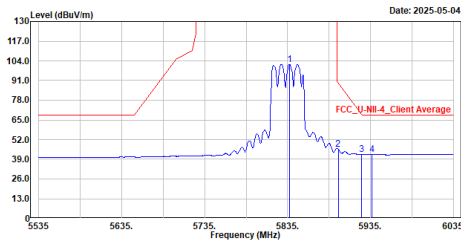

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5837.500	101.72	-----	-----	85.29	16.43	Average
2	5896.000	45.83	89.47	-43.64	29.22	16.61	Average
3	5924.000	42.29	68.93	-26.64	25.56	16.73	Average
4	5937.000	42.30	68.20	-25.90	25.56	16.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5835MHz_RU 484 65
Test by :Rock

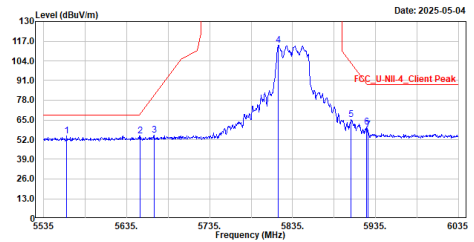

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5563.000	54.66	68.20	-13.54	39.33	15.33	Peak
2	5651.000	54.35	68.95	-14.60	38.56	15.79	Peak
3	5668.000	54.89	81.52	-26.63	38.94	15.95	Peak
4	5818.000	114.33	-----	-----	97.86	16.47	Peak
5	5905.500	65.48	102.50	-37.02	48.83	16.65	Peak
6	5924.000	60.18	88.93	-28.75	43.45	16.73	Peak
7	5926.000	58.30	88.20	-29.90	41.57	16.73	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_5835MHz_RU 484 65
Test by :Rock

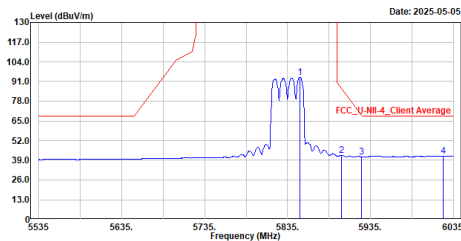

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5849.500	93.69	-----	-----	77.27	16.42	Average
2	5900.000	42.34	86.53	-44.19	25.71	16.63	Average
3	5924.000	41.39	68.93	-27.54	24.66	16.73	Average
4	6023.000	41.62	68.20	-26.58	24.88	16.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_5835MHz_RU 484 65
Test by :Rock

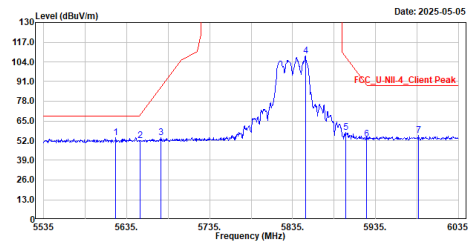

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5622.000	54.06	68.20	-14.14	38.50	15.56	Peak
2	5651.000	52.18	68.95	-16.77	36.39	15.79	Peak
3	5676.500	53.81	87.81	-34.00	37.78	16.03	Peak
4	5850.500	108.03	-----	-----	91.61	16.42	Peak
5	5899.000	57.48	107.27	-49.79	40.86	16.62	Peak
6	5924.000	53.09	88.93	-35.84	36.36	16.73	Peak
7	5986.500	55.22	88.20	-32.98	38.52	16.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5875MHz_RU 484 65
Test by :Rock

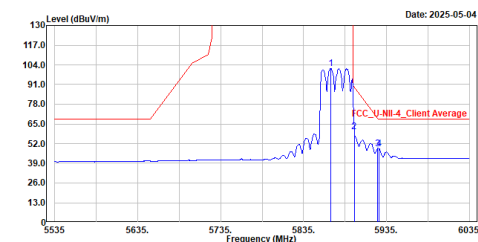


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5868.000	101.51	-----	-----	85.02	16.49	Average
2	5896.000	59.62	89.47	-29.85	43.01	16.61	Average
3	5924.000	48.62	68.93	-20.31	31.89	16.73	Average
4	5926.000	48.60	68.20	-19.60	31.87	16.73	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5875MHz_RU 484 65
Test by :Rock

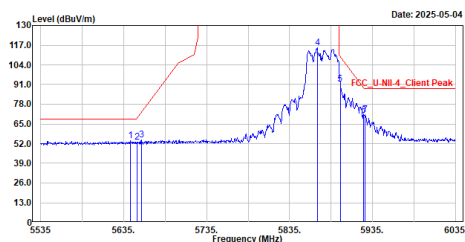


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5643.000	53.72	68.20	-14.48	38.00	15.72	Peak
2	5651.000	52.92	68.95	-16.03	37.13	15.79	Peak
3	5656.500	54.46	73.02	-18.56	38.62	15.84	Peak
4	5868.500	115.05	-----	-----	98.56	16.49	Peak
5	5896.000	91.36	109.47	-18.11	74.75	16.61	Peak
6	5924.000	70.42	88.93	-18.51	53.69	16.73	Peak
7	5926.000	71.27	88.20	-16.93	54.54	16.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_5875MHz_RU 484 65
Test by :Rock

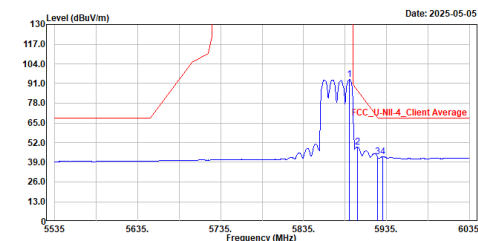


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5890.500	93.55	-----	-----	76.97	16.58	Average
2	5900.000	49.27	86.53	-37.26	32.64	16.63	Average
3	5924.000	42.73	68.93	-26.20	26.00	16.73	Average
4	5930.500	42.87	68.20	-25.33	26.12	16.75	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_5875MHz_RU 484 65
Test by :Rock

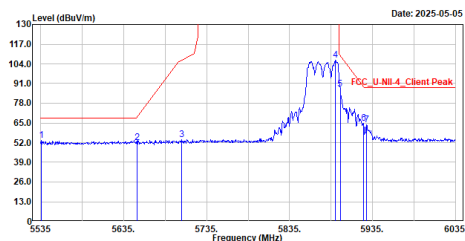


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5535.500	53.28	68.20	-14.92	38.01	15.27	Peak
2	5651.000	52.20	68.95	-16.75	36.41	15.79	Peak
3	5705.000	54.02	106.60	-52.58	37.73	16.29	Peak
4	5890.500	106.67	-----	-----	90.09	16.58	Peak
5	5896.000	87.54	109.47	-21.93	70.93	16.61	Peak
6	5924.000	64.94	88.93	-23.99	48.21	16.73	Peak
7	5927.500	63.65	88.20	-24.55	46.91	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax80_5855MHz_RU 996 67
Test by :Rock

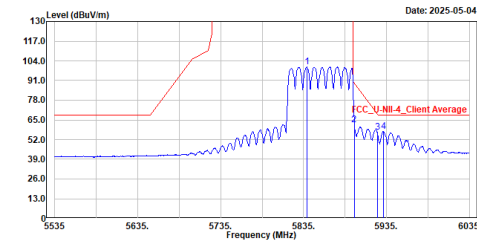


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5839.000	99.94	-----	-----	83.52	16.42	Average
2	5896.000	61.94	89.47	-27.53	45.33	16.61	Average
3	5924.000	56.71	68.93	-12.22	39.98	16.73	Average
4	5931.000	57.26	68.20	-10.94	40.51	16.75	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax80_5855MHz_RU 996 67
Test by :Rock

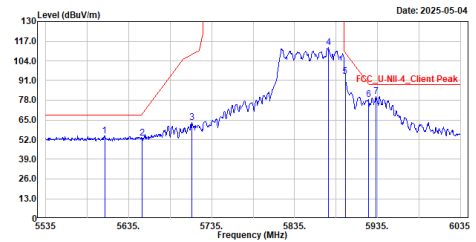


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5606.000	54.39	68.20	-13.81	38.96	15.43	Peak
2	5651.000	53.06	68.95	-15.89	37.27	15.79	Peak
3	5711.500	63.46	108.42	-44.96	47.14	16.32	Peak
4	5876.000	112.92	-----	-----	96.39	16.53	Peak
5	5896.000	93.50	109.47	-15.97	76.89	16.61	Peak
6	5924.000	78.25	88.93	-10.68	61.52	16.73	Peak
7	5933.000	88.67	88.20	-7.53	63.92	16.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax80_5855MHz_RU 996 67
Test by :Rock

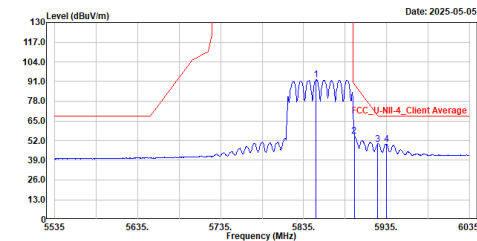


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5850.000	92.11	-----	-----	75.69	16.42	Average
2	5896.000	54.95	89.47	-34.52	38.34	16.61	Average
3	5924.000	49.78	68.93	-19.15	33.05	16.73	Average
4	5935.000	49.67	68.20	-18.53	32.93	16.74	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax80_5855MHz_RU 996 67
Test by :Rock

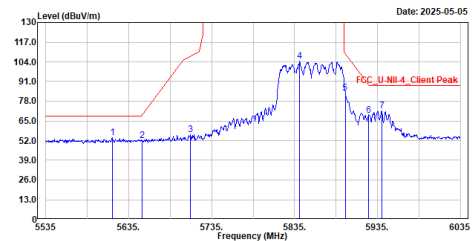


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5615.000	54.18	68.20	-14.02	38.67	15.51	Peak
2	5651.000	52.17	68.95	-16.78	36.38	15.79	Peak
3	5709.500	56.07	107.86	-51.79	39.76	16.31	Peak
4	5841.000	104.54	-----	-----	88.13	16.41	Peak
5	5896.000	83.57	109.47	-25.90	66.96	16.61	Peak
6	5924.000	68.75	88.93	-20.18	52.02	16.73	Peak
7	5940.000	71.45	88.20	-16.75	54.71	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax160_5815MHz_RU 2x996 68
Test by :Rock

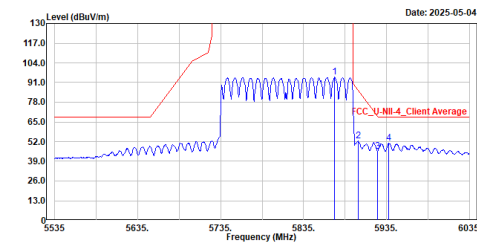

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5872.500	94.56	-----	-----	78.05	16.51	Average
2	5900.500	52.53	86.17	-33.64	35.90	16.63	Average
3	5924.000	45.81	68.93	-23.12	29.08	16.73	Average
4	5937.500	50.81	68.20	-17.39	34.07	16.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax160_5815MHz_RU 2x996 68
Test by :Rock

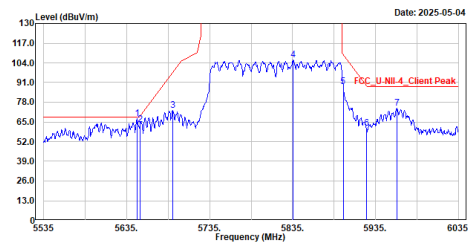

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5647.500	67.41	68.20	-0.79	51.65	15.76	Peak
2	5651.000	63.10	68.95	-5.85	47.31	15.79	Peak
3	5690.500	72.82	98.17	-25.35	56.66	16.16	Peak
4	5836.000	105.97	-----	-----	89.54	16.43	Peak
5	5896.000	88.43	109.47	-21.04	71.82	16.61	Peak
6	5924.000	60.99	88.93	-27.94	44.26	16.73	Peak
7	5960.500	73.94	88.20	-14.26	57.22	16.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax160_5815MHz_RU 2x996 68
Test by :Rock

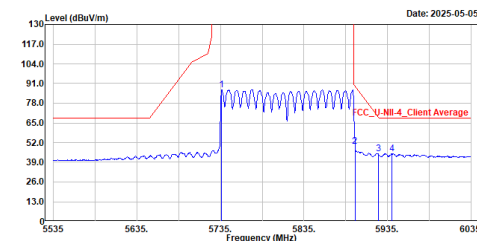

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5736.500	86.97	-----	-----	70.51	16.46	Average
2	5896.000	49.40	89.47	-40.07	32.79	16.61	Average
3	5924.000	44.41	68.93	-24.52	27.68	16.73	Average
4	5940.500	44.72	68.20	-23.48	27.97	16.75	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax160_5815MHz_RU 2x996 68
Test by :Rock

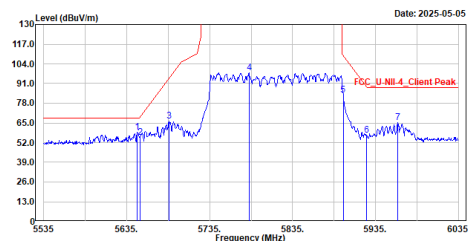


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5648.000	58.80	68.20	-9.40	43.04	15.76	Peak
2	5651.000	55.47	68.95	-13.48	39.68	15.79	Peak
3	5686.500	66.25	95.21	-28.96	50.12	16.13	Peak
4	5782.500	97.99	-----	-----	81.46	16.53	Peak
5	5896.000	83.22	109.47	-26.25	66.61	16.61	Peak
6	5924.000	57.02	88.93	-31.91	40.29	16.73	Peak
7	5961.500	65.09	88.20	-23.11	48.37	16.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Appendix C. Test Result of Radiated Emissions Co-location


Site :HY-CB02
Condition :3m ,Horizontal
mode :NFC_TX+11AC160_TX_5815MHz+ BLE2M_TX_2440MHz
Test by :Rock

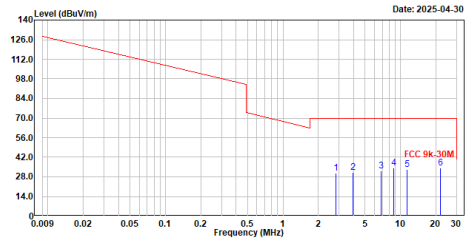

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2.808	30.79	69.50	-38.71	11.17	19.62	QP
2	3.916	31.43	69.50	-38.07	11.56	19.87	QP
3	6.854	32.32	69.50	-37.18	11.02	21.30	QP
4	8.743	34.41	69.50	-35.09	13.21	21.28	QP
5	11.334	33.48	69.50	-36.02	11.50	21.90	QP
6	21.864	34.10	69.50	-35.40	11.96	22.14	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,Vertical
mode :NFC_TX+11AC160_TX_5815MHz+ BLE2M_TX_2440MHz
Test by :Rock

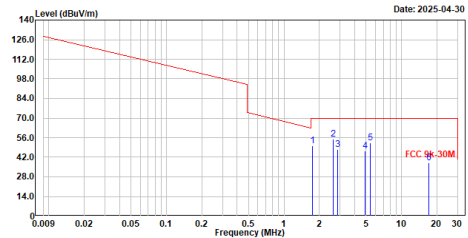

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1.740	50.09	69.50	-19.41	30.36	19.73	QP
2	2.632	54.88	69.50	-14.62	35.24	19.64	QP
3	2.877	47.64	69.50	-21.86	28.03	19.61	QP
4	4.875	46.57	69.50	-22.93	26.41	20.16	QP
5	5.417	52.06	69.50	-17.44	31.40	20.66	QP
6	17.141	37.90	69.50	-31.60	15.57	22.33	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,VERTICAL
mode :NFC_TX+11AC160_TX_5815MHz+ BLE2M_TX_2440MHz
Test by :Rock

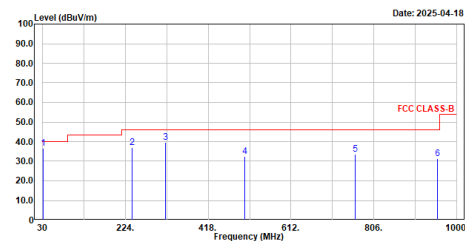

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	30.970	36.79	40.00	-3.21	62.33	-25.54	QP
2	240.490	36.98	46.00	-9.02	62.65	-25.67	QP
3	318.090	39.79	46.00	-6.21	62.89	-23.10	QP
4	584.330	32.58	46.00	-13.42	51.16	-18.58	QP
5	762.350	33.73	46.00	-12.27	47.35	-13.62	QP
6	954.410	31.45	46.00	-14.55	42.88	-11.43	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :NFC_TX+11AC160_TX_5815MHz+ BLE2M_TX_2440MHz
Test by :Rock

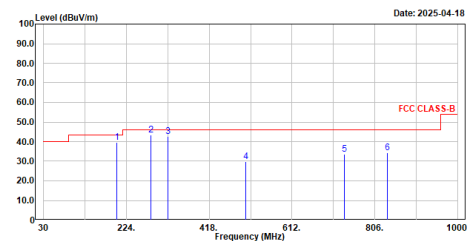

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	281.690	39.57	43.50	-3.93	66.97	-27.40	QP
2	282.200	43.24	46.00	-2.76	67.35	-24.11	QP
3	321.970	42.80	46.00	-3.20	65.75	-22.95	QP
4	584.330	29.72	46.00	-16.28	48.30	-18.58	QP
5	734.220	33.71	46.00	-12.29	47.74	-14.03	QP
6	836.070	34.33	46.00	-11.67	47.30	-12.97	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :NFC_TX+11AC160_TX_5815MHz+ BLE2M_TX_2440MHz
Test by :Rock

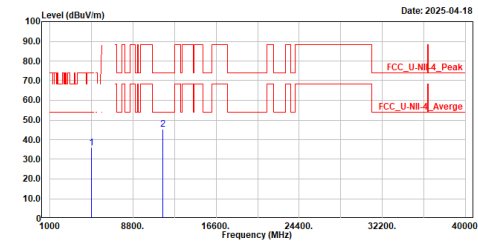

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	35.78	74.00	-38.22	42.68	-6.90	Peak
2	11630.000	45.10	74.00	-28.90	40.59	4.51	Peak

Notes:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :NFC_TX+11AC160_TX_5815MHz+ BLE2M_TX_2440MHz
Test by :Rock

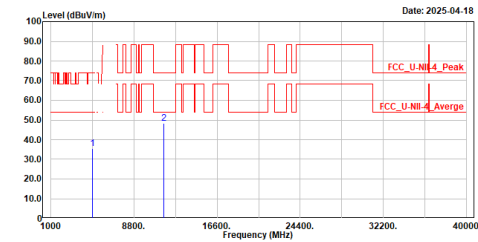

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	35.37	74.00	-38.63	42.27	-6.90	Peak
2	11630.000	48.32	74.00	-25.68	43.81	4.51	Peak

Notes:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.