



Antenna Passive TEST REPORT

Applicant	:	Beijing Orion Star Technology Co., Ltd.
Address	:	Room 1201, Building 1 ,building C4, Private Avenue East, Xintang Town, Zengcheng District, Guangzhou City,Guangdong Province, China
Manufacturer	:	Chengdu Ebyte Electronic Technology Co.,Ltd.
Address	:	Building B5,199, West Avenue, Gaoxin District, Chengdu, Sichuan Province
Equipment under Test	:	Lora Module
Report No.	:	DDT-B24091903-1A01
Issue Date	:	Sep. 25, 2024
Issued By	:	Tianjin Dongdian Testing Service Co., Ltd.
Address	:	Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park, Development Area, Tianjin, China. Tel: +86-022-580380, E-mail: ddt@dgddt.com, http://www.ddttest.com

检验检测专用章
Inspection & Testing Services

REPORT

CONMENT

1.	General TEST Information	5
1.1	Description of EUT	5
1.2	Accessories of EUT	5
1.3	Assistant equipment used for test	5
1.4	Block diagram of EUT configuration for test	5
1.5	Measurement uncertainty	5
1.6	Antenna Parameter	6
1.7	Test laboratory	6
2.	Electric performance measurement.....	7
2.1	General Information.....	7
2.2	Test Equipment	7
2.3	Block Diagram of Test Setup.....	7
2.4	Test Procedure	7
2.5	Result	8
Annex A	Test Setup Photo	12
Annex B	EUT Photo	13

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Sep. 25, 2024	

Test Report Declare

Applicant	:	Beijing Orion Star Technology Co., Ltd.
Address	:	Room 1201, Building 1 ,building C4, Private Avenue East, Xintang Town, Zengcheng District, Guangzhou City,Guangdong Province, China
Equipment under Test	:	Lora Module
Model No.	:	N/A
Trade Mark	:	N/A
Manufacturer	:	Chengdu Ebyte Electronic Technology Co.,Ltd.
Address	:	Building B5,199, West Avenue, Gaoxin District, Chengdu, Sichuan Province

We Declare:

The equipment described above is tested by Tianjin Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Tianjin Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

Report No:	DDT-B24091903-1A01		
Date of Receipt:	Sep. 23, 2024	Date of Test:	Sep. 24, 2024

Prepared By:

Novak Wei

Novak Wei / Engineer

Approved By:

Aaron Zhang

Aaron Zhang /Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Tianjin Dongdian Testing Service Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

1. General TEST Information

1.1 Description of EUT

EUT Description	:	Lora Module
Model Number	:	N/A
Frequency Band	:	2400MHz-2500MHz
Power Supply	:	N/A
Sample No	:	Y24091903-01
Antenna type	:	PCB Antenna
Note	:	N/A

1.2 Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
N/A	N/A	N/A	N/A	N/A

1.3 Assistant equipment used for test

Description of Accessories	Manufacturer	Model number	Description	Remark
N/A	N/A	N/A	N/A	N/A


1.4 Block diagram of EUT configuration for test



1.5 Measurement uncertainty

Test Item	uncertainty
Near-field gain measurement	0.44 dB
Near-field pattern measurement	0.44 dB
Note: This uncertainty indicates that the extended uncertainty confidence interval is about 95% and the corresponding inclusion factor k=2 is obtained.	

1.6 Antenna Parameter

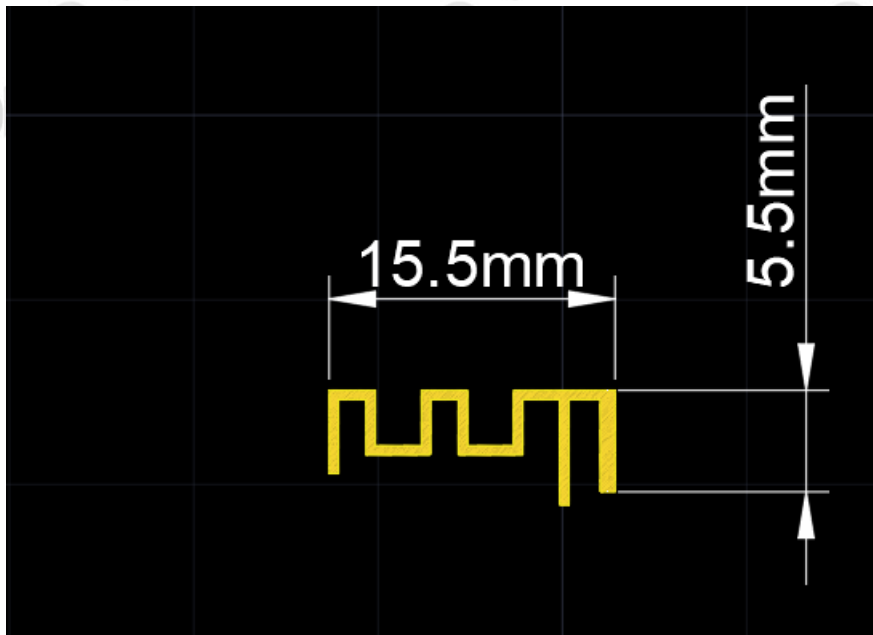

1.7 Test laboratory

Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China., 300385

Tel: +86-22-58038033, <http://www.ddttest.com>, Email: ddt@dgddt.com

NVLAP (National Voluntary Laboratory Accreditation Program) CODE: 500036-0

CNAS (China National Accreditation Service for Conformity Assessment) CODE: L13402

FCC Designation Number: CN5004; FCC Test Firm Registration Number: 368676

ISED (Innovation, Science and Economic Development Canada) Company Number: 27768

Conformity Assessment Body Identifier: CN0125

VCCI Facility Registration Number: C-20089, T-20093, R-20125, G-20122

2. Electric performance measurement


2.1 General Information

Test Date	2024-09-24		
Test Condition	Temperature: 23.4±1℃	Humidity: 41±1%	Pressure: 101.1±0.2 kPa
Test Place	OTA Room	Test Engineer	Novak Wei

2.2 Test Equipment

Equipment	Manufacturer	Mode No	Serial No	Last Cal.	Cal.Interval
ENA network analyzer	Keysight	E5071C	MY46900684	2024-05-06	1 year
Software	FEITU	ANTESTPRO	N/A	N/A	N/A

2.3 Block Diagram of Test Setup

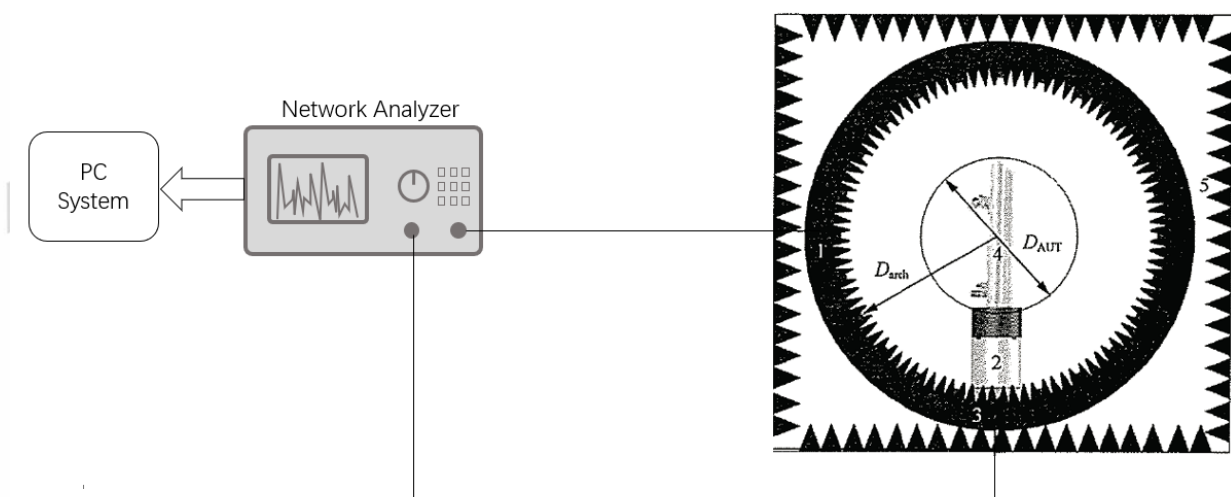

2.4 Test Procedure

- (1) Set up the antenna to be measured. Set up the antenna and mark the cross reference line at the center of the antenna port surface to be measured.
- (2) Connect the cable connector and adjust the down dip Angle (electrically tuned antenna).
- (3) Open the test software, create the test project, and configure the test port.
- (4) Use test software for automatic testing and save test data of electromagnetic field distribution.
- (5) Change the port, down dip Angle, or test frequency (if necessary), and repeat steps (3) to (4) until all status data to be measured is collected.
- (6) After near and far field exchange, the three-position spherical pattern of the antenna to be tested is obtained, and the Theta and Phi angles of the position where the maximum level of the


three-position spherical pattern is located are found. The horizontal plane pattern curve of the antenna to be tested is obtained by cutting according to equal Theta Angle, and the vertical plane pattern of the antenna to be tested is cancelled by cutting according to equal Phi Angle. Then the radiation parameters of the horizontal plane and vertical plane pattern of the antenna to be measured are obtained by using the processing method similar to that of the far field.

2.5 Result


Fre. (MHz)	Eff. (dBi)	Gain (dBi)	Eff. (%)	Directivity (dB)	Peak Gain Position (Theta)	Peak Gain Position (Phi)	Eff. ThetaPol (%)	Eff. PhiPol (%)	Upper Hem. Eff. (%)	Lower Hem. Eff. (%)
2400.0	-2.04	2.11	62.56	4.15	105.00	345.00	55.96	6.61	18.39	44.17
2410.0	-2.28	1.89	59.09	4.17	105.00	345.00	52.70	6.40	17.21	41.89
2420.0	-2.11	2.09	61.48	4.20	105.00	345.00	54.76	6.72	17.67	43.81
2430.0	-1.99	2.22	63.25	4.21	105.00	345.00	56.24	7.01	18.16	45.08
2440.0	-1.96	2.21	63.74	4.17	105.00	345.00	56.59	7.15	18.32	45.42
2450.0	-1.71	2.48	67.45	4.19	105.00	345.00	59.77	7.67	19.33	48.11
2460.0	-1.68	2.51	67.89	4.19	105.00	345.00	60.02	7.87	19.28	48.61
2470.0	-1.82	2.35	65.79	4.17	105.00	345.00	58.04	7.76	18.49	47.30
2480.0	-2.03	2.14	62.67	4.17	105.00	345.00	55.22	7.45	17.26	45.41
2490.0	-2.37	1.89	57.99	4.26	120.00	330.00	50.97	7.02	15.81	42.18
2500.0	-3.16	1.19	48.28	4.35	120.00	330.00	42.38	5.91	13.06	35.22

2400.0MHz H+V, Eff: 62.6%


Back View

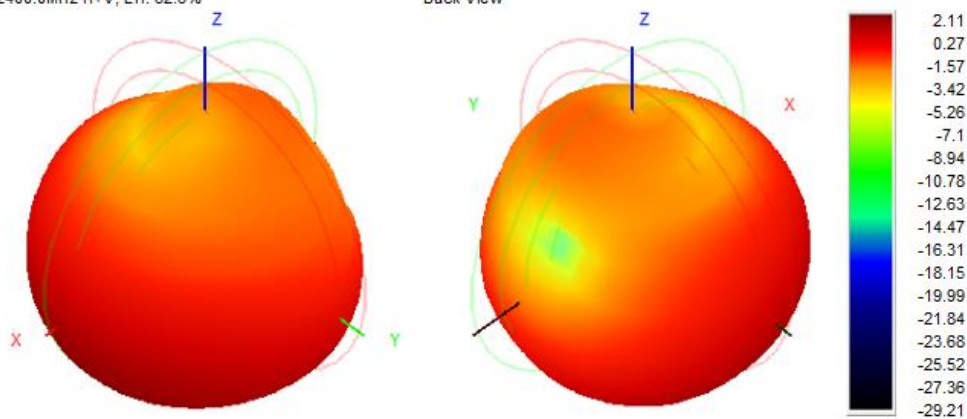


2410.0MHz H+V, Eff: 59.1%

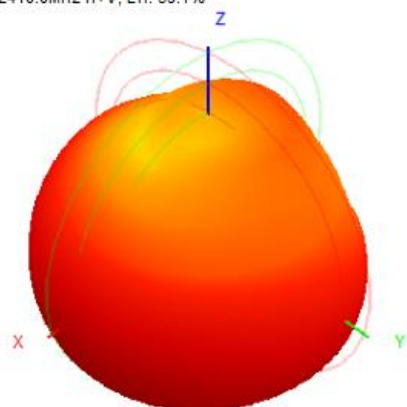



Back View

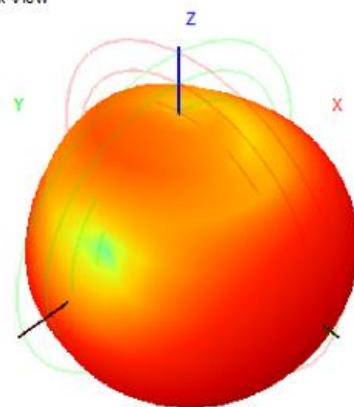


2430.0MHz H+V, Eff: 63.2%

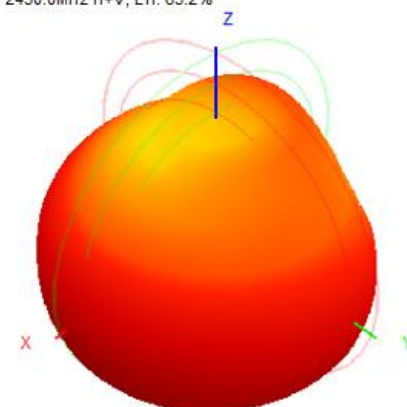



Back View

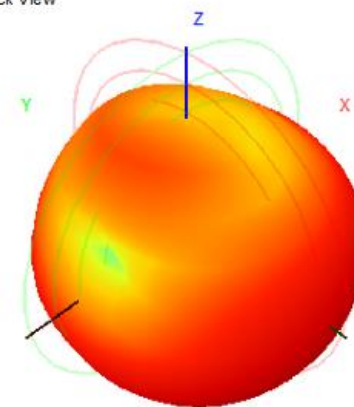


2440.0MHz H+V, Eff: 63.7%

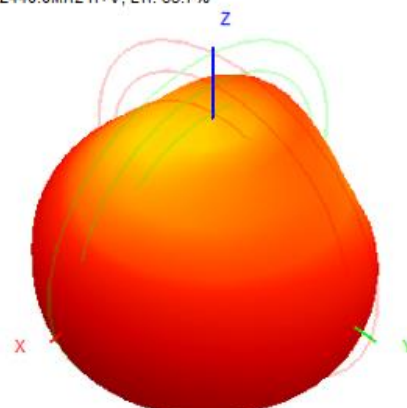



Back View

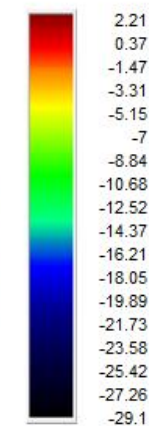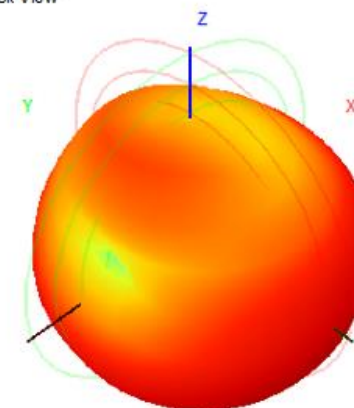


2450.0MHz H+V, Eff: 67.4%

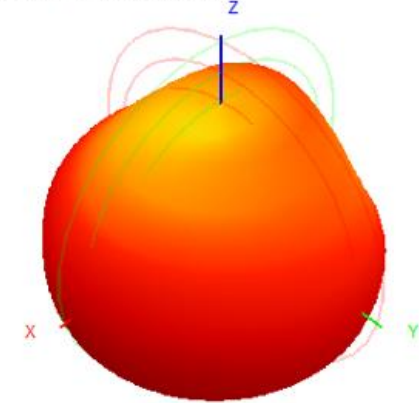



Back View

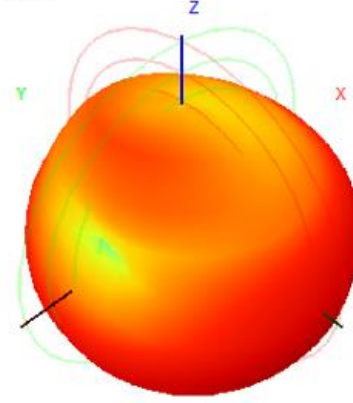


2460.0MHz H+V, Eff: 67.9%

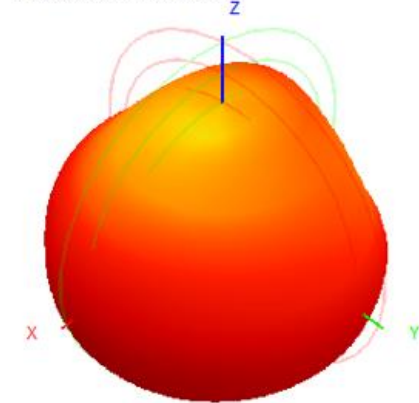



Back View

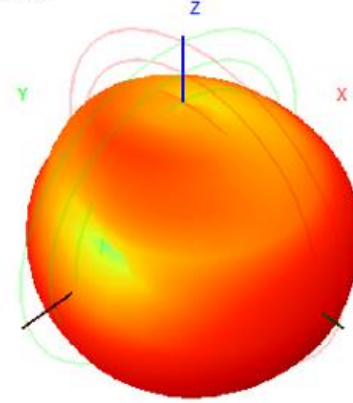


2470.0MHz H+V, Eff: 65.8%

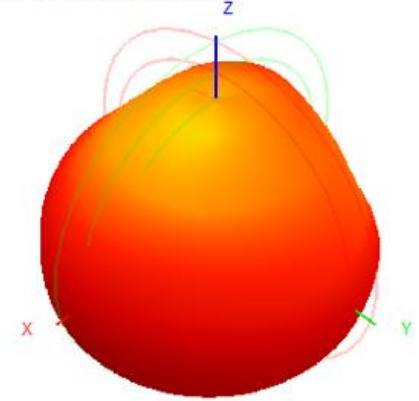



Back View

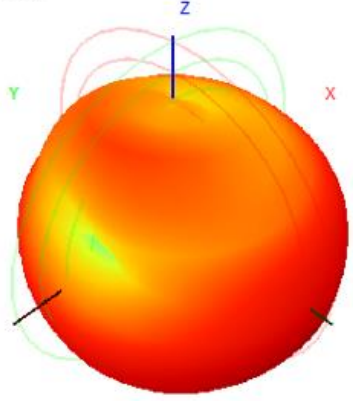


2480.0MHz H+V, Eff: 62.7%

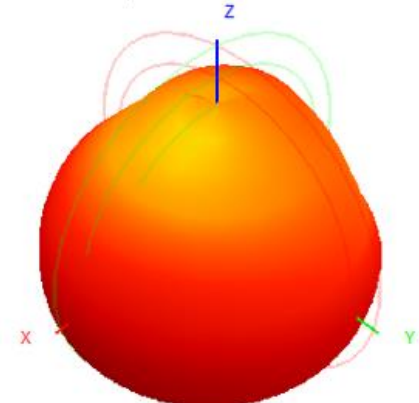



Back View

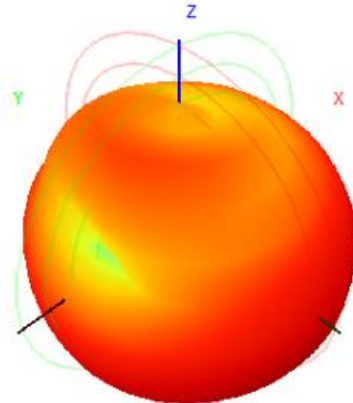


2490.0MHz H+V, Eff: 58.0%

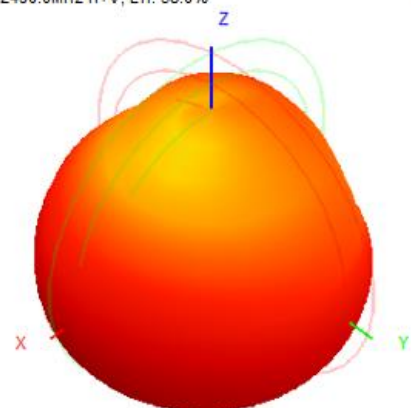



Back View

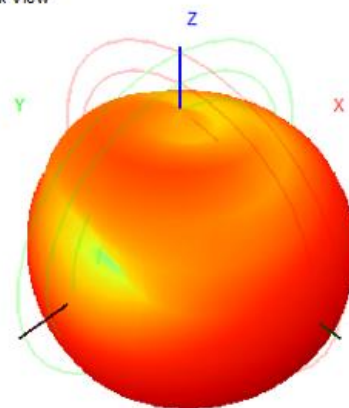

2500.0MHz H+V, Eff: 48.3%

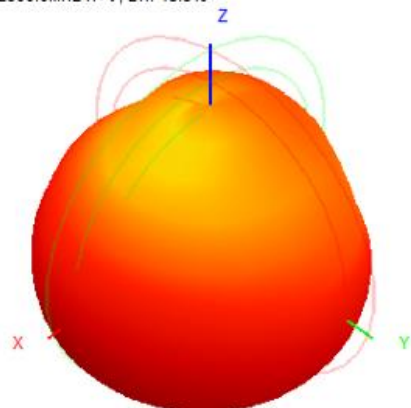


Back View

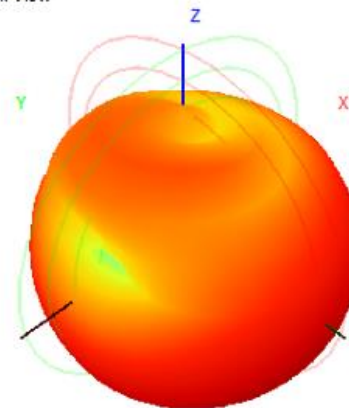

Annex A Test Setup Photo



Annex B EUT Photo

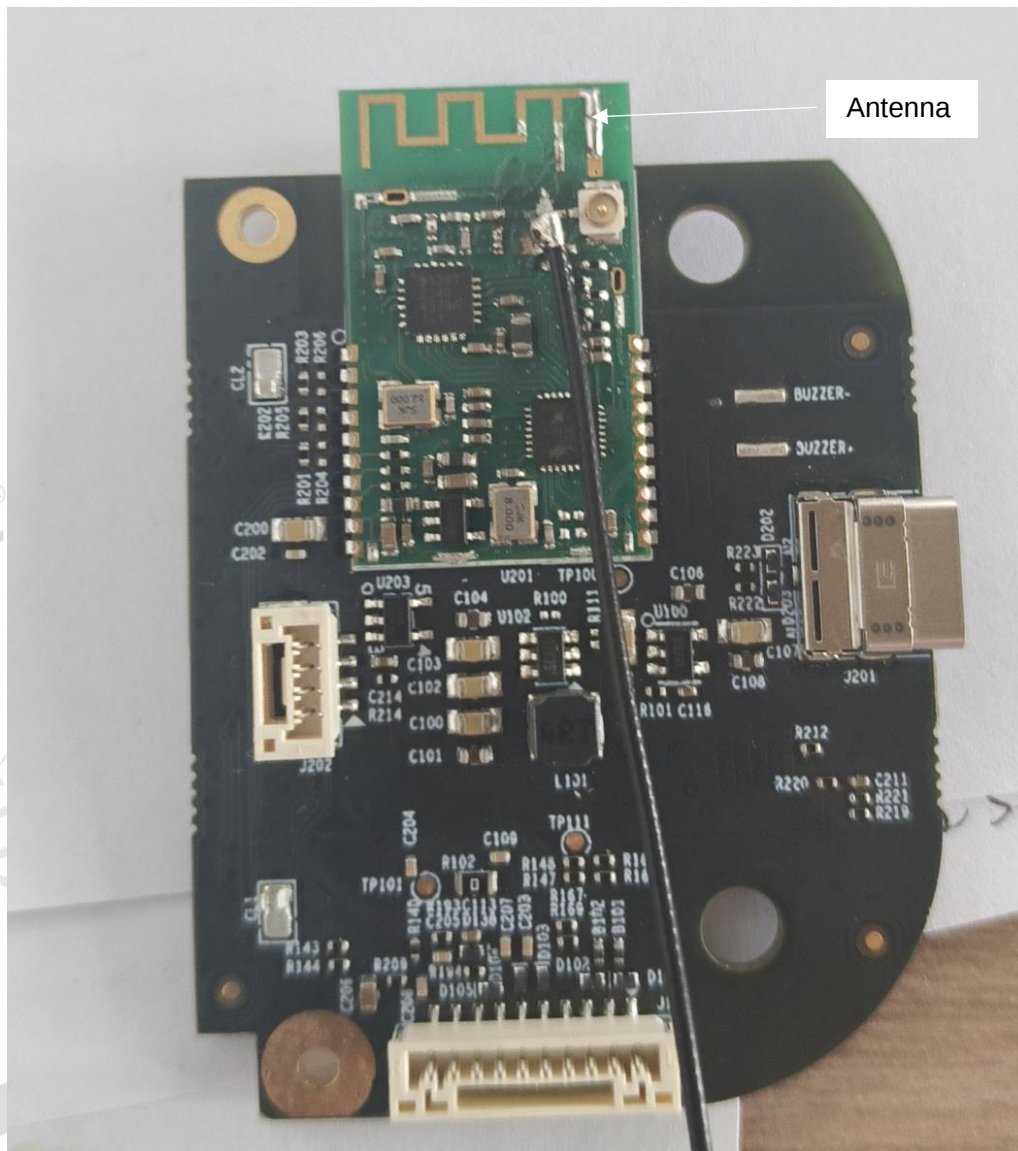

-END-