

## LM127

### Shenzhen Xin Kingbrand Enterprises Co., Ltd

#### **Manual Profile**

Thank you for purchasing LM127 mobile phone, a Series of OINOM. This instruction manual special used to guide you to understand the functions and features of Series of OINOM phone.

In addition to common call functions, LM127 also provides you Messages, MP3 player, Video player, EBook, and Camera, etc. It will bring you more convenience and pleasure for your work and life.

LM127 provides including rechargeable batteries, charges and many kinds of special accessories for your choosing to use. Unauthorized charger may cause danger, and this would violate the recognition for this phone and guarantee clauses.

LM127 has been through the national ministry of information industry network test. The indicators all meet the national standard requirements, and access to the "network access of telecommunications equipment permits" issued by the ministry of information industry.

Such as described in this manual is incompatible with your phone, please refer to the mobile phone.

The manufacturer has the final interpretation of this manual.

The manufacturer reserves the right to modify technical regulations without prior notice.

The manufacturer reserves the right to modify the contents of this manual without prior notice.

The manufacturer reserves the right to modify the technical product specifications without prior notice.

## Contents

<b>一、 Safety and Performance .....</b>	<b>3</b>
<b>二、 Your LM127.....</b>	<b>8</b>
<b>三、 Preparing for use.....</b>	<b>10</b>
3.1 Install SIM Card.....	10
3.2 Install Memory Card (T-FLASH Card).....	11
3.3 USB Usage .....	11
3.4 Security Password Usage .....	11
3.4 Connect to Network.....	13
3.5 Charge the battery.....	13
3.6 On/Off the phone.....	14
3.7 Headset .....	14
<b>四、 Basic Function.....</b>	<b>14</b>
4.1 Dial Call .....	14
4.2 Adjust Volume.....	15
4.3 Answer the incoming call .....	15
4.4 Call Process.....	16
<b>五、 Main Menu.....</b>	<b>16</b>
5.1 Call Center.....	17
5.1. 1 Call Records.....	17
5.1. 2 Call Setting.....	17
5.2 Phonebook .....	20
5.3 File Management.....	21
5.4 Organizer .....	22

5.5 Message .....	24
5.6 Multimedia.....	27
5.7 Network Service.....	30
5.8 Camera .....	30
5.9 Settings .....	32
<b>六、Input Method.....</b>	<b>36</b>
<b>七、Appendix.....</b>	<b>36</b>
Common problems and solutions .....	36
Explanation of terms.....	37

## 一、Safety and Performance

### ◆Emergency Service

Dial the emergency call in any country, you can directly dial 112 (or other emergency services call). You need to confirm the mobile power supply has been opened, and in the service area. Enter the emergency services number (112 or other numbers) and press dial key to call. Any digital network has 112 emergency call services. In UK, you can also use 999 standby emergency number, but you must insert a valid SIM card.

**Note: Due to the nature of cellular network, it can't guarantee the emergency call be success.**

### ◆Personal

- ◆ Interference might be caused by poor shielding performance of medical devices such as hearing aids and heart pacemakers in the use of radio frequency devices including mobile phones. Consult medical device manufacturer or your doctor before using mobile phone.
- ◆ Please turn off the phone in which place posted notice required to. These places include hospitals and rest homes and other medical establishments. Because these facilities may be using equipments sensitive to external RF signal.
- ◆ If you are using personal medical devices, please consult the manufacturer of these devices, to confirm that they are adequately shielded from around the RF signal. You can also ask your doctor the relevant information.
- ◆ For users with heart disease, you must pay special attention to phone ring volume and vibrating alert Settings.
- ◆ In oil storages, chemical factories and so on, which have explosive gases, or the location of explosive production process, we should pay close attention to the RP devices use restrictions. In standby state, your mobile phone sill launches the electromagnetic signal. If requested, you should turn off the phone.
- ◆ To pay attention to traffic safety. Do not use mobile phones while driving. And to use, you should park your car first.
- ◆ If your phone is lost or stolen, please immediately notify the telecommunications sector,

in order to disable the SIM card. It will protect you from the economic losses caused others to take the call.

- ◆ When you contact the telecommunications department or distributor, they need to know your phone's IMEI number. It's printed on the label on the back of the phone (or input "\* # 06 #" to check the IMEI number). Please put the number down and keep, for the future needs.
- ◆ In order to make your mobile phone is not misused, please take preventive measures, such as: set up mobile phone SIM card PIN code or personal security code, and modify in a timely manner when others know.
- ◆ Do not remove the battery in standby state mode, it will result in the loss of user data.
- ◆ When you leave your car, please do not put the phone on easy to be seen. It is best to carry or locked in the trunk.
- ◆ Do not let the children play with mobile phone, charger or battery.

## ◆Mobile Phone

Mobile phone contains sophisticated electronic circuitry, magnets and battery systems, it should be handle with care. In particular, you should pay attention to the following points:

- ◆ Your mobile phone will generate electromagnetic fields, please do not place it with magnetic storage media, such as computer disk.
- ◆ Using mobile phone near the TV, telephone, radio and personal computers and other electrical equipments may cause interference, thus affecting the performance of the phone.
- ◆ Whenever, do not keep the mobile phone and its accessories come into contact with the liquid or in a damp environment.
- ◆ Please do not put the mobile phone on the temperature is too high or too low.
- ◆ Please do not place the mobile phone on fire or near the lit cigarette.
- ◆ Please do not scribble on the mobile phone.
- ◆ Please do not place any objects within a slide phone.
- ◆ Please do not let the mobile phone drop or to have any rough throw behavior.
- ◆ Please do not put the mobile phone and computer disks, credit cards, travel cards or other magnetic objects together. Otherwise, the information stored in the disk or credit card, may be affected by the mobile phone.

- ◆ Please do not put the mobile phone or battery in the temperature more than 60 °C, such as car dashboard, windowsill, or direct sunlight of glass windows, etc. Do not attempt to remove the mobile phone or any other accessories.
- ◆ Only use a damp or anti-static cloth to wipe the mobile phone. Do not use dry cloth with static electricity to wipe the phone. Do not use chemical reagents or abrasive cleanser, otherwise it may damage the cabinet.
- ◆ The headset may be hot during normal using, and mobile phone may be hot when charging.
- ◆ Please remember to recycle, the carton packing of this mobile phone is well suited for recycling.
- ◆ Please do not keep the mobile phone not to install battery for a long time or the battery power is empty, otherwise, some data may be lost.
- ◆ Mobile phone contains some metallic substances, it may let you produce allergic phenomenon, it depends on your body and health.
- ◆ Please do not place the phone on the back of your trousers or skirt pocket, to prevent damage to the phone when you sit down. Do not put the phone on the bottom of the bag to prevent the phone from impact or strong squeeze.
- ◆ If you turn on the vibration function, please keep the mobile phone away from the heat source (such as radiator). And to avoid the phone slipped from the desktop due to vibration.
- ◆ Only can be used this type of handwritten pen. Use other handwritten pen may be in violation of the phone's warranty provisions, and may damage the touch screen.
- ◆ Please carefully insert and pull out handwritten pen, please insert it into the correct position, do not allow children to play with handwritten pen.
- ◆ Please try to avoid scratch touch screen. Do not use common pen or other sharp instruments to write on a touch screen.

## ◆ **Battery**

- ◆ Please do not short circuit battery equipment, it will damage the battery and generate heat, and may cause fire.

- ◆ Banned to put the battery into fire, lest cause an explosion. Used batteries should be returned to the supplier, or put it in the designated collection points, do not put in the household waste.
- ◆ Please do not use metal objects (such as coins or key ring) to contact with the battery endpoint, and make the short circuit.
- ◆ Please do not remove the phone battery in the boot state.
- ◆ Please do not put the phone battery in the mouth, because after swallow, the electrolyte can lead to poisoning.
- ◆ The internal components of the mobile phone battery can only be replaced by professional maintenance engineer. If you use wrong type of battery may cause explosion. Be sure to deal with the used batteries according to the manufacturer's instructions.
- ◆ Use any non-phone manufacturer specify battery, charger, there will be a potential danger, which caused by the damage to the mobile phone out of warranty.

 Note: If the battery is damaged, you should avoid touching the things inside. If it contact with the skin, please use a lot of water to wash. In the necessary circumstances, you should seek medical help.

### ◆ **On the road**

- ◆ Must always safety control the car. Please focus on driving.
- ◆ Please comply with all the requirements of the local traffic safety regulations.
- ◆ Before dialing or receiving calls, you should pay close attention to local legal system for mobile wireless phone using, and pay attention in using.
- ◆ According to the requirements of driving conditions, please stop the car, and then dial or receive the call.
- ◆ Unless in case of emergency, banned to stop at the isolation pier place in the highway to receive or dial a call.
- ◆ Airbag inflation aroused the strong force, please don't install or place the wireless communication equipment above the airbag, or the area that the airbag launch can touch. If the on-board wireless communication equipment is not properly installed, once the airbag inflation, it will cause serious damage.

- ◆ Please turn off your mobile phone when refueling, the same situation applies to ban the use of a two-way radio equipment. Please do not take any hazardous material which is inflammable, explosive with mobile phone together or handling, the internal spark may cause burns.
- ◆ The electronic system of the car, such as locked braking, speed control and fuel injection systems, generally, they do not suffer the effects of the radio waves. The manufacturers of such kind of equipment will tell whether these devices have a good shield function. If you suspect that radio waves cause the car broke down, please contact your dealer. Do not boot without qualified professional installer checks.

## ◆On the plane

- ◆ Please turn off the phone while you are in the plane or near the plane. It is illegal to use a mobile phone in the plane, it could have dangerous aircraft operating, it may also disrupt mobile phone networks.
- ◆ In an emergency situation, should according to safety regulations, and consent the crew's permission to use the phone.

## ◆Other manufacturers' equipments

- ◆ Use unauthorized equipments, cables or accessories of other manufacturers may lead to the phone's warranty failure, and it will also affect the normal use of the mobile phones. Please be sure to use the rationing cable.

## ◆Maintenance Service

- ◆ No user-serviceable parts inside of the mobile phone, battery and charger. Recommend to send your phone to designated repair facility for service.

## ◆Non-ionic Radiation

- ◆ Radio equipment should be connected to the antenna by non-radiating cables, such as coaxial cable. Antenna should not device in close to human body, unless both have metal shield, such as metal roof. You can only use the antenna specifically design for the mobile phone. Use of unauthorized antennas, unauthorized alterations or additions may damage the phone or in violation of the relevant provisions, resulting in reduced performance or cause the radiation level does not meet the standard.

## ◆Effective Use


♦ Please note that the following provisions in order to get the best performance with minimum power consumption: In communication, do not hand cover the built-in antenna place, otherwise it may affect call quality, and led to the phone to beyond normal level of output, shorten the battery call time and standby time.

## ◆Radio Frequency Energy

♦ Your mobile phone is a low power radio transmitter and receiver. Once the boot, it will periodically receive and send radio signal. Network system will control the transmitted power of the mobile phone.

## 二、Your LM127

### Phone Layout

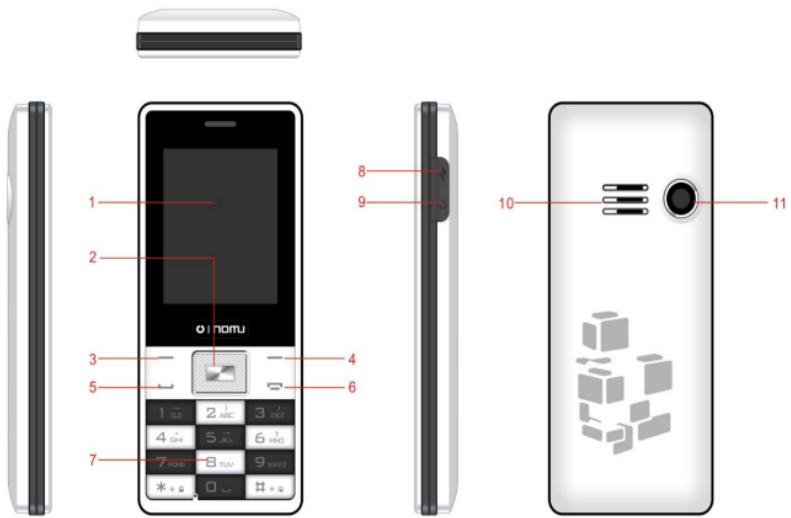

### External View Detailed:

No.	Key Note	Function Description
1	LCD	Displayer
2	Navigation key	<ul style="list-style-type: none"> <li>• Press up, down, left and right arrow keys to scroll in the text and menu.</li> <li>• You can also enter the settings menu in phone settings, by modifying the function keys to change the direction of the specified key shortcuts.</li> </ul>
3	Left Key	<ul style="list-style-type: none"> <li>• Press to enter to main menu in standby mode, items operating functions or confirming functions.</li> </ul>
4	Right Key	<ul style="list-style-type: none"> <li>• Enter to phonebook in standby mode. Press this key in menu to return to previous page, and cancel.</li> </ul>
5	Dial Key	<ul style="list-style-type: none"> <li>• Press to enter the call records. Input the number in standby mode, and press this key to dial.</li> </ul>
6	End Key	<ul style="list-style-type: none"> <li>• Long press to power on or off this phone.</li> <li>• Terminate a call or refused a call.</li> <li>• Return to standby state.</li> </ul>
7	Number Key	<ul style="list-style-type: none"> <li>• Input numbers or characters</li> </ul>
8	USB port	USB port
9	Earphone jack	Earphone jack
10	Loudspeaker	Loudspeaker
11	Viewfinder	Viewfinder

## LM129 Icons

	Vertical bars indicate the signal strength of the GSM network signal. Five bars indicate that your current position has the best
--	--

	reception.
	Indicates your phone is locked.
	Indicates music playing
	Indicates the alarm clock is set
	Headset mode
	New missed call
	New SMS
	Ring Mode
	Mute Mode
	Call Transfer
	Battery Icon

#### Charger usage instruction:

The charger connection interface end insert the mobile phone charging jack, when the battery icon flashes that the phone has been achieved for the charging.

### 三、Preparing for use

#### 3.1 Install SIM Card

The SIM card contains your private information, there is your phone number, PIN (personal identification code), PIN2, PUK (PIN unlock code), PUK2 (PIN2 unlock code) and the IMSI (International Mobile Subscriber Identity) number and network information, phonebook data and short message data, etc.

- The SIM card slot is located inside the phone, when installation, open the back cover , take out the battery and turn the phone to back, find the SIM card slot position.

Put the SIM card metal face down, gently insert to the card slot, and fixed it; you must turn the phone off first, open the phone back cover, then take out SIM card.

Open the back cover to take out the battery, insert SIM card to the SIM card slot.

- Please carefully operate SIM card, friction or bend easily damaged SIM card.
- Please pay attention to save the mobile phone and its accessories such as the SIM card small parts, and placed out of the reach of children.

### **3.2 Install Memory Card (T-FLASH Card)**

It is located in the phone's internal and it is a pluggable mobile memory card. When the phone is enable USB memory function and computer connected, transmission of the data files from the computer to mobile phone can be stored in T - FLASH card.

Install Method:

Turn off the phone, open the back cover and other external power supply, turn the phone to the back to find the location of the memory card slot. Put the memory card metal face down, gently insert to the card slot, and fixed it; you must turn the phone off first, open the phone back cover, then take out the memory card.

Note: Because of the phone memory is lesser, in the need to use the storage function, please try to store files in the memory card, so as not to affect the use of your phone.

### **3.3 USB Usage**

This mobile phone supports USB1.0 port. You can connect the phone to the computer through USB cable to copy\move files and some other operations. You can also browse the photos\sound records\video, etc through the computer which saved on the phone. Using USB cable: Insert one side of USB cable to USB interface on the PC, and connect the other side to the "USB/Charging interface" on the left of phone.

### **3.4 Security Password Usage**

Your mobile phone and SIM card has a variety of passwords. These passwords can help prevent unauthorized use of your mobile phone and SIM cards. When requested for any of the code explained below, key in the appropriate code and press the OK key. If the input error, press the "Clear" key to delete the incorrect input, and then enter the correct number. You can use menu "Settings -> Security Settings -> Change Password" to modify PIN Code, PIN2 Code and Phone Password.

#### **■Phone Password**

The phone password helps you to protect the phone against unauthorized use. The phone password is usually provided by the manufacturer with the phone. Manufacturer preset phone password is "0000". If the mobile phone has been locked, you will be required to enter the phone password when boot.

### ■PIN Code

PIN Code (Personal Identification Code, 4-8digits) protects your SIM card against unauthorized use. The PIN comes with the SIM card. If you start the PIN check function, then you will be required to input PIN code each boot.

If you enter an incorrect PIN three times in succession, the SIM card will be locked, the unlock method is as follows:

- According to the screen prompt to enter the correct PUK code, then unlock the SIM card.
- Enter the new PIN code and press "OK Key".
- Prompted to re-enter the new PIN code, re-enter the new PIN code and press "OK Key".
- PUK code is correct, then unlock the SIM card, and the PIN code is reset.

Note: If you enter the wrong PIN in three times, SIM card will be locked, and you should use the PUK code to unlock. PUK code is usually stored in the network operators.

### ■PUK Code

Enter the PUK code (Personal unlock code) to unlock the PIN code. PUK code is provided from manufacturer with SIM card. In case you have not it, please contact your network operator. If you enter an incorrect PUK ten times in succession, the SIM card becomes invalid. Please contact your network operator for a new card.

### ■PIN2 Code

PIN2 code (4-8 digits) is provided with SIM card. Enter the "Call costs" and "Fixed dial", please contact with the network operator to make sure if your SIM card support to these functions. If wrong PIN code is entered for three times, PIN2 code will be automatically locked. You have to enter the correct PUK2 code to unlock PIN2 code. The unlock method is as below:

- According to the screen prompt to enter the correct PUK2 code, then unlock.
- Enter the new PIN2 code, and press "OK Key"

- Prompted to re-enter the new PIN2 code, re-enter the new PIN2 code and press "OK Key".

#### ■PUK2 Code

PUK2 code (unlock PIN2 code, 8 digits) is used to unlock the locked PIN2 code. PUK2 code is provided from manufacturer with SIM card. If you enter an incorrect PUK ten times in succession, you will not be able to use PIN2 code function. Please contact your network operator for a new card.

#### ■Prohibit password

You will use the prohibit password when you start the Call barring. When you apply for this network function, the password can be obtained from the network operator.

### 3.4 Connect to Network

After unlocked SIM card and mobile phone successfully, the mobile phone will automatically search available network. After search to the network, the phone gets into standby state. You can dial and receive calls, and you can also make the following operation:

- Press Left Soft Key to enter main menu.
- Press Right Soft Key to enter Phonebook.
- Press Dial Key to enter the call records list.

Note: If the screen prompts "emergency call only", and you can only make emergency calls.

### 3.5 Charge the battery

- The battery charge indicator: your phone can monitor and display information about the battery.
- Normally you can see the rest of the battery power from the battery power of icons on the top right corner of the screen.
- When the battery power appears low, the screen shows "low power". If you choose warning tone in any mode of the scene mode, it still can sound alarm warning tone.
- When the battery is on charge, it displays charging animation. When charging animation stop, it means charging finish.

Note: The actual standby time and call time are concerned mobile phone usage and local

network environment, SIM card and the actual settings.

●Travel Charger: Travel charger can charge the battery through the phone. When charge the battery, put the battery into the phone:

1. Connect the travel charger adapter and the slot of the top of phone.
2. Plug travel charger into the right main power supply socket.

●When charging, the electricity grid number of battery icon is a state of flux until fully charged.

●At the end of the charging, the battery icon stops change.

Note: if the battery voltage low to can't allow the boot, when charging, it needs a long time for the battery icon change.

Warning: You must ensure that the local standard voltage and frequency match with your travel charger voltage and power ratings.

### **3.6 On/Off the phone**

- Long press the End key, boot the phone. The screen displays boot animation.
- If the phone asks to input the phone password, key in the password and press the "OK" soft key. Phone password is preset to 0000.
- If the phone asks for PIN code, key in the PIN code and press "OK" soft key. New account SIM card, PIN code is provided by the network operator.
- Enter the standby screen, the mobile phone will search network, when find the network, the current date and time will appear in the screen, now, you can dial or answer the call.
- Long press the End key to turn off the phone.

### **3.7 Headset**

When you insert the headset into the headset slot, it automatically get into the headset mode, the headset plays the role of the earpiece and microphone.

## **四、Basic Function**

### **4.1 Dial Call**

In the standby screen, directly to press the number keys, key in the area code and phone number,

tap the dial-up icon or press the call button to dial. Press the End key to end the call.

- International call: Press the \* key twice, enter "+" sign. Key in the country code, area code and phone number, press the call button.
- Dial extension telephone: after key in the exchange number, press the \* key three or four times, appear "p" or "w", input "p" or "w", and then key in the extension number and press call button.
- To correct typing errors: Press "clear" or the right soft key to delete the last character in the screen. To clear all the input, long press the right soft key, or directly press the end key.
- Make phonebook call: press the right soft key to access the phonebook in standby screen, queries to the call records, press the up or down key to find the call records to call.
- Input number and press call button, the mobile phone will automatically dial the corresponding number.
- Redial the last number: in the standby screen, press the call button to display the dialed calls list of records. The phone displays the dialed number, press the up or down key to select the number the call, and press the call button.
- Speed Dial Phone calls: edit the speed dial number in speed dial list "the phonebook -> the phonebook settings -> Speed Dial list", and confirm its status is set to "ON".

## 4.2 Adjust Volume

During a call, press the up and down navigation key to adjust the call volume.

## 4.3 Answer the incoming call

- Press the call button or left soft key to answer. When the call "shock", it says your phone is the on call.
- Press the End key to end the call.
- Directly press End key or right soft key to refuse an incoming call.

Note: If the phone can identify dialing, it will display calling phone number (if mobile phone has storage calling phone records, then it display calling name and number). If the phone can't identify dialing, it will display calling number. You can also answer the call when you use the menu or phonebook.

#### 4.4 Call Process

During a call, you can click the options menu to achieve reserve, end single calls, phonebook, call records, message, sound recording, mute/recover, dual tone multiple frequency and other functions. Please see the next chapter "menu function".

- Hands free: achieve hands free.
- Reserve: Retain the current call, the current call on hold, both side cannot hear each other's voice.

If network support call reserve function, you can start another call while you during a call in at the same time:

**A:**

- 1> Direct input number or press left soft key to find the call number in the phonebook, or press left soft key to choose new call and key in number, press the dial key to have the second call.
- 2> The first call is automatically reserved.

**B:**

- 1> Press left soft key to open mute to reserve the current call.
- 2> Then start to dial another call.

Once connected, one is in a call, another is on hold, you can convert these two call state, press switch keep to switch between these two calls.

- End single call: end the current call.
- New Call: create a new call.
- Phonebook: view the phonebook while calling.
- Call records: view the call records while calling.
- Message: view or send message while calling.
- Sound recording: recording while calling.
- Mute: This function can be turned off or turned on the microphone of the mobile phone and connect the other microphone. "Mute" function can let the other side cannot hear you.
- Dual tone multiple frequency: output the digital signal while calling.

#### 五、Main Menu

Please read the following guidelines carefully, so as to better grasp the functions.

## 5.1 Call Center

### 5.1. 1 Call Records

#### ■Missed Call

■ You can view the last 20 missed calls. Press the left soft key to proceed as follows:

- View: view the details of the phone number.
- Call: call the phone number.
- Send SMS: send SMS to the phone number.
- Save to phonebook: save the phone number to phonebook.
- Edit before calling: edit the phone number before call it.
- Delete: delete the phone number.

#### ■Dialed Call

● You can view the last 20 dialed calls. You can view, call, send SMS/MMS, save to phonebook, edit before calling and delete. Such as "Missed Call".

#### ■Received Call

● You can view the last 20 received calls. You can view, call, send SMS/MMS, save to phonebook, edit before calling and delete. Such as "Missed Call".

### 5.3. 2 Delete the Call Records

Delete the records of Missed Call, Dialed Call and Received Call or delete all the Call Records.

**Note: If you change SIM Card, the phone numbers of Call Record will be automatically cleared.**

## 5.1. 2 Call Setting

### 5.1. 2. 1 SIM1 Card Call Records

#### ■Call Waiting

● Start: Start the "call waiting" function, you in the communication if anyone call you, the other party can still come in. The network will provide you with alarm, and display another call on the

screen.

● Close: if you cancelled call waiting function, you have set up one call, if another one call you, that the other party will not be able to call in.

● Inquiry: used to query the current state to the network.

#### ■ Call Transfer

This function allows the incoming call is transferred to another phone you specify. Into the call settings, select call transfer, press the "OK" soft key to enter this function.

● Transfer all the voice call: this function used to transfer all the voice call.

● Transfer when cannot connect: transfer the incoming call when turn off the phone or not in service area.

● Transfer when no answer: transfer the incoming call when you no answer.

● Transfer in the busy: when the phone is in communication transfer the incoming call.

● Transfer all data calls: need to network operators support to transfer all the data call.

● Cancel the transfer: this function is used to cancel the transfer function.

■ Call Barring: This function allows you to restrict your calls. Set this function, you first need to network operator to provide network banning password. If the password is incorrect, an error message will be prompted. After you selected the option, continue to select on or off, the phone will require to key in the barring password. Then the phone will connect to network. Later, the network will respond and inform the operating result.

● Ban to Dial

● All calls: this banning is on, you cannot dial all calls.

● International calls: this banning is on, you only cannot dial the international calls.

● International calls except domestic calls: this banning is on, in the foreign country, you could only call local phone or homewards (i.e. ownership network provider host country) phone.

● Ban the incoming call

● All calls: this banning is on, you cannot receive all the incoming calls.

● Roaming calls: this banning is on, when using the phone outside of the own ship service area, you cannot receive the calls.

● Start: key in the banning password to start.

- Close: cancel this banning function.
- Inquiry: used to query the current state of the barring to the network.
- Cancel all:
  - Cancel the restrictions to call, cancel the restrictions also need to network operators to provide the restriction network password.
- Change Password
  - This function is used to modify the banning password. You should key in the original banning password before modifying.

**Note:** Some settings need network support. Call barring setting effective by local network and SIM card to open this function.

- Line switching
  - 1, Switching between line1 and line2. The default state is line1.

Note: If you choose line2, you can dial out or not, it is related to the network operator.

#### 5.1.2.2 SIM2 Card Call Records

- SIM2 card call settings are referring to SIM1 card call settings.

#### 5.1.2.3 Senior Settings

- Auto Redial: Turn on or off auto redial, start or close the auto redial call. Select to start, in the dialing process, if the other party does not respond, the phone will automatically redial over a period of time. Automatic redial cannot exceed 10 ten times. In the meantime, users cannot dial any other call. To end automatic redial, press the End key.
- Conversation time prompt: This function can make a prompt to the user. The alternative prompt types are for close, one sound or cycle.
- Call Connection Prompt: Open the call connection prompt, there will be a prompt tone after

call connection.

- Answer mode: you can set any key to answer or automatic answer via headset mode.

## 5.2 Phonebook

### 5.2.1 Searching

Quick Search: You can enter the name or telephone number, and other related information to quickly find the contacts in the phonebook. Press the # key to switch "abc" or "123" in the phonebook interface to switch the input method. Press the left soft key, select "Searching", the phonebook to find out all the records that meet the requirements in the phonebook. Press the up or down key to browse the records, press the dial button to call.

### 5.2.2 Add new contact

Add a new contact to SIM Card or mobile phone. The specific operation is as follows: in the phonebook menu, select "Add New Contact", prompt to select "to the SIM card" or "to the phone".

### 5.2.3 Options of The contact

Press left soft key in contact of phonebook, enter to the options of the contact, you can view, send SMS, send MMS, call, edit, delete, copy and check the call group.

- View: view the details of contact.
- Send SMS: send the SMS to the selected contact.
- Call: call the selected contact.
- Edit: edit the selected contact.
- Delete: delete the selected contact.
- Copy: allow to copy the record to the phone, SIM1 or SIM2.
- Send name card: send the phone number via SMS, MMS or Bluetooth.

### 5.2.4 Phonebook Settings

- Storage Position: set the phonebook display the contact storage position. You can select to save it in SIM1, SIM2, mobile phone and all the above. If the phone only has SIM1, this option will only display SIM1.
- Speed Dial: On/Off. When this function is set to open, a total of eight groups speed dial number can be set (the corresponding number key 2 ~ key 9). In standby state, long press the corresponding number key, you can dial the corresponding phone number.
- Other numbers: Can set this phone number and the fixed dial
- Storage State: Display the phonebook and SIM card phone book's already storage contact and can store contact number.
- Copy the contact: you can copy the phonebook from SIM1\SIM2 to the phone or from phone to SIM1\SIM2.
- Move the contact: you can move the phonebook from SIM1/SIM2 to the phone, or from phone to SIM1\SIM2.
- Delete all the contacts: you can delete all the contacts in phonebook and SIM card.

Note: boot and search the network, immediately check the phonebook if it shows "please wait", the tip is refers to the phonebook is initializing, please check it later.

### 5.3 File Management

- You can use this function easily to manage the directories and files which stored in the phone or extended memory card (such as T-Flash card). Open: use this function into the memory root directory, the root directory will list the system default folder, set up a folder and user files.
- Open the file management, press left soft key to enter "options", you can proceed as follows:
  - Open: open the specified folder.
  - New folder: create a new folder in the specified folder.
  - Rename: rename the specified folder.
  - Delete: delete the specified folder.
- You can operate the specified file as follows:
  - View(Play): view or play the specified file.

- Image information: list date and size of the specified file.
- Used as: the file can be selected for wallpaper.
- New folder: create a new folder in the specified folder.
- Rename: rename the specified file.
- Delete: delete the specified file.
- Copy: copy the specified file to specified position. Press the "back" cancel to this command. If the remaining space is not enough to complete copy operation, the mobile phone will give prompt information.
- Move: move the specified file to specified position.
- Detail information: view the date and size of the file.
- Format: use this function can be formatted all data, the system will re-establish the default folder.

Note: you can move the specified file or all the files and images of T-Flash card.

## 5.4 Organizer

### 5.4.1 Sokoban

Sokoban is a classic game, total of 108 levels, you can have the fun in the game

### 5.4.2 Calendar

■ Display the calendar from January 1970 to December 2030 (Gregorian and Lunar), show the date of the memo event. You can edit and view the specified date memo event. Select Calendar, press left soft key, the functions as below:

- Skip to a specified date: Skip to a specific date to view or edit the memo event.
- Switch to today: when you view the other date of calendar, you can choose this function to return the setting date.
- Lunar: turn on or off, check whether the calendar to display the lunar calendar

### 5.4.3 Alarm Ring

■ This phone offers five alarm clocks for the user to use, users can set according to their own

needs. If the alarm clock doesn't open, the screen has no alarm clock signs show that, the screen display sign after opening.

- Press Left or Right Key to select open or close.
- Set the alarm clock.
- Select the desired alarm clock ring: once a day, every day, custom choose a day or some days in one week.
- Snooze time: set to the default value of "1-10" minutes.
- Prompt type: set to ",only vibrate, only ring, vibration and ringing".
- Press "ok" or right soft key to complete the settings.

Note: when a alarm clock ring, if you choose to sleep or no any operation to prevent the ring, this alarm clock will default that the user has not heard the ring, 5 minutes later, the alarm clock will ring again. No any operation, the alarm clock will shut down automatically after ring 11 times.

#### 5.4.4 Calculator

■ The calculator applies simple calculate functions such as addition, subtraction, multiplication and division. Use the calculator, follow these steps:

- Input the first number: input the first number when the screen displays "0".
- Input operator: press the according +, -, \*, / and symbol keys.
- Input the second number.
- Results: press Left Soft Key, the screen will display the calculation results.
- Continue the calculation: if you want to use the existing calculation results, you can continue to input operator, and input the third number to calculate.
- Clear: press the Right Soft key.
- Exit: press right soft key "back" to exit.

#### 5.4.5 Ebook

■ The Ebook listed all TXT type Ebook directories of the memory card, the screen display Ebook size and number of lines below, press OK to open. Through the Options menu, you can complete

the following functions: open Ebook, system settings, message, delete, sort, help, etc.

- Open Ebook: open the specified Ebook.
- System setting: you can set the Ebook font size, volume page mode, roll page speed, choose storage location.
- Information: display the current selected Ebook's name, size and format.
- Delete: delete the current selected Ebook.
- Sort: sort the file by name, type, time and size.
- Help: Use Ebook fast operational guidelines.

■ Enter the Ebook reading interface, press left soft key to operate the following operations:

- Open full screen: open the full screen to read the Ebook.
- Skip a line to: enter the number of rows you want to read.
- Enter to bookmark: enter to the Ebook's bookmark.
- Add bookmark: bookmark the current reading position, next time you can enter My Bookmarks to continue reading.
- Delete bookmark: delete the current bookmark.
- Open the automatic roll page: open the Ebook's automatic roll page function.
- Close: close the current Ebook.

## 5.5 Message

### ■ SMS

Message function is a network service. You may need to apply to the network operator to send and receive messages. Each SMS capacity is up to 268 characters. When you write a message, you can press # key to switch input method or select the input method in options. Press "clear" to delete one word front of cursor. Long press "clear" to delete all the characters. Click End Key to back to standby state. Left or right key to select the character, press the \* key to select the input symbols.

### 5.5.1 Set up Message

- Edit new SMS.
- SMS: Edit the SMS in the SMS interface, press # key to switch the input method. After editing, you can click "options" to operate the following functions:
  - Send to: send the SMS.
  - Input method: select which input method you want to edit.
  - Senior options: can insert number and name.
  - Save: save the SMS to the draft box.

### 5.5.2 Inbox

The Inbox save the SMS and MMS in it. In message list, press left soft key to operate the following operations:

Note: The screen will show the icon when you receive new message. If the short message is full already, you will not be able to receive new message, please delete unnecessary short messages.

- View: view the message.
- Reply: reply via SMS.
- Call the sender: dial to the sender.
- Transfer: transfer the message.
- Delete: delete the message.
- Delete all: delete all the messages in inbox.
- In the view message interface, you can also complete the following operations in "Options":
  - Reply: reply via SMS.
  - Call the sender: dial to the sender.
  - Transfer: transfer the message.
  - Delete: delete the message.
  - Senior Options:
  - Use number: extract all phone number of the message, save them to SIM card or phone.

- Use USSD: extract the USSA of the message.

### 5. 5. 3 Draft Box

■ Draft box storage the not yet ready to send message to prepare for modify again and send. Press OK key to enter draft box, you can view, edit, delete, delete all, move, copy to the phone or SIM card, etc.

■ Under the message list, press Left Soft Key to proceed the following operations:

- View: view the SMS.
- Send: send the SMS.
- Edit: edit the SMS.
- Delete: delete the SMS.
- Delete all: delete all SMS in draft box

### 5. 5. 4 Outbox

■ Select "outbox", press OK Key to enter outbox. Select "Options", you can select the following options:

- Send: re-send the SMS.
- View: view the SMS.
- Re-send: re-send the SMS.
- Edit: edit the SMS. After you complete to edition, select the receiver to send the SMS.
- Delete: delete the SMS.
- Delete all: delete all the SMS of outbox.

■ Senior Options

- Use number: use all numbers and phone numbers of the message.
- Use USSD: use the USSD of the message.

### 5. 5. 5 Sent Message

■ Sent message is stored messages sent successfully. Click OK Key, enter to Sent Message list, click "options", you can select the following options:

- View: view the SMS.
- Transfer: transfer the SMS.
- Delete: delete the SMS.
- Delete all: delete all the SMS of Sent Message.
- Senior Options:
  - Use number: use all numbers and phone numbers of the message.
  - Use USSD: use the USSD of the message.

### 5. 5. 6 Message Settings

- SMS SIM card settings
- Center number: operator SMS center number, center number is related to network operators.
- SMS validity: You can choose different times of the valid formats
- Send format: set the format, usually default to text.
- Send report: open/close
- Reply Path: Open / Close
- Voice message: You need to set the number as a voice number, in the standby interface, you can long press the number "1" key to call the voice number.
- Storage State: check the SMS usage rate in phone and memory card.
- Save the sent SMS: open this function, the sent message will automatically save in Sent Message.
- Preferred save position: set the SMS storage mode. You can save the SMS in phone or SIM card.

Note: boot and search the network, immediately check the message if it shows "Message is not able to use", the tip is refers to the message is initializing, please check it later.

## 5. 6 Multimedia

### 5. 6. 1 Image Viewer

- Press left soft key to enter the menu:
- View: to view the images.
- Image information: view the details of image.
- Browse mode: to choose to view the images in List style or Matrix style.
- Used as: Images can be selected for wallpaper.
- Rename: modify the image's name.
- Delete: delete the image.
- Storage: select to save the image's position.
- In the image view interface, you can press the left navigation key rotating photos, press up and down navigation keys to switch images.

### 5.6.2 Video Recorder

- Enter to Video Recorder, in the camera preview state, press the OK key to start camera, the right soft key to stop. Press left soft key after enter to the camcorder function, the operations as below:
- Switch to camera: you can switch Video Recorder to camera.
- Camcorder settings:
- Avoid flicking: Optional 50Hz, 60Hz, and the Chinese domestic indoor fluorescent lighting environment is 50Hz.
- Video Settings: video quality: You can choose mobile phone low, medium, good, excellent quality.
- Storage: Allows you to save the videos on phone or memory card.
- In addition to set the video parameters in options, you can also use:
  - "2" key: to switch video quality.
  - Up and Down Key: Adjust video focus.

### 5.6.3 Video Player

- The phone supports 3GP, MP4 and AVI format video files. Press OK Key to enter to Video

Player list, in this mode, you can also:

Note: Videos can only be on the "videos" directory, in order to generate a file in the video player

● Play: play the specified video file.

● Rename: modify the video name.

● Delete: delete the video.

● Storage: select to save in phone or memory card.

■ Repeat: Repeat the video.

■ Video Play:

● Press the up key to switch between full-screen and half-screen, press OK key to pause. Press the down key to stop playing, press the left or right key to support fast forward and rewind,

Note: Press "\*" "#" to adjust volume.

#### 5. 6. 4 Music Player

■ Press left key to enter to Music Player list, press right key to return. Press up and down key to set to repeat and shuffle play, press left or right key to switch last one or next one. Press OK Key to pause or continue. Press left soft key to enter the playlist, click "options" to complete the following operations:

■ Play: play the specified music.

■ Detail information: to view the size, time, music name and player of this file.

■ Update playlist: update playlist of memory card or phone. When the automatic generation of list is set to open, provide the function.

Note: when the "automatic generation list" of "Settings" for closing, the other options as addition, remove and remove all.

■ Settings:

● Preferred List: choose music of memory card or phone.

● List Auto: open or close automatic generation list.

● Repeat: you can specify shut, single music, all the way to a play.

● Shuffle: you can select random play on and off states

- Background play: If you choose the open state, exit the music player interface, music can still play. Otherwise, music will automatically stop to play.
- Energy display style: you can choose different energy styles.

Note: Press "\*" "#" to adjust volume.

### 5.6.5 Sound Recorder

- Sound Recorder file the default stored in the root directory "Audio" of T - Flash card. Select one sound recorder file, then press left soft key. You can set the "record, play, append, rename, delete, delete all, setting and send" options.
- New Recorder: press the left soft key to pause, right soft key to stop, edit recordings saved with the name after stop.
- Play: to play the specified sound record. Press up and down key to adjust the volume.
- Append: to allow to record in same file.
- Rename: to amend the file's name.
- Delete: to delete the selected sound record.
- List: to display all the sound recorder list.
- Settings: set the storage position and file format.
- Used as: used the sound record file as call ring.

## 5.7 Network Service

### 5.7.1 STK

- This function is provided by network operator, according to the different services provided by different mobile manufacturers, there will be new menu options appearing.

### 5.8 Camera

Use the camera application, you can shoot and camera for around people or events any time.

Photo will be stored in the "Album". Camera generated photos are in JPG format.

Tip: JPG is a standard image compression format, you can use some of the most commonly used image viewer, image editor to see JPG format files. The files' extension names are JPG.

Note: please comply with all local laws and regulations on taking photographs. Please don't illegal use this function.

When the camera application open, you can see the scene that you want to shoot on the screen.

Press Left Soft key to select "Options", enter to the option menu:

- Switch to video: you can switch camera to video.
- Album: browse the images (for details, please refer to the Image Viewer of Multimedia.)
- Camera Settings:
  - Avoid flicking: Optional 50Hz, 60Hz, and the Chinese domestic indoor fluorescent lighting environment is 50Hz.
  - Delayed firming: You can choose to turn off, 5 seconds, 10 seconds, 15 seconds.
- Image Settings:
  - Set image size: support to pixel 176\*220/80\*60/160\*120/320\*240/640\*480.
  - Image quality: High, medium and low to adjust the quality of images.
- White Balance: You can choose automatic, solar light, incandescent lamp, fluorescent lamp, cloudy and white light.
- Scene Mode: You can select auto or night mode settings.
- Effect Settings: You can select normal, grayscale, sepia, sepia green, sepia blue and negative film, etc.
- Storage: Allows you to save the images on phone or memory card.
- Restore Default: Allows you to restore to the camera's default settings.
- In addition to the camera parameters can be set in the options, on the mobile phone keys can also be set related parameters of the camera:
  - OK key: to take photo
  - Up and down arrow keys: adjust the camera focus.
  - "1" key: select image size.
  - "2" key: select image quality.

## 5.9 Settings

### 5.9.1 Mode Settings

■ The user can refer to the SIM card usage to set the corresponding operation, this function in the double card insertion condition can choose:

- Open two modes: open two SIM cards at the meantime.
- SIM1 card only: open SIM1 card only.
- SIM2 card only: open SIM2 card only.

Note: if the user only insert SIM1 card, the bar just show only SIM1 card open.

### 5.9.2 User profiles

#### ■ Standard Mode

- Start: start Standard Mode.
- Personal Settings: you can set ring type, alert type, incoming call ring, ring volume, message ring, message ring volume, key sound, boot ring, shutdown ring and system prompt on/off.
- Alert type: you can choose ring, vibration, vibration and ring, vibration then ring.
- Ring type: ringing and ring once.
- Incoming call ring: system provides 5 types ringtone for your selection, and one custom ringtones.
- Ring Volume: sent the ring volume, it has 1-7 levels.
- Message: system provides 5 types ringtone.
- Message ringtone volume: set the message ringtone volume, it has 1-7 levels.
- Key Sound: you can choose mute, tap and tone as key sound.
- Key sound volume: set the key sound volume, it has 1-7 levels.
- Boot ring: system provides 5 types ringtone and mute.

- Shutdown ring: system provides 5 types ringtone and mute.
- System prompt: turn on or off system prompt.
- Reset: after choose reset, the scene mode will restore the initial value.
- Mute mode: all mute after boot.
- Meeting mode: Please refer to “Standard Mode”.
- Outdoor mode: Please refer to “Standard Mode”.

Note: Suggest that you can set your phone as meeting or mute mode in quiet public places. Long press “#” key to switch the mode to standard mode and mute mode in standby state.

### 5.9.3 Phone Settings

#### 5.9.3.1 Time and Date

- Time and date setting: Let you set time, date and daylight saving time. Press the arrow keys to move the cursor to the complete the operation, when daylight saving time is set to open, it displays the time delayed one hour.
- Format Setting: you can set the time in 12-hour or 24-hour format. Chronological arrangement and date separator choice.

#### 5.9.3.2 Schedule Power on/off

- Schedule Power on/off:
  - Schedule Power on: You can set two groups time of automatically power on. Before using the schedule power on function, you must first set its status to open.
  - Schedule Power off: You can set two groups time of automatically power off. Before using the schedule power off function, you must first set its status to open.

#### 5.9.3.3 Language

- Display the language menu for your selection. You can choose English or simplified Chinese. Selected language, menu and prompt information will change accordingly.

#### **5. 9. 3. 4 Preferred Input Method**

- Preferred input method: choose your commonly used input method as the default input method.

#### **5. 9. 3. 5 Standby Menu Display**

- Standby Menu Dispaly:
- Wallpaper: system provides 1 default image. You can download other images by yourself.
- Display date and time: click open or close to said whether display date and time in standby.

#### **5. 9. 3. 6 Flight Mode**

- Flight Mode:
- Normal mode: if your phone is in flight mode, this option will switch to normal mode.
- Flight Mode: When set to this mode, the phone is no signal, you cannot dial and receive and send message.

#### **5. 9. 3. 7 Other Settings**

- Other Settings
- LCD Backlight: set LCD backlight brightness and backlight time.

#### **5. 9. 4 Network Settings**

To obtain the below network services, please contact your network operator.

- Network selected: to set manually select or automatically select the network.
- Preference network: Choose priority use of network operators, the default display for the current network, click on the "options" or press the left soft key to set.
- GPRS connection: GPRS connection can be set, press "shift" key (left soft key) in permanent connection and necessary connection between conversion, by default as necessary connection.

## 5.9.5 Security Settings

This function provides the safe use of mobile phones and related some Settings.

■ PIN Lock: Ask to input the PIN code. You need to input PIN code when the phone is startup each time, otherwise, you cannot use SIM card. If wrong PIN code is entered for three times, you will have to enter PUK code to unlock it. PUK code is used to unlock and revise the locked PIN code. If the PUK code have been provided or missed, please contact with your network operator.

■ Change Password: to change PIN code, PIN2 code and phone password.

■ Using this function can be locked or unlocked the phone. Enter a password to turn on or off the phone lock operation. When the phone is locked and if you replace SIM card, you will be asked to enter the phone password when boot. Phone password is for 4 to 8 digit.

■ Keyboard Lock: This function is used to lock the phone keyboard operation, so do not use the phone in the case of misuse by careless start some functions to the keyboard. Set automatic keyboard lock time: 5 seconds, 30 seconds, 1 minute, 5 minutes. During the setting time, no keys are pressed will automatically lock the keyboard. When unlock, press any key, you can unlock the prompts on the screen.

■ Privacy Protection

■ Privacy Protection: Privacy protection functions, privacy phonebook, messages, call records, protect your privacy. Key in "1122" to enter to Privacy Protection, you can set the function.

■ The default password for privacy is "0000."

## 5.9.6 Connectivity

### 5.9.6.1 Data Account

■ Select the corresponding data account according to your needed connection network services.

You can edit, add, delete and change default account.

### 5.9.7 Restore factory settings

■ This feature would reset parts of functions as those configured at the factory. The factory

default password is 0000.

## 六、Input Method

This mobile phone provides intelligent input method, including Intelligent Pinyin input, Intelligent English uppercase, Intelligent English lowercase, stroke input, uppercase letters, lowercase letters, digital input.

### 6. 1 Icon of the input method

Into the various editing windows (including edit phonebook, edit message, memos, etc.), the icon of the input method will display:

Intelligent Pinyin input shows "Pin".

Stroke input shows "Bi".

Digital input shows "123".

Uppercase letters show "ABC".

Lowercase letters show "abc".

#### ■ Special character input method

1 In the inputting text message, you can click "\*" to input symbol.

2 Click "Left" or "Right" key to select the inserting symbol.

3 Press Left soft key to confirm the input.

#### ■ Switch input method:

In the editing window, press the # key to switch input methods.

## 七、Appendix

Appendix1: Carry on the following simple examination before you contact with after-sales service, perhaps can help you avoid the redundant maintenance time and expense to waste.

### Common problems and solutions

Common problems	The causes and solutions
-----------------	--------------------------

Unable to boot	1. Check whether the battery power is exhausted, please charge the battery. 2. Check whether the battery is bad contact. Please remove it first and reinstall, then retry boot.
SIM card error	1. SIM card metal surface have dirt, use clean cloth to brush the SIM card metal contact point. 2. Reinstall the SIM card. 3. SIM card is damaged, please replace SIM card.
Poor signal	Check on the signal strength indicator of the screen, 4 bars indicate a strong signal. Less than 2 bars indicate a weak signal
Unable to dial out	1. You may set to hide your phone number, but your network operator does not provide the service. 2. Surrounding environment may have a strong interference signal. 3. You may activate call barring function. 4. You may activate the line2, but your network operator does not provide the service.
Unable to charge	1. Battery may have over-discharge, it need to connect the charger after a period of time to charge 2. Battery performance have been worse
Unable to connect the network	1. The signal is weak, or around the radio interference. 2. SIM card is invalid, please contact with your network operator.
Unable to enter to service menu	1. Your SIM card may not support the service function 2. Parameters of GPRS were changed.

#### Explanation of terms

SMS	Short Message Service
EMS	Enhanced Message Service
SIM	Subscriber Identity Module

GSM	Global System for Mobile Communication
PIN	Personal Identity Number
PUK	PIN Unblocking Key
IMEI	International Mobile Equipment Identity

## Copyright Statement

OINOM has the final interpretation of this manual.

OINOM reserves the right to modify the technical product specifications without prior notice.

OINOM reserves the right to modify the contents of this manual without prior notice.

Without the prior written permission of OINOM, it is strictly prohibited to copy, use, published any content in this manual in any form.

In any case, OINOM disclaims responsible for any loss of data or income which caused by mobile phone reasons.

---

### **FCC RF Exposure Information and Statement**

The SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device types Mobile (FCC ID: 2ABUF-LM127) has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification for use at the head is 1.169W/kg and when properly worn on the body is 0.533W/kg. This device was tested for typical body-worn operations with the back of the handset kept 10mm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain a 10mm separation distance between the user's body and the back of the handset. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.

### **FCC WARNING**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE 3: This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.