




FCC Radio Test Report

FCC ID: 2A3BD-OSRDR02C1

This report concerns: Original Grant

Project No. : 2404C146
Equipment : AI Delivery Robot
Brand Name : ORIONSTAR
Test Model : OS-R-DR02-C
Series Model : OS-R-DR02-C1, OS-R-DR02-C2
Applicant : Beijing Orion Star Technology Co., Ltd
Address : Room A-2570, 2nd Floor, No. 30, Shixing Street, Shijingshan District, Beijing, P.R. China
Manufacturer : Beijing Orion Star Technology Co., Ltd
Address : Room A-2570, 2nd Floor, No. 30, Shixing Street, Shijingshan District, Beijing, P.R. China
Factory : Guangdong Mingji Hi-Tech Electronics Co.,Ltd
Address : No.12 Changfu Road, Qinghutou, Tangxia Town, Dongguan, Guangdong, China
Date of Receipt : May 27, 2024
Date of Test : Jun. 18, 2024 ~ Jul. 16, 2024
Issued Date : Aug. 16, 2024
Report Version : R01
Test Sample : Engineering Sample No.: DG20240527177-3 for conducted, DG202406075 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by : 
Sheldon Ou
Approved by : 
Chay Cai

Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	11
3.3 PARAMETERS OF TEST SOFTWARE	12
3.4 DUTY CYCLE	13
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.6 SUPPORT UNITS	14
3.7 CUSTOMER INFORMATION DESCRIPTION	14
4 . AC POWER LINE CONDUCTED EMISSIONS	15
4.1 LIMIT	15
4.2 TEST PROCEDURE	15
4.3 DEVIATION FROM TEST STANDARD	15
4.4 TEST SETUP	16
4.5 EUT OPERATION CONDITIONS	16
4.6 TEST RESULTS	16
5 . RADIATED EMISSIONS	17
5.1 LIMIT	17
5.2 TEST PROCEDURE	18
5.3 DEVIATION FROM TEST STANDARD	19
5.4 TEST SETUP	19
5.5 EUT OPERATION CONDITIONS	21
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	21
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	21
5.8 TEST RESULTS - ABOVE 1000 MHZ	21
6 . BANDWIDTH	22
6.1 LIMIT	22
6.2 TEST PROCEDURE	22

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	22
6.4 TEST SETUP	22
6.5 EUT OPERATION CONDITIONS	22
6.6 TEST RESULTS	22
7 . MAXIMUM OUTPUT POWER	23
7.1 LIMIT	23
7.2 TEST PROCEDURE	23
7.3 DEVIATION FROM STANDARD	23
7.4 TEST SETUP	23
7.5 EUT OPERATION CONDITIONS	23
7.6 TEST RESULTS	23
8 . CONDUCTED SPURIOUS EMISSIONS	24
8.1 LIMIT	24
8.2 TEST PROCEDURE	24
8.3 DEVIATION FROM STANDARD	24
8.4 TEST SETUP	24
8.5 EUT OPERATION CONDITIONS	24
8.6 TEST RESULTS	24
9 . POWER SPECTRAL DENSITY	25
9.1 LIMIT	25
9.2 TEST PROCEDURE	25
9.3 DEVIATION FROM STANDARD	25
9.4 TEST SETUP	25
9.5 EUT OPERATION CONDITIONS	25
9.6 TEST RESULTS	25
10 . MEASUREMENT INSTRUMENTS LIST	26
11 . EUT TEST PHOTO	29
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	35
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	38
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	43
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	46
APPENDIX E - BANDWIDTH	67
APPENDIX F - MAXIMUM OUTPUT POWER	71

Table of Contents**Page****APPENDIX G - CONDUCTED SPURIOUS EMISSIONS****75****APPENDIX H - POWER SPECTRAL DENSITY****82**

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-5-2404C146	R00	Original Report.	Jul. 25, 2024	Invalid
BTL-FCCP-5-2404C146	R01	Modified the comments.	Aug. 16, 2024	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

(1) "N/A" denotes test is not applicable in this test report.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

For Radiated emissions 1GHz~18GHz:

The test facilities used to collect the test data in this report is at the location of Room 102 & Room 701, Building 3, No.9, Jinshagang 1st Road, Dalang, Dongguan City, Guangdong People's Republic of China.

For others:

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan City, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB18 (3m)	CISPR	1GHz ~ 6GHz	4.48
		6GHz ~ 18GHz	3.88

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Conducted Spurious Emission	1.9 dB
Power Spectral Density	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Tested Date
AC Power Line Conducted Emissions	25°C	50%	AC 120V/60Hz	Hayden Chen	Jun .20, 2024
Radiated Emissions-9kHz to 30 MHz	21°C	50%	AC 120V/60Hz	Hayden Chen	Jun. 27, 2024
Radiated Emissions-30MHz to 1000MHz	25°C	60%	AC 120V/60Hz	Jensen Zhou	Jul. 12, 2024
Radiated Emissions-Above 1000MHz	23-25°C	53-60%	AC 120V/60Hz	Allen Tong Jensen Zhou	Jul. 10, 2024 Jul. 13, 2024
Bandwidth	24°C	45%	DC 12V	Arvin Tong	Jul. 09, 2024
Maximum Output Power	22-26°C	48-59%	DC 12V	Oliver Wang Steve Zhou	Jul. 04, 2024~ Jul. 11, 2024
Conducted Spurious Emissions	24°C	45%	DC 12V	Arvin Tong	Jul. 09, 2024
Power Spectral Density	24°C	45%	DC 12V	Arvin Tong	Jul. 09, 2024

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	AI Delivery Robot
Brand Name	ORIONSTAR
Test Model	OS-R-DR02-C
Series Model	OS-R-DR02-C1, OS-R-DR02-C2
Model Difference(s)	Differences in appearance only.
Hardware Version	V0.4
Software Version	V10.1
Power Source	1# DC Voltage supplied from Robot Charging Dock. 2# Supplied from Lithium battery. Model: 7S8P
Power Rating	1# DC 32V / 7A 2# DC 25.55V, 24.3Ah, 650.865Wh
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 144.4 Mbps
Maximum Output Power	IEEE 802.11b: 25.64 dBm (0.3664 W)

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Antenna Specification:

Ant.	Manufacturer	P/N	Antenna Type	Connector	Gain (dBi)
1	HUIZHOU SPEED WIRELESS TECHNOLOGY CO., LTD	F-0A-5Q-0008-000-K0	FPC	N/A	0.37
2		F-0A-5Q-0009-000-K0	FPC	N/A	1.32

Note:

- This EUT supports CDD, and all antenna gains are not equal, so Directional gain= $10\log[(10^{G1/20}+10^{G2/20}+...10^{GN/20})^2/N]$ dBi, that is Directional gain= $10\log[(10^{0.37/20}+10^{1.32/20})^2/2]$ dBi =3.87.

4. Table for Antenna Configuration:

Operating Mode	2TX
TX Mode	
IEEE 802.11b	V(Ant. 1 + Ant. 2)
IEEE 802.11g	V(Ant. 1 + Ant. 2)
IEEE 802.11n(HT20)	V(Ant. 1 + Ant. 2)

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX B Mode Channel 06

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 4	TX B Mode Channel 06

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 4	TX B Mode Channel 06

Radiated emissions test- Above 1GHz	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11

Conducted test	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11

NOTE:


- (1) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (2) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX B Mode Channel 06 is found to be the worst case and recorded.
- (3) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (4) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (5) For radiated emission Harmonic above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Vertical and recorded.
- (6) For radiated emission Bandedge above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Horizontal and recorded.

3.3 PARAMETERS OF TEST SOFTWARE

Test Software Version	QRCT_V4.0		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	21	22	21
IEEE 802.11g	14	16	16
IEEE 802.11n(HT20)	15	21	13


3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
 If duty cycle is $< 98\%$, duty factor shall be considered.
 The output power = measured power + duty factor.

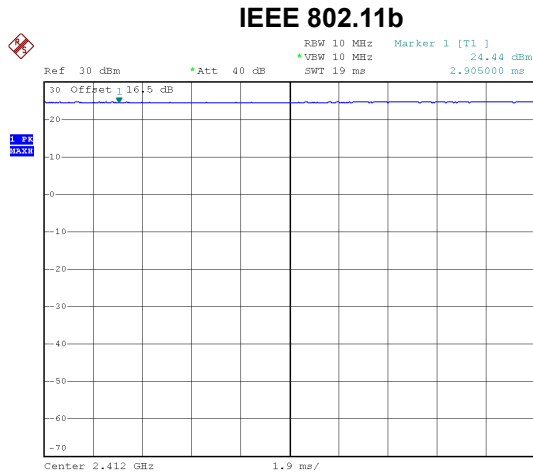


Date: 9.JUL.2024 10:46:11

Duty cycle = 1000.000 ms / 1000.000 ms = 100%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$

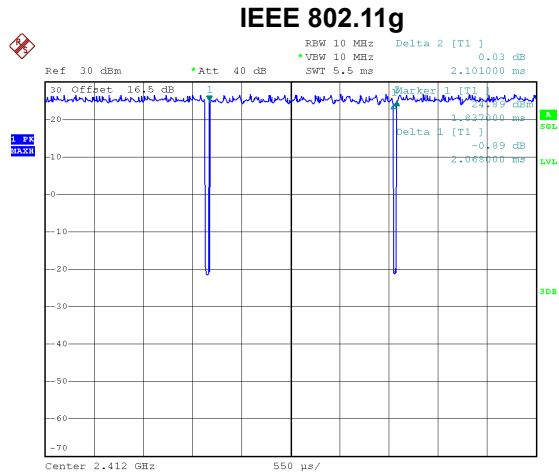

Date: 9.JUL.2024 10:53:51

Duty cycle = 2.068 ms / 2.101 ms = 98.43%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$

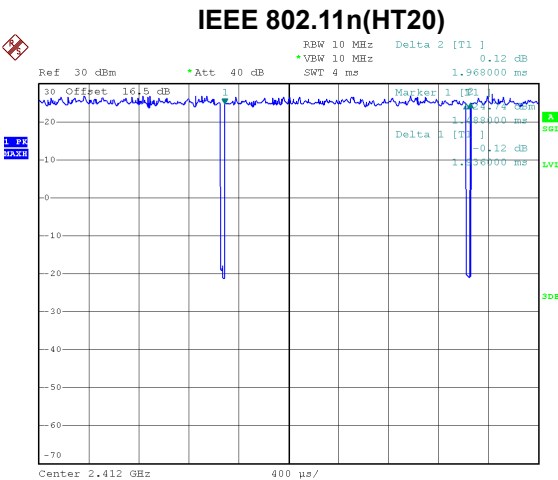

Date: 9.JUL.2024 10:57:39

Duty cycle = 1.936 ms / 1.968 ms = 98.37%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$

NOTE:

For IEEE 802.11b:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.


For IEEE 802.11g:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

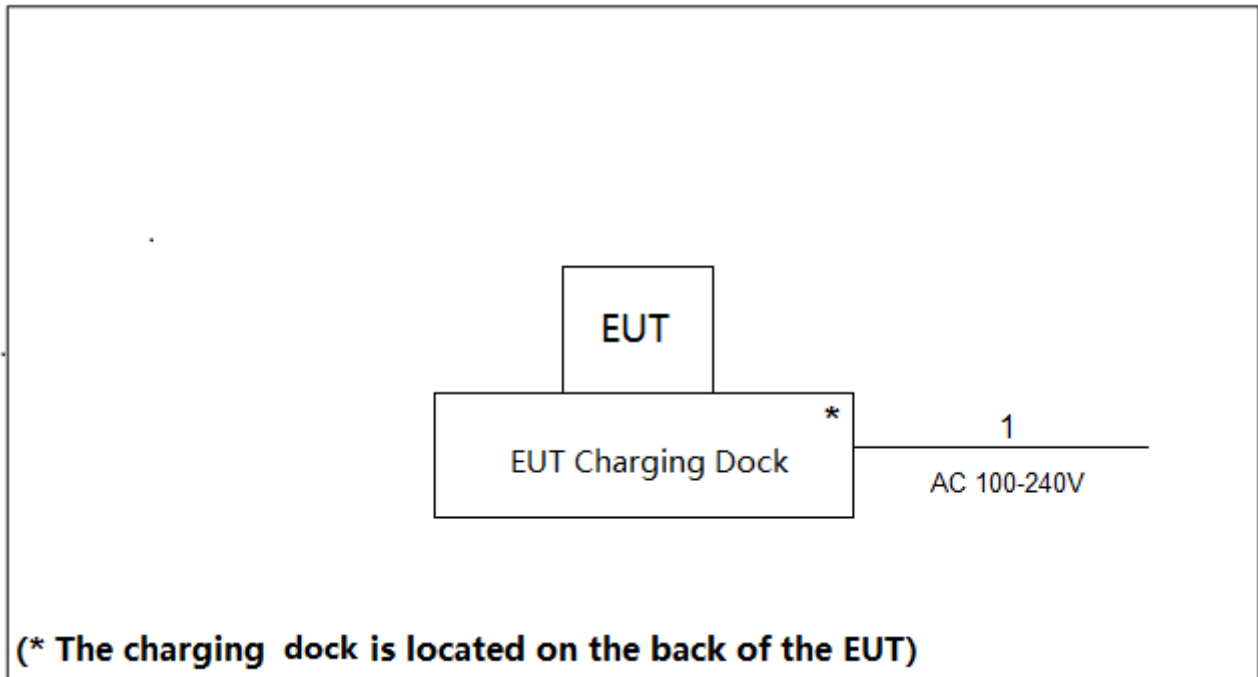

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	AC Cable	NO	NO	0.2m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

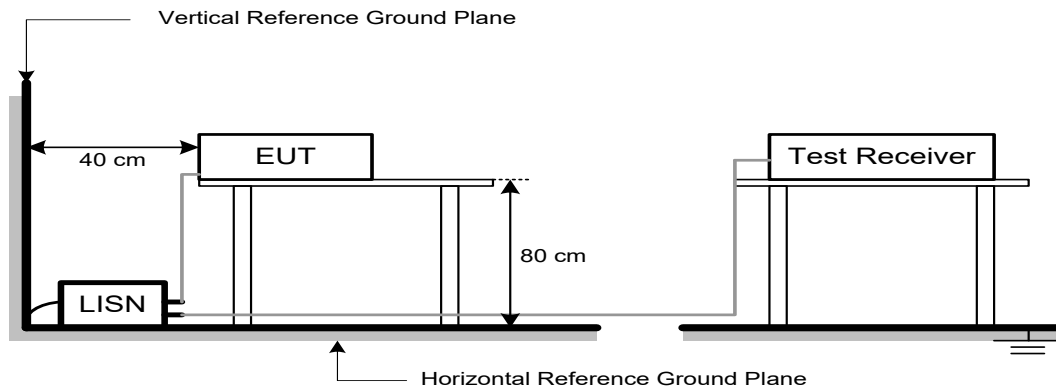

4.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dBμV/m)		Harmonic at 1m (dBμV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 4)	63.5 (Note 4)

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$$20\log(d_{\text{limit}}/d_{\text{measure}})=20\log(3/1)=9.5\text{ dB.}$$

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a thickness 0.1 meter above the ground at a 3 meter semi-anechoic chamber. (below 1GHz).
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a thickness 0.1 meter above the ground at a 3 meter semi-anechoic chamber. (above 1GHz).
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

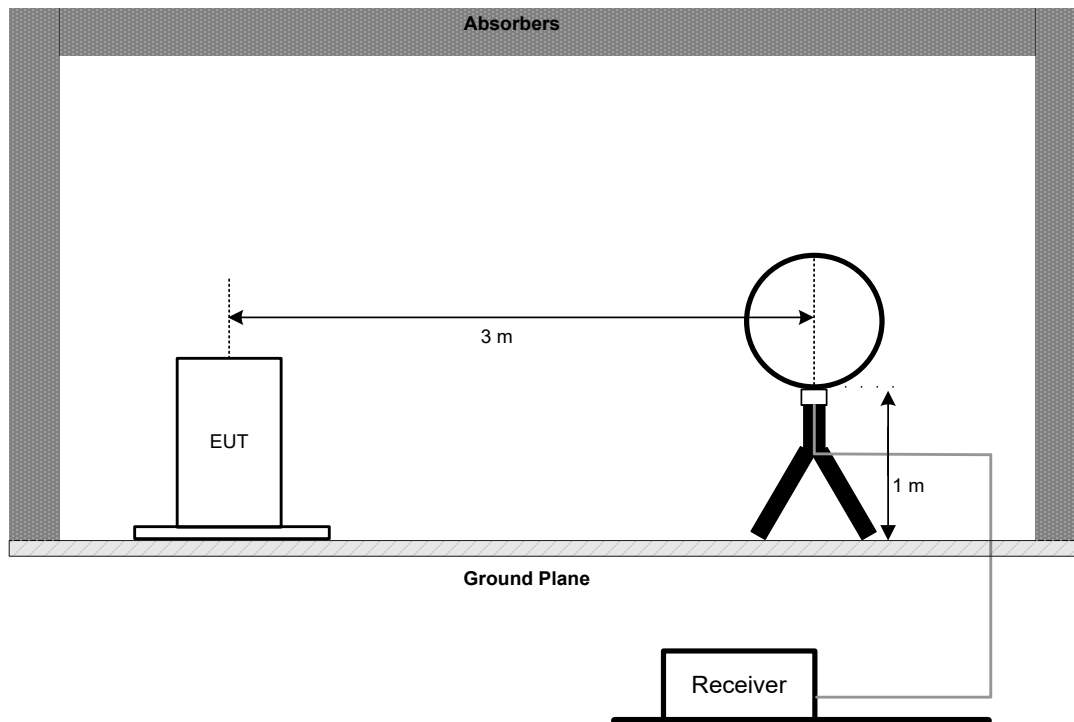


30 MHz to 1 GHz

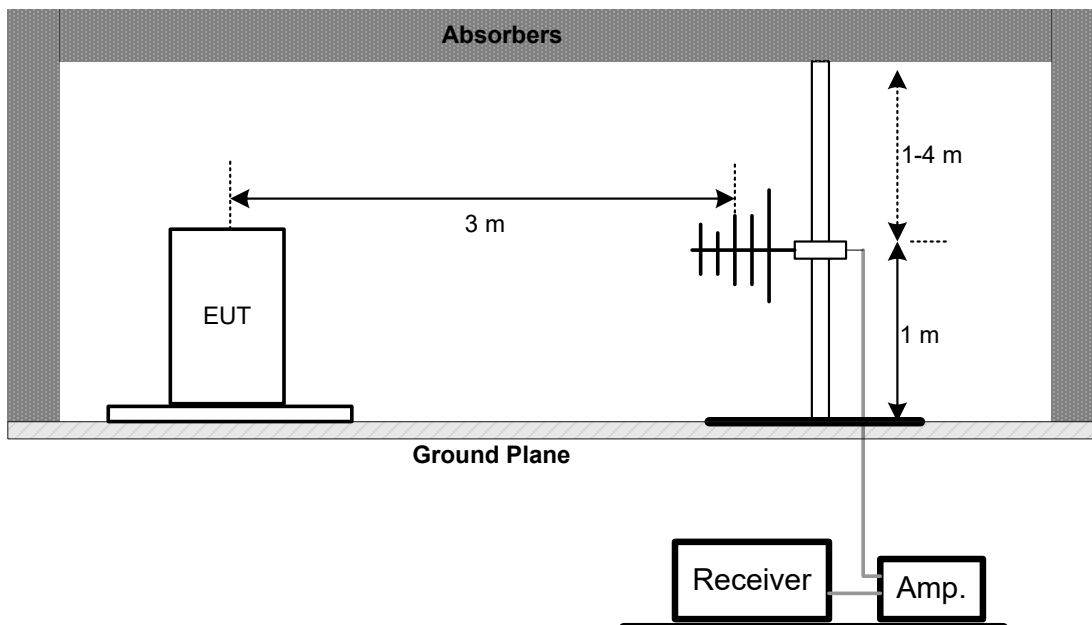


Above 1 GHz Band edge

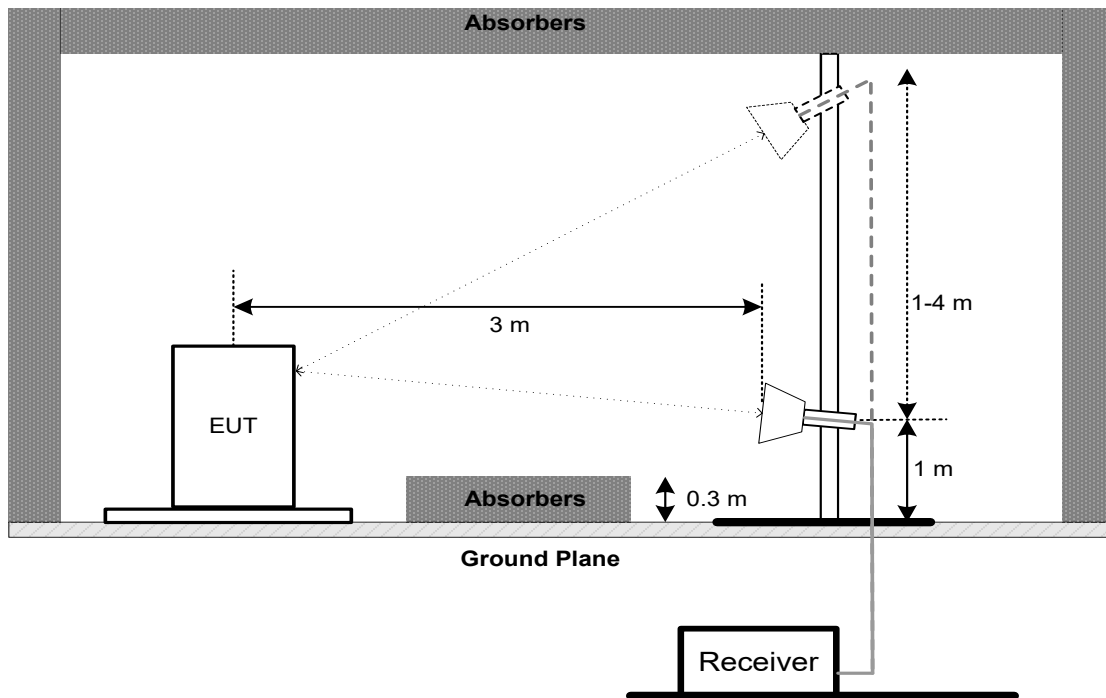

Harmonic (1 GHz to 18 GHz)

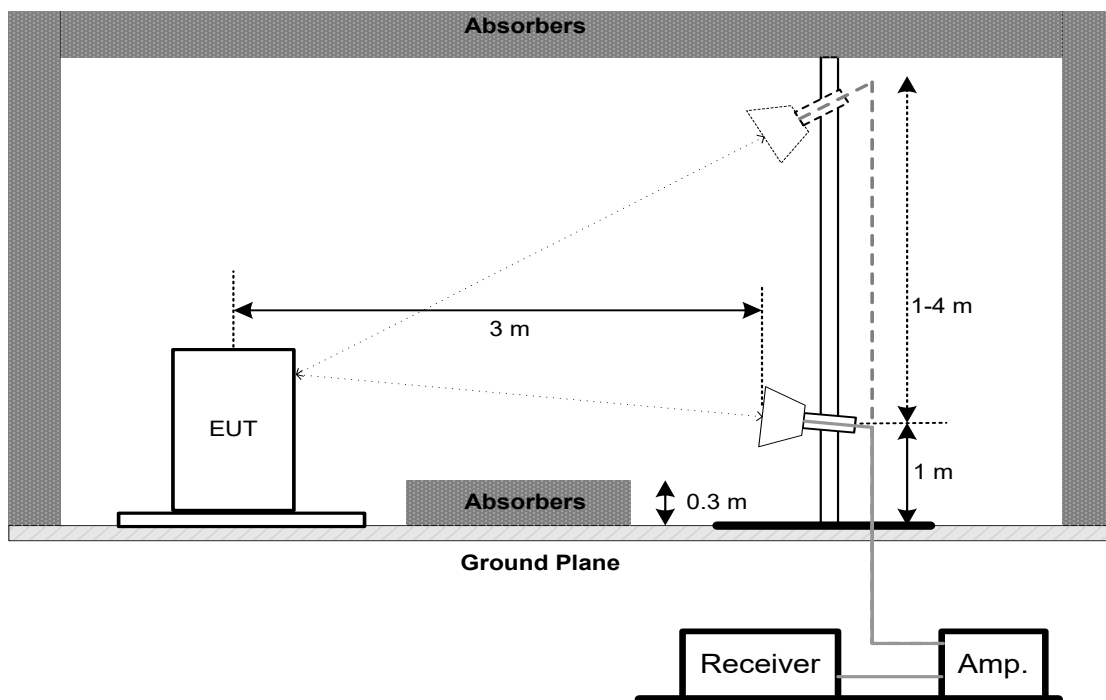

Harmonic (18 GHz to 26.5 GHz)

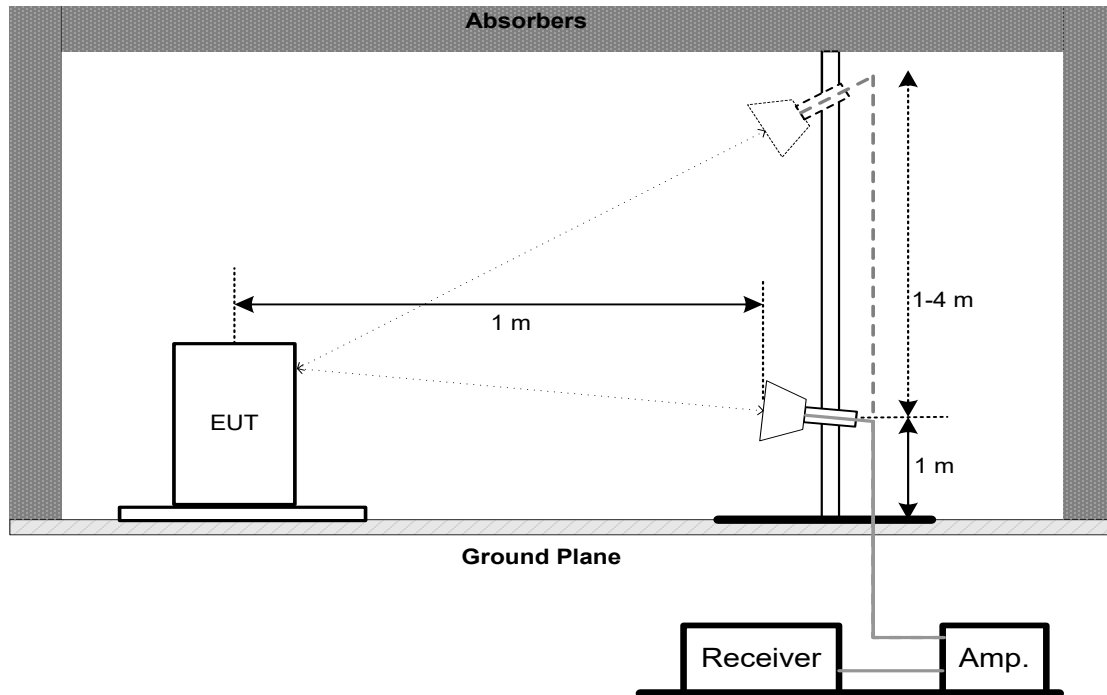

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	300 kHz For 20MHz 1 MHz For 40MHz
VBW	1 MHz For 20MHz 3 MHz For 40MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 Watt or 30.00 dBm


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.2.3.1 (for AVG power) of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

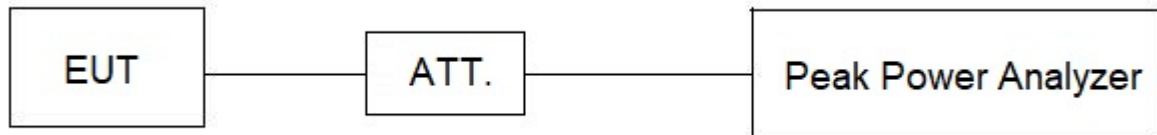

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. CONDUCTED SPURIOUS EMISSIONS

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. POWER SPECTRAL DENSITY

9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	25 MHz (20 MHz) / 60 MHz (40 MHz)
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESR3	103027	Jun. 01, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 22, 2024
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Nov. 27, 2024
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60 B-034	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 22, 2024
3	Cable	N/A	RW2350-3.8A-NMB M-1.5M	N/A	Jun. 09, 2025
4	Cable	N/A	RG 213/U	N/A	Jun. 09, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	ETS	9*6*6	N/A	Jul. 11, 2024

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1462	Dec. 13, 2024
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 13, 2024
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	Nov. 17, 2024
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 06, 2025
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 06, 2025
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 06, 2025
7	Receiver	Agilent	N9038A	MY52130039	Dec. 22, 2024
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 16, 2025

Radiated Emissions –1GHz to 18GHz For CB18

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Nov. 17, 2024
4	Cable	RegalWay	RWLP50-4.0A-SMS M-1.3M	N/A	Jan. 09, 2025
5	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MRA-3M	N/A	Jan. 09, 2025
6	Cable	RegalWay	RWLP50-4.0A-SMS M-9M	N/A	Jan. 09, 2025
7	966 Chamber room	ETS	RFD-100(SVSWR)	Q2179	Jan. 09, 2025
8	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210509A18ES	Aug. 08, 2024
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 31, 2025
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	STI	STI15-9912	N/A	Nov. 17, 2024

Radiated Emissions – Above 18GHz For CB03

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	May 31, 2025
2	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Nov. 17, 2024
3	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 26, 2024
4	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 26, 2024
5	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1227	Oct. 10, 2024
6	Positioning Controller	MF	MF-7802	N/A	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Receiver	Agilent	N9038A	MY52130039	Dec.22,2024
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Nov. 17, 2024
10	Double Ridged Guide Antenna	ETS	3115	75846	Mar. 20, 2025
11	Cable	RegalWay	RWLP50-4.0A-SMS M-12.5M	N/A	Feb. 19, 2025
12	Cable	RegalWay	RWLP50-4.0A-NM RASM-2.5M	N/A	Aug. 08, 2024
13	Cable	RegalWay	RWLP50-4.0A-NM RASMRA-0.8M	N/A	Aug. 08, 2024
14	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Nov. 19, 2024
15	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Nov. 17, 2024
16	966 Chamber room	CM	9*6*6	N/A	May 19, 2025

Bandwidth & Conducted Spurious Emissions & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	May 31, 2025
2	Attenuator	Talent Microwave	TA10A0-S-26.5	N/A	N/A
3	DC Block	N/A	N/A	N/A	N/A
4	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
5	DC power supply	UNI-T	UDP6721	AWP7224050031	Mar. 20, 2025
6	Attenuator	Talent Microwave	TA10A0-S-26.5	N/A	N/A

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 31, 2025
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 31, 2025
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A
4	DC power supply	UNI-T	UDP6721	AWP7224050031	Mar. 20, 2025

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



11. EUT TEST PHOTO



AC Power Line Conducted Emissions Test Photos



Radiated Emissions Test Photos



9 kHz to 30 MHz

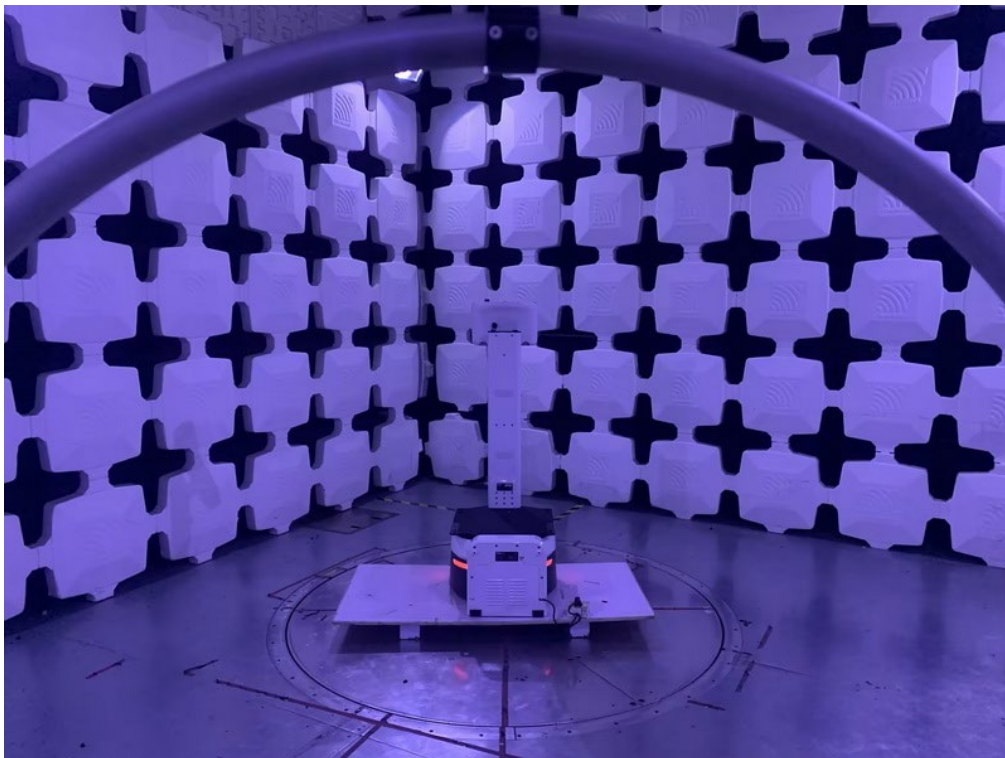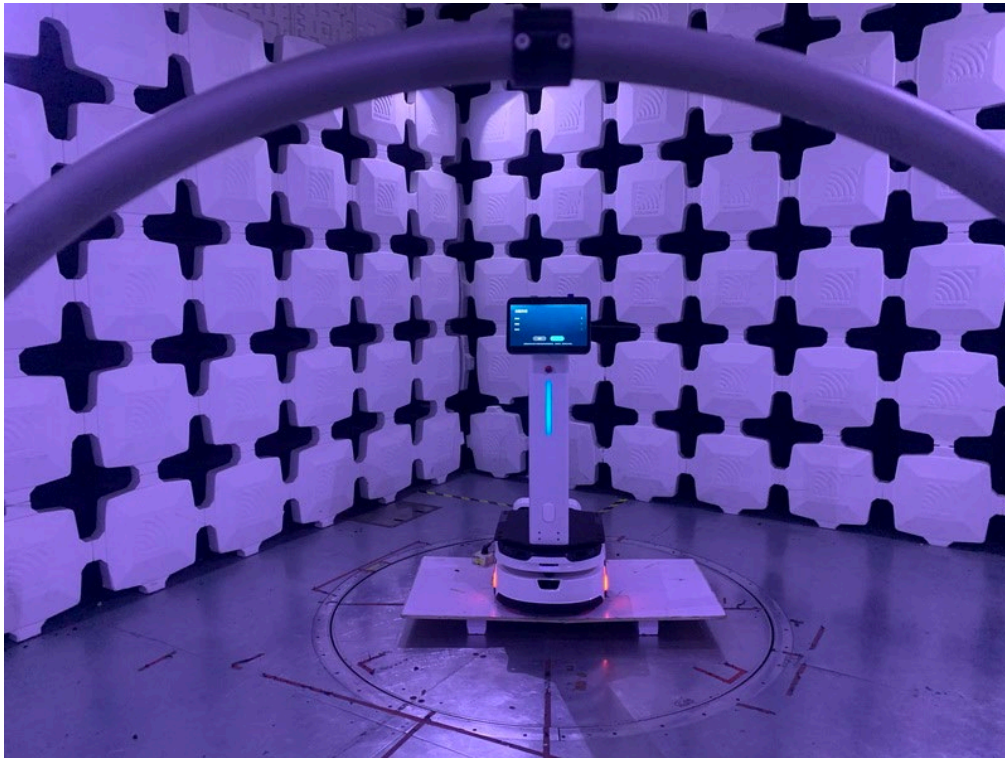

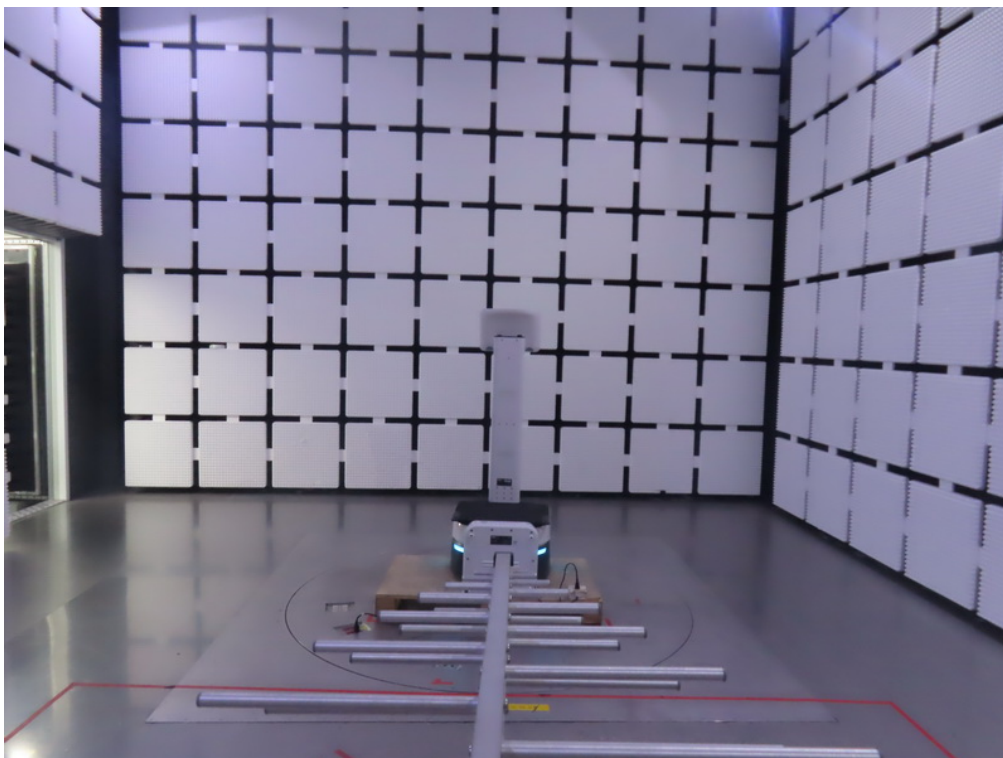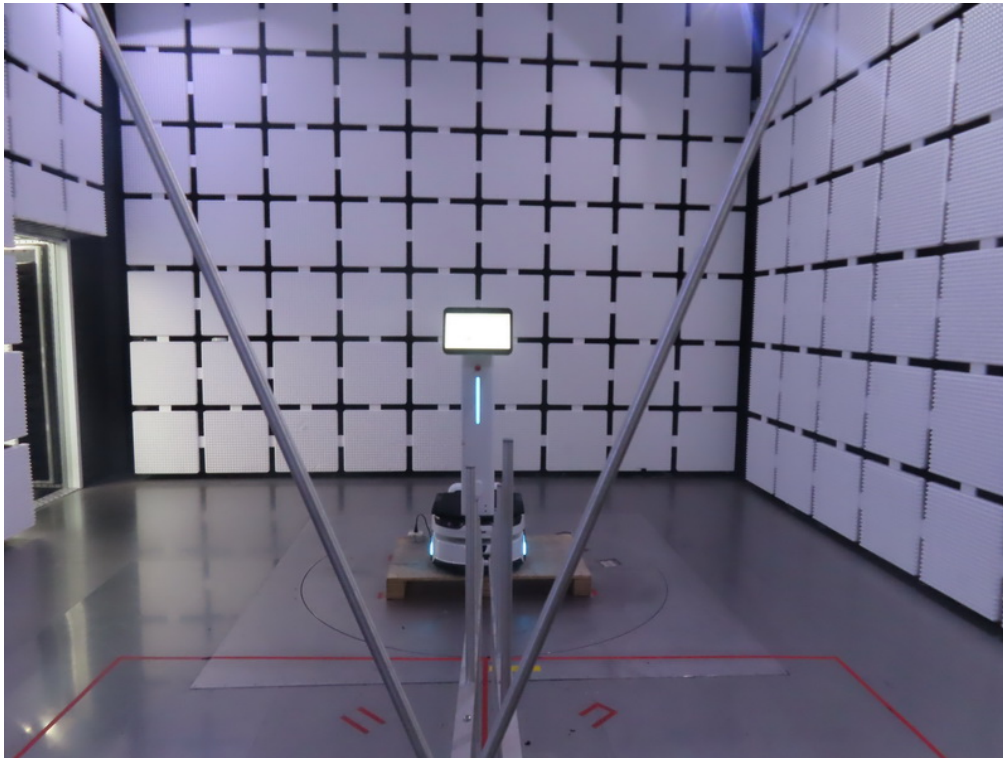Radiated Emissions Test Photos**30 MHz to 1 GHz**



Radiated Emissions Test Photos

Band edge & Harmonic (1 GHz to 18 GHz)

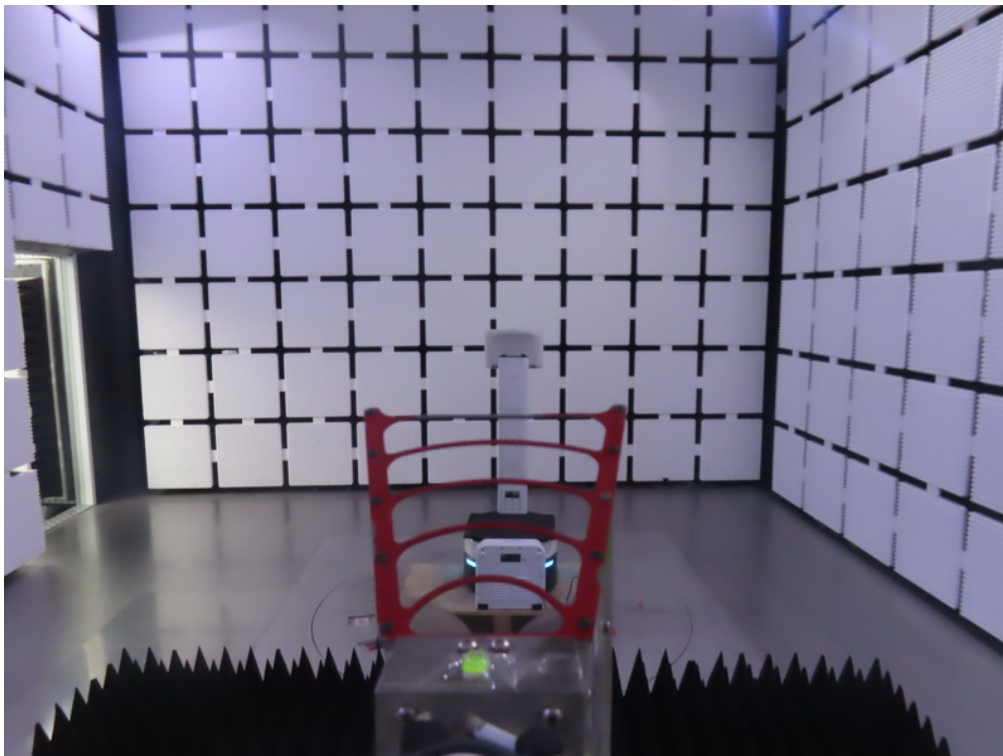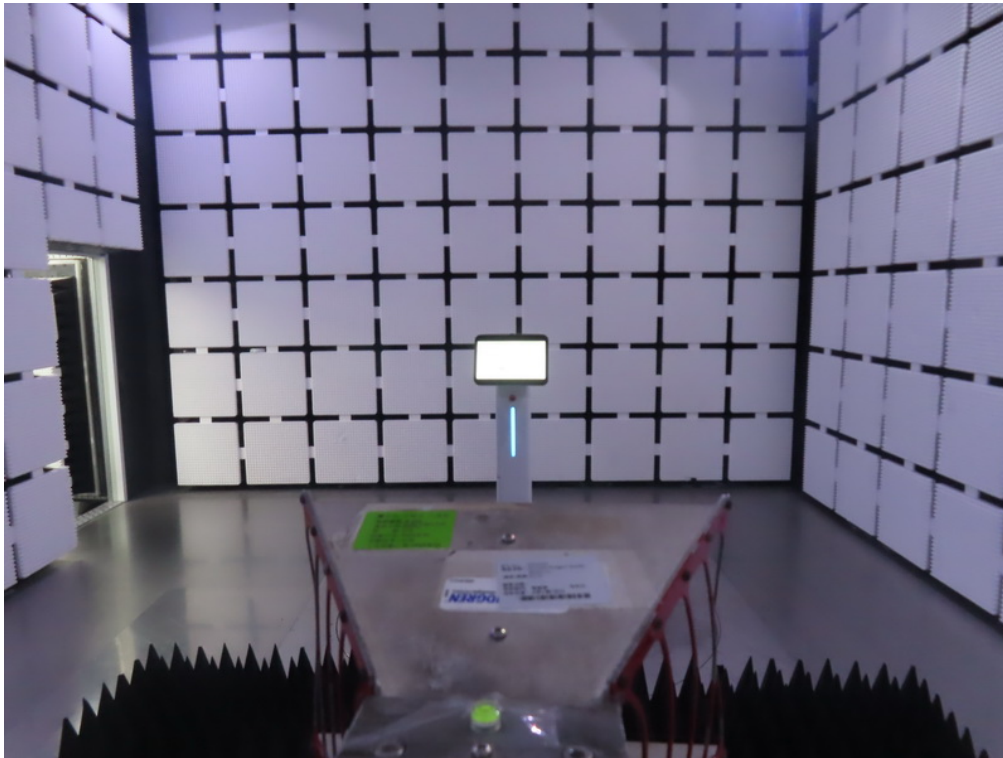


Radiated Emissions Test Photos

Harmonic (18 GHz to 26.5 GHz)

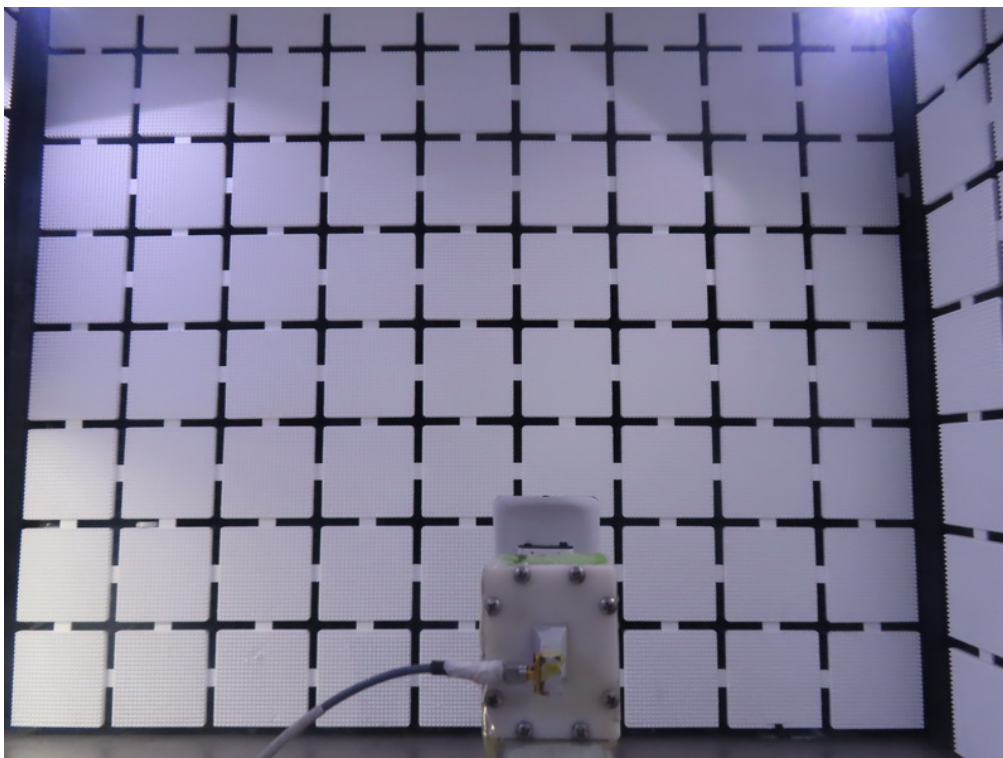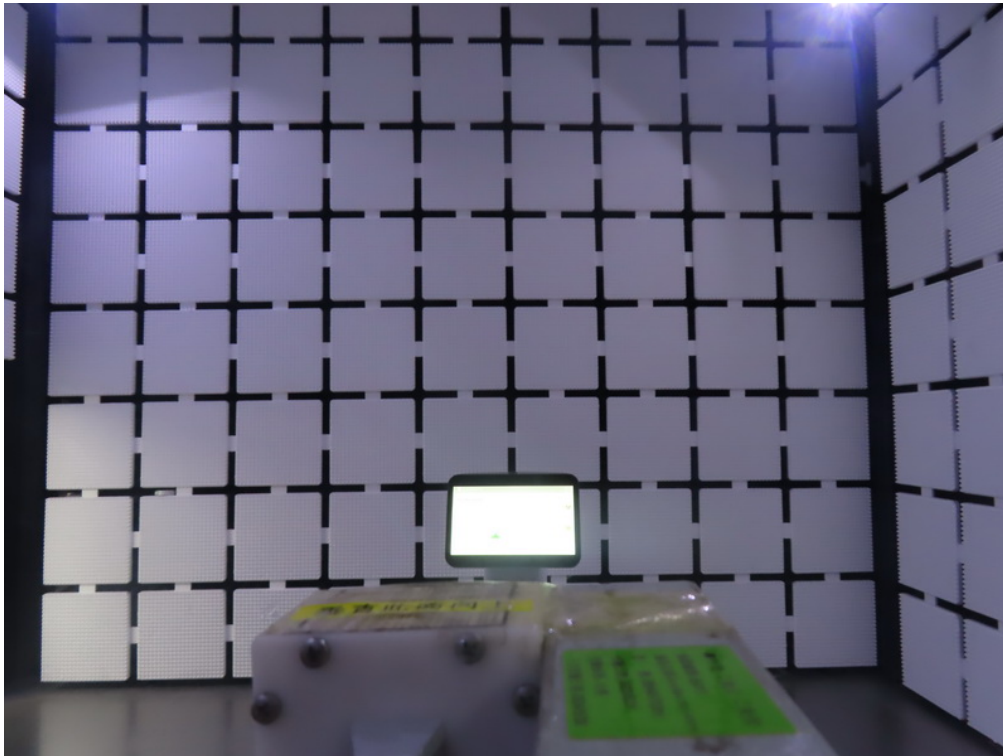


Conducted Test Photos

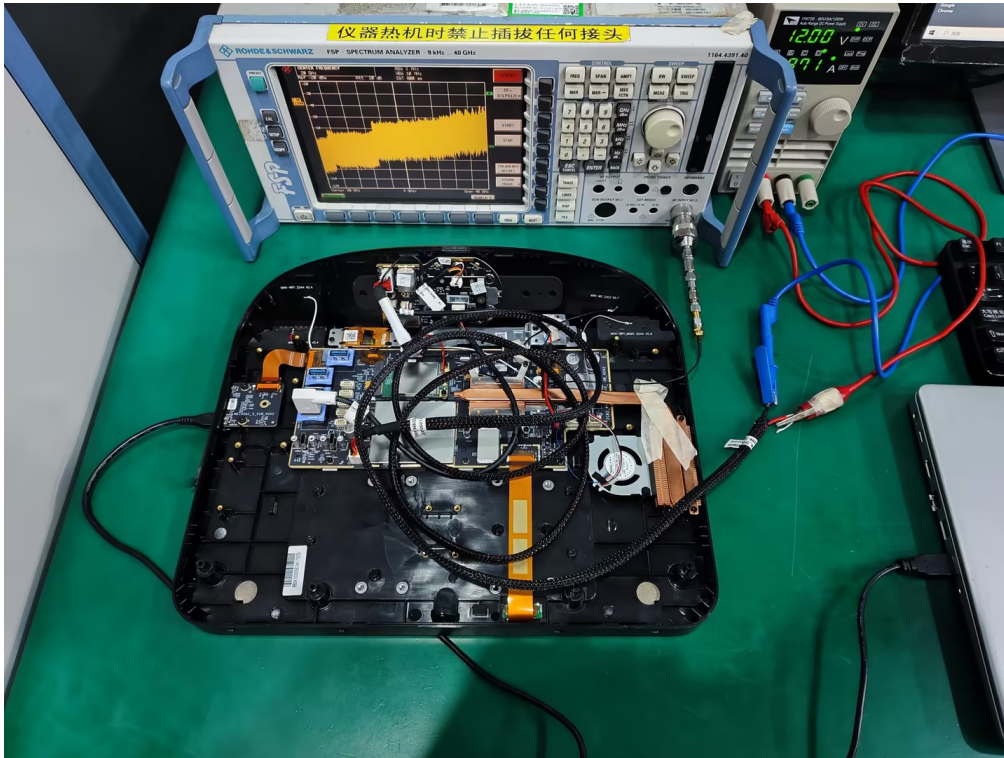

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX B Mode Channel 06	Phase	Line
-----------	----------------------	-------	------

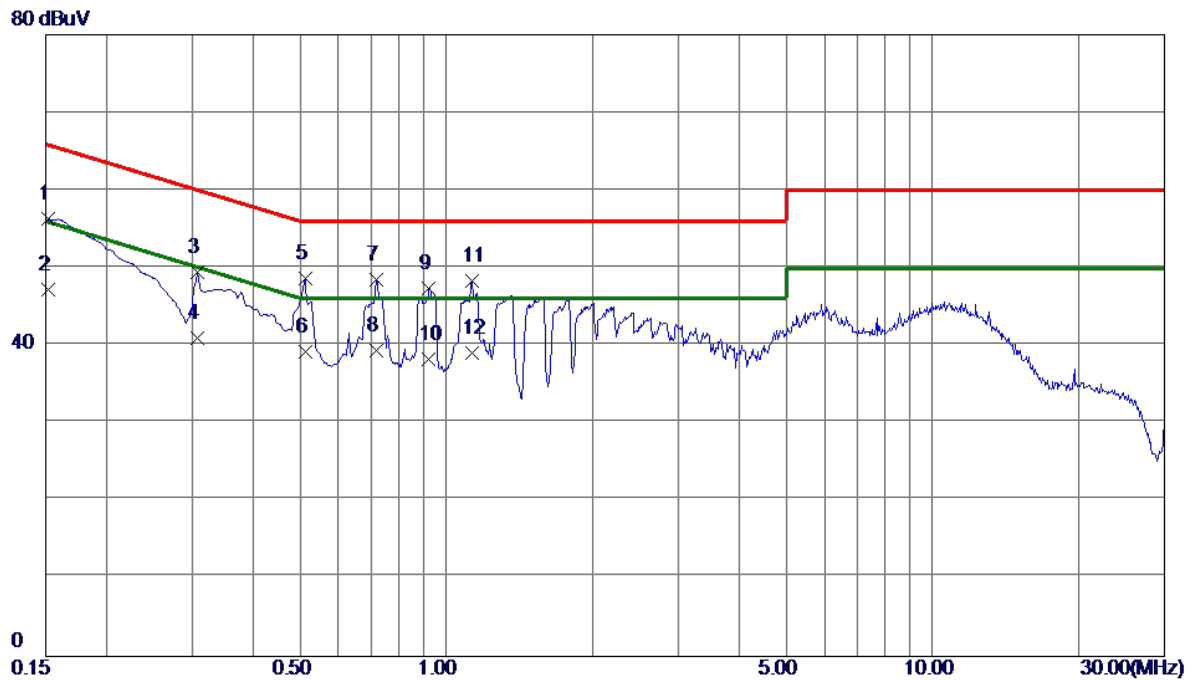


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1522	46.33	9.97	56.30	65.88	-9.58	QP	
2	0.1522	37.30	9.97	47.27	55.88	-8.61	AVG	
3	0.3075	39.18	10.19	49.37	60.04	-10.67	QP	
4	0.3075	30.80	10.19	40.99	50.04	-9.05	AVG	
5	0.5122	37.95	10.65	48.60	56.00	-7.40	QP	
6	0.5122	28.60	10.65	39.25	46.00	-6.75	AVG	
7	0.7192	37.42	11.02	48.44	56.00	-7.56	QP	
8 *	0.7192	28.40	11.02	39.42	46.00	-6.58	AVG	
9	0.9217	36.22	11.21	47.43	56.00	-8.57	QP	
10	0.9217	27.10	11.21	38.31	46.00	-7.69	AVG	
11	1.1310	36.98	11.30	48.28	56.00	-7.72	QP	
12	1.1310	27.69	11.30	38.99	46.00	-7.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Phase	Neutral
-----------	----------------------	-------	---------

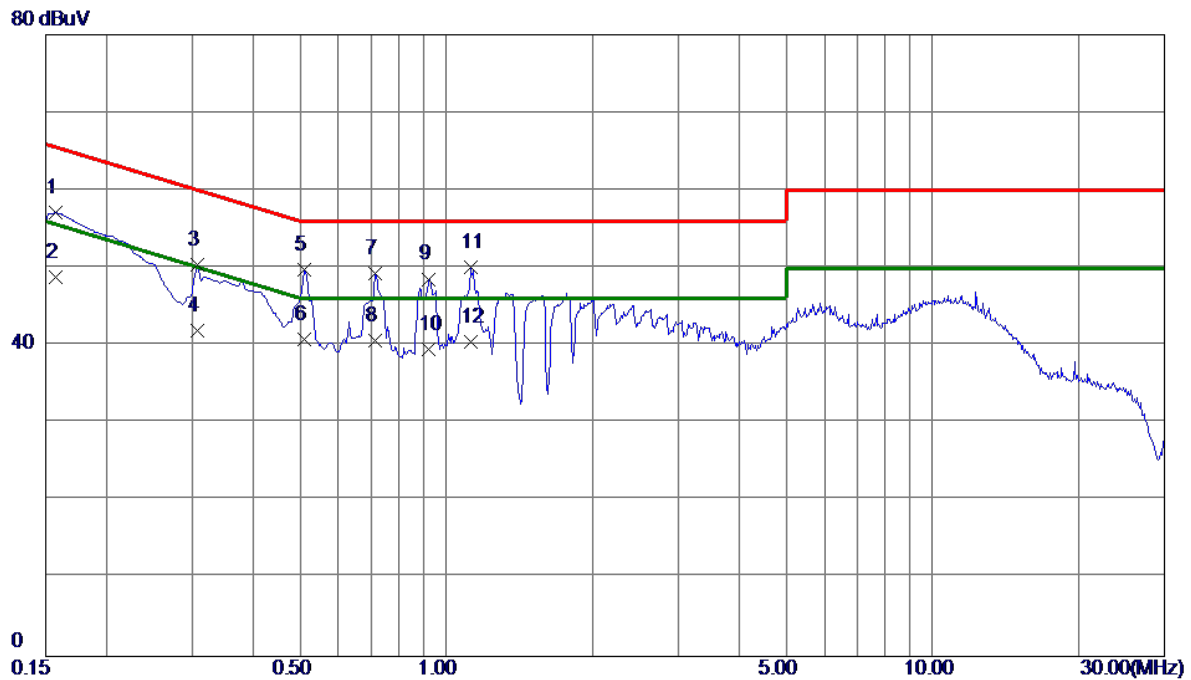


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1568	47.12	9.93	57.05	65.63	-8.58	QP	
2	0.1568	38.81	9.93	48.74	55.63	-6.89	AVG	
3	0.3075	40.30	10.15	50.45	60.04	-9.59	QP	
4	0.3075	31.70	10.15	41.85	50.04	-8.19	AVG	
5	0.5100	39.19	10.61	49.80	56.00	-6.20	QP	
6 *	0.5100	30.20	10.61	40.81	46.00	-5.19	AVG	
7	0.7147	38.31	10.97	49.28	56.00	-6.72	QP	
8	0.7147	29.60	10.97	40.57	46.00	-5.43	AVG	
9	0.9172	37.40	11.16	48.56	56.00	-7.44	QP	
10	0.9172	28.40	11.16	39.56	46.00	-6.44	AVG	
11	1.1220	38.86	11.25	50.11	56.00	-5.89	QP	
12	1.1220	29.20	11.25	40.45	46.00	-5.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX B Mode Channel 06	Polarization	Ant 0°
-----------	----------------------	--------------	--------

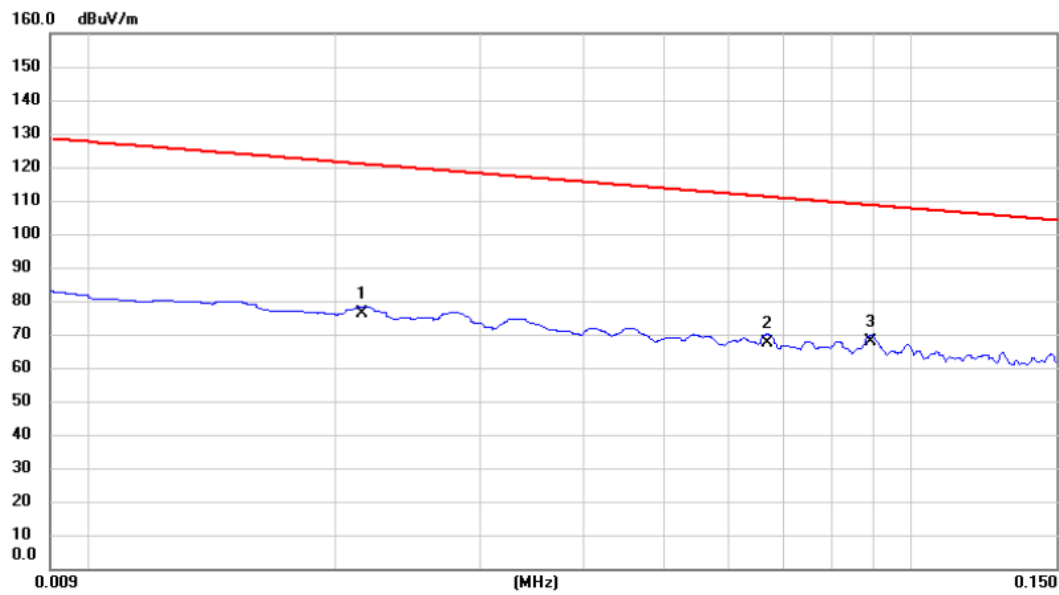


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0215	55.46	20.85	76.31	120.96	-44.65	AVG	
2		0.0668	46.31	21.26	67.57	111.11	-43.54	AVG	
3	*	0.0892	46.47	21.30	67.77	108.60	-40.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Polarization	Ant 0°
-----------	----------------------	--------------	--------

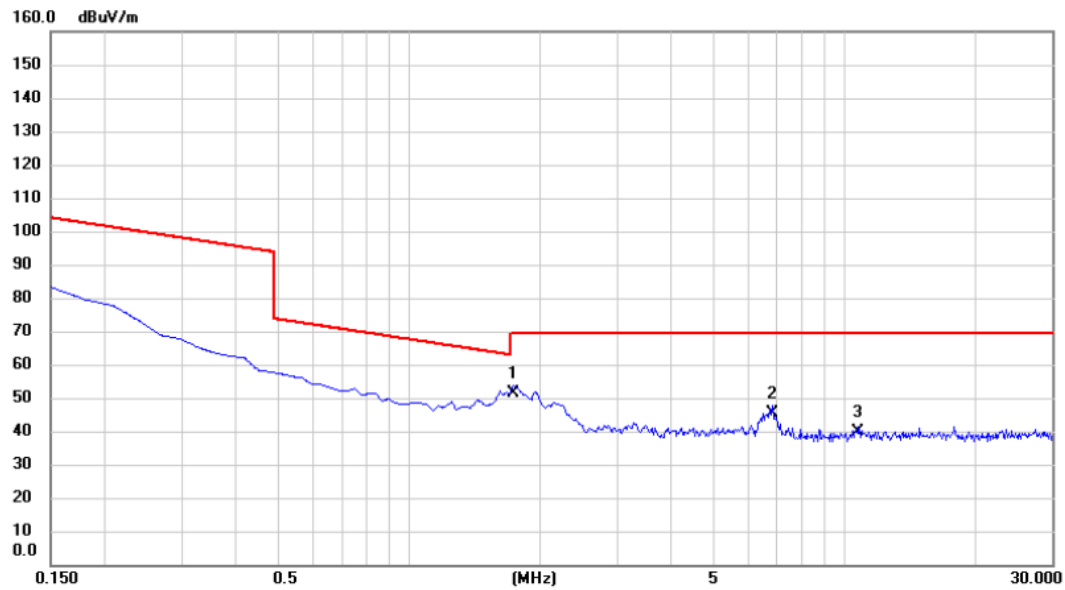


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.7320	30.21	21.13	51.34	69.54	-18.20	QP	
2		6.8065	24.06	21.19	45.25	69.54	-24.29	QP	
3		10.7467	18.45	21.21	39.66	69.54	-29.88	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Polarization	Ant 90°
-----------	----------------------	--------------	---------

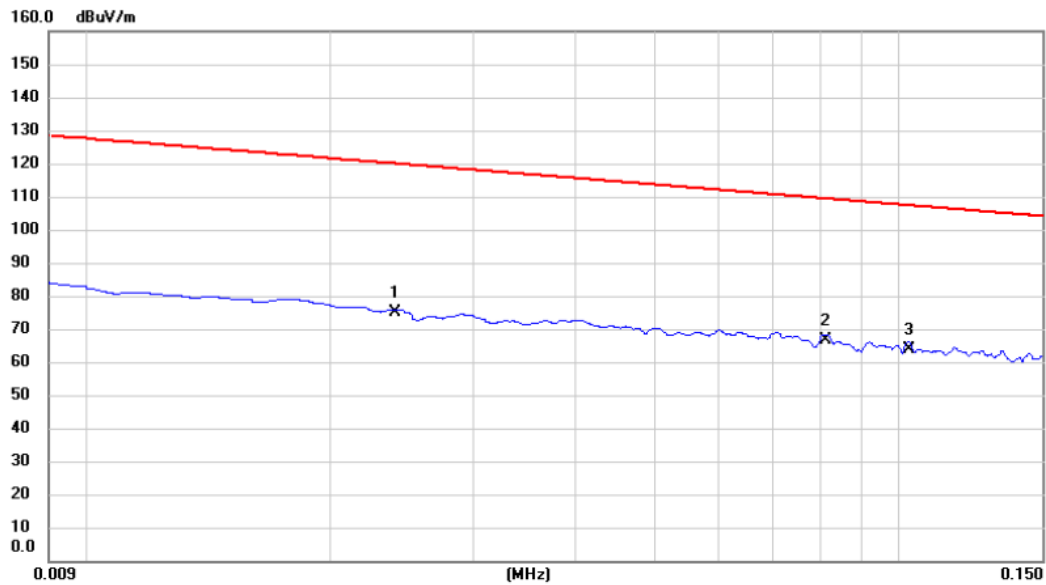


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.0240	53.94	20.92	74.86	120.00	-45.14	AVG	
2	*	0.0813	45.13	21.30	66.43	109.40	-42.97	AVG	
3		0.1028	42.67	21.33	64.00	107.37	-43.37	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Polarization	Ant 90°
-----------	----------------------	--------------	---------

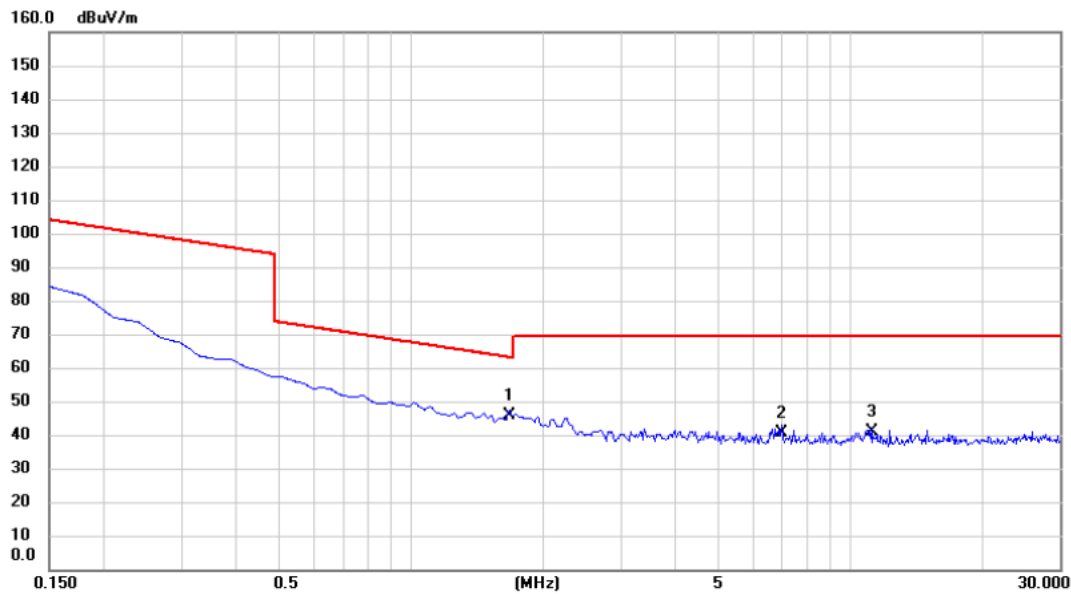

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.6724	24.75	21.13	45.88	63.14	-17.26	QP	
2		6.9856	19.31	21.19	40.50	69.54	-29.04	QP	
3		11.1647	19.63	21.19	40.82	69.54	-28.72	QP	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX B Mode Channel 06	Polarization	Vertical
-----------	----------------------	--------------	----------

80 dBuV/m

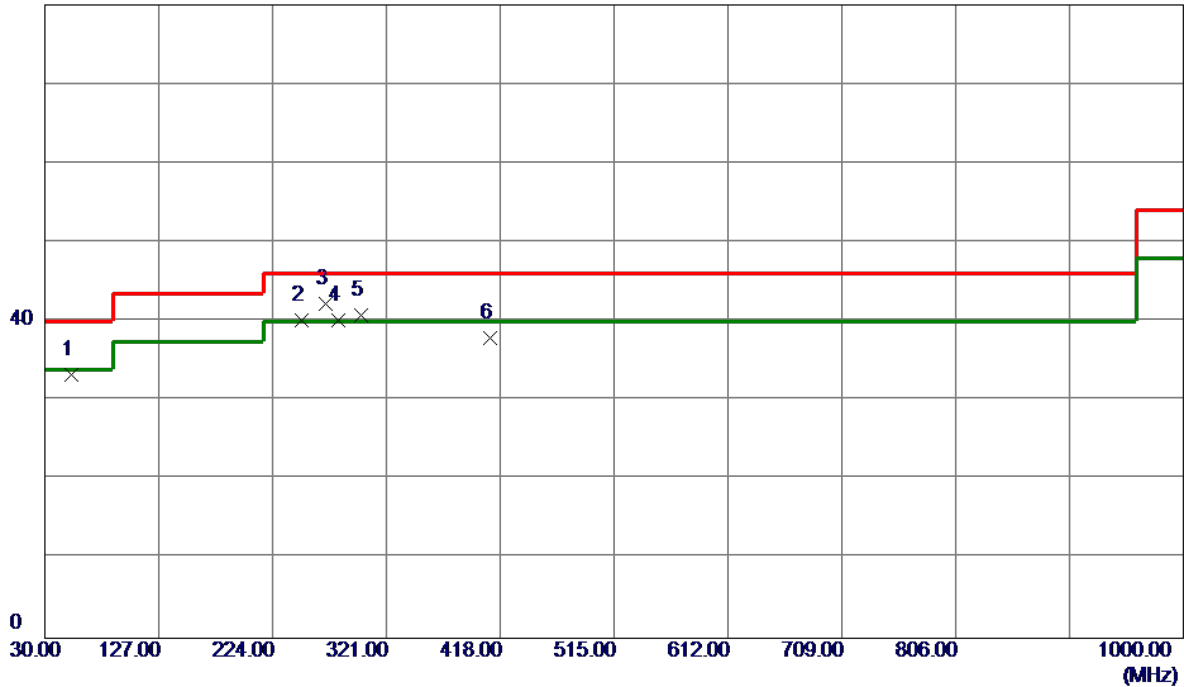


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	52.3100	44.55	-11.33	33.22	40.00	-6.78	Peak	
2	249.2200	52.61	-12.38	40.23	46.00	-5.77	Peak	
3 *	269.5900	53.85	-11.54	42.31	46.00	-3.69	QP	
4	279.7750	51.24	-11.05	40.19	46.00	-5.81	QP	
5	299.1750	51.43	-10.60	40.83	46.00	-5.17	Peak	
6	409.2700	45.70	-7.81	37.89	46.00	-8.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Polarization	Horizontal
-----------	----------------------	--------------	------------

80 dBuV/m

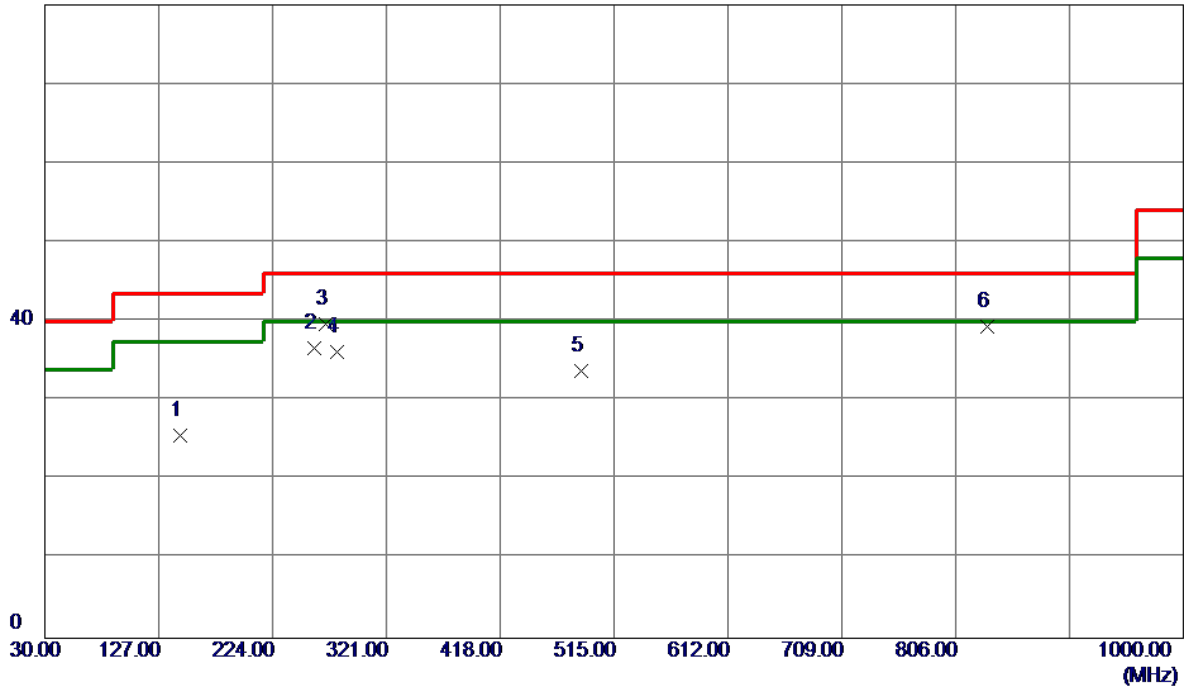

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	145.4299	37.01	-11.40	25.61	43.50	-17.89	Peak	
2	259.8900	48.72	-12.07	36.65	46.00	-9.35	Peak	
3 *	269.5900	51.26	-11.54	39.72	46.00	-6.28	Peak	
4	279.2900	47.21	-11.07	36.14	46.00	-9.86	Peak	
5	487.3550	40.00	-6.21	33.79	46.00	-12.21	Peak	
6	833.1599	40.11	-0.68	39.43	46.00	-6.57	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

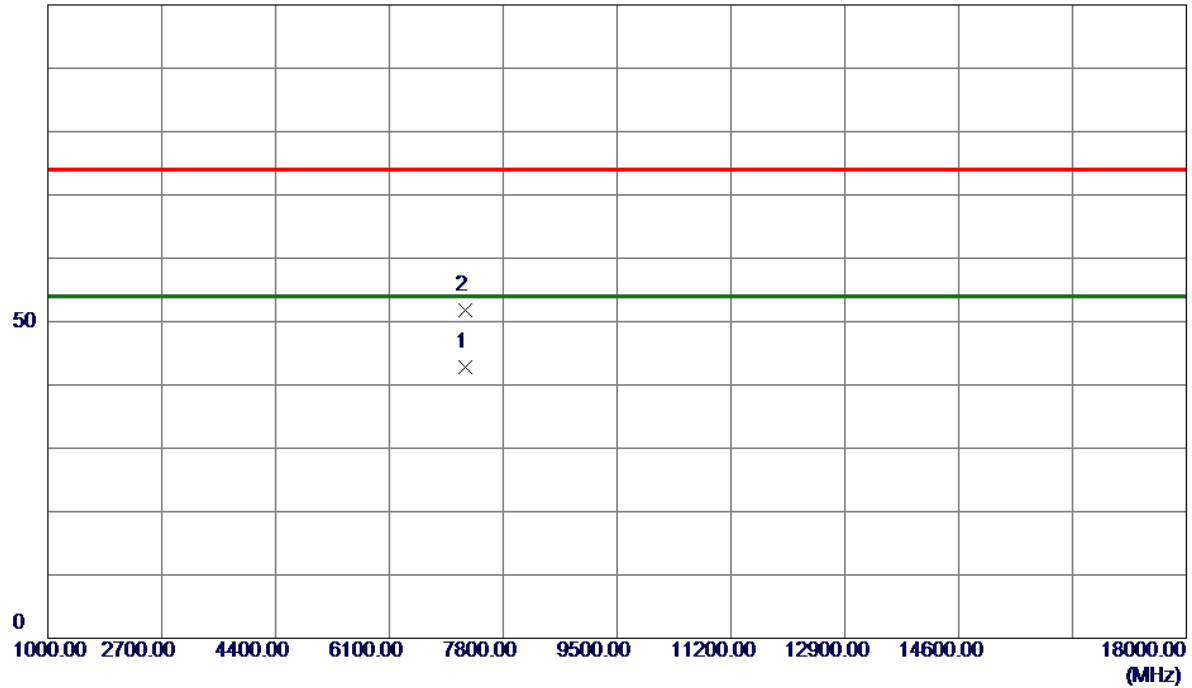


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7236.9000	34.25	8.46	42.71	54.00	-11.29	AVG	
2	7238.5400	43.38	8.46	51.84	74.00	-22.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

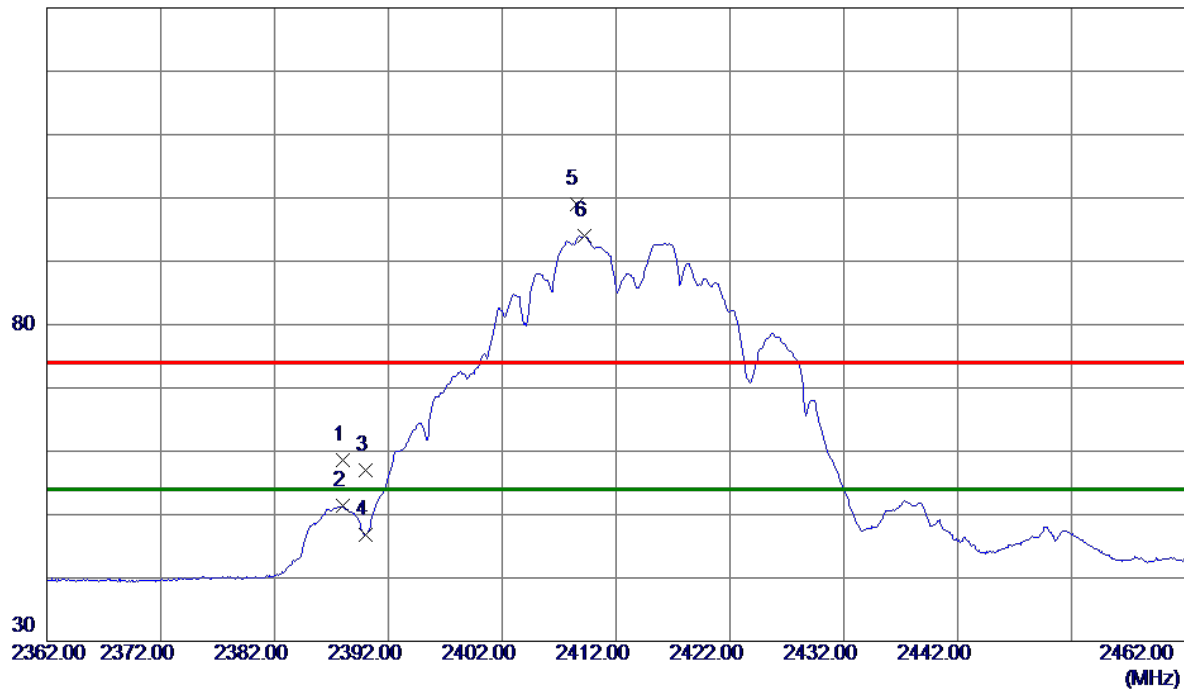


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.0000	49.12	9.44	58.56	74.00	-15.44	Peak	
2	2388.0000	41.87	9.44	51.31	54.00	-2.69	AVG	
3	2390.0000	47.52	9.44	56.96	74.00	-17.04	Peak	
4	2390.0000	37.31	9.44	46.75	54.00	-7.25	AVG	
5	2408.5000	89.53	9.45	98.98	74.00	24.98	Peak	No Limit
6 *	2409.2000	84.49	9.45	93.94	54.00	39.94	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

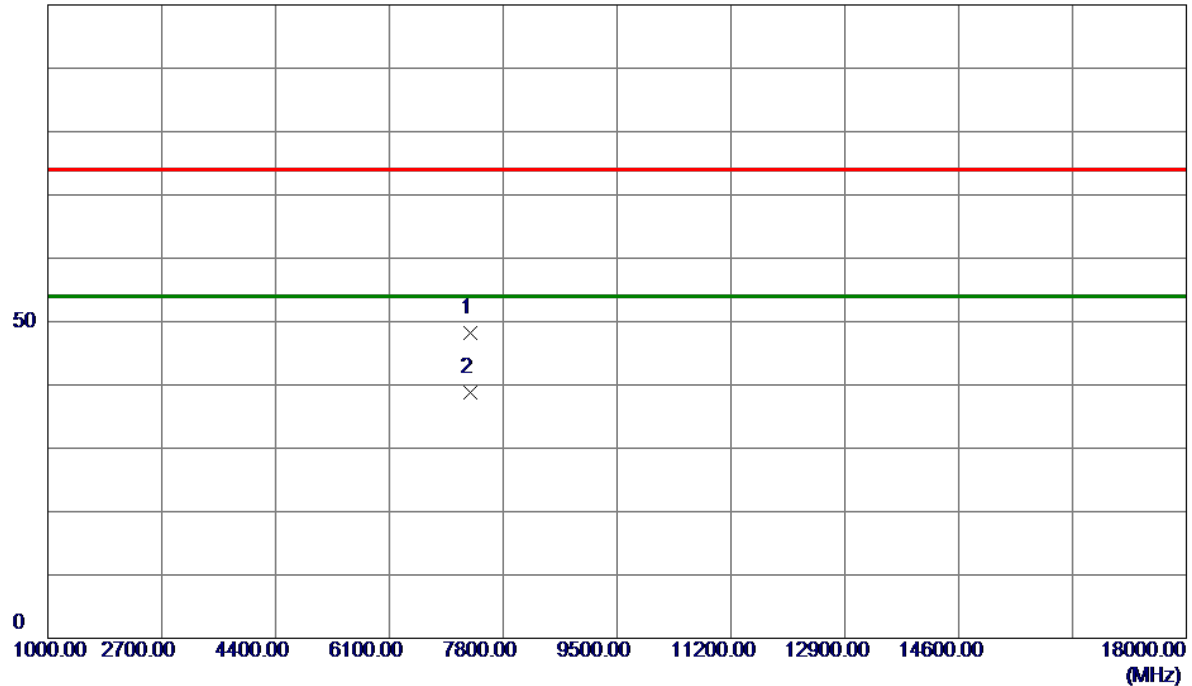


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7310.8800	39.58	8.63	48.21	74.00	-25.79	Peak	
2 *	7311.6800	30.21	8.64	38.85	54.00	-15.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

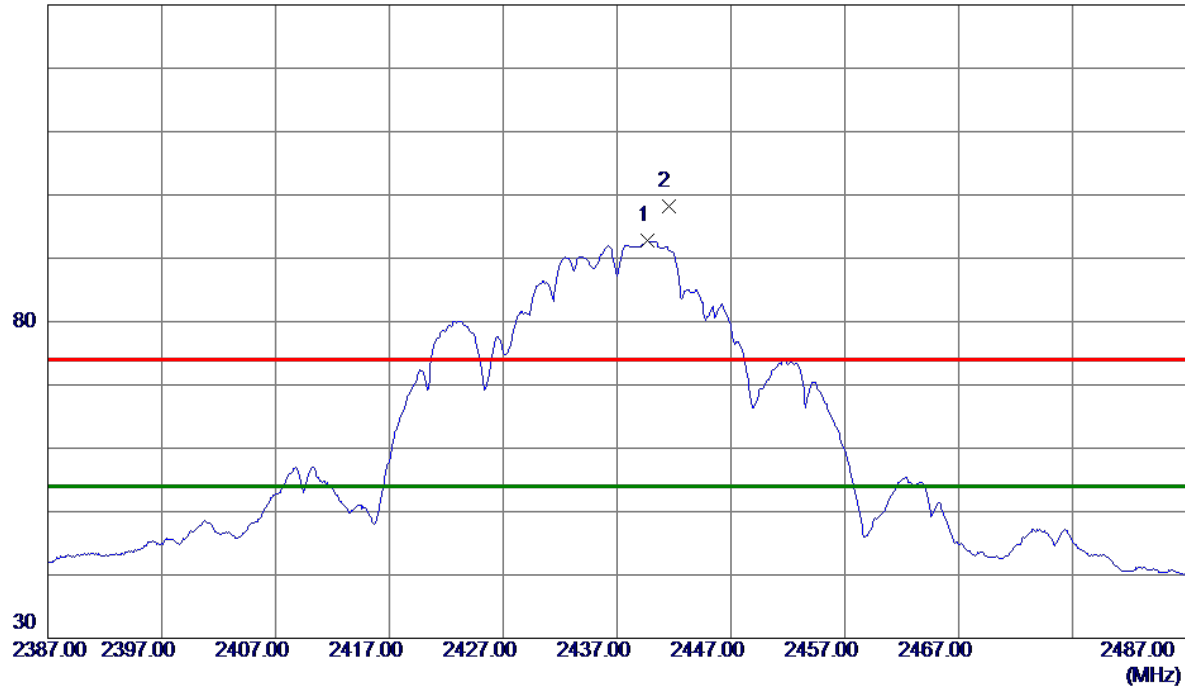


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2439.7000	83.30	9.46	92.76	54.00	38.76	AVG	No Limit
2	2441.5000	88.65	9.46	98.11	74.00	24.11	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

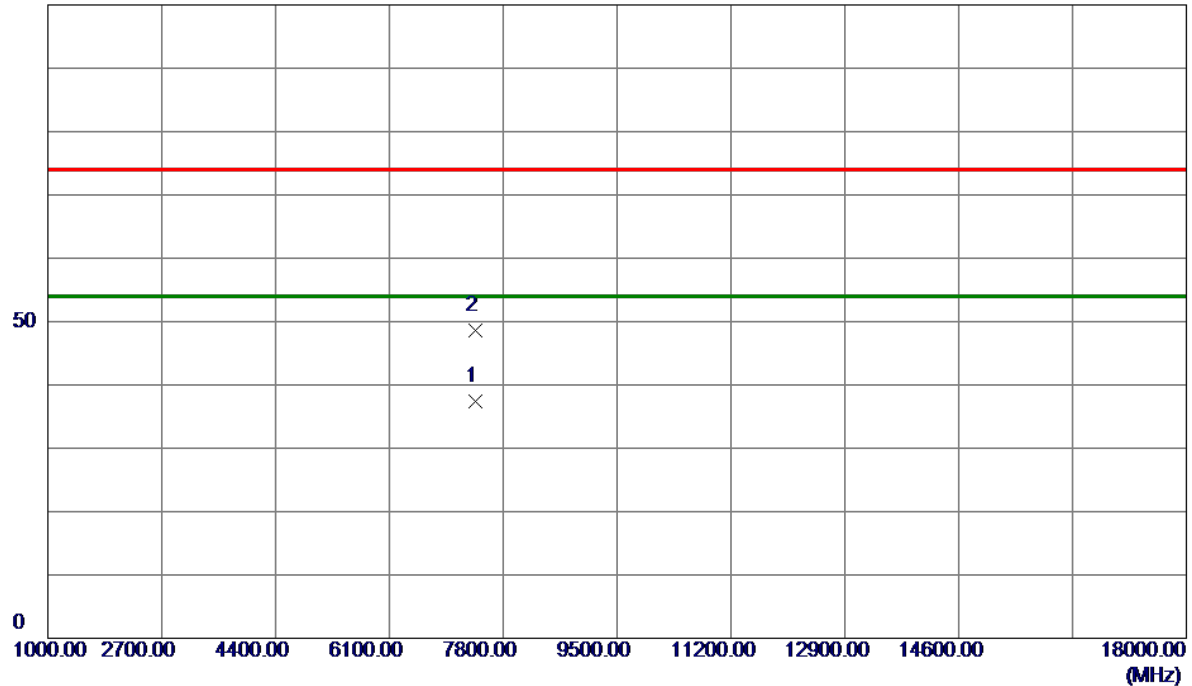


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7384.8800	28.62	8.81	37.43	54.00	-16.57	AVG	
2	7386.7800	39.81	8.81	48.62	74.00	-25.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

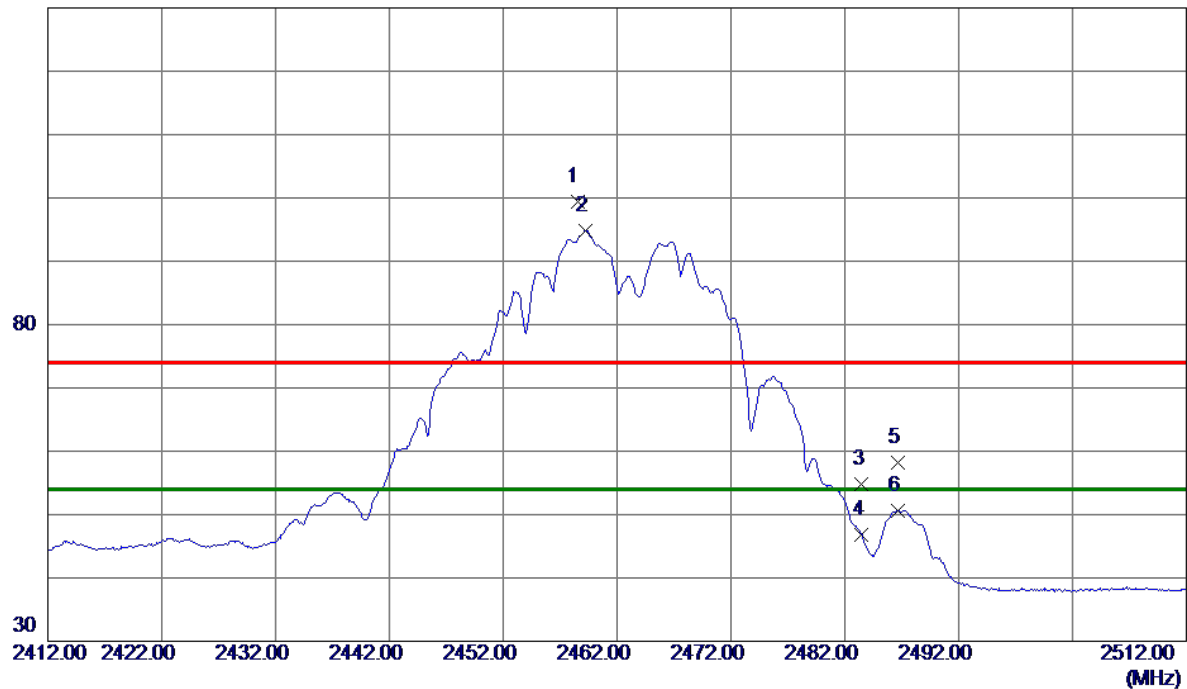


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2458.5000	89.95	9.46	99.41	74.00	25.41	Peak	No Limit
2 *	2459.2000	85.40	9.46	94.86	54.00	40.86	AVG	No Limit
3	2483.5000	45.38	9.47	54.85	74.00	-19.15	Peak	
4	2483.5000	37.28	9.47	46.75	54.00	-7.25	AVG	
5	2486.7000	48.65	9.47	58.12	74.00	-15.88	Peak	
6	2486.7000	41.18	9.47	50.65	54.00	-3.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

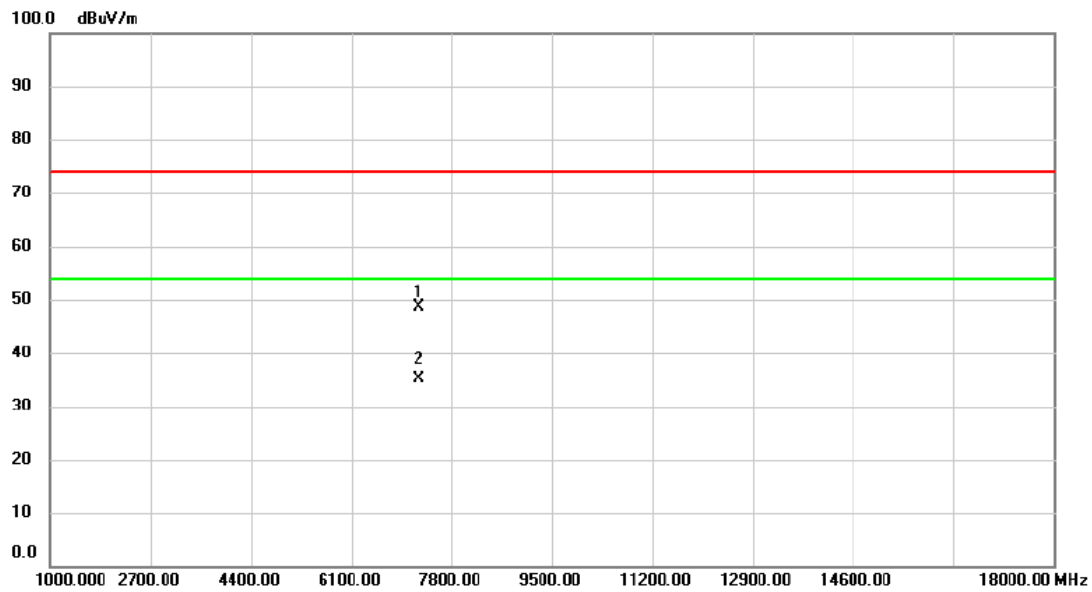


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7233.460	40.19	8.46	48.65	74.00	-25.35	peak	
2	*	7243.520	26.62	8.48	35.10	54.00	-18.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

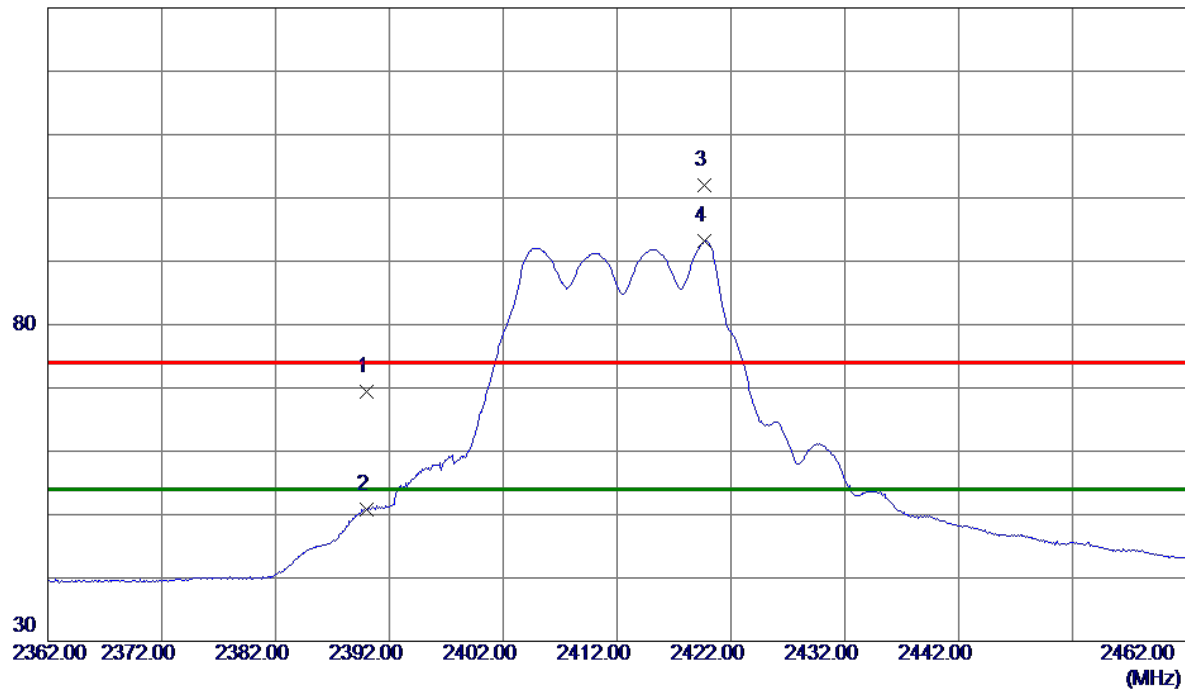


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	59.87	9.44	69.31	74.00	-4.69	Peak	
2	2390.0000	41.28	9.44	50.72	54.00	-3.28	AVG	
3	2419.7000	92.57	9.45	102.02	74.00	28.02	Peak	No Limit
4 *	2419.7000	83.78	9.45	93.23	54.00	39.23	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

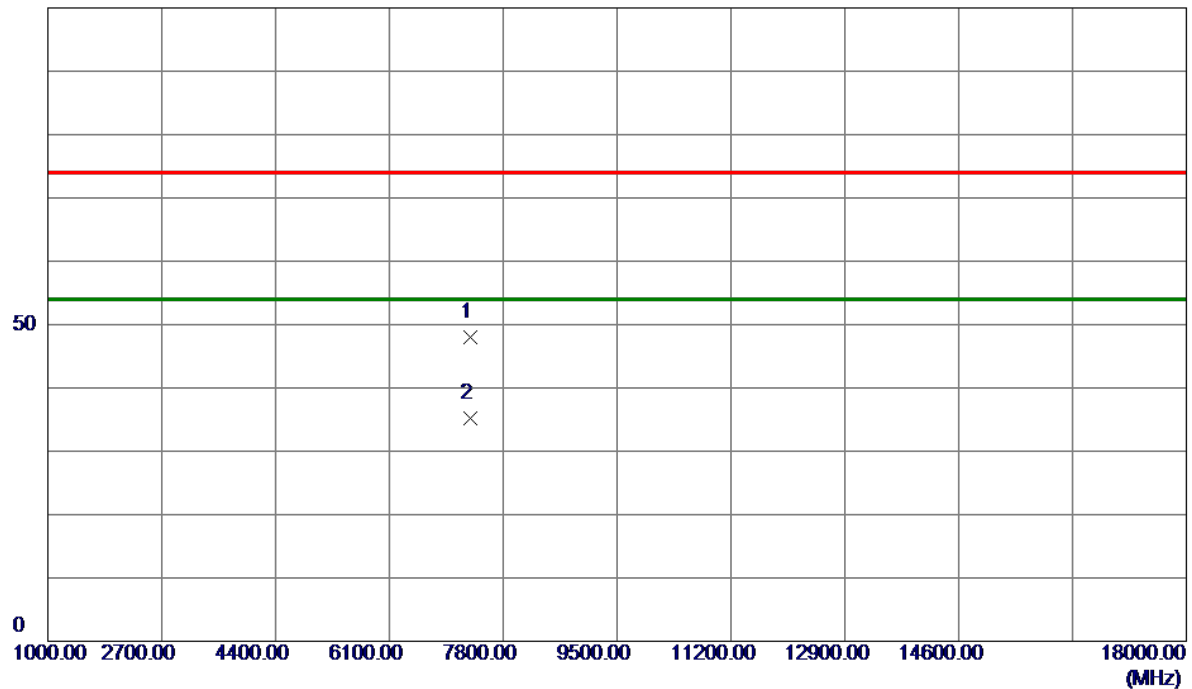


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7303.9800	39.41	8.62	48.03	74.00	-25.97	Peak	
2 *	7313.9200	26.54	8.64	35.18	54.00	-18.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

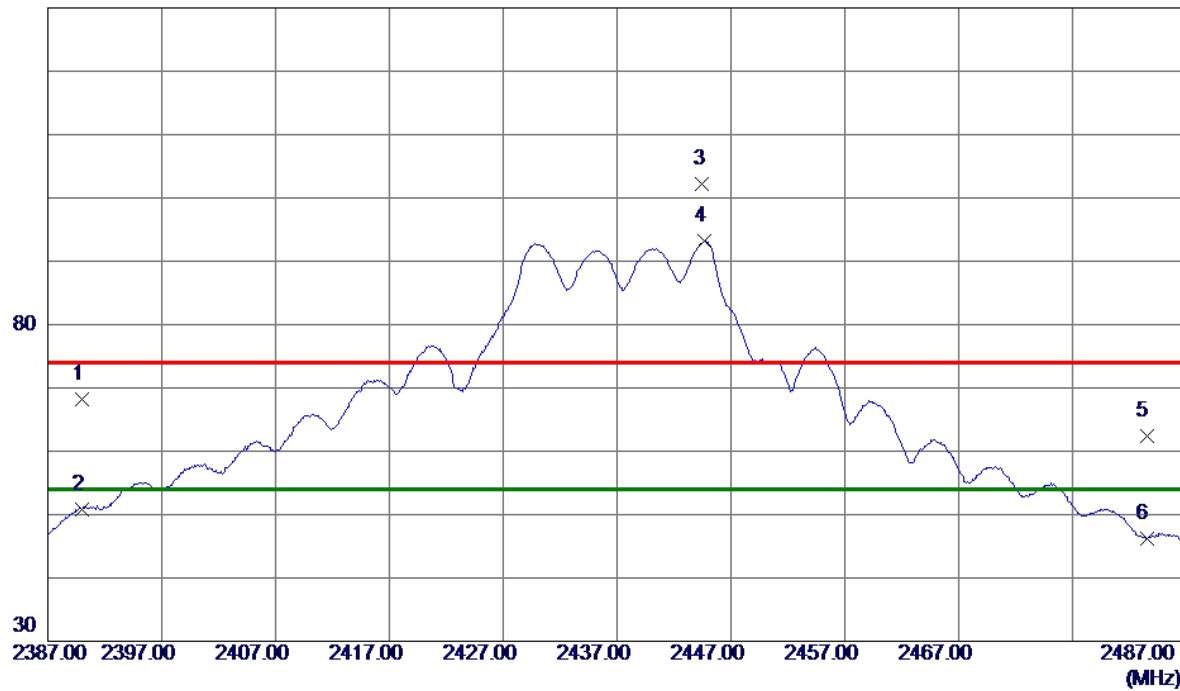


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	58.83	9.44	68.27	74.00	-5.73	Peak	
2	2390.0000	41.45	9.44	50.89	54.00	-3.11	AVG	
3	2444.5000	92.76	9.46	102.22	74.00	28.22	Peak	No Limit
4 *	2444.7000	83.70	9.46	93.16	54.00	39.16	AVG	No Limit
5	2483.5000	52.87	9.47	62.34	74.00	-11.66	Peak	
6	2483.5000	36.80	9.47	46.27	54.00	-7.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

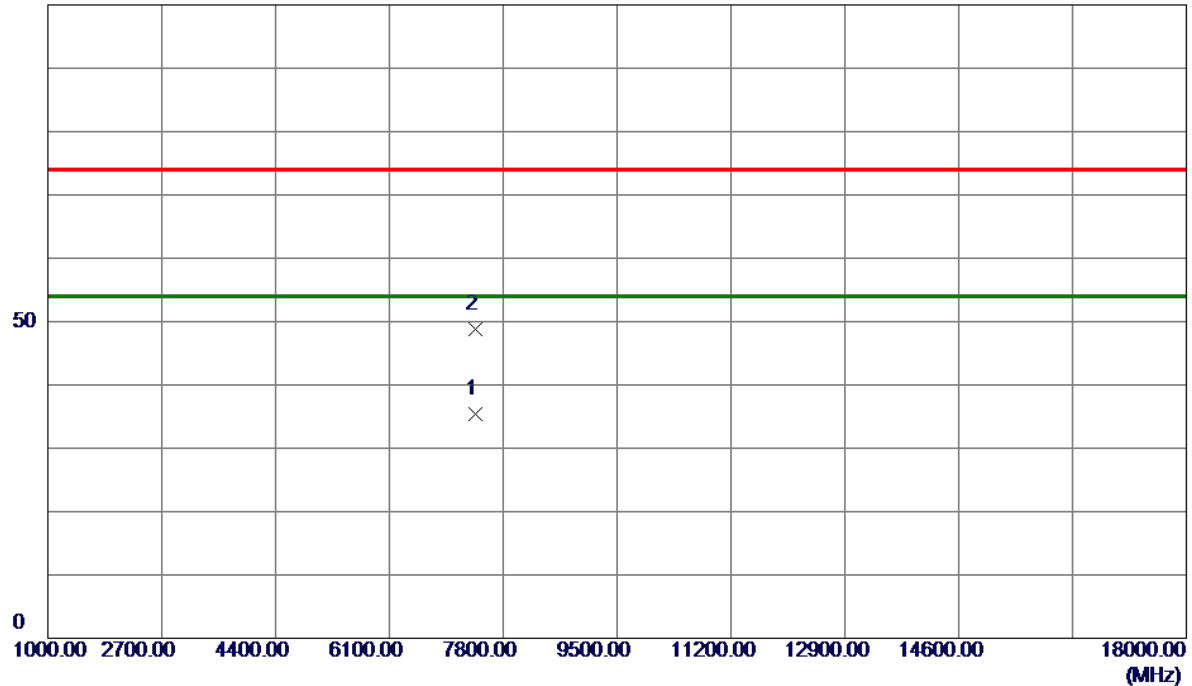


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7386.2400	26.64	8.81	35.45	54.00	-18.55	AVG	
2	7387.7000	40.01	8.81	48.82	74.00	-25.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

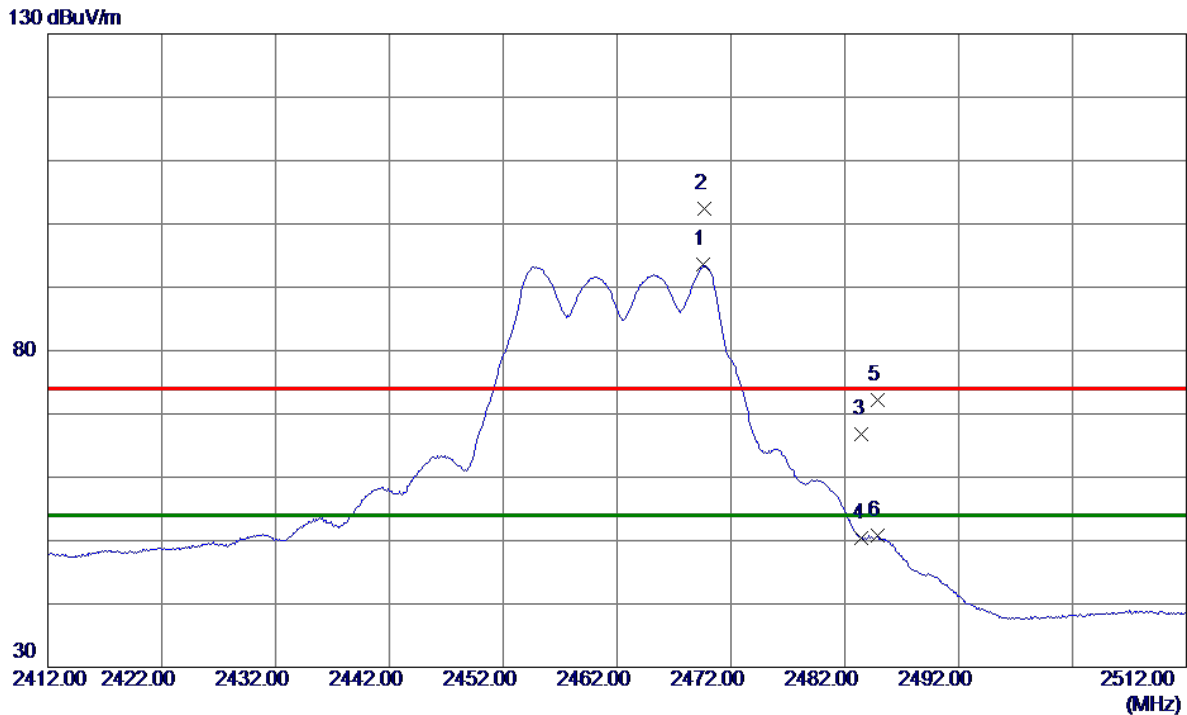


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2469.6000	84.08	9.47	93.55	54.00	39.55	AVG	No Limit
2	2469.7000	92.87	9.47	102.34	74.00	28.34	Peak	No Limit
3	2483.5000	57.28	9.47	66.75	74.00	-7.25	Peak	
4	2483.5000	40.90	9.47	50.37	54.00	-3.63	AVG	
5	2484.9000	62.81	9.47	72.28	74.00	-1.72	Peak	
6	2484.9000	41.26	9.47	50.73	54.00	-3.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

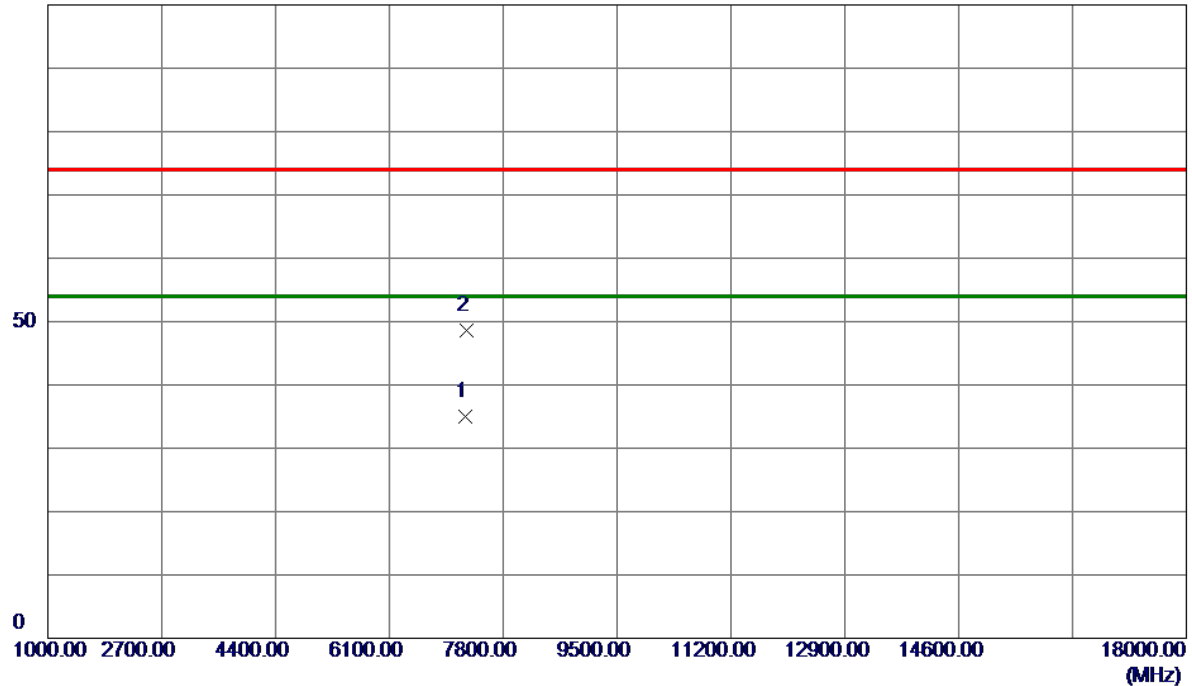


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7240.9400	26.62	8.47	35.09	54.00	-18.91	AVG	
2	7244.2200	40.19	8.48	48.67	74.00	-25.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

130 dBuV/m

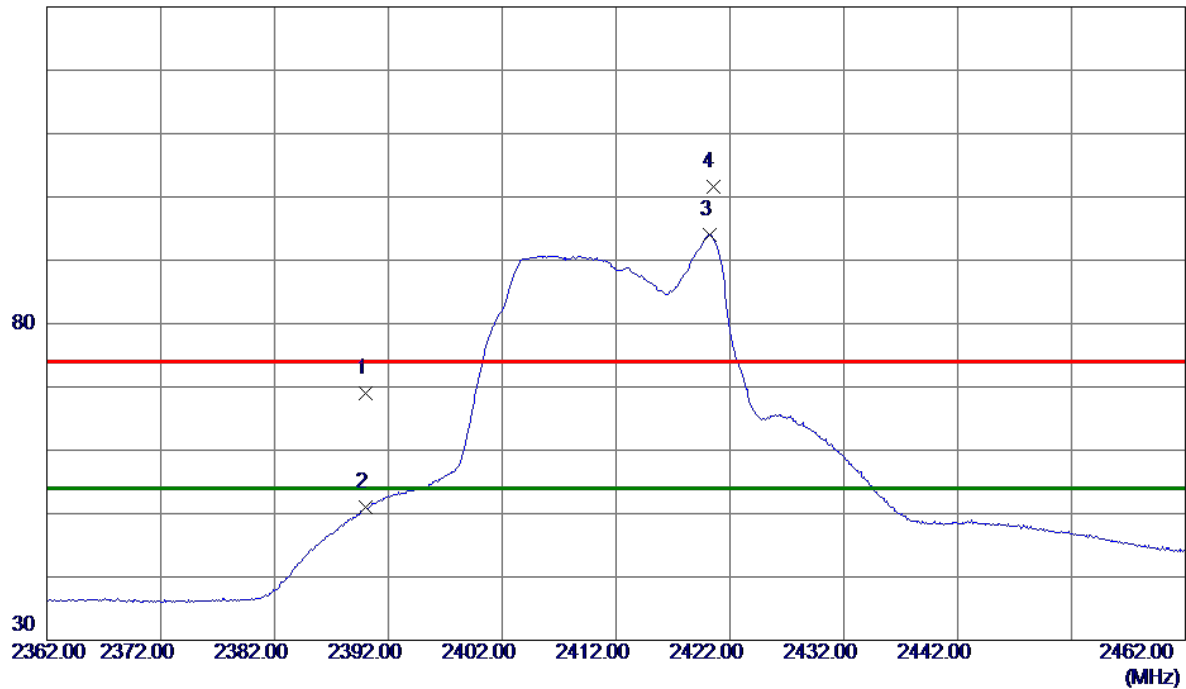


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	59.48	9.44	68.92	74.00	-5.08	Peak	
2	2390.0000	41.50	9.44	50.94	54.00	-3.06	AVG	
3 *	2420.2000	84.53	9.45	93.98	54.00	39.98	AVG	No Limit
4	2420.5000	92.20	9.45	101.65	74.00	27.65	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

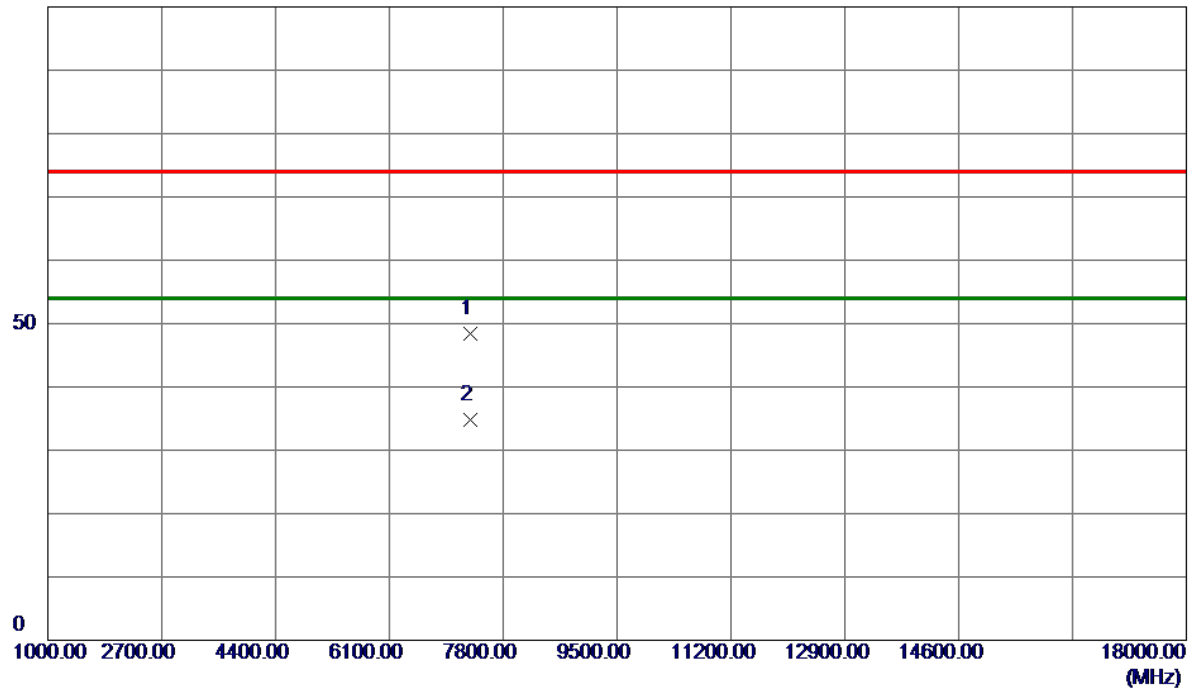


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7306.0400	39.86	8.62	48.48	74.00	-25.52	Peak	
2 *	7306.3400	26.22	8.62	34.84	54.00	-19.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

130 dBuV/m

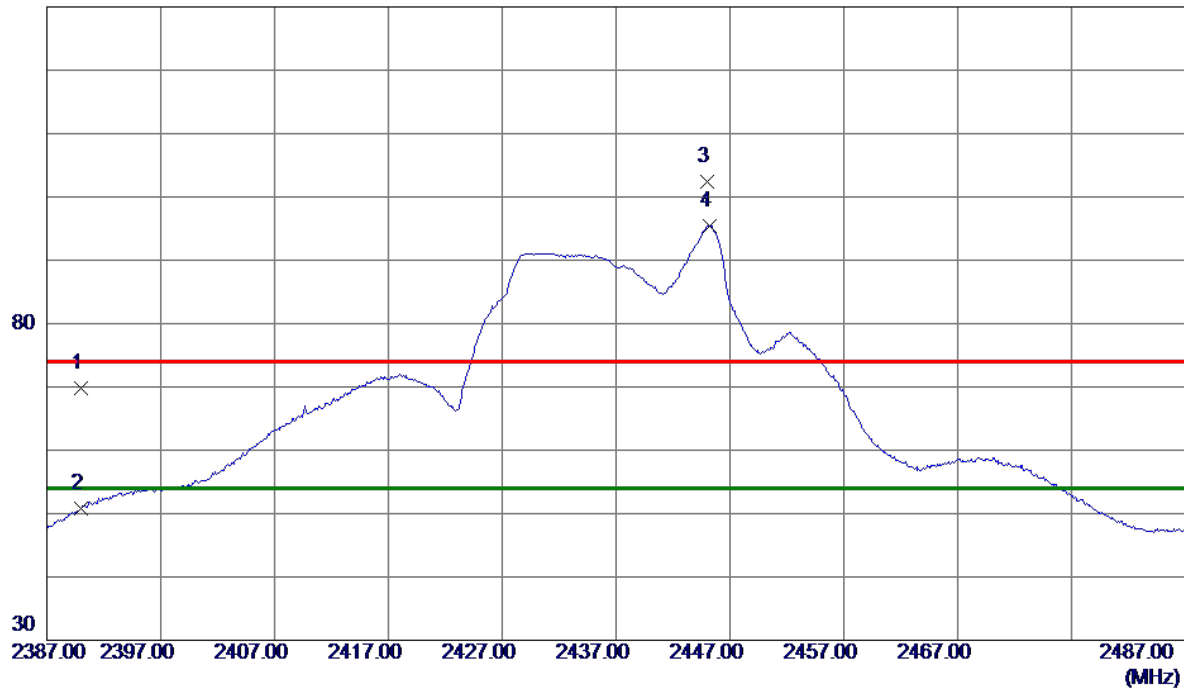


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	60.32	9.44	69.76	74.00	-4.24	Peak	
2	2390.0000	41.27	9.44	50.71	54.00	-3.29	AVG	
3	2445.0000	92.92	9.46	102.38	74.00	28.38	Peak	No Limit
4 *	2445.2000	85.99	9.46	95.45	54.00	41.45	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

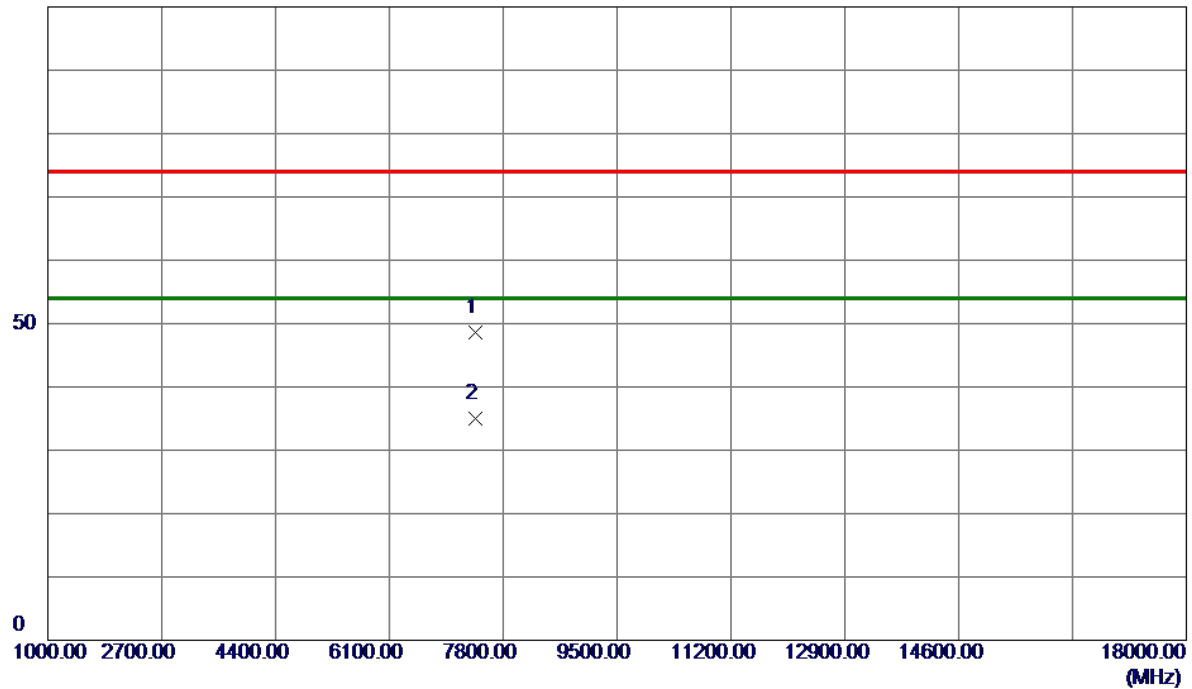


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7379.3800	39.74	8.80	48.54	74.00	-25.46	Peak	
2 *	7393.8200	26.10	8.83	34.93	54.00	-19.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

130 dBuV/m

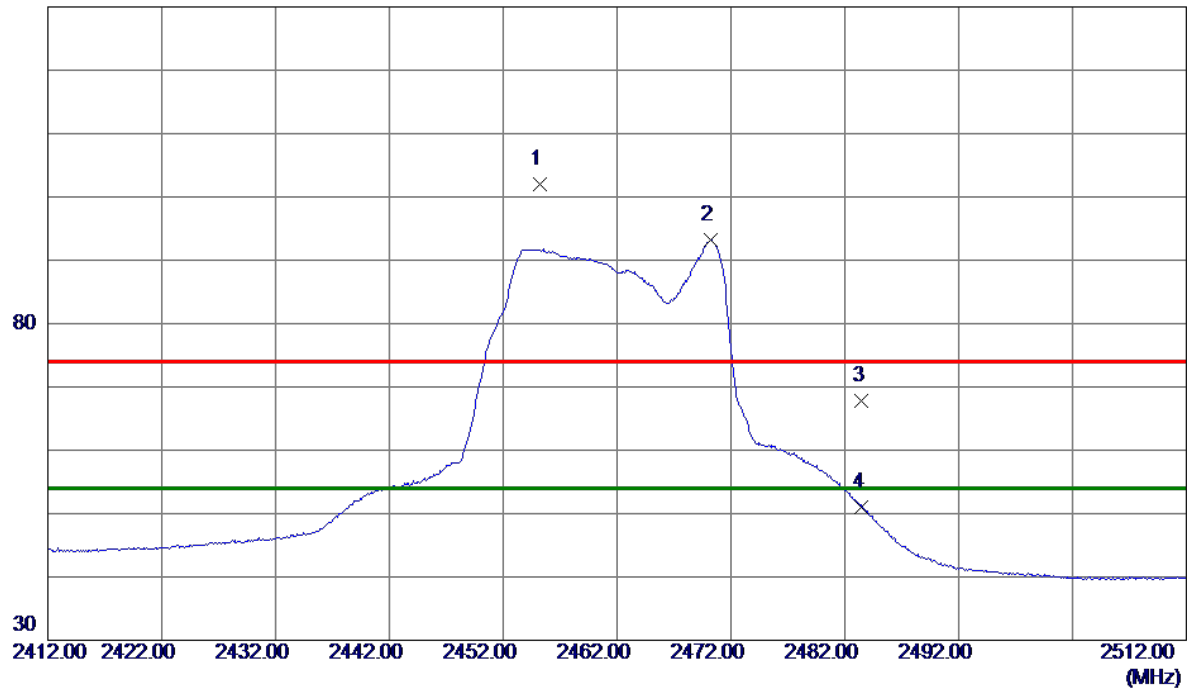


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2455.2000	92.63	9.46	102.09	74.00	28.09	Peak	No Limit
2 *	2470.2000	83.69	9.47	93.16	54.00	39.16	AVG	No Limit
3	2483.5000	58.24	9.47	67.71	74.00	-6.29	Peak	
4	2483.5000	41.62	9.47	51.09	54.00	-2.91	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

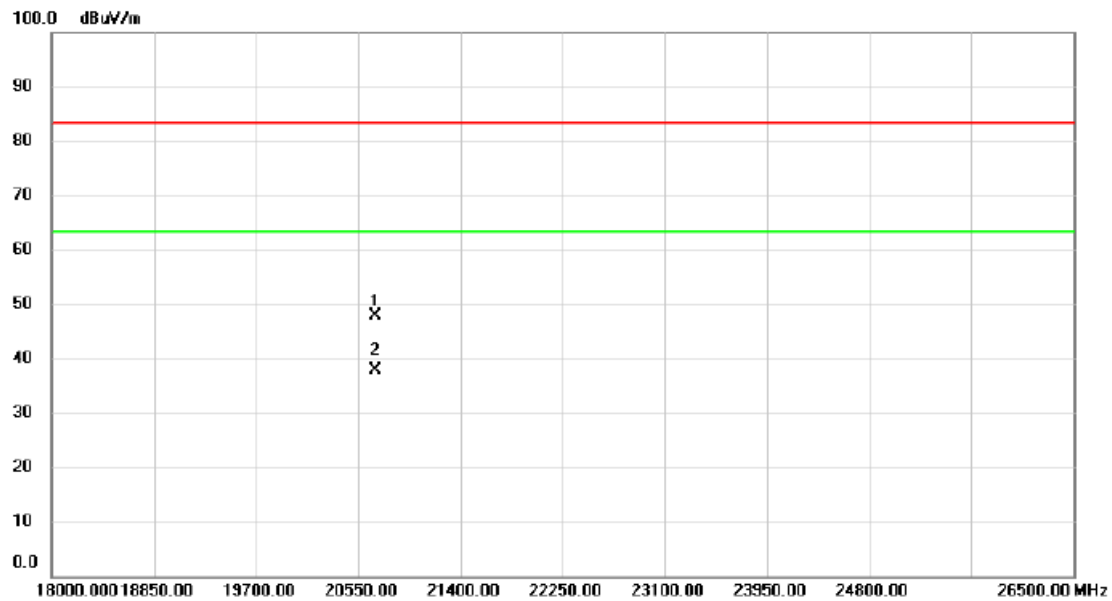


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		20690.25	53.13	-5.15	47.98	83.50	-35.52	peak	
2	*	20690.25	43.02	-5.15	37.87	63.50	-25.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

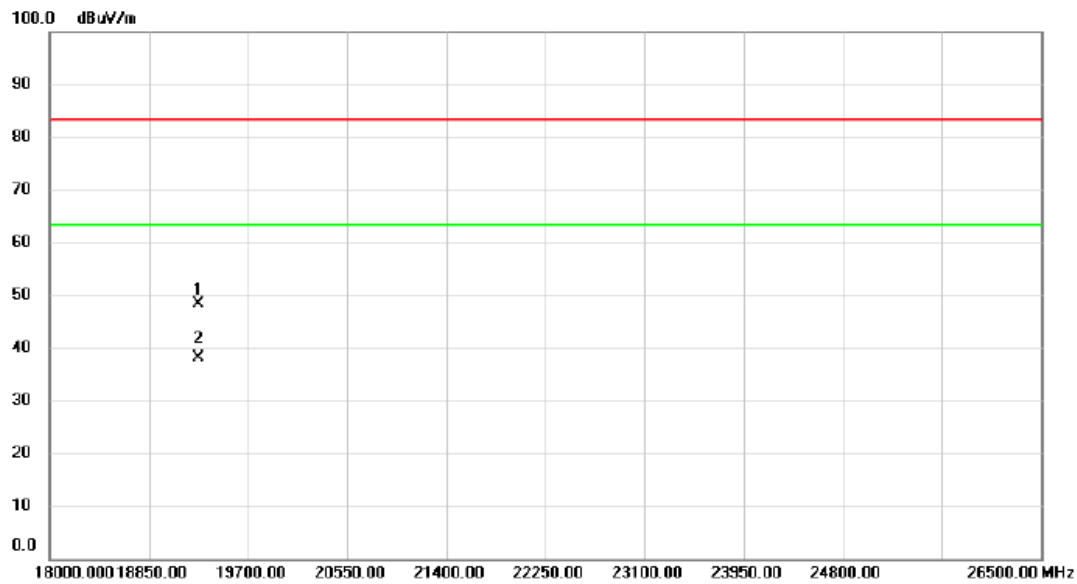

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		19270.75	53.95	-5.61	48.34	83.50	-35.16	peak	
2	*	19270.75	43.85	-5.61	38.24	63.50	-25.26	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	TX B Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	7.670	14.320	0.5	Complies
06	2437	9.080	14.720	0.5	Complies
11	2462	9.100	15.040	0.5	Complies

CH01

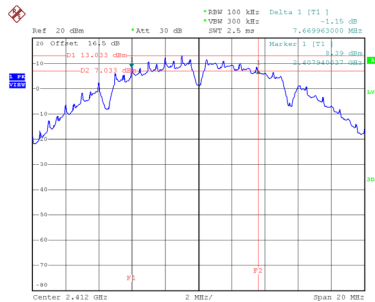


Date: 9.JUL.2024 11:28:24

CH06
6 dB Bandwidth

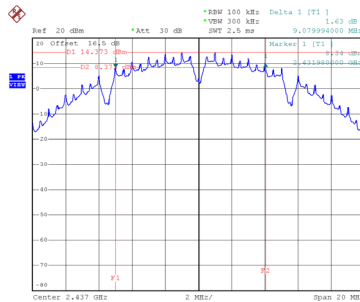


Date: 9.JUL.2024 11:36:21

CH11

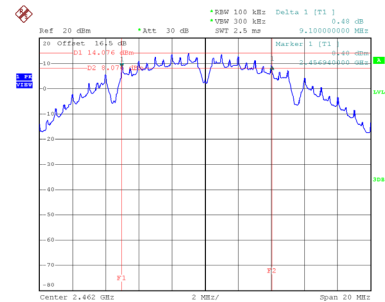


Date: 9.JUL.2024 11:37:59


99 % Occupied Bandwidth

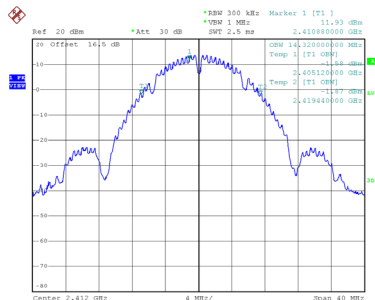

Date: 9.JUL.2024 11:28:32

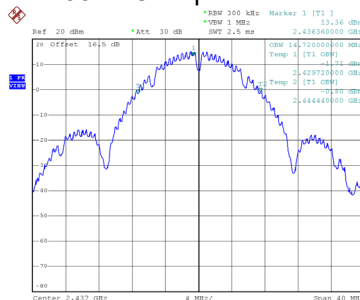

Date: 9.JUL.2024 11:36:28

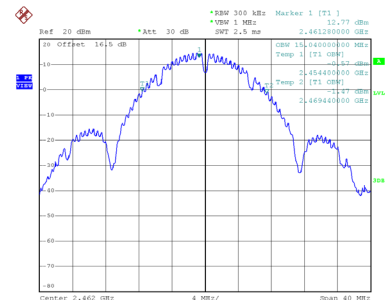

Date: 9.JUL.2024 11:38:07

Test Mode	TX G Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	16.400	23.760	0.5	Complies
06	2437	16.420	23.840	0.5	Complies
11	2462	15.560	22.800	0.5	Complies

CH01




Date: 9.JUL.2024 14:00:51

CH06
6 dB Bandwidth

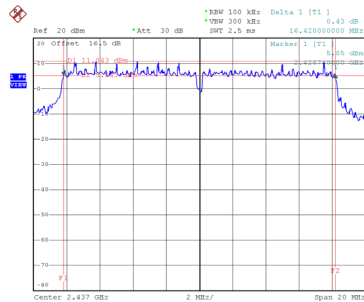


Date: 9.JUL.2024 14:03:30

CH11

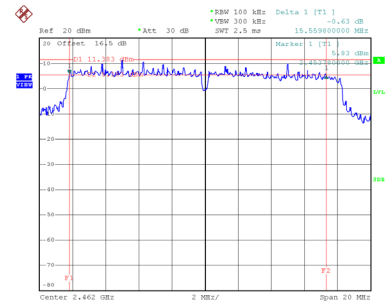


Date: 9.JUL.2024 14:05:35


99 % Occupied Bandwidth

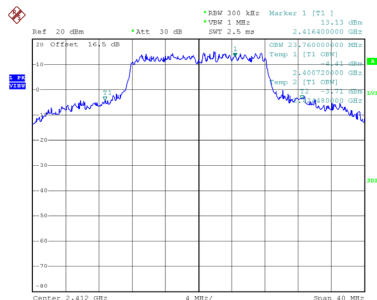

Date: 9.JUL.2024 14:00:59

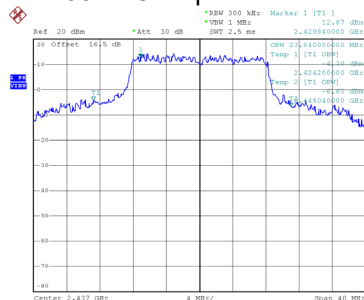

Date: 9.JUL.2024 14:03:37

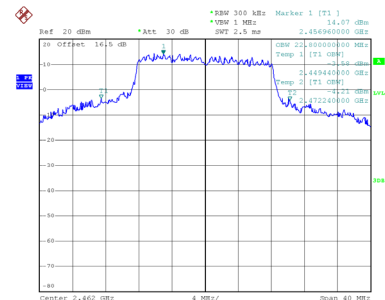

Date: 9.JUL.2024 14:05:43

Test Mode	TX N(HT20) Mode
-----------	-----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	17.660	18.160	0.5	Complies
06	2437	17.680	24.880	0.5	Complies
11	2462	16.630	24.480	0.5	Complies

CH01




Date: 9.JUL.2024 14:08:18

CH06
6 dB Bandwidth

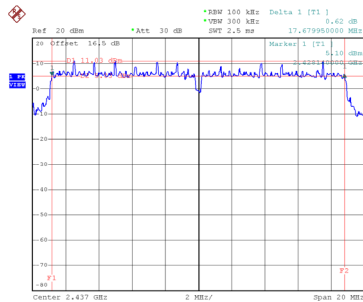


Date: 9.JUL.2024 14:14:40

CH11

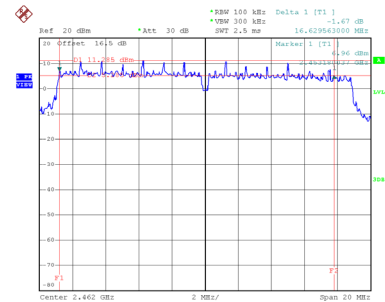


Date: 9.JUL.2024 14:15:57


99 % Occupied Bandwidth

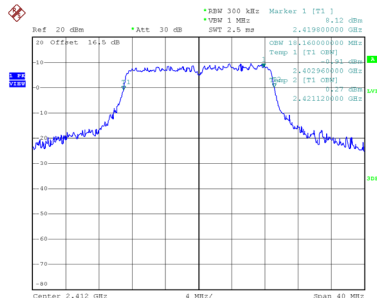

Date: 9.JUL.2024 14:08:26

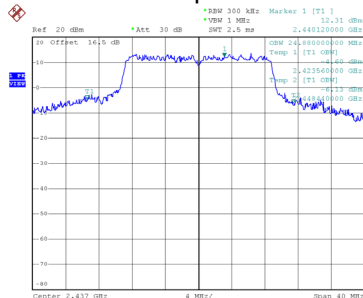

Date: 9.JUL.2024 14:14:48

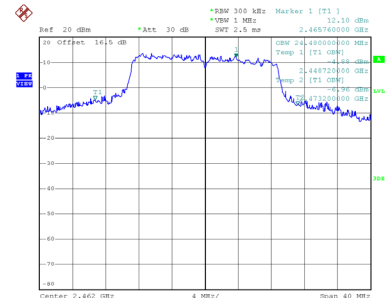

Date: 9.JUL.2024 14:16:04

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.65	0.00	21.65	30.00	1.0000	Complies
06	2437	22.12	0.00	22.12	30.00	1.0000	Complies
11	2462	21.33	0.00	21.33	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.06	0.00	22.06	30.00	1.0000	Complies
06	2437	23.09	0.00	23.09	30.00	1.0000	Complies
11	2462	20.50	0.00	20.50	30.00	1.0000	Complies

Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	24.87	30.00	1.0000	Complies
06	2437	25.64	30.00	1.0000	Complies
11	2462	23.95	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	14.67	0.00	14.67	30.00	1.0000	Complies
06	2437	16.67	0.00	16.67	30.00	1.0000	Complies
11	2462	16.21	0.00	16.21	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	15.24	0.00	15.24	30.00	1.0000	Complies
06	2437	17.05	0.00	17.05	30.00	1.0000	Complies
11	2462	16.87	0.00	16.87	30.00	1.0000	Complies

Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.97	30.00	1.0000	Complies
06	2437	19.87	30.00	1.0000	Complies
11	2462	19.56	30.00	1.0000	Complies

Test Mode	TX N(HT20) Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	15.93	0.00	15.93	30.00	1.0000	Complies
06	2437	21.08	0.00	21.08	30.00	1.0000	Complies
11	2462	13.38	0.00	13.38	30.00	1.0000	Complies

Test Mode	TX N(HT20) Mode_Ant. 2
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.34	0.00	16.34	30.00	1.0000	Complies
06	2437	21.68	0.00	21.68	30.00	1.0000	Complies
11	2462	14.22	0.00	14.22	30.00	1.0000	Complies


Test Mode	TX N(HT20) Mode_Total
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.15	30.00	1.0000	Complies
06	2437	24.40	30.00	1.0000	Complies
11	2462	16.83	30.00	1.0000	Complies

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS


Test Mode TX B Mode_Ant. 1

Bandedge-CH01

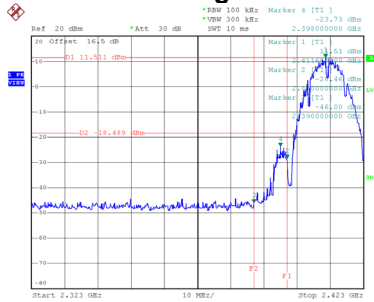


Date: 9.JUL.2024 11:28:40

Bandedge-CH11

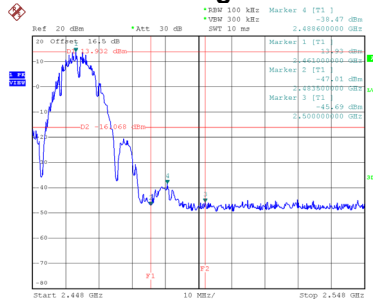


Date: 9.JUL.2024 11:38:15


CH01 – 10th Harmonic of the fundamental frequency

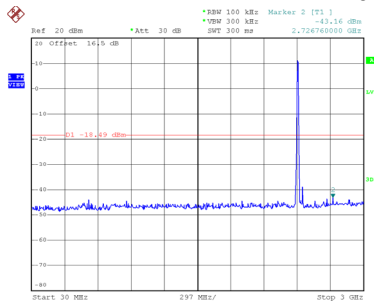

Date: 9.JUL.2024 11:28:53

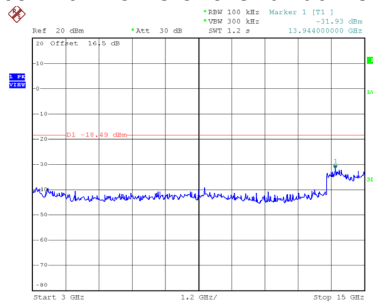


Date: 9.JUL.2024 11:29:02

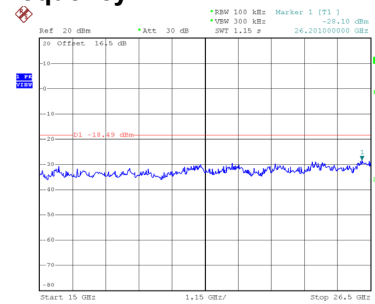


Date: 9.JUL.2024 11:29:10


CH06 – 10th Harmonic of the fundamental frequency

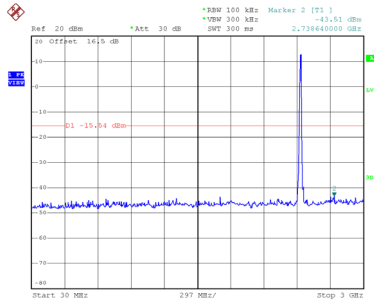

Date: 9.JUL.2024 11:36:50

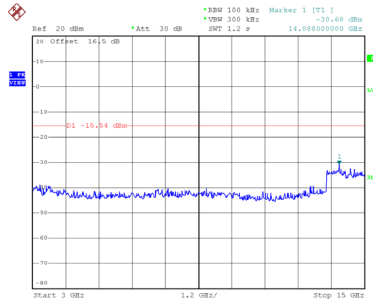


Date: 9.JUL.2024 11:36:58

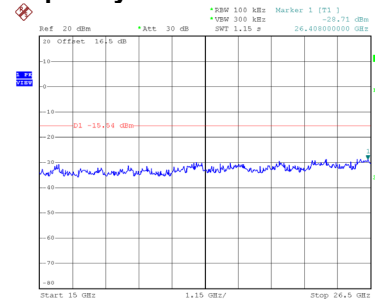


Date: 9.JUL.2024 11:37:07


CH11 – 10th Harmonic of the fundamental frequency

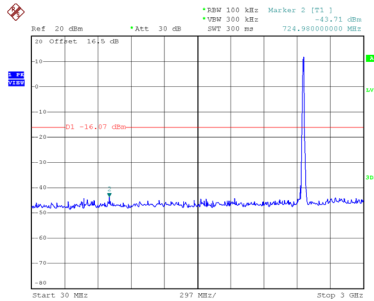

Date: 9.JUL.2024 11:38:29

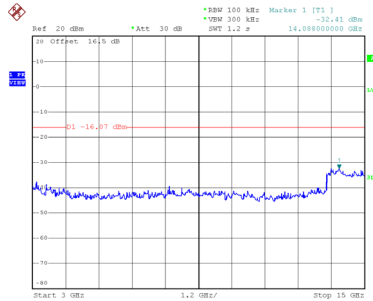


Date: 9.JUL.2024 11:38:37

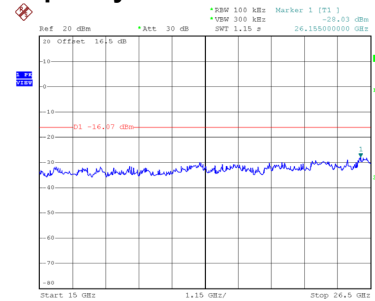

Date: 9.JUL.2024 11:38:45


Test Mode TX B Mode_Ant. 2

Bandedge-CH01

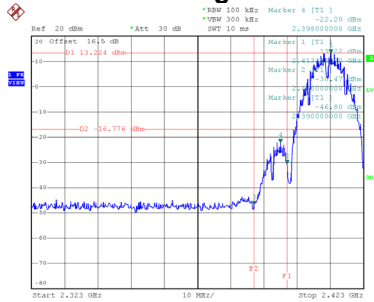


Date: 9.JUL.2024 11:42:35

Bandedge-CH11

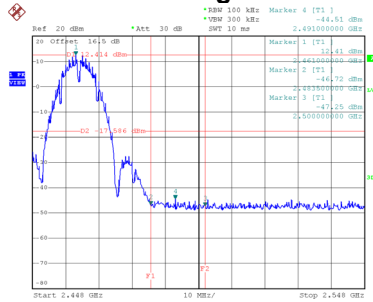


Date: 9.JUL.2024 11:48:03


CH01 – 10th Harmonic of the fundamental frequency

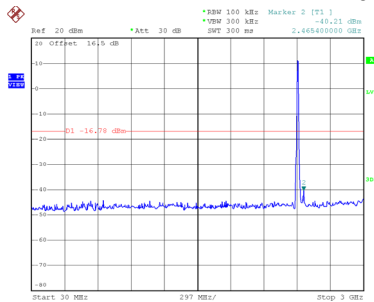

Date: 9.JUL.2024 11:42:49

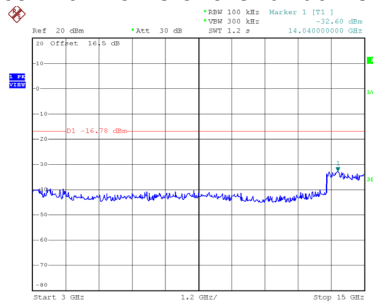


Date: 9.JUL.2024 11:42:57

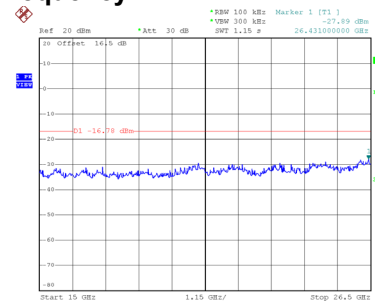


Date: 9.JUL.2024 11:43:05


CH06 – 10th Harmonic of the fundamental frequency

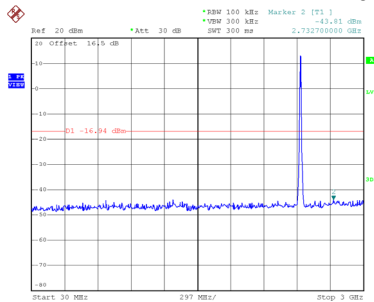

Date: 17.JUL.2024 19:36:13

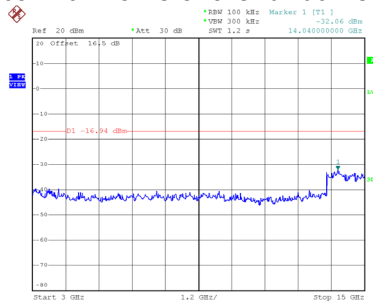


Date: 17.JUL.2024 19:36:21

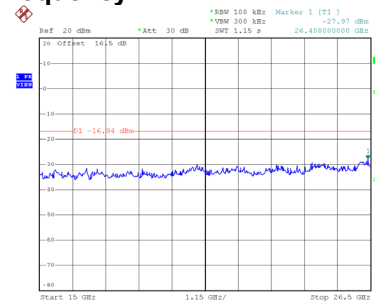


Date: 17.JUL.2024 19:36:30


CH11 – 10th Harmonic of the fundamental frequency

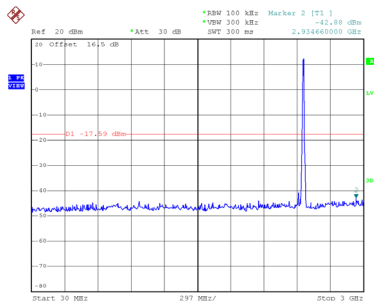

Date: 9.JUL.2024 11:48:17

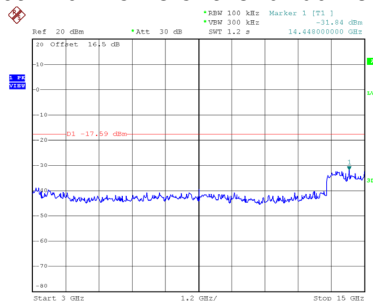

Date: 9.JUL.2024 11:48:25

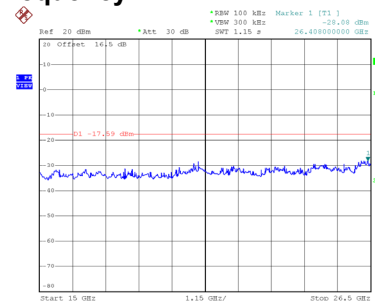

Date: 9.JUL.2024 11:48:32