



## FCC RADIO REPORT

Report No: STS1503070F01

Issued for

Cellacom incorporation

20955 pathfinder road, ste 200, diamond bar, ca 91765,  
USA

Product Name:	GSM feature phone
Brand Name:	Cellacom
Model No.:	T160
Series Model:	T160x(x represents for the lowercase letters from a to z)
FCC ID:	2AC343396993T160
Test Standard:	FCC Part 22H and 24E

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.

1/F, Building B, Zhuoke Science Park, Chongqing Road, Fuyong, Baoan District, Shenzhen, China

TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com





### TEST RESULT CERTIFICATION

**Applicant's name** ..... Cellacom incorporation  
 Address ..... 20955 pathfinder road, ste 200, diamond bar, ca 91765, USA  
**Manufacture's Name** ..... Shenzhen Joinhold Communication Technology Ltd.  
 Address ..... Unit 3, Bldg. D2, TCL International E City, 1001 Zhongshanyuan Park Rd.,  
 Nanshan, Shenzhen, China  
 Product name ..... GSM feature phone  
 Band name ..... Cellacom  
 Model and/or type reference ... T160  
**Standards** ..... FCC Part 22H and 24E  
 Test procedure..... TIA 603 C

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

**Date of Test**.....  
 Date of performance of tests ..... 23 Mar. 2015 ~30 Mar. 2015  
 Date of Issue..... 31 Mar. 2015  
 Test Result..... **Pass**

Testing Engineer :

(Jin Ming)

Report writing :

(Sunny zheng)

Authorized Signatory :

(Bovey Yang)





## TABLE OF CONTENTS

1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 PRODUCT DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	7
2.3 SPECIAL ACCESSORIES	7
2.4 EUT CONFIGURATION	7
2.5 EUT EXERCISE	7
2.6 CONFIGURATION OF EUT SYSTEM	7
2.7 MEASUREMENT INSTRUMENTS	8
3. DESCRIPTION OF TEST MODES	9
4. OUTPUT POWER	10
4.1 CONDUCTED OUTPUT POWER	10
4.2 PEAK-TO-AVERAGE RADIO (PAR) OF TRANSMITTER	13
4.3 RADIATED OUTPUT POWER	16
5. SPURIOUS EMISSION	19
5.1 SPURIOUS EMISSION	19
5.2 RADIATED SPURIOUS EMISSION	21
6. FREQUENCY STABILITY	25
6.1 MEASUREMENT METHOD	25
6.2 PROVISIONS APPLICABLE	26
6.3 MEASUREMENT RESULT	27
7. OCCUPIED BANDWIDTH	31
7.1 MEASUREMENT METHOD	31
7.2 PROVISIONS APPLICABLE	31
7.3 MEASUREMENT RESULT	31
8. EMISSION BANDWIDTH	33
8.1 MEASUREMENT METHOD	33
8.2 PROVISIONS APPLICABLE	33
8.3 MEASUREMENT RESULT	33
9. BAND EDGE	35
9.1 MEASUREMENT METHOD	35
9.2 PROVISIONS APPLICABLE	35
9.3 MEASUREMENT RESULT	35



APPENDIX I	36
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION	36
APPENDIX II	51
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)	51
EMISSION BANDWIDTH (-26DBC)	51
APPENDIX III	63
TEST PLOTS FOR BAND EDGES	63
PHOTOS OF TEST SETUP	69





## 1.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of ansi C63.10: 2009; TIA 603 C and fcc cfr 47 rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	22.913(a) / 24.232 (b)
		Radiated output power	
2	Spurious Emission	Conducted spurious emission	2.1051 / 22.917 / 24.238
		Radiated spurious emission	
3	Frequency Stability		2.1055 /24.235
4	Occupied Bandwidth		2.1049 (h)(i)
5	Emission Bandwidth		22.917(b) / 24.238 (b)
6	Band Edge		22.917(b) / 24.238 (b)

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

### 1.1 TEST FACILITY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F, Building 2, Zhuoke Science Park, Chongqing Road, Fuyong, Baoan District, Shenzhen, China.

FCC Registration No.: 842334; IC Registration No.: 12108A-1

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38$ dB
2	RF power,conducted	$\pm 0.16$ dB
3	Spurious emissions,conducted	$\pm 0.21$ dB
4	All emissions,radiated(<1G)	$\pm 4.68$ dB
5	All emissions,radiated(>1G)	$\pm 4.89$ dB
6	Temperature	$\pm 0.5^{\circ}$ C
7	Humidity	$\pm 2\%$



## 2. GENERAL INFORMATION

### 2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	GSM feature phone
Model No:	T160
Series Model:	T160x(x represents for the lowercase letters from a to z)
Model difference:	only the different in mode name.
Hardware version:	--
Software version:	--
FCC ID:	2AC343396993T160
Frequency Bands:	<input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS 1900 (U.S. Bands) <input type="checkbox"/> GSM 900 <input type="checkbox"/> DCS 1800 (Non-U.S. Bands) U.S. Bands: <input type="checkbox"/> UMTS FDD Band II <input type="checkbox"/> UMTS FDD Band V Non-U.S. Bands: <input type="checkbox"/> UMTS FDD Band I <input type="checkbox"/> UMTS FDD Band VIII
Max RF Output Power:	GSM850:32.05dBm,GSM1900:25.12dBm
Type of Emission:	GSM(850):250KGXW: GSM(1900):247KGXW GPRS(850):246KGXW; GPRS(1900):249KGXW EDGE(850):249KG7W: EDGE(1900):252KG7W
SIM CARD	Support dual-SIM, dual standby, the multiple SIM card with two lines cannot transmitting at the same time
Antenna:	PIFA Antenna
Antenna gain:	0 dBi
Power Supply:	DC 3.7V by battery or DC 5.0V supplied by adapter
Battery parameter:	DC 3.7V/2000mAh
Adapter Input:	AC100-240V, 50-60Hz, 200mA
Adapter Output:	DC 5.0V,350mA
GPRS/EDGE Class	Multi-Class12
Extreme Vol. Limits:	DC3.7 V to 4.2 V (Nominal DC3.7V)
Extreme Temp. Tolerance	-20°C to +65°C
** Note: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	



## 2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for fcc id: 2AC343396993T160 filing to comply with the fcc part 22H&24E.

## 2.3 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with eut intended for fcc grant together.

## 2.4 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

## 2.5 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

## 2.6 CONFIGURATION OF EUT SYSTEM

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

EUT

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	GSM feature phone	T160	FCC ID: 2AC343396993T160	EUT

*Note: All the accessories have been used during the test. the following "EUT" in setup diagram means EUT system.*



## 2.7 MEASUREMENT INSTRUMENTS

The radiated emission testing was performed according to the procedures of ansi C 63.10: 2009; TIA 603C and fcc cfr 47 rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4407B	MY50140340	2014.10.25	2015.10.24
Test Receiver	R&S	ESCI	101427	2014.10.25	2015.10.24
Communication Tester	Agilent	8960	MY48360751	2014.10.25	2015.10.24
Communication Tester	R&S	CMU200	112012	2014.10.25	2015.10.24
Test Receiver	R&S	ESCI	102086	2014.10.25	2015.10.24
Loop Antenna	Daze	ZN30900N	SEL0097	2014.10.27	2015.10.26
Bilog Antenna	Teseq	CBL6111D	34678	2014.10.27	2015.10.26
Horn Antenna	R&S	9120D	152265	2014.10.27	2015.10.26







### 3. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS/EDGES850, GSM/GPRS/EDGE1900, modes have been tested during the test. the worst condition (GPRS/EDGE 850) be recorded in the test report if no other modes test data.





#### 4. OUTPUT POWER

##### 4.1 CONDUCTED OUTPUT POWER

###### 4.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS /EDGE850, GSM/GPRS/EDGE1900,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

###### 4.1.2 MEASUREMENT RESULT

Conducted Output Power Limits for GSM 850 MHZ		
Mode	Nominal Peak Power	Tolerance(dB)
GSM850	32 dBm	+/- 1

Conducted Output Power Limits for PCS 1900 MHZ		
Mode	Nominal Peak Power	Tolerance(dB)
GSM1900	24.5 dBm	+/- 1





## GSM 850:

Mode	Frequency (MHz)	Peak Power	AVG Power
GSM850	824.2	31.68	31.29
	836.6	31.68	31.45
	848.8	32.05	31.68
GPRS850 (1 Slot)	824.2	31.66	31.39
	836.6	31.67	31.41
	848.8	32.04	31.67
GPRS850 (2 Slot)	824.2	30.66	30.38
	836.6	30.51	30.18
	848.8	30.93	30.68
GPRS850 (3 Slot)	824.2	28.51	28.28
	836.6	28.33	28.06
	848.8	28.86	28.48
GPRS850 (4 Slot)	824.2	27.41	27.08
	836.6	27.18	26.84
	848.8	27.77	27.50
EDGE850 (1 Slot)	824.2	31.55	31.33
	836.6	31.58	31.27
	848.8	31.98	31.61
EDGE850 (2 Slot)	824.2	30.49	30.12
	836.6	30.49	30.23
	848.8	30.86	30.50
EDGE850 (3 Slot)	824.2	28.37	28.01
	836.6	28.37	28.07
	848.8	28.73	28.47
EDGE850 (4 Slot)	824.2	27.23	27.02
	836.6	27.32	26.93
	848.8	27.67	27.43



## PCS 1900:

Mode	Frequency (MHz)	Peak Power	AVG Power
GSM1900	1850.2	23.73	23.43
	1880	24.26	23.95
	1909.8	25.12	24.86
GPRS1900 (1 Slot)	1850.2	23.24	22.94
	1880	23.79	23.50
	1909.8	24.91	24.58
GPRS1900 (2 Slot)	1850.2	22.69	22.38
	1880	23.23	22.97
	1909.8	24.11	23.87
GPRS1900 (3 Slot)	1850.2	20.60	20.32
	1880	21.11	20.82
	1909.8	22.05	21.76
GPRS1900 (4 Slot)	1850.2	19.47	19.15
	1880	19.99	19.72
	1909.8	20.90	20.55
EDGE1900 (1 Slot)	1850.2	23.62	23.30
	1880	23.11	22.85
	1909.8	24.62	24.35
EDGE1900 (2 Slot)	1850.2	22.51	22.21
	1880	21.96	21.69
	1909.8	23.49	23.16
EDGE1900 (3 Slot)	1850.2	20.41	20.02
	1880	19.92	19.66
	1909.8	21.42	21.15
EDGE1900 (4 Slot)	1850.2	19.28	19.07
	1880	18.87	18.53
	1909.8	20.38	19.99

## 4.2 PEAK-TO-AVERAGE RADIO (PAR) OF TRANSMITTER

### 4.2.1 STANDARD APPLICABLE

ACCORDING TO §24.232(D), POWER MEASUREMENTS FOR TRANSMISSIONS BY STATIONS AUTHORIZED UNDER THIS SECTION MAY BE made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the PEAK-TO-AVERAGE RATIO (PAR) OF THE TRANSMISSION MAY NOT EXCEED 13 DB.


### 4.2.2 TEST EQUIPMENT LIST AND DETAILS

Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4407B	MY50140340	2014.10.25	2015.10.24
Communication Tester	Agilent	8960	MY48360751	2014.10.25	2015.10.24
Communication Tester	R&S	CMU200	112012	2014.10.25	2015.10.24
TEST RECEIVER	R&S	ESCI	102086	2014.10.25	2015.10.24

### 4.2.3 TEST PROCEDURE

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded.

TEST CONFIGURATION FOR THE EMISSION BANDWIDTH TESTING:

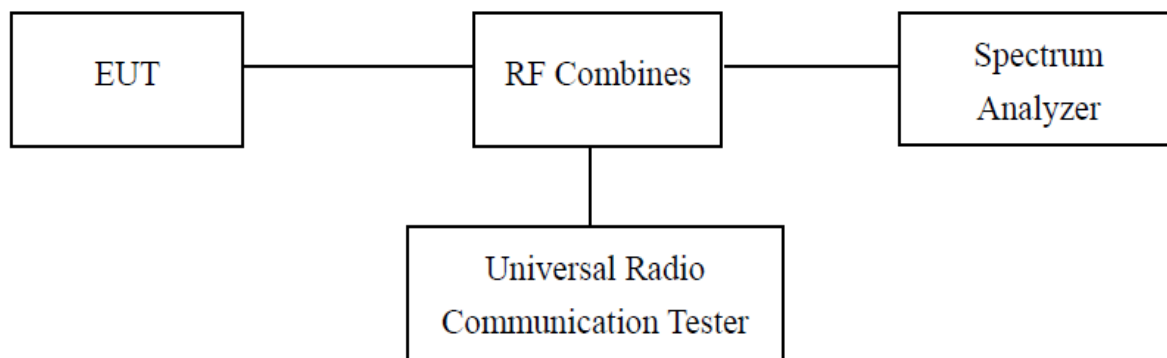

### 4.2.4 ENVIRONMENTAL CONDITIONS

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar



## 4.2.5 SUMMARY OF TEST RESULTS

## GSM 850:

Mode	Frequency (MHz)	Peak Power	AVG Power	PAR	Limit
GSM850	824.2	31.68	31.29	0.39	13
	836.6	31.68	31.45	0.23	13
	848.8	<b>32.05</b>	31.68	0.37	13
GPRS850 (1 Slot)	824.2	31.66	31.39	0.27	13
	836.6	31.67	31.41	0.26	13
	848.8	32.04	31.67	0.37	13
GPRS850 (2 Slot)	824.2	30.66	30.38	0.28	13
	836.6	30.51	30.18	0.33	13
	848.8	30.93	30.68	0.25	13
GPRS850 (3 Slot)	824.2	28.51	28.28	0.23	13
	836.6	28.33	28.06	0.27	13
	848.8	28.86	28.48	0.38	13
GPRS850 (4 Slot)	824.2	27.41	27.08	0.33	13
	836.6	27.18	26.84	0.34	13
	848.8	27.77	27.5	0.27	13
EDGE850 (1 Slot)	824.2	31.55	31.33	0.22	13
	836.6	31.58	31.27	0.31	13
	848.8	31.98	31.61	0.37	13
EDGE850 (2 Slot)	824.2	30.49	30.12	0.37	13
	836.6	30.49	30.23	0.26	13
	848.8	30.86	30.5	0.36	13
EDGE850 (3 Slot)	824.2	28.37	28.01	0.36	13
	836.6	28.37	28.07	0.3	13
	848.8	28.73	28.47	0.26	13
EDGE850 (4 Slot)	824.2	27.23	27.02	0.21	13
	836.6	27.32	26.93	0.39	13
	848.8	27.67	27.43	0.24	13



## PCS 1900:

Mode	Frequency (MHz)	Peak Power	AVG Power	PAR	Limit
GSM1900	1850.2	23.73	23.43	0.30	13
	1880	24.26	23.95	0.31	13
	1909.8	<b>25.12</b>	24.86	0.26	13
GPRS1900 (1 Slot)	1850.2	23.24	22.94	0.30	13
	1880	23.79	23.5	0.29	13
	1909.8	24.91	24.58	0.33	13
GPRS1900 (2 Slot)	1850.2	22.69	22.38	0.31	13
	1880	23.23	22.97	0.26	13
	1909.8	24.11	23.87	0.24	13
GPRS1900 (3 Slot)	1850.2	20.6	20.32	0.28	13
	1880	21.11	20.82	0.29	13
	1909.8	22.05	21.76	0.29	13
GPRS1900 (4 Slot)	1850.2	19.47	19.15	0.32	13
	1880	19.99	19.72	0.27	13
	1909.8	20.9	20.55	0.35	13
EDGE1900 (1 Slot)	1850.2	23.62	23.3	0.32	13
	1880	23.11	22.85	0.26	13
	1909.8	24.62	24.35	0.27	13
EDGE1900 (2 Slot)	1850.2	22.51	22.21	0.30	13
	1880	21.96	21.69	0.27	13
	1909.8	23.49	23.16	0.33	13
EDGE1900 (3 Slot)	1850.2	20.41	20.02	0.39	13
	1880	19.92	19.66	0.26	13
	1909.8	21.42	21.15	0.27	13
EDGE1900 (4 Slot)	1850.2	19.28	19.07	0.21	13
	1880	18.87	18.53	0.34	13
	1909.8	20.38	19.99	0.39	13



### 4.3 RADIATED OUTPUT POWER

#### 4.3.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS/EDGE850, GSM/GPRS/EDGE1900,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The measurements procedures specified in TIA-603C-2009 were applied.

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
2. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $AR_{pl} = Pin + 2.15 - Pr$ . The  $AR_{pl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below:  $Power = P_{Mea} + AR_{pl}$
3. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
5. The EUT is then put into continuously transmitting mode at its maximum power level.
6. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15dBi$ .
9. Both Horizontal And Vertical Antenna Polarities Were Tested And Performed Pretest To Three Orthogonal Axis. The Worst Case Emissions Were Reported

#### 4.3.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850	$\leq 38.45$ dBm (7W)
PCS 1900	$\leq 33$ dBm (2W)





## 4.3.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM850	824.2	25.94	Horizontal	Pass
	824.2	27.97	Vertical	Pass
	836.6	25.97	Horizontal	Pass
	836.6	<b>28.12</b>	Vertical	Pass
	848.8	26.15	Horizontal	Pass
	848.8	27.95	Vertical	Pass

Radiated Power (ERP) for GPRS 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GPRS850	824.2	(dBm)	Horizontal	Pass
	824.2	25.12	Vertical	Pass
	836.6	<b>27.19</b>	Horizontal	Pass
	836.6	25.20	Vertical	Pass
	848.8	27.18	Horizontal	Pass
	848.8	25.09	Vertical	Pass

Radiated Power (ERP) for EDGE 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
EDGE850	824.2	26.01	Horizontal	Pass
	824.2	27.96	Vertical	Pass
	836.6	25.95	Horizontal	Pass
	836.6	27.98	Vertical	Pass
	848.8	26.01	Horizontal	Pass
	848.8	<b>28.10</b>	Vertical	Pass



Radiated Power (EIRP) for PCS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
PCS1900	1850.2	18.96	Horizontal	Pass
	1850.2	<b>21.09</b>	Vertical	Pass
	1880.0	19.14	Horizontal	Pass
	1880.0	21.01	Vertical	Pass
	1909.8	19.02	Horizontal	Pass
	1909.8	21.01	Vertical	Pass

Radiated Power (EIRP) for GPRS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GPRS 1900	1850.2	18.86	Horizontal	Pass
	1850.2	<b>20.90</b>	Vertical	Pass
	1880.0	18.83	Horizontal	Pass
	1880.0	20.74	Vertical	Pass
	1909.8	18.86	Horizontal	Pass
	1909.8	20.86	Vertical	Pass

Radiated Power (EIRP) for EDGE 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
EDGE 1900	1850.2	18.51	Horizontal	Pass
	1850.2	20.52	Vertical	Pass
	1880.0	18.66	Horizontal	Pass
	1880.0	<b>20.57</b>	Vertical	Pass
	1909.8	18.68	Horizontal	Pass
	1909.8	20.54	Vertical	Pass



## 5. SPURIOUS EMISSION

### 5.1 SPURIOUS EMISSION

#### 5.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.

2. Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM/GPRS/EDGE 850 MHz	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of GSM/GPRS/EDGE 1900 MHz	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8



### 5.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

### 5.1.3 MEASUREMENT RESULT

PLEASE REFER TO : APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

Note: 1. Below 30MHz no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.




## 5.2 RADIATED SPURIOUS EMISSION

### 5.2.1 MEASUREMENT METHOD


The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GSM/GPRS/EDGE850, GSM/GPRS/EDGE1900) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as,  $RSE = R_x \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$  The SA is calibrated using following setup.

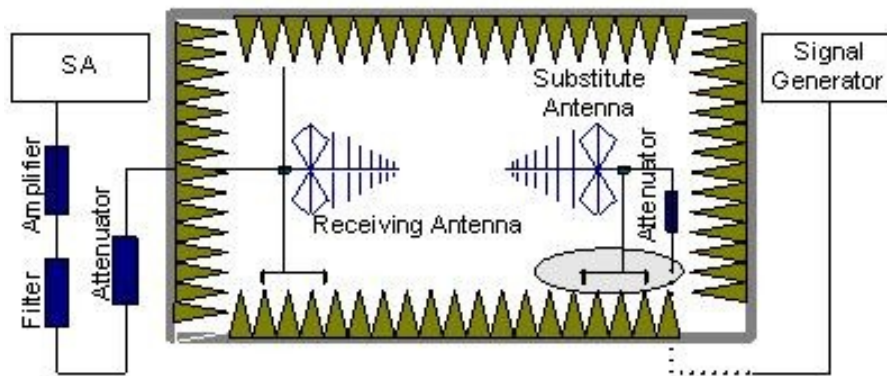

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

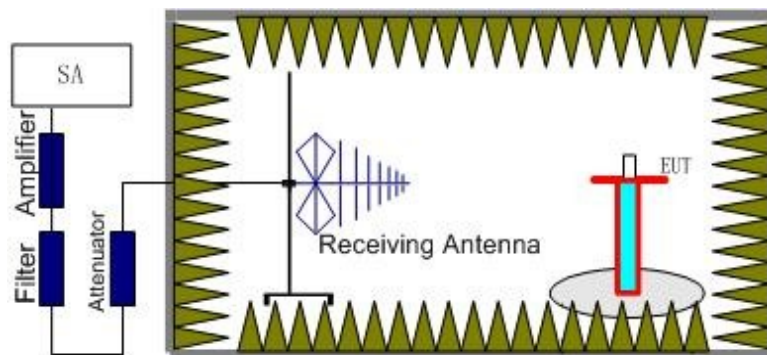



Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below:  $Power = P_{Mea} + A_{Rpl}$

### 5.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode.



## 5.2.3 MEASUREMENT RESULT

GSM 850:

The Worst Test Results Channel 128/824.2 MHz						
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit	Margin	Polarity
1648.422	-35.35	-4.65	-40	-13	-27	Horizontal
2472.612	-36.23	-2.21	-38.44	-13	-25.44	Horizontal
3296.821	-31.24	0.21	-31.03	-13	-18.03	Horizontal
1648.422	-38.39	-4.65	-43.04	-13	-30.04	Vertical
2472.612	-41.43	-2.21	-43.64	-13	-30.64	Vertical
3296.821	-42.57	0.21	-42.78	-13	-29.78	Vertical
The Worst Test Results Channel 190/836.6 MHz						
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit	Margin	Polarity
1673.213	-36.57	-4.65	-41.22	-13	-28.22	Horizontal
2509.821	-42.46	-2.21	-44.67	-13	-31.67	Horizontal
3346.405	-38.67	0.21	-38.46	-13	-25.46	Horizontal
1673.213	-37.57	-4.65	-42.22	-13	-29.22	Vertical
2509.821	-31.24	-2.21	-33.45	-13	-20.45	Vertical
3346.405	-36.55	0.21	-36.34	-13	-23.34	Vertical
The Worst Test Results Channel 251/848.8 MHz						
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit	Margin	Polarity
1697.612	-35.57	-4.65	-40.22	-13	-27.22	Horizontal
2546.413	-43.23	-2.21	-45.44	-13	-32.44	Horizontal
3395.214	-42.24	0.21	-42.03	-13	-29.03	Horizontal
1697.612	-35.68	-4.65	-40.33	-13	-27.33	Vertical
2546.413	-41.46	-2.21	-43.67	-13	-30.67	Vertical
3395.214	-37.81	0.21	-37.6	-13	-24.6	Vertical

**Note:** Below 30MHz no Spurious found and The GSM modes is the worst condition.





PCS 1900:

The Worst Test Results for Channel 512/1850.2MHz						
Frequency(MH)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
3700.411	-33.78	0.33	-33.45	-13	-20.45	Horizontal
5550.612	-35.35	4.01	-31.34	-13	-18.34	Horizontal
7400.823	-42.24	10.7	-31.54	-13	-18.54	Horizontal
3700.411	-34.53	0.33	-34.2	-13	-21.2	Vertical
5550.612	-35.35	4.01	-31.34	-13	-18.34	Vertical
7400.823	-41.39	10.7	-30.69	-13	-17.69	Vertical
The Worst Test Results for Channel 661/1880.0MHz						
Frequency(MH)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
3760.121	-36.32	0.33	-35.99	-13	-22.99	Horizontal
5640.231	-32.43	4.01	-28.42	-13	-15.42	Horizontal
7520.214	-42.56	10.7	-31.86	-13	-18.86	Horizontal
3760.121	-31.46	0.33	-31.13	-13	-18.13	Vertical
5640.231	-36.45	4.01	-32.44	-13	-19.44	Vertical
7520.214	-37.46	10.7	-26.76	-13	-13.76	Vertical
The Worst Test Results for Channel 810/1909.8MHz						
Frequency(MH)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
3819.623	-32.13	0.33	-31.8	-13	-18.8	Horizontal
5729.416	-35.52	4.01	-31.51	-13	-18.51	Horizontal
7639.218	-37.23	10.7	-26.53	-13	-13.53	Horizontal
3819.623	-32.22	0.33	-31.89	-13	-18.89	Vertical
5729.416	-41.56	4.01	-37.55	-13	-24.55	Vertical
7639.218	-38.13	10.7	-27.43	-13	-14.43	Vertical

**Note:** Below 30MHZ no Spurious found and The GSM modes is the worst condition.





## 6. FREQUENCY STABILITY

### 6.1 MEASUREMENT METHOD

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43+10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
  2. Subject the EUT to overnight soak at  $-10^{\circ}\text{C}$ .
  3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band, channel 190 for GSM 850 band measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
  4. Repeat the above measurements at  $10^{\circ}\text{C}$  increments from  $-10^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$ . Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
  5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
  6. Subject the EUT to overnight soak at  $+50^{\circ}\text{C}$ .
  7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
  8. Repeat the above measurements at  $10^{\circ}\text{C}$  increments from  $+50^{\circ}\text{C}$  to  $-10^{\circ}\text{C}$ . Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- .At all temperature levels hold the temperature to  $\pm 0.5^{\circ}\text{C}$  during the measurement procedure.



## 6.2 PROVISIONS APPLICABLE

### 6.2.1 FOR HAND CARRIED BATTERY POWERED EQUIPMENT

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.3VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

### 6.2.2 FOR EQUIPMENT POWERED BY PRIMARY SUPPLY VOLTAGE

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20oC.



### 6.3 MEASUREMENT RESULT

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20oC.

Frequency Error Against Voltage for GSM 850 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	24	0.029
3.7	15	0.018
4.2	26	0.031

Frequency Error Against Temperature for GSMS850 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	26	0.031
-20	31	0.037
-10	26	0.031
0	32	0.038
10	25	0.030
20	28	0.033
30	-22	-0.026
40	37	0.044
50	32	0.038

Frequency Error Against Voltage for GPRS850 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	26	0.031
3.7	26	0.031
4.2	-22	-0.026

Frequency Error Against Temperature for GPRS850 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-36	-0.043
-20	23	0.028
-10	-36	-0.043
0	25	0.030
10	-27	-0.032
20	25	0.030
30	-27	-0.032
40	33	0.039
50	32	0.038


**Frequency Error Against Voltage for EDGE 850 band**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	24	0.029
3.7	22	0.026
4.2	-24	-0.029

**Frequency Error Against Temperature for EDGE 850 band**

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-35	-0.042
-20	23	0.028
-10	-36	-0.043
0	28	0.033
10	18	0.022
20	27	0.032
30	-25	-0.030
40	33	0.039
50	29	0.035

**Note:** The EUT doesn't work below -30°C

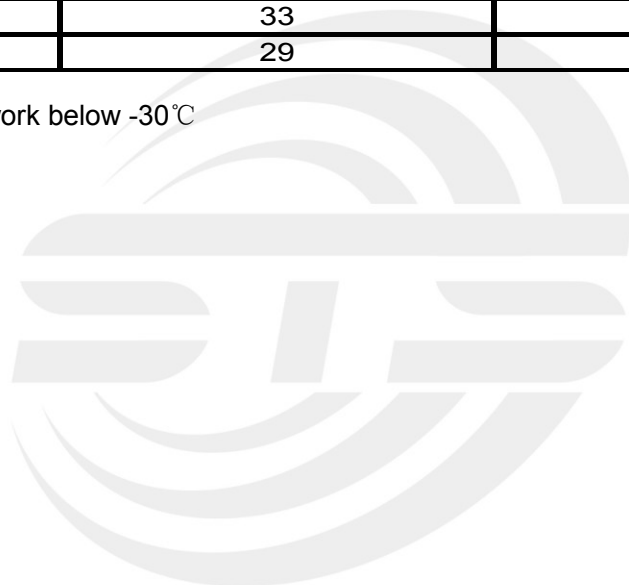



Frequency Error Against Temperature for GSM1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	23	0.012
-20	26	0.014
-10	25	0.013
0	23	0.012
10	-25	-0.013
20	22	0.012
30	31	0.016
40	27	0.014
50	-24	-0.013

Frequency Error Against Voltage for GPRS1900 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	25	0.013
3.7	23	0.012
4.2	32	0.017

Frequency Error Against Temperature for GPRS1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	22	0.012
-20	25	0.013
-10	27	0.014
0	21	0.011
10	32	0.017
20	24	0.013
30	25	0.013
40	32	0.017
50	27	0.014



Frequency Error Against Voltage for EDGE 1900 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	23	0.012
3.7	26	0.014
4.2	35	0.019

Frequency Error Against Temperature for EDGE 1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	22	0.012
-20	21	0.011
-10	24	0.013
0	25	0.013
10	36	0.019
20	27	0.014
30	25	0.013
40	31	0.016
50	26	0.014

**Note:** The EUT doesn't work below -30°C



## 7. OCCUPIED BANDWIDTH

### 7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### 7.2 PROVISIONS APPLICABLE

Limits applicated report test result only.

### 7.3 MEASUREMENT RESULT

<b>Occupied Bandwidth (99%) for GSM 850 band</b>		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	824.2	249.8292
Middle Channel	836.6	240.5968
High Channel	848.8	243.7496

<b>Occupied Bandwidth (99%) for GPRS 850 band</b>		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	824.2	245.1927
Middle Channel	836.6	243.0037
High Channel	848.8	245.6046

<b>Occupied Bandwidth (99%) for EDGE 850 band</b>		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	824.2	249.2049
Middle Channel	836.6	240.7397
High Channel	848.8	239.6594



<b>Occupied Bandwidth (99%) for GSM1900 band</b>		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	1850.2	244.1637
Middle Channel	1880.0	246.7824
High Channel	1909.8	244.3805

<b>Occupied Bandwidth (99%) for GPRS1900 band</b>		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	1850.2	248.8517
Middle Channel	1880.0	245.6933
High Channel	1909.8	242.7503

<b>Occupied Bandwidth (99%) for EDGE 1900 band</b>		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	1850.2	251.9151
Middle Channel	1880.0	246.2251
High Channel	1909.8	246.5663





## 8. Emission Bandwidth

### 8.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### 8.2 PROVISIONS APPLICABLE


The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

### 8.3 MEASUREMENT RESULT

<b>Emission Bandwidth (-26dBc) for GSM850 band</b>		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	824.2	322.132
Middle Channel	836.6	317.803
High Channel	848.8	320.606
<b>Emission Bandwidth (-26dBc) for GPRS850 band</b>		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	824.2	319.449
Middle Channel	836.6	319.614
High Channel	848.8	315.981
<b>Emission Bandwidth (-26dBc) for EDGE 850 band</b>		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	824.2	318.817
Middle Channel	836.6	318.456
High Channel	848.8	318.221



<b>Emission Bandwidth (-26dBc) for GSM1900 band</b>		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	1850.2	317.661
Middle Channel	1880.0	317.900
High Channel	1909.8	321.250
<b>Emission Bandwidth (-26dBc) for GPRS1900 band</b>		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	1850.2	321.770
Middle Channel	1880.0	315.962
High Channel	1909.8	315.439
<b>Emission Bandwidth (-26dBc) for EDGE 1900 band</b>		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	1850.2	321.044
Middle Channel	1880.0	315.904
High Channel	1909.8	313.228

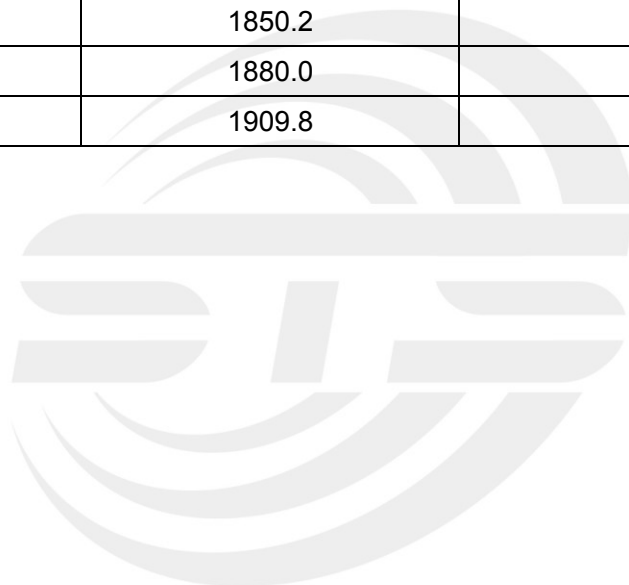



## 9. BAND EDGE

### 9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### 9.2 PROVISIONS APPLICABLE

as Specified in FCC rules of 22.917(b) and 24.238(b)

### 9.3 MEASUREMENT RESULT


Please refers to Appendix III for compliance test plots for band edges





## APPENDIX I

# TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION



CONDUCTED EMISSION IN GSM 850 BAND

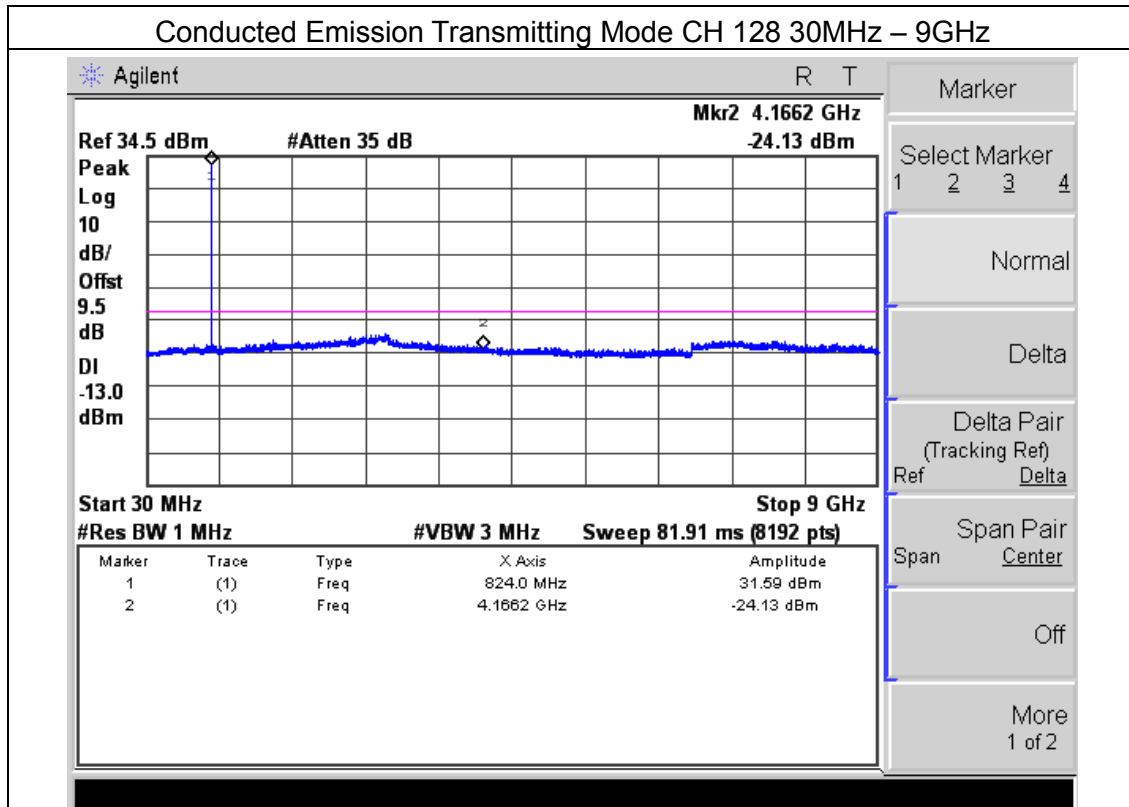


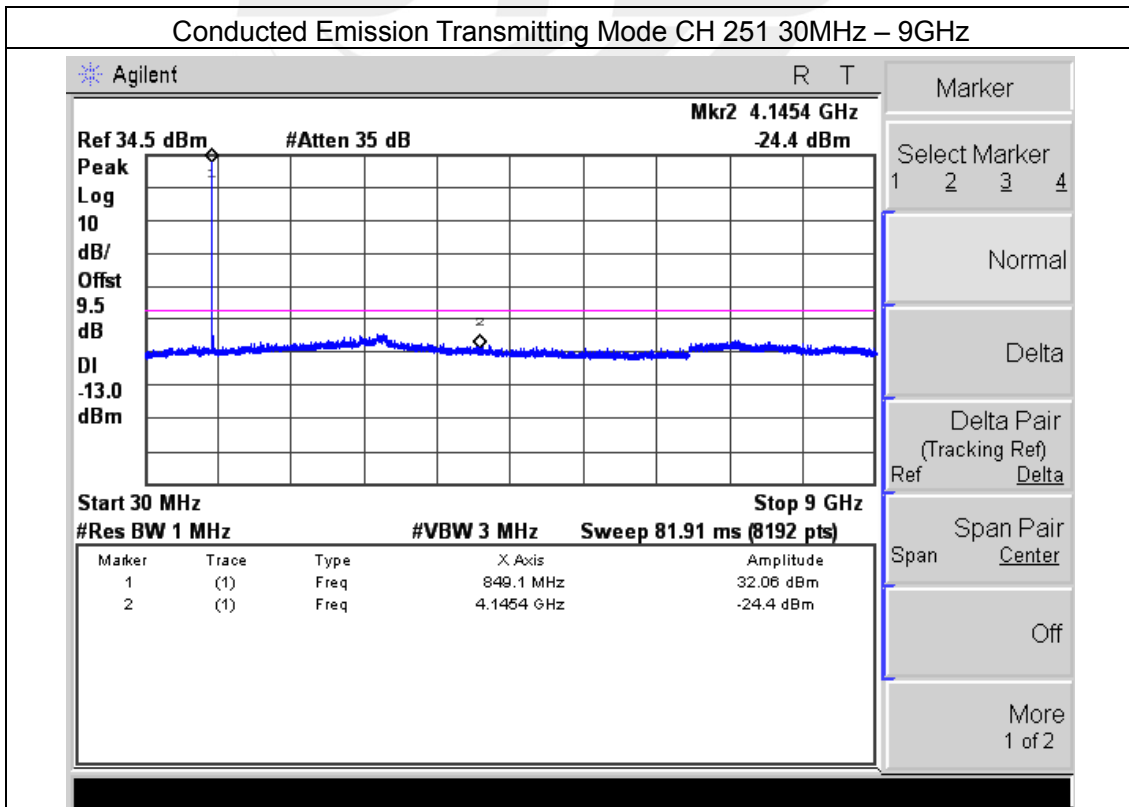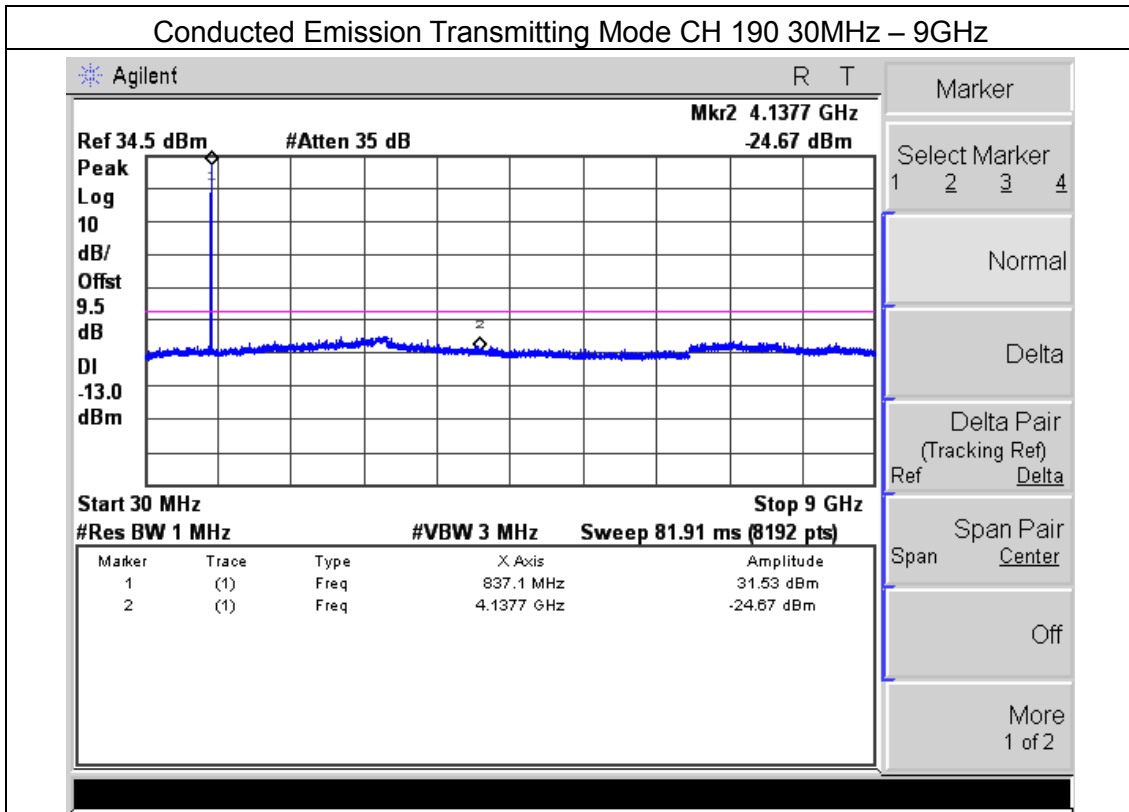





CONDUCTED EMISSION IN GPRS 850 BAND

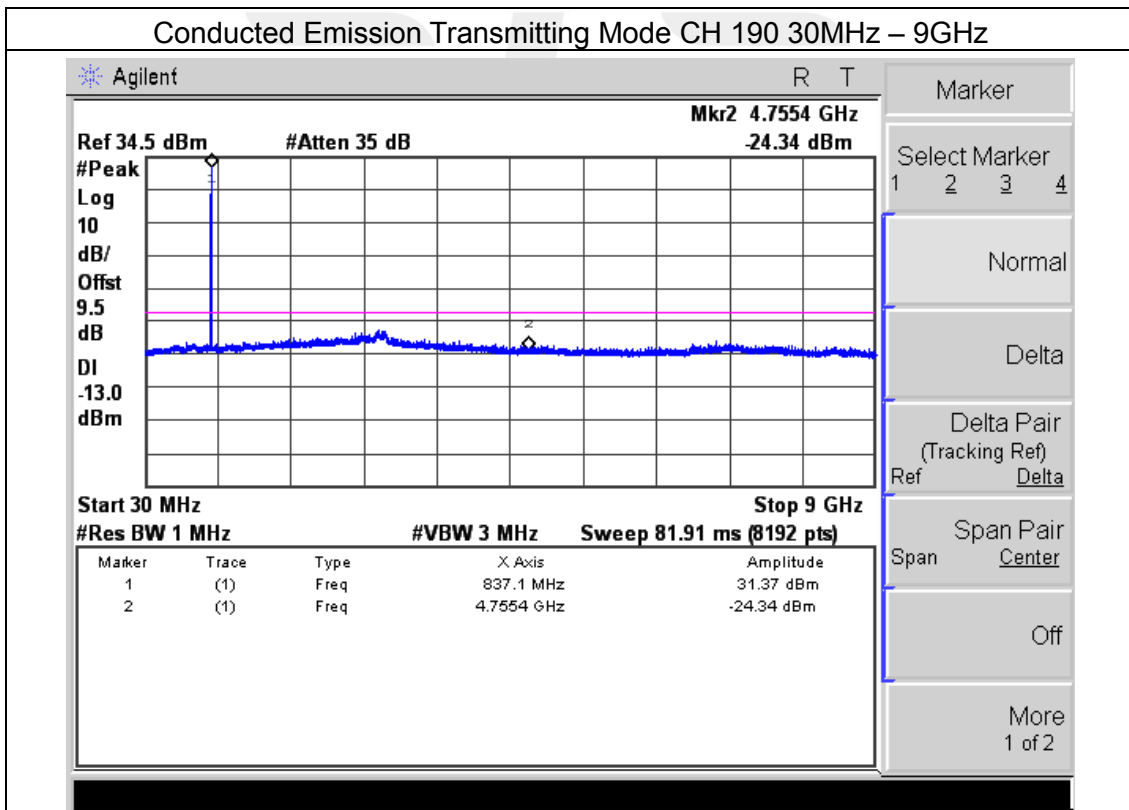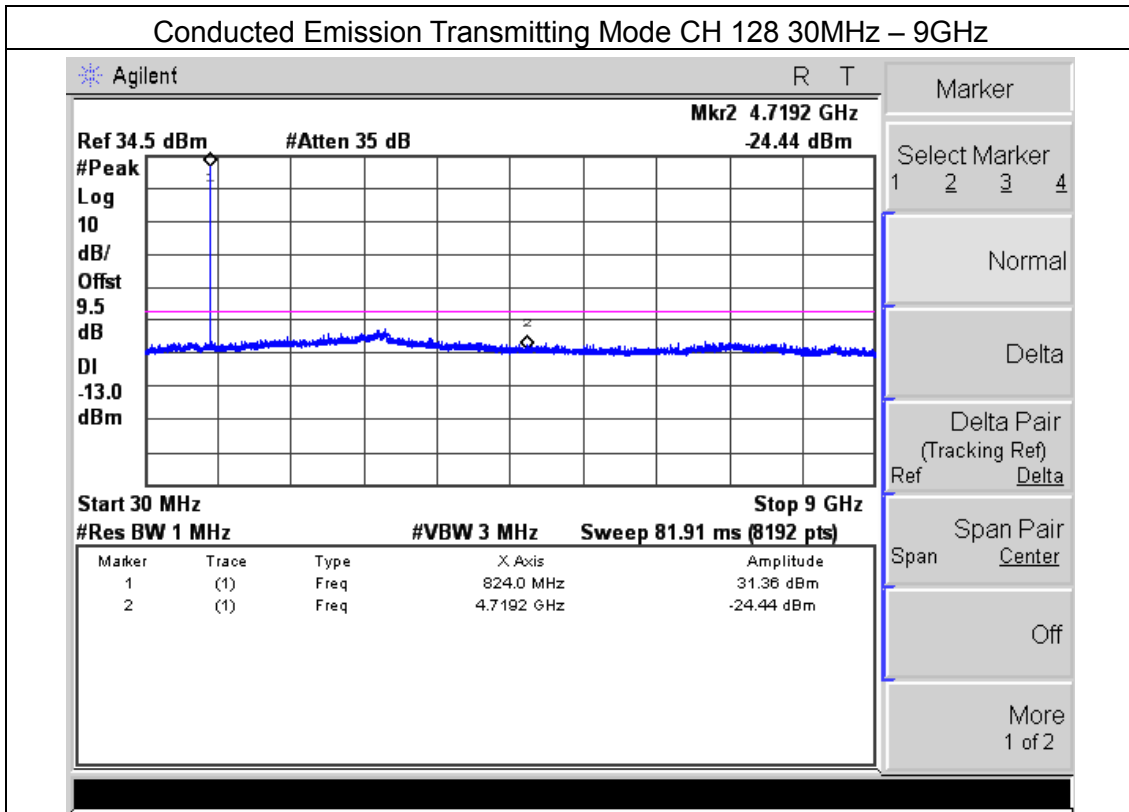

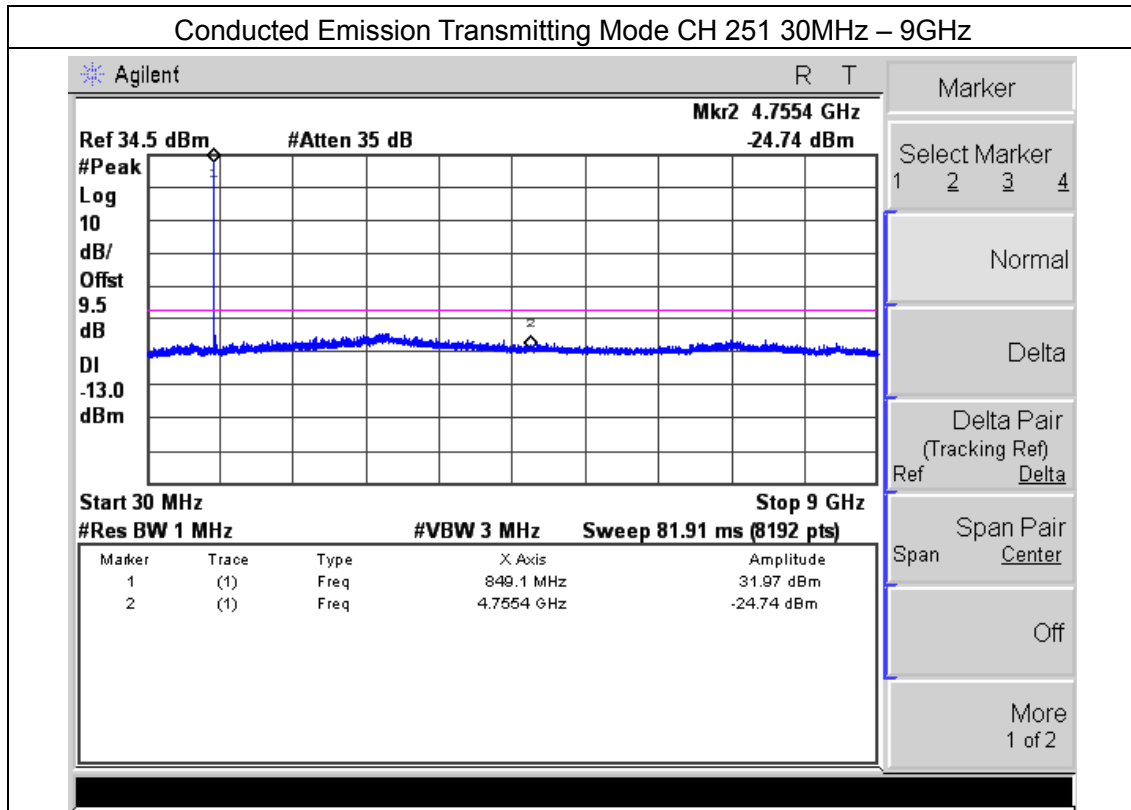




CONDUCTED EMISSION IN EDGE 850 BAND

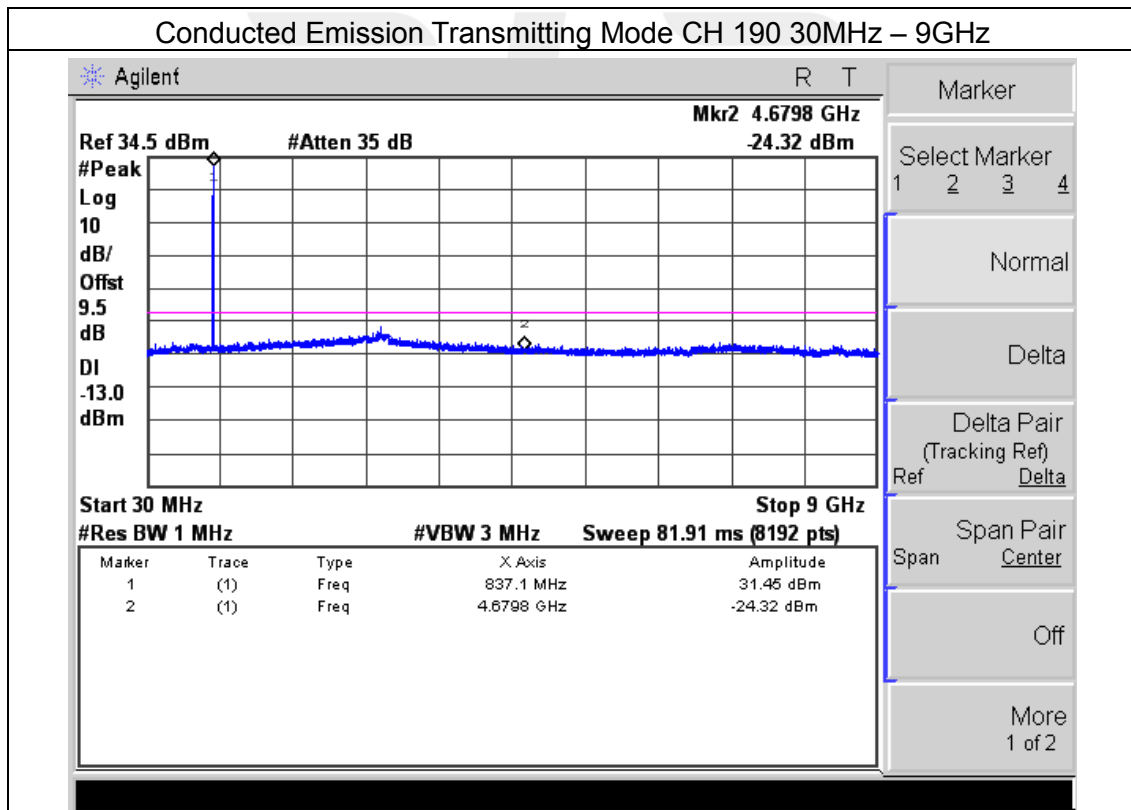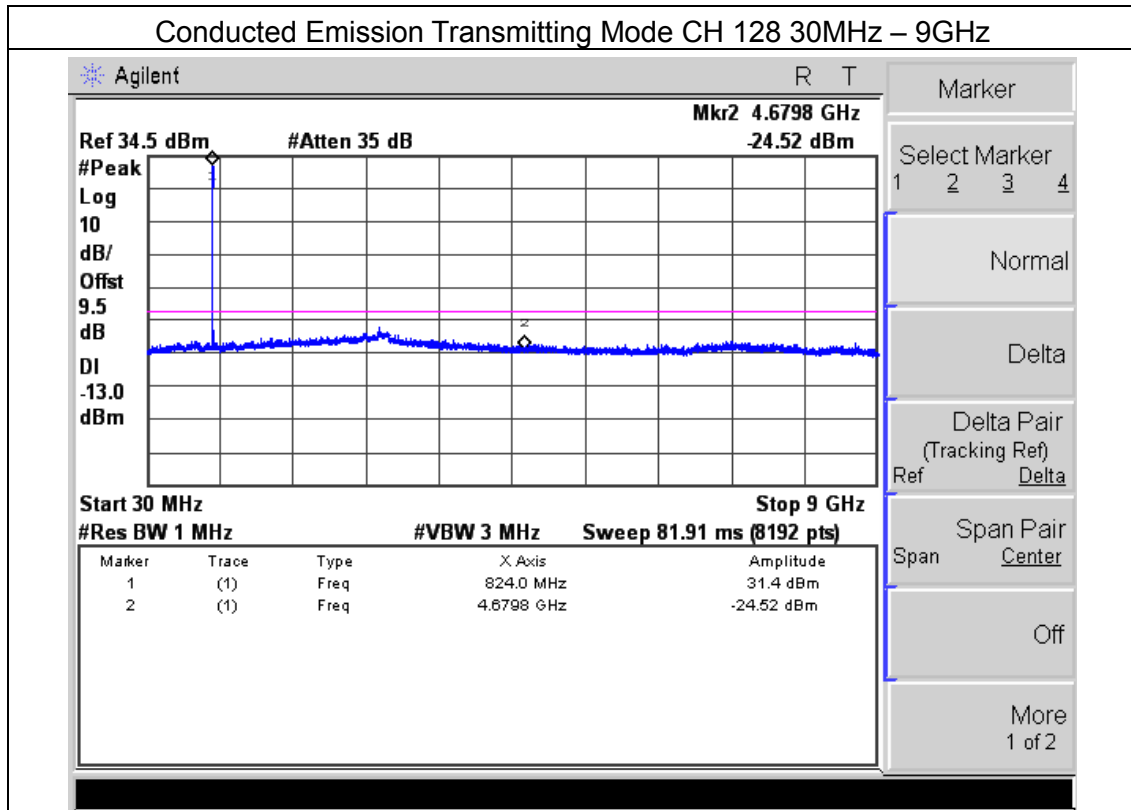





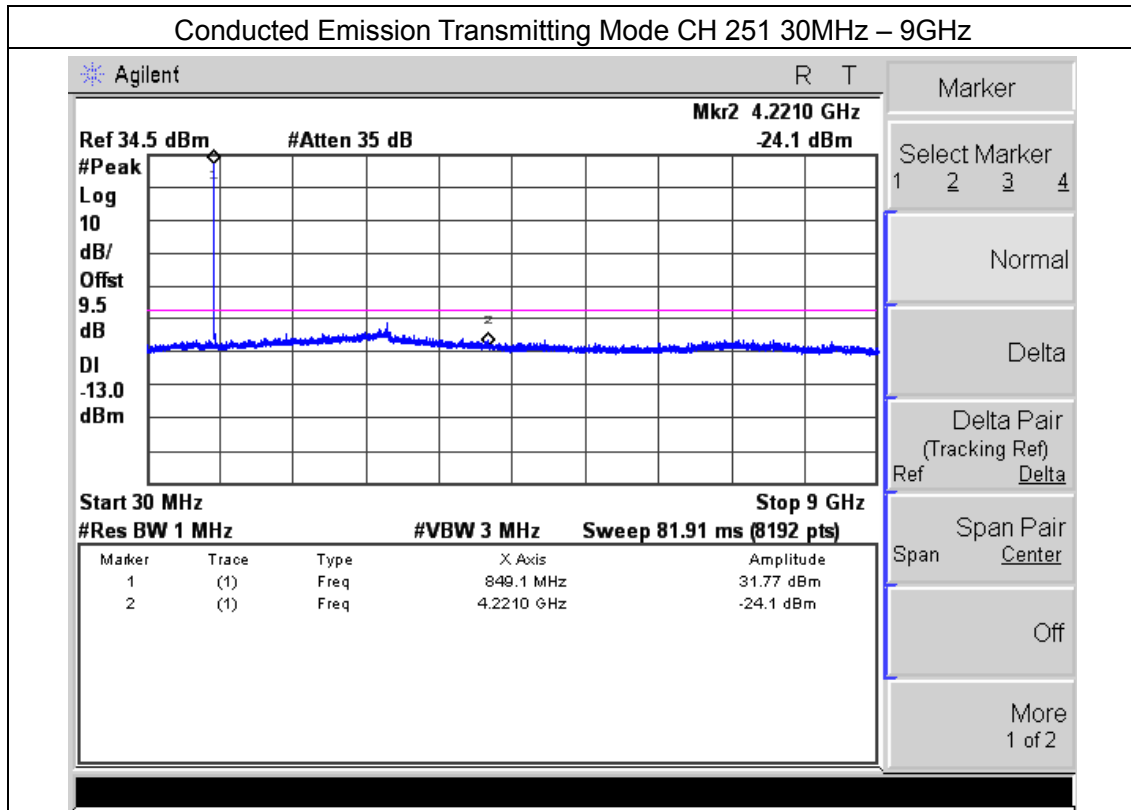





CONDUCTED EMISSION IN GSM1900 BAND

Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

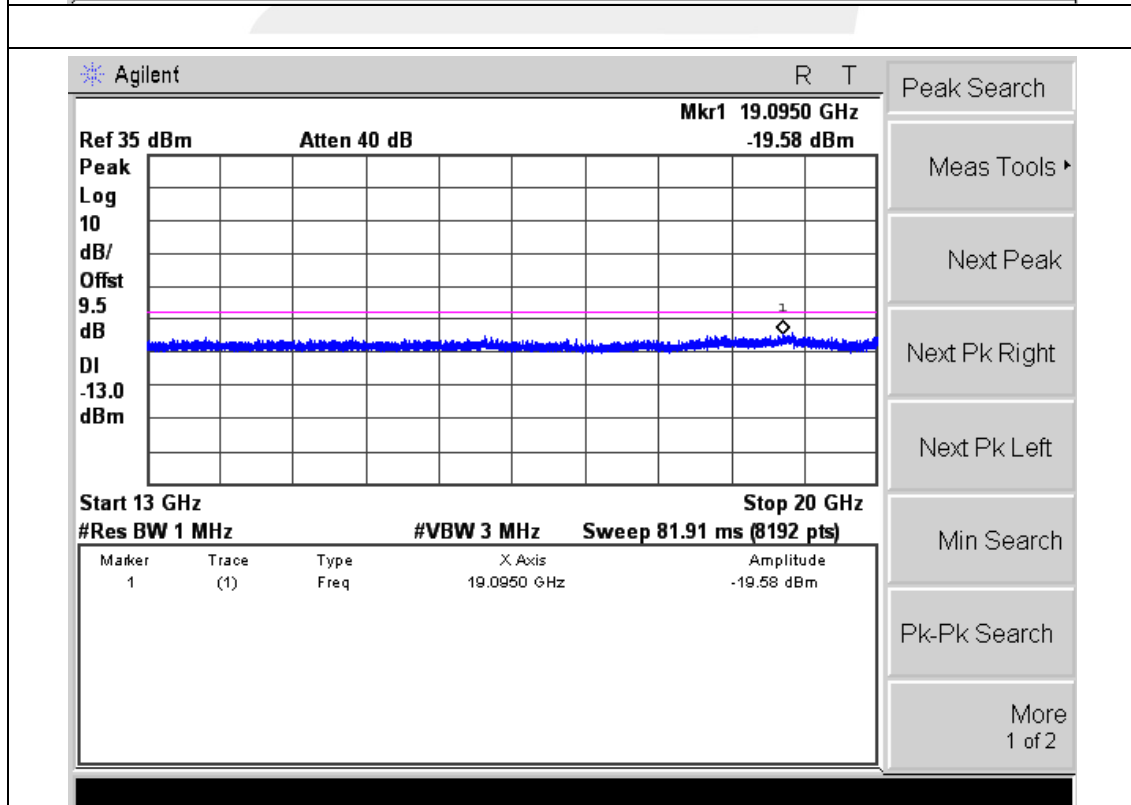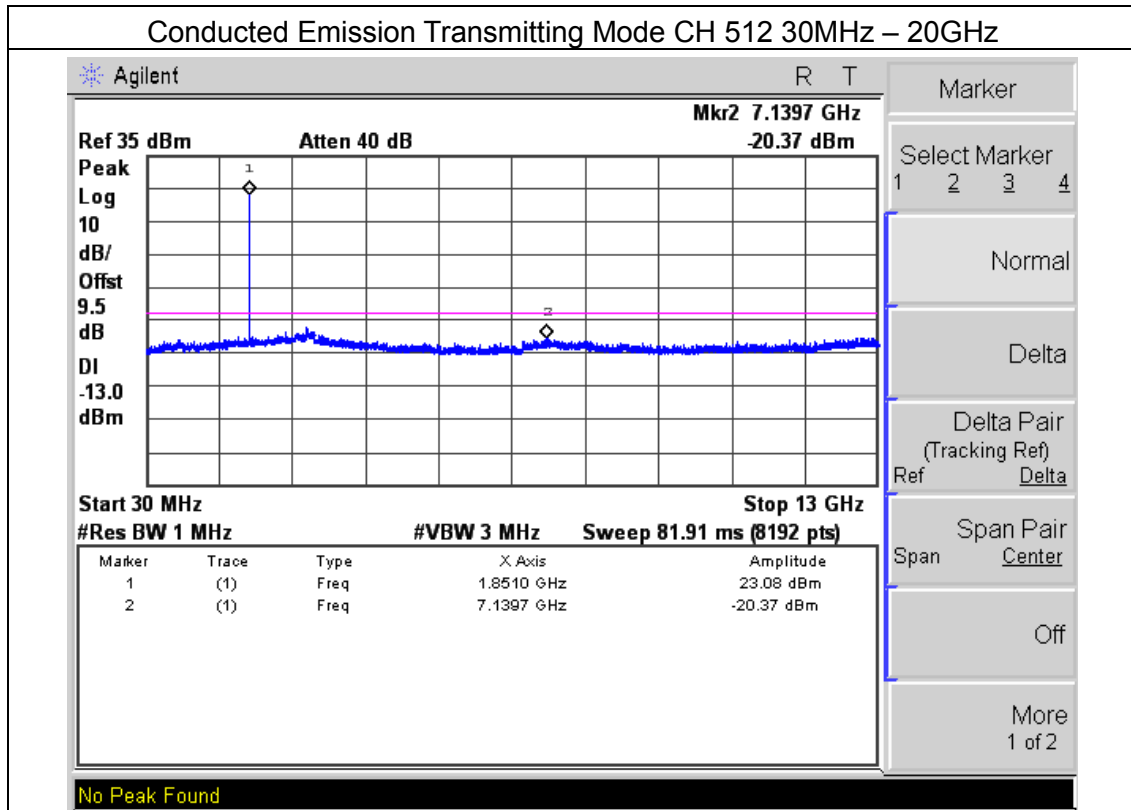





Conducted Emission Transmitting Mode CH 661 30MHz – 20GHz

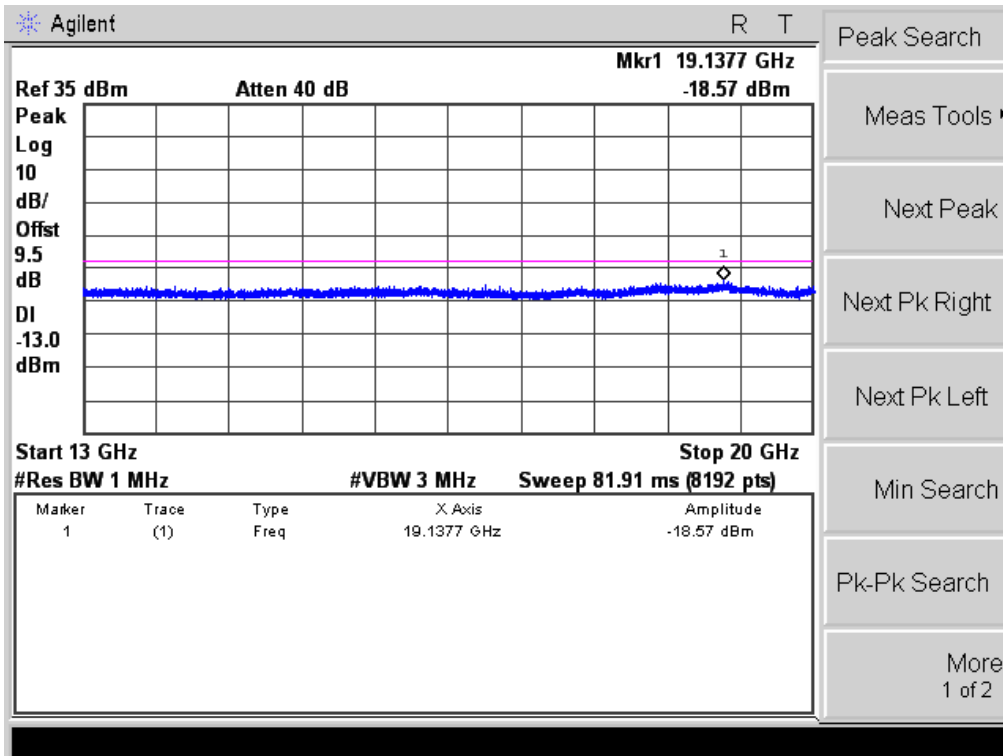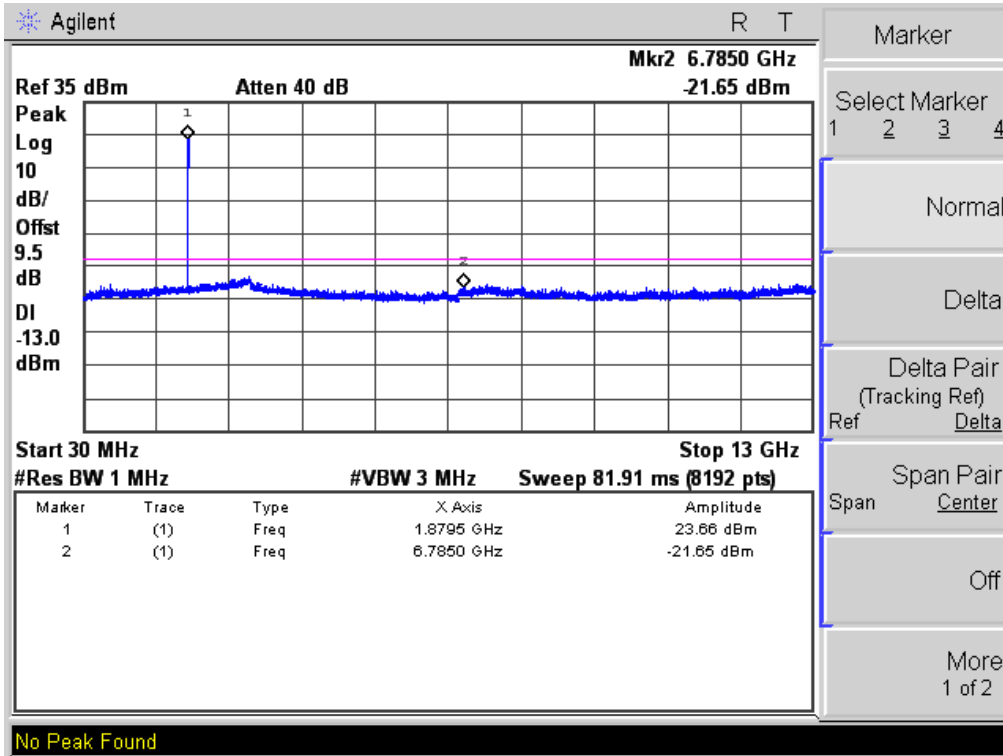





Conducted Emission Transmitting Mode CH 810 30MHz – 20GHz

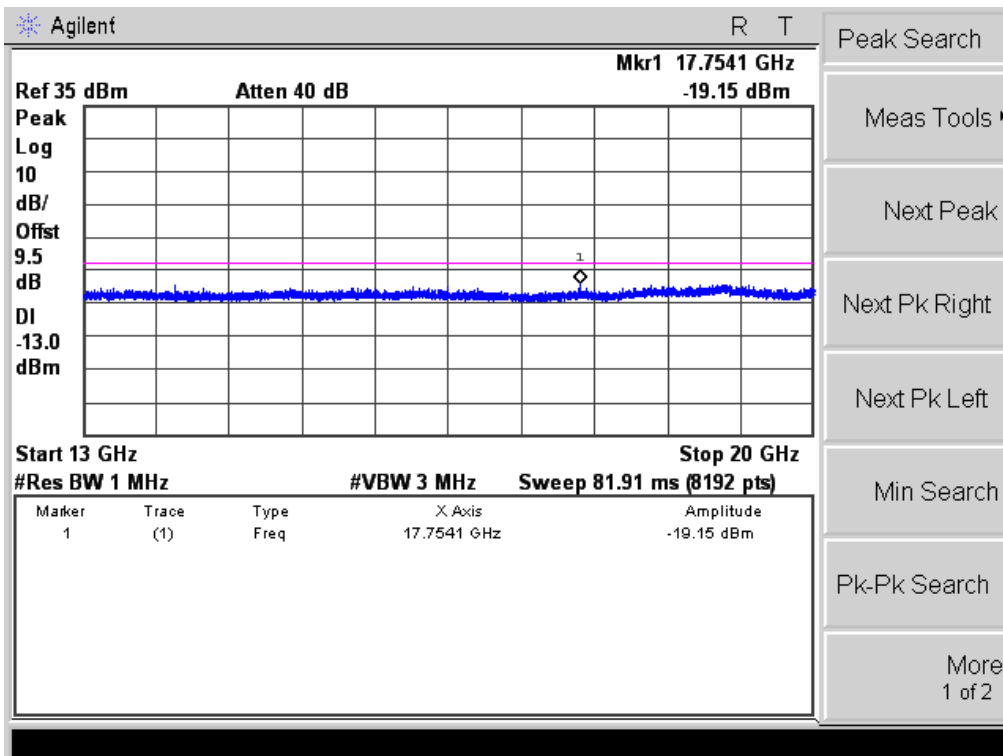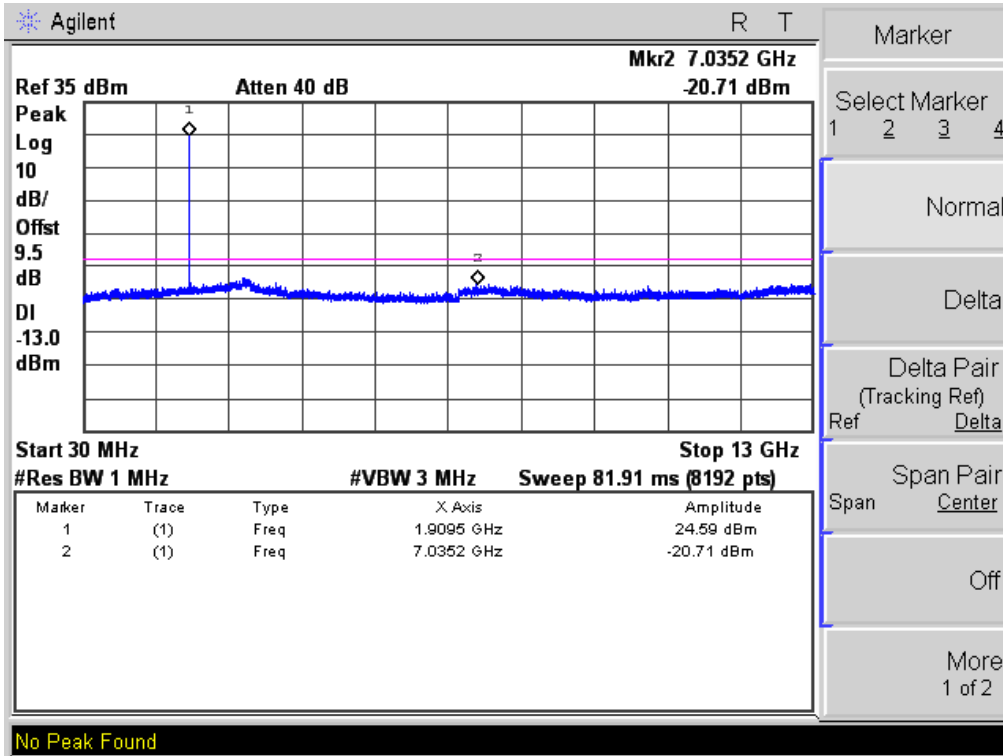





CONDUCTED EMISSION IN GPRS1900 BAND

Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

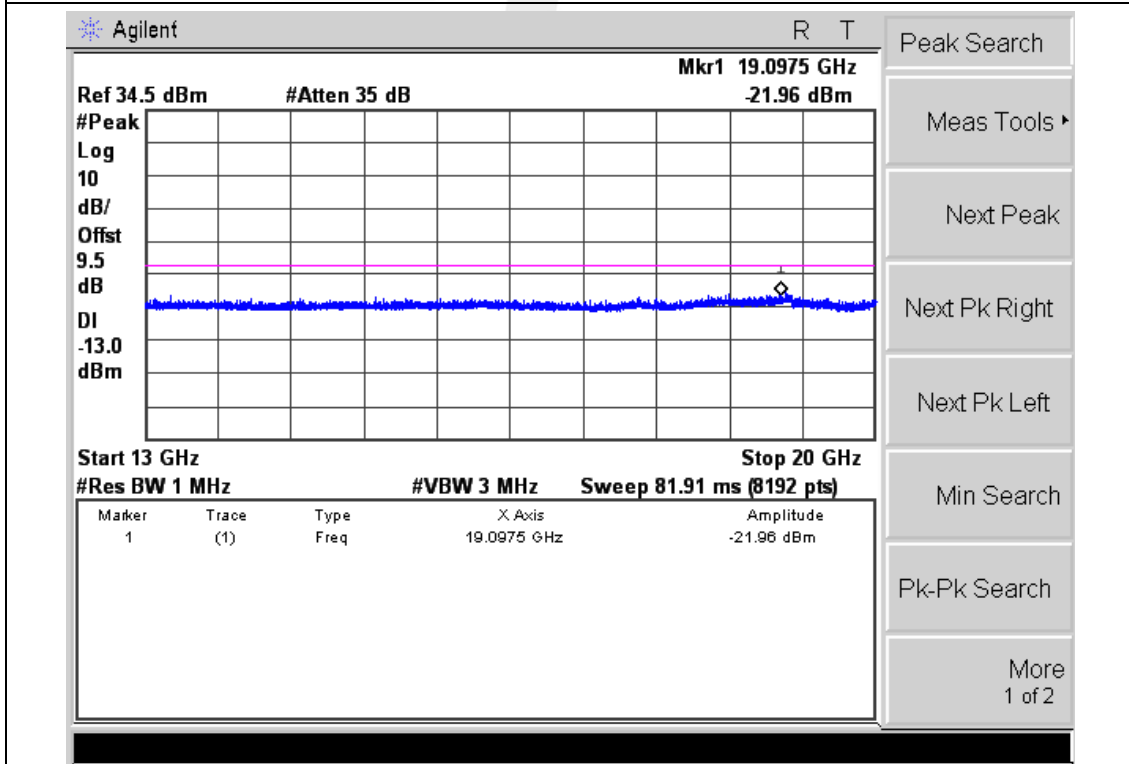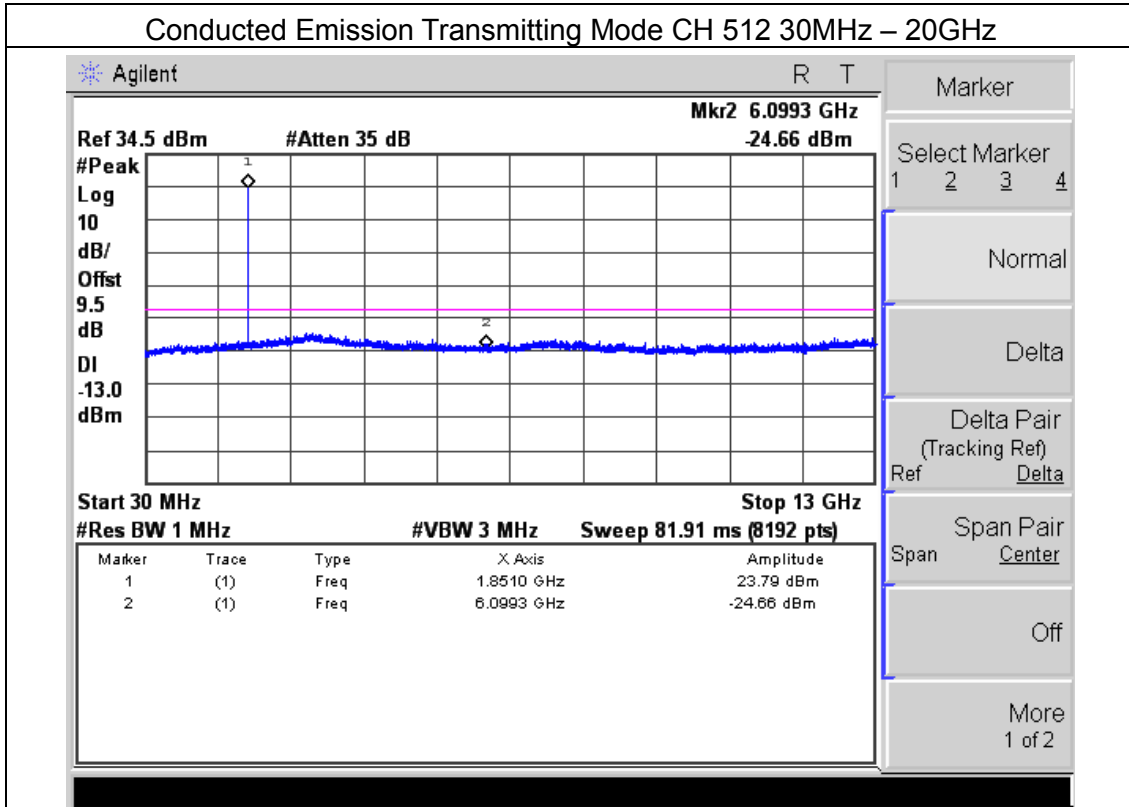





### Conducted Emission Transmitting Mode CH 661 30MHz – 20GHz

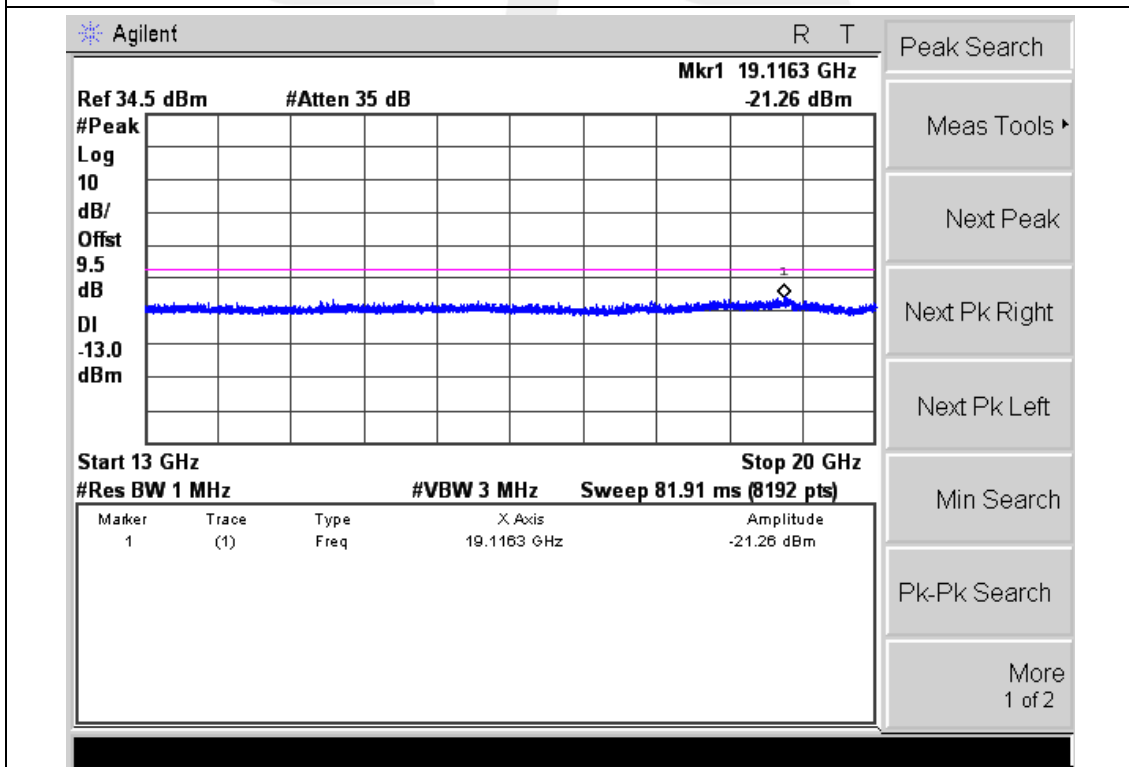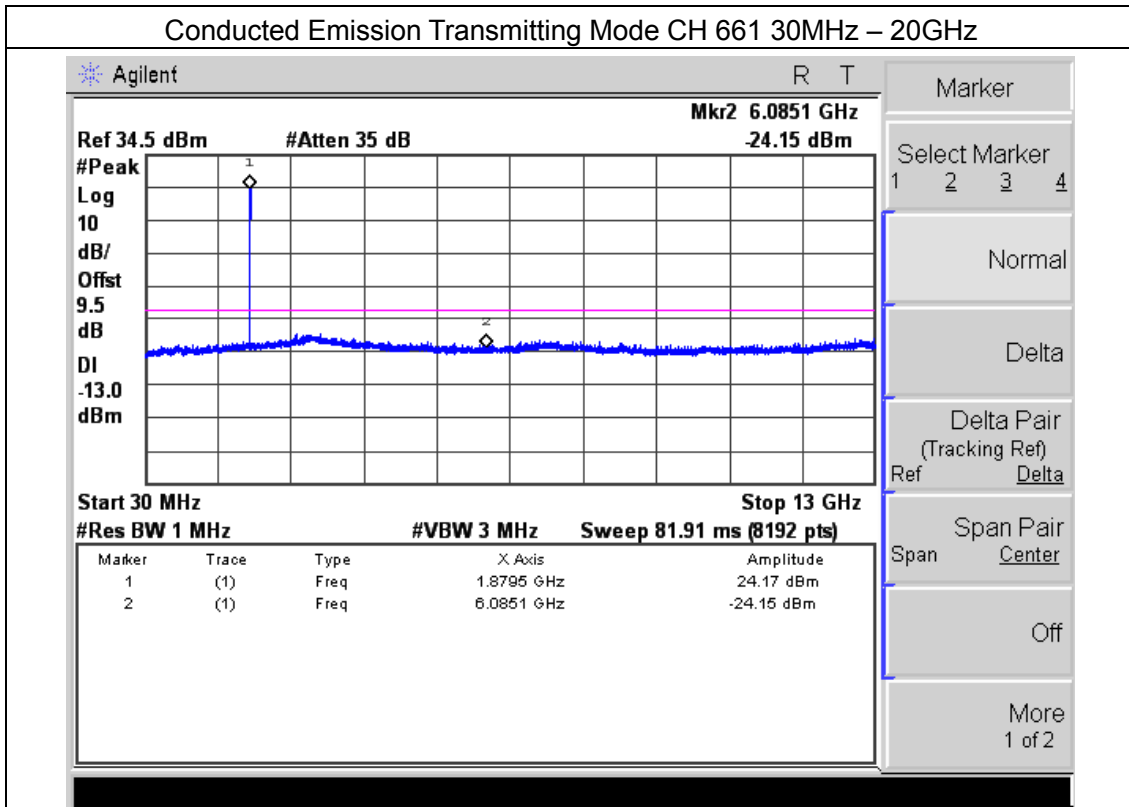





Conducted Emission Transmitting Mode CH 810 30MHz – 20GHz

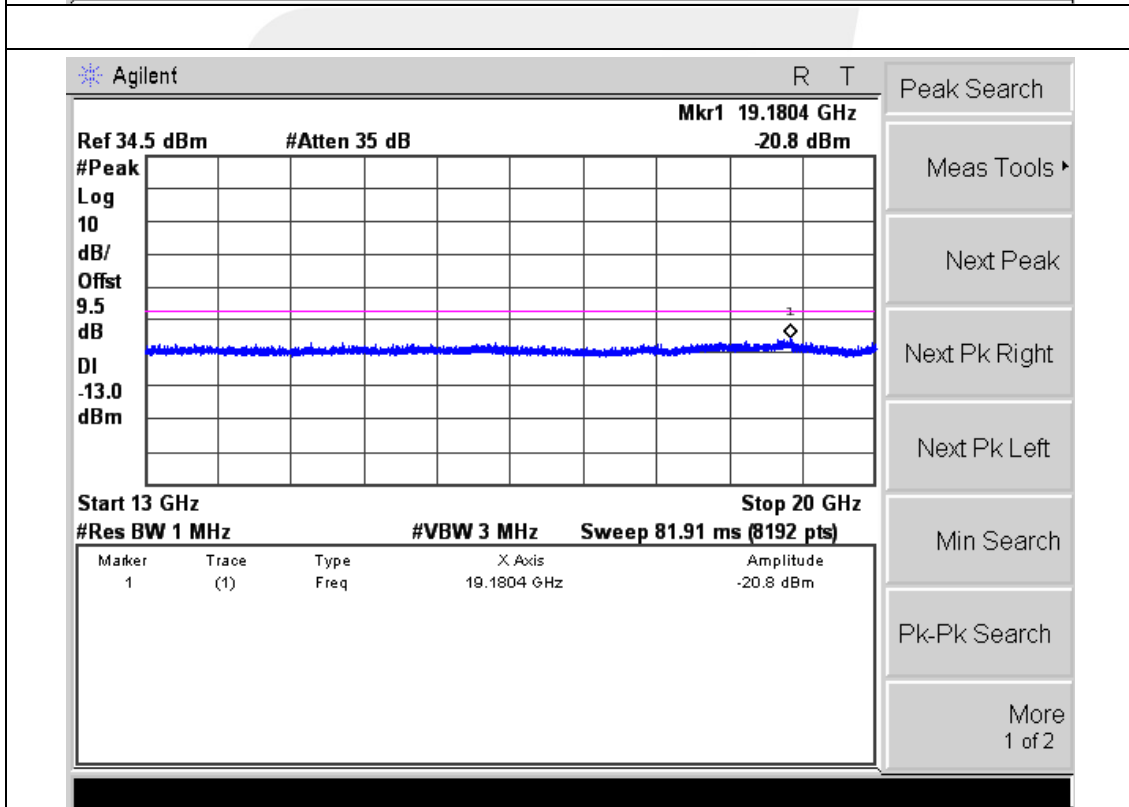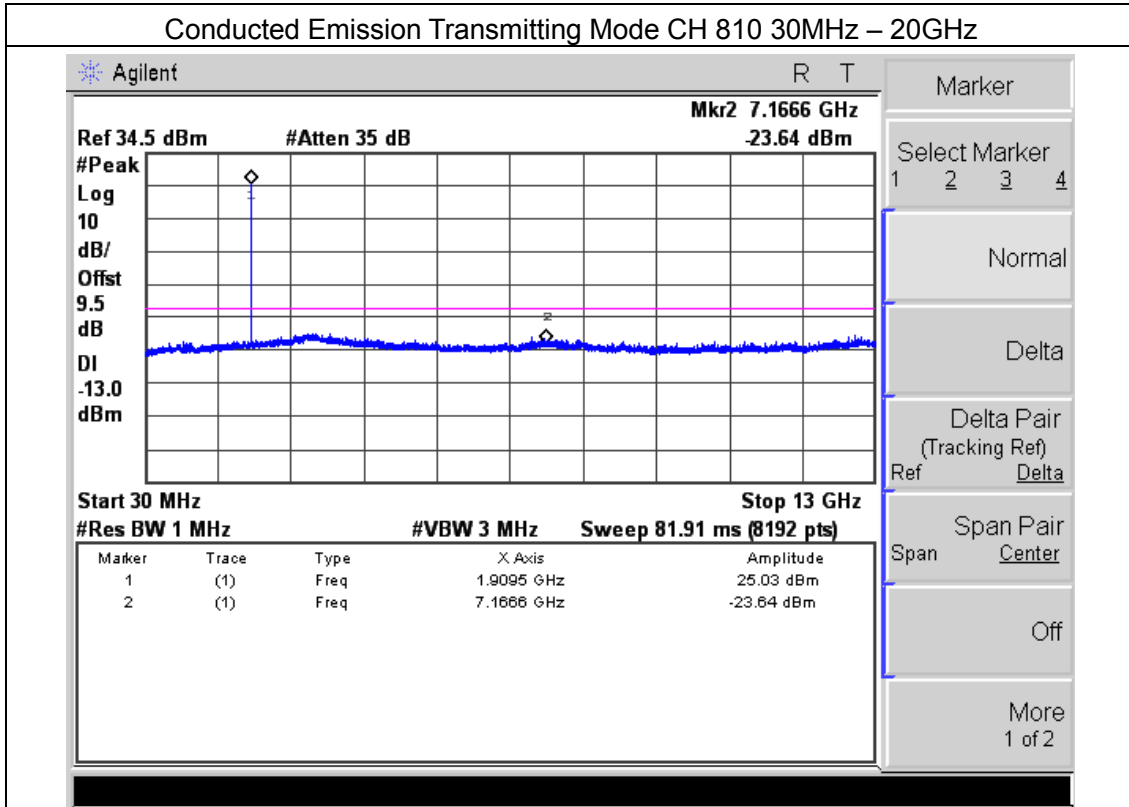



CONDUCTED EMISSION IN EDGE 1900 BAND



Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

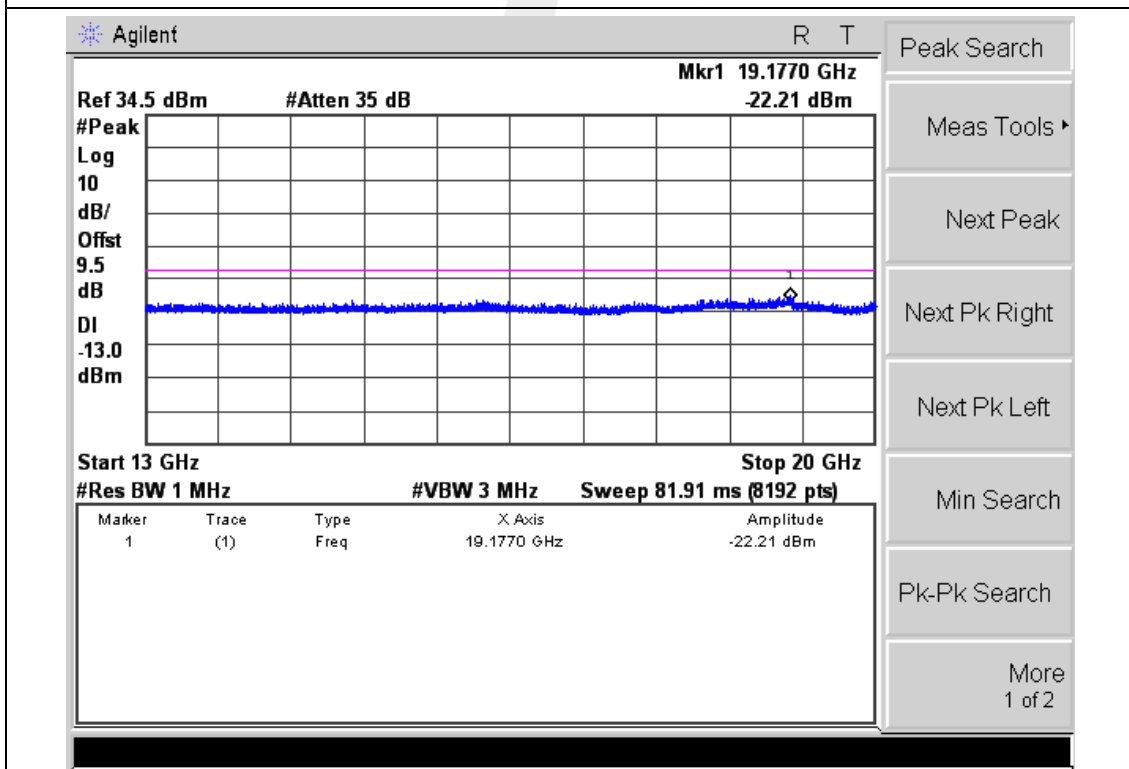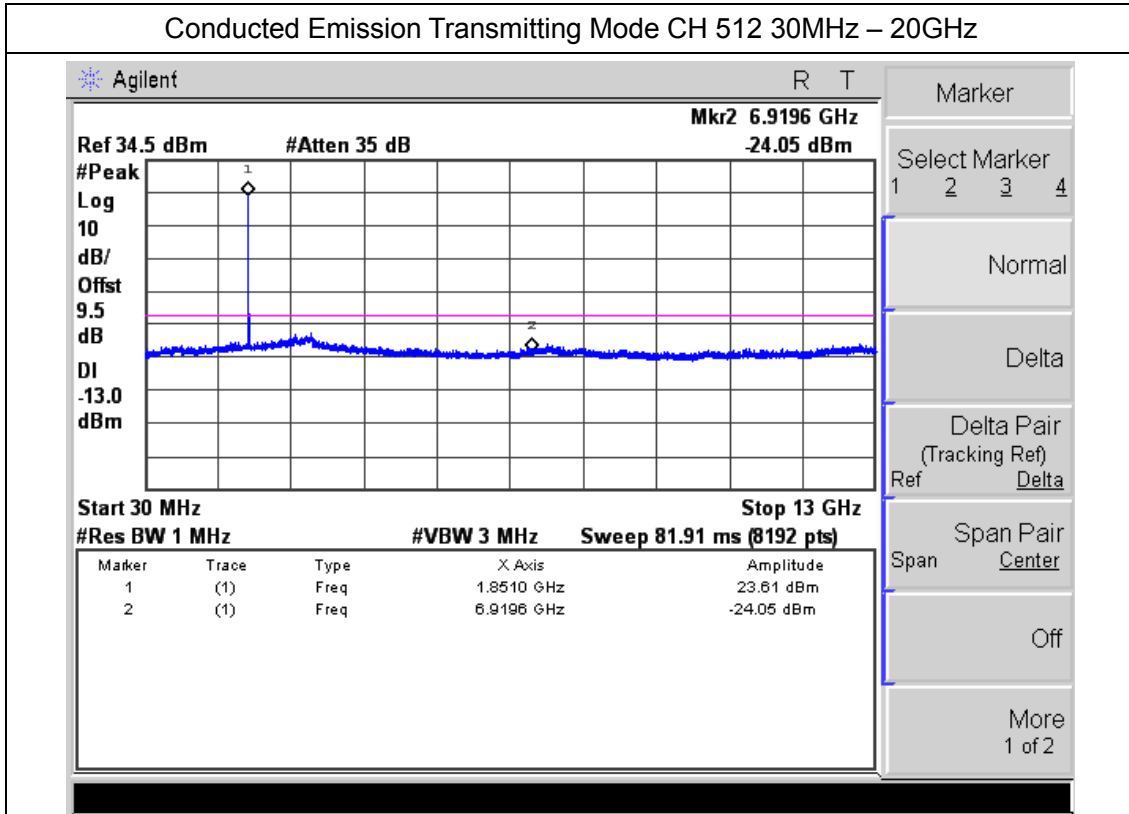







Conducted Emission Transmitting Mode CH 661 30MHz – 20GHz

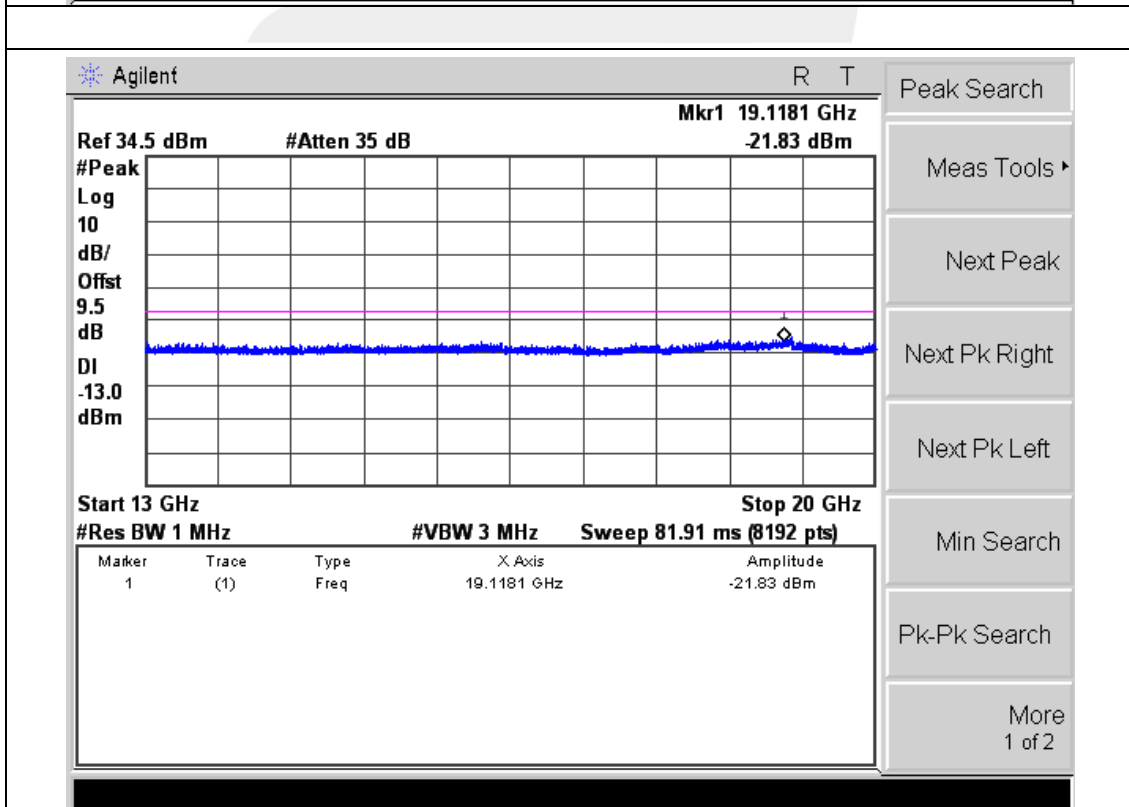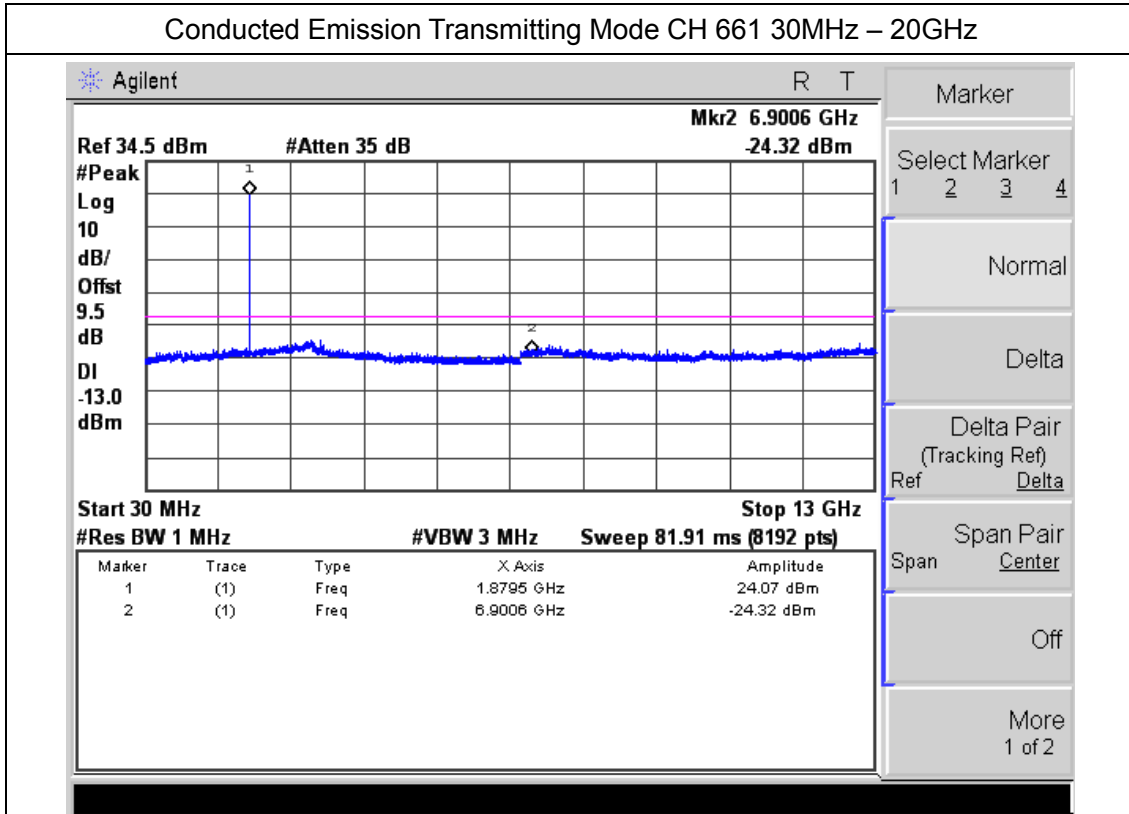




Conducted Emission Transmitting Mode CH 810 30MHz – 20GHz

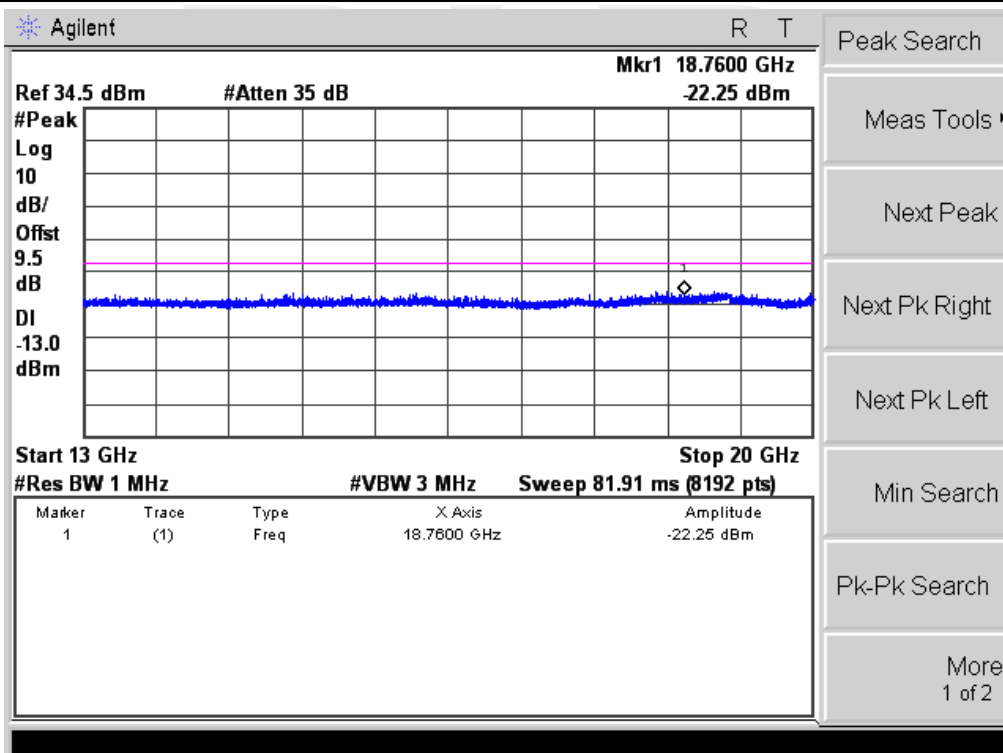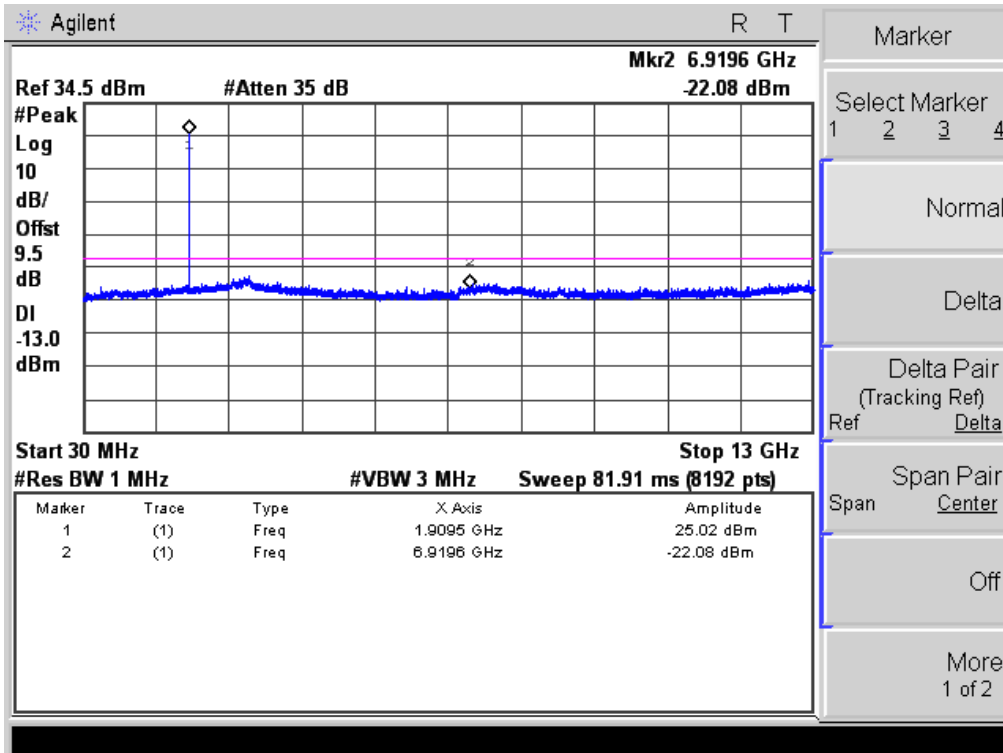




## APPENDIX II

# TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) EMISSION BANDWIDTH (-26dBC)

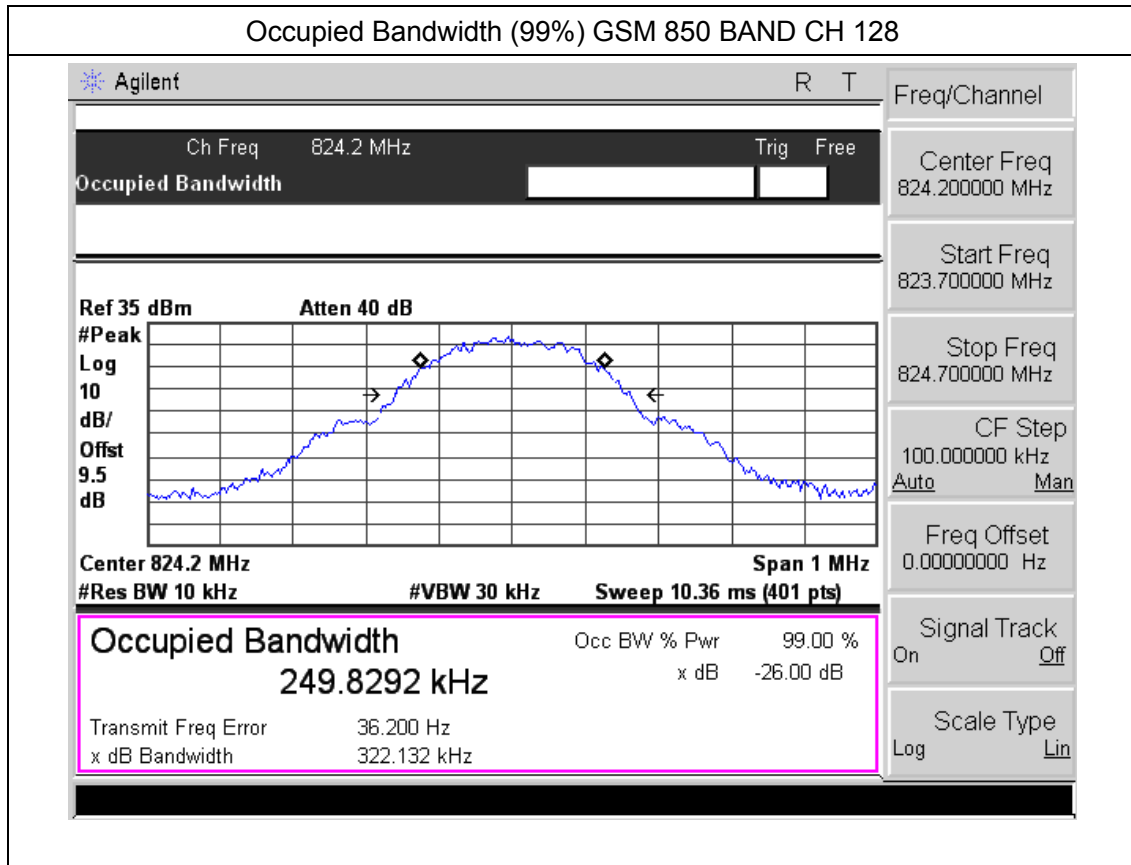




### Occupied Bandwidth (99%) GSM 850 BAND CH 190

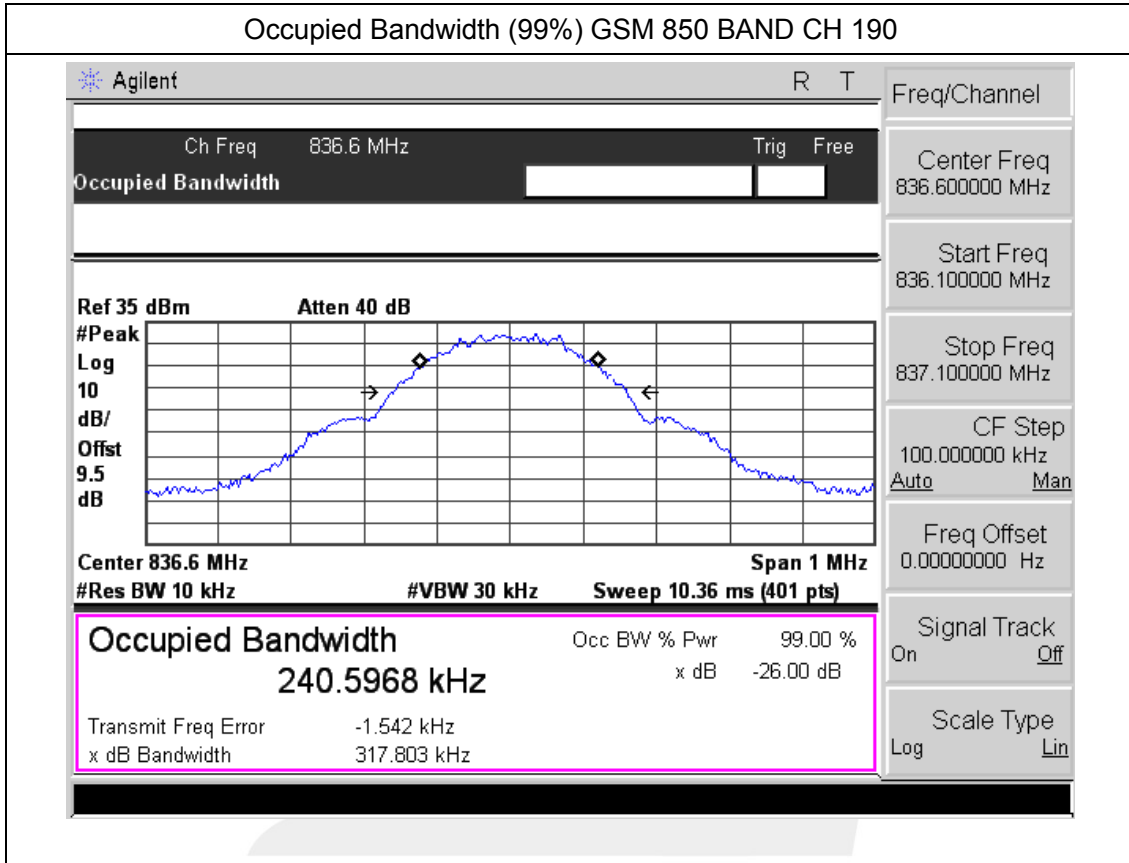

### Occupied Bandwidth (99%) GSM 850 BAND CH 251

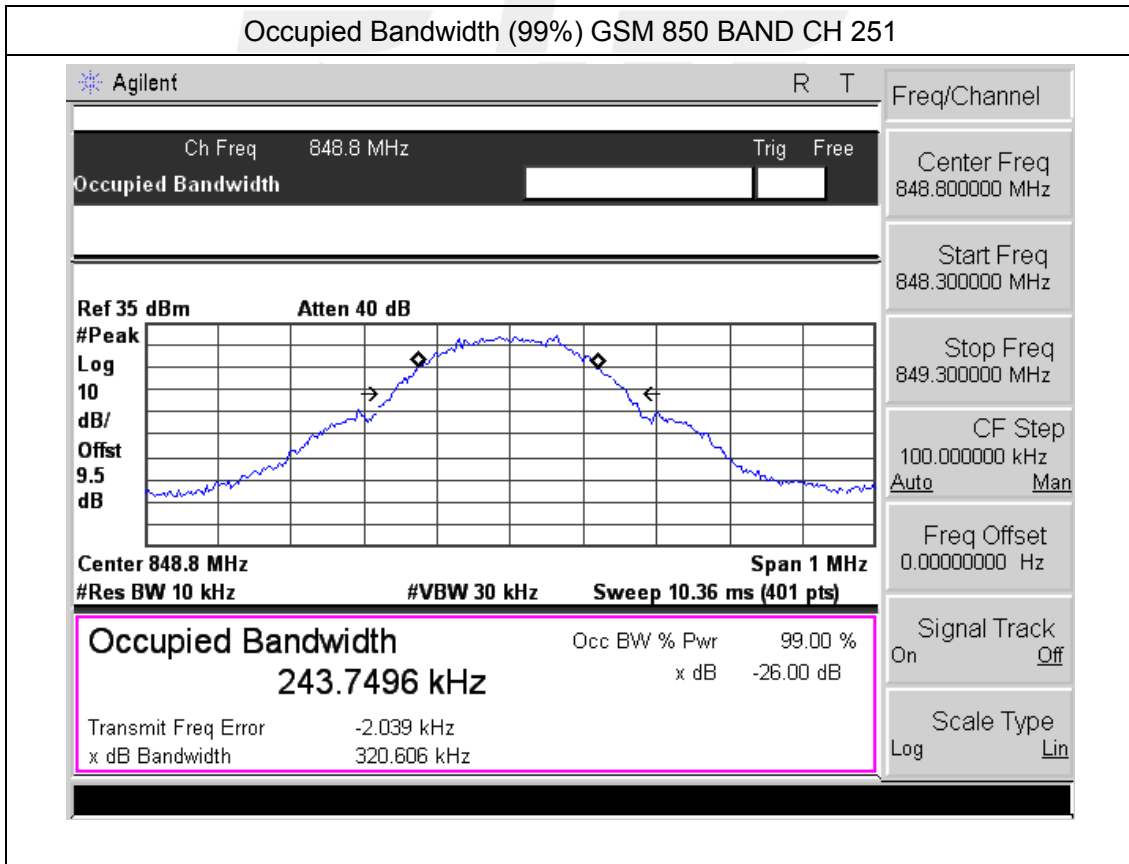



### Occupied Bandwidth (99%) GPRS 850 BAND CH 128

Agilent
R T

Ch Freq 824.2 MHz Trig Free

Occupied Bandwidth

Ref 34.5 dBm #Atten 40 dB

Center 824.2 MHz Span 1 MHz  
#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %  
245.1927 kHz x dB -26.00 dB

Transmit Freq Error -1.817 kHz  
x dB Bandwidth 319.449 kHz

Display

Full Screen

Display Line -13.00 dBm  
On Off

Limits ▶

Active Fctn Position ▶  
Center

Title ▶

Preferences ▶

### Occupied Bandwidth (99%) GSM 850 BAND CH 190

Agilent
R T

Ch Freq 836.6 MHz Trig Free

Occupied Bandwidth

Ref 34.5 dBm #Atten 40 dB

Center 836.6 MHz Span 1 MHz  
#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %  
243.0037 kHz x dB -26.00 dB

Transmit Freq Error -3.134 kHz  
x dB Bandwidth 319.614 kHz

Freq/Channel

Center Freq 836.600000 MHz

Start Freq 836.100000 MHz



Stop Freq 837.100000 MHz

CF Step 100.000000 kHz  
Auto Man

Freq Offset 0.00000000 Hz


Signal Track On Off

Scale Type Log Lin

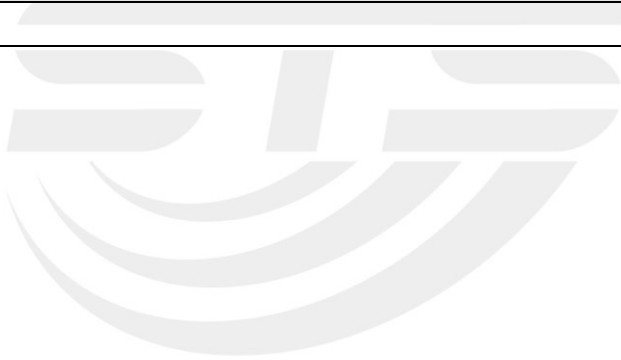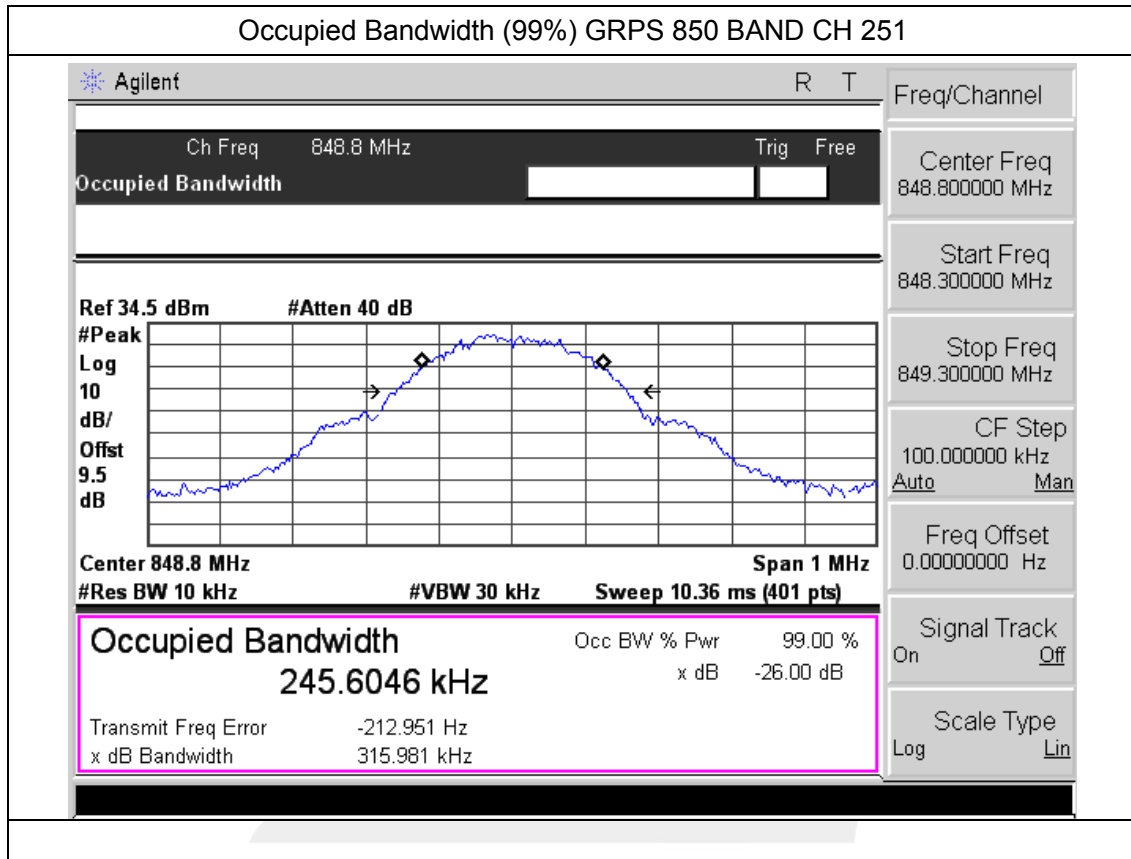





## Occupied Bandwidth (99%) EDGE 850 BAND CH 128

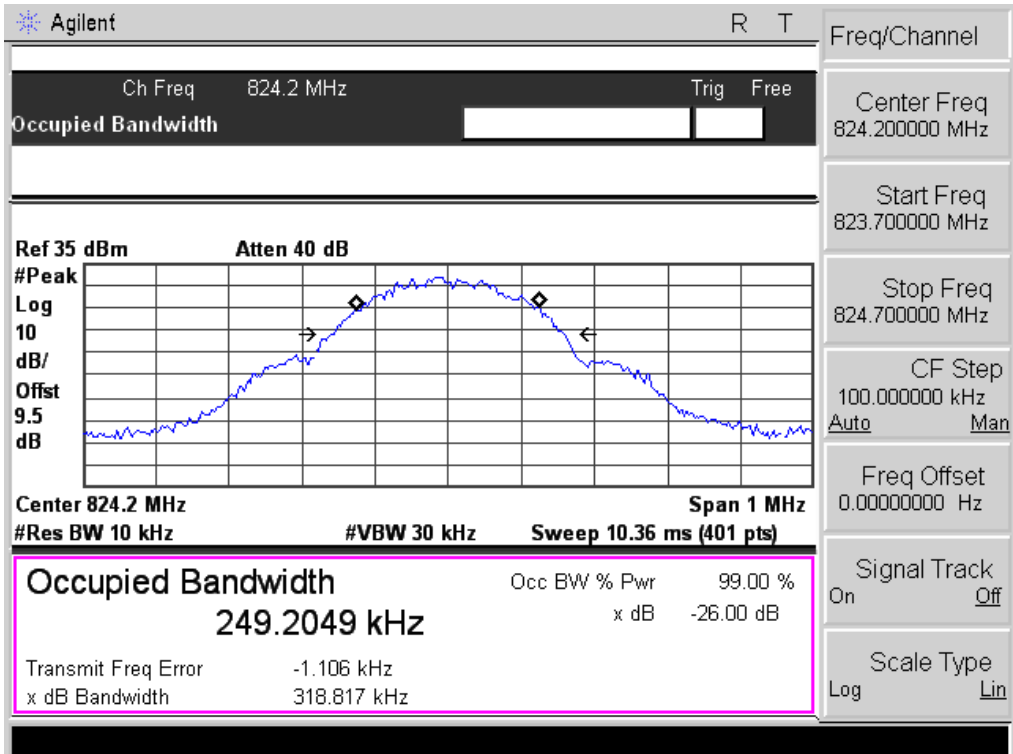

## Occupied Bandwidth (99%) EDGE 850 BAND CH 190

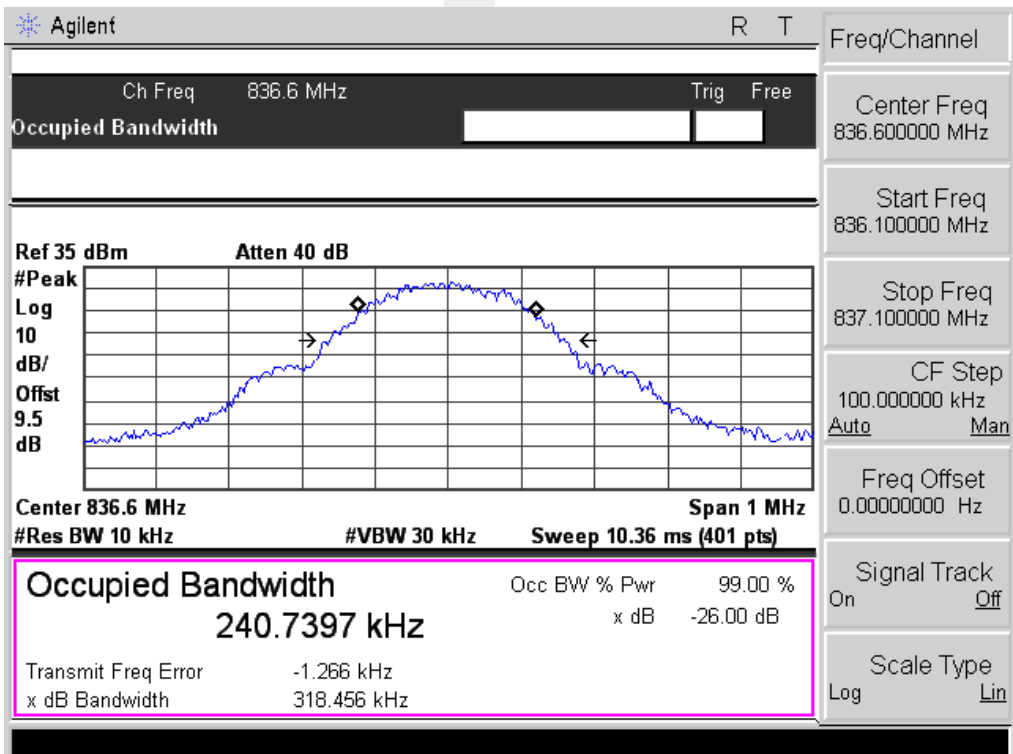


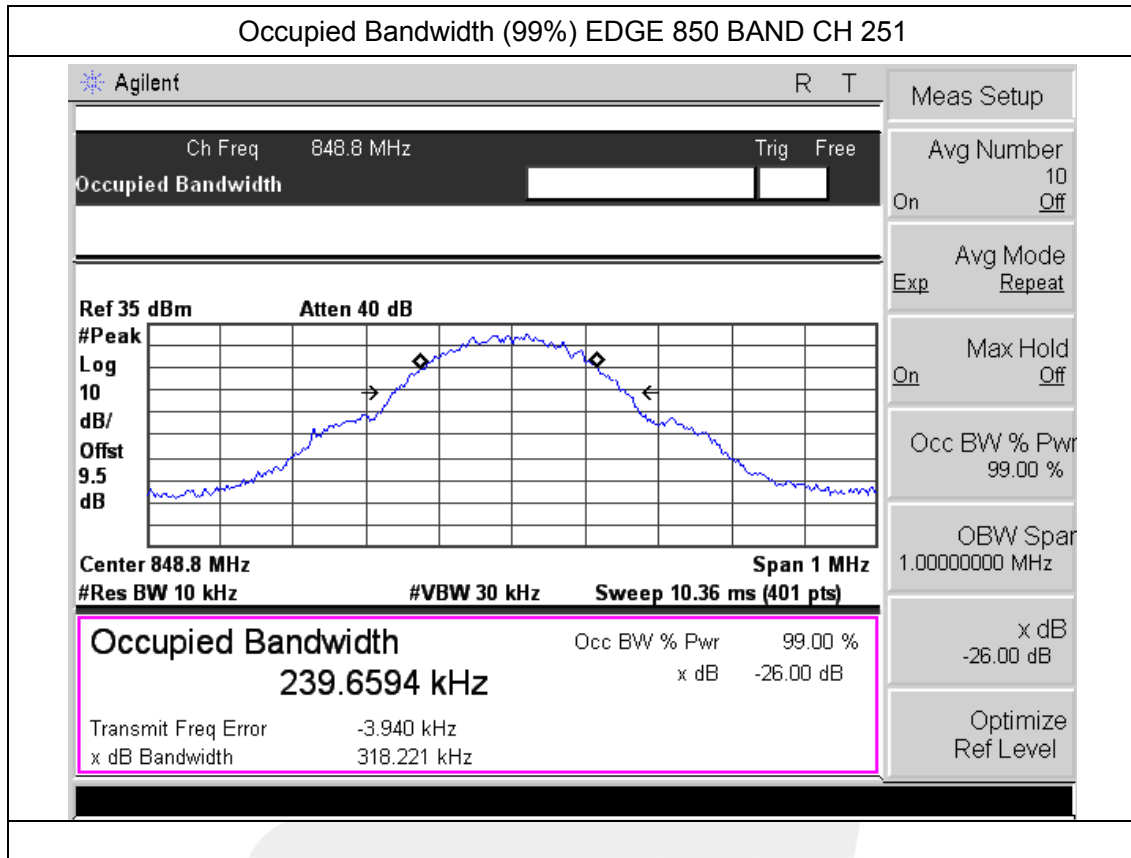







### Occupied Bandwidth (99%) PCS 1900 BAND CH 512

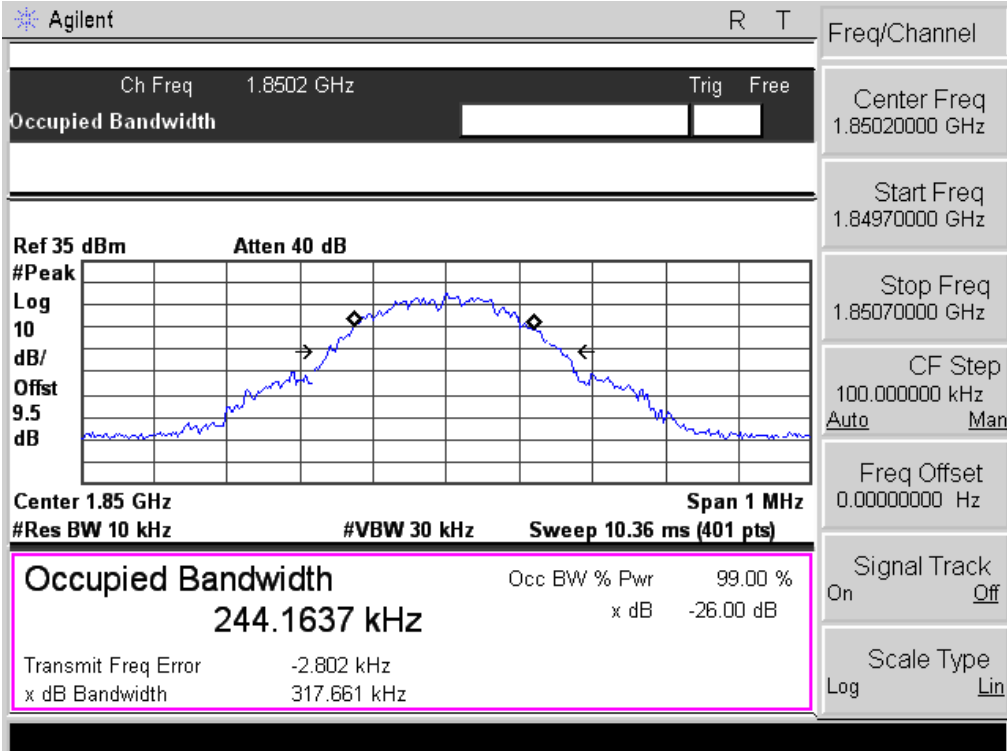

### Occupied Bandwidth (99%) PCS 1900 BAND CH 661

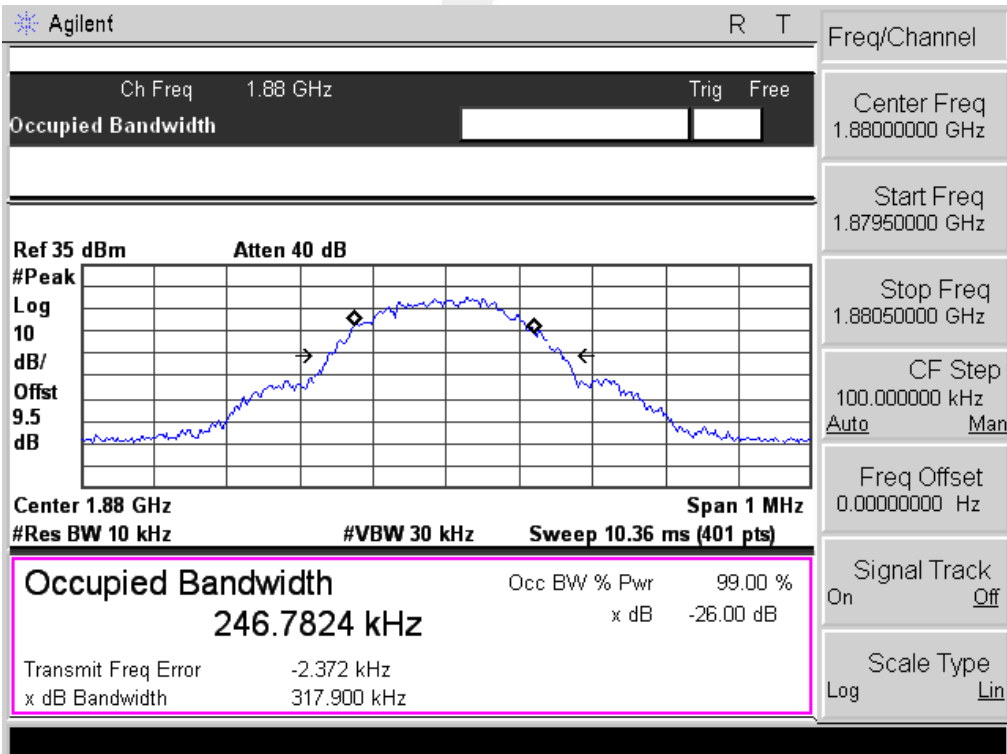

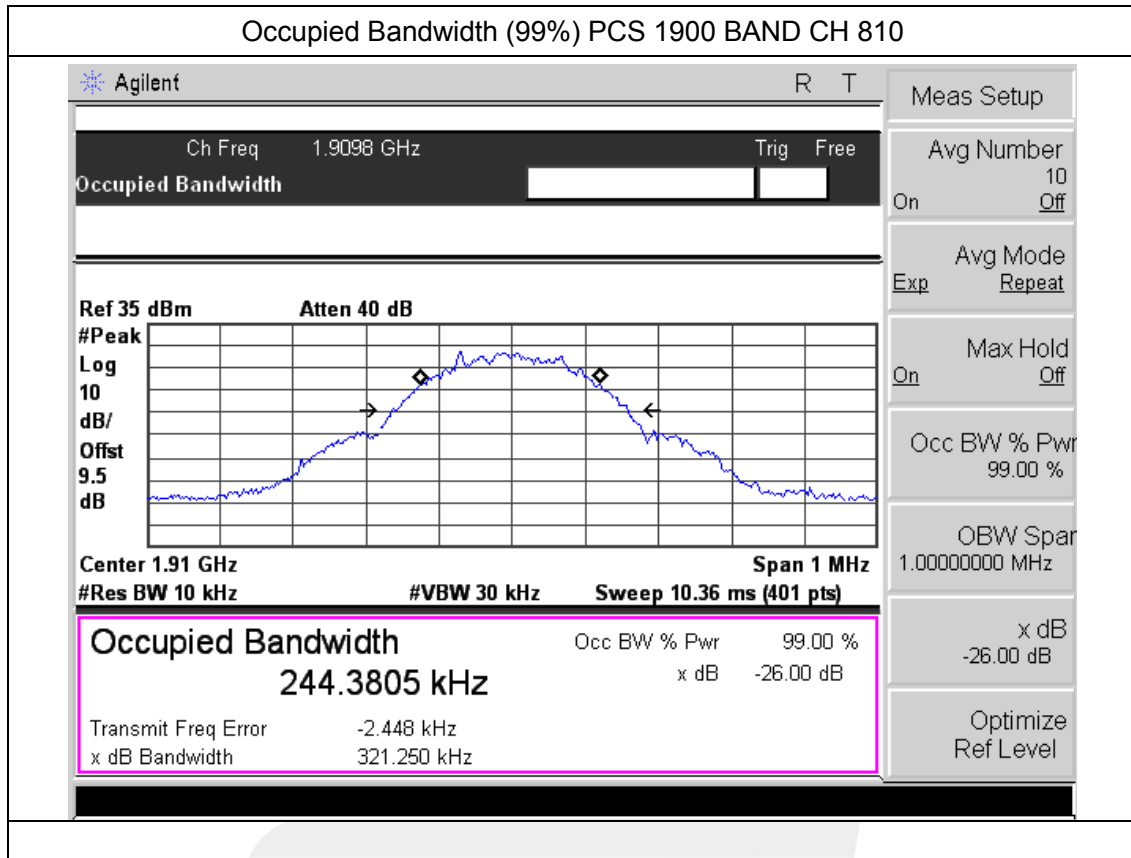



### Occupied Bandwidth (99%) GPRS 1900 BAND CH 512

Agilent R T

Ch Freq 1.8502 GHz Trig Free

Occupied Bandwidth

Ref 34.5 dBm #Atten 40 dB

Center 1.85 GHz Span 1 MHz  
#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts)

<b>Occupied Bandwidth</b>	Occ BW % Pwr	99.00 %
<b>248.8517 kHz</b>	x dB	-26.00 dB
Transmit Freq Error	-1.787 kHz	
x dB Bandwidth	321.770 kHz	

Freq/Channel

Center Freq 1.85020000 GHz

Start Freq 1.84970000 GHz

Stop Freq 1.85070000 GHz

CF Step 100.000000 kHz  
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

### Occupied Bandwidth (99%) GPRS 1900 BAND CH 661

Agilent R T

Ch Freq 1.88 GHz Trig Free

Occupied Bandwidth

Ref 34.5 dBm #Atten 40 dB

Center 1.88 GHz Span 1 MHz  
#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts)

<b>Occupied Bandwidth</b>	Occ BW % Pwr	99.00 %
<b>245.6933 kHz</b>	x dB	-26.00 dB
Transmit Freq Error	-547.870 Hz	
x dB Bandwidth	315.962 kHz	

Freq/Channel

Center Freq 1.88000000 GHz

Start Freq 1.87950000 GHz


Stop Freq 1.88050000 GHz

CF Step 100.000000 kHz  
Auto Man

Freq Offset 0.00000000 Hz


Signal Track On Off

Scale Type Log Lin

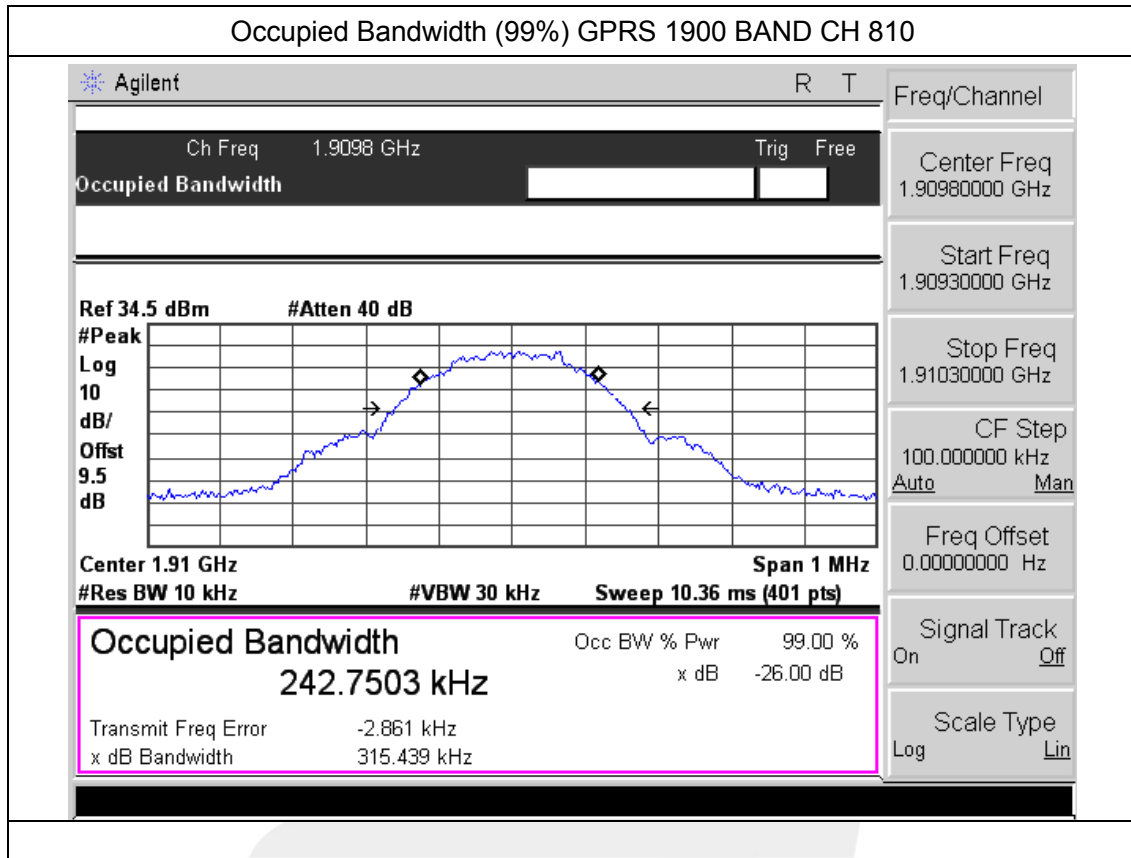






## Occupied Bandwidth (99%) EDGE 1900 BAND CH 512

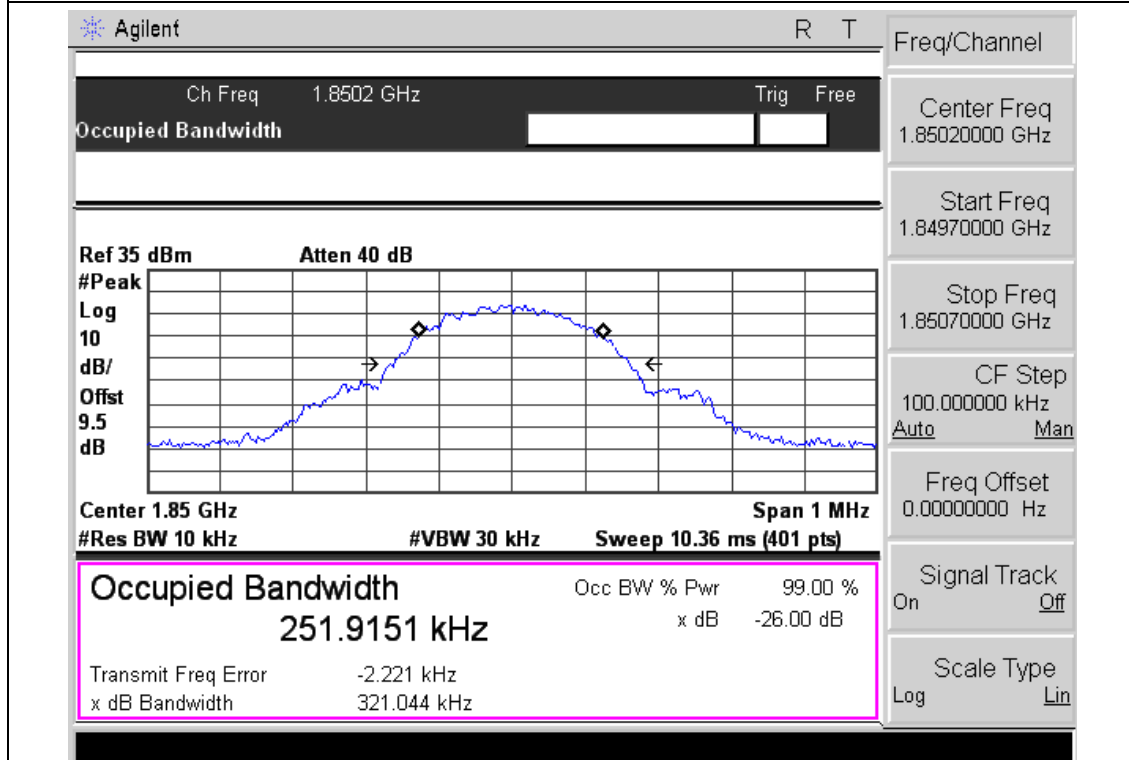


## Occupied Bandwidth (99%) EDGE 1900 BAND CH 661

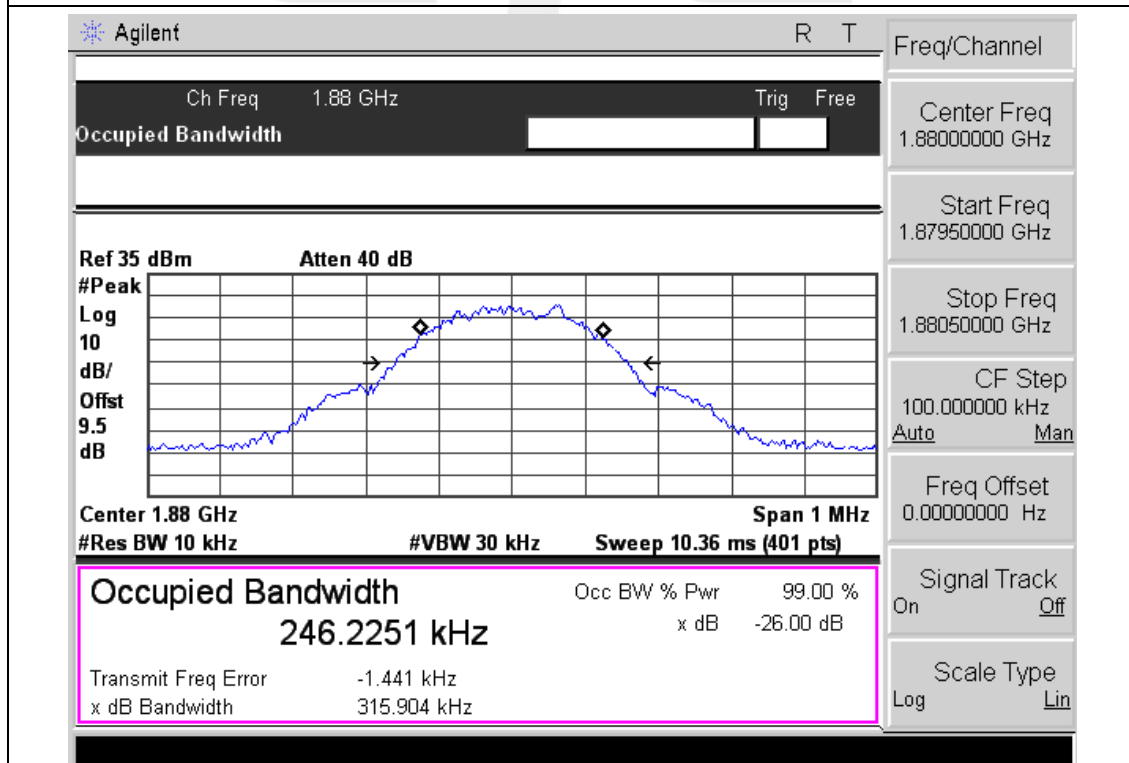

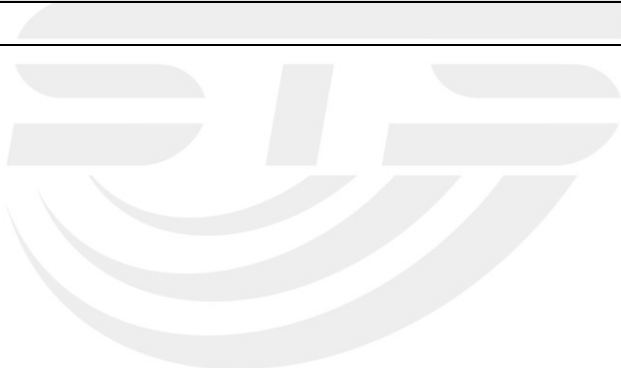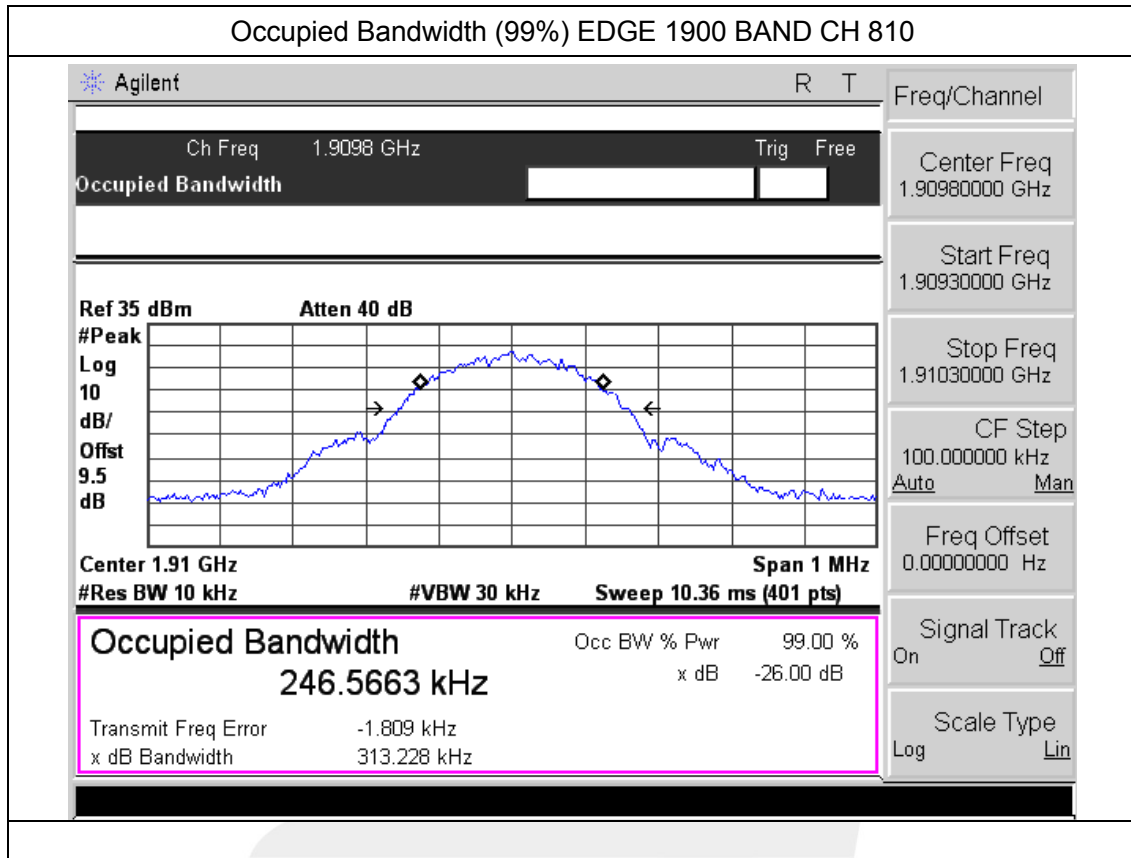


# APPENDIX III

## TEST PLOTS FOR BAND EDGES

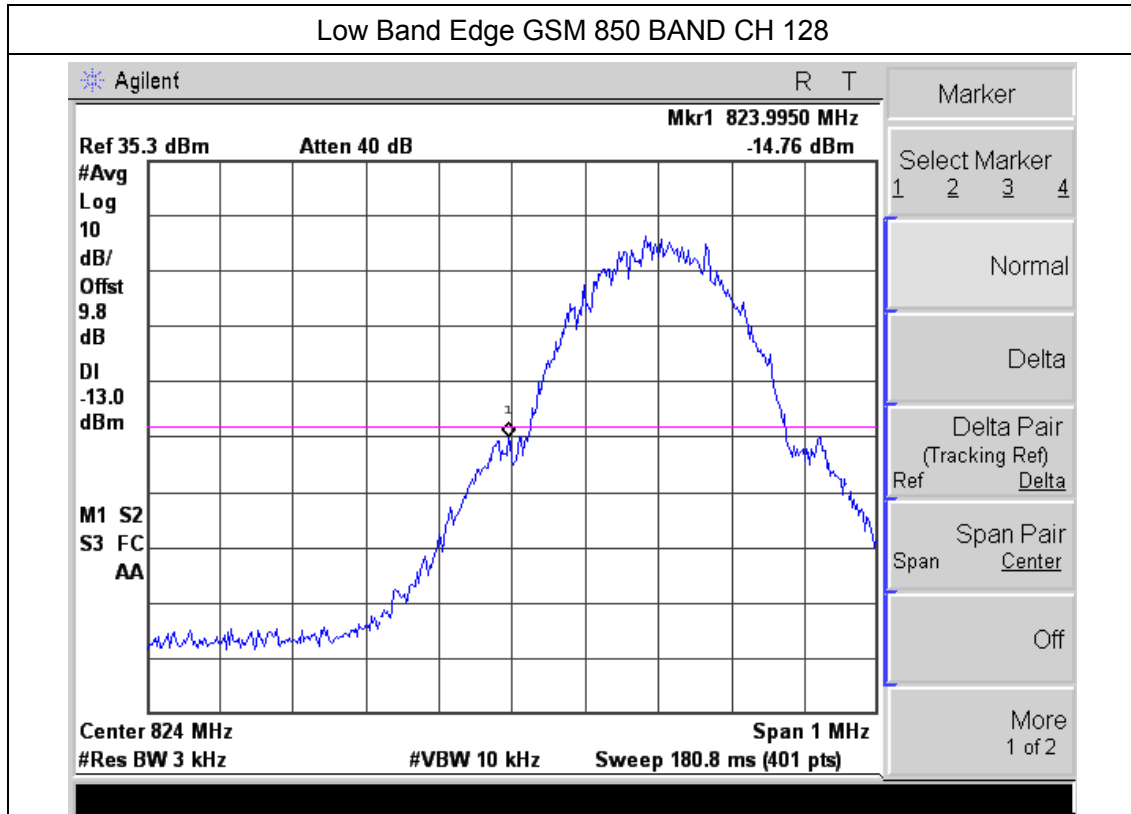


Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB

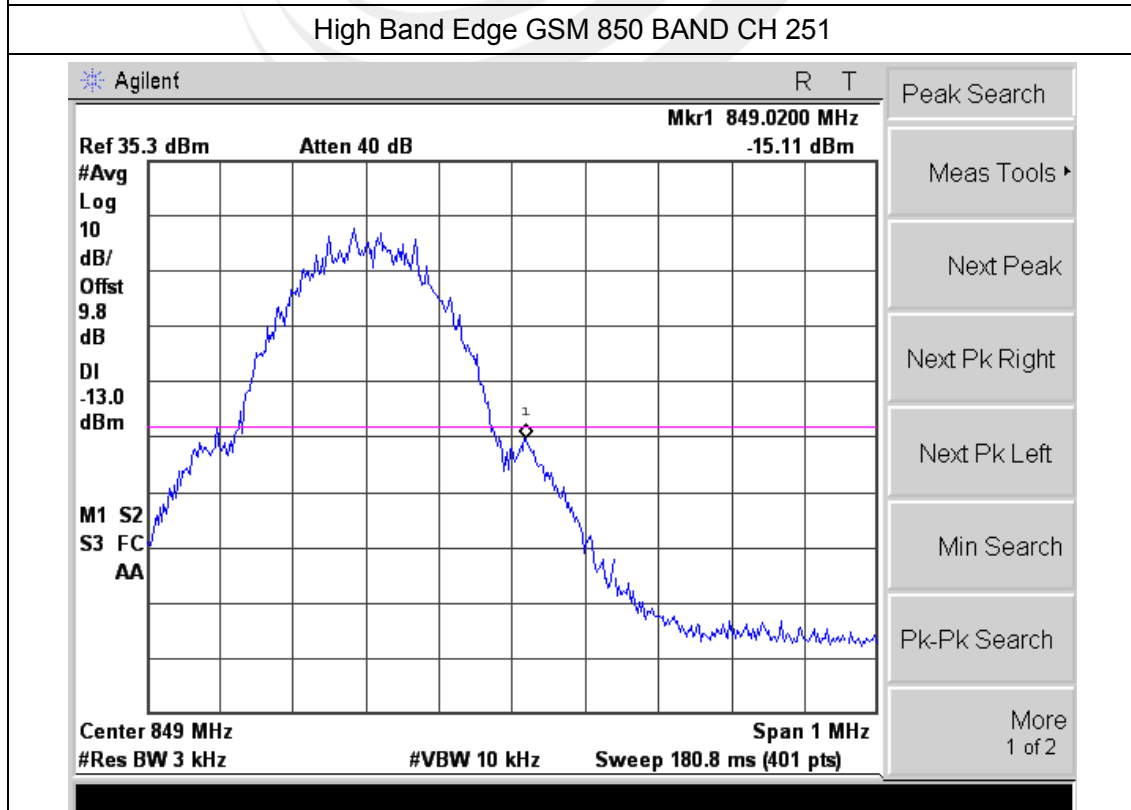

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB




### Low Band Edge GPRS 850 BAND CH 128

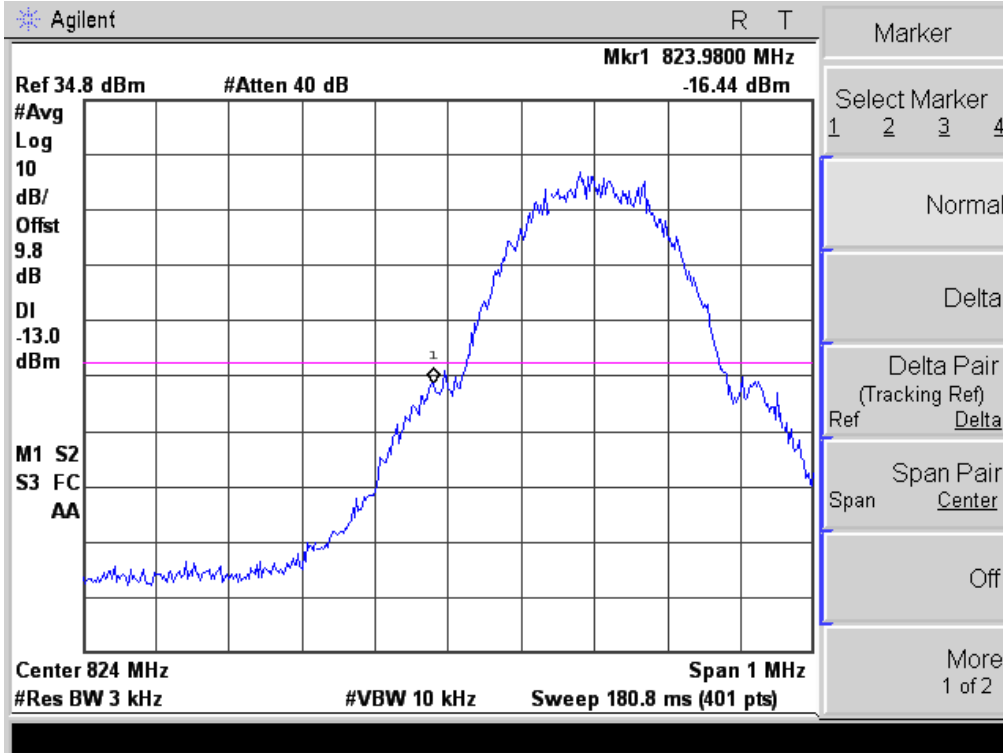

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB

### High Band Edge GPRS 850 BAND CH 251

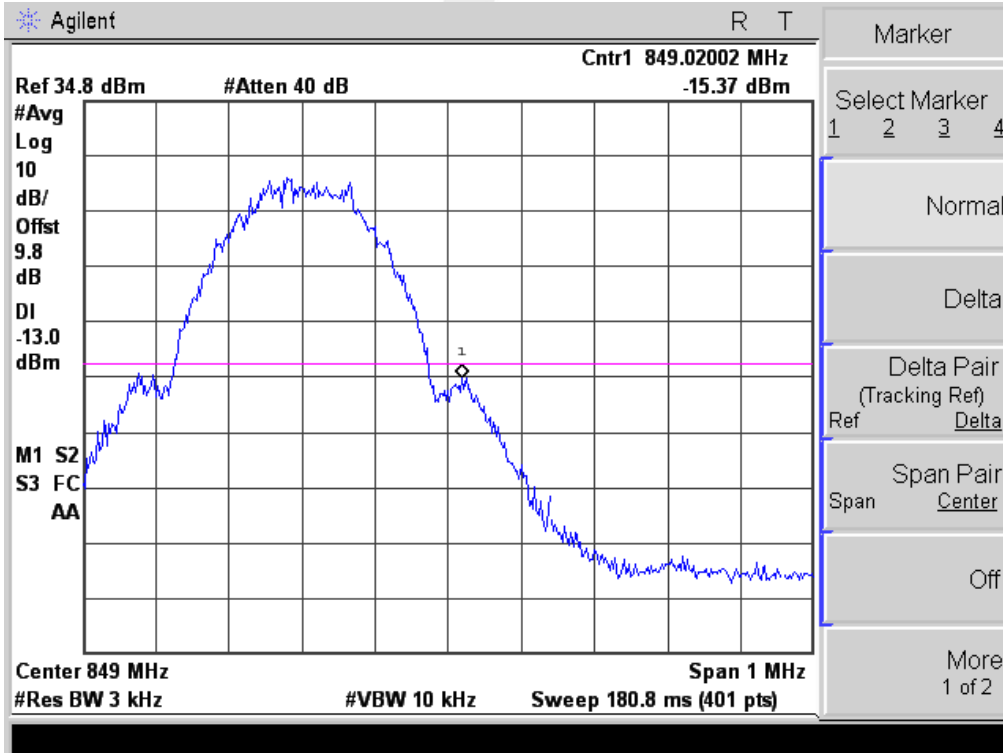


Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB






Low Band Edge EDGE 850 BAND CH 128

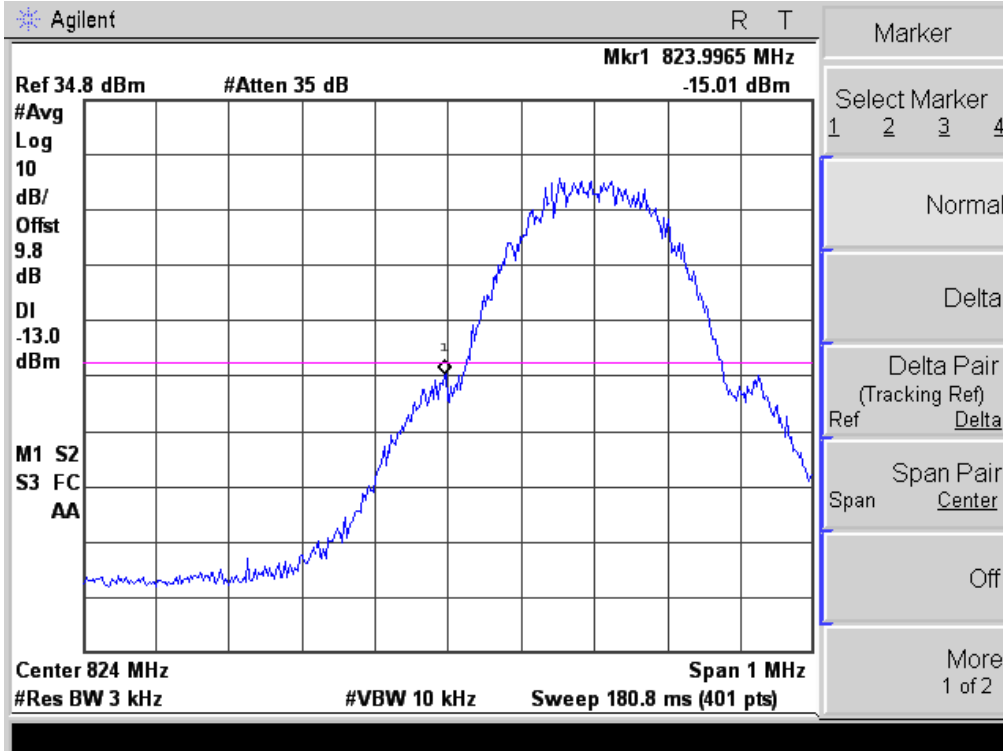

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB


High Band Edge EDGE 850 BAND CH 251

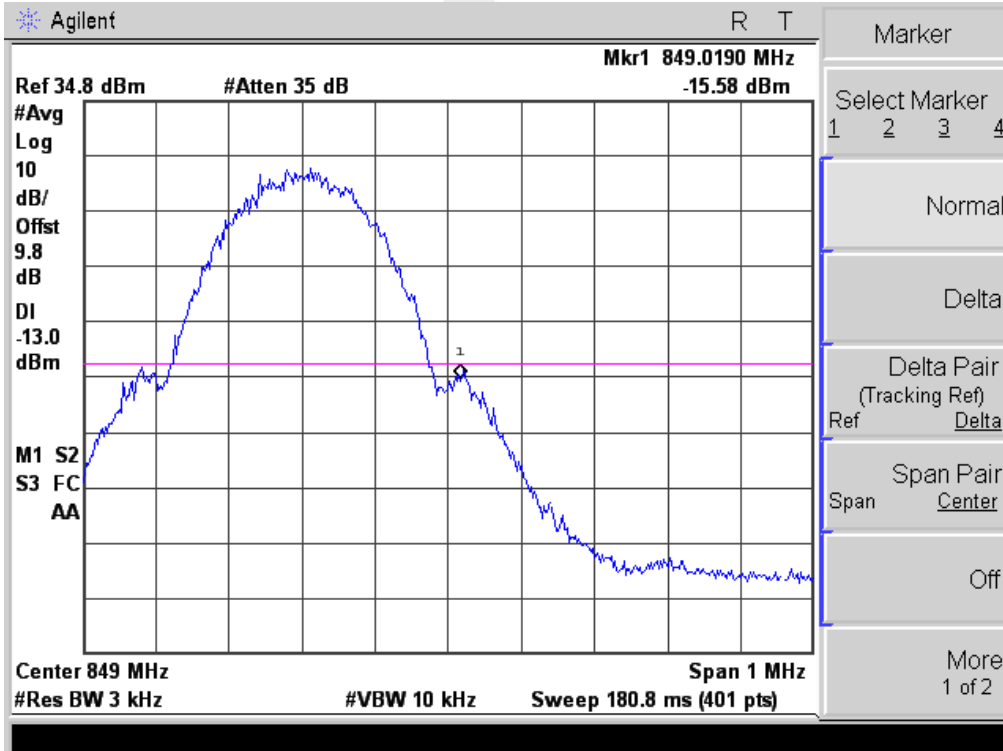

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB




Low Band Edge PCS 1900 BAND CH 512

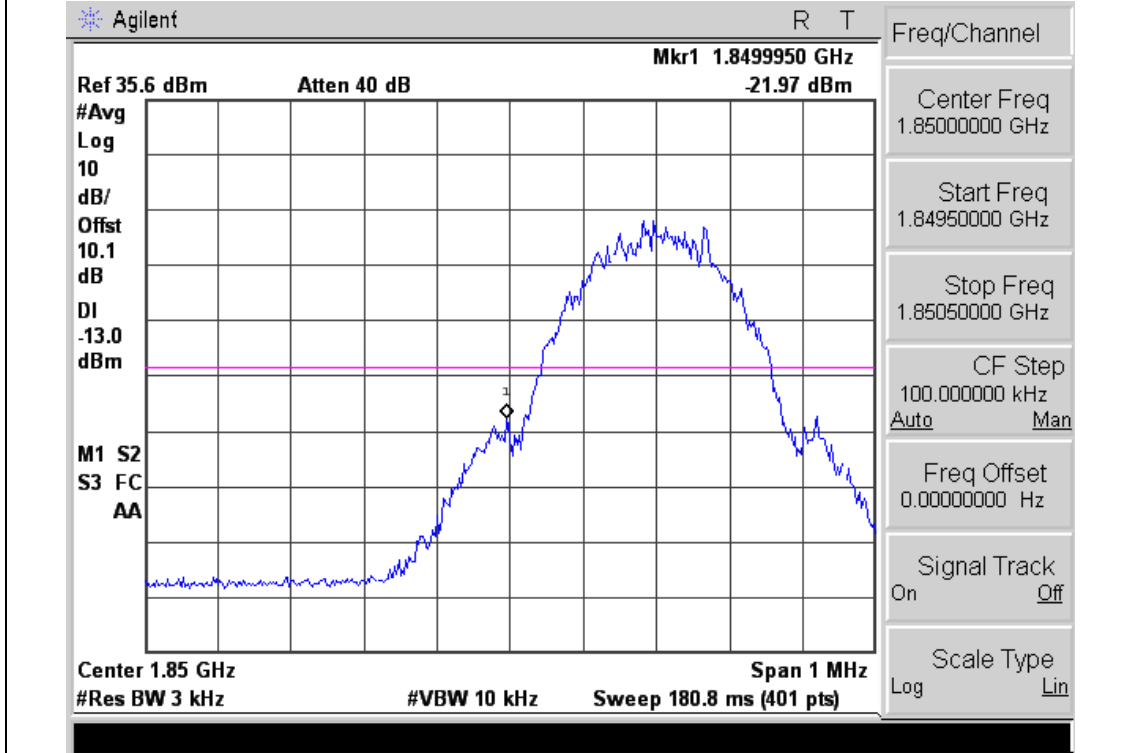

Note: Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB


High Band Edge PCS 1900 BAND CH 810

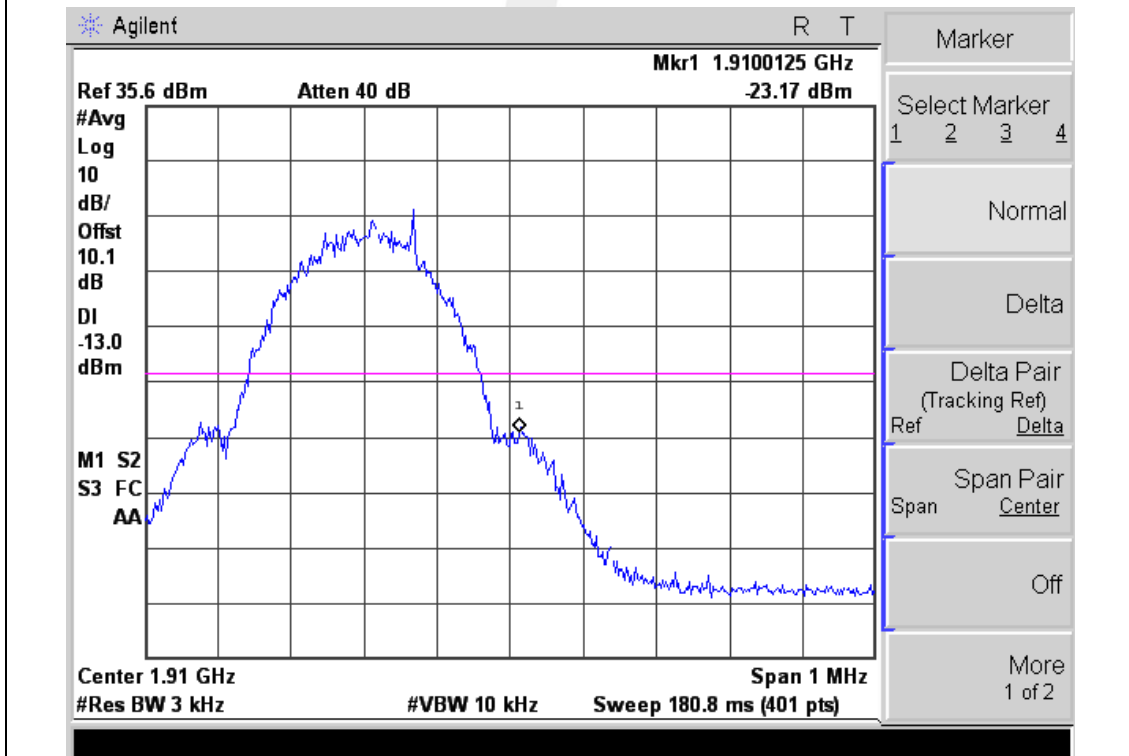

Note: Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB




Low Band Edge GPRS 1900 BAND CH 512

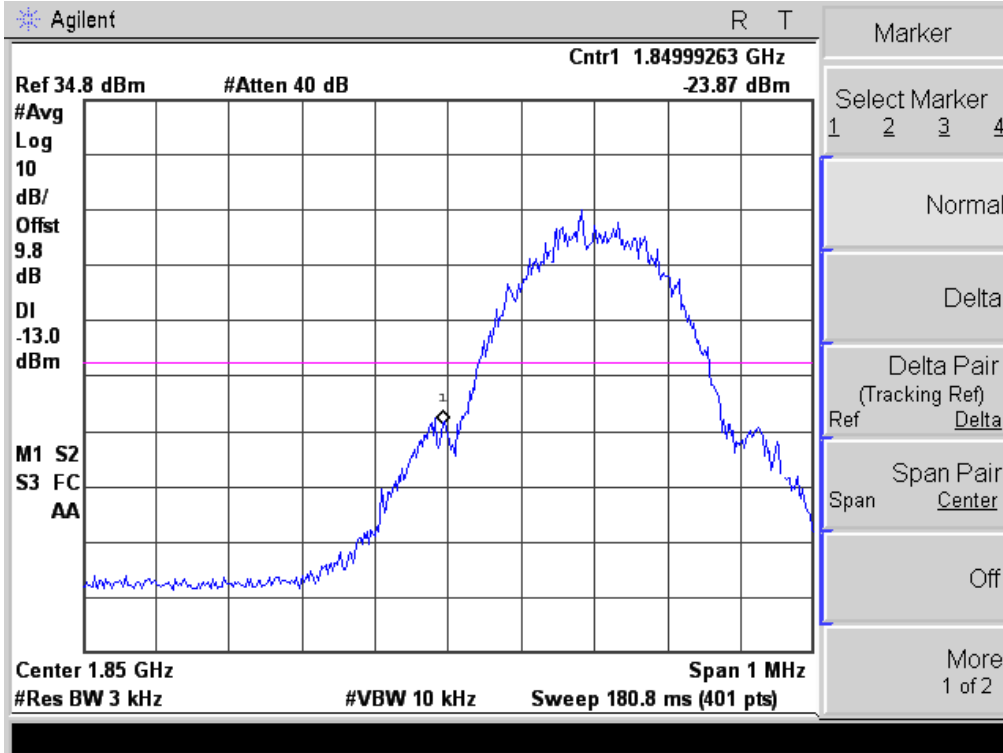

Note: Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB


High Band Edge GPRS 1900 BAND CH 810

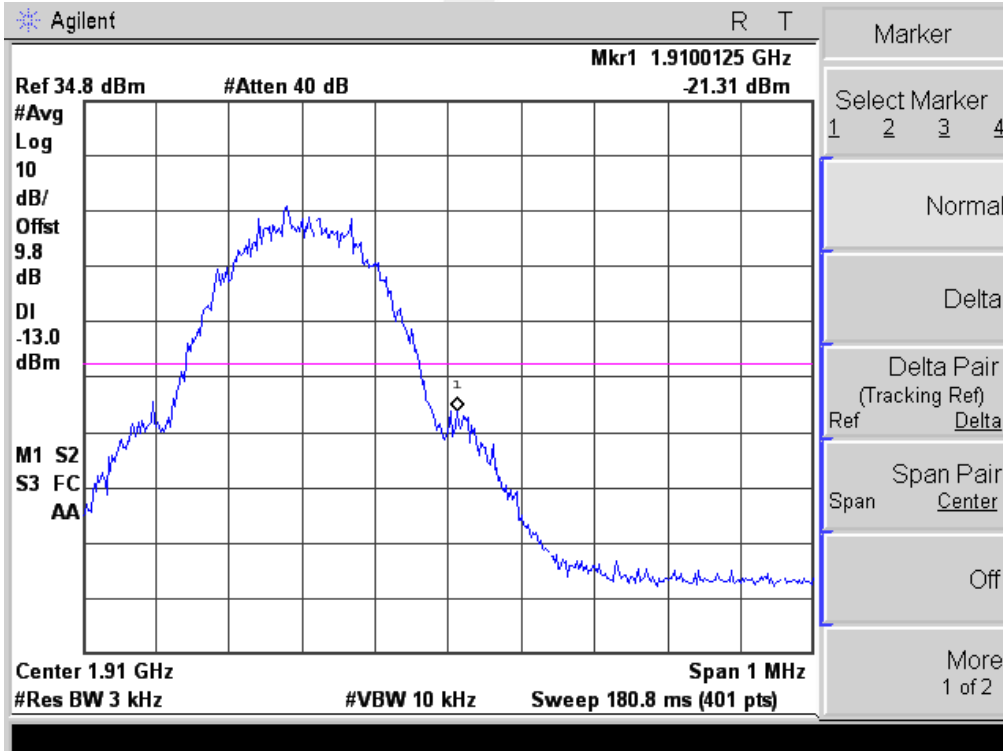

Note: Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB




### Low Band Edge EDGE 1900 BAND CH 512

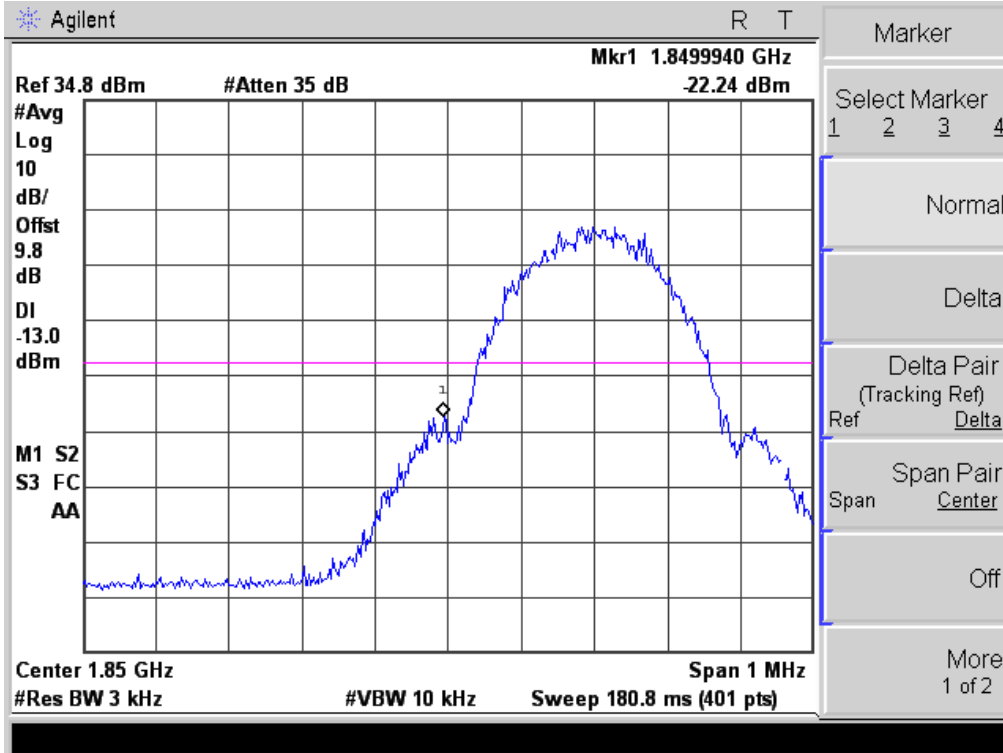

Note: Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB

### High Band Edge EDGE 1900 BAND CH 810

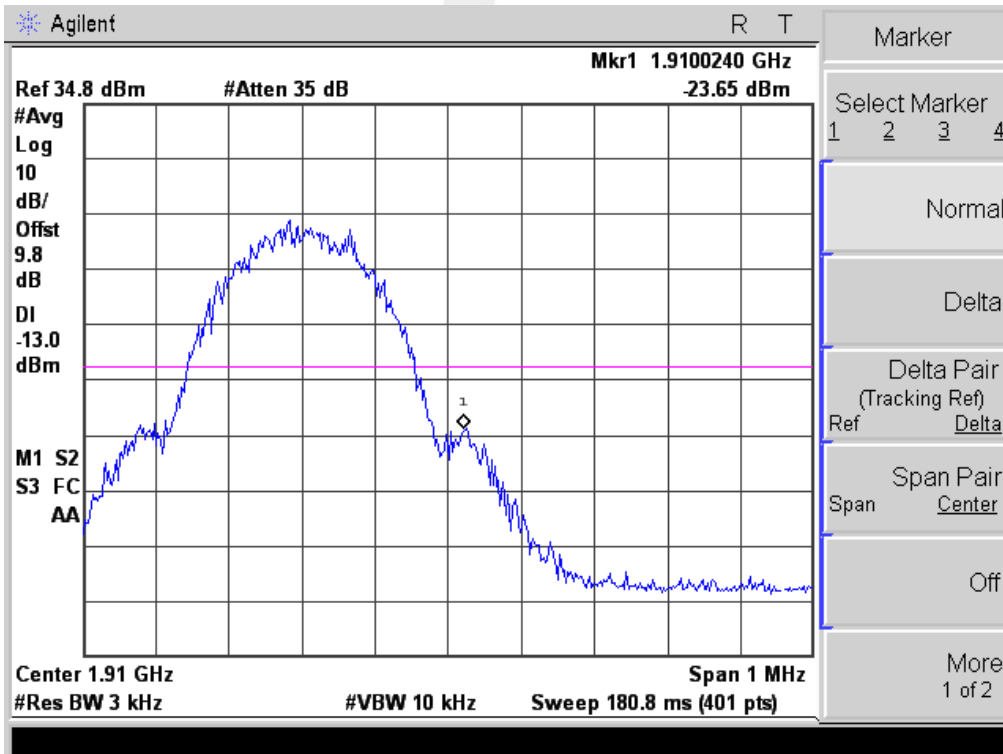


Note: Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB

## APPENDIX IV

# PHOTOS OF TEST SETUP

### RADIATED SPURIOUS EMISSION

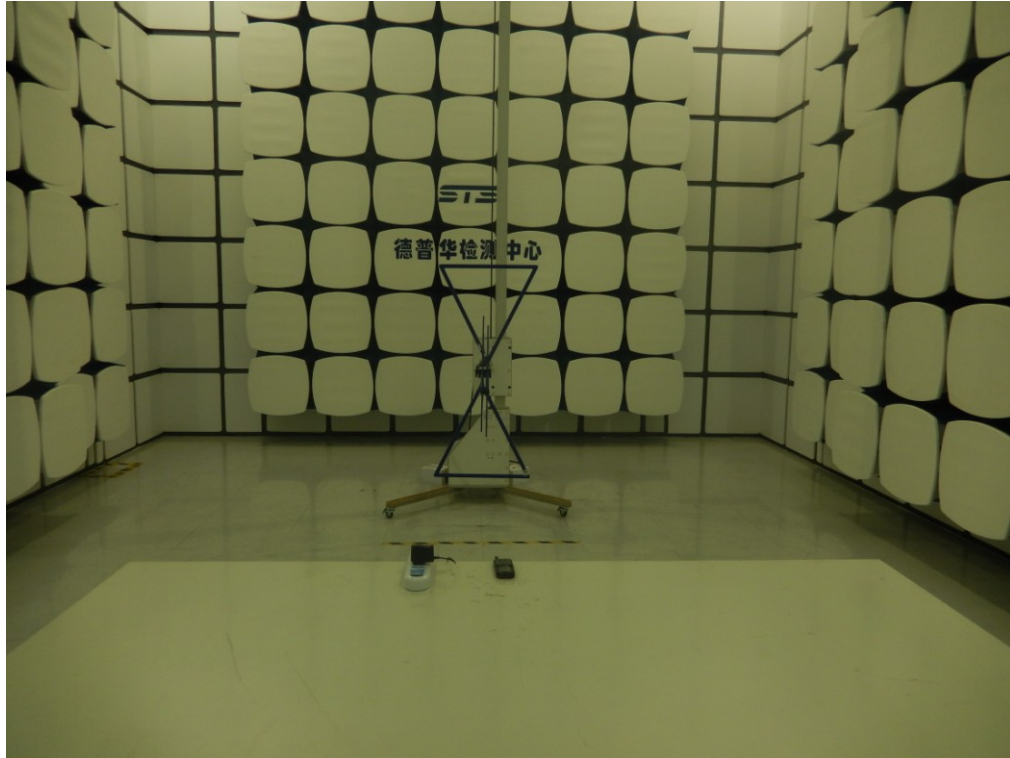

----END OF REPORT----