

Users Manual

一. Package Information

- 1、Bluetooth keyboard User Mannul *1
2. Charger Cable * 1
3. Bluetooth keyboard * 1

二. Product Features:

- 1, Broadcom Bluetooth 3.0 are used, the chip model is BCM20730, it has the capability of bluetooth2.0 interface.
- 2 , Built-in special power management software , it will automaticly display the low battery capacity.
- 3, Ultra-thin design, easy to take it with you.
- 4, The unique mute design, effectively avoid disturbing others, it can work more efficiency . (Especially suitable for many people live in one room)
- 5, The silicone is waterproof, the surface can be washed with water directly , more convenient for using.
- 6, Using the industry- leading Bluetooth technology solutions , WIDCOMM BTW (Microsoft officially designated software) Bluetooth software .
- 7 , It can support computers, business phone , tablet , which improves the efficiency.
- 8 , The working environment temperature should between -20 degrees to 55 degrees and humidity 20-50%
- 9 , The built-in lithium battery design which eliminate the trouble of frequent replacement of the battery.

三. keyboard specification

- 1 ,Standard Interface: Bluetooth V3.0
- 2 , Operating distance: 10 meters
- 3 , Modulation : 2.4G Direct Sequence Frequency Hopping (FHSS)
- 4 , Transmit power : class 2 level
- 5 , Working voltage :1.9-3 .3 v
- 6, Working current : 4mA
- 7 , Standby current : 0.5mA
- 8 , Sleep current : 100uA
- 9 , Charge current : 100MA

- 10 , Standby time : 30 days
- 11 , Charging time of 2-3 hours
- 12 , Battery life : 3 years
- 13 , Non-stop working time: 100 hours
- 14 , Pressure tap for keycap : 80g
- 15 , Key life : above 200W
- 16, Battery capacity: 150mah

四. System Requirements

1, Computer operating system requirements:
Windows/98/ME/2000/Vista/WIN7 and Apple computer operating systems,
etc.

2,Mobile operating system requirements:

For Windows mobile6.0 and above systems, such as Samsung, etc.

For Android. If HTC / millet / Samsung, etc.

For Iphone Mobile / Ipad tablet, etc.


五. Operation of Bluetooth keyboard

Steps for pairing the keyboard with the computer :

Turn on the power switch of the keyboard :

1, Shown as below, move the keyboard's power switch to "ON" button,when the blue LED flashes then extinguished, reminding you that the keyboard is turned on.

2, Press on the code button,when the flashing blue light will be flashes regularly, it mean your keyboard already entered the code of the keyboard state. Shown as below

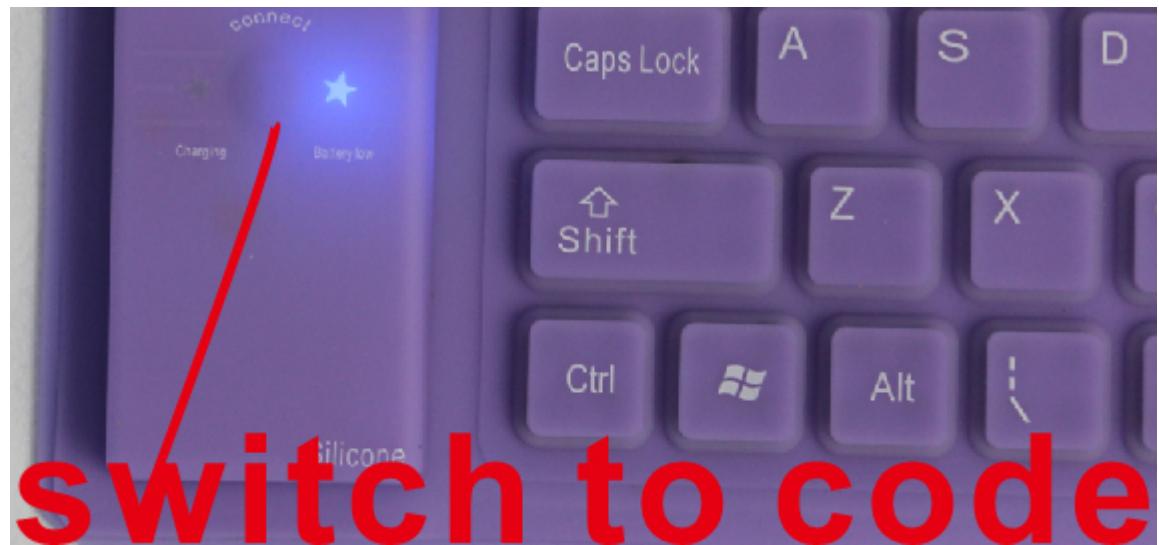

Attention: The connection light will be turned off once the wireless bluetooth keyboard be connected successfully.

(二) Establish the connection between Bluetooth keyboard and the computer

1. Plug the bluetooth adapter into your computer's USB port (if your keyboard does not have a Bluetooth adapter, pls purchase one in Electronic

Center), then the computer will automatically install the adapter driver, if you buy the adapter by yourself, you may find there is a CD-ROM drive, and you need to put this CD into your computer's CD-ROM drive, then install the adapter driver, if your computer comes with Bluetooth, then it's no need to install a Bluetooth adapter.

Attention:

The CD-ROM drive in bluetooth is the one which should be installed when collecting the keyboard and the mobilephone.


A, Code matching steps between bluetooth keyboard and computer under Windows XP

1 Make sure the computer Bluetooth function is activated, double-click the



Bluetooth Icon in the lower right corner of Taskbar.


Open the Bluetooth Management interface, click the "Add" and choose the state device is ready, then click Next shown as below.

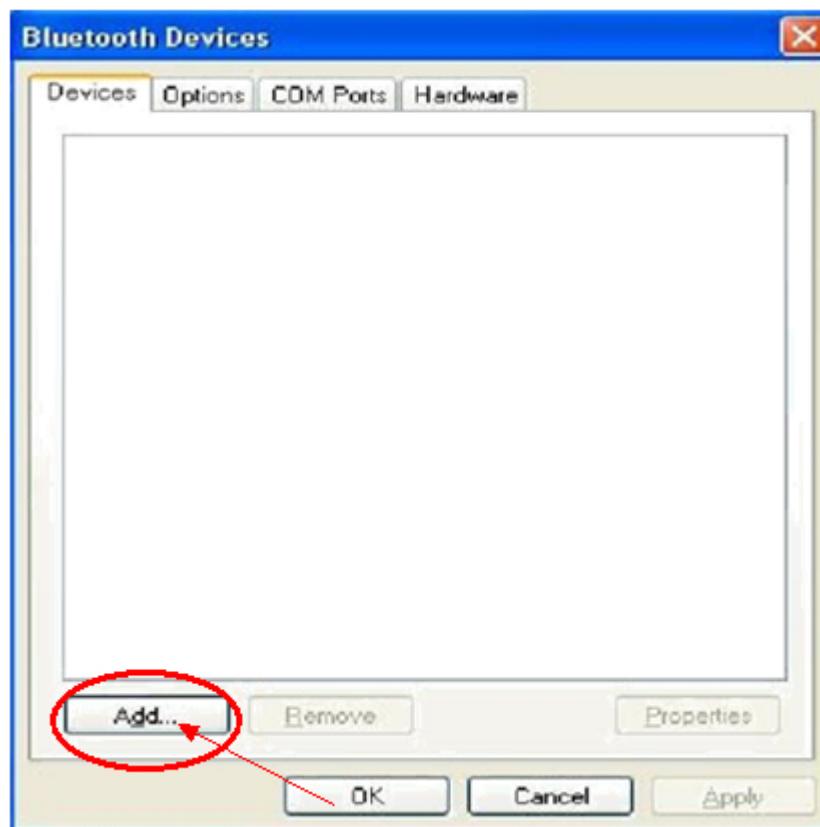

2. Wait until the Bluetooth devices find the keyboard, then select The Keyboard or A New Device, click Next Step and skip to the next interface. You will find there will be a new device appears, at this time you need to click on it, then choose Next Step. Shown as below:




3. When skipped to the next interface, there will be four options, we recommend you select "Choose a passkey for me" (You can also choose to set your own keys, or do not use the key), and then click Next Step as below:

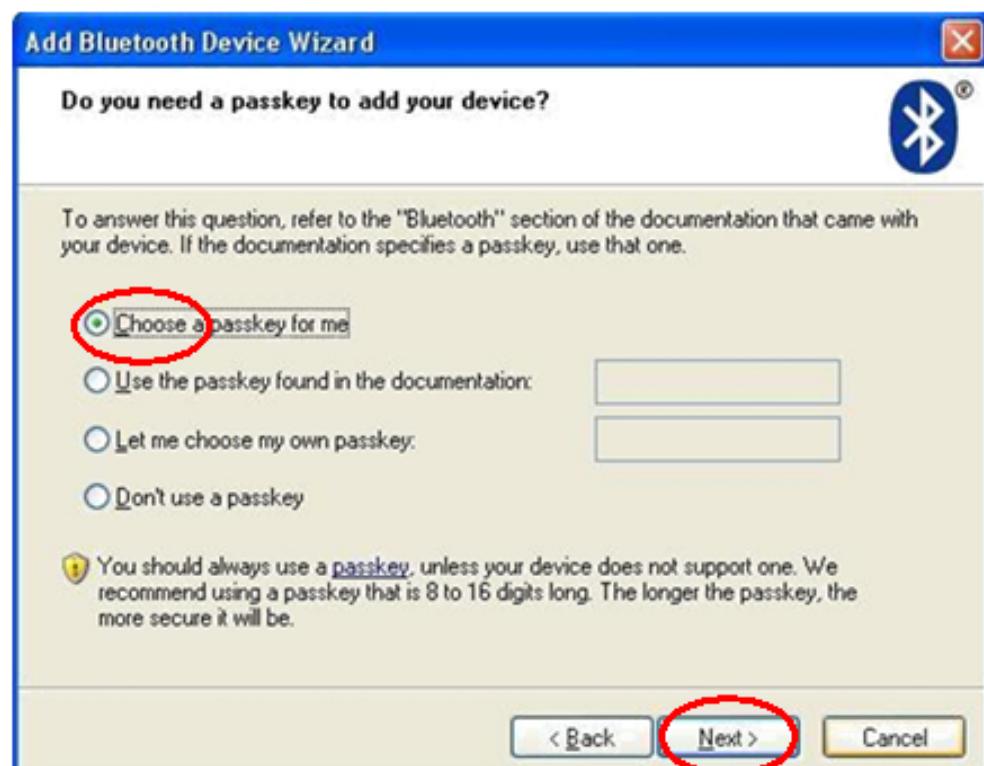

4. Use the Bluetooth keyboard for inputting a randomly generated secret key or enter your own setting of keys, then press Enter to make a confirmation. If you choose Do Not Use The Key, then it is no need to input the key, click Next Step directly, the system will automatically complete the installation of new equipment.

Attention: Please input the right password.

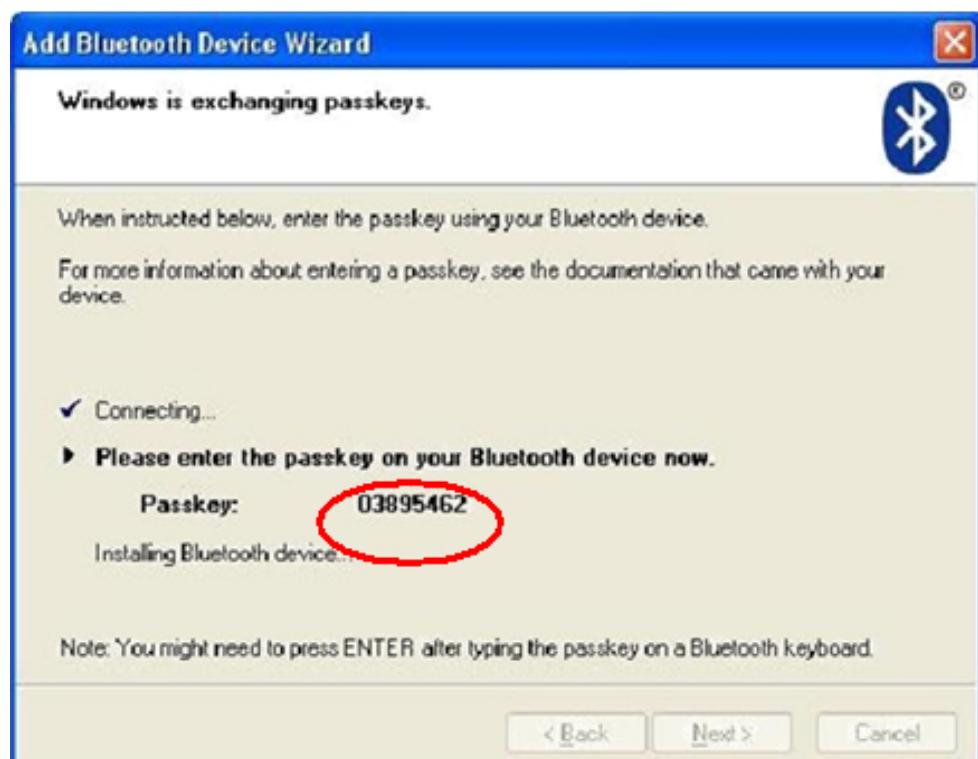

5 Add the Bluetooth Device Wizard, click "Finish", now your keyboard is ready for use as below:




B.Code matching steps between bluetooth keyboard and Samsung mobilephone under Android System.



1.Repeat the fifth item above "Operation of Bluetooth keyboard " operation,

turn on the phone and unlock the main screen,find Settings Icon  in your phone.then enter the Bluetooth Function.And click it for starting scan the Bluetooth devices, the available device.


2.You can see the interface below when the Wireless Bluetooth Device appeared as below:

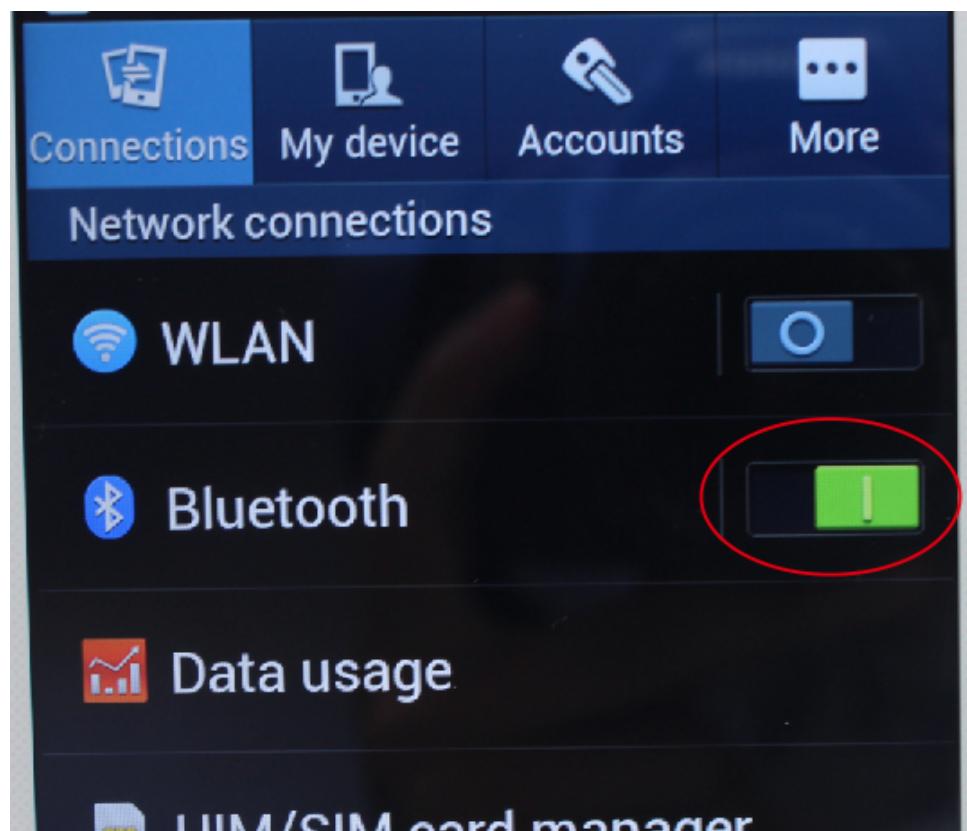

2.Wait until the phone searched the Bluetooth keyboard,then find the name of bluetooth device for pairing.As below:

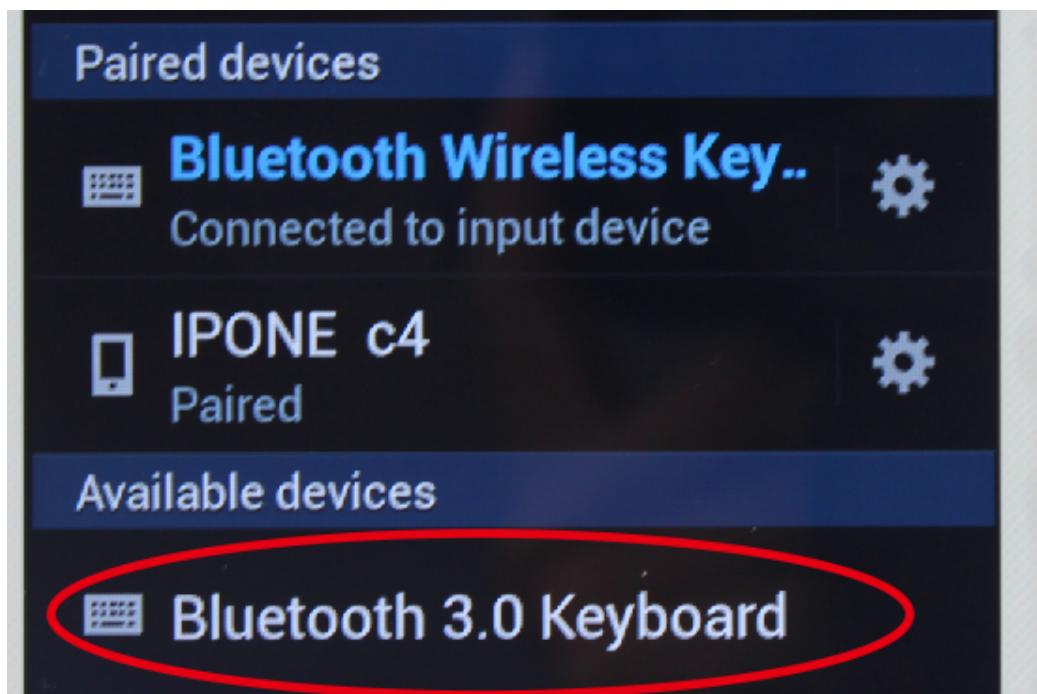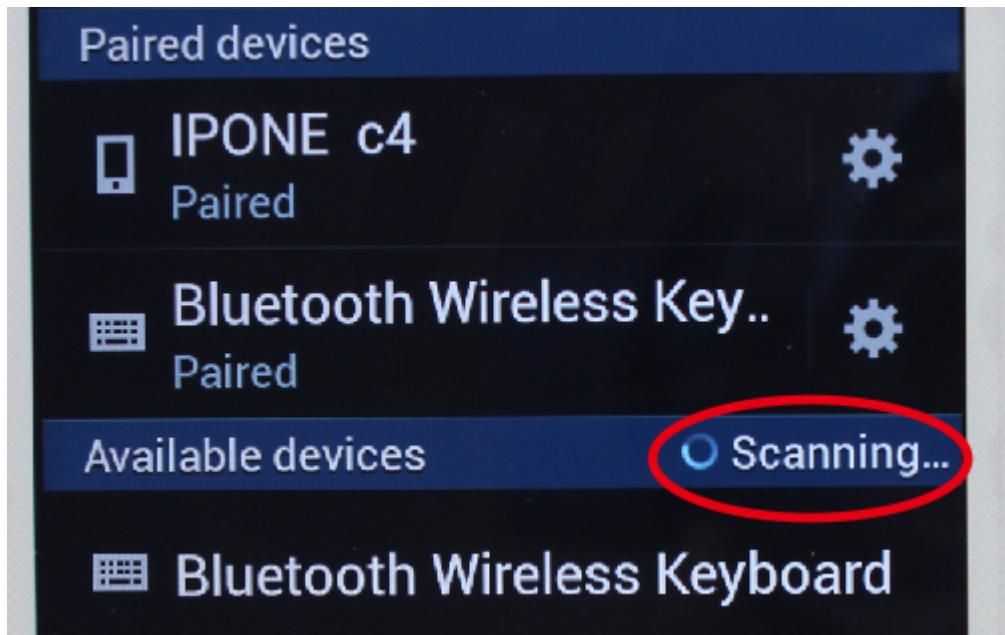

3. When paring the mobilephone and the Bluetooth Keyboard, if the device does not need a password, it will pair successfully directly; if the device need password, then please input "697607" (Arabic numerbers) on bluetooth keyboard, click Enter Button for connecting, and (The Arabic numerals are the keys for connecting Bluetooth Keyboard). A new window will jump out to remind you that it is already connect to the input device, which means that your phone and the Bluetooth keyboard paired successfully, it can be used now. Shown as below:

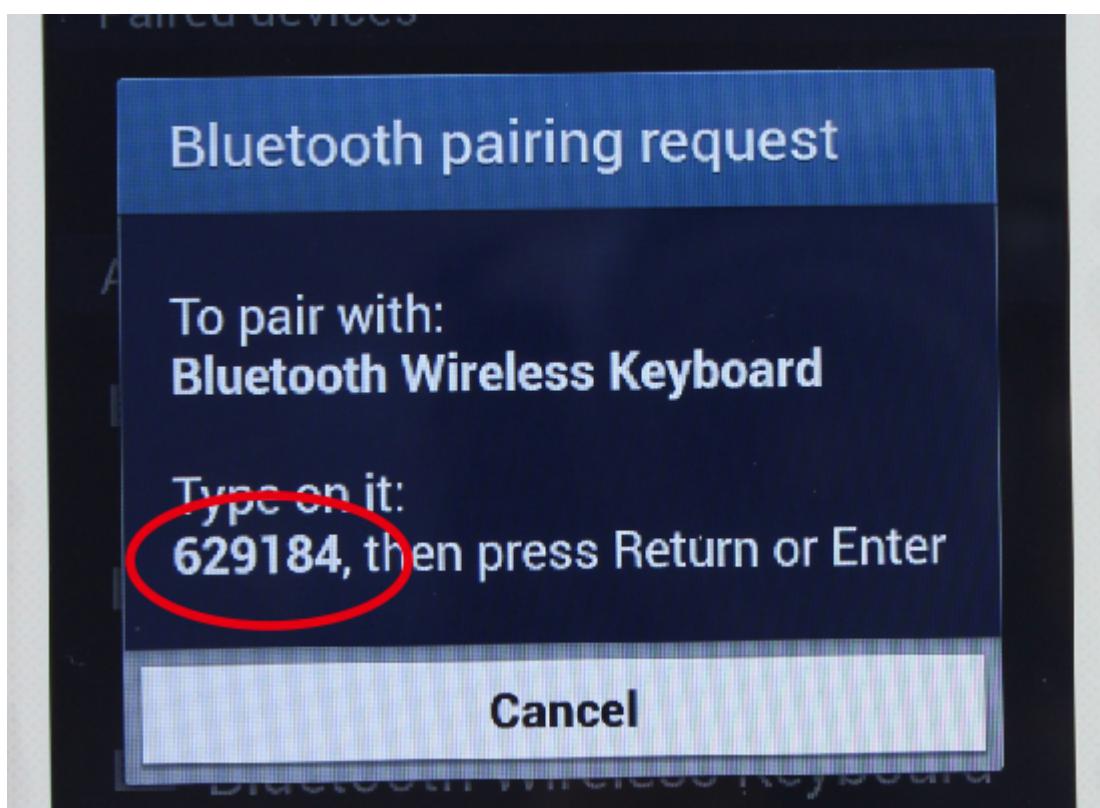

Attention: The password inputted should be input on the bluetooth keyboard and it should be the arabic numbers .Please ensure you have

Input the correct number,then press Enter Key for confirmation.



C.Code Matching Steps between the Ipad and Bluetooth Keyboard under IOS System:

1.Repeat the fifth item above "Operation of Bluetooth keyboard " , turn on the ipad and unlock it, open the Settings window  to find the Bluetooth Icon(Normally the Bluetooth Device will default off) ,please open Bluetooth by hand,then search for the Bluetooth devices until it appeared in the available Devices column, display as below:



2. Wait for a moment while searching the wireless bluetooth device, until the available devices appear in the column ,then please click the unpaired Bluetooth keyboard device for keyboard pairing..Shown as below:



Attention: When pairing between iPad and the mobilephone ,if the device doesn't need a password,it will match successfully directly; if the device need a password,then please input your Bluetooth keyboard password here. **** * (Arabic number) click the Enter Key for connecting, and (The Arabic numbers are keys for connecting Bluetooth Keyboard)a new window will jump out to remind you that it is already connect to the input device, which means hat your Ipad and the Bluetooth keyboard paired successfully, it can be used now. Shown as below:



六.Charging Method for Bluetooth Keyboard

1, when you use the Bluetooth keyboard, and find that the red indication on the keyboard is flashing , it is reminds you that the battery of the Bluetooth keyboard is low, and you need to recharge the keyboard. Charging step pls see as below:




2. Firstly, take out the USB charging cable from the purchase attachment, plug the male side into the computer's USB port, and plug the other side into the keyboard's charging port, when charging the charging indicator will showed with red color, as below:



Attention: Please plug the USB cable into the right position and don't swing the plug.

Some function keys on iSO Device


Apple Device



Attention: Some multi-media keys can be used directly under the ISO .


Note: some multimedia keys can be used directly ISO, need not press FN + can be achieved.

Android Device

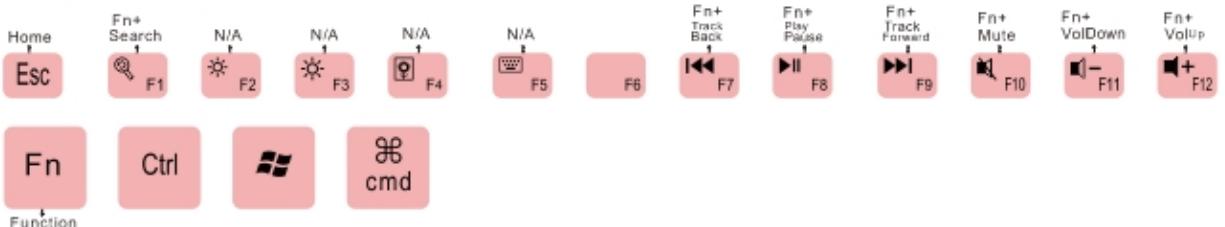

Note: in Android system use FN + to realize multimedia capabilities.

Windows Device

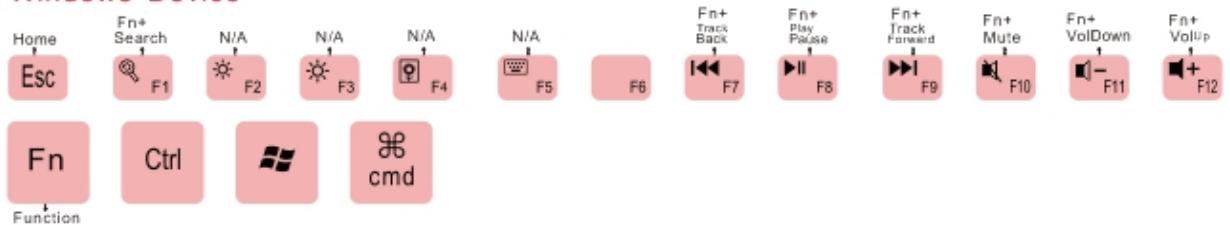

Note: in Windows system use FN + to realize multimedia capabilities.

Storage

1, when you don't use the keyboard or you want to carry the keyboard with you , please do not forget to turn off the power of the keyboard (Press the code key for a long time,until the red light stop flashing) Turn off the keyboard 's power can extend battery life.

2 , If you don't need to use the keyboard for a long time , please charge the battery to a half , about (30 minutes ~ 1 hour) , then keep your keyboard , In this way, the battery life can be extended .

Attention: When you use the keyboard properly , or when you are not using the keyboard and do not turn off the power, please do not roll up the

keyboard , it will keep your keyboard working all the time,it will greatly reduce the usage time of the keyboard.

Precautions:

- 1.Do not touch sharp objects.
- 2.Do not put the heavy objects onto the keyboard.
- 3.Do not stretch o twiste product with great strength.
- 4.Do not heat it in the microwave.
- 5.Do not contact with oil,organic liquid.
- 6.Do not press o fold at right angles.

Silicone can be washed by water,alcohol or alcohol disinfectant cleaning, Schomburg plastic parts can only be cleaned.

一) Keyboard and the computer can not connect :

1 , Check whether your Bluetooth adapter is installed, and the bluetooth device in your computer be started normally .

2 , Press and release the keyboard pairing button, check if the red light be blinked .

3, Whether the distance is within 10 meters when the keyboard pairing with the computer.

4 , If the Bluetooth Device o computer is changed , it should be connected again if anyone of them has been changed.

5 , Check if your computer is connected to other Bluetooth devices terminal , and confirm whether the speed of PC Bluetooth device is fast enough.

6 , Check if your Bluetooth keyboard battery is low , if it is , please charge.

7 , Check if your Bluetooth device has been damaged.

二) Every time you turn off the keyboard power o restart the computer , the keyboard is still doesn't work:

1, When the keyboard and the computer power off,you should pair the code again if you want to connect the keyboard and computer again.But it may take you two o three seconds if you restart it ,or turn on the power again , please press any button on the keyboard, then wait for three seconds, then you can use the keyboard normally.

Tip: When the battery voltage is low, the low voltage on the keyboard will blink, it is reminding you that the keyboard should be charged. For

not making a trouble to your work,please make sure your keyboard alway keep enough voltage.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device.

Pursuant to Part 15 of the of the FCC Rules, these limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates users age and can radiate radio frequency energy and, if not installed and used in accordance with instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on.

This device complies with Part 15 of the FCC Rule.Operation is subject to the following two conditions: (1) this device may not cause harmful interference.and (2) this device must accept any interference received, including interference that may cause undesired operation.