

FCC Part 15 EMI TEST REPORT



of
E.U.T. : Bluetooth intercom headset
Model No. : R1A
Serial Model : R1+
FCC ID : 2A3C2QR1

for

APPLICANT : Taiwan Protect Ltd.
ADDRESS : NO. 337-1, Sec.1, Zhongyang Rd., Wuchi Dist.,
Taichung City 43546, Taiwan

Test Performed by

Taiwan Testing and Certification Center
No.34, Dingfu, Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)

Tel:(02)26023052 Fax:(02)26010910
<http://www/etc.org.tw> ; e-mail : emc@etc.org.tw

Report Number :20-03-RBF-021-01

TEST REPORT CERTIFICATION

Applicant : Taiwan Protect Ltd.
NO. 337-1, Sec.1, Zhongyang Rd., Wuchi Dist., Taichung City
43546, Taiwan

Manufacture : Taiwan Protect Ltd.
NO. 337-1, Sec.1, Zhongyang Rd., Wuchi Dist., Taichung City
43546, Taiwan

Description of Device :
a) Type of EUT : Bluetooth intercom headset
b) Trade Name : AiTouch
c) Model No. : R1A
d) Serial Model : R1+
e) Power Supply : DC 3.7V
f) Frequency Range : BR 2402~2480MHz
EDR 2402~2480MHz

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10-2013, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Summary of Tests


Test	Results
Radiated Emission	Pass
Conducted Emission	Pass
Hopping Channel Separation	Pass
Number of Hopping frequencies used	Pass
Hopping Channel Bandwidth	Pass
Dwell Time of each frequency	Pass
Output Power Requirement	Pass
100 kHz Bandwidth of Frequency Band Edges Requirement	Pass
Out-of-Band Conducted Emission Requirement	Pass
Duty Cycle	N/A

Date Test Item Received : 3/31/2020

Date Test Campaign Completed : 8/10/2021


Date of Issue : 11/2/2021

Test Engineer :



(Brian Huang, Engineer)


Approve & Authorized :



Vincent Chang, Supervisor

Section Manager of EMC Dept. II

Table of Contents Page

Table of Contents	Page	4
1 GENERAL INFORMATION.....		7
1.1	Product Description.....	7
1.2	Test Methodology	7
1.3	Test Facility.....	7
2 PROVISIONS APPLICABLE.....		8
2.1	Definition	8
2.2	Requirement for Compliance	9
2.3	Restricted Bands of Operation	11
2.4	Labeling Requirement.....	12
2.5	User Information	12
2.6	Measurement Uncertainty	13
3 SYSTEM TEST CONFIGURATION		14
3.1	Justification	14
3.2	Devices for Tested System.....	15
4 RADIATED EMISSION MEASUREMENT		16
4.1	Applicable Standard	16
4.2	Measurement Procedure.....	16
4.3	Measuring Instrument	18
4.4	Radiated Emission Data	19
4.5	Field Strength Calculation.....	32
4.6	Photos of Radiation Measuring Setup.....	33
5 CONDUCTED EMISSION MEASUREMENT		37
5.1	Standard Applicable	37
5.2	Measurement Procedure.....	37
5.3	Conducted Emission Data	38
5.4	Result Data Calculation.....	40
5.5	Conducted Measurement Equipment	40
5.6	Photos of Conduction Measuring Setup.....	41
6 ANTENNA REQUIREMENT		42
6.1	Standard Applicable	42
6.2	Antenna Construction.....	42
7 HOPPING CHANNEL SEPARATION.....		43
7.1	Standard Applicable	43

7.2 Measurement Procedure.....	43
7.3 Measurement Equipment	44
7.4 Measurement Data	44
8 NUMBER OF HOPPING FREQUENCY USED	49
8.1 Standard Applicable	49
8.2 Measurement Procedure.....	49
8.3 Measurement Equipment	49
8.4 Measurement Data	50
9 CHANNEL BANDWIDTH.....	55
9.1 Standard Applicable	55
9.2 Measurement Procedure.....	55
9.3 Measurement Equipment	56
9.4 Measurement Data	56
10 DWELL TIME ON EACH CHANNEL.....	61
10.1 Standard Applicable	61
10.2 Measurement Procedure.....	61
10.3 Measurement Equipment	61
10.4 Measurement Data	62
11 OUTPUT POWER MEASUREMENT.....	76
11.1 Standard Applicable	76
11.2 Measurement Procedure.....	76
11.3 Measurement Equipment	76
11.4 Measurement Data	77
12 100 KHZ BANDWIDTH OF BAND EDGES MEASUREMENT.....	82
12.1 Standard Applicable	82
12.2 Measurement Procedure.....	82
12.3 Measurement Equipment	83
12.4 Measurement Data	83
13 CONDUCTED SPURIOUS EMISSION MEASUREMENT	88
13.1 Standard Applicable	88
13.2 Measurement Procedure.....	88
13.3 Measurement Equipment	89
13.4 Measurement Data	89
14. DUTY CYCLE.....	96
14.1 Standard Applicable	96

14.2 Measurement Equipment	96
14.3 Measurement Data	96

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Bluetooth intercom headset
- b) Trade Name : AiTouch
- c) Model No. : R1A
- d) Power Supply : R1+
- e) Receiving Frequency : DC 3.7V

1.2 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.10-2013. Other required measurements were illustrated in separate sections of this test report for details. For RF test the measurement procedure was referred to FCC KDB 558074 D01 15.247 Meas Guidance v05r02

Measurement Software

Software	Version	Note
e3	Version 6.100618f	Radiated Emission Test
e3	Version 6.100421	Conducted Emission Test

1.3 Test Facility

Location of the Test site: No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei City, Taiwan 24442, R.O.C.

Designation Number: TW2628.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business or industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreases with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Hopping Channel Separation

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

(5) Number of Hopping frequencies used

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

(6) Hopping Channel Bandwidth

For frequency hopping system operating in the 2400–2483.5 MHz band, there is no requirement for the maximum 20dB bandwidth of the hopping channel. The measurement of the hopping channel bandwidth is for the reference of the hopping channel separation requirement.

(7) Dwell Time of each frequency

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400–2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

(8) Output Power Requirement

According to 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

(9) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the

transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

(10) Out-of-Band Conducted Emission Requirement

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

In the users manual, the Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

2.6 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz ~ 30MHz	$\pm 3.34\text{dB}$ (Mains)(LISN)
Radiated emissions	9kHz ~ 30MHz	$\pm 4.22\text{dB}$
Radiated emissions	30MHz ~ 1GHz	$\pm 4.2\text{dB}$ ($30\text{MHz} \leq f \leq 300\text{MHz}$)
		$\pm 4.44\text{dB}$ ($300\text{MHz} < f \leq 1\text{GHz}$)
Conducted Measurement	Above 1GHz	$\pm 4.44\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)
		$\pm 3.02\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)
Conducted Measurement	9kHz ~ 40GHz	$\pm 0.88\text{dB}$ ($9\text{kHz} \leq f \leq 30\text{MHz}$)
		$\pm 0.88\text{dB}$ ($30\text{MHz} < f \leq 1\text{GHz}$)
		$\pm 1.04\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)
		$\pm 1.2\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)
Frequencies Tolerance	9kHz ~ 40GHz	$\pm 4.04 \times 10^{-8}$
Occupied Bandwidth	9kHz ~ 40GHz	$\pm 5\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

The test result(s) does not consider the uncertainty of measurement when the test standard(s) and/or test method which refer by the labs has the limit or judgments for the test result(s).

3 SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the transmitting antenna connected to EUT (if applicable) to maximize the emission from EUT.

For conducted and radiated emissions, whichever RF channel is operated, the digital circuits' function identically. As the reason, measurement of emissions from digital circuits is performed with the highest, middle and the lowest channel by transmitting mode.

All measurement were intentional to maximum the emissions from EUT by varying the connection cables(if applicable), therefore, the test result is sure to meet the applicable requirement.

For portable device (if applicable), the EUT was pretested in three orthogonal plans: put on table horizontally, stands vertically and side up vertically. The worst case was chosen for final test.

The following modes were invastigated and the worst cases (mode 1 and 3) were chosen for final test.

1. Basic Rate (BR) 1 Mbps uses GFSK modulation
2. Enhanced Data Rate (EDR) 2Mbps uses $\pi/4$ -DQPSK modulation
3. Enhanced Data Rate (EDR) 3Mbps uses 8DPSK modulation

3.2 Devices for Tested System

EUT & accessories.

Device	Manufacture	Model	Description
Bluetooth intercom headset*	Taiwan Protect Ltd.	R1A	---
Type-C to USB	Taiwan Protect Ltd.	R1A	1.0m Unshielded Line
Type-C to year phone	Taiwan Protect Ltd.	R1A	1.0m Unshielded Line

Remark “*” means equipment under test.

The EUT connected with the following peripheral devices.

Device	Manufacture	Model	Description
AC/DC Power Adapter	TOPCOM	TC-KPD36WD	--

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

4.2 Measurement Procedure

A. Preliminary Measurement For Portable Devices

For portable devices, the following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

B. Final Measurement

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz and above 1 GHz, testing in a 966 RF shielded chamber #2.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables (if any) associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


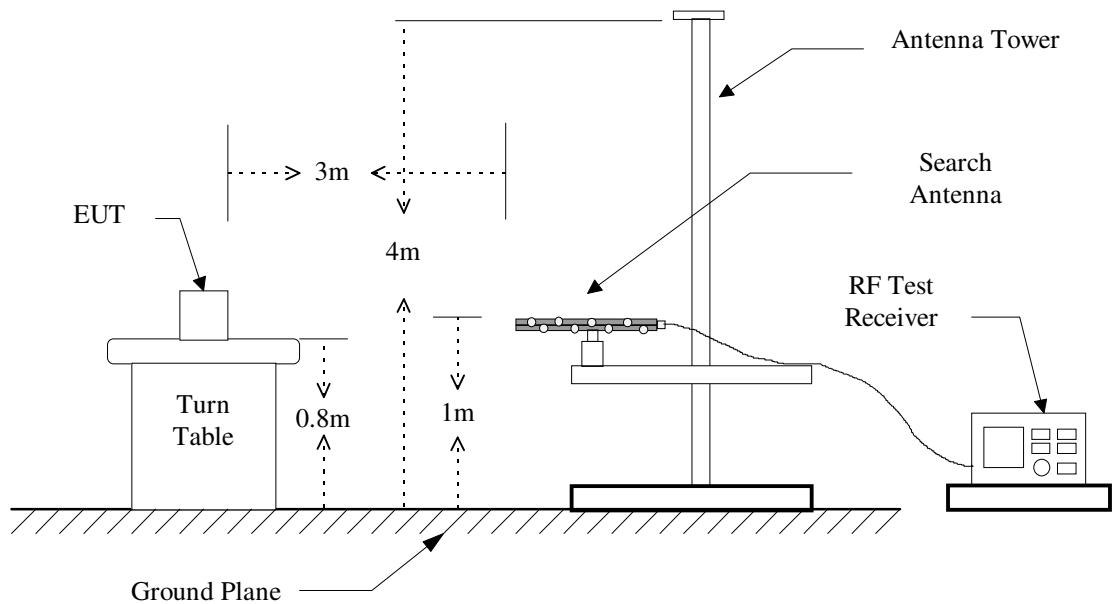


Figure 2 : Frequencies measured above 1 GHz configuration

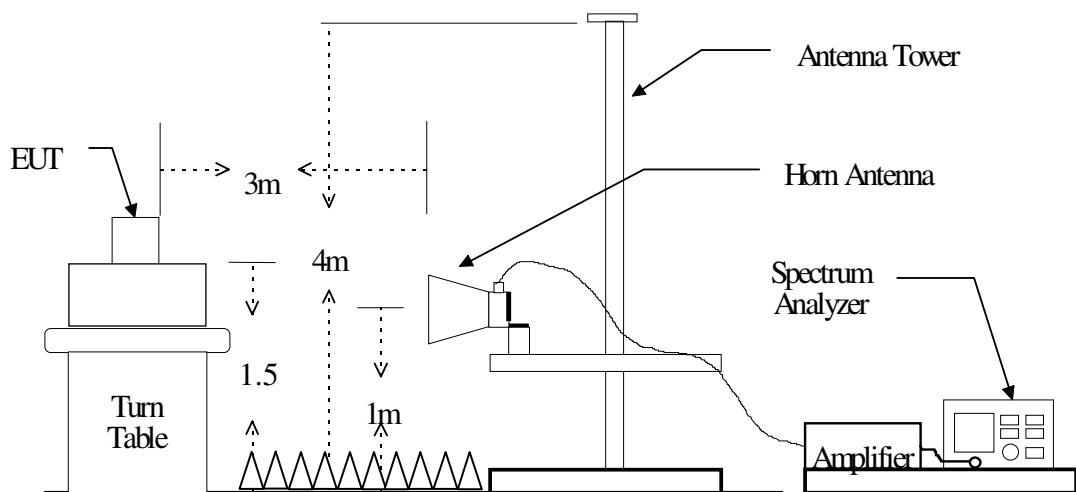

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESU40	2021/3/25	2022/3/24
Bi-Log Antenna	ETC & JYEBAO	MCTD 2786B & FAT- NM5NF5T3G 2W5	2021/7/8	2022/7/7
Amplifier	HP	8447D	2021/07/15	2022/07/14
Horn Antenna (1-18G)	EMCO	3117	2021/03/16	2022/03/15
Amplifier (1G-18G)	HP	8449B	2020/10/06	2021/10/05
Horn Antenna (18-40G)	EMCO	3116	2020/08/19	2021/08/18
Amplifier (1G-40G)	Keysight	83051A	2020/08/27	2021/08/26

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz or $\geq 1/T$ (Note 1)

Note 1:


$VBW = 10 \text{ Hz}$, when the duty cycle is no less than 98%.

$VBW \geq 1/T$, when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

4.4 Radiated Emission Data

4.4.1 Tx Portion

A. Bluetooth BR

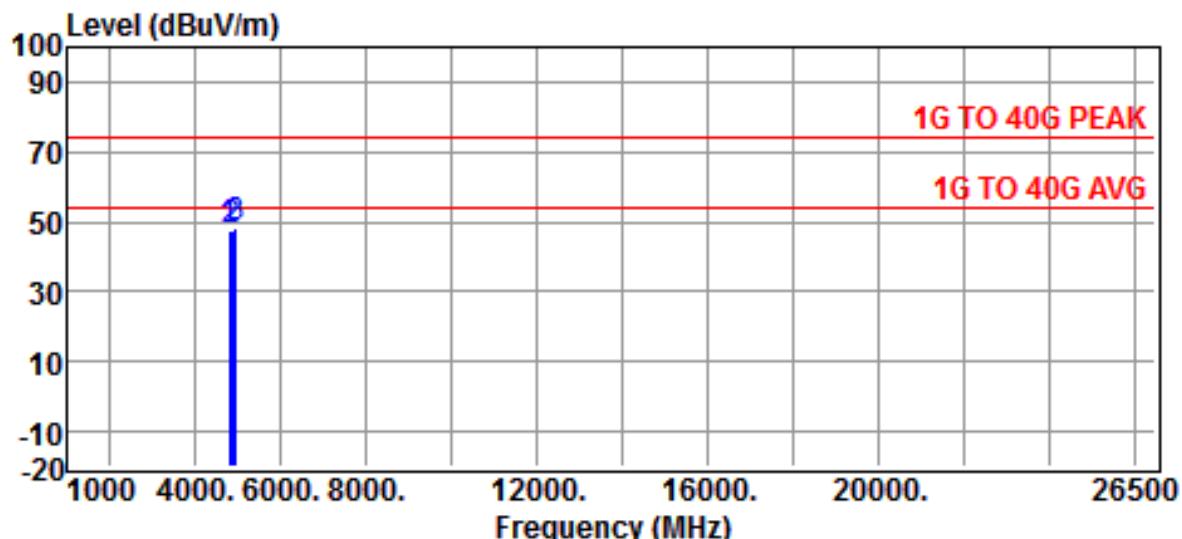


Site :Chamber #2 Date :2020-04-22
 Limit :1G TO 40G PEAK Ant. Pol. :HORIZONTAL
 EUT : Bluetooth intercom headset Model :R1A
 Power Rating : Battery 3.7V Temp. :20°C
 Engineer : Brian Huang Humi. :68 %
 Test Mode :BR Mode
 Test Mode :

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4804.0000	43.70	4.07	47.77	74.00	-26.23	Peak
4882.0000	43.74	4.16	47.90	74.00	-26.10	Peak
4960.0000	43.81	4.25	48.06	74.00	-25.94	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

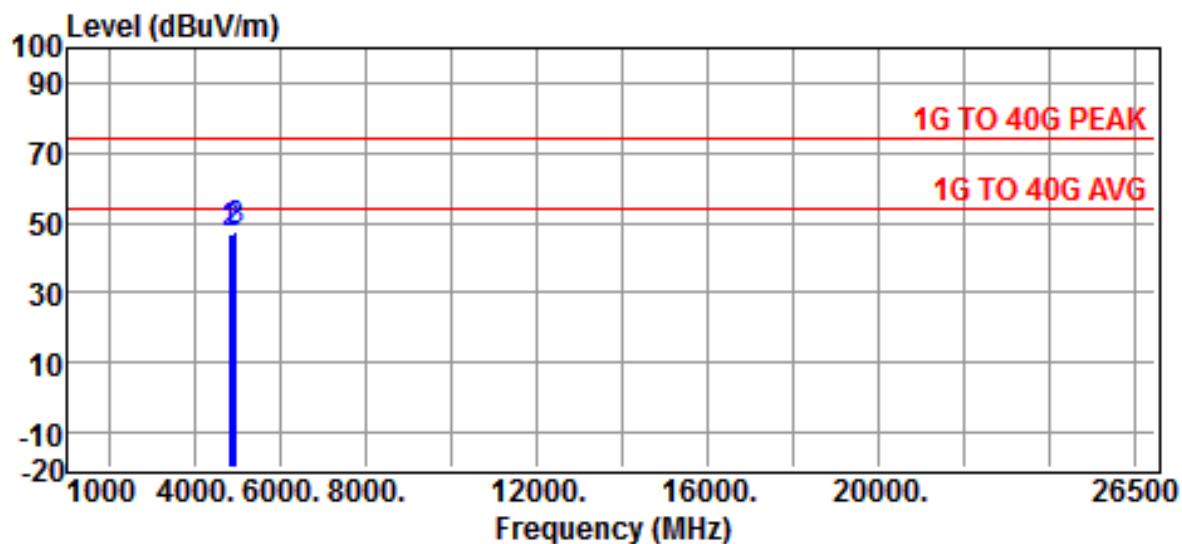


Site :Chamber #2 Date :2020-04-22
 Limit :1G TO 40G PEAK Ant. Pol. :VERTICAL
 EUT : Bluetooth intercom headset Model :R1A
 Power Rating : Battery 3.7V Temp. :20°C
 Engineer : Brian Huang Humi. :68 %
 Test Mode :BR Mode
 Test Mode :

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4804.0000	42.70	4.07	46.77	74.00	-27.23	Peak
4882.0000	42.80	4.16	46.96	74.00	-27.04	Peak
4960.0000	43.05	4.25	47.30	74.00	-26.70	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

B. Bluetooth EDR

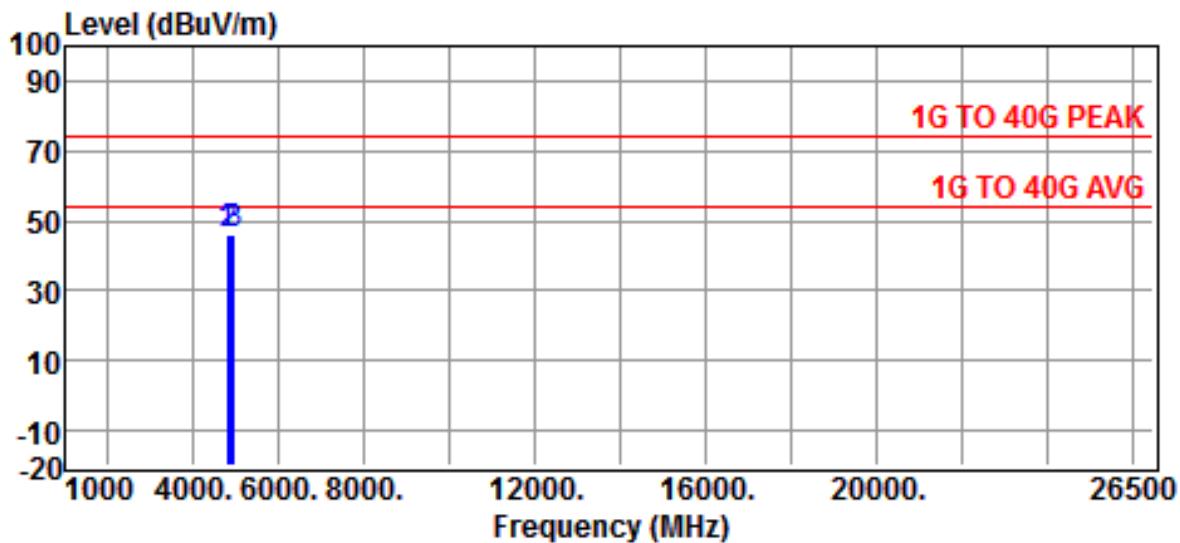


Site :Chamber #2 Date :2020-04-22
 Limit :1G TO 40G PEAK Ant. Pol. :HORIZONTAL
 EUT : Bluetooth intercom headset Model :R1A
 Power Rating : Battery 3.7V Temp. :20°C
 Engineer : Brian Huang Humi. :68 %
 Test Mode :EDR Mode
 Test Mode :

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4804.0000	41.80	4.07	45.87	74.00	-28.13	Peak
4882.0000	41.93	4.16	46.09	74.00	-27.91	Peak
4960.0000	41.95	4.25	46.20	74.00	-27.80	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

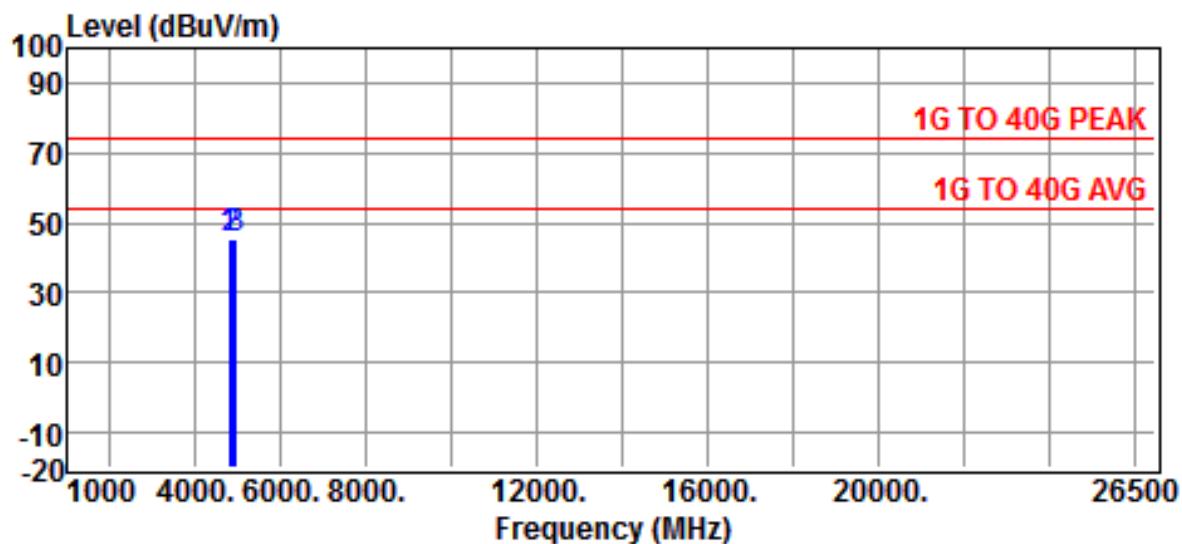

Site :Chamber #2 Date :2020-04-22
 Limit :1G TO 40G PEAK Ant. Pol. :VERTICAL
 EUT : Bluetooth intercom headset Model :R1A
 Power Rating : Battery 3.7V Temp. :20°C
 Engineer : Brian Huang Humi. :68 %
 Test Mode :EDR Mode
 Test Mode :


Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4804.0000	41.20	4.07	45.27	74.00	-28.73	Peak
4882.0000	41.31	4.16	45.47	74.00	-28.53	Peak
4960.0000	41.36	4.25	45.61	74.00	-28.39	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

4.4.2 Radiated Emissions in Restricted Bands

A. Bluetooth BR

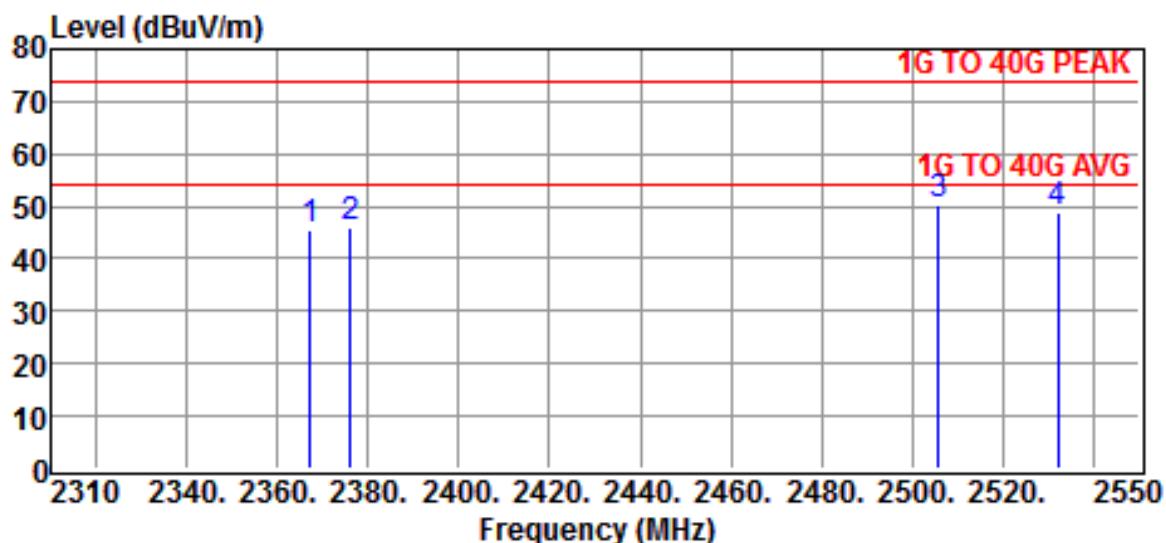


Site :Chamber #2 Date :2020-04-22
 Limit :1G TO 40G PEAK Ant. Pol. :HORIZONTAL
 EUT : Bluetooth intercom headset Model :R1A
 Power Rating : Battery 3.7V Temp. :20°C
 Engineer : Brian Huang Humi. :68 %
 Test Mode :BR Mode
 Test Mode :

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2367.3600	46.27	-0.88	45.39	74.00	-28.61	Peak
2376.0000	46.99	-0.83	46.16	74.00	-27.84	Peak
2505.8400	50.74	-0.55	50.19	74.00	-23.81	Peak
2532.2400	49.65	-0.57	49.08	74.00	-24.92	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

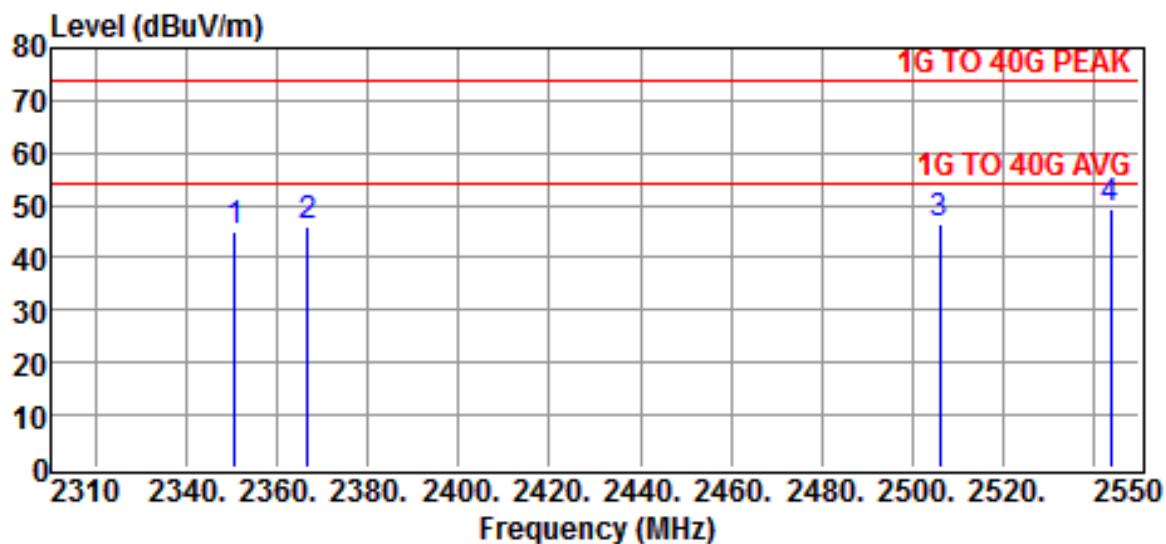


Site :Chamber #2 Date :2020-04-22
 Limit :1G TO 40G PEAK Ant. Pol. :VERTICAL
 EUT : Bluetooth intercom headset Model :R1A
 Power Rating : Battery 3.7V Temp. :20°C
 Engineer : Brian Huang Humi. :68 %
 Test Mode :BR Mode
 Test Mode :

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2350.5600	46.06	-0.98	45.08	74.00	-28.92	Peak
2366.6400	46.66	-0.88	45.78	74.00	-28.22	Peak
2506.0800	47.22	-0.55	46.67	74.00	-27.33	Peak
2543.7600	49.84	-0.58	49.26	74.00	-24.74	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

B. Bluetooth EDR

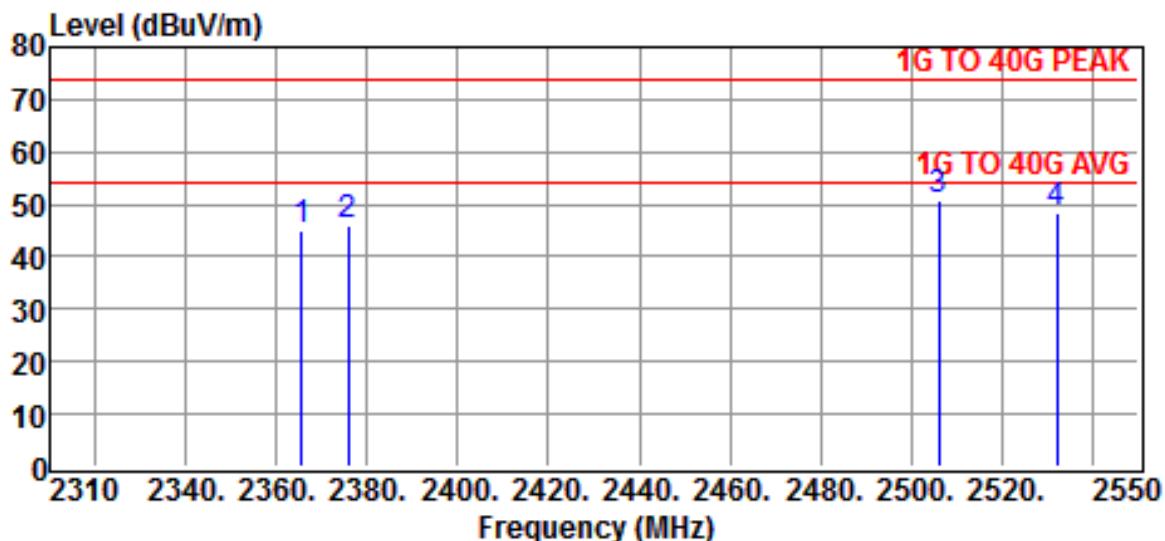


Site :Chamber #2 Date :2020-04-22
 Limit :1G TO 40G PEAK Ant. Pol. :HORIZONTAL
 EUT : Bluetooth intercom headset Model :R1A
 Power Rating : Battery 3.7V Temp. :20°C
 Engineer : Brian Huang Humi. :68 %
 Test Mode :EDR Mode
 Test Mode :

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2365.4400	46.04	-0.89	45.15	74.00	-28.85	Peak
2375.7600	46.69	-0.83	45.86	74.00	-28.14	Peak
2506.0800	51.33	-0.55	50.78	74.00	-23.22	Peak
2532.2400	49.18	-0.57	48.61	74.00	-25.39	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

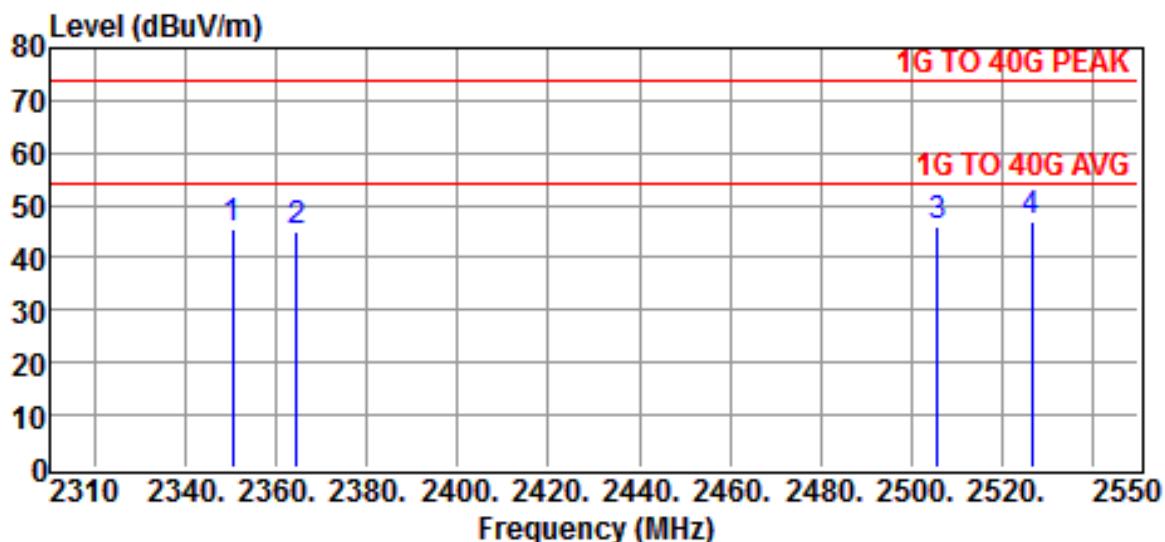

Site :Chamber #2 Date :2020-04-22
 Limit :1G TO 40G PEAK Ant. Pol. :VERTICAL
 EUT : Bluetooth intercom headset Model :R1A
 Power Rating : Battery 3.7V Temp. :20°C
 Engineer : Brian Huang Humi. :68 %
 Test Mode :EDR Mode
 Test Mode :


Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2350.3200	46.30	-0.98	45.32	74.00	-28.68	Peak
2364.4800	45.95	-0.90	45.05	74.00	-28.95	Peak
2505.8400	46.40	-0.55	45.85	74.00	-28.15	Peak
2526.4800	47.52	-0.56	46.96	74.00	-27.04	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

4.4.3 Other Emissions

a) Emission frequencies below 1 GHz

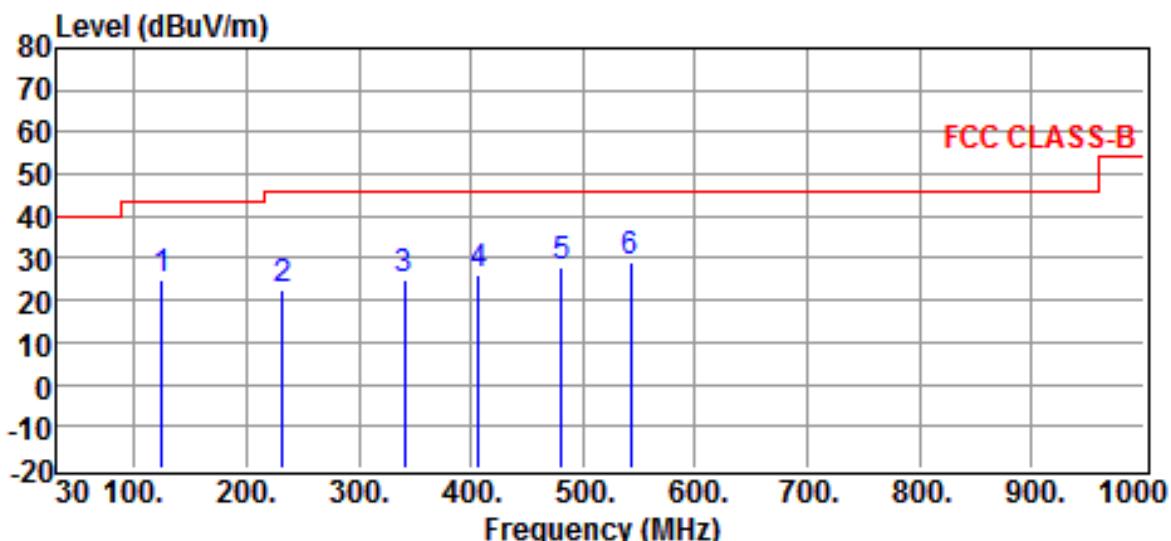


Site :Chamber #2 Date :2021-08-10
 Limit :FCC CLASS-B Ant. Pol. :HORIZONTAL
 EUT : Bluetooth intercom headset Model :R1A
 Power Rating : Battery Temp. :25°C
 Engineer : Brian Huang Humi. :60 %
 Test Mode :BT Mode

	Freq MHz	Reading dBuV	Correction Factor dB/m	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
	125.0600	29.47	-4.81	24.66	43.50	-18.84	QP
	232.7300	29.91	-7.59	22.32	46.00	-23.68	QP
	341.3700	28.52	-3.73	24.79	46.00	-21.21	QP
	406.3600	28.52	-2.21	26.31	46.00	-19.69	QP
	481.0500	29.16	-1.36	27.80	46.00	-18.20	QP
*	542.1600	29.27	-0.28	28.99	46.00	-17.01	QP

Note :

1. Result = Reading + Correction Factor
2. Average Result = Peak Result + Duty Factor ()
3. Correction Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.
6. " * " mean this data is the worst emission level.

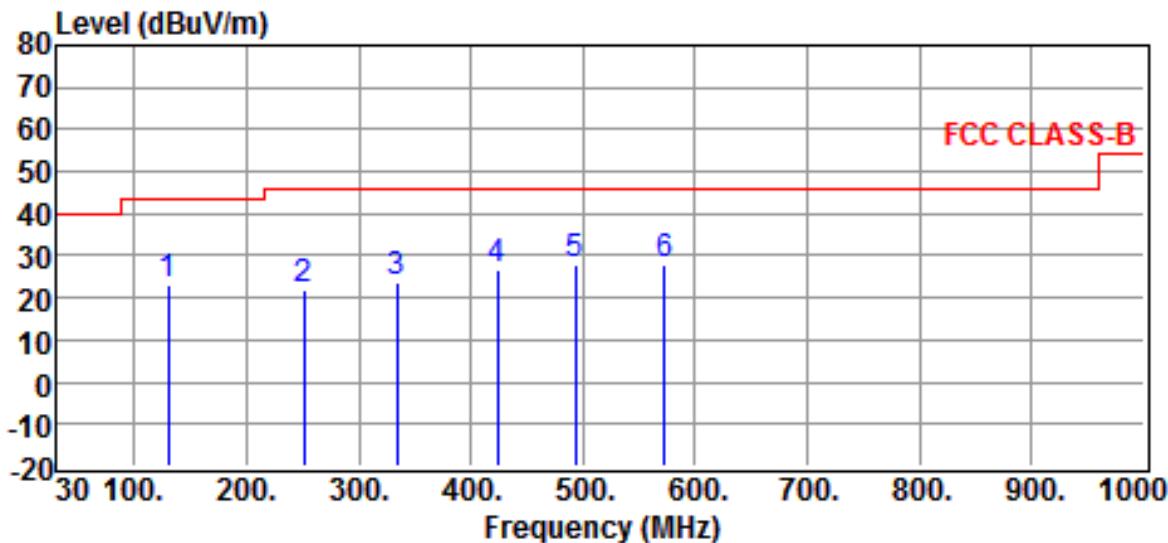


Site :Chamber #2 Date : 2021-08-10
 Limit :FCC CLASS-B Ant. Pol. :VERTICAL
 EUT : Bluetooth intercom headset Model :R1A
 Power Rating : Battery Temp. :25°C
 Engineer : Brian Huang Humi. :60 %
 Test Mode :BT Mode

	Freq MHz	Reading dBuV	Correction Factor dB/m	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
	129.9100	28.03	-4.83	23.20	43.50	-20.30	QP
	251.1600	28.43	-6.64	21.79	46.00	-24.21	QP
	334.5800	27.60	-3.98	23.62	46.00	-22.38	QP
	423.8200	28.56	-2.10	26.46	46.00	-19.54	QP
	493.6600	29.23	-1.32	27.91	46.00	-18.09	QP
*	573.2000	28.51	-0.37	28.14	46.00	-17.86	QP

Note :

1. Result = Reading + Correction Factor
2. Average Result = Peak Result + Duty Factor ()
3. Correction Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.
6. " * " mean this data is the worst emission level.

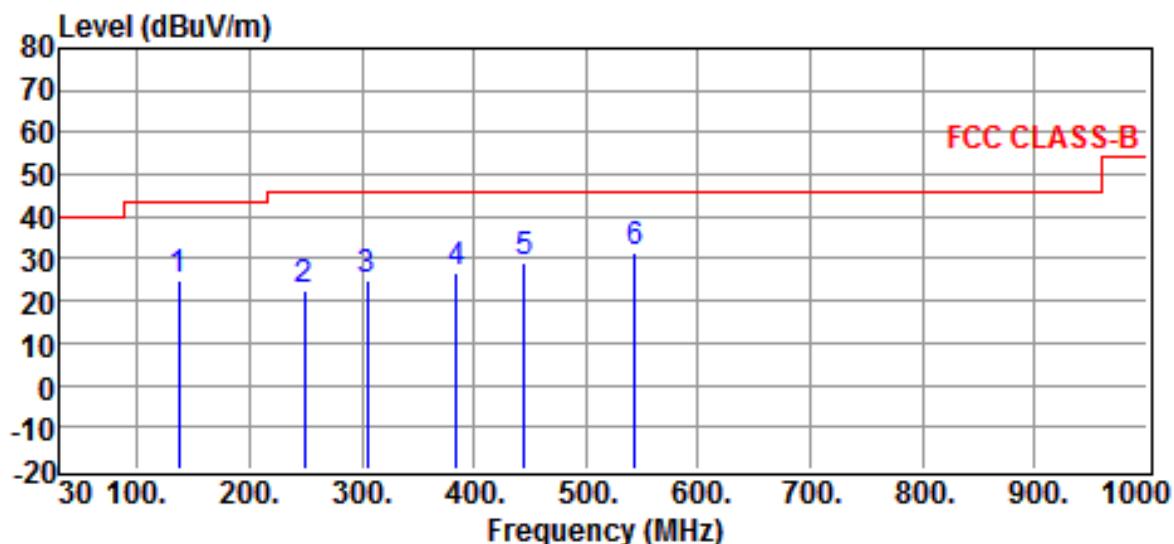


Site :Chamber #2 Date :2021-08-10
 Limit :FCC CLASS-B Ant. Pol. :HORIZONTAL
 EUT : Bluetooth intercom headset Model :R1A
 Power Rating :DC From Adapter Temp. :25°C
 Engineer : Brian Huang Humi. :60 %
 Test Mode :Charge Mode

	Freq MHz	Reading dBuV	Correction Factor dB/m	Result dBuV/m	Limits dBuV/m	Over limit Db	Detector
	136.7000	29.77	-5.14	24.63	43.50	-18.87	QP
	249.2200	29.14	-6.76	22.38	46.00	-23.62	QP
	305.4800	29.75	-4.83	24.92	46.00	-21.08	QP
	385.0200	29.41	-2.80	26.61	46.00	-19.39	QP
	445.1600	30.60	-1.59	29.01	46.00	-16.99	QP
*	544.1000	31.46	-0.23	31.23	46.00	-14.77	QP

Note :

1. Result = Reading + Correction Factor
2. Average Result = Peak Result + Duty Factor ()
3. Correction Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.
6. " * " mean this data is the worst emission level.

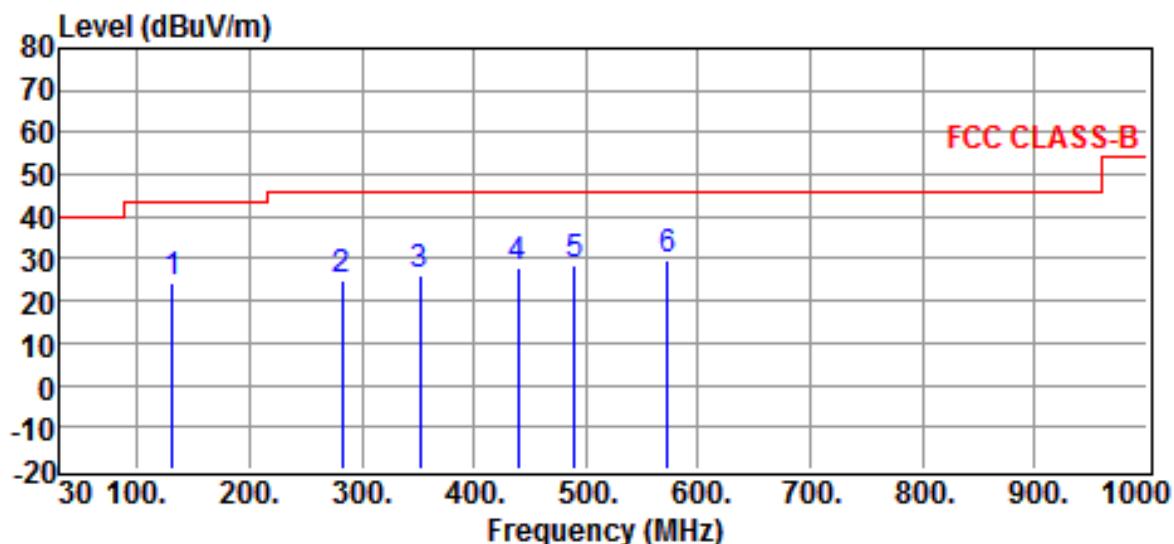

Site :Chamber #2 Date :2021-08-10
 Limit :FCC CLASS-B Ant. Pol. :VERTICAL
 EUT : Bluetooth intercom headset Model :R1A
 Power Rating :DC Power From Adapter Temp. :25 °C
 Engineer :Brian Huang Humi. :60 %
 Test Mode :Charge Mode

	Freq MHz	Reading dBuV	Correction Factor dB/m	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
	130.8800	29.04	-4.91	24.13	43.50	-19.37	QP
	282.2000	29.76	-5.01	24.75	46.00	-21.25	QP
	352.0400	29.64	-3.67	25.97	46.00	-20.03	QP
	439.3400	29.64	-1.62	28.02	46.00	-17.98	QP
	489.7800	29.74	-1.25	28.49	46.00	-17.51	QP
*	573.2000	29.89	-0.37	29.52	46.00	-16.48	QP

Note :

1. Result = Reading + Correction Factor
2. Average Result = Peak Result + Duty Factor ()
3. Correction Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.
6. " * " mean this data is the worst emission level.

b) Emission frequencies above 1 GHz

According to exploratory test no any obvious emission were detected from above 1 GHz.

c) Emission frequencies below 30MHz (9kHz - 30MHz)

According to exploratory test no any obvious emission were detected from 9kHz to 30MHz. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss (if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$



where Corrected Factor

$$= \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4.6 Photos of Radiation Measuring Setup

(Below 1GHz) – BT

Test Model : R1A

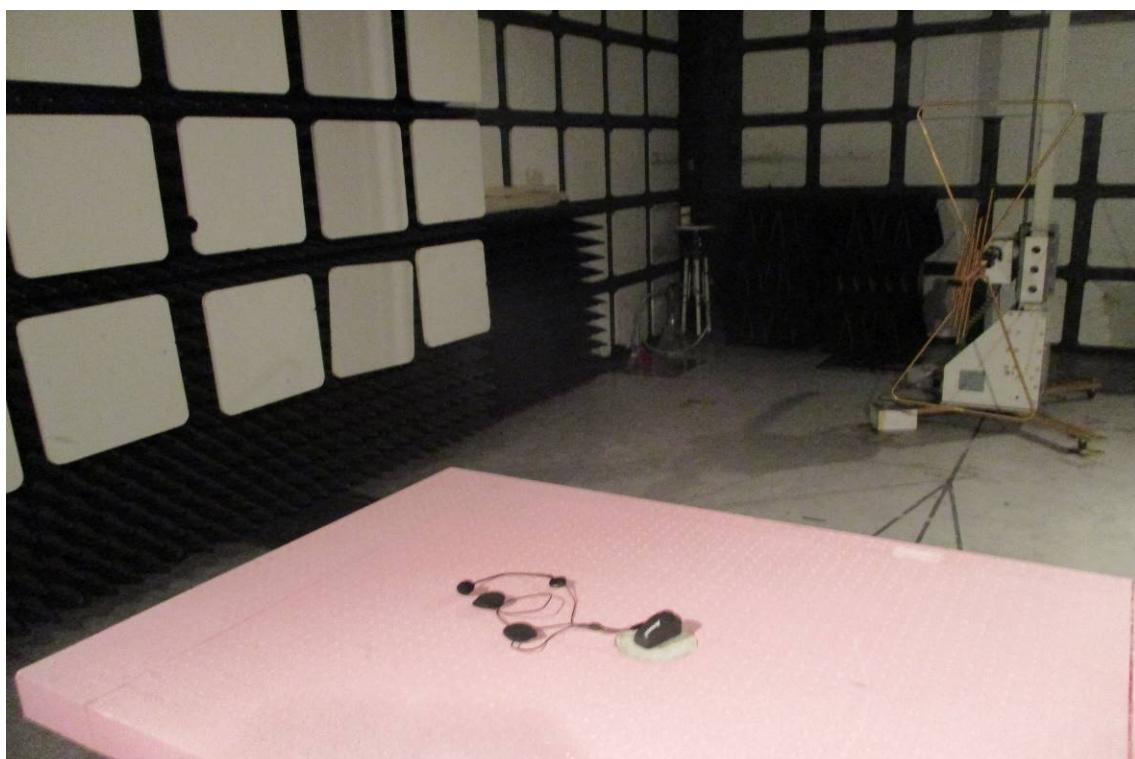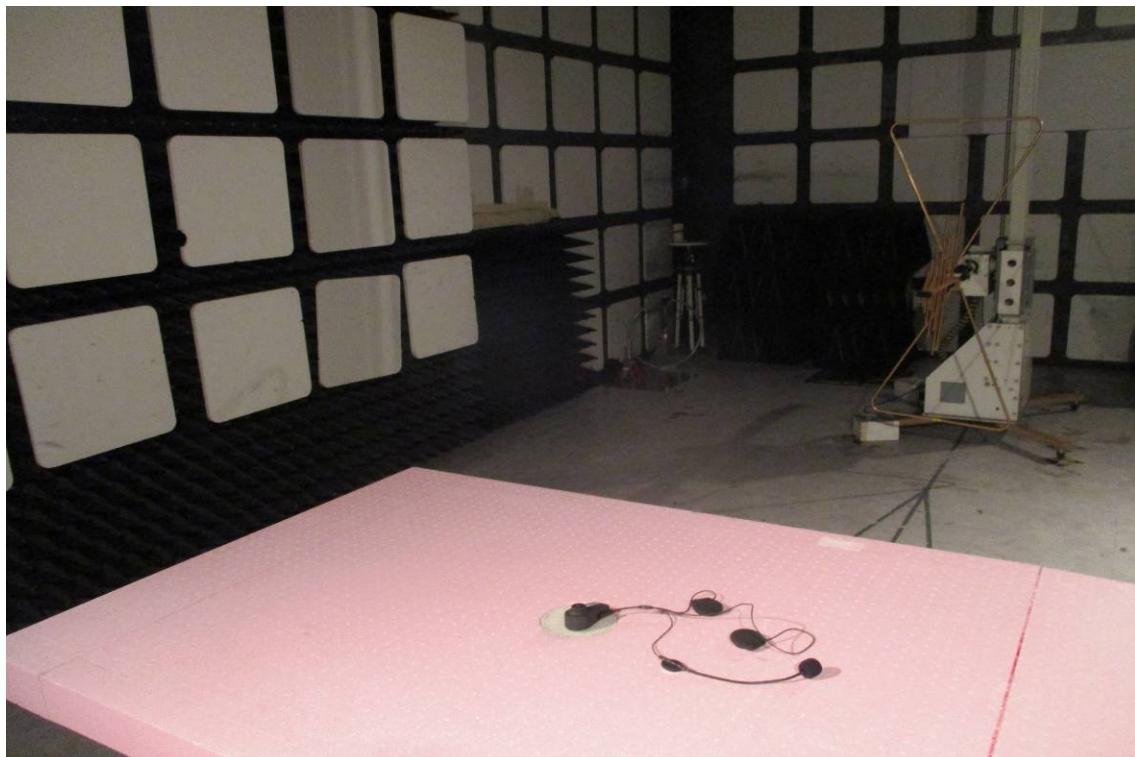

(1-6GHz)
Test Model : R1A



(18-26GHz)
Test Model : R1A



(Below 1GHz) - CHARGE
Test Model : R1A



5 CONDUCTED EMISSION MEASUREMENT


5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to §15.107(a) and §15.207(a) respectively. Both Limits are identical specification.


5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

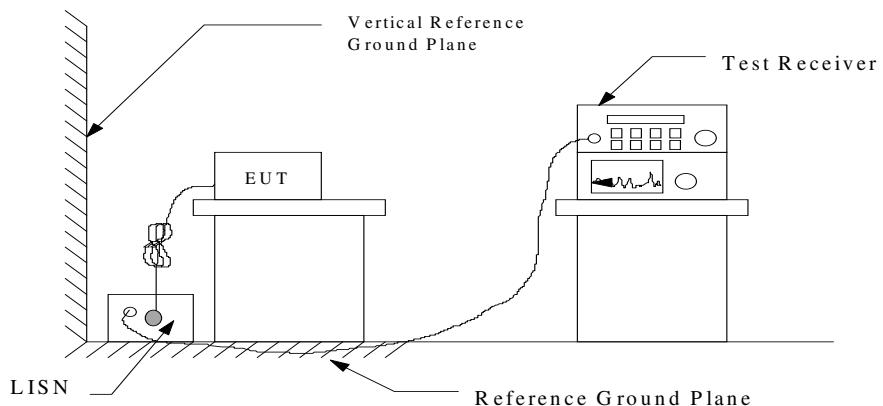

5.3 Conducted Emission Data

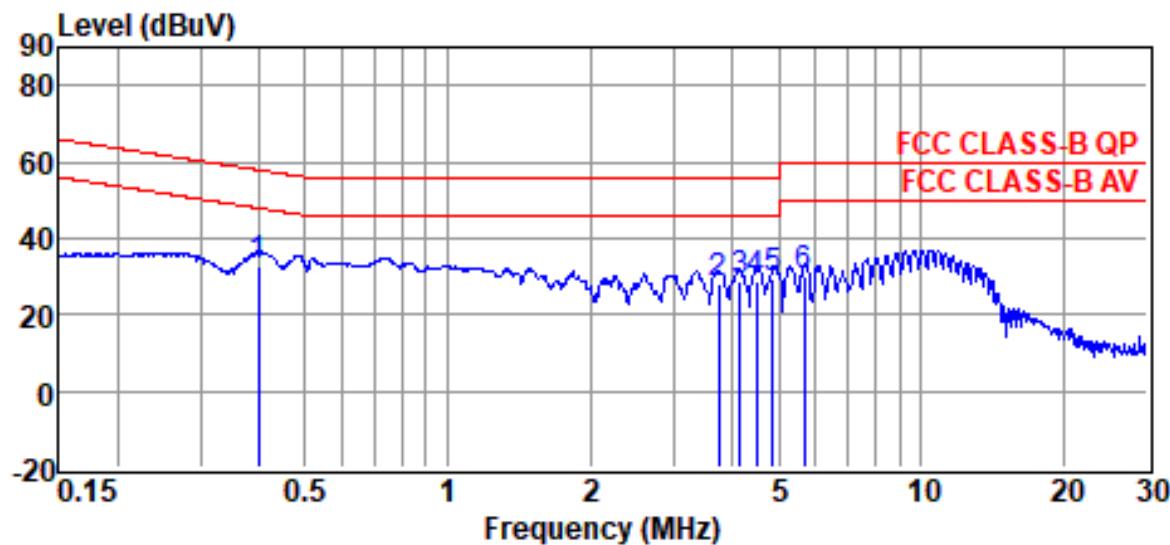


Site	: conducted #1	Date	: 2021-08-10
Condition	: FCC CLASS-B QP	LISN	: NEUTRAL
Tem / Hum	: 24 °C / 65%	Test Mode	: Charge Mode
EUT	: Bluetooth intercom headset		
Power Rating	: DC 5V From Adapter 120Vac60Hz		
Engineer	: Brian Huang	Model	: R1A

	Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
*	0.3976	22.80	10.09	32.89	57.90	-25.01	QP
	3.7400	17.78	10.23	28.01	56.00	-27.99	QP
	4.1580	18.52	10.23	28.75	56.00	-27.25	QP
	4.5010	18.57	10.24	28.81	56.00	-27.19	QP
	4.8740	19.20	10.24	29.44	56.00	-26.56	QP
	5.6530	19.65	10.24	29.89	60.00	-30.11	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss+ Pulse Limiter Factor
3. " * " mean this data is the worst emission level

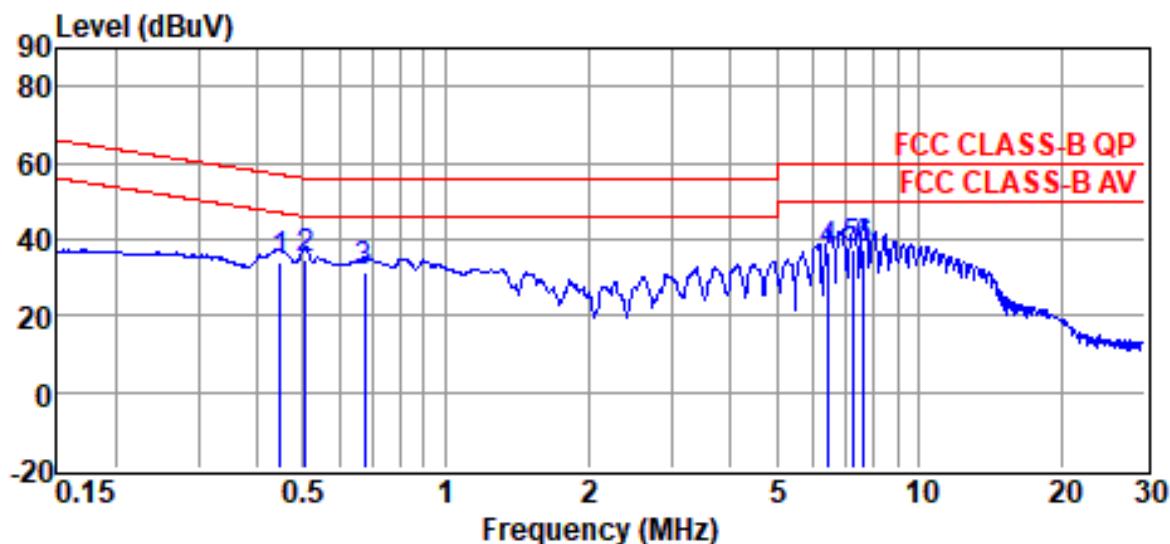

Site : conducted #1 Date : 2021-08-10
 Condition : FCC CLASS-B QP LISN : LINE
 Tem / Hum : 24 °C / 65% Test Mode : Charge Mode
 EUT : Bluetooth intercom headset
 Power Rating : DC 5V From Adapter 120Vac60Hz
 Engineer : Brian Huang Model : R1A

	Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
	0.4468	23.66	10.08	33.74	56.93	-23.19	QP
*	0.5047	24.76	10.08	34.84	56.00	-21.16	QP
	0.6754	21.48	10.09	31.57	56.00	-24.43	QP
	6.4540	26.38	10.23	36.61	60.00	-23.39	QP
	7.2520	27.20	10.25	37.45	60.00	-22.55	QP
	7.6460	26.79	10.25	37.04	60.00	-22.96	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss+ Pulse Limiter Factor
3. " * " mean this data is the worst emission level

5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB μ V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB}\mu\text{V}$$

$$\begin{aligned} \text{Level in } \mu\text{V} &= \text{Common Antilogarithm}[(22.6 \text{ dB}\mu\text{V})/20] \\ &= 13.48 \mu\text{V} \end{aligned}$$

5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCI	2020/10/14	2021/10/13
LISN	Schwarzbeck	NSLK 8127 PLC	2020/12/22	2021/12/21
PLUSE LIMITER (10dB)	Schwarzbeck	VTSD 9561 F-N	2021/04/29	2022/04/28

5.6 Photos of Conduction Measuring Setup

Test model:R1A



6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 Antenna Construction

The antenna is permanently mounted on main PCB, no consideration of replacement.
Please see internal photos and the antenna specifications.

7 HOPPING CHANNEL SEPARATION


7.1 Standard Applicable

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peaks of two adjacent channels
 - Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span
 - Video (or Average) Bandwidth (VBW) \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

Figure 4 : Measurement configuration.



7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2020/01/15	2021/01/14

7.4 Measurement Data

Test Date : Apr. 14, 2020 Temperature : 22 °C Humidity : 51 %


Mode: Bluetooth BR

- a) Channel Low : Adjacent Hopping Channel Separation is 1.004 MHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 1.000 MHz
- c) Channel High : Adjacent Hopping Channel Separation is 1.004 MHz


Mode: Bluetooth EDR

- a) Channel Low : Adjacent Hopping Channel Separation is 1.002 MHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 1.002 MHz
- c) Channel High : Adjacent Hopping Channel Separation is 1.002 MHz


Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ (1 GHz $< f \leq 18$ GHz).

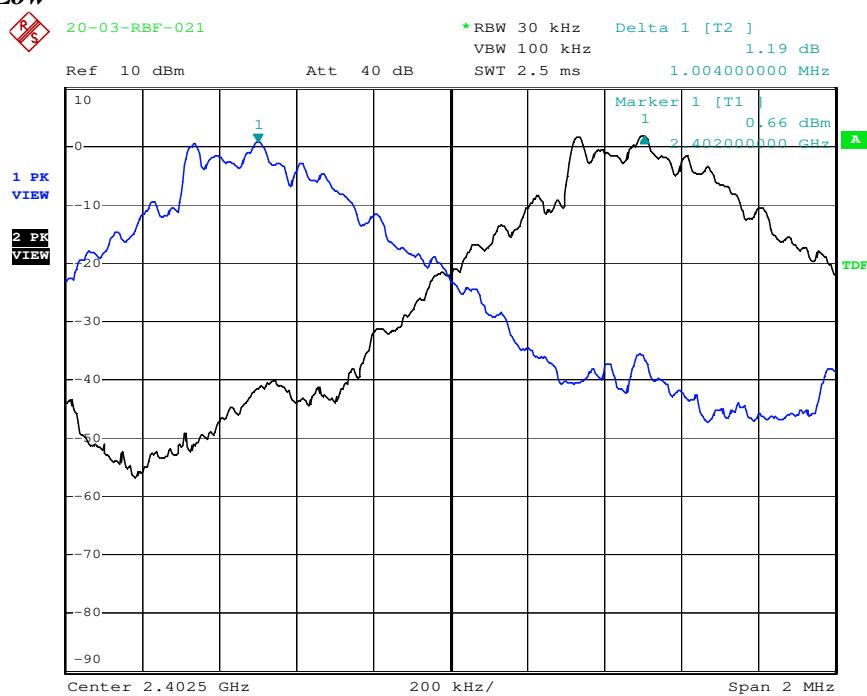Mode: Bluetooth BR**Channel Low**


Date: 14.APR.2020 14:35:27

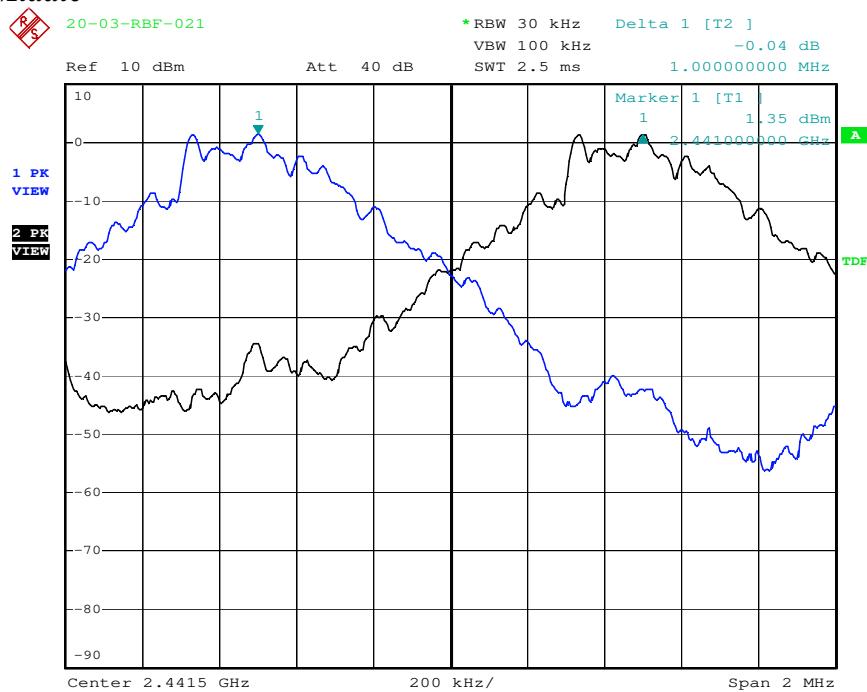Channel Middle


Date: 14.APR.2020 14:36:49

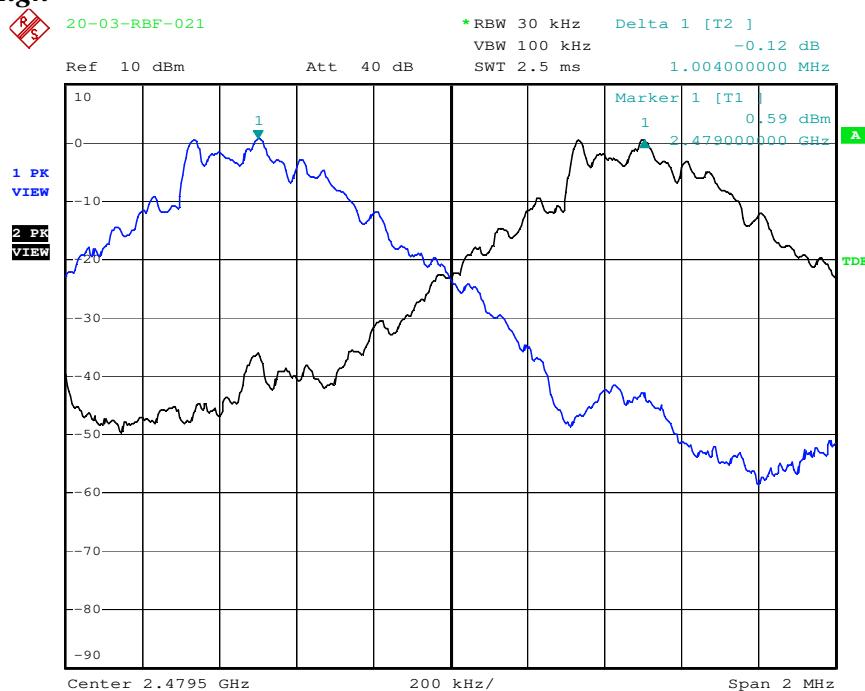Channel High


Date: 14.APR.2020 14:37:57

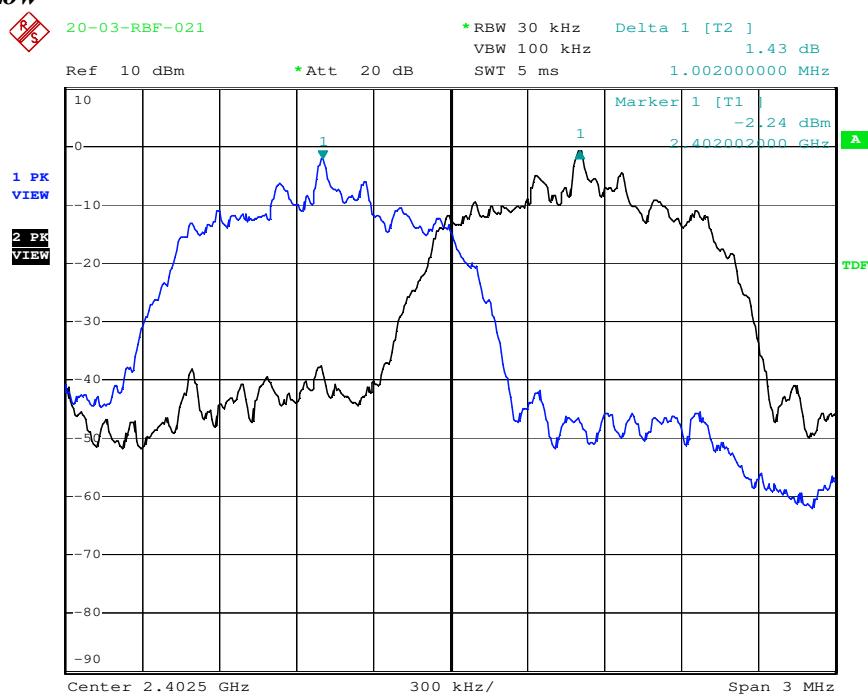Mode: Bluetooth EDR**Channel Low**

Date: 14.APR.2020 15:40:46

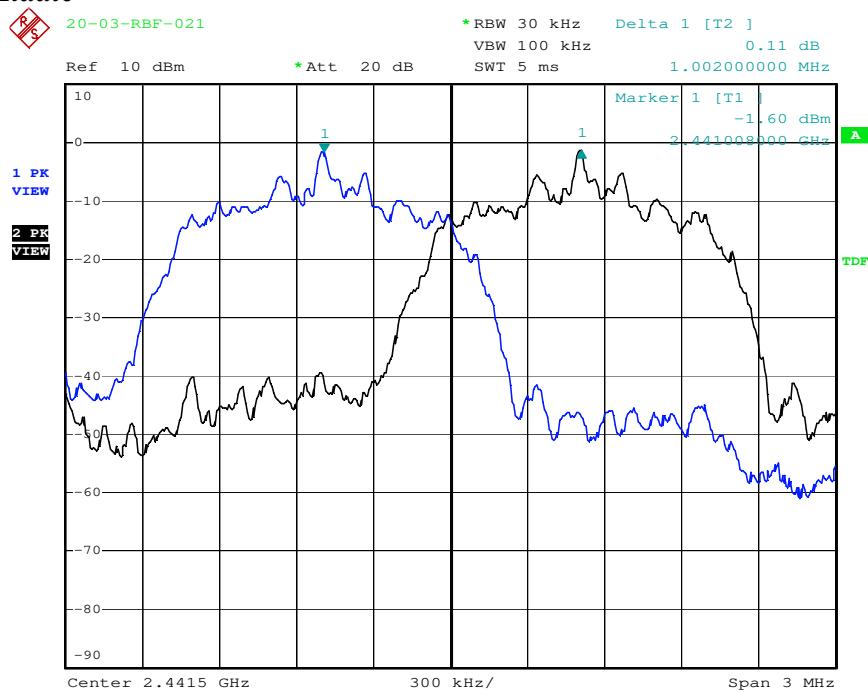Channel Middle

Date: 14.APR.2020 15:41:39

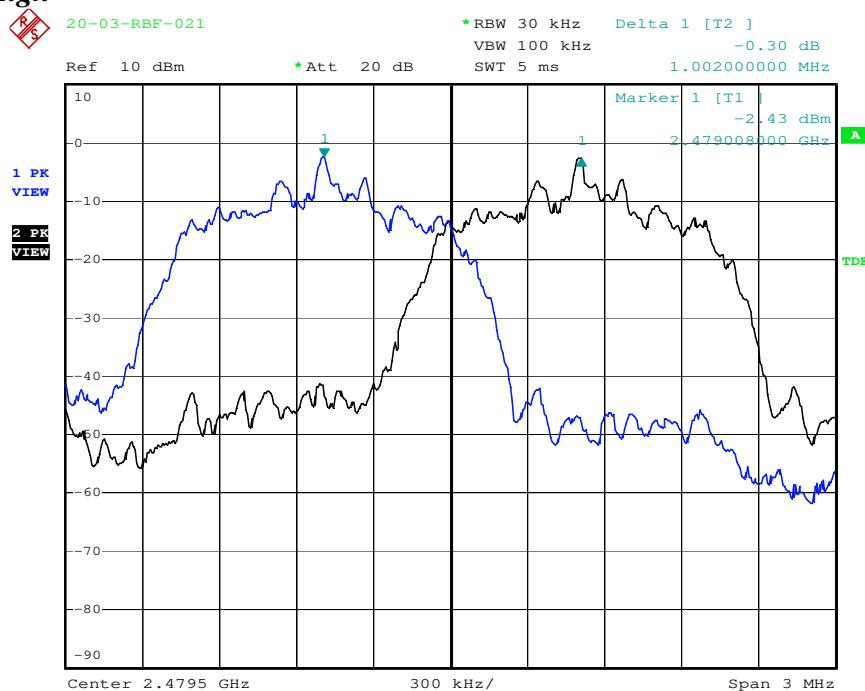Channel High

Date: 14.APR.2020 15:42:40

8 NUMBER OF HOPPING FREQUENCY USED

8.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument.
Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
 - Span = the frequency band of operation
 - RBW \geq 1% of the span
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2020/01/15	2021/01/14

8.4 Measurement Data

Test Date : Apr. 14, 2020 Temperature : 22 °C Humidity : 51 %

A. Bluetooth BR

There are 79 hopping frequencies used.


B. Bluetooth EDR

There are 79 hopping frequencies used.


Justification on AFH mode:

Adaptive Frequency Hopping (AFH) means that a device can hop over a reduced set of frequencies. The frequencies hopped may reduced in AFH mode but at least 15 channels will be used, normally AFH mode has 20 channels.


Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ (1 GHz $< f \leq 18$ GHz).

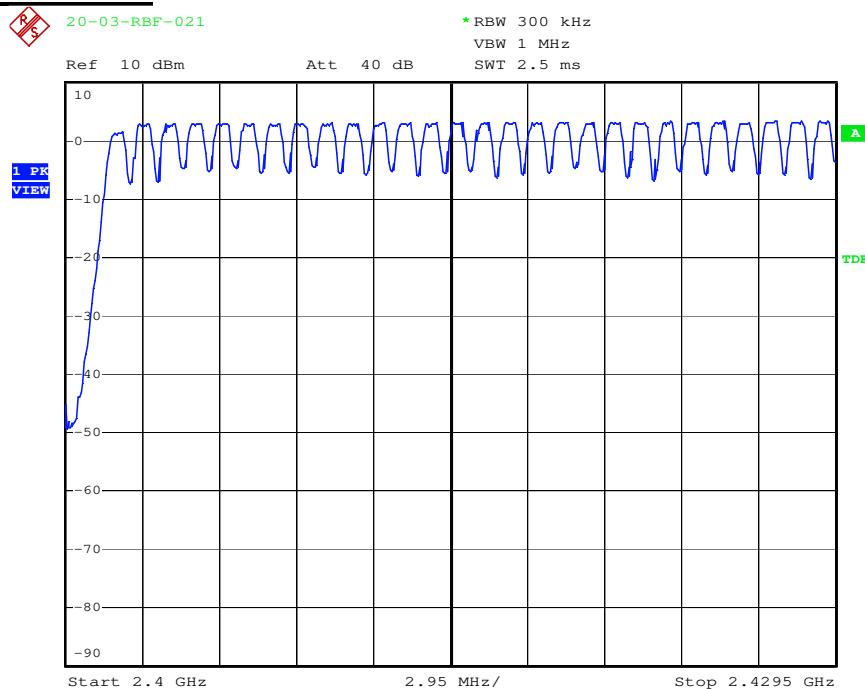Mode: Bluetooth BR


Date: 14.APR.2020 14:19:32

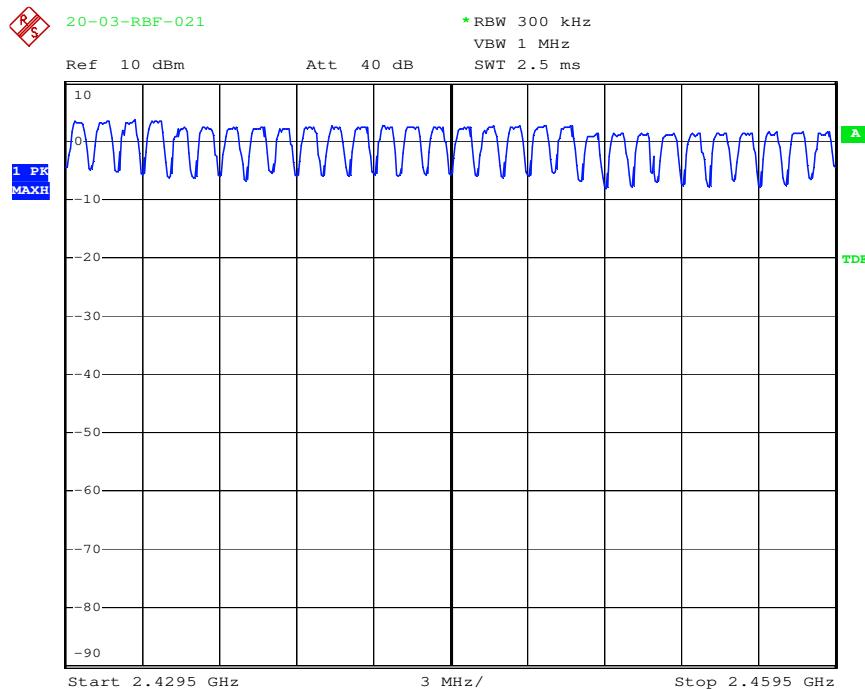


Date: 14.APR.2020 14:20:31

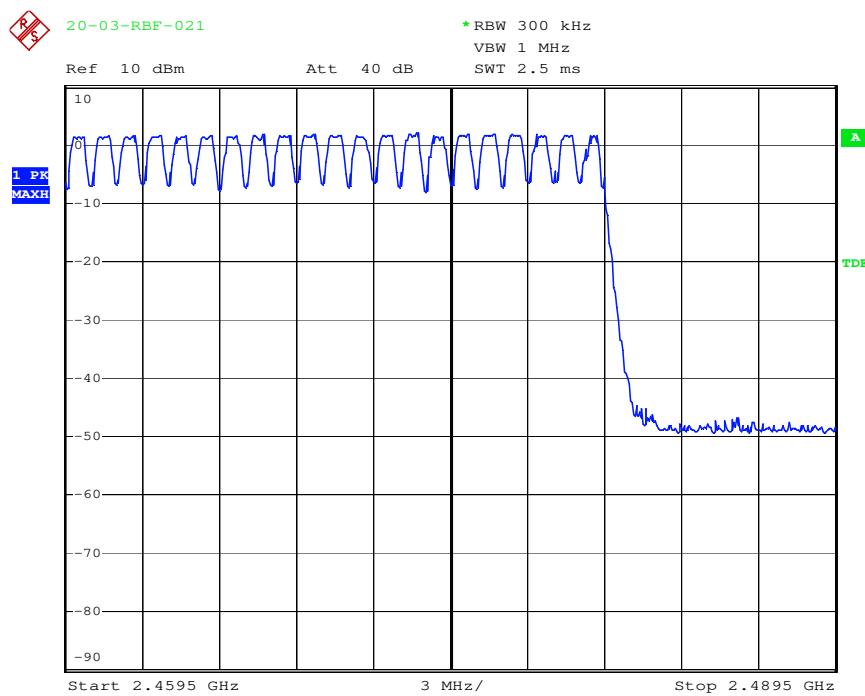


Date: 14.APR.2020 14:21:14

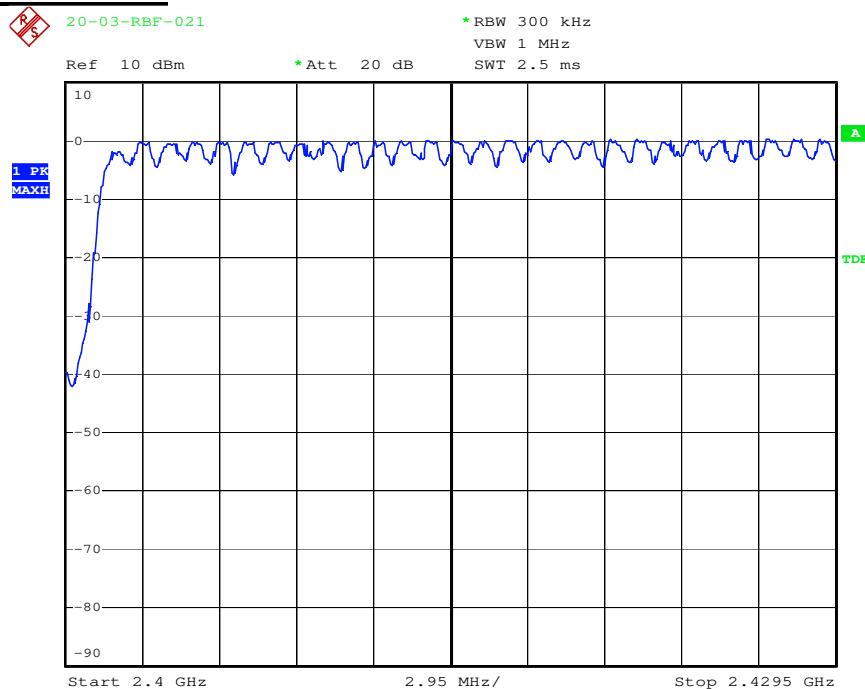Mode: Bluetooth EDR

Date: 14.APR.2020 15:24:48

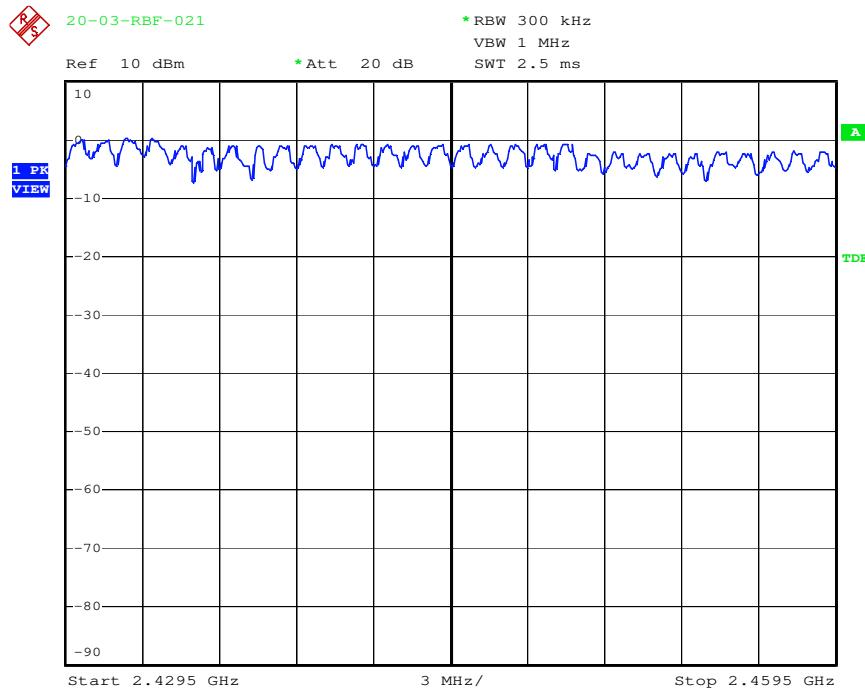

Date: 14.APR.2020 15:26:18

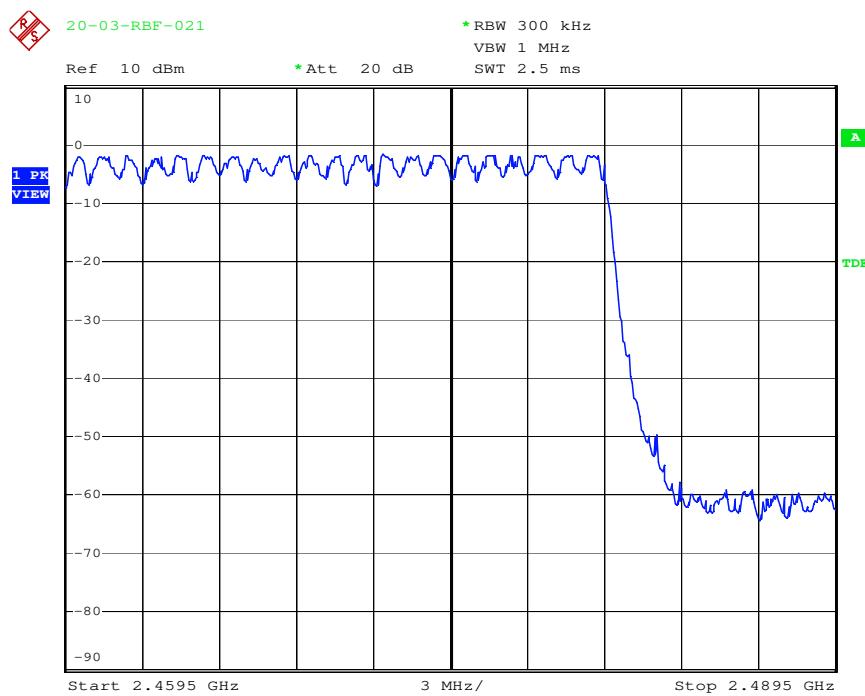

Date: 14.APR.2020 15:27:20

9 CHANNEL BANDWIDTH

9.1 Standard Applicable

For frequency hopping system operating in the 2400–2483.5 MHz band, there is no requirement for the maximum 20dB bandwidth of the hopping channel. The measurement of the hopping channel bandwidth is for the reference of the hopping channel separation requirement.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument.
Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth
VBW \geq RBW
Sweep = auto
Detector function = peak
Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2020/01/15	2021/01/14

9.4 Measurement Data

Test Date : Apr. 14, 2020 Temperature : 22 °C Humidity : 51 %


Mode: Bluetooth BR

- a) Channel Low : Channel Bandwidth is **0.928** MHz
- b) Channel Middle : Channel Bandwidth is **0.924** MHz
- c) Channel High : Channel Bandwidth is **0.916** MHz


Mode: Bluetooth EDR

- a) Channel Low : Channel Bandwidth is **1.208** MHz
- b) Channel Middle : Channel Bandwidth is **1.204** MHz
- c) Channel High : Channel Bandwidth is **1.208** MHz


Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ (1 GHz $< f \leq 18$ GHz).

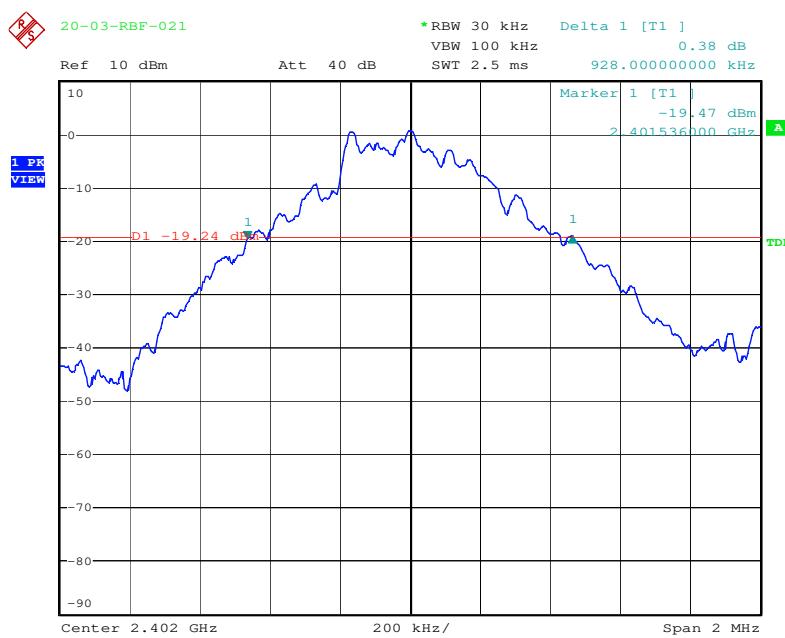Mode:Bluetooth BR**Channel Low**


Date: 14.APR.2020 14:25:49

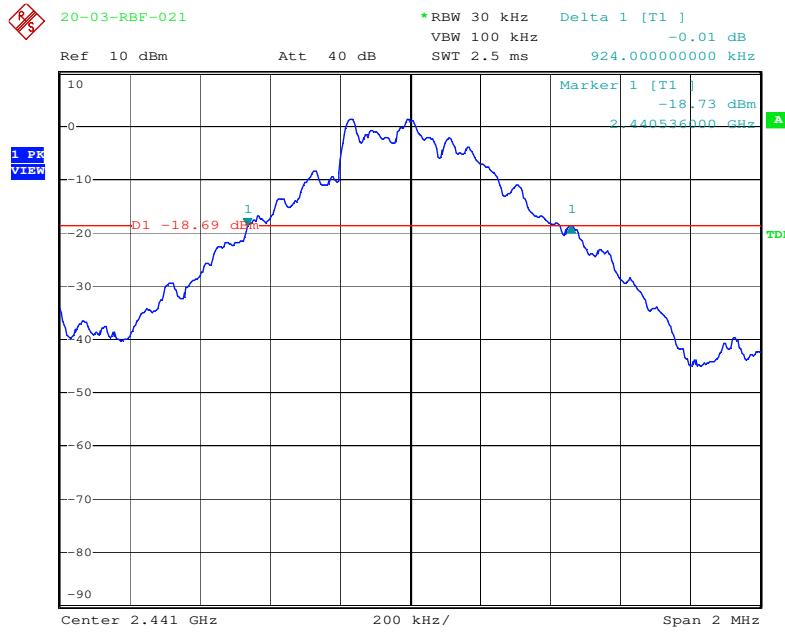Channel Middle


Date: 14.APR.2020 14:25:11

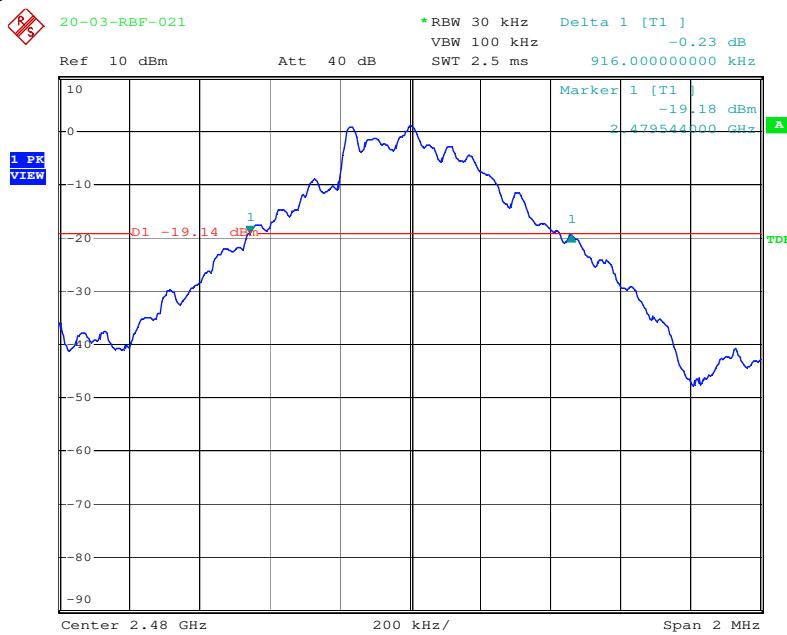Channel High


Date: 14.APR.2020 14:24:13

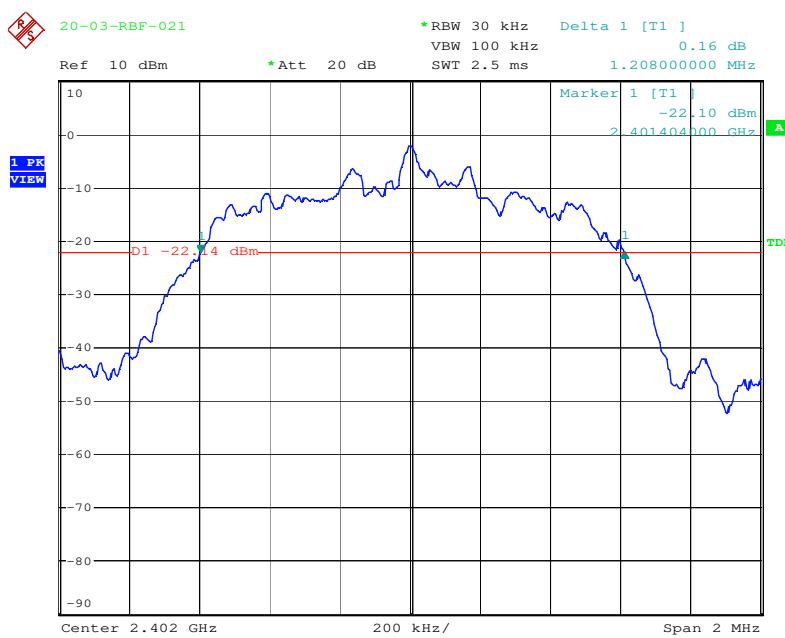Mode: Bluetooth EDR**Channel Low**

Date: 14.APR.2020 15:35:09

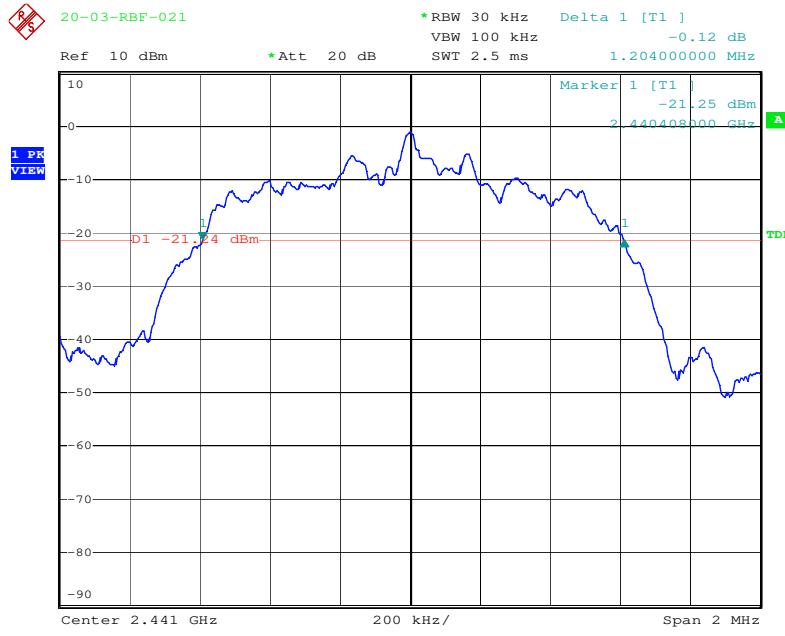Channel Middle

Date: 14.APR.2020 15:34:30

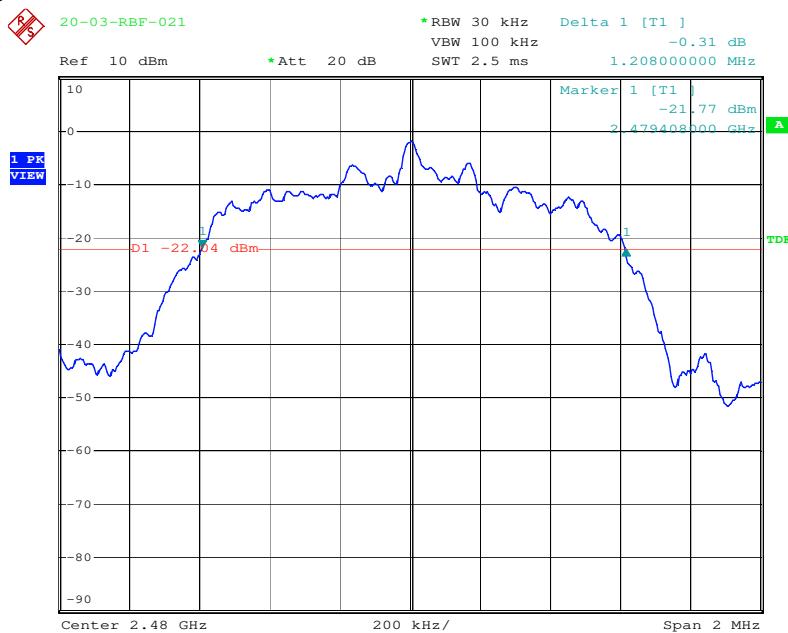Channel High

Date: 14.APR.2020 15:33:54

10 DWELL TIME ON EACH CHANNEL

10.1 Standard Applicable

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument.
Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel
RBW = 1 MHz
VBW \geq RBW
Sweep = as necessary to capture the entire dwell time per hopping channel
Detector function = peak
Trace = max hold
4. Use the marker-delta function to determine the dwell time. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

Justification on AFH mode:

Adaptive Frequency Hopping (AFH) means that a device can hop over a reduced set of frequencies. The frequencies hopped may be reduced in AFH mode but at least 15 channels will be used, normally AFH mode has 20 channels.

10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2020/01/15	2021/01/14

10.4 Measurement Data

Test Mode: Bluetooth BR

Test Date : Apr. 14, 2020 Temperature : 22 °C Humidity : 51 %

Period = 0.4(seconds) x 79(channels) = 31.6 seconds

A. DH1 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are $1600/(1+1) = 800$ transmissions per second. In one period for each particular channel there are $10.13 \times 31.6 = 320.1$ times of transmissions.

- a) Channel Low : the dwell time is **0.45** ms $\times 320.1 = 144.045$ ms
- b) Channel Middle : the dwell time is **0.45** ms $\times 320.1 = 144.045$ ms
- c) Channel High : the dwell time is **0.44** ms $\times 320.1 = 140.844$ ms

The maximum time of occupancy for a particular channel is 144.045 ms in any 31.6 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

B. DH3 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are $1600/(3+1) = 400$ transmissions per second. In one period for each particular channel there are $5.06 \times 31.6 = 159.9$ times of transmissions.

- a) Channel Low : the dwell time is **1.72** ms $\times 159.9 = 275.028$ ms
- b) Channel Middle : the dwell time is **1.72** ms $\times 159.9 = 275.028$ ms
- c) Channel High : the dwell time is **1.72** ms $\times 159.9 = 275.028$ ms

The maximum time of occupancy for a particular channel is 275.028 ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

C. DH5 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are $1600/(5+1) = 266.7$ transmissions per second. In one period for each particular channel there are $3.38 \times 31.6 = 106.81$ times of transmissions.

- a) Channel Low : the dwell time is **3.00** ms $\times 106.81 = 320.430$ ms
- b) Channel Middle : the dwell time is **3.02** ms $\times 106.81 = 322.566$ ms
- c) Channel High : the dwell time is **3.00** ms $\times 106.81 = 320.430$ ms

The maximum time of occupancy for a particular channel is 322.566 ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

Note : The expanded uncertainty of dwell time on each channel tests is 2dB.

Test Mode:Bluetooth EDRTest Date : Apr. 14, 2020 Temperature : 22 °C Humidity : 51 %**Period = 0.4(seconds) x 79(channels) = 31.6 seconds****A. DH1 Mode**

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are $1600/(1+1) = 800$ transmissions per second. In one period for each particular channel there are $10.13 \times 31.6 = 320.1$ times of transmissions.

- a) Channel Low : the dwell time is **0.48** ms $\times 320.1 = 153.648$ ms
- b) Channel Middle : the dwell time is **0.47** ms $\times 320.1 = 150.447$ ms
- c) Channel High : the dwell time is **0.50** ms $\times 320.1 = 160.050$ ms

The maximum time of occupancy for a particular channel is 160.050 ms in any 31.6 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

B. DH3 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are $1600/(3+1) = 400$ transmissions per second. In one period for each particular channel there are $5.06 \times 31.6 = 159.9$ times of transmissions.

- a) Channel Low : the dwell time is **1.73** ms $\times 159.9 = 276.627$ ms
- b) Channel Middle : the dwell time is **1.79** ms $\times 159.9 = 286.221$ ms
- c) Channel High : the dwell time is **1.79** ms $\times 159.9 = 286.221$ ms

The maximum time of occupancy for a particular channel is 286.221 ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.


C. DH5 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are $1600/(5+1) = 266.7$ transmissions per second. In one period for each particular channel there are $3.38 \times 31.6 = 106.81$ times of transmissions.


- a) Channel Low : the dwell time is **3.01** ms $\times 106.81 = 321.498$ ms
- b) Channel Middle : the dwell time is **3.01** ms $\times 106.81 = 321.498$ ms
- c) Channel High : the dwell time is **3.01** ms $\times 106.81 = 321.498$ ms

The maximum time of occupancy for a particular channel is 321.498 ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.


Note : The expanded uncertainty of dwell time on each channel tests is 2dB.

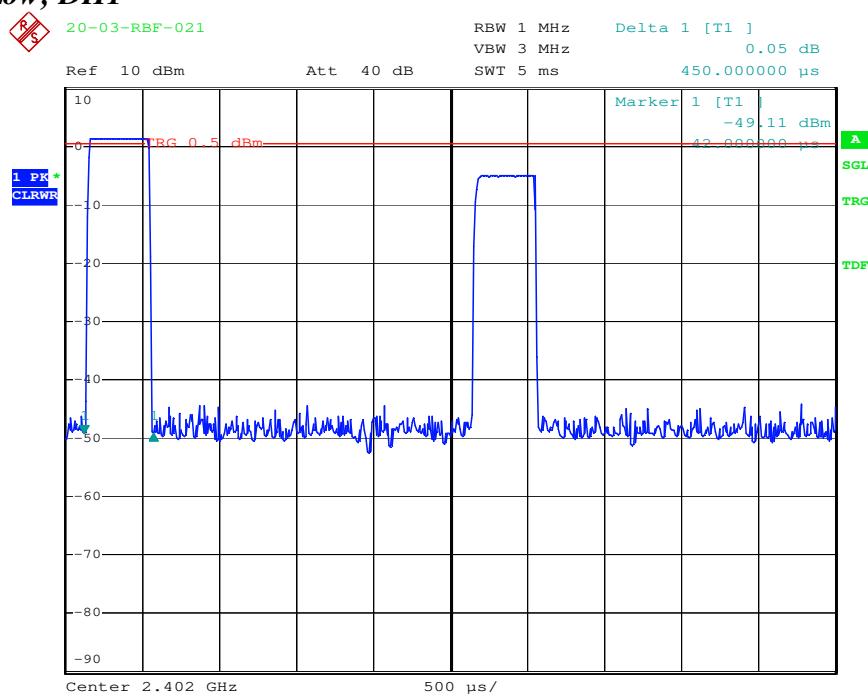Mode: Bluetooth BR**Channel Low; DH1**


Date: 14.APR.2020 14:44:51

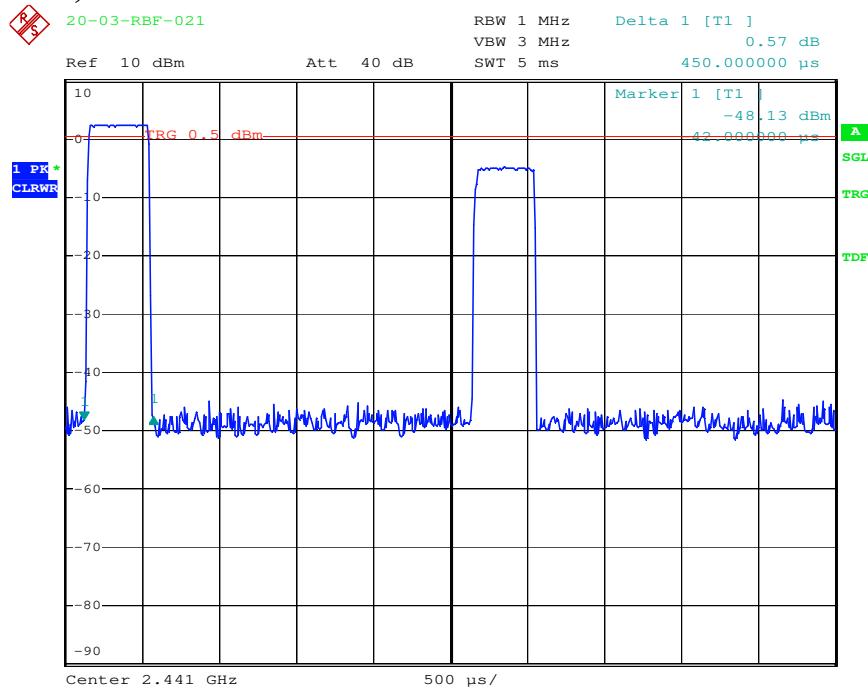Channel Middle; DH1


Date: 14.APR.2020 14:45:22

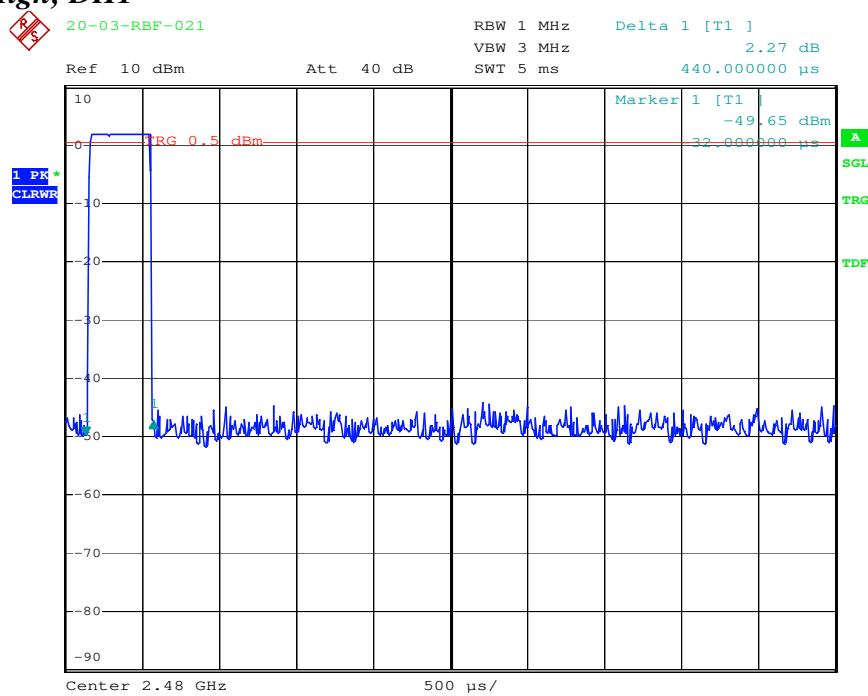Channel High; DH1


Date: 14.APR.2020 14:45:47

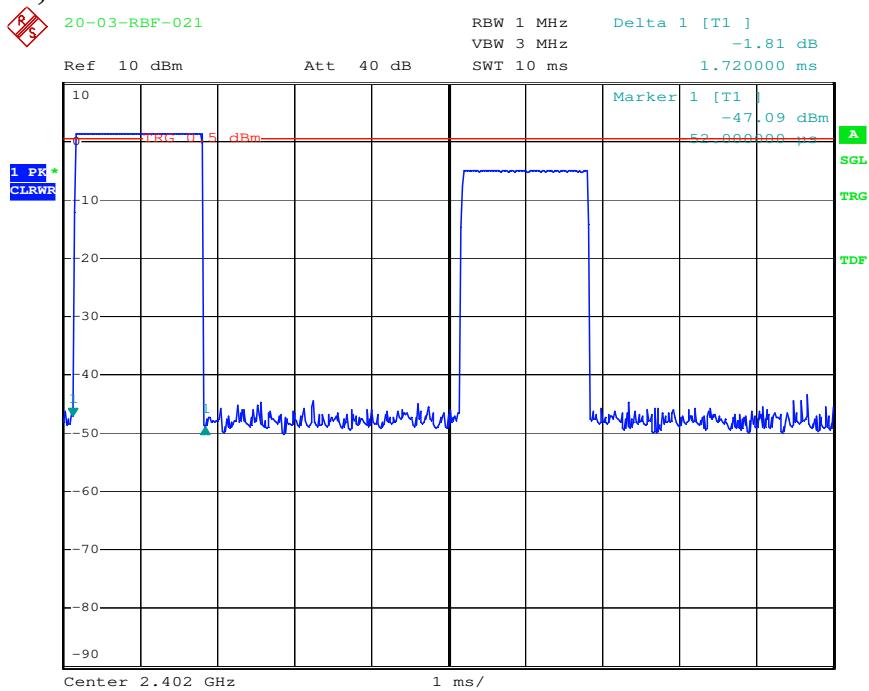Channel Low; DH3


Date: 14.APR.2020 14:47:28

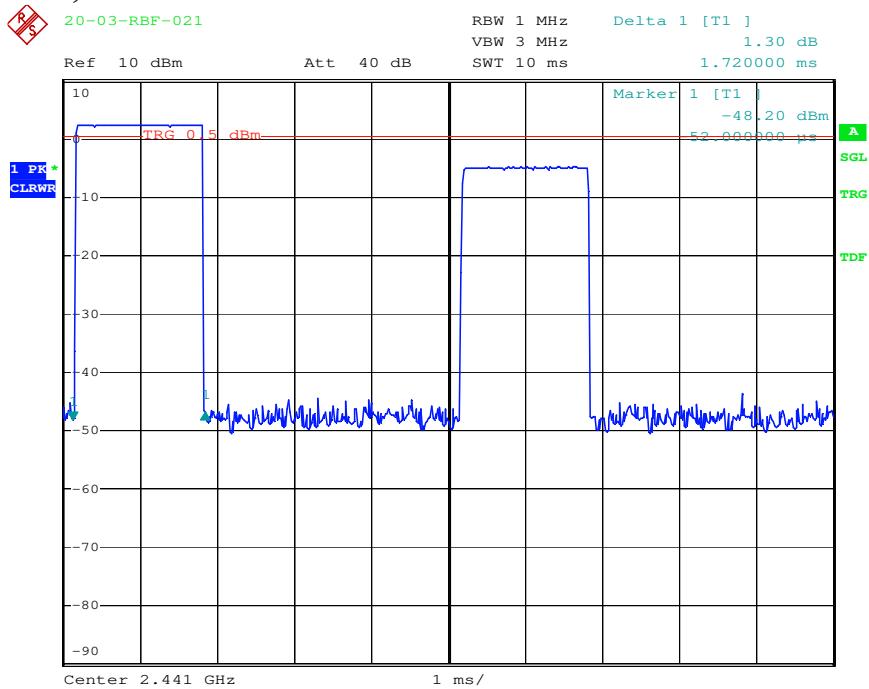Channel Middle; DH3


Date: 14.APR.2020 14:47:03

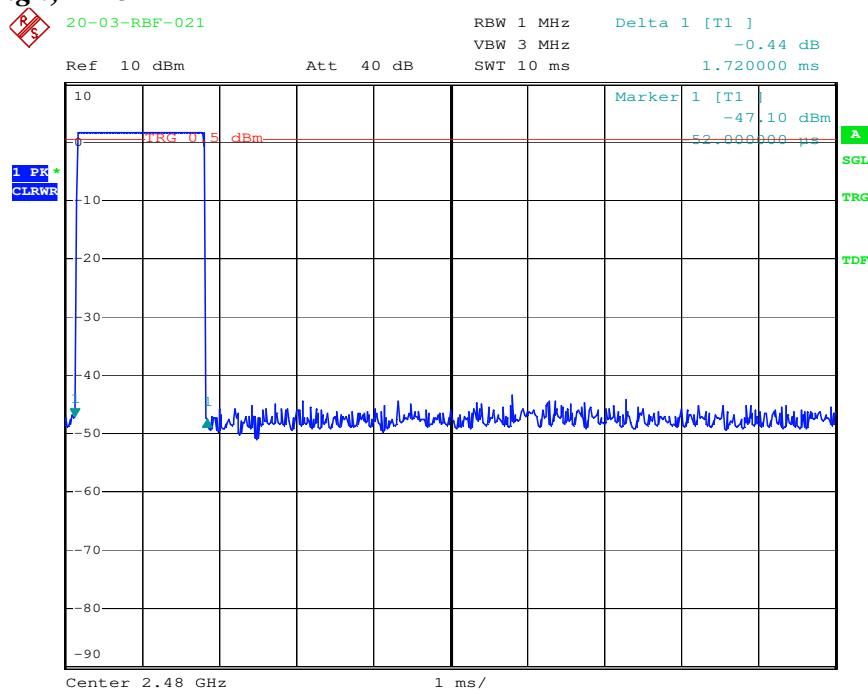Channel High; DH3


Date: 14.APR.2020 14:46:40

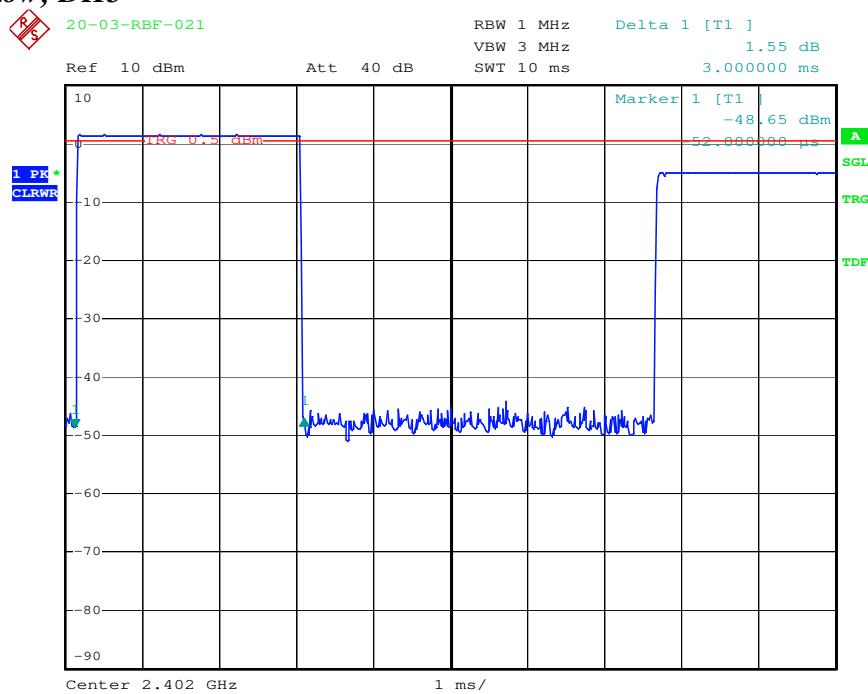Channel Low; DH5


Date: 14.APR.2020 14:48:15

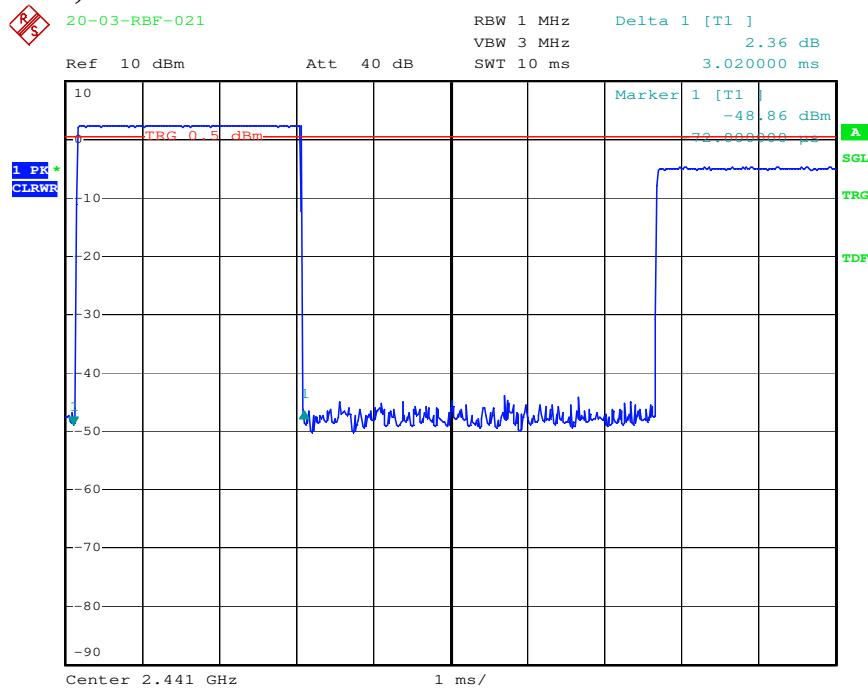Channel Middle; DH5


Date: 14.APR.2020 14:48:36

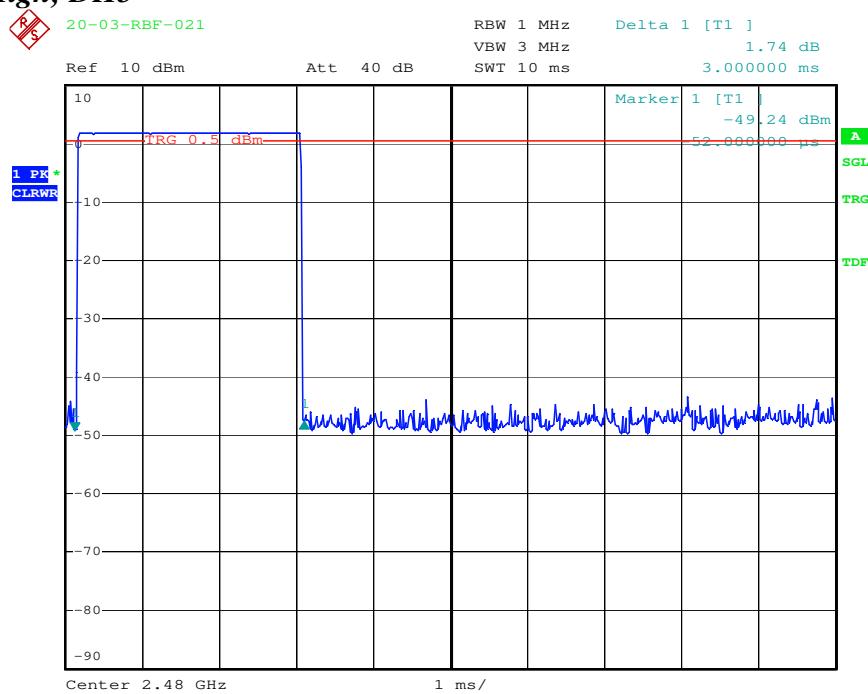Channel High; DH5


Date: 14.APR.2020 14:49:01

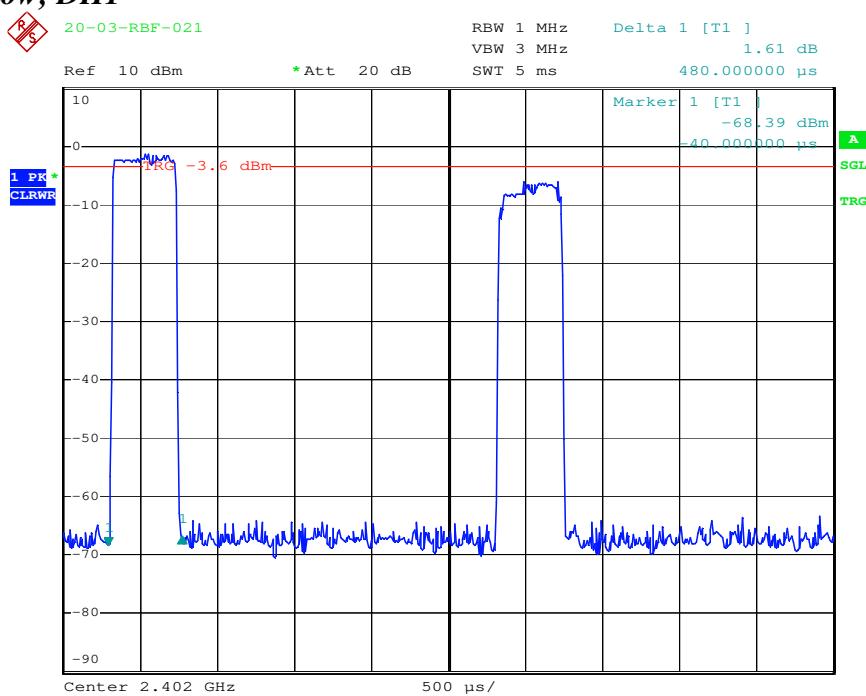Mode: Bluetooth EDR**Channel Low; DH1**


Date: 14.APR.2020 15:54:13

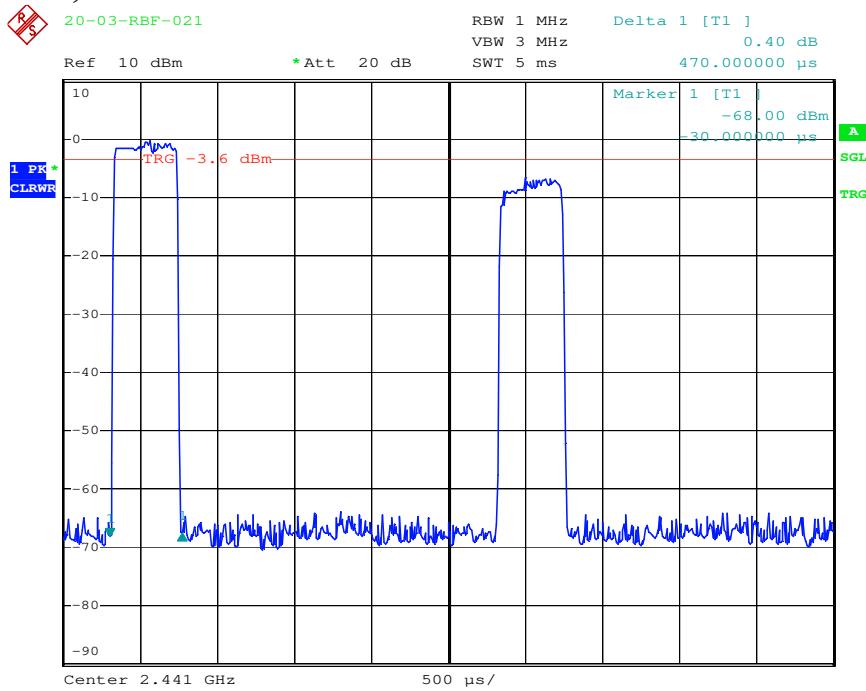Channel Middle; DH1


Date: 14.APR.2020 15:57:23

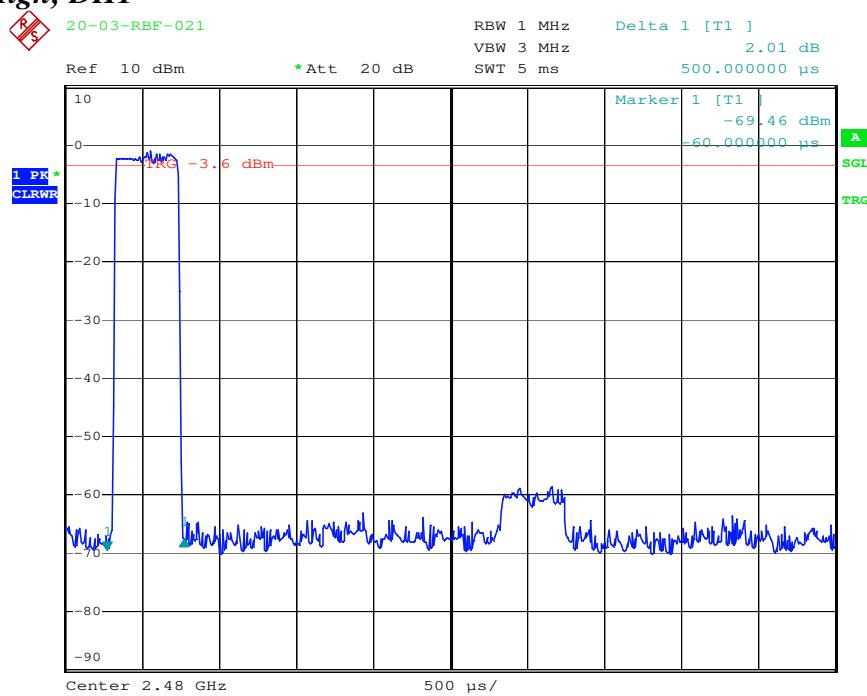Channel High; DH1


Date: 14.APR.2020 15:57:49

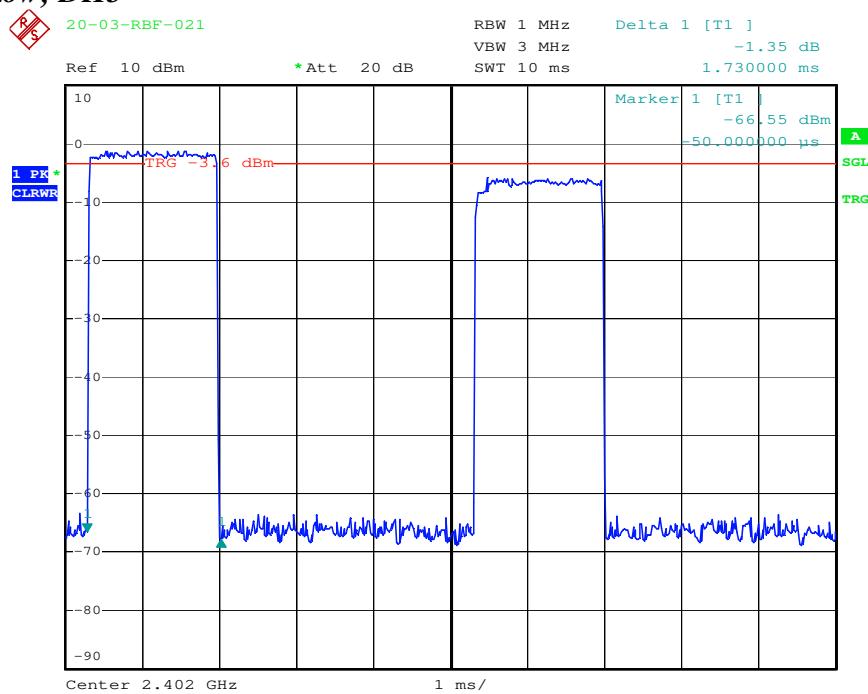Channel Low; DH3


Date: 14.APR.2020 15:53:43

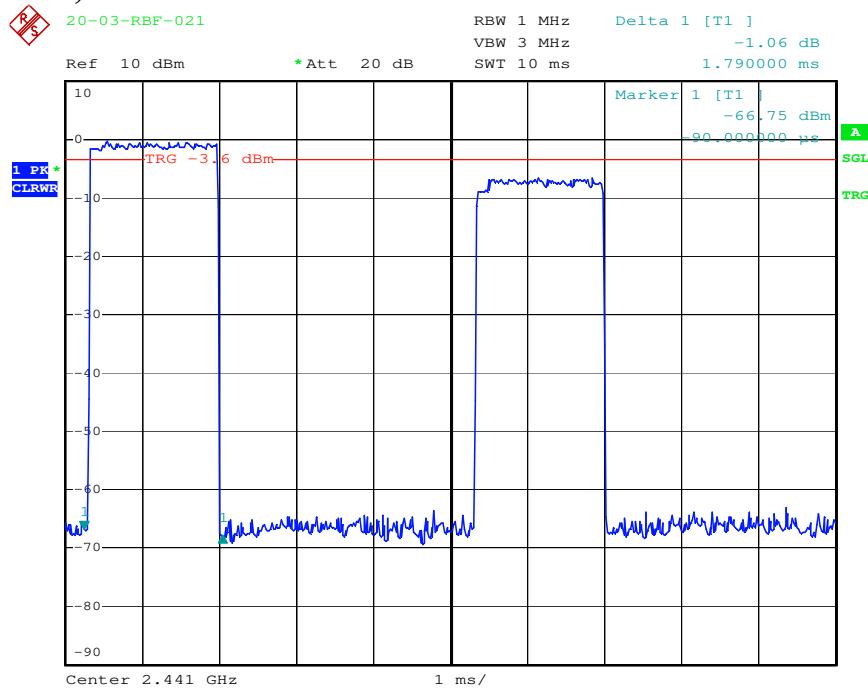Channel Middle; DH3


Date: 14.APR.2020 15:53:22

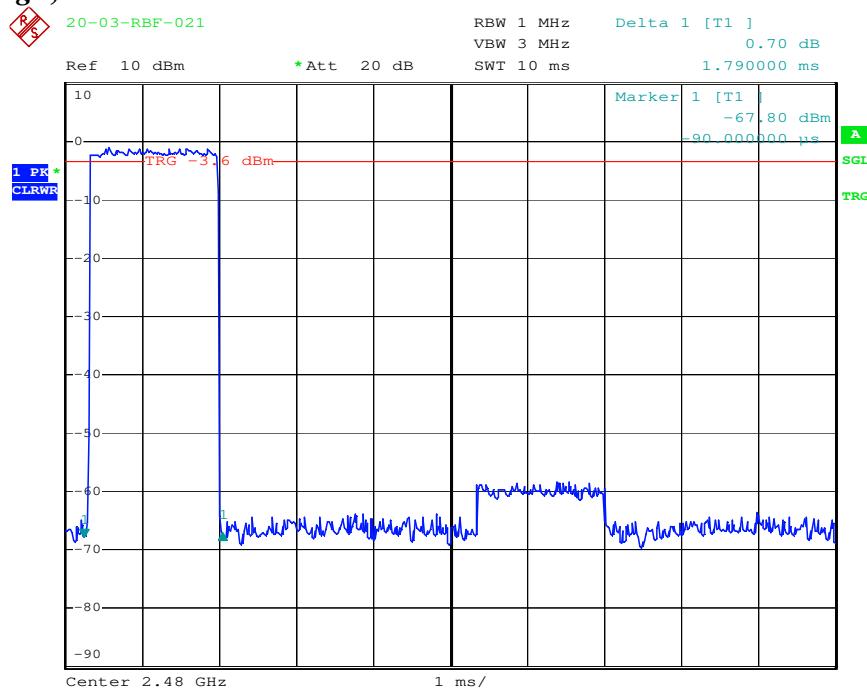Channel High; DH3


Date: 14.APR.2020 15:51:35

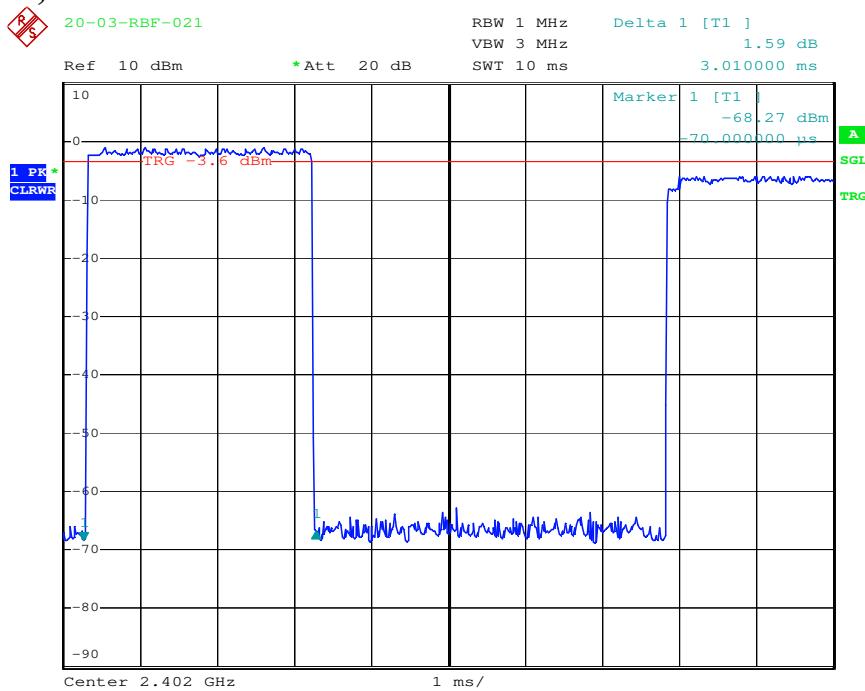Channel Low; DH5

Date: 14.APR.2020 15:49:57

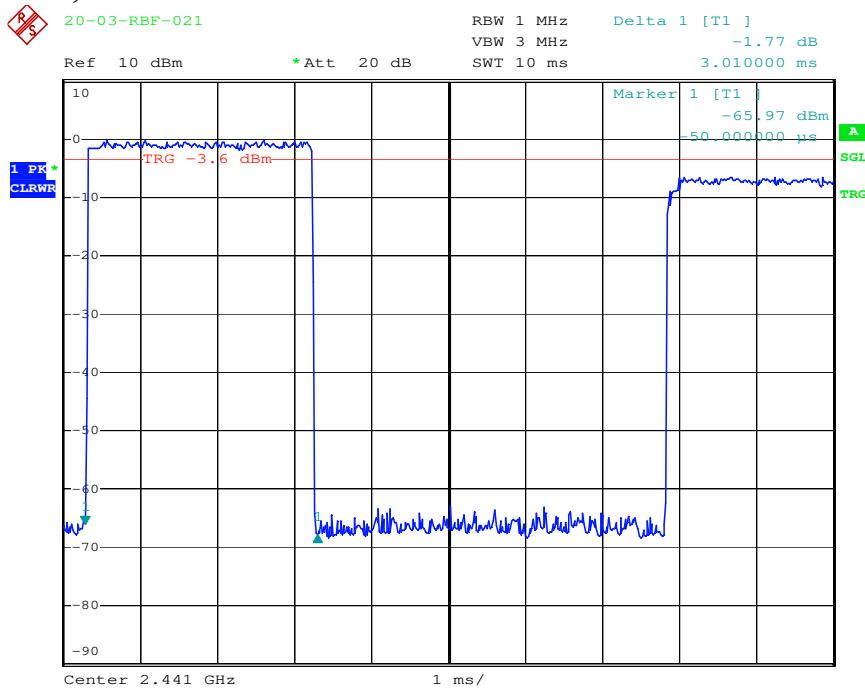Channel Middle; DH5

Date: 14.APR.2020 15:50:21

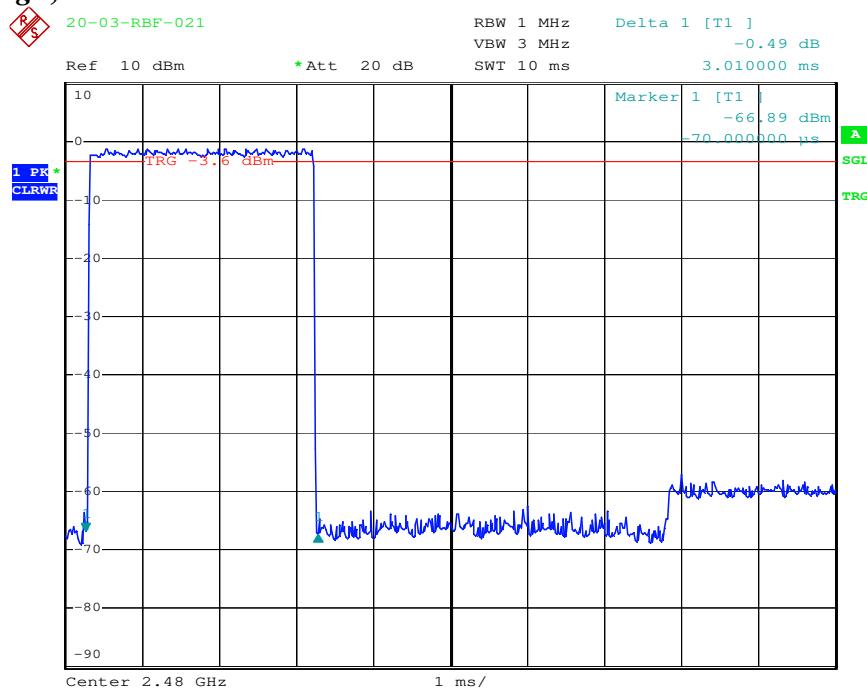Channel High; DH5

Date: 14.APR.2020 15:50:39

11 OUTPUT POWER MEASUREMENT

11.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - RBW > the 20 dB bandwidth of the emission being measured
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2020/01/15	2021/01/14

11.4 Measurement Data

Test Date : Apr. 14, 2020 Temperature : 22 °C Humidity : 51 %


Mode: Bluetooth BR

a) Channel Low	: Output Peak Power is	<u>1.75</u>	dBm or	1.496	mW °
b) Channel Middle	: Output Peak Power is	<u>2.46</u>	dBm or	1.762	mW °
c) Channel High	: Output Peak Power is	<u>1.86</u>	dBm or	1.535	mW °


Mode: Bluetooth EDR

a) Channel Low	: Output Peak Power is	<u>-0.19</u>	dBm or	0.957	mW °
b) Channel Middle	: Output Peak Power is	<u>0.75</u>	dBm or	1.189	mW °
c) Channel High	: Output Peak Power is	<u>-0.07</u>	dBm or	0.984	mW °


Note : The expanded uncertainty: 2dB.

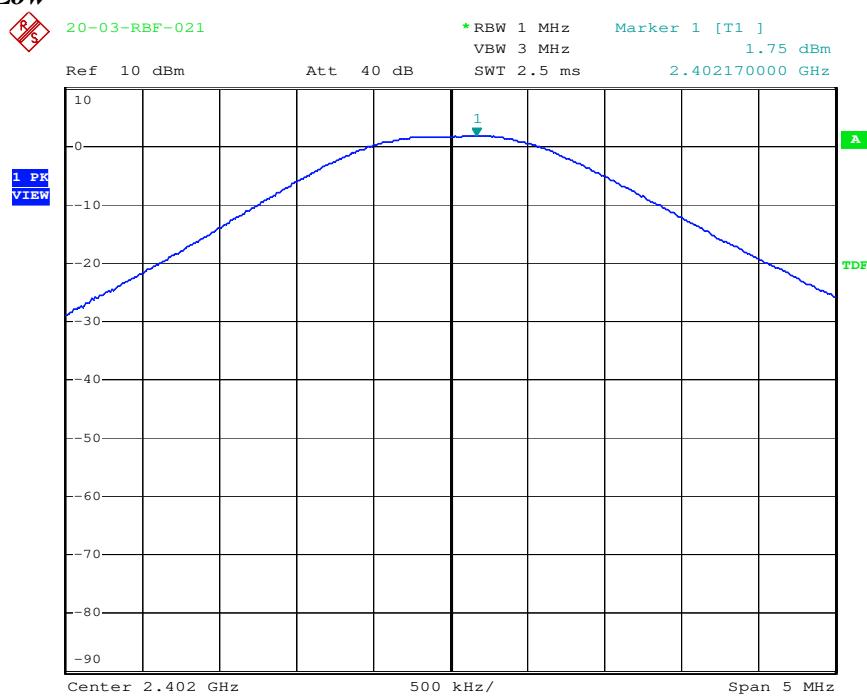Mode: Bluetooth BR**Channel Low**


Date: 14.APR.2020 14:26:22

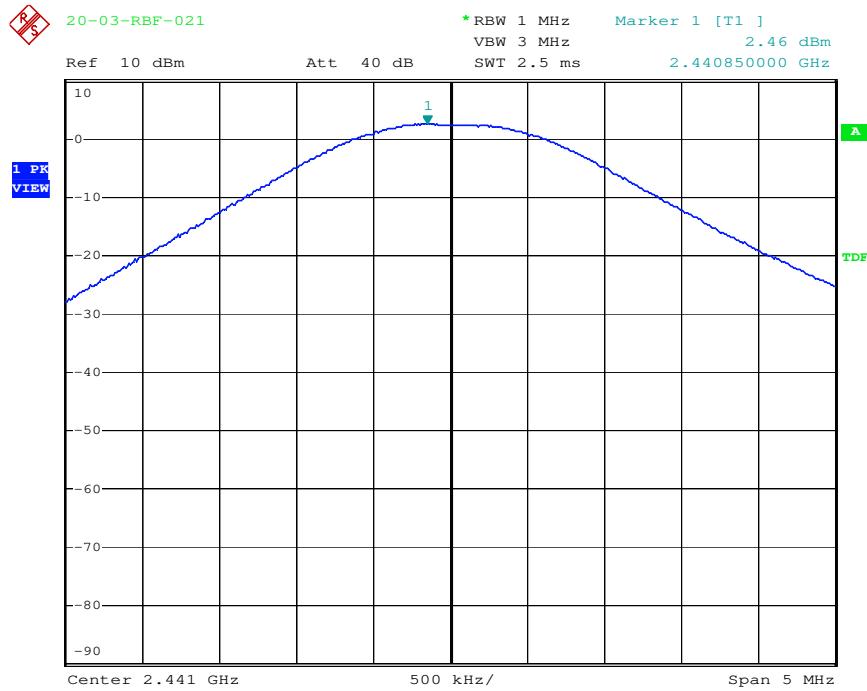Channel Middle


Date: 14.APR.2020 14:26:42

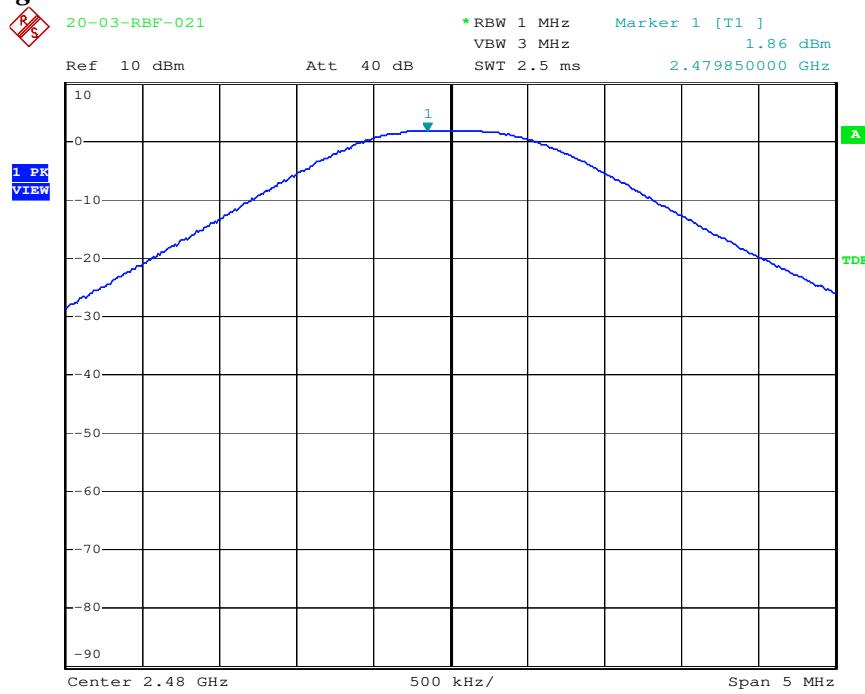Channel High


Date: 14.APR.2020 14:27:03

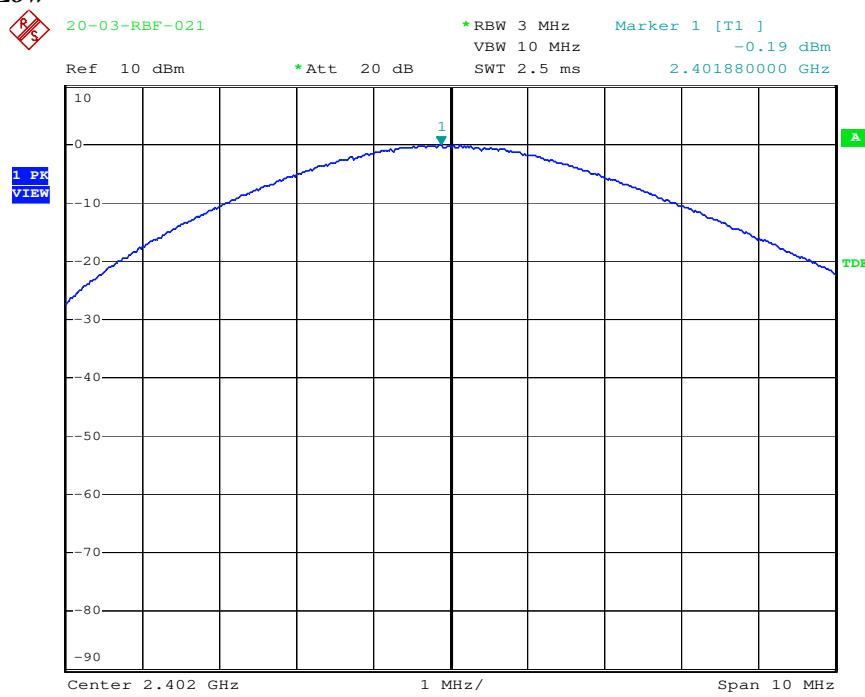Mode: Bluetooth EDR**Channel Low**

Date: 14.APR.2020 15:39:31

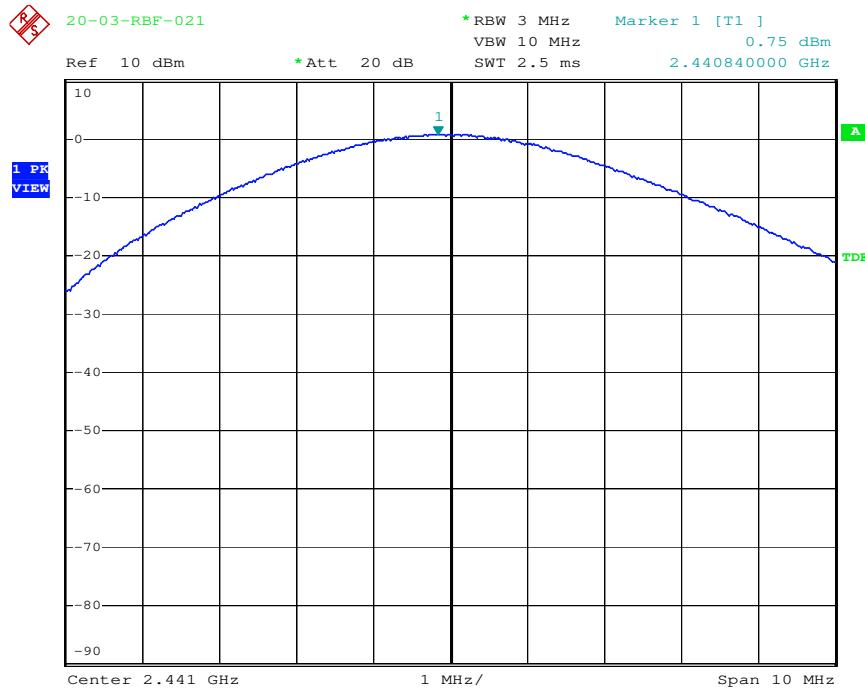Channel Middle

Date: 14.APR.2020 15:39:07

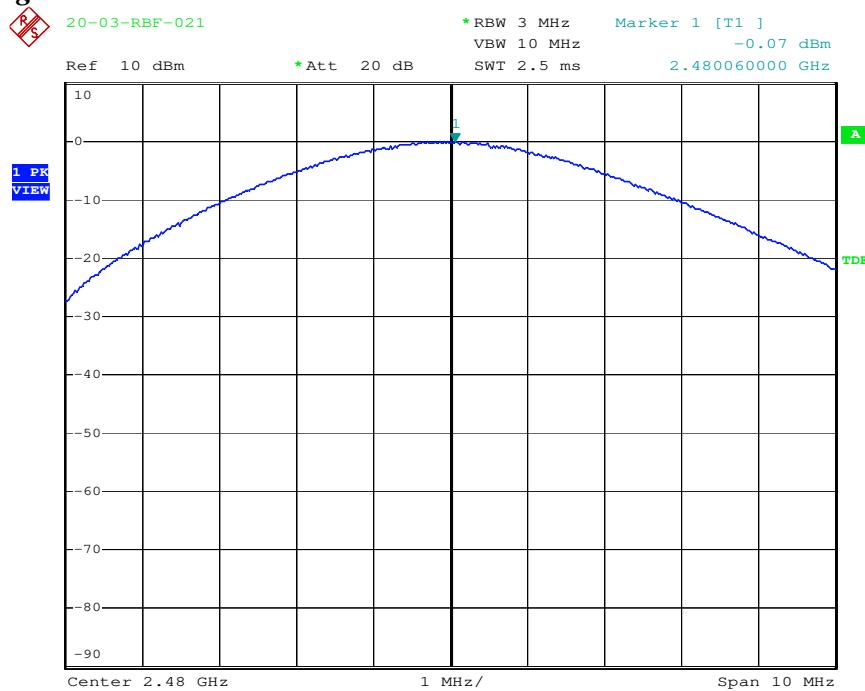Channel High

Date: 14.APR.2020 15:38:45

12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

12.1 Standard Applicable

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the FM RDS/AM DIGITAL TUNING CLOCK RADIO WITH BLUETOOTH PLAYBACK frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation
 - RBW \geq 1% of the span
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

12.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2020/01/15	2021/01/14

12.4 Measurement Data

Test Date : Apr. 14, 2020 Temperature : 22 °C Humidity : 51 %

Mode: Bluetooth BR


- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

Mode: Bluetooth EDR

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.


Note : The expanded uncertainty: 2dB.

Mode: Bluetooth BR
Lower Band Edge (Hoppin off)

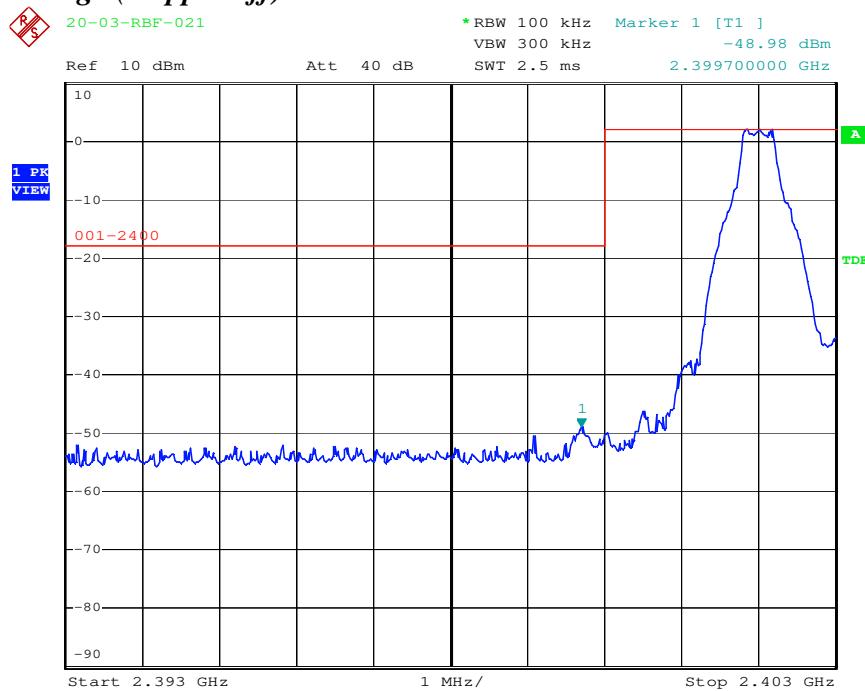


Date: 14.APR.2020 14:29:12


Upper Band Edge (Hoppin off)

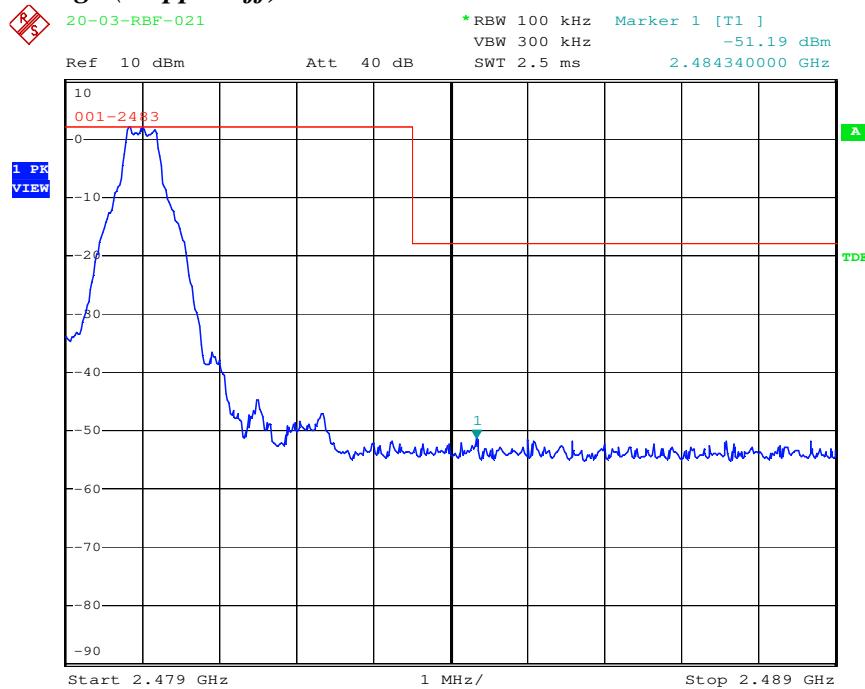

Date: 14.APR.2020 14:28:06

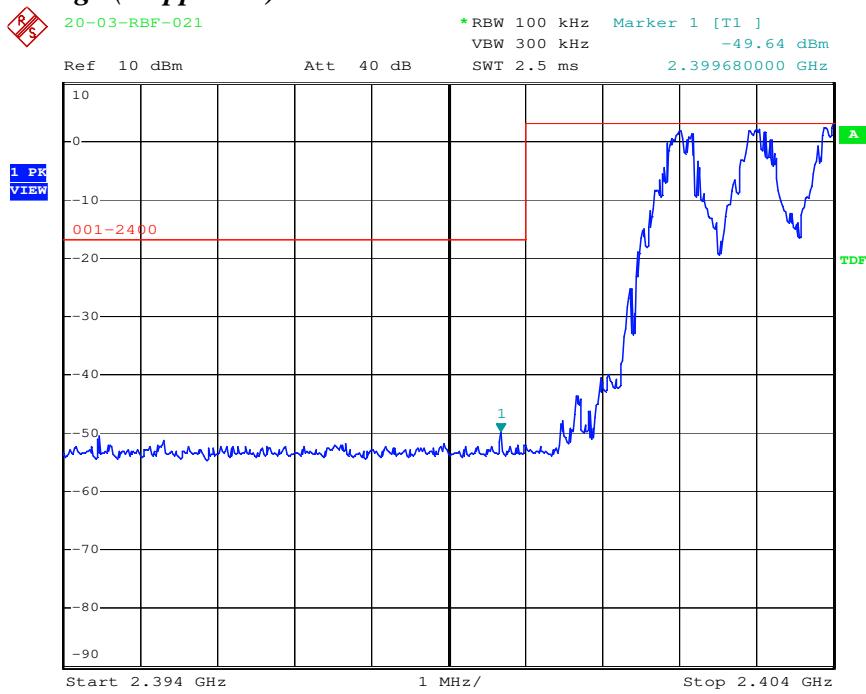
Lower Band Edge (Hoppin on)

Date: 14.APR.2020 14:30:56

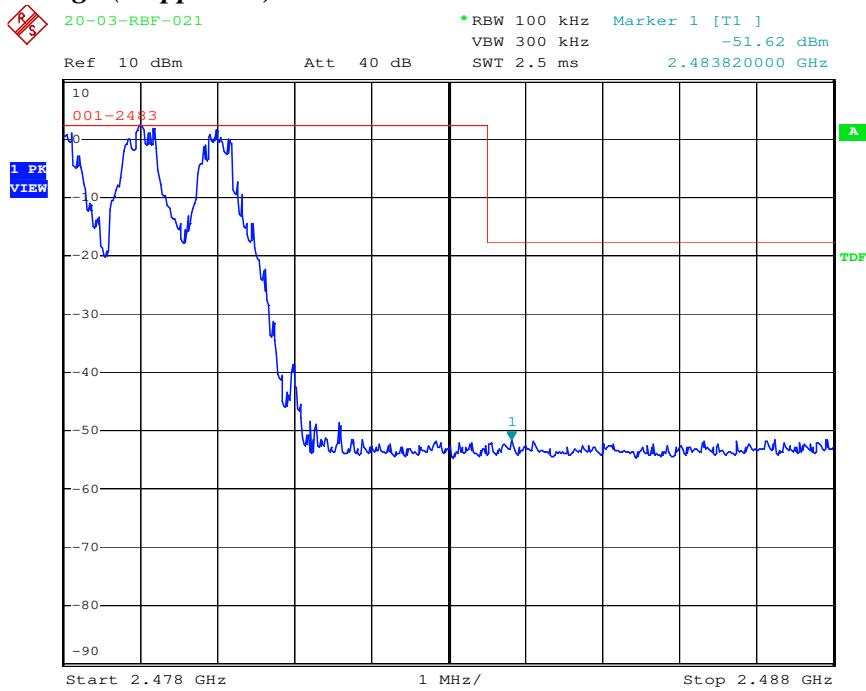Upper Band Edge (Hoppin on)


Date: 14.APR.2020 14:32:16

Mode: Bluetooth EDR
Lower Band Edge (Hoppin off)

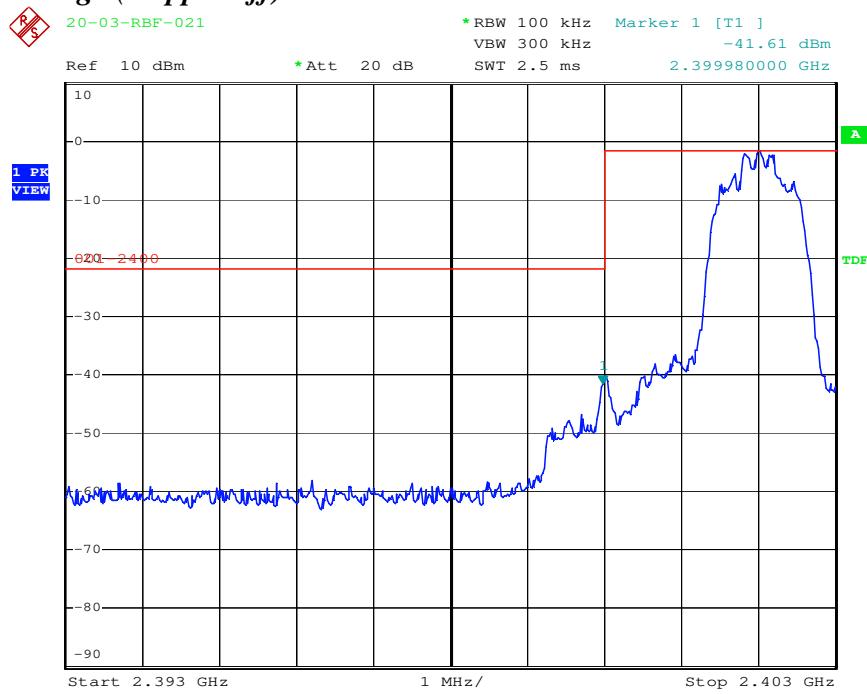


Date: 14.APR.2020 15:36:17


Upper Band Edge (Hoppin off)

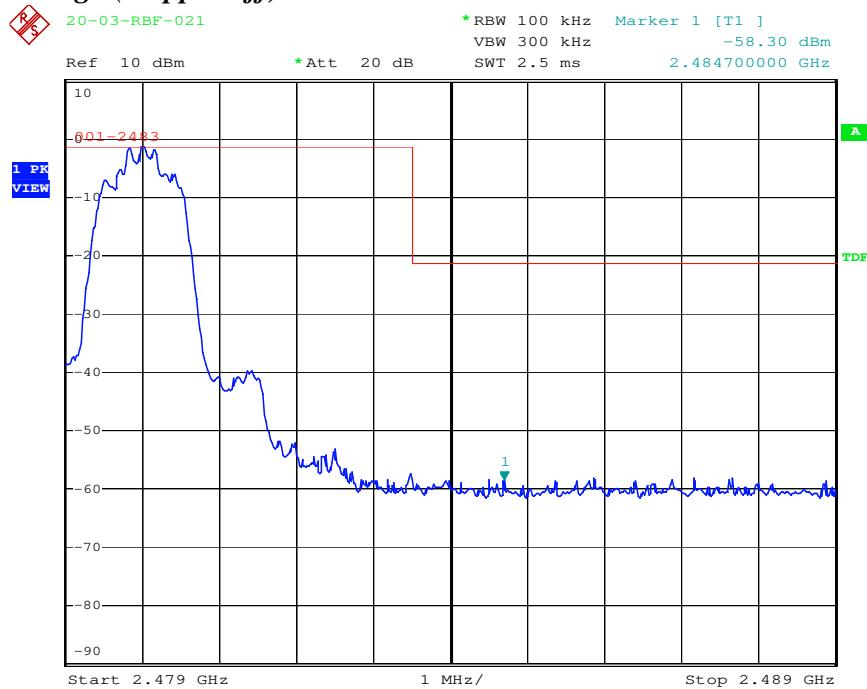

Date: 14.APR.2020 15:37:26

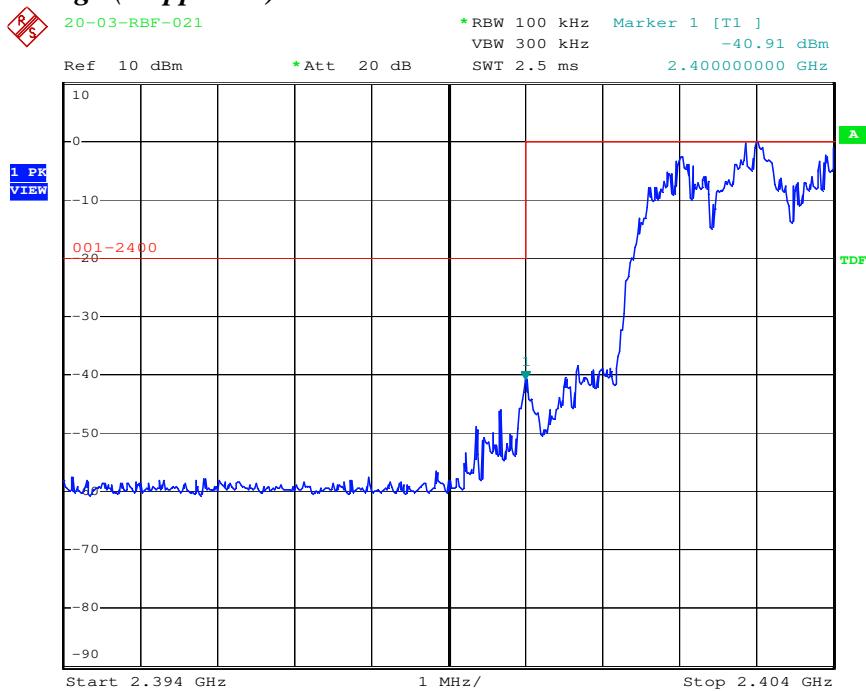Lower Band Edge (Hoppin on)

Date: 14.APR.2020 15:29:29

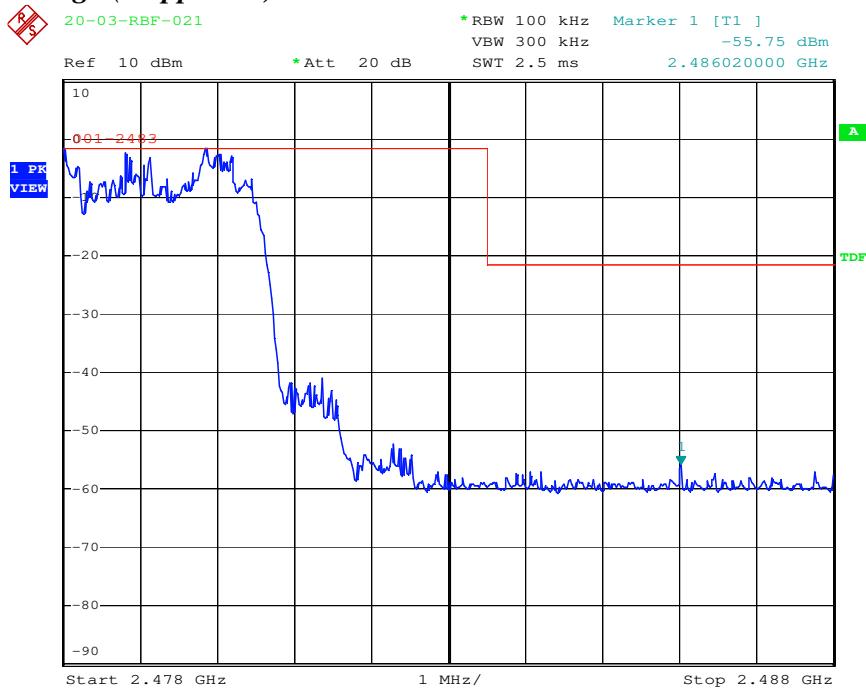Upper Band Edge (Hoppin on)

Date: 14.APR.2020 15:31:11

13 CONDUCTED SPURIOUS EMISSION MEASUREMENT

13.1 Standard Applicable

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the FM RDS/AM DIGITAL TUNING CLOCK RADIO WITH BLUETOOTH PLAYBACK frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

13.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold.
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

13.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2020/01/15	2021/01/14

13.4 Measurement Data

Test Date : Apr. 14, 2020 Temperature : 22 °C Humidity : 51 %

Mode: Bluetooth BR

Mode : Low Channel/ Mid Channel/ Hi Channel


a) 1 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Mode: Bluetooth EDR


Mode : Low Channel/ Mid Channel/ Hi Channel

a) 1 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty: 2dB.

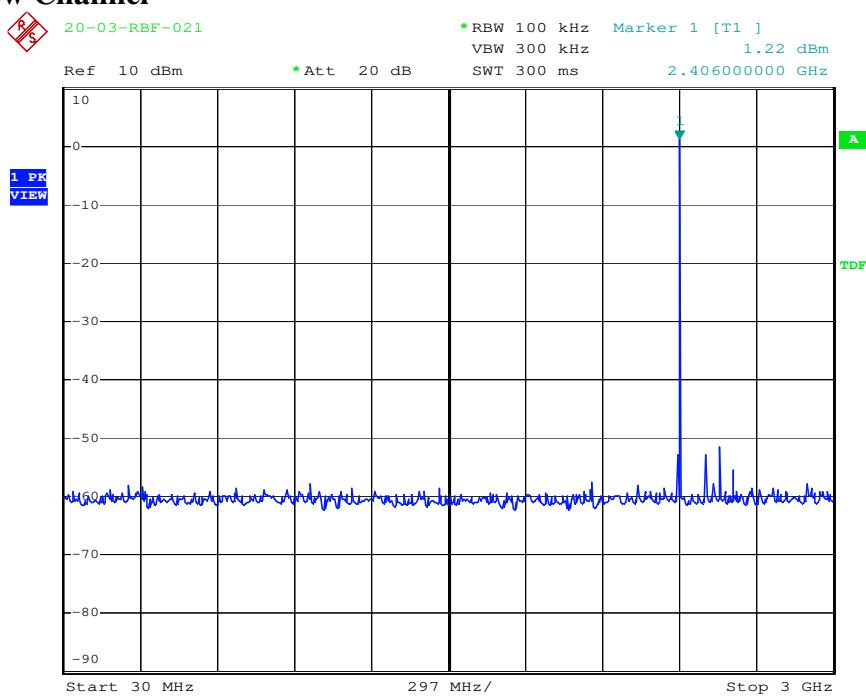
Mode: Bluetooth BR**Mode : Low Channel**

Date: 14.APR.2020 14:52:32

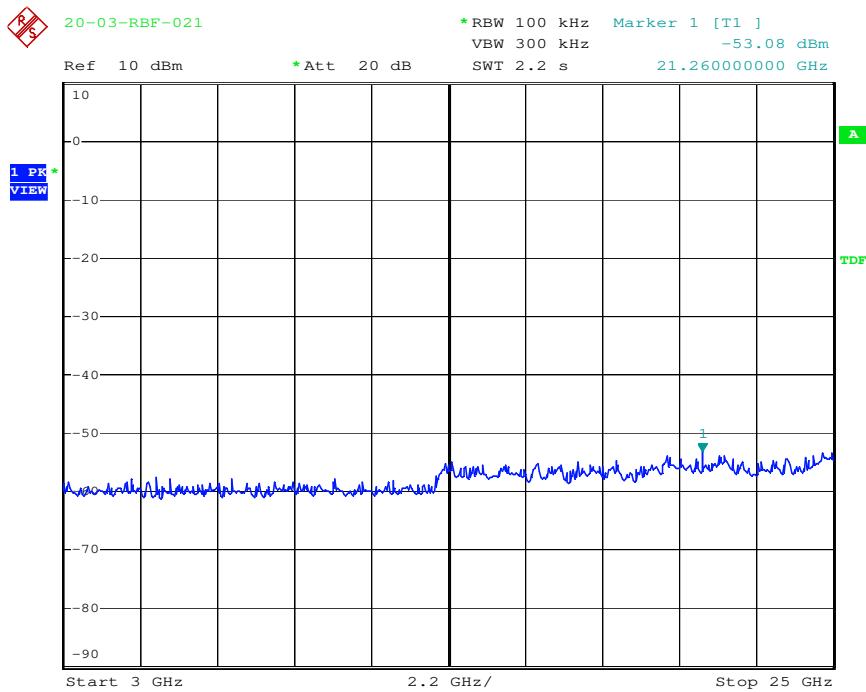


Date: 14.APR.2020 14:51:12

Mode : Mid Channel

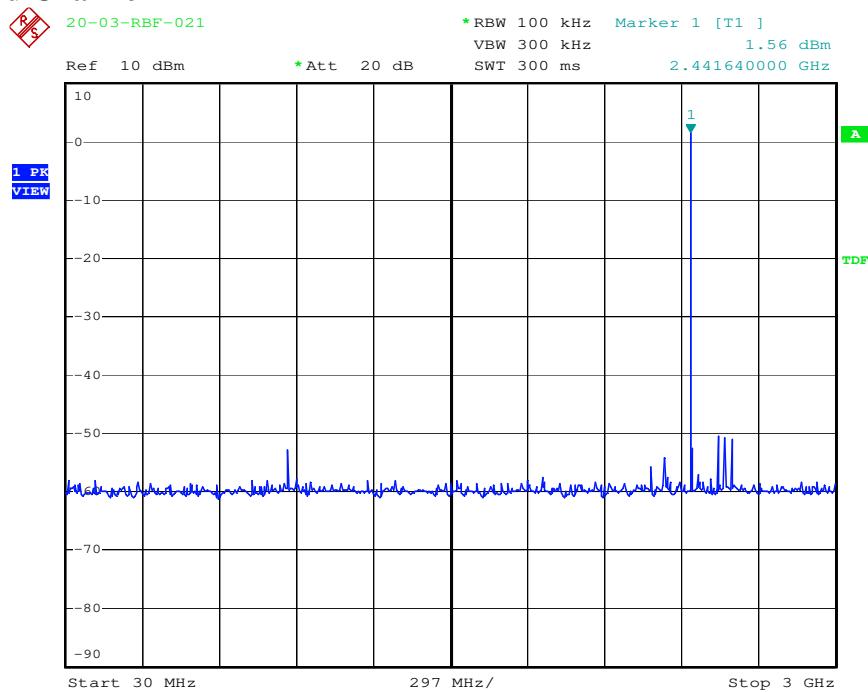


Date: 14.APR.2020 14:51:44

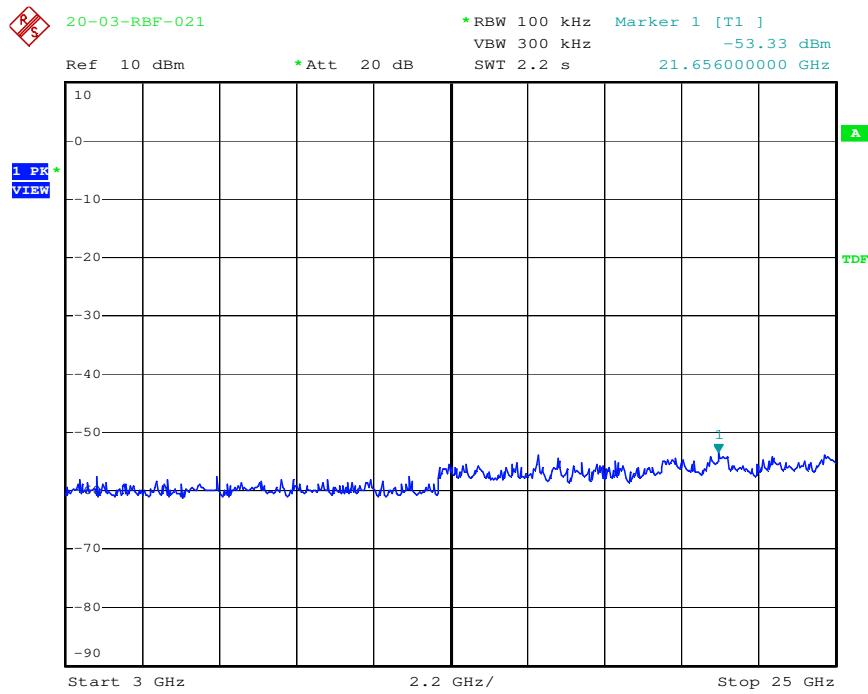


Date: 14.APR.2020 14:52:03


Mode : Hi Channel

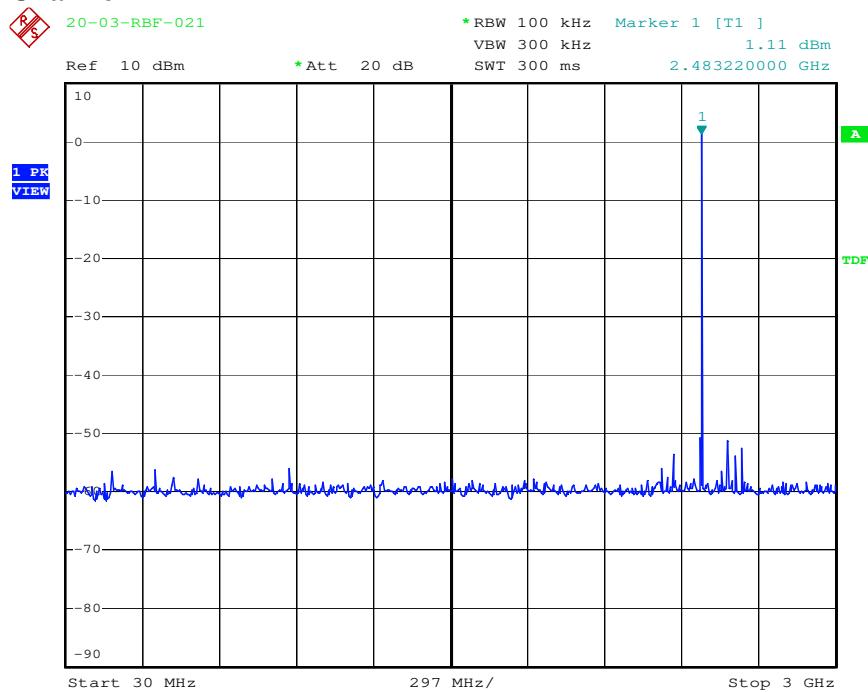


Date: 14.APR.2020 14:53:00

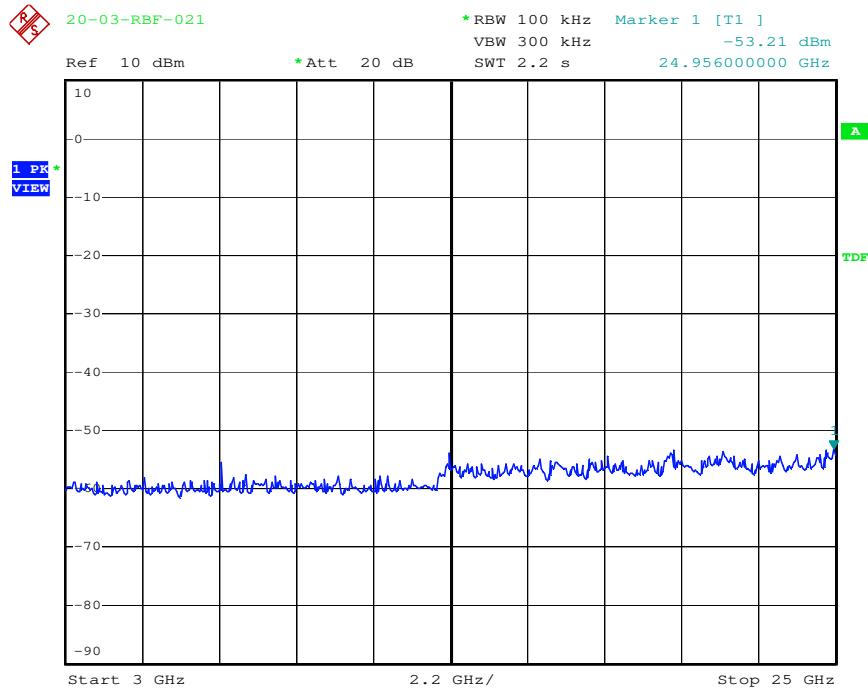

Date: 14.APR.2020 14:53:27

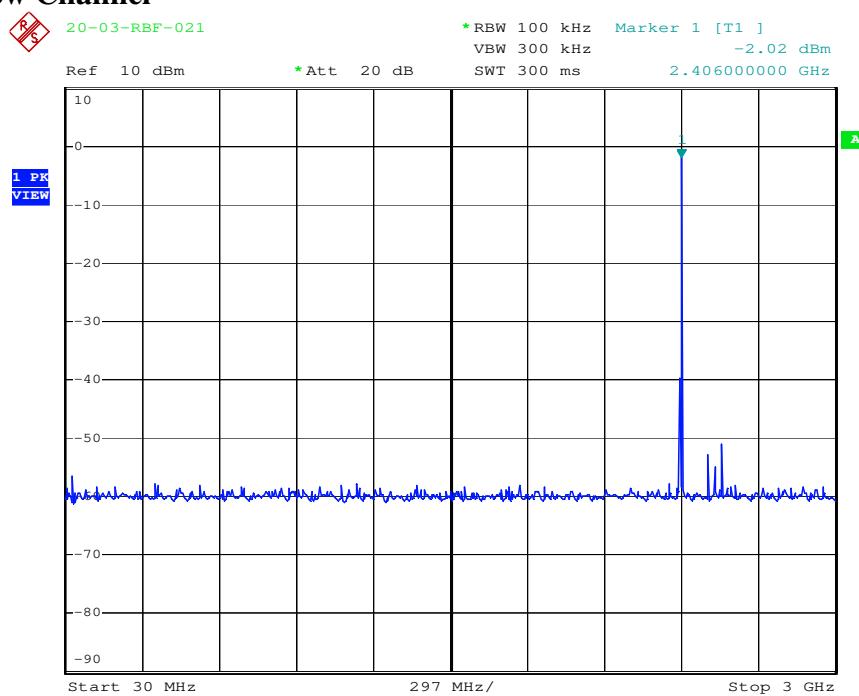
Mode: Bluetooth EDR**Mode : Low Channel**

Date: 14.APR.2020 15:58:48

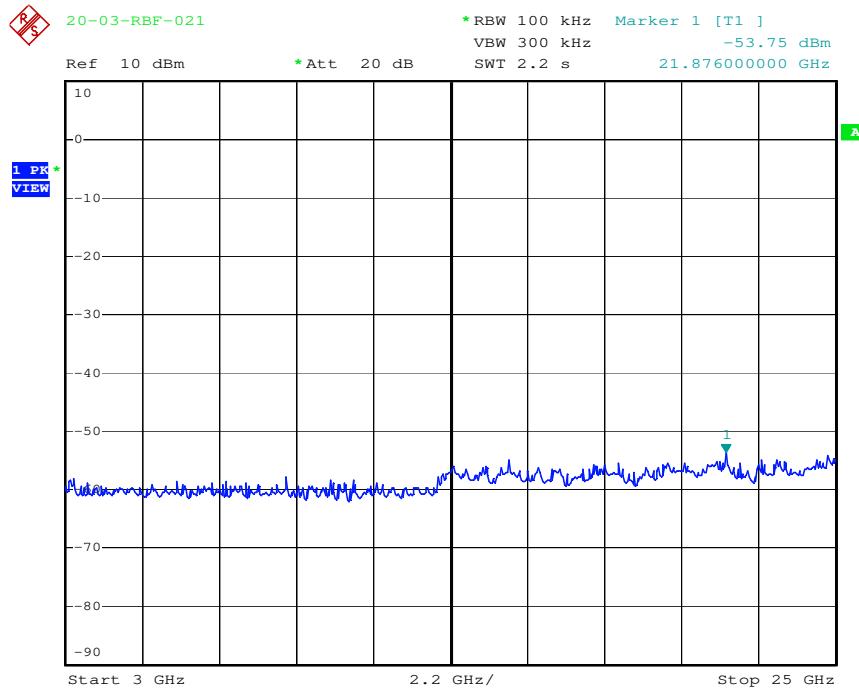


Date: 14.APR.2020 15:59:09

Mode : Mid Channel

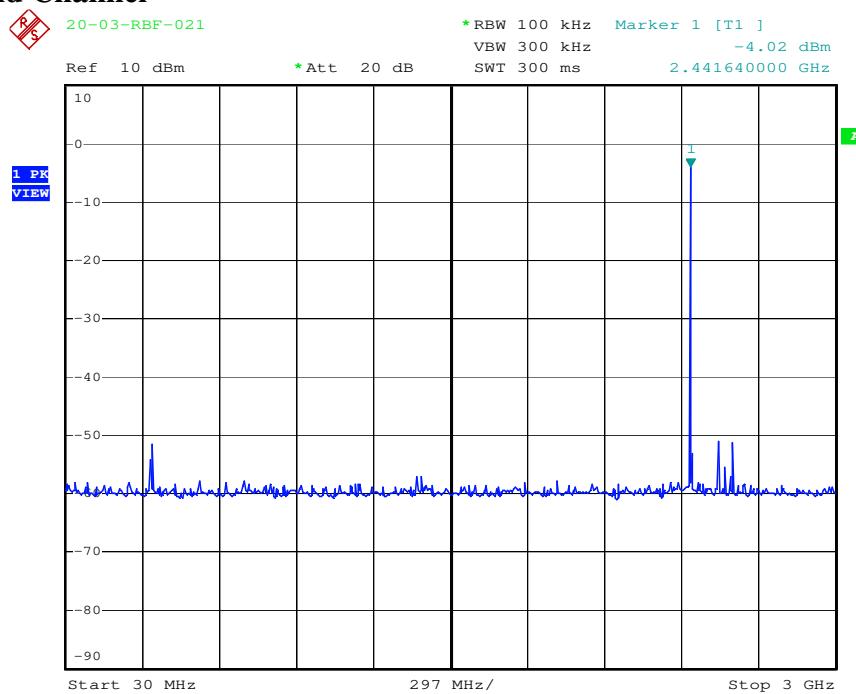


Date: 14.APR.2020 15:59:46

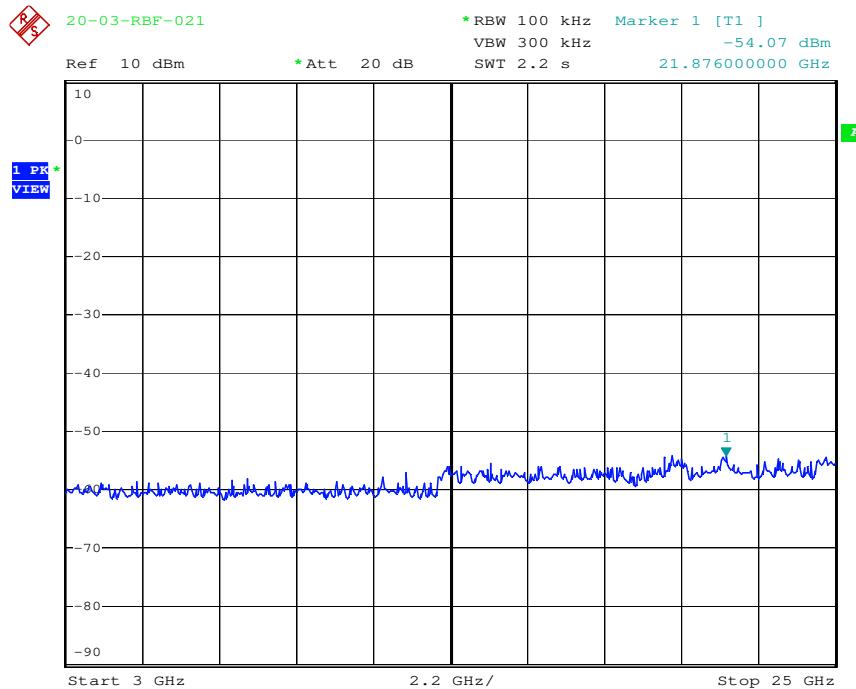


Date: 14.APR.2020 16:00:08

Mode : Hi Channel

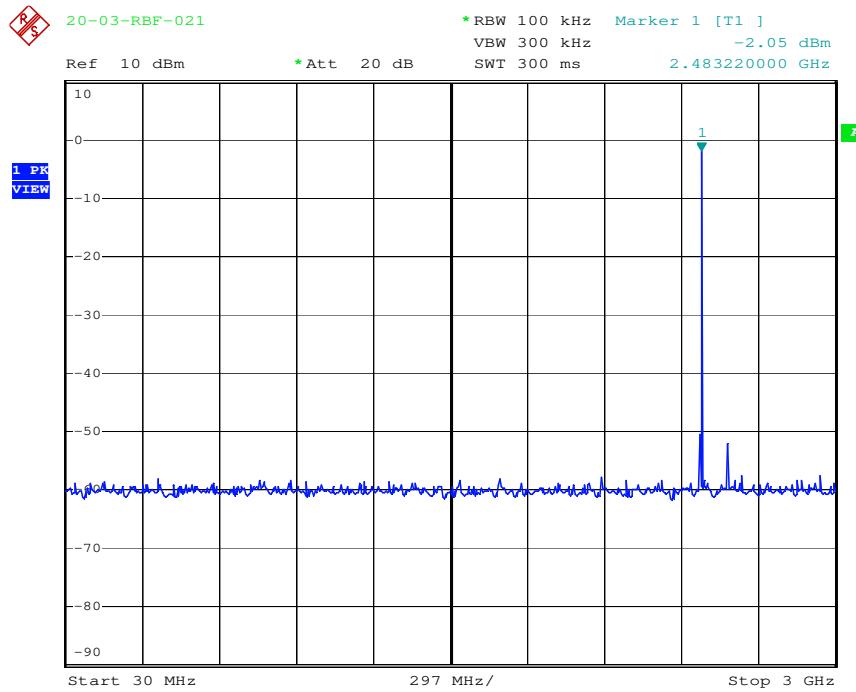

Date: 14.APR.2020 16:00:37

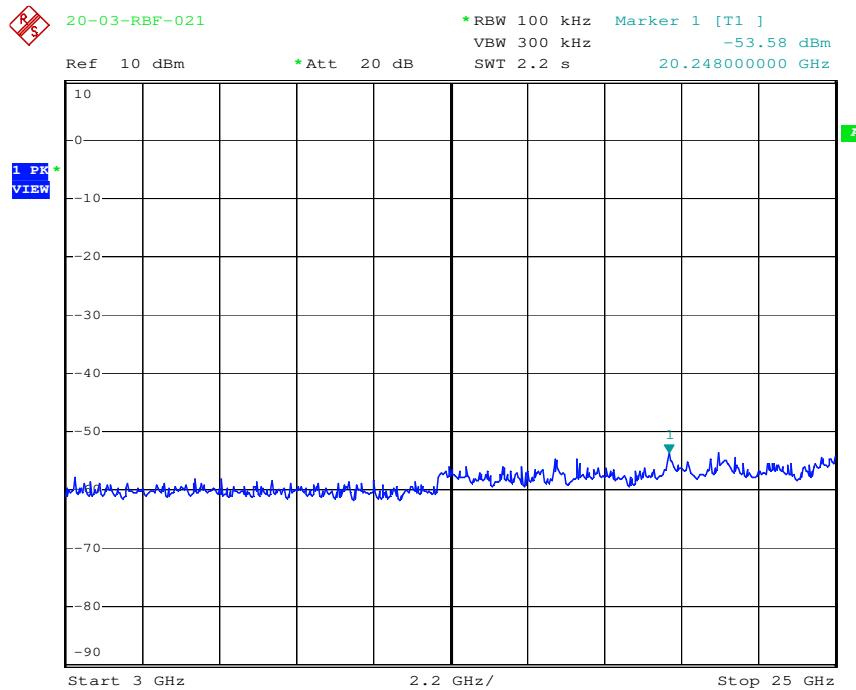

Date: 14.APR.2020 16:00:55

14. DUTY CYCLE

14.1 Standard Applicable

None. Reference only.

14.2 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2020/01/15	2021/01/14

14.3 Measurement Data

Test Date : Apr. 14, 2020 Temperature : 22 °C Humidity : 51 %

Duty Cycle Calculation

Mode	Period (ms)	Transmission duration (T) (ms)	Duty Cycle (%)	1/T (kHz)	VBW setting (kHz)
BR / DH1	1.24	0.45	36.29	2.222	3
BR / DH3	2.52	1.72	68.25	0.581	1
BR / DH5	3.74	2.98	79.68	0.336	1
EDR / DH1	1.25	0.47	37.60	2.128	3
EDR / DH3	2.53	1.77	69.96	0.565	1
EDR / DH5	3.75	2.99	79.73	0.334	1


Note:

1. DH5 has the highest duty cycle worst case and is reported.
2. When the duty cycle is less than 98%, for the average measurement of the radiated emission test, the VBW setting is $>1/T$ where the T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Refer to the following page for data plots.


BR / DH1

Period

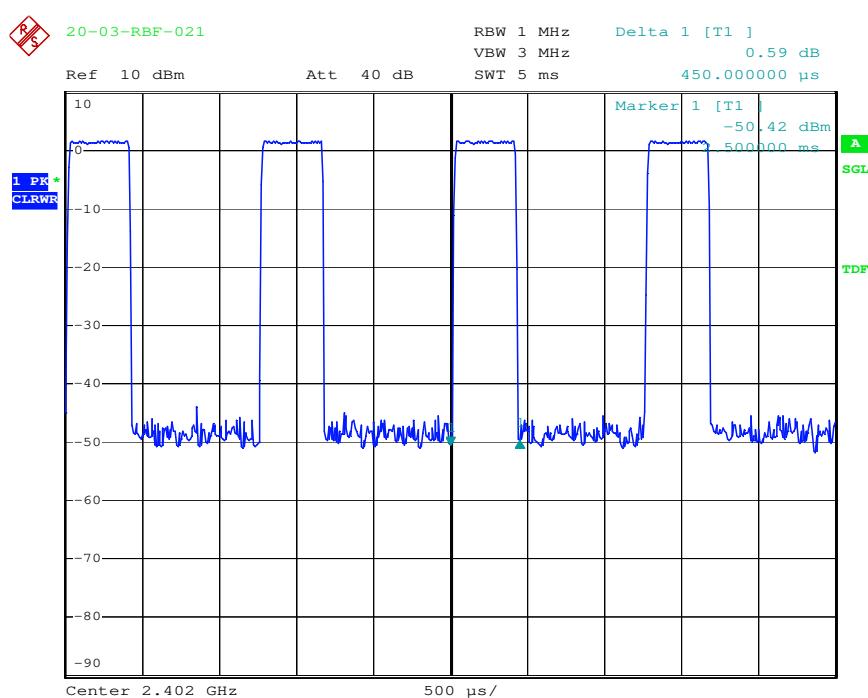

Date: 14.APR.2020 14:39:55


Transmission duration (T)

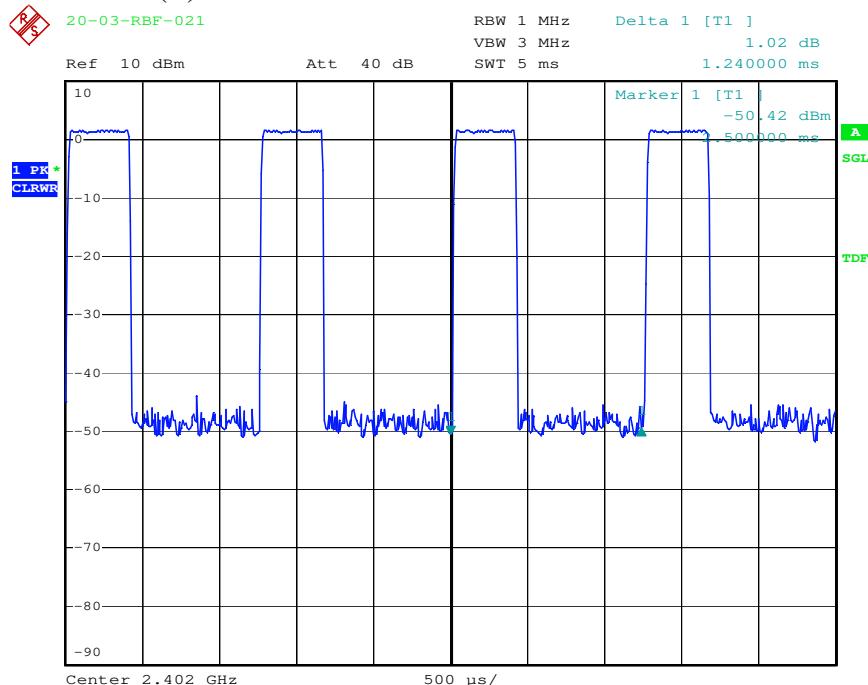

Date: 14.APR.2020 14:39:17


BR / DH3

Period

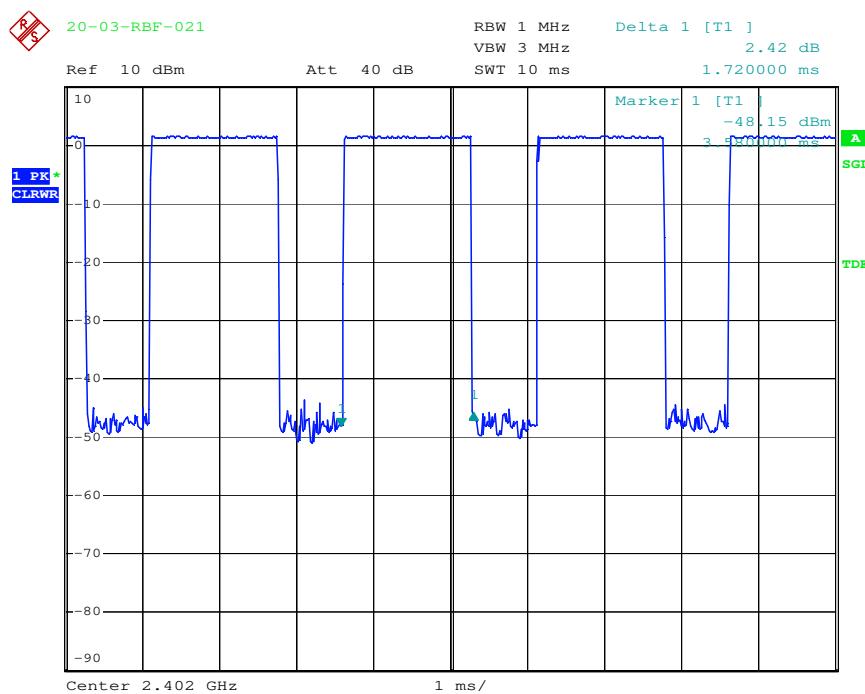

Date: 14.APR.2020 14:41:21


Transmission duration (T)

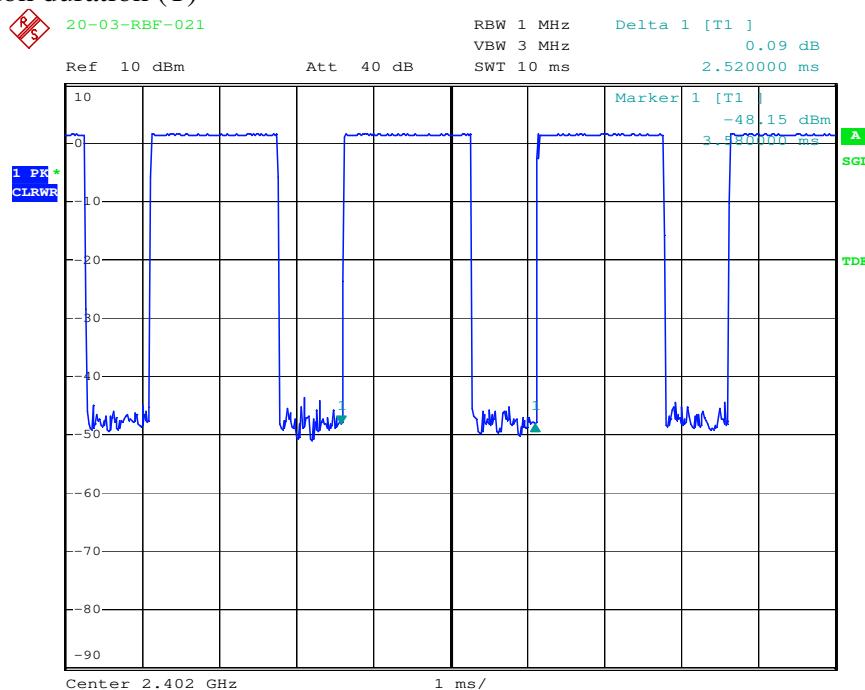

Date: 14.APR.2020 14:40:58


BR / DH5

Period

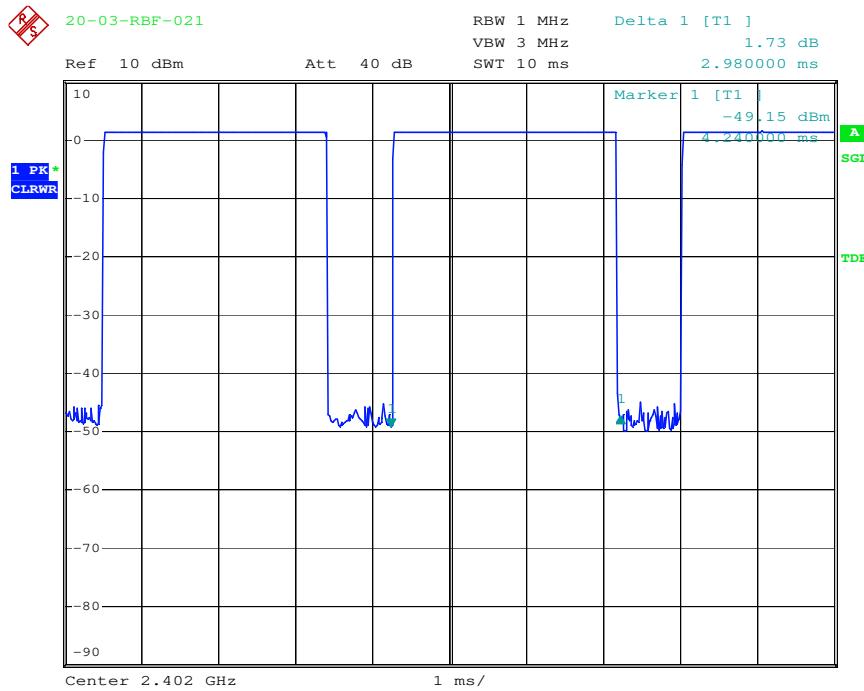

Date: 14.APR.2020 14:43:07


Transmission duration (T)

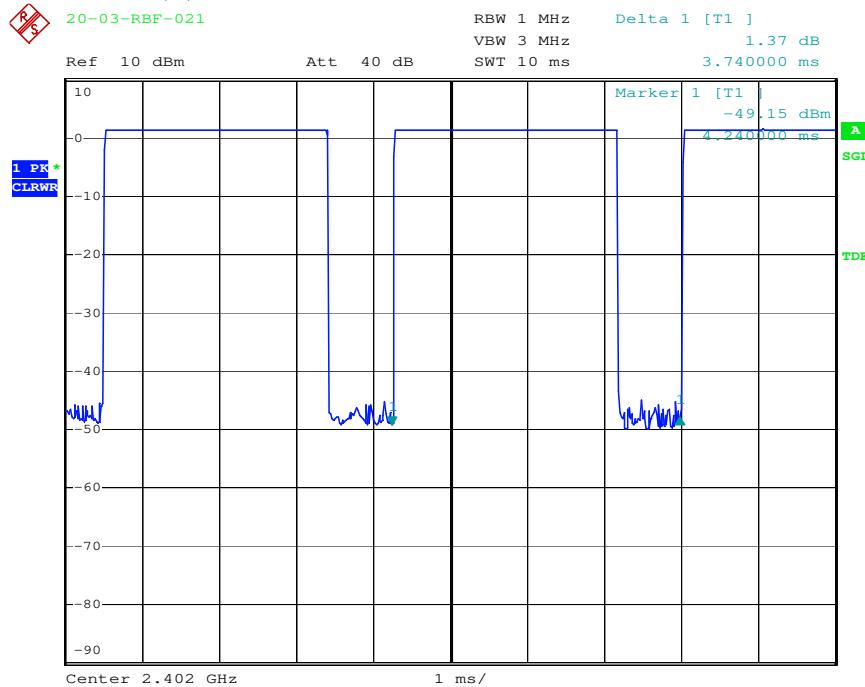

Date: 14.APR.2020 14:42:48


EDR / DH1

Period

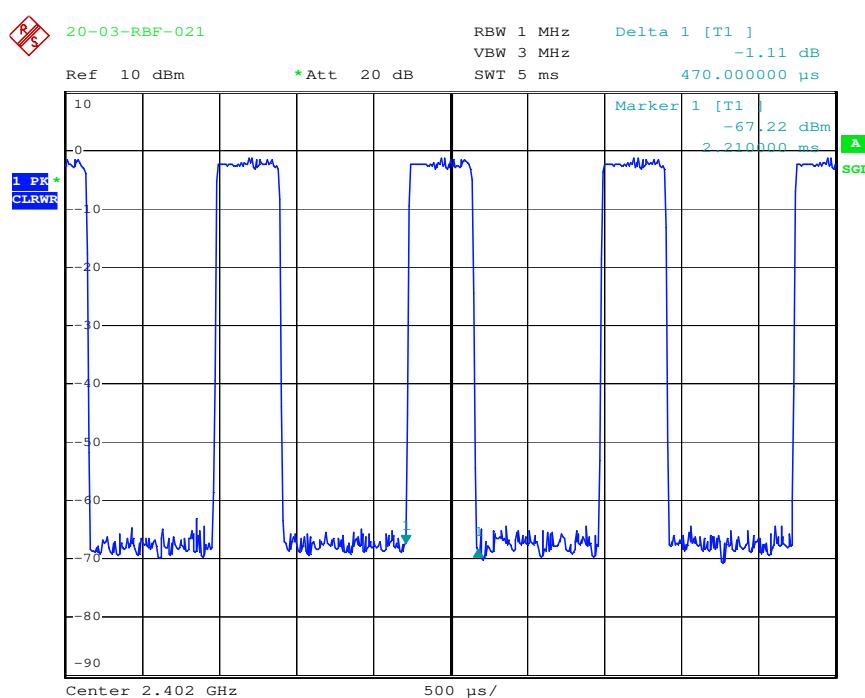

Date: 14.APR.2020 15:46:25


Transmission duration (T)

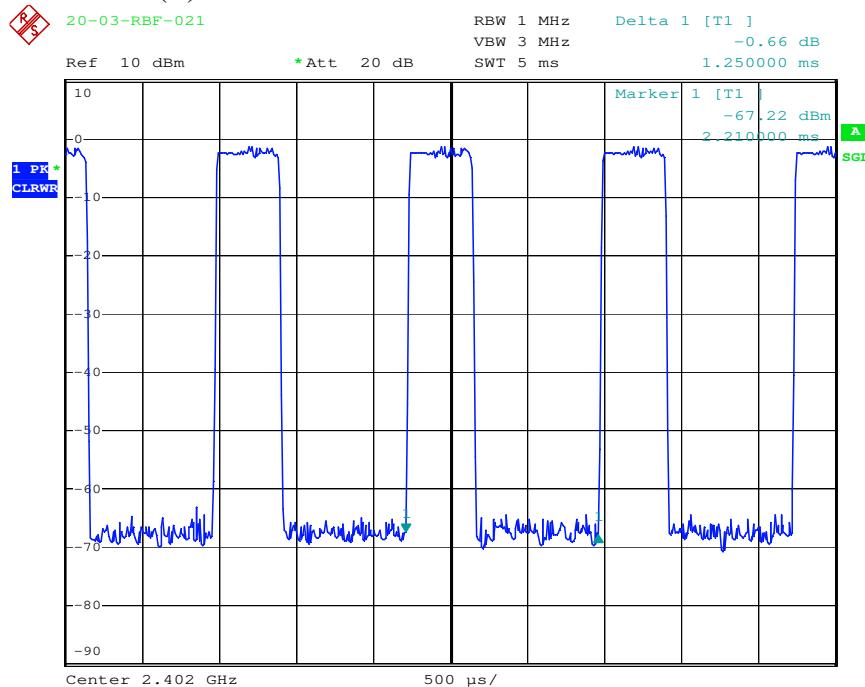

Date: 14.APR.2020 15:46:08


EDR / DH3

Period

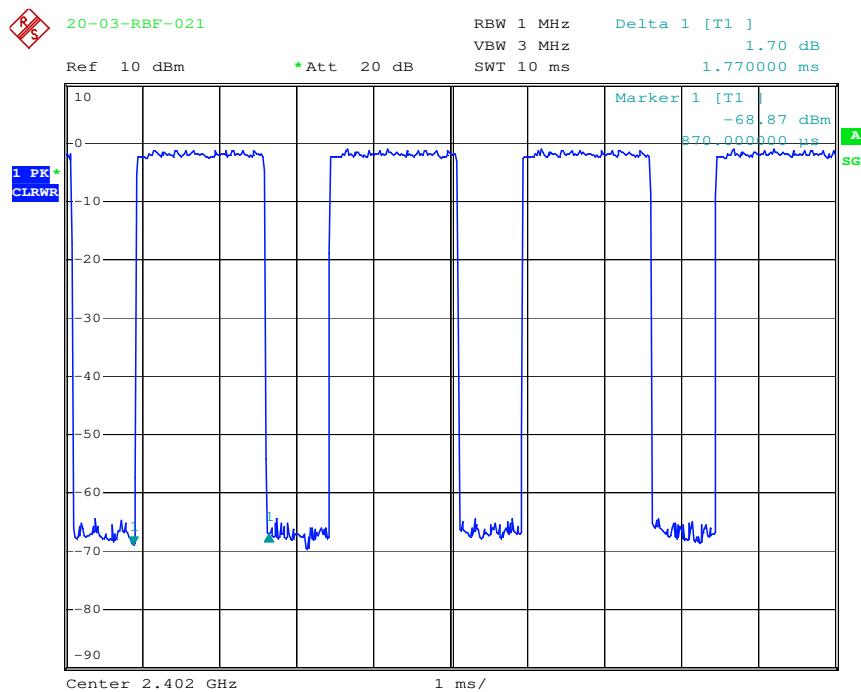

Date: 14.APR.2020 15:47:31


Transmission duration (T)

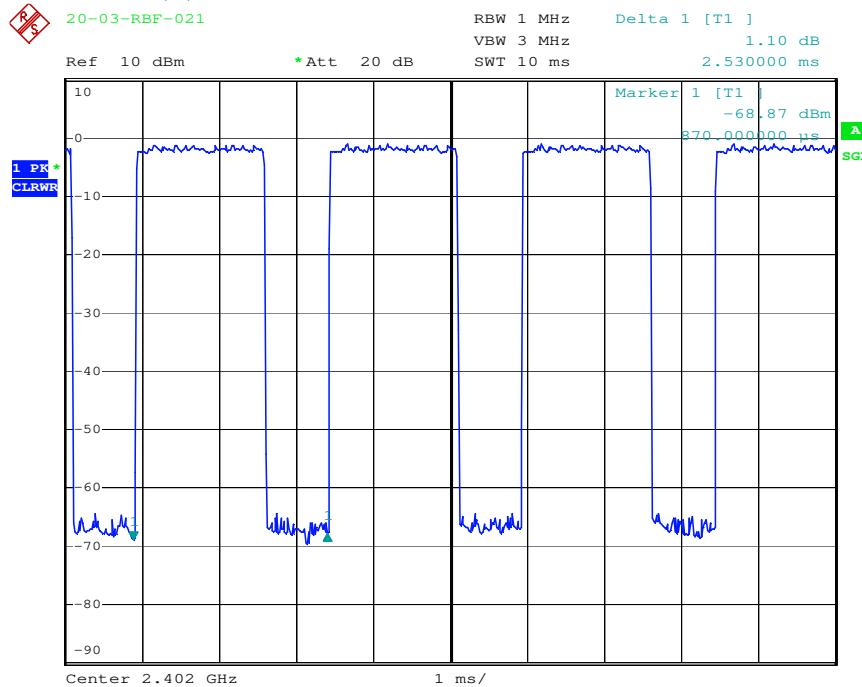

Date: 14.APR.2020 15:47:12


EDR / DHS

Period

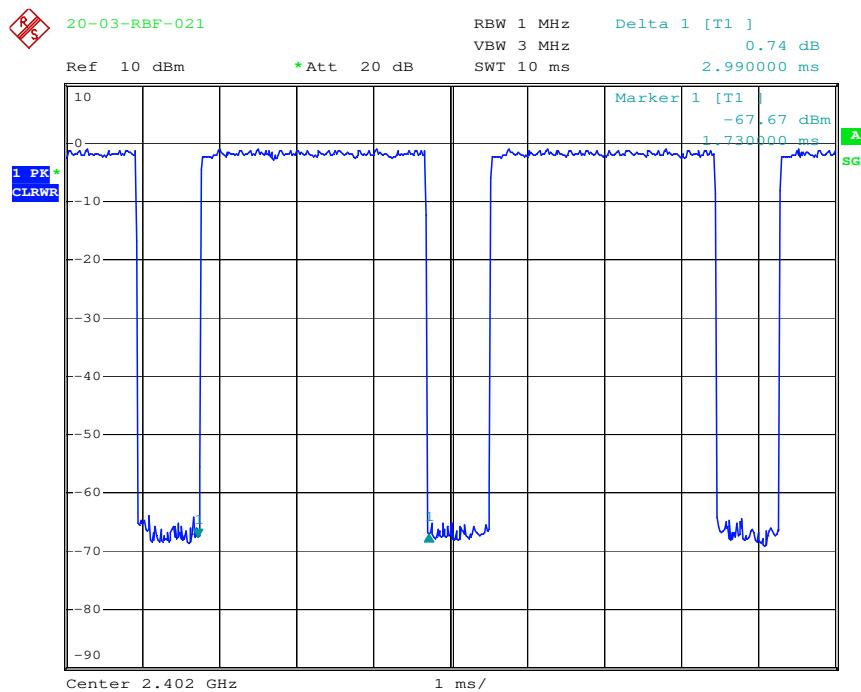

Date: 14.APR.2020 15:48:16

Transmission duration (T)

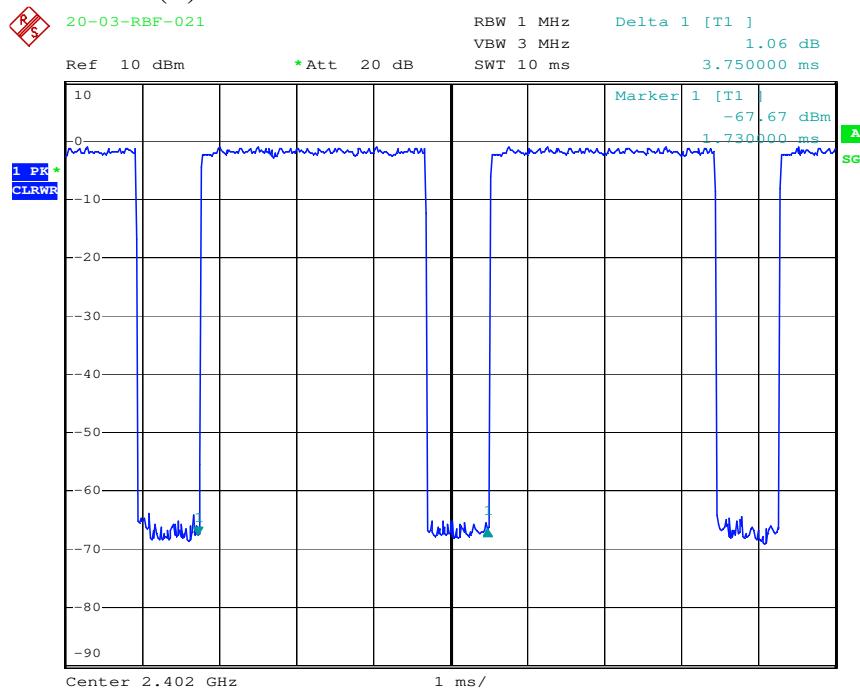

Date: 14.APR.2020 15:48:00

CONSTRUCTION PHOTOS OF EUT

1.



2.



CONSTRUCTION PHOTOS OF EUT

3.




4. Test model:R1A




CONSTRUCTION PHOTOS OF EUT

5.

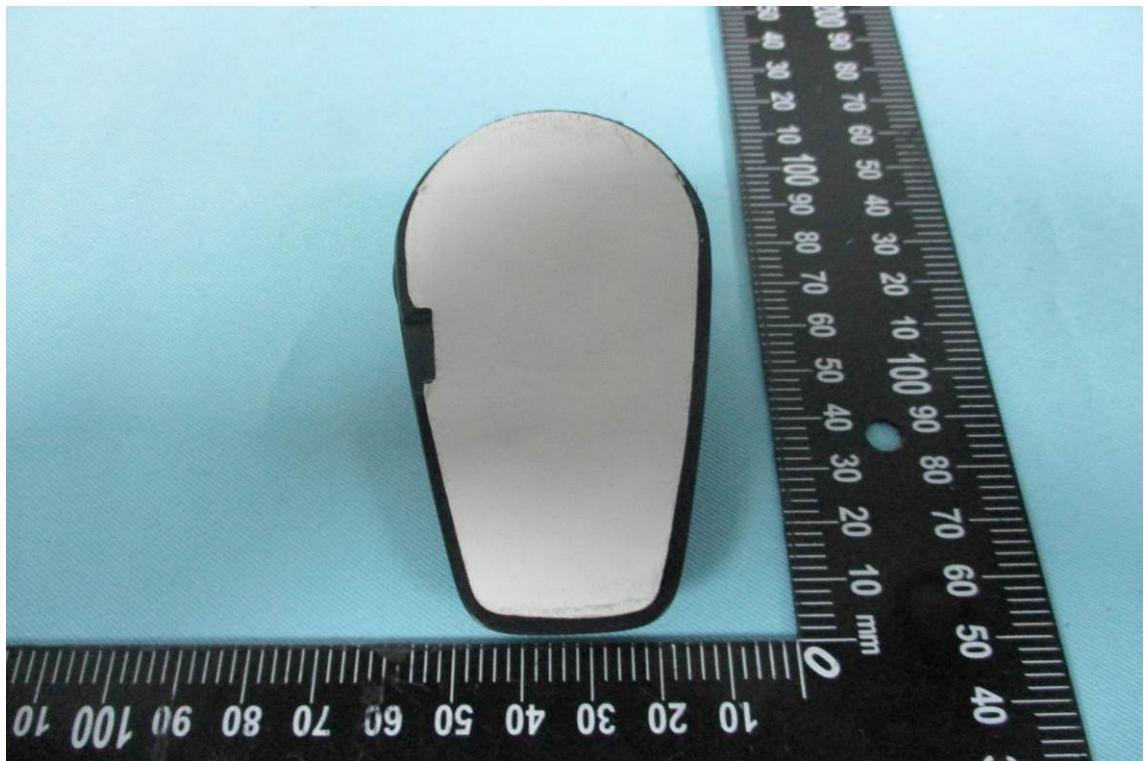

6.

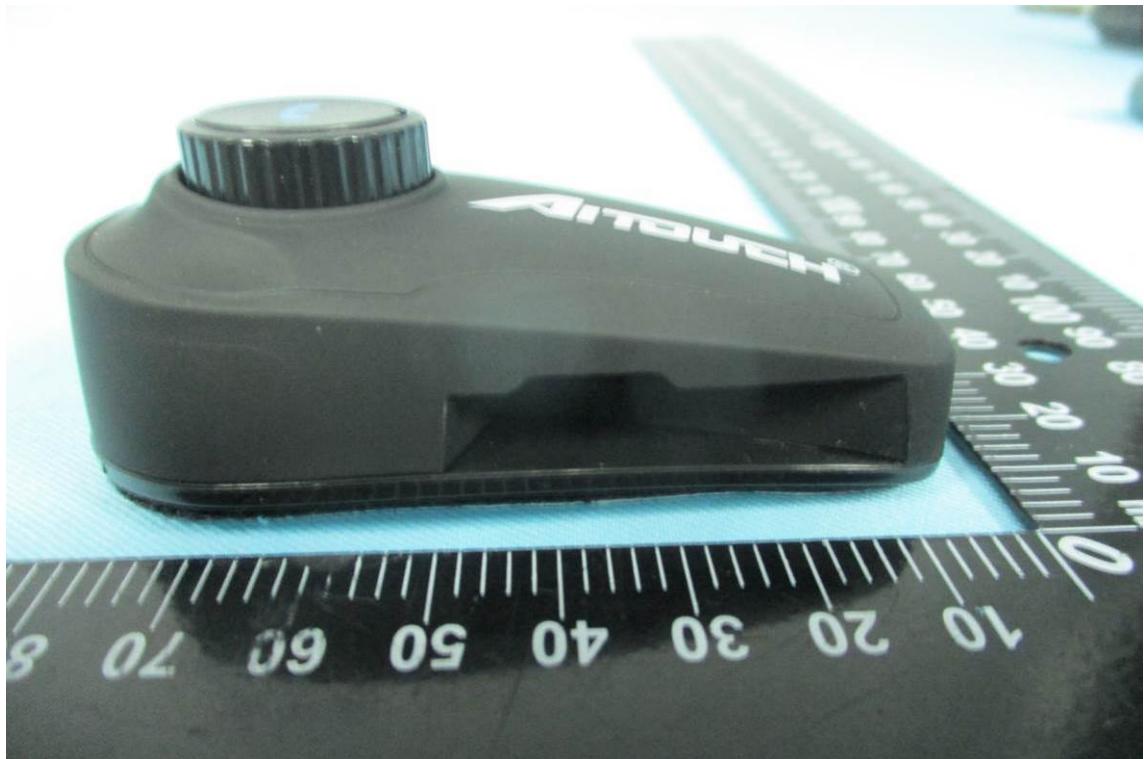

CONSTRUCTION PHOTOS OF EUT

7.




8.



CONSTRUCTION PHOTOS OF EUT

9.

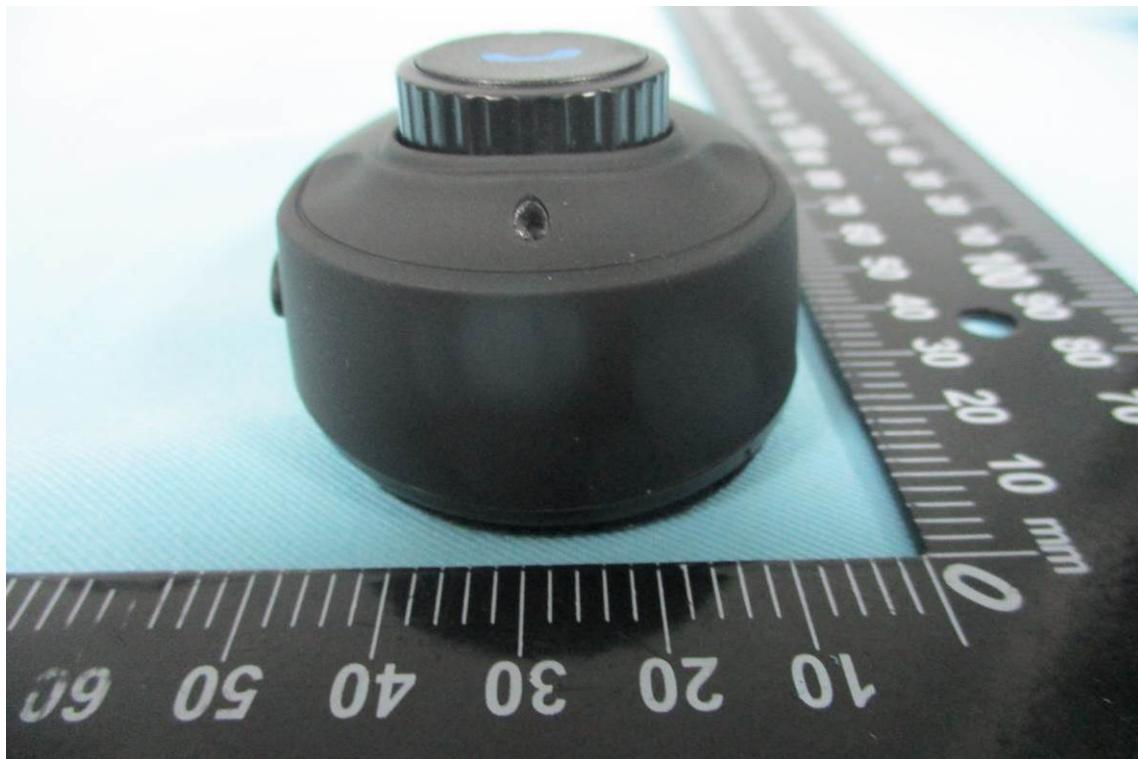


10.




CONSTRUCTION PHOTOS OF EUT

11.

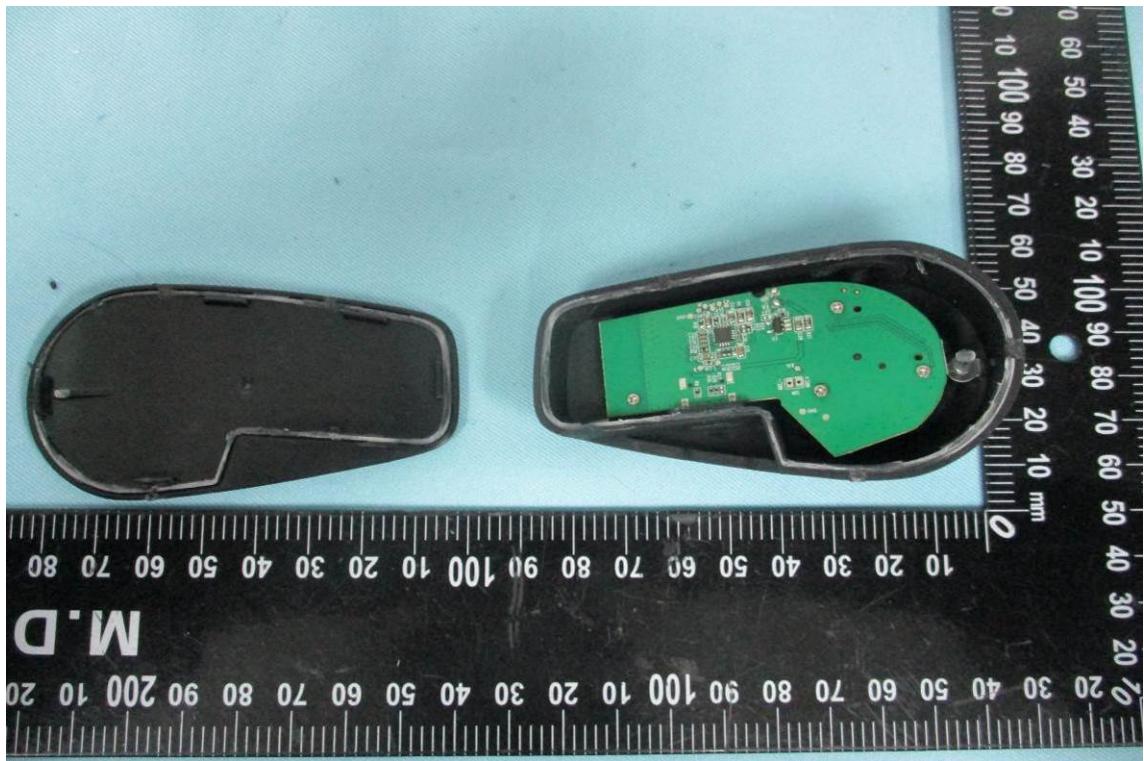


12.

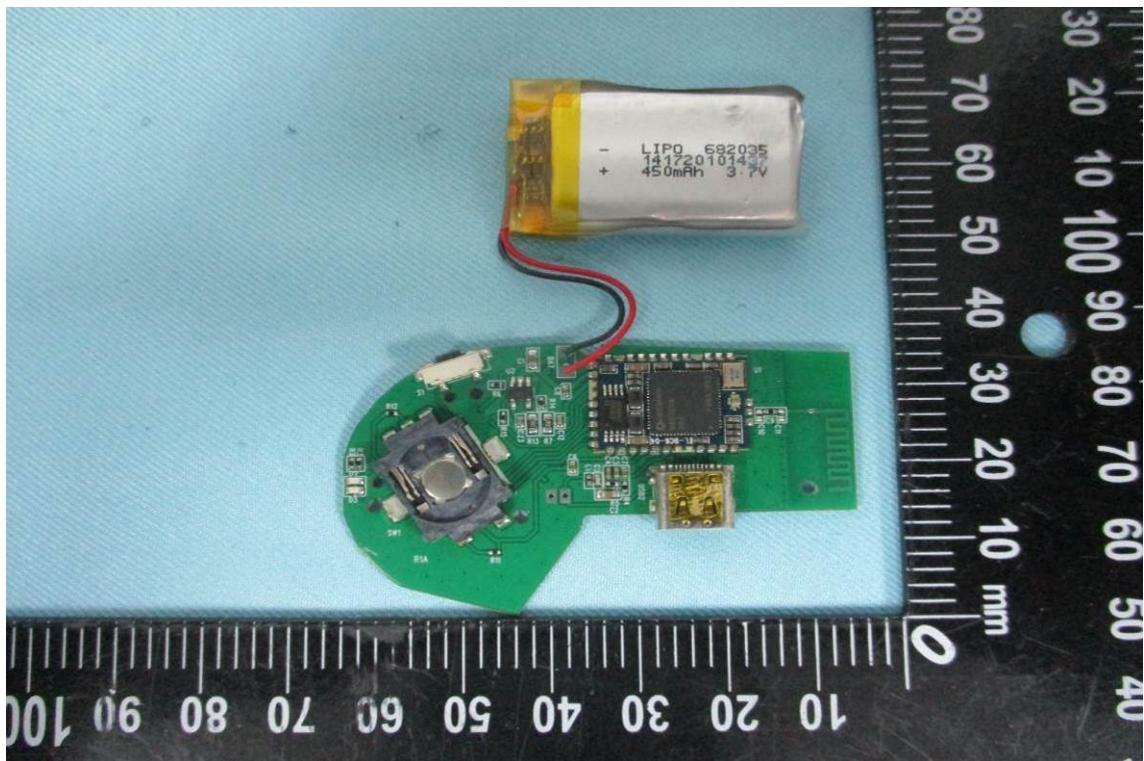


CONSTRUCTION PHOTOS OF EUT

13.

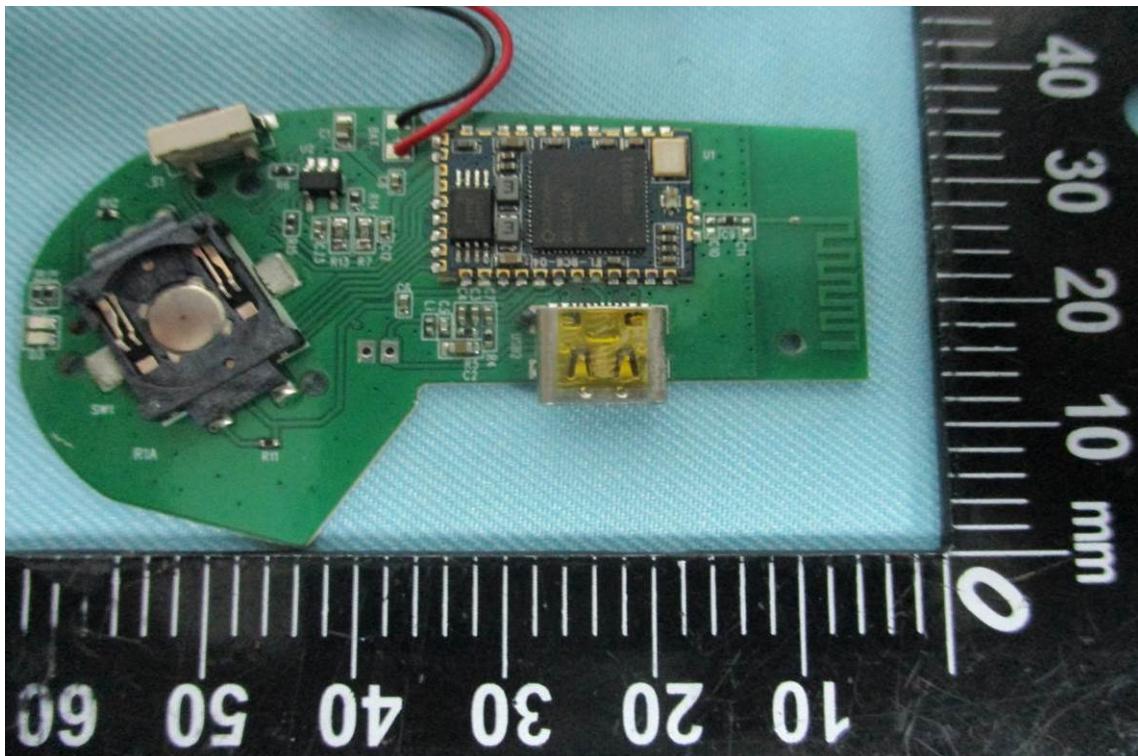


14.

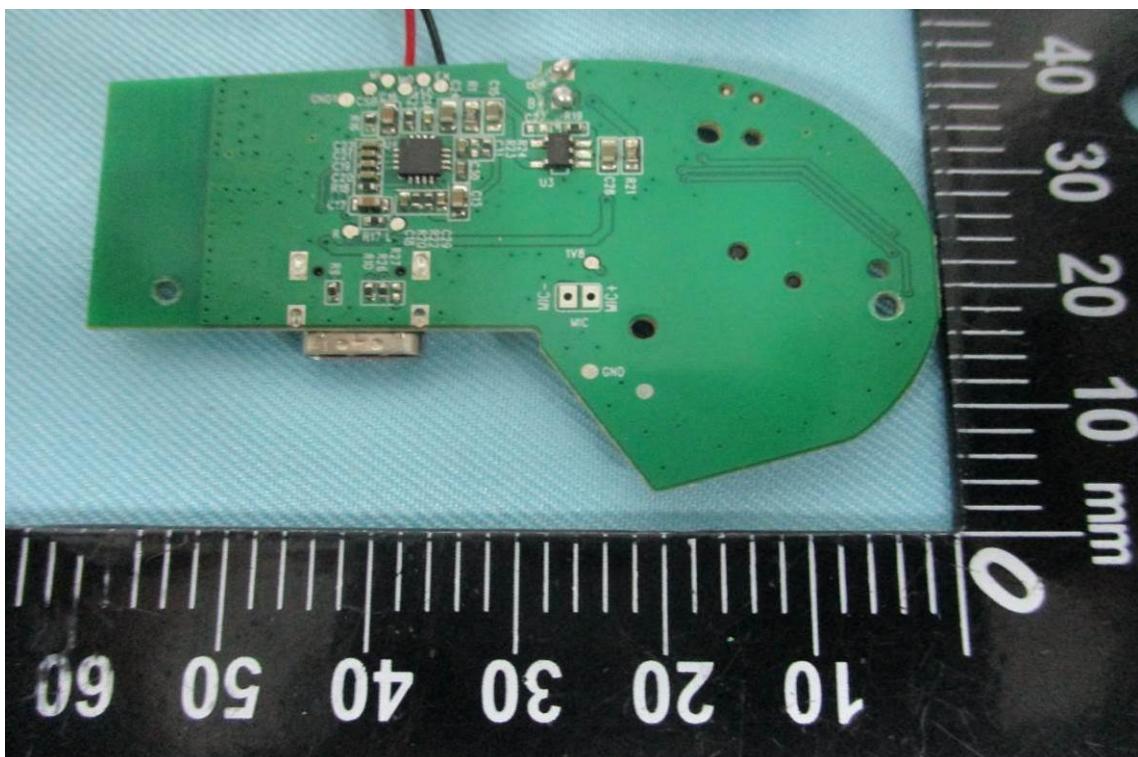


CONSTRUCTION PHOTOS OF EUT

15.

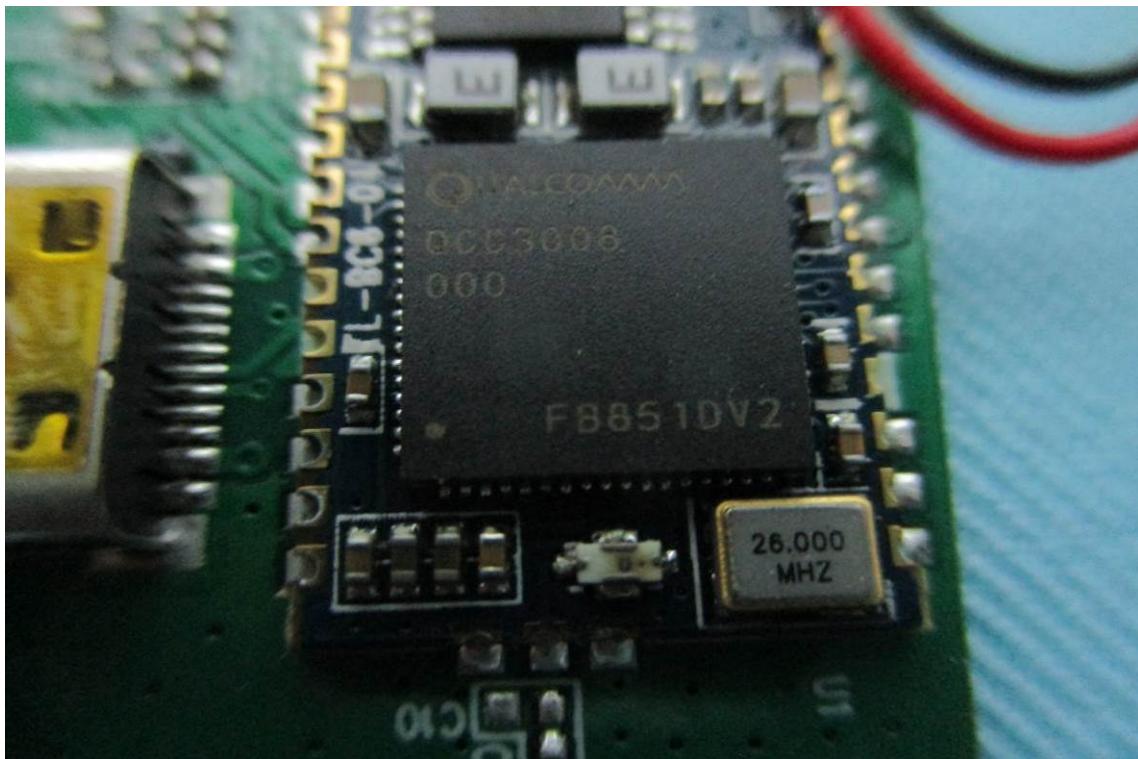


16.

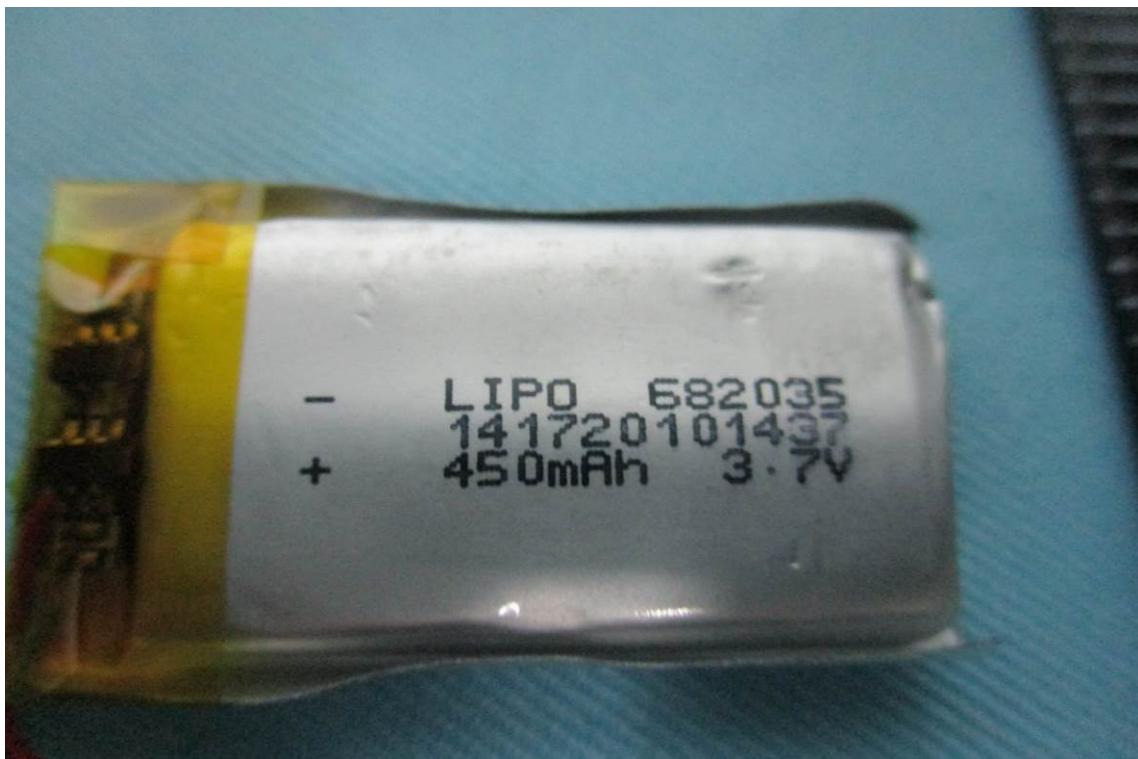

CONSTRUCTION PHOTOS OF EUT

17. PCB ANT

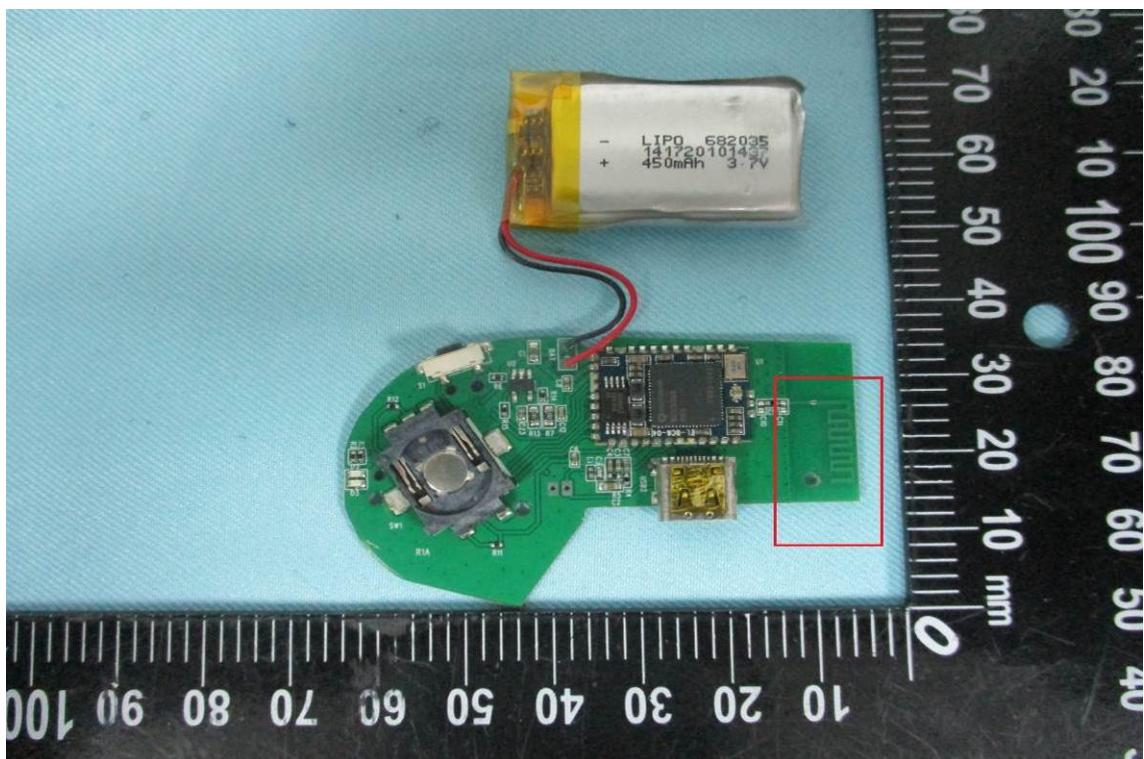

CONSTRUCTION PHOTOS OF EUT

18.



19.



CONSTRUCTION PHOTOS OF EUT

20.



21.




CONSTRUCTION PHOTOS OF EUT

22.



23.

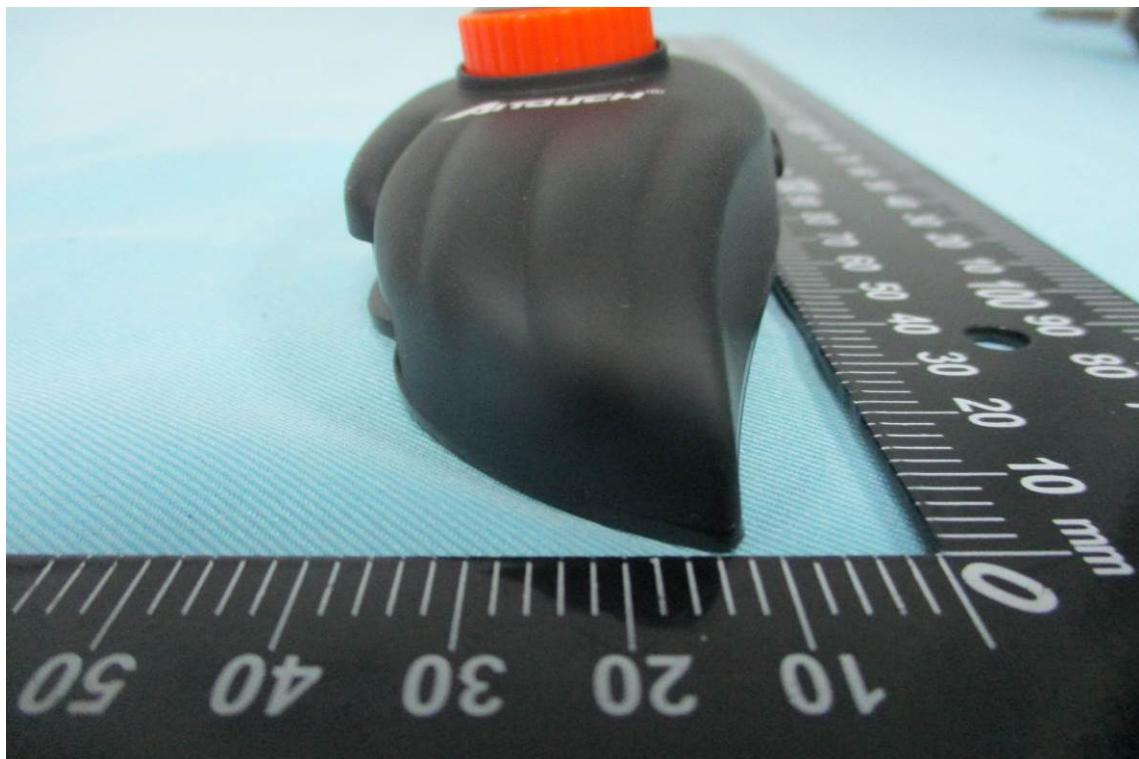

CONSTRUCTION PHOTOS OF EUT

24.



DIFFERENCE INFORMATIONS OF SERIES MODEL

1. Test Model : R1A
 2. The Model without test (Series Model): R1+

The Difference Information:

Model No.	Test Model:	Series Model:	Series Model:	Series Model:
	R1A	R1+		
Difference Item				
PCB Layout and The Circuit Diagram	O	O		
Components	O	O		
Material	O	O		
Function	O	O		
Shape & Color	X	X		
Other				

Notes: (1) "O" means the item is same with Main model.
 (2) "X" means the item is different with main model. And please explain it.

Remark: 1. The multiple listing recognized without test basis is according to information supplied by manufacturer.

2. The manufacturer or supplier's quality system shall ensure that the tested model or apparatus is representative of the series-produced apparatus concerned.

Manufacturer / Supplier

Company Name : Taiwan Protect Ltd.

Signature




Name : Ivan Pai Date : _____