




BiTrend™ EssentialSeries Wi-Fi Module Datasheet



WT1FBS

Hangzhou Gubei Electronics Technology Co., Ltd.

Copyright Information

The information contained in this document is the proprietary information of Hangzhou Gubei Electronics Technology Co., Ltd. (hereinafter referred as BroadLink). Further, no portion of this document may be altered or edited in any form or by any means without the prior written consent of BroadLink, the copyright holder.

Further BroadLink reserves the right to make modifications, additions and deletions to this document due to typographical errors, inaccurate information, or improvements to products mentioned in the document at any time and without notice. Such changes will, nevertheless be incorporated into new editions of this document or published as errata sheet.

Version History

V 1.0.0 17/07/2015 1st issue of preliminary document

Table of Contents

1. Introduction.....	3
1.1 Overview.....	3
1.2 Applications.....	4
1.3 Key Features	4
2. Product Overview	5
2.1 Product Picture	5
2.2 Block Diagram.....	6
3. Electrical Characteristics.....	6
3.1 Absolute Maximum Ratings – Voltage & Current	6
3.2 Digital I/O Port Characteristics	7
3.3 Current consumption	7
3.4 Absolute maximum ratings – Temperature.....	8
3.5 Absolute maximum ratings – ESD	8
4. RF Characteristics.....	8
4.1 Basic Characteristics	8
4.2 IEEE802.11b Mode.....	8
4.3 IEEE802.11g Mode.....	9
4.4 IEEE802.11n 20Mhz Bandwidth Mode	10
5. Mechanical Characteristics	13
6. Module Interfaces.....	14
6.1 PIN Layout	14
6.2 PIN Definitions	15
7. Reference Design.....	16
8. Antenna Characteristics	17
8.1 Antenna Selection	17
8.2 Minimizing Radio Interference	18
8.3 Specification of On-Board Antenna	19
Appendix A	21
Appendix B	23
Contact Us	25

1. Introduction

1.1 Overview

BiTrend™ Essential is the industrial leading 2.4Ghz 802.11 b/g/n embedded Wi-Fi module which delivers unmatched performance and codeless development in a compact package, providing a quick, easy and cost effective way for developers and manufacturers to add Wi-Fi connectivity for home automation, lighting control, energy efficiency and other IOT applications.

BiTrend™ Essential family combines a 2.4Ghz 802.11 b/g/n radio transceiver with a 32-bit microprocessor and embedded with MAC, baseband processing and optimized Wi-Fi network stack. It is an ideal solution for developers and manufacturers with limited RF and embedded programming expertise as it significantly reduces RF design time and removes the burden of testing and certification.

Benefitted from BroadLink's turn-key solution, BiTrend™ Essential is an ideal solution for developers with limited Wi-Fi or RF expertise or for those seeking faster time to market. It reduces RF design time and removes the burden of testing and certification. BiTrend™ Essential is fully compliant with IEEE 802.11 b/g/n standard and certified with CE, FCC and RoHS.

BiTrend™ Essential is a highly integrated Wi-Fi SoC(system on Chip) single chip, which supports IEEE802.11b/g/n single stream, providing GPIO for intelligent control, and UART interfaces for device communication.

BiTrend™ Essential has 8Mbits flash and integrates power amplifier, low noise amplifier, and RF switch to reduce the module size and RF design capability required. And also integrate power manage unit for single 3.3V power source for cost effective design.

BiTrend™ Essential embedded 32-bit RISC MCU for 802.11b/g/n drivers, supplicant, TCP/IP protocol stack, and networking applications, can be operated in station mode and softAP mode. The WT1FBS is an ideal solution for embedded device to enable networking service with minimized design effort.

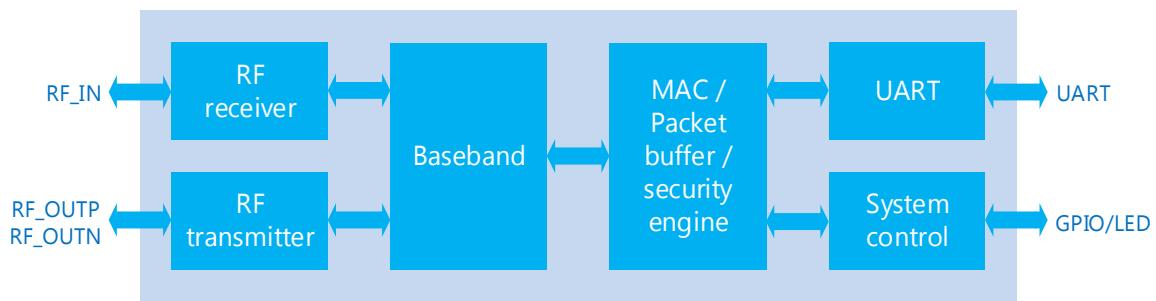


Figure 1. WT1FBS block diagram

1.2 Applications

- Smart home appliances
- Remote Control
- Medical/Health Care
- Network consumer devices

1.3 Key Features

a. Support IEEE802.11b/g/n

Frequency Range	2.412 GHz - 2.462 GHz
Wi-Fi Standard	IEEE 802.11 b/g/n
Transmitter Power	802.11b:17dBm 802.11g:19dBm 802.11n:19dBm
MIN Receiver Sensitivity	802.11b<-78dBm 802.11g<-68dBm 802.11n<-66dBm
Data rate	11M@802.11b, 54M@802.11g, MCS7@802.11n
Security	Encryption Standard: WEP/WEPA/WPA2 EncryptionAlgorithm: WEP64/WEP128/TKIP/AES
Wi-Fi Modes	STA/AP

b. Support UART transparent transfer
 c. Support STA\AP
 d. Patent SmartConfig™ technology
 e. Support IPv4, TCP/UDP/ DNS/DHCP
 f. PCB printed antenna


g. Antenna type	PCB printed ANT
	IPEX connector for external antenna

- h. Power source: 3.3V
- i. Peripherals:
 - 1*UART
 - 4*GPIO
- j. Dimension 37.5mm*20.4mm*4mm
- k. ESD: 2KV
- l. Absolute maximum ratings


Symbol	Description	Min.	Max.	Units
T _s	Storage temperature	-40	125	°C
T _{AMBIENT}	Ambient Temperature	-10	70	°C
V _{dd}	Supply voltage	0	3.63	V
V _{io}	Voltage on IO pin	-0.28	3.63	V
V _{ESD}	HBM(human body model)		2000	V

2. Product Overview

2.1 Product Picture

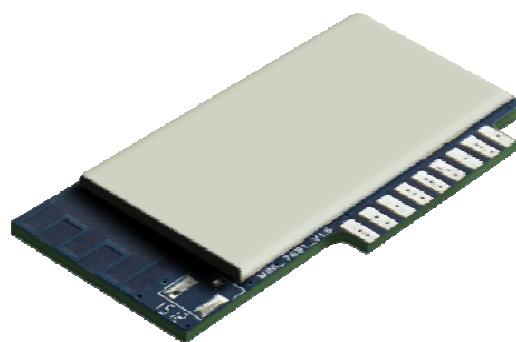

2.2 Block Diagram

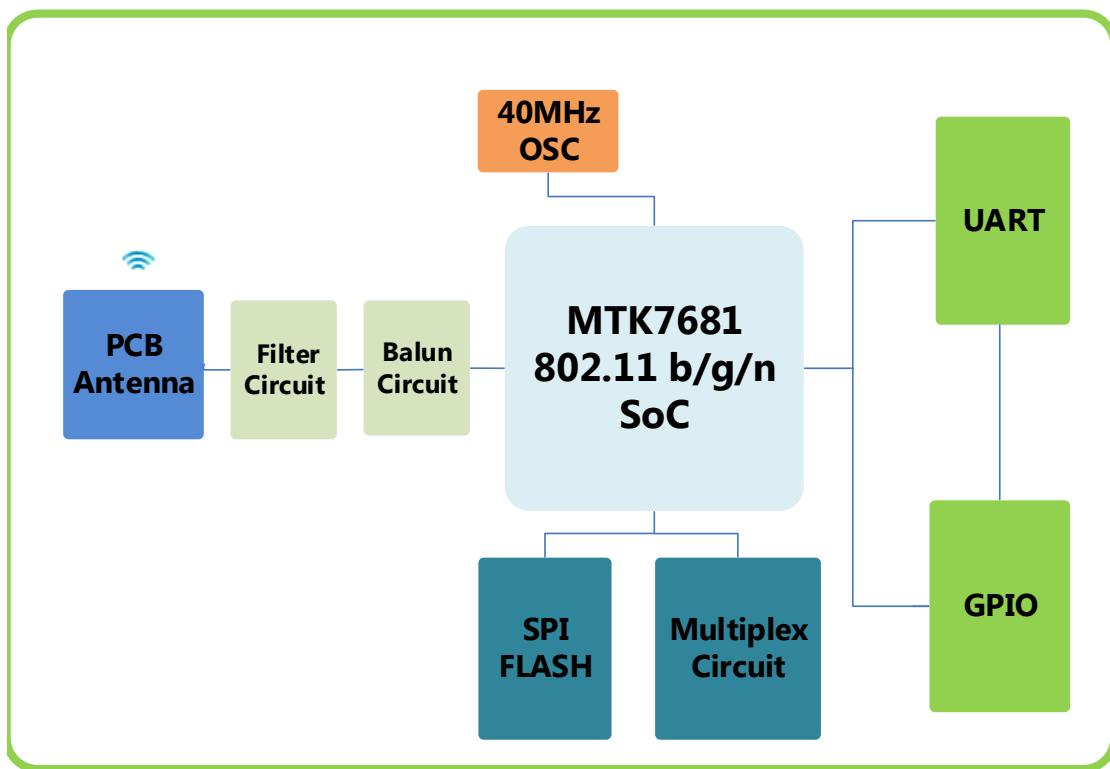

3. Electrical Characteristics

3.1 Absolute Maximum Ratings – Voltage & Current

Using products above the absolute maximum ratings may cause permanent damage to the device. These are maximum ratings only and functional operation of the device at these conditions is not implied. Exposure to maximum rating conditions for extended periods may affect the reliability of the device.

Symbol	Rating	MIN	TYP	MAX	Unit
VDD33	3.3V Supply Voltage	2.97	3.3	3.63	V
VDD12	1.2V Supply Voltage	1.14	1.2	1.26	V
VDD15	1.5V Supply Voltage	1.425	1.5	1.575	V

3.2 Digital I/O Port Characteristics

Output voltage levels

Symbol	Parameter	Conditions	MIN	MAX	Unit
V_{IL}	Input Low Voltage	LV TTL	-0.28	0.6	V
V_{IH}	Input High Voltage		2.0	3.63	V
V_{T^-}	Schmitt Trigger Negative Going Threshold Voltage	LV TTL	0.68	1.36	V
V_{T^+}	Schmitt Trigger Positive Going Threshold Voltage		1.36	1.7	V
V_{OL}	Output Low Voltage	$ I_{OL} = 1.6 \sim 14 \text{ mA}$	-0.28	0.4	V
V_{OH}	Output High Voltage	$ I_{OH} = 1.6 \sim 14 \text{ mA}$	2.4	$VDD33 + 0.33$	V
R_{PU}	Input Pull-Up Resistance	PU=high, PD=low	40	190	$\text{K}\Omega$
R_{PD}	Input Pull-Down Resistance	PU=low, PD=high	40	190	$\text{K}\Omega$

3.3 Current consumption

Symbol	Note	Condition	Performance	
			TYP	Unit
I_{RF}	IDLE mode		80	mA
I_{RF}	RX Active, HT40, MCS7		151	mA
I_{RF}	TX HT40, MCS7	@ 15dBm	210	mA
I_{RF}	TX CCK	11Mbps @ 18dBm	250	mA

Note: All result is measured at the antenna port and VDD33 is 3.3V

3.4 Absolute maximum ratings – Temperature

Symbol	Ra	Max	Unit
T _{STG}	Storage temperature	-40 to +125	°C
T _A	Working temperature	-10 to +70	°C
Humidit	Non condensing, relative humidity	90% (RH)	

3.5 Absolute maximum ratings – ESD

Symbol	Ratings	Conditions	Class	Max	Unit
V _{ESD(HBM)}	Electrostatic discharge voltage (human body model)	TA = +25 °C conforming to JESD22-A114	2	2000	V

4. RF Characteristics

4.1 Basic Characteristics

Item	Specification
Operating Frequency	2.412 GHz - 2.462 GHz
Wi-Fi Standard	IEEE 802.11b/g/n
Modulation Type	11b: DBPSK, DQPSK, CCK for DSSS 11g: BPSK, QPSK, 16QAM, 64QAM for OFDM 11n: MCS0~7, OFDM
Data Rates	11b: 1, 2, 5.5 and 11 Mbps 11g: 6, 9, 12, 18, 24, 36, 48 and 54 Mbps 11n: MCS0~7, up to 150 Mbps
Antenna Type	IPEX connector for external antenna PCB printed ANT

4.2 IEEE802.11b Mode

Item	Specification
Modulation Type	DSSS/CCK

Frequencyrange	2412MHz~2462MHz			
Channel	CH1 toCH11			
Datarate	1,2,5.5,11Mbps			

TX Characteristics	Min	Typical	Max.	Unit
Transmitter Output Power				
11bTarget Power		17		dBm
Frequency Error	-20		+20	ppm
Constellation Error(peak EVM)@ target power				
1~11Mbps		-17	-10	

RX Characteristics	Min	Typical	Max.	Unit
Minimum Input Level Sensitivity				
1Mbps (FER \leq 8%)		-95	-83	dBm
2Mbps (FER \leq 8%)	-20	-93	-80	dBm
5.5Mbps (FER \leq 8%)		-91	-79	dBm
11Mbps (FER \leq 8%)		-89	-76	dBm
Maximum Input Level (FER \leq 8%)	-10			dBm

4.3 IEEE802.11g Mode

Item	Specification			
ModulationType	OFDM			
Frequencyrange	2412MHz~2462MHz			
Channel	CH1 toCH11			
Datarate	6,9,12,18,24,36,48,54Mbps			

TX Characteristics	Min	Typical	Max.	Unit
Transmitter Output Power				
11gTarget Power		19		dBm
Frequency Error	-20		+20	ppm
Constellation Error(peak EVM)@ target power				
6Mbps			-5	dB
9Mbps			-8	dB
12Mbps			-10	dB

18Mbps			-13	dB
24Mbps			-16	dB
36Mbps			-19	dB
48Mbps			-22	dB
54Mbps			-25	dB
Transmit spectrum mask				
@11MHz			20	dBr
@20MHz			-28	dBr
@30MHz			-40	dBr

RX Characteristics	Min	Typical	Max.	Unit
Minimum Input Level Sensitivity				
6Mbps		-90	-83	dBm
9Mbps	-	-88	-80	dBm
12Mbps		-86	-79	dBm
18Mbps		-85	-76	dBm
24Mbps		-82		dBm
36Mbps		-79		dBm
48Mbps		-75		dBm
54Mbps		-72		dBm
Maximum Input Level (FER \leq 10%)	-20			dBm

4.4 IEEE802.11n 20Mhz Bandwidth Mode

Item	Specification
ModulationType	OFDM
Frequencyrange	2412MHz~2462MHz
Channel	CH1 toCH11
Datarate	MCS0/1/2/3/4/5/6/7

TX Characteristics	Min	Typical	Max.	Unit
Transmitter Output Power				
11n HT20 Target Power		19		dBm
Frequency Error	-20		+20	ppm

Constellation Error(peak EVM)@ target power				
MCS0			-5	dB
MCS1			-10	dB
MCS2			-13	dB
MCS3			-16	dB
MCS4			-19	dB
MCS5			-22	dB
MCS6			-25	dB
MCS7			-28	dB
Transmit spectrum mask				
@11MHz			20	dBr
@20MHz			-28	dBr
@30MHz			-40	dBr
RX Characteristics	Min	Typical	Max.	Unit
Minimum Input Level Sensitivity				
MCS0		-89	-82	dBm
MCS1	-	-86	-79	dBm
MCS2		-84	-77	dBm
MCS3		-82	-74	dBm
MCS4		-78	-70	dBm
MCS5		-74	-66	dBm
MCS6		-72	-65	dBm
MCS7		-69	-64	dBm
Maximum Input Level (FER $\leq 10\%$)	-20			dBm

4.5 IEEE802.11n 40Mhz Bandwidth Mode

Item	Specification			
ModulationType	OFDM			
Frequencyrange	2422MHz~2452MHz			
Channel	CH3 toCH9			
Datarate	MCS0/1/2/3/4/5/6/7			

TX Characteristics	Min	Typical	Max.	Unit
Transmitter Output Power				
11n HT20 Target Power		19		dBm
Frequency Error	-20		+20	ppm
Constellation Error(peak EVM)@ target power				
MCS0			-5	dB
MCS1			-10	dB
MCS2			-13	dB
MCS3			-16	dB
MCS4			-19	dB
MCS5			-22	dB
MCS6			-25	dB
MCS7			-28	dB
Transmit spectrum mask				
@11MHz			20	dBr
@20MHz			-28	dBr
@30MHz			-40	dBr
RX Characteristics	Min	Typical	Max.	Unit
Minimum Input Level Sensitivity				
MCS0		-89	-82	dBm
MCS1	-	-86	-79	dBm
MCS2		-84	-77	dBm
MCS3		-82	-74	dBm
MCS4		-78	-70	dBm
MCS5		-74	-66	dBm

MCS6		-72	-65	dBm
MCS7		-69	-64	dBm
Maximum Input Level (FER \leq 10%)	-20			dBm

5. Mechanical Characteristics

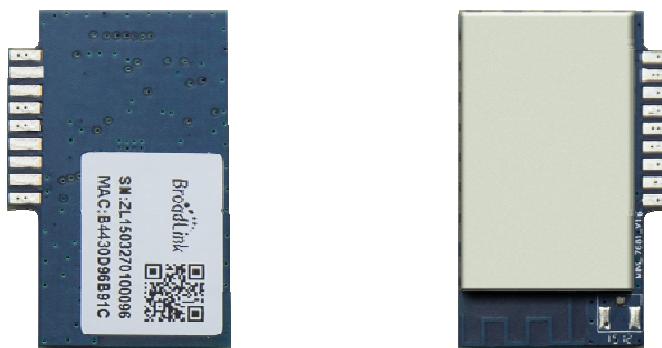


Figure2.WT1FBS

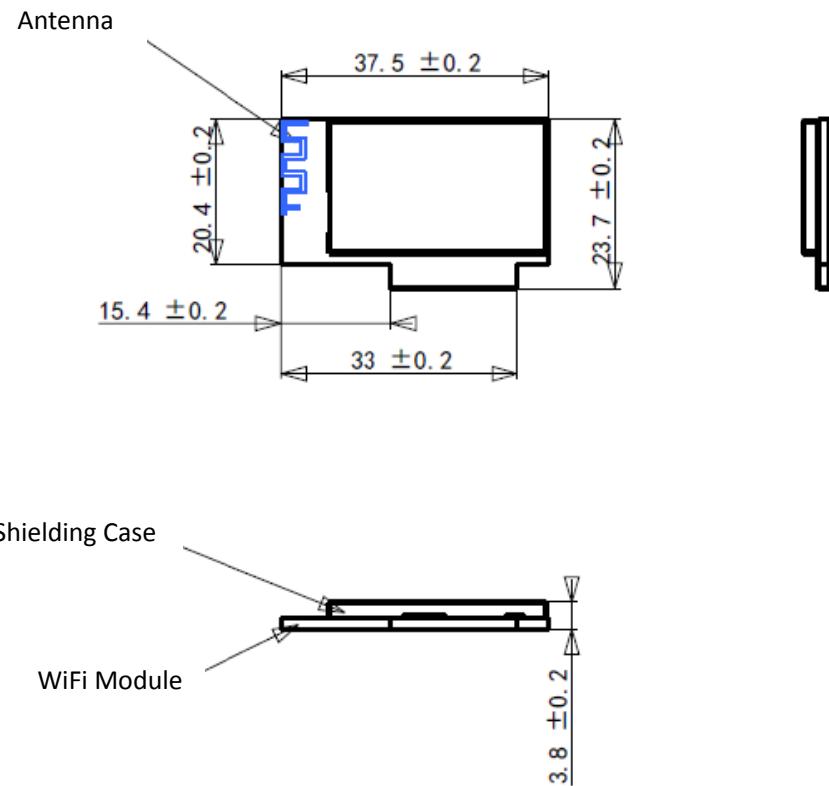


Figure3.WT1FBSview(Metricunits)

6. Module Interfaces

6.1 PIN Layout

WT1FBS has one group of pins1X9. The layout of PINs are shown in the figure below.

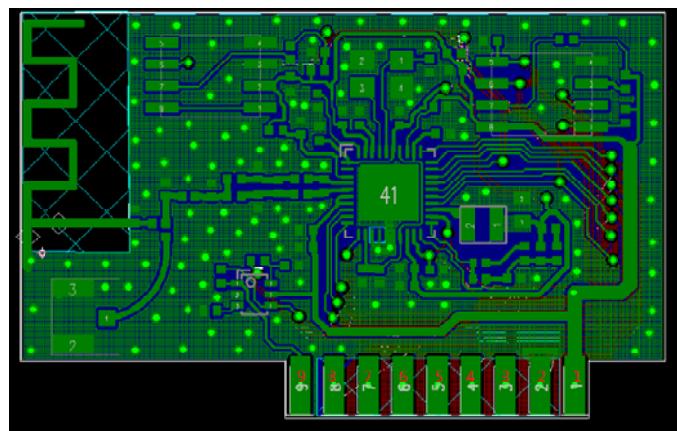



Figure6.WT1FBSpin-out

6.2 PIN Definitions

PIN Assignment

PIN	PIN NAME	NOTE
Pin1	VDD	
Pin2	GND	
Pin3	GPIO0	
Pin4	GPIO1	Soft Rest; High Level On
Pin5	GPIO2	
Pin6	GPIO3	
Pin7	GPIO0	
Pin8	UART_TX	Only for transparent transfer
Pin9	UART_RX	

7. Reference Design

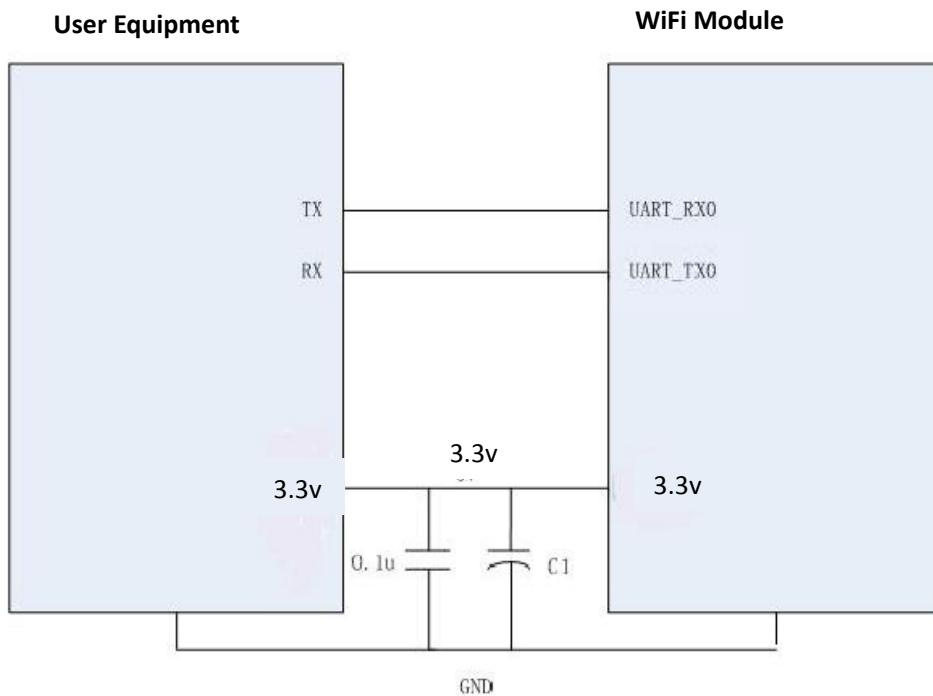

For the devices using power source of 3.3V, the UARTs of host device and WiFi module can be connected directly as the picture above to start communicating.

The WT1FBS uses power source of 3.3V. It is recommended that the power supply current should be more than 300mA. The VDD power supply is connected in parallel with a filtering capacitor and rectification capacitor to ensure voltage stability. It is recommended that the value of C1 is not less than 100uF.

8. Antenna Characteristics

8.1 Antenna Selection

The WT1FBS supports on-board PCB printed antenna. When the Operating Frequency is between 2.4G~2.5GHz, S11 of antenna port is less than -10dB and peak gain is about 2dBi.

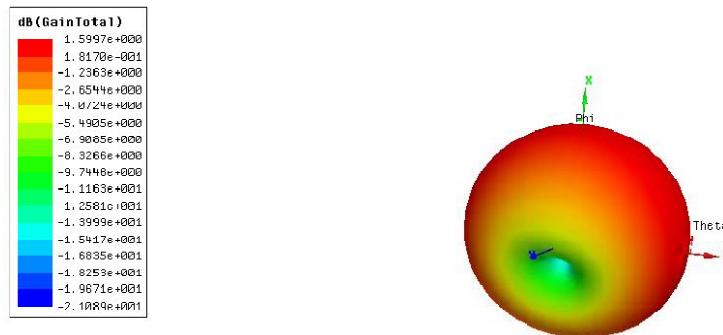


Figure 7. Antenna radiation pattern simulation


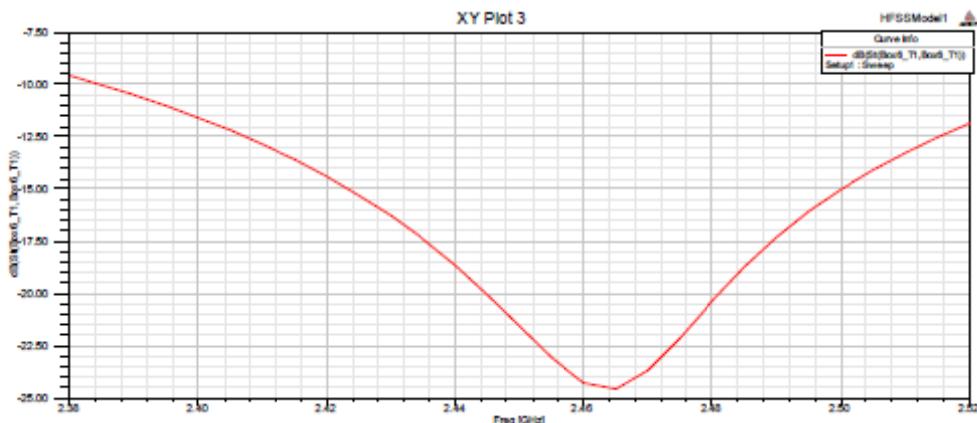



Figure 8. Antenna port S11 simulation curve

In practical use, WT1FBS is welded on user's board and value of S11 has some changes.

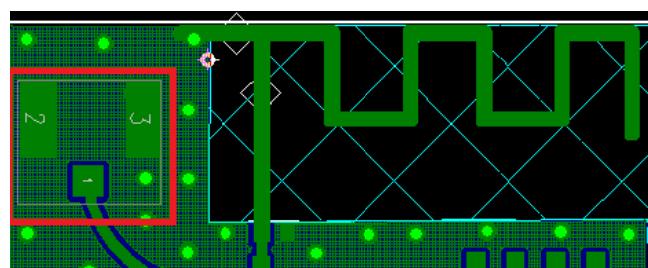

When choose the external antenna, it needs to move the resistance from the location


of L3 to R18, as shown in the red rectangle of the picture below.

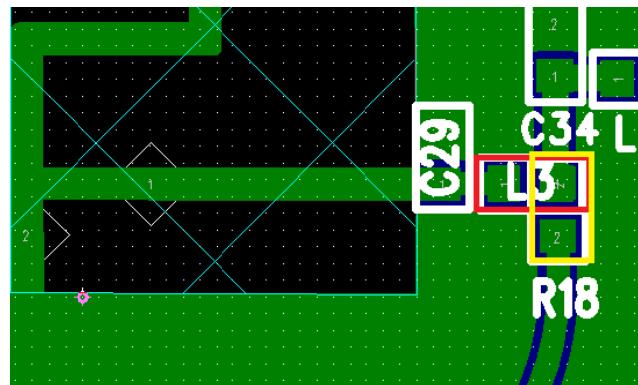

8.2 Minimizing Radio Interference

When integrating the Wi-Fi module with on board PCB printed antenna, make sure the three points below:



1. The area under the antenna end of the module should be keep clear of metallic components, connectors, vias, traces and other materials that can interfere with the radio signal.
2. The area around the antenna end the module protrudes at least 10mm from the mother board PCB and any metal enclosure.
3. When planning PCB layout, it is recommended that user places the antenna of Wi-Fi module as close as possible to the edge of boarder to ensure the good performance of antenna, which is shown in the picture below.

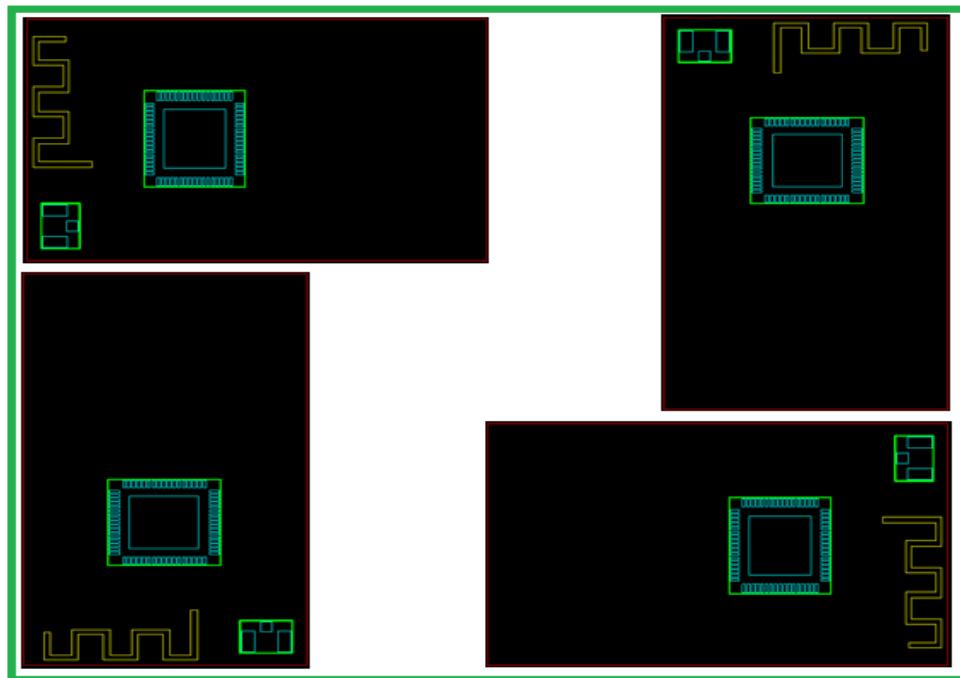


8.3 Specification of On-Board Antenna

OperatingFrequency	2.4G~2.5GHz
VSWR(max)	2
Peak Gain	2dBi
AntennaType	IFA

8.4 IPEX Connector

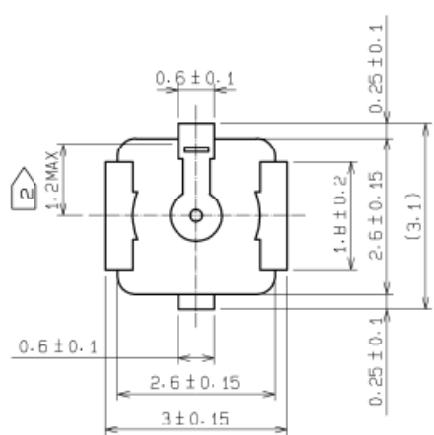

RECOMMENDED PCB LAYOUT
(MOUNTING SURFACE SIDE)(5:1)

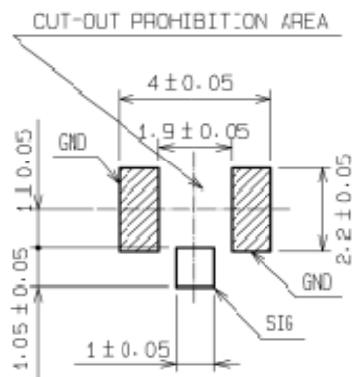

Appendix A

ADC	Analog-to -Digital Converter
AES	Advanced Encryption Standard
ANT	Antenna
AP	Wireless Access Point
BPSK	Binary Phase Shift Keying
DBPSK	Differential binary phase shift keying
DC	Direct Current
CCK	Complementary Code Keying
CDM	Charge Device Model
DHCP	Dynamic Host Configuration Protocol
CMOS	Complementary Metal Oxide Semiconductor
DNS	Determination of non-significance
DQPSK	Differential quadrature phase shift keying
DSSS	Demand assigned signaling and switching subsystem
DTIM	Digital Transmission Interface Module
EMSP	Enhanced Modular Signal Processor
ESD	Electrostatic Discharge
EVM	Error Vector Magnitude
FCC	Federal Communications Commission
FER	Floating Error
GND	Ground
GPIO	General Purpose Input/Output
HBM	Human body model
IEEE	Institute of Electrical and Electronics Engineers
IO	Input/output
IOT	Individual operation test
IPv4	Internet Protocol version 4
LED	Light-emitting diode
LVttl	Low Voltage Transistor Logic
MAC	Medium Access Control layer
MCS	Modulation and coding scheme
MCU	Microcontroller Unit
MIMO	Multiple-Input Multiple-Output
MSL	Multilayer Switching Protocol
NC	Numerical Control
NRST	Negative Reset
OFDM	Orthogonal Frequency Division Multiplexing
OSC	Oscillator
PCB	Printed Circuit Board
PIFA	Planar inverted F antenna
QPSK	Quadrature Phase Shift Keyin

RC	Resistance- capacitance
RF	Radio Frequency
RISC	Reduced Instruction Set Computer
RoHS	Restriction of Hazardous Substances
RX	Receiver
SDIO	Serial Digital Input/Output
SoC	System on Chip
SPDT	Single-Pole Double-Throw
SPI	Serial Peripheral Interface
STA	Spanning Tree Algorithm
TCP	Transfer Control Protocol
TKIP	Temporal Key Integrity Protocol
TX	Transmitter
IP	Internet Protocol
UART	Universal Asynchronous Receiver/Transmitter
UDP	User Datagram Protocol
UFL	a miniature coaxial RF connector for high-frequency signals manufactured by Hirose Electric Group
VSWR	Voltage Standing Wave Ratio
WEP	Wired Equivalent Privacy
WEPA	Wired Electronic Packaging Association
WEP64	64 bit Wired Equivalent Privacy
WEP128	128 bit Wired Equivalent Privacy
WPA2	Wi-Fi Protected Access 2
XTAL	External Crystal Oscillator
QAM	Quadrature Amplitude Modulation
802.11 b/g/n	The IEEE 802.11 b/g/n

Appendix B

[1] IEEE 802.11b/g/n- published IEEE 802.11-2007 wireless networking standard and published IEEE 802.11-2012 standard for Information technology - Clause 19 of the published IEEE 802.11-2007 standard, and Clause 19 of the published IEEE 802.11-2012 standard.

W	M	1	P	B	S
Category					
W=WIFI MODULE					
Chip manufacturer					
M=Marvell					
T=MTK					
Series					
M1=88W8782					
M2=88W8801					
T1=MT7681					
Package					
S=SMD					
P=PIM					
D=DIP					
F=CF					
H=Header					
Antenna					
B=PCB Antenna					
U=U.FL Jack					
H=Helical Antenna					
Shielding Case					
S=With Shielding Case					
Empty=Without Shielding Case					

FCC WARNINGS:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator& your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

In accordance with FCC Part 15C, this module is listed as a Single Modular Transmitter device. Therefore, the final host product must be submitted to [HangZhou Gubei Electronics Technology Co., Ltd.] for confirmation that the installation of the module into the host is in compliance with the regulations of FCC . Specifically, if an antenna other than the model documented in the Filing is used, a Class 2 Permissive Change must be filed with the FCC.

FCC Label Instructions

The outside of final products that contains this module device must display a label referring to the enclosed module. This exterior label can use wording such as the following: "Contains Transmitter Module FCC ID: 2ACDZ-WT1FBS" or "Contains FCC ID: 2ACDZ-WT1FBS" Any similar wording that expresses the same meaning may be used.

To satisfy FCC RF Exposure requirements for mobile and base station transmission devices, a separation distance of 20 cm or more should be maintained between the antenna of this device and persons during operation. To ensure compliance, operation at closer than this distance is not recommended. The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Contact Us



Hangzhou Gubei Electronics Technology Co., Ltd.

Room 106, Building 1, No. 611 Jianghong Road, Binjiang, Hangzhou, Zhejiang, P.R.China

T: +86-571-85159281 **F:** +86-571-86631817

E: intl@broadlink.com.cn **W:** www.ibroadlink.com.cn