





5000 mAh Wireless Power Bank FOLDABLE + MAGSAFE COMPATIBLE

USER MANUAL

IN THE BOX

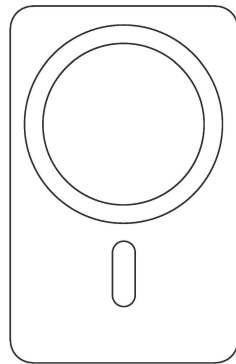


Magnetic Wireless Power Bank



USB-C to USB-C
Cable

PRODUCT PARTS

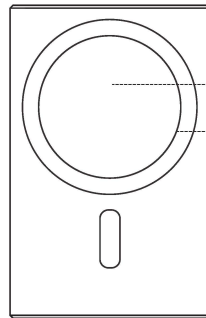

Wireless charging
area
Magnetic attraction
position

USB-C port

Power Button

Battery indicator
light

HOW TO USE

Check the remaining power:

Press the power button once, the White LED indicator lights will light up to indicate the remaining battery. The indicator lights will turn off automatically after about 30 seconds.

Charging the power bank:

Use the USB-C to USB-C cable to charge the power bank. A wall charger with USB-C port, or computer with USB-C port required. The indicator light will blink to show charging is in progress. When charging is done, the light will stop blinking and all 4 white lights will stay lit. Remove cable once charging is complete.

Charging phone by cable(non-wirelessly):


Use the charging cable to connect the power bank to your phones USB-C port and click the power button once. The power bank will begin to charge your phone. Once charging is complete remove you phone and the power bank will automatically power itself off.

NOTE: Charging your phone using the provided USB-C cable provides faster charge time than charging wirelessly.

HOW TO USE

Charging phone wirelessly:


Place your phone in the wireless charging area and click the power button once. The power bank will start charging your phone. Once charging is complete remove you phone and the power bank will automatically power itself off. See below diagram for correct placement of phone.

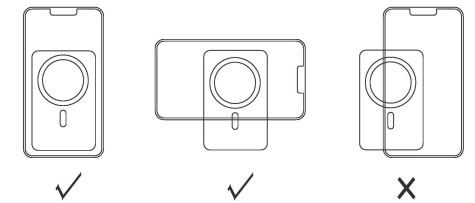

NOTE: Wireless charging is compatible with MagSafe compatible phone cases.


NOTE: The power bank is capable of charging two devices simultaneously. One through wireless charging and the other through wired charging.

HOW TO USE (Foldable Stand)

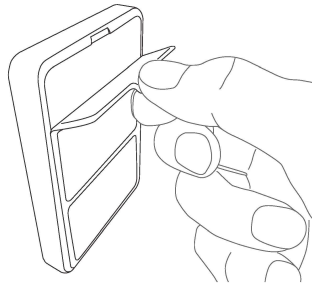

STEP 1:

Pull out the foldable stand. It is magnetically attached.

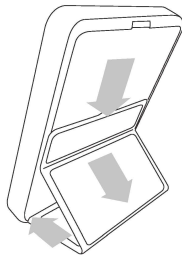

STEP 2:

Fold as shown in above diagram. Place phone on wireless charging area to begin use.

SPECS:

- Model: XYS-PB5MWT
- FCC ID: 2ACE5-PB5MWT
- Battery Capacity: 3.85V/5000mAh/18.5Wh
- Type-C Input: DC 5V/2.4A 9V/2A 12V/1.5A (Max)
- Type-C Output:5V/4.5A 9V/2.22A 12V/1.67A(22.5W)
- Wireless Charging Output:5W/7.5W/10W/15W(Max)
- 2 device simultaneous Charging Output:
USB-C port output: 5V 2.4A max, Wireless charger: 5W max. Total 12W+ 5W= 17W max
- Size: 2.6 x 3.9 x 0.4 in.
- Weight: 5 oz

Compatibility:

- Magnetically attaches to Apple iPhone 12 or later and AirPods models with MagSafe Charging Case.
- Works with MagSafe phone cases.
- Compatible with Qi charging (no magnetic experience): iPhone 8 or later, AirPods models with wireless charging case, and Android phones.
- For Android mobile phones complying with Qi standards use a MagSafe compatible phone case for magnetic experience.

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC ID: 2ACE5-PB5MWT

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Precautions

NOTE: Please read all instructions and warnings before using this product. Improper use will damage the product or endanger personal safety.

1. The charging contact surface on the back of the mobile phone does not contain metal substances, such as iron sheet, ring, metal protective case, etc.
2. When the mobile phone is charging, if intermittent charging or serious heating is found, it is likely that the receiving coil of the mobile phone is not fully aligned with the wireless charging coil, and there are metal foreign bodies in the protective sleeve of the mobile phone. Please try to cool the mobile phone, remove the protective sleeve, and then align it in the normal position.
3. This product has over-current protection function. If the product is used improperly, it will turn off or reduce the output power, reduce the charging speed and ensure safety. Please check whether the equipment is used improperly or not.
4. Do not place the product in water, fire, medium high temperature environment (more than 50°C) and low temperature environment (less than -20 °C). Do not let children play with, especially the accessories.
5. Please use a dry soft cloth to clean the surface. Do not use chemicals, soap or detergent.
6. Please don't dismantle the machine by yourself. The user's abnormal use or improper placement of this product may reduce the service life or damage the product, Therefore, the responsibility does not belong to the warranty responsibility or the manufacturer's responsibility. Please understand.
7. There is conversion rate in mobile power supply, so the battery capacity of mobile power supply is not equal to the rechargeable capacity.
8. Please charge your power regularly (at least 5 months is recommended) to maintain long service life.
9. Improper use of the product may easily result in damage to the product itself or endanger the safety of user and their property.
10. Non professionals are strictly prohibited to decompose this product.
11. Avoid using electrical appliances or loads that exceed the output current of the product, the circuit will be protected, no output.
12. Avoid knocking, throwing, trampling, squeezing, etc.

LIMITED One (1) Year Limited Warranty

S. Bower Inc.™ One (1) Year Limited Warranty: This warranty gives you specific legal rights and you may have other rights which vary from state to state.

The S. Bower Inc.™ Limited Warranty is a voluntary manufacturer's warranty provided to the consumer. This warranty provides rights separate to rights provided by consumer law, including but not limited to those relating to non-conforming goods. S. Bower Inc.™ One-Year Limited Warranty benefits are in addition to, and not instead of, rights provided by consumer law and it does not exclude, limit or suspend a buyer's rights arising from consumer law. Consumers have the right to choose whether to claim service under the S. Bower Inc.™ One-Year Limited Warranty or under their consumer law rights. The S. Bower Inc.™ One-Year Limited Warranty terms and conditions shall not apply to consumer law claims, contact your local consumer organization. Please note: All claims made under the S. Bower Inc.™ One-Year Limited Warranty will be governed by the terms set out in this warranty document. S. Bower Inc.™ warrants to the product owner that this product will be free against defects in materials and workmanship for a period of ONE (1) YEAR from the date of original retail purchase when used in accordance with S. Bower Inc.™'s user manual. Under this warranty, you will be able to send your claims and defective product to S. Bower Inc.™, via freight prepaid, along with proof of purchase, and will be repaired or replaced, based on S. Bower Inc.™ sole discretion. Repair and/or replacement may be made with new or refurbished product components at S. Bower Inc.™ sole discretion. This limited warranty does not cover failures due to abuse, accidental damage or when repairs have been made or attempted by anyone other than S. Bower Inc.™ personnel. A defective product meeting the warranty conditions set forth herein will be replaced or repaired at no charge in either of two ways: The first, which will result in exchanges only, is to return the product to the retailer from whom it was purchased (provided that the store is a participating retailer). Returns should be made within the time period of the retailer's policy for exchanges. Proof of purchase may be required. Please check with the retailer for its specific return policy regarding time limits for returns or exchanges. The second option is to send the product (prepaid freight) to S. Bower Inc.™ corporate offices located at S. Bower Inc. 38-09 43rd Avenue 1st Floor Long Island City, NY 11101 for repair or replacement at S. Bower Inc.™'s option. Proof of purchase is required. Include name, return address, and issues that you are experiencing with S. Bower Inc.™ products. All other guarantees, express or implied, are hereby disclaimed. This warranty does not cover products sold outside of the United States.