

TEST REPORT

Reference No...... : WTD21D11124412W001
FCC ID : 2A3CR-SWB
Applicant..... : CME offshore SAL
Address..... : Hechaime Bldg, 2nd floor, Sami El-Solh Ave, Badaro, Beirut, Lebanon
Manufacturer : CME Electronics Technology Co., LTD
Address..... : Suite B, 18th Floor, Jingwange No. 303, Qinglv Road South, Gongbei, Zhuhai 519020, Guangdong Province, China
Product..... : Smart Water Bottle
Model(s)..... : SWB-MFBLE01
Standards..... : FCC CFR47 Part 15.247: 2017
Date of Receipt sample : 2021-11-16
Date of Test : 2021-11-16 to 2021-11-23
Date of Issue..... : 2021-11-23
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China
Tel: +86-769-2267 6998

Compiled by:

Levi Xiao

Levi Xiao / Project Engineer

Approved by:



Daniel Liu

Daniel Liu / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	6
BT BLE:.....	6
4.4 TEST MODE	7
4.5 TEST FACILITY	8
5 TEST SUMMARY	9
6 EQUIPMENT USED DURING TEST	10
6.1 EQUIPMENTS LIST	10
6.2 DESCRIPTION OF SUPPORT UNITS	11
6.3 MEASUREMENT UNCERTAINTY	11
6.4 TEST EQUIPMENT CALIBRATION	11
7 CONDUCTED EMISSION	12
7.1 E.U.T. OPERATION	12
7.2 EUT SETUP	12
7.3 MEASUREMENT DESCRIPTION	12
7.4 CONDUCTED EMISSION TEST RESULT	13
8 RADIATED EMISSIONS.....	15
8.1 EUT OPERATION.....	15
8.2 TEST SETUP	16
8.3 SPECTRUM ANALYZER SETUP	17
8.4 TEST PROCEDURE	18
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	18
8.6 SUMMARY OF TEST RESULTS	19
9 DUTY CYCLE.....	22
10 CONDUCTED SPURIOUS EMISSIONS.....	23
10.1 TEST PROCEDURE.....	23
10.2 TEST RESULT	24
11 BAND EDGE MEASUREMENT	27
11.1 TEST PRODUCE	27
11.2 TEST RESULT	28
12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	29
12.1 TEST PROCEDURE:.....	29
12.2 TEST RESULT:	29
13 MAXIMUM PEAK OUTPUT POWER	33
13.1 TEST PROCEDURE:.....	33
13.2 TEST RESULT:	34
14 POWER SPECTRAL DENSITY	37
14.1 TEST PROCEDURE:.....	37
14.2 TEST RESULT:	37
15 ANTENNA REQUIREMENT	40

16 RF EXPOSURE..... 41

17 PHOTOGRAPHS OF TEST SETUP AND EUT..... 42

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD21D11124412 W001	2021-11-16	2021-11-16 to 2021-11-23	2021-11-23	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Smart Water Bottle
Model(s):	SWB-MFBLE01
Model Description:	N/A

4.2 Details of E.U.T.

Operation Frequency:	2402~2480MHz
Max. RF output power:	-0.60dBm
Type of Modulation:	GFSK
Antenna installation:	internal permanent antenna
Antenna Gain:	0dBi
Ratings:	DC 3.7V For Battery(Working) DC 5.0V For Adapter Charging

4.3 Channel List

BT BLE:

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2440MHz	2480MHz

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

4.5 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2021-07-26	2022-07-25
2.	LISN	R&S	ENV216	101215	2021-07-26	2022-07-25
3.	Cable	Top	TYPE16(3.5M)	-	2021-07-26	2022-07-25
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2021-07-26	2022-07-25
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2021-07-26	2022-07-25
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2021-07-26	2022-07-25
4.	Cable	LARGE	RF300	-	2021-07-26	2022-07-25
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2021-04-26	2022-04-25
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2021-04-19	2022-04-18
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2021-08-23	2022-08-22
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2021-04-26	2022-04-25
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2021-04-30	2022-04-29
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2021-07-30	2022-07-29
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2021-04-26	2022-04-25
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2021-04-26	2022-04-25
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2021-04-26	2022-04-25
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2021-11-01	2022-10-30
3	Amplifier	Compliance direction systems inc	PAP-0203	22024	2021-04-26	2022-04-25
4	Cable	HUBER+SUHNER	CBL2	525178	2021-04-26	2022-04-25

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2021-07-26	2022-07-25
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2021-07-26	2022-07-25
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2021-04-26	2022-04-25

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Adapter	Huawei	AP0501000	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	$\pm 1 \times 10^{-7}$ Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7 dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207
Test Method: ANSI C63.10:2013
Test Result: PASS
Frequency Range: 150kHz to 30MHz
Limit:

Frequency (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50
*Decreases with the logarithm of the frequency.		


7.1 E.U.T. Operation

Operating Environment:
Temperature: 22.4 °C
Humidity: 53.7 % RH
Atmospheric Pressure: 101.8kPa
Test Voltage: AC 120V, 60Hz
EUT Operation:

The test was performed in Transmitting mode, the worst test data (8DPSK modulation High channel) were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

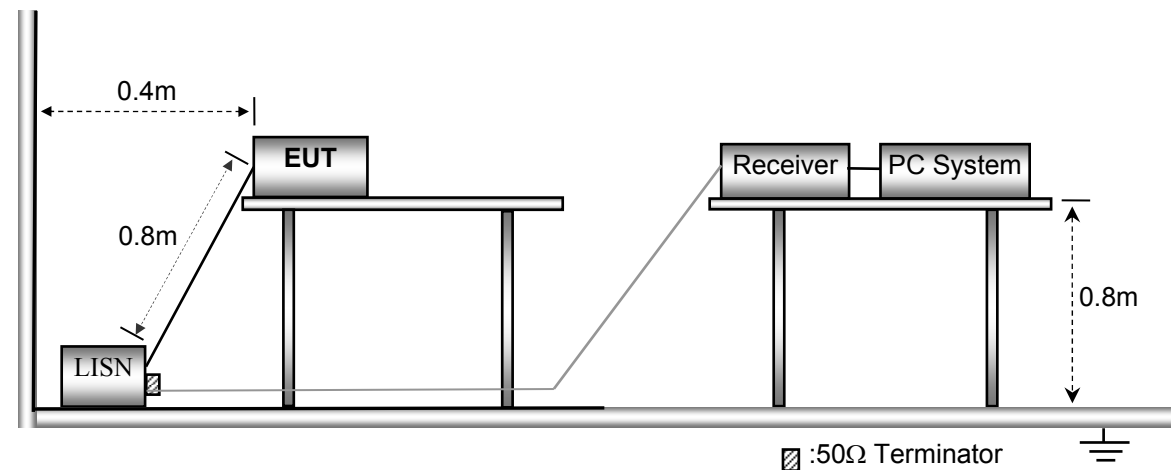


7.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result

Remark: Only the worst data (8DPSK modulation High channel mode) were reported
Live line:

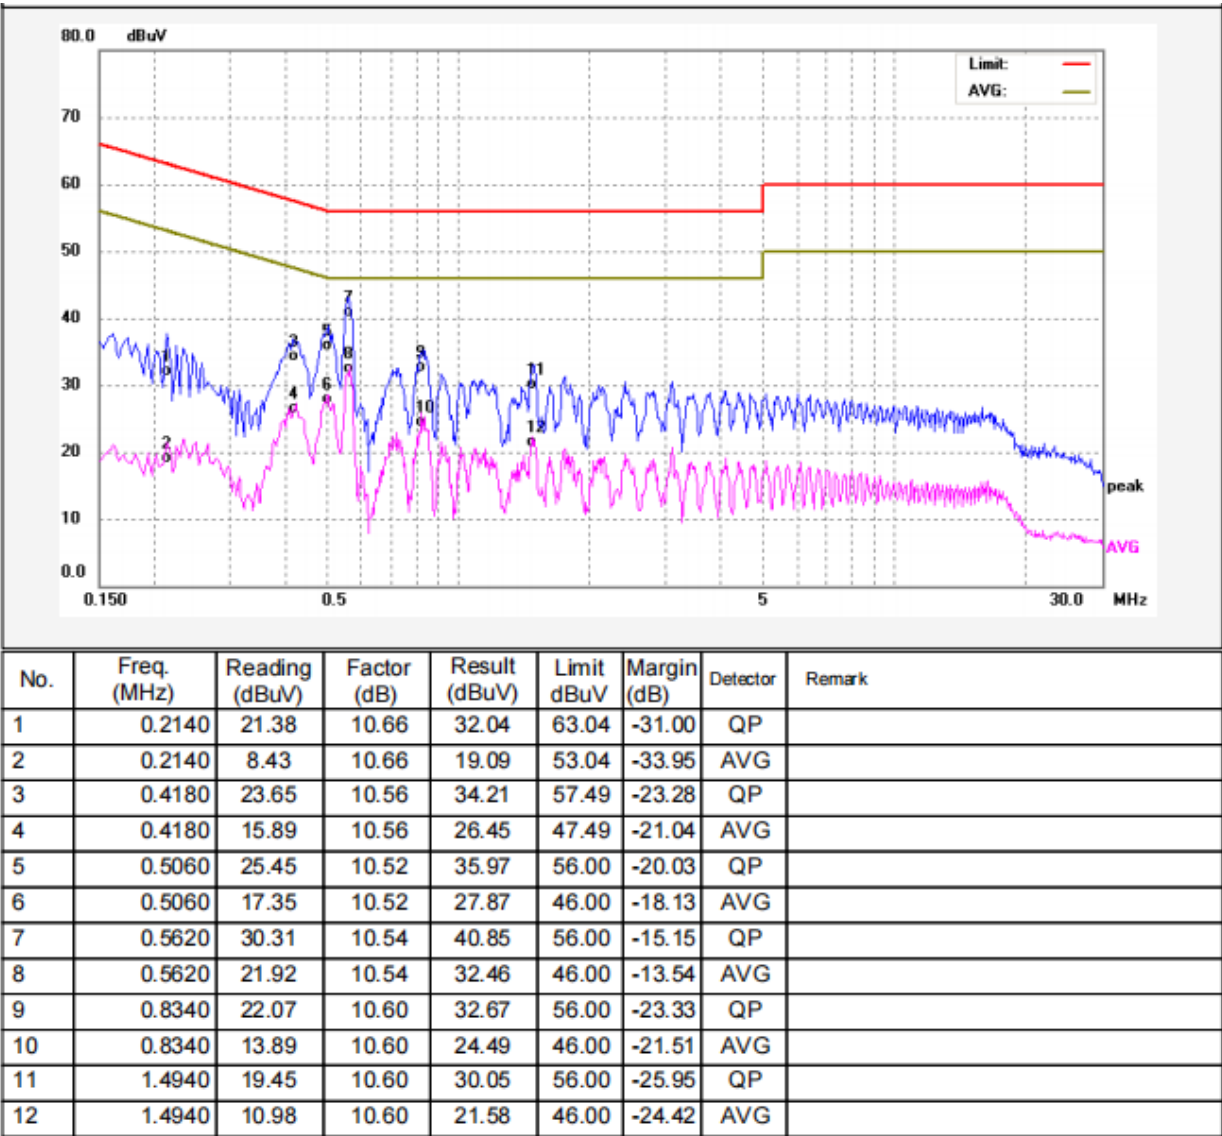

Neutral line:

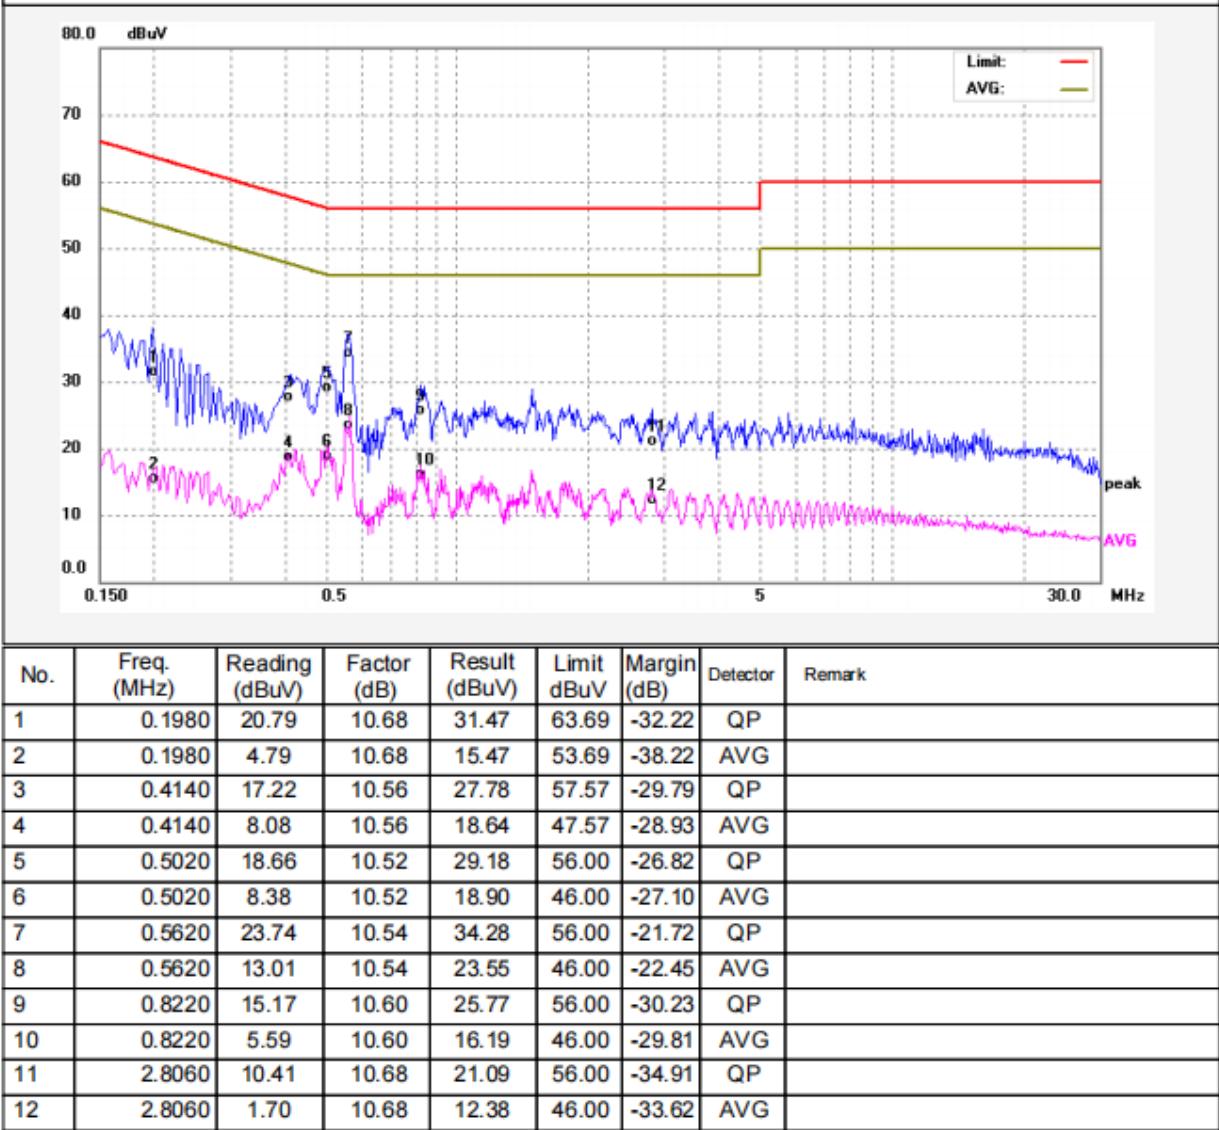

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

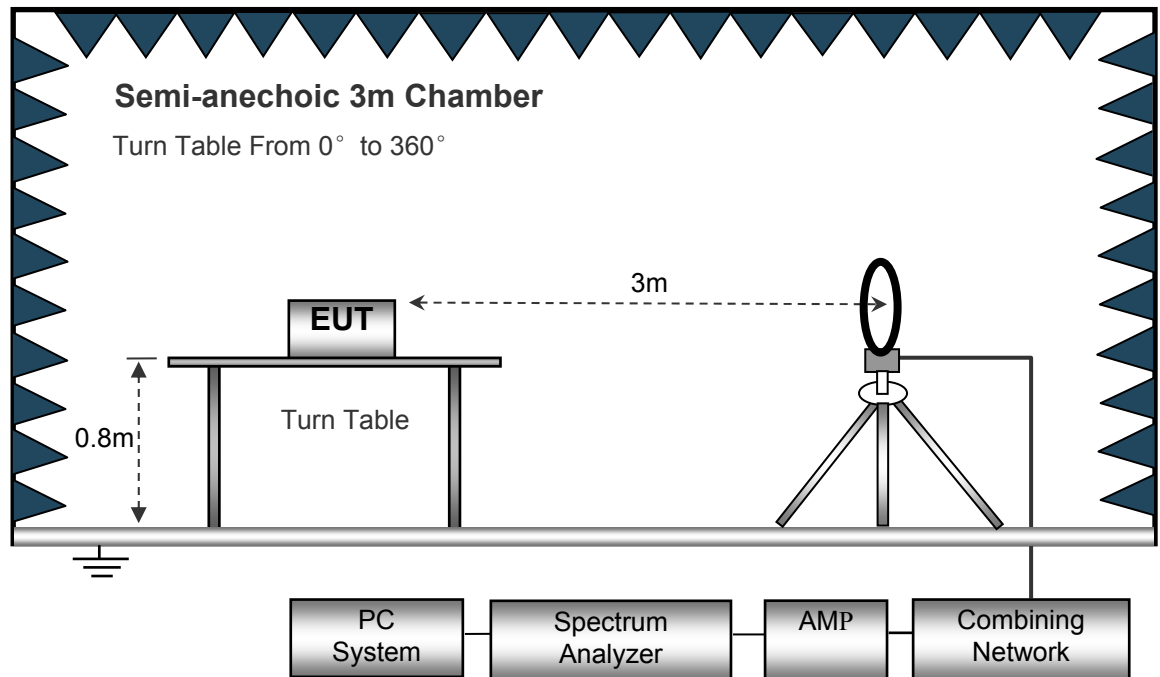

The test setup for emission measurement from 30 MHz to 1 GHz.

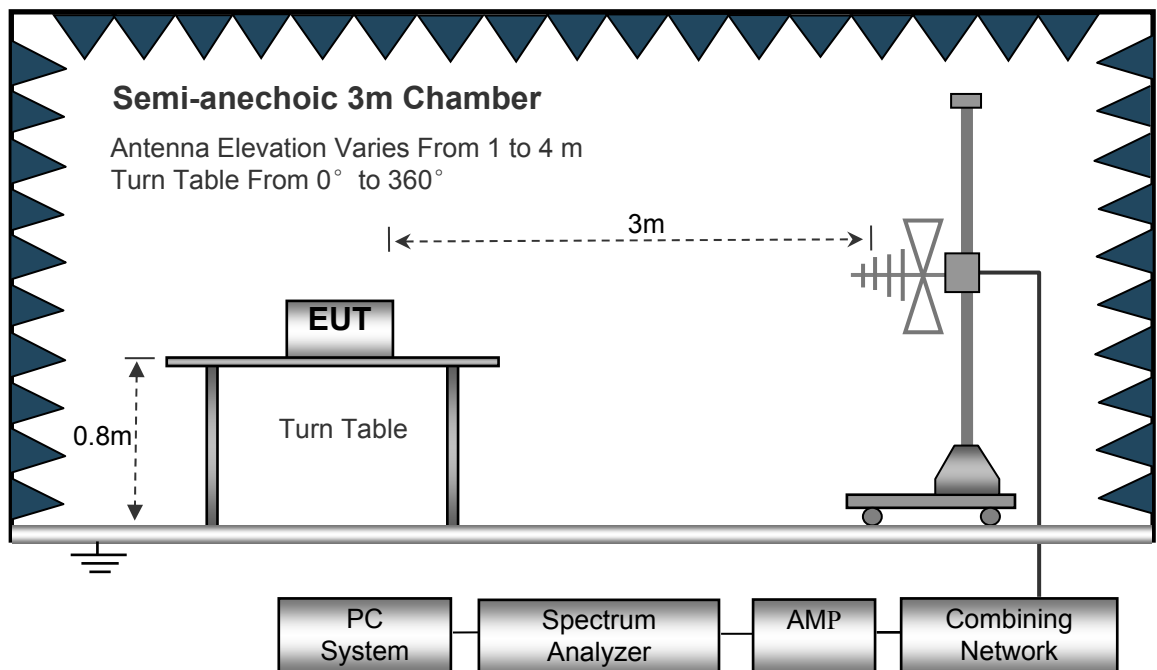

The test setup for emission measurement above 1 GHz.

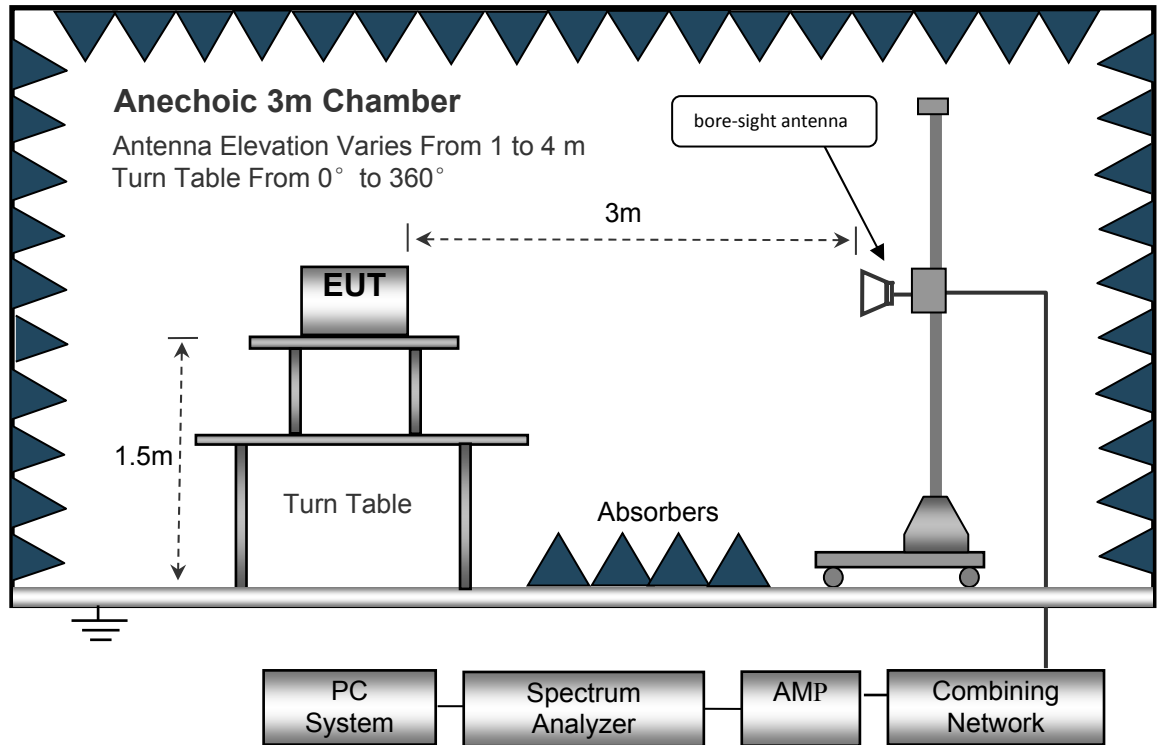

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth.....10kHz
 Video Bandwidth.....10kHz
 Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 DetectorPK
 Resolution Bandwidth.....100kHz
 Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
 DetectorPK
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....3MHz
 DetectorAve.
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Test Frequency: 9KHz~26MHz

Remark: only the worst data (GFSK modulation Low channel mode) were recorded.

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.257	25.36	QP	21.84	40.00	7.20	29.54	-22.34
15.647	25.14	QP	21.35	40.00	6.49	29.54	-23.05
25.612	25.09	QP	20.67	40.00	5.76	29.54	-23.78

Test Frequency : 26MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 8GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel 2402MHz									
269.17	33.44	QP	137	2.0	H	-13.35	20.09	46.00	-25.91
269.17	41.64	QP	311	1.5	V	-13.35	28.29	46.00	-17.71
4804.00	43.46	PK	319	1.5	V	-1.06	42.40	74.00	-31.60
4804.00	41.01	Ave	319	1.5	V	-1.06	39.95	54.00	-14.05
7206.00	45.55	PK	107	2.0	H	1.33	46.88	74.00	-27.12
7206.00	36.41	Ave	107	2.0	H	1.33	37.74	54.00	-16.26
2336.45	45.02	PK	229	1.3	V	-13.19	31.83	74.00	-42.17
2336.45	39.00	Ave	229	1.3	V	-13.19	25.81	54.00	-28.19
2387.57	44.04	PK	302	1.1	H	-13.14	30.90	74.00	-43.10
2387.57	37.61	Ave	302	1.1	H	-13.14	24.47	54.00	-29.53
2487.81	43.37	PK	324	1.2	V	-13.08	30.29	74.00	-43.71
2487.81	37.80	Ave	324	1.2	V	-13.08	24.72	54.00	-29.28

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Middle Channel 2440MHz									
269.17	32.33	QP	4	1.2	H	-13.35	18.98	46.00	-27.02
269.17	41.44	QP	240	1.5	V	-13.35	28.09	46.00	-17.91
4880.00	43.46	PK	246	1.7	V	-0.62	42.84	74.00	-31.16
4880.00	40.21	Ave	246	1.7	V	-0.62	39.59	54.00	-14.41
7320.00	44.14	PK	194	1.4	H	2.21	46.35	74.00	-27.65
7320.00	35.04	Ave	194	1.4	H	2.21	37.25	54.00	-16.75
2341.07	45.14	PK	344	1.6	V	-13.19	31.95	74.00	-42.05
2341.07	38.38	Ave	344	1.6	V	-13.19	25.19	54.00	-28.81
2383.77	44.42	PK	64	1.6	H	-13.14	31.28	74.00	-42.72
2383.77	36.91	Ave	64	1.6	H	-13.14	23.77	54.00	-30.23
2489.98	44.29	PK	190	1.9	V	-13.08	31.21	74.00	-42.79
2489.98	36.22	Ave	190	1.9	V	-13.08	23.14	54.00	-30.86

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK High Channel 2480MHz									
269.17	31.66	QP	222	1.1	H	-13.35	18.31	46.00	-27.69
269.17	38.46	QP	271	1.6	V	-13.35	25.11	46.00	-20.89
4960.00	43.23	PK	121	1.2	V	-0.24	42.99	74.00	-31.01
4960.00	40.55	Ave	121	1.2	V	-0.24	40.31	54.00	-13.69
7440.00	43.73	PK	147	1.6	H	2.84	46.57	74.00	-27.43
7440.00	36.29	Ave	147	1.6	H	2.84	39.13	54.00	-14.87
2332.68	45.13	PK	305	1.1	V	-13.19	31.94	74.00	-42.06
2332.68	38.67	Ave	305	1.1	V	-13.19	25.48	54.00	-28.52
2376.85	44.98	PK	114	1.6	H	-13.14	31.84	74.00	-42.16
2376.85	36.51	Ave	114	1.6	H	-13.14	23.37	54.00	-30.63
2493.15	44.24	PK	297	1.8	V	-13.08	31.16	74.00	-42.84
2493.15	37.60	Ave	297	1.8	V	-13.08	24.52	54.00	-29.48

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

Remark: All test data were reported and only the worst case (low channel mode) test graphs were showed in test report

9 Duty Cycle

Type of Modulation	Packets	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
GFSK	1-DH1	3	3	1.00	100.00	0.00	0.00


Remark:

Duty cycle=On Time/period;

Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;

Average factor= $20 \log_{10} \text{Duty cycle}$

GFSK Low Channel

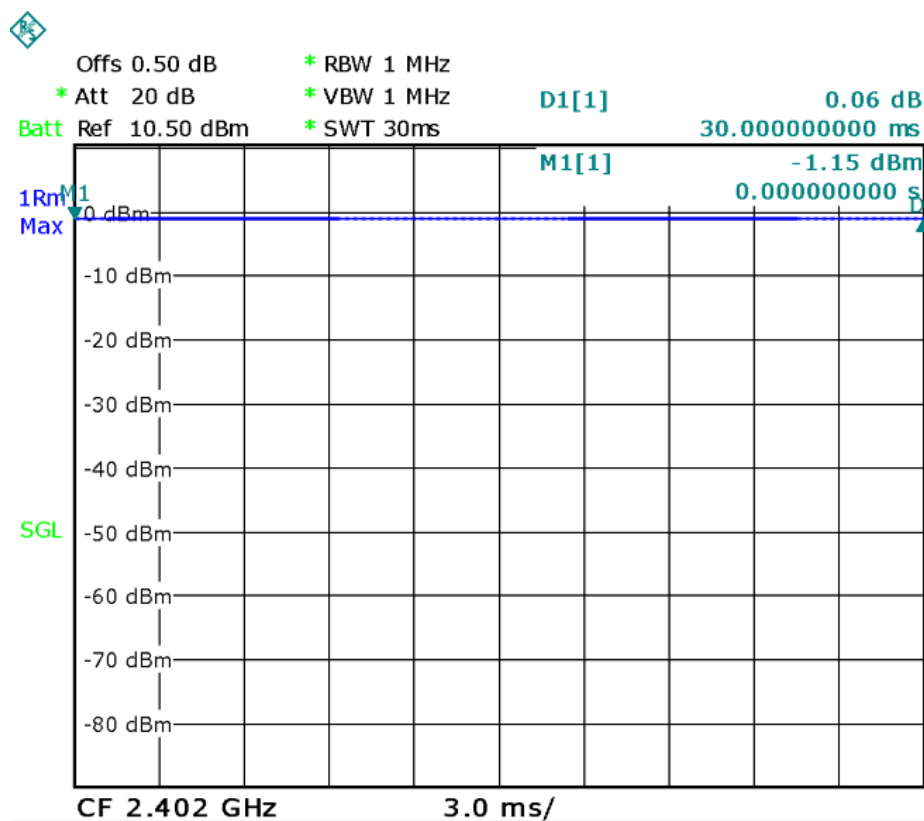

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto



Detector function = peak, Trace = max hold

Above 30MHz:


RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


10.2 Test Result

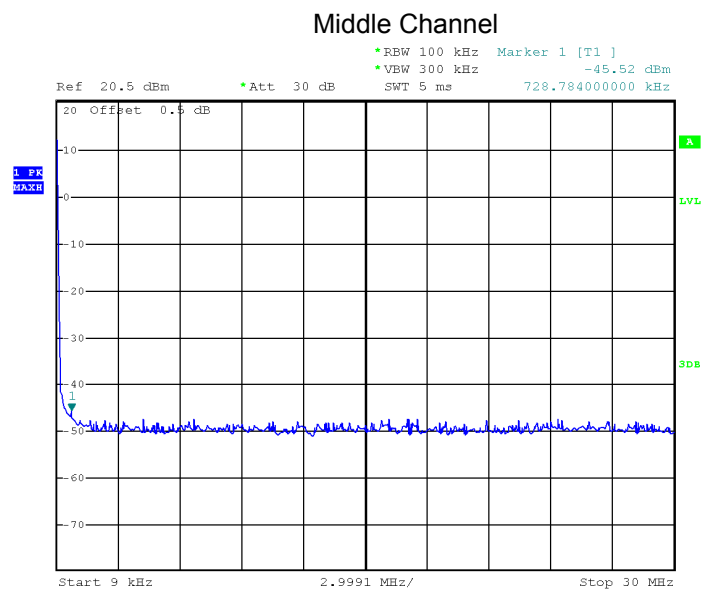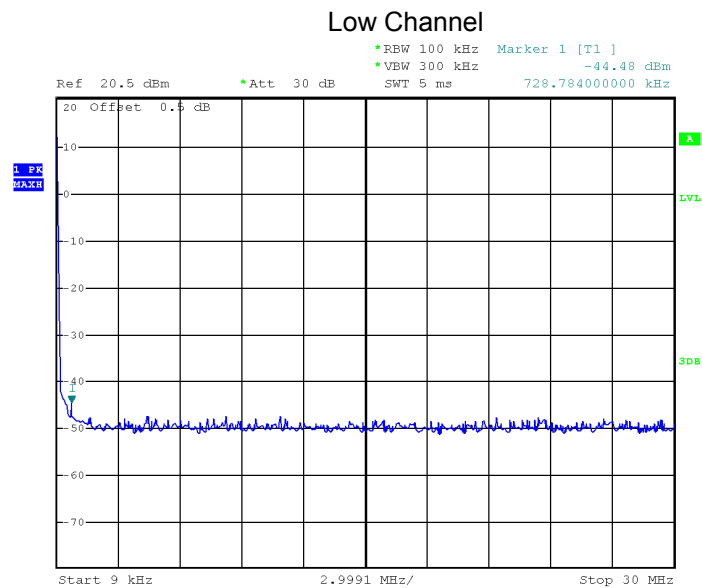


High Channel

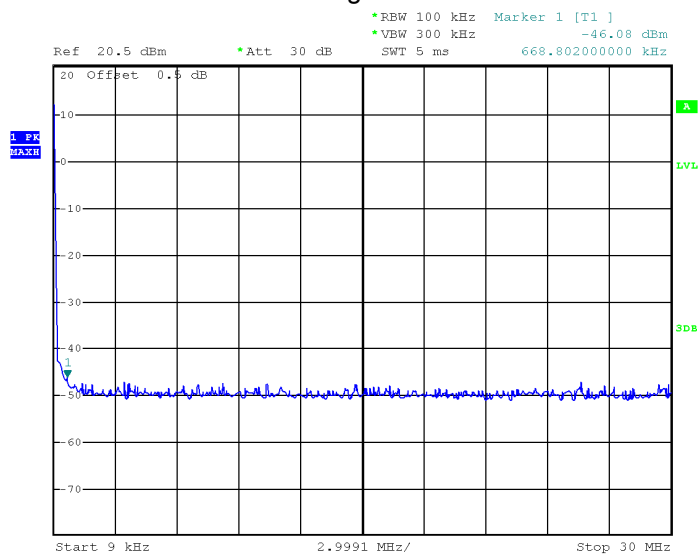


Low Channel

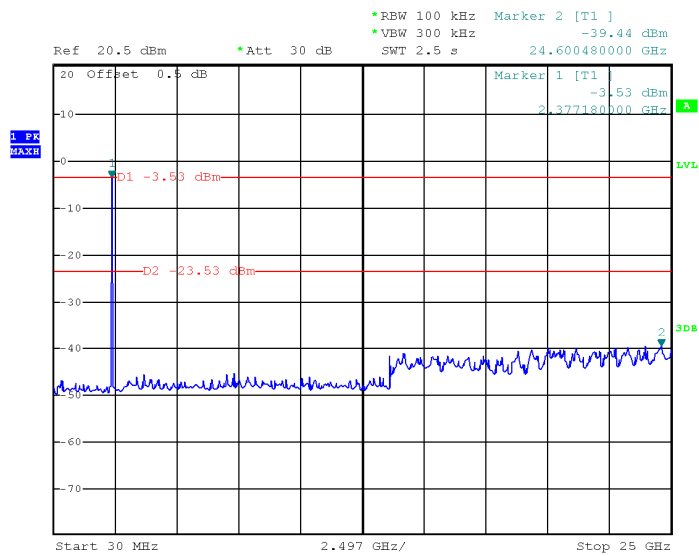

Middle Channel

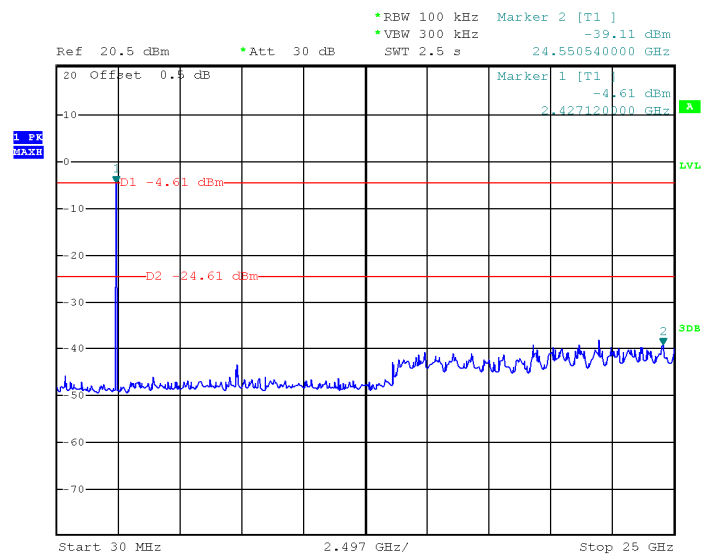

High Channel

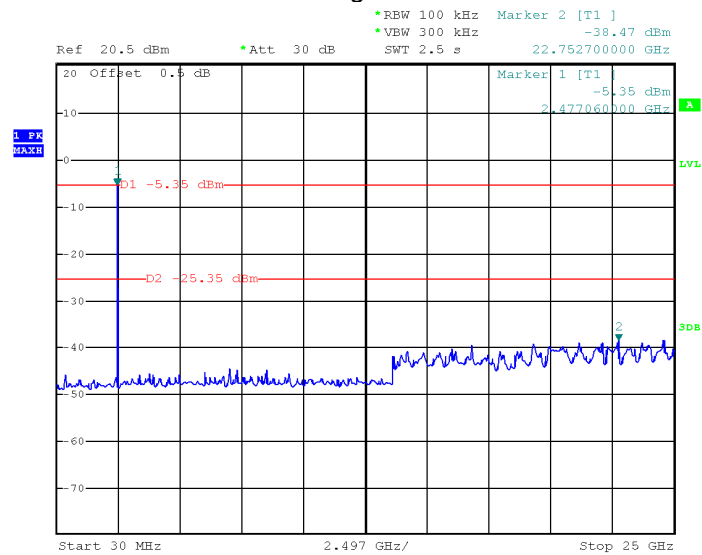

11 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.2 Test Result

Test result plots shown as follows:

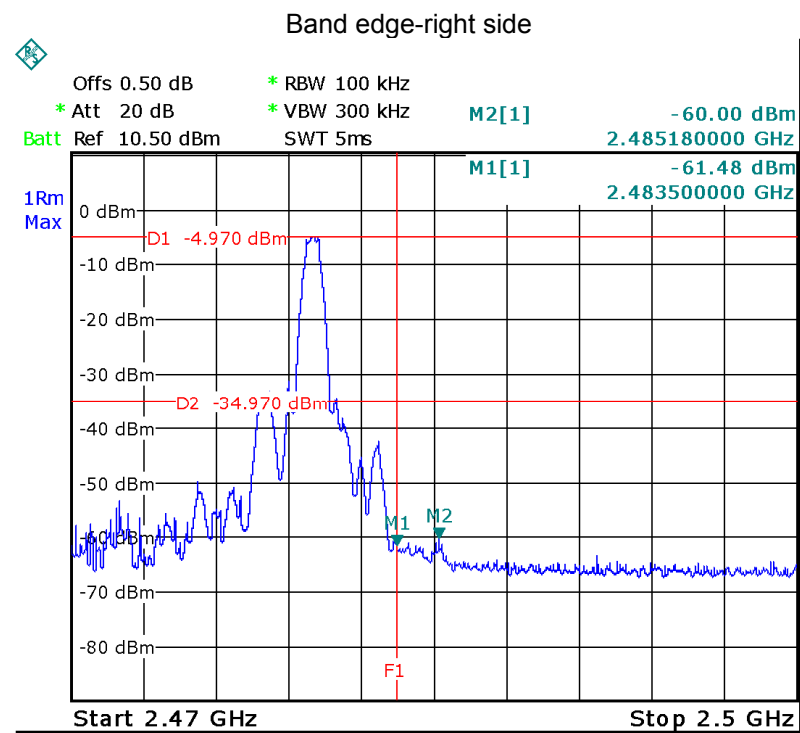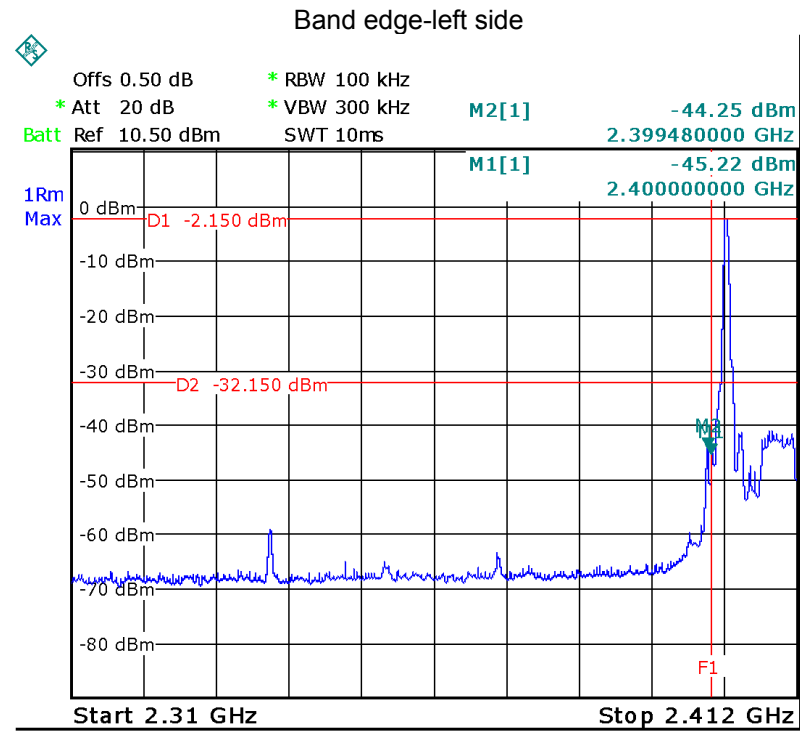

12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


12.2 Test Result:

Operation mode	Test Channel	Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (kHz)
GFSK(TX)	Channel 0	0.695	1.054	500
	Channel 19	0.707	1.054	500
	Channel 40	0.719	1.054	500


Test result plot:


6 dB Bandwidth

Channel 0

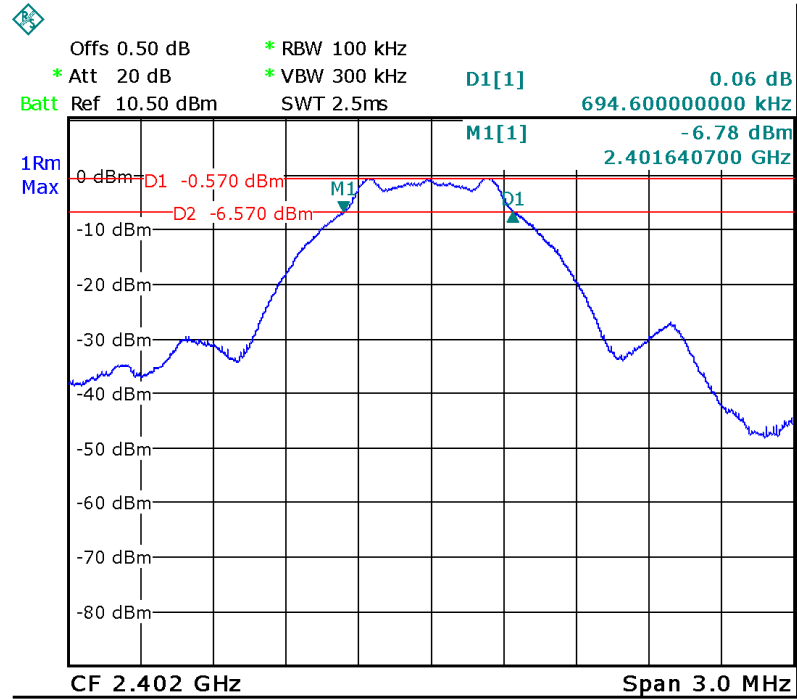




Channel 19

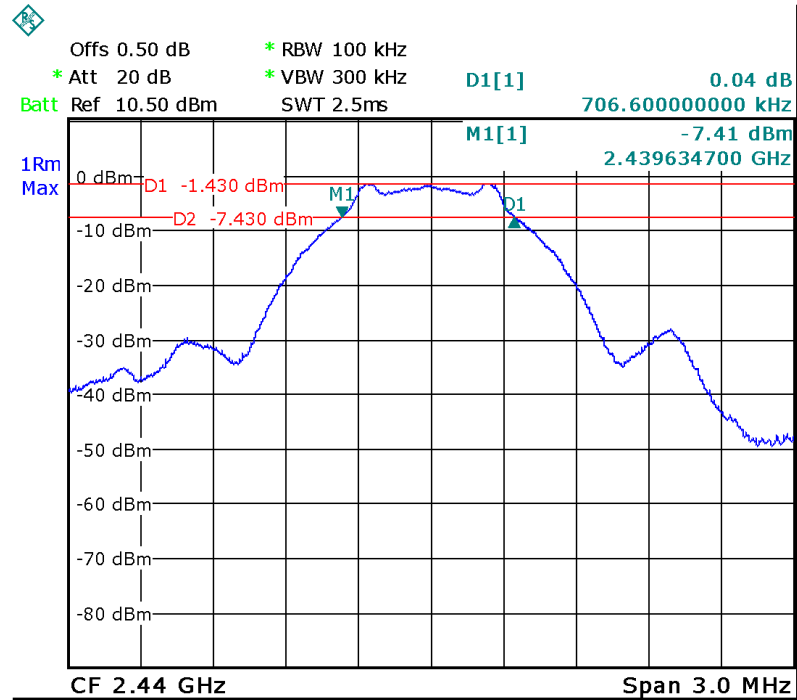

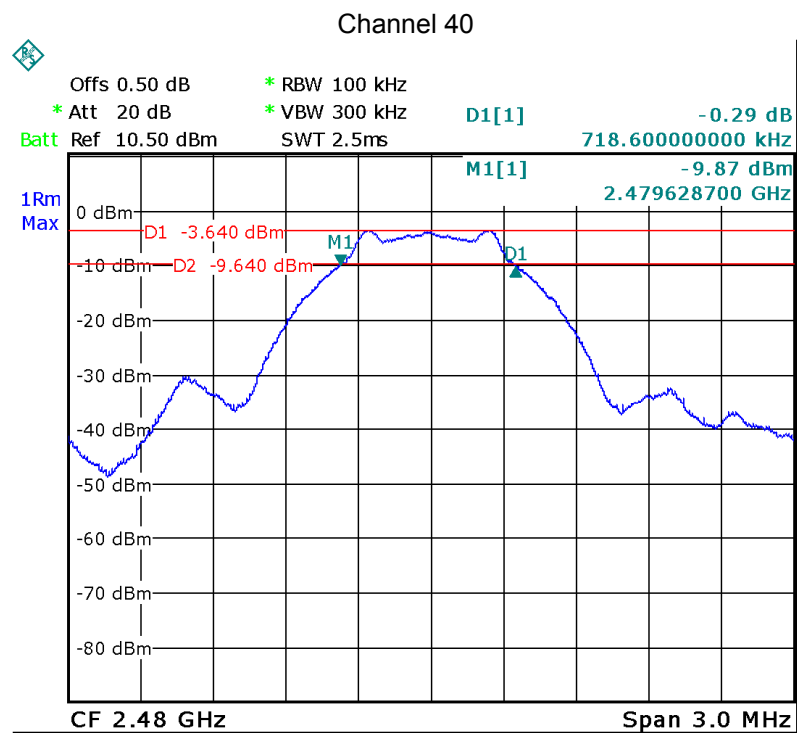

99% Bandwidth

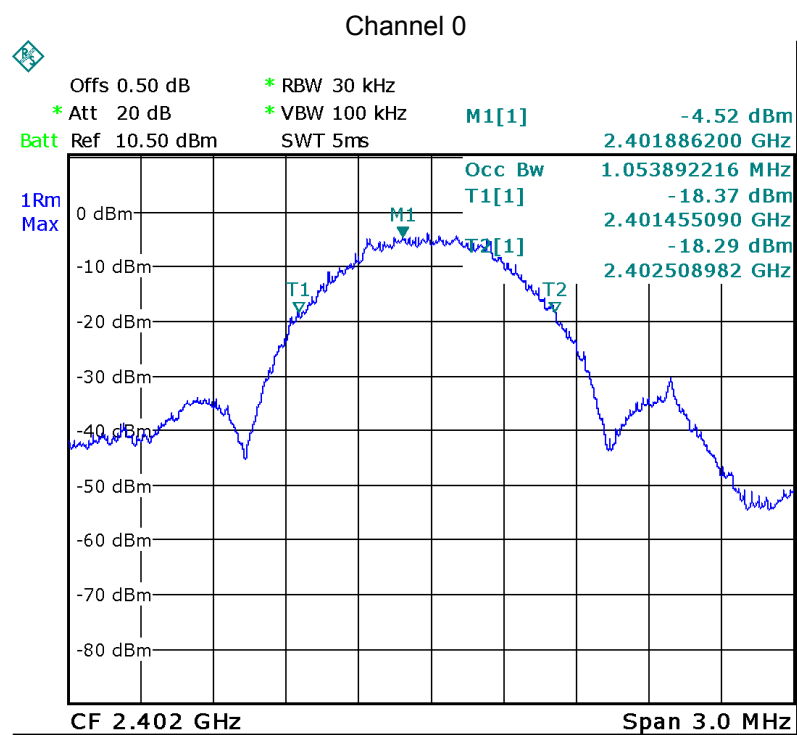

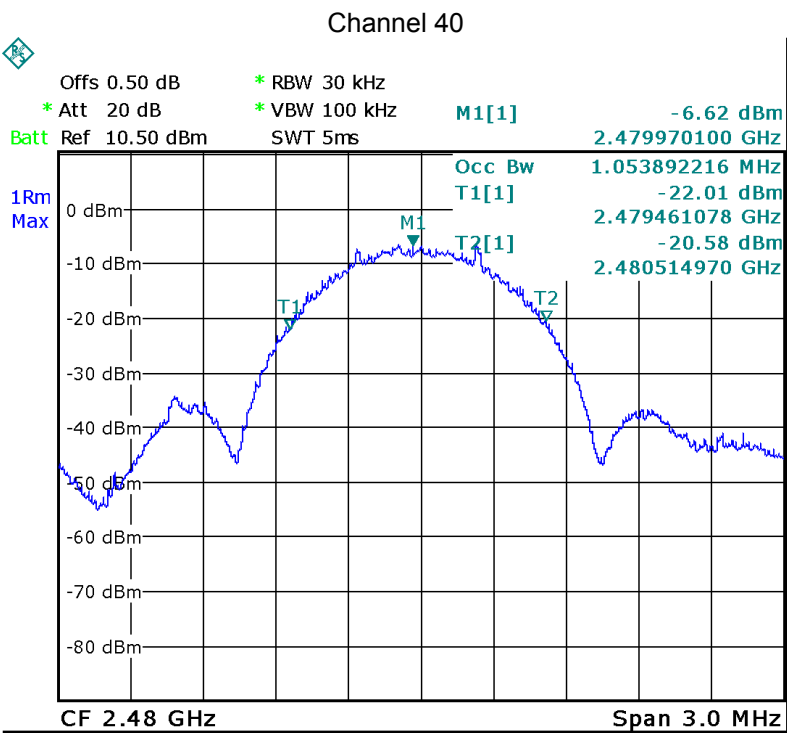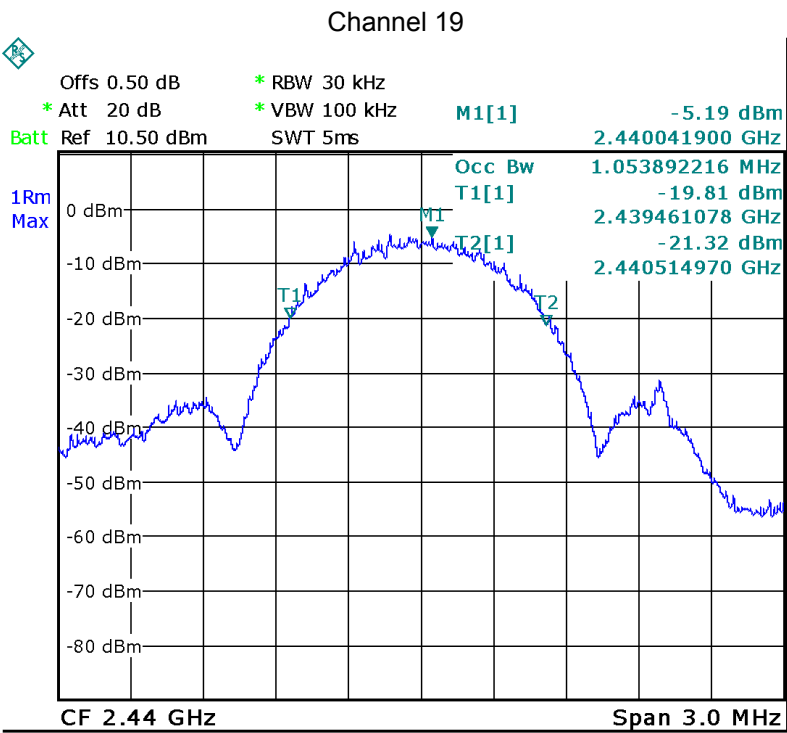

13 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019

13.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019

section 9.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the $RBW \geq DTS$ bandwidth.
- b) Set $VBW \geq 3 \times RBW$.
- c) Set $span \geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 9.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.


- a) Set the $RBW = 1 \text{ MHz}$.
- b) Set the $VBW \geq 3 \times RBW$
- c) Set the $span \geq 1.5 \times DTS$ bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

13.2 Test Result:


Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
GFSK(TX)	Low-2402	-0.60	1W/30dBm
	Middle-2440	-1.09	1W/30dBm
	High-2480	-3.11	1W/30dBm


Test Plot

Channel 0

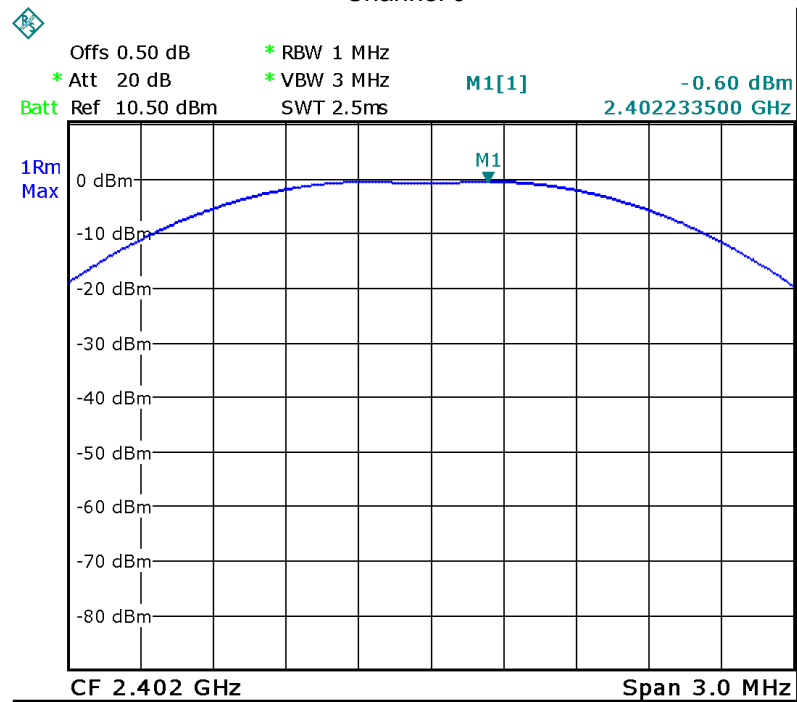

Channel 19

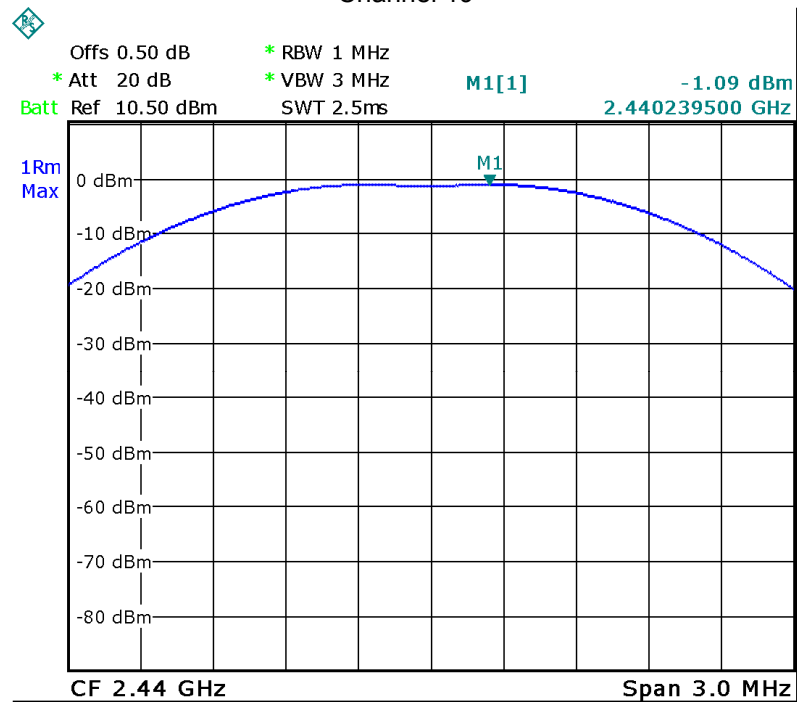

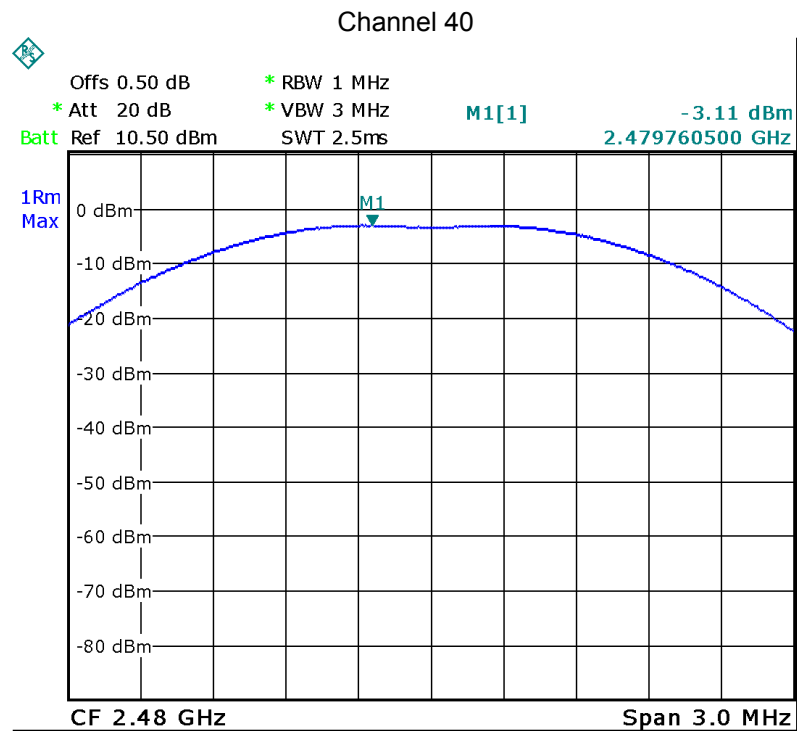

14 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019

14.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 10.2


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

14.2 Test Result:


Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
GFSK(TX)	Low-2402	-15.53	8dBm per 3kHz
	Middle-2440	-17.64	8dBm per 3kHz
	High-2480	-19.57	8dBm per 3kHz


Test Plot

Channel 0

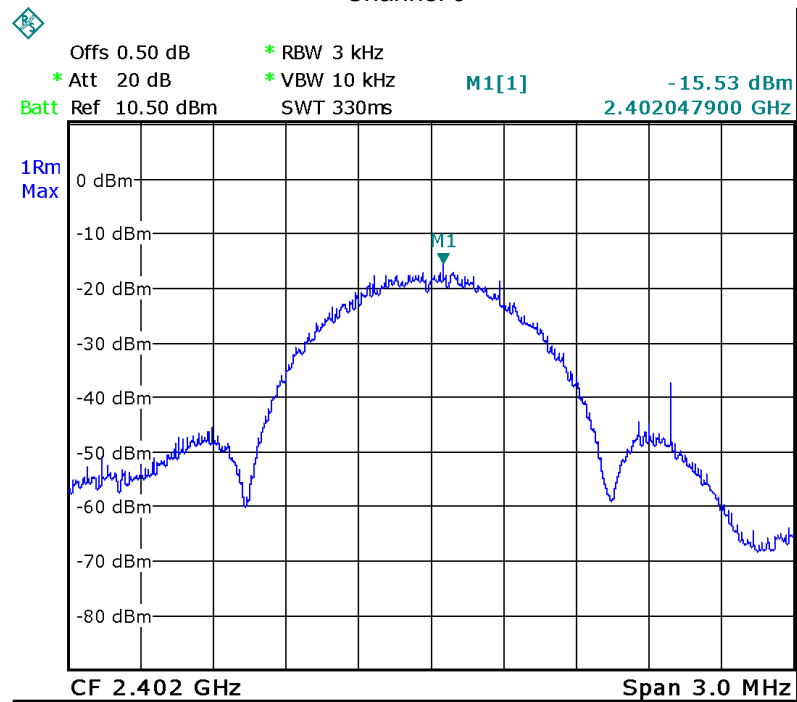

Channel 19

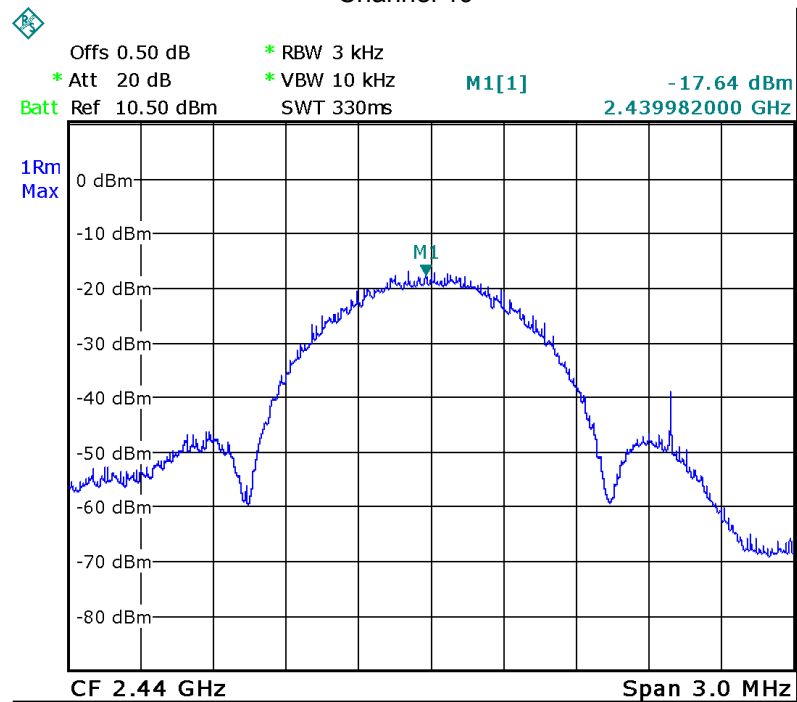

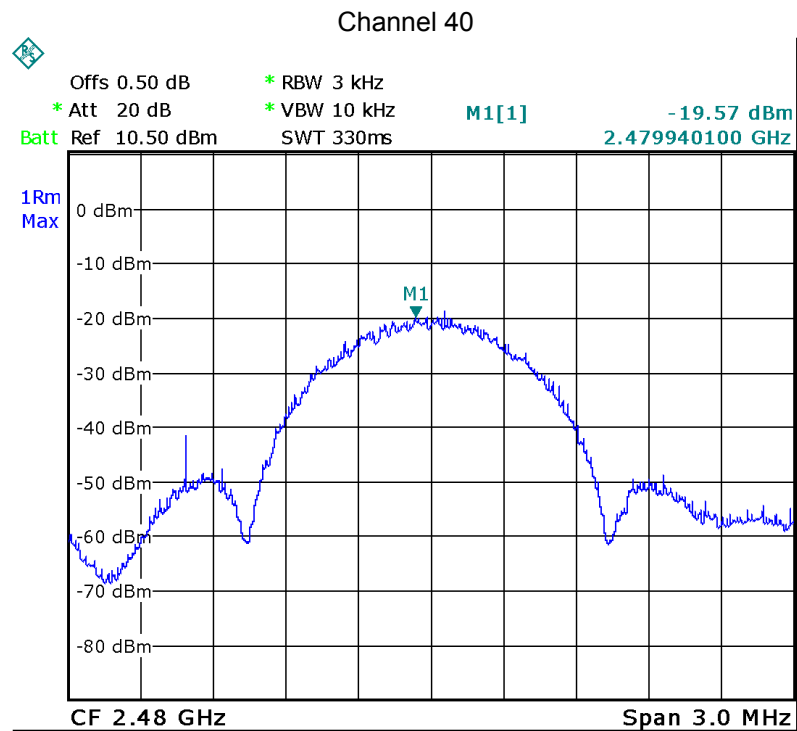

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

16 RF Exposure

Remark: refer to MPE test report: WTD21D11124412W002.

17 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix- SWB-MFBLE01 -Photos.

=====End of Report=====