



FCC RADIO REPORT

Report No: STS1503019F01

Issued for

Social Mobile Telecommunications

16400 NW 2nd Ave. #201 Miami, Florida 33169

Product Name:	GSM PHONE
Brand Name:	Breeze
Model No.:	FB201N
Series Model:	Breeze III
FCC ID:	2ACLMFB201N
Test Standard:	FCC Part 22H and 24E

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.

1/F, Building B, Zhuoke Science Park, Chongqing Road, Fuyong, Baoan District, Shenzhen, China

TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





TEST RESULT CERTIFICATION

Applicant's name Social Mobile Telecommunications

Address 16400 NW 2nd Ave. #201 Miami, Florida 33169

Manufacture's Name SMT TELECOMM HK LIMITED

Address Unit C 8/F, CHARMHILL CTR 50 HILLWOOD RD TST KL

Product name GSM PHONE

Band name Breeze

Model and/or type reference ... FB201N

Standards FCC Part 22H and 24E

Test procedure TIA 603 C

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....

Date of performance of tests 12 Mar. 2015 ~19 Mar. 2015

Date of Issue 20 Mar. 2015


Test Result **Pass**

Testing Engineer : 

(Jin Ming)

Report writing : 

(Sunny zheng)

Authorized Signatory : 

(Bovey Yang)





TABLE OF CONTENTS

1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 PRODUCT DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	7
2.3 SPECIAL ACCESSORIES	7
2.4 EUT CONFIGURATION	7
2.5 EUT EXERCISE	7
2.6 CONFIGURATION OF EUT SYSTEM	7
2.7 MEASUREMENT INSTRUMENTS	8
3. DESCRIPTION OF TEST MODES	9
4. OUTPUT POWER	10
4.1 CONDUCTED OUTPUT POWER	10
4.2 PEAK-TO-AVERAGE RADIO (PAR) OF TRANSMITTER	13
4.3 RADIATED OUTPUT POWER	16
5. SPURIOUS EMISSION	19
5.1 SPURIOUS EMISSION	19
5.2 RADIATED SPURIOUS EMISSION	21
6. FREQUENCY STABILITY	25
6.1 MEASUREMENT METHOD	25
6.2 PROVISIONS APPLICABLE	26
6.3 MEASUREMENT RESULT	27
7. OCCUPIED BANDWIDTH	31
7.1 MEASUREMENT METHOD	31
7.2 PROVISIONS APPLICABLE	31
7.3 MEASUREMENT RESULT	31
8. EMISSION BANDWIDTH	33
8.1 MEASUREMENT METHOD	33
8.2 PROVISIONS APPLICABLE	33
8.3 MEASUREMENT RESULT	33
9. BAND EDGE	35
9.1 MEASUREMENT METHOD	35
9.2 PROVISIONS APPLICABLE	35
9.3 MEASUREMENT RESULT	35



APPENDIX I	36
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION	36
APPENDIX II	51
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)	51
EMISSION BANDWIDTH (-26dbc)	51
APPENDIX III	63
TEST PLOTS FOR BAND EDGES	63
PHOTOS OF TEST SETUP	69





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of ansi C63.10: 2009; TIA 603 C and fcc cfr 47 rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	22.913(a) / 24.232 (b)
		Radiated output power	
2	Spurious Emission	Conducted spurious emission	2.1051 / 22.917 / 24.238
		Radiated spurious emission	
3	Frequency Stability		2.1055 /24.235
4	Occupied Bandwidth		2.1049 (h)(i)
5	Emission Bandwidth		22.917(b) / 24.238 (b)
6	Band Edge		22.917(b) / 24.238 (b)

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F, Building 2, Zhuoke Science Park, Chongqing Road, Fuyong, Bao'an District, Shenzhen, China.

FCC Registration No.: 842334; IC Registration No.: 12108A-1

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	GSM PHONE
Model No:	FB201N
Series Model:	Breeze III
Model difference:	only the different in mode name.
Hardware version:	6132_MB_V1.1
Software version:	--
FCC ID:	2ACLMFB201N
Frequency Bands:	<input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS 1900 (U.S. Bands) <input type="checkbox"/> GSM 900 <input type="checkbox"/> DCS 1800 (Non-U.S. Bands) U.S. Bands: <input type="checkbox"/> UMTS FDD Band II <input type="checkbox"/> UMTS FDD Band V Non-U.S. Bands: <input type="checkbox"/> UMTS FDD Band I <input type="checkbox"/> UMTS FDD Band VIII
Max RF Output Power:	GSM850:31.33dBm,GSM1900:27.20dBm
Type of Emission:	GSM(850):250KGXW: GSM(1900):246KGXW GPRS(850):245KGXW; GPRS(1900):249KGXW EDGE(850):246KG7W: EDGE(1900):247KG7W
SIM CARD	Support single card
Antenna:	PIFA Antenna
Antenna gain:	0 dBi
Power Supply:	DC 3.7V by battery or DC 5.0V supplied by adapter
Battery parameter:	DC 3.7V/600mAh
Adapter Input:	AC100-240V, 50-60Hz, 150mA
Adapter Output:	DC 5.0V,600mA
GPRS/EDGE Class	Multi-Class12
Extreme Vol. Limits:	DC3.7 V to 4.2 V (Nominal DC3.7V)
Extreme Temp. Tolerance	-20°C to +50°C
** Note: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	



2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for fcc id: 2ACLMFB201N filing to comply with the fcc part 22H&24E.

2.3 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with eut intended for fcc grant together.

2.4 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.5 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.6 CONFIGURATION OF EUT SYSTEM

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

EUT

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	GSM PHONE	FB201N	FCC ID: 2ACLMFB201N	EUT

Note: All the accessories have been used during the test. the following "EUT" in setup diagram means EUT system.



2.7 MEASUREMENT INSTRUMENTS

The radiated emission testing was performed according to the procedures of ansi C 63.10: 2009; TIA 603C and fcc cfr 47 rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4407B	MY50140340	2014.10.25	2015.10.24
Test Receiver	R&S	ESCI	101427	2014.10.25	2015.10.24
Communication Tester	Agilent	8960	MY48360751	2014.10.25	2015.10.24
Communication Tester	R&S	CMU200	112012	2014.10.25	2015.10.24
Test Receiver	R&S	ESCI	102086	2014.10.25	2015.10.24
Loop Antenna	Daze	ZN30900N	SEL0097	2014.10.27	2015.10.26
Bilog Antenna	Teseq	CBL6111D	34678	2014.10.27	2015.10.26
Horn Antenna	R&S	9120D	152265	2014.10.27	2015.10.26



3. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS/EDGE850, GSM/GPRS/EDGE1900, modes have been tested during the test. the worst condition (GPRS/EDGE 850) be recorded in the test report if no other modes test data.





4. OUTPUT POWER

4.1 CONDUCTED OUTPUT POWER

4.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS/EDGE850, GSM/GPRS/EDGE1900,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

4.1.2 MEASUREMENT RESULT

Conducted Output Power Limits for GSM 850 MHZ		
Mode	Nominal Peak Power	Tolerance(dB)
GSM850	31 dBm	+/- 1

Conducted Output Power Limits for PCS 1900 MHZ		
Mode	Nominal Peak Power	Tolerance(dB)
GSM1900	26.5 dBm	+/- 1



GSM 850:

Mode	Frequency (MHz)	Peak Power	AVG Power
GSM850	824.2	31.08	30.72
	836.6	31.33	31.01
	848.8	30.93	30.68
GPRS850 (1 Slot)	824.2	31.07	30.74
	836.6	31.32	31.04
	848.8	30.92	30.71
GPRS850 (2 Slot)	824.2	29.89	29.55
	836.6	30.16	29.84
	848.8	29.91	29.60
GPRS850 (3 Slot)	824.2	27.88	27.67
	836.6	28.13	27.77
	848.8	27.80	27.54
GPRS850 (4 Slot)	824.2	26.88	26.60
	836.6	27.02	26.70
	848.8	26.68	26.39
EDGE850 (1 Slot)	824.2	31.04	30.77
	836.6	31.31	31.10
	848.8	30.9	30.51
EDGE850 (2 Slot)	824.2	29.92	29.69
	836.6	30.29	30.02
	848.8	29.86	29.65
EDGE850 (3 Slot)	824.2	27.90	27.69
	836.6	28.23	27.91
	848.8	27.83	27.48
EDGE850 (4 Slot)	824.2	26.80	26.56
	836.6	27.04	26.81
	848.8	26.73	26.53



PCS 1900:

Mode	Frequency (MHz)	Peak Power	AVG Power
GSM1900	1850.2	25.90	25.57
	1880	26.87	26.56
	1909.8	27.20	26.90
GPRS1900 (1 Slot)	1850.2	25.88	25.60
	1880	26.86	26.65
	1909.8	27.18	26.98
GPRS1900 (2 Slot)	1850.2	24.76	24.36
	1880	25.86	25.50
	1909.8	26.12	25.86
GPRS1900 (3 Slot)	1850.2	22.64	22.42
	1880	23.70	23.32
	1909.8	24.09	23.71
GPRS1900 (4 Slot)	1850.2	21.54	21.21
	1880	22.61	22.39
	1909.8	22.93	22.73
EDGE1900 (1 Slot)	1850.2	25.86	25.52
	1880	26.84	26.45
	1909.8	27.16	26.78
EDGE1900 (2 Slot)	1850.2	24.76	24.41
	1880	25.64	25.40
	1909.8	26.05	25.79
EDGE1900 (3 Slot)	1850.2	22.57	22.25
	1880	23.49	23.09
	1909.8	23.98	23.69
EDGE1900 (4 Slot)	1850.2	21.54	21.27
	1880	22.41	22.04
	1909.8	22.95	22.59



4.2 PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER

4.2.1 STANDARD APPLICABLE

ACCORDING TO §24.232(D), POWER MEASUREMENTS FOR TRANSMISSIONS BY STATIONS AUTHORIZED UNDER THIS SECTION MAY BE made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the PEAK-TO-AVERAGE RATIO (PAR) OF THE TRANSMISSION MAY NOT EXCEED 13 DB.


4.2.2 TEST EQUIPMENT LIST AND DETAILS

Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4407B	MY50140340	2014.10.25	2015.10.24
Communication Tester	Agilent	8960	MY48360751	2014.10.25	2015.10.24
Communication Tester	R&S	CMU200	112012	2014.10.25	2015.10.24
TEST RECEIVER	R&S	ESCI	102086	2014.10.25	2015.10.24

4.2.3 TEST PROCEDURE

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded.

TEST CONFIGURATION FOR THE EMISSION BANDWIDTH TESTING:

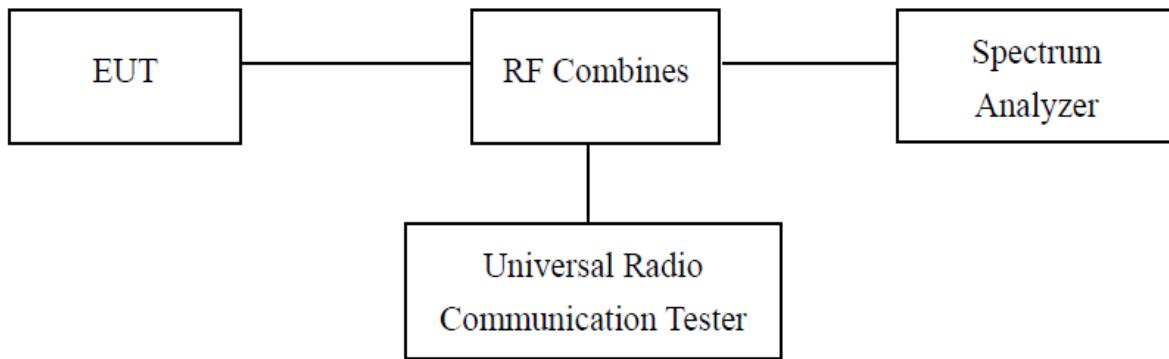

4.2.4 ENVIRONMENTAL CONDITIONS

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar



4.2.5 SUMMARY OF TEST RESULTS

GSM 850:

Mode	Frequency (MHz)	Peak Power	AVG Power	PAR	Limit
GSM850	824.2	31.08	30.72	0.36	13
	836.6	31.33	31.01	0.32	13
	848.8	30.93	30.68	0.25	13
GPRS850 (1 Slot)	824.2	31.07	30.74	0.33	13
	836.6	31.32	31.04	0.28	13
	848.8	30.92	30.71	0.21	13
GPRS850 (2 Slot)	824.2	29.89	29.55	0.34	13
	836.6	30.16	29.84	0.32	13
	848.8	29.91	29.6	0.31	13
GPRS850 (3 Slot)	824.2	27.88	27.67	0.21	13
	836.6	28.13	27.77	0.36	13
	848.8	27.8	27.54	0.26	13
GPRS850 (4 Slot)	824.2	26.88	26.6	0.28	13
	836.6	27.02	26.7	0.32	13
	848.8	26.68	26.39	0.29	13
EDGE850 (1 Slot)	824.2	31.04	30.77	0.27	13
	836.6	31.31	31.1	0.21	13
	848.8	30.9	30.51	0.39	13
EDGE850 (2 Slot)	824.2	29.92	29.69	0.23	13
	836.6	30.29	30.02	0.27	13
	848.8	29.86	29.65	0.21	13
EDGE850 (3 Slot)	824.2	27.9	27.69	0.21	13
	836.6	28.23	27.91	0.32	13
	848.8	27.83	27.48	0.35	13
EDGE850 (4 Slot)	824.2	26.8	26.56	0.24	13
	836.6	27.04	26.81	0.23	13
	848.8	26.73	26.53	0.2	13



PCS 1900:

Mode	Frequency (MHz)	Peak Power	AVG Power	PAR	Limit
GSM1900	1850.2	25.9	25.57	0.33	13
	1880	26.87	26.56	0.31	13
	1909.8	27.20	26.9	0.30	13
GPRS1900 (1 Slot)	1850.2	25.88	25.6	0.28	13
	1880	26.86	26.65	0.21	13
	1909.8	27.18	26.98	0.20	13
GPRS1900 (2 Slot)	1850.2	24.76	24.36	0.40	13
	1880	25.86	25.5	0.36	13
	1909.8	26.12	25.86	0.26	13
GPRS1900 (3 Slot)	1850.2	22.64	22.42	0.22	13
	1880	23.70	23.32	0.38	13
	1909.8	24.09	23.71	0.38	13
GPRS1900 (4 Slot)	1850.2	21.54	21.21	0.33	13
	1880	22.61	22.39	0.22	13
	1909.8	22.93	22.73	0.20	13
EDGE1900 (1 Slot)	1850.2	25.86	25.52	0.34	13
	1880	26.84	26.45	0.39	13
	1909.8	27.16	26.78	0.38	13
EDGE1900 (2 Slot)	1850.2	24.76	24.41	0.35	13
	1880	25.64	25.4	0.24	13
	1909.8	26.05	25.79	0.26	13
EDGE1900 (3 Slot)	1850.2	22.57	22.25	0.32	13
	1880	23.49	23.09	0.40	13
	1909.8	23.98	23.69	0.29	13
EDGE1900 (4 Slot)	1850.2	21.54	21.27	0.27	13
	1880	22.41	22.04	0.37	13
	1909.8	22.95	22.59	0.36	13



4.3 RADIATED OUTPUT POWER

4.3.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS/EDGE850, GSM/GPRS/EDGE1900,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The measurements procedures specified in TIA-603C-2009 were applied.

- 1.In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
- 2.The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $AR_{pl}=P_{in} + 2.15 - P_r$. The AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power=PM_{ea}+AR_{pl}$
- 3.The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4.From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5.The EUT is then put into continuously transmitting mode at its maximum power level.
- 6.Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7.This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).
- 8.ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

9.Both Horizontal And Vertical Antenna Polarities Were Tested And Performed Pretest To Three Orthogonal Axis. The Worst Case Emissions Were Reported

4.3.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850	<=38.45 dBm (7W)
PCS 1900	<=33 dBm (2W)



4.3.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM850	824.2	26.14	Horizontal	Pass
	824.2	28.18	Vertical	Pass
	836.6	26.15	Horizontal	Pass
	836.6	28.05	Vertical	Pass
	848.8	26.03	Horizontal	Pass
	848.8	28.14	Vertical	Pass

Radiated Power (ERP) for GPRS 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GPRS850	824.2	25.45	Horizontal	Pass
	824.2	27.43	Vertical	Pass
	836.6	25.40	Horizontal	Pass
	836.6	27.57	Vertical	Pass
	848.8	25.40	Horizontal	Pass
	848.8	27.46	Vertical	Pass

Radiated Power (ERP) for EDGE 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
EDGE850	824.2	25.23	Horizontal	Pass
	824.2	27.28	Vertical	Pass
	836.6	25.25	Horizontal	Pass
	836.6	27.22	Vertical	Pass
	848.8	25.31	Horizontal	Pass
	848.8	27.16	Vertical	Pass



Radiated Power (EIRP) for PCS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
PCS1900	1850.2	21.46	Horizontal	Pass
	1850.2	23.63	Vertical	Pass
	1880.0	21.44	Horizontal	Pass
	1880.0	23.57	Vertical	Pass
	1909.8	21.63	Horizontal	Pass
	1909.8	23.50	Vertical	Pass

Radiated Power (EIRP) for GPRS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GPRS 1900	1850.2	20.65	Horizontal	Pass
	1850.2	22.63	Vertical	Pass
	1880.0	20.51	Horizontal	Pass
	1880.0	22.51	Vertical	Pass
	1909.8	20.63	Horizontal	Pass
	1909.8	22.57	Vertical	Pass

Radiated Power (EIRP) for EDGE 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
EDGE 1900	1850.2	21.48	Horizontal	Pass
	1850.2	23.51	Vertical	Pass
	1880.0	21.64	Horizontal	Pass
	1880.0	23.55	Vertical	Pass
	1909.8	21.62	Horizontal	Pass
	1909.8	23.48	Vertical	Pass



5. SPURIOUS EMISSION

5.1 SPURIOUS EMISSION

5.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 20 GHz,. For GSM850, data taken from 30 MHz to 9 GHz.

2. Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM/GPRS/EDGE 850 MHz	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of GSM/GPRS/EDGE 1900 MHz	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8



5.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

5.1.3 MEASUREMENT RESULT

PLEASE REFER TO : APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

Note: 1. Below 30MHz no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.




5.2 RADIATED SPURIOUS EMISSION

5.2.1 MEASUREMENT METHOD


The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GSM/GPRS/EDGE850, GSM/GPRS/EDGE1900) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The procedure of radiated spurious emissions is as follows:

- a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = Rx \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$ The SA is calibrated using following setup.

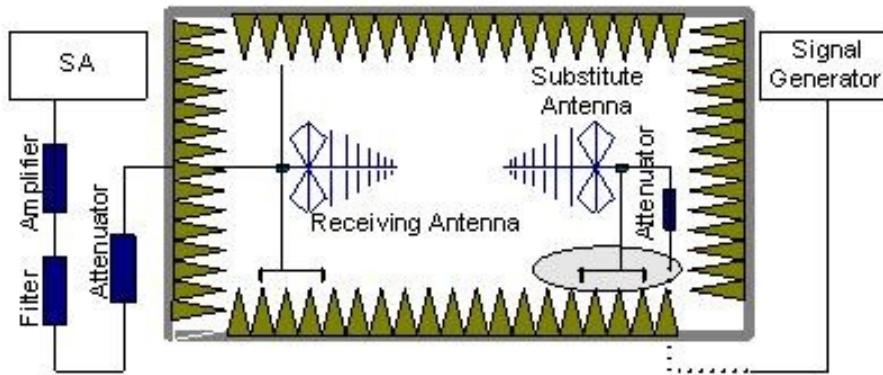

- b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

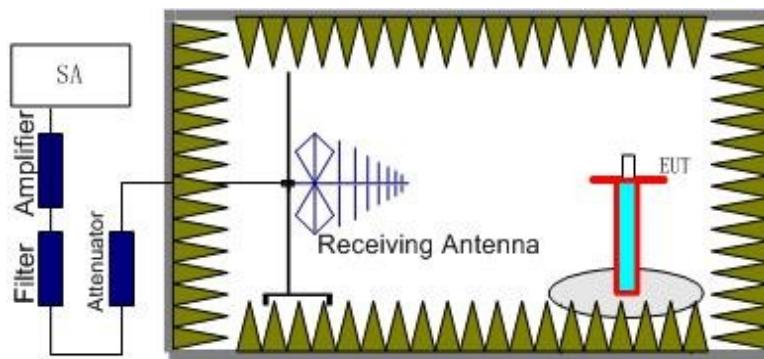



Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{RPL} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: $\text{Power} = P_{Mea} + A_{RPL}$

5.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode.



5.2.3 MEASUREMENT RESULT

GSM 850:

The Worst Test Results Channel 128/824.2 MHz						
Frequency(MHz)	Power(dBm)	AR _{PL} (dBm)	P _{Mea} (dBm)	Limit	Margin	Polarity
1648.422	-35.32	-4.65	-39.97	-13	-26.97	Horizontal
2472.612	-36.41	-2.21	-38.62	-13	-25.62	Horizontal
3296.821	-31.64	0.21	-31.43	-13	-18.43	Horizontal
1648.422	-38.75	-4.65	-43.4	-13	-30.4	Vertical
2472.612	-41.74	-2.21	-43.95	-13	-30.95	Vertical
3296.821	-42.75	0.21	-42.96	-13	-29.96	Vertical

The Worst Test Results Channel 190/836.6 MHz						
Frequency(MHz)	Power(dBm)	AR _{PL} (dBm)	P _{Mea} (dBm)	Limit	Margin	Polarity
1673.213	-36.64	-4.65	-41.29	-13	-28.29	Horizontal
2509.821	-42.85	-2.21	-45.06	-13	-32.06	Horizontal
3346.405	-38.84	0.21	-38.63	-13	-25.63	Horizontal
1673.213	-37.73	-4.65	-42.38	-13	-29.38	Vertical
2509.821	-31.32	-2.21	-33.53	-13	-20.53	Vertical
3346.405	-36.21	0.21	-36	-13	-23	Vertical

The Worst Test Results Channel 251/848.8 MHz						
Frequency(MHz)	Power(dBm)	AR _{PL} (dBm)	P _{Mea} (dBm)	Limit	Margin	Polarity
1697.612	-35.53	-4.65	-40.18	-13	-27.18	Horizontal
2546.413	-43.74	-2.21	-45.95	-13	-32.95	Horizontal
3395.214	-42.63	0.21	-42.42	-13	-29.42	Horizontal
1697.612	-35.32	-4.65	-39.97	-13	-26.97	Vertical
2546.413	-41.53	-2.21	-43.74	-13	-30.74	Vertical
3395.214	-37.16	0.21	-36.95	-13	-23.95	Vertical

Note: Below 30MHZ no Spurious found and The GSM modes is the worst condition.



PCS 1900:

The Worst Test Results for Channel 512/1850.2MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
3700.411	-33.42	0.33	-33.09	-13	-20.09	Horizontal
5550.612	-35.75	4.01	-31.74	-13	-18.74	Horizontal
7400.823	-42.74	10.7	-32.04	-13	-19.04	Horizontal
3700.411	-34.42	0.33	-34.09	-13	-21.09	Vertical
5550.612	-35.75	4.01	-31.74	-13	-18.74	Vertical
7400.823	-41.32	10.7	-30.62	-13	-17.62	Vertical

The Worst Test Results for Channel 661/1880.0MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
3760.121	-36.53	0.33	-36.2	-13	-23.2	Horizontal
5640.231	-32.52	4.01	-28.51	-13	-15.51	Horizontal
7520.214	-42.76	10.7	-32.06	-13	-19.06	Horizontal
3760.121	-31.64	0.33	-31.31	-13	-18.31	Vertical
5640.231	-36.75	4.01	-32.74	-13	-19.74	Vertical
7520.214	-37.64	10.7	-26.94	-13	-13.94	Vertical

The Worst Test Results for Channel 810/1909.8MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
3819.623	-32.43	0.33	-32.1	-13	-19.1	Horizontal
5729.416	-35.74	4.01	-31.73	-13	-18.73	Horizontal
7639.218	-37.53	10.7	-26.83	-13	-13.83	Horizontal
3819.623	-32.74	0.33	-32.41	-13	-19.41	Vertical
5729.416	-41.23	4.01	-37.22	-13	-24.22	Vertical
7639.218	-38.13	10.7	-27.43	-13	-14.43	Vertical

Note: Below 30MHz no Spurious found and The GSM modes is the worst condition.



6. FREQUENCY STABILITY

6.1 MEASUREMENT METHOD

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
 2. Subject the EUT to overnight soak at -10°C.
 3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
 4. Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
 5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1 Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
 6. Subject the EUT to overnight soak at +50°C.
 7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
 8. Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- .At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.



6.2 PROVISIONS APPLICABLE

6.2.1 FOR HAND CARRIED BATTERY POWERED EQUIPMENT

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.3VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

6.2.2 FOR EQUIPMENT POWERED BY PRIMARY SUPPLY VOLTAGE

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20oC.



6.3 MEASUREMENT RESULT

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20oC.

Frequency Error Against Voltage for GSM 850 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	20	0.024
3.7	19	0.023
4.2	28	0.033

Frequency Error Against Temperature for GSMS850 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	25	0.030
-20	32	0.038
-10	27	0.032
0	31	0.037
10	26	0.031
20	25	0.030
30	-28	-0.033
40	33	0.039
50	30	0.036

Frequency Error Against Voltage for GPRS850 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	22	0.026
3.7	23	0.028
4.2	-22	-0.026

Frequency Error Against Temperature for GPRS850 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-34	-0.041
-20	28	0.033
-10	-33	-0.039
0	23	0.028
10	-26	-0.031
20	26	0.031
30	-23	-0.028
40	32	0.038
50	30	0.036

**Frequency Error Against Voltage for EDGE 850 band**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	22	0.026
3.7	26	0.031
4.2	-24	-0.029

Frequency Error Against Temperature for EDGE 850 band

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-34	-0.041
-20	22	0.026
-10	-33	-0.039
0	25	0.030
10	-28	-0.033
20	25	0.030
30	-22	-0.026
40	31	0.037
50	35	0.042

Note: The EUT doesn't work below -30°C



Frequency Error Against Temperature for GSM1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	25	0.013
-20	24	0.013
-10	23	0.012
0	26	0.014
10	-27	-0.014
20	25	0.013
30	32	0.017
40	26	0.014
50	-24	-0.013

Frequency Error Against Voltage for GPRS1900 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	26	0.014
3.7	29	0.015
4.2	32	0.017

Frequency Error Against Temperature for GPRS1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	22	0.012
-20	25	0.013
-10	27	0.014
0	21	0.011
10	32	0.017
20	24	0.013
30	25	0.013
40	32	0.017
50	27	0.014



Frequency Error Against Voltage for EDGE 1900 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	24	0.013
3.7	25	0.013
4.2	36	0.019

Frequency Error Against Temperature for EDGE 1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	23	0.012
-20	25	0.013
-10	27	0.014
0	22	0.012
10	34	0.018
20	26	0.014
30	28	0.015
40	32	0.017
50	23	0.012

Note: The EUT doesn't work below -30°C



7. OCCUPIED BANDWIDTH

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

7.2 PROVISIONS APPLICABLE

Limits applied to report test result only.

7.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	824.2	249.9543
Middle Channel	836.6	244.5570
High Channel	848.8	246.3098

Occupied Bandwidth (99%) for GPRS 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	824.2	244.5970
Middle Channel	836.6	244.5895
High Channel	848.8	243.8326

Occupied Bandwidth (99%) for EDGE 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	824.2	245.6468
Middle Channel	836.6	246.4625
High Channel	848.8	245.1371



Occupied Bandwidth (99%) for GSM1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	244.2337
Middle Channel	1880.0	243.0800
High Channel	1909.8	245.8497

Occupied Bandwidth (99%) for GPRS1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	246.3317
Middle Channel	1880.0	246.0976
High Channel	1909.8	248.5595

Occupied Bandwidth (99%) for EDGE 1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	244.9637
Middle Channel	1880.0	246.9760
High Channel	1909.8	246.5842



8. Emission Bandwidth

8.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

8.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

8.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	316.335
Middle Channel	836.6	324.712
High Channel	848.8	321.076

Emission Bandwidth (-26dBc) for GPRS850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	319.552
Middle Channel	836.6	314.730
High Channel	848.8	320.627

Emission Bandwidth (-26dBc) for EDGE 850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	316.768
Middle Channel	836.6	315.651
High Channel	848.8	318.662



Emission Bandwidth (-26dBc) for GSM1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	322.114
Middle Channel	1880.0	321.893
High Channel	1909.8	320.617

Emission Bandwidth (-26dBc) for GPRS1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	315.121
Middle Channel	1880.0	315.629
High Channel	1909.8	321.887

Emission Bandwidth (-26dBc) for EDGE 1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	319.312
Middle Channel	1880.0	316.161
High Channel	1909.8	317.544



9. BAND EDGE

9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

9.2 PROVISIONS APPLICABLE

as Specified in FCC rules of 22.917(b) and 24.238(b)

9.3 MEASUREMENT RESULT


Please refers to Appendix III for compliance test plots for band edges





APPENDIX I

TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

CONDUCTED EMISSION IN GSM 850 BAND

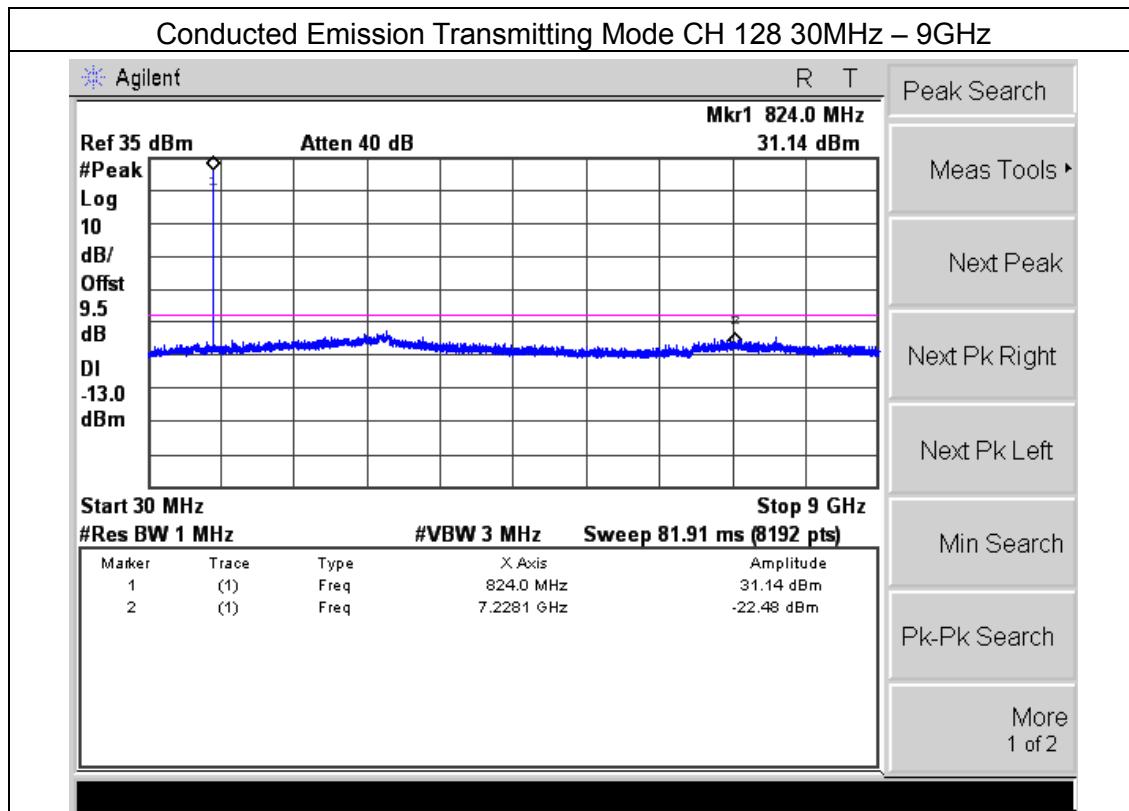


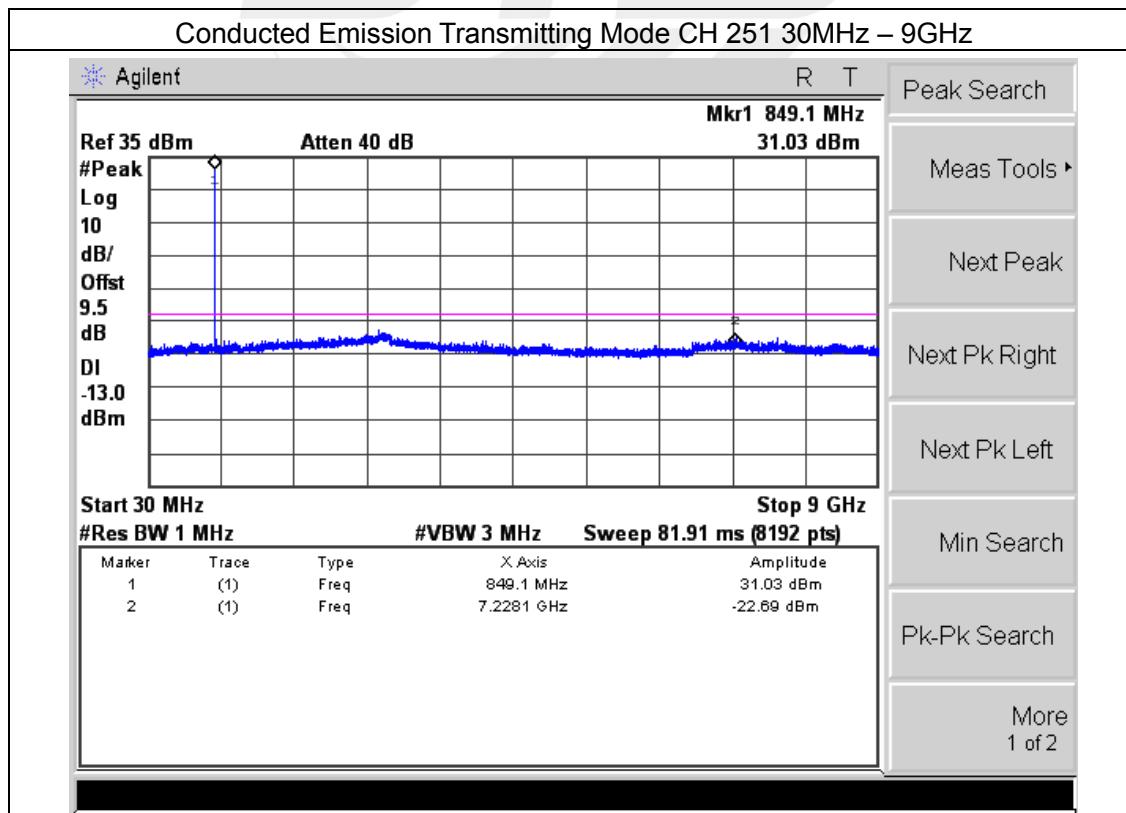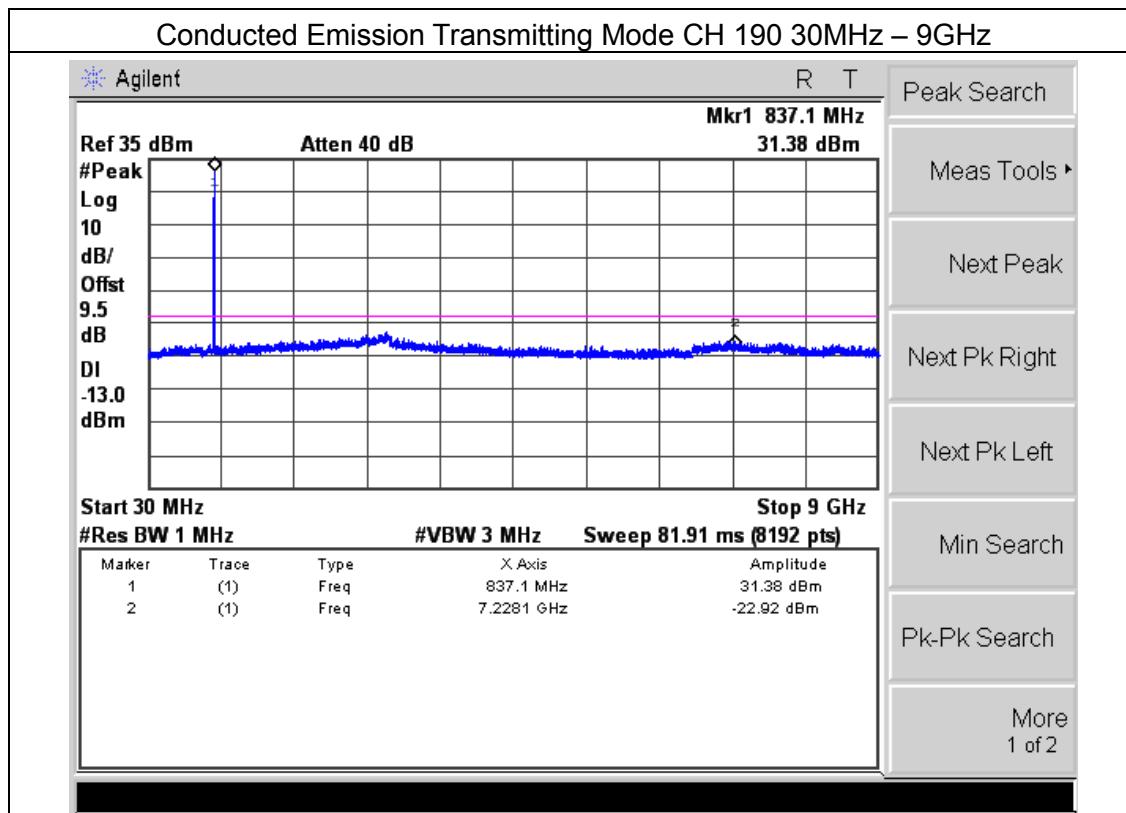





CONDUCTED EMISSION IN GPRS 850 BAND

Conducted Emission Transmitting Mode CH 128 30MHz – 9GHz

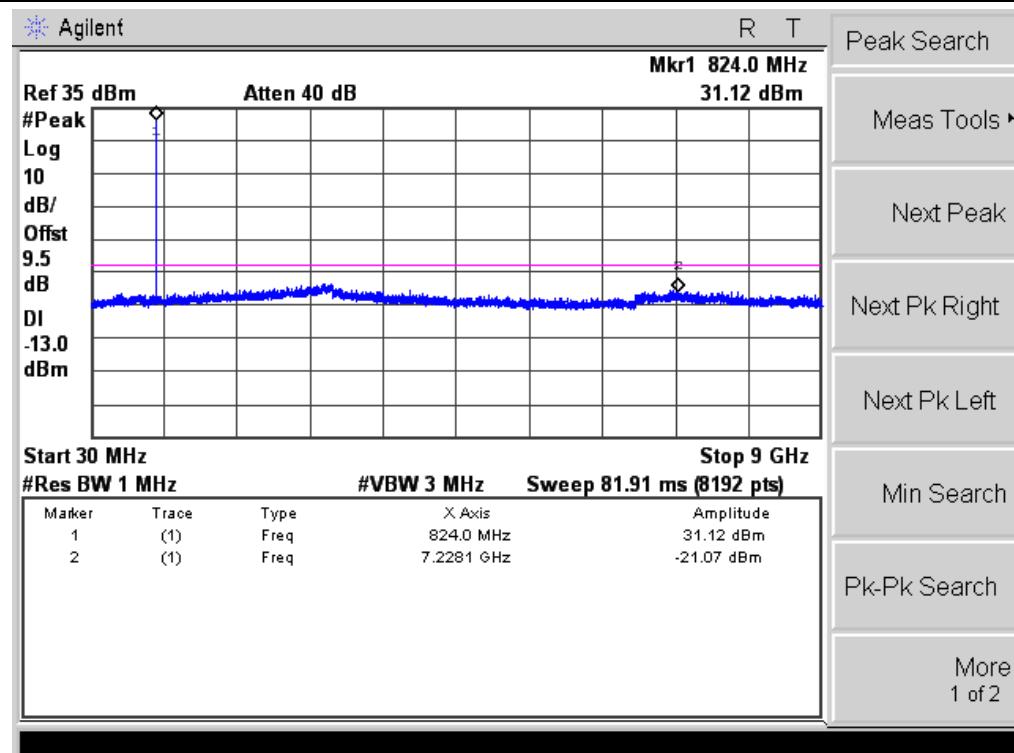

Conducted Emission Transmitting Mode CH 190 30MHz – 9GHz

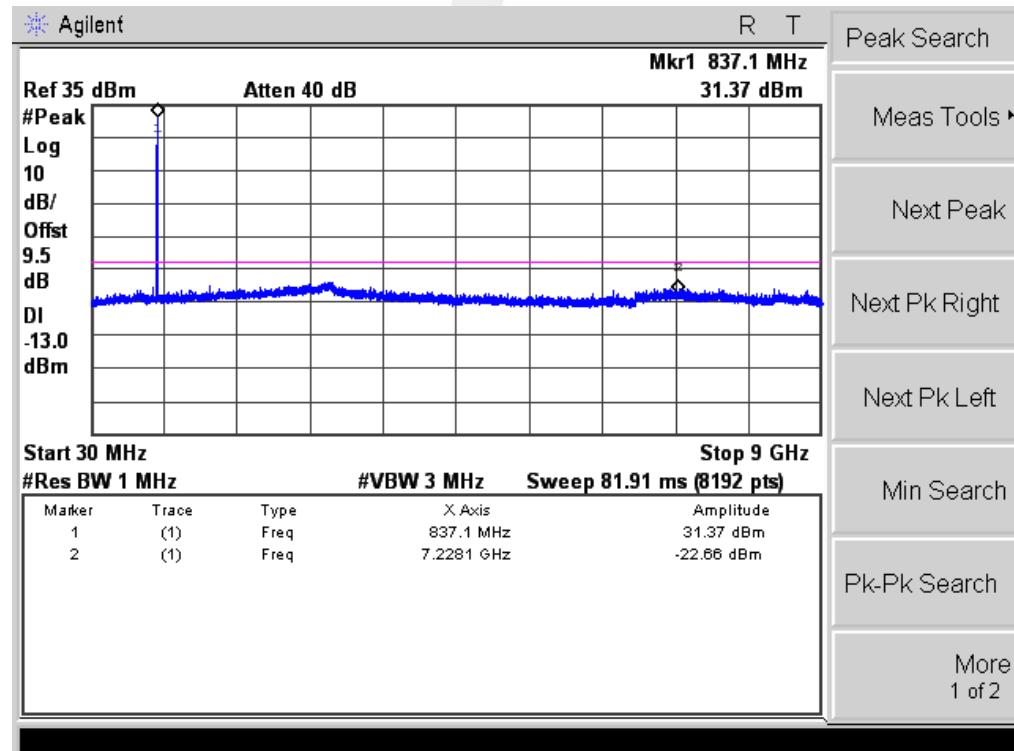


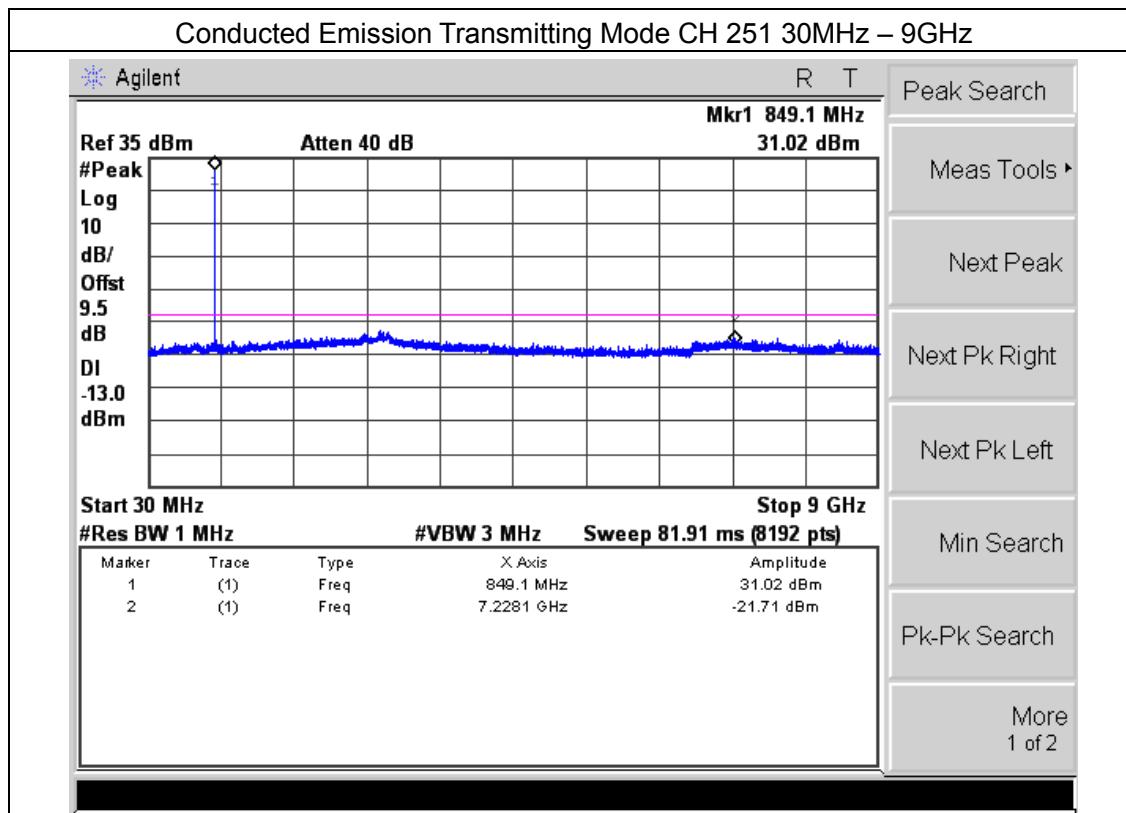





CONDUCTED EMISSION IN EDGE 850 BAND

Conducted Emission Transmitting Mode CH 128 30MHz – 9GHz

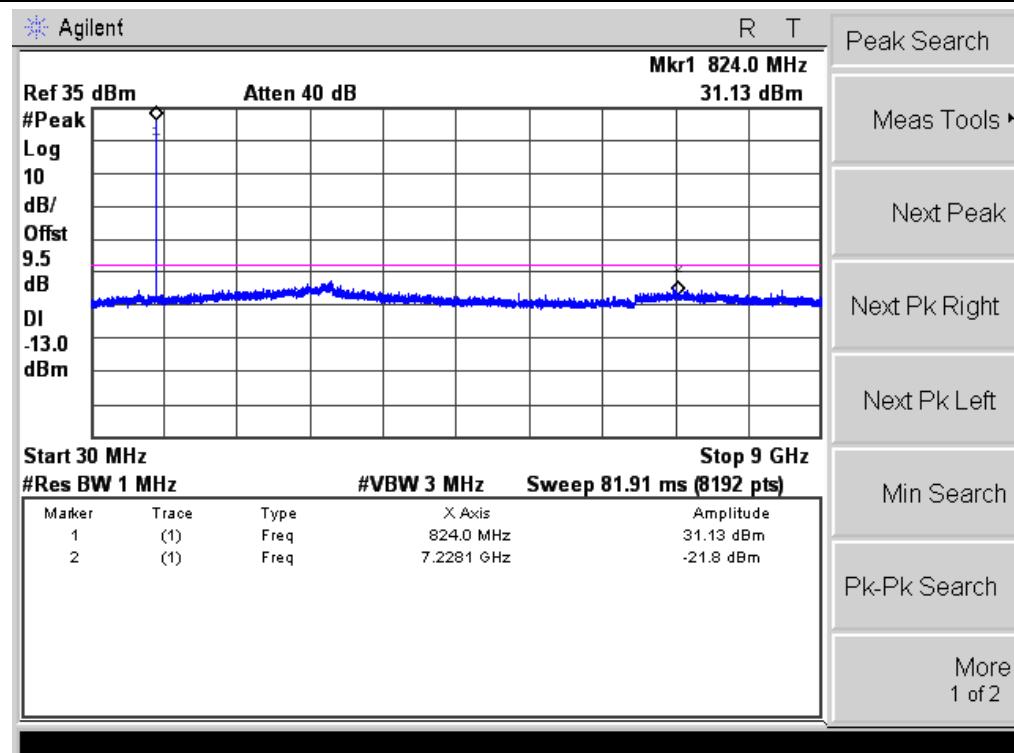



Conducted Emission Transmitting Mode CH 190 30MHz – 9GHz

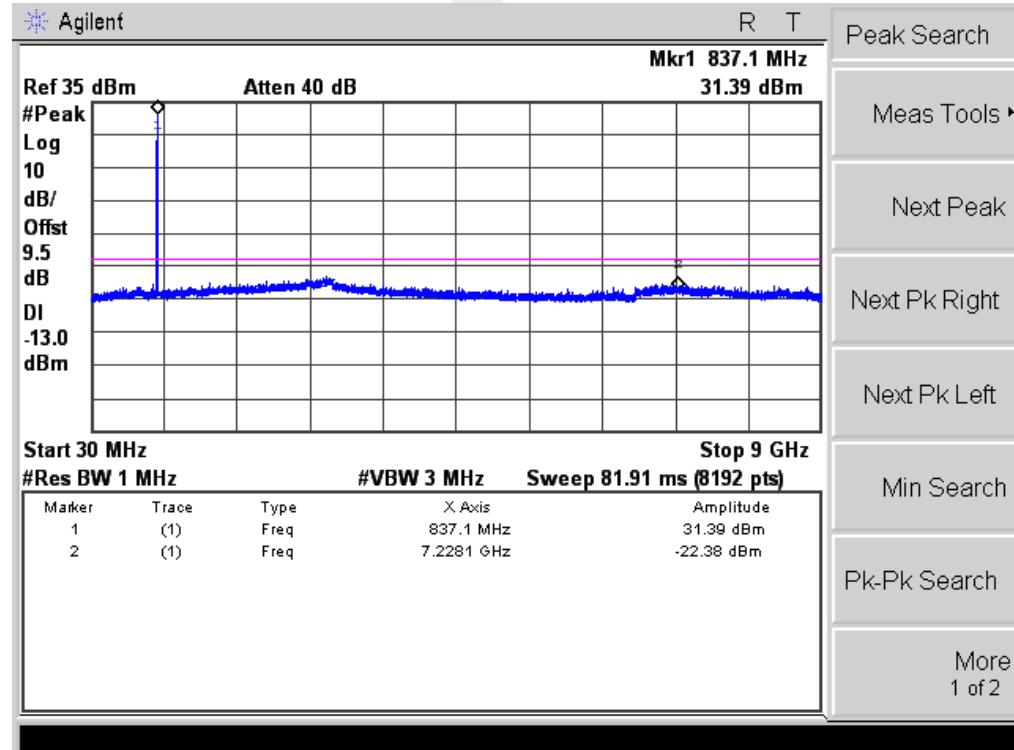


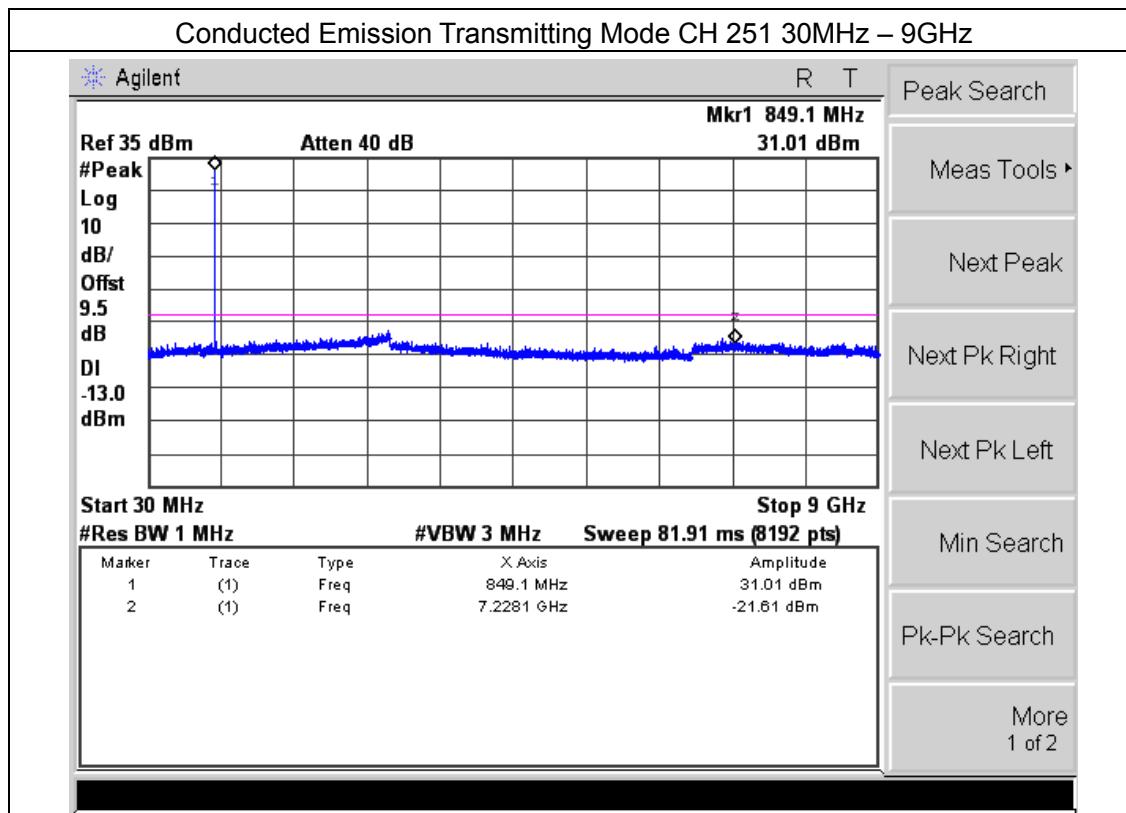


CONDUCTED EMISSION IN GSM1900 BAND


Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

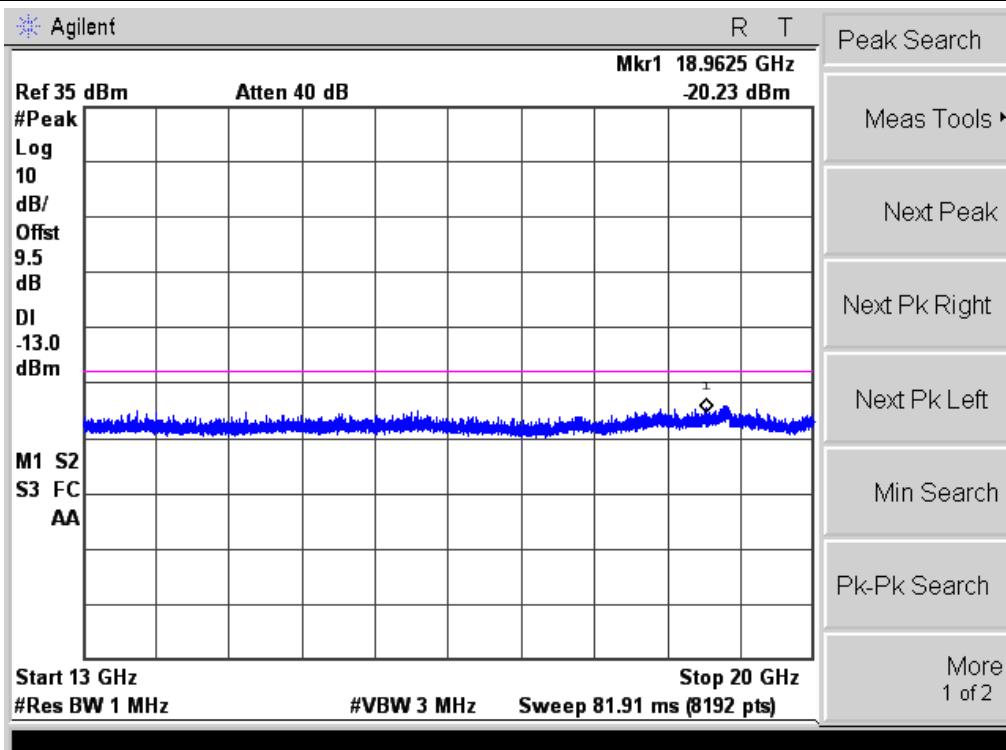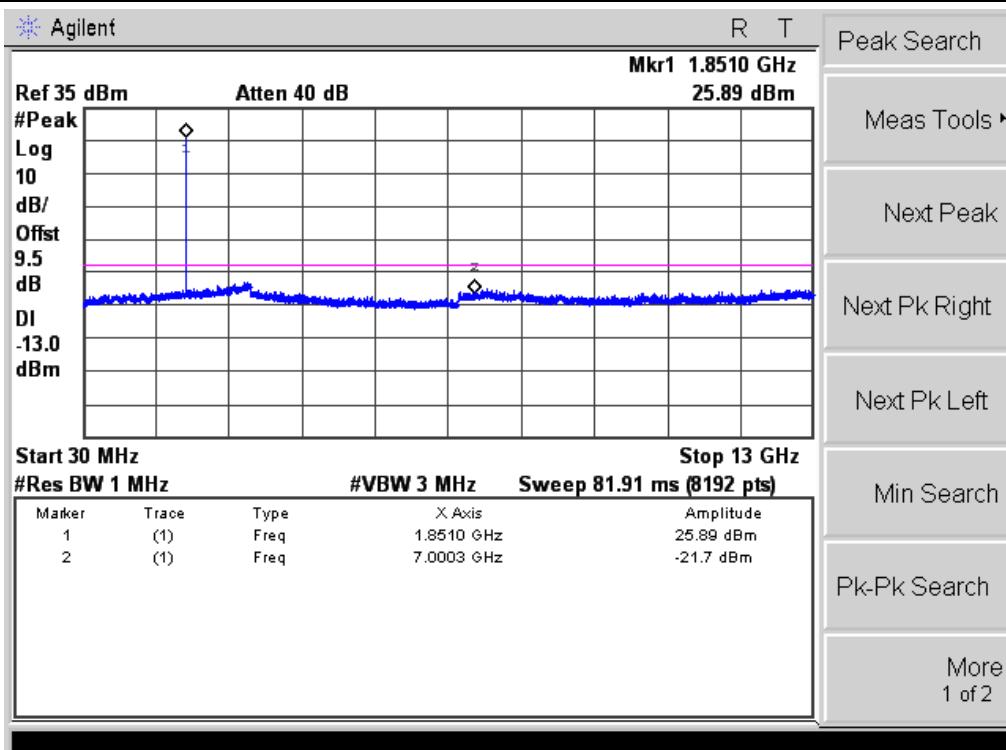


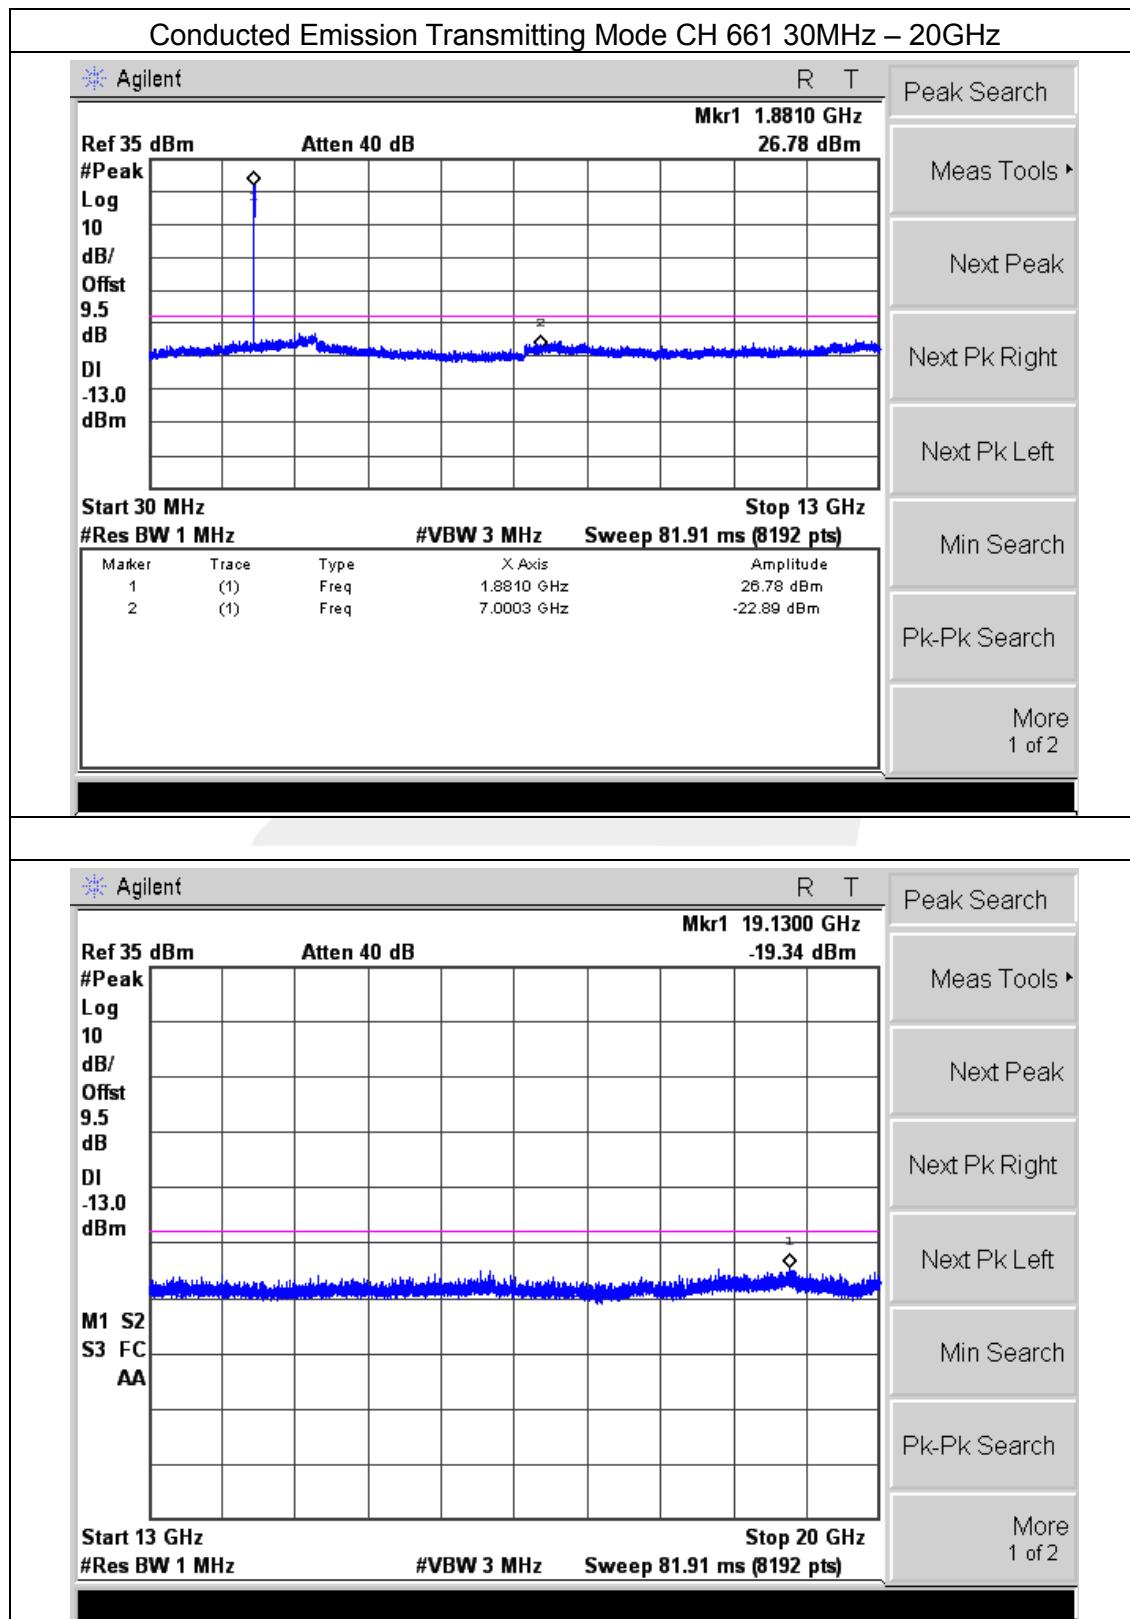


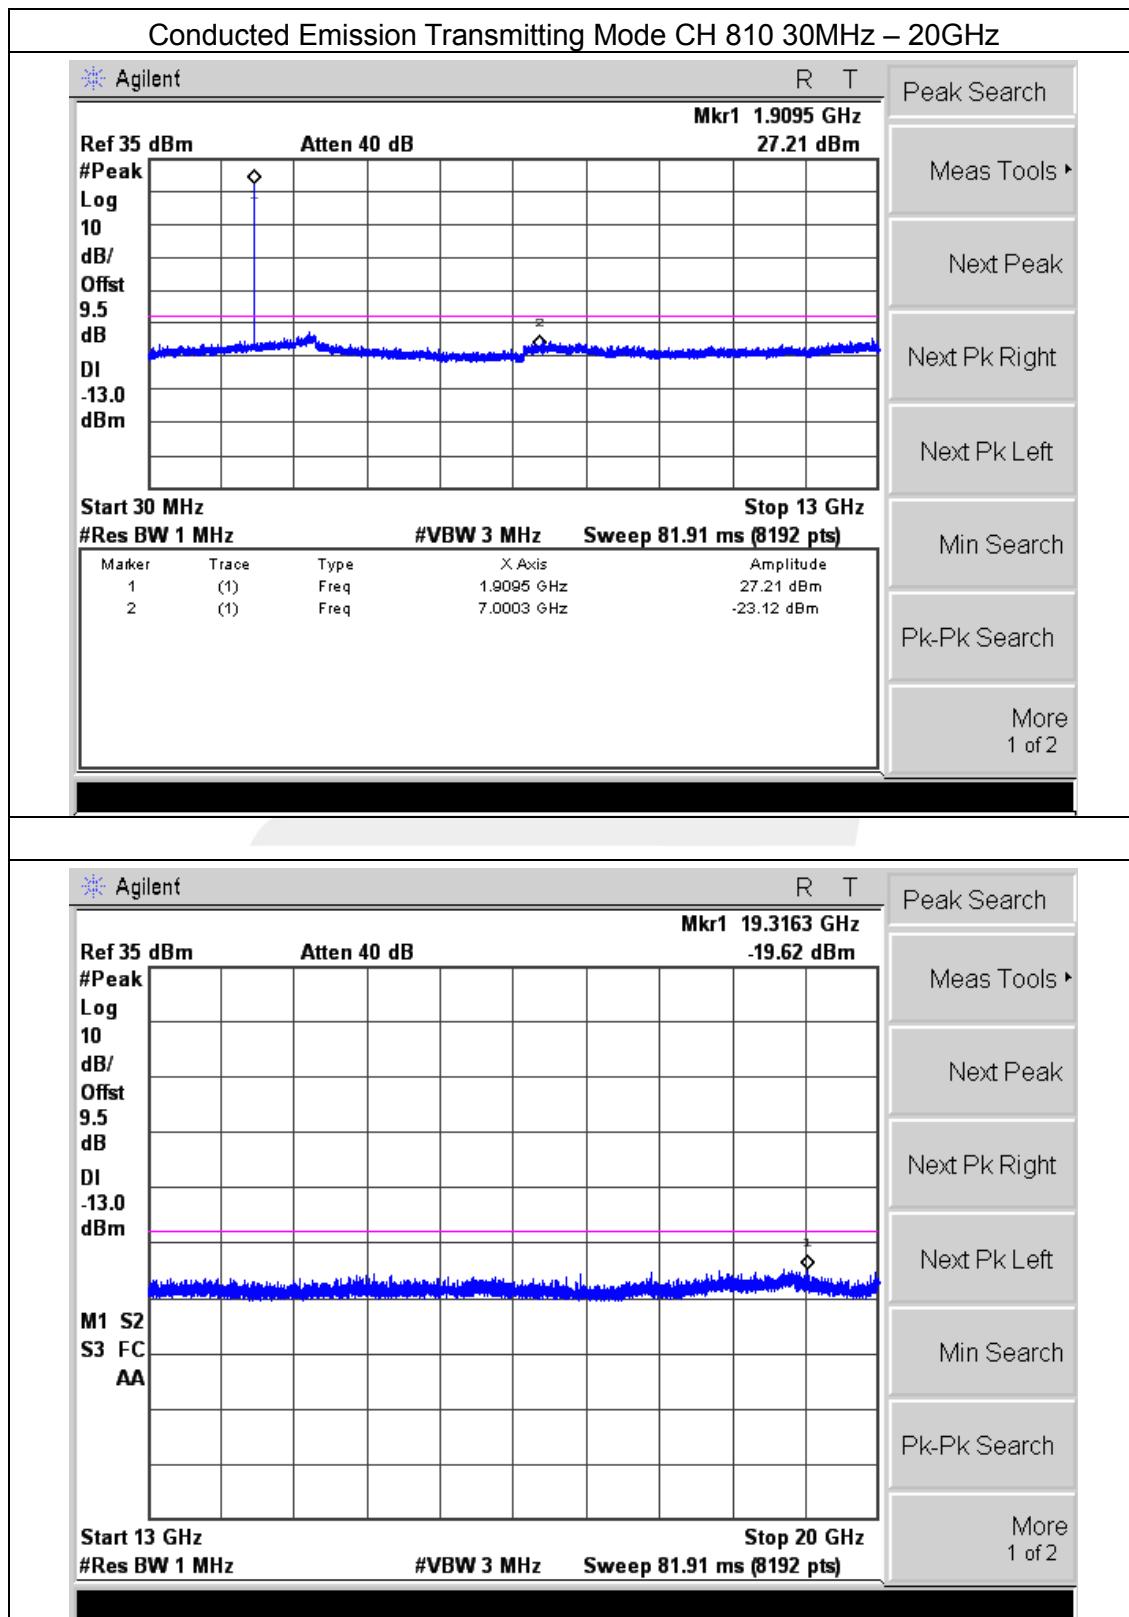

CONDUCTED EMISSION IN GPRS1900 BAND


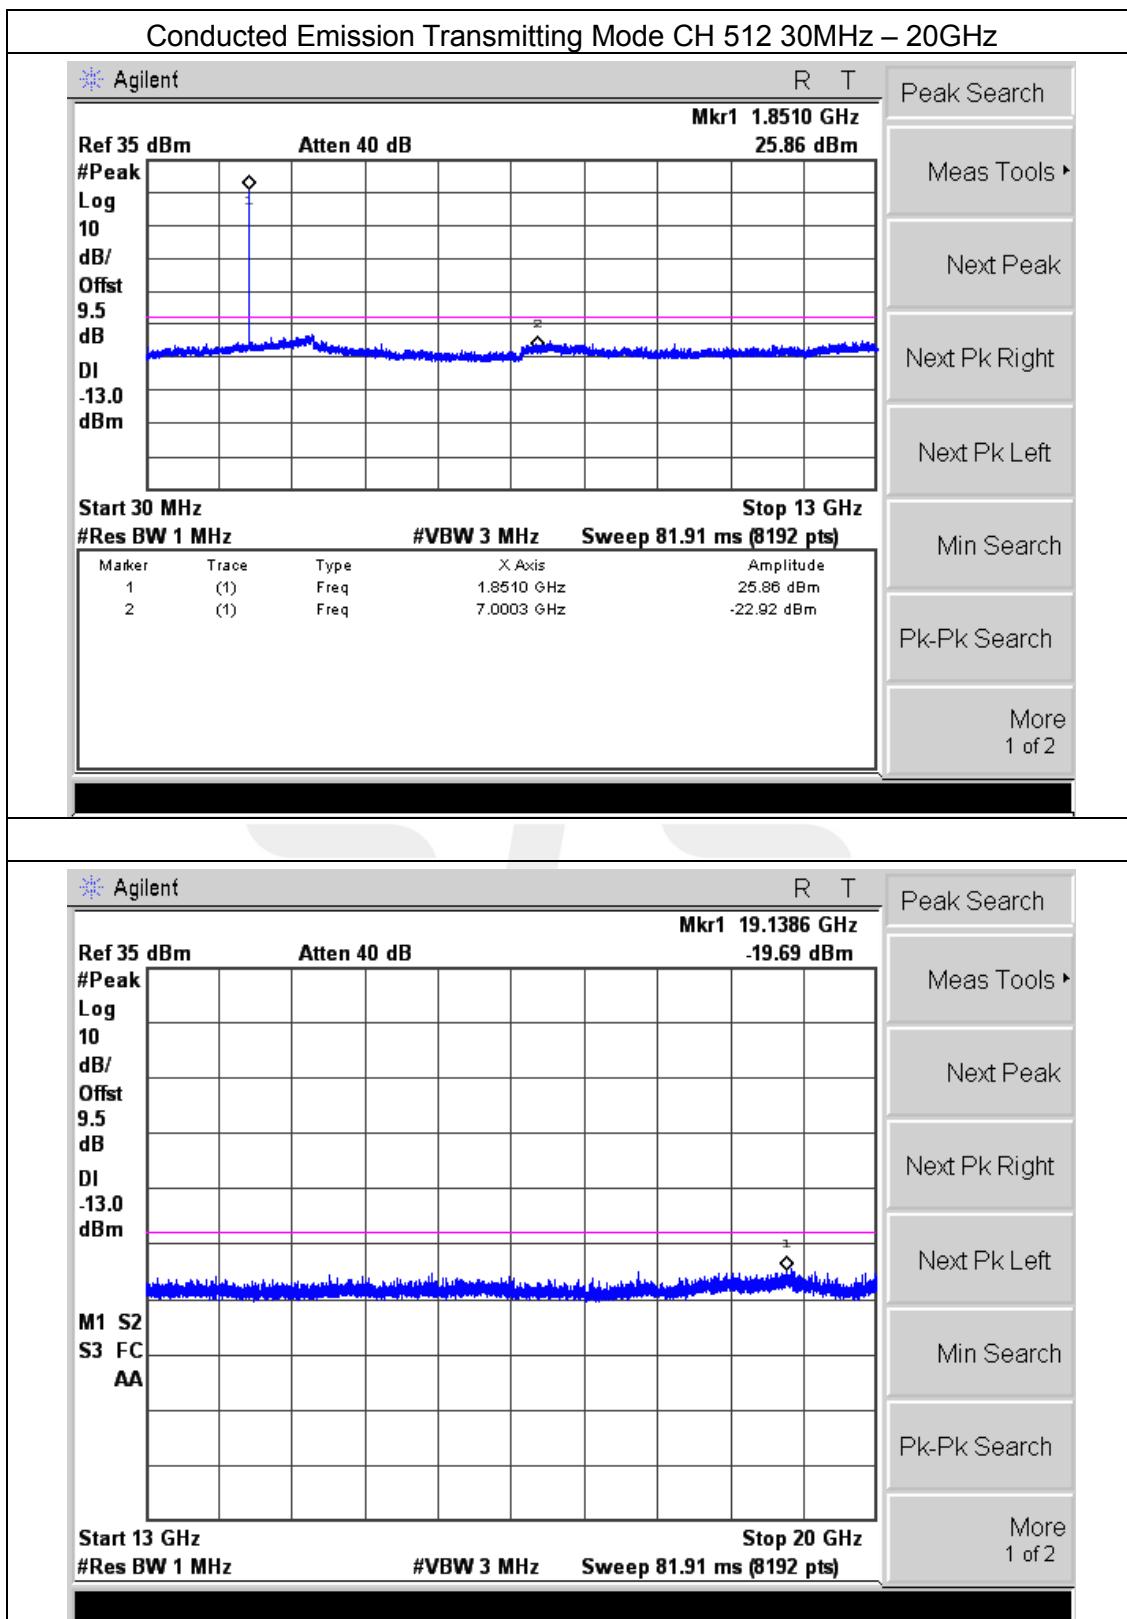


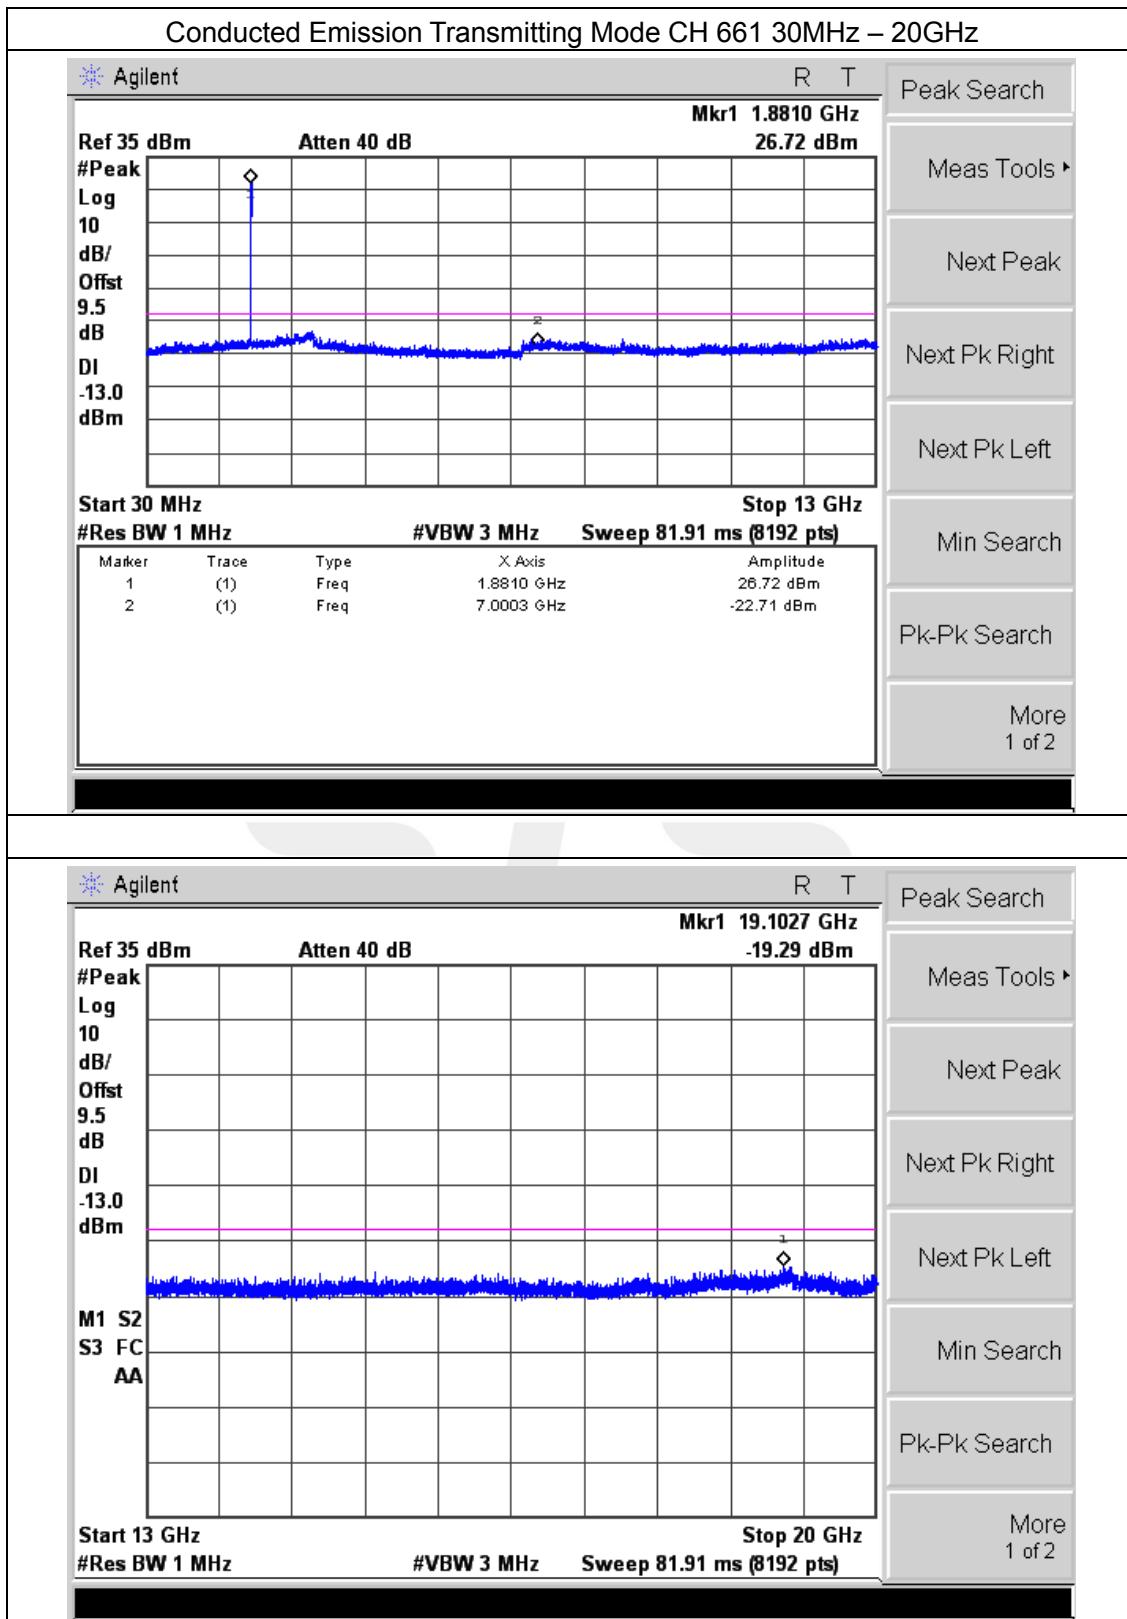


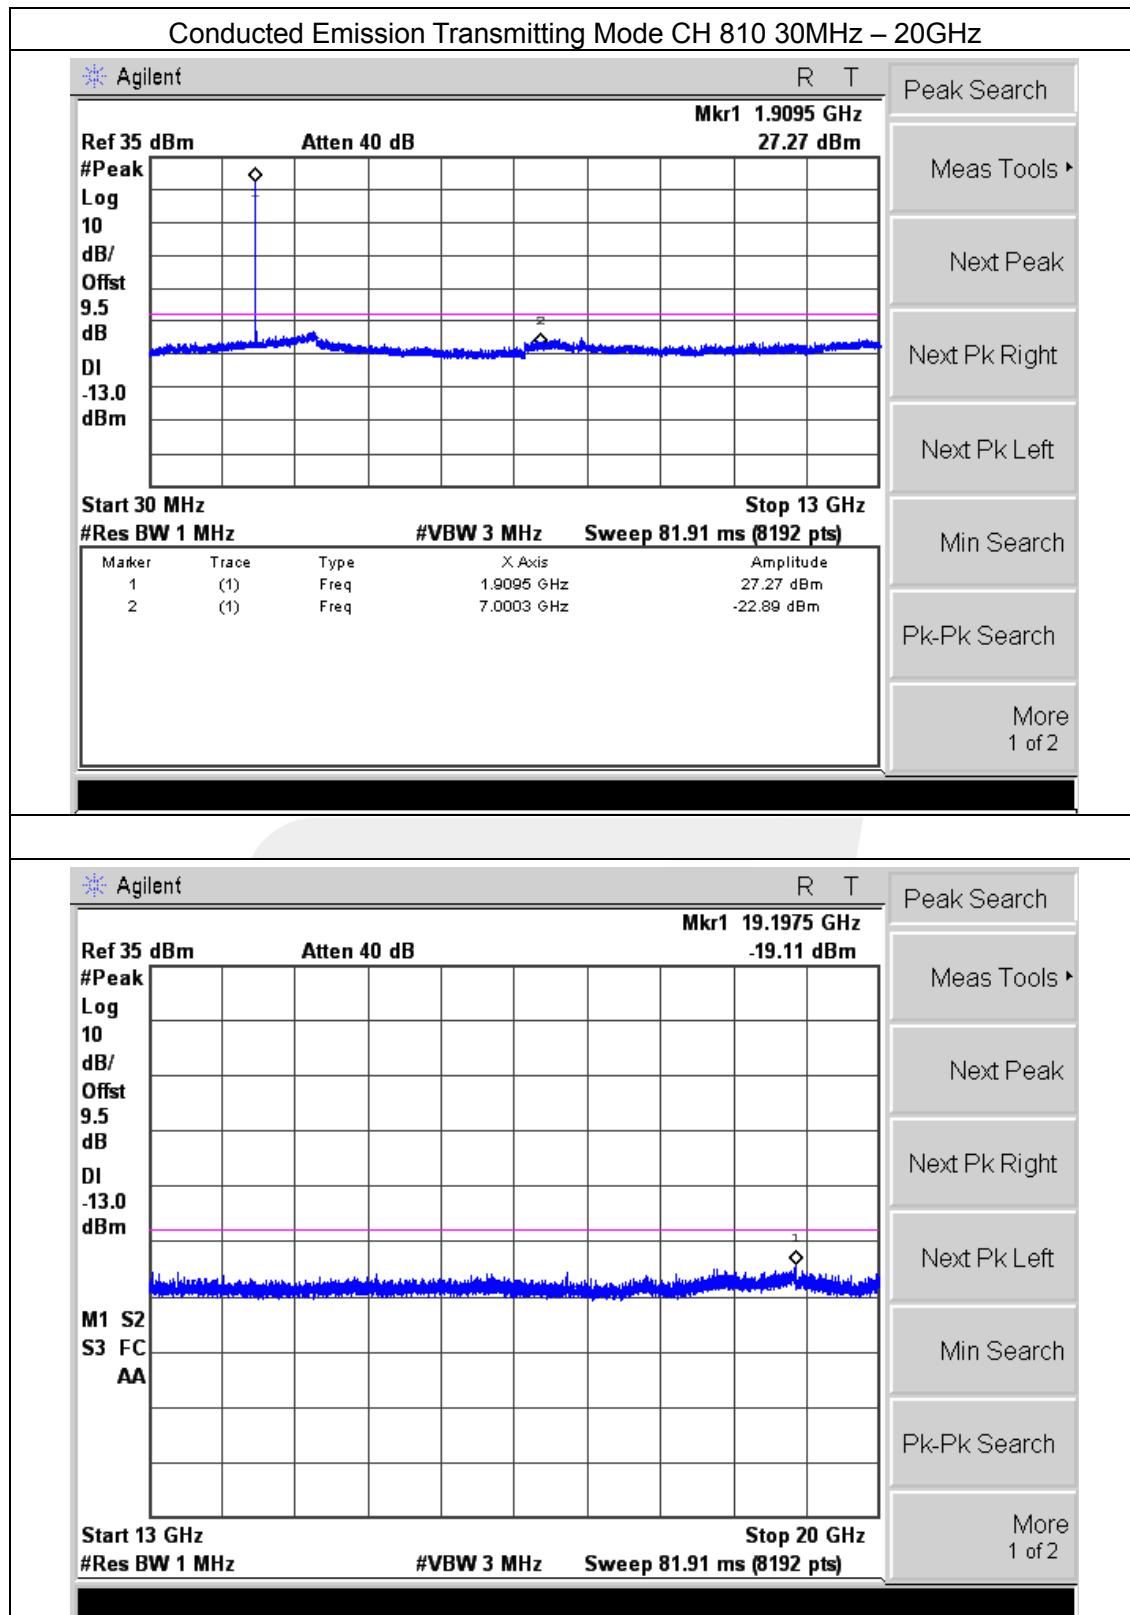


CONDUCTED EMISSION IN EDGE 1900 BAND

Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

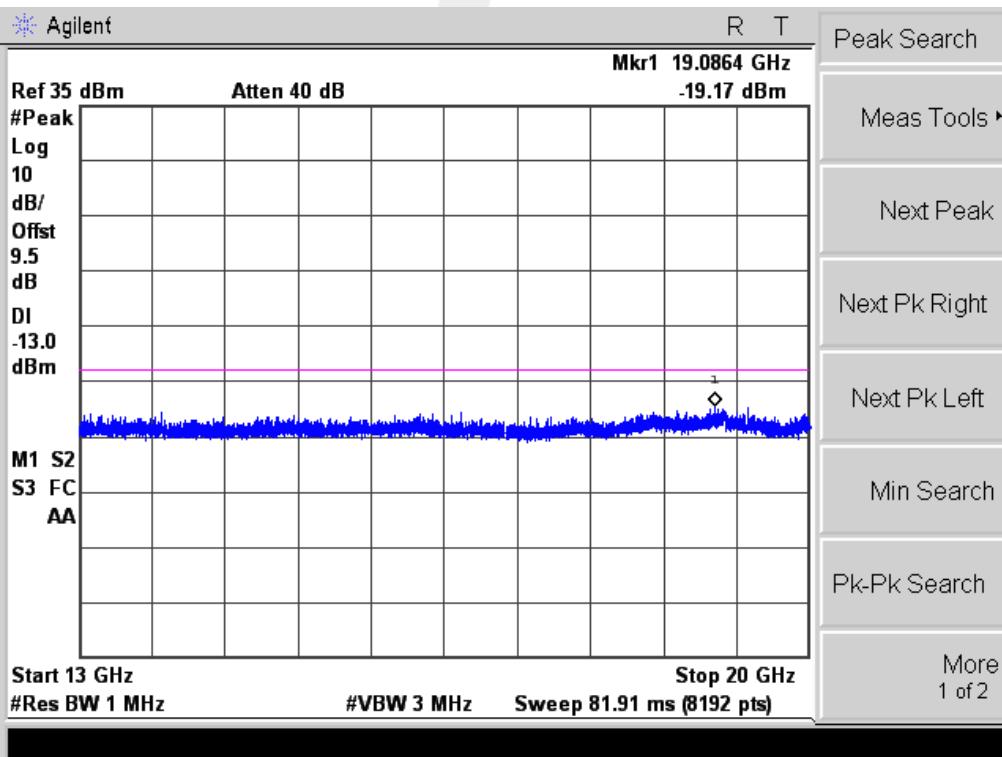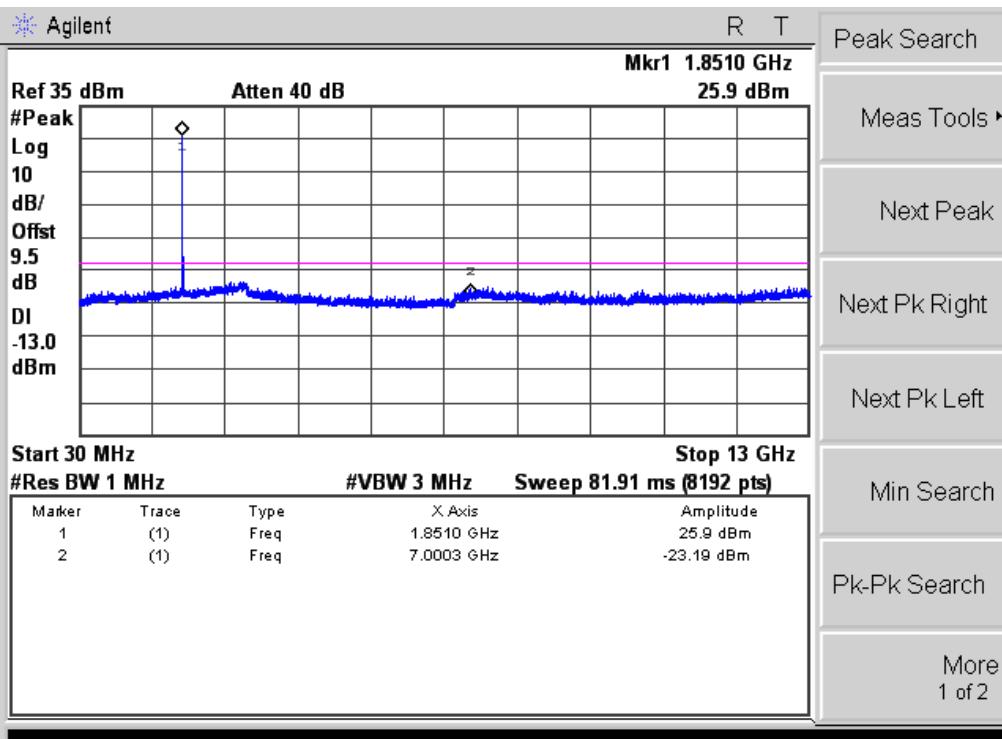

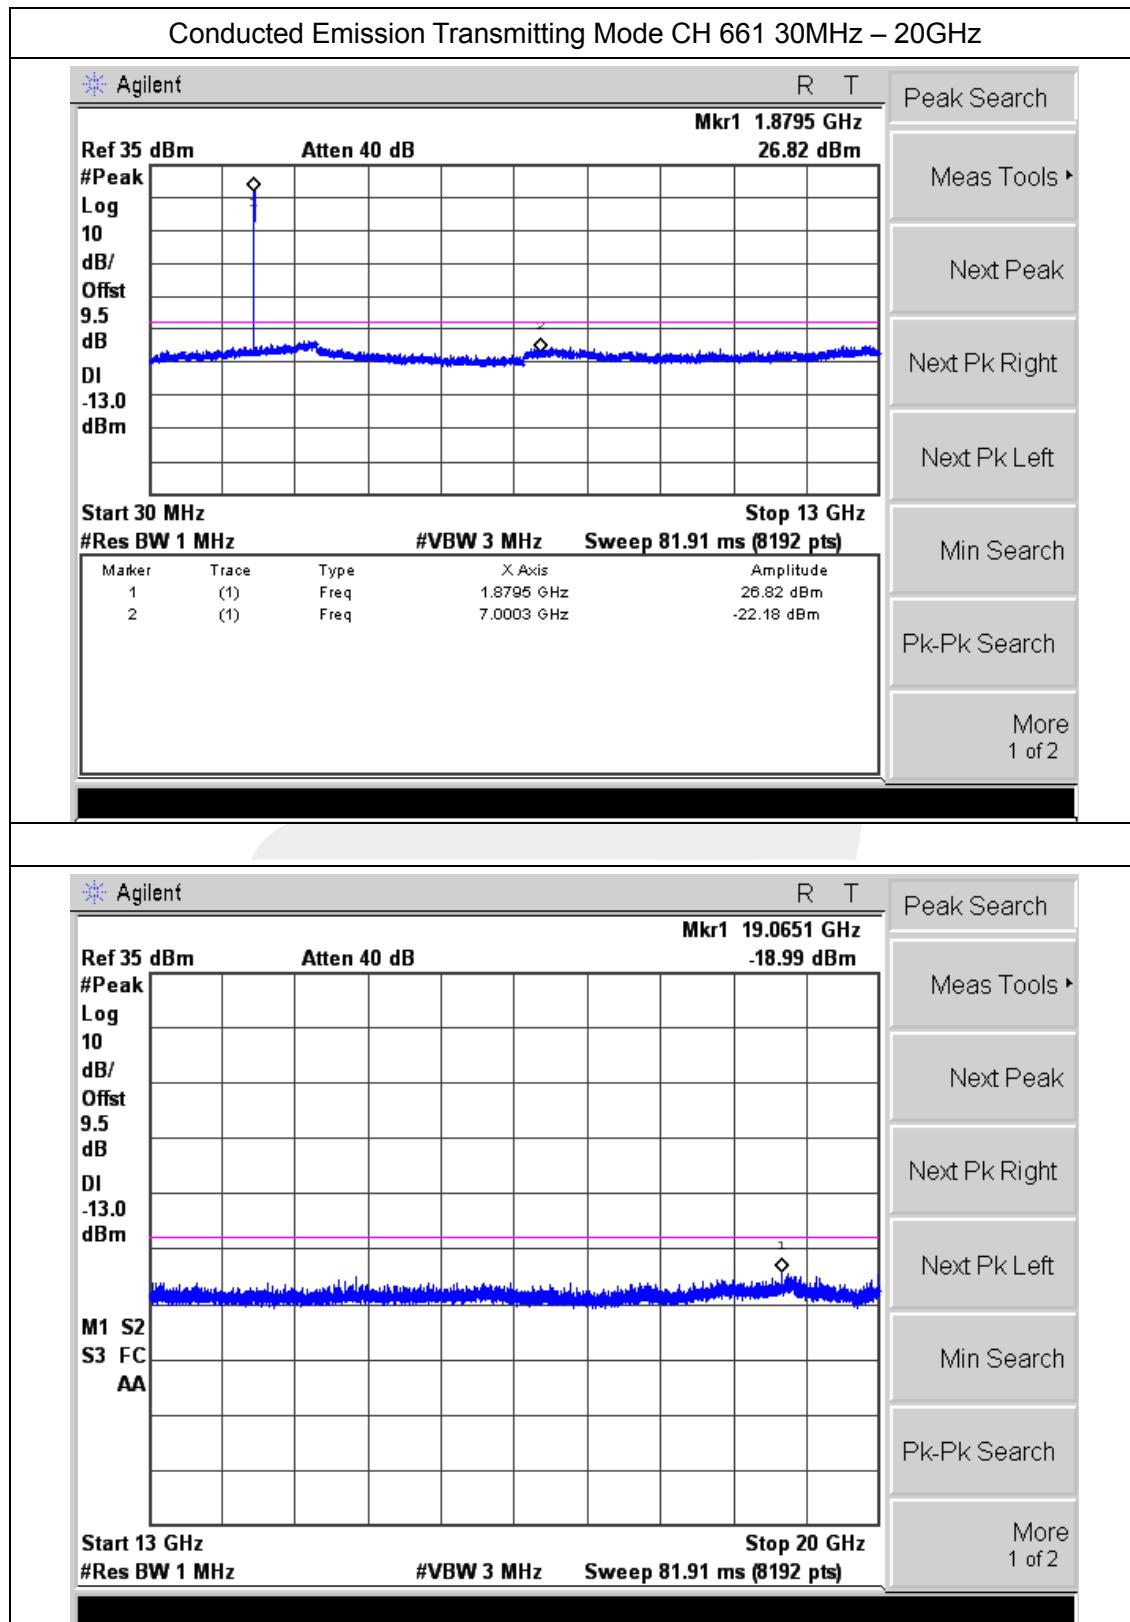



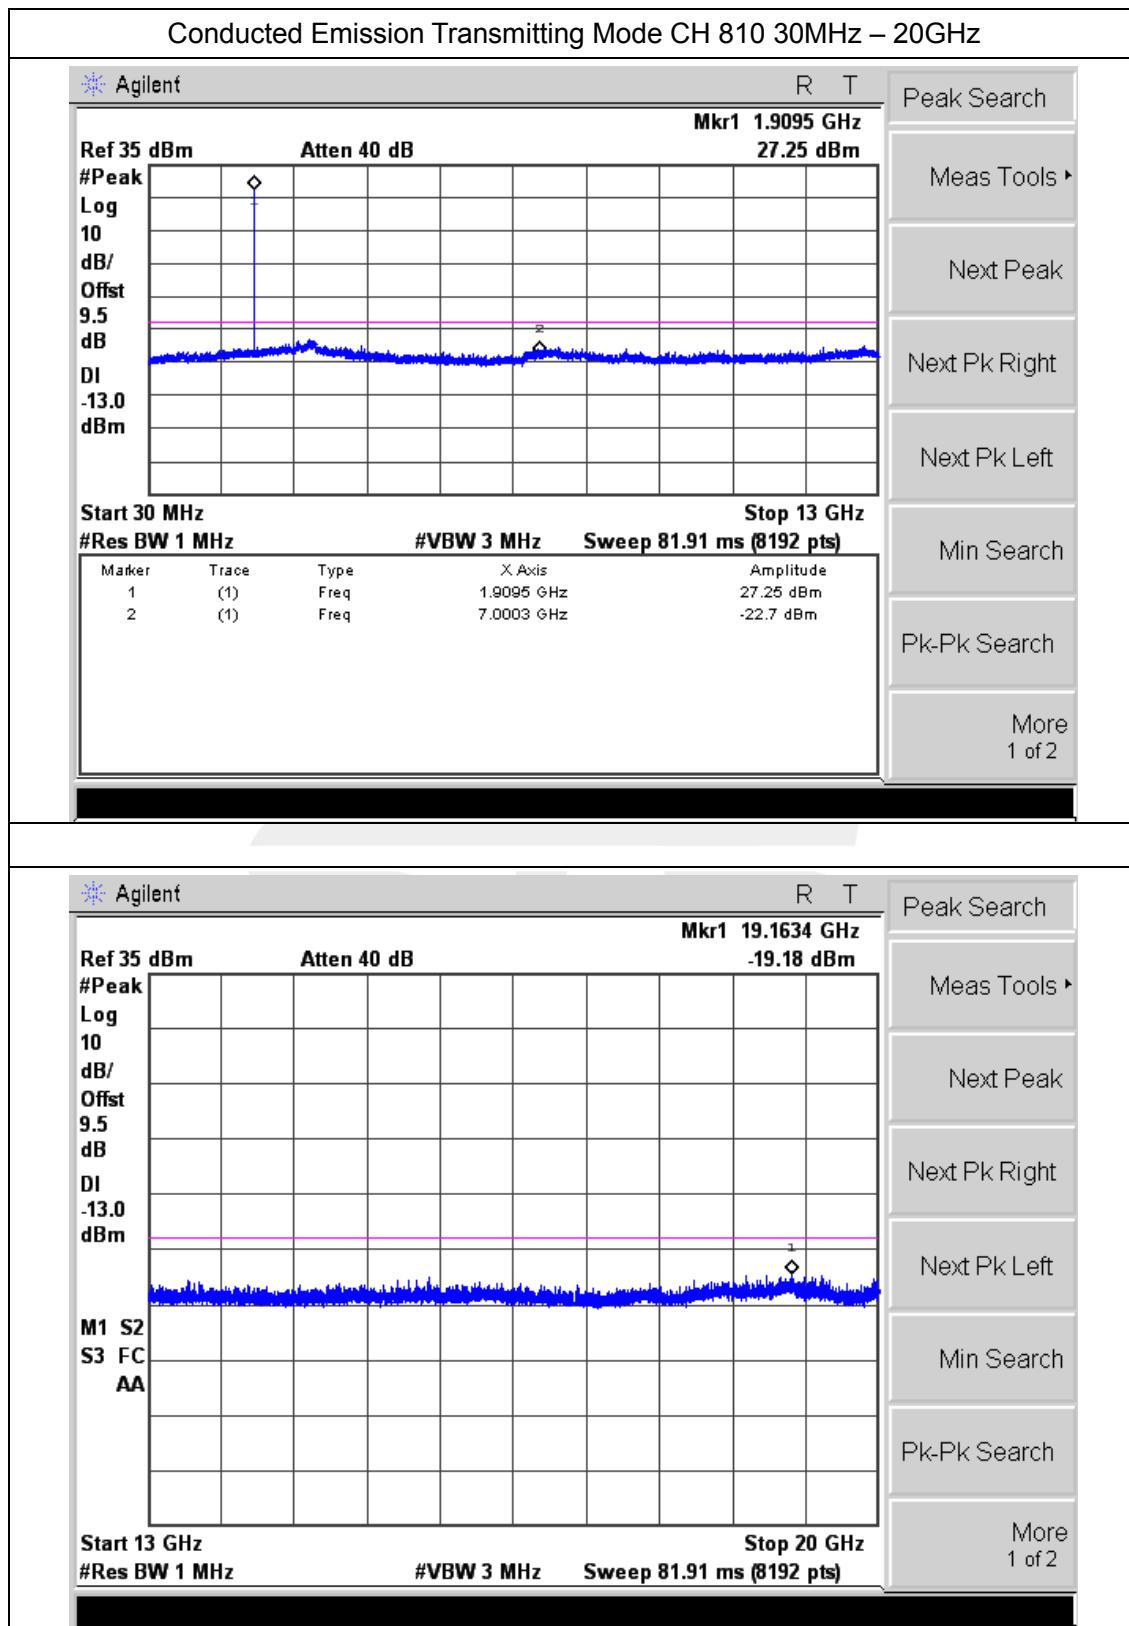



APPENDIX II


TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)


EMISSION BANDWIDTH (-26dBc)

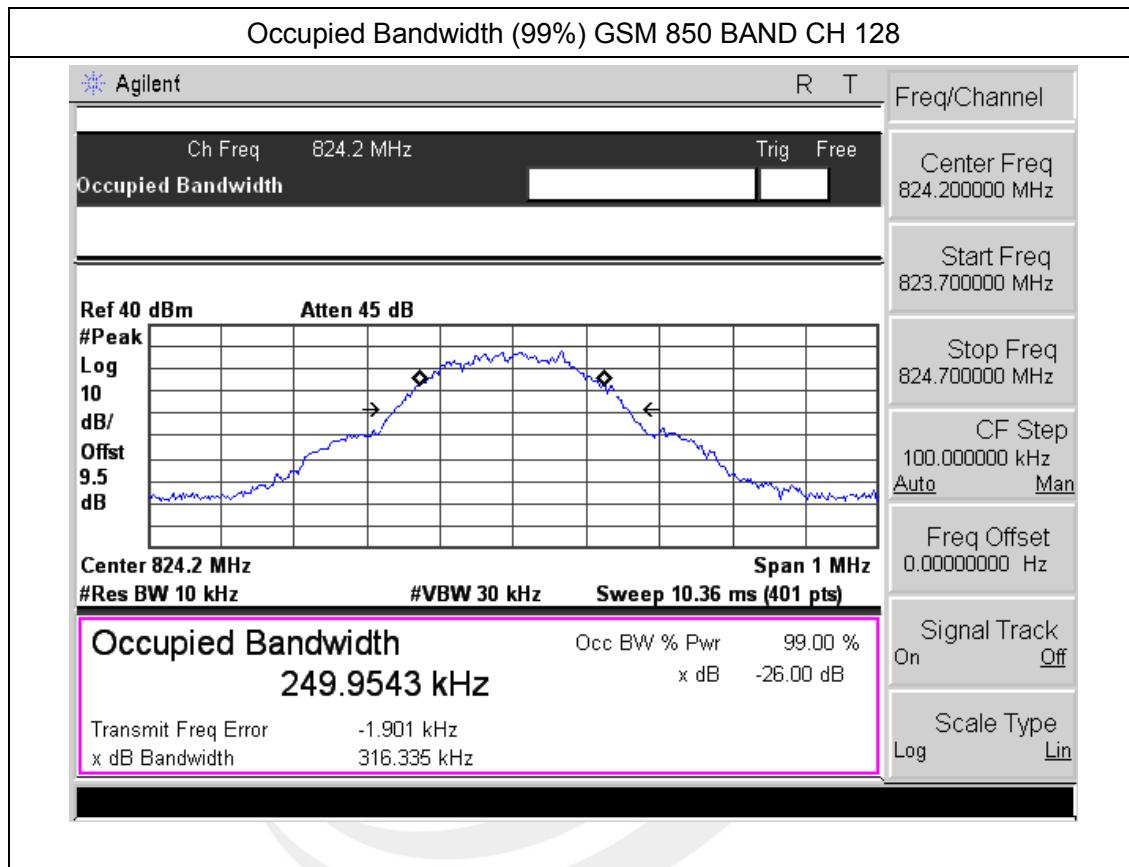


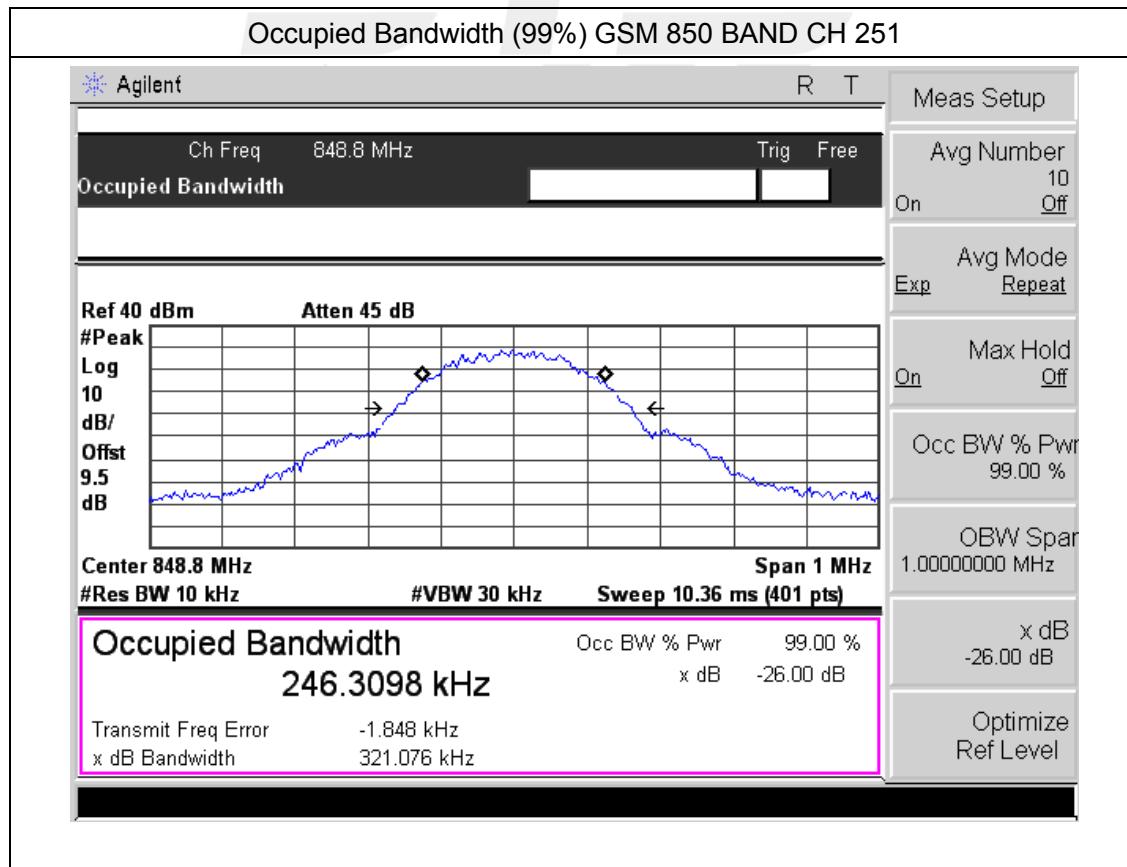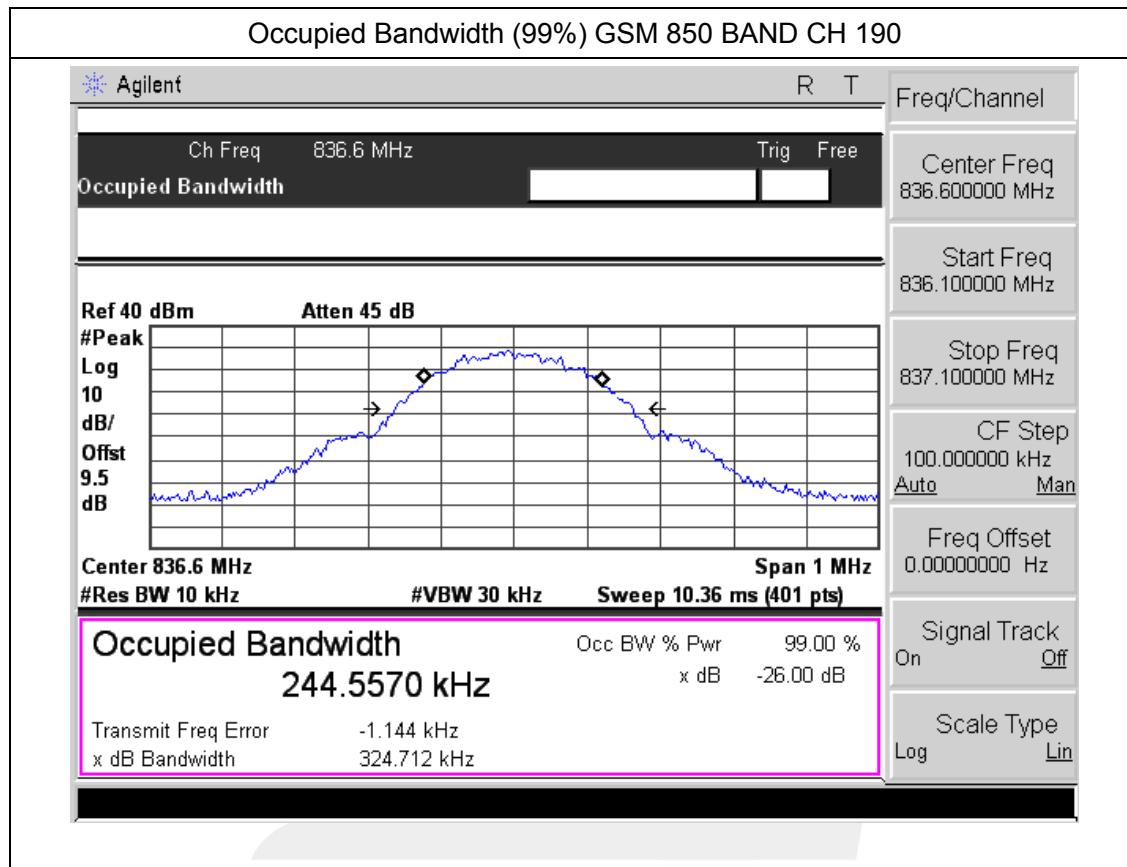


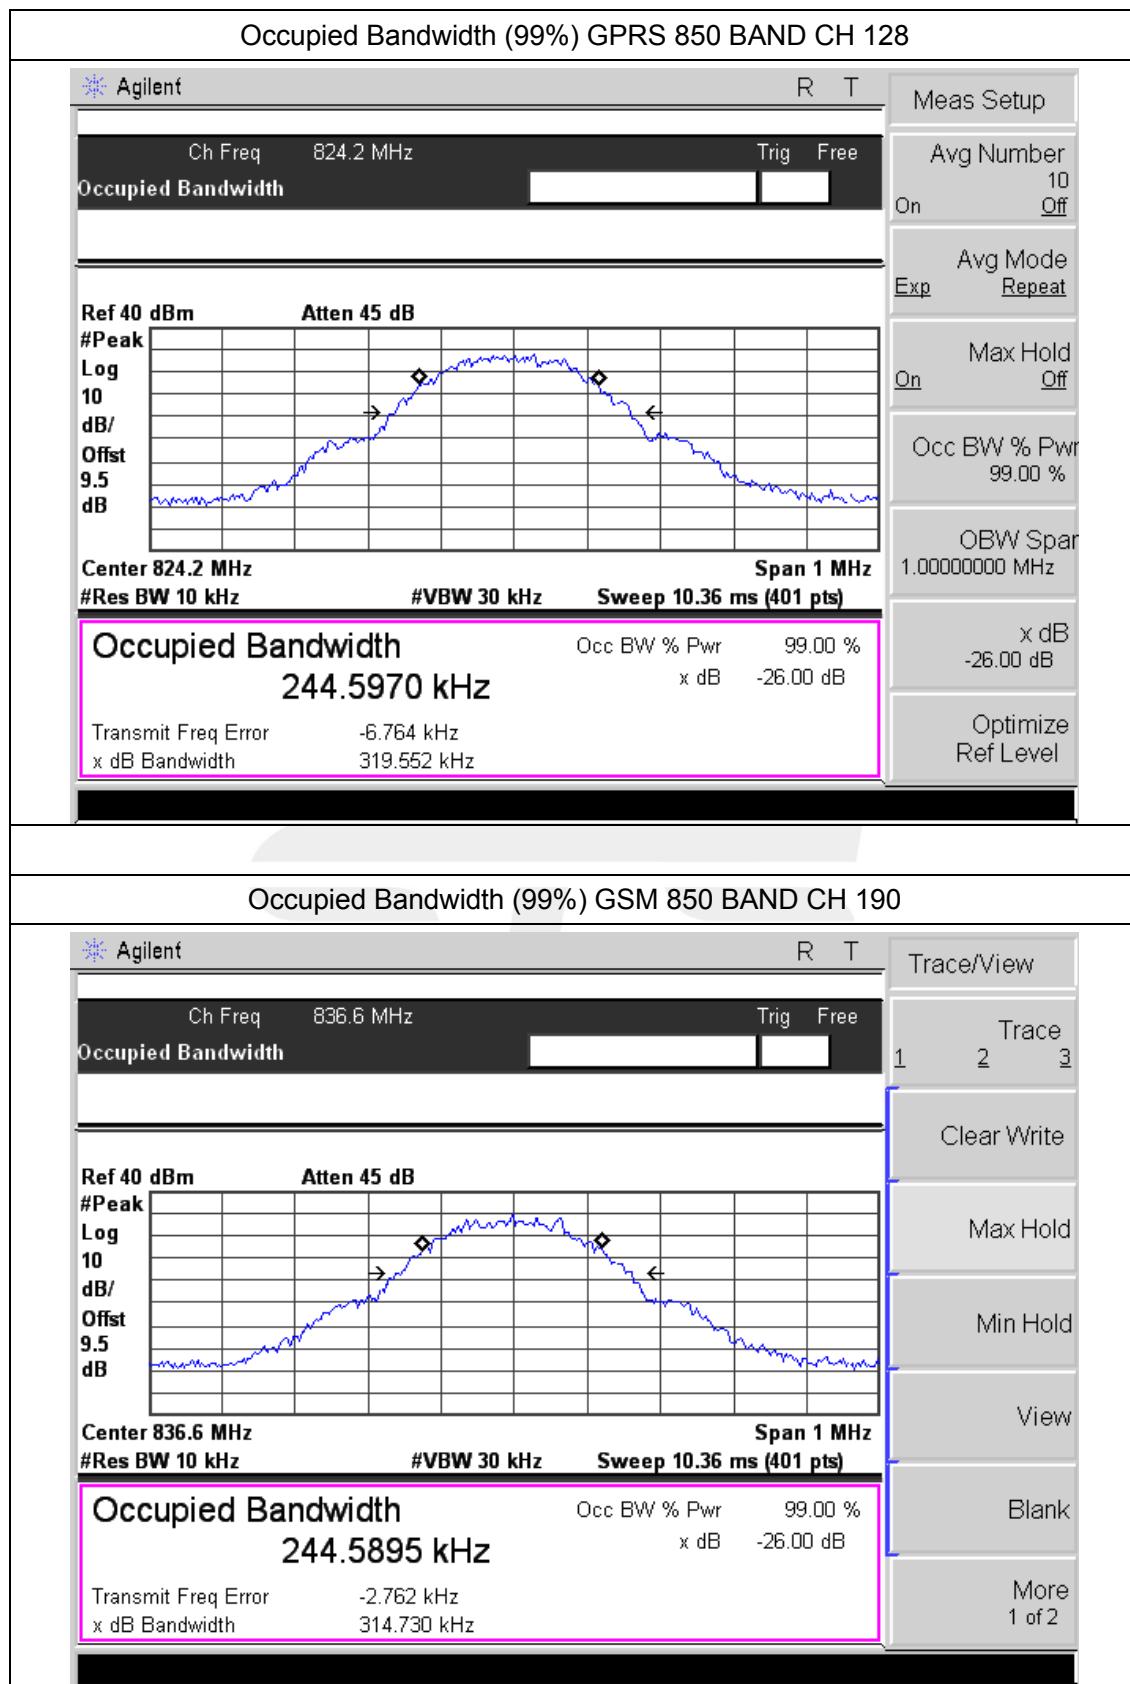


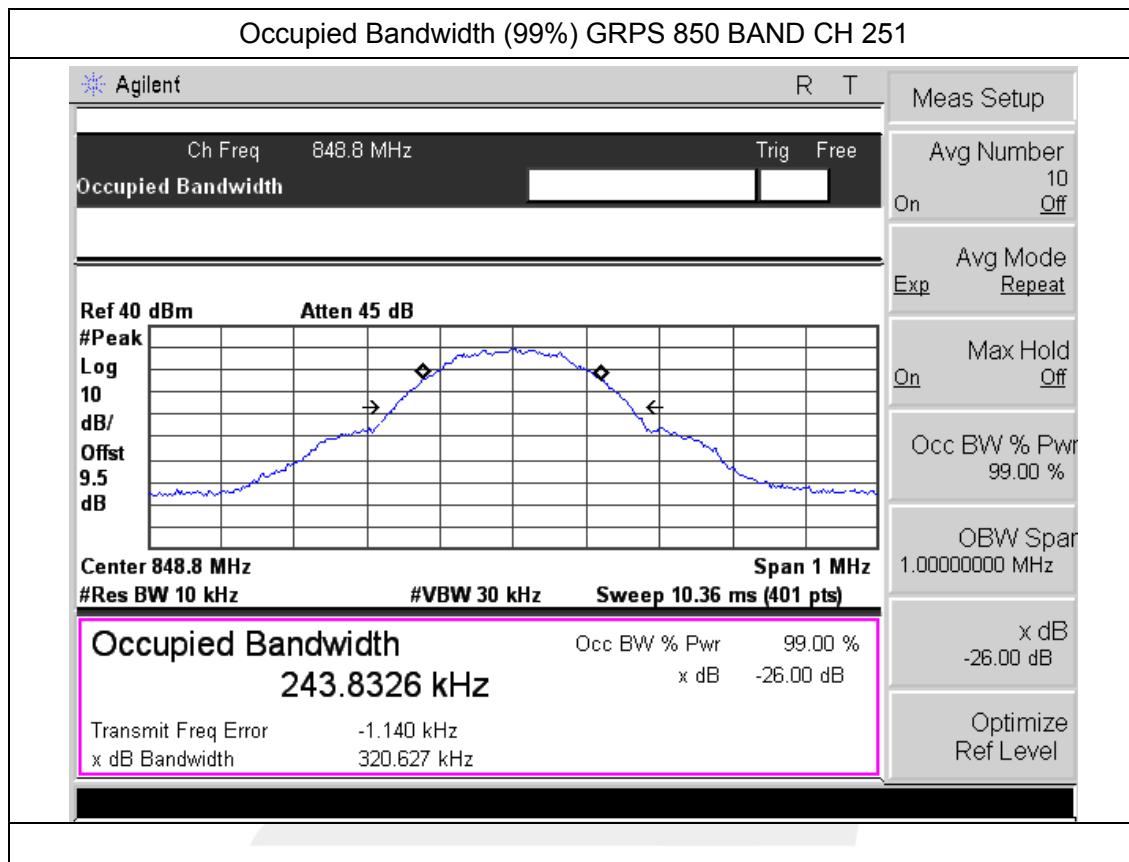


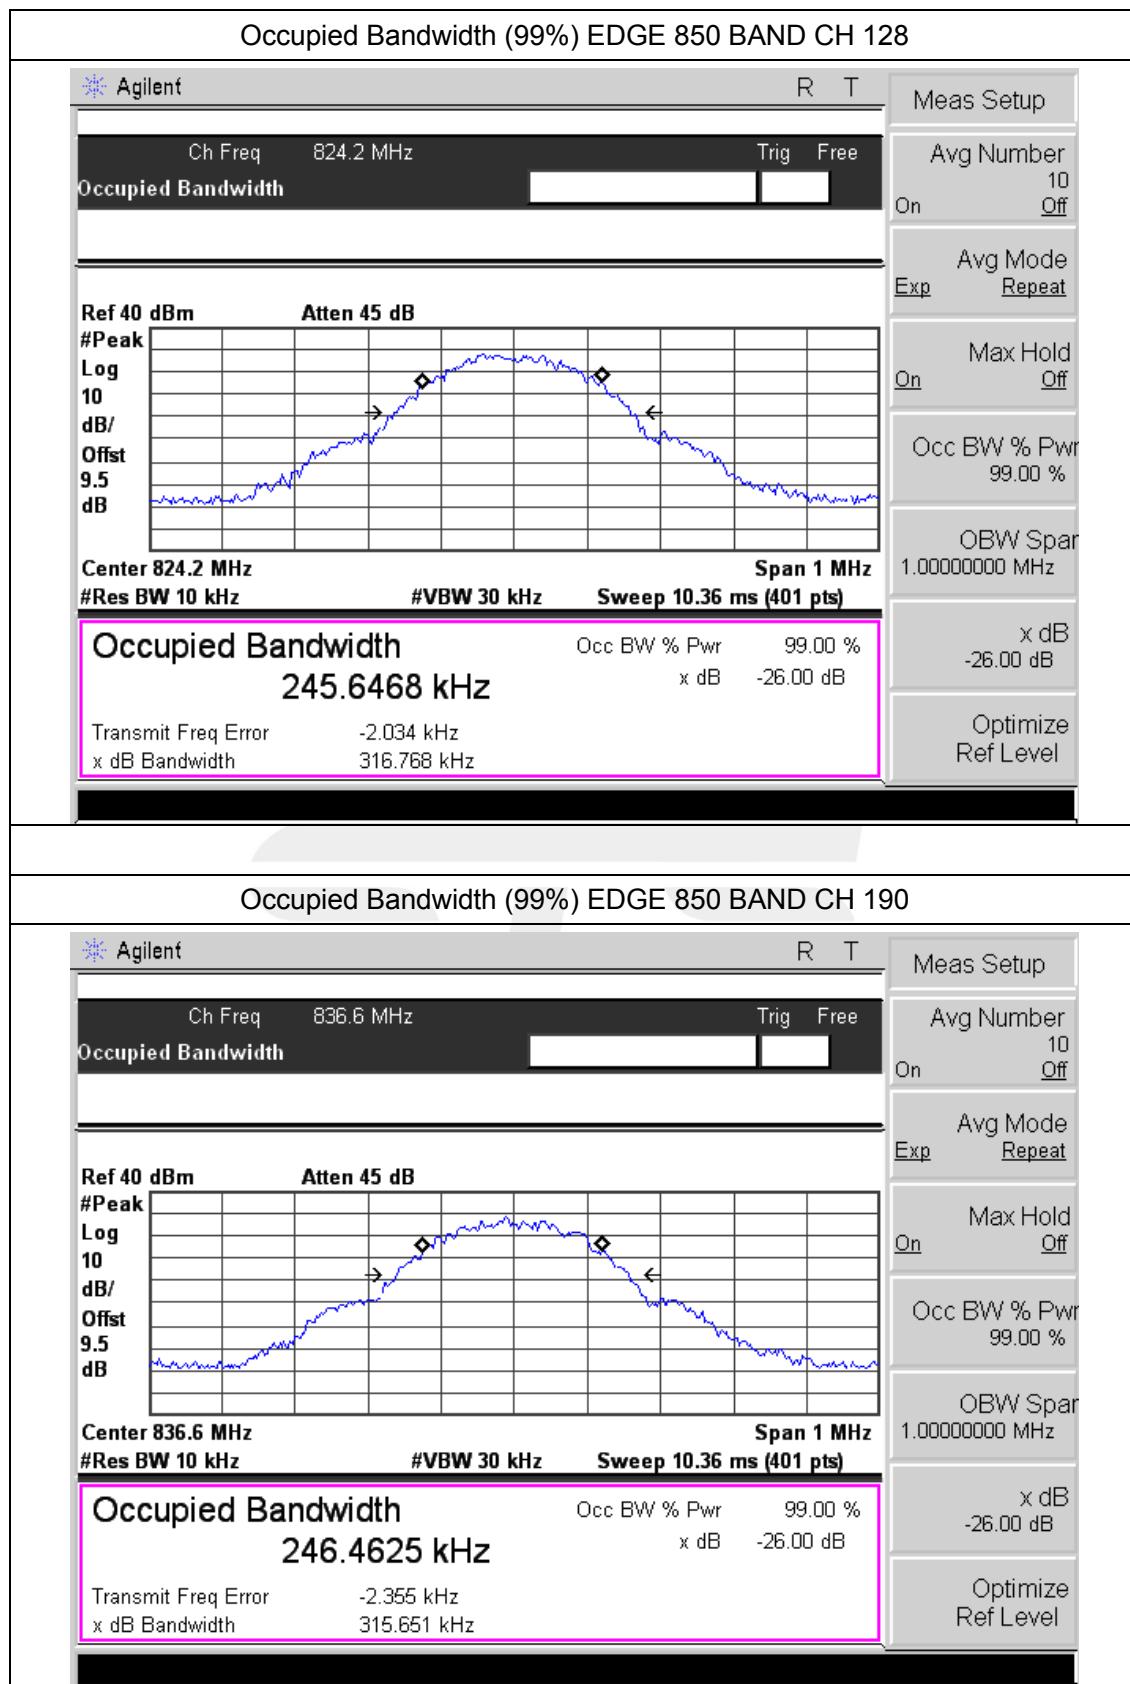


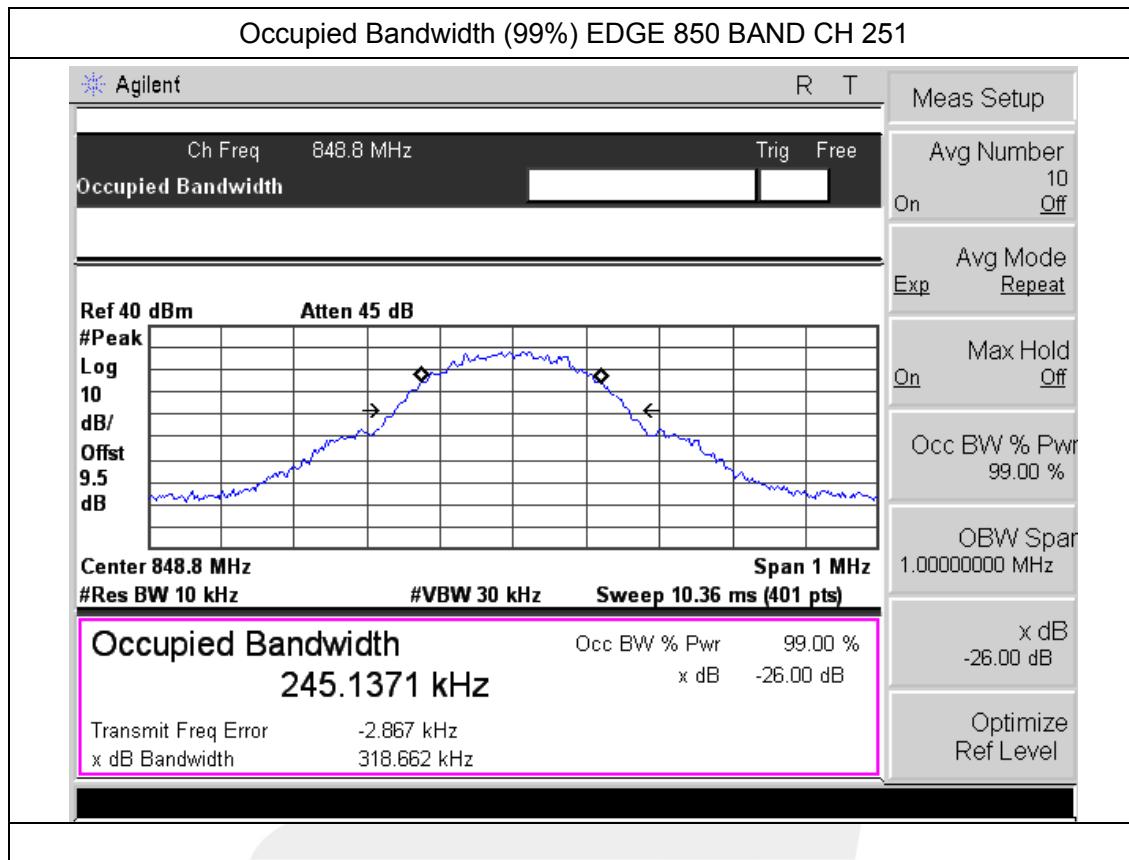


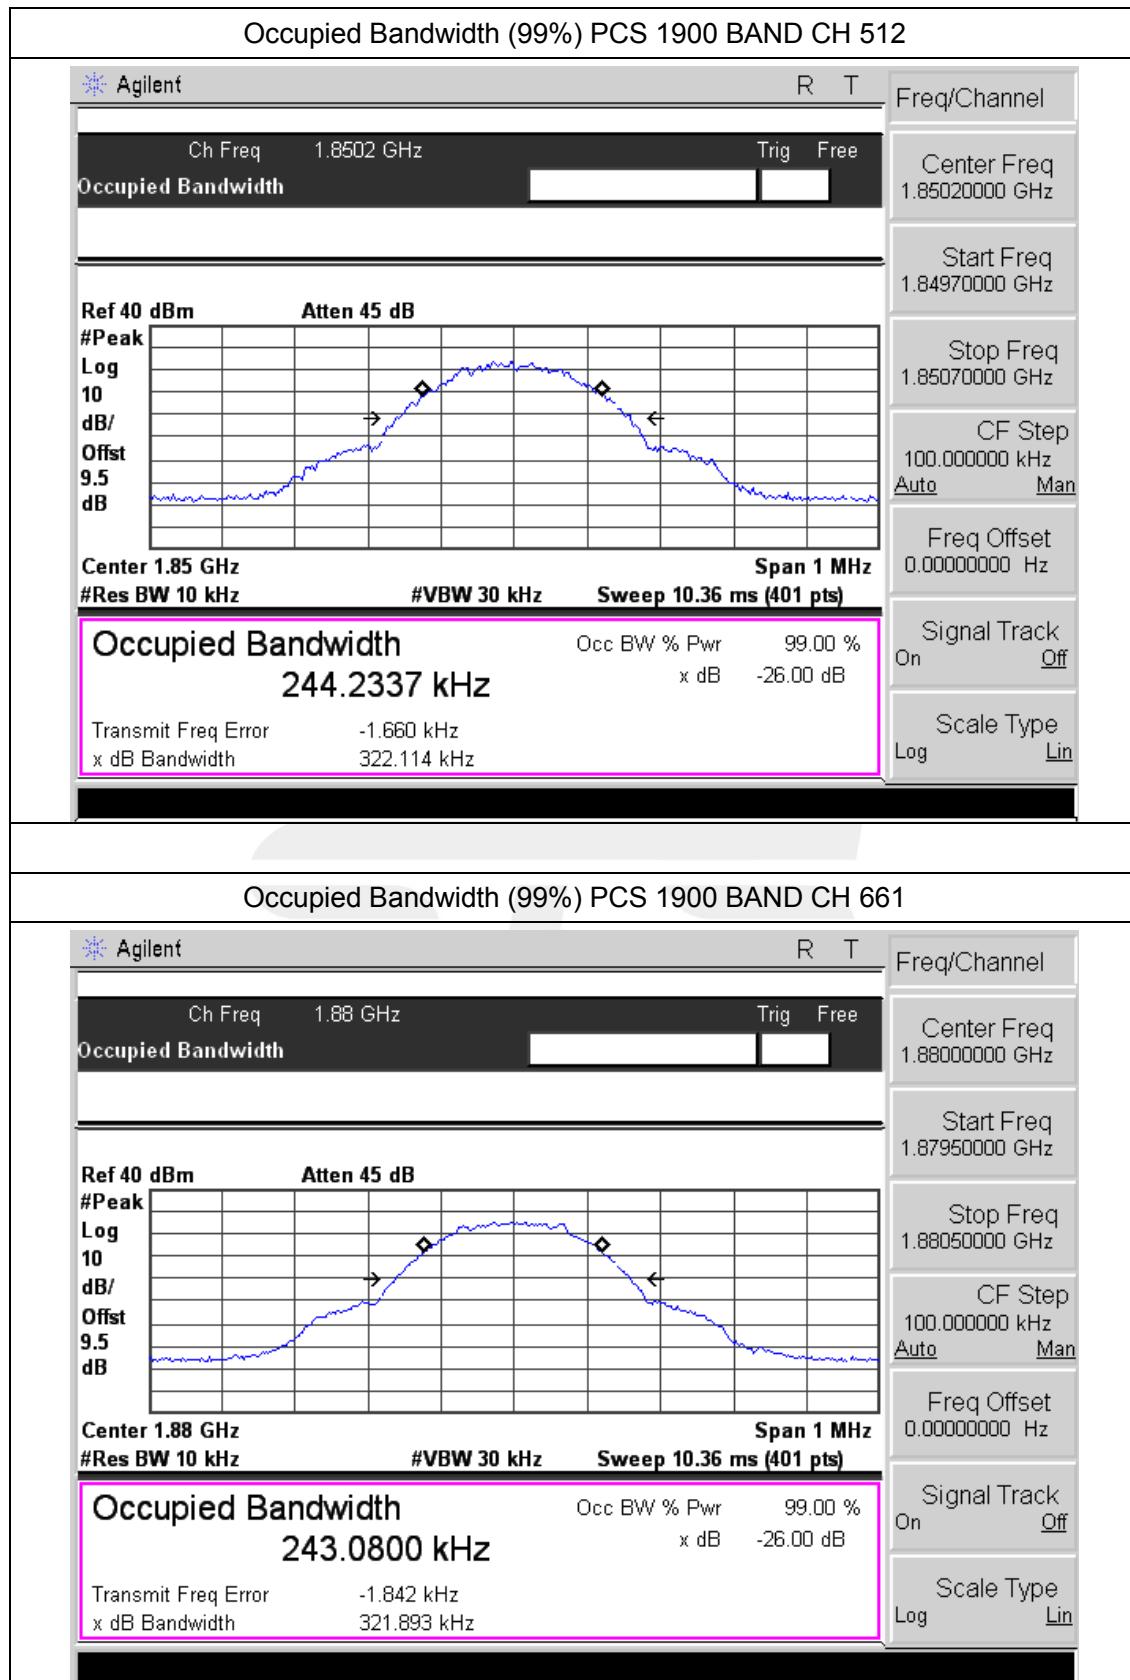


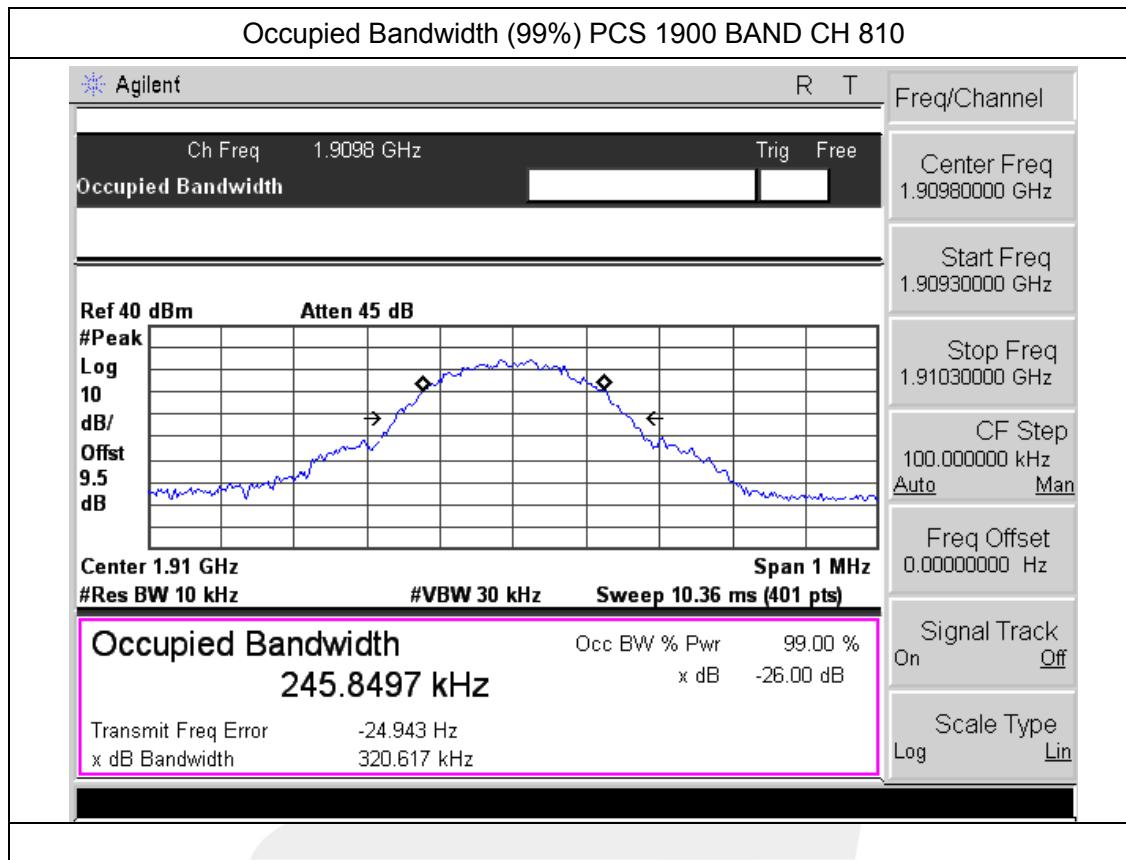

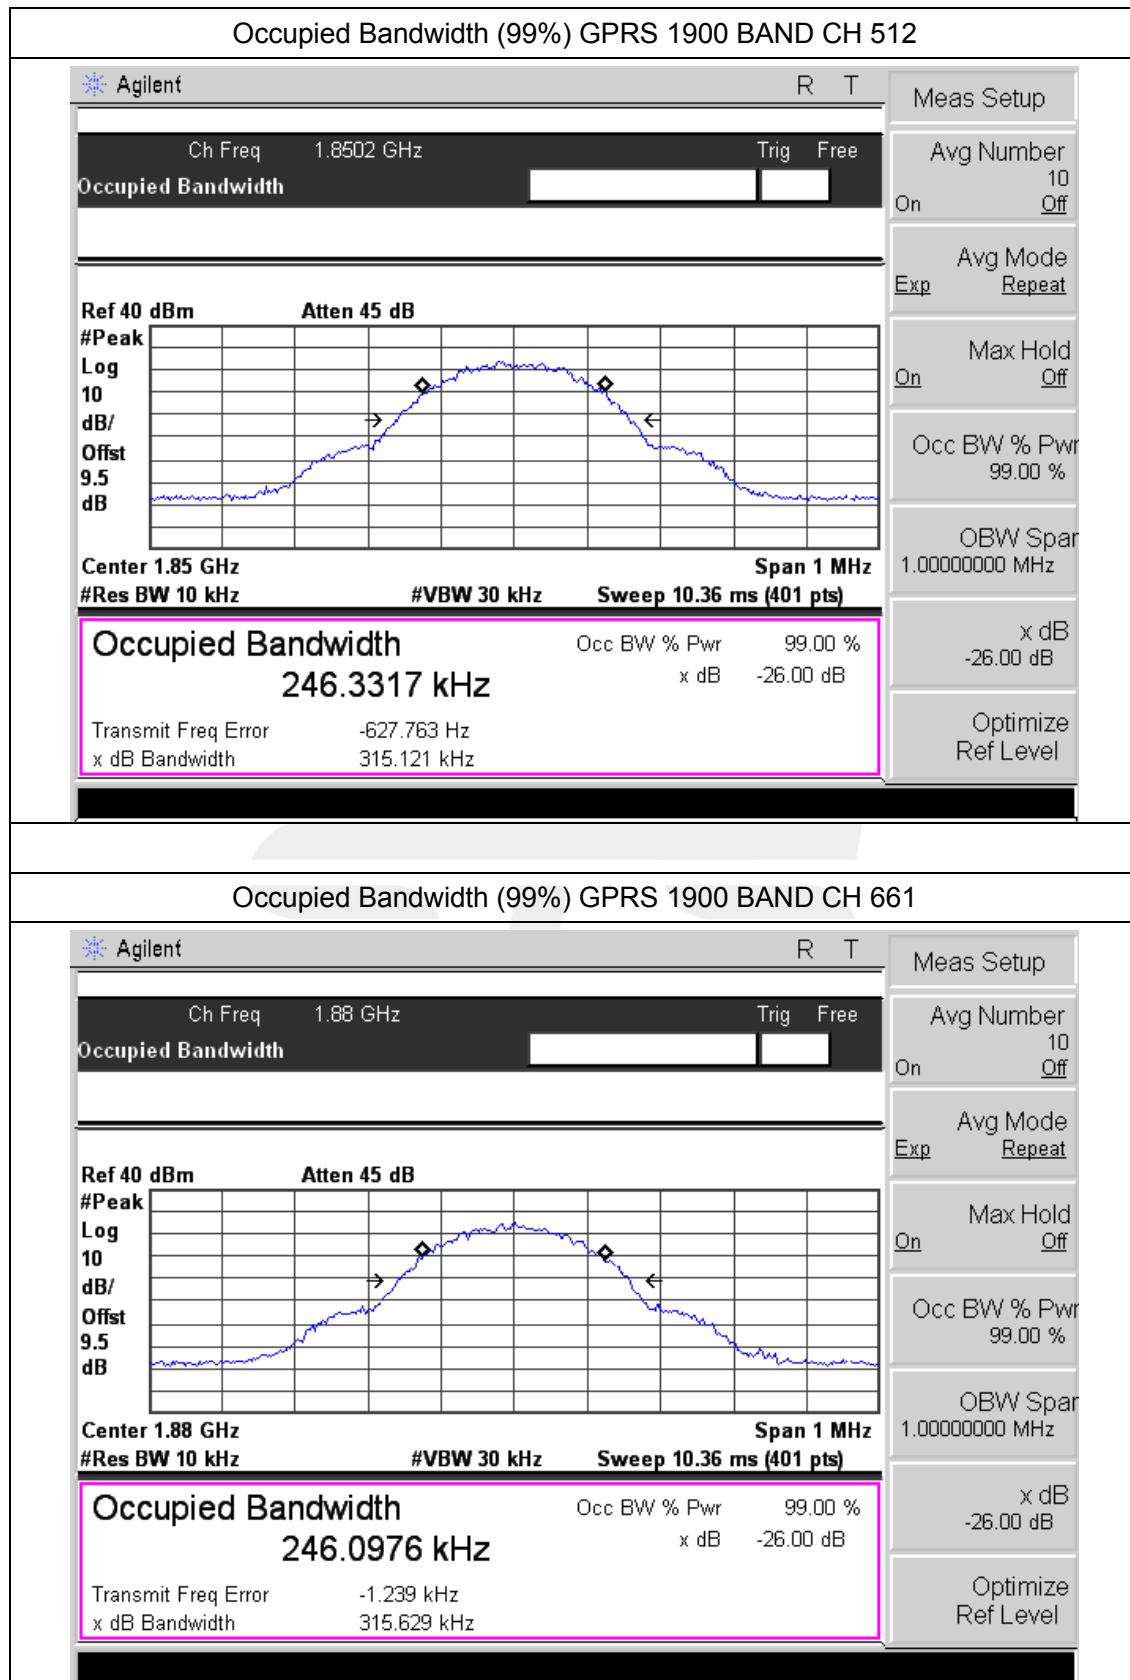

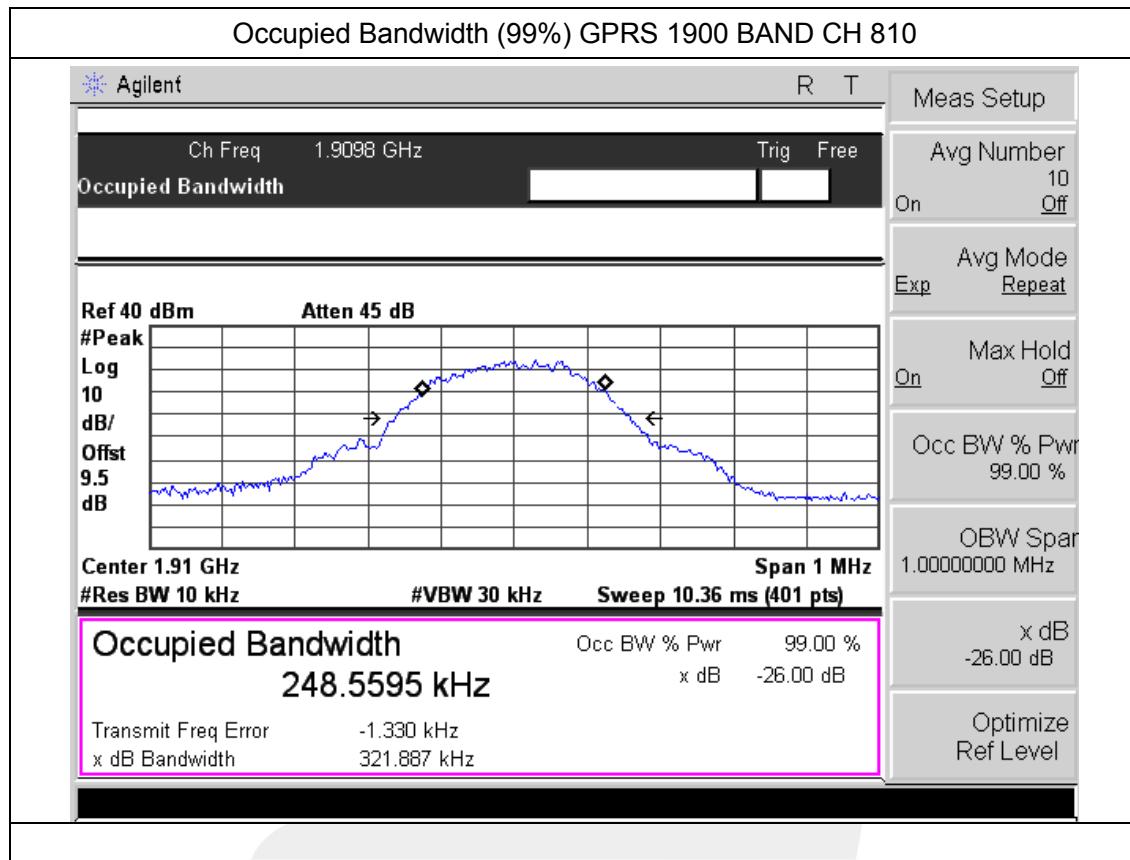


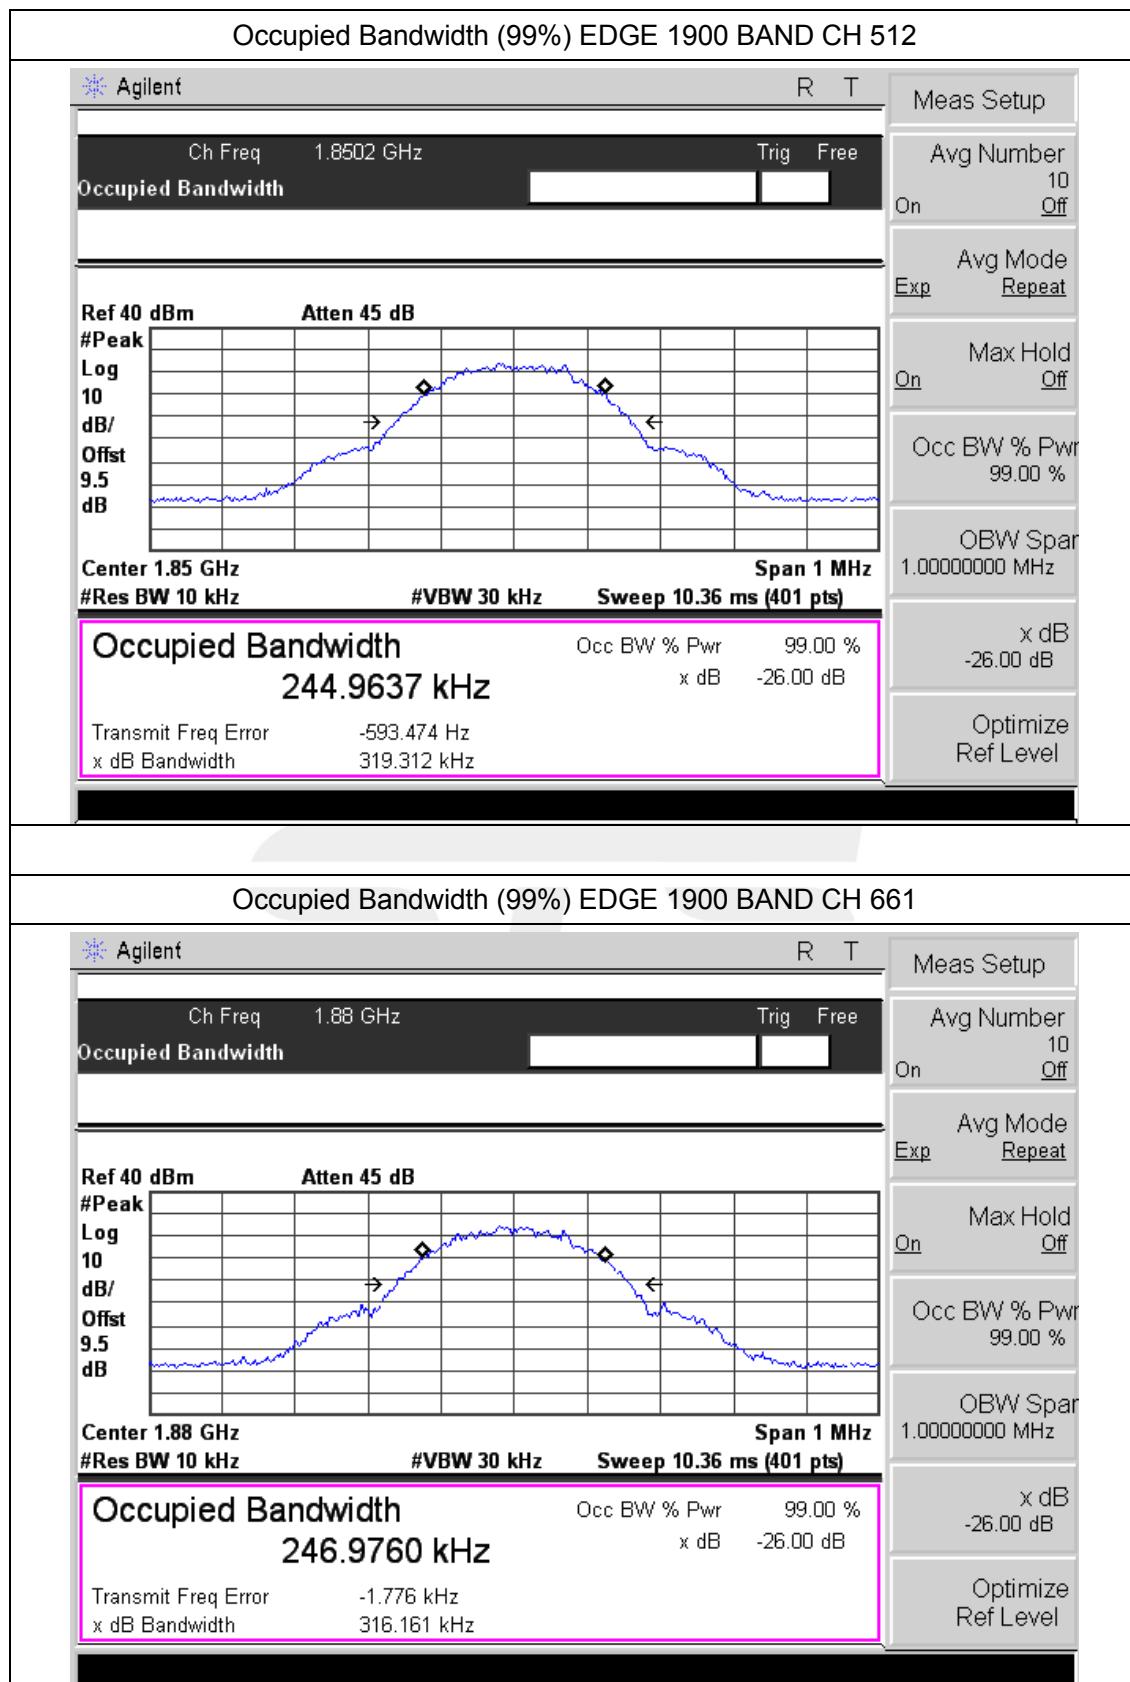


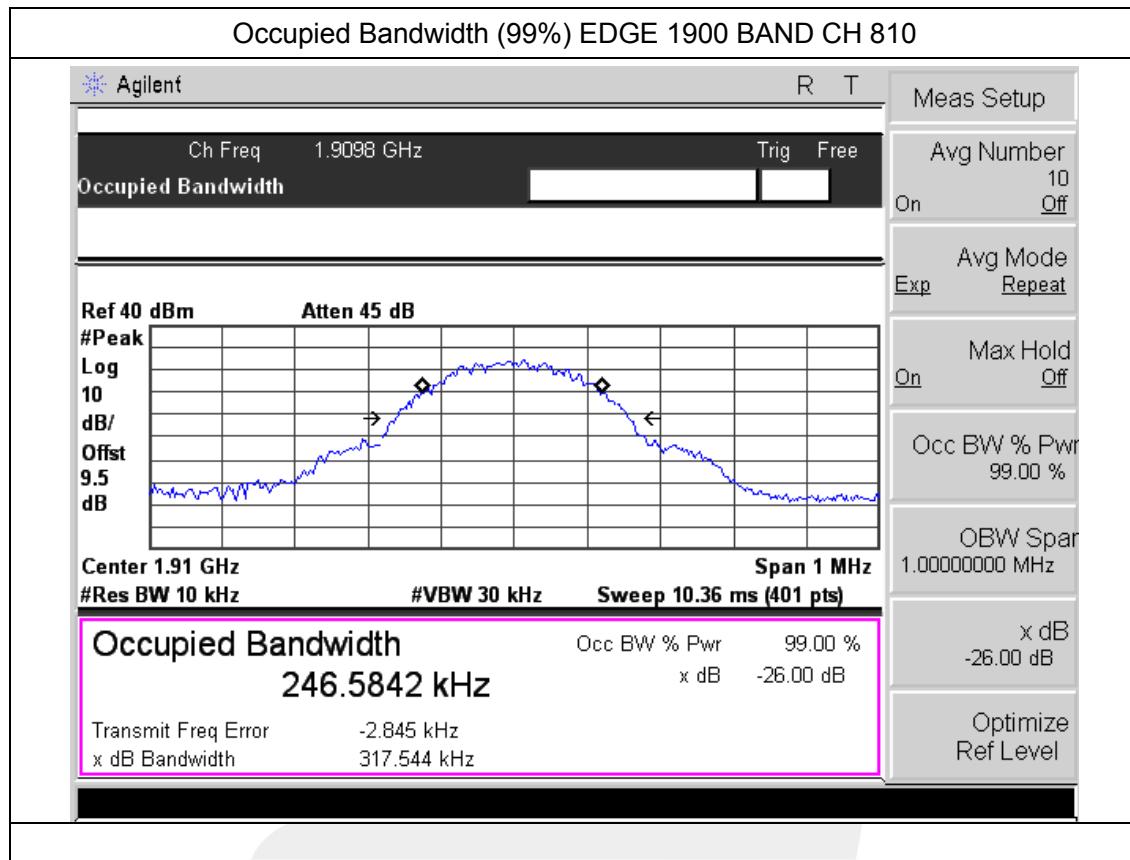



APPENDIX III


TEST PLOTS FOR BAND EDGES

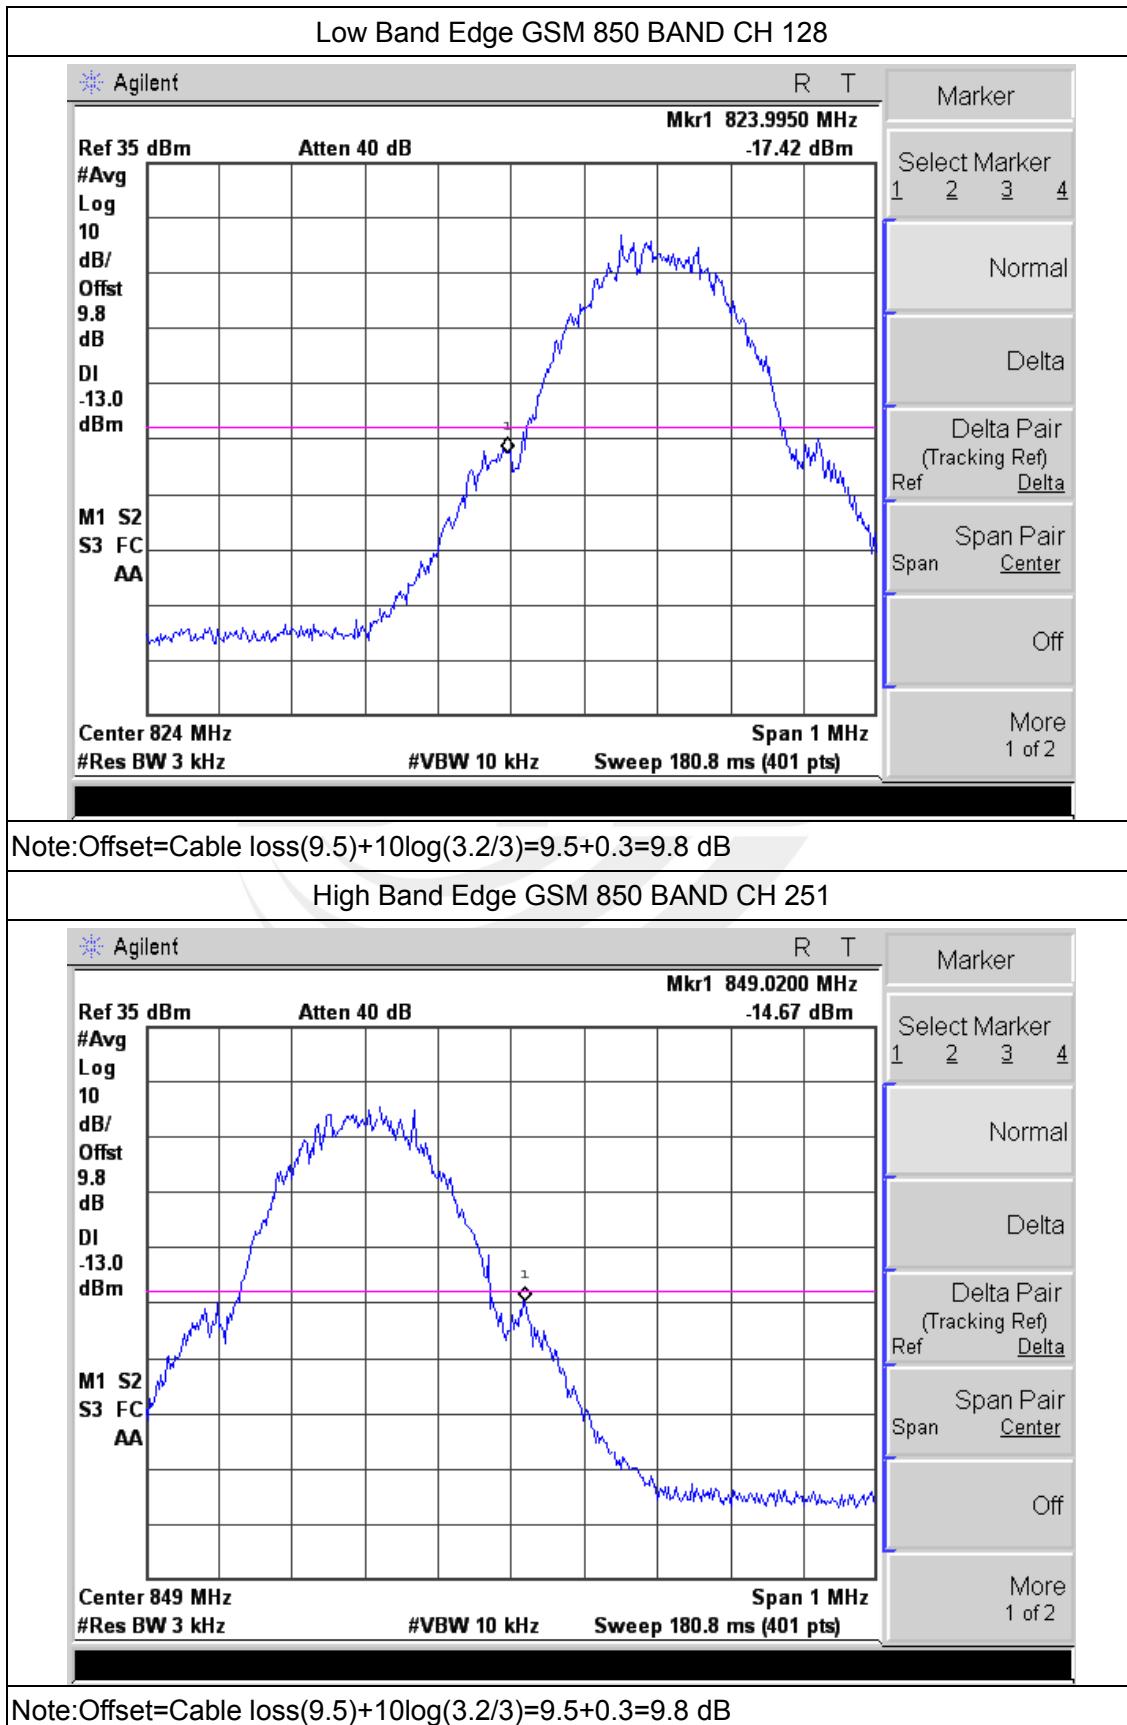


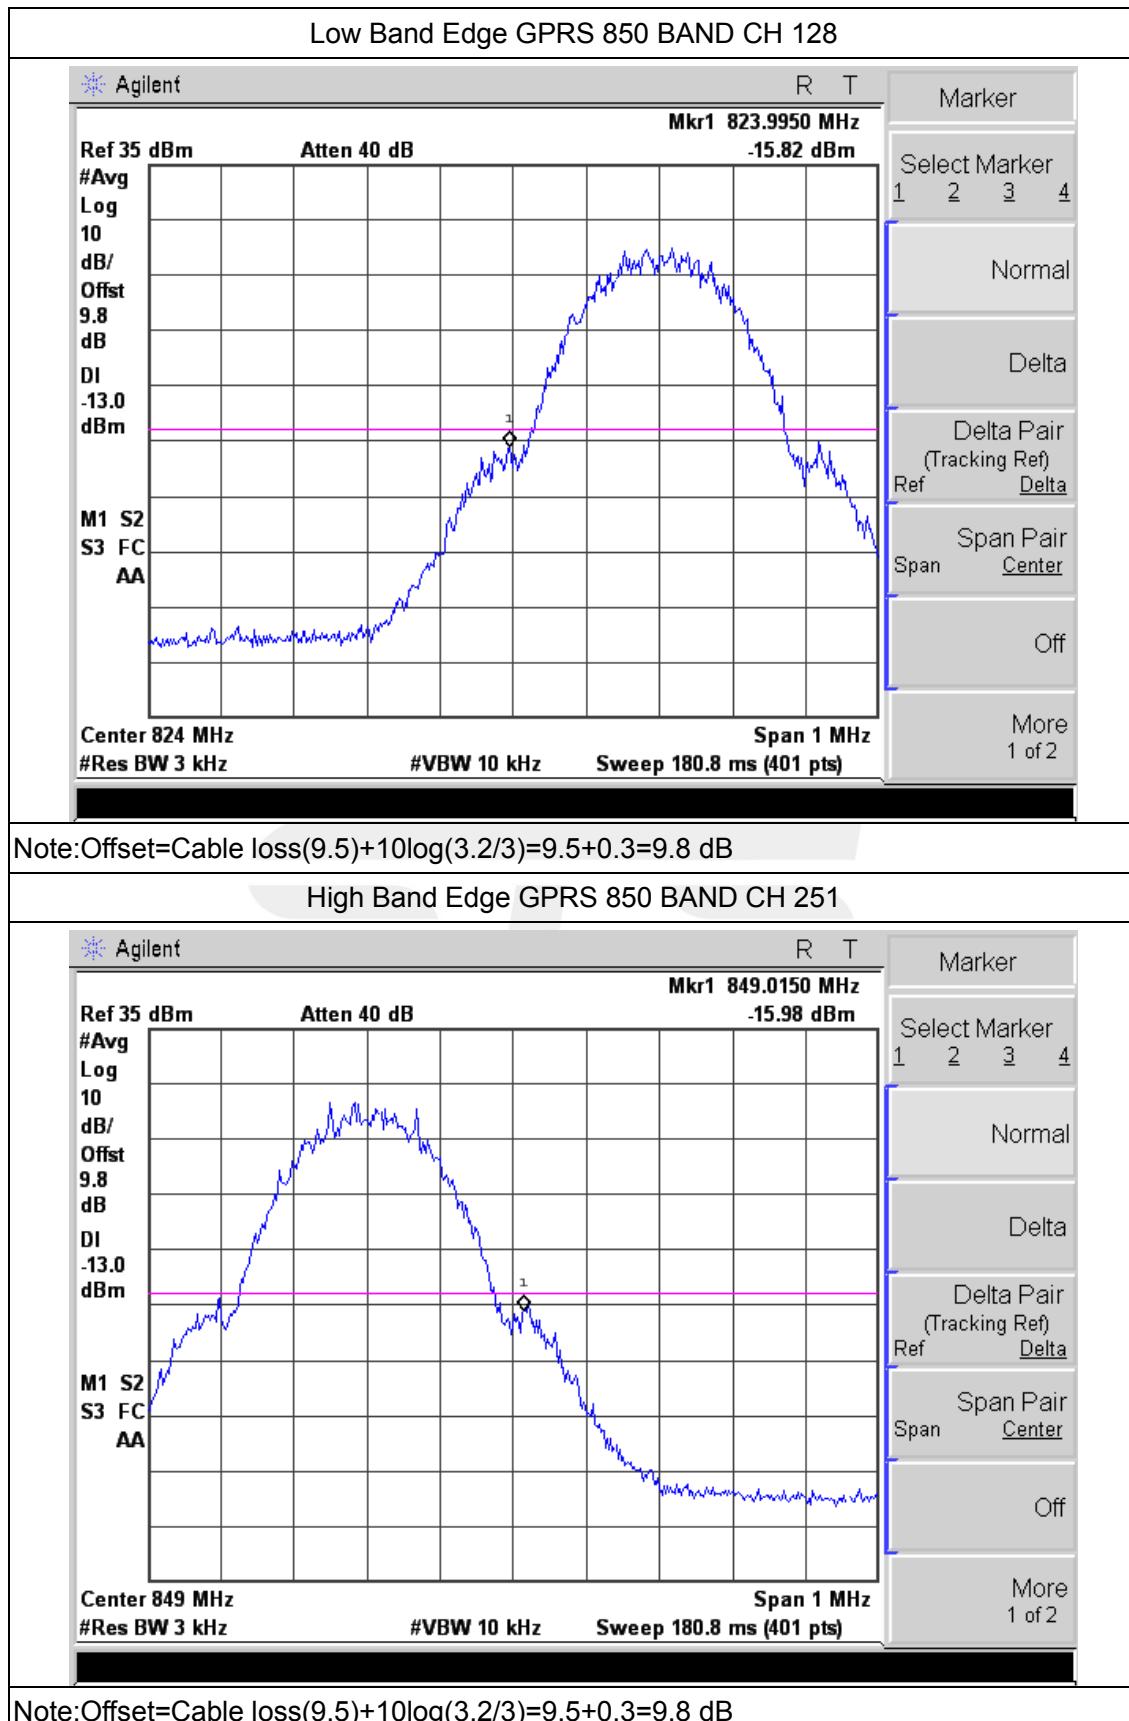

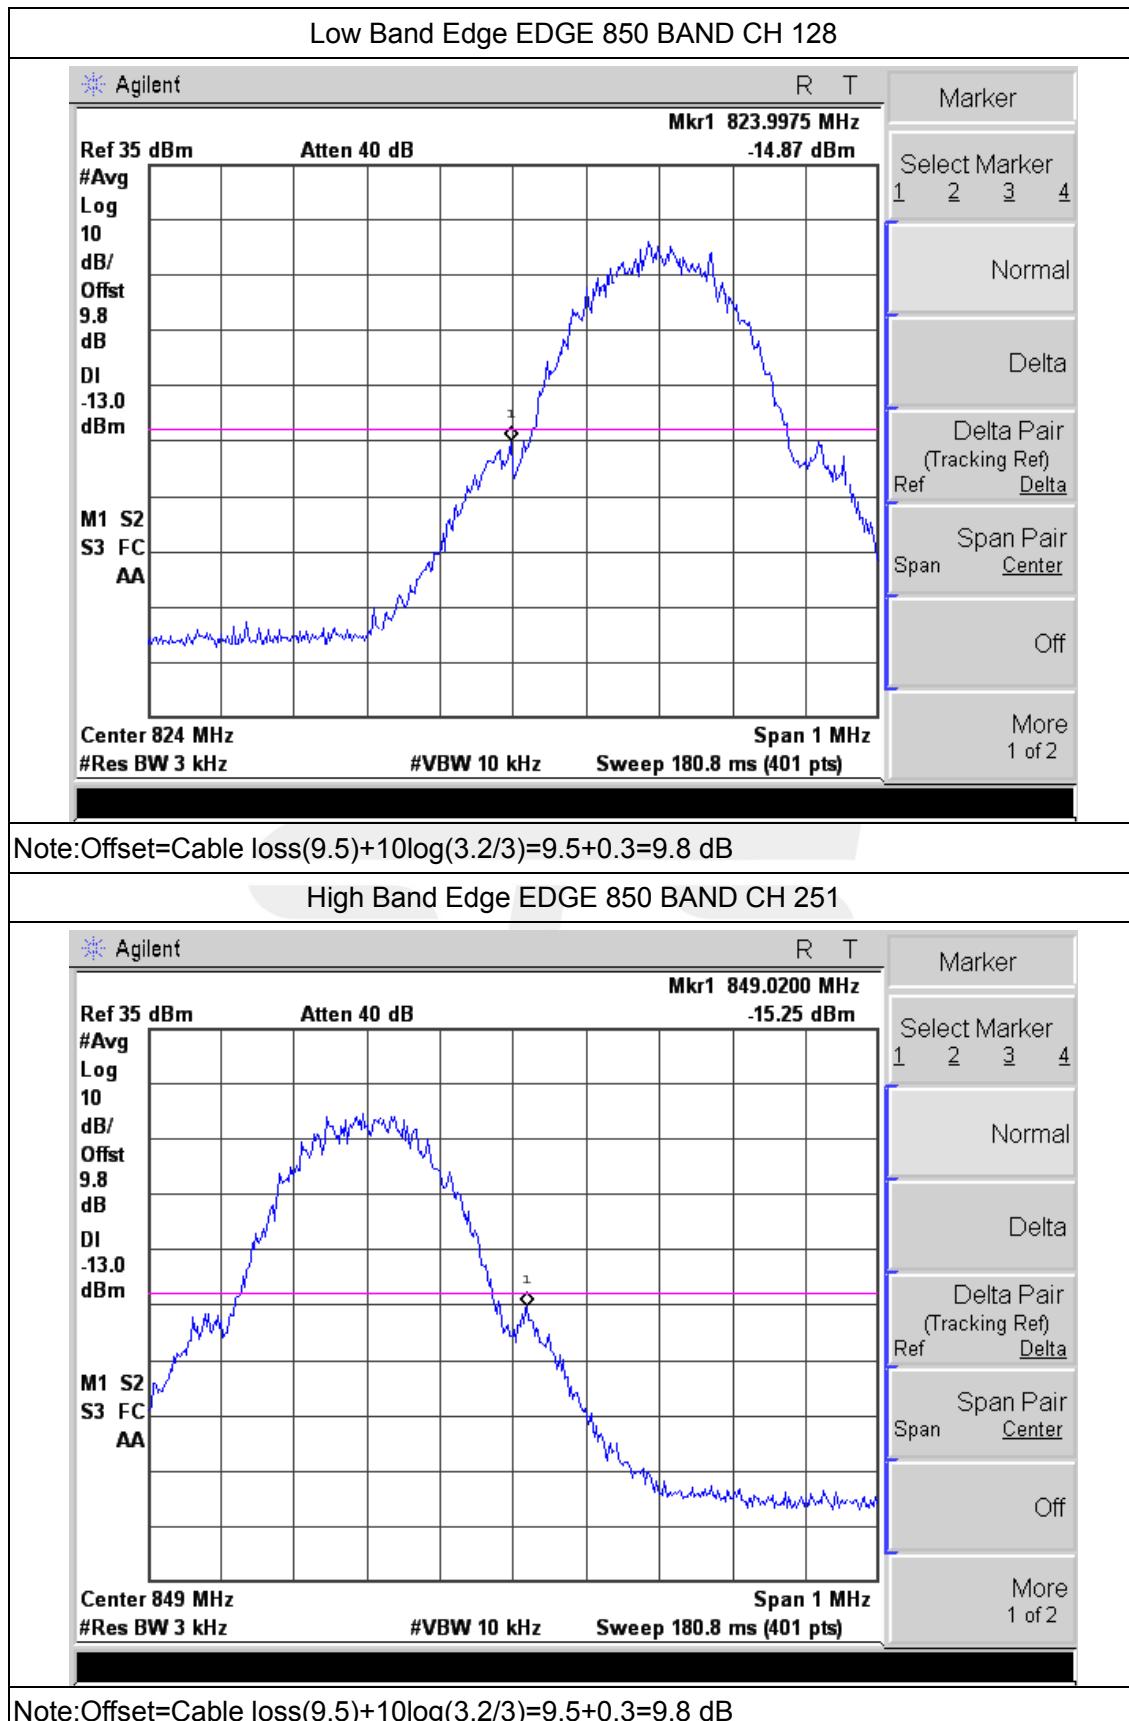

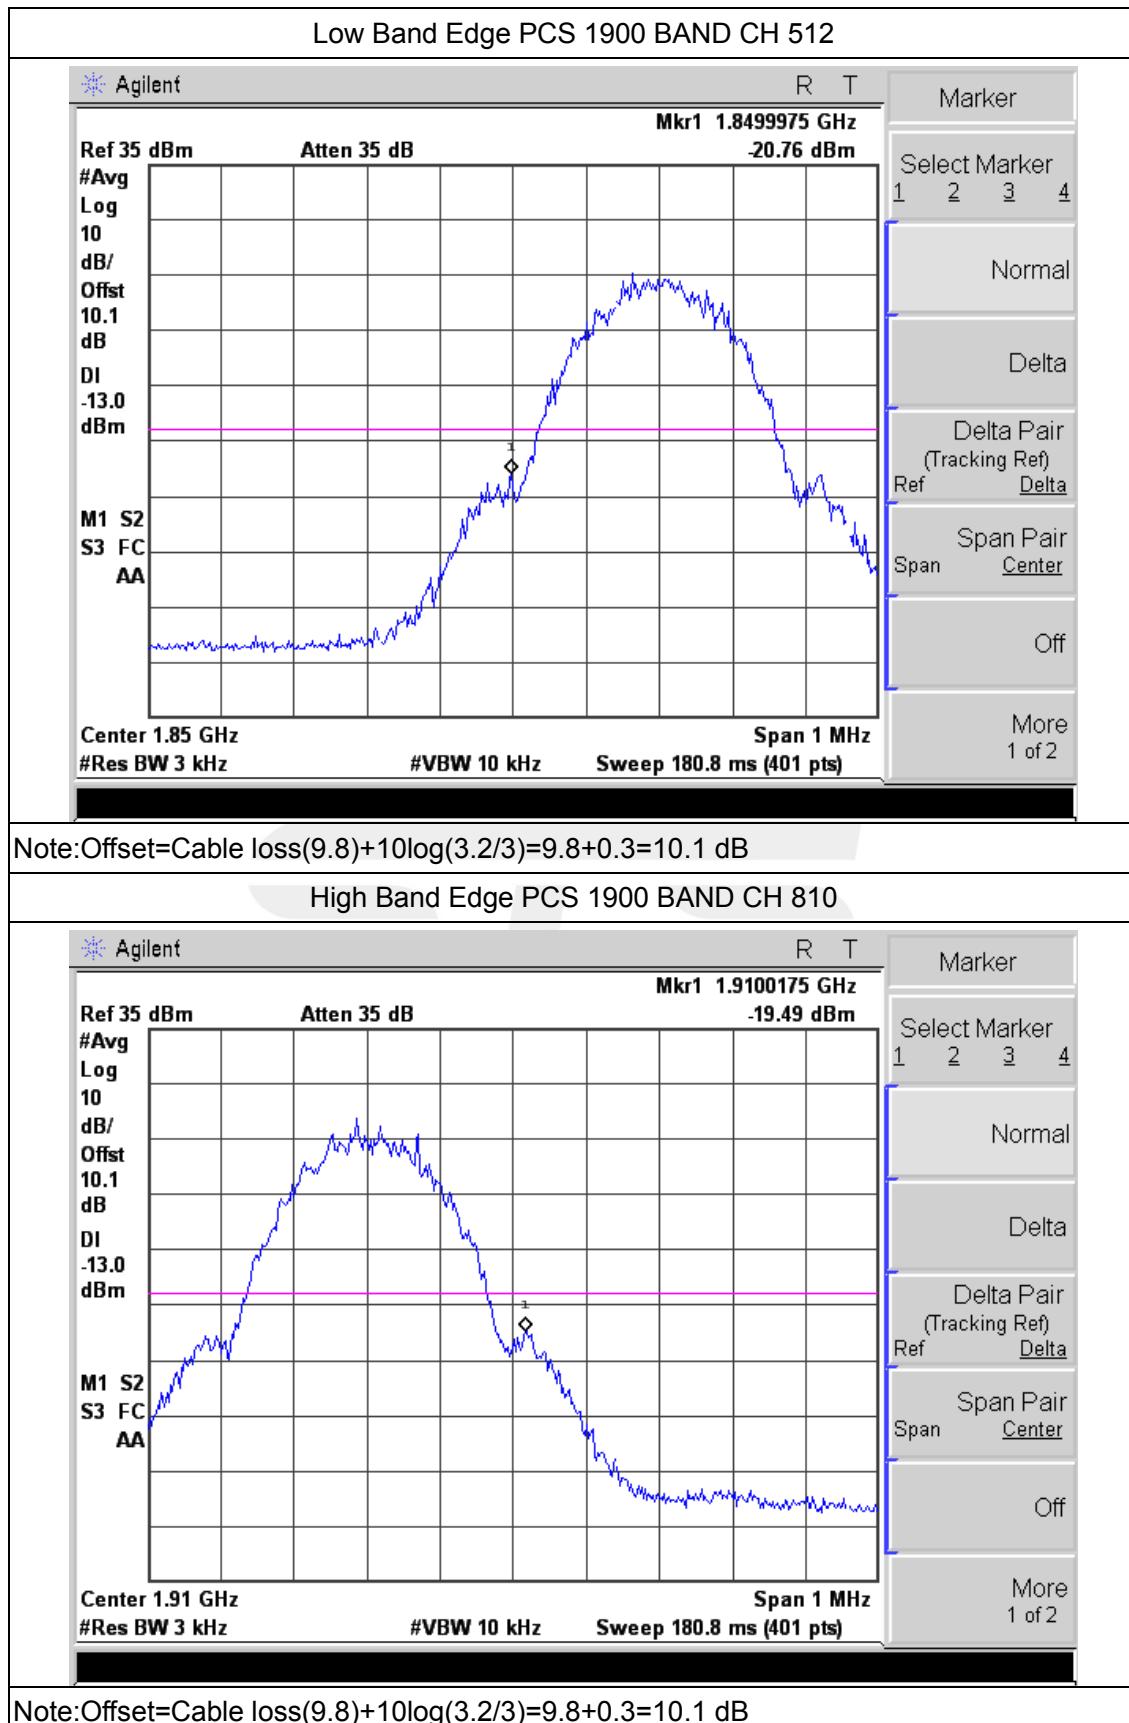


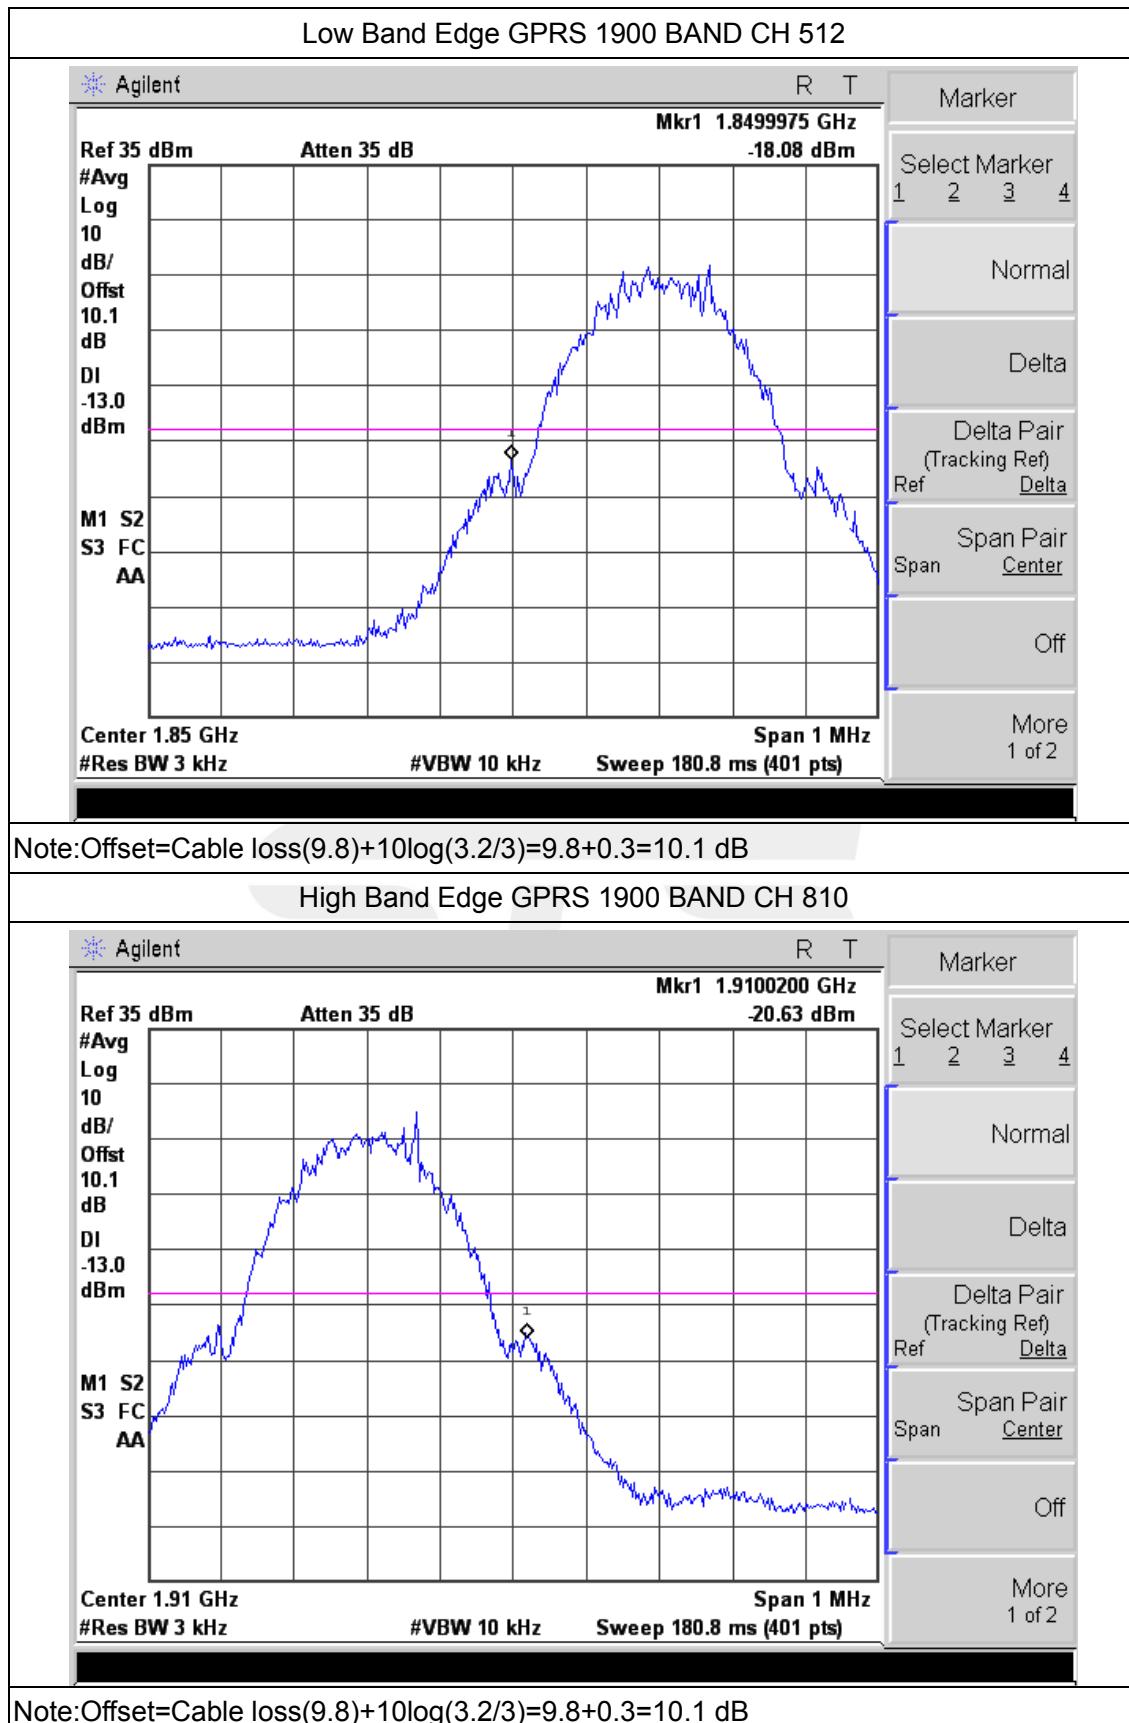


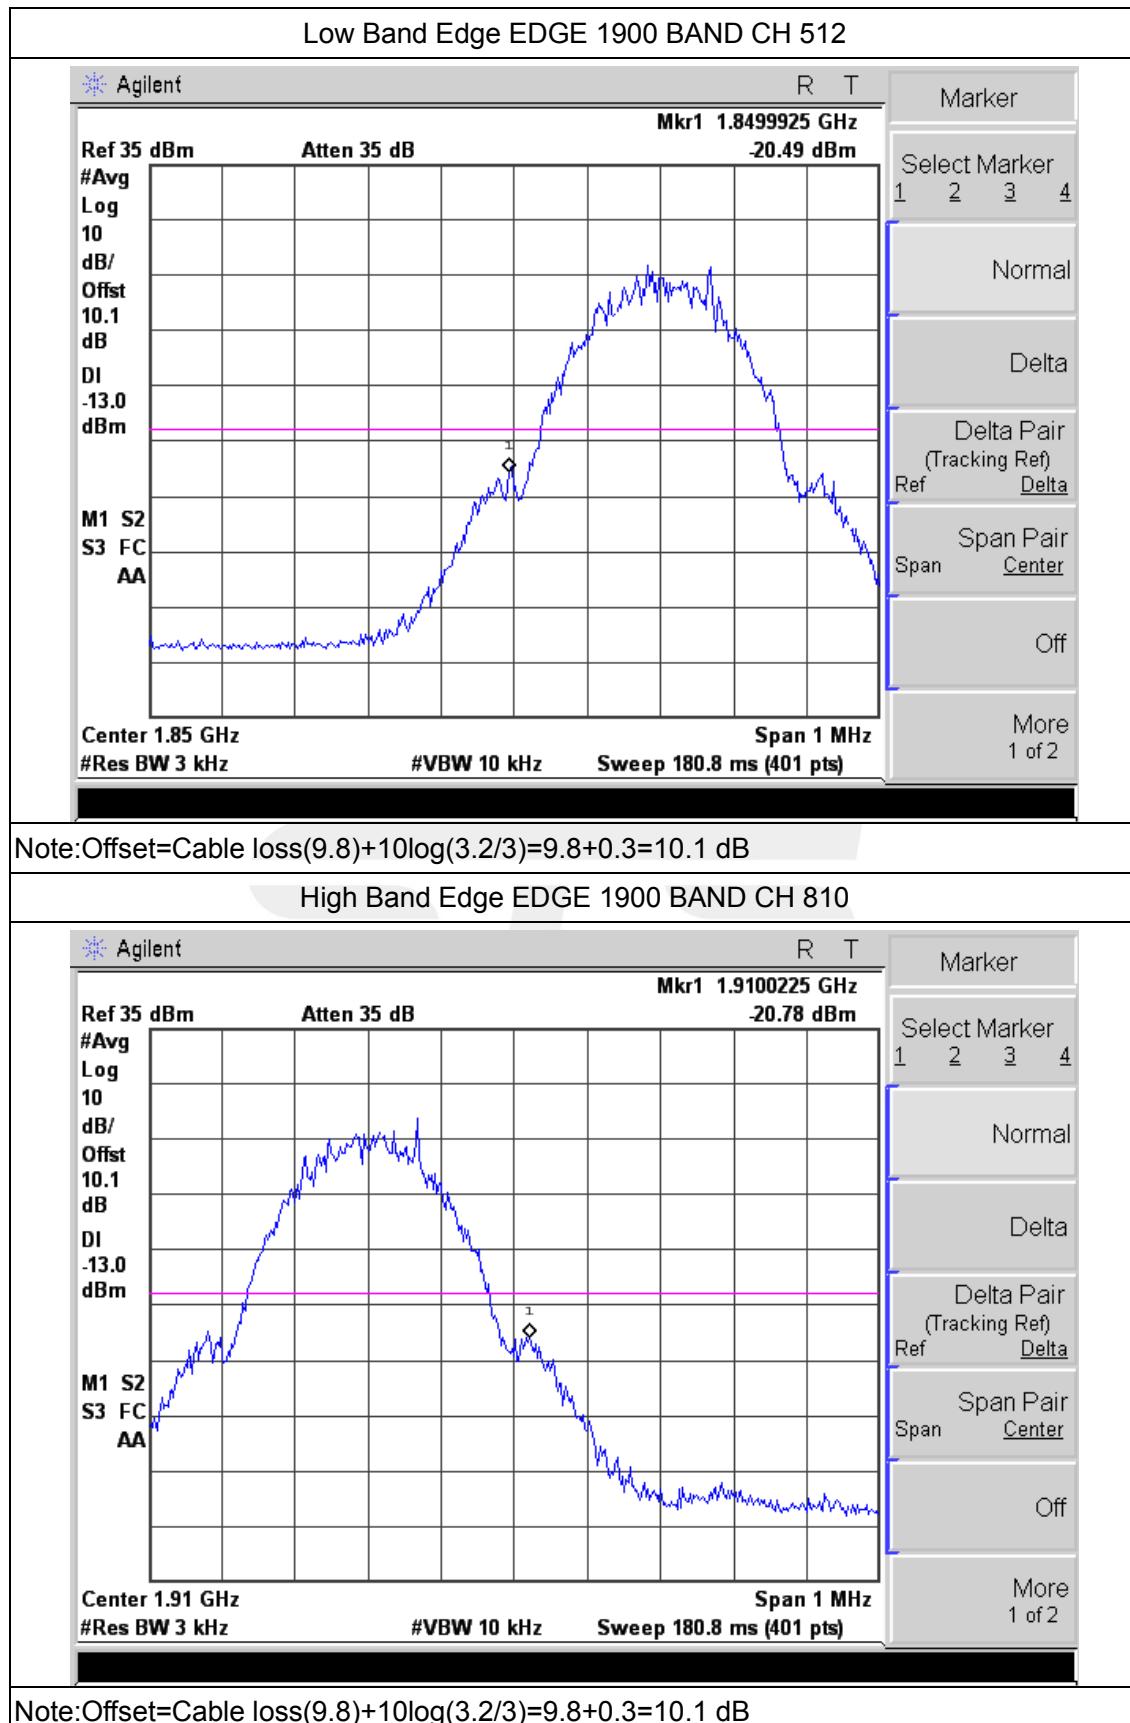

APPENDIX IV

PHOTOS OF TEST SETUP

RADIATED SPURIOUS EMISSION

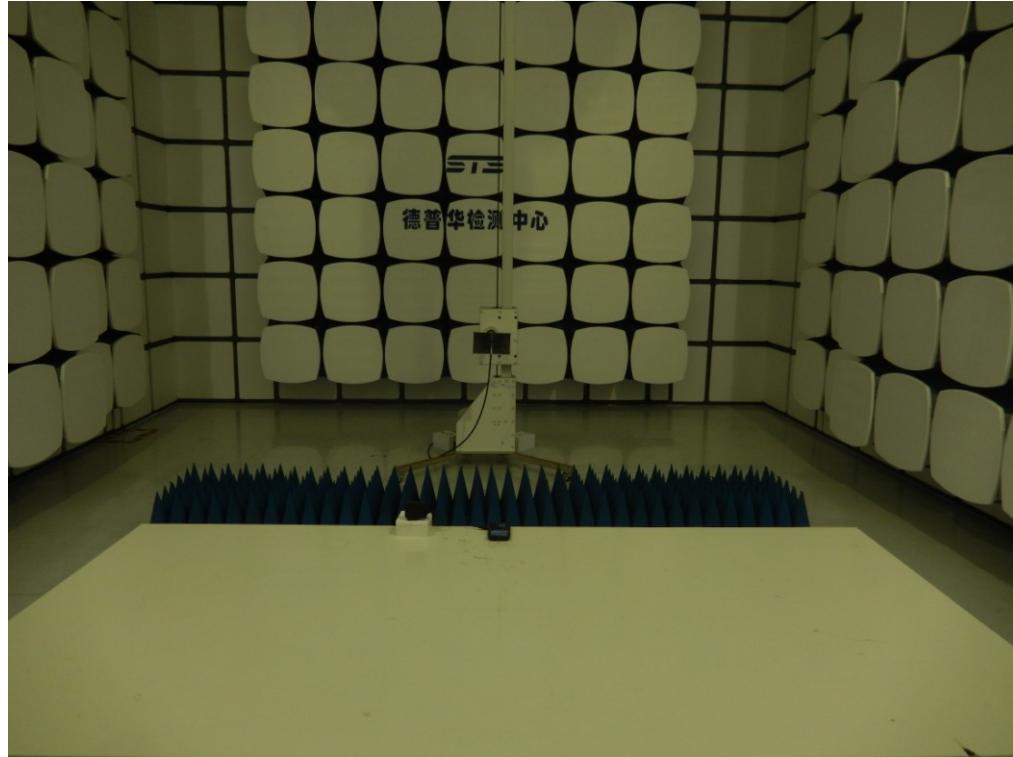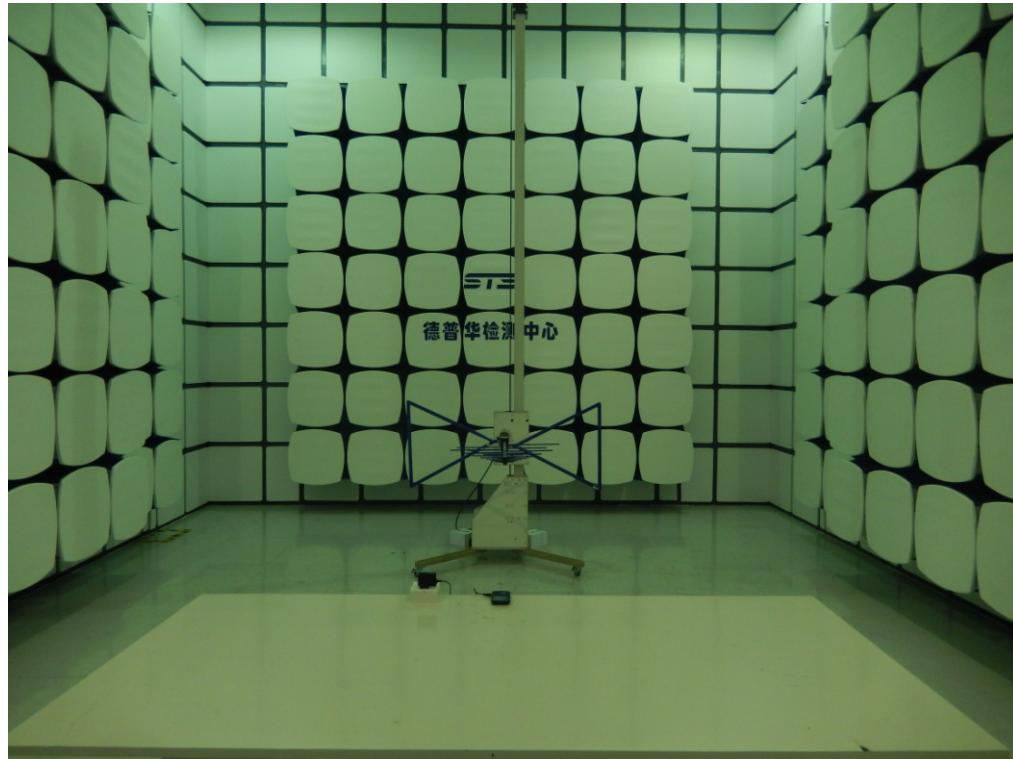

----END OF REPORT----