





TEST REPORT

of the accredited test laboratory

TÜV Nr.:INE-AT/FG-18/145

Applicant:

SES-imagotag GmbH

St. Peter Gürtel 10b

A - 8042 Graz

Tested Product:

Networking transceiver "EDG1-0270-A"

FCC-ID:

2ACQM-EDG1-0270-A

IC-ID:

12154A-EDG1-0270-A

Manufacturer:

SES-imagotag GmbH St. Peter Gürtel 10b

A - 8042 Graz

Output power /

3,16 mV/m average

power supply:

3V DC

0.35 MHz

field strength:

@ 3m distance

internal battery

Frequency range:

2404 - 2479,25 MHz

Channel separation:

Standard:

FCC: 47 CFR Part 15 (15. June 2018 edition)

RSS-210 Issue 9, August 2016

TÜV AUSTRIA SERVICES GMBH Test laboratory for EMC

Supervisor of EMC-laboratory:

Ing. Wilhelm Seier

undslegel

13.08.2018

Copy Nbr.:

checked by:

Ing. Michael Emminger

A publication of this test report is only permitted literally.

Copying or reproduction of partial sections needs a written permission of TÜV AUSTRIA SERVICES GMBH.

The results of this test report only refer to the provided equipment.

TÜV AUSTRIA SERVICES GMBH

Office:

Deutschstrasse 10 1230 Vienna/Austria T: +43 5 0454-0 F: +43 5 0454-6505 E: pzw@tuv.at W: www.tuv.at

Business Area Industry & Energy Austria

Technik



Testing Laboratory, Inspection Body, Certification Body, Calibration Laboratory, Verifizierungsstelle

Notified Body 0408 IC 2932K-1

Non-executive Board of Directors: KR DI Johann Marihart

Management: DI Dr. Stefan Haas Mag. Christoph Wenninger

Registered Office: Deutschstrasse 10 1230 Vienna/Austria

Branch Offices: www.tuv.at/standorte

Company Register Court / - Number: Vienna / FN 288476 f

Bank Details: IBAN AT131200052949001066 BIC BKAUATWW

IBAN AT153100000104093282 BIC RZBAATWW

VAT ATU63240488 DVR 3002476

Contents

	Designation	PAGE
1.	Applicant	3
2.	Description of EUT	4
3.	Standards / Final result	5
4.	Test results	
	List of measurements according to 47 CFR 15 and RSS-210	
4.1	Test object data	6
4.2	Number of channels and channel spacing	7
4.3	Duty Cycle for averaging	8
4.4	Field strength at 2400 – 2483,5 MHz	9-11
4.5	Emissions outside 2400 – 2483,5 MHz (15.209)	12-14
Appendix	Designation	PAGES
1	Test equipment used	4
2	Photodocumentation	9

Test Report Reference: INE-AT/FG-18/145

Ambient temperature: 28°C Relative humidity: 51%

1. Applicant

Company: SES-imagotag GmbH

Department: Product & Project Manager

Address: A – 8042 Graz; St. Peter Gürtel 10b

Contact person: Mr. Philipp Jauck

EUT received on: 30.07.2018

Tests were performed on: 30.07. and 31.07. and 06.08.2018

2. Description of EUT

EUT: Networking transceiver "EDG1-0270-A"

Serial Number: Prototype

Manufacturer: SES-imagotag GmbH

A - 8042 Graz; St. Peter Gürtel 10b

Description: SES-imagotag GmbH provided the following configuration for the

measurements:

Prototype with special test-firmware for continuous transmission

Operating mode: The measurements were carried out at the following running states:

test-firmware running, transmitting continuously

Technical data EUT: Rated voltage: 3VDC

Rated current: <1A Rated frequency: DC

Mains voltage during the tests: 3VDC internal battery

Climatic conditions in Relative humidity: 51% the emc laboratory: Temperature: 28°C

Test Report Reference: INE-AT/FG-18/145

Ambient temperature: 28°C Relative humidity: 51%

3. Standards / Final result

Name	Title	Deviation		
Title 47 CFR Part 15 15. June 2018 edition	RADIO FREQUENCY DEVICES	none	ОК	
RSS-210 Issue 9, August 2016	Licence-Exempt Radio Apparatus: Category I Equipment	none	ОК	

Result: Opinions and interpretation of testing laboratory OK: EUT passed

NOK: EUT failed

Test Report Reference: INE-AT/FG-18/145

Ambient temperature: 28°C Relative humidity: 51%

4.1 TEST OBJECT DATA

General EUT Description

This transceiver module is working in a network consisting of a controller station, so called Accesspoint, and various displays. The Accesspoint transmits information to the displays and receives acknowledgements. This device is a module to be used in displays operating in the network system. The device is equipped with a passive NFC chip onboard which does not have its own rf generation. It works as tag and can also receive information from the NFC reader station.

- 2.1033 (c) Technical description
- 2.1033 (4) Type of emission: Minimum shift keying declared channel bandwidth 250 kHz 'virtual' channel spacing 0,35 MHz. Only 11 channels from the channel plan are used, therefore the channel spacing in reality is much higher and varies from 2,45 MHz minimum up to 17,15 MHz.
- 2.1033 (5) Frequency range: 2404 2479,25 MHz (channel center frequencies of channel 0 up to ch. 10)
- 2.1033 (6) Power range and Controls: The maximum field strength measured is 3,16 mV/m average @ 3m distance. There is no power control or regulation.
- 2.1033 (7) Maximum output power rating: 3,16 mV/m average @ 3m distance.
- 2.1033 (8) DC Voltage and Current: 3 VDC (internal battery)
 maximum current consumption: 28,0mA during continuous transmission
- RSS-135 This standard does not apply to:
 - 1.1.(a) a receiver that scans radio frequencies for the purpose of enabling its associated transmitter to avoid transmitting in an occupied frequency but which does not have the capability of decoding the message (e.g. converting it to audio voice) contained in the radio signal

Tests were performed on: July 30th and 31st and August 6th 2018.

4.2 Number of channels and channel spacing

§ 2.1033

Channel plan:

Channel Number	Center frequency (MHz)	Channel spacing (MHz)
0	2404	- 0-
1	2409,95	5,95
2	2421,85	11,9
3	2424,65	2,8
4		17,15
	2441,8	7,35
5	2449,15	12,6
6	2461,75	7,7
7	2469,45	4,9
8	2474,35	
9	2476,8	2,45
10	2479,25	2,45


Tests were performed on channels 0, 4 and 10.

Test Equipment used: N/A

4.3 Duty Cycle measurements for averaging

§ 15.249 (e)

Mode: data transmission (worst case in 100ms)

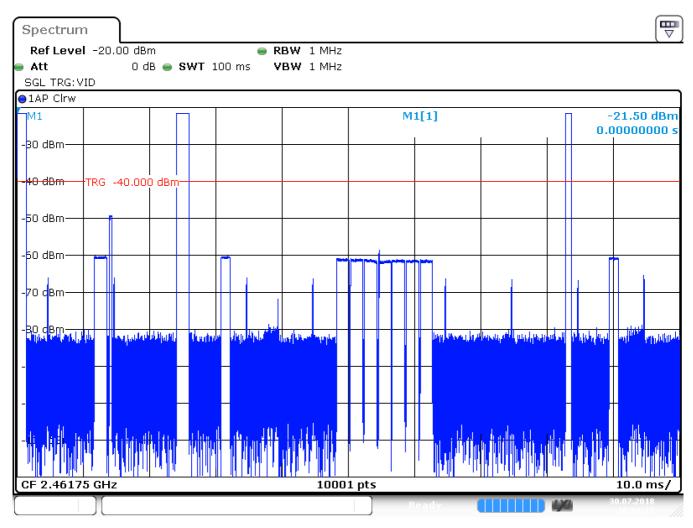

Date: 30.JUL.2018 10:02:16

According to the timing protocol description provided by the manufacturer and attached as technical description to the application for certification, the transmission burst time was checked to not exceed the declared value. The declared value was taken for calculation, as that gives the worst case. Transmission bursts of 1,48ms length occurring twice in 100ms with another handshaking burst of 1,97ms length give a duty cycle of 4,93% or an average factor of -26,1 dB.

LIMIT SUBCLAUSE 15.249(e)

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Test Equipment used: EMV-205

4.4 Field strength of emissions at 2400 - 2483,5 MHz

§ 15.249 (a) (c)

Operating on CH 0 (2404 MHz)

The maximum peak value measured was 96,1 dB μ V/m = 63,83 mV/m at 3m distance.

With the averaging factor calculated on page 5 of this test report of -26,1 dB the maximum average value is then 70,0 dB μ V/m = 3,16 mV/m at 3m distance.

LIMIT SUBCLAUSE 15.249(a) (c)

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)		
902–928 MHz	50	500		
2400–2483.5 MHz	50	500		
5725–5875 MHz	50	500		
24.0–24.25 GHz	250	2500		

⁽c) Field strength limits are specified at a distance of 3 meters.

Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-200

Field strength of emissions at 2400 - 2483,5 MHz

§ 15.249 (a) (c)

Operating on CH 4 (2441,8 MHz)

The maximum peak value measured was 96,0 dB μ V/m = 63,10 mV/m at 3m distance.

With the averaging factor calculated on page 5 of this test report of -26,1 dB the maximum average value is then 69,9 dB μ V/m = 3,13 mV/m at 3m distance.

LIMIT SUBCLAUSE 15.249(a) (c)

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)		
902–928 MHz	50	500		
2400–2483.5 MHz	50	500		
5725–5875 MHz	50	500		
24.0–24.25 GHz	250	2500		

⁽c) Field strength limits are specified at a distance of 3 meters.

Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-200

Field strength of emissions at 2400 - 2483,5 MHz

§ 15.249 (a) (c)

Operating on CH 10 (2479,25 MHz)

The maximum peak value measured was 95,6 dB μ V/m = 60,26 mV/m at 3m distance.

With the averaging factor calculated on page 5 of this test report of -26,1 dB the maximum average value is then 69,5 dB μ V/m = 2,99 mV/m at 3m distance.

LIMIT SUBCLAUSE 15.249(a) (c)


(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)		
902–928 MHz	50	500		
2400–2483.5 MHz	50	500		
5725–5875 MHz	50	500		
24.0–24.25 GHz	250	2500		

⁽c) Field strength limits are specified at a distance of 3 meters.

Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-200

4.5 Emissions outside 2400 – 2483,5 MHz § 15.249 (d) (e) Channel 0 (2404 MHz) – average values above 1 GHz are shown in magenta – green = peak

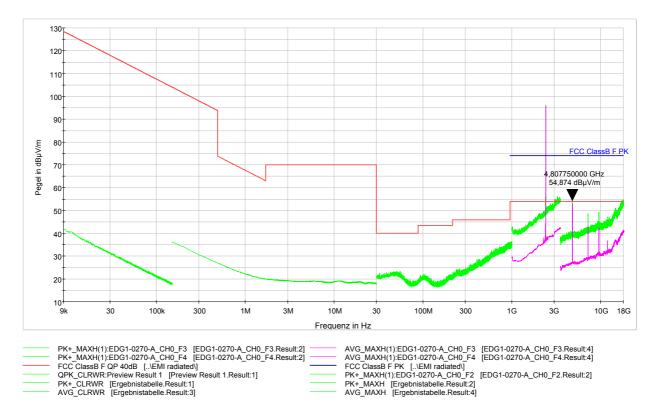

LIMIT SUBCLAUSE 15.249(d) (e) (15.209)


- (d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.
- (e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Test Equipment used:

EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416 Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz § 15.249 (d) (e) Channel 4 (2441,8 MHz) – average values above 1 GHz are shown in magenta – green = peak

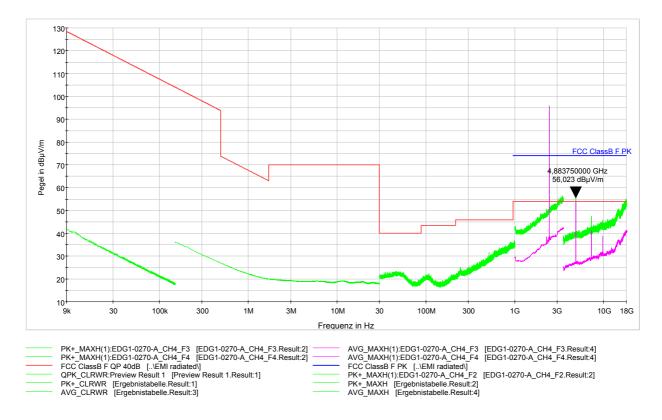

LIMIT SUBCLAUSE 15.249(d) (e) (15.209)


- (d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.
- (e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Test Equipment used:

EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416 Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz § 15.249 (d) (e) Channel 10 (2479,25 MHz) – average values above 1 GHz are shown in magenta – green = peak

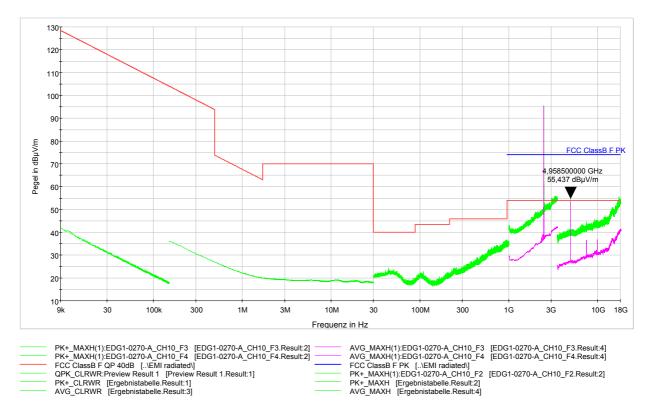

LIMIT SUBCLAUSE 15.249(d) (e) (15.209)

- (d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.
- (e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Test Equipment used:

EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416 Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

www.tuv.at | office@tuv.at

Appendix 1 Test equipment used



	Anechoic Chamber with 3m measurement distance	NT-100	Spectrumanalyzer – FSP7 9 kHz – 7 GHz	NT-200	Division: Industry & Energy
	Stripline according to ISO 11452-5	NT-108	ESCI - Test receiver 9 kHz - 7 GHz	NT-203/1	B
	MA4000 - Antenna mast 1 - 4 m height	NT-110/1	ESI26 – Test receiver 20 Hz – 26,5 GHz	NT-207	Department: FG Test report number:
П	DS - Turntable 0 - 400 ° Azimuth	NT-111/1	Digital Radio Tester CTS55	NT-208	INE-AT/FG-18/145
	CO3000 Controller Mast+Turntable	NT-112/1	Noise-gen., ITU-R 559-2 20 Hz – 20 kHz	NT-209	Page: 1 of 4 Date: 13.08.2018
	HUF-Z3 - Log. Per. Antenna 200 - 1000 MHz	NT-121	CMTA - Radiocommunication analyzer; 0,1 - 1000 MHz	NT-210	Checked by:
	FMZB1513 - Loop Antenna 9 kHz - 30 MHz	NT-122/1	3271 - Spectrum analyzer 100 Hz - 26,5 GHz	NT-211	
	HFH-Z6 - Rod Antenna 9 kHz - 30 MHz	NT-123	Digital Radio Tester Aeroflex 3920	NT-212/1	
	3121C - Dipole Antenna 28 - 1000 MHz	NT-124	Mixer M28HW 26,5 GHz - 40 GHz	NT-214	
	3115 - Horn Antenna 1 - 18 GHz (immunity)	NT-125	RubiSource T&M Timing reference	NT-216	
	3116 - Horn Antenna 18 - 40 GHz	NT-126	Radiocommunicationanalyzer SWR 1180 MD	NT-217	
	SAS-200/543 - Bicon. Antenna 20 MHz - 300 MHz	NT-127	Mixer M19HWD 40 GHz – 60 GHz	NT-218	
	AT-1080 - Log. Per. Antenna 80 - 1000 MHz	NT-128	Mixer M12HWD 60 GHz – 90 GHz	NT-219	
	HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-129	DSO9104 Digital scope	NT-220/1	
	HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-130	TPS 2014 Digital scope	NT-222	
	3146 - Log. Per. Antenna 200 - 1000 MHz	NT-131	Artificial Ear according to IEC 60318	NT-224	×
	VULB 9163 Trilog Antenna 30 – 3000 MHz	NT-131/1	1 kHz Sound calibrator	NT-225	
	Loop Antenna H-Field	NT-132	B10 - Harmonics and flicker analyzer	NT-232	
	Horn Antenna 500 MHz - 2900 MHz	NT-133	SRM-3006 Spectrumanalyzer	NT-233/1a	
	Horn Antenna 500 MHz - 6000 MHz	NT-133/1	E-field probe SRM 75 MHz – 3 GHz	NT-234	
	Log. per. Antenna 800 MHz - 2500 MHz	NT-134	Field Meter NBM-500 incl. E- and H-Field probes	NT-240a-e	
	Log. per. Antenna 800 MHz - 2500 MHz	NT-135	Hall-Teslameter ETM-1	NT-241	
	BiConiLog Antenna 26 MHz – 2000 MHz	NT-137	EFA-3 H-field- / E-field probe	NT-243	
	Conical Dipol Antenna PCD8250	NT-138	EHP-50F H-field- / E-field probe	NT-243/1	
	HF 906 - Horn Antenna 1 - 18 GHz (emission)	NT-139	Field Meter EMR-200 100 kHz – 3 GHz	NT-244	
	HZ-1 Antenna tripod	NT-150	E-field probe 100 kHz – 3 GHz	NT-245	
	BN 1500 Antenna tripod	NT-151	H-field probe 300 kHz – 30 MHz	NT-246	
	Ant. tripod for EN61000-4-3 Model TP1000A	NT-156			
	Power quality analyzer Fluke 1760 (complete set)	NT-160 - NT-173			

www.tuv.at | office@tuv.at

Appendix 1 (continued) Test equipment used



	E-field probe 3 MHz – 18 GHz	NT-247	500W1000M7 - RF-Amplifier 80 - 1000 MHz / 500 W	NT-332
	H-field probe 27 MHz – 1 GHz	NT-248	AS0102-65R - RF-Amplifier 1 GHz - 2 GHz	NT-333
	ELT-400 1 Hz – 400 kHz	NT-249	APA01 – RF-Amplifier 0,5 GHz – 2,5 GHz	NT-334
	MDS 21 - Absorbing clamp 30 - 1000 MHz	NT-250	Preamplifier 1 GHz - 4 GHz	NT-335
	FCC-203I EM Injection clamp	NT-251	Preamplifier for GPS MKU 152 A	NT-336
	FCC-203I-DCN Ferrite decoupling network	NT-252	Preamplifier 100 MHz – 23 GHz	NT-337
	PR50 Current Probe	NT-253	DC Block 10 MHz – 18 GHz Model 8048	NT-338
	i310s Current Probe	NT-254/1	2-97201 Electronic load	NT-341
	Fluke 87 V True RMS Multimeter	NT-260	TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-344
	Model 2000 Digital Multimeter	NT-261	TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-345
	Fluke 87 V Digital Multimeter	NT-262/1	VDS 200 Mobil-impuls-generator	NT-350
	ESH2-Z5-U1 Artificial mains network 4x25A	NT-300	LD 200 Mobil-impuls-generator	NT-351
Е	ESH3-Z5-U1 Artificial mains network 2x10A	NT-301	MPG 200 Mobil-Impuls-Generators	NT-352
	ESH3-Z6-U1 Artificial mains network 1x100A	NT-302	EFT 200 Mobil-impuls-generator	NT-353
	ESH3-Z6-U1 Artificial mains network 1x100A	NT-302a	AN 200 S1 Artificial Network	NT-354
	PHE 4500/B Power amplifier	NT-304	FP-EFT 32M 3 ph. Coupling filter (Burst)	NT-400/1
Г	EZ10 T-Artificial Network	NT-305	PHE 4500 - Mains impedance network	NT-401
	SMG - Signal generator 0,1 - 1000 MHz	NT-310	IP 6.2 Coupling filter for data lines (Surge)	NT-403
	SMA100A - Signal generator 9 kHz - 6 GHz	NT-310/1	TK 9421 High Power Volt. Probe 150 kHz - 30 MHz	NT-409
	RefRad Reference generator	NT-312	ESH2-Z3 - Probe 9 kHz - 30 MHz	NT-410
	SMP 02 Signal generator 10 MHz - 20 GHz	NT-313	IP 4 - Capacitive clamp (Burst)	NT-411
	40 MHz Arbitrary Generator TGA1241	NT-315	Highpass-Filter 100 MHz – 3 GHz	NT-412
L	Artificial mains network NSLK 8127-PLC	NT-316	Highpass-Filter 600 MHz – 4 GHz	NT-413
	ESD 30 System up to 25 kV	NT-321	Highpass-Filter 1250 MHz – 4 GHz	NT-414
Γ	PSURGE 4.1 Surge generator	NT-324	Highpass-Filter 1800 MHz – 16 GHz	NT-415
	IMU4000 Immunity test system	NT-325/1		
Ε	VCS 500-M6 Surge-Generator	NT-326		
E	Oscillatory Wave Simulator incl. Coupling networks	NT- 328a+b+c		
	BTA-250 - RF-Amplifier 9 kHz - 220 MHz / 250 W	NT-330		
	T82-50 RF-Amplifier 2 GHz – 8 GHz	NT-331		

Division: Industry & Energy

Department: FG

Test report number: INE-AT/FG-18/145

Page: 2 of 4

Date: 13.08.2018

Checked by: _

office@tuv.at

whivet office

Appendix 1 (continued) Test equipment used



[Highpass-Filter 3500 MHz – 18 GHz	NT-416	FCC-801-AF10 Coupling decoupling network	NT-461	Division: Industry & Energy
I		RF-Attenuator 10 dB DC – 18 GHz / 50 W	NT-417	FCC-801-S25 Coupling decoupling network	NT-462	Department: FG
[RF-Attenuator 6 dB DC – 18 GHz / 50 W	NT-418	FCC-801-T4 Coupling decoupling network	NT-463	Test report number:
[J	RF-Attenuator 3 dB DC – 18 GHz / 50 W	NT-419	FCC-801-C1 Coupling decoupling network	NT-464	INE-AT/FG-18/145 Page: 3 of 4
[RF-Attenuator 20 dB DC - 1000 MHz / 25 W	NT-421	SW 9605 - Current probe 150 kHz – 30 MHz	NT-465/1	Date: 13.08.2018
I		RF-Attenuator 30 dB DC - 1000 MHz / 1 W	NT-423	95242-1 – Current probe 1 MHz – 400 MHz	NT-468	Checked by:
ļ		RF-Attenuator 30 dB	NT-424	94106-1L-1 – Current probe 100 kHz – 450 MHz	NT-471	L
		RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-425	GA 1240 Power amplifier according to EN 61000-4-16	NT-480	
-		RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-426	Coupling networks according to EN 61000-4-16	NT-481 - NT-483	
		RF-Attenuator 6 dB	NT-428	Van der Hoofden Test Head	NT-484	
		RF-Attenuator 0 dB - 81 dB	NT-429	EMC Video/Audiosystem	NT-511/1	
		WRU 27 - Band blocking 27 MHz	NT-430	ES-K1 Version 1.71 SP2 Test software	NT-520	
		WHJ450C9 AA - High pass 450 MHz	NT-431	EMC32 Version 10.40.00 Test software	NT-520/1	
		WHJ250C9 AA - High pass 250 MHz	NT-432	SRM-TS Version 1.3 software for SRM-3000	NT-522	
		RF-Load 150 W	NT-433	SRM-TS Version 1.3.1 software for SRM-3006	NT-522/1	
		Impedance transducer 1:4; 1:9; 1:16	NT-435	Spitzenberger und Spies Test software V4.1	NT-525	
		RF-Attenuator DC – 18 GHz 6 dB	NT-436	Noise power test apparatus according to EN 55014	NT-530	
		RF-Attenuator DC – 18 GHz 6 dB	NT-437	Vertical coupling plane (ESD)	NT-531	
		RF-Attenuator DC – 18 GHz 10 dB	NT-438	Test cable #4 for EN 61000-4-6	NT-553	
		RF-Attenuator DC – 18 GHz 20 dB	NT-439	Test cable #3 for conducted emission	NT-554	
		I+P 7780 Directional coupler 100 - 2000 MHz	NT-440	Test cable #5+#6 ESD-cable (2x470k)	NT-555 + NT-556	
		ESH3-Z2 - Pulse limiter 9 kHz - 30 MHz	NT-441	Test cable #8 Sucoflex 104EA	NT-559	
		Power Divider 6 dB/1 W/50 Ohm	NT-443	Test cable #9 (for outdoor measurements)	NT-580	
		Directional coupler 0,1 MHz – 70 MHz	NT-444	Test cable #10 (for outdoor measurements)	NT-581	
		Directional coupler 0,1 MHz – 70 MHz	NT-445	Test cable #13 Sucoflex 104PE	NT-584	
		Tube imitations according to EN 55015	NT-450	Test cable #21 for SRM-3000	NT-592	
		FCC-801-M3-16A Coupling decoupling network	NT-458	Shield chamber	NT-600	
		FCC-801-M2-50A Coupling decoupling network	NT-459	Climatic chamber	M-1200	
		FCC-801-M5-25 Coupling decoupling network	NT-460			

Appendix 1 (continued) Test equipment used



	Anechoic Chamber	EMV-100		Log.per Antenna 0,7 – 9 GHz STLP9149	EMV-305	Division: Industry & Energy
П	3 m / 5 m measuring distance Turntabel	EMV-101		HF- Ampflifier 9 kHz-250 MHz BBA150 (low noise)	EMV-306	3.00
	6 m diameter Antenna mast	EMV-102		Load Dump Generator LD 200N	EMV-350	Department: FG Test report number:
	1 – 4 m Mast and Turntable controller	EMV-103		Ultra Compact Symulator UCS 200N100	EMV-351	INE-AT/FG-18/145
	FC-06 EMC Video/Audiosystem	EMV-104		Automotive Power fail module	EMV-352	Page: 4 of 4
	EMC Software	EMV-105		PFM 200N100.1 Voltage Drop Symulator	EMV-353	Date: 13.08.2018 Checked by:
	EMC32 Version 10.40.00 Hornantenna 1 – 18 GHz	EMV-110		VDS 200Q100 Arb. Generator	EMV-354	70.
ш	HF 907	LIVIV-110		AutoWave Ultra Compact Symulator	EMV-355	
	Antennapre.amp. 1 – 18 GHz ERZ-LNA0200-1800-30-2	EMV-111		UCS 500N7		
	Trilog Antenna 30-3000 MHz VULB9163	EMV-112		Coupling decoupling network CNI 503B7 / 32 A	EMV-356	
	Monopol 9 kHz – 30 MHz VAMP 9243	EMV-113		Coupling decoupling network CNI 503B7 / 63 A	EMV-357	
	Antennapre.amp 18 – 40 GHz BBV 9721	EMV-114		Telecom Surge Generator TSurge 7	EMV-358	
	Hornantenna 200 – 2000 MHz AH-220	EMV-110		Coupling decoupling network CNI 508N2	EMV-359	
	DC Artificial Network	EMV-150		Coupling decoupling network CNV 504N2.2	EMV-360	
	PVDC 8300 AC Artificial Network	EMV-151		Immunity generator NSG4060/NSG4060-1	EMV-361	
	NNLK 8121 RC EMI Receiver	EMV-200		Coupling network CDND M316-2	EMV-362	
	ESR26 Signalgenerator 9 kHz – 40 GHz	EMV-201		Coupling network CT419-5	EMV-363	
	N5173B GPS Frequency normal	EMV-202		ESD Generator NSG 437	EMV-364	
	B-88 DC Power supply	EMV-203		Pulse Limiter VTSD 9561-F BNC	EMV-405	
	N5745A Spektrum Analyzator	EMV-205		Transient emission BSM200N40+BS200N100	EMV- 450+451	
П	FSV40 Thd Multimeter	EMV-206		Cap. Coupling Clamp	EMV-455	
_	Model 2015	EMV-		HFK Mag. Field System	EMV-	
Ц	Poweramplifier PAS15000	207/abc		MS100N+MC26100+MC2630 Coupling network	456-458 EMV-459	
	Inrush Current Source	EMV- 208/abc	Ц	CDN M2-100A	EIVIV-439	
	Arbgenerator Sycore	EMV-209		Coupling network CDN M3-32A	EMV-460	
	Harmonics/Flicker analyzer ARS 16/3	EMV-210		Coupling network CDN M5-100A	EMV-461	
	HF- Ampflifier 9 kHz-250 MHz BBA150	EMV-300		Current Clamp CIP 9136A	EMV-462	
	HF- Amplifier 80 -1000 MHz BBA150	EMV-301		DC Artificial Network HV-AN 150	EMV- 464+465	
	HF- Amplifier 0,8 - 6 GHz	EMV-302		Coupling Clamp EM 101	EMV-466	
	BBA150 High Power Ant. 20-200 MHz	EMV-303		Decoupling Clamp FTC 101	EMV-467	
	VHBD 9134 Log.per Antenna 80-2700 MHz STLP 9128 E special	EMV-304		Power attenuator 10 dB / 250 Watt	EMV-469/	2



Description: Front view

Division: Industry & Energy

Department: FG

Test report reference: INE-AT/FG-18/145

Page: 1 of 9

Date: 13.08.2018

checked by: __





Description: Backside view

Division: Industry & Energy

Department: FG

Test report reference: INE-AT/FG-18/145

Page: 2 of 9

Date: 13.08.2018

checked by: __/





Description: Battery compartment opened


Division: Industry & Energy

Department: FG

Test report reference: INE-AT/FG-18/145

Page: 3 of 9

Date: 13.08.2018

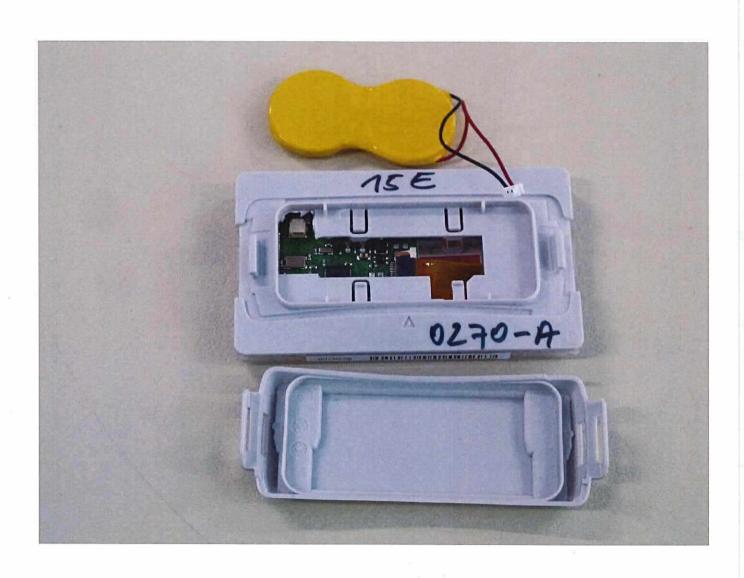



Description: Case opened


Division: Industry & Energy

Department: FG

Test report reference: INE-AT/FG-18/145

Page: 4 of 9

Date: 13.08.2018

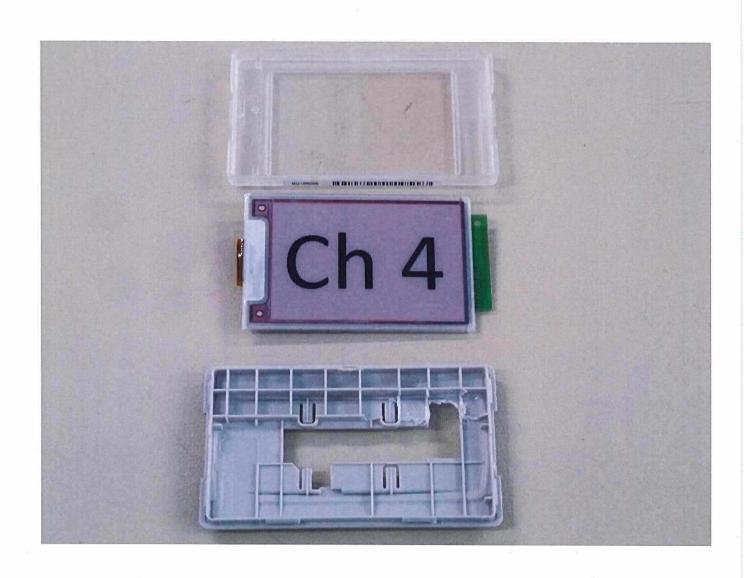



Description: Electronics view #1

Division: Industry & Energy

Department: FG

Test report reference: INE-AT/FG-18/145

Page: 5 of 9

Date: 13.08.2018





Description: Electronics view #2


Division: Industry & Energy

Department: FG

Test report reference: INE-AT/FG-18/145

Page: 6 of 9

Date: 13.08.2018

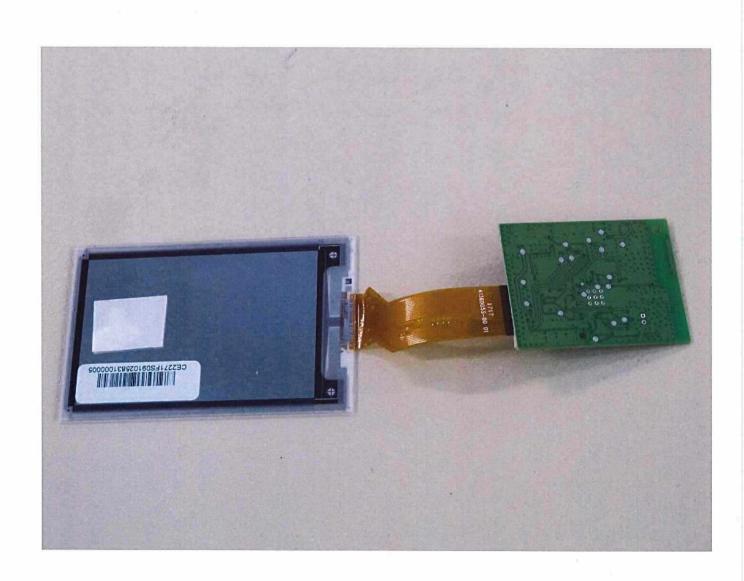



Description: Test setup

Division: Industry & Energy


Department: FG

Test report reference: INE-AT/FG-18/145

Page: 7 of 9

Date: 13.08.2018

checked by: ___

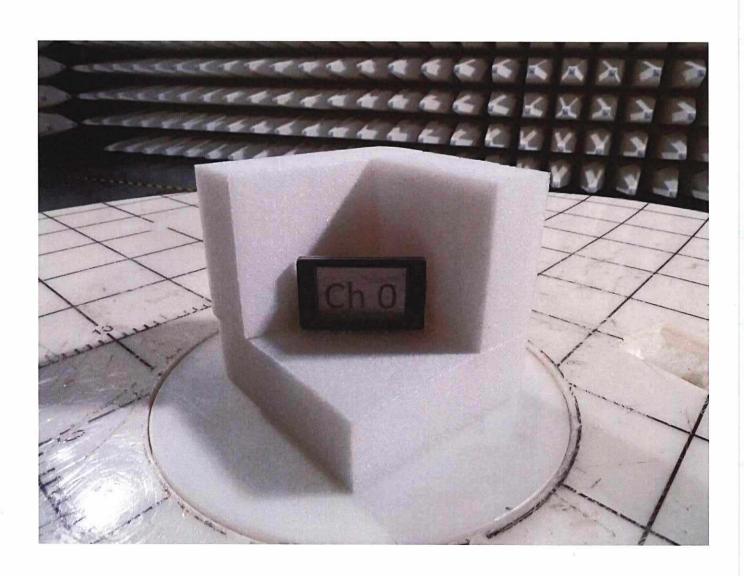





Description: Test setup below 30 MHz

Division: Industry & Energy

Department: FG

Test report reference: INE-AT/FG-18/145

Page: 8 of 9

Date: 13.08.2018





Description: Test setup 30-1000MHz

Division: Industry & Energy

Department: FG

Test report reference: INE-AT/FG-18/145

Page: 9 of 9

Date: 13.08.2018

