



FCC RADIO TEST REPORT

FCC ID: 2ACZA-MP309

Product : Mobile Phone

Trade Name : Ole!

Model No : MP309

Serial Model : N/A

Applicant's name : Shenzhen Magicpomelo Technology Co., Ltd

Address : 2905,Block A Reith International Center,No.1002 Yanhe Road,Luohu District,Shenzhen, Guangdong.

Prepared By : Nowd Testing Services Co.,Ltd.

No. 606, FuerYuanjian Business Centre, 25 Zone, Bao'an District, Shenzhen, Guandong

Tel : (86) 755-27830065

Fax : (86) 755-27830095

Report No. : NTS1408150273R1

Date of Test : Aug.20, 2014

Date of Rep. : Aug.29, 2014

TEST REPORT DECLARATION


Applicant : Shenzhen Magicpomelo Technology Co., Ltd
Address : F/L3, Hongye Building, No.2 Yunshan East Road, Jiangbei Area, Huizhou City, Guangdong Prov., China.
Manufacturer : HUIZHOU GUANTONG ELECTRONIC TECHNOLOGY CO.,LTD
Address : NO.2,BEIAO AVENUE,DAWENBA,AOTOU, DAYABAY,HUIZHOU
EUT Description : Mobile Phone
Trademark : Ole!
Model No. : MP309
Serial Model : N/A
Power Supply : DC 3.7V
Standards : FCC Part 22H and 24E
Test procedure : ANSI C63.4-2003, TIA/EIA 603

This device described above has been tested by Nowd Testing Services Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Nowd Testing Services Co., Ltd., this document may be altered or revised by Nowd Testing Services Co., Ltd., personal only, and shall be noted in the revision of the document.

Date of Test:

Aug. 29, 2014



Prepared by:

Jack Wu

Testing Engineer



Reviewed by:

Andy Xie

Technical Manager



Approved by:

sommus

Authorized Signatory

TABLE OF CONTENTS

| | |
|---|----|
| 1.1 PRODUCT DESCRIPTION | 5 |
| 1.2 RELATED SUBMITTAL(S) / GRANT (S)..... | 7 |
| 1.3 TEST METHODOLOGY..... | 7 |
| 1.4 TEST FACILITY..... | 7 |
| 1.5 MEASUREMENT INSTRUMENTS..... | 7 |
| 1.6 SPECIAL ACCESSORIES..... | 9 |
| 1.7 EQUIPMENT MODIFICATIONS | 9 |
| 2. SYSTEM TEST CONFIGURATION | 9 |
| 2.1 EUT CONFIGURATION..... | 9 |
| 2.2 EUT EXERCISE | 9 |
| 2.3 GENERAL TECHNICAL REQUIREMENTS | 9 |
| 2.4 CONFIGURATION OF EUT SYSTEM..... | 10 |
| 3. SUMMARY OF TEST RESULTS | 11 |
| 4. DESCRIPTION OF TEST MODES..... | 11 |
| 5. OUTPUT POWER..... | 12 |
| 5.1 Conducted Output Power..... | 12 |
| 5.2 Radiated Output Power..... | 16 |
| 6. SPURIOUS EMISSION | 19 |
| 6.1 CONDUCTED SPURIOUS EMISSION..... | 19 |
| 6.2 Radiated Spurious Emission | 20 |
| 7. FREQUENCY STABILITY..... | 23 |
| 7.1 MEASUREMENT METHOD | 23 |
| 7.2 PROVISIONS APPLICABLE..... | 23 |
| 7.3 MEASUREMENT RESULT | 24 |

| | |
|--|-----------|
| 8. OCCUPIED BANDWIDTH..... | 26 |
| 8.1 MEASUREMENT METHOD | 26 |
| 8.2 PROVISIONS APPLICABLE..... | 26 |
| 8.3 MEASUREMENT RESULT..... | 26 |
| 9. EMISSION BANDWIDTH | 27 |
| 9.1 MEASUREMENT METHOD | 27 |
| 9.2 PROVISIONS APPLICABLE..... | 27 |
| 9.3 MEASUREMENT RESULT..... | 27 |
| 10. BAND EDGE | 28 |
| 10.1 MEASUREMENT METHOD | 28 |
| 10.2 PROVISIONS APPLICABLE | 28 |
| 10.3 MEASUREMENT RESULT..... | 28 |
| 11. PEAK-TO-AVERAGE RATIO | 29 |
| 11.1.1 DESCRIPTION OF THE PAR MEASUREMENT | 29 |
| 11.1.2 MEASURING INSTRUMENTS | 29 |
| 11.1.3 TEST PROCEDURES | 29 |
| 11.1.4 TEST SETUP | 29 |
| 11.1.5 TEST RESULT OF PEAK-TO-AVERAGE RATIO | 30 |
| 11.1.6 TEST RESULT (PLOTS) OF PEAK-TO-AVERAGE RATIO | 30 |
| TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION..... | 32 |
| TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)..... | 41 |
| EMISSION BANDWIDTH (-26dbc) | 41 |
| APPENDIX III..... | 48 |
| TEST PLOTS FOR BAND EDGES..... | 48 |
| PHOTOGRAPHS OF TEST SETUP | 51 |

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

| | |
|--|--|
| Product Designation: | Mobile Phone |
| Hardware version: | -- |
| Software version: | -- |
| Frequency Bands: | <input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS 1900 (U.S. Bands) <input checked="" type="checkbox"/> GSM 900 <input checked="" type="checkbox"/> DCS 1800 (Non-U.S. Bands) U.S. Bands: <input type="checkbox"/> UMTS FDD Band II <input type="checkbox"/> UMTS FDD Band V Non-U.S. Bands: <input type="checkbox"/> UMTS FDD Band I <input type="checkbox"/> UMTS FDD Band VIII |
| Antenna: | PIFA Antenna |
| Antenna gain: | -2.0 dBi |
| Power Supply: | DC 3.7V by battery or DC 5.0V supplied by adapter |
| Battery parameter: | DC 3.7V/500mAh |
| Adapter Input: | AC 100-240V, 50-60Hz 0.2A |
| Adapter Output: | DC 5.0V, 0.25A |
| GPRS Class | Multi-Class12 |
| SIM CARD | The Phone has dual SIM Card sockets but only one of the dual SIM Card can be transmitting when the two SIM Cards are inserting the phone together. Anyone of the SIM Card socket was tested |
| Extreme Vol. Limits: | DC3.4 V to 4.2 V (Nominal DC3.7 V) |
| Extreme Temp. Tolerance | -10°C to +50°C |
| ** Note: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage. | |

| MODE | Max. Conducted Average Power (dBm) |
|-----------|---------------------------------------|
| GSM850 | 31.65 |
| GPRS 850 | 31.33 |
| GSM1900 | 29.79 |
| GPRS 1900 | 28.78 |

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **2ACZA-MP309** filing to comply with the FCC Part 22H&24E .

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

Nowd Testing Services Co.,Ltd.

No. 606, FuerYuanjian Business Centre, 25 Zone, Bao'an District, Shenzhen, Guandong

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2009.

FCC Registration No.:230614

1.5 MEASUREMENT INSTRUMENTS

| NAME OF EQUIPMENT | MANUFACTURER | MODEL | SERIAL NUMBER | LAST CALIBRATION | CALIBRATED UNTIL |
|----------------------|-------------------|-------------|---------------|------------------|------------------|
| SPECTRUM ANALYZER | AGILENT | E4440A | US44300399 | 2014.6.26 | 2015.6.25 |
| TEST RECEIVER | R&S | ESCI | A0304218 | 2014.6.26 | 2015.6.25 |
| COMMUNICATION TESTER | AGILENT | 8960 | 3104A03367 | 2014.6.26 | 2015.6.25 |
| COMMUNICATION TESTER | R&S | CMU200 | A0304247 | 2014.6.26 | 2015.6.25 |
| TEST RECEIVER | R&S | FCKL1528 | A0304230 | 2014.6.26 | 2015.6.25 |
| LISN | SCHWARZBECK | NSLK8127 | A0304233 | 2014.6.26 | 2015.6.25 |
| CLIMATE CHAMBER | ALBATROSS | -- | -- | 2014.6.26 | 2015.6.25 |
| Loop Antenna | Daze | ZN30900N | SEL0097 | 2014.6.26 | 2015.6.25 |
| Biological Antenna | A.H. Systems Inc. | SAS-521-4 | N/A | 2014.6.26 | 2015.6.25 |
| HORN ANTENNA | EM | EM-AH-10180 | N/A | 2014.6.26 | 2015.6.25 |
| HORN ANT | SCHWARZBECK | BBHA 9170 | 9170-181 | 2014.07.06 | 2015.07.05 |
| SIGNAL GENERATOR | R&S | SMT 06 | 832080/007 | 2014.07.05 | 2015.07.04 |
| POWER METER | R&S | NRVS | 100696 | 2014.07.05 | 2015.07.04 |
| POWER SENSOR | R&S | URV5-Z4 | 0395.1619.05 | 2014.07.05 | 2015.07.04 |

| | | | | | |
|-----------|----|----------|--------|------------|------------|
| AMPLIFIER | EM | EM-30180 | 060538 | 2014.07.05 | 2015.07.04 |
|-----------|----|----------|--------|------------|------------|

1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

| Item Number | Item Description | | FCC Rules |
|-------------|-----------------------|-----------------------------|--------------------------|
| 1 | Output Power | Conducted output power | 22.913(a) / 24.232 (b) |
| | | Radiated output power | |
| 2 | Spurious Emission | Conducted spurious emission | 2.1051 / 22.917 / 24.238 |
| | | Radiated spurious emission | |
| 3 | Frequency Stability | | 2.1055 /24.235 |
| 4 | Occupied Bandwidth | | 2.1049 (h)(i) |
| 5 | Emission Bandwidth | | 22.917(b) / 24.238 (b) |
| 6 | Band Edge | | 22.917(b) / 24.238 (b) |
| 7 | Peak-to-Average Ratio | | 24.232(d) |

2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

| Item | Equipment | Model No. | ID or Specification | Note |
|------|--------------|-----------|---------------------|------|
| 1 | Mobile Phone | MP309 | FCC ID: 2ACZA-MP309 | EUT |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Note: All the accessories have been used during the test.

the following "EUT" in setup diagram means EUT system.

3. SUMMARY OF TEST RESULTS

| Item Number | Item Description | | FCC Rules | Result |
|-------------|--------------------------|-----------------------------|--------------------------|--------|
| 1 | Output Power | Conducted Output Power | 22.913(a) / 24.232 (b) | Pass |
| | | Radiated Output Power | | |
| 2 | Spurious Emission | Conducted Spurious Emission | 2.1051 / 22.917 / 24.238 | Pass |
| | | Radiated Spurious Emission | | |
| 3 | Mains Conducted Emission | | 15.107 / 15.207 | Pass |
| 4 | Frequency Stability | | 2.1055 /24.235 | Pass |
| 5 | Occupied Bandwidth | | 2.1049 (h)(i) | Pass |
| 6 | Emission Bandwidth | | 22.917(b) / 24.238 (b) | Pass |
| 7 | Band Edge | | 22.917(b) / 24.238 (b) | Pass |
| 8 | Peak-to-Average Ratio | | 24.232(d) | Pass |

4. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS, GSM/GPRS1900 modes have been tested during the test.

the worst condition (GSM850, GSM1900) be recorded in the test report if no other modes test data.

5. OUTPUT POWER

5.1 Conducted Output Power

5.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GPRS850, GPRS1900,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

5.1.2 MEASUREMENT RESULT

| Conducted Output Power Limits for GSM 850 MHZ | | |
|---|--------------------|---------------|
| Mode | Nominal Peak Power | Tolerance(dB) |
| GSM850 | 31 dBm | +/- 1 |
| GPRS 850-1TS: | 31 dBm | +/- 1 |
| GPRS 850-2TS: | 30 dBm | +/- 1 |
| GPRS 850-3TS: | 29 dBm | +/- 1 |
| GPRS 850-4TS: | 28 dBm | +/- 1 |

| Conducted Output Power Limits for PCS 1900 MHZ | | |
|--|--------------------|---------------|
| Mode | Nominal Peak Power | Tolerance(dB) |
| GSM1900 | 29 dBm | +/- 1 |
| GPRS 1900-1TS: | 28 dBm | +/- 1 |
| GPRS 1900-2TS: | 27 dBm | +/- 1 |
| GPRS 1900-3TS: | 27 dBm | +/- 1 |
| GPRS 1900-4TS: | 26 dBm | +/- 1 |

GSM 850:

| Mode | Frequency (MHz) | Maximum Burst-Average Output Power |
|---------------------|----------------------------|---|
| GSM850 | 824.2 | 31.47 |
| | 836.6 | 31.65 |
| | 848.8 | 31.28 |
| GPRS850 (1 Slot) | 824.2 | 31.13 |
| | 836.6 | 31.33 |
| | 848.8 | 31.17 |
| GPRS850 (2 Slot) | 824.2 | 30.24 |
| | 836.6 | 30.35 |
| | 848.8 | 30.48 |
| GPRS850 (3 Slot) | 824.2 | 29.59 |
| | 836.6 | 29.38 |
| | 848.8 | 29.64 |
| GPRS850 (4 Slot) | 824.2 | 28.27 |
| | 836.6 | 28.43 |
| | 848.8 | 28.69 |

PCS 1900:

| Mode | Frequency (MHz) | Maximum Burst-Average Output Power |
|----------------------|-----------------|------------------------------------|
| GSM1900 | 1850.2 | 29.79 |
| | 1880 | 28.64 |
| | 1909.8 | 29.33 |
| GPRS1900 (1 Slot) | 1850.2 | 28.26 |
| | 1880 | 28.04 |
| | 1909.8 | 28.78 |
| GPRS1900 (2 Slot) | 1850.2 | 27.84 |
| | 1880 | 27.66 |
| | 1909.8 | 27.52 |
| GPRS1900 (3 Slot) | 1850.2 | 27.39 |
| | 1880 | 27.42 |
| | 1909.8 | 27.64 |
| GPRS1900 (4 Slot) | 1850.2 | 26.58 |
| | 1880 | 26.46 |
| | 1909.8 | 26.54 |

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

| UE Transmit Channel Configuration | CM(db) | MPR(db) |
|--|-----------|-------------|
| For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH | 0≤ CM≤3.5 | MAX(CM-1,0) |

Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$.For all other combinations of DPDCH, DPCCH,

HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

5.2 Radiated Output Power

5.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $ARpl = P_{in} + 2.15 - P_r$. The $ARpl$ is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power = PMea + ARpl$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.
9. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

| Mode | Nominal Peak Power |
|----------|--------------------|
| GSM 850 | <=38.45 dBm (7W) |
| PCS 1900 | <=33 dBm (2W) |

5.2.3 MEASUREMENT RESULT

| Radiated Power (ERP) for GSM 850 MHZ | | | | |
|--------------------------------------|-----------|---------------------|--------------------------|------------|
| Mode | Frequency | Result | | Conclusion |
| | | Max. Peak ERP (dBm) | Polarization Of Max. ERP | |
| GSM850 | 824.2 | 28.69 | Horizontal | Pass |
| | 824.2 | 27.57 | Vertical | Pass |
| | 836.6 | 28.59 | Horizontal | Pass |
| | 836.6 | 28.82 | Vertical | Pass |
| | 848.8 | 29.53 | Horizontal | Pass |
| | 848.8 | 29.88 | Vertical | Pass |

| Radiated Power (ERP) for GPRS 850 MHZ | | | | |
|---------------------------------------|-----------|---------------------|--------------------------|------------|
| Mode | Frequency | Result | | Conclusion |
| | | Max. Peak ERP (dBm) | Polarization Of Max. ERP | |
| GPRS850 | 824.2 | 28.65 | Horizontal | Pass |
| | 824.2 | 27.38 | Vertical | Pass |
| | 836.6 | 28.34 | Horizontal | Pass |
| | 836.6 | 28.87 | Vertical | Pass |
| | 848.8 | 28.39 | Horizontal | Pass |
| | 848.8 | 27.56 | Vertical | Pass |

| Radiated Power (E.I.R.P) for PCS 1900 MHZ | | | | |
|---|-----------|----------------------------|----------------------------------|------------|
| Mode | Frequency | Result | | Conclusion |
| | | Max. Peak E.I.R.P.(dBm) | Polarization Of Max. E.I.R.P. | |
| PCS1900 | 1850.2 | 27.28 | Horizontal | Pass |
| | 1850.2 | 26.45 | Vertical | Pass |
| | 1880.0 | 27.60 | Horizontal | Pass |
| | 1880.0 | 26.38 | Vertical | Pass |
| | 1909.8 | 28.74 | Horizontal | Pass |
| | 1909.8 | 27.54 | Vertical | Pass |

| Radiated Power (E.I.R.P) for GPRS 1900 MHZ | | | | |
|--|-----------|----------------------------|----------------------------------|------------|
| Mode | Frequency | Result | | Conclusion |
| | | Max. Peak E.I.R.P.(dBm) | Polarization Of Max. E.I.R.P. | |
| GPRS 1900 | 1850.2 | 26.85 | Horizontal | Pass |
| | 1850.2 | 25.74 | Vertical | Pass |
| | 1880.0 | 26.61 | Horizontal | Pass |
| | 1880.0 | 25.57 | Vertical | Pass |
| | 1909.8 | 26.68 | Horizontal | Pass |
| | 1909.8 | 26.52 | Vertical | Pass |

NOTE 1: in the part, result the worst case GPRS 1slot for GSM 850 and PCS1900,

6. SPURIOUS EMISSION

6.1 CONDUCTED SPURIOUS EMISSION

6.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.

2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

| Typical Channels for testing of GSM/GPRS 850 MHz | |
|--|-----------------|
| Channel | Frequency (MHz) |
| 128 | 824.2 |
| 190 | 836.6 |
| 251 | 848.8 |

| Typical Channels for testing of PCS/ GPRS 1900 MHz | |
|--|-----------------|
| Channel | Frequency (MHz) |
| 512 | 1850.2 |
| 661 | 1880.0 |
| 810 | 1909.8 |

6.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

6.1.3 MEASUREMENT RESULT

PLEASE REFER TO : APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

Note:

1. Below 30MHz no Spurious found and The GSM modes is the worst condition.
2. As no emission found in standby or receive mode, no recording in this report.


6.2 Radiated Spurious Emission

6.2.1 MEASUREMENT METHOD


The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS850, GPRS1900) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.Only shown the worst data.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = Rx \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$ The SA is calibrated using following setup.

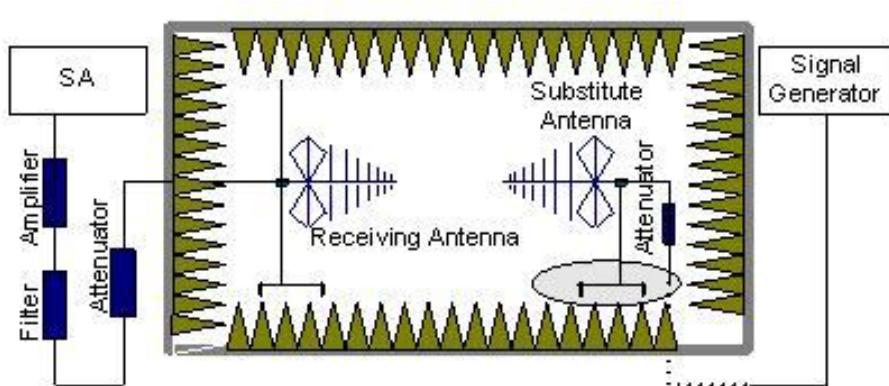

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

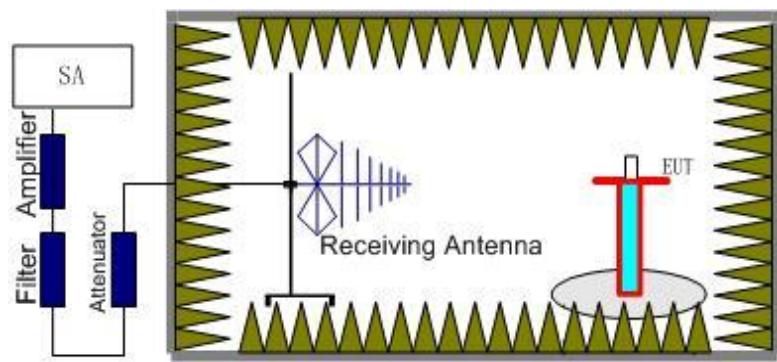

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band II(1852.4MHz, 1880MHz, 1907.6MHz), UMTS band V(826.4MHz, 835.0MHz, 846.6MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{RPL} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: $\text{Power} = P_{\text{Mea}} + A_{RPL}$

6.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10\log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode:

6.2.3 MEASUREMENT RESULT

GSM 850:

| Test Results for Channel 128/824.2 MHz | | | | | |
|--|------------|------------------------|------------------------|-------------|------------|
| Frequency(MHz) | Power(dBm) | A _{Rpl} (dBm) | P _{Mea} (dBm) | Limit (dBm) | Polarity |
| 1648.4 | -38.68 | -4.65 | -43.33 | -13.00 | Horizontal |
| 1648.4 | -38.59 | -4.65 | -43.24 | -13.00 | Vertical |
| 2472.6 | -26.84 | -2.10 | -28.94 | -13.00 | Vertical |
| 2472.6 | -27.56 | -2.10 | -29.66 | -13.00 | Horizontal |
| Test Results for Channel 128/836.6 MHz | | | | | |
| 1673.2 | -37.76 | -4.97 | -42.73 | -13.00 | Horizontal |
| 1673.2 | -36.51 | -4.97 | -41.48 | -13.00 | Vertical |
| 2509.8 | -25.30 | -2.35 | -27.65 | -13.00 | Vertical |
| 2509.8 | -24.26 | -2.35 | -26.61 | -13.00 | Horizontal |
| Test Results for Channel 128/848.8 MHz | | | | | |
| 1697.6 | -35.56 | -4.97 | -40.53 | -13.00 | Horizontal |
| 1697.6 | -38.70 | -4.97 | -43.67 | -13.00 | Vertical |
| 2546.4 | -25.46 | -2.68 | -28.14 | -13.00 | Vertical |
| 2546.4 | -28.82 | -2.68 | -31.5 | -13.00 | Horizontal |

PCS 1900:

| Test Results for Channel 661/1850.2MHz | | | | | |
|--|------------|------------------------|------------------------|-------------|------------|
| Frequency(MHz) | Power(dBm) | A _{Rpl} (dBm) | P _{Mea} (dBm) | Limit (dBm) | Polarity |
| 3700.4 | -34.77 | 13.1 | -21.67 | -13.00 | Vertical |
| 3700.4 | -36.53 | 13.1 | -23.43 | -13.00 | Horizontal |
| 5550.6 | -43.89 | 14.7 | -29.19 | -13.00 | Horizontal |
| 5550.6 | -41.65 | 14.7 | -26.95 | -13.00 | Vertical |
| Test Results for Channel 661/1880.0MHz | | | | | |
| 3760 | -30.58 | 13.8 | -16.78 | -13.00 | Vertical |
| 3760 | -33.75 | 13.8 | -19.95 | -13.00 | Horizontal |
| 5640 | -43.57 | 15.5 | -28.07 | -13.00 | Horizontal |
| 5640 | -40.31 | 15.5 | -24.81 | -13.00 | Vertical |
| Test Results for Channel 661/1909.8MHz | | | | | |
| 3819.6 | -32.65 | 12.6 | -20.05 | -13.00 | Vertical |
| 3819.6 | -34.26 | 12.6 | -21.66 | -13.00 | Horizontal |
| 5729.4 | -43.10 | 15.8 | -27.3 | -13.00 | Horizontal |
| 5729.4 | -41.28 | 15.8 | -25.48 | -13.00 | Vertical |

Note: Below 30MHz no Spurious found.

7. FREQUENCY STABILITY

7.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10°C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

7.2 PROVISIONS APPLICABLE

7.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

7.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

7.3 MEASUREMENT RESULT

| Frequency Error Against Voltage for GSM 850 band | | |
|--|---------------------|----------------------|
| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
| 3.4 | 28 | 0.033 |
| 3.7 | 30 | 0.036 |
| 4.2 | 26 | 0.031 |

| Frequency Error Against Temperature for GSMS850 band | | |
|--|---------------------|----------------------|
| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
| -10 | 51 | 0.061 |
| 0 | 46 | 0.055 |
| 10 | 37 | 0.044 |
| 20 | 55 | 0.066 |
| 30 | 48 | 0.057 |
| 40 | 32 | 0.038 |
| 50 | 64 | 0.077 |

| Frequency Error Against Voltage for GPRS850 band | | |
|--|---------------------|----------------------|
| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
| 3.4 | 28 | 0.033 |
| 3.7 | 23 | 0.028 |
| 4.2 | 27 | 0.032 |

| Frequency Error Against Temperature for GPRS850 band | | |
|--|---------------------|----------------------|
| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
| -10 | 42 | 0.050 |
| 0 | 33 | 0.039 |
| 10 | 27 | 0.032 |
| 20 | 27 | 0.032 |
| 30 | 30 | 0.036 |
| 40 | 35 | 0.042 |
| 50 | 41 | 0.049 |

Note: The EUT doesn't work below -10°C

| Frequency Error Against Voltage for GSM1900 band | | |
|--|---------------------|----------------------|
| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
| 3.4 | 38 | 0.020 |
| 3.7 | 41 | 0.022 |
| 4.2 | 30 | 0.016 |

| Frequency Error Against Temperature for GSM1900 band | | |
|--|---------------------|----------------------|
| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
| -10 | 26 | 0.014 |
| 0 | 45 | 0.024 |
| 10 | 48 | 0.026 |
| 20 | 62 | 0.033 |
| 30 | 40 | 0.021 |
| 40 | 13 | 0.007 |
| 50 | 26 | 0.014 |

| Frequency Error Against Voltage for GPRS1900 band | | |
|---|---------------------|----------------------|
| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
| 3.4 | 41 | 0.022 |
| 3.7 | 41 | 0.022 |
| 4.2 | 62 | 0.033 |

| Frequency Error Against Temperature for GPRS1900 band | | |
|---|---------------------|----------------------|
| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
| -10 | 61 | 0.032 |
| 0 | 52 | 0.028 |
| 10 | 43 | 0.023 |
| 20 | 42 | 0.022 |
| 30 | 36 | 0.019 |
| 40 | 44 | 0.023 |
| 50 | 39 | 0.021 |

Note: The EUT doesn't work below -10°C

8. OCCUPIED BANDWIDTH

8.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

8.2 PROVISIONS APPLICABLE

The occupied bandwidth (99%) shall not exceed 300 KHz.

8.3 MEASUREMENT RESULT

| Occupied Bandwidth (99%) for GSM 850 band | | |
|---|----------------|--------------------------------|
| Mode | Frequency(MHz) | Occupied Bandwidth (99%)(kHz) |
| Low Channel | 824.2 | 247.77 |
| Middle Channel | 836.6 | 248.26 |
| High Channel | 848.8 | 254.22 |

| Occupied Bandwidth (99%) for GPRS 850 band | | |
|--|----------------|--------------------------------|
| Mode | Frequency(MHz) | Occupied Bandwidth (99%)(kHz) |
| Low Channel | 824.2 | 245.70 |
| Middle Channel | 836.6 | 245.41 |
| High Channel | 848.8 | 245.73 |

| Occupied Bandwidth (99%) for GSM1900 band | | |
|---|----------------|--------------------------------|
| Mode | Frequency(MHz) | Occupied Bandwidth (99%)(kHz) |
| Low Channel | 1850.2 | 242.29 |
| Middle Channel | 1880.0 | 248.63 |
| High Channel | 1909.8 | 246.73 |

| Occupied Bandwidth (99%) for GPRS1900 band | | |
|--|----------------|--------------------------------|
| Mode | Frequency(MHz) | Occupied Bandwidth (99%)(kHz) |
| Low Channel | 1850.2 | 255.46 |
| Middle Channel | 1880.0 | 249.71 |
| High Channel | 1909.8 | 260.08 |

9. EMISSION BANDWIDTH

9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

9.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

9.3 MEASUREMENT RESULT

| Emission Bandwidth (-26dBc) for GSM850 band | | |
|---|----------------|-----------------------------------|
| Mode | Frequency(MHz) | Emission Bandwidth (-26dBc)(kHz) |
| Low Channel | 824.2 | 319.657 |
| Middle Channel | 836.6 | 321.631 |
| High Channel | 848.8 | 330.844 |

| Emission Bandwidth (-26dBc) for GPRS 850 band | | |
|---|----------------|-----------------------------------|
| Mode | Frequency(MHz) | Emission Bandwidth (-26dBc)(kHz) |
| Low Channel | 824.2 | 320.468 |
| Middle Channel | 836.6 | 321.712 |
| High Channel | 848.8 | 322.212 |

| Emission Bandwidth (-26dBc) for GSM1900 band | | |
|--|----------------|-----------------------------------|
| Mode | Frequency(MHz) | Emission Bandwidth (-26dBc)(kHz) |
| Low Channel | 1850.2 | 310.977 |
| Middle Channel | 1880.0 | 318.146 |
| High Channel | 1909.8 | 323.627 |

| Emission Bandwidth (-26dBc) for GPRS1900 band | | |
|---|----------------|-----------------------------------|
| Mode | Frequency(MHz) | Emission Bandwidth (-26dBc)(kHz) |
| Low Channel | 1850.2 | 323.024 |
| Middle Channel | 1880.0 | 315.175 |
| High Channel | 1909.8 | 333.699 |

10. BAND EDGE

10.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

10.2 PROVISIONS APPLICABLE

as Specified in FCC rules of 22.917(b) and 24.238(b)

10.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges

11. Peak-to-Average Ratio

11.1.1 DESCRIPTION OF THE PAR MEASUREMENT

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.1.2 MEASURING INSTRUMENTS

See list of measuring instruments of this test report.

11.1.3 TEST PROCEDURES

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.1.4 TEST SETUP

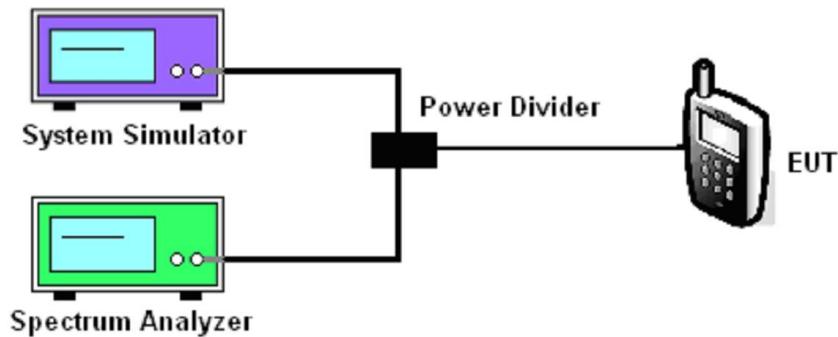


11.1.5 TEST RESULT OF PEAK-TO-AVERAGE RATIO



| Modes | GSM1900(GSM) | | |
|-------------------------------|--------------|--------------|---------------|
| Channel | 512 (Low) | 661 (Mid) | 810 (High) |
| Frequency(MHz) | 1850.2 | 1880 | 1909.8 |
| Peak-to-Average Ratio (dB) | 0.02 | 0.01 | 0.01 |

11.1.6 TEST RESULT (PLOTS) OF PEAK-TO-AVERAGE RATIO

| | | | |
|--------|----------|-------------|----------|
| Band : | GSM 1900 | Test Mode : | GSM Link |
|--------|----------|-------------|----------|

Peak-to-Average Ratio on Channel 512

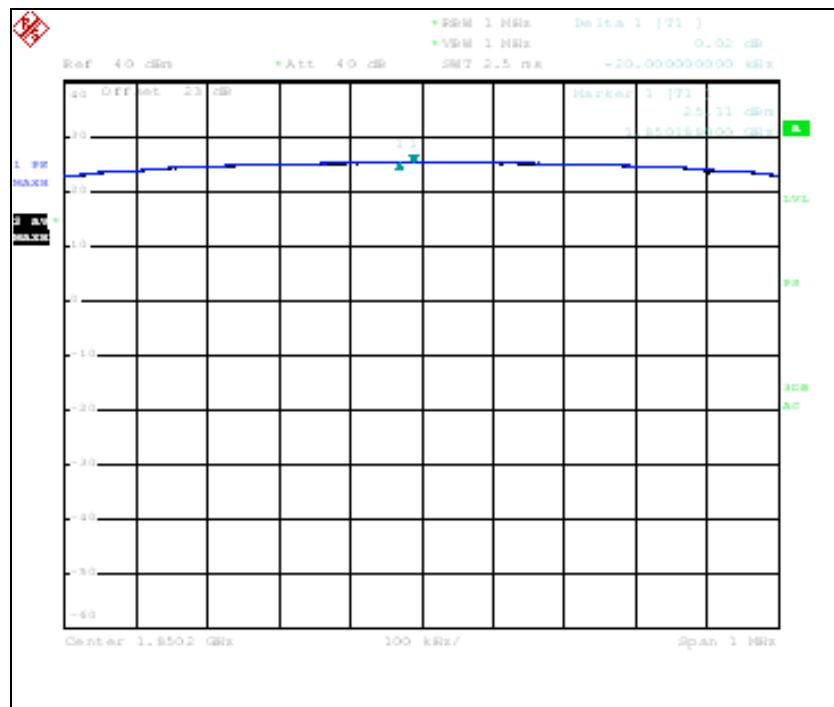

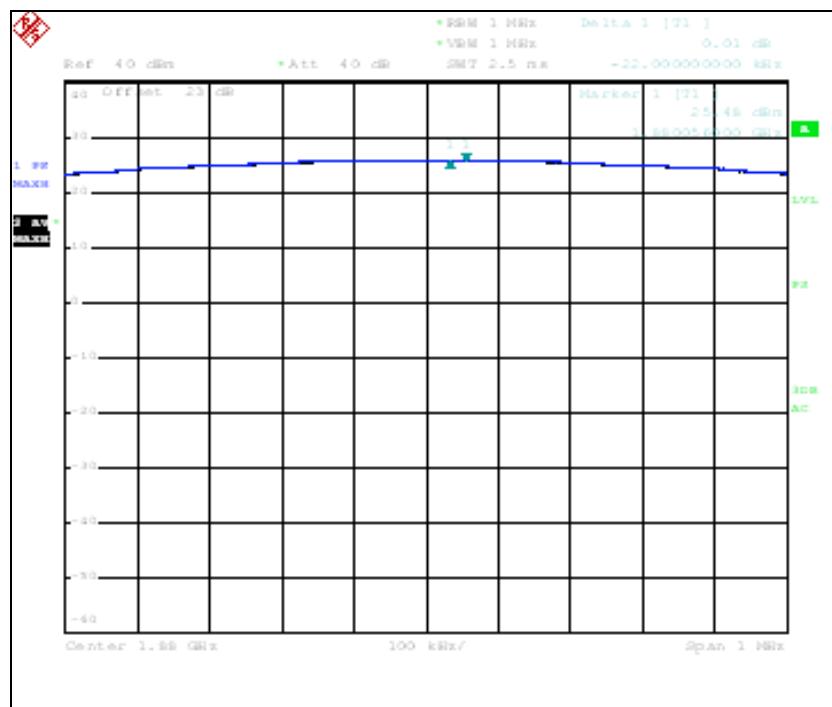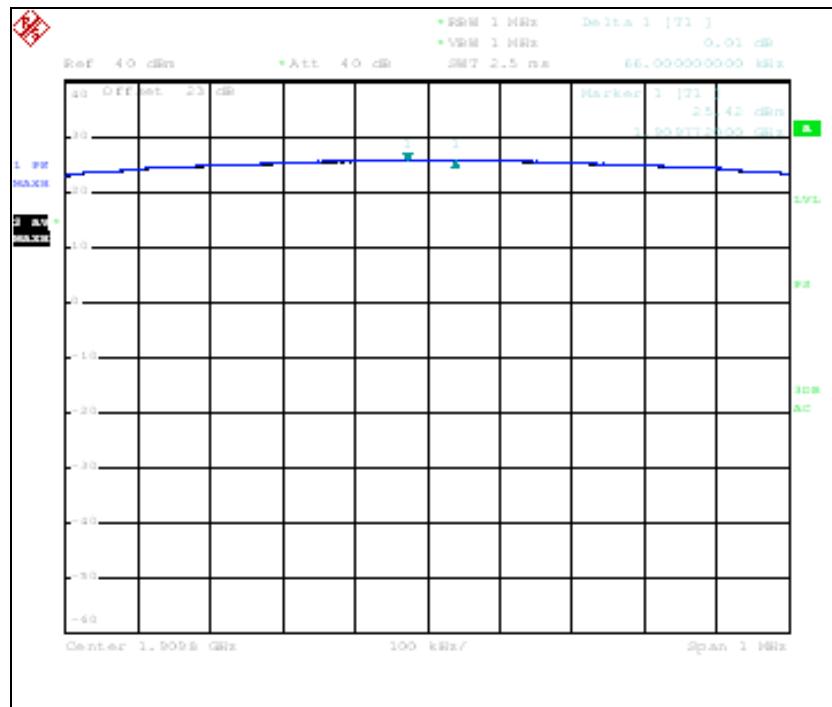
Peak-to-Average Ratio on Channel 661**Peak-to-Average Ratio on Channel 810**

APPENDIX I


TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

CONDUCTED EMISSION IN GSM 850 BAND


Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz

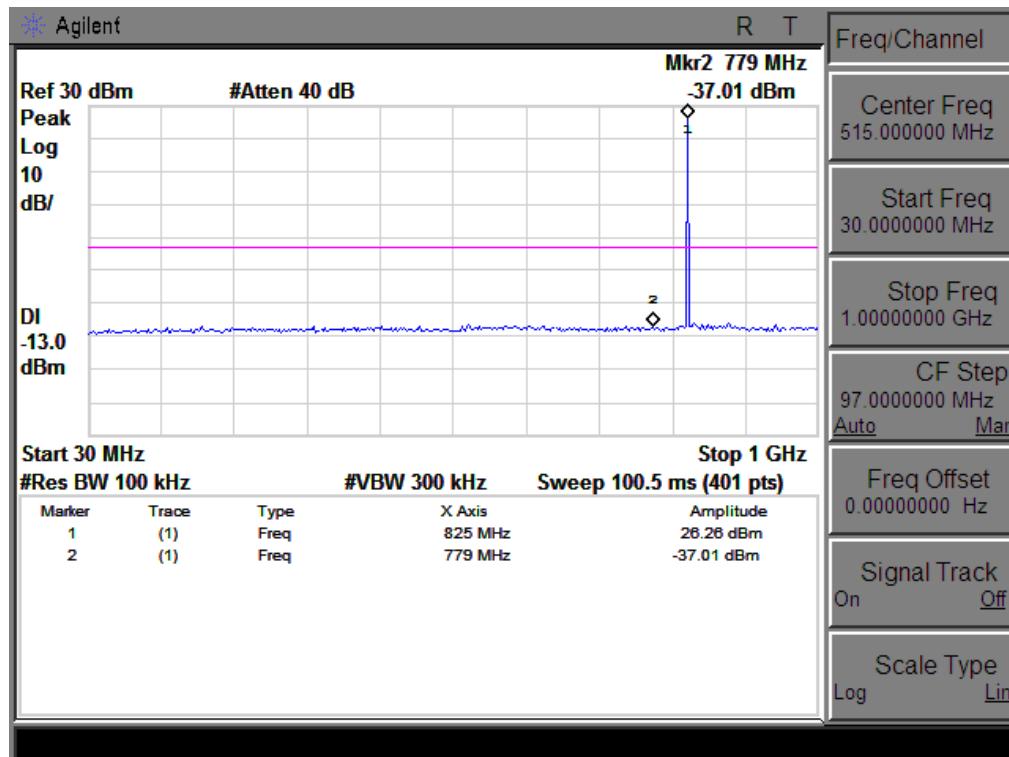


Conducted Emission Transmitting Mode CH 128 1GHz – 10GHz

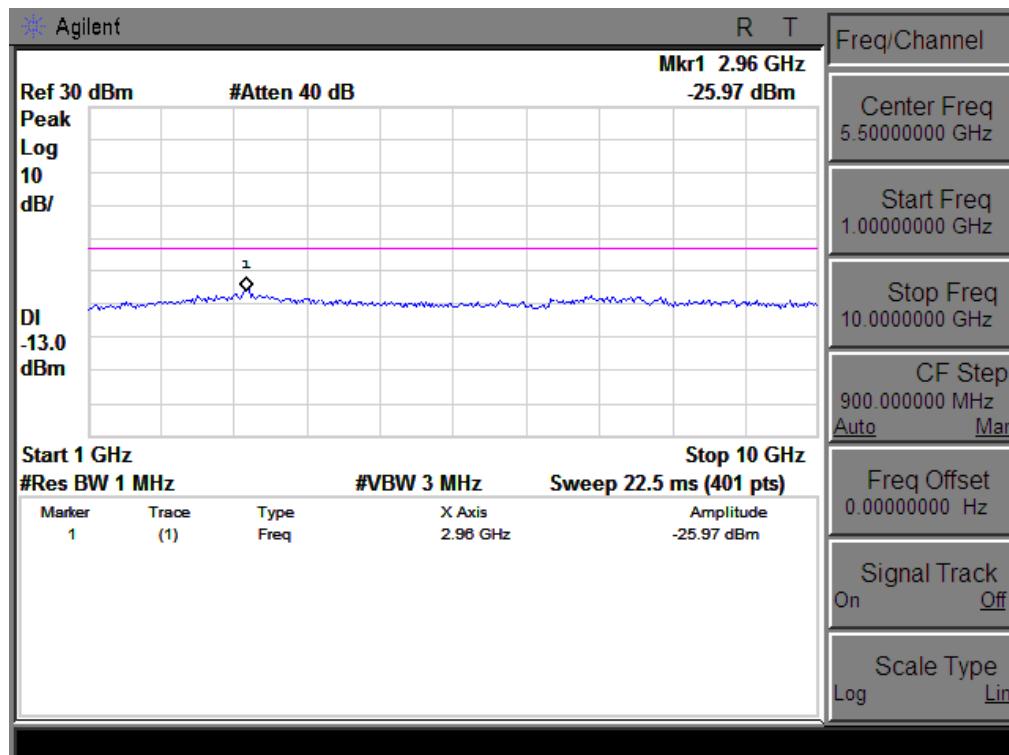


Conducted Emission Transmitting Mode CH 190 30MHz – 1GHz

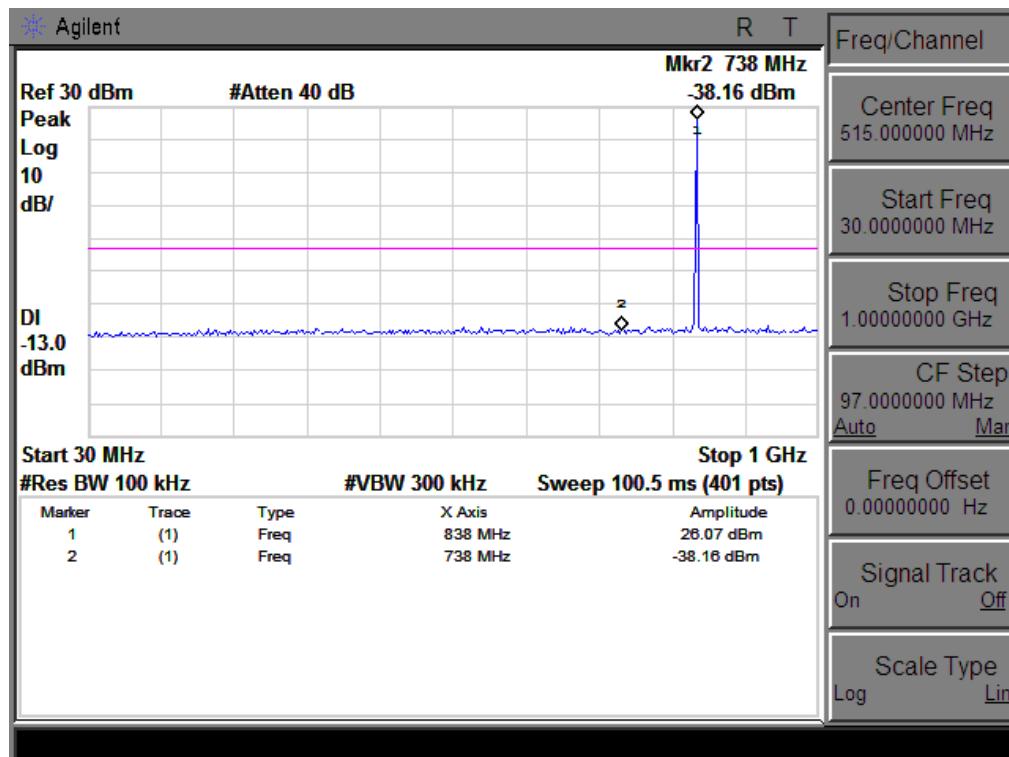


Conducted Emission Transmitting Mode CH 190 1GHz – 10GHz

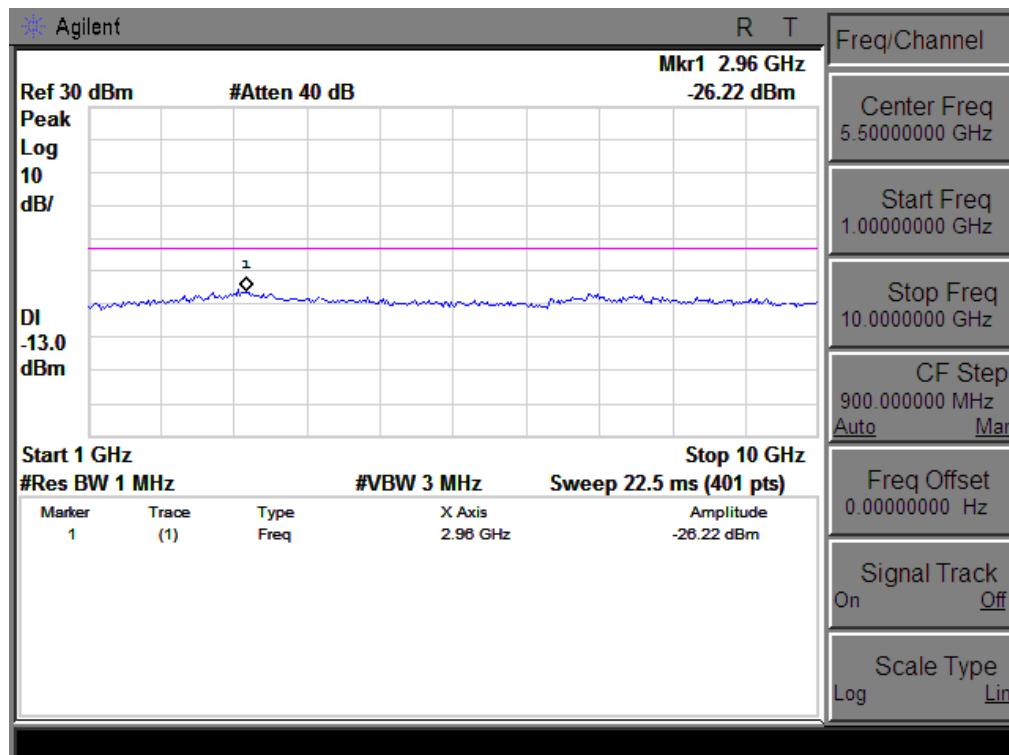

Conducted Emission Transmitting Mode CH 251 30MHz – 1GHz

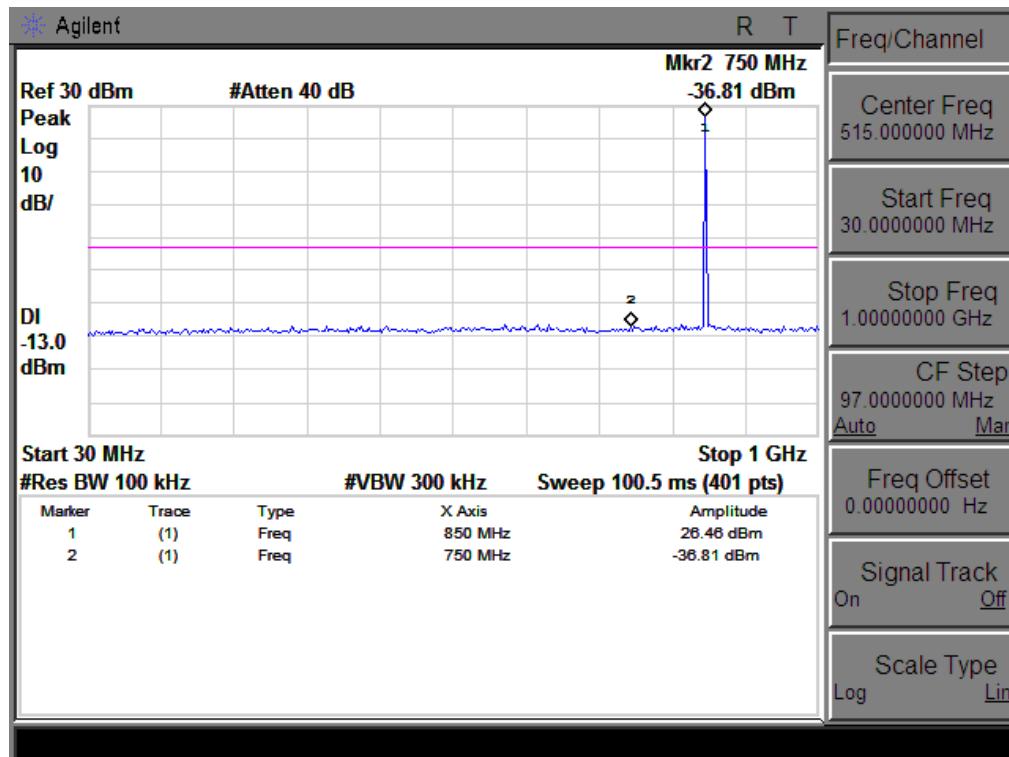


Conducted Emission Transmitting Mode CH 251 1GHz – 10GHz

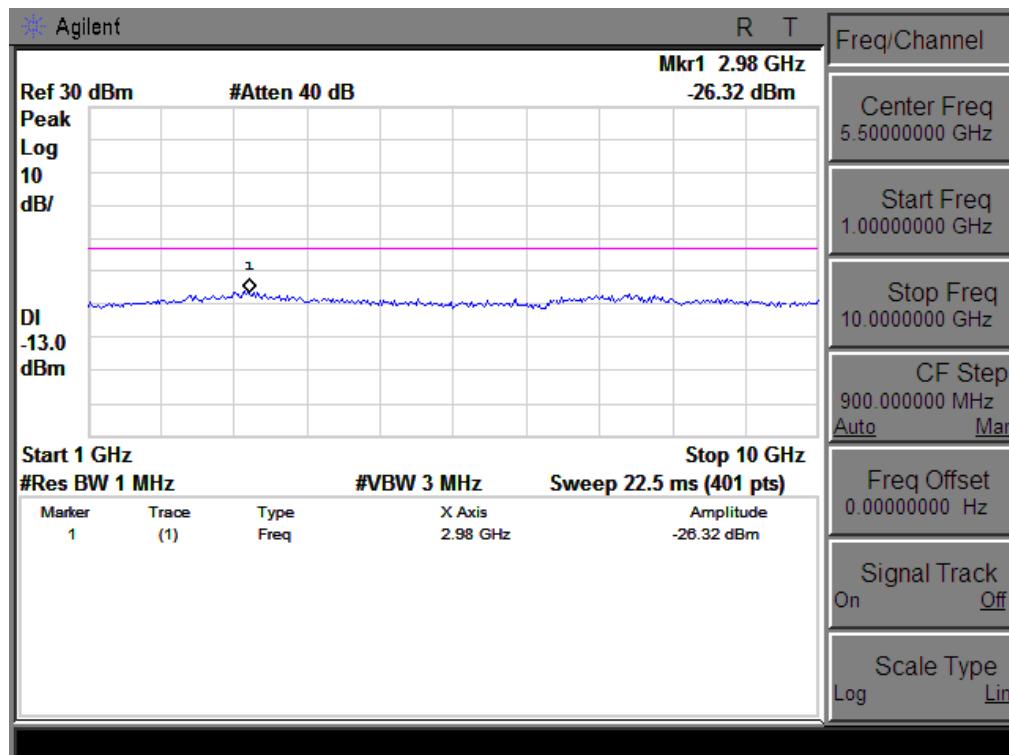


CONDUCTED EMISSION IN GSM1900 BAND


Conducted Emission Transmitting Mode CH 512 30MHz – 1GHz

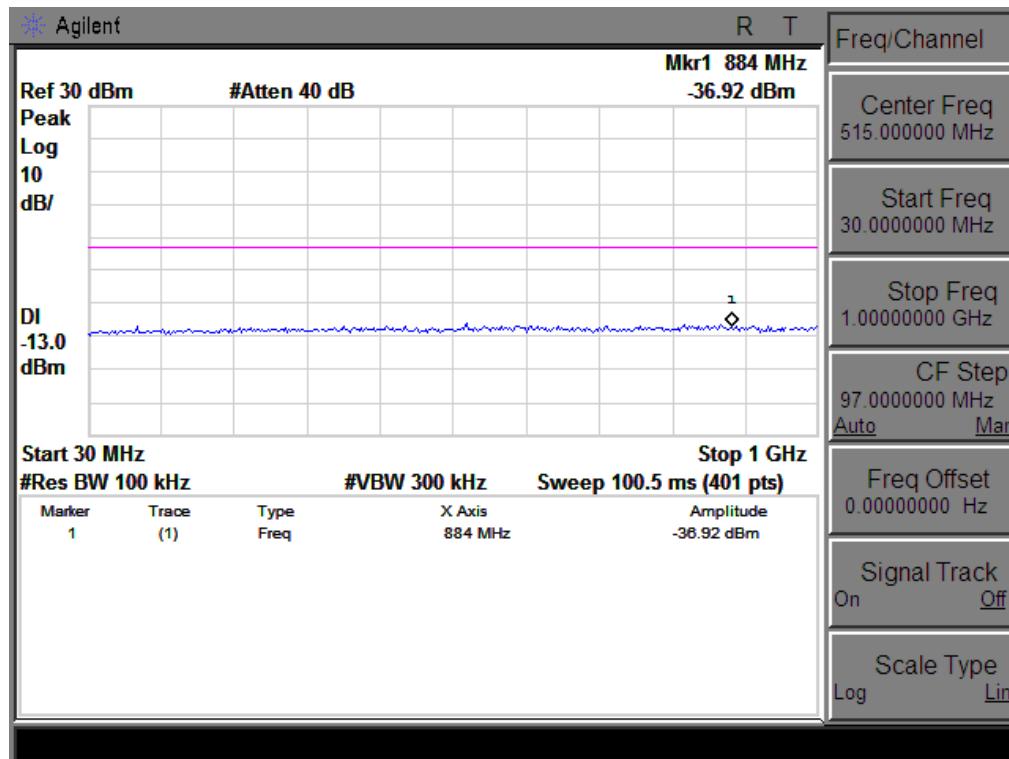


Conducted Emission Transmitting Mode CH 512 1GHz – 2GHz

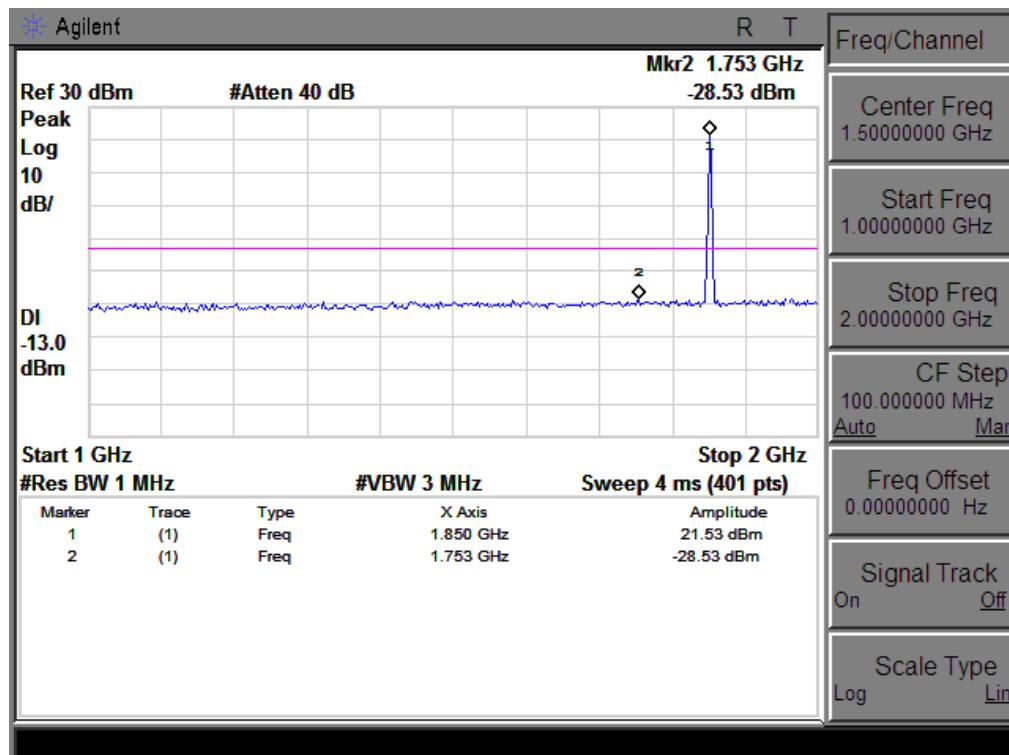


Conducted Emission Transmitting Mode CH 512 2GHz – 20GHz

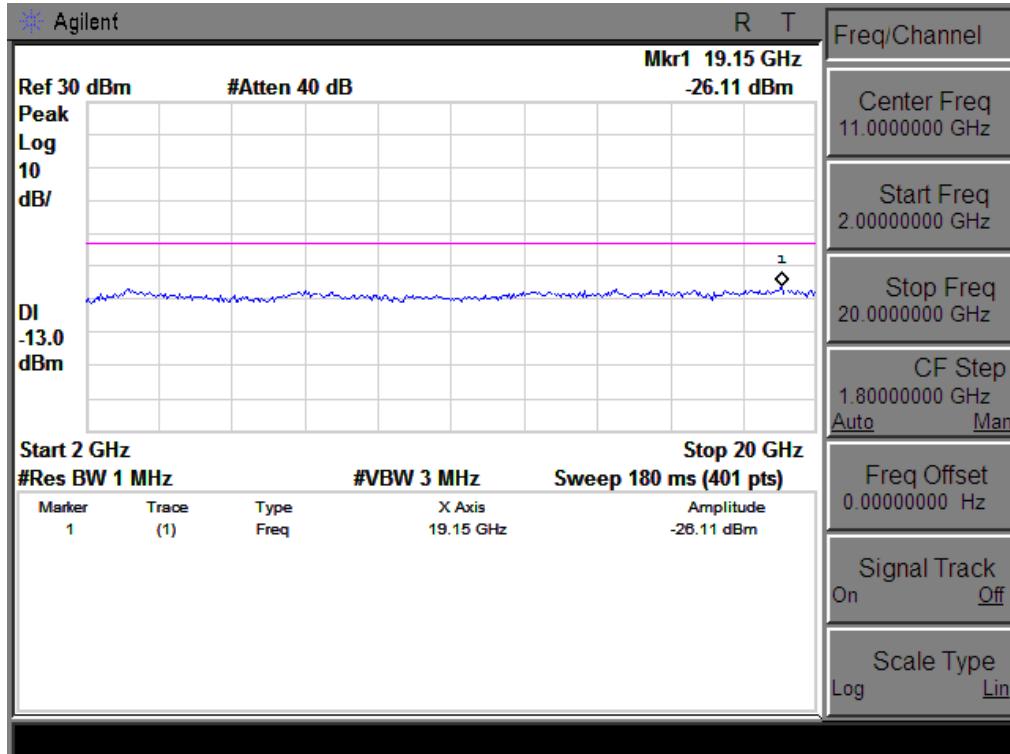


Conducted Emission Transmitting Mode CH 661 30MHz – 1GHz

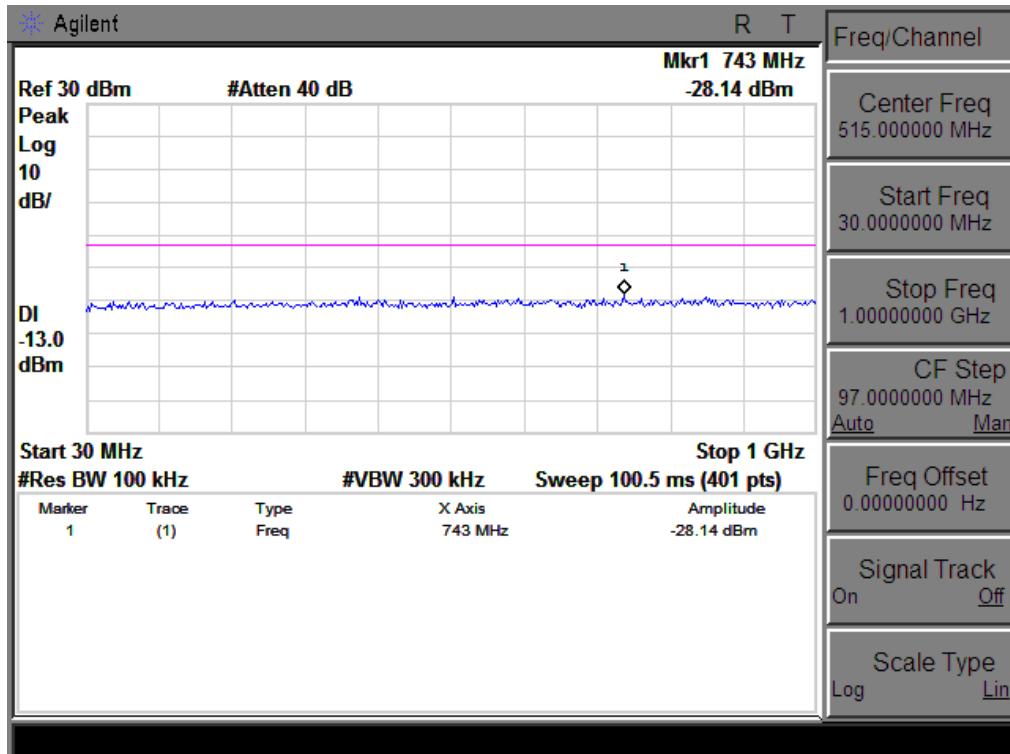


Conducted Emission Transmitting Mode CH 661 1GHz – 2GHz

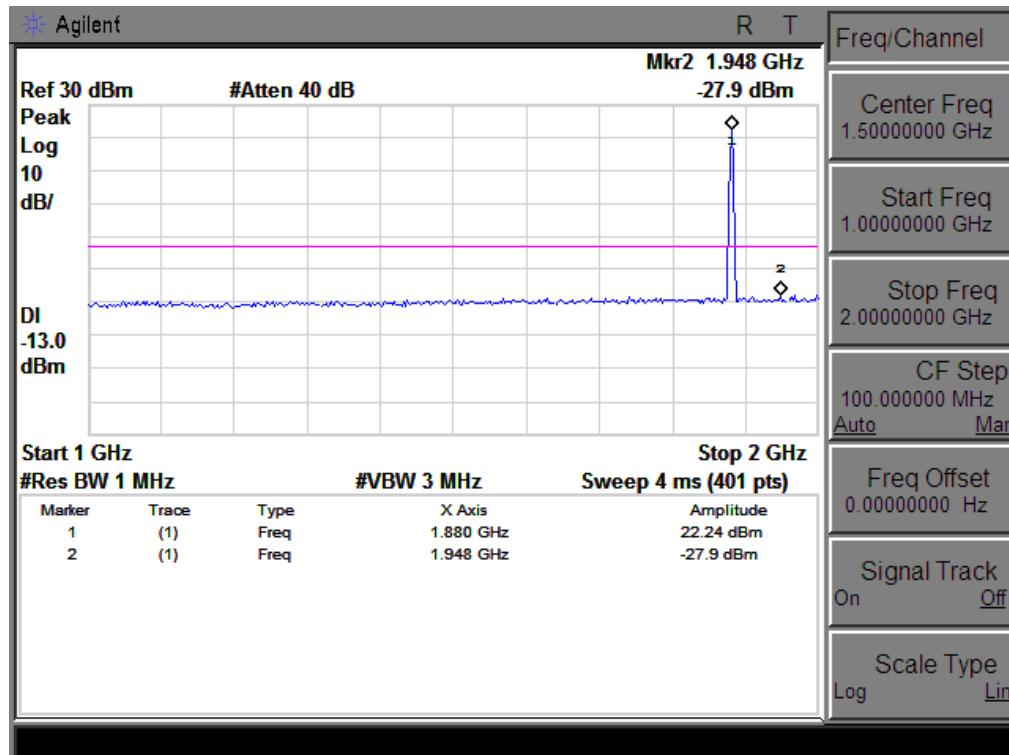


Conducted Emission Transmitting Mode CH 661 2GHz – 20GHz

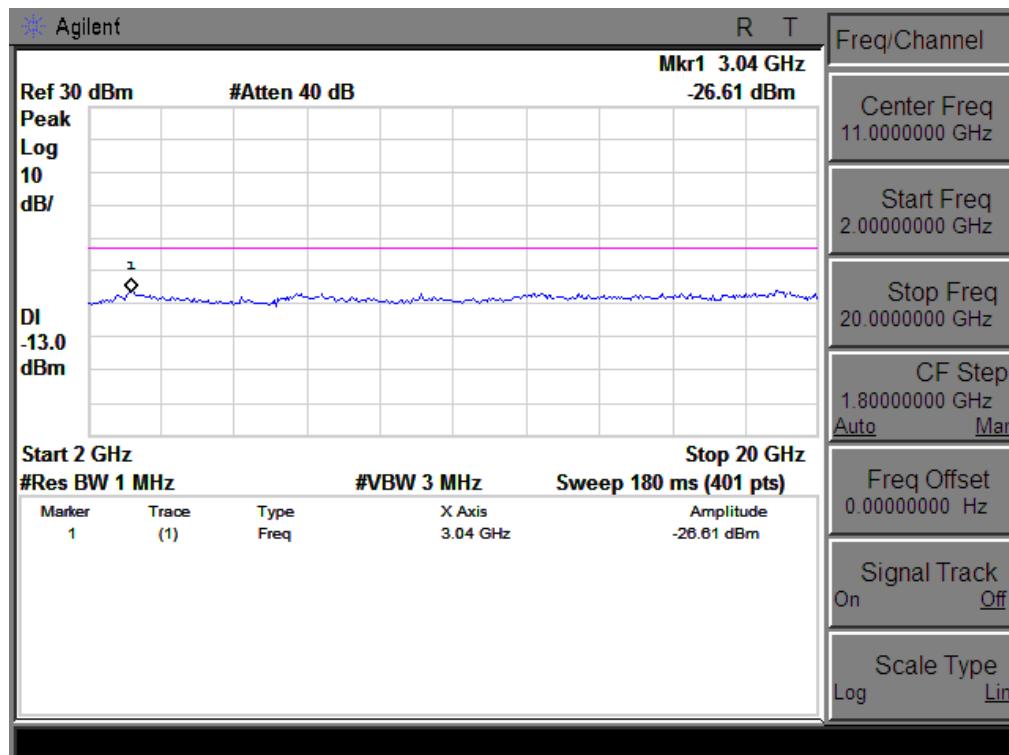


Conducted Emission Transmitting Mode CH 810 30MHz – 1GHz

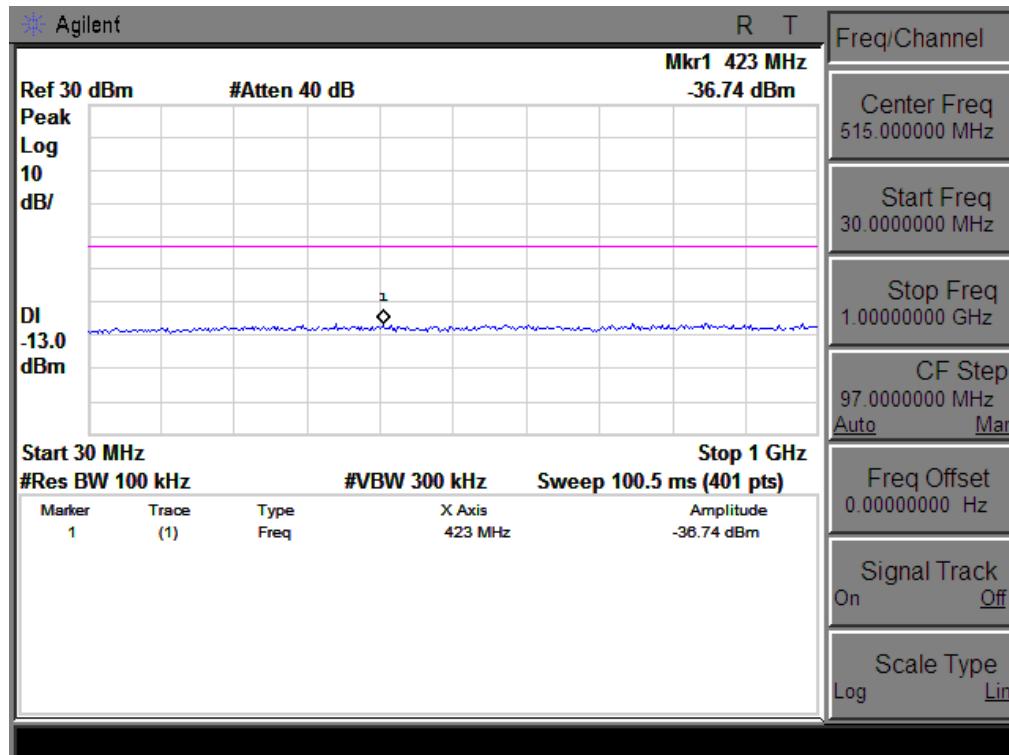

Conducted Emission Transmitting Mode CH 810 1GHz – 2GHz

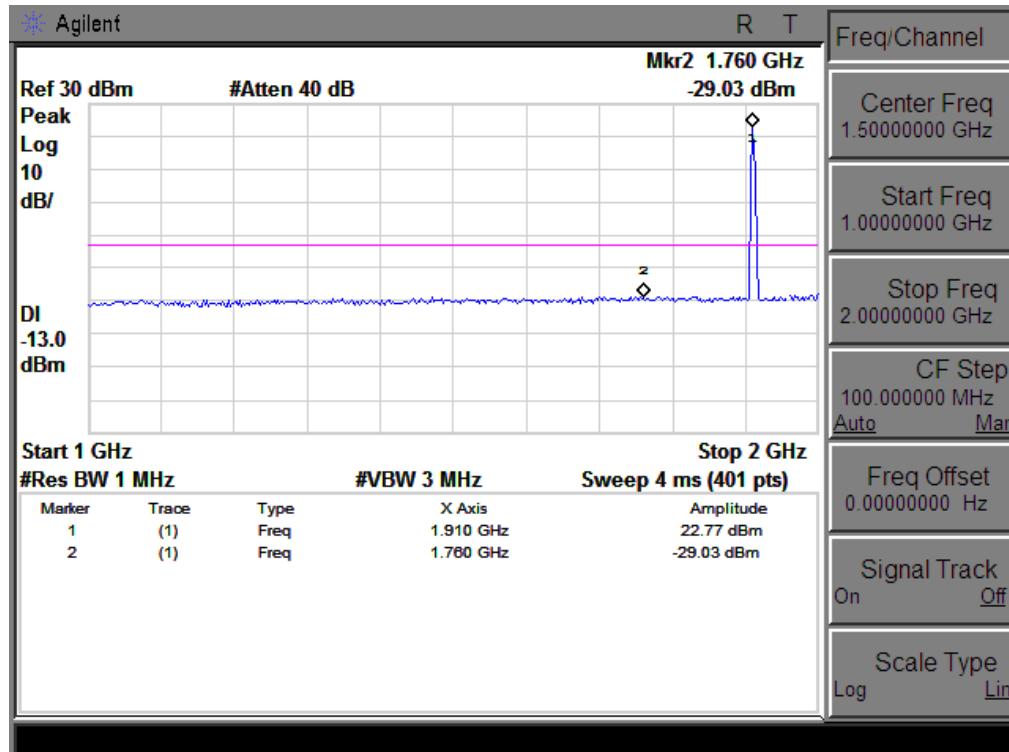

Conducted Emission Transmitting Mode CH 810 2GHz – 20GHz

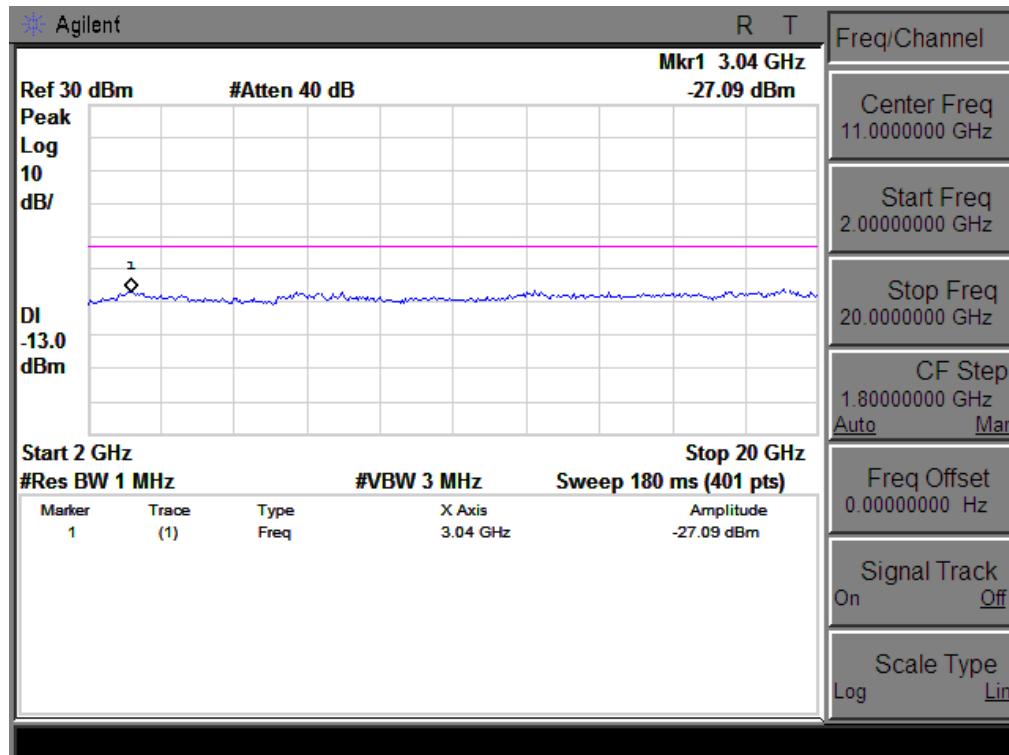


APPENDIX II


TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)

EMISSION BANDWIDTH (-26dBc)


Occupied Bandwidth (99%) GSM 850 BAND CH 128

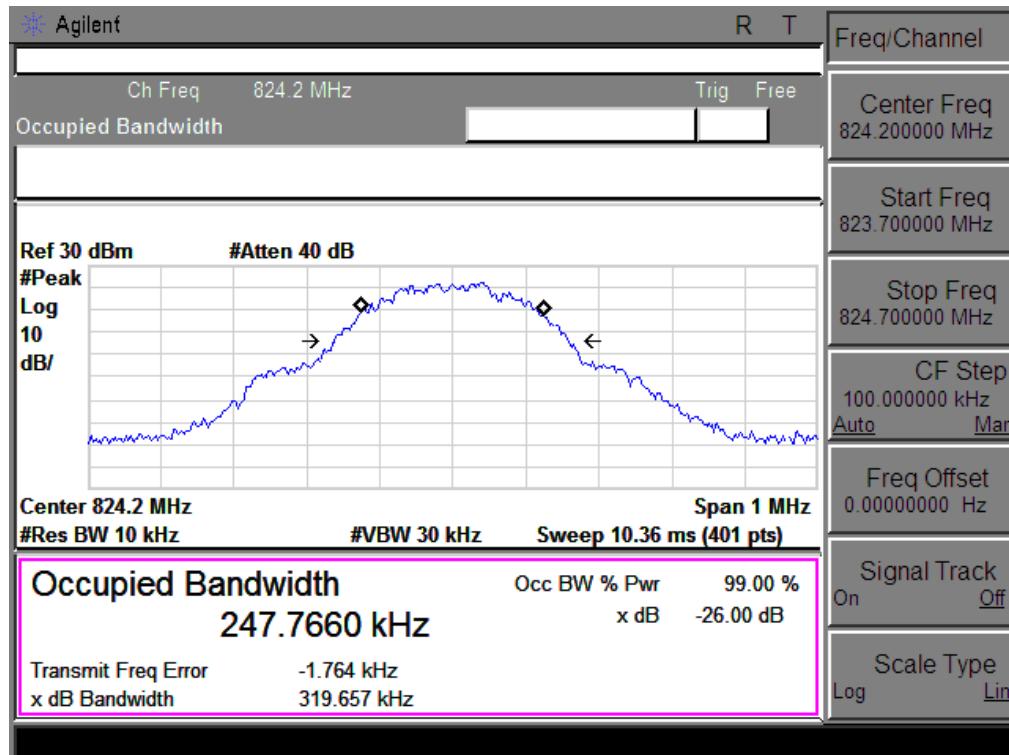


Occupied Bandwidth (99%) GSM 850 BAND CH 190

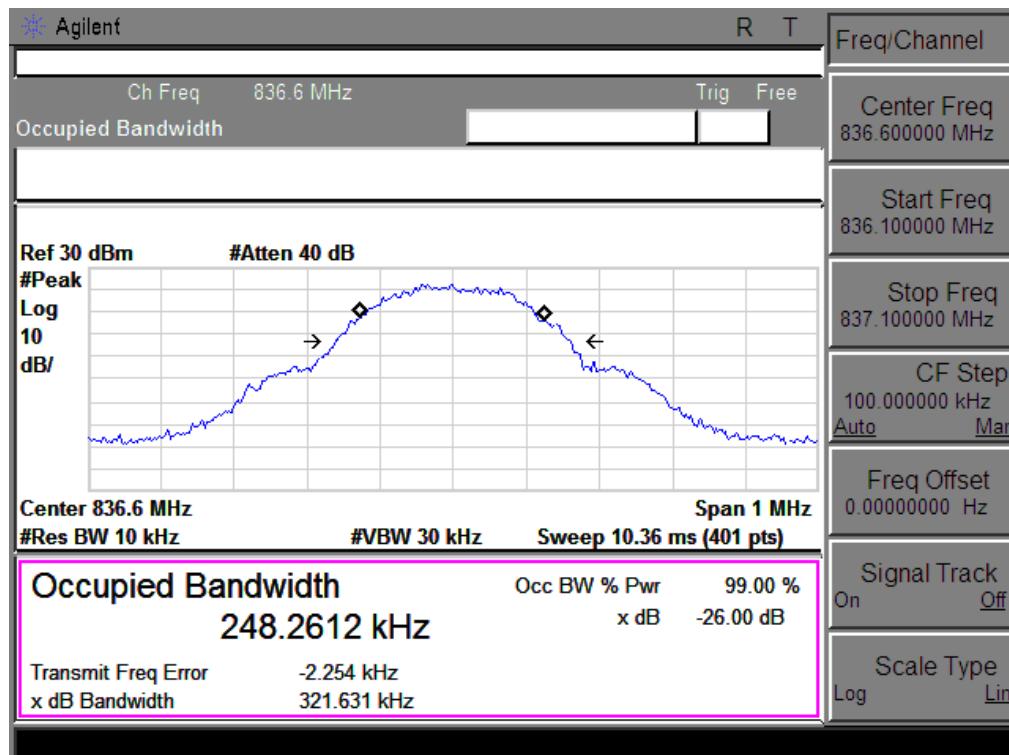


Occupied Bandwidth (99%) GSM 850 BAND CH 251

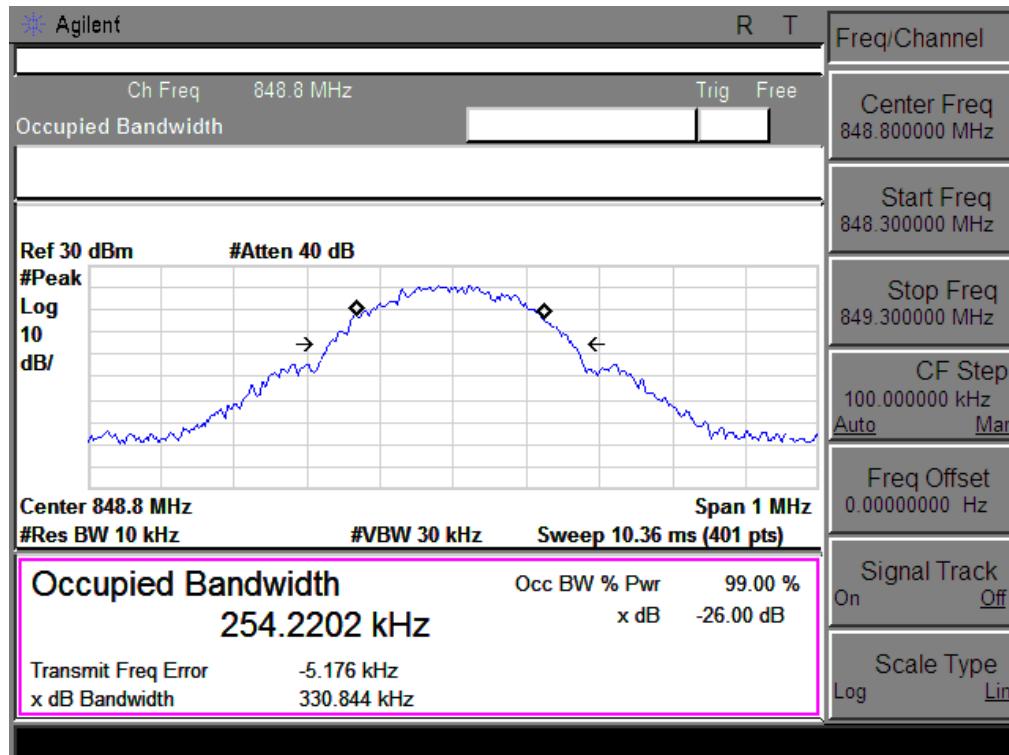


Occupied Bandwidth (99%) GPRS 850 BAND CH 128

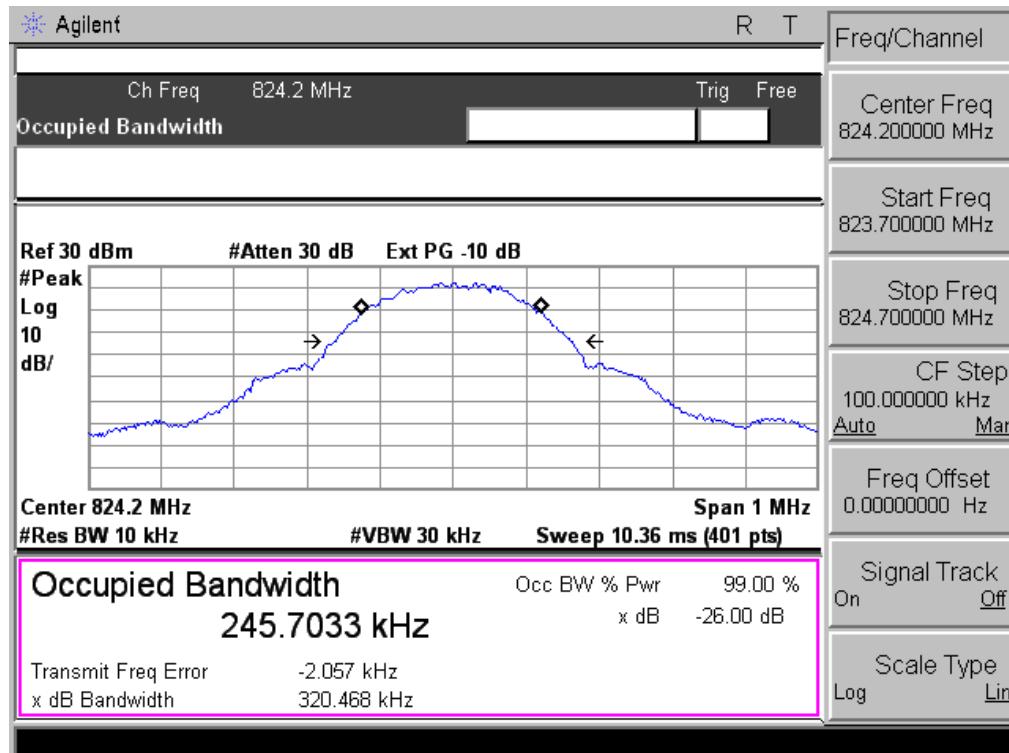


Occupied Bandwidth (99%) GPRS 850 BAND CH 190

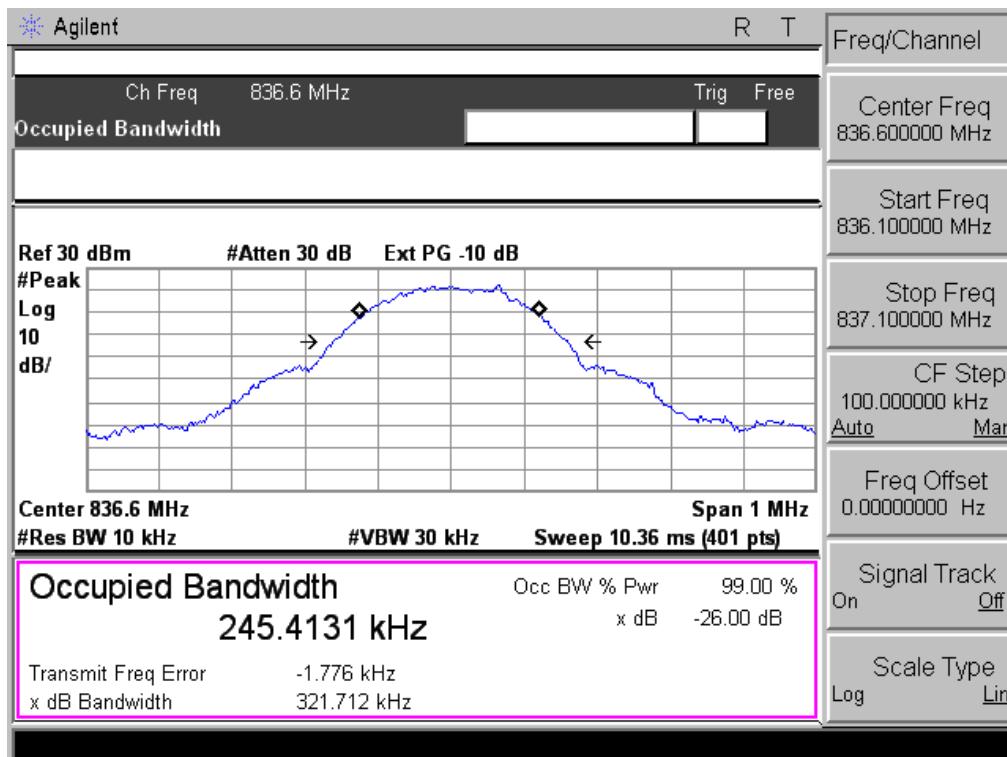


Occupied Bandwidth (99%) GPRS 850 BAND CH 251

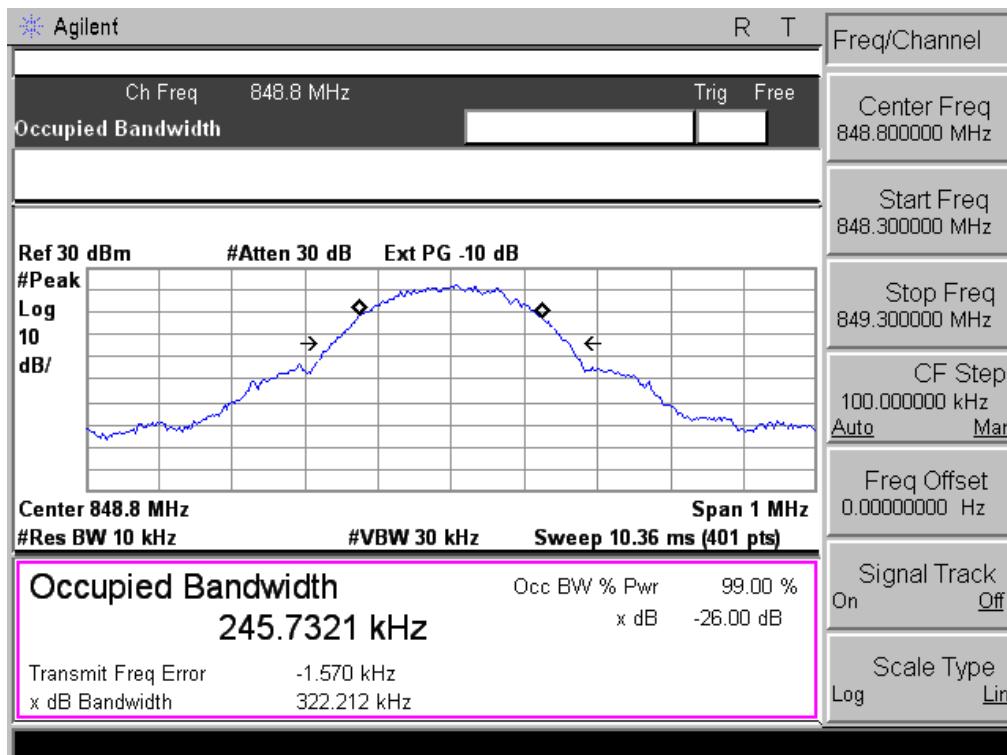


Occupied Bandwidth (99%) PCS 1900 BAND CH 512

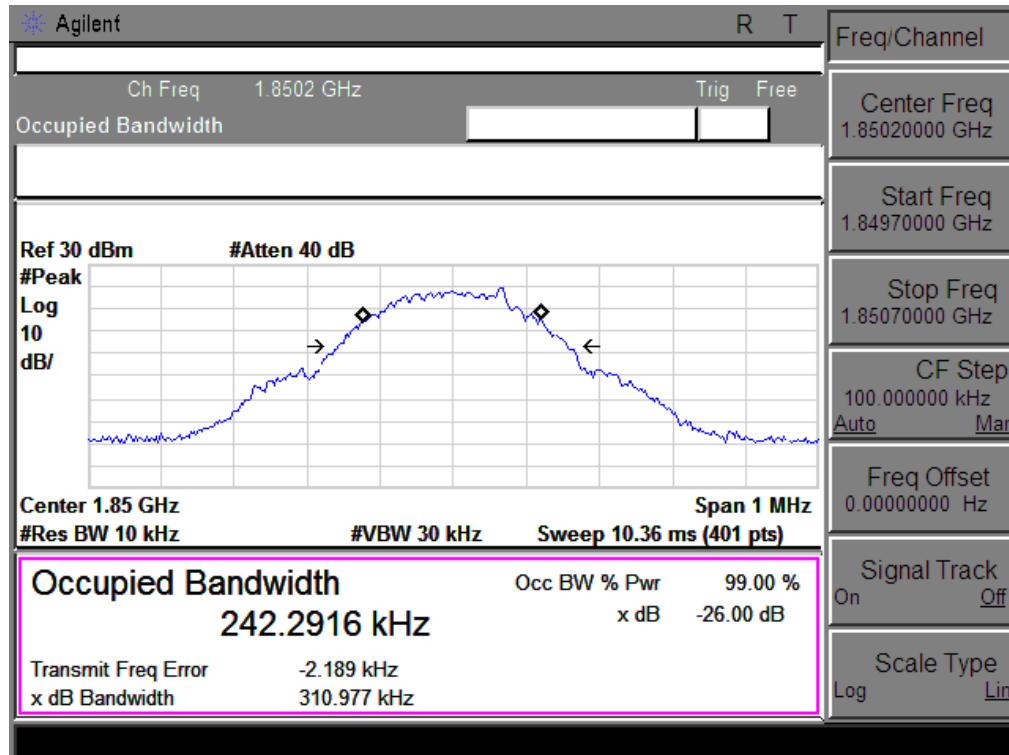


Occupied Bandwidth (99%) PCS 1900 BAND CH 661

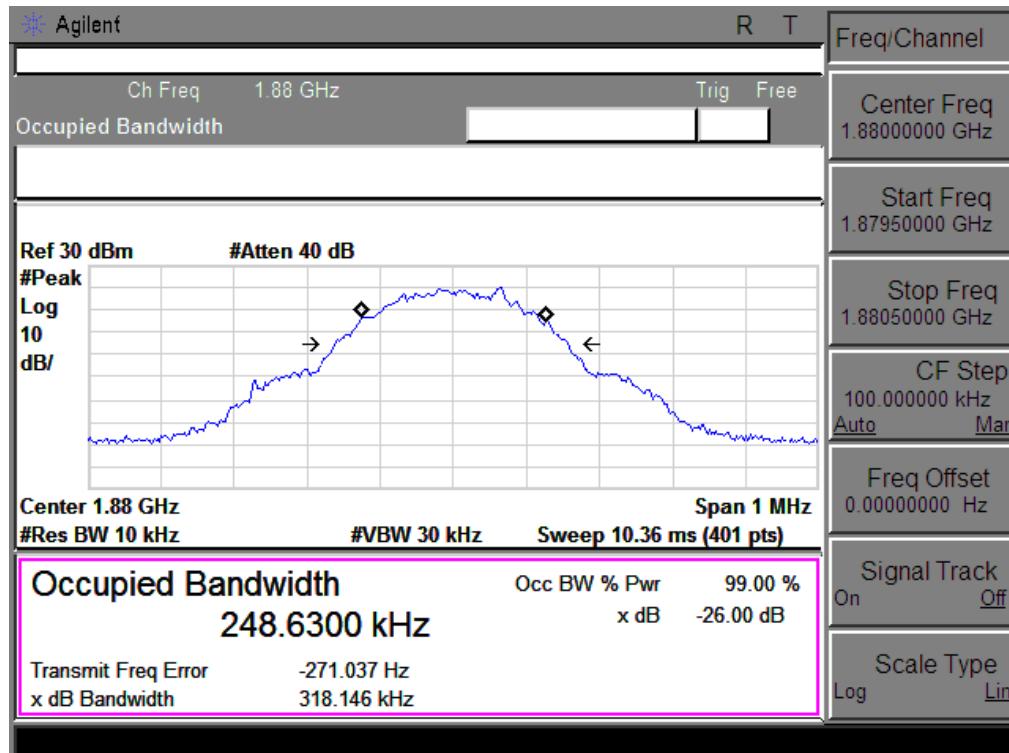


Occupied Bandwidth (99%) PCS 1900 BAND CH 810

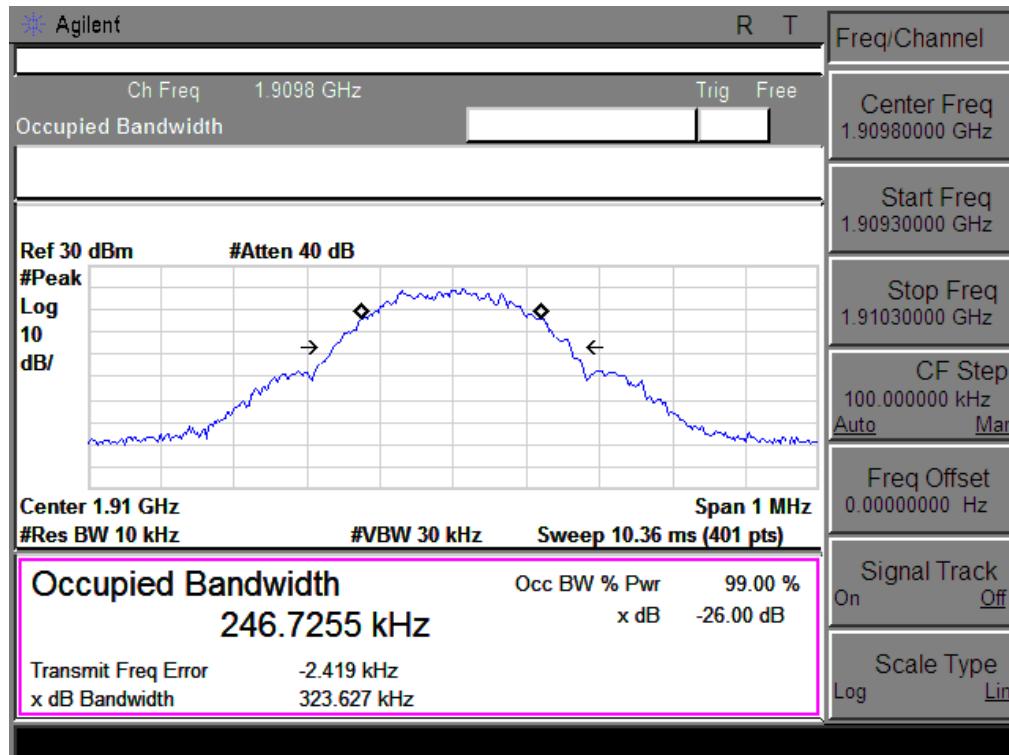


Occupied Bandwidth (99%) GPRS 1900 BAND CH 512

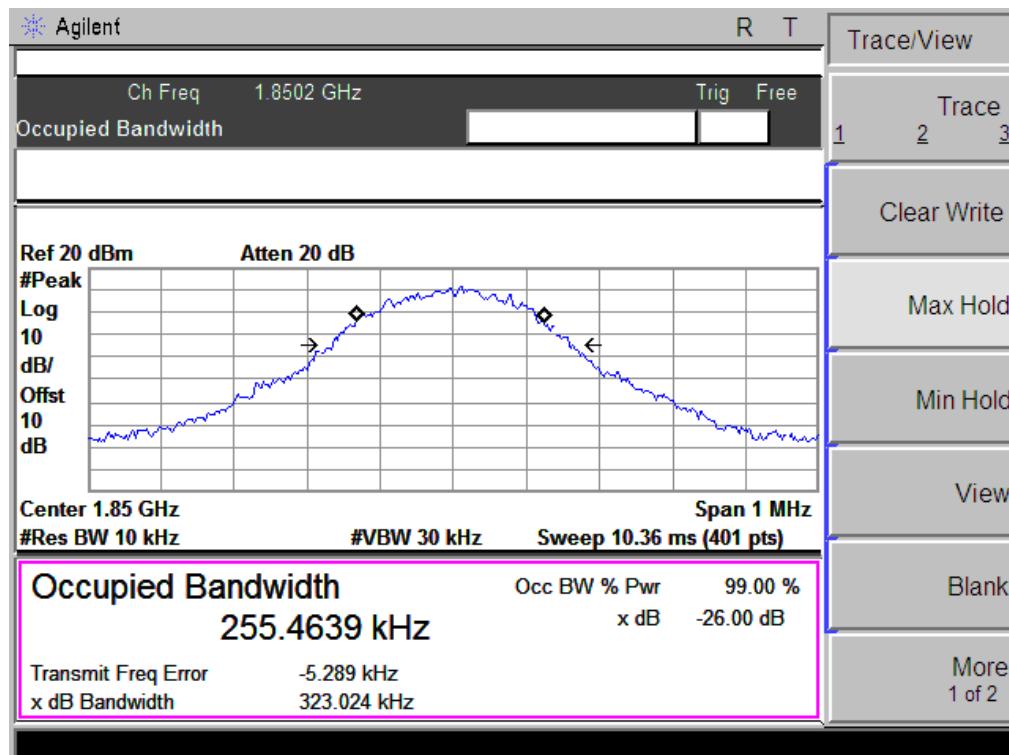

Occupied Bandwidth (99%) GPRS 1900 BAND CH 661

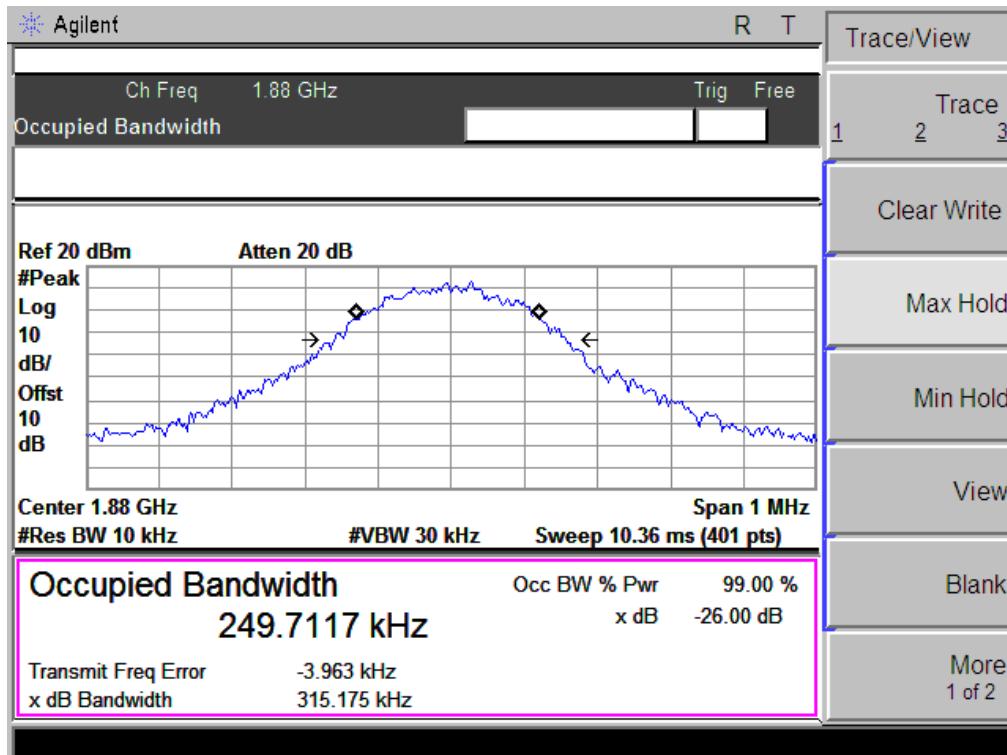


Occupied Bandwidth (99%) GPRS 1900 BAND CH 810

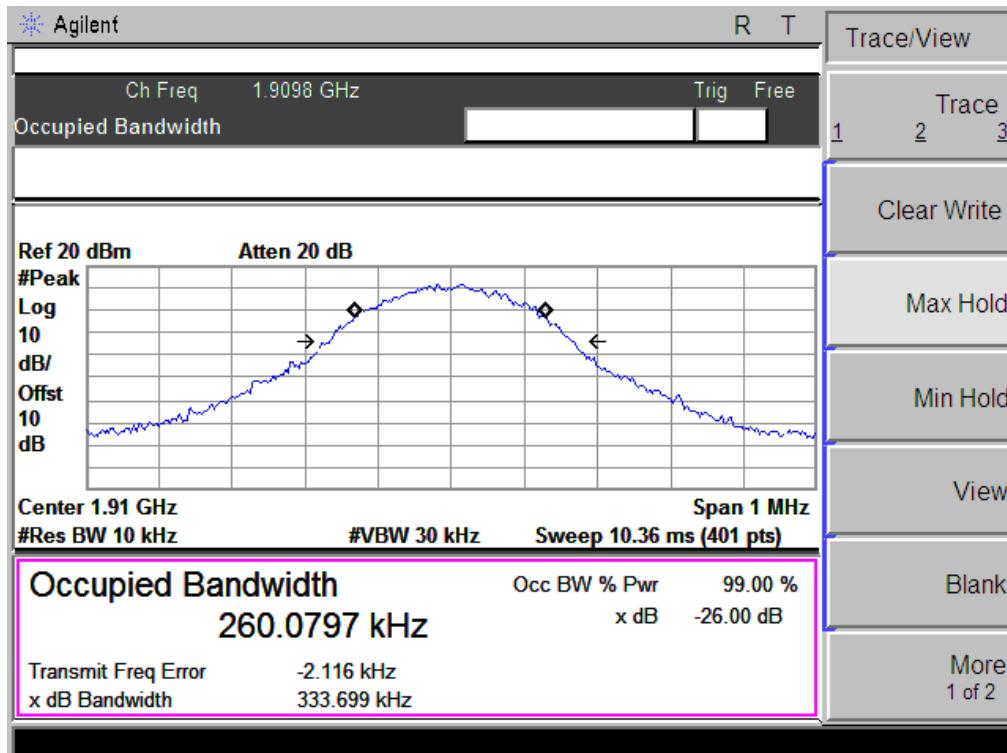


APPENDIX III

TEST PLOTS FOR BAND EDGES


Low Band Edge GSM 850 BAND CH 128

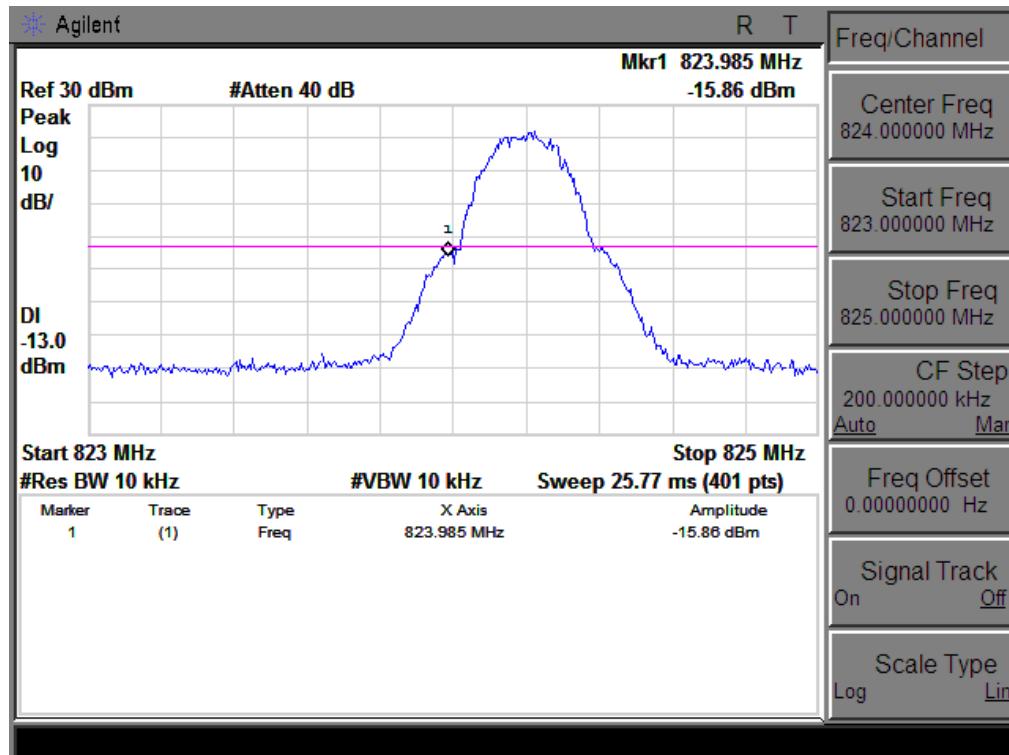


High Band Edge GSM 850 BAND CH 251

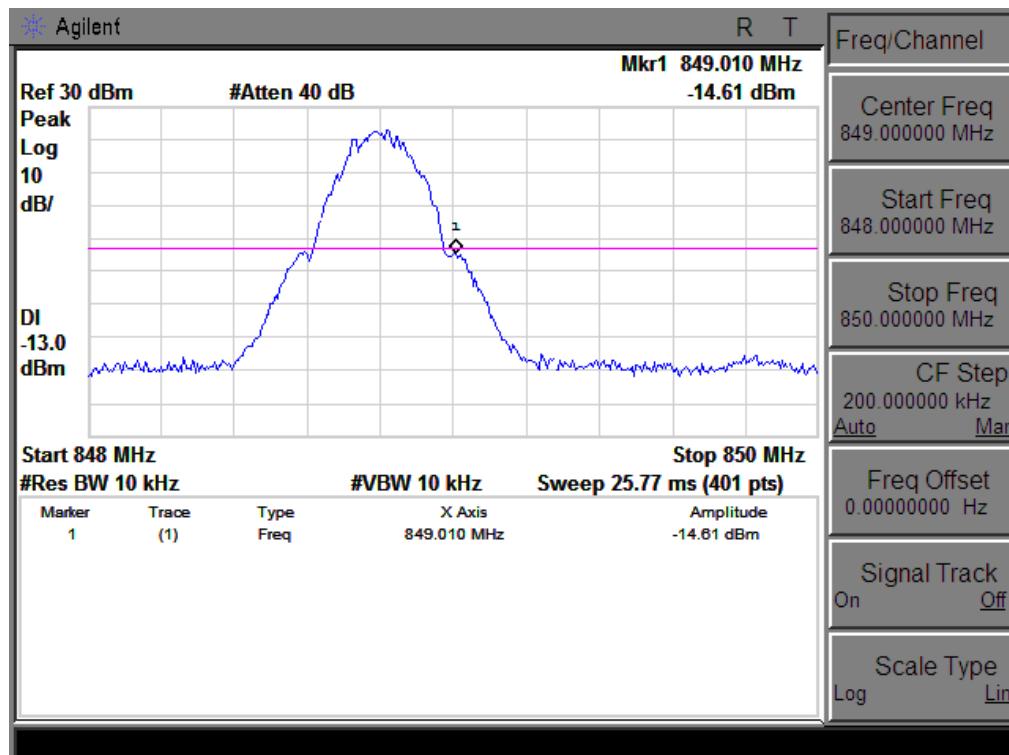

Low Band Edge PCS 1900 BAND CH 512

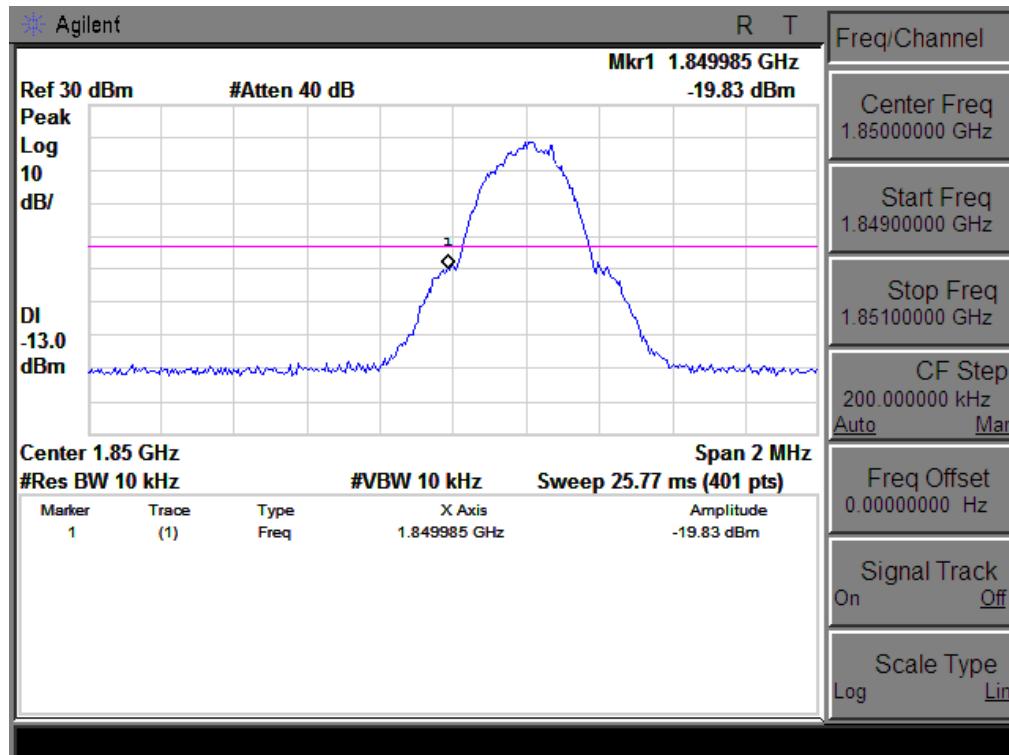



High Band Edge PCS 1900 BAND CH 810

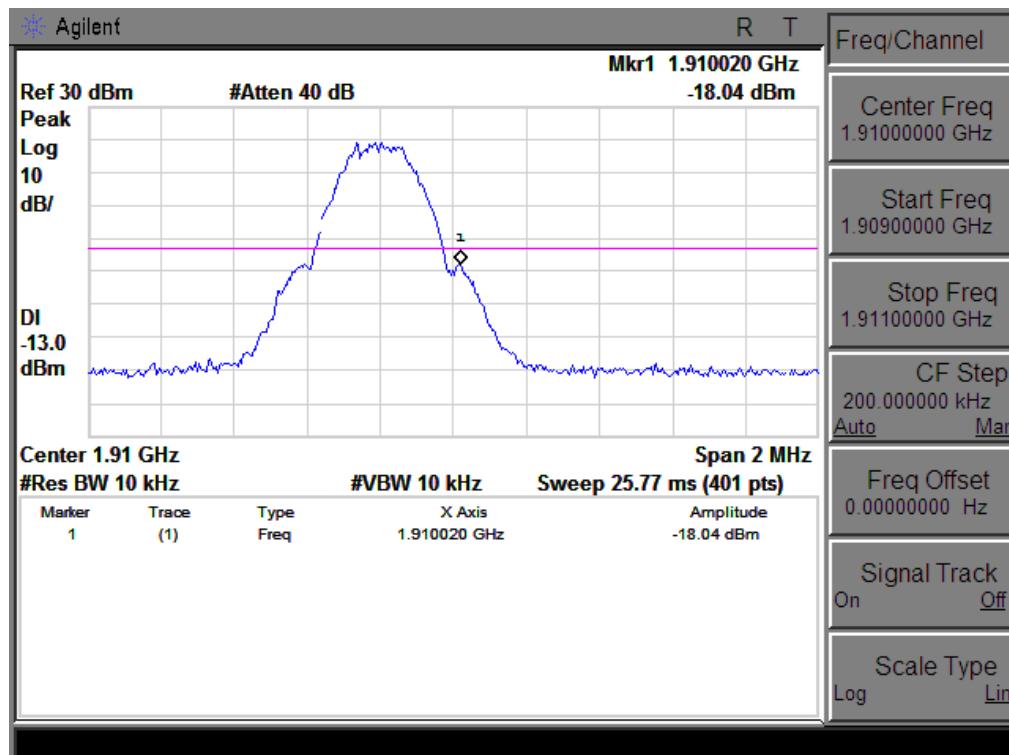

APPENDIX IV

PHOTOGRAPHS OF TEST SETUP

RADIATED SPURIOUS EMISSION

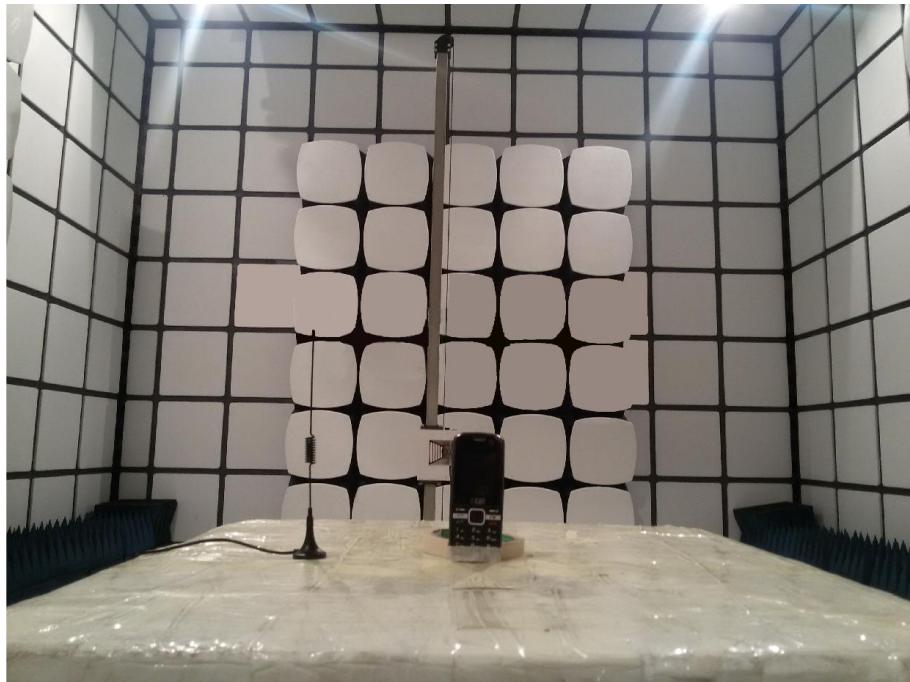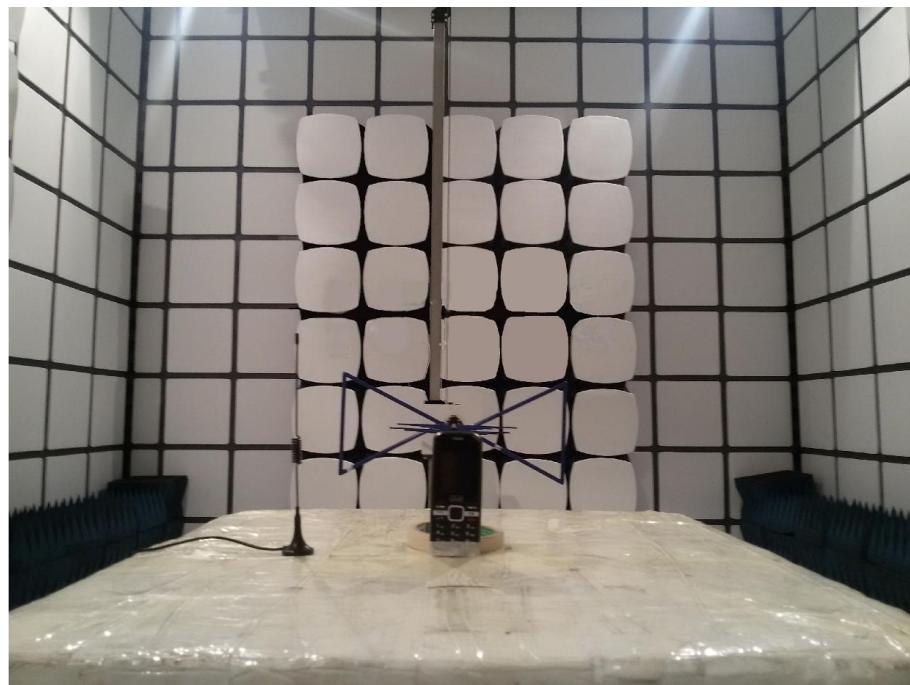

----END OF REPORT----