





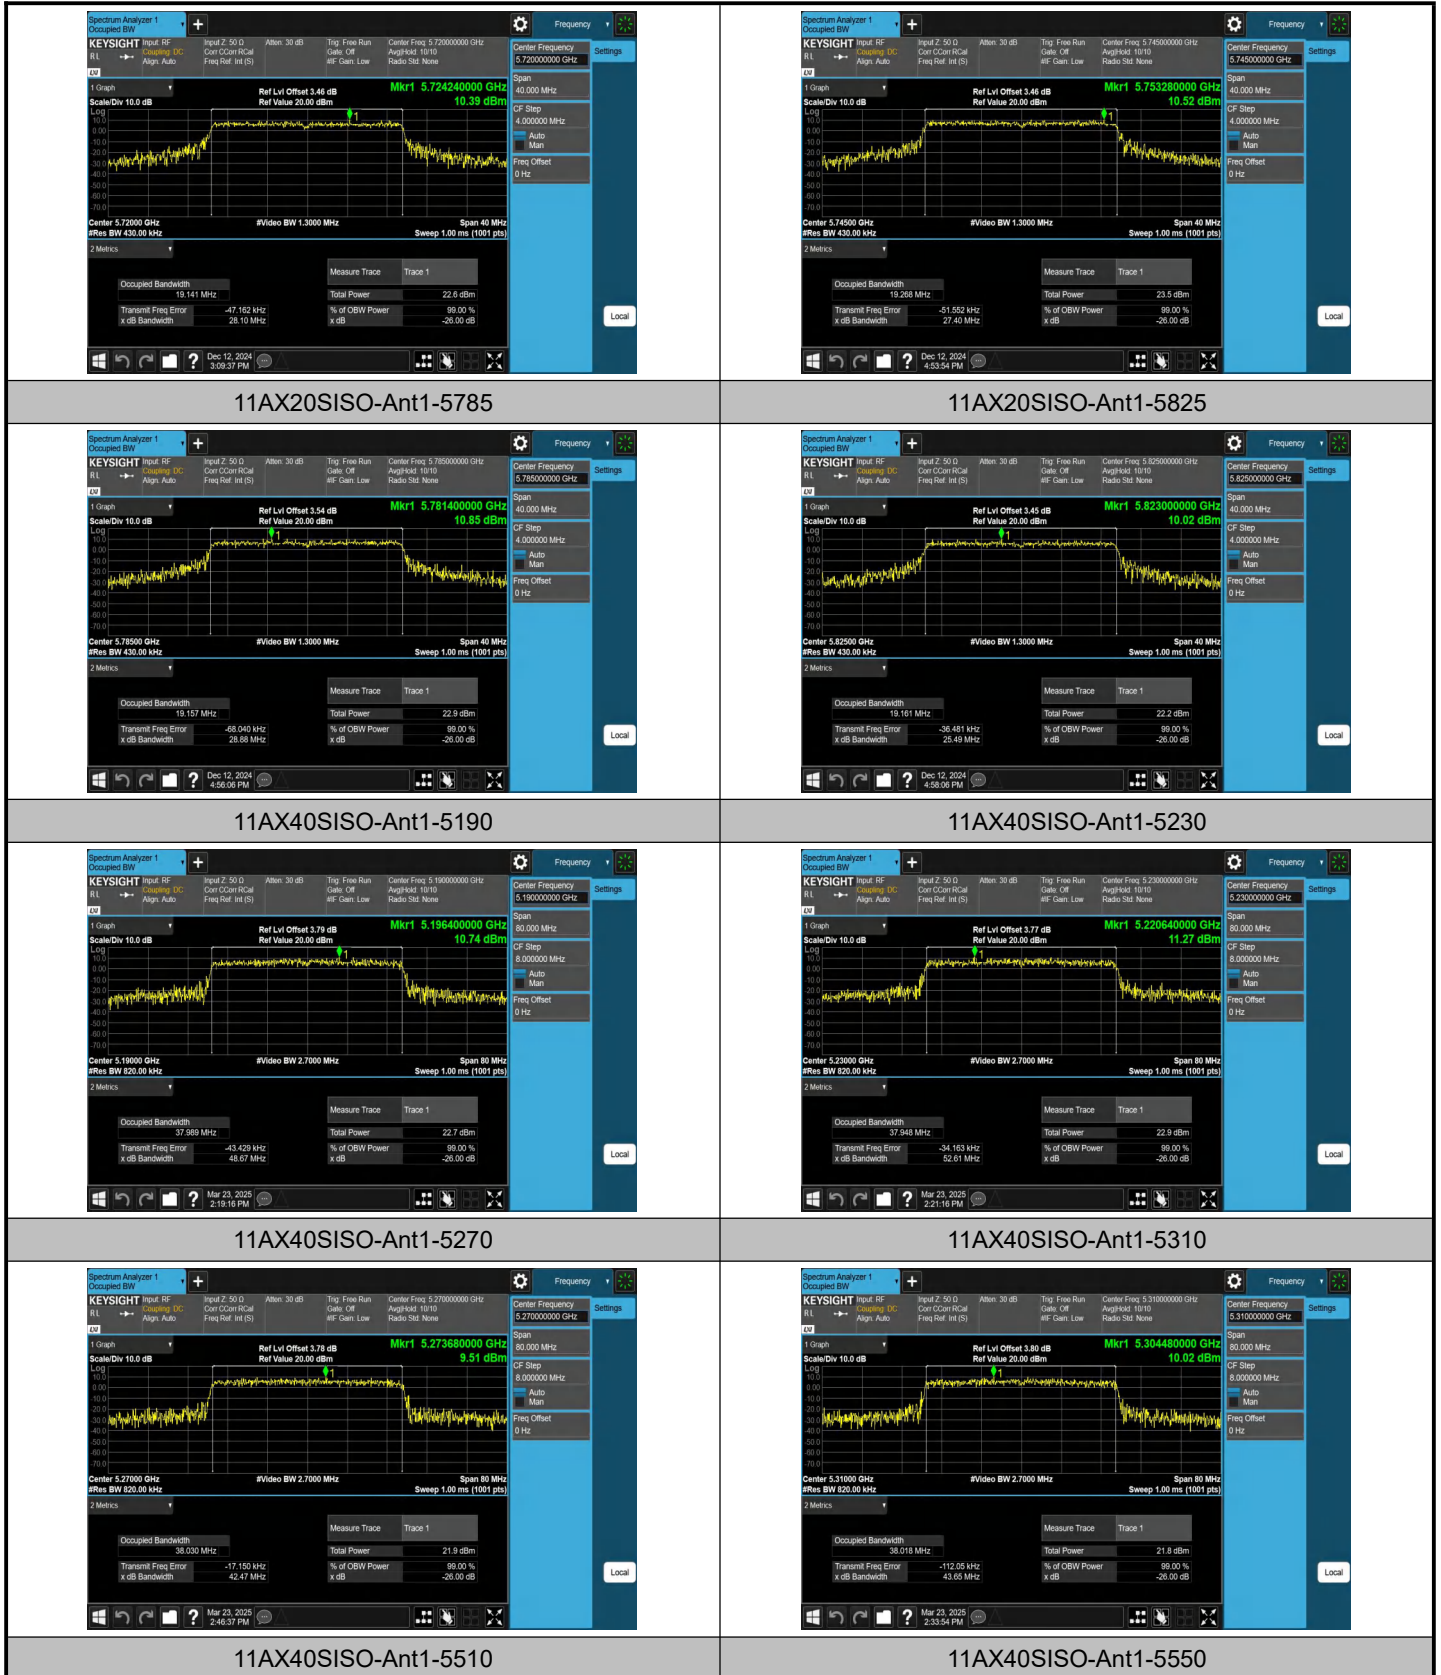

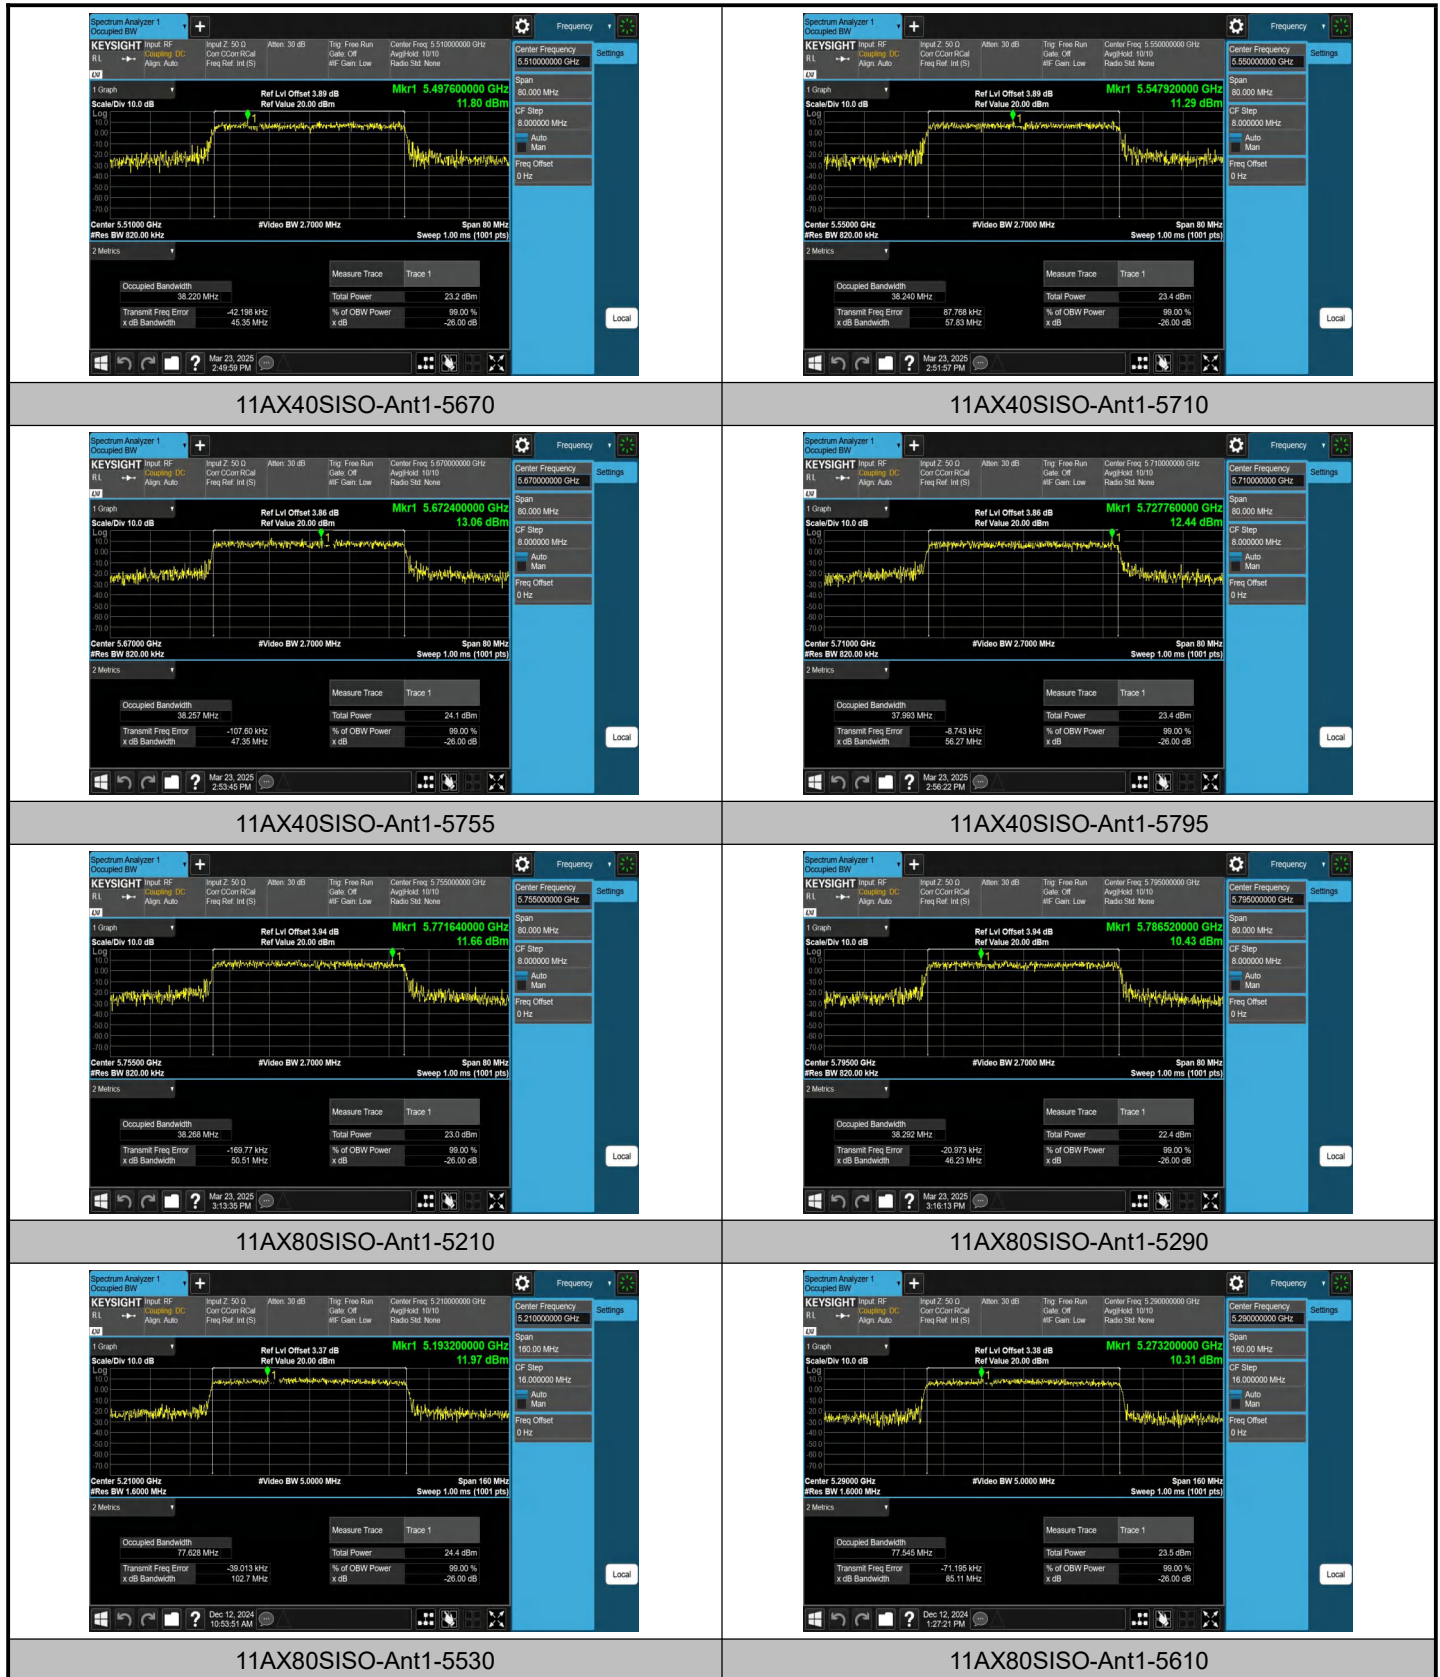

A.2 Maximum Conducted Output Power Measurement


Test Result


Test Mode	Antenna	Frequency [MHz]	Channel Power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	17.76	89.10	0.50	18.26	≤23.98	PASS
11A	Ant1	5220	18.21	86.42	0.63	18.84	≤23.98	PASS
11A	Ant1	5240	18.18	92.11	0.36	18.54	≤23.98	PASS
11A	Ant1	5260	17.86	91.50	0.39	18.25	≤23.98	PASS
11A	Ant1	5300	18.18	86.96	0.61	18.79	≤23.98	PASS
11A	Ant1	5320	18.01	89.17	0.50	18.51	≤23.98	PASS
11A	Ant1	5500	18.19	85.89	0.66	18.85	≤23.98	PASS
11A	Ant1	5580	18.41	92.05	0.36	18.77	≤23.98	PASS
11A	Ant1	5700	16.63	74.87	1.26	17.89	≤23.98	PASS
11A	Ant1	5720_UNII-2C	17.62	87.50	0.58	18.20	≤23.83	PASS
11A	Ant1	5720_UNII-3	10.73	87.50	0.58	11.31	≤30.00	PASS
11A	Ant1	5745	18.49	90.91	0.41	18.90	≤30.00	PASS
11A	Ant1	5785	18.18	90.32	0.44	18.62	≤30.00	PASS
11A	Ant1	5825	17.26	90.26	0.45	17.71	≤30.00	PASS
11N20SISO	Ant1	5180	18.13	96.95	0.13	18.26	≤23.98	PASS
11N20SISO	Ant1	5220	18.24	97.32	0.12	18.36	≤23.98	PASS
11N20SISO	Ant1	5240	18.25	96.03	0.18	18.43	≤23.98	PASS
11N20SISO	Ant1	5260	18.49	95.86	0.18	18.67	≤23.98	PASS
11N20SISO	Ant1	5300	18.35	97.70	0.10	18.45	≤23.98	PASS
11N20SISO	Ant1	5320	18.18	95.50	0.20	18.38	≤23.98	PASS
11N20SISO	Ant1	5500	18.58	95.49	0.20	18.78	≤23.98	PASS
11N20SISO	Ant1	5580	18.67	93.21	0.31	18.98	≤23.98	PASS
11N20SISO	Ant1	5700	18.27	97.88	0.09	18.36	≤23.98	PASS
11N20SISO	Ant1	5720_UNII-2C	17.77	91.88	0.37	18.14	≤23.67	PASS
11N20SISO	Ant1	5720_UNII-3	11.64	91.88	0.37	12.01	≤30.00	PASS
11N20SISO	Ant1	5745	18.72	97.51	0.11	18.83	≤30.00	PASS
11N20SISO	Ant1	5785	18.13	97.88	0.09	18.22	≤30.00	PASS
11N20SISO	Ant1	5825	17.58	97.70	0.10	17.68	≤30.00	PASS
11N40SISO	Ant1	5190	18.08	96.64	0.15	18.23	≤23.98	PASS
11N40SISO	Ant1	5230	18.24	96.45	0.16	18.40	≤23.98	PASS
11N40SISO	Ant1	5270	18.42	97.22	0.12	18.54	≤23.98	PASS
11N40SISO	Ant1	5310	18.28	96.08	0.17	18.45	≤23.98	PASS
11N40SISO	Ant1	5510	18.48	96.64	0.15	18.63	≤23.98	PASS

11N40SISO	Ant1	5550	18.63	95.69	0.19	18.82	≤23.98	PASS
11N40SISO	Ant1	5670	18.58	97.80	0.10	18.68	≤23.98	PASS
11N40SISO	Ant1	5710_UNII-2C	18.65	97.22	0.12	18.77	≤23.98	PASS
11N40SISO	Ant1	5710_UNII-3	7.97	97.22	0.12	8.09	≤30.00	PASS
11N40SISO	Ant1	5755	18.62	97.61	0.11	18.73	≤30.00	PASS
11N40SISO	Ant1	5795	18.11	97.22	0.12	18.23	≤30.00	PASS
11AC20SISO	Ant1	5180	17.99	97.70	0.10	18.09	≤23.98	PASS
11AC20SISO	Ant1	5220	18.15	97.33	0.12	18.27	≤23.98	PASS
11AC20SISO	Ant1	5240	18.17	97.70	0.10	18.27	≤23.98	PASS
11AC20SISO	Ant1	5260	18.43	96.59	0.15	18.58	≤23.98	PASS
11AC20SISO	Ant1	5300	18.31	97.70	0.10	18.41	≤23.98	PASS
11AC20SISO	Ant1	5320	18.17	96.96	0.13	18.30	≤23.98	PASS
11AC20SISO	Ant1	5500	18.51	96.05	0.18	18.69	≤23.98	PASS
11AC20SISO	Ant1	5580	18.61	96.58	0.15	18.76	≤23.98	PASS
11AC20SISO	Ant1	5700	18.80	96.77	0.14	18.94	≤23.98	PASS
11AC20SISO	Ant1	5720_UNII-2C	17.75	97.70	0.10	17.85	≤23.60	PASS
11AC20SISO	Ant1	5720_UNII-3	11.87	97.70	0.10	11.97	≤30.00	PASS
11AC20SISO	Ant1	5745	18.70	97.14	0.13	18.83	≤30.00	PASS
11AC20SISO	Ant1	5785	18.04	96.23	0.17	18.21	≤30.00	PASS
11AC20SISO	Ant1	5825	17.39	95.86	0.18	17.57	≤30.00	PASS
11AC40SISO	Ant1	5190	17.99	97.61	0.11	18.10	≤23.98	PASS
11AC40SISO	Ant1	5230	18.15	97.61	0.11	18.26	≤23.98	PASS
11AC40SISO	Ant1	5270	18.39	97.61	0.11	18.50	≤23.98	PASS
11AC40SISO	Ant1	5310	18.27	96.84	0.14	18.41	≤23.98	PASS
11AC40SISO	Ant1	5510	18.50	96.46	0.16	18.66	≤23.98	PASS
11AC40SISO	Ant1	5550	18.46	97.03	0.13	18.59	≤23.98	PASS
11AC40SISO	Ant1	5670	18.26	96.65	0.15	18.41	≤23.98	PASS
11AC40SISO	Ant1	5710_UNII-2C	18.42	95.90	0.18	18.60	≤23.98	PASS
11AC40SISO	Ant1	5710_UNII-3	7.89	95.90	0.18	8.07	≤30.00	PASS
11AC40SISO	Ant1	5755	18.01	96.84	0.14	18.15	≤30.00	PASS
11AC40SISO	Ant1	5795	17.44	97.42	0.11	17.55	≤30.00	PASS
11AC80SISO	Ant1	5210	18.12	96.79	0.14	18.26	≤23.98	PASS
11AC80SISO	Ant1	5290	18.38	97.42	0.11	18.49	≤23.98	PASS
11AC80SISO	Ant1	5530	18.58	96.17	0.17	18.75	≤23.98	PASS
11AC80SISO	Ant1	5610	17.95	95.97	0.18	18.13	≤23.98	PASS
11AC80SISO	Ant1	5690_UNII-2C	18.85	97.41	0.11	18.96	≤23.98	PASS
11AC80SISO	Ant1	5690_UNII-3	4.86	97.41	0.11	4.97	≤30.00	PASS
11AC80SISO	Ant1	5775	18.72	96.38	0.16	18.88	≤30.00	PASS
11AX20SISO	Ant1	5180	17.53	95.32	0.21	17.74	≤23.98	PASS








11AX20SISO	Ant1	5220	18.01	95.32	0.21	18.22	≤23.98	PASS
11AX20SISO	Ant1	5240	18.04	96.52	0.15	18.19	≤23.98	PASS
11AX20SISO	Ant1	5260	16.89	94.40	0.25	17.14	≤23.98	PASS
11AX20SISO	Ant1	5300	17.72	94.40	0.25	17.97	≤23.98	PASS
11AX20SISO	Ant1	5320	17.54	94.87	0.23	17.77	≤23.98	PASS
11AX20SISO	Ant1	5500	17.56	94.87	0.23	17.79	≤23.98	PASS
11AX20SISO	Ant1	5580	17.74	95.32	0.21	17.95	≤23.98	PASS
11AX20SISO	Ant1	5700	18.17	96.04	0.18	18.35	≤23.98	PASS
11AX20SISO	Ant1	5720_UNII-2C	16.81	97.00	0.13	16.94	≤23.38	PASS
11AX20SISO	Ant1	5720_UNII-3	11.41	97.00	0.13	11.54	≤30.00	PASS
11AX20SISO	Ant1	5745	17.89	97.00	0.13	18.02	≤30.00	PASS
11AX20SISO	Ant1	5785	17.40	97.24	0.12	17.52	≤30.00	PASS
11AX20SISO	Ant1	5825	16.73	96.76	0.14	16.87	≤30.00	PASS
11AX40SISO	Ant1	5190	17.77	96.27	0.17	17.94	≤23.98	PASS
11AX40SISO	Ant1	5230	17.80	94.87	0.23	18.03	≤23.98	PASS
11AX40SISO	Ant1	5270	16.85	95.79	0.19	17.04	≤23.98	PASS
11AX40SISO	Ant1	5310	16.78	94.87	0.23	17.01	≤23.98	PASS
11AX40SISO	Ant1	5510	17.74	96.99	0.13	17.87	≤23.98	PASS
11AX40SISO	Ant1	5550	17.93	96.99	0.13	18.06	≤23.98	PASS
11AX40SISO	Ant1	5670	18.49	96.99	0.13	18.62	≤23.98	PASS
11AX40SISO	Ant1	5710_UNII-2C	17.66	95.56	0.20	17.86	≤23.98	PASS
11AX40SISO	Ant1	5710_UNII-3	7.83	95.56	0.20	8.03	≤30.00	PASS
11AX40SISO	Ant1	5755	18.02	96.99	0.13	18.15	≤30.00	PASS
11AX40SISO	Ant1	5795	17.57	95.10	0.22	17.79	≤30.00	PASS
11AX80SISO	Ant1	5210	18.11	95.36	0.21	18.32	≤23.98	PASS
11AX80SISO	Ant1	5290	17.70	94.86	0.23	17.93	≤23.98	PASS
11AX80SISO	Ant1	5530	17.67	95.61	0.19	17.86	≤23.98	PASS
11AX80SISO	Ant1	5610	17.97	96.61	0.15	18.12	≤23.98	PASS
11AX80SISO	Ant1	5690_UNII-2C	18.01	96.85	0.14	18.15	≤23.98	PASS
11AX80SISO	Ant1	5690_UNII-3	4.73	96.85	0.14	4.87	≤30.00	PASS
11AX80SISO	Ant1	5775	17.84	96.09	0.17	18.01	≤30.00	PASS


Test Graphs








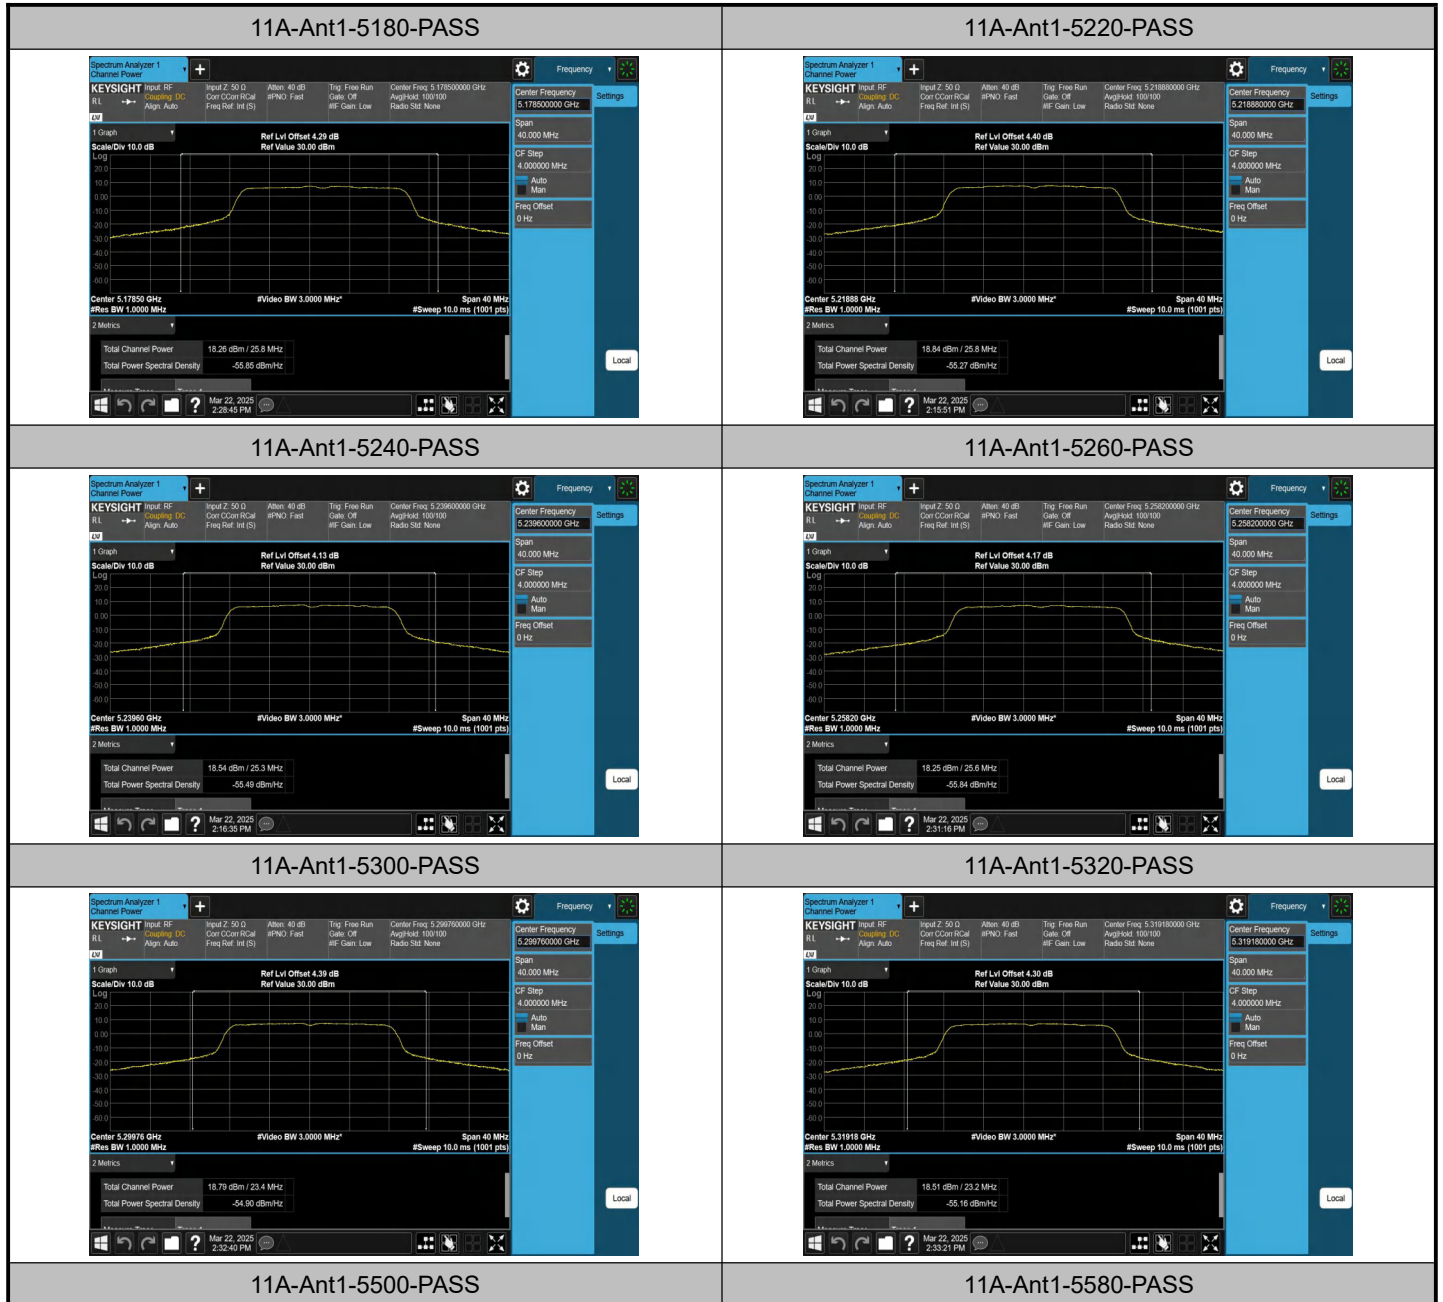


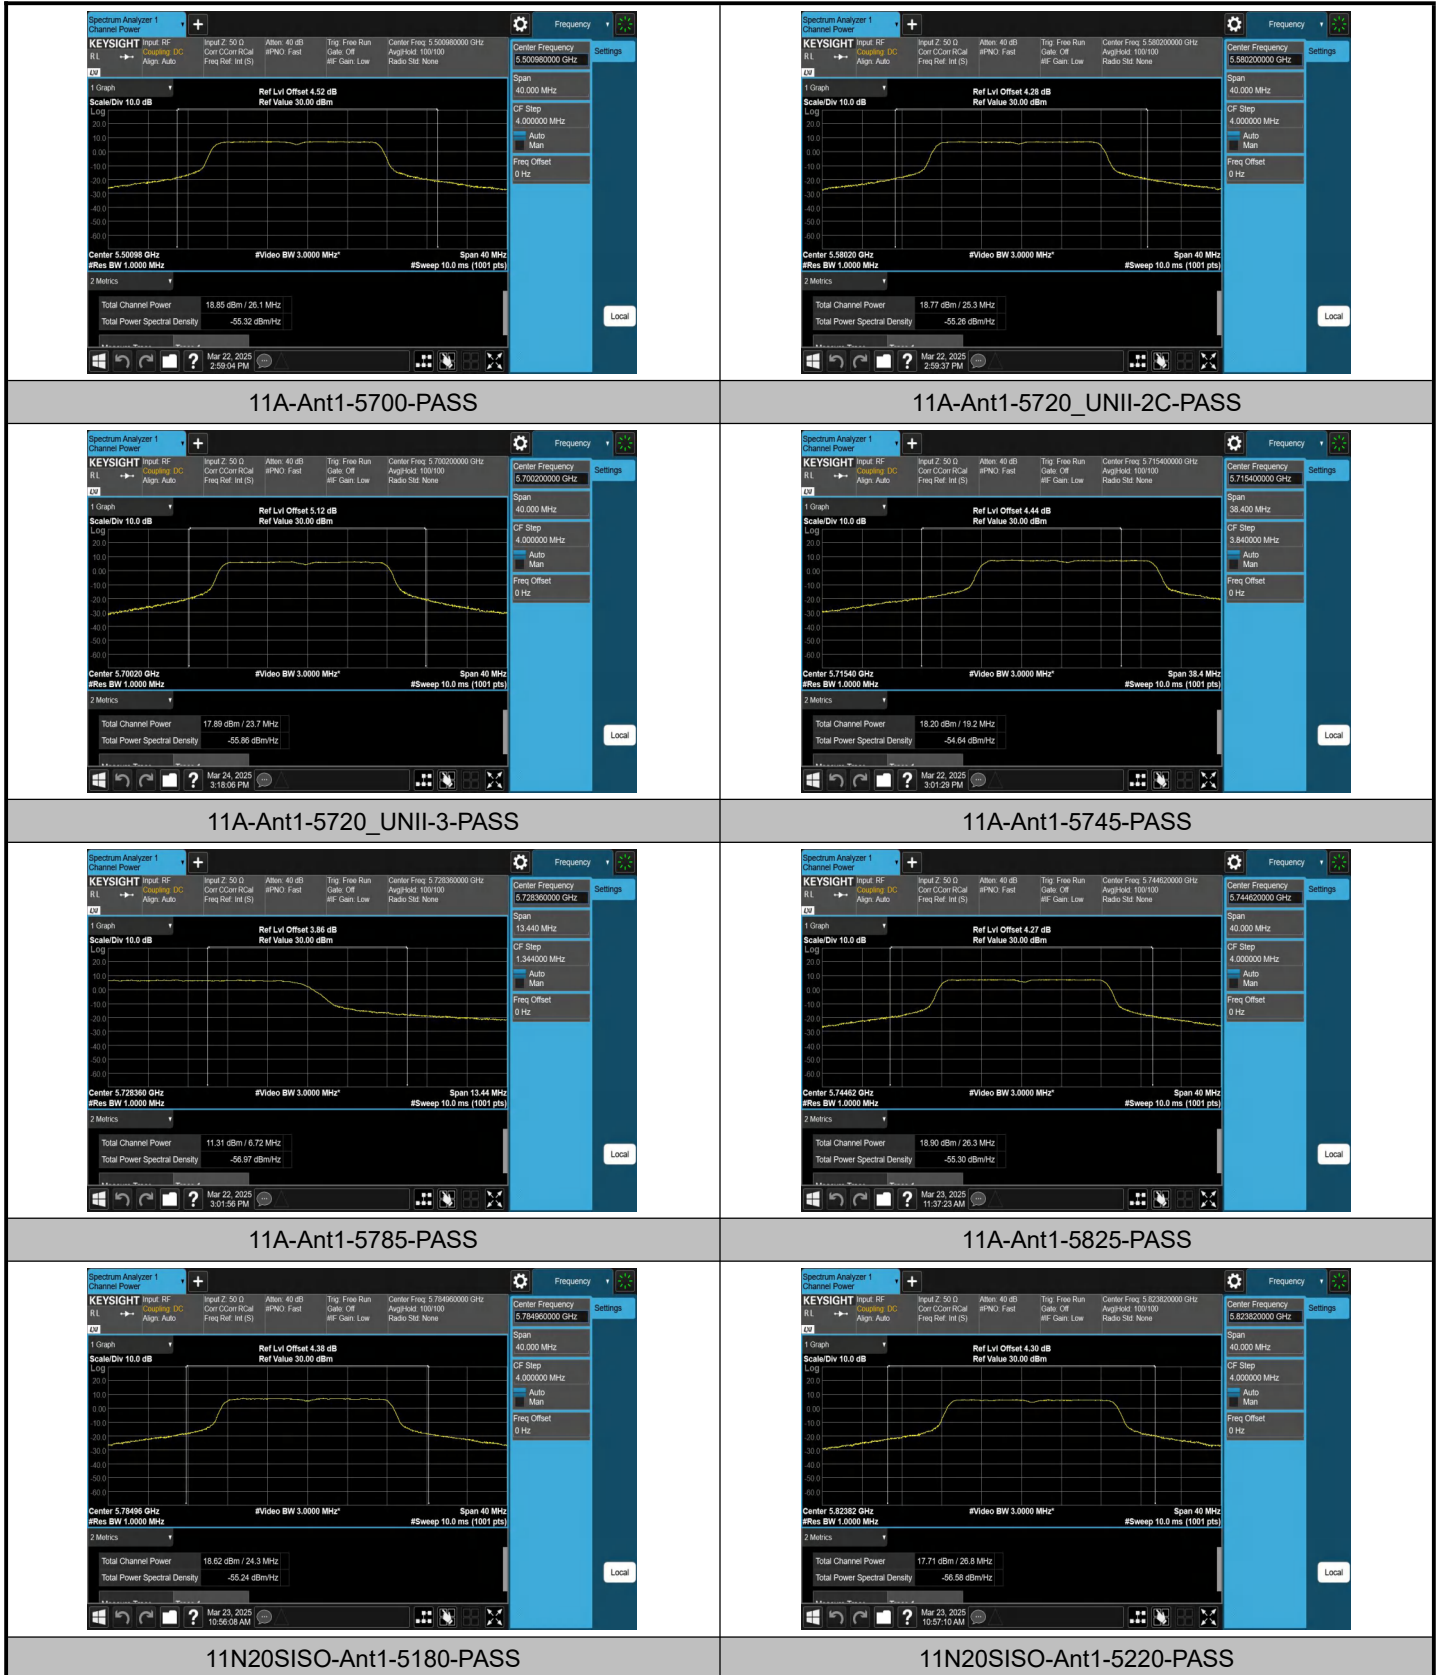

	
11N20SISO-Ant1-5240-PASS	11N20SISO-Ant1-5260-PASS
	
11N20SISO-Ant1-5300-PASS	11N20SISO-Ant1-5320-PASS
	
11N20SISO-Ant1-5500-PASS	11N20SISO-Ant1-5580-PASS
	
11N20SISO-Ant1-5700-PASS	11N20SISO-Ant1-5720_UNII-2C-PASS

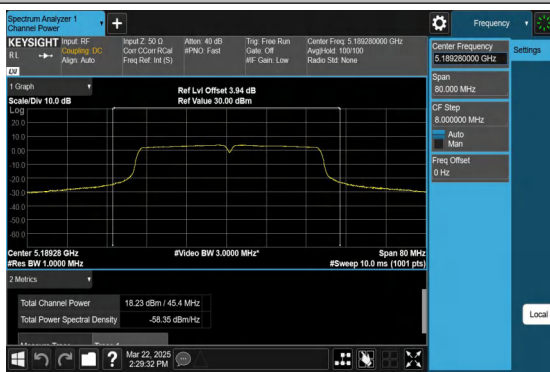
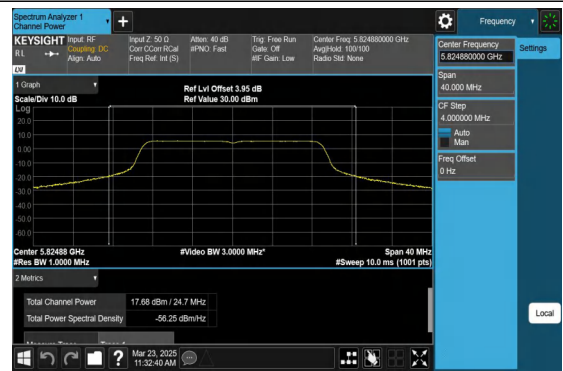
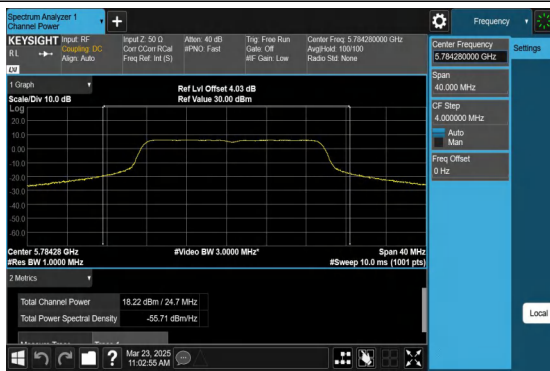
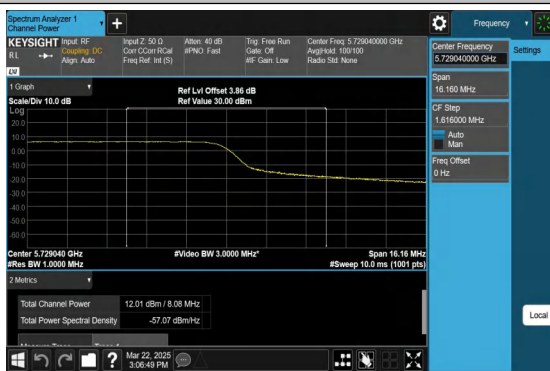
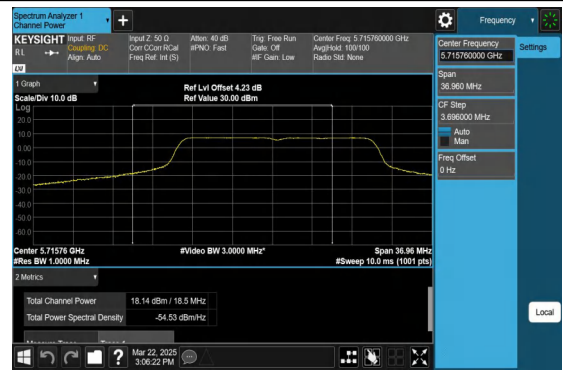
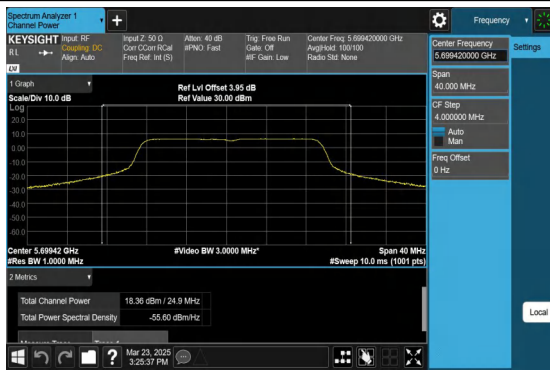


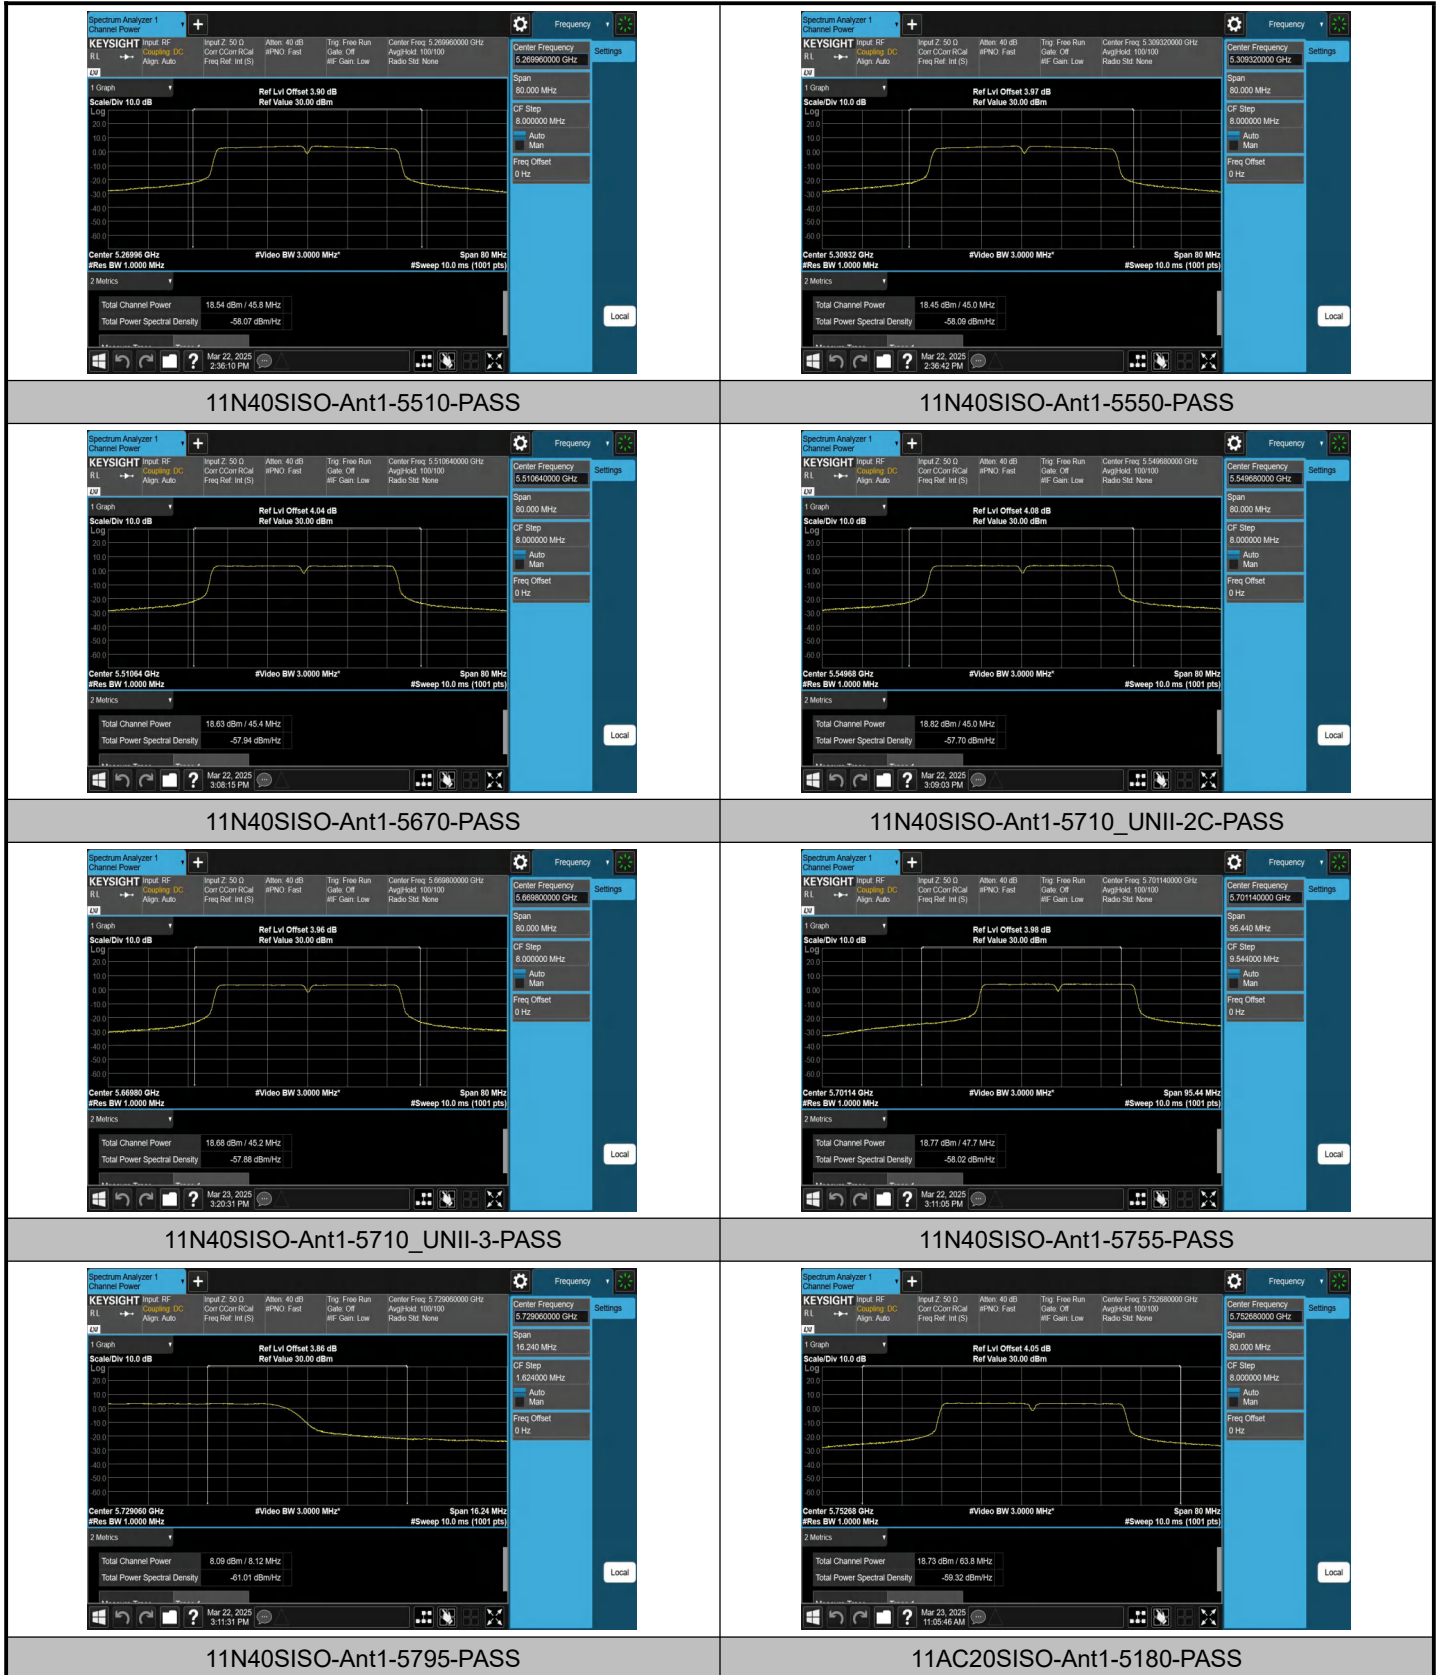

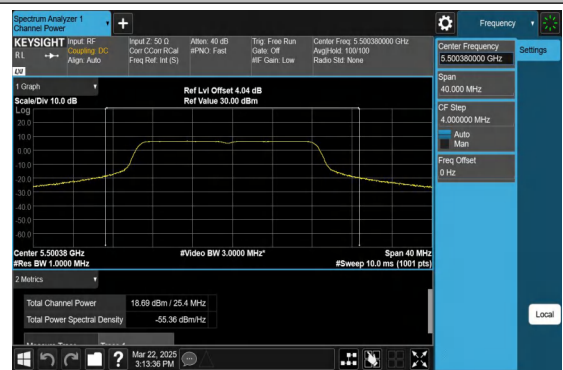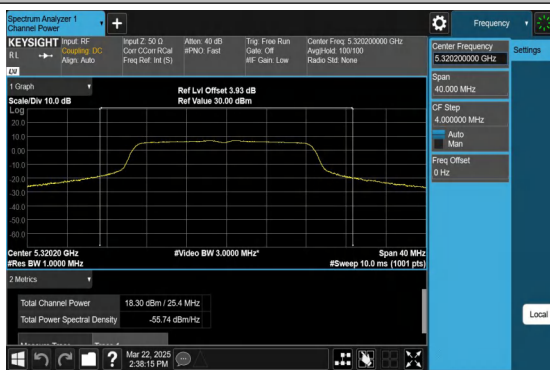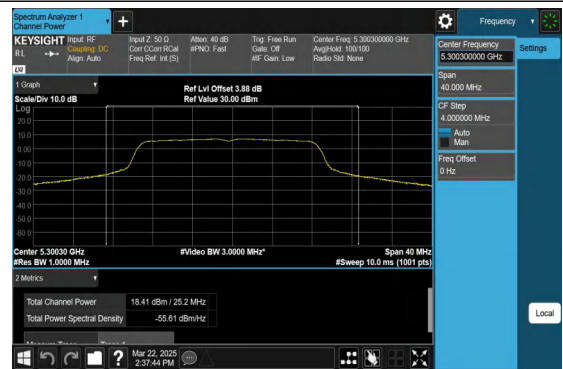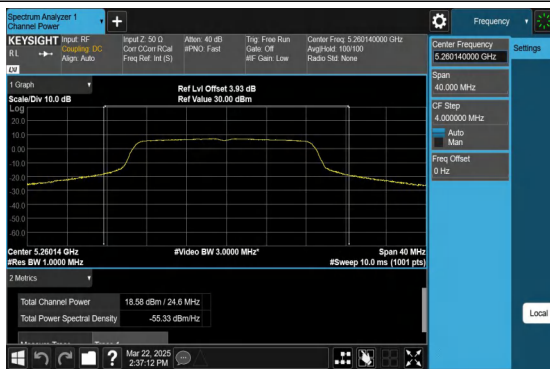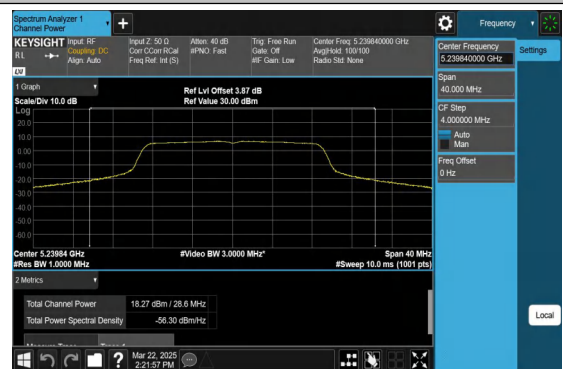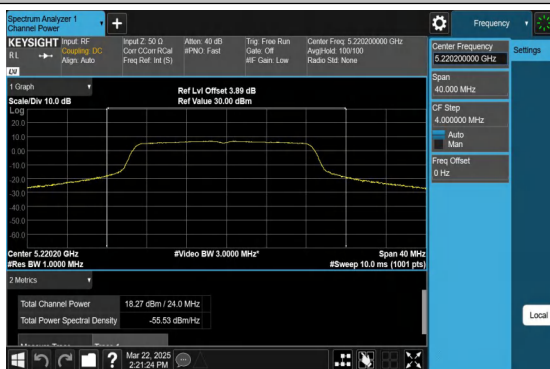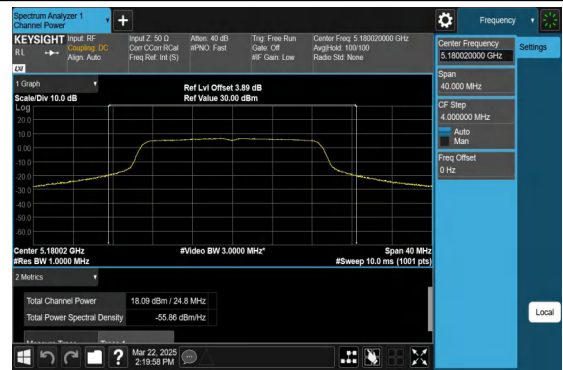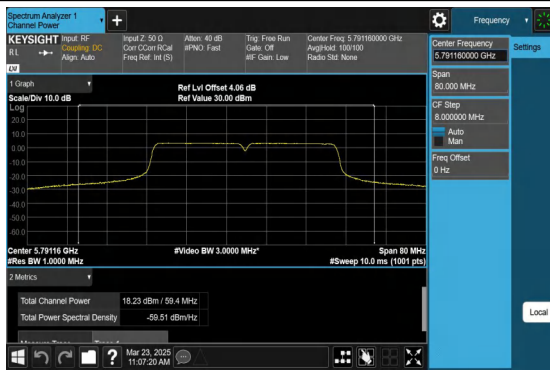

11AC20SISO-Ant1-5580-PASS

11AC20SISO-Ant1-5700-PASS

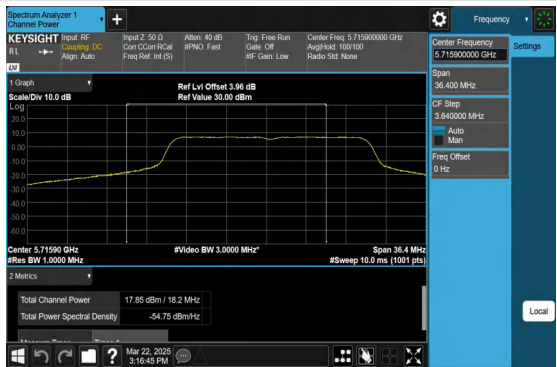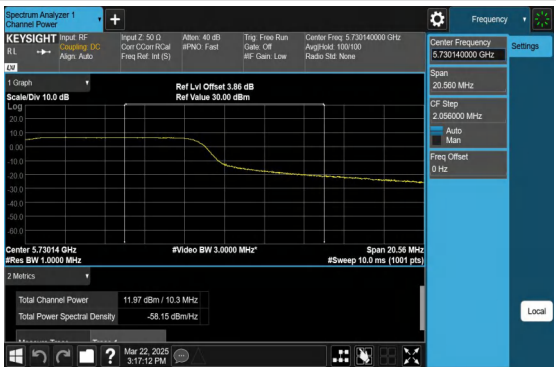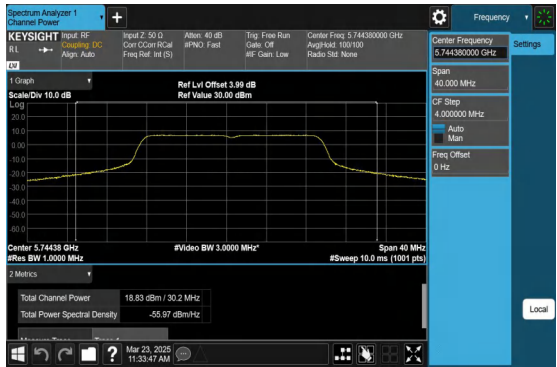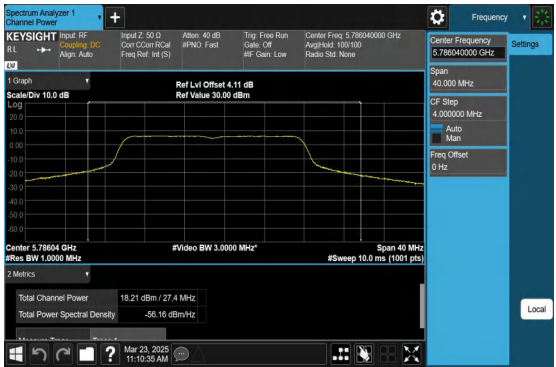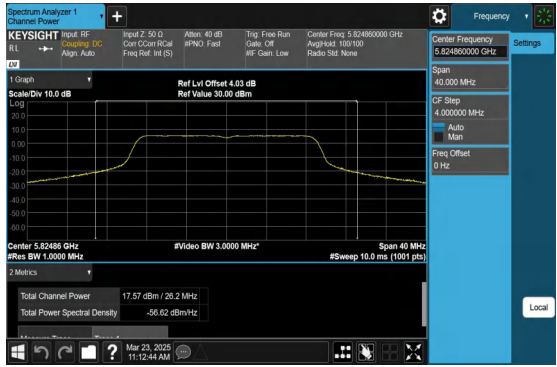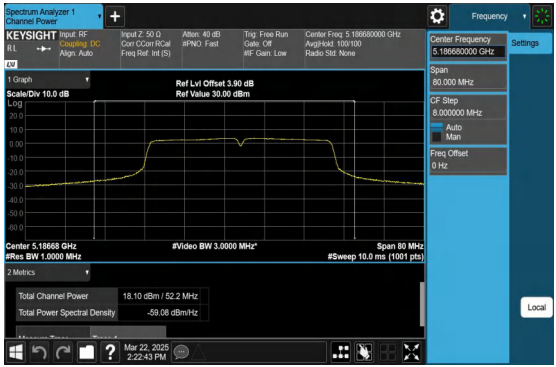	
11AC20SISO-Ant1-5720_UNII-2C-PASS	11AC20SISO-Ant1-5720_UNII-3-PASS
	
11AC20SISO-Ant1-5745-PASS	11AC20SISO-Ant1-5785-PASS
	
11AC20SISO-Ant1-5825-PASS	11AC40SISO-Ant1-5190-PASS
	
11AC40SISO-Ant1-5230-PASS	11AC40SISO-Ant1-5270-PASS

11AC40SISO-Ant1-5310-PASS	11AC40SISO-Ant1-5510-PASS
11AC40SISO-Ant1-5550-PASS	11AC40SISO-Ant1-5670-PASS
11AC40SISO-Ant1-5710_UNII-2C-PASS	11AC40SISO-Ant1-5710_UNII-3-PASS
11AC40SISO-Ant1-5755-PASS	11AC40SISO-Ant1-5795-PASS

