

TEST REPORT

FCC ID: 2A3DJ-L1

Product : Projector
Model Name : L1, PR01, PR02, F1, C1,
Q1, N1, B1, X1, SV1, RS1
Brand : N/A
Report No. : MAX250331810P01-R04

Prepared for

ShenZhen Powerful Photoelectron Co., Ltd

**101 5/F, 3/F H2 Building,Hongfa Science Park Tangtou Community,
Shiyan Street, Baoan District, Shenzhen,China**

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

**A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China**

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant's name : ShenZhen Powerful Photoelectron Co., Ltd

Address : 101 5/F, 3/F H2 Building,Hongfa Science Park Tangtou Community,
Shiyan Street, Baoan District, Shenzhen,China

Manufacture's name : ShenZhen Powerful Photoelectron Co., Ltd

Address : 101 5/F, 3/F H2 Building,Hongfa Science Park Tangtou Community,
Shiyan Street, Baoan District, Shenzhen,China

Product name : Projector

Model name : L1, PR01, PR02, F1, C1, Q1, N1, B1, X1, SV1, RS1

Standards : FCC CFR Title 47 Part 15 Subpart C Section 15.407
ANSI C63.10:2020
KDB 789033 D02 v02r01

Test procedure : ANSI C63.10:2020

Test Date : Apr. 09, 2025-Apr. 20, 2025


Date of Issue : Apr. 21, 2025

Test Result : Pass

This device described above has been tested by MAXLAB, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of MAXLAB, this document may be altered or revised by MAXLAB, personal only, and shall be noted in the revision of the document.

Test Engineer:



Engineer/ Cindy Zheng

Technical Manager:



RF Manager/ Vivian Jiang

Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 TEST FACILITY	6
4 GENERAL INFORMATION	7
4.1 GENERAL DESCRIPTION OF E.U.T.	7
4.2 TEST SETUP CONFIGURATION	9
4.3 TEST MODE	9
5 EQUIPMENT DURING TEST	10
5.1 EQUIPMENTS LIST	10
5.2 MEASUREMENT UNCERTAINTY	12
5.3 DESCRIPTION OF SUPPORT UNITS	12
6 CONDUCTED EMISSION	13
6.1 E.U.T. OPERATION	13
6.2 EUT SETUP	13
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
6.4 MEASUREMENT PROCEDURE:	14
6.5 CONDUCTED EMISSION LIMIT	14
6.6 MEASUREMENT DESCRIPTION	14
6.7 CONDUCTED EMISSION TEST RESULT	14
7 RADIATED SPURIOUS EMISSIONS	17
7.1 EUT OPERATION	17
7.2 TEST SETUP	19
7.3 SPECTRUM ANALYZER SETUP	20
7.4 TEST PROCEDURE	21
7.5 SUMMARY OF TEST RESULTS	22
8 POWER SPECTRAL DENSITY TEST	37
8.1 TEST STANDARD AND LIMIT	37
8.2 TEST SETUP	38
8.3 TEST PROCEDURE	38

8.4 TEST DATA.....	39
9 26DB & 6DB & 99% EMISSION BANDWIDTH TEST	40
9.1 TEST STANDARD	40
9.2 TEST SETUP	40
9.3 TEST PROCEDURE	40
9.4 TEST DATA.....	41
10 MAXIMUM CONDUCTED OUTPUT POWER	42
10.1 TEST STANDARD AND LIMIT	42
10.2 TEST SETUP	42
10.3 TEST PROCEDURE	42
10.4 TEST DATA.....	44
11 OUT OF BAND EMISSIONS AND SPURIOUS EMISSION	45
11.1 TEST STANDARD AND LIMIT	45
11.2 TEST SETUP	45
11.3 TEST PROCEDURE	46
11.4 TEST DATA.....	46
12 FREQUENCY STABILITY MEASUREMENT	47
12.1 TEST STANDARD AND LIMIT	47
12.2 TEST SETUP	47
12.3 TEST PROCEDURE	47
12.4 TEST DATA.....	48
13 ANTENNA REQUIREMENT	49
13.1 TEST STANDARD AND REQUIREMENT	49
13.2 ANTENNA CONNECTED CONSTRUCTION	49
14 TEST SETUP & EUT PHOTOGRAPH	50

2 Test Summary

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.407(b), 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission	PASS	
15.407 (a) 15.407 (e)	99% , 6dB and 26dB Bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407(b)	Band Edge	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirement	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

3 TEST FACILITY

Site Description

EMC Lab.: FCC-Registration No:562200 Designation Number: CN1338

MAXLAB Testing Co., Ltd.has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert.No:4707.01

MAXLAB Testing Co, Ltd.has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

Industry Canada Registration Number.Is:11093A

CAB identifier: CN0019

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

Name of Firm: MAXLAB Testing Co, Ltd.

Site Location: 1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

4 General Information

4.1 General Description of E.U.T.

Product Name:	Projector
Model No.:	L1
Sample ID	20250221Z-001#
Sample(s) Status:	Engineer sample
series model.:	PR01, PR02, F1, C1, Q1, N1, B1, X1, SV1, RS1
Model Different.:	Differences between the basic and derivative model(s)
Operation Frequency:	WIFI 5.2G: 5150MHz~5250MHz WIFI 5.8G:5725MHz~5850MHz
Modulation type:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac OFDMA with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11ax (802.11ax Only support full RU Mode)
Antenna Type:	Internal Antenna
Antenna gain:	WIFI 5.2G:1.94dBi; WIFI 5.8G:2.02dBi
Power supply	AC 100-240V 50/60Hz
Hardware Version:	N/A
Software Version:	N/A
Remark:	the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.

802.11a/n/ac/ax(20MHz) Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	44	5220	48	5240


802.11/n/ac/ax(40MHz) Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	-	-	-	-

802.11a/n/ac/ax(20 MHz) Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-


802.11/n/ac/ax(40MHz) Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

4.2 Test Setup Configuration


Conducted Emission



Radiated Emission(30MHz-1GHz)



Radiated Emission(above 1GHz)



Conducted Spurious



4.3 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	Seekwave_test 1.0
Power level setup	10

5 Equipment During Test

5.1 Equipments List

Conducted Emission					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	MAX252	2024-10-27	2025-10-26
EMI Test Receiver	R&S	ESCI 7	MAX552	2024-10-27	2025-10-26
Coaxial Switch	ANRITSU CORP	MP59B	MAX225	2024-10-27	2025-10-26
ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	MAX226	2024-10-27	2025-10-26
Coaxial Cable	MAX	N/A	MAX227	N/A	N/A
Thermo meter	KTJ	TA328	MAX233	2024-10-27	2025-10-26
Absorbing clamp	Elektronik-Feinmechanik	MDS21	MAX229	2024-10-27	2025-10-26
LISN	R&S	ENV216	308	2024-10-27	2025-10-26
LISN	R&S	ENV216	314	2024-10-27	2025-10-26

Radiation Test equipment					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)*6.4(H)	MAX250	2024-10-27	2025-10-26
Control Room	ZhongYu Electron	6.2(L)*2.5(W)*2.4(H)	MAX251	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESU26	MAX203	2024-10-27	2025-10-26
BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	MAX214	2024-10-27	2025-10-26
Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	MAX208	2024-10-27	2025-10-26
Horn Antenna	ETS-LINDGREN	3160	MAX217	2024-10-27	2025-10-26
Coaxial Cable	MAX	N/A	MAX213	2024-10-27	2025-10-26
Coaxial Cable	MAX	N/A	MAX211	2024-10-27	2025-10-26
Coaxial cable	MAX	N/A	MAX210	2024-10-27	2025-10-26
Coaxial Cable	MAX	N/A	MAX212	2024-10-27	2025-10-26
Amplifier(100kHz-3GHz)	HP	8347A	MAX204	2024-10-27	2025-10-26
Amplifier(2GHz-20GHz)	HP	84722A	MAX206	2024-10-27	2025-10-26
Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	MAX218	2024-10-27	2025-10-26
Band filter	Amindeon	82346	MAX219	2024-10-27	2025-10-26
Power Meter	Anritsu	ML2495A	MAX540	2024-10-27	2025-10-26
Power Sensor	Anritsu	MA2411B	MAX541	2024-10-27	2025-10-26
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	MAX575	2024-10-27	2025-10-26
Splitter	Agilent	11636B	MAX237	2024-10-27	2025-10-26

Loop Antenna	ZHINAN	ZN30900A	MAX534	2024-10-27	2025-10-26
Breitband hornantenne	SCHWARZBECK	BBHA 9170	MAX579	2024-10-27	2025-10-26
Amplifier	TDK	PA-02-02	MAX574	2024-10-27	2025-10-26
Amplifier	TDK	PA-02-03	MAX576	2024-10-27	2025-10-26
PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	MAX578	2024-10-27	2025-10-26

RF Conducted Test:					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
MXA Signal Analyzer	Agilent	N9020A	MAX566	2024-10-27	2025-10-26
EMI Test Receiver	R&S	ESCI 7	MAX552	2024-10-27	2025-10-26
Spectrum Analyzer	Agilent	E4440A	MAX533	2024-10-27	2025-10-26
MXG vector Signal Generator	Agilent	N5182A	MAX567	2024-10-27	2025-10-26
ESG Analog Signal Generator	Agilent	E4428C	MAX568	2024-10-27	2025-10-26
USB RF Power Sensor	DARE	RPR3006W	MAX569	2024-10-27	2025-10-26
RF Switch Box	Shongyi	RFSW3003328	MAX571	2024-10-27	2025-10-26
Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40- 880	MAX572	2024-10-27	2025-10-26

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	EZ	EZ-EMC	EMC-CON 3A1.1+
2	EMC radiation test system	EZ	EZ-EMC	FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Radiated Emission(25GHz~40GHz)	±3.38dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

5.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Projector	N/A	L1	N/A	EUT

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

6 Conducted Emission


Test Requirement: : FCC CFR 47 Part 15 Section 15.207
Test Method: : ANSI C63.10:2020
Test Result: : PASS
Frequency Range: : 150kHz to 30MHz
Class/Severity: : Class B
Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation


Operating Environment :
Temperature: : 23.2°C
Humidity: : 51 % RH
Atmospheric Pressure: : 101.12 kPa
Test Voltage : : AC 120V/60Hz

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2020

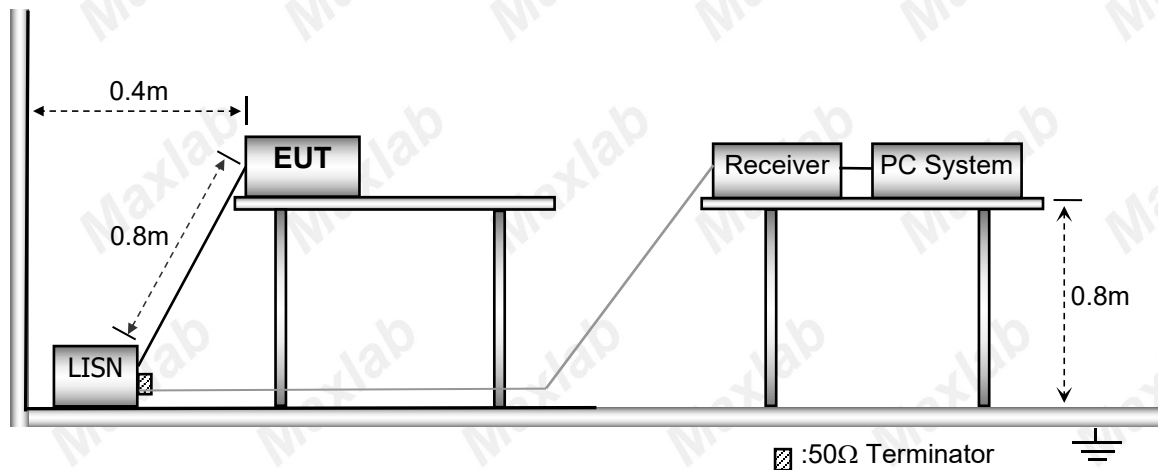

6.3 Test SET-UP (Block Diagram of Configuration)

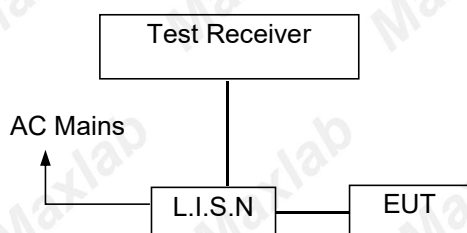

6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

6.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.7 Conducted Emission Test Result

Pass


Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (802.11a, Lowest channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

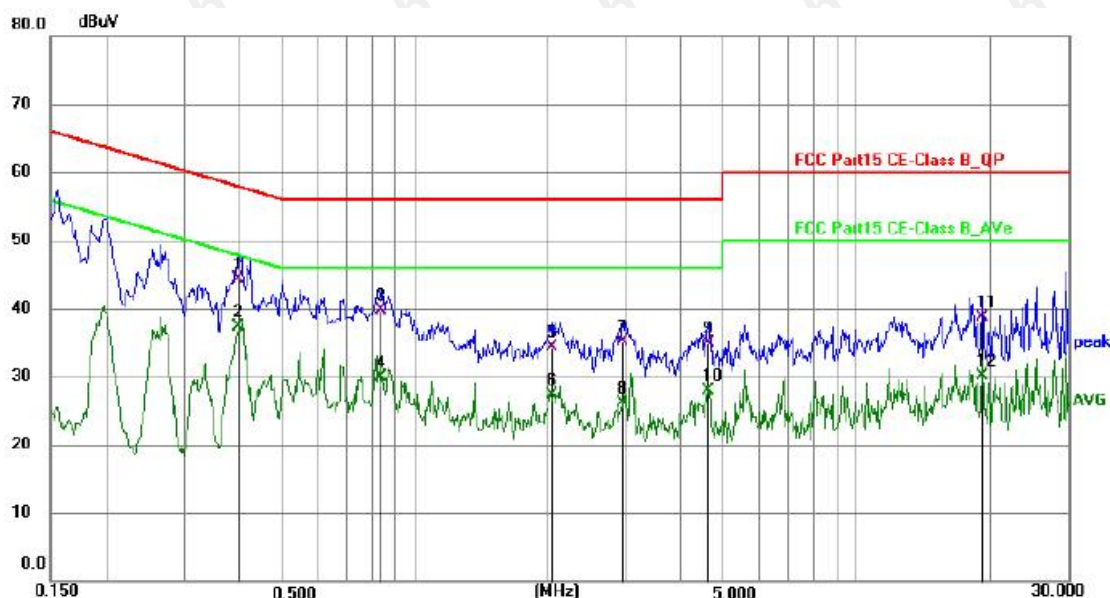

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3996	24.77	19.49	44.26	57.86	-13.60	QP
2 *	0.3996	17.77	19.49	37.26	47.86	-10.60	AVG
3	0.8400	20.13	19.49	39.62	56.00	-16.38	QP
4	0.8400	10.45	19.49	29.94	46.00	-16.06	AVG
5	2.0450	14.75	19.54	34.29	56.00	-21.71	QP
6	2.0450	7.77	19.54	27.31	46.00	-18.69	AVG
7	2.9550	15.61	19.55	35.16	56.00	-20.84	QP
8	2.9550	6.56	19.55	26.11	46.00	-19.89	AVG
9	4.6100	15.36	19.60	34.96	56.00	-21.04	QP
10	4.6100	8.35	19.60	27.95	46.00	-18.05	AVG
11	19.1900	18.62	20.01	38.63	60.00	-21.37	QP
12	19.1900	10.06	20.01	30.07	50.00	-19.93	AVG

Temperature :	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

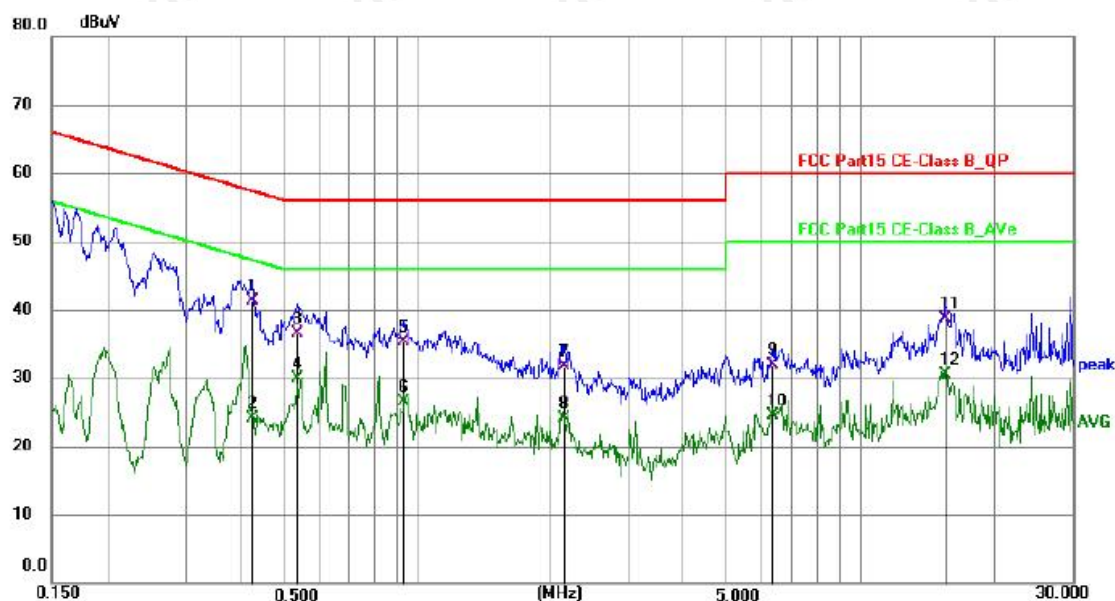

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4250	21.77	19.49	41.26	57.35	-16.09	QP
2	0.4250	4.64	19.49	24.13	47.35	-23.22	AVG
3	0.5373	17.03	19.49	36.52	56.00	-19.48	QP
4 *	0.5373	10.45	19.49	29.94	46.00	-16.06	AVG
5	0.9350	15.75	19.51	35.26	56.00	-20.74	QP
6	0.9350	7.00	19.51	26.51	46.00	-19.49	AVG
7	2.1450	12.07	19.55	31.62	56.00	-24.38	QP
8	2.1450	4.58	19.55	24.13	46.00	-21.87	AVG
9	6.3200	12.32	19.63	31.95	60.00	-28.05	QP
10	6.3200	4.96	19.63	24.59	50.00	-25.41	AVG
11	15.5050	18.67	19.94	38.61	60.00	-21.39	QP
12	15.5050	10.57	19.94	30.51	50.00	-19.49	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

7 Radiated Spurious Emissions

Test Requirement	:	FCC CFR47 Part 15 Section 15.209 & 15.407 RSS-Gen §8.9, RSS-Gen §8.10
Test Method	:	ANSI C63.10:2020
Test Result	:	PASS
Measurement Distance	:	3m
Limit	:	See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Undesirable emission limits

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge

Requirement	Limit(EIRP)	Limit (Field strength at 3m)
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dB μ V/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

7.1 EUT Operation


Operating Environment :

Temperature	: 24.5 °C
Humidity	: 55.5% RH
Atmospheric Pressure	: 101.3kPa
Test Voltage	: AC 120V60Hz


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

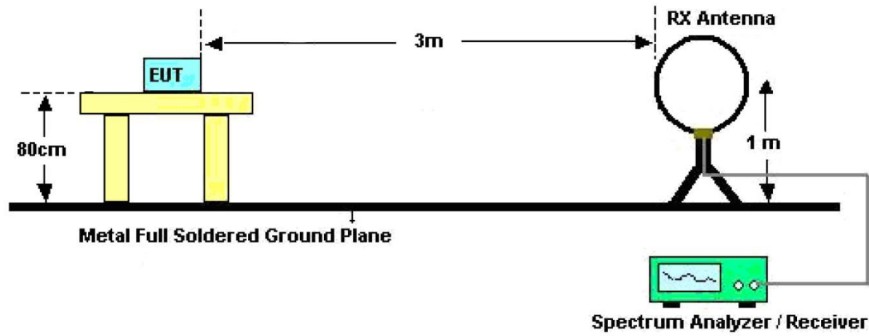

The test setup for emission measurement from 30 MHz to 1 GHz.

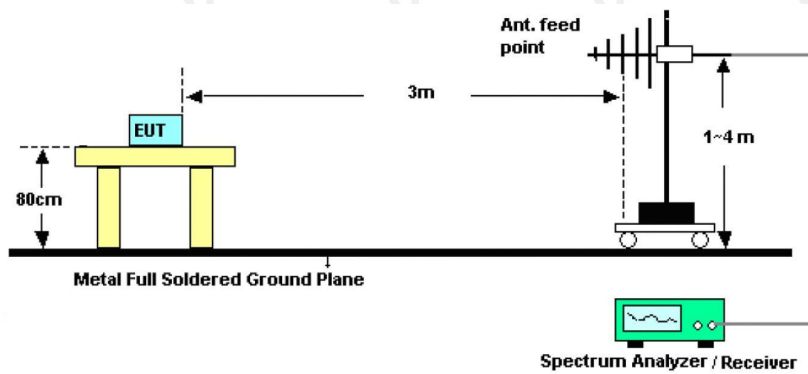

The test setup for emission measurement above 1 GHz.

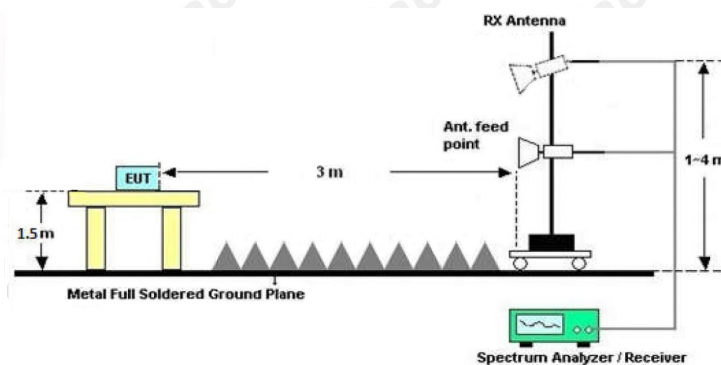

7.3 Spectrum Analyzer Setup

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2020.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

Please refer to the following test plots, Low Channel Worst case 802.11a for record:

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	130.8369	43.44	-18.98	24.46	43.50	-19.04	QP
2	163.7550	48.85	-18.64	30.21	43.50	-13.29	QP
3	191.7450	45.75	-16.79	28.96	43.50	-14.54	QP
4	254.7281	52.98	-14.92	38.06	46.00	-7.94	QP
5	273.2340	48.67	-14.24	34.43	46.00	-11.57	QP
6	434.0650	46.11	-11.01	35.10	46.00	-10.90	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	51.6613	46.42	-14.35	32.07	40.00	-7.93	QP
2	66.2660	45.21	-16.95	28.26	40.00	-11.74	QP
3	86.5027	43.38	-18.89	24.49	40.00	-15.51	QP
4	164.3300	50.24	-18.64	31.60	43.50	-11.90	QP
5	269.4282	49.72	-14.43	35.29	46.00	-10.71	QP
6	315.4806	45.60	-13.38	32.22	46.00	-13.78	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Test Frequency 1GHz-40GHz

802.11a

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490	45.84	32.29	8.39	38.90	60.84	74.00	-13.16	PK
V	11490	29.21	32.29	8.39	38.90	44.21	54.00	-9.79	AV
V	17233.3	42.69	31.19	9.62	40.37	61.49	74.00	-12.51	PK
V	17233.3	24.88	31.19	9.62	40.37	43.68	54.00	-10.32	AV
V	22980	43.94	27.02	7.20	38.98	63.10	74.00	-10.90	PK
V	22980	20.95	27.02	7.20	38.98	40.11	54.00	-13.89	AV
V	28723.3	41.83	27.10	7.56	40.18	62.47	74.00	-11.53	PK
V	28723.3	20.03	27.10	7.56	40.18	40.67	54.00	-13.33	AV
H	11490	45.04	32.29	8.39	38.90	60.04	74.00	-13.96	PK
H	11490	26.99	32.29	8.39	38.90	41.99	54.00	-12.01	AV
H	17233.3	45.03	31.19	9.62	40.37	63.83	74.00	-10.17	PK
H	17233.3	23.36	31.19	9.62	40.37	42.16	54.00	-11.84	AV
H	22980	43.62	27.02	7.20	38.98	62.78	74.00	-11.22	PK
H	22980	22.67	27.02	7.20	38.98	41.83	54.00	-12.17	AV
H	28723.3	43.17	27.10	7.56	40.18	63.81	74.00	-10.19	PK
H	28723.3	20.47	27.10	7.56	40.18	41.11	54.00	-12.89	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570	43.83	32.26	8.48	38.90	58.95	74.00	-15.05	PK
V	11570	22.98	32.26	8.48	38.90	38.10	54.00	-15.90	AV
V	17353.3	37.49	31.08	9.67	40.61	56.69	74.00	-17.31	PK
V	17353.3	17.59	31.08	9.67	40.61	36.79	54.00	-17.21	AV
V	23140	39.86	27.03	7.24	39.03	59.10	74.00	-14.90	PK
V	23140	21.67	27.03	7.24	39.03	40.91	54.00	-13.09	AV
V	28923.3	39.36	27.10	7.58	40.34	60.18	74.00	-13.82	PK
V	28923.3	17.32	27.10	7.58	40.34	38.14	54.00	-15.86	AV
H	11570	44.55	32.26	8.48	38.90	59.67	74.00	-14.33	PK
H	11570	20.67	32.26	8.48	38.90	35.79	54.00	-18.21	AV
H	17353.3	39.54	31.08	9.67	40.61	58.74	74.00	-15.26	PK
H	17353.3	17.94	31.08	9.67	40.61	37.14	54.00	-16.86	AV
H	23140	39.89	27.03	7.24	39.03	59.13	74.00	-14.87	PK
H	23140	19.83	27.03	7.24	39.03	39.07	54.00	-14.93	AV
H	28923.3	37.71	27.10	7.58	40.34	58.53	74.00	-15.47	PK
H	28923.3	16.94	27.10	7.58	40.34	37.76	54.00	-16.24	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:5825MHz									
V	11650	44.43	32.23	8.56	38.90	59.66	74.00	-14.34	PK
V	11650	27.17	32.23	8.56	38.90	42.40	54.00	-11.60	AV
V	17473.3	43.74	30.97	9.73	40.85	63.35	74.00	-10.65	PK
V	17473.3	24.09	30.97	9.73	40.85	43.70	54.00	-10.30	AV
V	23300	36.85	27.03	7.26	39.06	56.14	74.00	-17.86	PK
V	23300	23.71	27.03	7.26	39.06	43.00	54.00	-11.00	AV
V	29123.3	40.86	27.10	7.61	40.40	61.77	74.00	-12.23	PK
V	29123.3	21.17	27.10	7.61	40.40	42.08	54.00	-11.92	AV
H	11650	42.78	32.23	8.56	38.90	58.01	74.00	-15.99	PK
H	11650	25.5	32.23	8.56	38.90	40.73	54.00	-13.27	AV
H	17473.3	43.75	30.97	9.73	40.85	63.36	74.00	-10.64	PK
H	17473.3	26.64	30.97	9.73	40.85	46.25	54.00	-7.75	AV
H	23300	44.82	27.03	7.26	39.06	64.11	74.00	-9.89	PK
H	23300	21.45	27.03	7.26	39.06	40.74	54.00	-13.26	AV
H	29123.3	36.33	27.10	7.61	40.40	57.24	74.00	-16.76	PK
H	29123.3	23.04	27.10	7.61	40.40	43.95	54.00	-10.05	AV

802.11a

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:5180MHz									
V	10360	45.64	32.29	8.39	38.90	60.64	74.00	-13.36	PK
V	10360	26.48	32.29	8.39	38.90	41.48	54.00	-12.52	AV
V	15540	41.52	31.19	9.62	40.37	60.32	74.00	-13.68	PK
V	15540	22.67	31.19	9.62	40.37	41.47	54.00	-12.53	AV
V	20720	43.16	27.02	7.20	38.98	62.32	74.00	-11.68	PK
V	20720	23.54	27.02	7.20	38.98	42.70	54.00	-11.30	AV
V	25900	41.69	27.10	7.56	40.18	62.33	74.00	-11.67	PK
V	25900	20.39	27.10	7.56	40.18	41.03	54.00	-12.97	AV
H	10360	49.31	32.29	8.39	38.90	64.31	74.00	-9.69	PK
H	10360	27.85	32.29	8.39	38.90	42.85	54.00	-11.15	AV
H	15540	43.55	31.19	9.62	40.37	62.35	74.00	-11.65	PK
H	15540	21.02	31.19	9.62	40.37	39.82	54.00	-14.18	AV
H	20720	43.29	27.02	7.20	38.98	62.45	74.00	-11.55	PK
H	20720	22.35	27.02	7.20	38.98	41.51	54.00	-12.49	AV
H	25900	42.78	27.10	7.56	40.18	63.42	74.00	-10.58	PK
H	25900	19.64	27.10	7.56	40.18	40.28	54.00	-13.72	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:5200MHz									
V	10400	42.95	32.26	8.48	38.90	58.07	74.00	-15.93	PK
V	10400	20.87	32.26	8.48	38.90	35.99	54.00	-18.01	AV
V	15600	38	31.08	9.67	40.61	57.20	74.00	-16.80	PK
V	15600	16.64	31.08	9.67	40.61	35.84	54.00	-18.16	AV
V	20800	36.8	27.03	7.24	39.03	56.04	74.00	-17.96	PK
V	20800	20.18	27.03	7.24	39.03	39.42	54.00	-14.58	AV
V	26000	40.09	27.10	7.58	40.34	60.91	74.00	-13.09	PK
V	26000	18.2	27.10	7.58	40.34	39.02	54.00	-14.98	AV
H	10400	45.65	32.26	8.48	38.90	60.77	74.00	-13.23	PK
H	10400	21.55	32.26	8.48	38.90	36.67	54.00	-17.33	AV
H	15600	41.35	31.08	9.67	40.61	60.55	74.00	-13.45	PK
H	15600	19.57	31.08	9.67	40.61	38.77	54.00	-15.23	AV
H	20800	39.24	27.03	7.24	39.03	58.48	74.00	-15.52	PK
H	20800	17.55	27.03	7.24	39.03	36.79	54.00	-17.21	AV
H	26000	38.89	27.10	7.58	40.34	59.71	74.00	-14.29	PK
H	26000	18.45	27.10	7.58	40.34	39.27	54.00	-14.73	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:5240MHz									
V	10480	45.54	32.23	8.56	38.90	60.77	74.00	-13.23	PK
V	10480	26.38	32.23	8.56	38.90	41.61	54.00	-12.39	AV
V	15720	42.84	30.97	9.73	40.85	62.45	74.00	-11.55	PK
V	15720	25.01	30.97	9.73	40.85	44.62	54.00	-9.38	AV
V	20960	40.66	27.03	7.26	39.06	59.95	74.00	-14.05	PK
V	20960	22.64	27.03	7.26	39.06	41.93	54.00	-12.07	AV
V	26200	40.05	27.10	7.61	40.40	60.96	74.00	-13.04	PK
V	26200	20.36	27.10	7.61	40.40	41.27	54.00	-12.73	AV
H	10480	43.55	32.23	8.56	38.90	58.78	74.00	-15.22	PK
H	10480	26.6	32.23	8.56	38.90	41.83	54.00	-12.17	AV
H	15720	39.42	30.97	9.73	40.85	59.03	74.00	-14.97	PK
H	15720	24.85	30.97	9.73	40.85	44.46	54.00	-9.54	AV
H	20960	41.49	27.03	7.26	39.06	60.78	74.00	-13.22	PK
H	20960	21.43	27.03	7.26	39.06	40.72	54.00	-13.28	AV
H	26200	34.59	27.10	7.61	40.40	55.50	74.00	-18.50	PK
H	26200	21.86	27.10	7.61	40.40	42.77	54.00	-11.23	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss - Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst mode is 802.11a, only the worst data is recorded.

Restrict Band EMISSION MEASUREMENT

Frequency	Meter Reading	antenna Factor	cable loss	preamp factor	Emission Level	Limit	Margin	Polar	Detector Type	Result
								(H/V)		
(MHz)	(dBuV/m)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)			
802.11a:5180MHz										
5150	51.33	33.14	5.29	33.88	55.88	74	-18.12	V	PK	Pass
5150	33.14	33.14	5.29	33.88	37.69	54	-16.31	V	AV	Pass
5145	53.17	33.14	5.29	33.88	57.72	74	-16.28	V	PK	Pass
5145	34.08	33.14	5.29	33.88	38.63	54	-15.37	V	AV	Pass
5150	52.38	33.14	5.29	33.88	56.93	74	-17.07	H	PK	Pass
5150	34.00	33.14	5.29	33.88	38.55	54	-15.45	H	AV	Pass
5145	50.83	33.14	5.29	33.88	55.38	74	-18.62	H	PK	Pass
5145	33.02	33.14	5.29	33.88	37.57	54	-16.43	H	AV	Pass
802.11a:5240MHz										
5350	54.47	33.06	5.44	33.72	59.25	74	-14.75	V	PK	Pass
5350	35.20	33.06	5.44	33.72	39.98	54	-14.02	V	AV	Pass
5370	50.44	33.05	5.45	33.70	55.24	74	-18.76	V	PK	Pass
5370	34.03	33.05	5.45	33.70	38.83	54	-15.17	V	AV	Pass
5350	55.45	33.06	5.44	33.72	60.23	74	-13.77	H	PK	Pass
5350	37.86	33.06	5.44	33.72	42.64	54	-11.36	H	AV	Pass
5370	53.13	33.05	5.45	33.70	57.93	74	-16.07	H	PK	Pass
5370	34.80	33.05	5.45	33.70	39.60	54	-14.40	H	AV	Pass
802.11n20:5180MHz										

5150	52.51	33.14	5.29	33.88	57.06	74	-16.94	V	PK	Pass
5150	35.36	33.14	5.29	33.88	39.91	54	-14.09	V	AV	Pass
5145	53.10	33.14	5.29	33.88	57.65	74	-16.35	V	PK	Pass
5145	35.16	33.14	5.29	33.88	39.71	54	-14.29	V	AV	Pass
5150	52.88	33.14	5.29	33.88	57.43	74	-16.57	H	PK	Pass
5150	36.50	33.14	5.29	33.88	41.05	54	-12.95	H	AV	Pass
5145	51.37	33.14	5.29	33.88	55.92	74	-18.08	H	PK	Pass
5145	33.68	33.14	5.29	33.88	38.23	54	-15.77	H	AV	Pass
802.11n20:5240MHz										
5350	54.08	33.06	5.44	33.72	58.86	74	-15.14	V	PK	Pass
5350	36.64	33.06	5.44	33.72	41.42	54	-12.58	V	AV	Pass
5370	50.27	33.05	5.45	33.70	55.07	74	-18.93	V	PK	Pass
5370	34.95	33.05	5.45	33.70	39.75	54	-14.25	V	AV	Pass
5350	53.35	33.06	5.44	33.72	58.13	74	-15.87	H	PK	Pass
5350	40.64	33.06	5.44	33.72	45.42	54	-8.58	H	AV	Pass
5370	52.07	33.05	5.45	33.70	56.87	74	-17.13	H	PK	Pass
5370	36.84	33.05	5.45	33.70	41.64	54	-12.36	H	AV	Pass
802.11ac20:5180MHz										
5150	52.68	33.14	5.29	33.88	57.23	74	-16.77	V	PK	Pass
5150	36.04	33.14	5.29	33.88	40.59	54	-13.41	V	AV	Pass
5145	52.63	33.14	5.29	33.88	57.18	74	-16.82	V	PK	Pass
5145	34.92	33.14	5.29	33.88	39.47	54	-14.53	V	AV	Pass
5150	53.59	33.14	5.29	33.88	58.14	74	-15.86	H	PK	Pass
5150	35.80	33.14	5.29	33.88	40.35	54	-13.65	H	AV	Pass
5145	52.03	33.14	5.29	33.88	56.58	74	-17.42	H	PK	Pass

5145	36.75	33.14	5.29	33.88	41.30	54	-12.70	H	AV	Pass
802.11ac20:5240MHz										
5350	55.46	33.06	5.44	33.72	60.24	74	-13.76	V	PK	Pass
5350	37.95	33.06	5.44	33.72	42.73	54	-11.27	V	AV	Pass
5370	50.72	33.05	5.45	33.70	55.52	68.2	-12.68	V	PK	Pass
5370	37.66	33.05	5.45	33.70	42.46	54	-11.54	V	AV	Pass
5350	55.68	33.06	5.44	33.72	60.46	74	-13.54	H	PK	Pass
5350	41.53	33.06	5.44	33.72	46.31	54	-7.69	H	AV	Pass
5370	52.94	33.05	5.45	33.70	57.74	68.2	-10.46	H	PK	Pass
5370	37.09	33.05	5.45	33.70	41.89	54	-12.11	H	AV	Pass
802.11ax20:5180MHz										
5150	57.23	33.14	5.29	33.88	61.78	74	-12.22	V	PK	Pass
5150	40.78	33.14	5.29	33.88	45.33	54	-8.67	V	AV	Pass
5145	53.93	33.14	5.29	33.88	58.48	74	-15.52	V	PK	Pass
5145	39.80	33.14	5.29	33.88	44.35	54	-9.65	V	AV	Pass
5150	57.21	33.14	5.29	33.88	61.76	74	-12.24	H	PK	Pass
5150	43.51	33.14	5.29	33.88	48.06	54	-5.94	H	AV	Pass
5145	55.89	33.14	5.29	33.88	60.44	74	-13.56	H	PK	Pass
5145	37.89	33.14	5.29	33.88	42.44	54	-11.56	H	AV	Pass
802.11ax20:5240MHz										
5350	55.94	33.06	5.44	33.72	60.72	74	-13.28	V	PK	Pass
5350	37.21	33.06	5.44	33.72	41.99	54	-12.01	V	AV	Pass
5370	55.33	33.05	5.45	33.70	60.13	68.2	-8.07	V	PK	Pass
5370	33.74	33.05	5.45	33.70	38.54	54	-15.46	V	AV	Pass
5350	54.70	33.06	5.44	33.72	59.48	74	-14.52	H	PK	Pass

5350	42.76	33.06	5.44	33.72	47.54	54	-6.46	H	AV	Pass
5370	55.40	33.05	5.45	33.70	60.20	68.2	-8.00	H	PK	Pass
5370	33.90	33.05	5.45	33.70	38.70	54	-15.30	H	AV	Pass
802.11n40:5190MHz										
5150	54.86	33.14	5.29	33.88	59.41	74	-14.59	V	PK	Pass
5150	37.71	33.14	5.29	33.88	42.26	54	-11.74	V	AV	Pass
5145	51.21	33.14	5.29	33.88	55.76	74	-18.24	V	PK	Pass
5145	36.82	33.14	5.29	33.88	41.37	54	-12.63	V	AV	Pass
5150	54.87	33.14	5.29	33.88	59.42	74	-14.58	H	PK	Pass
5150	43.16	33.14	5.29	33.88	47.71	54	-6.29	H	AV	Pass
5145	53.34	33.14	5.29	33.88	57.89	74	-16.11	H	PK	Pass
5145	38.58	33.14	5.29	33.88	43.13	54	-10.87	H	AV	Pass
802.11n40:5230MHz										
5350	55.70	33.06	5.44	33.72	60.48	74	-13.52	V	PK	Pass
5350	36.34	33.06	5.44	33.72	41.12	54	-12.88	V	AV	Pass
5370	55.10	33.05	5.45	33.70	59.90	74	-14.10	V	PK	Pass
5370	33.93	33.05	5.45	33.70	38.73	54	-15.27	V	AV	Pass
5350	53.43	33.06	5.44	33.72	58.21	74	-15.79	H	PK	Pass
5350	41.58	33.06	5.44	33.72	46.36	54	-7.64	H	AV	Pass
5370	52.89	33.05	5.45	33.70	57.69	74	-16.31	H	PK	Pass
5370	34.17	33.05	5.45	33.70	38.97	54	-15.03	H	AV	Pass
802.11ac40:5190MHz										
5150	54.69	33.14	5.29	33.88	59.24	74	-14.76	V	PK	Pass
5150	34.93	33.14	5.29	33.88	39.48	54	-14.52	V	AV	Pass
5145	50.60	33.14	5.29	33.88	55.15	74	-18.85	V	PK	Pass

5145	35.38	33.14	5.29	33.88	39.93	54	-14.07	V	AV	Pass
5150	55.25	33.14	5.29	33.88	59.80	74	-14.20	H	PK	Pass
5150	37.50	33.14	5.29	33.88	42.05	54	-11.95	H	AV	Pass
5145	52.37	33.14	5.29	33.88	56.92	74	-17.08	H	PK	Pass
5145	35.25	33.14	5.29	33.88	39.80	54	-14.20	H	AV	Pass
802.11ac40:5230MHz										
5350	52.87	33.06	5.44	33.72	57.65	74	-16.35	V	PK	Pass
5350	35.74	33.06	5.44	33.72	40.52	54	-13.48	V	AV	Pass
5370	52.92	33.05	5.45	33.70	57.72	74	-16.28	V	PK	Pass
5370	33.87	33.05	5.45	33.70	38.67	54	-15.33	V	AV	Pass
5350	54.01	33.06	5.44	33.72	58.79	74	-15.21	H	PK	Pass
5350	35.62	33.06	5.44	33.72	40.40	54	-13.60	H	AV	Pass
5370	51.76	33.05	5.45	33.70	56.56	74	-17.44	H	PK	Pass
5370	34.32	33.05	5.45	33.70	39.12	54	-14.88	H	AV	Pass
802.11ax40:5190MHz										
5150	56.78	33.14	5.29	33.88	61.33	74	-12.67	V	PK	Pass
5150	36.92	33.14	5.29	33.88	41.47	54	-12.53	V	AV	Pass
5145	53.18	33.14	5.29	33.88	57.73	74	-16.27	V	PK	Pass
5145	36.10	33.14	5.29	33.88	40.65	54	-13.35	V	AV	Pass
5150	56.72	33.14	5.29	33.88	61.27	74	-12.73	H	PK	Pass
5150	36.86	33.14	5.29	33.88	41.41	54	-12.59	H	AV	Pass
5145	53.07	33.14	5.29	33.88	57.62	74	-16.38	H	PK	Pass
5145	36.24	33.14	5.29	33.88	40.79	54	-13.21	H	AV	Pass

802.11ax40:5230MHz										
5350	53.16	33.06	5.44	33.72	57.94	74	-16.06	V	PK	Pass
5350	37.25	33.06	5.44	33.72	42.03	54	-11.97	V	AV	Pass
5370	54.82	33.05	5.45	33.70	59.62	74	-14.38	V	PK	Pass
5370	36.47	33.05	5.45	33.70	41.27	54	-12.73	V	AV	Pass
5350	53.39	33.06	5.44	33.72	58.17	74	-15.83	H	PK	Pass
5350	36.76	33.06	5.44	33.72	41.54	54	-12.46	H	AV	Pass
5370	52.63	33.05	5.45	33.70	57.43	74	-16.57	H	PK	Pass
5370	35.59	33.05	5.45	33.70	40.39	54	-13.61	H	AV	Pass

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8 POWER SPECTRAL DENSITY TEST

8.1 Test Standard and Limit

According to FCC §15.407(3)

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum

power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi

without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247 6.2

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.

8.2 Test Setup**8.3 Test Procedure**

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. The testing follows FCC KDB 789033 D02.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
4. For U-NII1, U-NII-2A, U-NII-2C Band:

Set RBW=1MHz, VBW=3MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)

For U-NII-3 Band:

Set RBW=510 kHz, VBW=3*RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)

5. Use the cursor on spectrum to peak search the highest level of trace
6. Record the max. reading and add $10 \log(1/\text{duty cycle})$.

8.4 Test Data


Please see the attachment for WIFI5.2G and WIFI5.8G data.

9 26DB & 6DB & 99% Emission Bandwidth Test

9.1 Test Standard

Test Standard	FCC Part15 C Section 15.407, RSS-247
	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

9.2 Test Setup



9.3 Test Procedure

a) Set RBW = approximately 1 % of the EBW.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

9.4 Test Data

Please see the attachment for WIFI5.2G and WIFI5.8G data.

10 Maximum Conducted Output Power

10.1 Test Standard and Limit

According to FCC §15.407

For an outdoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).


For the band 5.725–5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

According to RSS-247 6.2

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

10.2 Test Setup



10.3 Test Procedure

The EUT was directly connected to the Power meter

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers

are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep):

(i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

- (ii) Set RBW = 1 MHz.
- (iii) Set VBW $\geq$ 3 MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 Test Data

Please see the attachment for WIFI5.2G and WIFI5.8G data.

11 Out of Band Emissions and Spurious Emission

11.1 Test Standard and Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

RSS-247 Section 6.2

Devices shall comply with the following:

All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or

All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text "for indoor use only."


Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;

15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;

10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

11.2 Test Setup



11.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.4 Test Data

Please see the attachment for WIFI5.2G and WIFI5.8G data.

12 Frequency Stability Measurement

12.1 Test Standard and Limit

FCC


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

IC

If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.

12.2 Test Setup



12.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).

6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value(LV=AC 102V NV=AC 120V HV=AC 138V)

7. Extreme temperature is -20°C~50°C.

12.4 Test Data

Please see the attachment for WIFI5.2G and WIFI5.8G data.

13 Antenna Requirement

13.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. According to RSS-GEN section 6.8 The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list. For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below). When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

13.2 Antenna Connected Construction

The antenna is Internal Antenna which permanently attached, and the best case gain of the antenna is 1.94 dBi(WIFI 5.2G); 2.02dBi(WIFI5.8G). It complies with the standard requirement.

14 TEST SETUP & EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----