

# FCC RADIO TEST REPORT

FCC ID: 2ADBRK968

Of

Product Name: smart mobile phone

Brand Name: KALIHO, K-CEL, K-TEN

Model No.: K968 Series Model: A600

Test Report Number: STS1410012F01

Issued for

Shenzhen Kaliho Technology Development Limited
Rm1901, Block A, The Stars Plaza, Huaqiang North Rd., Futian District,
Shenzhen, China

Issued by

Shenzhen STS Test Services Co., Ltd.

1/F, Building 2, Zhuoke Science Park, Chongqing Road, Fuyong, Baoan District, Shenzhen, China

TEL: +86-755 6119 6328

FAX: +86-755 6119 6328

E-mail:sts@stsapp.com

This test report may be reproduced in full only.

All Test Data Presented in this report is only applicable to presented Test sample.

### **TEST RESULT CERTIFICATION**

District, Shenzhen, China

Manufacture's Name ...... Shenzhen Kaliho Technology Development Limited

Address ...... Floor 4, Flat F, XingHui Technology industrial park, Huaning West

Rd., Dalang Street, Longhua, Baoan district, Shenzhen

Product name ...... smart mobile phone

Band name ...... KALIHO, K-CEL, K-TEN

Model and/or type reference .: K968

Standards ...... FCC Part 22H and 24E

Test procedure....: TIA 603 C

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test .....

Date (s) of performance of tests ... Oct 11, 2014 ~ Oct 18, 2014

Date of Issue..... Oct 19, 2014

Test Result......Pass

Testing Engineer :

(Tony Liu)

Technical Manager

**Authorized Signatory** 

(Vita Li

10

(Bovey Yang)

## **TABLE OF CONTENTS**

1.1 PRODUCT DESCRIPTION4
1.2 RELATED SUBMITTAL(S) / GRANT (S)5
1.3 TEST METHODOLOGY5
1.4 TEST FACILITY5
1.5 MEASUREMENT INSTRUMENTS5
1.6 SPECIAL ACCESSORIES5
1.7 EQUIPMENT MODIFICATIONS5
2. SYSTEM TEST CONFIGURATION
2.1 EUT CONFIGURATION
2.2 EUT EXERCISE
2.3 GENERAL TECHNICAL REQUIREMENTS
2.4 CONFIGURATION OF EUT SYSTEM7
3. SUMMARY OF TEST RESULTS8
4. DESCRIPTION OF TEST MODES
4. DESCRIPTION OF TEST MODES8
5. OUTPUT POWER
5. OUTPUT POWER
5. OUTPUT POWER
5. OUTPUT POWER
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       15         6. SPURIOUS EMISSION       19
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       15         6. SPURIOUS EMISSION       19         6.1 CONDUCTED SPURIOUS EMISSION       19
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       15         6. SPURIOUS EMISSION       19         6.1 CONDUCTED SPURIOUS EMISSION       19         6.2 RADIATED SPURIOUS EMISSION       21
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       15         6. SPURIOUS EMISSION       19         6.1 CONDUCTED SPURIOUS EMISSION       19         6.2 RADIATED SPURIOUS EMISSION       21         7. FREQUENCY STABILITY       27
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       15         6. SPURIOUS EMISSION       19         6.1 CONDUCTED SPURIOUS EMISSION       19         6.2 RADIATED SPURIOUS EMISSION       21         7. FREQUENCY STABILITY       27         7.1 MEASUREMENT METHOD       27
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       15         6. SPURIOUS EMISSION       19         6.1 CONDUCTED SPURIOUS EMISSION       19         6.2 RADIATED SPURIOUS EMISSION       21         7. FREQUENCY STABILITY       27         7.1 MEASUREMENT METHOD       27         7.2 PROVISIONS APPLICABLE       27
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       15         6. SPURIOUS EMISSION       19         6.1 CONDUCTED SPURIOUS EMISSION       19         6.2 RADIATED SPURIOUS EMISSION       21         7. FREQUENCY STABILITY       27         7.1 MEASUREMENT METHOD       27         7.2 PROVISIONS APPLICABLE       27         7.3 MEASUREMENT RESULT       28

8.3 MEASUREMENT RESULT	33
9. EMISSION BANDWIDTH3	6
9.1 MEASUREMENT METHOD	36
9.2 PROVISIONS APPLICABLE	36
9.3 MEASUREMENT RESULT	36
10. BAND EDGE	9
10.1 MEASUREMENT METHOD	39
10.2 PROVISIONS APPLICABLE	39
10.3 MEASUREMENT RESULT	39
APPENDIX I4	10
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION4	0
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)	'1
EMISSION BANDWIDTH (-26DBC)7	'1
APPENDIX III9	6
TEST PLOTS FOR BAND EDGES9	16
APPENDIX IV10	
PHOTOGRAPHS OF TEST SETUP10	9

## 1. GENERAL INFORMATION

### 1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	smart mobile phone			
Hardware version:				
Software version:				
FCC ID:	2ADBRK968			
Frequency Bands:	SGSM 850 SPCS 1900 (U.S. Bands)  GSM 900 DCS 1800 (Non-U.S. Bands)  U.S. Bands:  SUMTS FDD Band II SUMTS FDD Band V  Non-U.S. Bands:  UMTS FDD Band I UMTS FDD Band VIII			
Bluetooth	Operation Frequency:2402 – 2480 MHz Modulation: GFSK(1Mbps),π/4-DQPSK(2Mbps),8-DPSK(3Mbps)			
WIFI	Operation Frequency: 802.11b/g/n 20: 2412~2462 MHz 802.11n 40: 2422~2452MHz Modulation Type: CCK/OFDM/DBPSK/DAPSK			
SIM CARD	Support dual-SIM, dual standby, the multiple SIM card with two lines cannot transmitting at the same time			
Antenna:	Integrated Antenna			
Antenna gain:	0 dBi			
Power Supply:	DC 3.7V by battery or DC 5.0V supplied by adapter			
Battery parameter:	DC 3.7V/1000mAh			
Adapter Input:	AC100-240V, 50-60Hz, 200mA			
Adapter Output:	DC 5.0V, 500mA			
GPRS/EDGE Class	Multi-Class12			
Extreme Vol. Limits:	DC3.4 V to 4.2 V (Nominal DC3.7 V)			
Extreme Temp. Tolerance	-10℃ to +50℃			
** Note: The High Voltage 4.	** Note: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT			

couldn't be operate normally with higher or lower voltage.

#### 1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ADBRK968** filing to comply with the FCC Part 22H&24E.

#### 1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

#### **1.4 TEST FACILITY**

The test site used to collect the radiated data is located at:

Shenzhen STS Test Services Co., Ltd.

1/F, Building 2, Zhuoke Science Park, Chongqing Road, Fuyong, Baoan District, Shenzhen, China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration No.: 842334

#### 1.5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	NEXT CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2015.6.26
TEST RECEIVER	R&S	ESCI	A0304218	2015.6.26
COMMUNICATION TESTER	AGILENT	8960	3104A03367	2015.7.21
COMMUNICATION TESTER	R&S	CMU200	A0304247	2015.7.21
TEST RECEIVER	R&S	FCKL1528	A0304230	2015.6.26
LISN	SCHWARZBECK	NSLK8127	A0304233	2015.6.26
CLIMATE CHAMBER	ALBATROSS			2015.6.26
Loop Antenna	Daze	ZN30900N	SEL0097	2015.6.26
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	N/A	2015.4.26
Horn Antenna	EM	EM-AH-10180	N/A	2015.4.26

#### 1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

#### 1.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

### 2. SYSTEM TEST CONFIGURATION

#### 2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

#### 2.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
4	Output	Conducted output power	22.012(a) / 24.222 (b)
1	Power	Radiated output power	22.913(a) / 24.232 (b)
Courieus		Conducted	
2 Spurious Emission	spurious emission	2.1051 / 22.917 / 24.238	
	Emission	Radiated spurious emission	
3	Frequency Stability		2.1055 /24.235
4	Occupied Bandwidth		2.1049 (h)(i)
5	Emission Bandwidth		22.917(b) / 24.238 (b)
6	Band Edge		22.917(b) / 24.238 (b)

### 2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System

EUT

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	smart mobile phone	K968	FCC ID: 2ADBRK968	EUT

Note: All the accessories have been used during the test. the following "EUT" in setup diagram means EUT system.

### 3. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
		Conducted		
1	Output	Output Power	22.913(a) / 24.232 (b)	Pass
'	Power	Radiated		
		Output Power		
		Conducted		Pass
2	Spurious	Spurious Emission	2 4054 / 22 047 / 24 229	
2	Emission	Radiated	2.1051 / 22.917 / 24.238	
		Spurious Emission		
3	Mains Conducted Emission		15.107 / 15.207	Pass
4	Frequency Stability		2.1055 /24.235	Pass
5	5 Occupied Bandwidth		2.1049 (h)(i)	Pass
6	6 Emission Bandwidth		22.917(b) / 24.238 (b)	Pass
7	Band Edge		22.917(b) / 24.238 (b)	Pass

### 4. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS/EDGES850, GSM/GPRS/EDGE1900, HSDPA band V, HSUPA band V And HSDPA band II, HSUPA band II modes have been tested during the test.

the worst condition (GPRS/EDGE 850) be recorded in the test report if no other modes test data.

## **5. OUTPUT POWER**

## **5.1 CONDUCTED OUTPUT POWER**

#### **5.1.1 MEASUREMENT METHOD**

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GPRS/EDGE850, GPRS/EDGE1900, HSDPA band V) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

#### **5.1.2 MEASUREMENT RESULT**

Conducted Output Power Limits for GSM 850 MHZ		
Mode Nominal Peak Power Tolerance(dB)		
GSM850	31 dBm	+/- 1

Conducted Output Power Limits for PCS 1900 MHZ		
Mode Nominal Peak Power		Tolerance(dB)
GSM1900	29 dBm	+/- 1

Conducted Output Power Limits for WCDMA band V /II			
Mode	Nominal Peak Power	Tolerance(dB)	
WCDMA band V 22 dBm		+/-1	
WCDMA band II	22 dBm	+/-1	

## **GSM 850:**

Mode	Frequency (MHz)	Peak Power
	824.2	31.96
GSM850	836.6	31.62
	848.8	31.65
ODDOOLO	824.2	31.33
GPRS850	836.6	31.24
(1 Slot)	848.8	31.34
CDDCoro	824.2	27.23
GPRS850	836.6	27.10
(2 Slot)	848.8	27.30
ODDOOLO	824.2	25.57
GPRS850	836.6	25.53
(3 Slot)	848.8	25.40
ODDOOLO	824.2	24.46
GPRS850	836.6	24.65
(4 Slot)	848.8	24.59
EDOE050	824.2	31.19
EDGE850 — (1 Slot) —	836.6	31.17
	848.8	31.11
FDOFOS	824.2	28.04
EDGE850	836.6	28.25
(2 Slot)	848.8	28.17
EDOE050	824.2	26.78
EDGE850	836.6	26.93
(3 Slot)	848.8	26.91
EDOE050	824.2	24.28
EDGE850	836.6	24.48
(4 Slot)	848.8	24.49

## PCS 1900:

Mode	Frequency (MHz)	Peak Power
	1850.2	29.55
GSM1900	1880	29.71
	1909.8	29.69
CDDC1000	1850.2	28.62
GPRS1900	1880	28.79
(1 Slot)	1909.8	28.79
CDDC1000	1850.2	25.59
GPRS1900	1880	25.60
(2 Slot)	1909.8	25.57
CDDC4000	1850.2	24.57
GPRS1900	1880	24.59
(3 Slot)	1909.8	24.24
CDDC4000	1850.2	23.27
GPRS1900	1880	23.13
(4 Slot)	1909.8	23.11
EDGE1900	1850.2	29.37
	1880	29.49
(1 Slot)	1909.8	29.55
EDCE1000	1850.2	26.41
EDGE1900 — (2 Slot) —	1880	26.54
(2 3101)	1909.8	26.62
EDCE4000	1850.2	24.75
EDGE1900	1880	24.95
(3 Slot)	1909.8	24.92
EDGE1900	1850.2	23.56
(4 Slot)	1880	23.76
(4 3101)	1909.8	23.72

## **UMTS BAND V**

Mode	Frequency (MHz)	Peak Power
WCDMA 850	826.4	22.58
RMC	836.6	22.67
RIVIC	846.6	22.67
LICODA	826.4	22.43
HSDPA Subtest 1	836.6	22.37
Sublest 1	846.6	22.54
LICDDA	826.4	21.59
HSDPA	836.6	21.78
Subtest 2	846.6	21.77
LICDDA	826.4	20.49
HSDPA Subtest 3	836.6	20.63
Sublest 3	846.6	20.69
LICDDA	826.4	20.50
HSDPA Subtest 4	836.6	20.71
Sublest 4	846.6	20.68
LICLIDA	826.4	22.17
HSUPA	836.6	22.36
Subtest 1	846.6	22.35
LICLIDA	826.4	20.41
HSUPA Subtest 2	836.6	20.57
Sublest 2	846.6	20.54
LICLIDA	826.4	20.48
HSUPA Subtest 3	836.6	20.64
Sublest 3	846.6	20.68
HCLIDA	826.4	22.15
HSUPA Subtest 4	836.6	22.32
Sublest 4	846.6	22.33
LICLIDA	826.4	20.28
HSUPA Subtest 5	836.6	20.42
Sublest 5	846.6	20.41

## **UMTS BAND II**

Mode	Frequency (MHz)	Peak Power
WCDMA 1900	1852.4	22.76
RMC	1880	22.94
RIVIC	1907.6	22.89
HSDPA -	1852.4	22.56
Subtest 1	1880	22.47
Sublest 1	1907.6	22.43
LICDDA	1852.4	20.34
HSDPA Subtest 2	1880	20.52
Sublest 2	1907.6	20.49
HSDPA -	1852.4	19.27
Subtest 3	1880	19.48
Sublest 3	1907.6	19.39
HSDPA	1852.4	18.84
Subtest 4	1880	19.04
Sublest 4	1907.6	18.99
LICLIDA	1852.4	20.49
HSUPA	1880	20.70
Sublest 1	1907.6	20.67
HSUPA -	1852.4	21.29
Subtest 2	1880	21.50
Sublest 2	1907.6	21.40
HSUPA -	1852.4	19.40
Subtest 3	1880	19.52
Sublest 3	1907.6	19.53
HSUPA -	1852.4	21.21
Subtest 4	1880	21.35
Sublest 4	1907.6	21.27
HSUPA -	1852.4	19.32
Subtest 5	1880	19.51
Sublest 3	1907.6	19.49

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)	
For all combinations of ,DPDCH,DPCCH	0≤ CM≤3.5	MAX(CM-1,0)	
HS-DPDCH,E-DPDCH and E-DPCCH	0≤ CIVI≤3.5		

Note: CM=1 for  $\beta_c/\beta_d=12/15$ ,  $\beta_{hs}/\beta_c=24/15$ . For all other combinations of DPDCH, DPCCH,

HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

#### **5.2 RADIATED OUTPUT POWER**

#### **5.2.1 MEASUREMENT METHOD**

The measurements procedures specified in TIA-603C-2009 were applied.

- In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. The ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi...
- 9. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

#### **5.2.2 PROVISIONS APPLICABLE**

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850	<=38.45 dBm (7W)
PCS 1900	<=33 dBm (2W)
UMTS BAND V	<=38.45 dBm (7W)
UMTS BAND II	<=33 dBm (2W)

## **5.2.3 MEASUREMENT RESULT**

Radiated Power (ERP) for GSM 850 MHZ					
		Re	sult		
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion	
		(dBm)	Of Max. ERP		
	824.2	27.23	Horizontal	Pass	
	824.2	29.31	Vertical	Pass	
CCMOTO	836.6	27.37	Horizontal	Pass	
GSM850	836.6	29.20	Vertical	Pass	
	848.8	27.23	Horizontal	Pass	
	848.8	29.23	Vertical	Pass	

Radiated Power (ERP) for GPRS 850 MHZ					
		Re	sult		
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion	
		(dBm)	Of Max. ERP		
	824.2	26.78	Horizontal	Pass	
	824.2	28.82	Vertical	Pass	
GPRS850	836.6	26.73	Horizontal	Pass	
GPK3030	836.6	28.68	Vertical	Pass	
	848.8	26.72	Horizontal	Pass	
	848.8	28.71	Vertical	Pass	

Radiated Power (ERP) for EDGE 850 MHZ					
	Result		sult		
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion	
		(dBm)	Of Max. ERP		
	824.2	26.79	Horizontal	Pass	
	824.2	28.71	Vertical	Pass	
EDGE850	836.6	26.75	Horizontal	Pass	
EDGE630	836.6	28.82	Vertical	Pass	
	848.8	26.72	Horizontal	Pass	
	848.8	28.67	Vertical	Pass	

	Radiated Power (E.I.R.P) for PCS 1900 MHZ					
		Res	Result			
Mode	Frequency	Max. Peak	Polarization	Conclusion		
		E.I.R.P.(dBm)	Of Max. E.I.R.P.			
	1850.2	27.04	Horizontal	Pass		
	1850.2	29.08	Vertical	Pass		
PCS1900	1880.0	27.06	Horizontal	Pass		
	1880.0	29.05	Vertical	Pass		
	1909.8	27.20	Horizontal	Pass		
	1909.8	29.13	Vertical	Pass		

	Radiated Power (E.I.R.P) for GPRS 1900 MHZ					
	Result					
Mode	Frequency	Max. Peak	Polarization	Conclusion		
		E.I.R.P.(dBm)	Of Max. E.I.R.P.			
	1850.2	26.83	Horizontal	Pass		
	1850.2	28.74	Vertical	Pass		
GPRS	1880.0	26.73	Horizontal	Pass		
1900	1880.0	28.70	Vertical	Pass		
	1909.8	26.63	Horizontal	Pass		
	1909.8	28.63	Vertical	Pass		

	Radiated Power (E.I.R.P) for EDGE 1900 MHZ					
	Result		ult			
Mode	Frequency	Max. Peak	Polarization	Conclusion		
		E.I.R.P.(dBm)	Of Max. E.I.R.P.			
	1850.2	26.76	Horizontal	Pass		
	1850.2	28.83	Vertical	Pass		
EDGE	1880.0	26.72	Horizontal	Pass		
1900	1880.0	28.71	Vertical	Pass		
	1909.8	26.75	Horizontal	Pass		
	1909.8	28.76	Vertical	Pass		

Radiated Power (E.I.R.P) for UMTS band ∨					
			Result		
Mode	Frequency	Max. Peak	Polarization	Conclusion	
		E.I.R.P.(dBm)	Of Max. E.I.R.P.		
	826.4	19.27	Horizontal	Pass	
	826.4	20.22	Vertical	Pass	
RMC	836.6	19.36	Horizontal	Pass	
12.2kbps	836.6	20.21	Vertical	Pass	
	846.6	19.06	Horizontal	Pass	
	846.6	20.07	Vertical	Pass	

	Radiated Power (E.I.R.P) for UMTS band II				
			Result		
Mode	Frequency	Max. Peak	Polarization	Conclusion	
		E.I.R.P.(dBm)	Of Max. E.I.R.P.		
	1852.4	19.49	Horizontal	Pass	
	1852.4	20.42	Vertical	Pass	
RMC	1880	19.09	Horizontal	Pass	
12.2kbps	1880	20.22	Vertical	Pass	
	1907.6	18.93	Horizontal	Pass	
	1907.6	20.02	Vertical	Pass	

### 6. SPURIOUS EMISSION

### **6.1 CONDUCTED SPURIOUS EMISSION**

#### **6.1.1 MEASUREMENT METHOD**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
- 2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM/GPRS 850 MHz			
Channel	Frequency (MHz)		
128	824.2		
190	836.6		
251	848.8		

Typical Channels for testing of PCS/ GPRS 1900 MHz			
Channel	Frequency (MHz)		
512	1850.2		
661	1880.0		
810	1909.8		

Typical Channels for testing of UMTS band V			
Channel	Frequency (MHz)		
4132	826.4		
4183	836.6		
4233	846.6		

Typical Channels for testing of UMTS band II			
Channel	Frequency (MHz)		
9262	1852.4		
9400	1880		
9538	1907.6		

#### **6.1.2 PROVISIONS APPLICABLE**

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

#### **6.1.3 MEASUREMENT RESULT**

PLEASE REFER TO: APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

**Note:** 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.


#### **6.2 RADIATED SPURIOUS EMISSION**

#### **6.2.1 MEASUREMENT METHOD**


The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS850, GPRS1900, HSDPA band V,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, RSE=Rx (dBuV) +CL (dB) +SA (dB) +Gain (dBi) -107 (dBuV to dBm) The SA is calibrated using following setup.

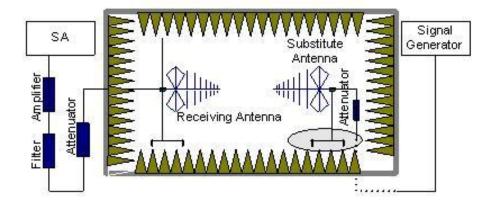

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

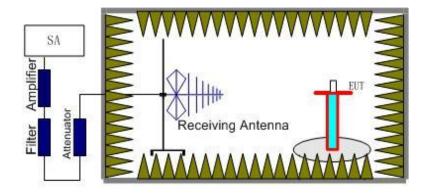

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of

the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) ,GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band V (4132 (826.4MHz), 4183(836.6MHz) and 4233 (846.6MHz) and UMTS band II (9262 (1852.4.6MHz), 9400(1880MHz) and 9538 (1907.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A<sub>Rpl</sub> is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power=P<sub>Mea</sub>+A<sub>Rpl</sub>

#### **6.2.2 PROVISIONS APPLICABLE**

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Note:** only result the worst condition of each test mode:

### **6.2.3 MEASUREMENT RESULT**

GSM 850:

The Worst Test Results Channel 128/824.2 MHz						
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
1648.422	-35.67	-4.65	-40.32	-13	-27.32	Horizontal
2472.612	-36.32	-2.21	-38.53	-13	-25.53	Horizontal
3296.821	-31.14	0.21	-30.93	-13	-17.93	Horizontal
1648.422	-38.26	-4.65	-42.91	-13	-29.91	Vertical
2472.612	-41.43	-2.21	-43.64	-13	-30.64	Vertical
3296.821	-40.72	0.21	-40.93	-13	-27.93	Vertical
_	The	Worst Test R	esults Channe	I 190/836.6 MHz	4	-
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
1673.213	-36.25	-4.65	-40.9	-13	-27.9	Horizontal
2509.821	-42.15	-2.21	-44.36	-13	-31.36	Horizontal
3346.405	-36.47	0.21	-36.26	-13	-23.26	Horizontal
1673.213	-37.25	-4.65	-41.9	-13	-28.9	Vertical
2509.821	-32.15	-2.21	-34.36	-13	-21.36	Vertical
3346.405	-35.24	0.21	-35.03	-13	-22.03	Vertical
	The	Worst Test R	esults Channe	I 251/848.8 MHz	4	-
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
1697.612	-35.13	-4.65	-39.78	-13	-26.78	Horizontal
2546.413	-43.25	-2.21	-45.46	-13	-32.46	Horizontal
3395.214	-45.26	0.21	-45.05	-13	-32.05	Horizontal
1697.612	-35.14	-4.65	-39.79	-13	-26.79	Vertical
2546.413	-41.26	-2.21	-43.47	-13	-30.47	Vertical
3395.214	-37.26	0.21	-37.05	-13	-24.05	Vertical

Note: Below 30MHZ no Spurious found and The GSM modes is the worst condition.

## PCS 1900:

The Worst Test Results for Channel 512/1850.2MHz						
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
3700.411	-36.24	0.33	-35.91	-13	-22.91	Horizontal
5550.612	-43.53	4.01	-39.52	-13	-26.52	Horizontal
7400.823	-42.25	10.7	-31.55	-13	-18.55	Horizontal
3700.411	-34.27	0.33	-33.94	-13	-20.94	Vertical
5550.612	-38.26	4.01	-34.25	-13	-21.25	Vertical
7400.823	-41.27	10.7	-30.57	-13	-17.57	Vertical
	The V	Vorst Test Res	ults for Channe	el 661/1880.0MH	z	
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
3760.121	-36.12	0.33	-35.79	-13	-22.79	Horizontal
5640.231	-52.24	4.01	-48.23	-13	-35.23	Horizontal
7520.214	-43.25	10.7	-32.55	-13	-19.55	Horizontal
3760.121	-31.43	0.33	-31.1	-13	-18.1	Vertical
5640.231	-43.21	4.01	-39.2	-13	-26.2	Vertical
7520.214	-33.27	10.7	-22.57	-13	-9.57	Vertical
	The V	Vorst Test Res	ults for Channe	el 810/1909.8MH	z	
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
3819.623	-32.25	0.33	-31.92	-13	-18.92	Horizontal
5729.416	-45.21	4.01	-41.2	-13	-28.2	Horizontal
7639.218	-37.24	10.7	-26.54	-13	-13.54	Horizontal
3819.623	-32.24	0.33	-31.91	-13	-18.91	Vertical
5729.416	-45.39	4.01	-41.38	-13	-28.38	Vertical
7639.218	-39.13	10.7	-28.43	-13	-15.43	Vertical

Note: Below 30MHZ no Spurious found and The GSM modes is the worst condition.

## UMTS band V

Channel 413226.4MHz						
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
1652.805	-34.23	-4.65	-38.88	-13	-25.88	Horizontal
2479.215	-35.43	-2.21	-37.64	-13	-24.64	Horizontal
1652.778	-34.14	-4.65	-38.79	-13	-25.79	Vertical
2479.188	-31.25	-2.21	-33.46	-13	-20.46	Vertical
		Chan	nel 4183/836.6N	1 Hz		
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
1673.136	-31.23	-4.65	-35.88	-13	-22.88	Horizontal
2509.774	-35.46	-2.21	-37.67	-13	-24.67	Horizontal
1673.154	-27.13	-4.65	-31.78	-13	-18.78	Vertical
2509.740	-35.14	-2.21	-37.35	-13	-24.35	Vertical
		Chan	nel 4233/846.6N	1 Hz		
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
1693.808	-36.15	-4.65	-40.8	-13	-27.8	Horizontal
2539.078	-38.14	-2.21	-40.35	-13	-27.35	Horizontal
1693.150	-27.24	-4.65	-31.89	-13	-18.89	Vertical
2539.761	-34.12	-2.21	-36.33	-13	-23.33	Vertical

Note: Below 30MHZ no Spurious found and The RMC modes is the worst condition.

## UMTS band II

Channel 9262/1852.4MHz						
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
3704.792693	-34.23	0.33	-33.9	-13	-20.9	Horizontal
5557.125138	-35.25	4.01	-31.24	-13	-18.24	Horizontal
3704.734145	-34.14	0.33	-33.81	-13	-20.81	Vertical
5557.172354	-31.13	4.01	-27.12	-13	-14.12	Vertical
		Cha	nnel 9400/1880	)MHz		
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
3760.030038	-31.15	0.33	-30.82	-13	-17.82	Horizontal
5640.177	-35.35	4.01	-31.34	-13	-18.34	Horizontal
3760.091175	-27.25	0.33	-26.92	-13	-13.92	Vertical
5640.139858	-35.21	4.01	-31.2	-13	-18.2	Vertical
		Chan	nel 9538/1907.	6MHz		
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin	Polarity
3815.214697	-36.23	0.33	-35.9	-13	-22.9	Horizontal
5722.75656	-38.24	4.01	-34.23	-13	-21.23	Horizontal
3815.131705	-27.21	0.33	-26.88	-13	-13.88	Vertical
5962.746656	-35.25	4.01	-31.24	-13	-18.24	Vertical

Note: Below 30MHZ no Spurious found and The RMC modes is the worst condition.

### 7. FREQUENCY STABILITY

#### 7.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 . Measure the carrier frequency at room temperature.
- 2 .Subject the EUT to overnight soak at -10℃.
- 3 .With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band, channel 190 for GSM 850 band and channel 4183 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 .Repeat the above measurements at  $10^{\circ}$ C increments from  $-10^{\circ}$ C to  $+50^{\circ}$ C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 .Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 .Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 .Repeat the above measurements at  $10^{\circ}$ C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 .At all temperature levels hold the temperature to  $\pm -0.5^{\circ}$  during the measurement procedure.

#### 7.2 PROVISIONS APPLICABLE

#### 7.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

### 7.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

#### 7.3 MEASUREMENT RESULT

Frequency Error Against Voltage for GSM 850 band				
Voltage(V) Frequency error(Hz) Frequency error(ppm)				
3.4	27	0.032		
3.7	25	0.030		
4.2	24	0.029		

Frequency Error Against Temperature for GSMS850 band				
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)		
-10	24	0.029		
0	31	0.037		
10	26	0.031		
20	-26	-0.031		
30	-27	-0.032		
40	31	0.037		
50	-35	-0.042		

Frequency Error Against Voltage for GPRS850 band				
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)		
3.4	27	0.032		
3.7	26	0.031		
4.2	-24	-0.029		

Frequency Error Against Temperature for GPRS850 band				
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)		
-10	-33	-0.039		
0	22	0.026		
10	-25	-0.030		
20	26	0.031		
30	-25	-0.030		
40	33	0.039		
50	-31	-0.037		

Frequency Error Against Voltage for EDGE S850 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	25	0.030
3.7	24	0.029
4.2	25	0.030

Frequency Error Against Temperature for EDGE 850 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	-31	-0.037
0	23	0.028
10	-23	-0.028
20	22	0.026
30	-24	-0.029
40	32	0.038
50	-29	-0.035

**Note:** The EUT doesn't work below -10°C

Frequency Error Against Voltage for GSM1900 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	25	0.013
3.7	-24	-0.013
4.2	-21	-0.011

Frequency Error Against Temperature for GSM1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	24	0.013
0	23	0.012
10	-24	-0.013
20	26	0.014
30	31	0.016
40	24	0.013
50	-23	-0.012

Frequency Error Against Voltage for GPRS 1900 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	27	0.014
3.7	-24	-0.013
4.2	-22	-0.012

Frequency Error Against Temperature for GPRS 1900 band		
temperature(℃)	Frequency error(Hz)	Frequency error(ppm)
-10	26	0.014
0	26	0.014
10	-27	-0.014
20	25	0.013
30	31	0.016
40	25	0.013
50	-22	-0.012

Frequency Error Against Voltage for EDGE 1900 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	25	0.013
3.7	-23	-0.012
4.2	-22	-0.012

Frequency Error Against Temperature for EDGE 1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	25	0.013
0	27	0.014
10	-24	-0.013
20	24	0.013
30	31	0.016
40	22	0.012
50	-23	-0.012

Note: The EUT doesn't work below -10  $^{\circ}\mathrm{C}$ 

Frequency Error Against Voltage for UMTS band V		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	32	0.038
3.7	27	0.032
4.2	-25	-0.030

Frequency Error Against Temperature for UMTS band V		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	32	0.038
0	29	0.035
10	27	0.032
20	26	0.031
30	25	0.030
40	23	0.028
50	25	0.030

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for UMTS band II		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	31	0.037
3.7	26	0.031
4.2	-28	-0.034

Frequency Error Against Temperature for UMTS band II		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	32	0.038
0	28	0.034
10	25	0.030
20	24	0.029
30	19	0.023
40	21	0.025
50	23	0.028

Note: The EUT doesn't work below -10°C

## 8. OCCUPIED BANDWIDTH

#### **8.1 MEASUREMENT METHOD**

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### **8.2 PROVISIONS APPLICABLE**

The occupied bandwidth (99%) shall not exceed 300 KHz.

#### **8.3 MEASUREMENT RESULT**

Occupied Bandwidth (99%) for GSM 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	824.2	244.4055
Middle Channel	836.6	244.3292
High Channel	848.8	244.8975

Occupied Bandwidth (99%) for GPRS 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	824.2	242.4746
Middle Channel	836.6	241.3195
High Channel	848.8	241.1649

Occupied Bandwidth (99%) for EDGE 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	824.2	246.4020
Middle Channel	836.6	246.8779
High Channel	848.8	246.4329

Occupied Bandwidth (99%) for GSM1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	1850.2	244.9560
Middle Channel	1880.0	247.4696
High Channel	1909.8	244.2267

Occupied Bandwidth (99%) for GPRS1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	1850.2	243.8887
Middle Channel	1880.0	251.0637
High Channel	1909.8	250.5962

Occupied Bandwidth (99%) forEDGE 1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	1850.2	246.9556
Middle Channel	1880.0	247.4556
High Channel	1909.8	246.2227

Occupied Bandwidth (99%) for UMTS band V			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	
Low Channel	826.4	4.1533	
Middle Channel	836.6	4.1741	
High Channel	846.6	4.1596	
Occupied Bandwidth (99%) for UMTS HSDPA band V			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	
Low Channel	826.4	4.1589	
Middle Channel	836.6	4.1679	
High Channel	846.6	4.1633	
Occupied Bandwidth (99%) for UMTS HSUPA band V			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	
Low Channel	826.4	4.1534	
Middle Channel	836.6	4.1754	
High Channel	846.6	4.1751	

Occupied Bandwidth (99%) for UMTS band II				
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( MHz)		
Low Channel	1852.4	4.1798		
Middle Channel	1880	4.1798		
High Channel	1907.6	4.1808		
Occı	Occupied Bandwidth (99%) for UMTS HSDPA band II			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( MHz)		
Low Channel	1852.4	4.1863		
Middle Channel	1880	4.1815		
High Channel	1907.6	4.1727		
Occı	Occupied Bandwidth (99%) for UMTS HSUPA band II			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( MHz)		
Low Channel	1852.4	4.1824		
Middle Channel	1880	4.1855		
High Channel	1907.6	4.2046		

#### 9. EMISSION BANDWIDTH

#### 9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

#### 9.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

#### 9.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	824.2	321.183
Middle Channel	836.6	319.226
High Channel	848.8	325.101

Emission Bandwidth (-26dBc) for GPRS850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	824.2	319.592
Middle Channel	836.6	319.543
High Channel	848.8	312.416

Emission Bandwidth (-26dBc) for EDGE 850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	824.2	318.103
Middle Channel	836.6	319.217
High Channel	848.8	321.125

Emission Bandwidth (-26dBc) for GSM1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	1850.2	324.517
Middle Channel	1880.0	322.417
High Channel	1909.8	321.485

Emission Bandwidth (-26dBc) for GPRS1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	1850.2	313.648
Middle Channel	1880.0	313.827
High Channel	1909.8	317.439

Emission Bandwidth (-26dBc) for EDGE 1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	1850.2	318.831
Middle Channel	1880.0	318.221
High Channel	1909.8	319.113

Emission Bandwidth (-26dBc) for UMTS band V		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( MHz)
Low Channel	826.4	4.700
Middle Channel	836.6	4.682
High Channel	846.6	4.694
Emission Bandwidth (-26dBc) for UMTS HSDPA band V		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( MHz)
Low Channel	826.4	4.699
Middle Channel	836.6	4.683
High Channel	846.6	4.689
Emission Bandwidth (-26dBc) for UMTS HSUPA band V		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( MHz)
Low Channel	826.4	4.694
Middle Channel	836.6	4.695
High Channel	846.6	4.712

Emission Bandwidth (-26dBc) for UMTS band II			
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( MHz)	
Low Channel	1852.4	4.721	
Middle Channel	1880	4.761	
High Channel	1907.6	4.764	
Emission Bandwidth (-26dBc) for UMTS HSDPA band II			
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( MHz)	
Low Channel	1852.4	4.760	
Middle Channel	1880	4.713	
High Channel	1907.6	4.771	
Emiss	Emission Bandwidth (-26dBc) for UMTS HSUPA band II		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( MHz)	
Low Channel	1852.4	4.783	
Middle Channel	1880	4.712	
High Channel	1907.6	4.746	

#### 10. BAND EDGE

#### **10.1 MEASUREMENT METHOD**

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

#### **10.2 PROVISIONS APPLICABLE**


as Specified in FCC rules of 22.917(b) and 24.238(b)

#### **10.3 MEASUREMENT RESULT**


Please refers to Appendix III for compliance test plots for band edges

Report No. STS1410012F01
APPENDIX I
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

### CONDUCTED EMISSION IN GSM 850 BAND Conducted Emission Transmitting Mode CH 128 30MHz – 9GHz

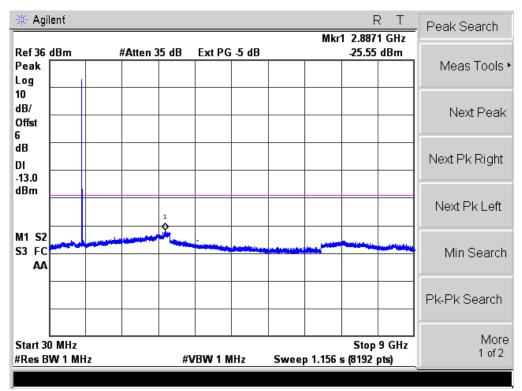


#### Conducted Emission Transmitting Mode CH 190 30MHz - 9GHz

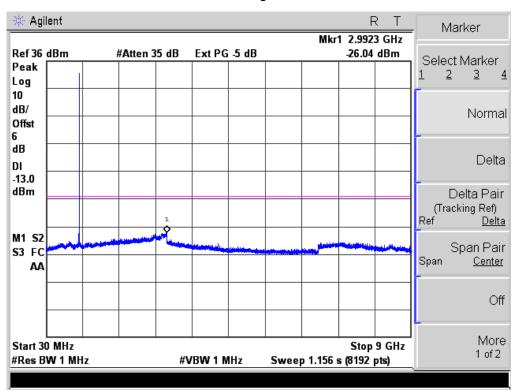


#### Conducted Emission Transmitting Mode CH 251 30MHz – 9GHz 🔆 Agilent R Marker Mkr1 2.9780 GHz Ref 36 dBm #Atten 35 dB Ext PG -5 dB -26.08 dBm Select Marker 1 2 3 4 Peak Log 10 dB/ Normal Offst 6 dΒ Delta DI -13.0 dBm Delta Pair (Tracking Ref) <u>Delta</u> M1 S2 Span Pair S3 FC Span <u>Center</u> АΑ Off More Start 30 MHz Stop 9 GHz 1 of 2 #Res BW 1 MHz #VBW 1 MHz Sweep 1.156 s (8192 pts)


### CONDUCTED EMISSION IN GPRS 850 BAND Conducted Emission Transmitting Mode CH 128 30MHz – 9GHz

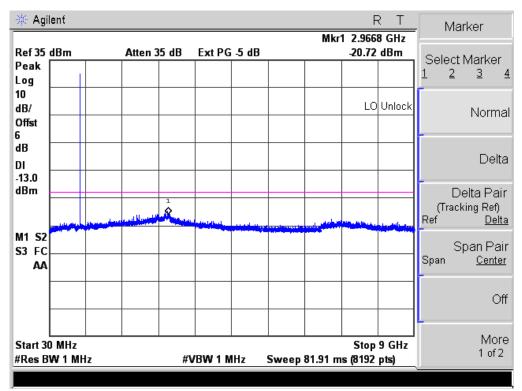


#### Conducted Emission Transmitting Mode CH 190 30MHz - 9GHz

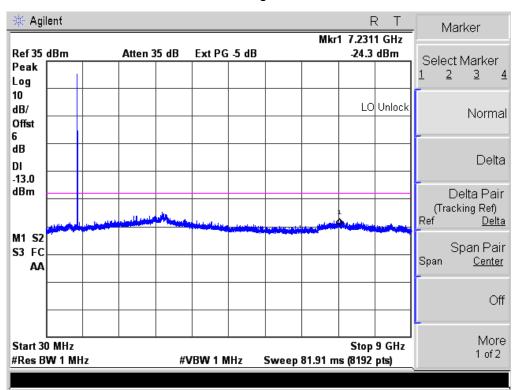


### Conducted Emission Transmitting Mode CH 251 30MHz – 9GHz

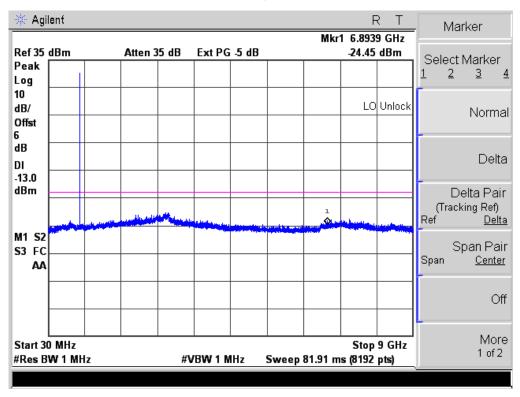


### CONDUCTED EMISSION IN EDGE 850 BAND Conducted Emission Transmitting Mode CH 128 30MHz – 9GHz

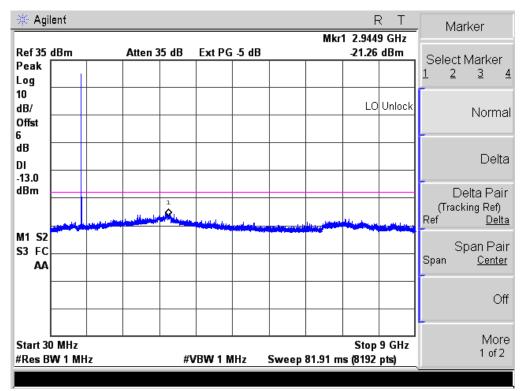


#### Conducted Emission Transmitting Mode CH 190 30MHz - 9GHz

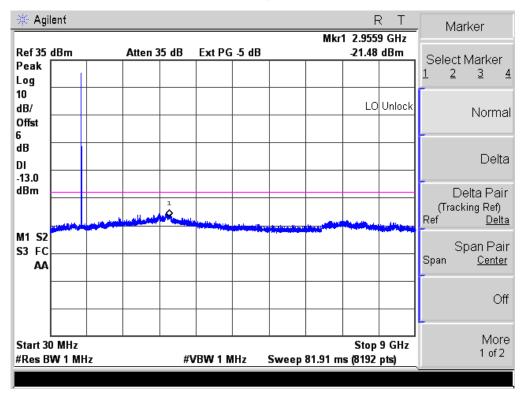


#### Conducted Emission Transmitting Mode CH 251 30MHz – 9GHz

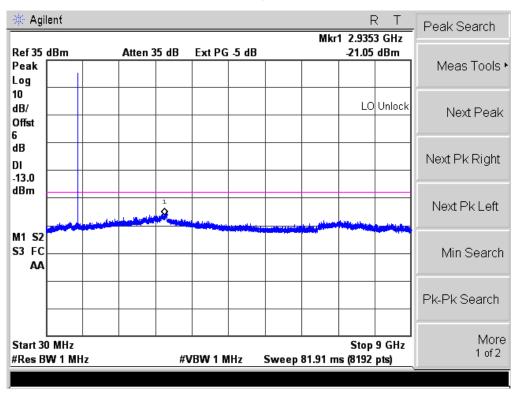



# CONDUCTED EMISSION IN GSM1900 BAND Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

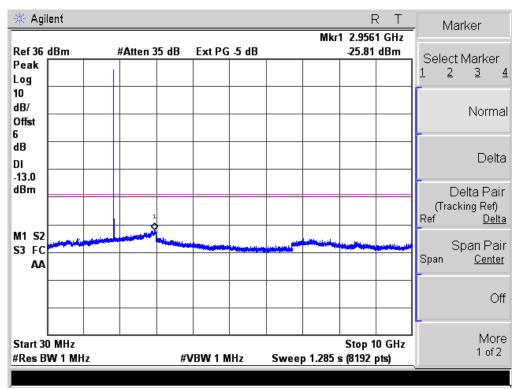

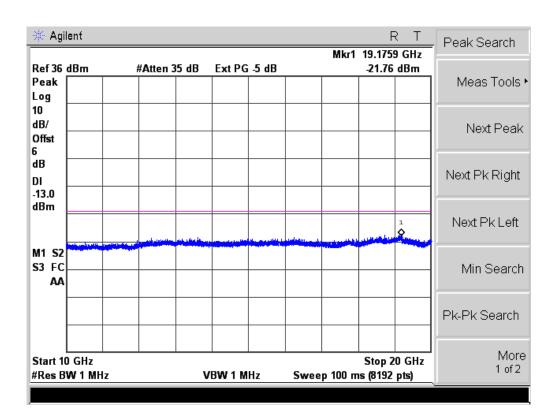



#### Conducted Emission Transmitting Mode CH 661 30MHz - 20GHz

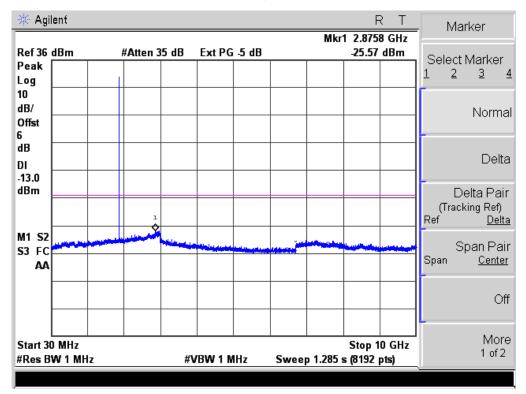

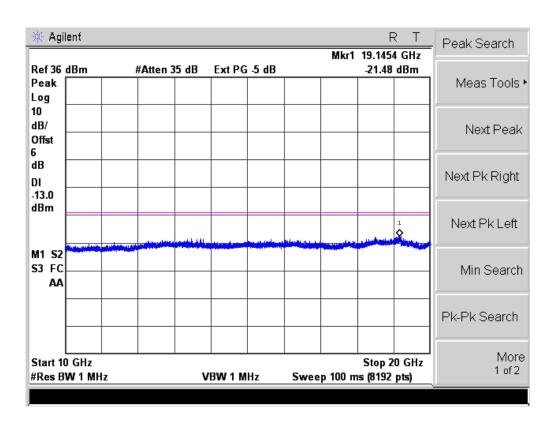



#### Conducted Emission Transmitting Mode CH 810 30MHz - 20GHz

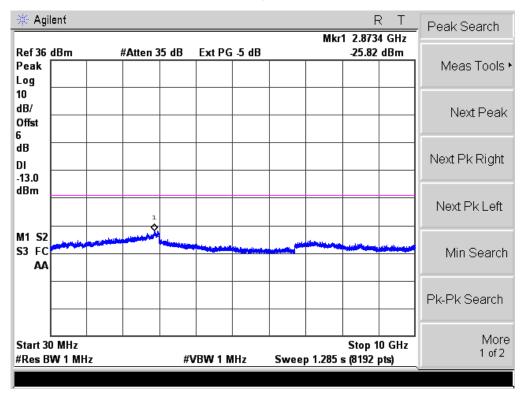

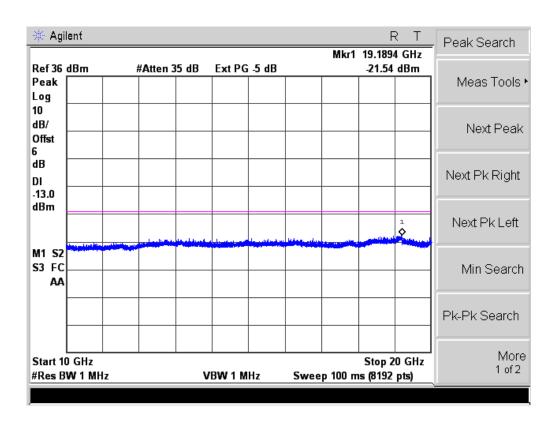



# CONDUCTED EMISSION IN GPRS1900 BAND Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

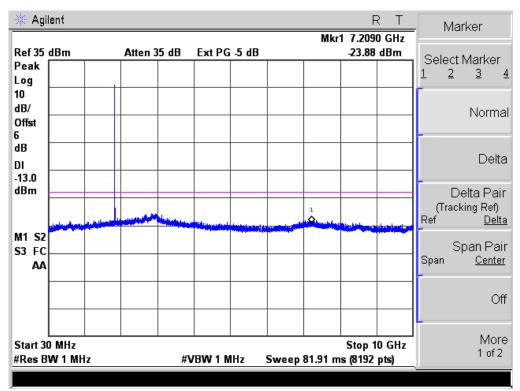

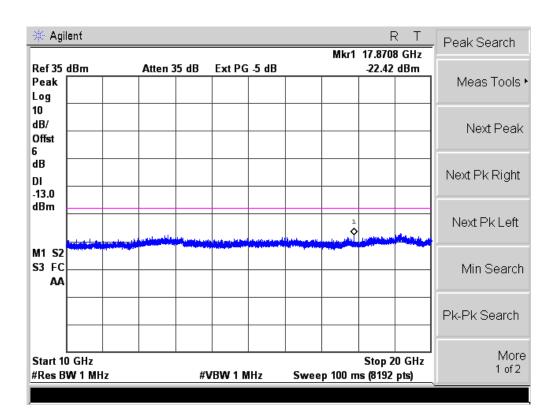



#### Conducted Emission Transmitting Mode CH 661 30MHz - 20GHz

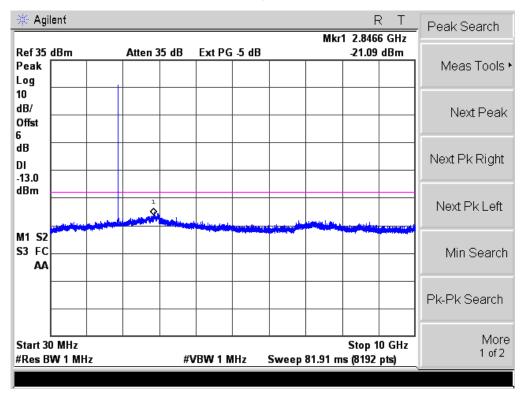

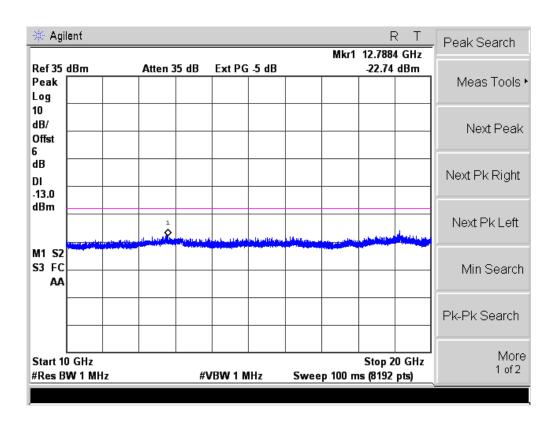



#### Conducted Emission Transmitting Mode CH 810 30MHz - 20GHz

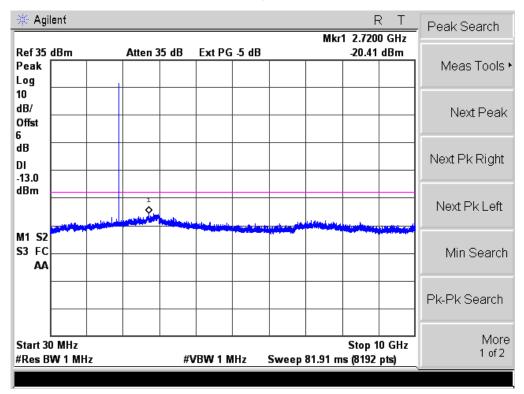

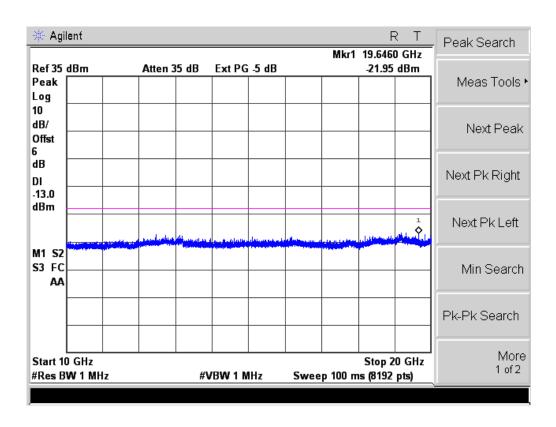



# CONDUCTED EMISSION IN EDGE 1900 BAND Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

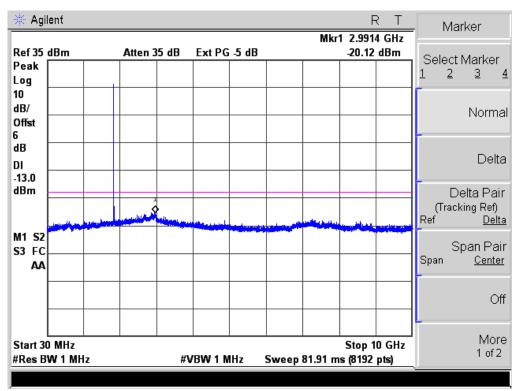

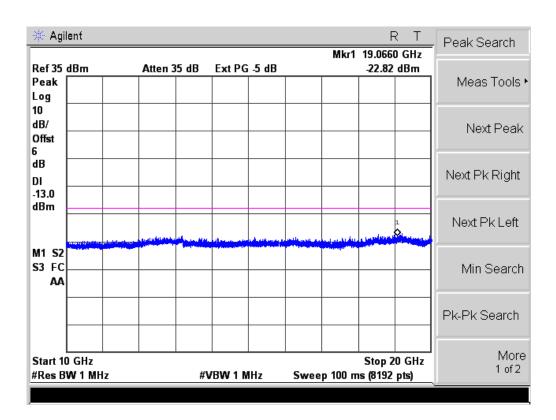



#### Conducted Emission Transmitting Mode CH 661 30MHz - 20GHz

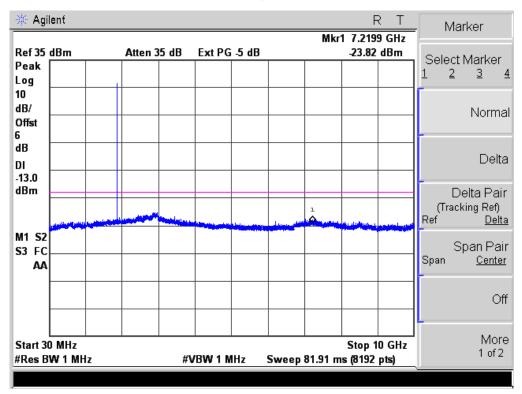

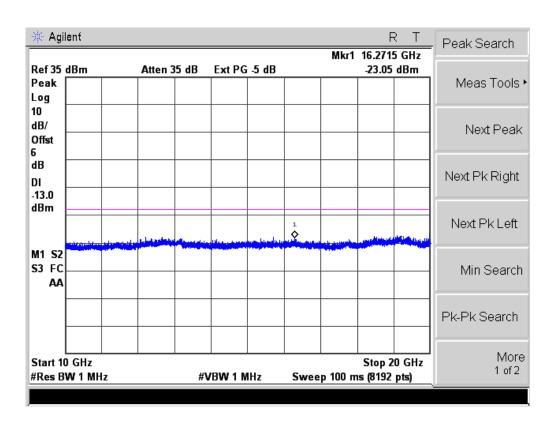


#### Conducted Emission Transmitting Mode CH 810 30MHz - 20GHz

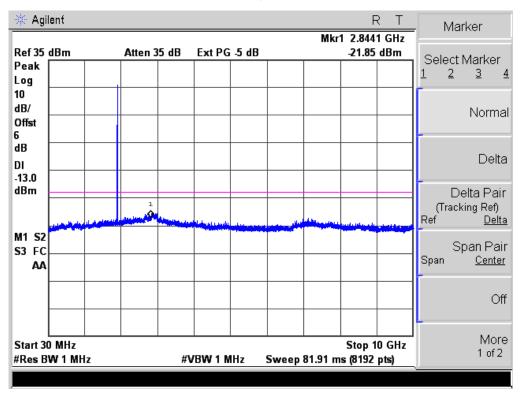


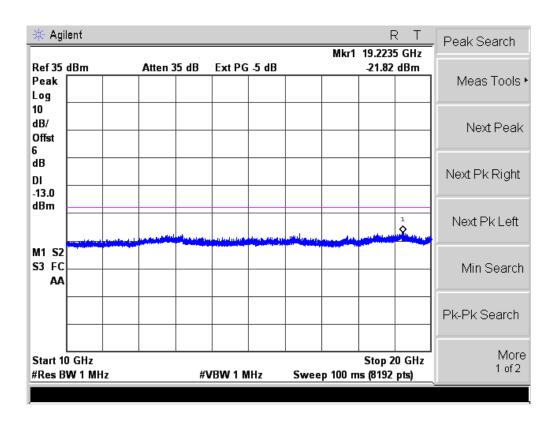


### CONDUCTED EMISSION IN UMTS band V Conducted Emission Transmitting Mode 4132 30MHz – 9GHz

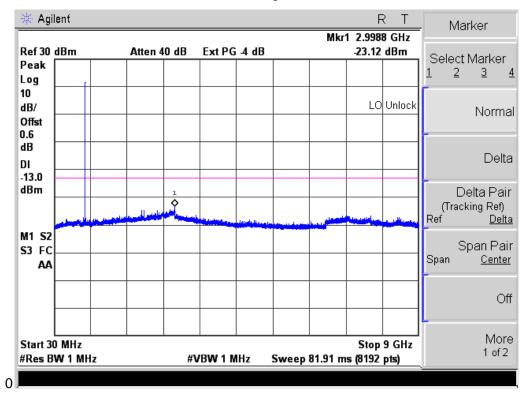


#### Conducted Emission Transmitting Mode CH 4183 30MHz - 9GHz

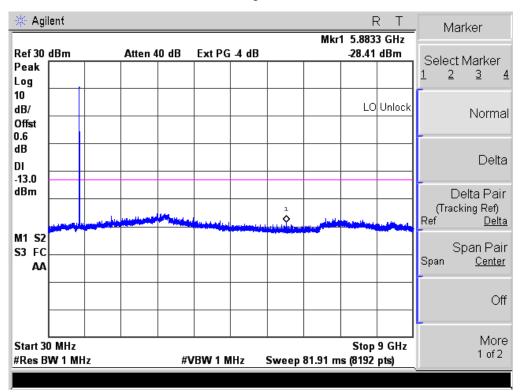


### Conducted Emission Transmitting Mode CH 4233 30MHz – 9GHz

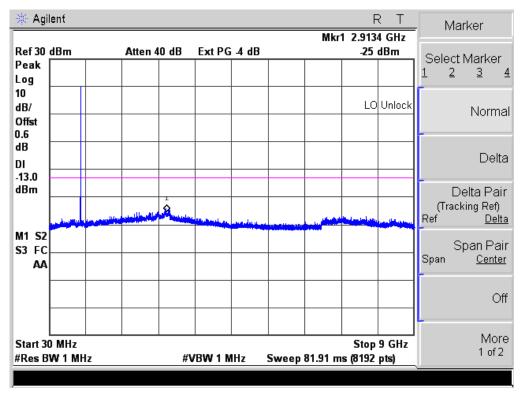

### CONDUCTED EMISSION IN UMTS HSDPA band V Conducted Emission Transmitting Mode 4132 30MHz – 9GHz

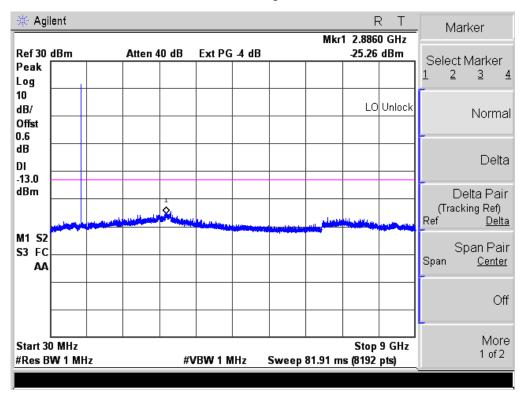


#### Conducted Emission Transmitting Mode CH 4183 30MHz - 9GHz

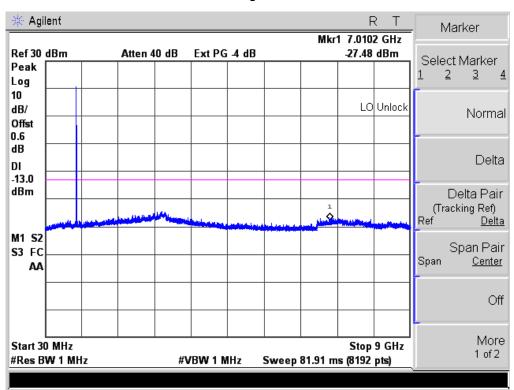


#### Conducted Emission Transmitting Mode CH 4233 30MHz - 9GHz 🔆 Agilent R Marker Mkr1 2.8893 GHz Ref 30 dBm Atten 40 dB Ext PG 4 dB -25.01 dBm Select Marker 1 2 3 Peak Log 10 LO Unlock dB/ Normal Offst 0.6 dΒ Delta DI -13.0 dBm Delta Pair (Tracking Ref) <u>Delta</u> M1 S2 Span Pair S3 FC Span <u>Center</u> AΑ Off More Start 30 MHz Stop 9 GHz 1 of 2 #Res BW 1 MHz #VBW 1 MHz Sweep 81.91 ms (8192 pts)


### CONDUCTED EMISSION IN UMTS HSUPA band V Conducted Emission Transmitting Mode 4132 30MHz – 9GHz

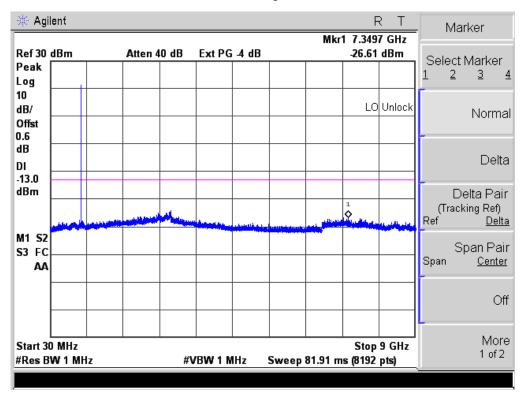


#### Conducted Emission Transmitting Mode CH 4183 30MHz - 9GHz

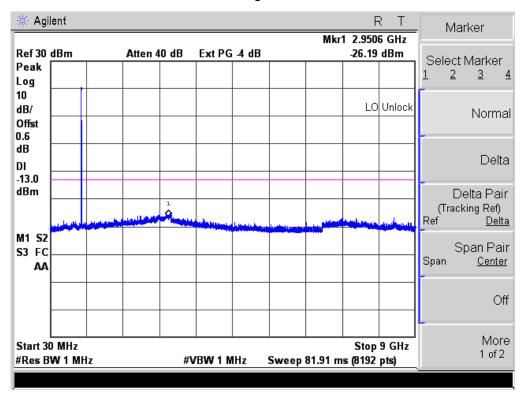


### Conducted Emission Transmitting Mode CH 4233 30MHz – 9GHz

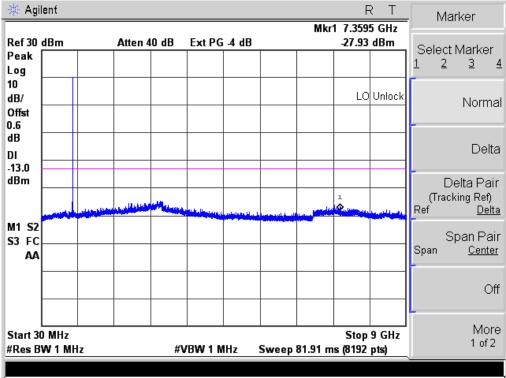



# CONDUCTED EMISSION IN UMTS band II Conducted Emission Transmitting Mode 9262 30MHz – 20GHz

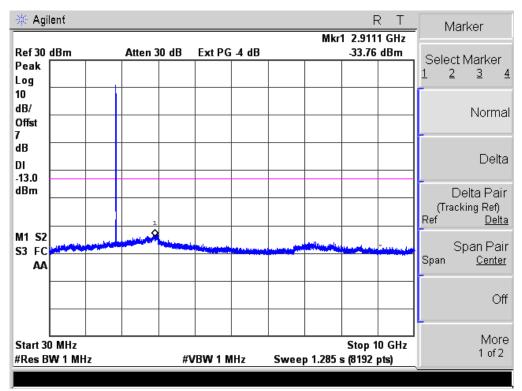

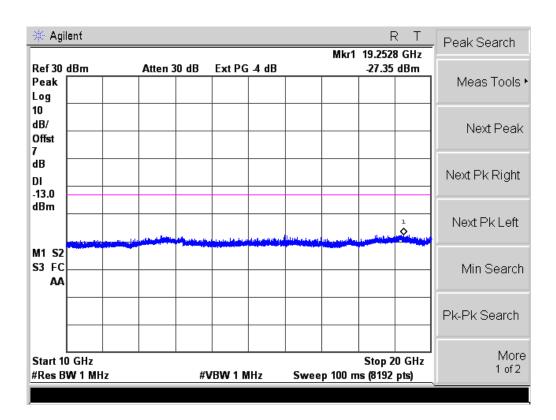



#### Conducted Emission Transmitting Mode CH 9400 30MHz - 20GHz

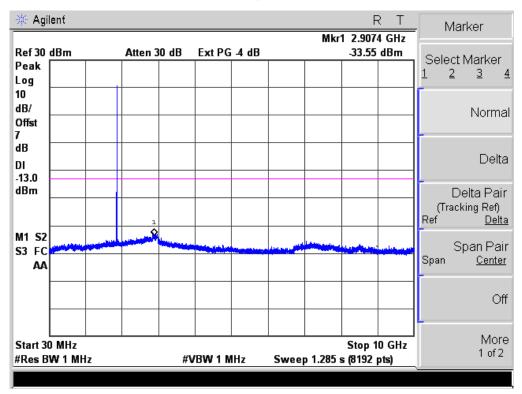

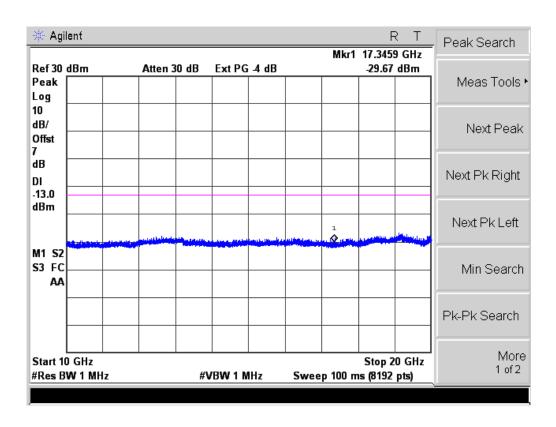



#### Conducted Emission Transmitting Mode CH 9538 30MHz - 20GHz

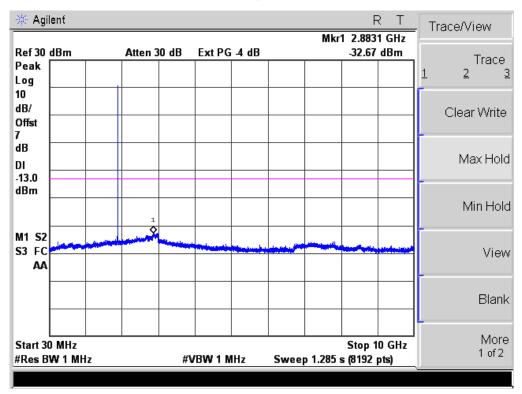

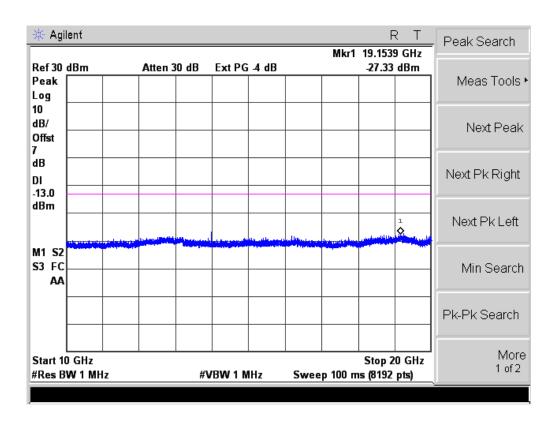



### CONDUCTED EMISSION IN UMTS HSDPA band II Conducted Emission Transmitting Mode 9262 30MHz – 20GHz

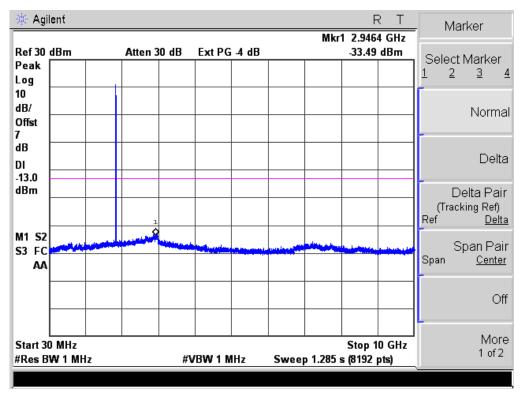

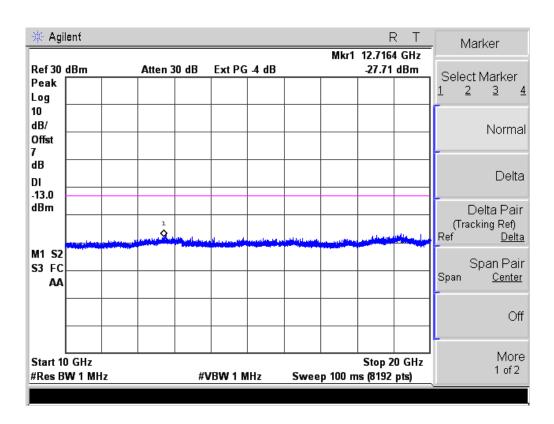



#### Conducted Emission Transmitting Mode CH 9400 30MHz - 20GHz

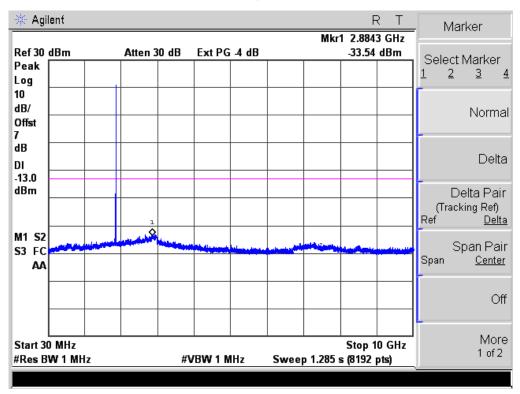

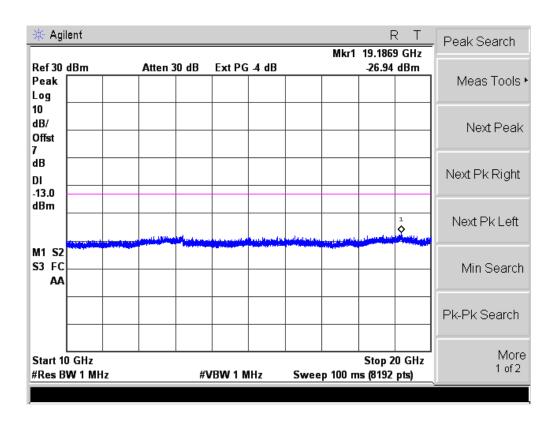



#### Conducted Emission Transmitting Mode CH 9538 30MHz - 20GHz

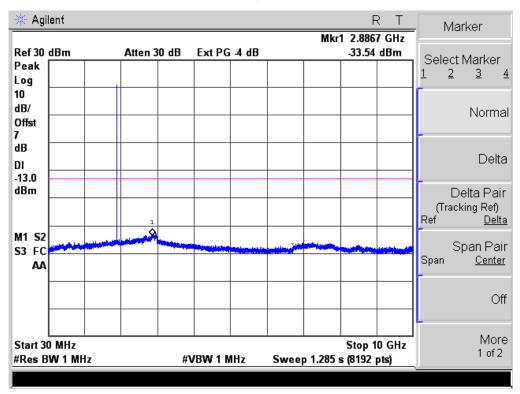

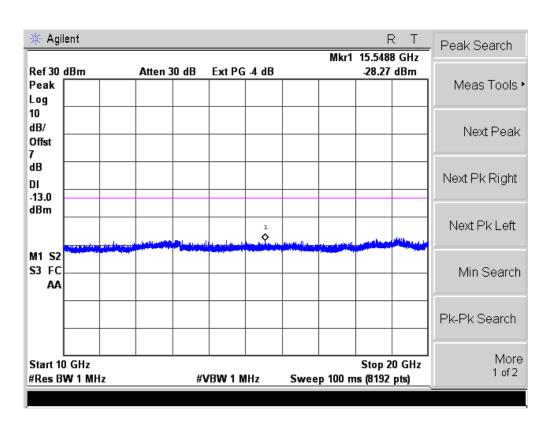



# CONDUCTED EMISSION IN UMTS HSUPA band II Conducted Emission Transmitting Mode 9262 30MHz – 20GHz

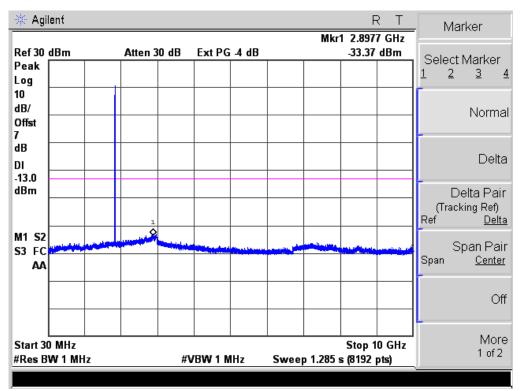

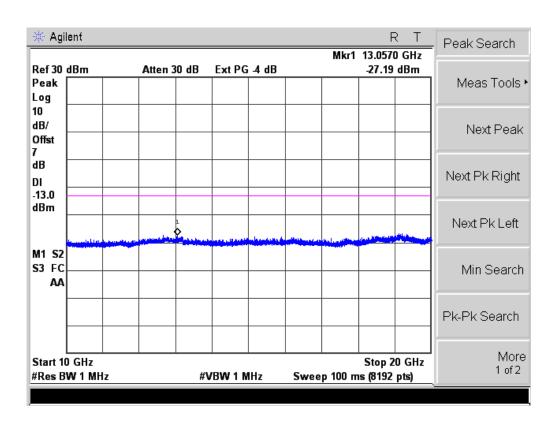



#### Conducted Emission Transmitting Mode CH 9400 30MHz - 20GHz

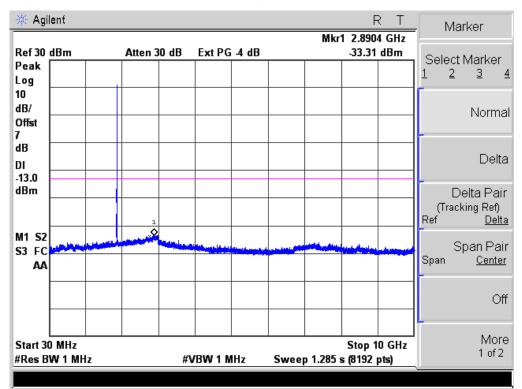

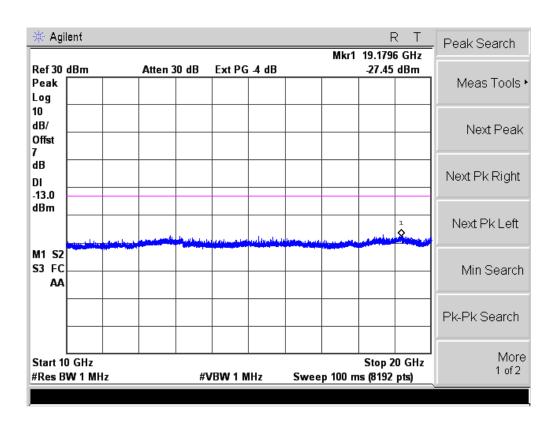


#### Conducted Emission Transmitting Mode CH 9538 30MHz - 20GHz

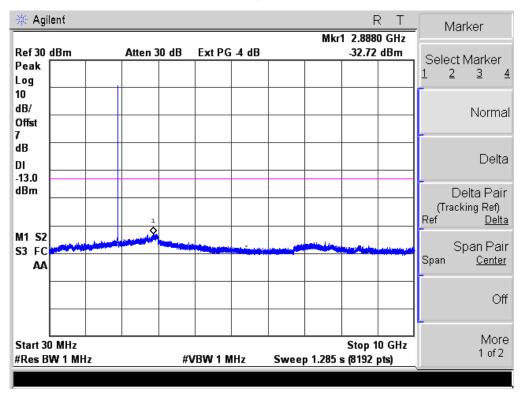

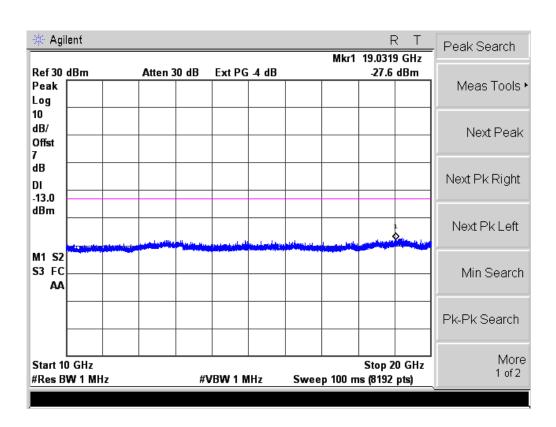



Report No. STS1410012F01
APPENDIX II
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)
EMISSION BANDWIDTH (-26dBC)

## Occupied Bandwidth (99%) GSM 850 BAND CH 128

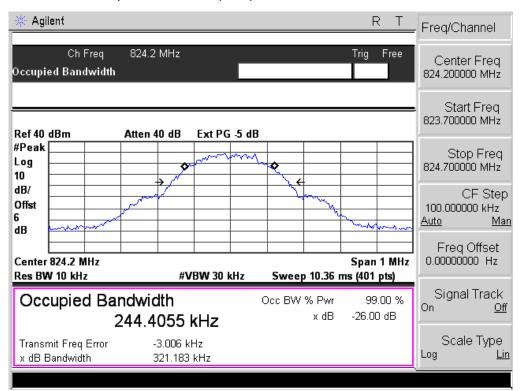


## Occupied Bandwidth (99%) GSM 850 BAND CH 190

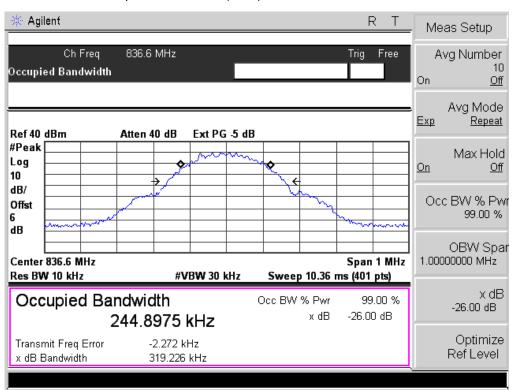


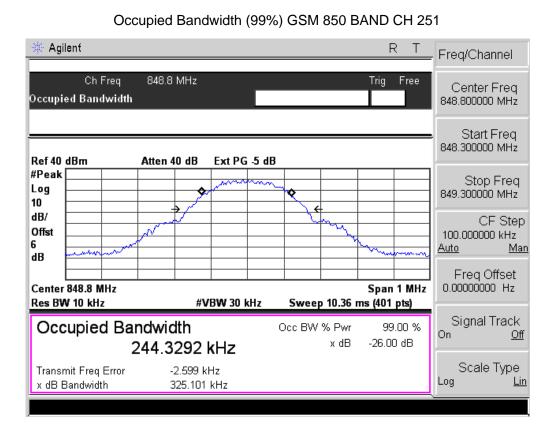


# Occupied Bandwidth (99%) GRPS 850 BAND CH 128

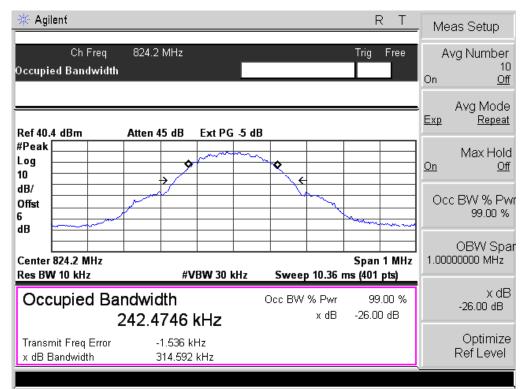


#### Occupied Bandwidth (99%) GRPS 850 BAND CH 190

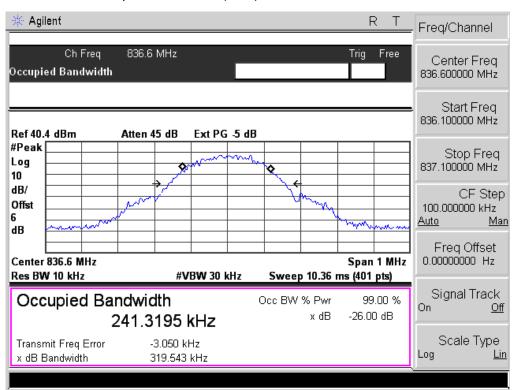


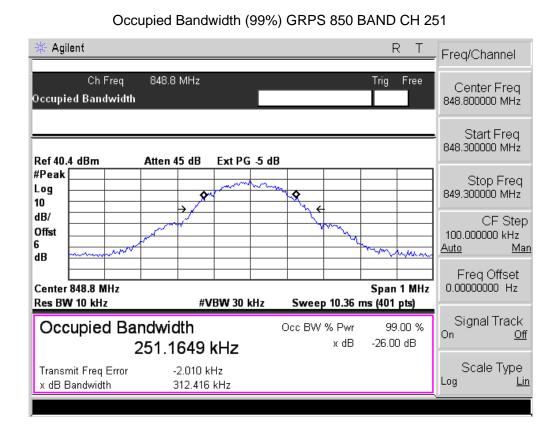


# Occupied Bandwidth (99%) EDGE 850 BAND CH 128

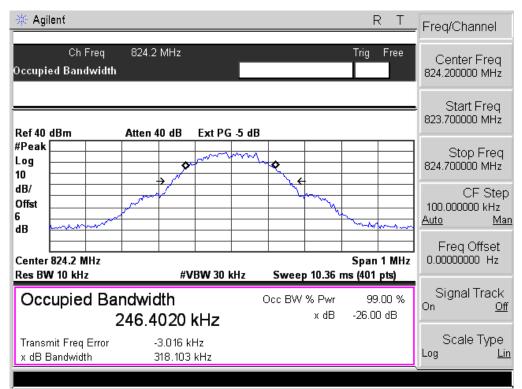


## Occupied Bandwidth (99%) EDGE 850 BAND CH 190

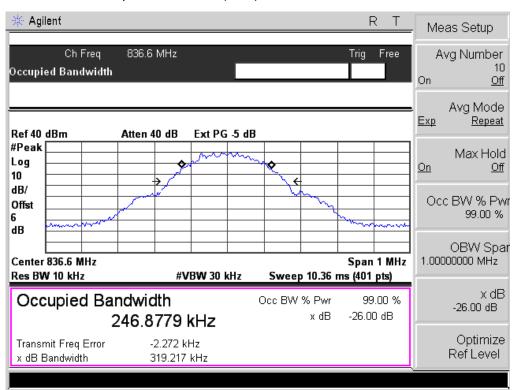


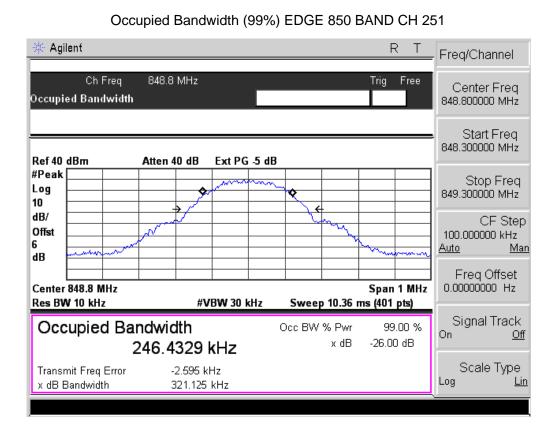


# Occupied Bandwidth (99%) PCS 1900 BAND CH 512

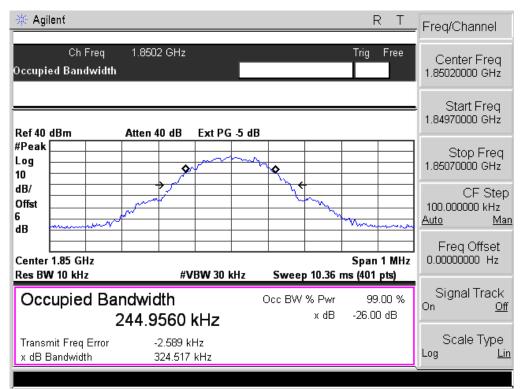


## Occupied Bandwidth (99%) PCS 1900 BAND CH 661

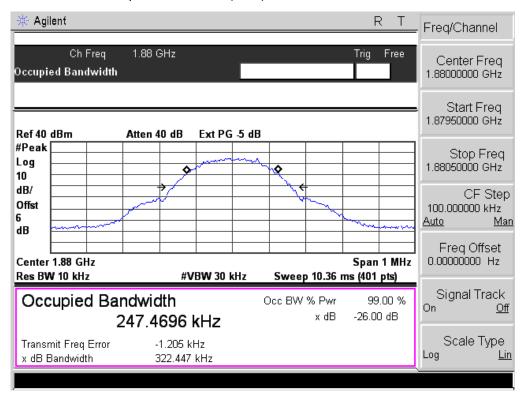


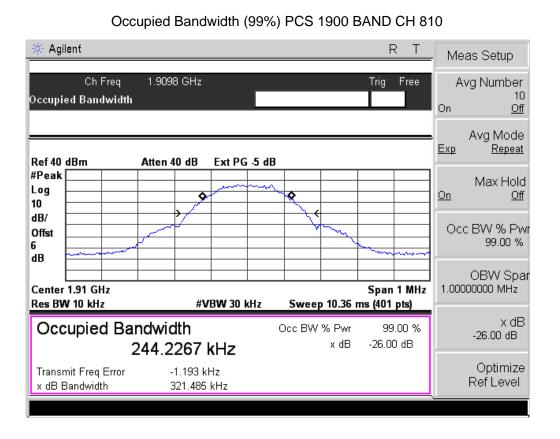


# Occupied Bandwidth (99%) GPRS 1900 BAND CH 512

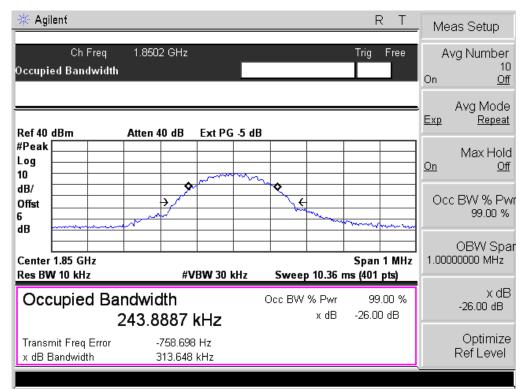


#### Occupied Bandwidth (99%) GPRS 1900 BAND CH 661

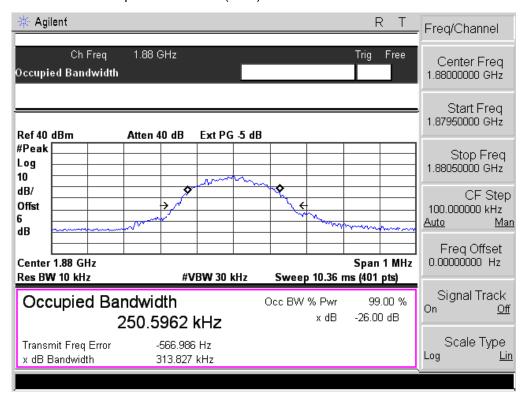


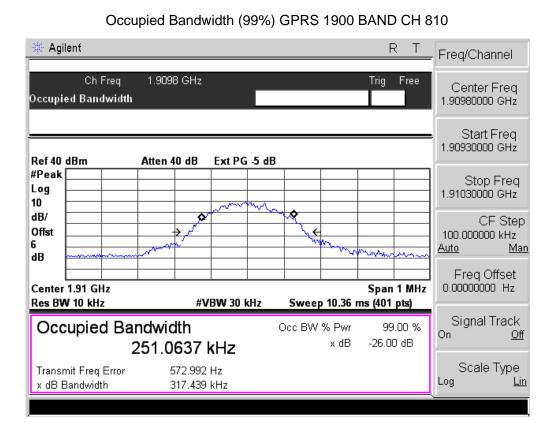


# Occupied Bandwidth (99%) EDGE 1900 BAND CH 512

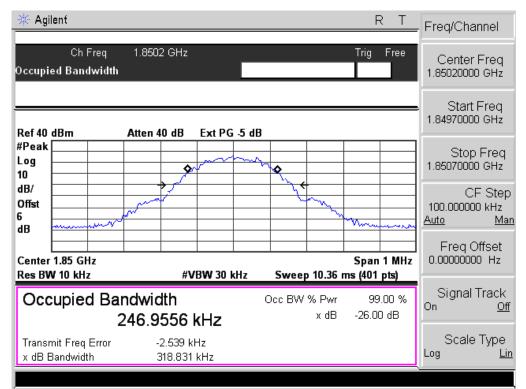


#### Occupied Bandwidth (99%) EDGE 1900 BAND CH 661

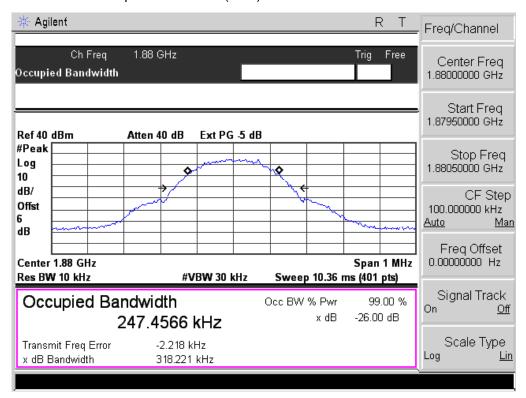


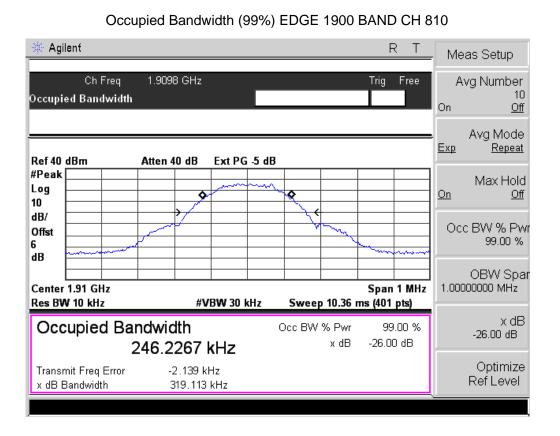

# Occupied Bandwidth (99%) UMTS BAND V CH 4132

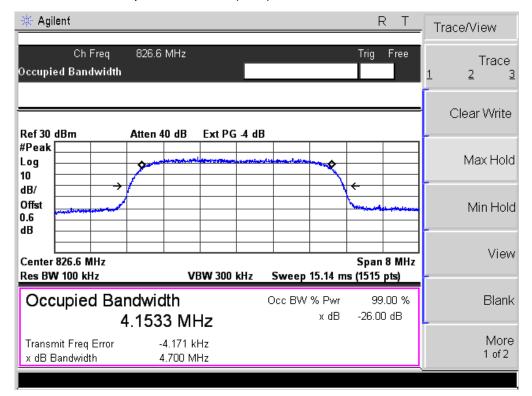


# Occupied Bandwidth (99%) UMTS BAND V CH 4183

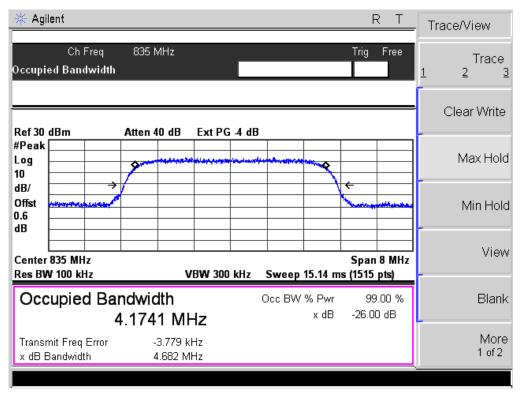


#### Occupied Bandwidth (99%) UMTS BAND V CH 4233 Agilent Meas Setup Trig Free Ch Freq 846.4 MHz Avg Number Occupied Bandwidth On <u>Off</u> Avg Mode Ехр Repeat Ref 30 dBm Atten 40 dB Ext PG 4 dB #Peak Max Hold Log <u>On</u> <u>Off</u> 10 dB/ Occ BW % Pwr Offst 99.00 % 0.6 dΒ **OBW Spar** Center 846.4 MHz Span 8 MHz 8.00000000 MHz Res BW 100 kHz VBW 300 kHz Sweep 15.14 ms (1515 pts) x dBOccupied Bandwidth Occ BW % Pwr 99.00 % -26.00 dB x dB -26.00 dB 4.1596 MHz Optimize Transmit Freq Error -25.894 kHz Ref Level x dB Bandwidth 4.694 MHz

# Occupied Bandwidth (99%) UMTS HSDPA BAND V CH 4132

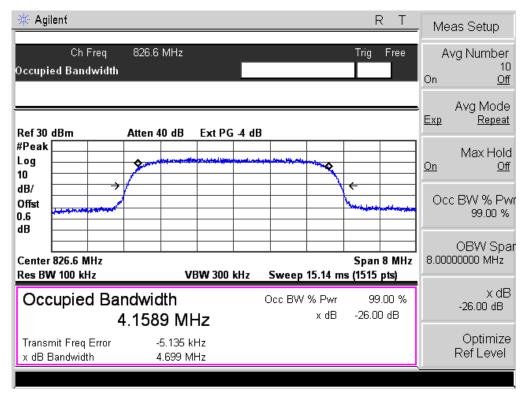


#### Occupied Bandwidth (99%) UMTS HSDPA BAND V CH 4183

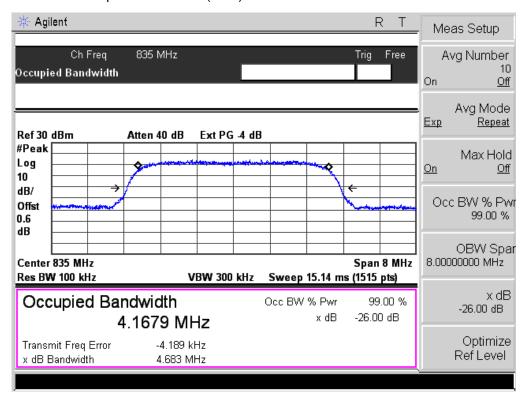



#### Occupied Bandwidth (99%) UMTS HSDPA BAND V CH 4233 Agilent Meas Setup Trig Free Ch Freq 846.4 MHz Avg Number Occupied Bandwidth On <u>Off</u> Avg Mode Ехр Repeat Ref 30 dBm Atten 40 dB Ext PG 4 dB #Peak Max Hold Log <u>On</u> <u>Off</u> 10 dB/ Occ BW % Pwr Offst 99.00 % 0.6 dΒ **OBW Spar** Center 846.4 MHz Span 8 MHz 8.00000000 MHz Res BW 100 kHz VBW 300 kHz Sweep 15.14 ms (1515 pts) x dBOccupied Bandwidth Occ BW % Pwr 99.00 % -26.00 dB x dB -26.00 dB 4.1633 MHz Optimize Transmit Freq Error -26.178 kHz Ref Level x dB Bandwidth 4.689 MHz

# Occupied Bandwidth (99%) UMTS HSUPA BAND V CH 4132

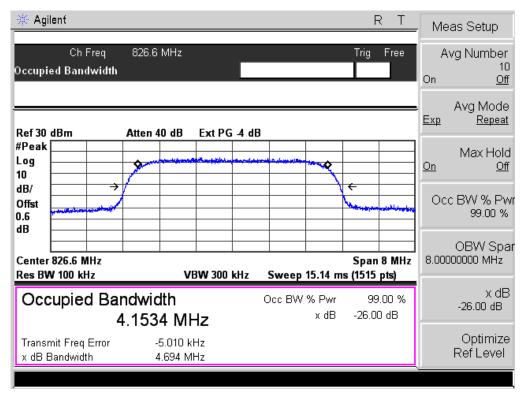


#### Occupied Bandwidth (99%) UMTS HSUPA BAND V CH 4183

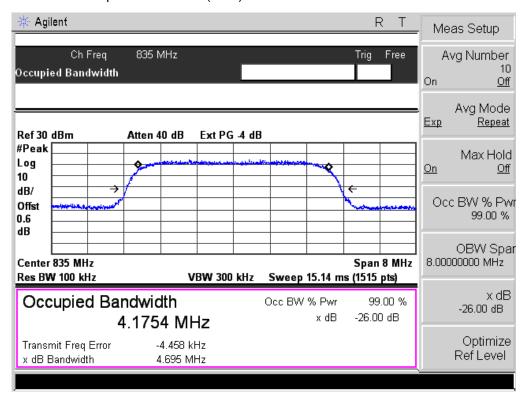


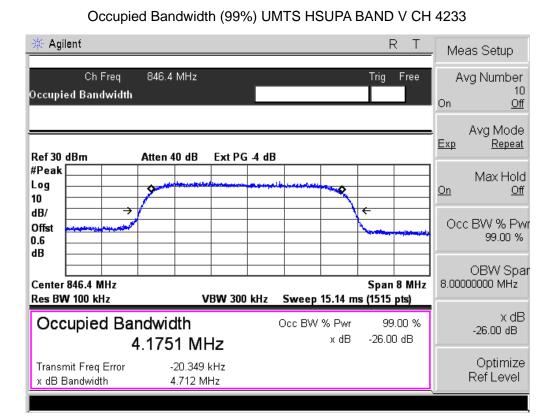


# Occupied Bandwidth (99%) UMTS BAND II CH 9262

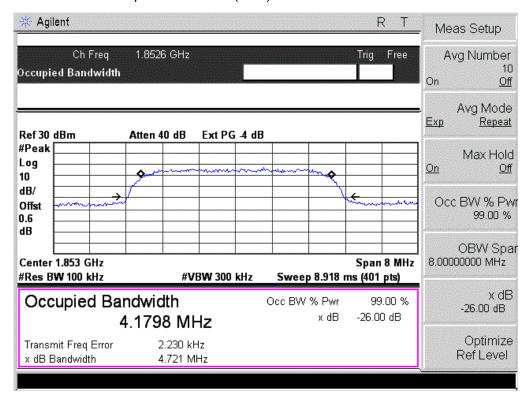


#### Occupied Bandwidth (99%) UMTS BAND II CH 9400

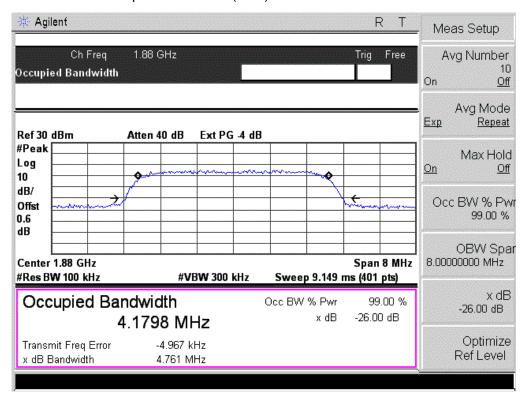


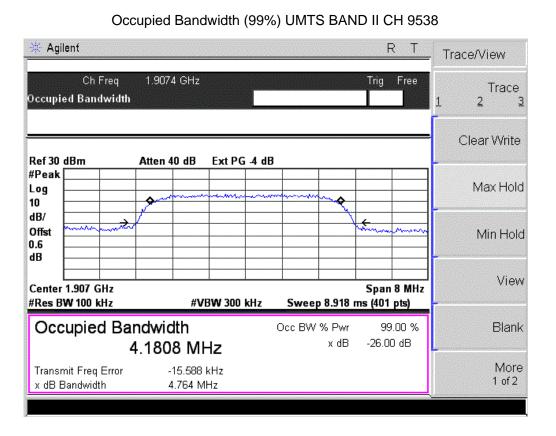

# Occupied Bandwidth (99%) UMTS HSDPA BAND II CH 9262

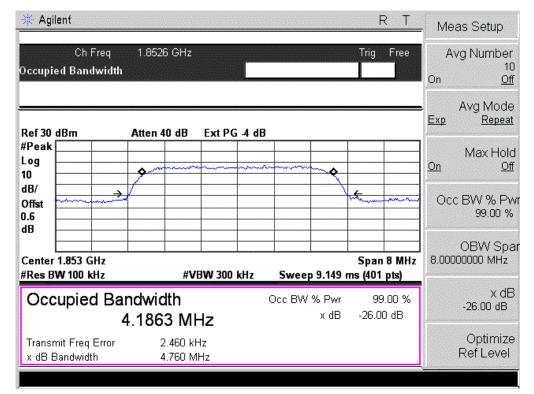


#### Occupied Bandwidth (99%) UMTS HSDPA BAND II CH 9400

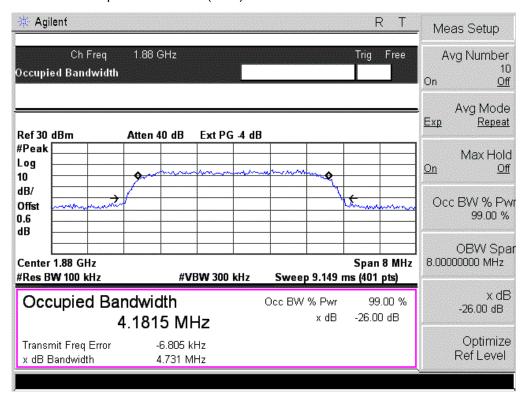


#### Occupied Bandwidth (99%) UMTS HSDPA BAND II CH 9538 Agilent Meas Setup Trig Free Ch Freq 1.9074 GHz Avg Number Occupied Bandwidth On Off Avg Mode Ехр Repeat Ref 30 dBm Atten 40 dB Ext PG 4 dB #Peak Max Hold Log <u>On</u> Off 10 dB/ Occ BW % Pwr Offst 99.00 % 0.6 dΒ **OBW Spar** Center 1.907 GHz Span 8 MHz 8.00000000 MHz #Res B**W** 100 kHz #VBW 300 kHz Sweep 8.918 ms (401 pts) x dBOccupied Bandwidth Occ BW % Pwr 99.00 % -26.00 dB x dB -26.00 dB 4.1727 MHz Optimize Transmit Freq Error -7.409 kHz Ref Level 4.771 MHz x dB Bandwidth

# Occupied Bandwidth (99%) UMTS HSUPA BAND II CH 9262

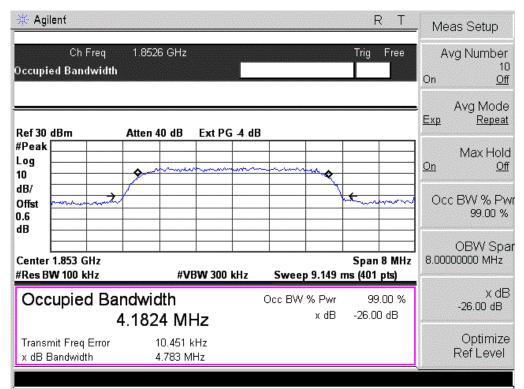


#### Occupied Bandwidth (99%) UMTS HSUPA BAND II CH 9400

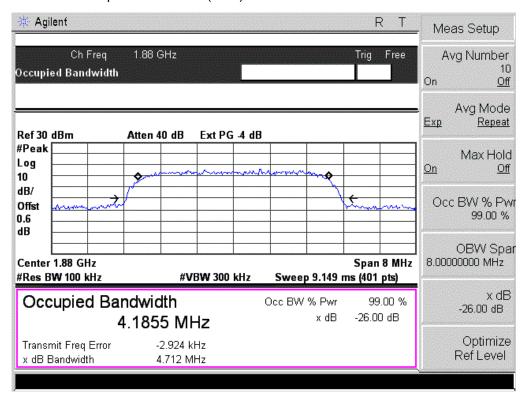


#### Occupied Bandwidth (99%) UMTS HSUPA BAND II CH 9538 Agilent Meas Setup Trig Free Ch Freq 1.9074 GHz Avg Number Occupied Bandwidth On Off Avg Mode Ехр Repeat Ref 30 dBm Atten 40 dB Ext PG 4 dB #Peak Max Hold Log <u>On</u> Off 10 dB/ Occ BW % Pwr Offst 99.00 % 0.6 dΒ **OBW Spar** Center 1.907 GHz Span 8 MHz 8.00000000 MHz #Res B**W** 100 kHz #VBW 300 kHz Sweep 8.918 ms (401 pts) x dBOccupied Bandwidth Occ BW % Pwr 99.00 % -26.00 dB x dB -26.00 dB 4.2046 MHz Optimize Transmit Freq Error -15.205 kHz Ref Level 4.746 MHz x dB Bandwidth

	Report No. STS1410012F01
APPENDIX III	
TEST PLOTS FOR BAND EDGE	ES


# Low Band Edge GSM 850 BAND CH 128

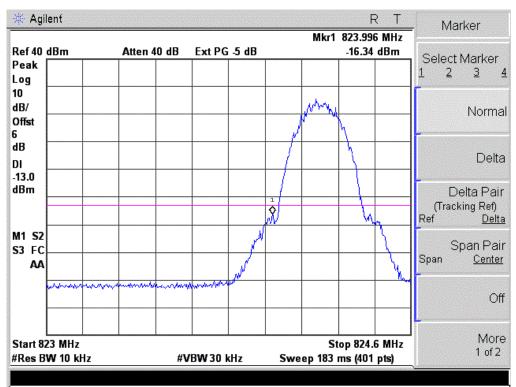


# High Band Edge GSM 850 BAND CH 251

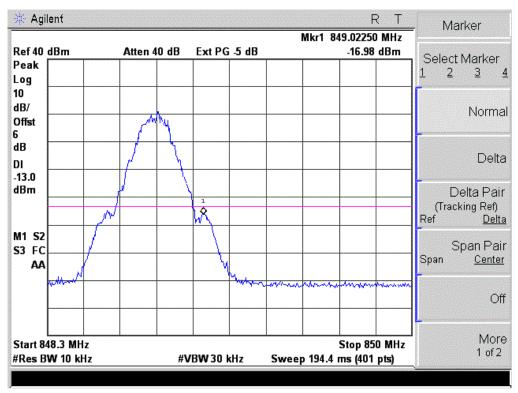


# Low Band Edge GPRS 850 BAND CH 128

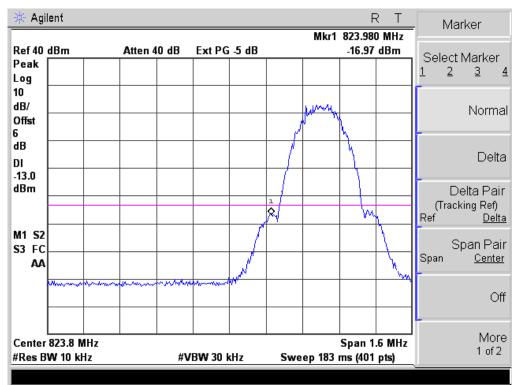


## High Band Edge GPRS 850 BAND CH 251

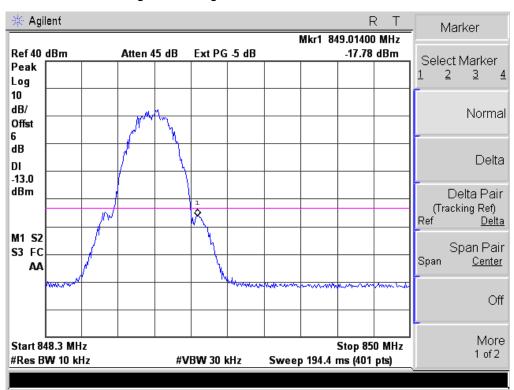


# Low Band Edge EDGE 850 BAND CH 128

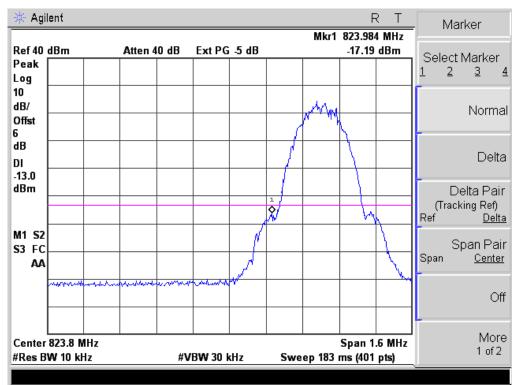


## High Band Edge EDGE 850 BAND CH 251

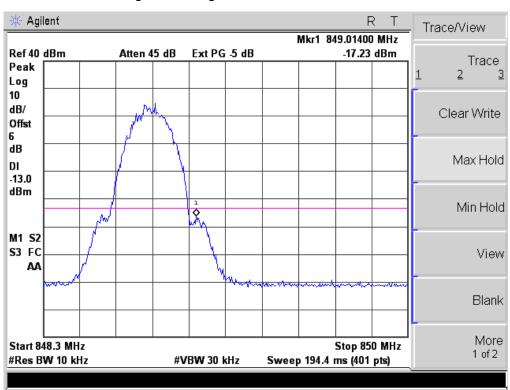


# Low Band Edge PCS 1900 BAND CH 512

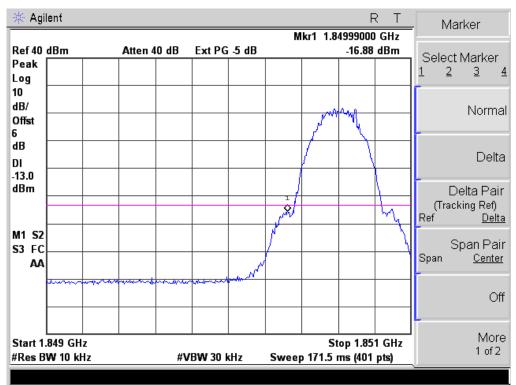


# High Band Edge PCS 1900 BAND CH 810

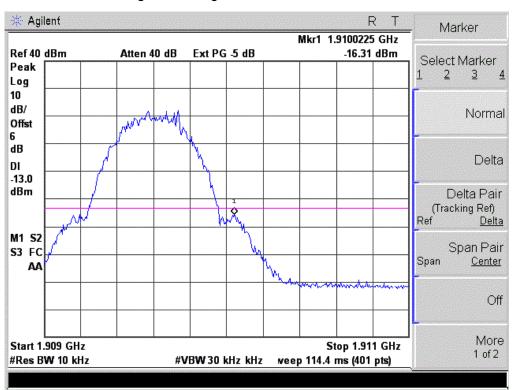


# Low Band Edge GPRS 1900 BAND CH 512

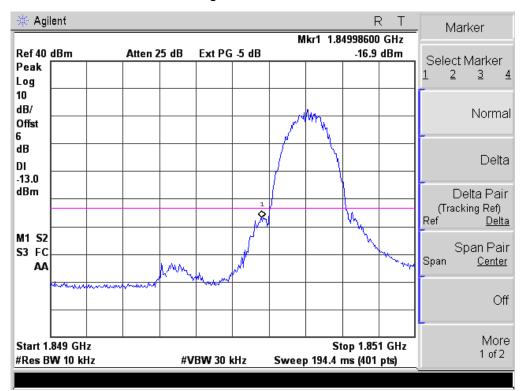


# High Band Edge GPRS 1900 BAND CH 810

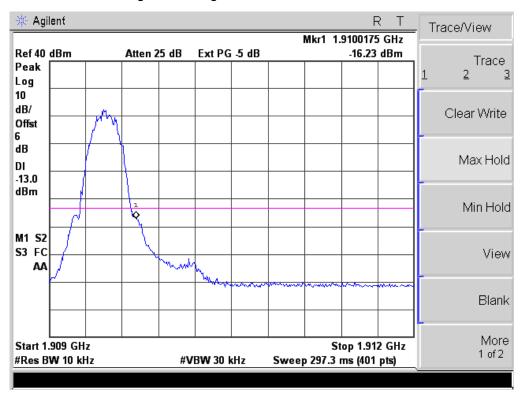


# Low Band Edge EDGE 1900 BAND CH 512

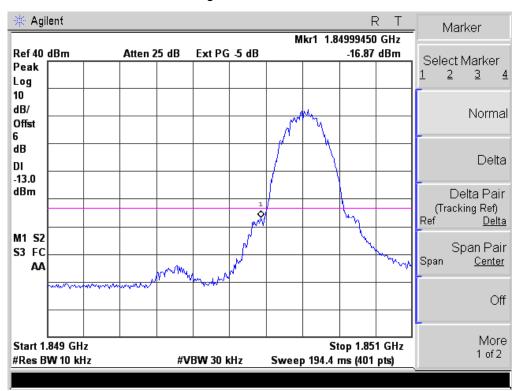


High Band Edge EDGE 1900 BAND CH 810

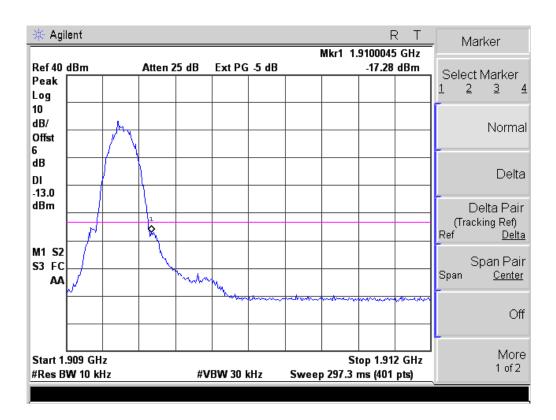


# Low Band Edge UMTS BAND V CH 4132

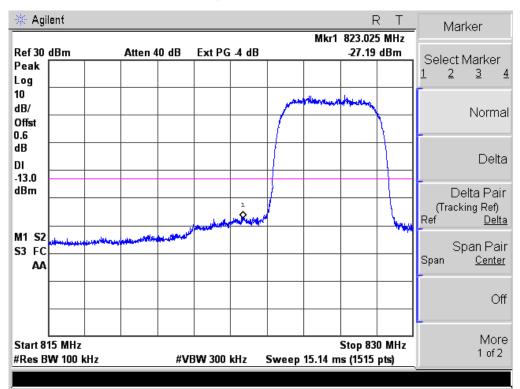


## High Band Edge UMTS BAND V CH 4183

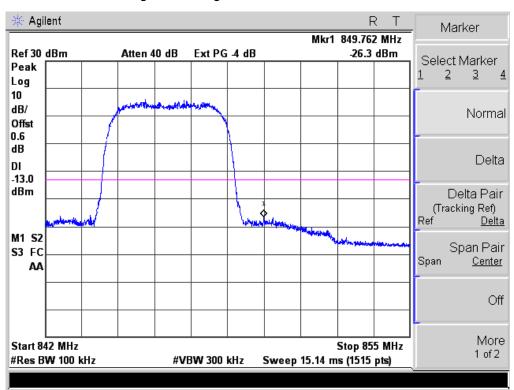


# Low Band Edge HSDPA BAND V CH 4233

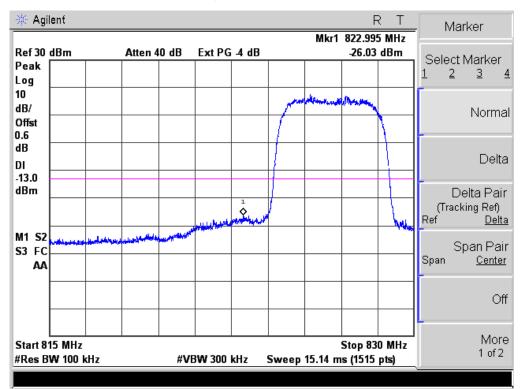


## High Band Edge HSDPA BAND V CH 4132

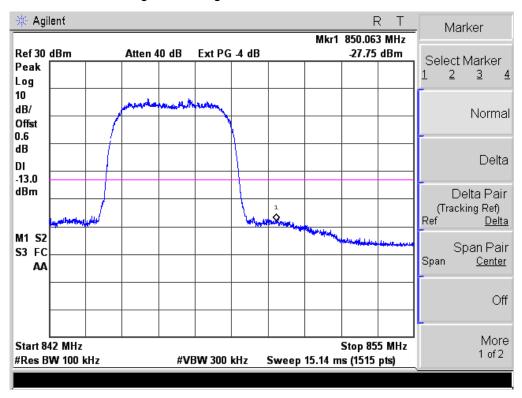


# Low Band Edge HSUPA BAND V CH 4183

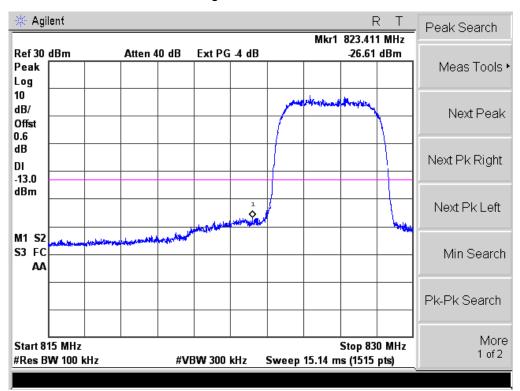


# High Band Edge HSUPA BAND V CH 4233

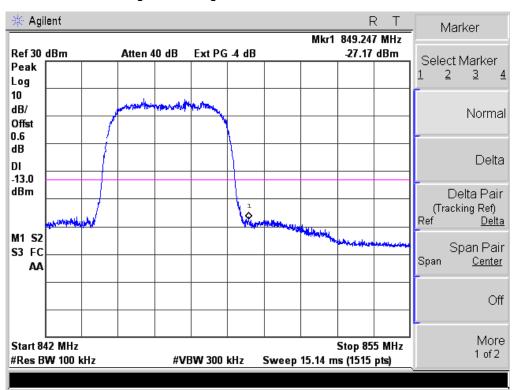


# Low Band Edge UMTS BAND II CH 9262

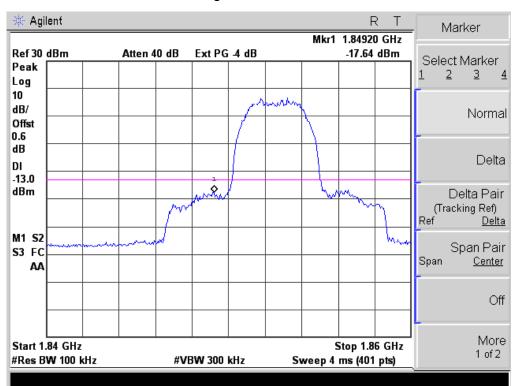


## High Band Edge UMTS BAND II CH 9400

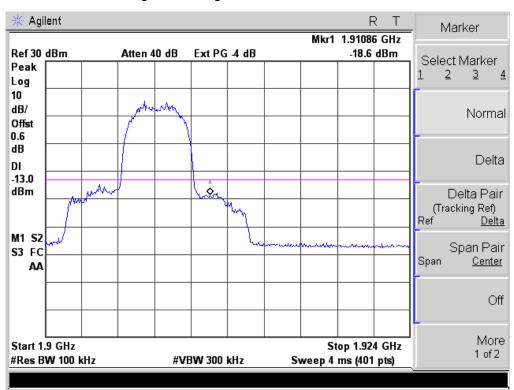


## Low Band Edge HSDPA BAND II CH 9538

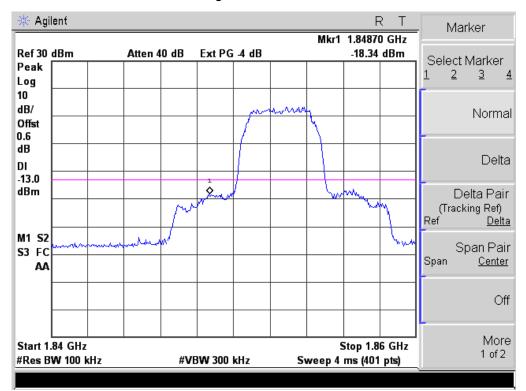


## High Band Edge HSDPA BAND II CH 9262

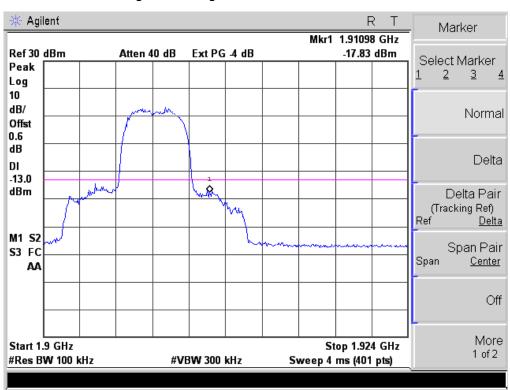

## Low Band Edge HSUPA BAND II CH 9400

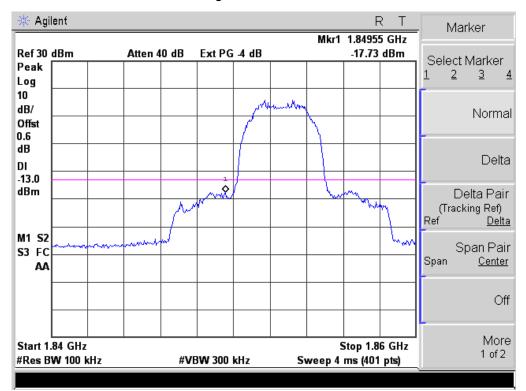



# High Band Edge HSUPA BAND II CH 9538

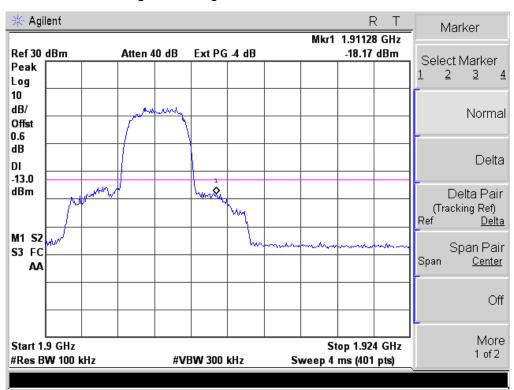

# APPENDIX IV PHOTOGRAPHS OF TEST SETUP

RADIATED SPURIOUS EMISSION

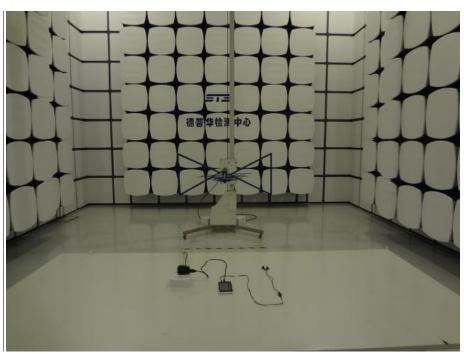

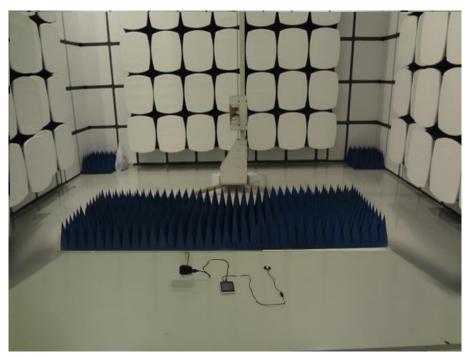

----END OF REPORT----