

Appendix A

RF Test Data for BT V5.0(BDR/EDR) (Conducted Measurement)

Product Name: Monoprice BT-205 Bluetooth Over Ear Headphone

Trade Mark: Monoprice

Test Model: 41840

Environmental Conditions


Temperature:	24.6° C
Relative Humidity:	54.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Ken He
Supervised by:	Li Huan

A.1 Maximum Conducted Peak Output Power


Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
GFSK	LCH	1.866	21	PASS
	MCH	0.730	21	PASS
	HCH	-0.494	21	PASS
$\pi/4$ DQPSK	LCH	4.081	21	PASS
	MCH	2.981	21	PASS
	HCH	1.769	21	PASS
8DPSK	LCH	4.550	21	PASS
	MCH	3.447	21	PASS
	HCH	2.262	21	PASS

Test Graphs


GFSK/LCH

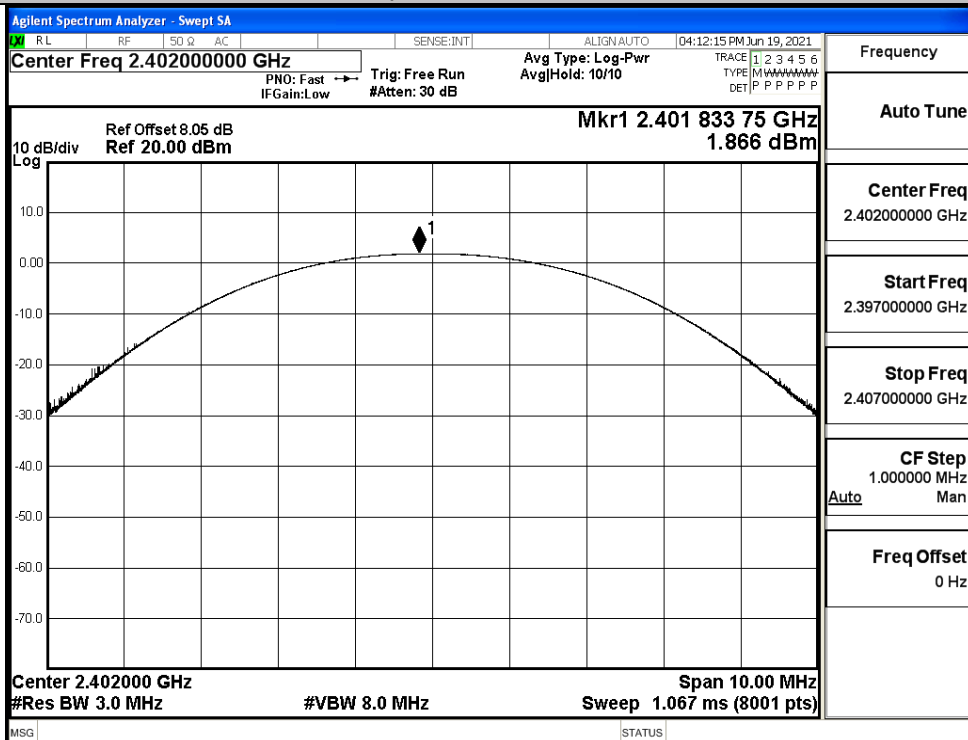


GFSK/MCH


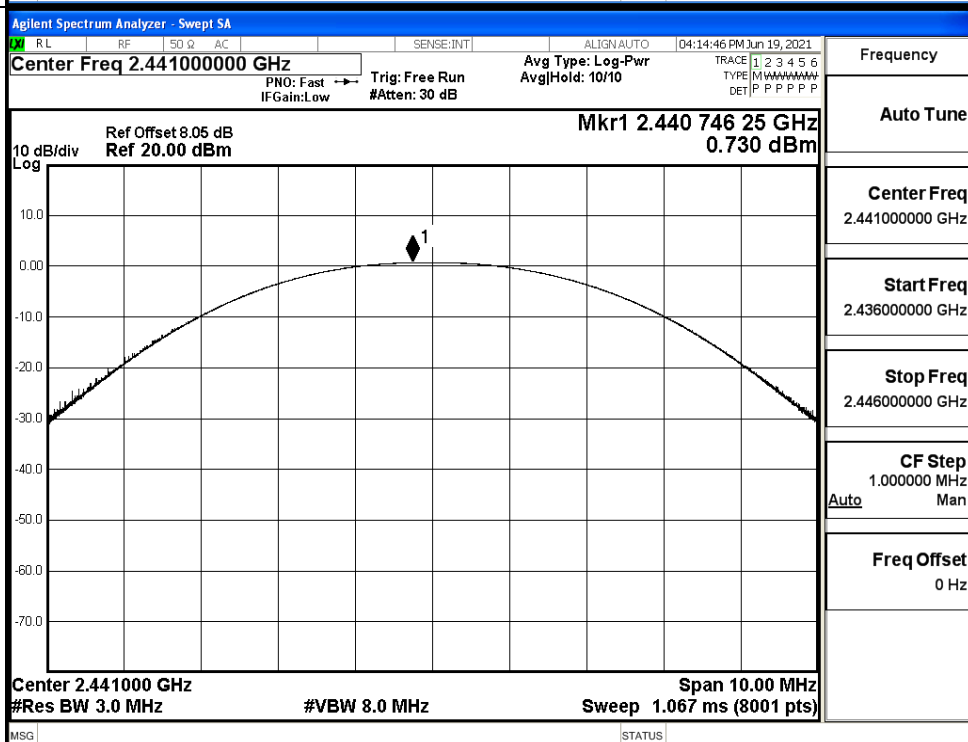


GFSK/HCH

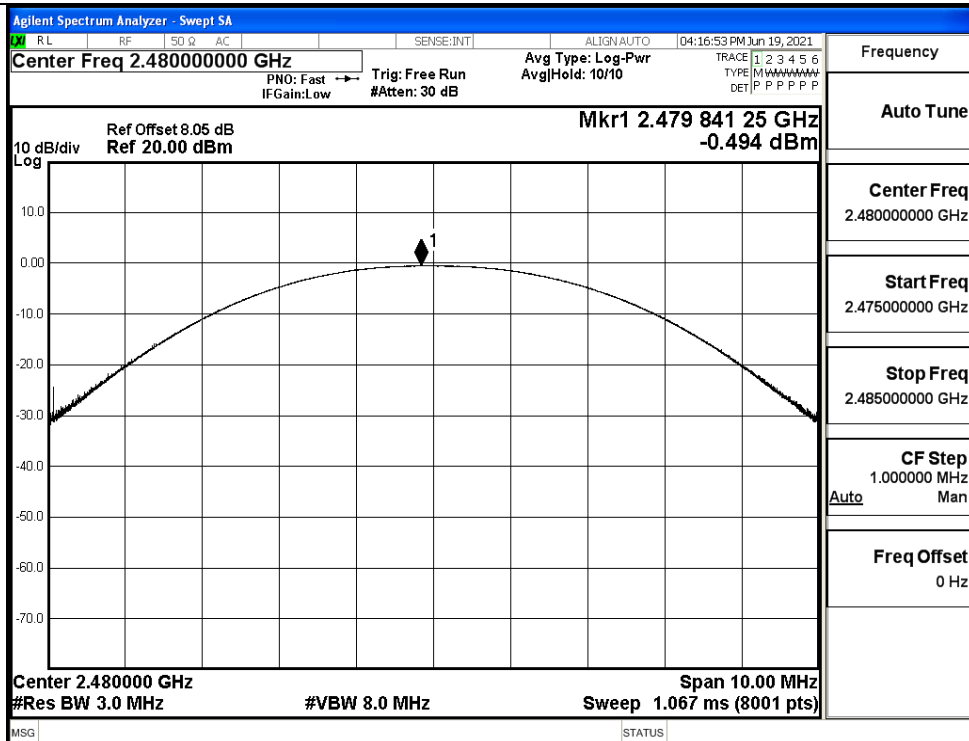


$\pi/4$ DQPSK/LCH

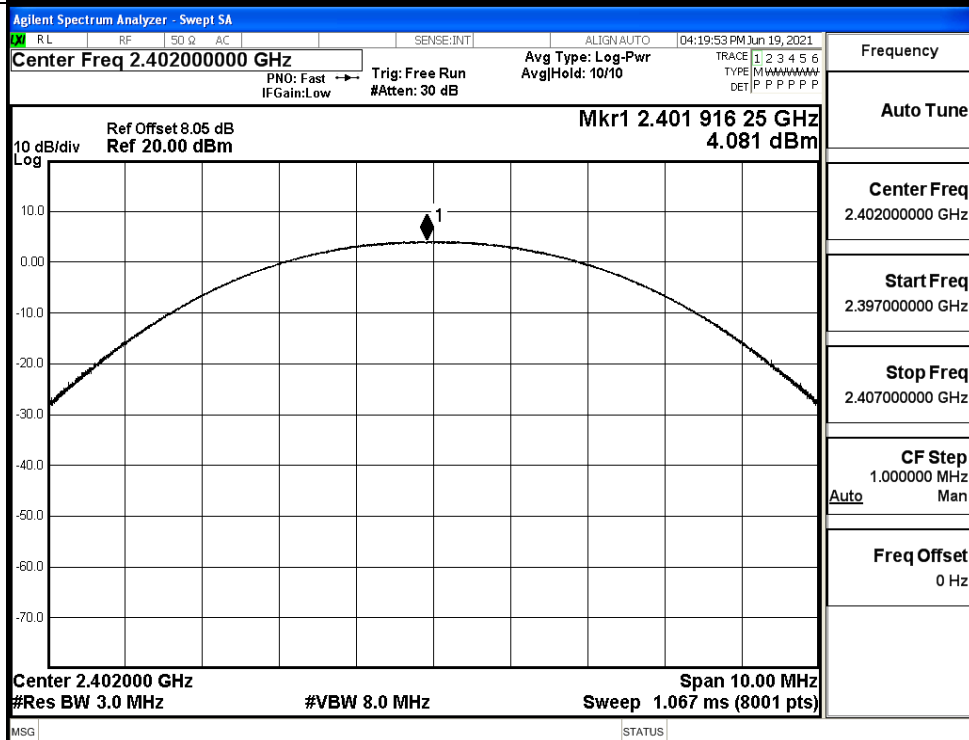


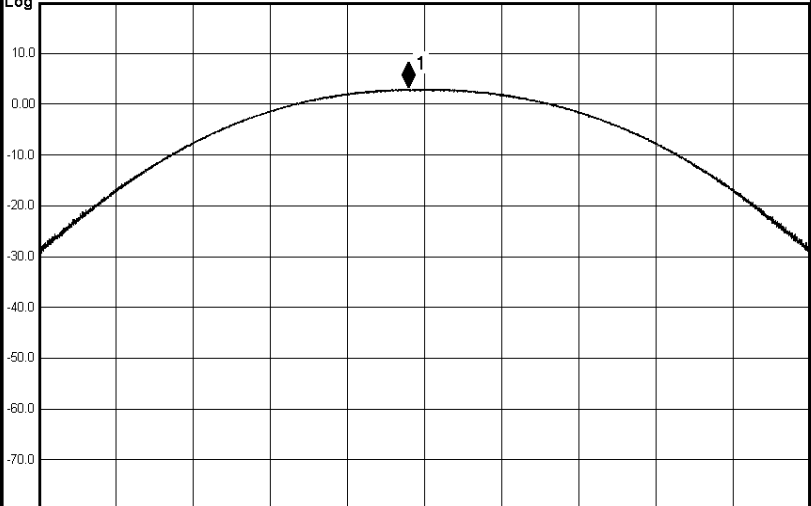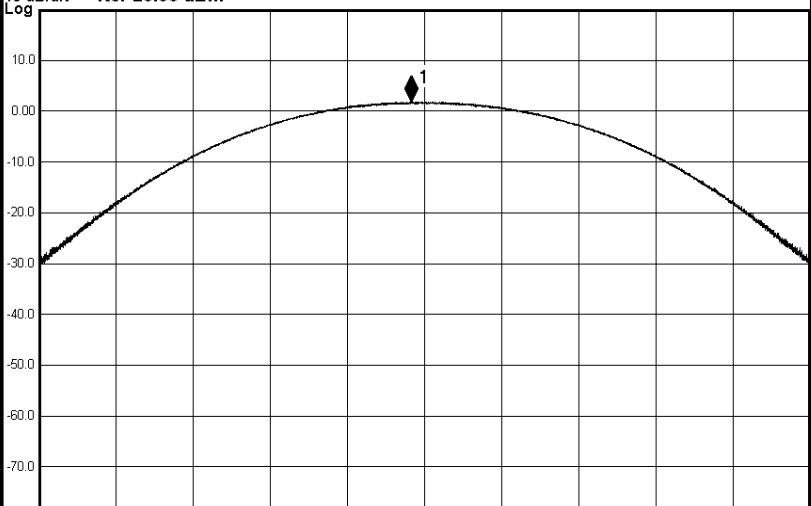$\pi/4$DQPSK/MCH	Agilent Spectrum Analyzer - Swept SA RL RF 50 Q AC SENSE:INT ALIGN: AUTO 04:22:30 PM Jun 19, 2021 Center Freq 2.441000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr AvgHold: 10/10 Mkr1 2.440 791 25 GHz 2.981 dBm 10 dB/div Log Ref Offset 8.05 dB Ref 20.00 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 10.00 MHz Sweep 1.067 ms (8001 pts) MSG STATUS  Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.436000000 GHz Stop Freq 2.446000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz
$\pi/4$DQPSK/HCH	Agilent Spectrum Analyzer - Swept SA RL RF 50 Q AC SENSE:INT ALIGN: AUTO 04:24:10 PM Jun 19, 2021 Center Freq 2.480000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr AvgHold: 10/10 Mkr1 2.479 828 75 GHz 1.769 dBm 10 dB/div Log Ref Offset 8.05 dB Ref 20.00 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 10.00 MHz Sweep 1.067 ms (8001 pts) MSG STATUS  Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.475000000 GHz Stop Freq 2.485000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz


8DPSK/LCH

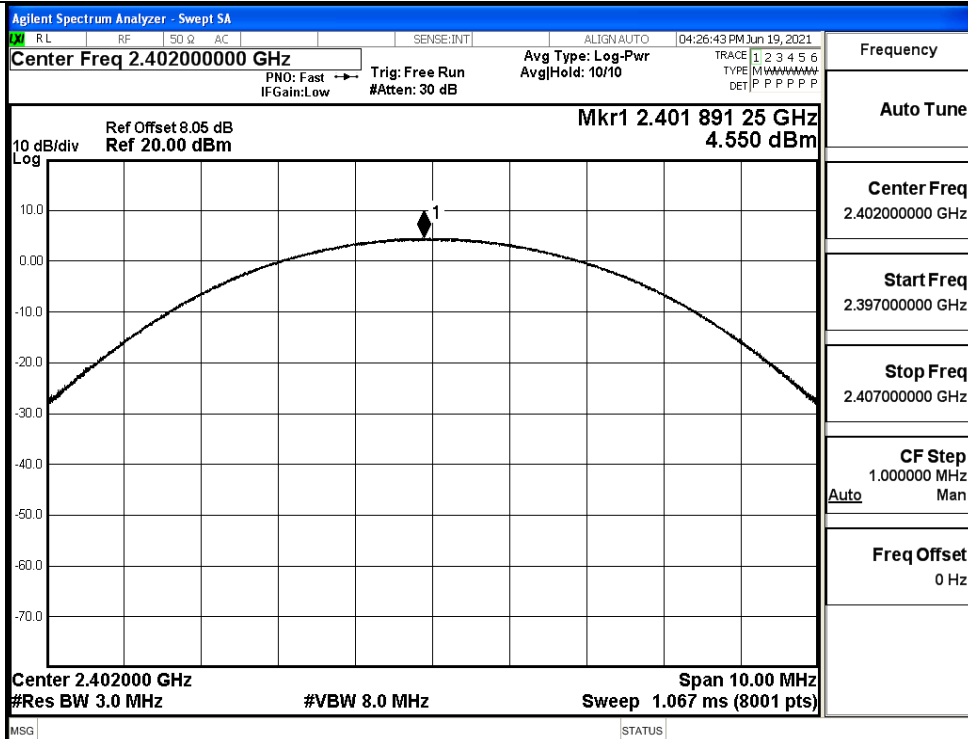

8DPSK/MCH

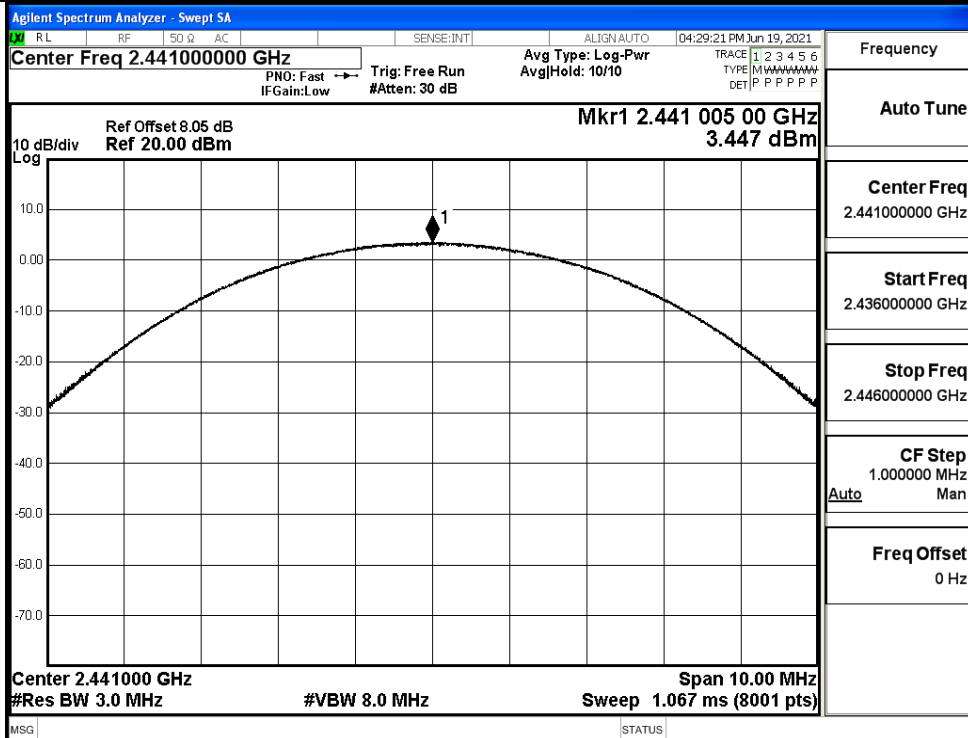


8DPSK/HCH

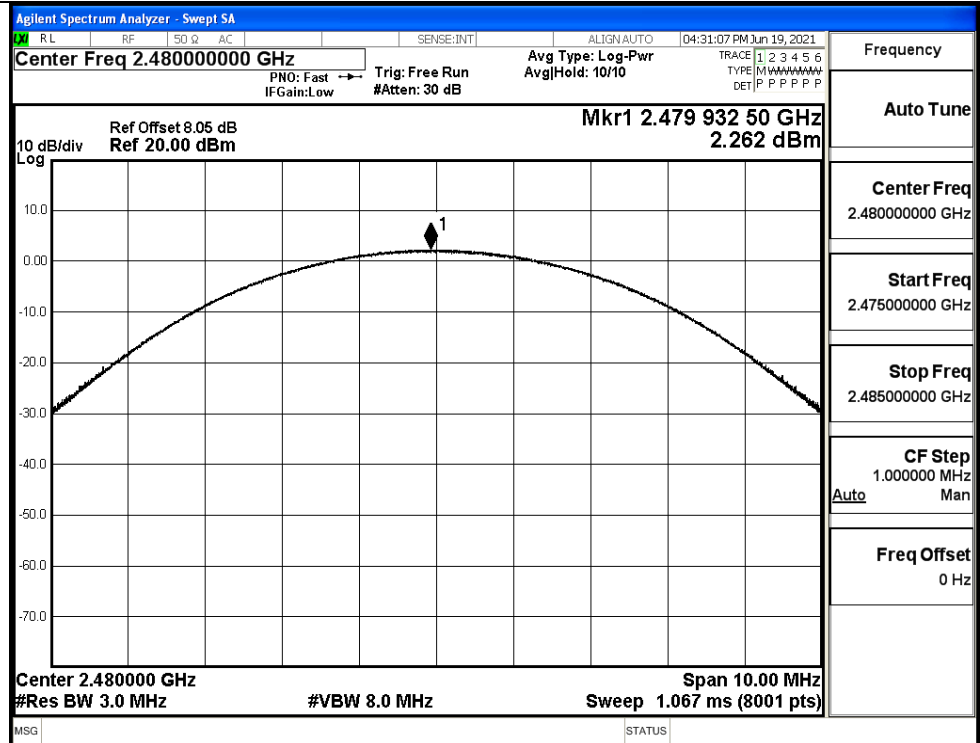


A.2 20dB Bandwidth

Mode	Channel.	20dB Bandwidth [MHz]	Limit [MHz]	Verdict
GFSK	LCH	0.9526	Not Specified	PASS
	MCH	0.9515	Not Specified	PASS
	HCH	0.9516	Not Specified	PASS
$\pi/4$ DQPSK	LCH	1.332	Not Specified	PASS
	MCH	1.331	Not Specified	PASS
	HCH	1.333	Not Specified	PASS
8DPSK	LCH	1.305	Not Specified	PASS
	MCH	1.303	Not Specified	PASS
	HCH	1.303	Not Specified	PASS


Test Graphs

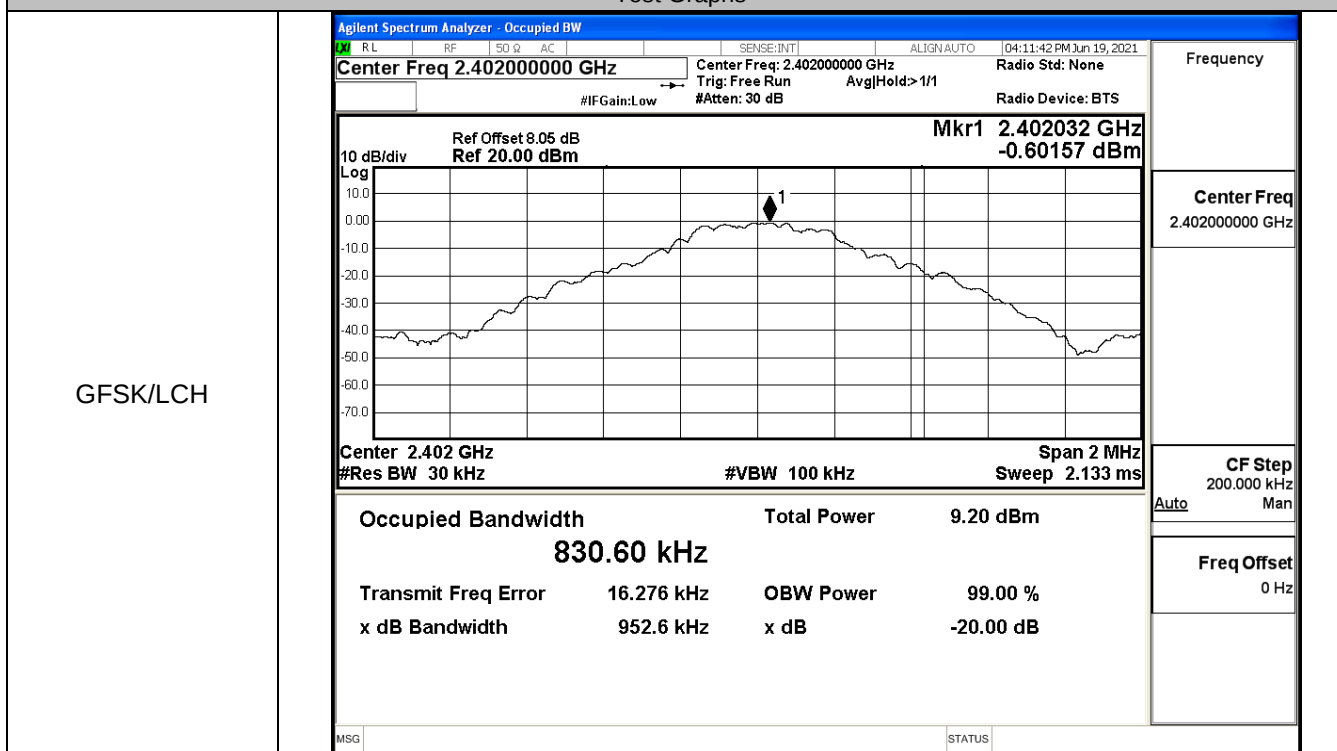


GFSK/MCH

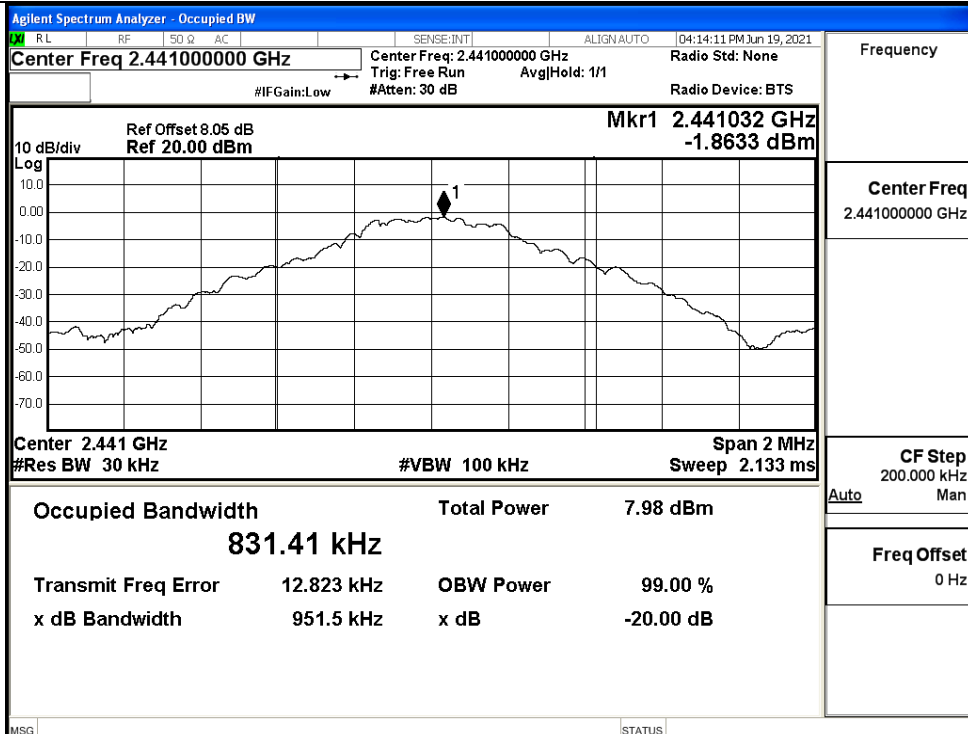


GFSK/HCH

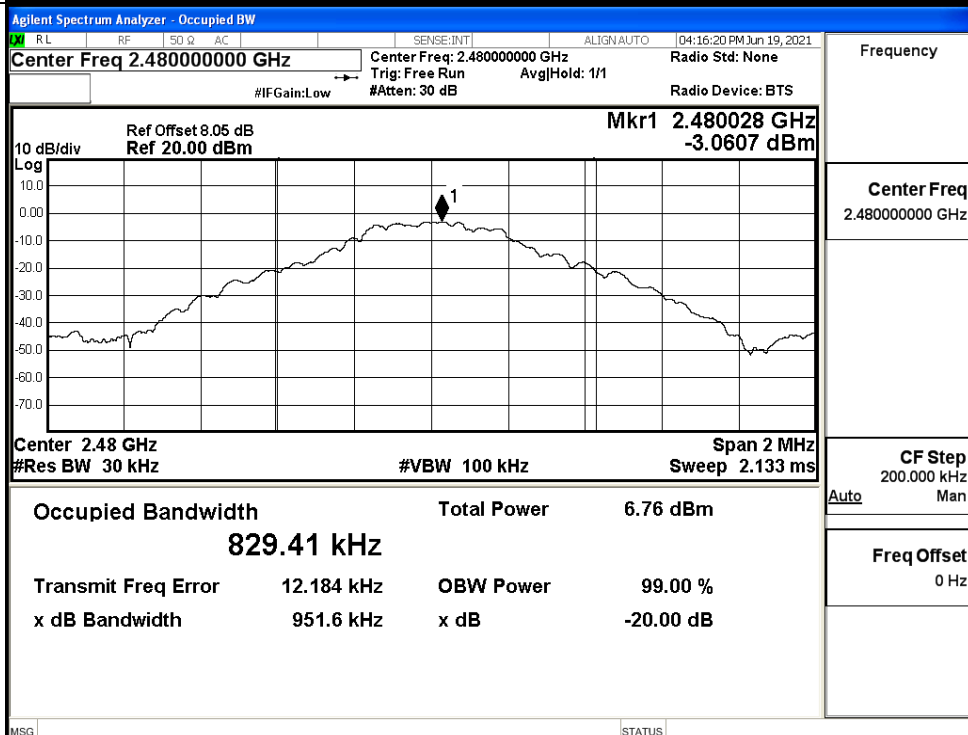


$\pi/4$ DQPSK/LCH

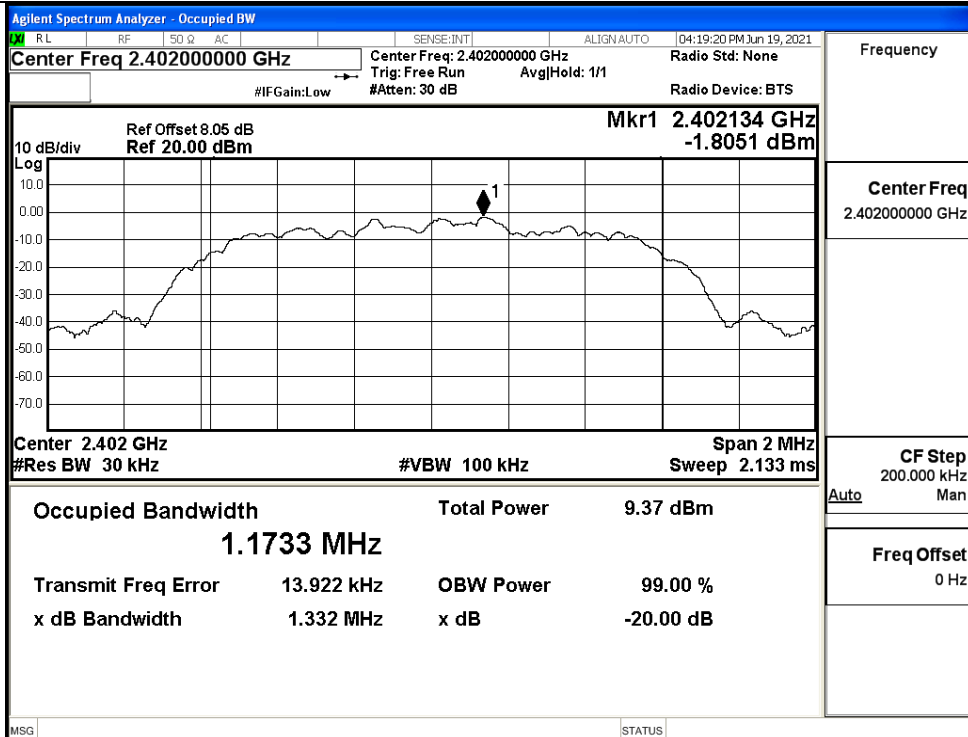


$\pi/4$ DQPSK/MCH

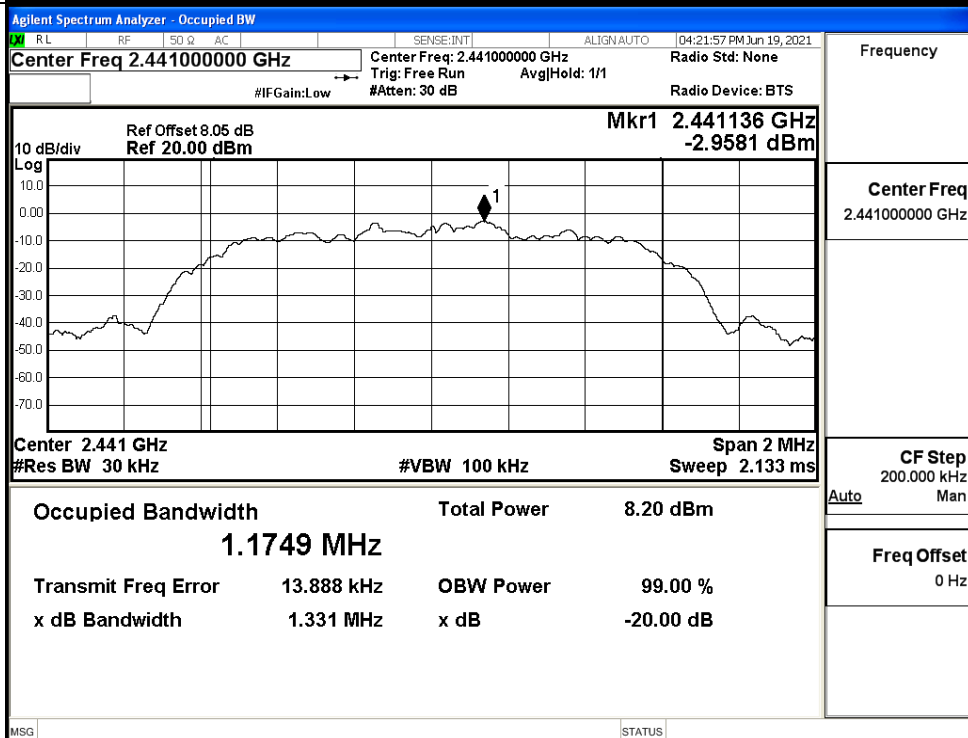


$\pi/4$ DQPSK/HCH

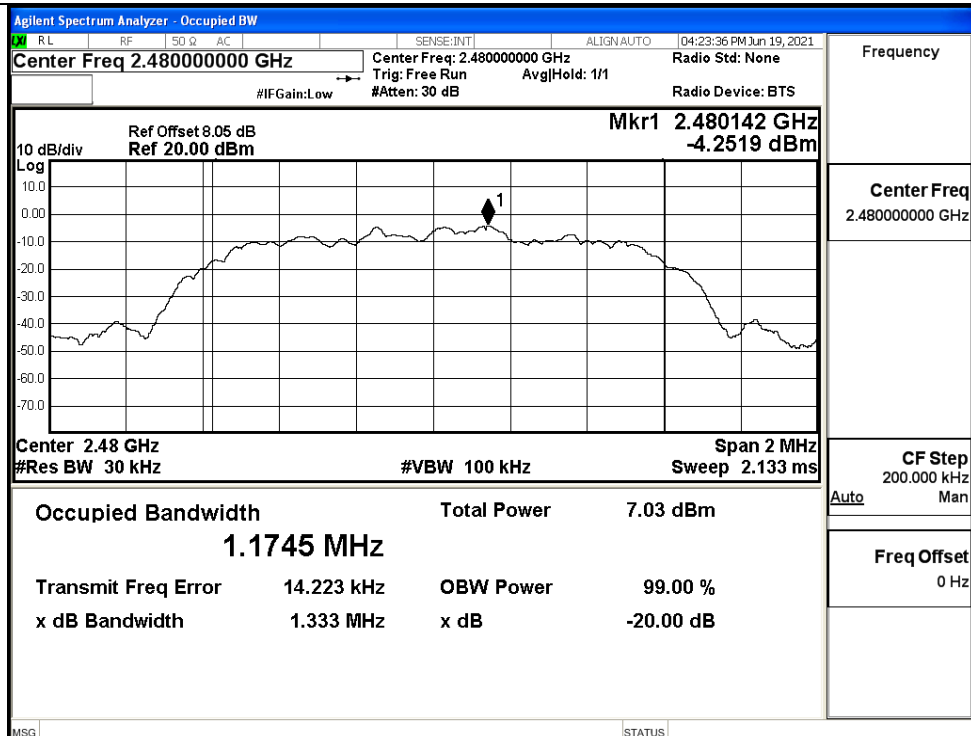


8DPSK/LCH

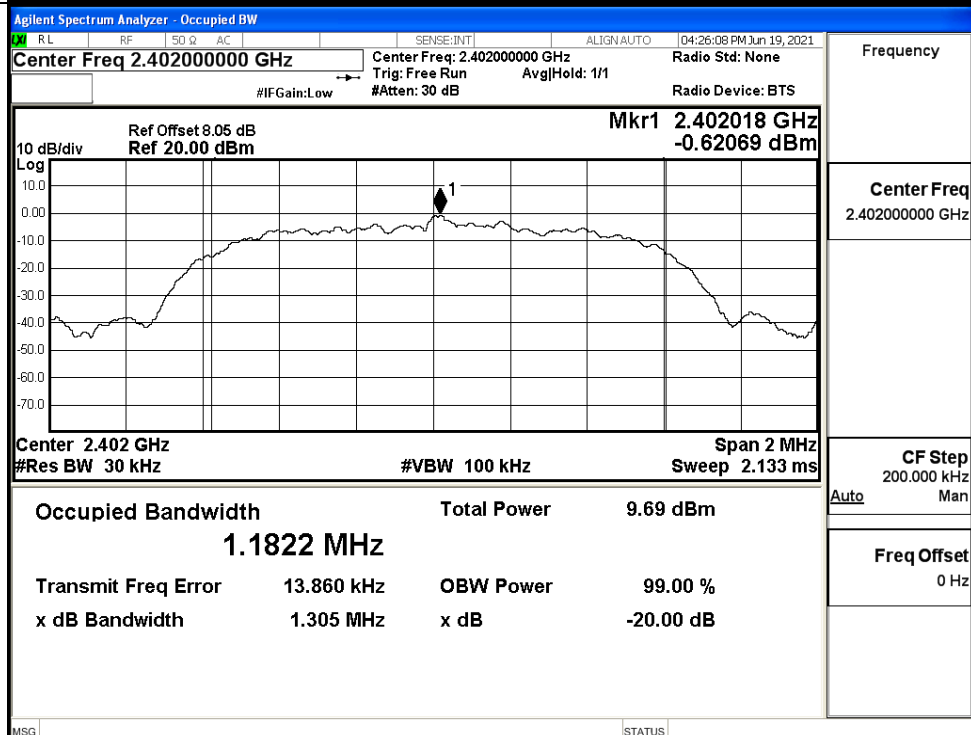

8DPSK/MCH

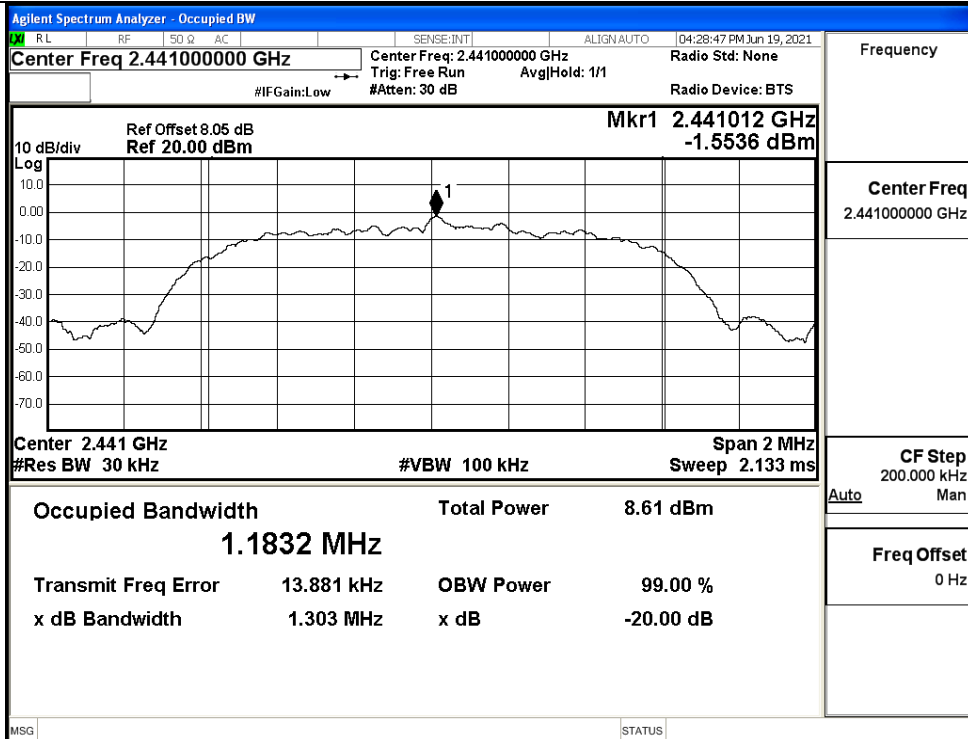


8DPSK/HCH

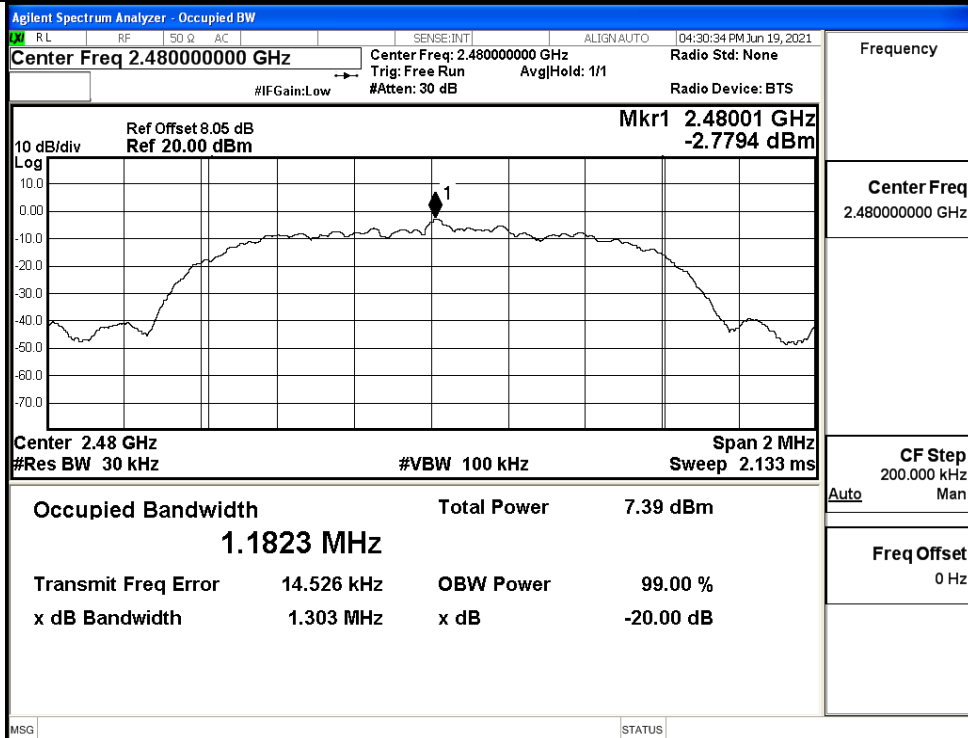


A.3 Carrier Frequency Separation

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit [MHz]	Verdict
GFSK	LCH	1.030	0.635	PASS
	MCH	0.882	0.635	PASS
	HCH	0.906	0.635	PASS
$\pi/4$ DQPSK	LCH	1.014	0.889	PASS
	MCH	0.978	0.889	PASS
	HCH	1.182	0.889	PASS
8DPSK	LCH	0.936	0.870	PASS
	MCH	1.220	0.870	PASS
	HCH	1.004	0.870	PASS

Test Graphs

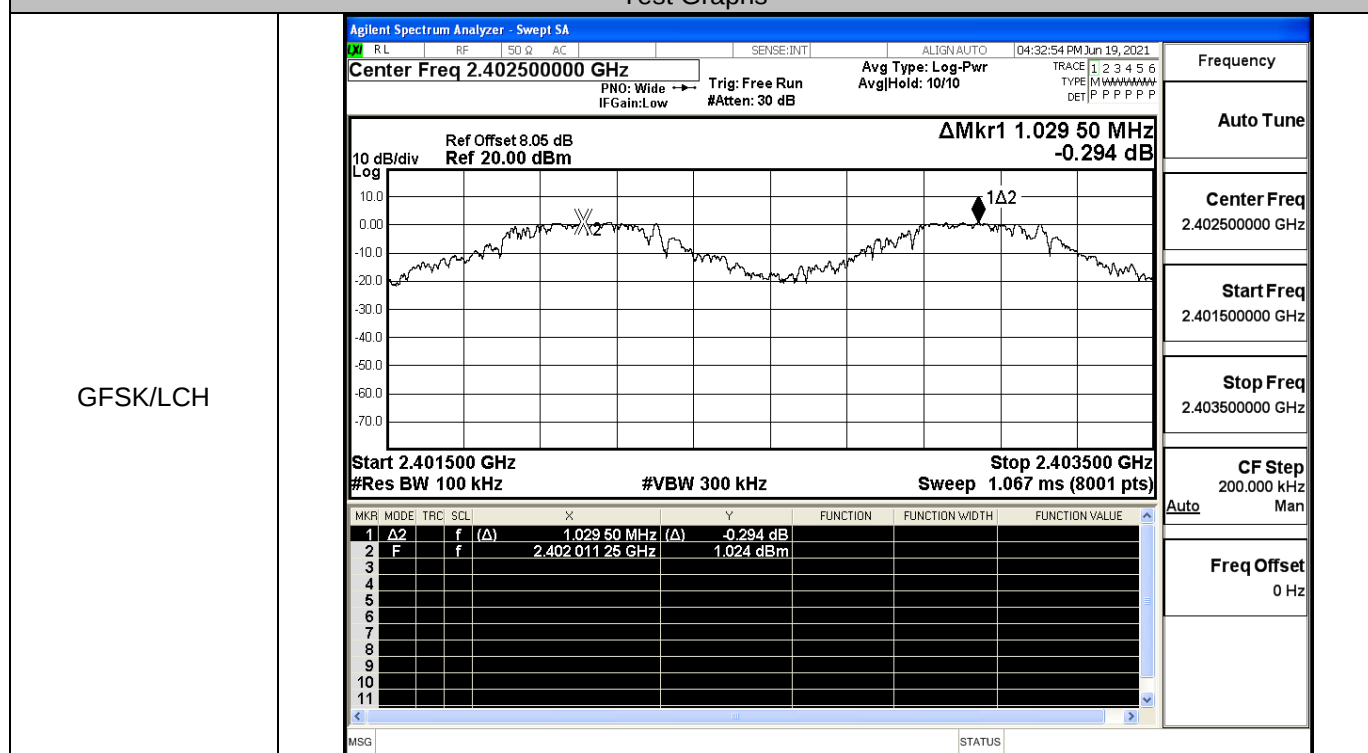

GFSK/MCH

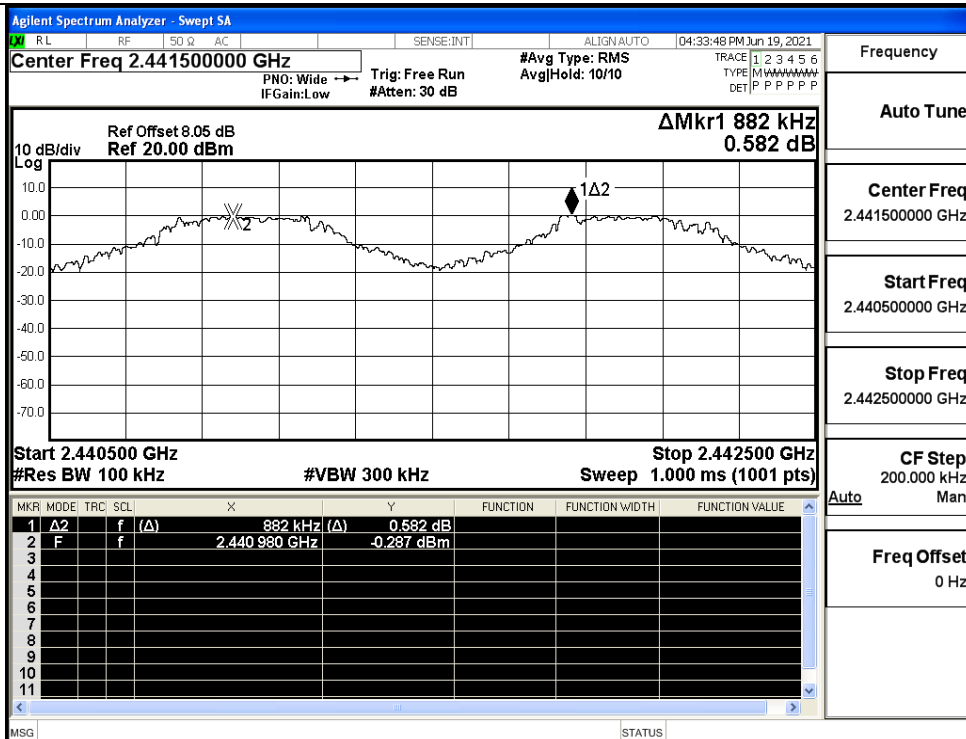

Frequency

Auto Tune

Center Freq
2.441500000 GHz


Start Freq
2.440500000 GHz

Stop Freq
2.442500000 GHz

CF Step
200.000 kHz
Man

Freq Offset
0 Hz

GFSK/HCH

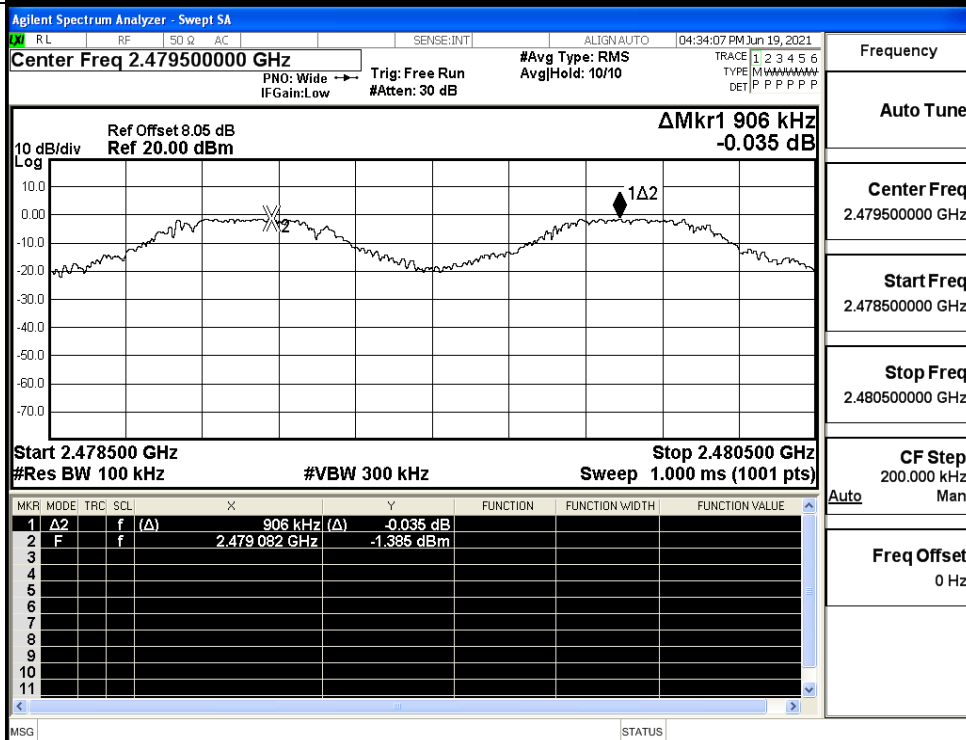

Frequency

Auto Tune



Center Freq
2.479500000 GHz


Start Freq
2.478500000 GHz

Stop Freq
2.480500000 GHz


CF Step
200.000 kHz
Man

Freq Offset
0 Hz

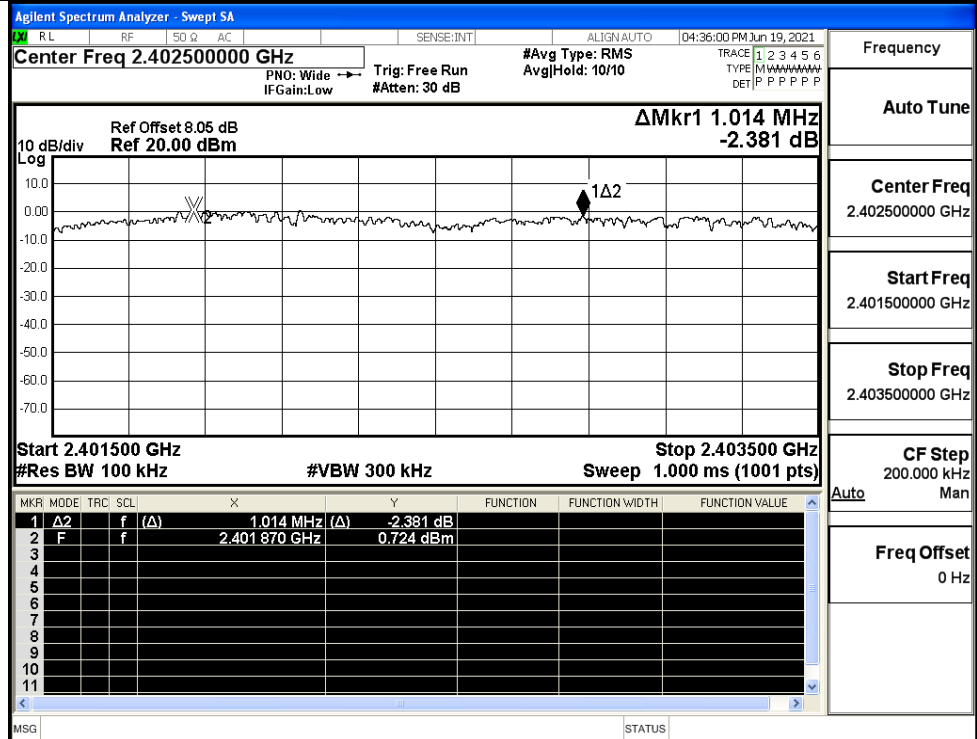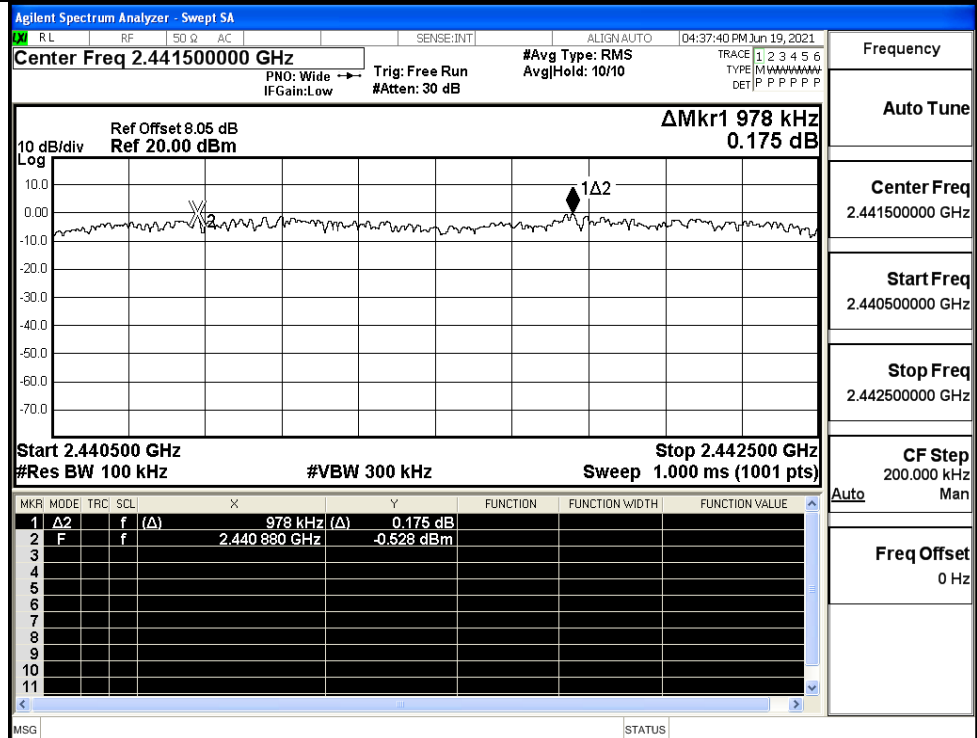
$\pi/4$ DQPSK/LCH $\pi/4$ DQPSK/MCH

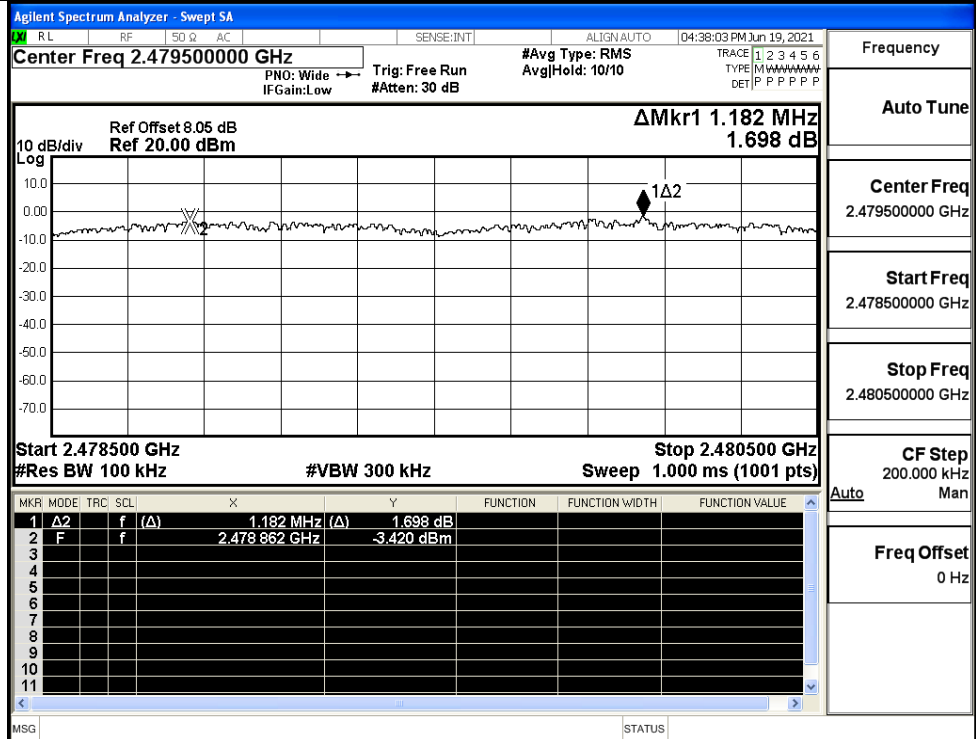$\pi/4$ DQPSK/HCH

8DPSK/LCH

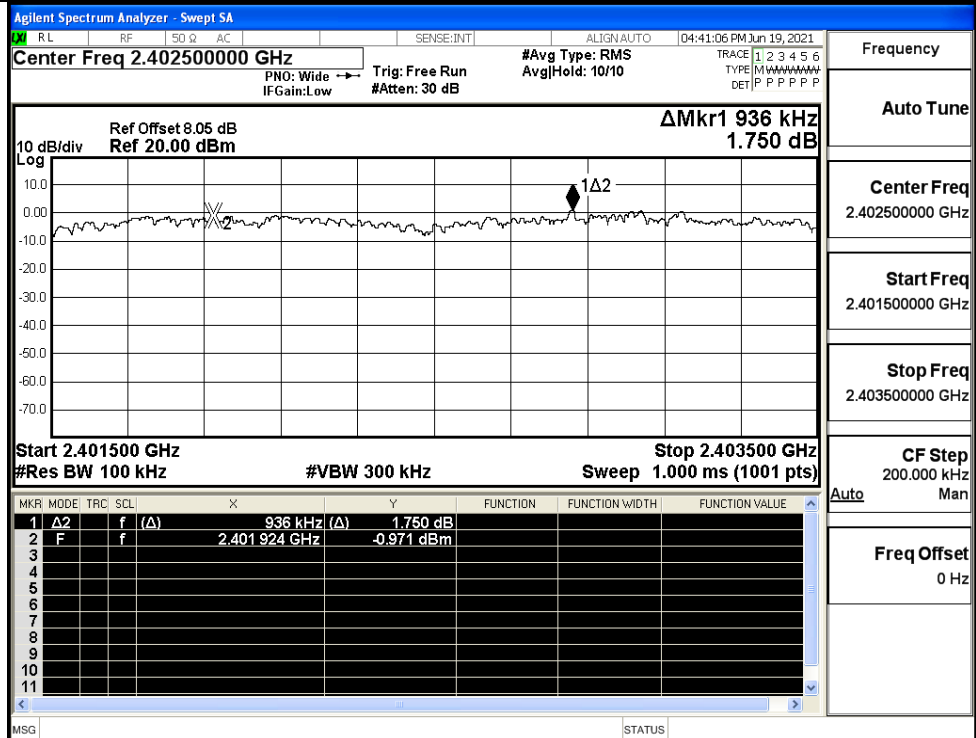

8DPSK/MCH

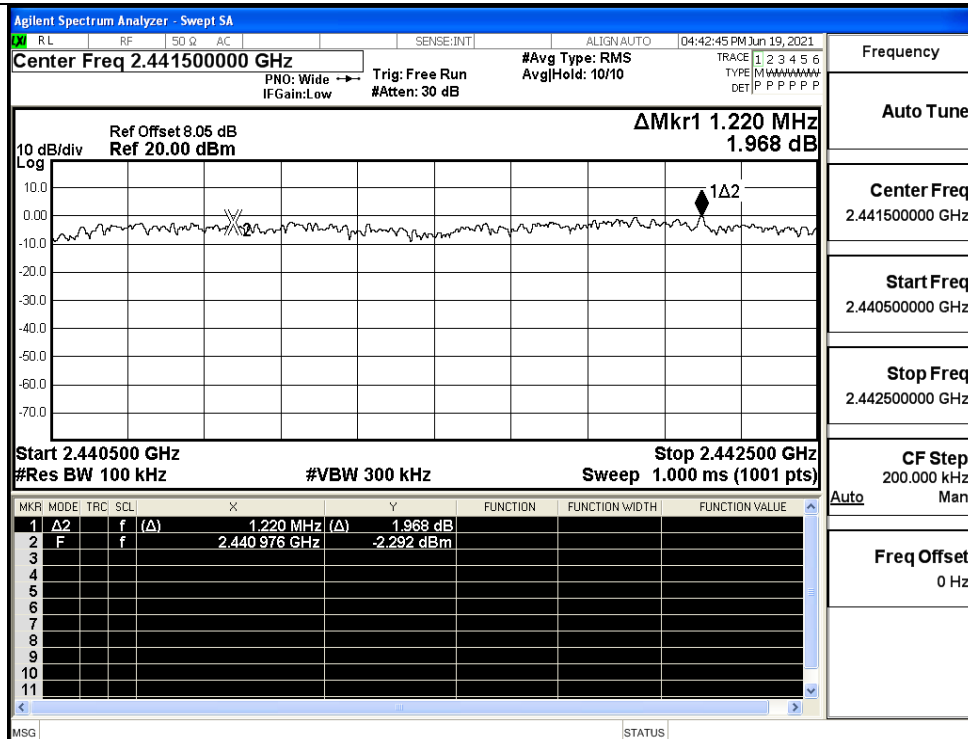

Frequency

Auto Tune

Center Freq
2.441500000 GHz


Start Freq
2.440500000 GHz

Stop Freq
2.442500000 GHz

CF Step
200.000 kHz
Man

Freq Offset
0 Hz

8DPSK/HCH

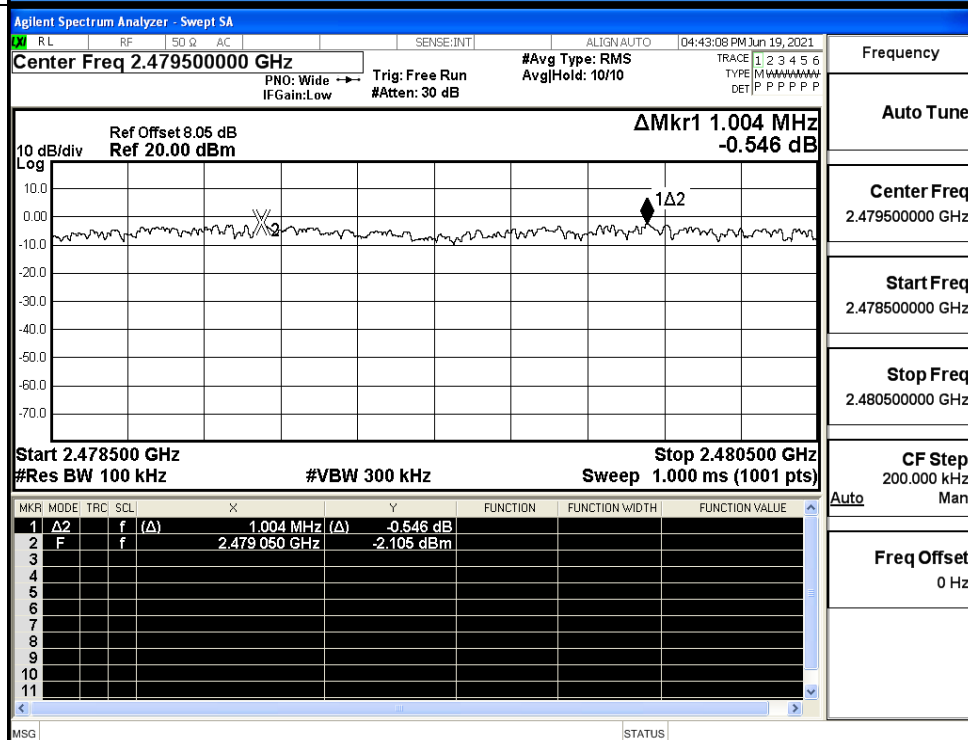

Frequency

Auto Tune

Center Freq
2.479500000 GHz

Start Freq
2.478500000 GHz

Stop Freq
2.480500000 GHz

CF Step
200.000 kHz
Man


Freq Offset
0 Hz

A.4 Hopping Channel Number

Mode	Channel.	Number of Hopping Channel [N]	Limit [N]	Verdict
GFSK	Hop	79	>=15	PASS
$\pi/4$ DQPSK	Hop	79	>=15	PASS
8DPSK	Hop	79	>=15	PASS


Test Graphs

GFSK/Hop

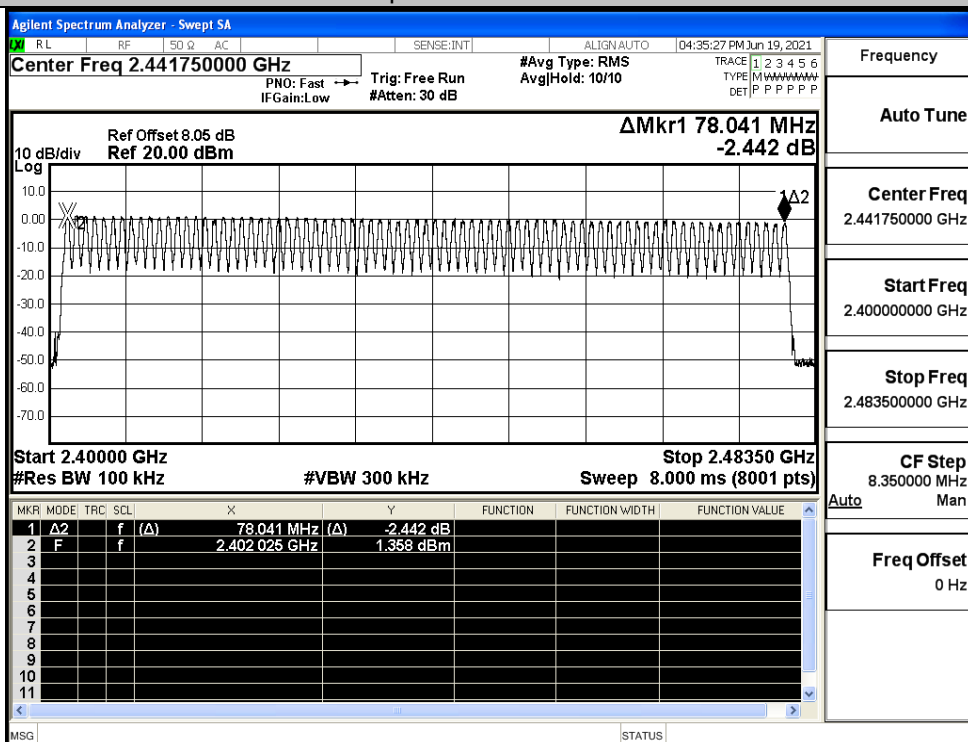

Frequency

Auto Tune

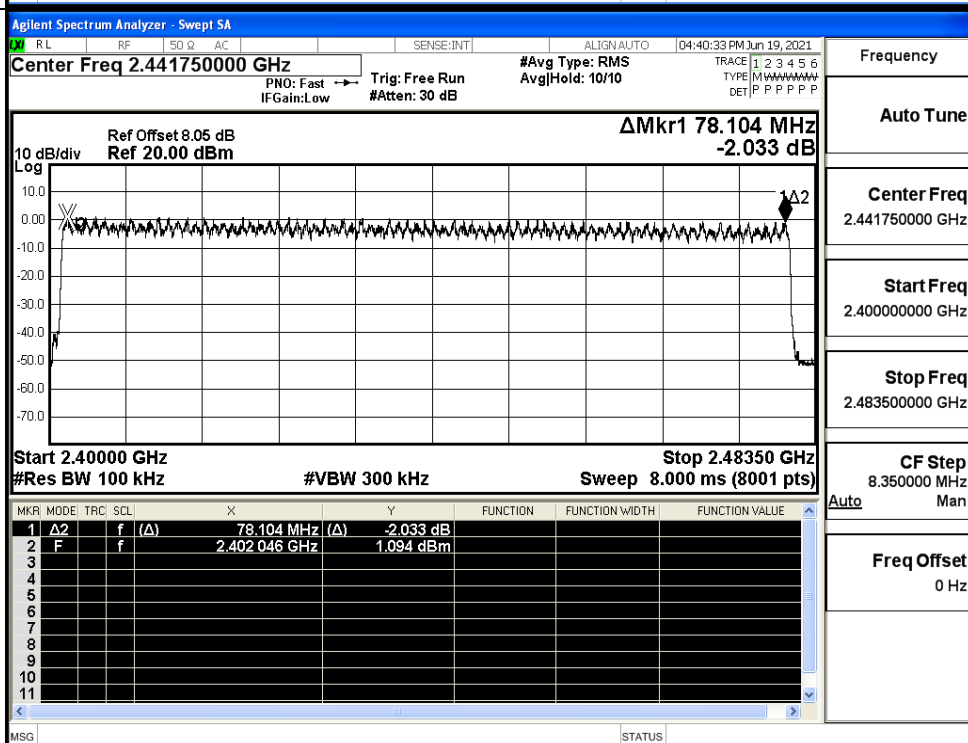
Center Freq
2.441750000 GHzStart Freq
2.400000000 GHzStop Freq
2.483500000 GHzCF Step
8.350000 MHz
ManFreq Offset
0 Hz $\pi/4$ DQPSK/Hop

Frequency

Auto Tune

Center Freq
2.441750000 GHzStart Freq
2.400000000 GHzStop Freq
2.483500000 GHzCF Step
8.350000 MHz
ManFreq Offset
0 Hz

8DPSK/Hop

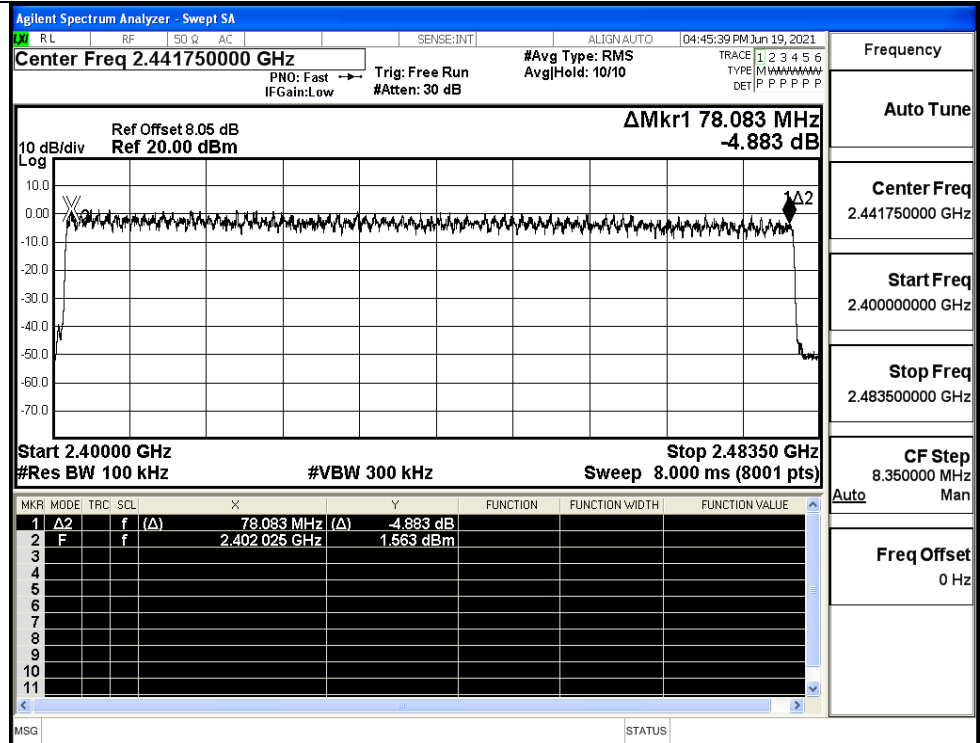


A.5 Dwell Time


Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Limit [s]	Verdict
GFSK	DH5	LCH	2.9	106.7	0.309	0.4	PASS
	DH5	MCH	2.9	106.7	0.309	0.4	PASS
	DH5	HCH	2.9	106.7	0.309	0.4	PASS
$\pi/4$ DQPSK	2DH5	LCH	2.9	106.7	0.309	0.4	PASS
	2DH5	MCH	2.9	106.7	0.309	0.4	PASS
	2DH5	HCH	2.9	106.7	0.309	0.4	PASS
8DPSK	3DH5	LCH	2.9	106.7	0.309	0.4	PASS
	3DH5	MCH	2.9	106.7	0.309	0.4	PASS
	3DH5	HCH	2.9	106.7	0.309	0.4	PASS

Test Graphs


GFSK_DH5/LCH

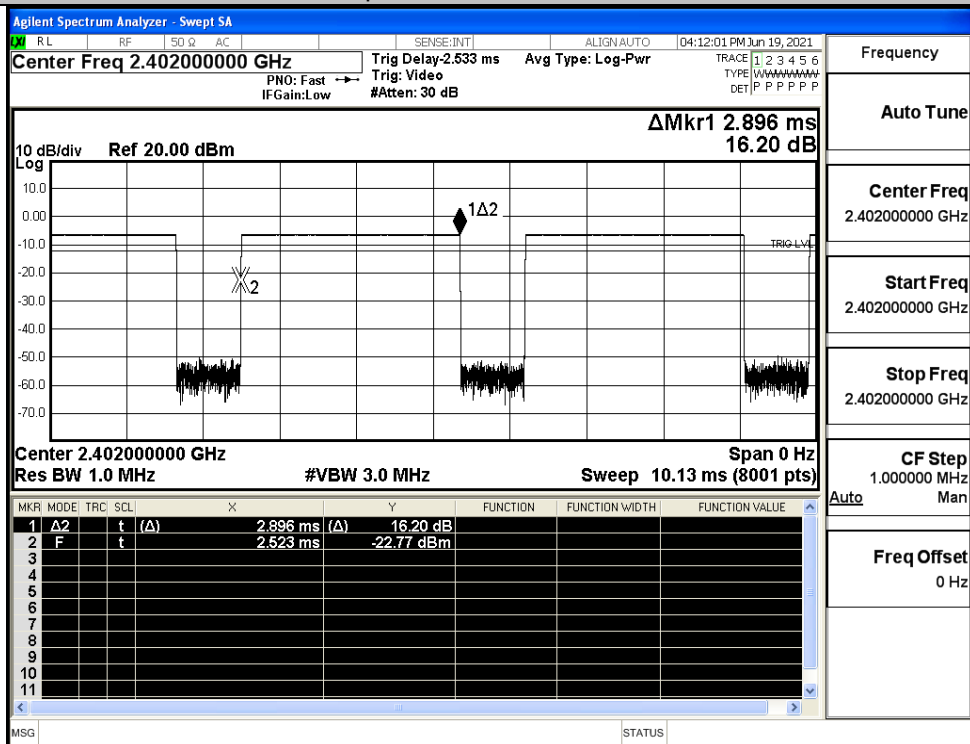

GFSK_DH5/MCH

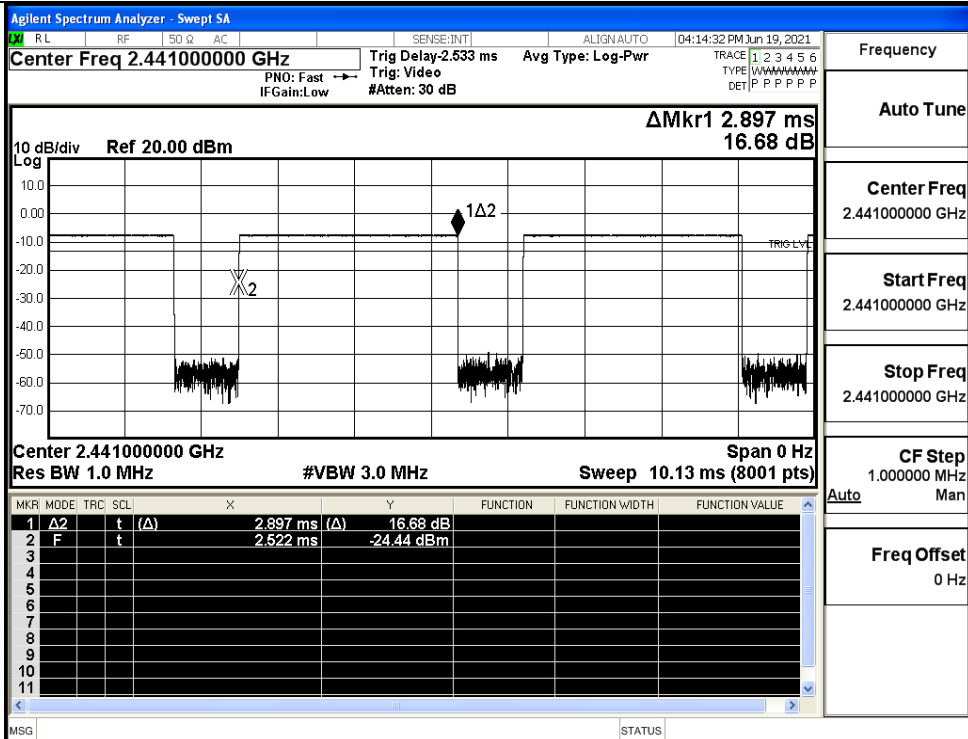

GFSK_DH5/HCH

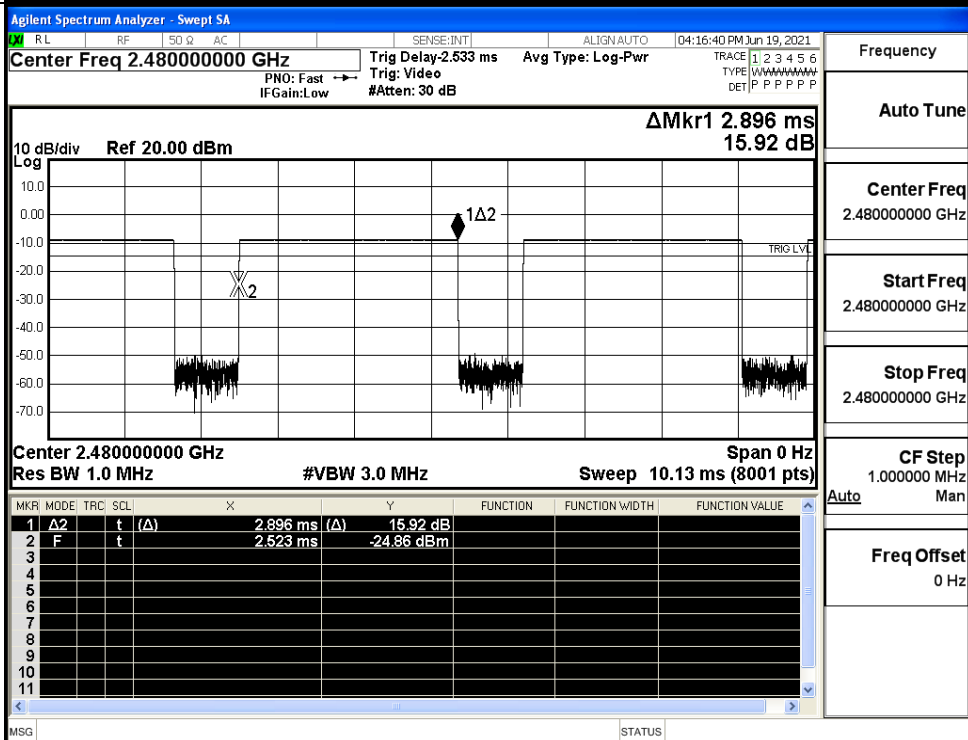


[illegible]

Frequency	
Auto Tune	
Center Freq	2.402000000 GHz
Start Freq	2.402000000 GHz
Stop Freq	2.402000000 GHz
CF Step	1.000000 MHz
Auto	Man
Freq Offset	0 Hz


[illegible]

Frequency	
Auto Tune	
Center Freq	2.441000000 GHz
Start Freq	2.441000000 GHz
Stop Freq	2.441000000 GHz
CF Step	1.000000 MHz
Auto	Man
Freq Offset	0 Hz


$\pi/4$ DQPSK
_2DH5/HCH

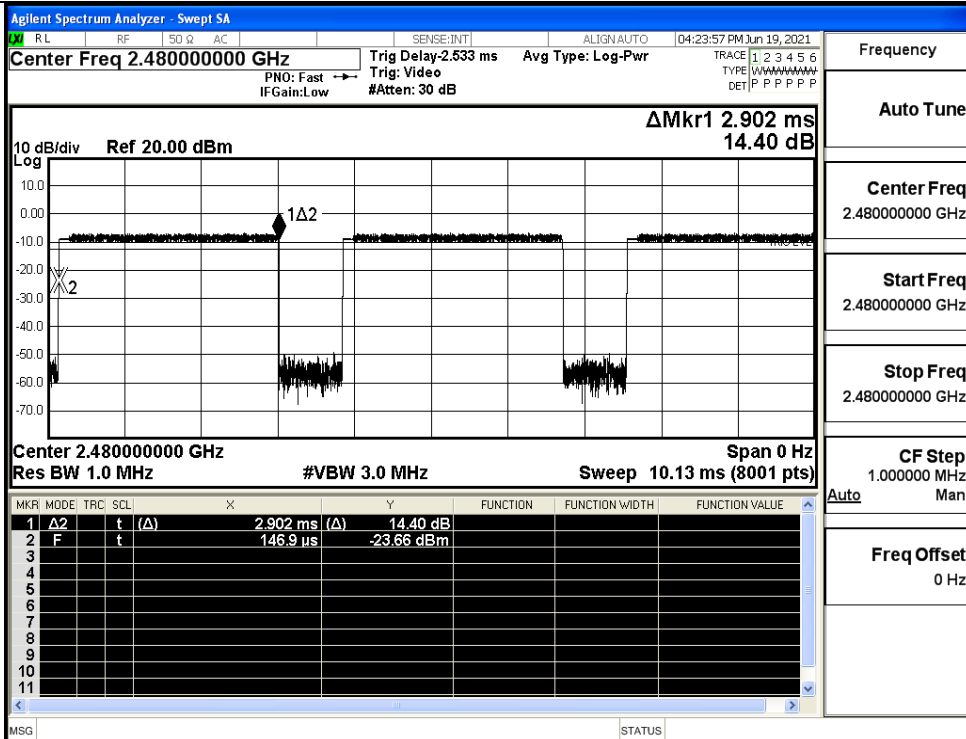


8DPSK _3DH5/LCH

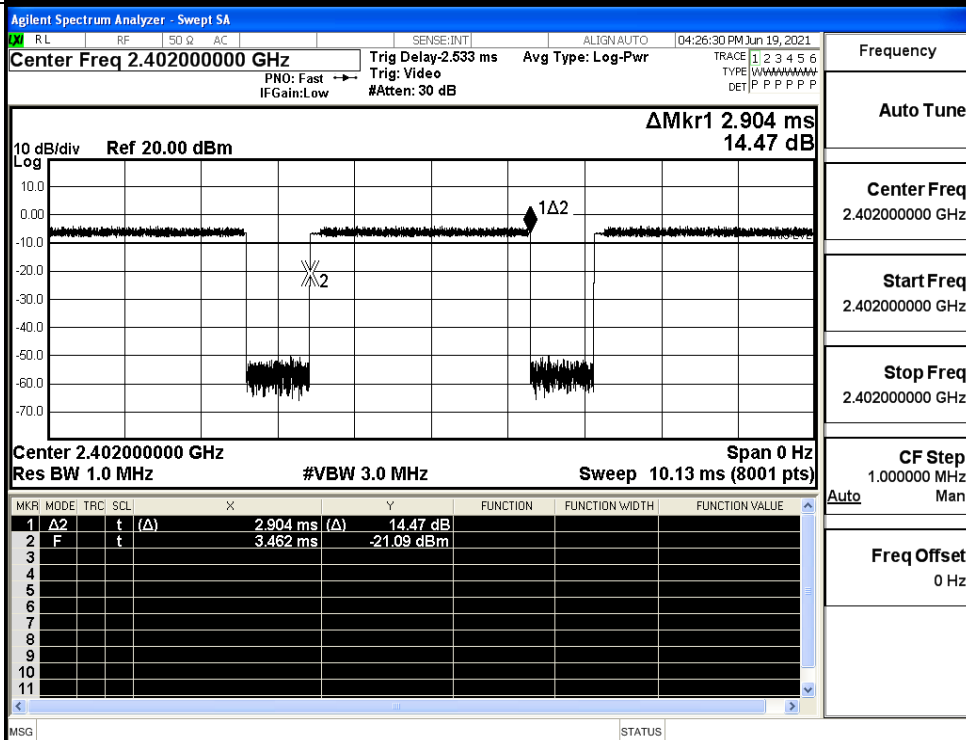

8DPSK_3DH5/MCH

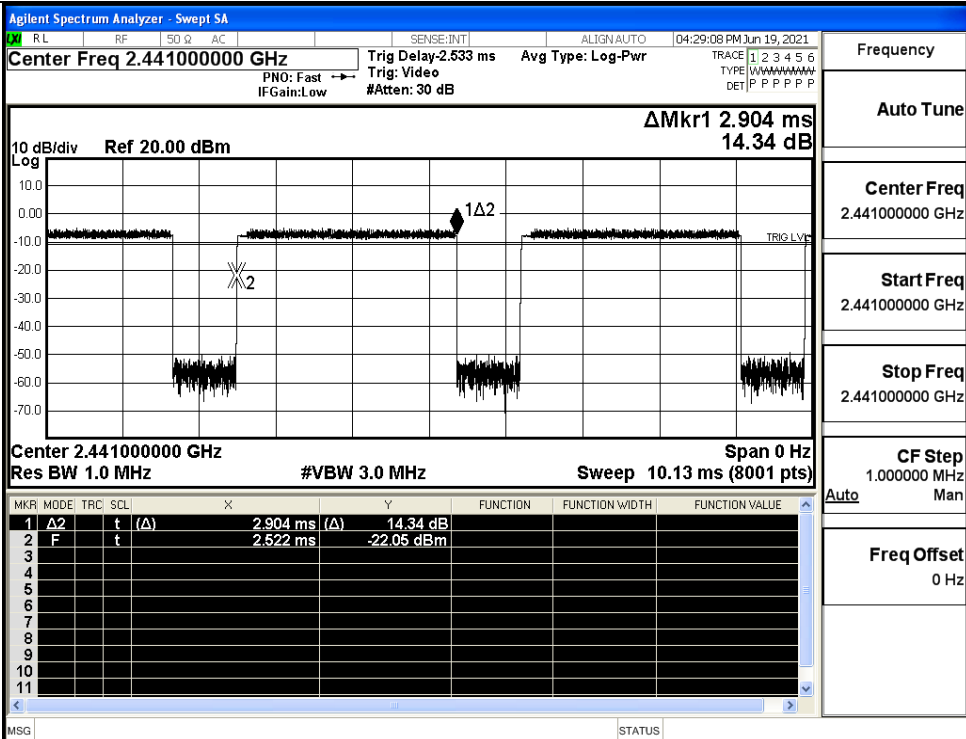



8DPSK_3DH5/HCH

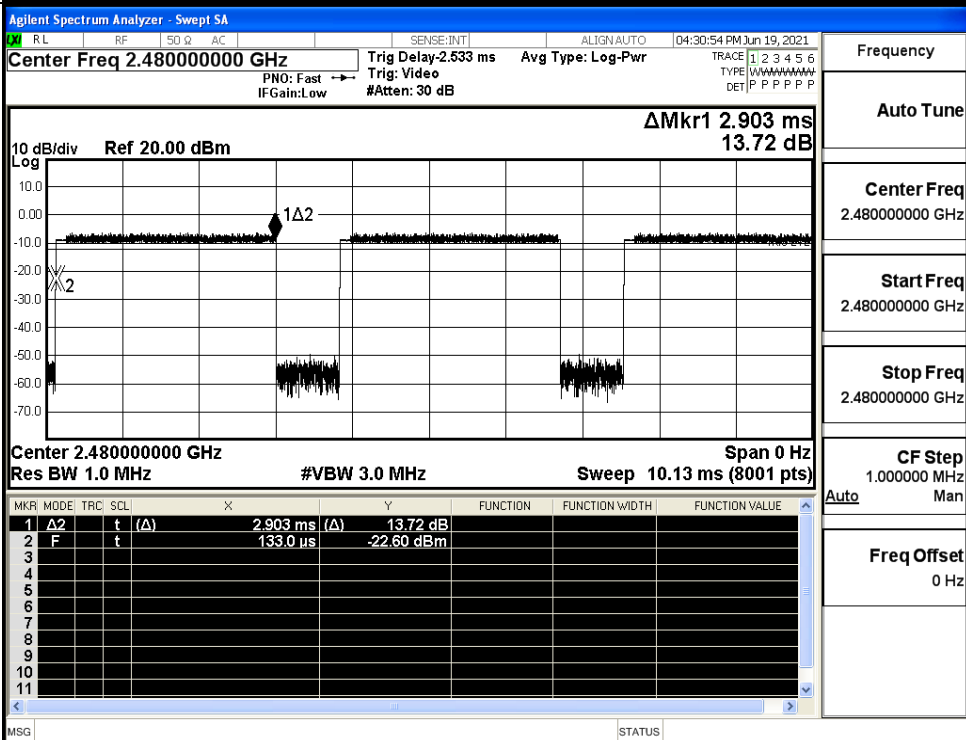

A.6 RF Conducted Spurious Emissions


Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	1.584	-38.038	-18.416	PASS
	MCH	0.48	-37.422	-19.520	PASS
	HCH	-0.851	-38.298	-20.851	PASS
$\pi/4$ DQPSK	LCH	1.058	-38.117	-18.942	PASS
	MCH	0.159	-37.668	-19.841	PASS
	HCH	-1.189	-36.804	-21.189	PASS
8DPSK	LCH	1.43	-38.389	-18.570	PASS
	MCH	0.397	-37.785	-19.603	PASS
	HCH	-0.826	-37.467	-20.826	PASS

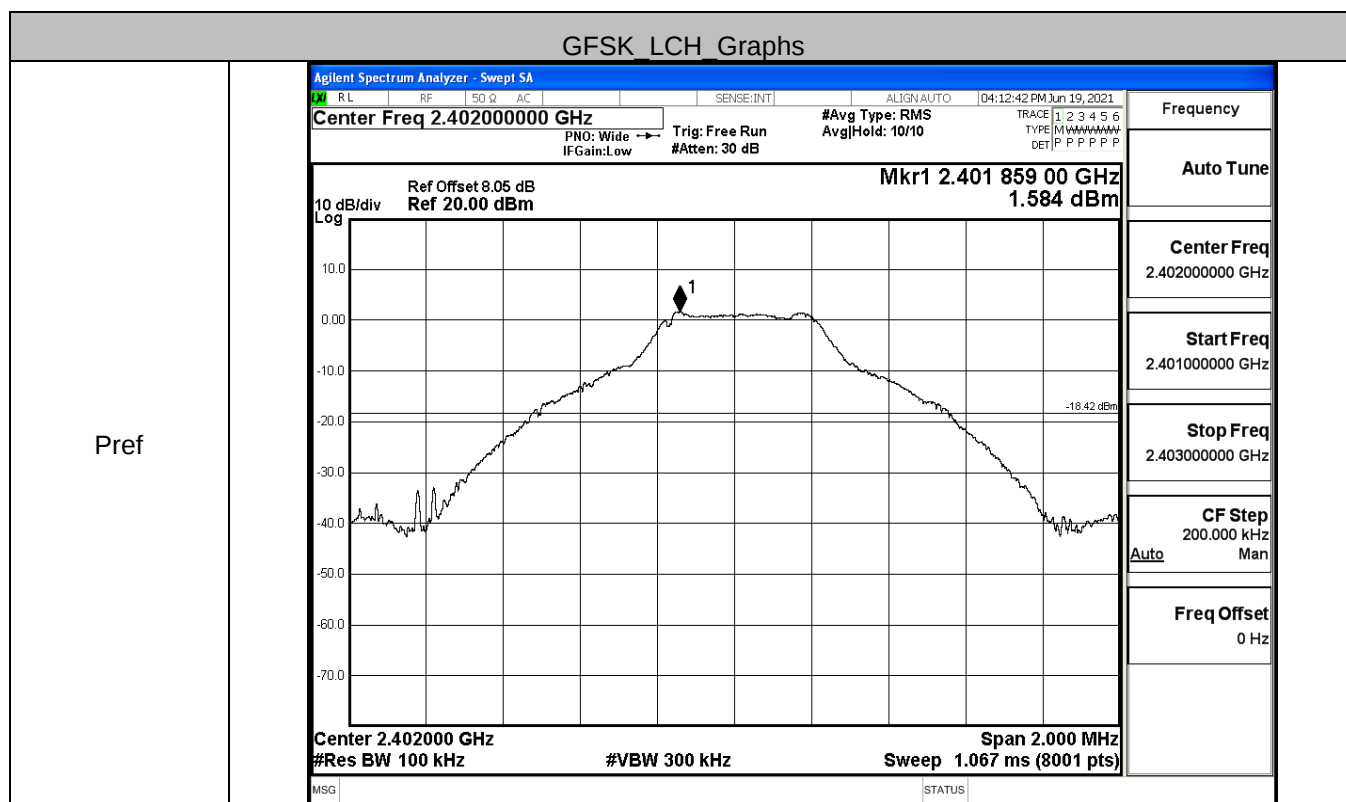

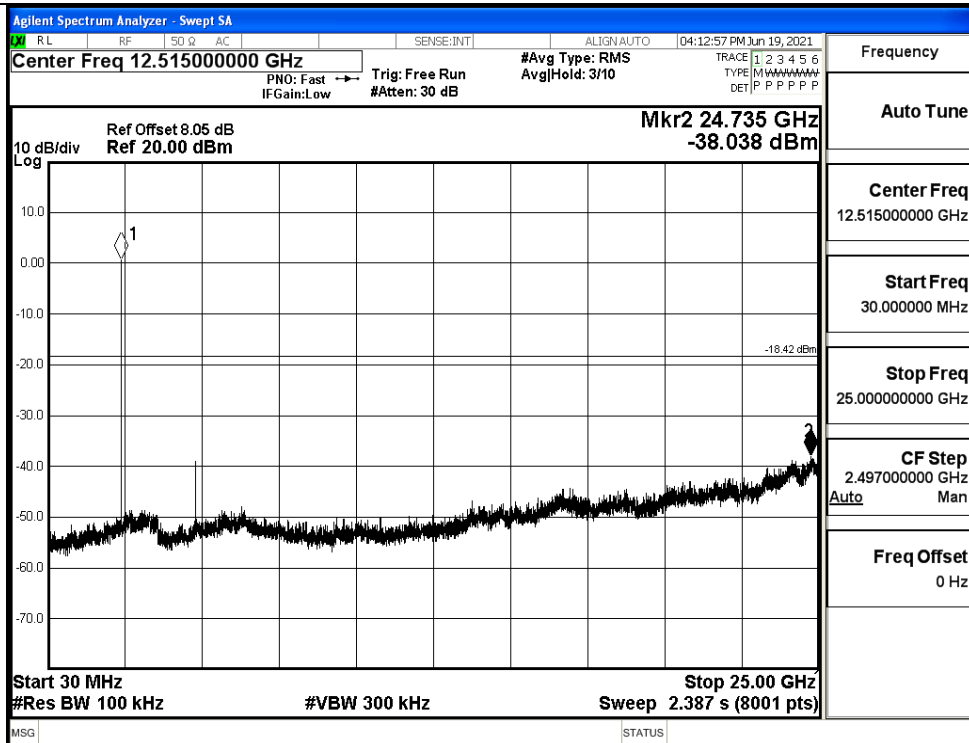


GFSK_MCH_Graphs

Pref

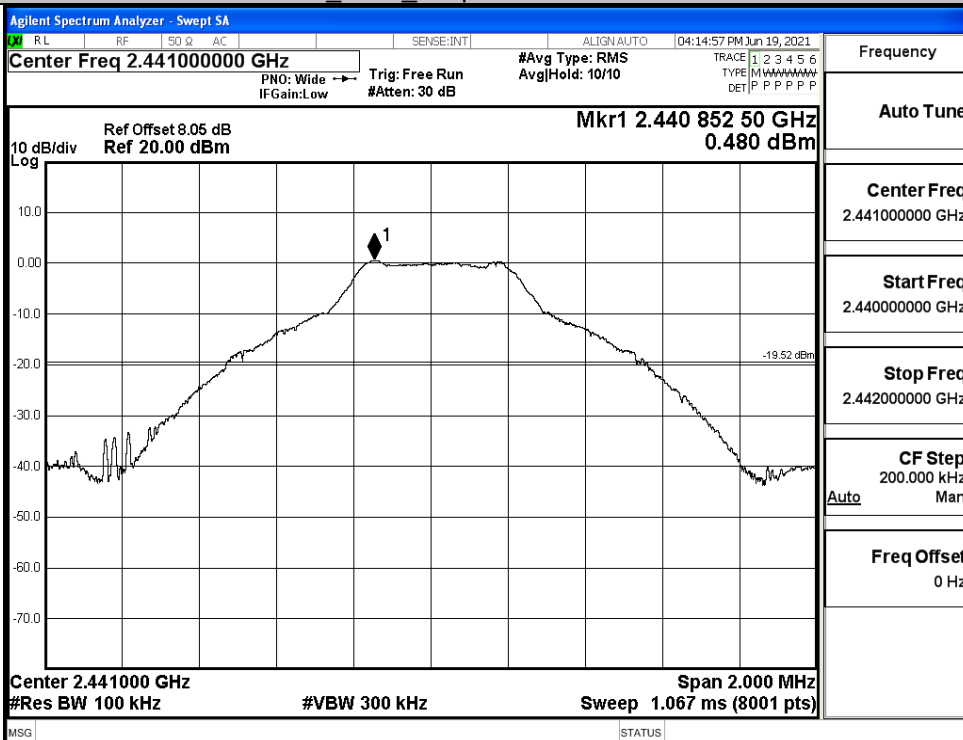


Puw

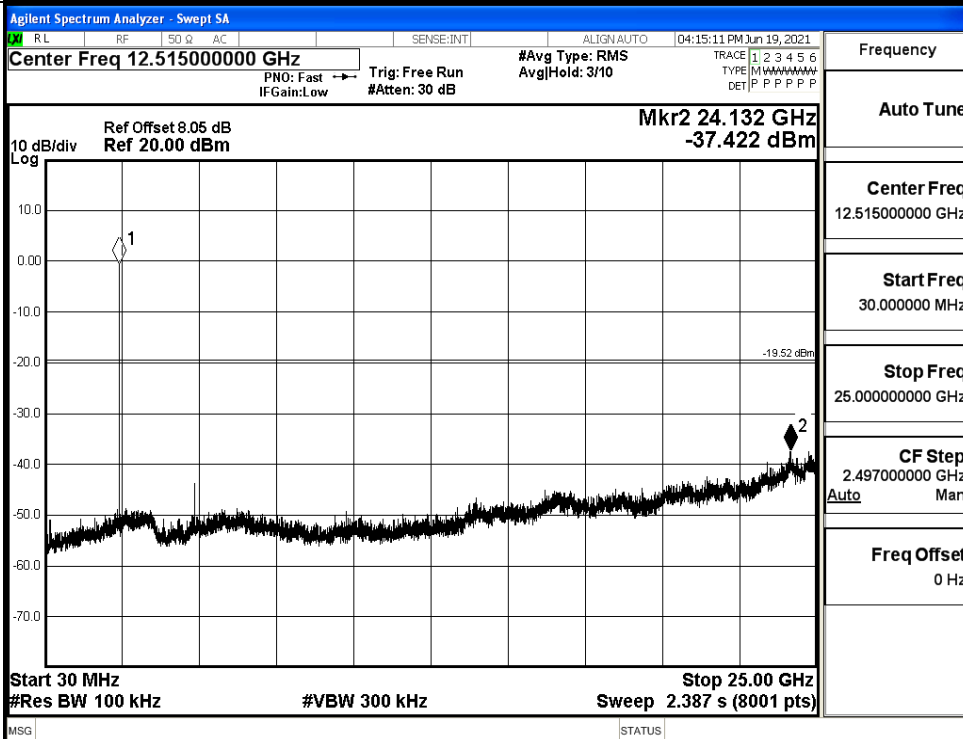


GFSK HCH_Graphs

Pref

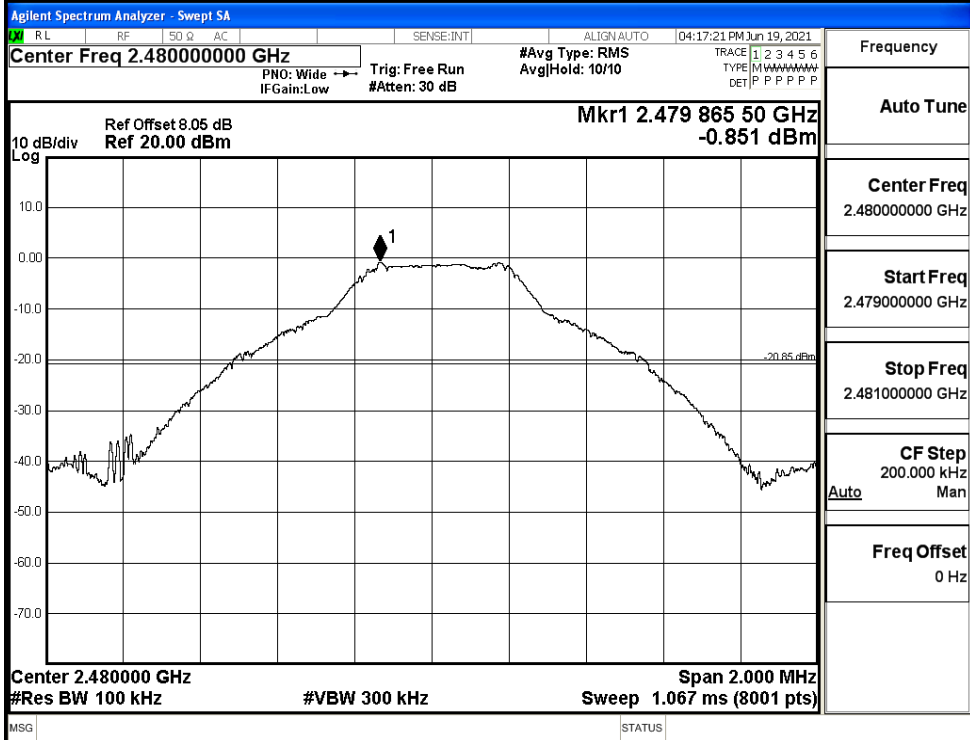


Puw

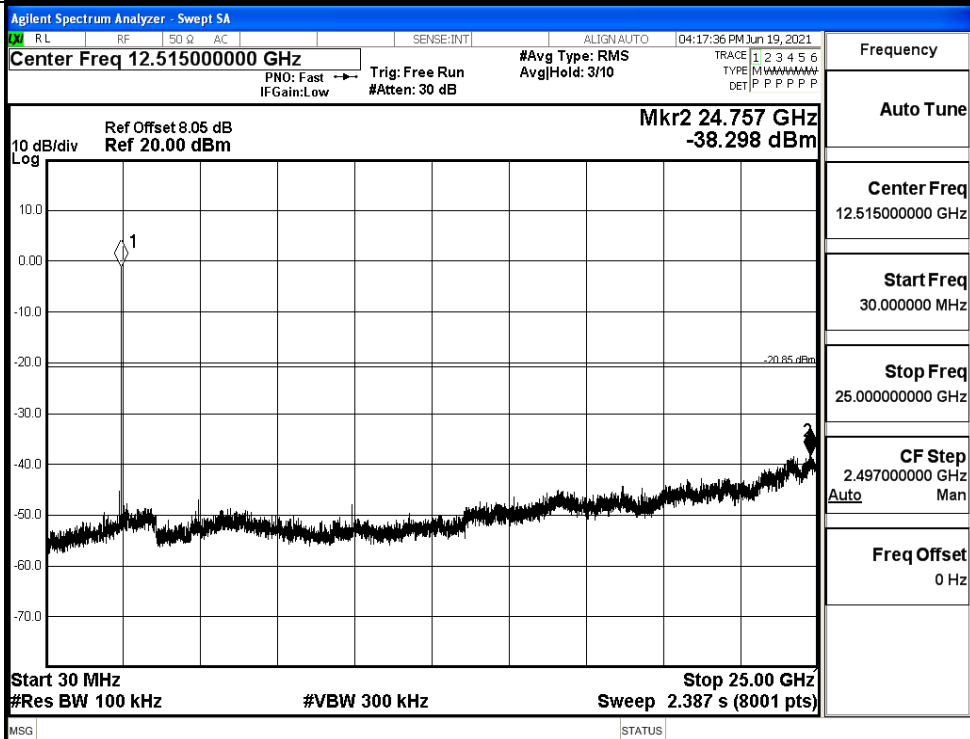


$\pi/4$ DQPSK_LCH_Graphs

Pref

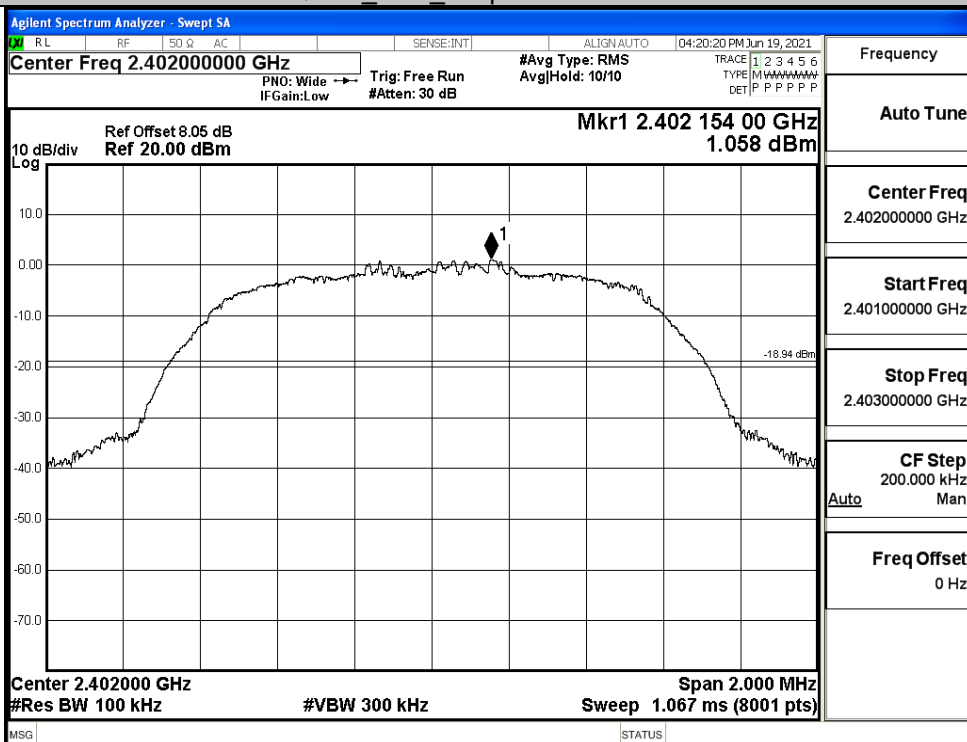


Puw

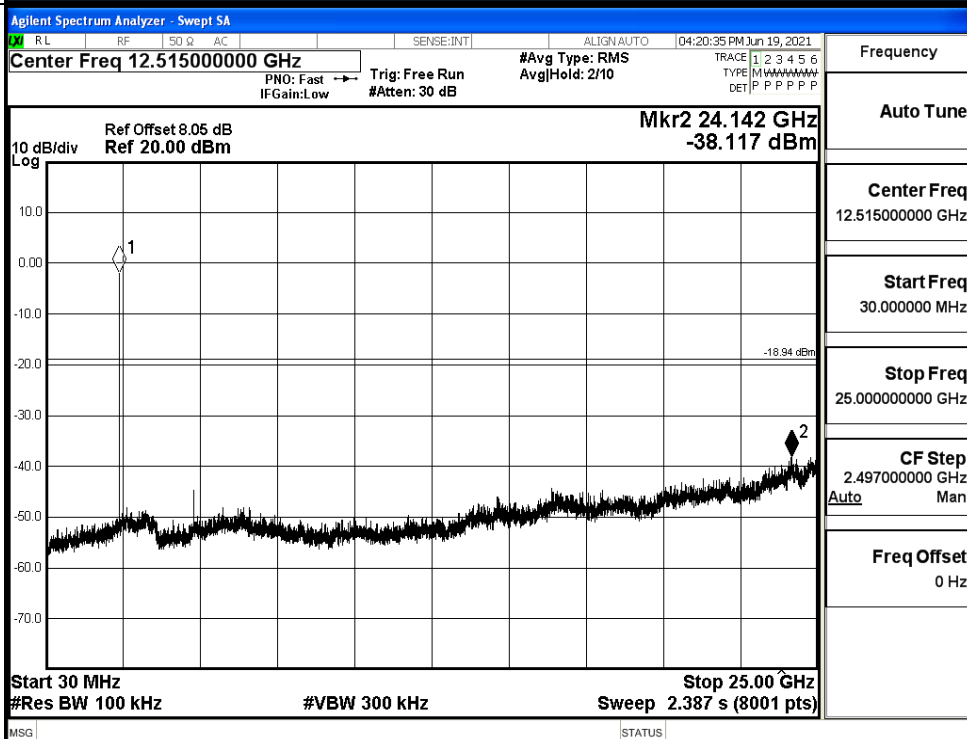


$\pi/4$ DQPSK_MCH_Graphs

Pref

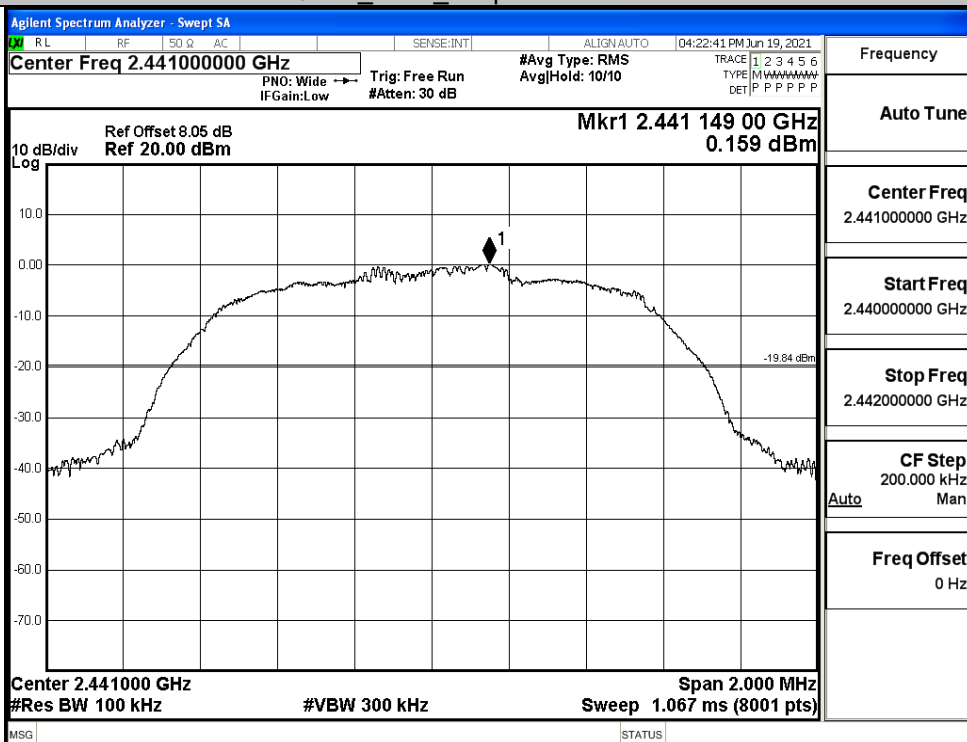


Puw

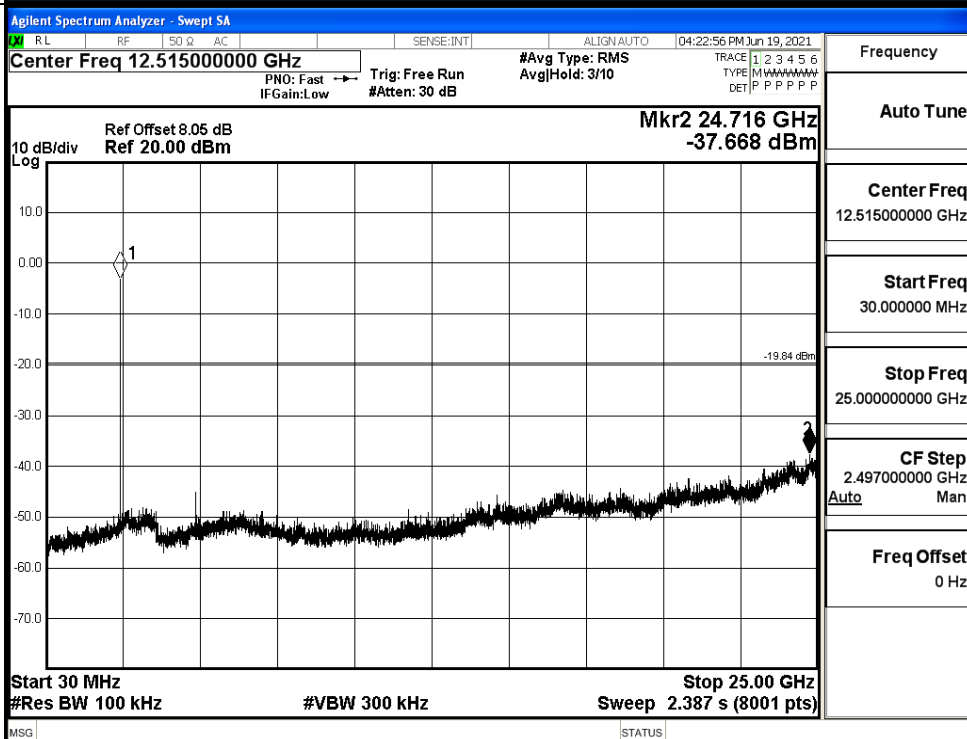


$\pi/4$ DQPSK_HCH_Graphs

Pref

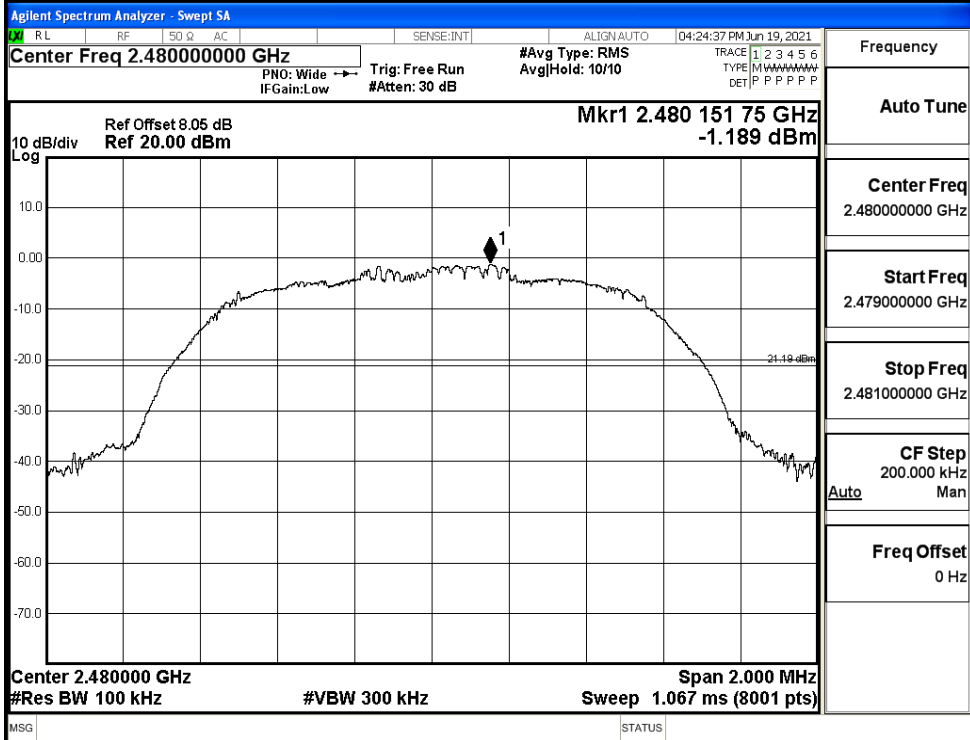


Puw

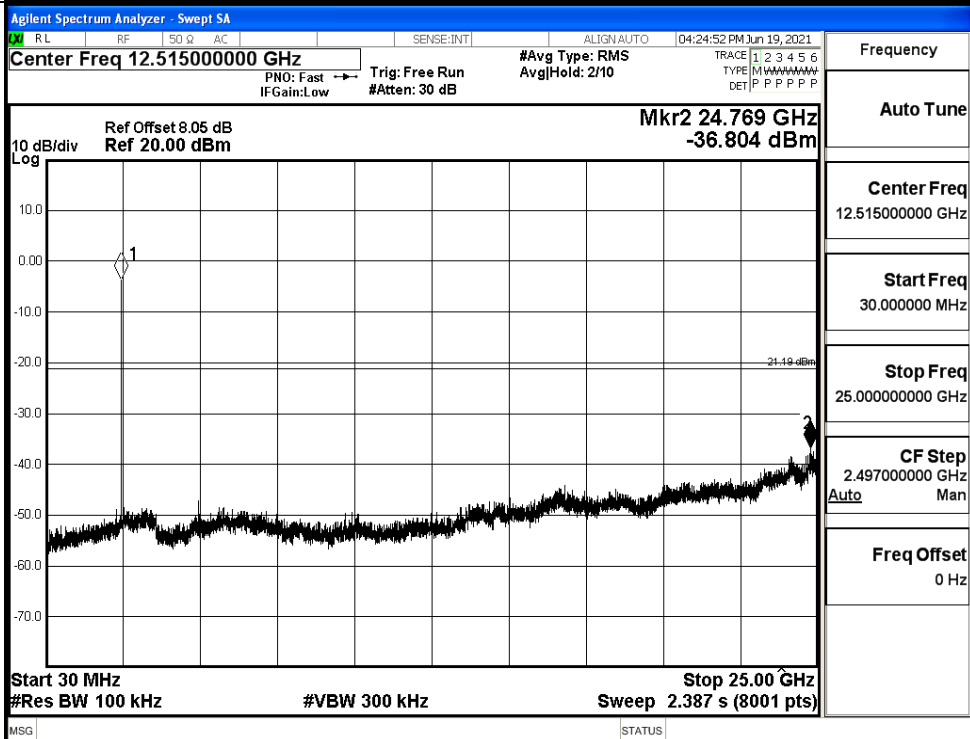


8DPSK_LCH_Graphs

Pref

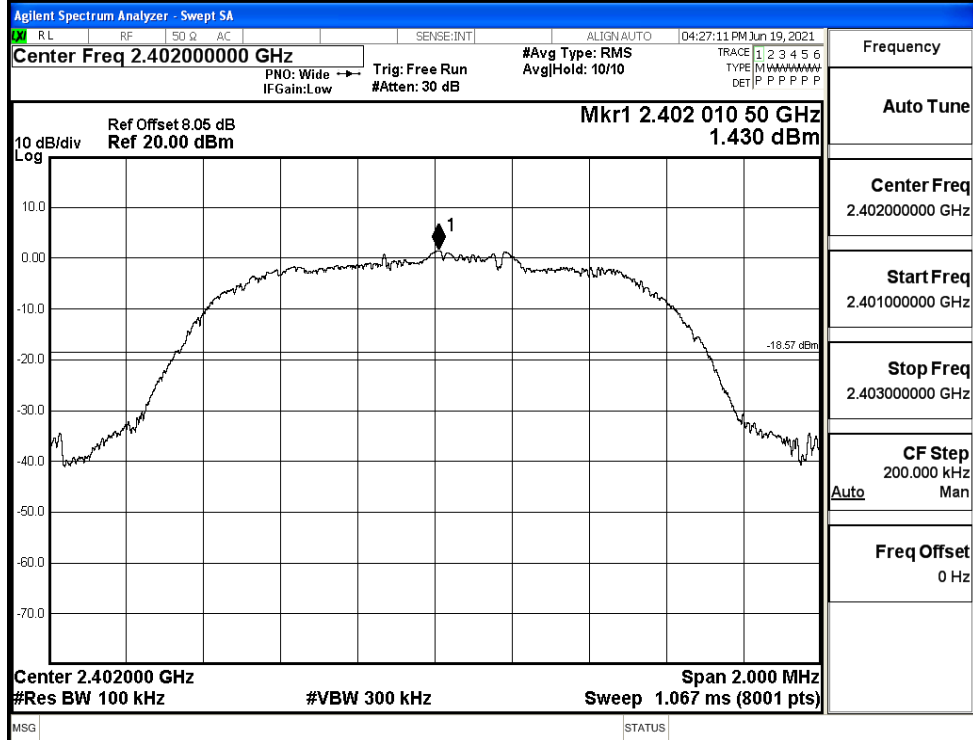


Puw

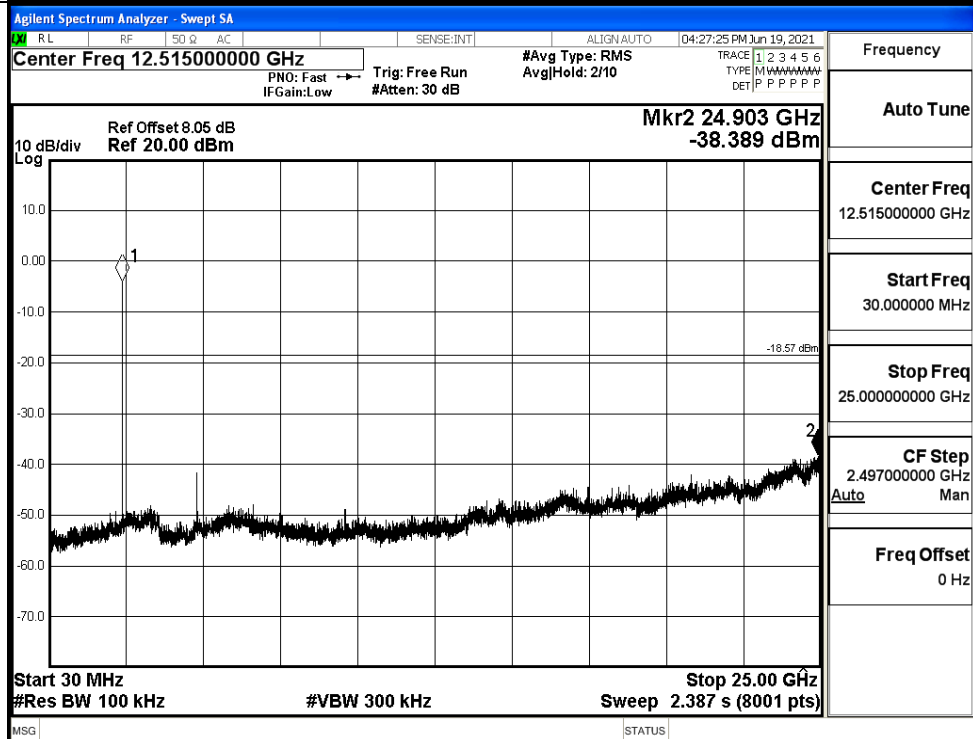


8DPSK_MCH_Graphs

Pref

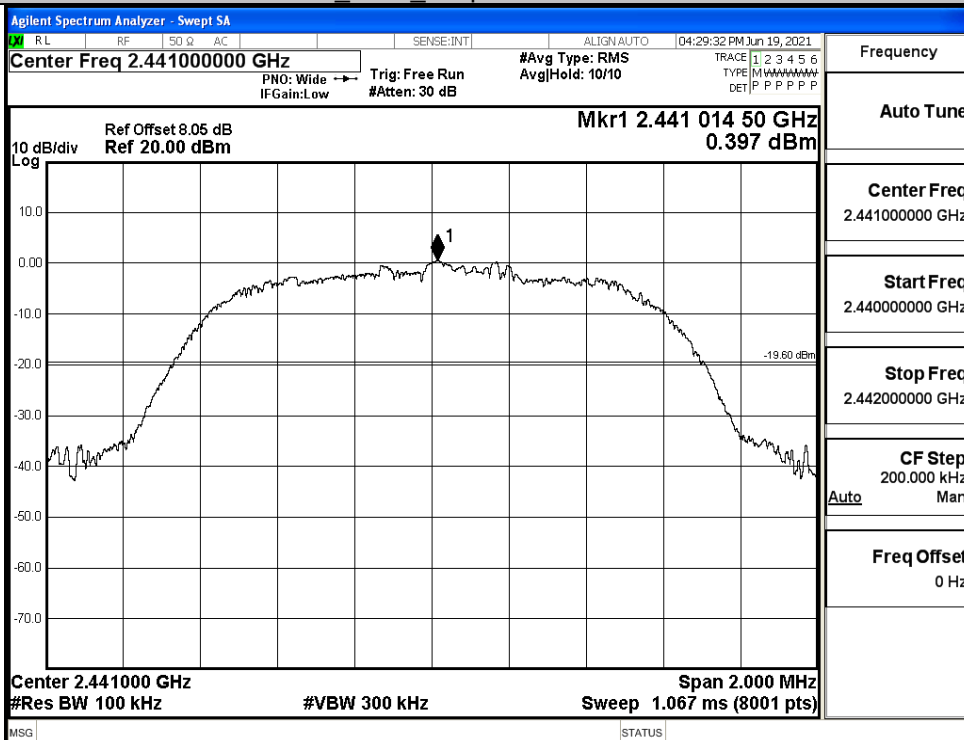


Puw

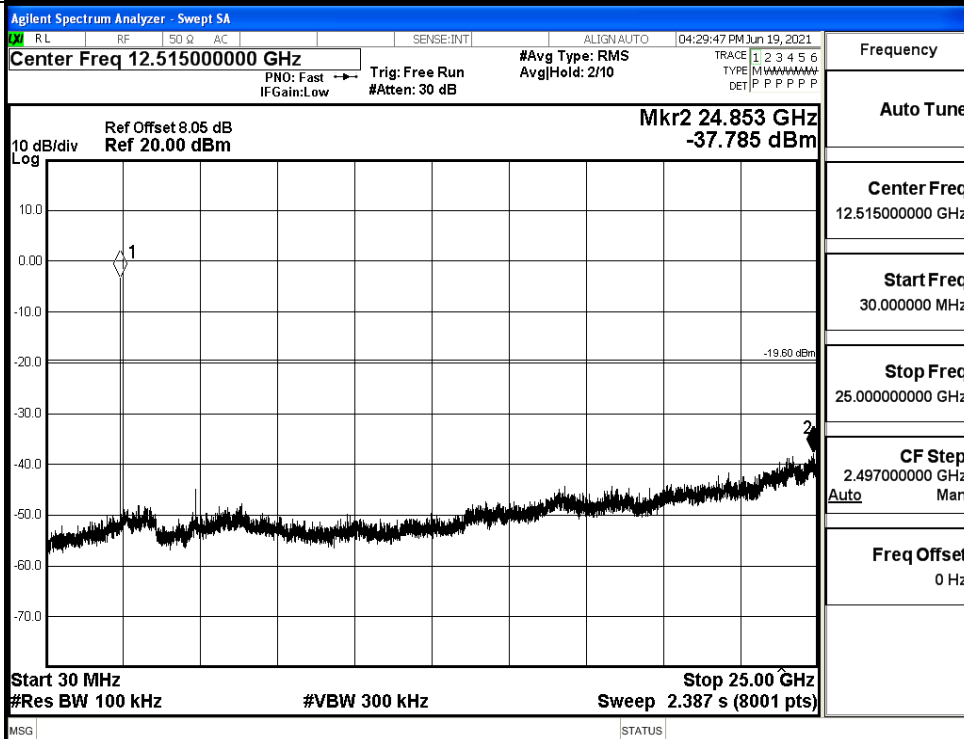


8DPSK_HCH_Graphs

Pref

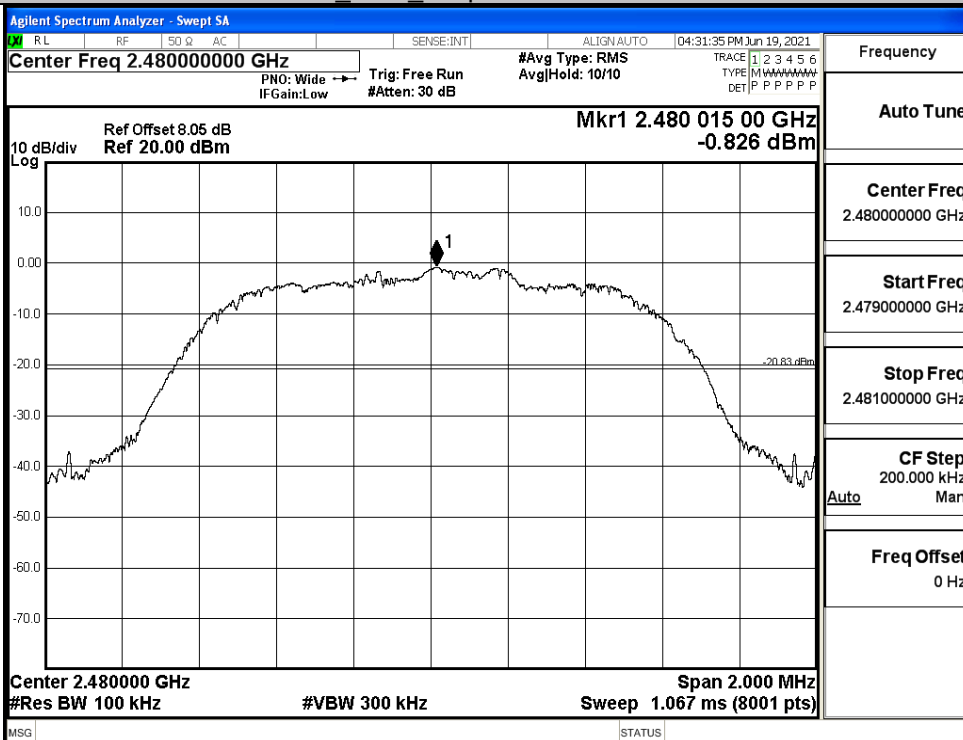

Puw

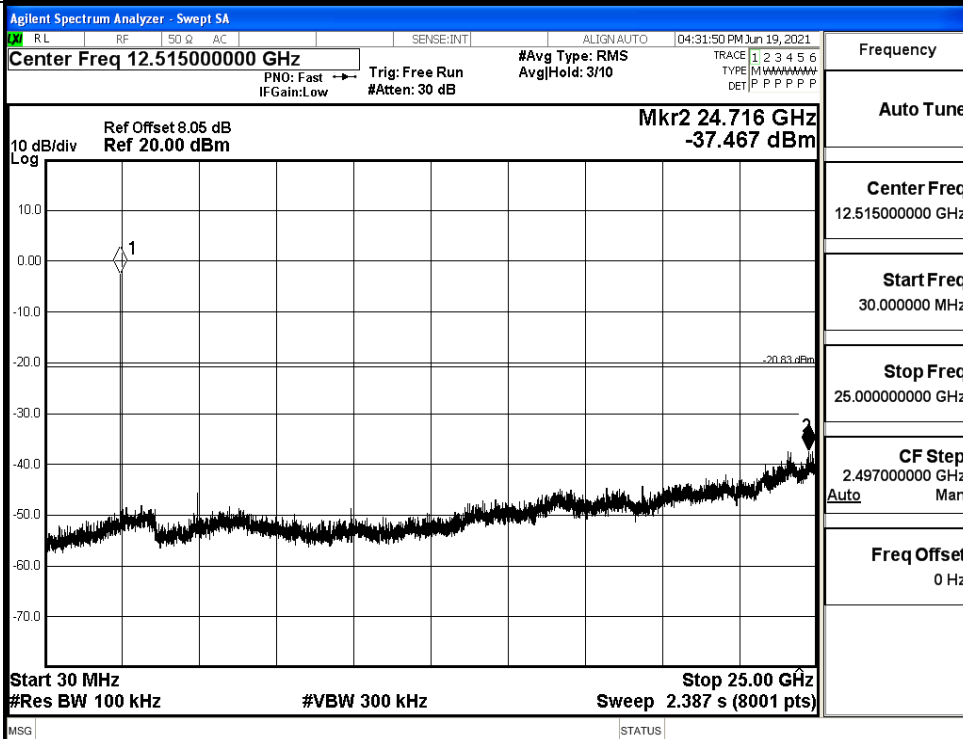


A.7 Band-edge for RF Conducted Emissions


Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	1.549	Off	-48.242	-18.45	PASS
			1.479	On	-47.384	-18.52	PASS
	HCH	2480	-0.810	Off	-49.674	-20.81	PASS
			0.060	On	-48.031	-19.94	PASS
$\pi/4$ DQPSK	LCH	2402	1.104	Off	-49.704	-18.9	PASS
			1.222	On	-48.705	-18.78	PASS
	HCH	2480	-0.951	Off	-49.091	-20.95	PASS
			-0.357	On	-48.008	-20.36	PASS
8DPSK	LCH	2402	1.473	Off	-48.907	-18.53	PASS
			1.393	On	-49.144	-18.61	PASS
	HCH	2480	-0.791	Off	-47.938	-20.79	PASS
			0.285	On	-48.432	-19.72	PASS

Test Graphs


GFSK/LCH/No Hop

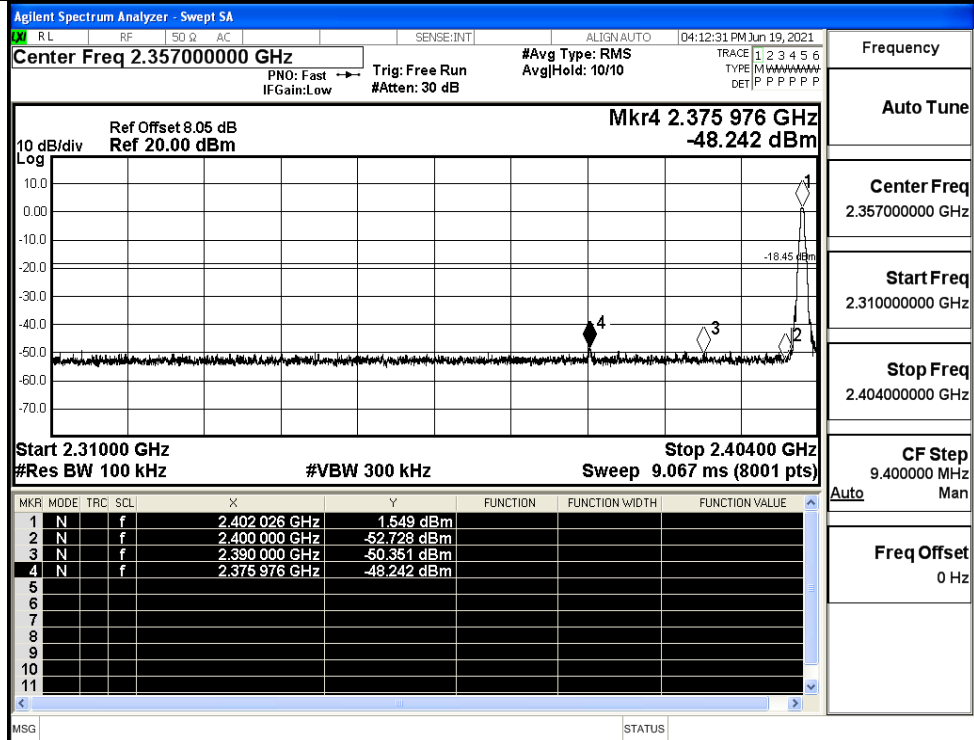


GFSK/LCH/Hop

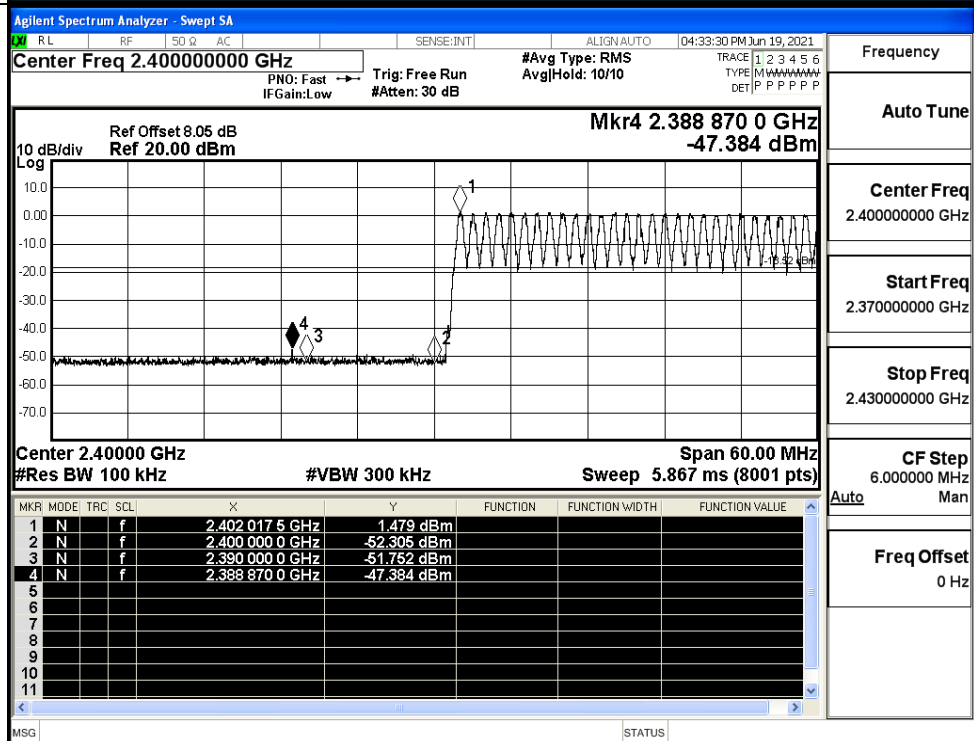


GFSK/HCH/No Hop

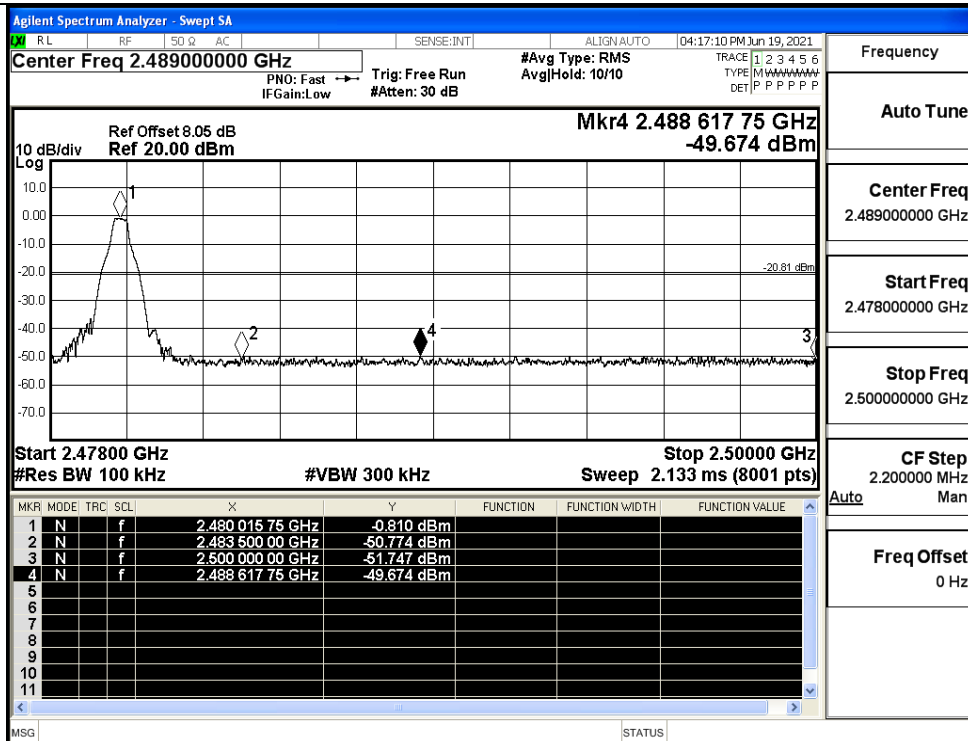

GFSK/HCH/Hop

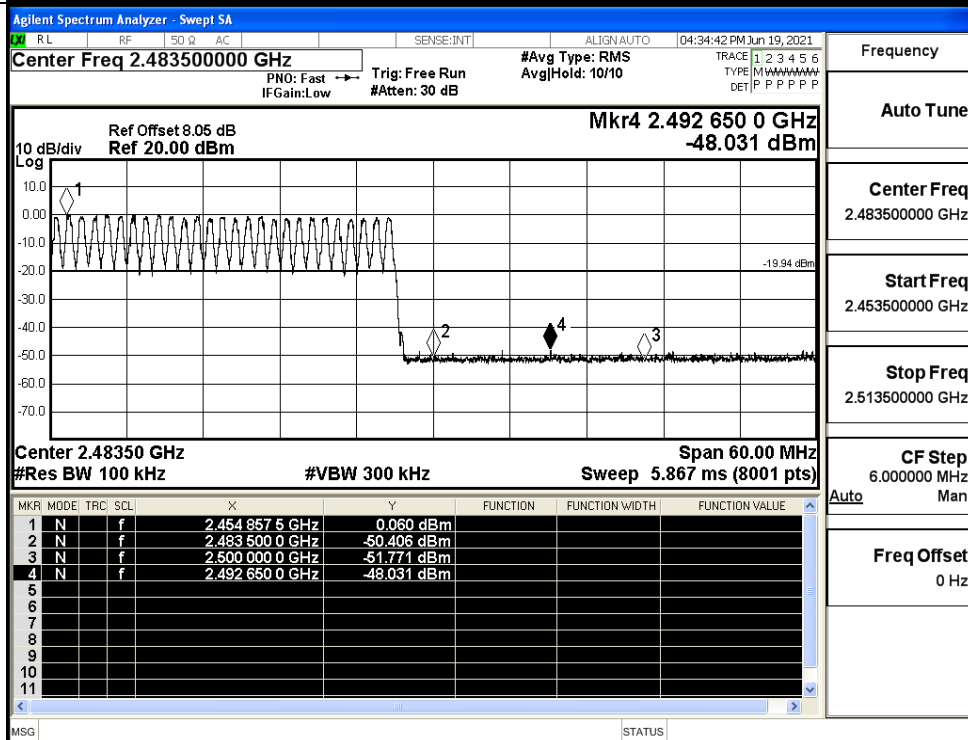

$\pi/4$ DQPSK/LCH/No
Hop

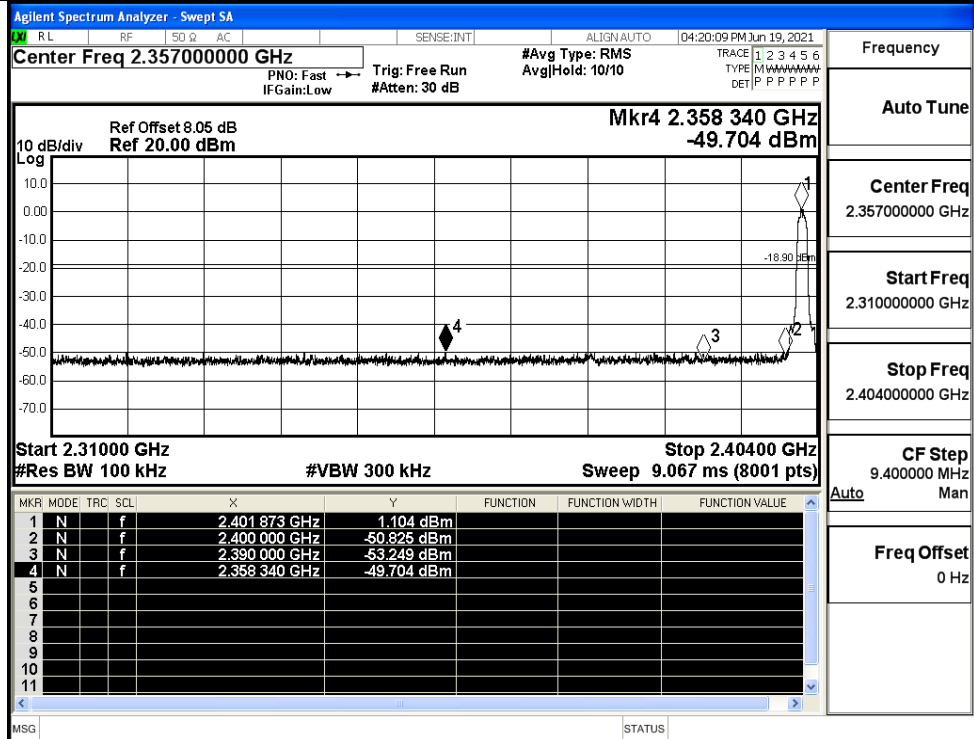

Frequency

Auto Tune

Center Freq
2.357000000 GHz


Start Freq
2.310000000 GHz

Stop Freq
2.404000000 GHz

CF Step
9.400000 MHz

Freq Offset
0 Hz

$\pi/4$ DQPSK/LCH/Hop

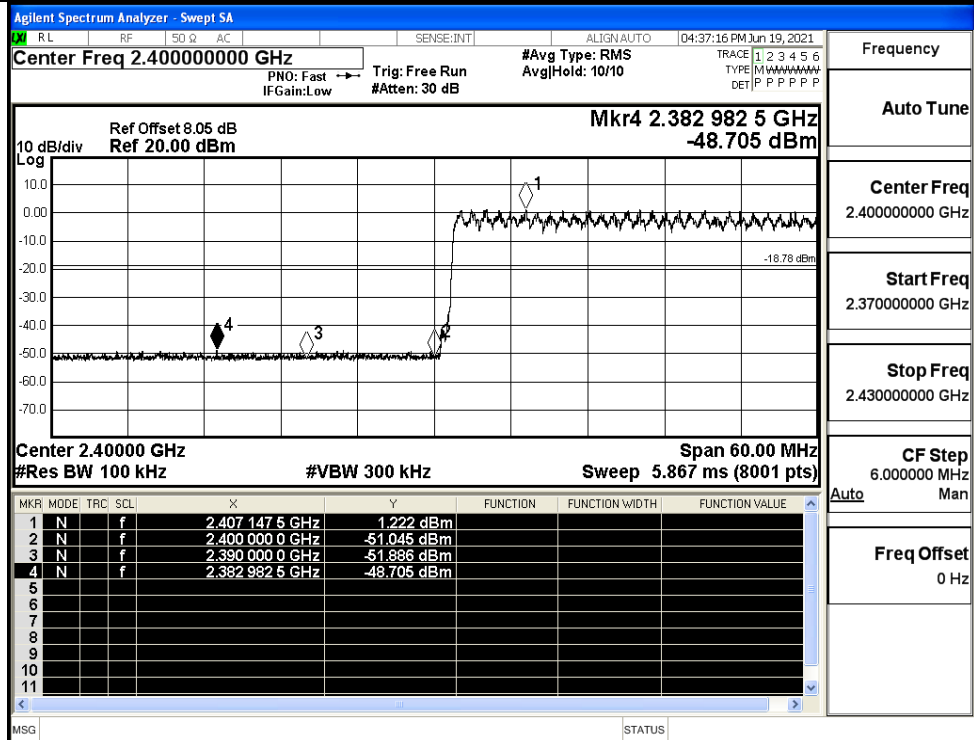

Frequency

Auto Tune

Center Freq
2.400000000 GHz


Start Freq
2.370000000 GHz

Stop Freq
2.430000000 GHz

CF Step
6.000000 MHz

Freq Offset
0 Hz

$\pi/4$ DQPSK/HCH/No
Hop

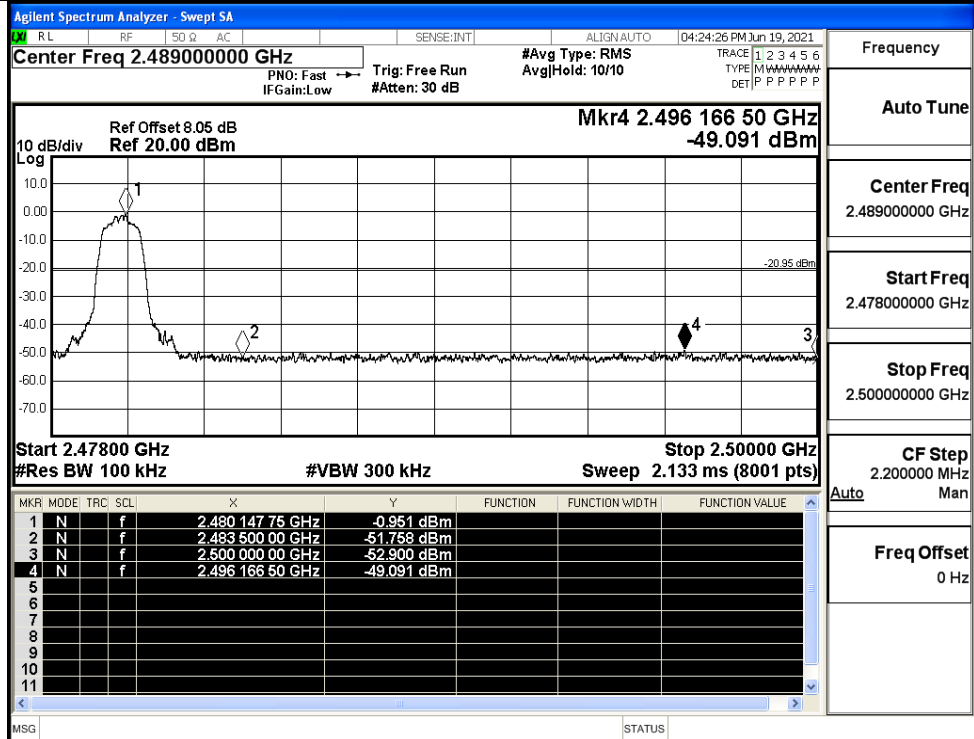

Frequency

Auto Tune

Center Freq
2.489000000 GHz

Start Freq
2.478000000 GHz


Stop Freq
2.500000000 GHz

CF Step
2.200000 MHz

Auto Man

Freq Offset
0 Hz

$\pi/4$ DQPSK/HCH/Hop

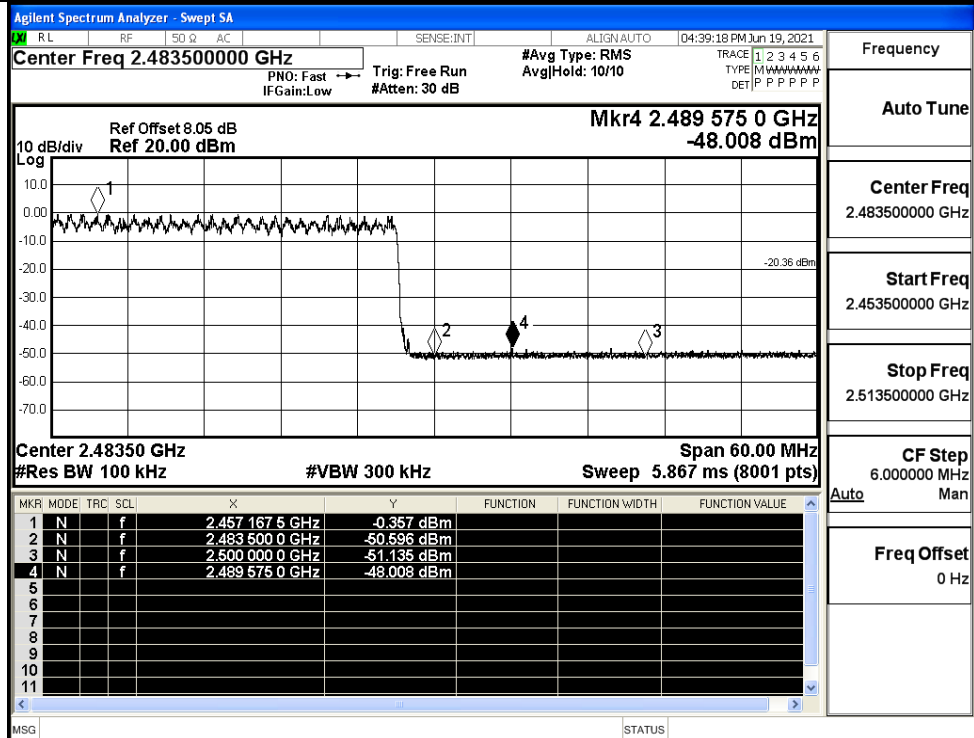

Frequency

Auto Tune

Center Freq
2.483500000 GHz

Start Freq
2.453500000 GHz


Stop Freq
2.513500000 GHz

CF Step
6.000000 MHz

Auto Man

Freq Offset
0 Hz

8DPSK/LCH/No Hop

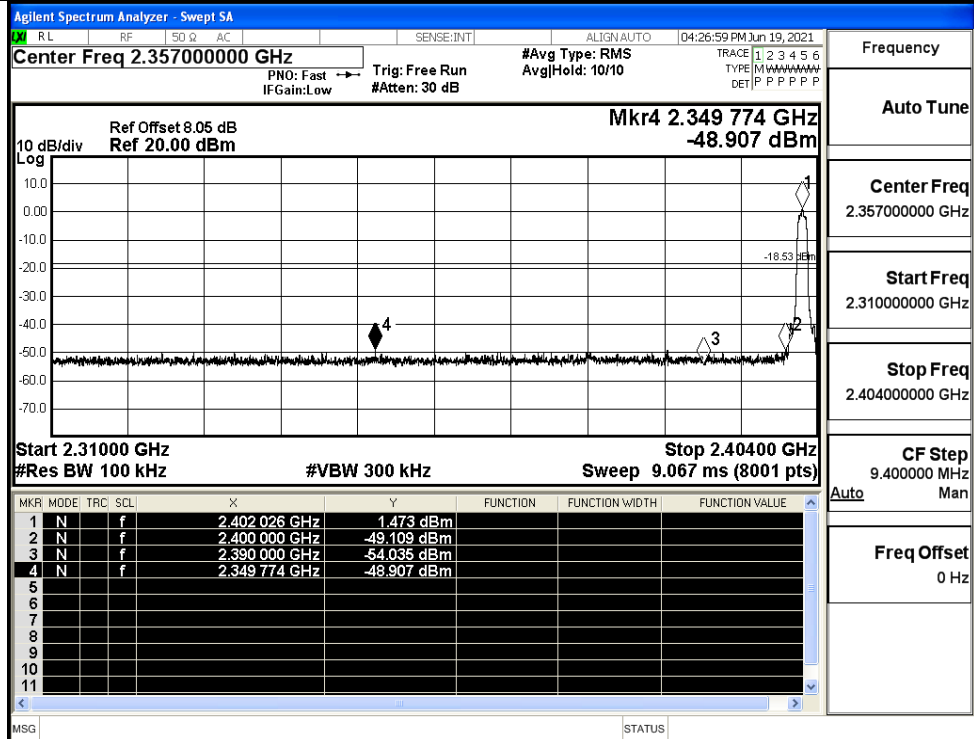

Frequency

Auto Tune

Center Freq
2.357000000 GHz


Start Freq
2.310000000 GHz

Stop Freq
2.404000000 GHz

CF Step
9.400000 MHz
Auto Man

Freq Offset
0 Hz

8DPSK/LCH/Hop

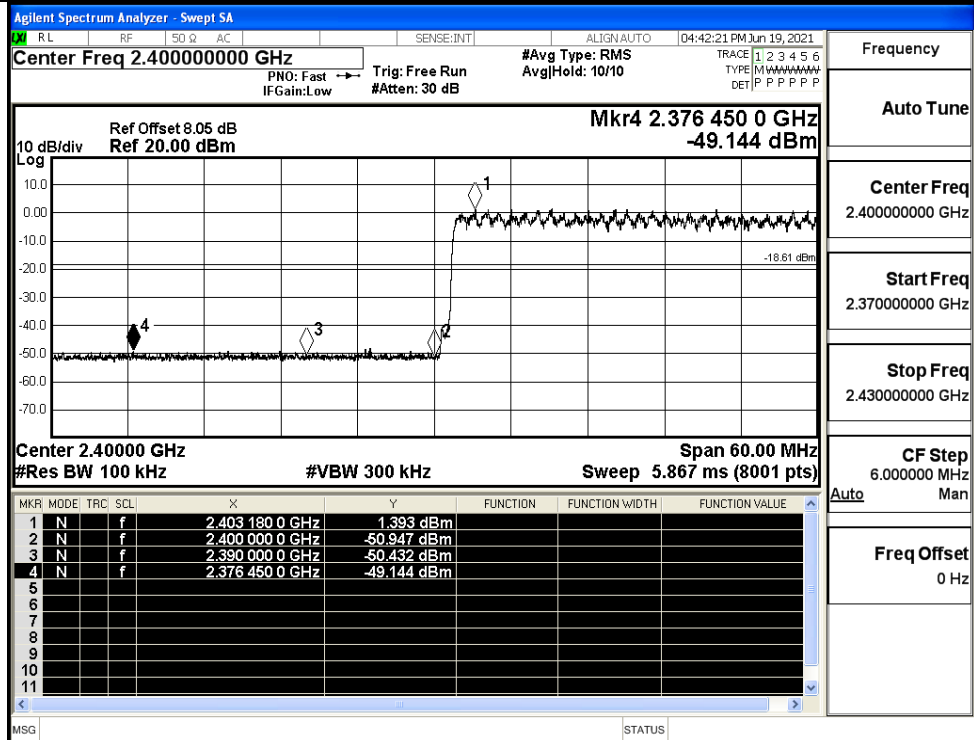

Frequency

Auto Tune

Center Freq
2.400000000 GHz


Start Freq
2.370000000 GHz

Stop Freq
2.430000000 GHz


CF Step
6.000000 MHz
Auto Man

Freq Offset
0 Hz

8DPSK/HCH/No Hop

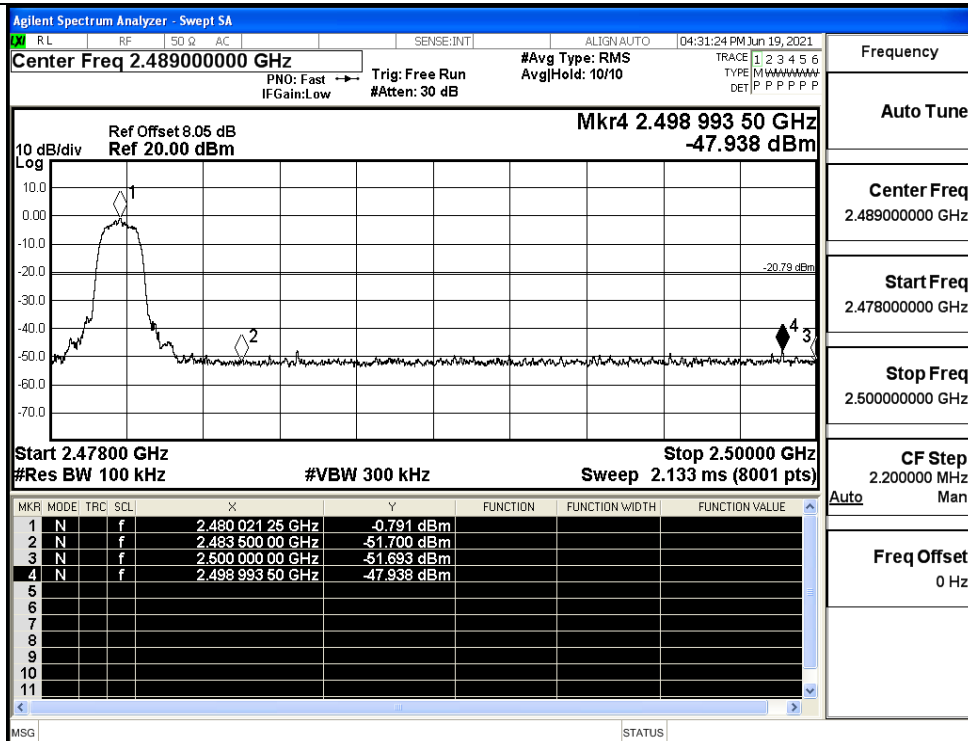


8DPSK/HCH/Hop

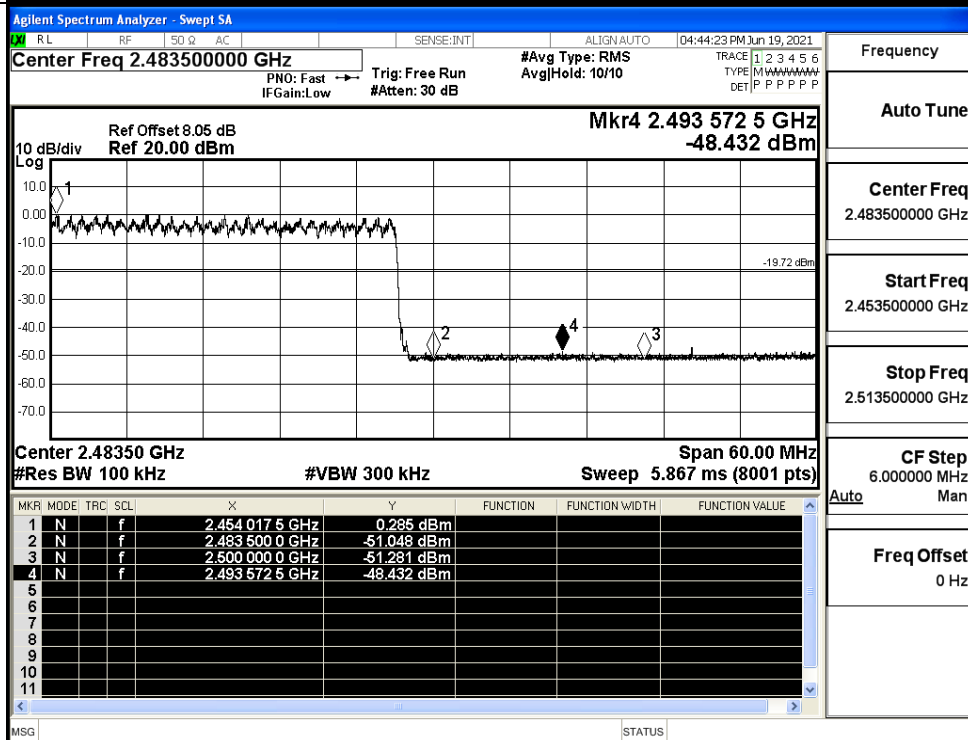


A.8 Restrict-band band-edge measurements

Test Mode	Hopping	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdict
GFSK	Off	2310.0	-41.53	2.0	0	55.70	PEAK	74	PASS
	Off	2310.0	-53.33	2.0	0	43.90	AV	54	PASS
	Off	2390.0	-42.72	2.0	0	54.51	PEAK	74	PASS
	Off	2390.0	-52.93	2.0	0	44.30	AV	54	PASS
	Off	2483.5	-43.02	2.0	0	54.21	PEAK	74	PASS
	Off	2483.5	-52.40	2.0	0	44.83	AV	54	PASS
	Off	2500.0	-41.44	2.0	0	55.79	PEAK	74	PASS
	Off	2500.0	-52.20	2.0	0	45.03	AV	54	PASS
$\pi/4$ DQPSK	Off	2310.0	-43.19	2.0	0	54.04	PEAK	74	PASS
	Off	2310.0	-53.17	2.0	0	44.06	AV	54	PASS
	Off	2390.0	-43.41	2.0	0	53.82	PEAK	74	PASS
	Off	2390.0	-52.87	2.0	0	44.36	AV	54	PASS
	Off	2483.5	-43.12	2.0	0	54.11	PEAK	74	PASS
	Off	2483.5	-52.33	2.0	0	44.90	AV	54	PASS
	Off	2500.0	-40.74	2.0	0	56.49	PEAK	74	PASS
	Off	2500.0	-52.27	2.0	0	44.96	AV	54	PASS
8DPSK	Off	2310.0	-42.05	2.0	0	55.18	PEAK	74	PASS
	Off	2310.0	-53.33	2.0	0	43.90	AV	54	PASS
	Off	2390.0	-39.68	2.0	0	57.55	PEAK	74	PASS
	Off	2390.0	-52.99	2.0	0	44.24	AV	54	PASS
	Off	2483.5	-41.88	2.0	0	55.35	PEAK	74	PASS
	Off	2483.5	-52.36	2.0	0	44.87	AV	54	PASS
	Off	2500.0	-42.69	2.0	0	54.54	PEAK	74	PASS
	Off	2500.0	-52.29	2.0	0	44.94	AV	54	PASS


Restrict-band band-edge measurements_Hopping Off_GFSK_PEAK (Low Channel)

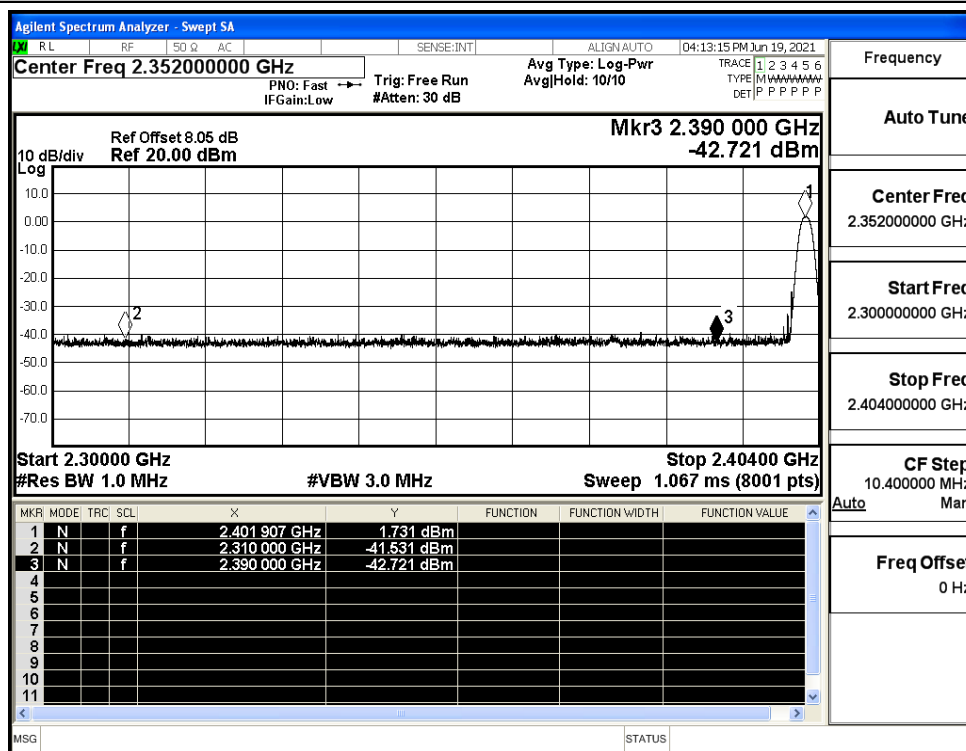


Restrict-band band-edge measurements_Hopping Off_GFSK_Average (Low Channel)

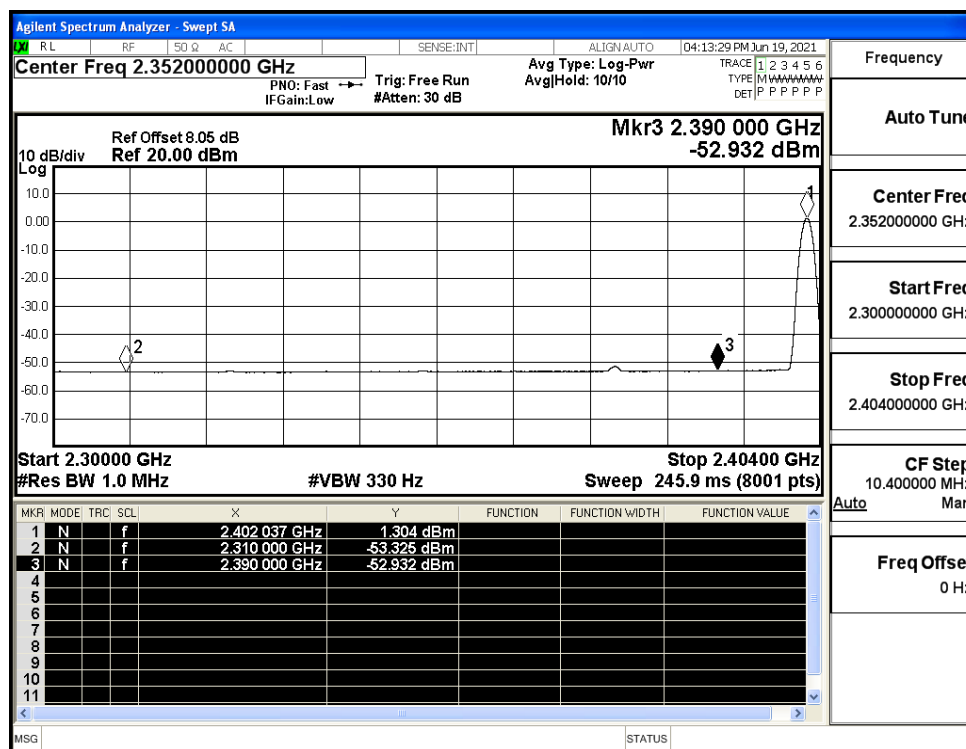


Restrict-band band-edge measurements_Hopping Off_GFSK_PEAK (High Channel)

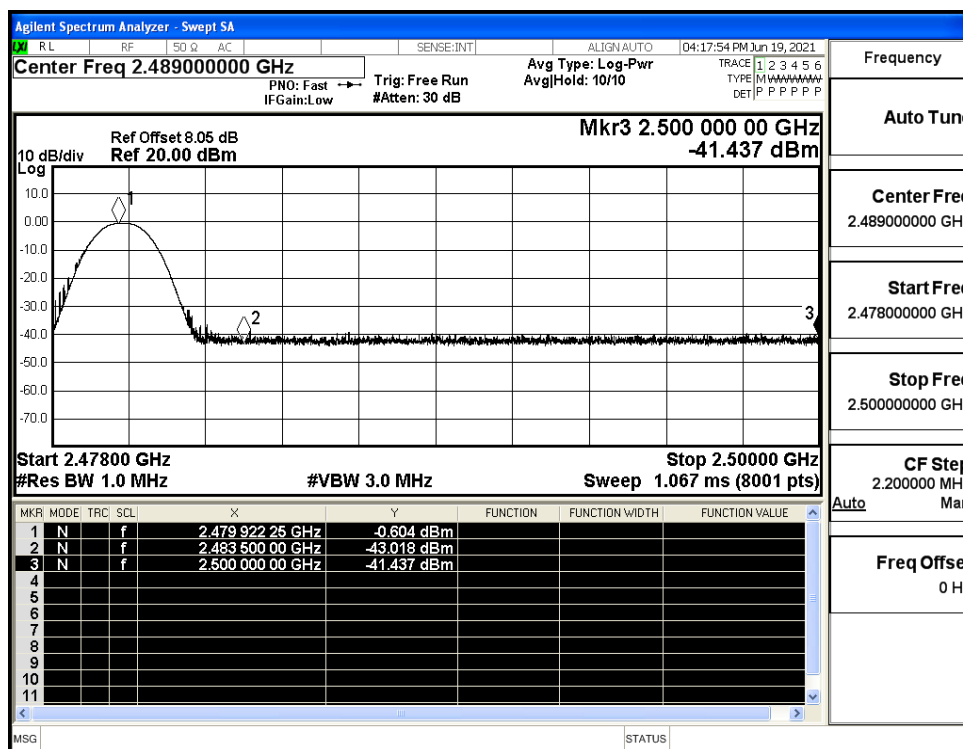


Restrict-band band-edge measurements_Hopping Off_GFSK_Average (High Channel)

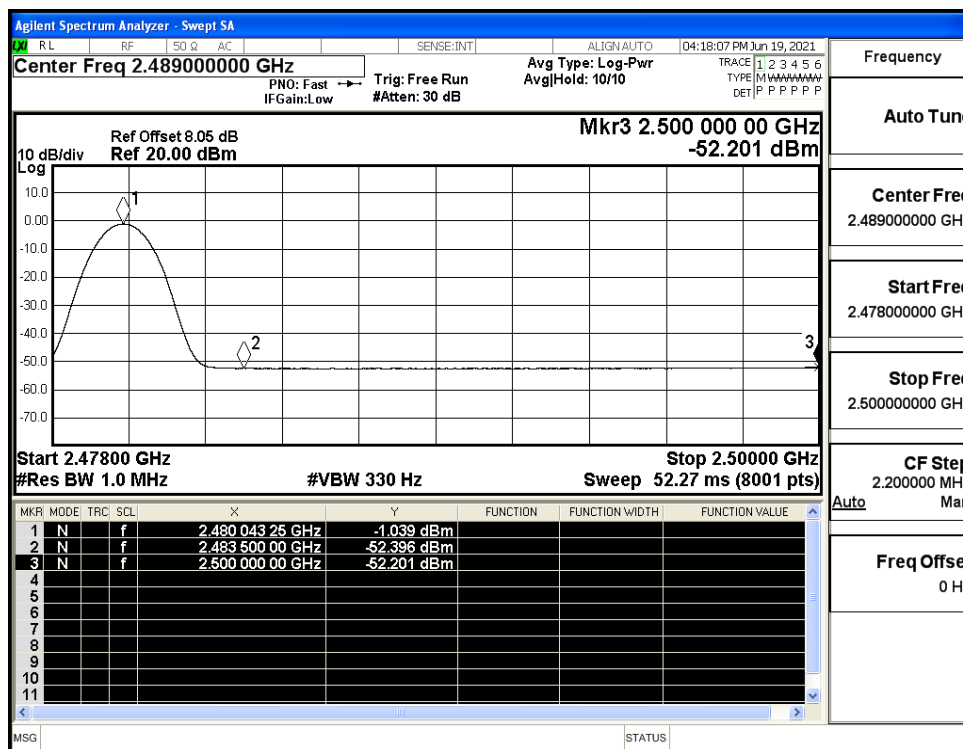


Restrict-band band-edge measurements_Hopping Off $\pi/4$ -DQPSK_PEAK (Low Channel)

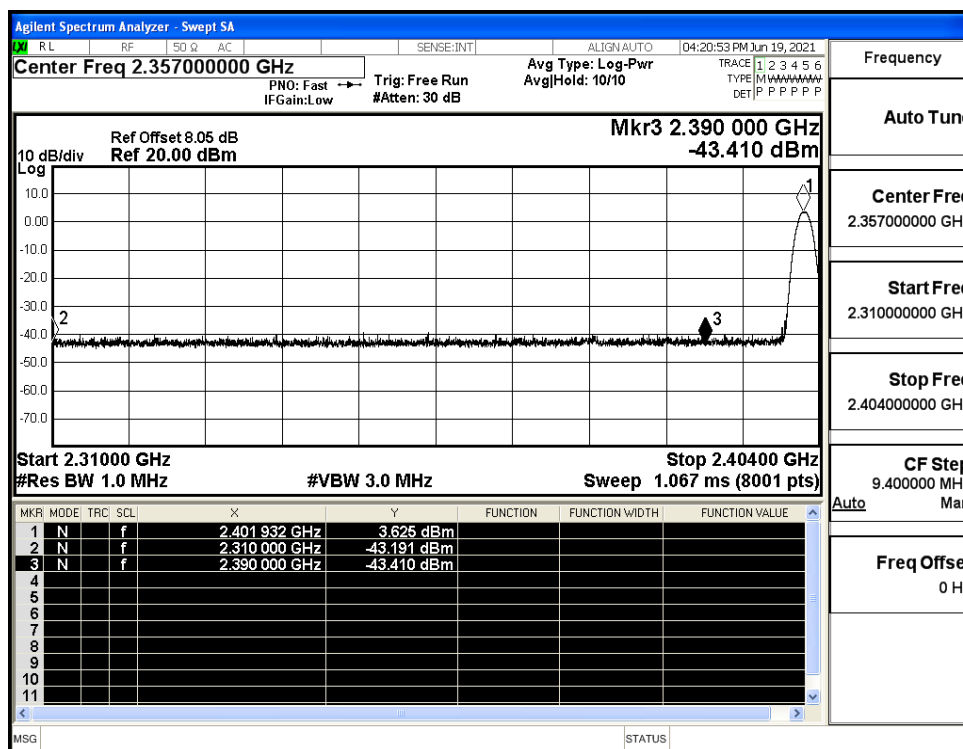


Restrict-band band-edge measurements_Hopping Off $\pi/4$ -DQPSK_Average (Low Channel)

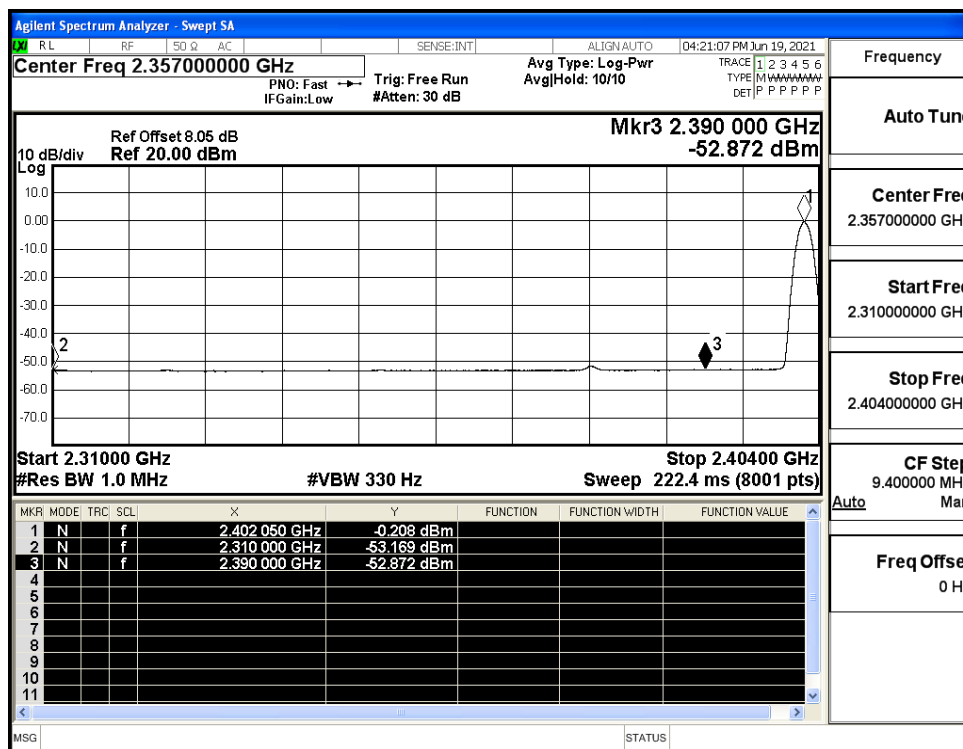


Restrict-band band-edge measurements_Hopping Off_π/4-DQPSK_PEAK (High Channel)

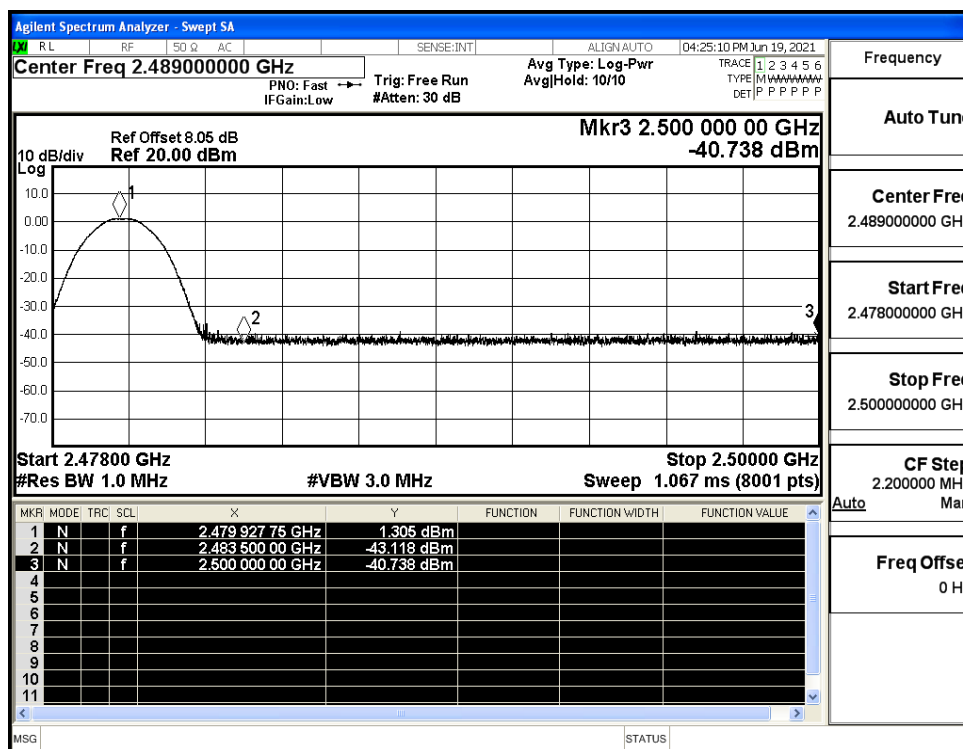


Restrict-band band-edge measurements_Hopping Off_π/4-DQPSK_Average (High Channel)

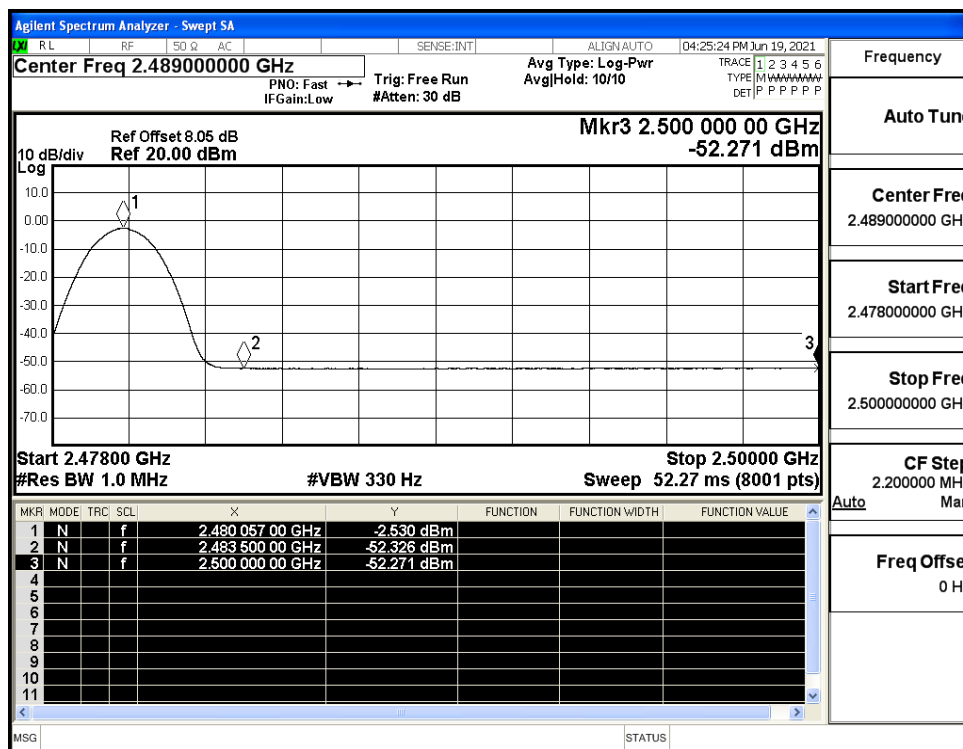


Restrict-band band-edge measurements_Hopping Off_8DPSK_PEAK (Low Channel)

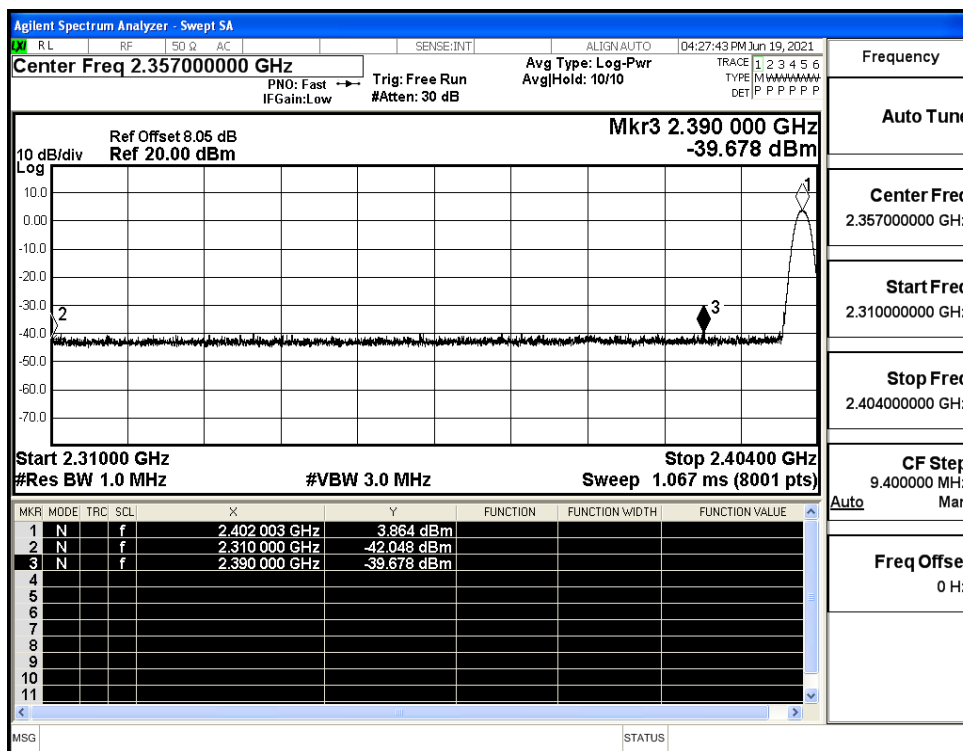

Restrict-band band-edge measurements_Hopping Off_8DPSK_Average (Low Channel)

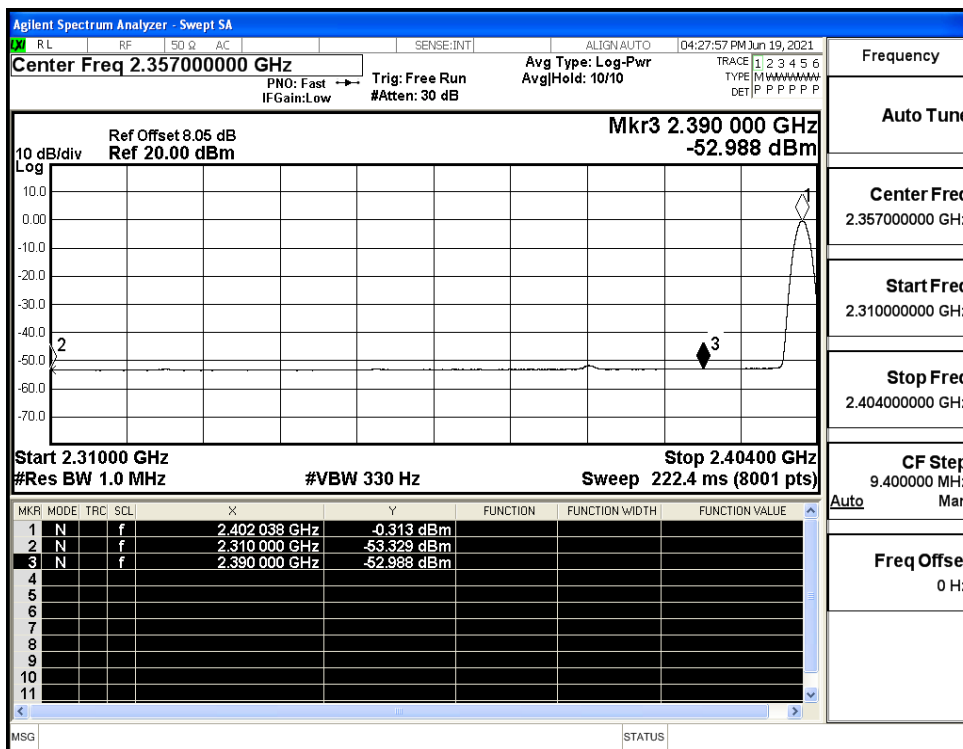

Restrict-band band-edge measurements_Hopping Off_8DPSK_PEAK (High Channel)

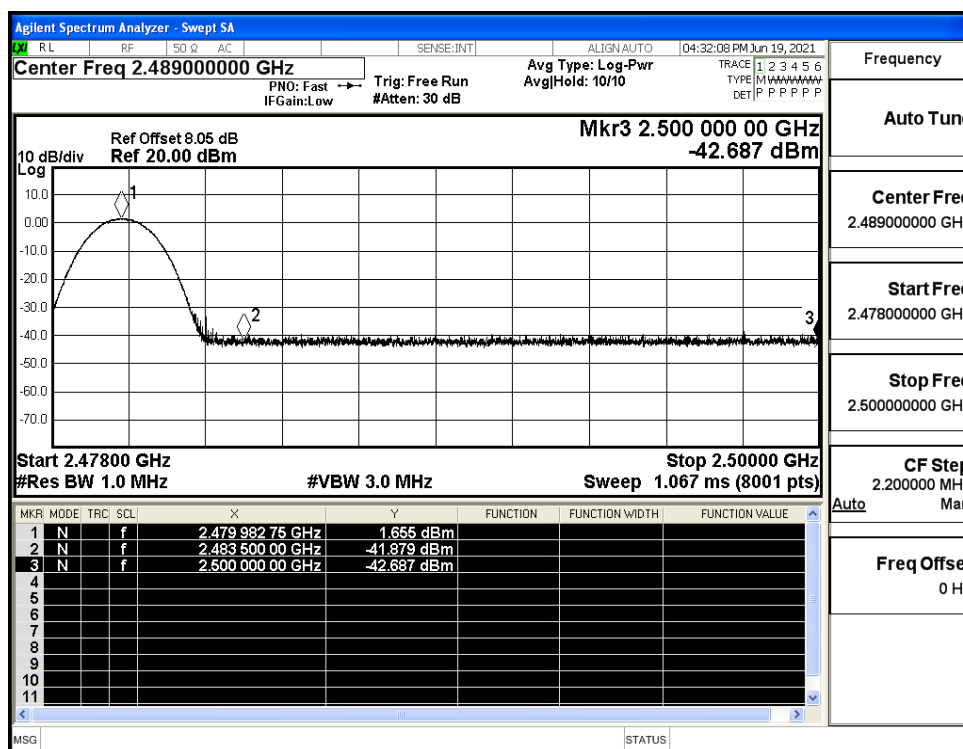

Restrict-band band-edge measurements_Hopping Off_8DPSK_Average (High Channel)

