



FCC PART 15.407 TEST REPORT

On Behalf of

Xiamen Prima Technology Inc.

NO.333,Shangtang North Road,Xiang' an District, Xiamen, Fujian,China

FCC ID: 2ADID-WXT23M2001
Model: WXT23M2001

June 11, 2025

This Report Concerns: ☒ Original Report	Equipment Type: WIFI module
Test Engineer: LBi Li / <i>LBi Li</i>	
Report Number: QCT25ER-0091E-04	
Test Date: May 27 ~ June 10, 2025	
Reviewed By: Vincent Yang / <i>Vincent Yang</i>	
Approved By: Kendy Wang / <i>Kendy Wang</i>	
Prepared By: Shenzhen QC Testing Laboratory Co., Ltd. East of 1/F., Building E, Xinghong Science Park, No.111, Shuiku Road, Fenghuanggang, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China Tel: 0755-23008269 Fax: 0755-23726780	



Table of Contents

1. GENERAL INFORMATION	5
1.1 Product Description for Equipment under Test (EUT)	5
1.2 System Test Configuration	6
1.3 Test Facility	9
1.4 Measurement Uncertainty	9
2. SUMMARY OF TEST RESULTS	10
3. LIST OF TEST AND MEASUREMENT INSTRUMENTS	11
3.1 Conducted Emission Test	11
3.2 Radiated Emission Test	11
3.3 RF Conducted test	12
4. ANTENNA REQUIREMENT	13
5. CONDUCTED EMISSIONS	14
5.1 Applicable Standard	14
5.2 Limit	14
5.3 Test setup	14
5.4 EMI Test Receiver Setup	14
5.5 Test procedure	14
5.6 Test Data	14
6. EMISSION BANDWIDTH	17
6.1 Test Method of -26dB Bandwidth	17
6.2 Test Method of -6dB Bandwidth	17
6.3 Test Method of 99% Bandwidth	17
6.4 Test setup	18
6.5 Test Data	18
7. MAXIMUM CONDUCTED OUTPUT POWER	213
7.1 Test Method	213
7.2 Limit	213
7.3 Test setup	213
7.4 Test Procedure	213
7.5 Test Data	213
8. MAXIMUM POWER SPECTRAL DENSITY	220
8.1 Applicable Standard	220
8.2 Limit	220
8.3 Test setup	220
8.4 Test Procedure	220
8.5 Test Data	220



9. BAND EDGE	318
9.1 Applicable Standard	318
9.2 Limit	318
9.3 EMI Test Receiver Setup	318
9.4 Test setup	318
9.5 Test Procedure	318
9.6 Test Data	319
10. RADIATED EMISSION METHOD	354
10.1 Applicable Standard	354
10.2 Limit	354
10.3 Test setup	354
10.4 EMI Test Receiver Setup	355
10.5 Test procedure	355
10.6 Test Data	356
11. FREQUENCIES STABILITY	366
11.1 Applicable Standard	366
11.2 Limit	366
11.3 Test setup	366
11.4 Test Procedure	366
11.5 Test Data	367
12. DYNAMIC FREQUENCY SELECTION (DFS)	372



Report Number

Description

Issued Date

QCT25ER-0091E-04

Initial Issue

2025-6-11



1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Description	WIFI module
Model No.	WXT23M2001
Tested Model	WXT23M2001
Sample(s) Status	Engineer sample
Operation Frequency:	U-NII-1: 5180MHz~5240MHz U-NII-2A: 5260MHz~5320MHz U-NII-2C: 5500MHz~5720MHz U-NII-3: 5745MHz~5825MHz
Modulation type:	802.11a/802.11n/802.11ac: (OFDM) 802.11ax: (OFDMA)
Antenna Type:	PCB Antenna
Antenna gain*1:	U-NII-1/ U-NII-2A: Ant 1: -1.58dBi Ant 2: -2.38dBi Note: Ant 1 and Ant 2 support MIMO mode, so directional gain value as below: $\text{Directional Gain} = 10 * \log[(10^{-1.58/20} + 10^{-2.38/20})^2 / 2] = 1.04\text{dBi}$ U-NII-2C/ U-NII-3: Ant 1: 3.35dBi Ant 2: 5.85dBi Note: Ant 1 and Ant 2 support MIMO mode, so directional gain value as below: $\text{Directional Gain} = 10 * \log[(10^{3.35/20} + 10^{5.85/20})^2 / 2] = 7.70\text{dBi}$
Power supply:	5V DC (Powered by USB Port)
TPC Support	No
DFS	Slaver device without radar detection function
Trade Mark:	Prima
Applicant	Xiamen Prima Technology Inc.
Address	NO.333,Shangtang North Road,Xiang' an District, Xiamen, Fujian,China
Manufacturer	Xiamen Prima Technology Inc.
Address	NO.333,Shangtang North Road,Xiang' an District, Xiamen, Fujian,China
Sample No.	Y25E0091E01WC

Note: *1This information provided by Manufacturer, SZ QC Lab is not responsible for the accuracy of this information.



1.2 System Test Configuration

1.2.1 Channel List

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5180~5240MHz (U-NII-1)	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz		
For 20 MHz Bandwidth, use channel 36, 40, 44, 48. For 40 MHz Bandwidth, use channel 38, 46. For 80 MHz Bandwidth, use channel 42.				
5260~5320MHz (U-NII-2A)	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
	58	5290 MHz		
For 20 MHz Bandwidth, use channel 52, 56, 60, 64. For 40 MHz Bandwidth, use channel 54, 62. For 80 MHz Bandwidth, use channel 58.				
5500~5720MHz (U-NII-2C)	100	5500 MHz	122	5610 MHz
	102	5510 MHz	124	5620 MHz
	104	5520 MHz	126	5630 MHz
	106	5530 MHz	128	5640 MHz
	108	5540 MHz	132	5660 MHz
	110	5550 MHz	134	5670 MHz
	112	5560 MHz	136	5680 MHz
	114	5570 MHz	138	5690 MHz
	116	5580 MHz	140	5700 MHz
	118	5590 MHz	142	5710 MHz
	120	5600 MHz	144	5720 MHz
For 20 MHz Bandwidth, use channel 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144. For 40 MHz Bandwidth, use channel 102, 110, 118, 126, 134, 142. For 80 MHz Bandwidth, use channel 106, 122, 138.				
5745~5825MHz (U-NII-3)	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz
For 20 MHz Bandwidth, use channel 149, 153, 157, 161, 165. For 40 MHz Bandwidth, use channel 151, 159. For 80 MHz Bandwidth, use channel 155.				



Note: In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test Mode	Channel (MHz)		
	5G Wi-Fi UNII-1		
802.11a 802.11n HT20 802.11ac VHT20 802.11ax HE20	CH36 (5180MHz)	CH40 (5200MHz)	CH48 (5240MHz)
	5G Wi-Fi UNII-2A		
	CH52 (5260MHz)	CH60 (5300MHz)	CH64 (5320MHz)
	5G Wi-Fi UNII-2C		
	CH100 (5500MHz)	CH116 (5580MHz)	CH140 (5700MHz)
	CH144 (5720MHz)		
	5G Wi-Fi UNII-3		
	CH149 (5745MHz)	CH157 (5785MHz)	CH165 (5825MHz)

Test Mode	Channel (MHz)		
	5G Wi-Fi UNII-1		
802.11n HT40 802.11ac VHT40 802.11ax HE40	CH38 (5190MHz)	CH46 (5230MHz)	
	5G Wi-Fi UNII-2A		
	CH54 (5270MHz)	CH62 (5310MHz)	
	5G Wi-Fi UNII-2C		
	CH102 (5510MHz)	CH110 (5550MHz)	CH134 (5670MHz)
	CH142 (5710MHz)		
	5G Wi-Fi UNII-3		
	CH151 (5755MHz)	CH159 (5795MHz)	

Test Mode	Channel (MHz)		
	5G Wi-Fi UNII-1		
802.11ac VHT80 802.11ax HE80	CH42 (5210MHz)		
	5G Wi-Fi UNII-2A		
	CH58 (5290MHz)		
	5G Wi-Fi UNII-2C		
	CH106 (5530MHz)	CH122 (5610MHz)	CH138 (5690MHz)
	5G Wi-Fi UNII-3		
	CH155 (5775MHz)		



1.2.2 EUT Exercise Software

The test software (QATool_Dbg) was used to control EUT work in Continuous TX mode, and select test channel, wireless mode:

Mode	Data Rate (Mbps)	ANT 1 Power Level	ANT 2 Power Level
802.11a	6	18	18
802.11n20/802.11n40	MCS0	17	17
802.11ac20/802.11ac40/802.11ac80	MCS0	16	16
802.11ax20/802.11ax40/802.11ax80	MCS0	17	17

The software and power level was provided by the applicant.

1.2.3 Support Equipment

Manufacturer	Description	Model	Remark
Technity Solutions Inc.	Intelligent Wireless AccessPointe	TS-MWI3000 W4P	FCC ID: 2ATAZ-MWI3000W4P
Dell	Notebook PC	Inspiron 15 3511	13764488907
Dell	Notebook PC 65W-AC ADAPTER	HA65NS5-00	A065R073L
Un-Known	USB Cable	Un-Known	Un-Known

1.2.4 Test mode and test voltage

1. Transmitting mode: Keep the EUT in continuously transmitting.
2. 802.11ax mode only support Full RU.
3. Test voltage: 5V DC (Powered by USB Port)



1.3 Test Facility

Test Firm : Shenzhen QC Testing Laboratory Co., Ltd.

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS – Registration No.: L8464

The EMC Laboratory has been accredited by CNAS, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

A2LA Certificate Number: 6759.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 561109

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 29628

CAB identifier: CN0141

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

1.4 Measurement Uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 1.42 \times 10^{-4}\%$
RF output power, conducted	$\pm 1.06\text{dB}$
Power Spectral Density, conducted	$\pm 1.06\text{dB}$
Unwanted Emissions, conducted	$\pm 2.51\text{dB}$
AC Power Line Conducted Emission	$\pm 1.80\text{dB}$
Radiated Spurious Emission test (9kHz-30MHz)	$\pm 2.66\text{dB}$
Radiated Spurious Emission test (30MHz-1000MHz)	$\pm 4.04\text{dB}$
Radiated Spurious Emission test (1000MHz-18000MHz)	$\pm 4.70\text{ dB}$
Radiated Spurious Emission test (18GHz-40GHz)	$\pm 4.80\text{dB}$
Temperature	$\pm 0.8^{\circ}\text{C}$
Humidity	$\pm 3.2\%$
DC and low frequency voltages	$\pm 0.1\%$
Time	$\pm 5\%$
Duty cycle	$\pm 5\%$

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



2. Summary of Test Results

Test Item	Section	Result
Antenna Requirement	§15.203	Pass
AC Power Line Conducted Emission	§15.207	Pass
Maximum Conducted Output Power	§15.407(a)(1), (a)(3)	Pass
Emission Bandwidth	§15.407(a)(2)	Pass
Maximum Power Spectral Density	§15.407(a)(1), (a)(3)	Pass
Band Edge	§15.407(b)(1), (b)(2), (b)(3), (b)(4)	Pass
Unwanted Emission	§15.205/§15.209/§15.407(b)(1), (b)(2), (b)(3), (b)(4), (b)(8), (b)(9)	Pass
Frequencies Stability	§15.407(g)	Pass
Dynamic Frequency Selection (DFS)	§15.407(h)	Pass

- Note:
1. In the configuration tested, the EUT complied with the standards specified above;
 2. Test according to ANSI C63.10: 2013;
 3. The Frequency Stability item is declared by the manufacturer;
 4. All indications of Pass/Fail in this report are opinions expressed by Shenzhen QC Testing Laboratory Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.



3. List of Test and Measurement Instruments

3.1 Conducted Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	EMI Test Receiver	Rohde&Schwarz	ESIB 7	2277573376	2025.03.17	2026.03.16
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	101820	2024.08.06	2025.08.05
3	Artificial Mains Network	SCHWARZBECK	NSLK8126	8126200	2024.08.06	2025.08.05
4	PULSE LIMITER	Rohde&Schwarz	ESH3-Z2	100058	2025.03.18	2026.03.17

Conducted Emission Measurement Software: TS+ JS32-CE Ver 5.0.0

3.2 Radiated Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1.	EMI Test Receiver	Rohde&Schwarz	ESIB 7	2277573376	2025.03.17	2026.03.16
2.	EMI Test Receiver	Rohde&Schwarz	ESPI3	101131	2025.03.17	2026.03.16
3.	Spectrum Analyzer	Rohde&Schwarz	FSV 40	101458	2025.03.18	2026.03.17
4.	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9168	VULB9168-588	2025.03.22	2026.03.21
5.	Loop Antenna	EMCO	6502	2133	2025.03.19	2026.03.18
6.	horn antenna	SCHWARZBECK	BBHA9120D	2069	2024.08.10	2025.08.09
7.	Horn Antenna	COM-MW	ZLB7-18-40G-950	12221225	2024.08.10	2026.08.09
8.	Pre-amplifier	MITEQ	TTA0001-18	2063645	2025.03.17	2026.03.16
9.	Pre-amplifier	MITEQ	TTA1800-30-HG	2063644	2025.03.17	2026.03.16
10.	Pre-amplifier	COM-MW	DLAN-18000-40000-02	10229104	2025.03.22	2026.03.21
11.	966 Camber	ZhongYU	9*6*6	/	2023.05.08	2026.05.07

Radiated Emission Measurement Software: EZ_EMC Ver QCT03A2 RE+



3.3 RF Conducted test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1.	Wideband Radio Communication Tester	Rohde & Schwarz	CW500	151583	2025.03.18	2026.03.17
2.	Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40	101458	2025.03.18	2026.03.17
3.	Signal Generator	Agilent	N5182A	MY50141563	2025.03.18	2026.03.17
4.	RF Automatic Test System	MW	MW100-RFCB/ MW100-PSB	MW2007004	2025.03.18	2026.03.17
RF Conducted Measurement Software: MTS 8310 Ver 2.0.0.0						



4. Antenna requirement

Standard requirement: FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna: The Antenna is PCB Antenna, reference to the Internal photo for details.

5. Conducted Emissions

5.1 Applicable Standard


FCC Part15 C Section 15.207

5.2 Limit

Frequency range (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Note *: The level decreases linearly with the logarithm of the frequency.

5.3 Test setup

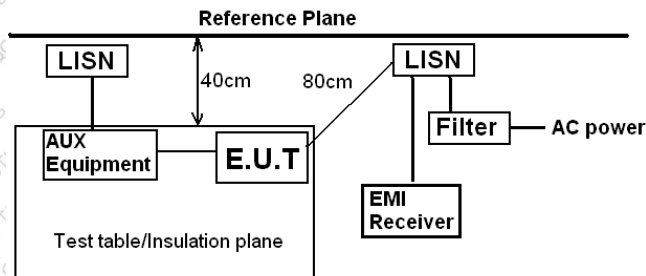

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

5.4 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.
RBW=9 kHz, VBW=30 kHz, Sweep time=auto

5.5 Test procedure

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.

5.6 Test Data


Temperature	26.1°C	Humidity	59%
ATM Pressure	101.1kPa	Antenna Gain	see page 5
Test by	LBi Li	Test result	PASS



Measurement data:

Pre-scan all test modes, found worst case at 802.11n20_MIMO 5260MHz TX, and so only show the test result of 802.11n20_MIMO 5260MHz TX.

Line:

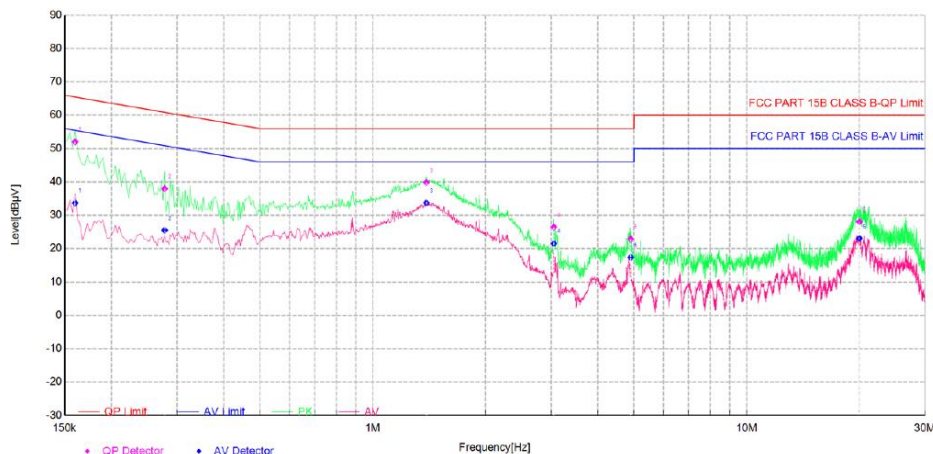


Final Data List

NO.	Freq. [MHz]	Factor[dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Phase	Verdict
1	0.1600	10.59	52.03	65.46	13.43	33.72	55.46	21.74	L	PASS
2	0.2775	10.69	37.97	60.89	22.92	25.52	50.89	25.37	L	PASS
3	1.3925	10.66	39.87	56.00	16.13	33.75	46.00	12.25	L	PASS
4	3.0485	10.71	26.51	56.00	29.49	21.56	46.00	24.44	L	PASS
5	4.8980	10.73	22.93	56.00	33.07	17.39	46.00	28.61	L	PASS
6	20.0225	10.91	28.07	60.00	31.93	23.09	50.00	26.91	L	PASS



Neutral:

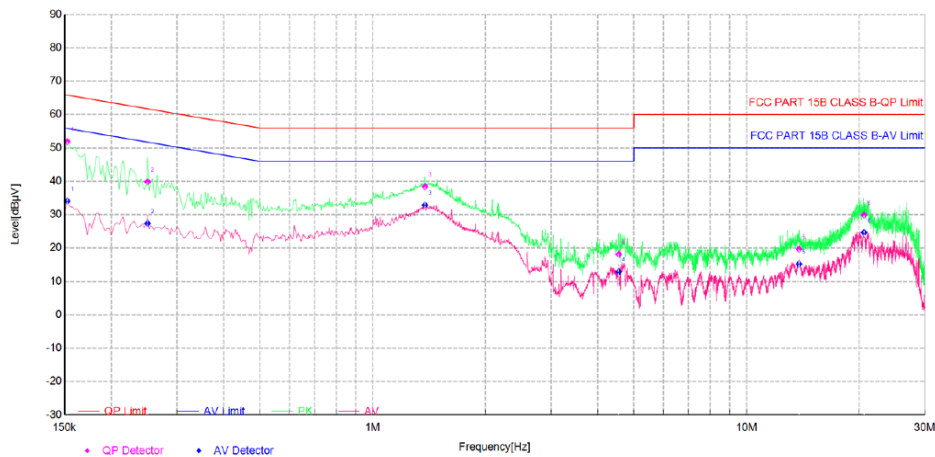

Final Data List

NO.	Freq. [MHz]	Factor[dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Phase	Verdict
1	0.1525	10.47	51.93	65.86	13.93	34.07	55.86	21.79	N	PASS
2	0.2500	10.67	39.86	61.76	21.90	27.38	51.76	24.38	N	PASS
3	1.3800	10.63	38.41	56.00	17.59	32.88	46.00	13.12	N	PASS
4	4.5515	10.61	18.13	56.00	37.87	12.88	46.00	33.12	N	PASS
5	13.8215	10.94	19.68	60.00	40.32	15.20	50.00	34.80	N	PASS
6	20.6165	10.88	29.92	60.00	30.08	24.68	50.00	25.32	N	PASS

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.



6. Emission Bandwidth

6.1. Test Method of -26dB Bandwidth

According to KDB789033 D02

- a) Set RBW=approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Limit: No limit

6.2. Test Method of -6dB Bandwidth

According to KDB789033 D02

- a) Set center frequency to the nominal EUT channel center frequency.
- b) Set RBW= 100kHz.
- c) Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- d) Detector = Peak.
- e) Trace mode = max hold.
- f) Sweep= No faster than coupled (auto) time.
- g) Allow the trace to stabilize.
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- i) Record the results in the test report.

Limit: $\geq 500\text{kHz}$

6.3. Test Method of 99% Bandwidth

According to KDB789033 D02


- a) Set center frequency to the nominal EUT channel center frequency
- b) Set span = 1.5 times to 5.0 times the OBW.
- c) Set RBW= 1 % to 5% of the OBW
- d) Set VBW ≥ 3 RBW
- e) Trace mode=max hold.
- f) Sweep auto couple.
- g) Allow the trace to stabilize.

h) Use the 99 % power bandwidth function of the instrument.

i) Record the results in the test report.

Limit: No limit

6.4. Test setup

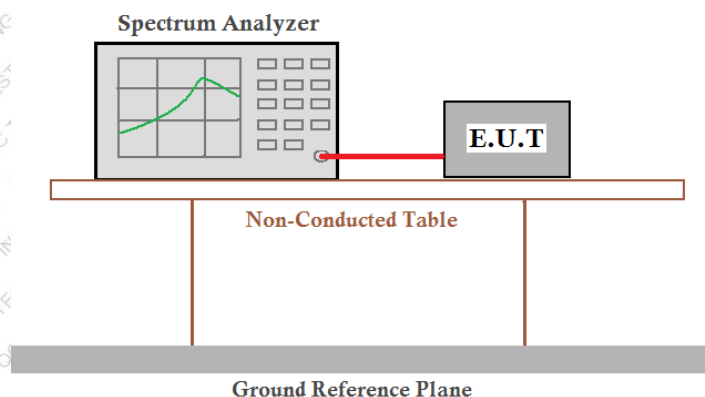

The EUT was placed on 0.8m height table, the RE output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.

6.5. Test Data

Temperature	21.9 °C	Humidity	50%
ATM Pressure	101.1kPa	Antenna Gain	see page 5
Test by	LBi Li	Test result	PASS

Please refer to following table and plots.



-26dB Bandwidth Test result:


Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)		Limit -26 dB Bandwidth (MHz)	Verdict
		Ant1	Ant2		
a	5180	28.077	25.938	/	Pass
a	5200	26.931	28.983	/	Pass
a	5240	20.133	20.226	/	Pass
a	5260	26.766	26.274	/	Pass
a	5300	26.859	27.687	/	Pass
a	5320	26.955	27.36	/	Pass
a	5500	28.125	28.932	/	Pass
a	5580	26.274	28.11	/	Pass
a	5700	27.51	28.158	/	Pass
a	5720	26.973	26.019	/	Pass
n20	5180	29.289	28.761	/	Pass
n20	5200	25.452	27.759	/	Pass
n20	5240	20.154	20.754	/	Pass
n20	5260	26.496	27.99	/	Pass
n20	5300	26.262	27.369	/	Pass
n20	5320	25.773	28.023	/	Pass
n20	5500	27.765	29.757	/	Pass
n20	5580	25.566	29.85	/	Pass
n20	5700	25.422	29.478	/	Pass
n20	5720	25.959	29.598	/	Pass
n40	5190	39.612	40.446	/	Pass
n40	5230	39.324	40.734	/	Pass
n40	5270	39.81	40.626	/	Pass
n40	5310	39.78	40.638	/	Pass
n40	5510	39.642	40.53	/	Pass
n40	5550	39.828	40.584	/	Pass
n40	5670	39.576	40.65	/	Pass
n40	5710	40.152	40.644	/	Pass
ac20	5180	27.498	28.737	/	Pass
ac20	5200	25.839	28.329	/	Pass
ac20	5240	20.148	20.613	/	Pass
ac20	5260	25.143	27.921	/	Pass
ac20	5300	27.165	27.177	/	Pass
ac20	5320	26.022	28.74	/	Pass
ac20	5500	26.799	29.307	/	Pass
ac20	5580	25.887	29.799	/	Pass
ac20	5700	25.989	29.007	/	Pass
ac20	5720	25.116	29.316	/	Pass
ac40	5190	39.846	40.452	/	Pass




ac40	5230	39.912	40.296	/	Pass
ac40	5270	39.6	40.32	/	Pass
ac40	5310	39.762	40.434	/	Pass
ac40	5510	40.014	40.578	/	Pass
ac40	5550	39.666	40.044	/	Pass
ac40	5670	40.134	40.452	/	Pass
ac40	5710	40.23	40.314	/	Pass
ac80	5210	79.872	79.812	/	Pass
ac80	5290	79.62	79.812	/	Pass
ac80	5530	79.584	79.8	/	Pass
ac80	5610	79.788	80.028	/	Pass
ac80	5690	80.148	80.16	/	Pass
ax20	5180	26.52	25.875	/	Pass
ax20	5200	24.921	27.276	/	Pass
ax20	5240	19.95	19.929	/	Pass
ax20	5260	25.728	26.667	/	Pass
ax20	5300	26.994	28.395	/	Pass
ax20	5320	25.269	27.474	/	Pass
ax20	5500	26.214	25.965	/	Pass
ax20	5580	24.966	28.596	/	Pass
ax20	5700	24.177	25.953	/	Pass
ax20	5720	26.457	26.532	/	Pass
ax40	5190	39.666	39.384	/	Pass
ax40	5230	39.42	39.414	/	Pass
ax40	5270	39.642	39.39	/	Pass
ax40	5310	39.462	39.456	/	Pass
ax40	5510	39.444	39.612	/	Pass
ax40	5550	39.492	39.558	/	Pass
ax40	5670	39.354	39.612	/	Pass
ax40	5710	39.666	39.36	/	Pass
ax80	5210	80.424	80.052	/	Pass
ax80	5290	80.184	80.016	/	Pass
ax80	5530	80.064	80.208	/	Pass
ax80	5610	80.268	80.304	/	Pass
ax80	5690	80.304	39.384	/	Pass



-26dB Bandwidth NVNT a 5180MHz Ant1

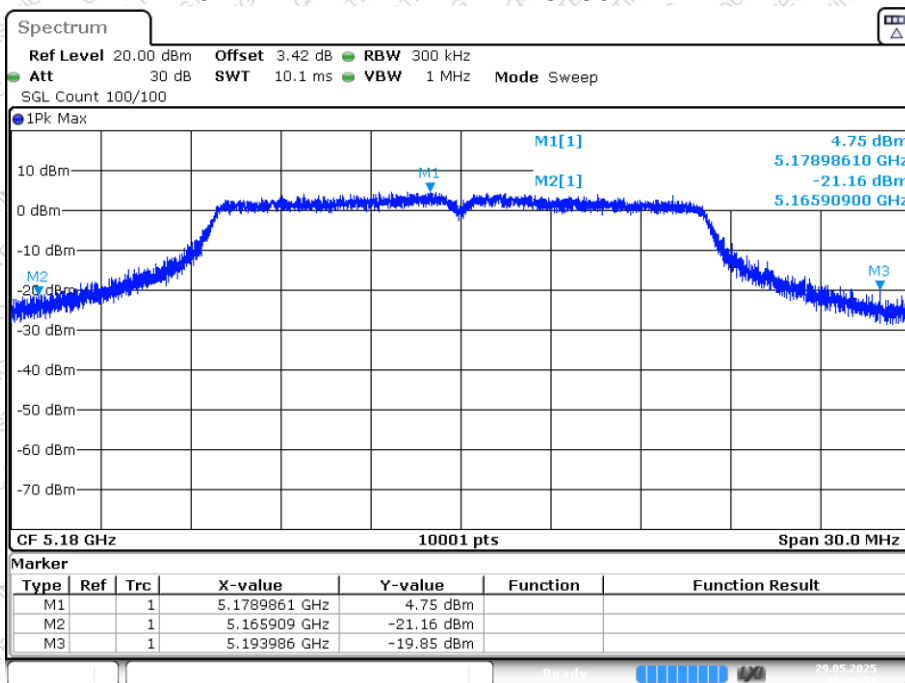


-26dB Bandwidth NVNT a 5200MHz Ant1

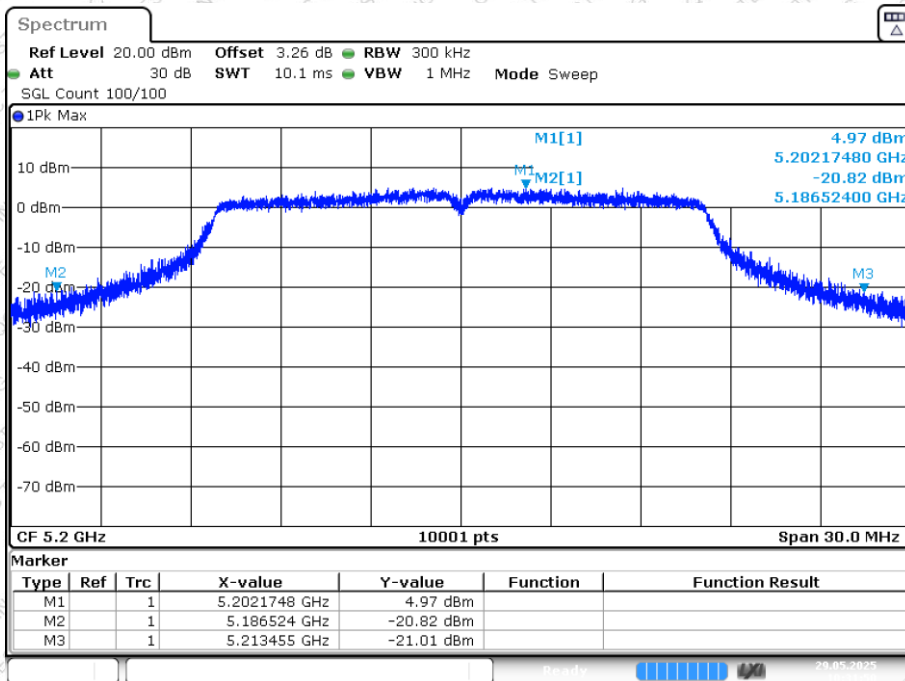




-26dB Bandwidth NVNT a 5240MHz Ant1

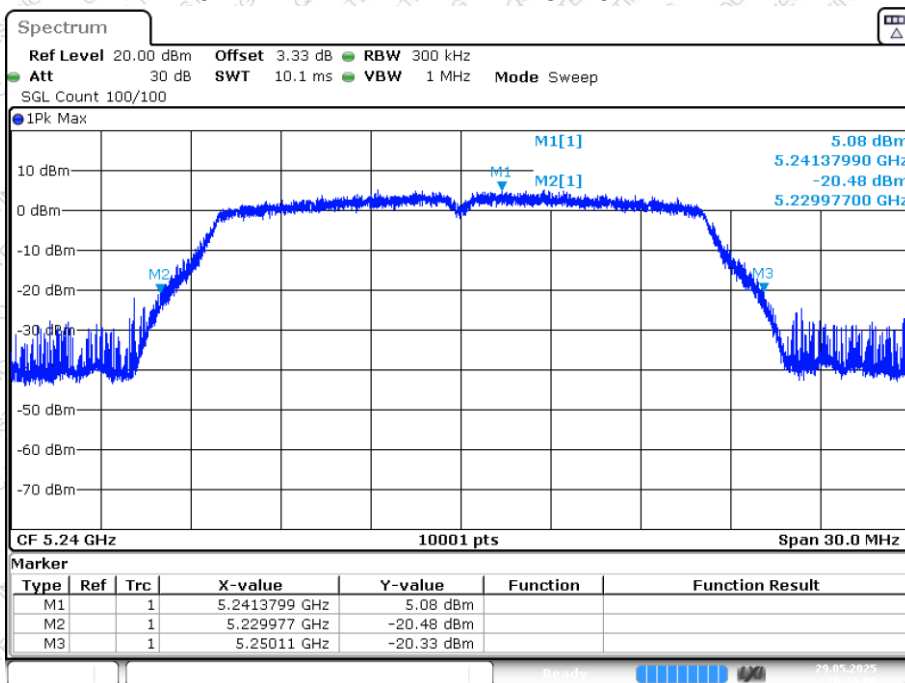


-26dB Bandwidth NVNT a 5260MHz Ant1

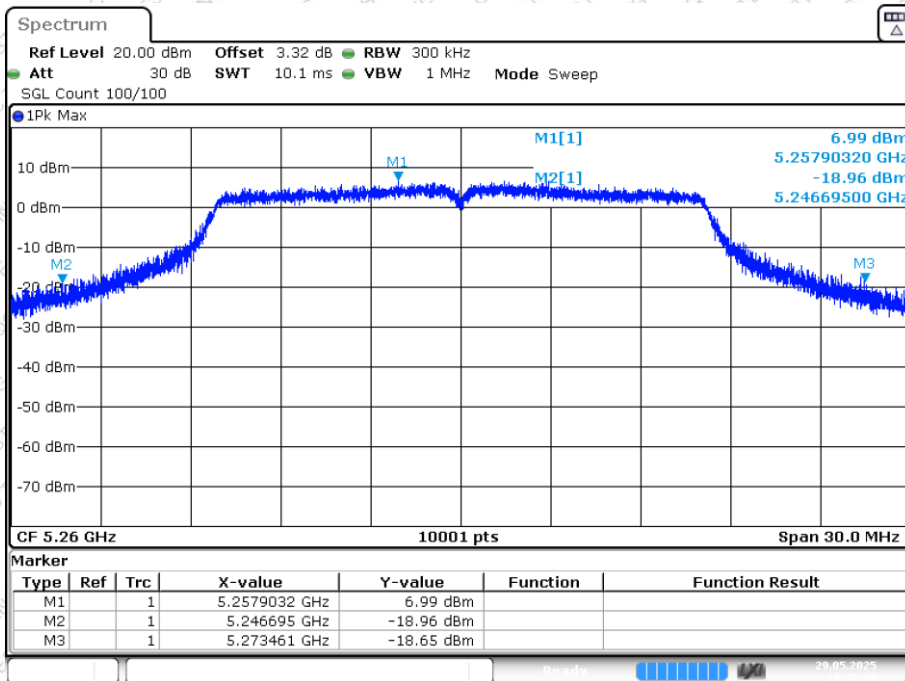




-26dB Bandwidth NVNT a 5300MHz Ant1

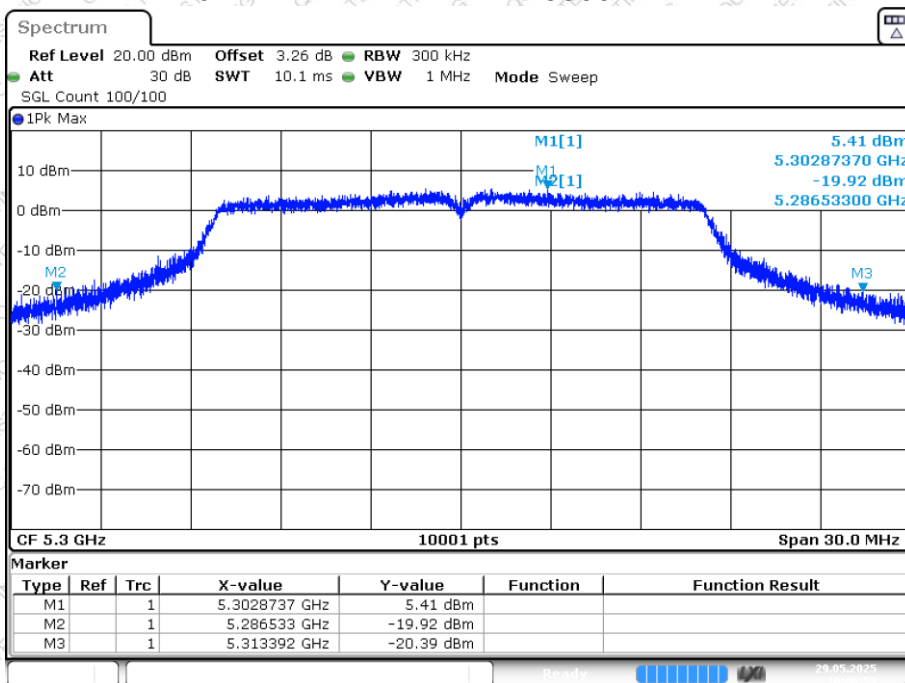


-26dB Bandwidth NVNT a 5320MHz Ant1

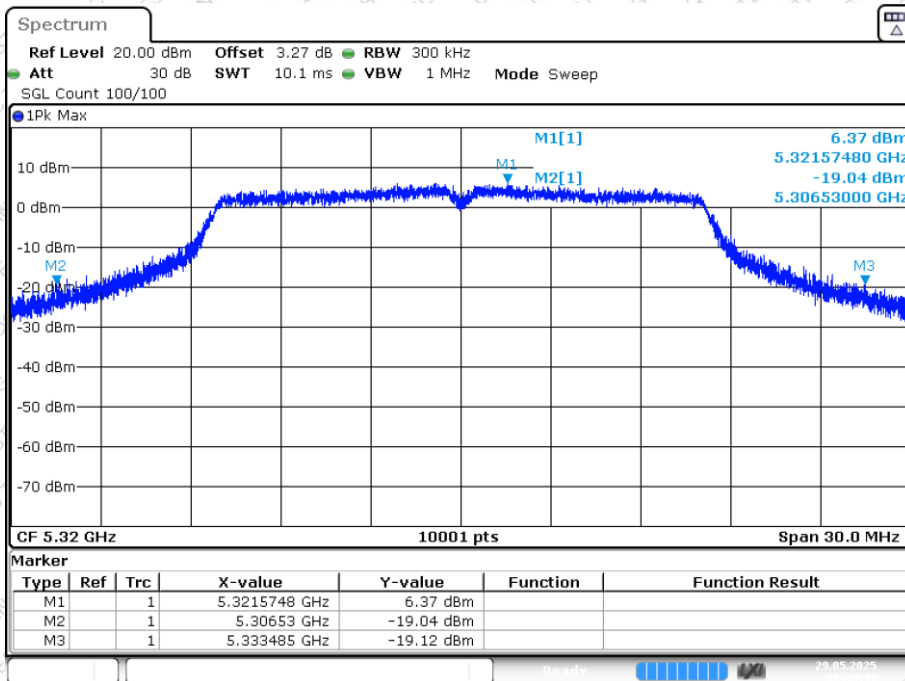




-26dB Bandwidth NVNT a 5500MHz Ant1

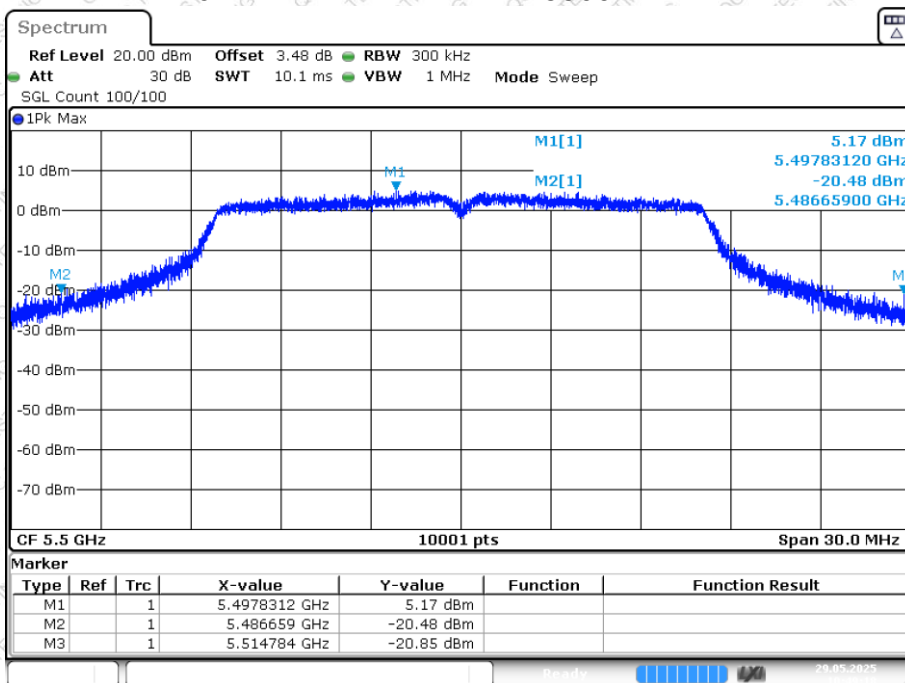


-26dB Bandwidth NVNT a 5580MHz Ant1

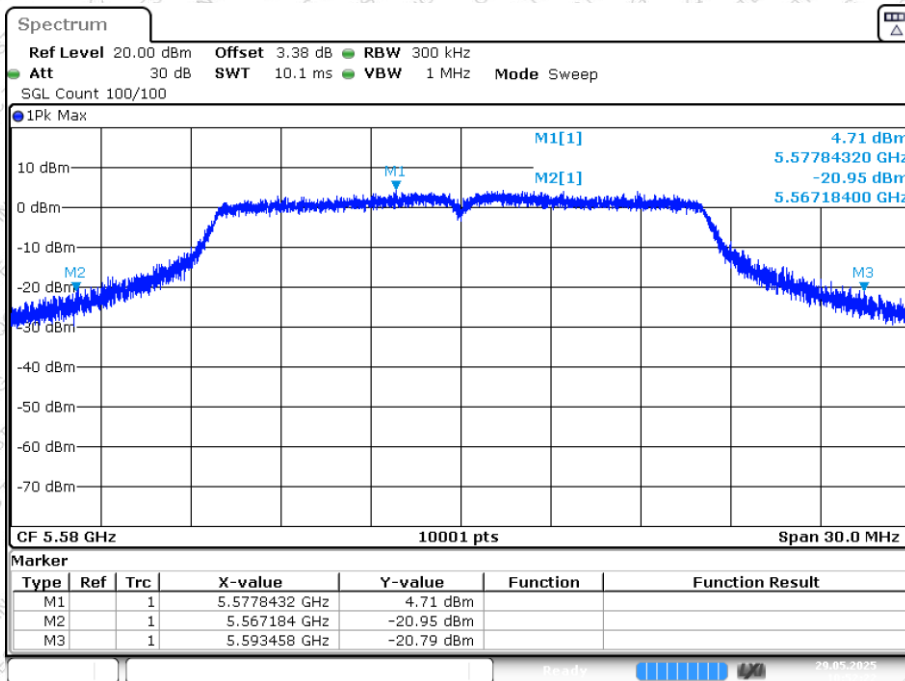




-26dB Bandwidth NVNT a 5700MHz Ant1

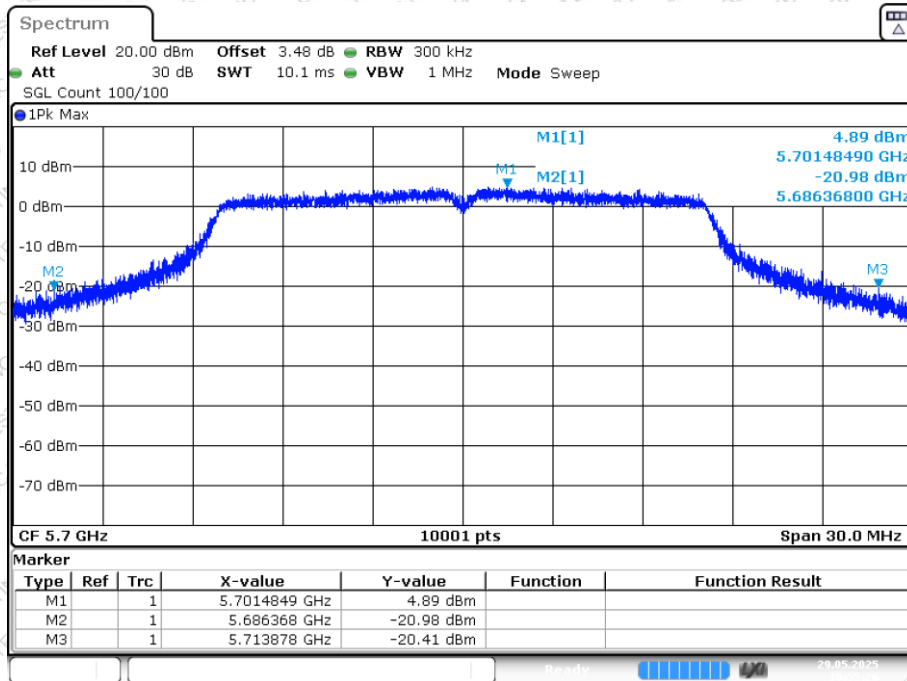


-26dB Bandwidth NVNT a 5720MHz Ant1

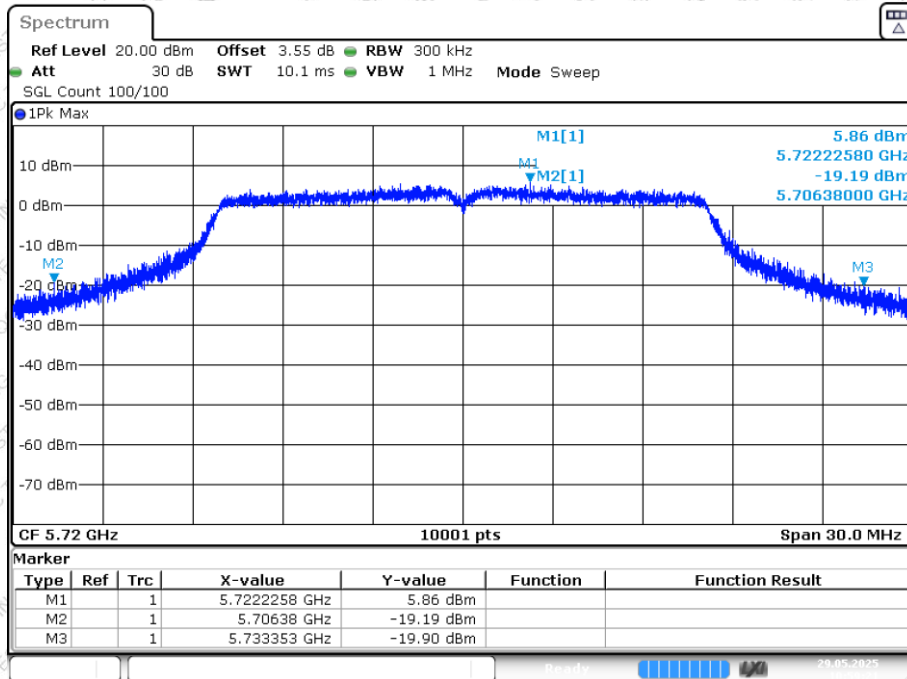




-26dB Bandwidth NVNT a 5180MHz Ant2

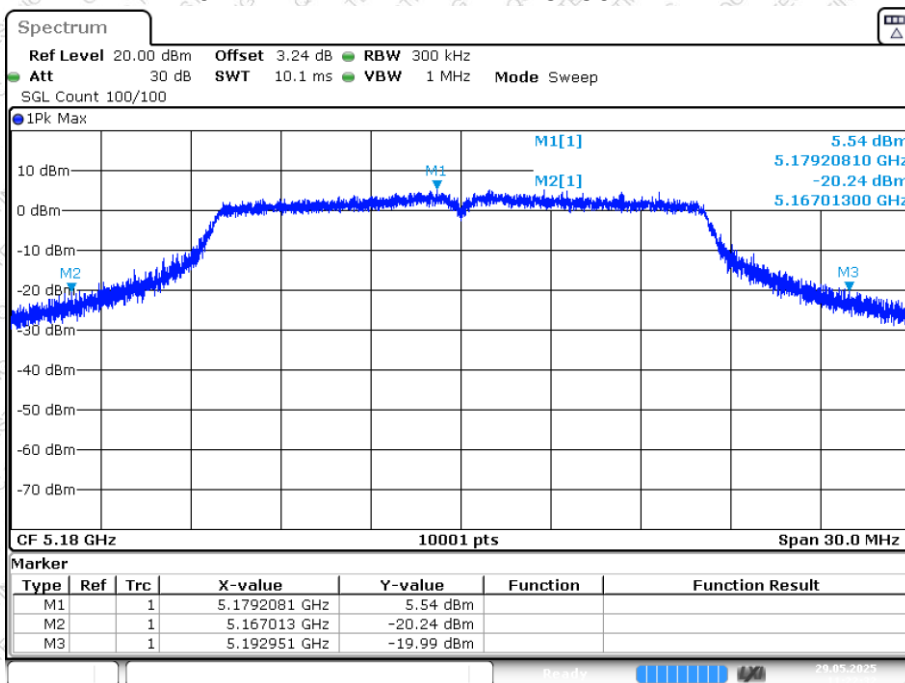


-26dB Bandwidth NVNT a 5200MHz Ant2

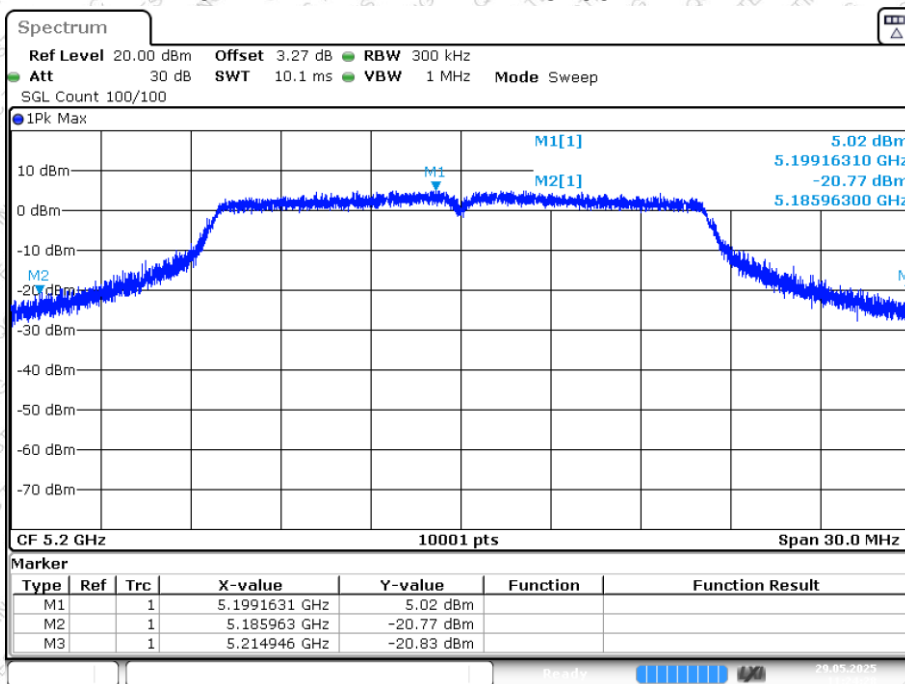




-26dB Bandwidth NVNT a 5240MHz Ant2

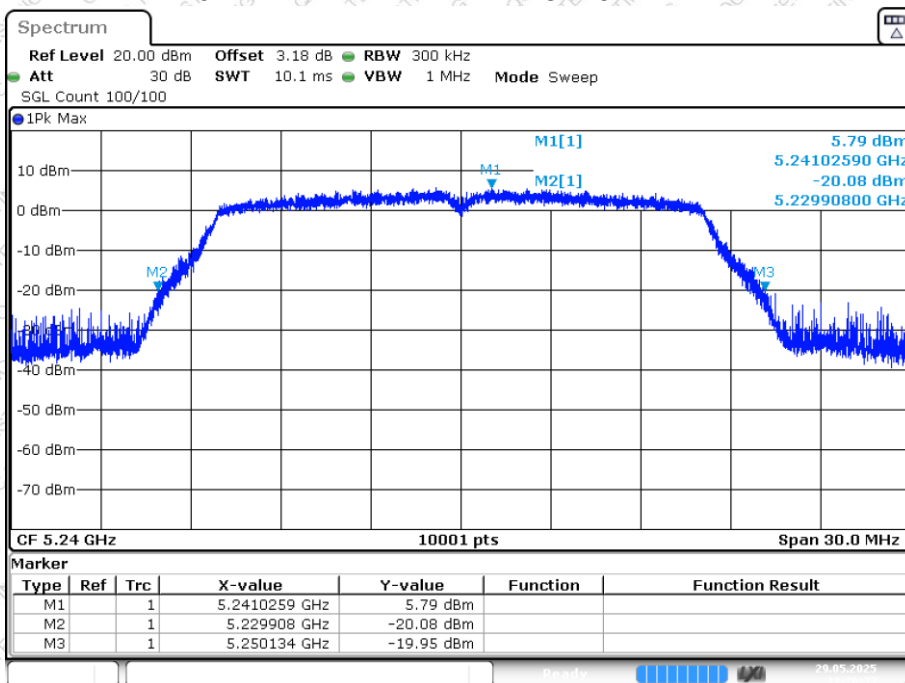

Date: 29 MAY 2025 11:26:33


-26dB Bandwidth NVNT a 5260MHz Ant2

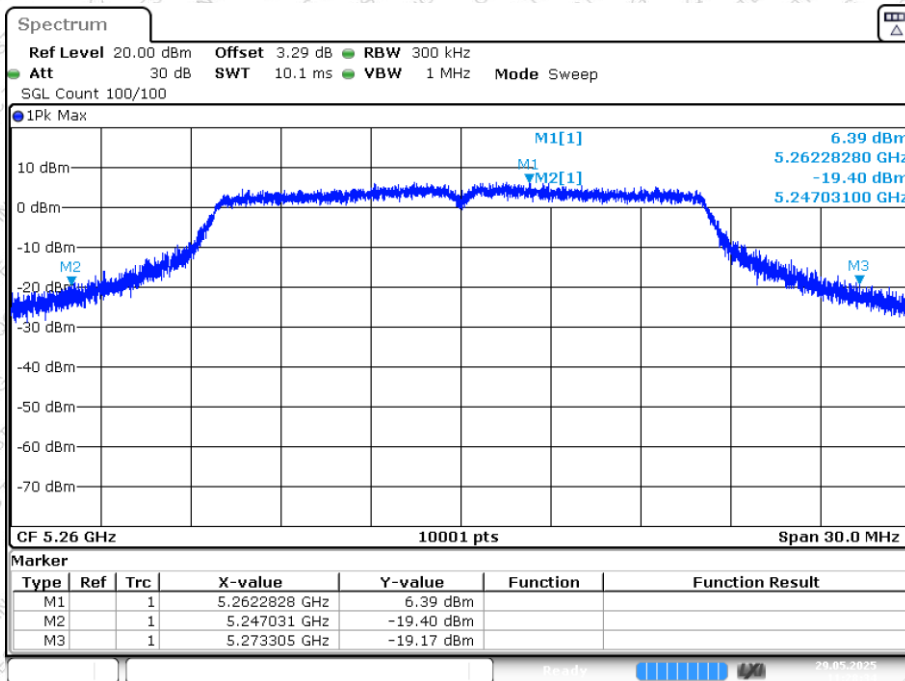


Date: 29 MAY 2025 11:28:34



-26dB Bandwidth NVNT a 5300MHz Ant2

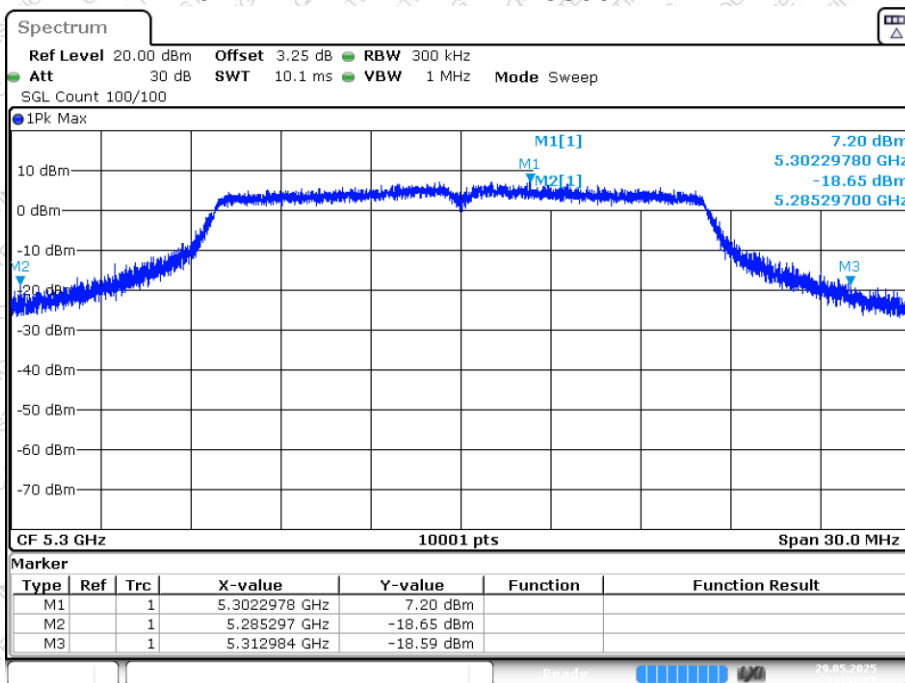


-26dB Bandwidth NVNT a 5320MHz Ant2

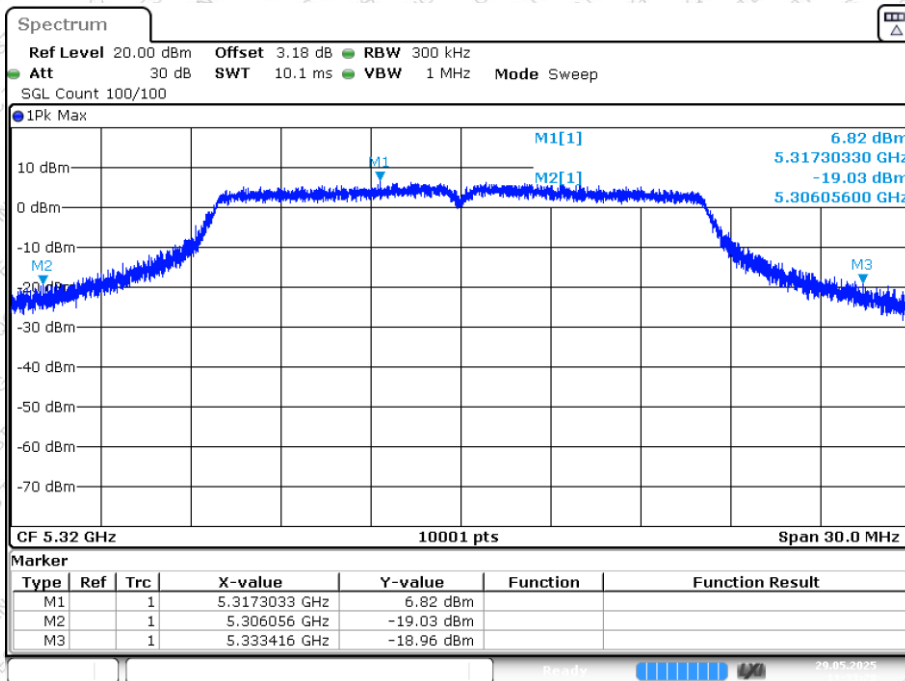




-26dB Bandwidth NVNT a 5500MHz Ant2

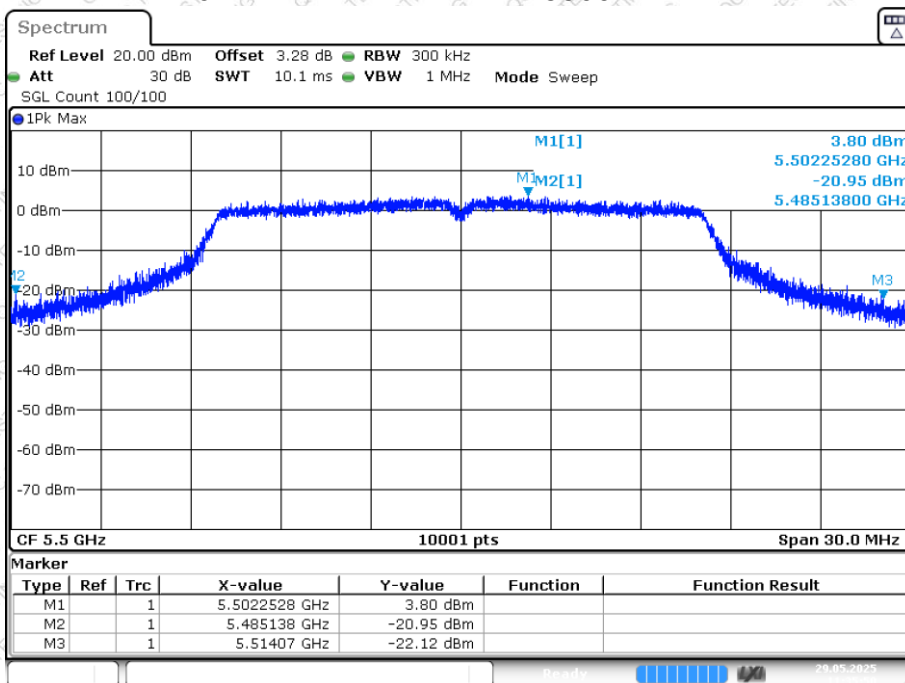


-26dB Bandwidth NVNT a 5580MHz Ant2

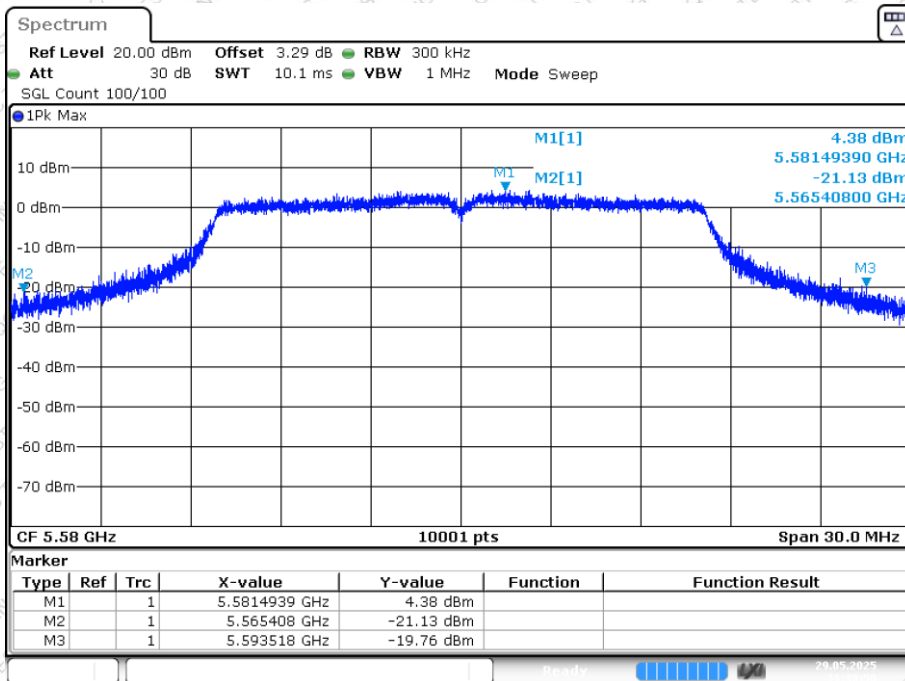




-26dB Bandwidth NVNT a 5700MHz Ant2

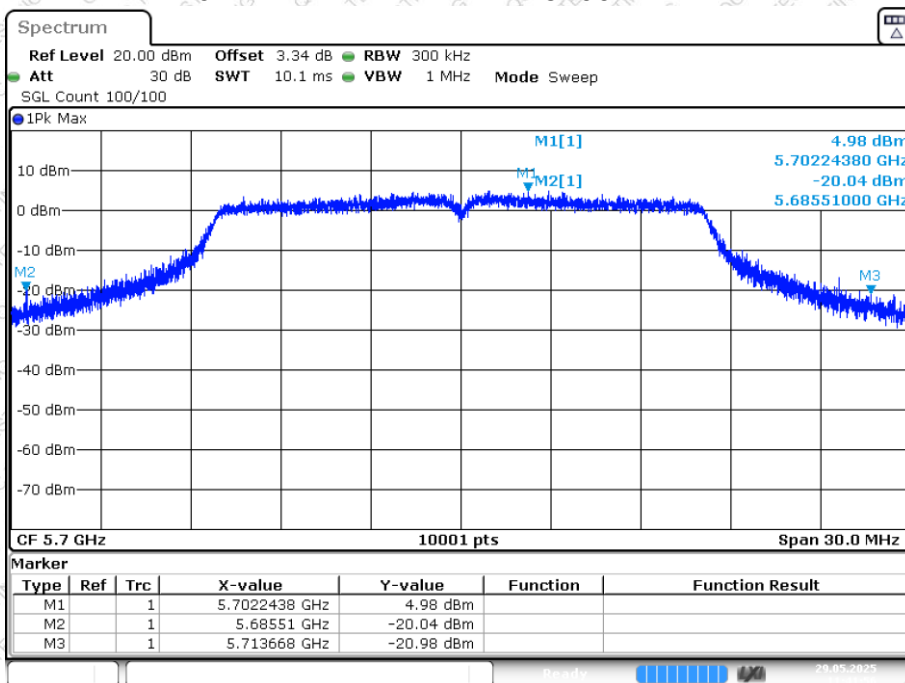


-26dB Bandwidth NVNT a 5720MHz Ant2

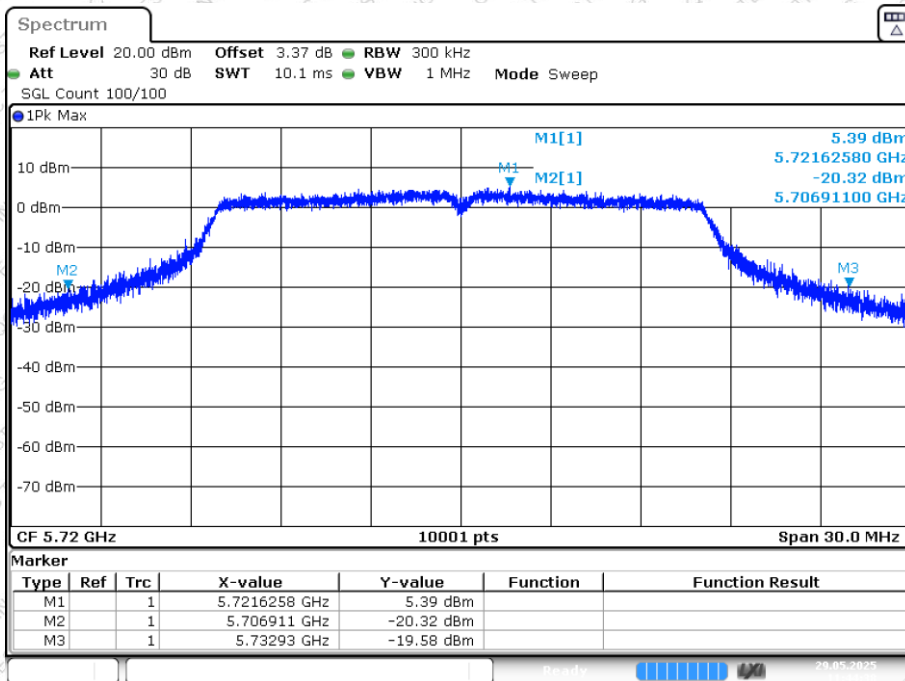




-26dB Bandwidth NVNT n20 5180MHz Ant1

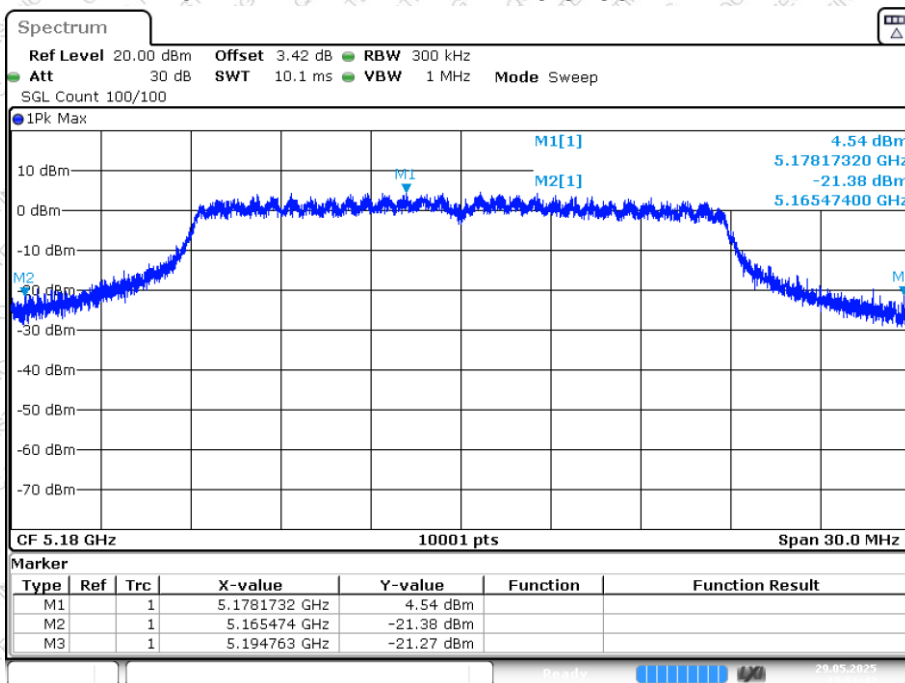

Date: 29 MAY 2025 13:51:43


-26dB Bandwidth NVNT n20 5180MHz Ant2

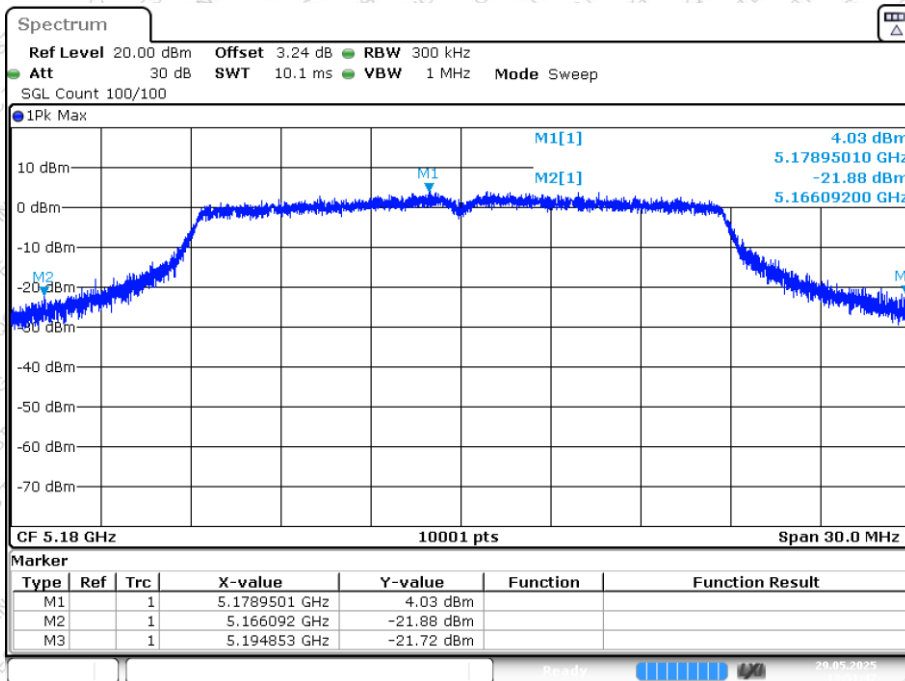

Date: 29 MAY 2025 13:51:47




-26dB Bandwidth NVNT n20 5200MHz Ant1

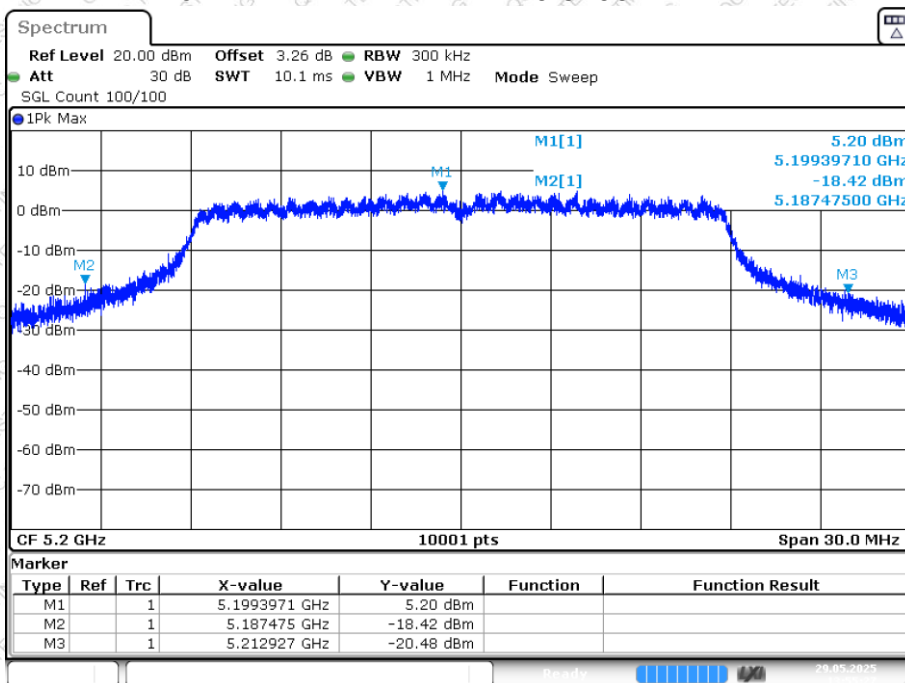

Date: 29 MAY 2025 13:55:27


-26dB Bandwidth NVNT n20 5200MHz Ant2

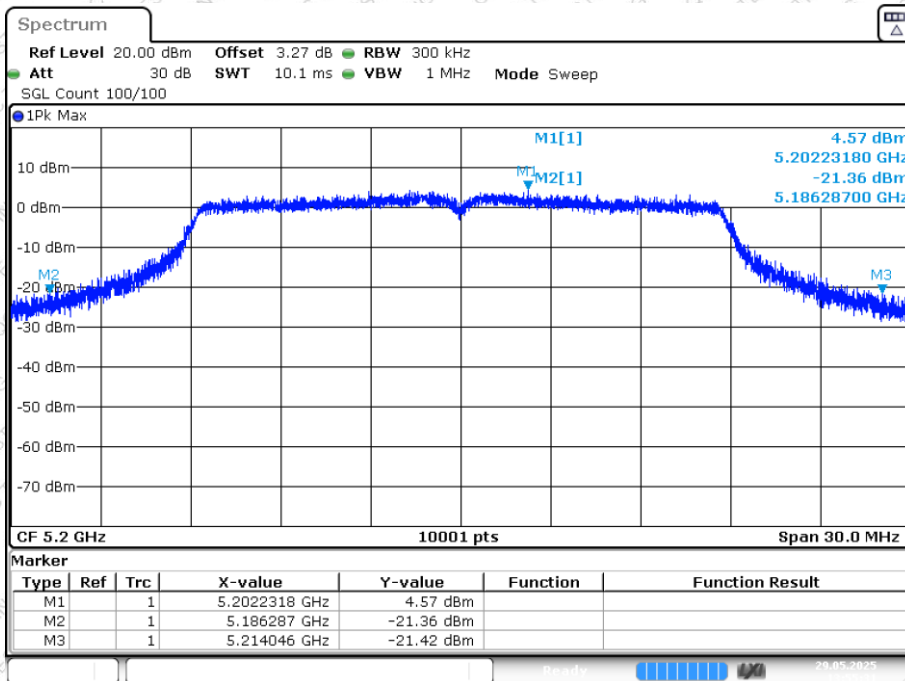

Date: 29 MAY 2025 13:55:31




-26dB Bandwidth NVNT n20 5240MHz Ant1

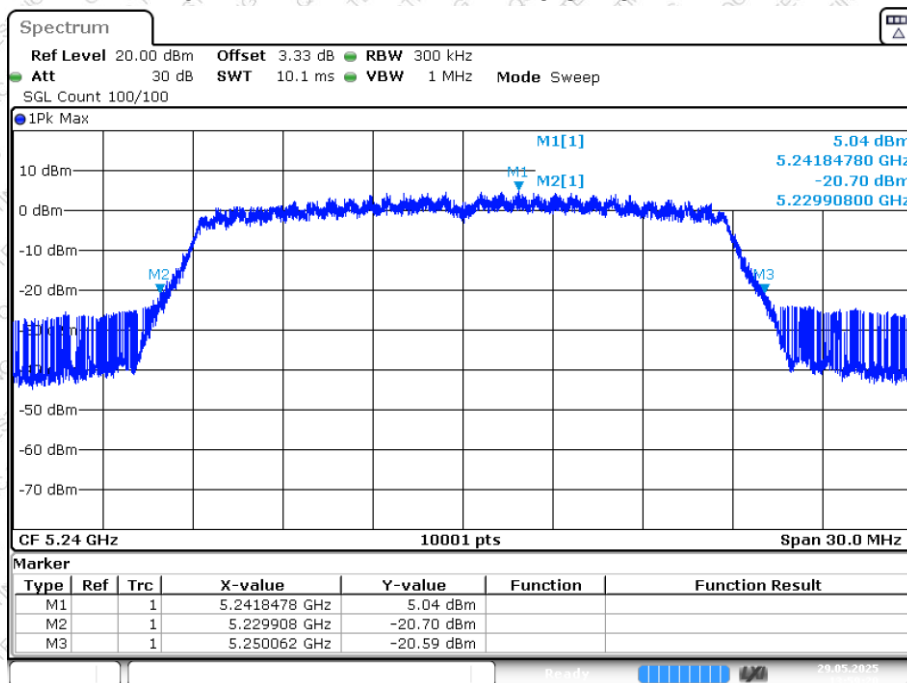

Date: 29 MAY 2025 13:59:21


-26dB Bandwidth NVNT n20 5240MHz Ant2

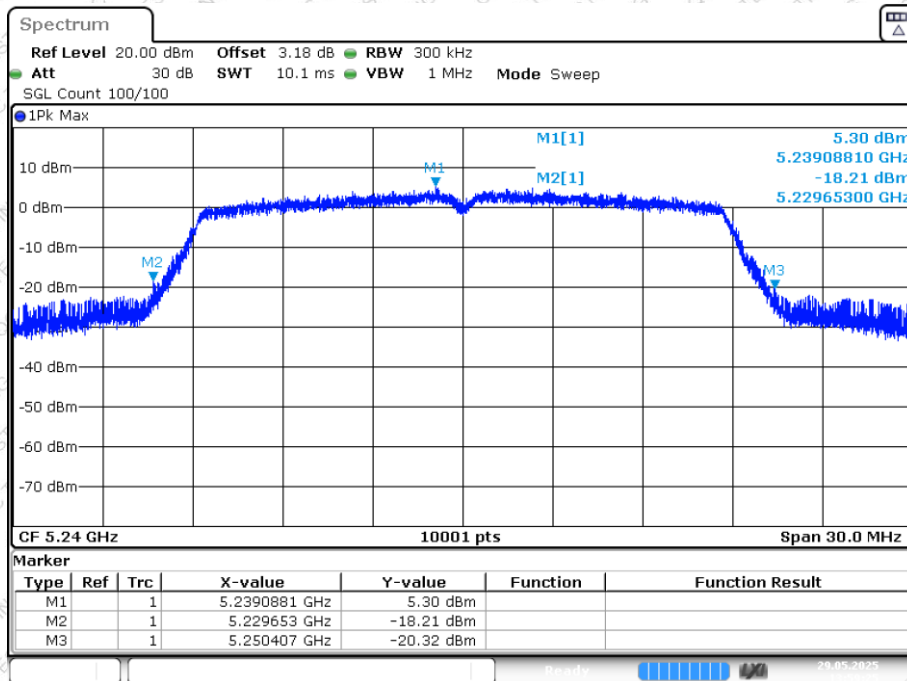


Date: 29 MAY 2025 13:59:25



-26dB Bandwidth NVNT n20 5260MHz Ant1

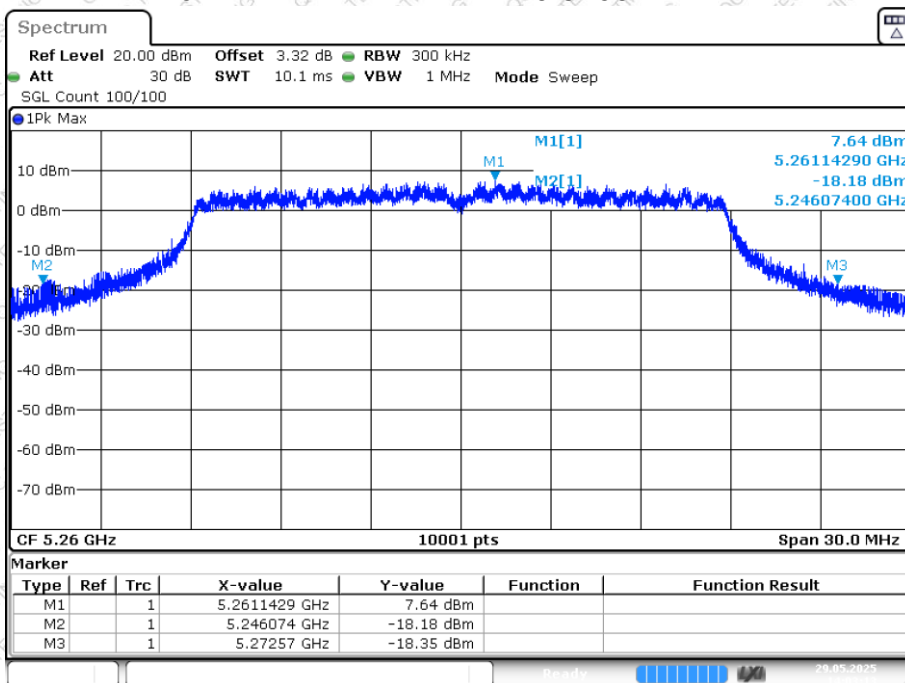


-26dB Bandwidth NVNT n20 5260MHz Ant2

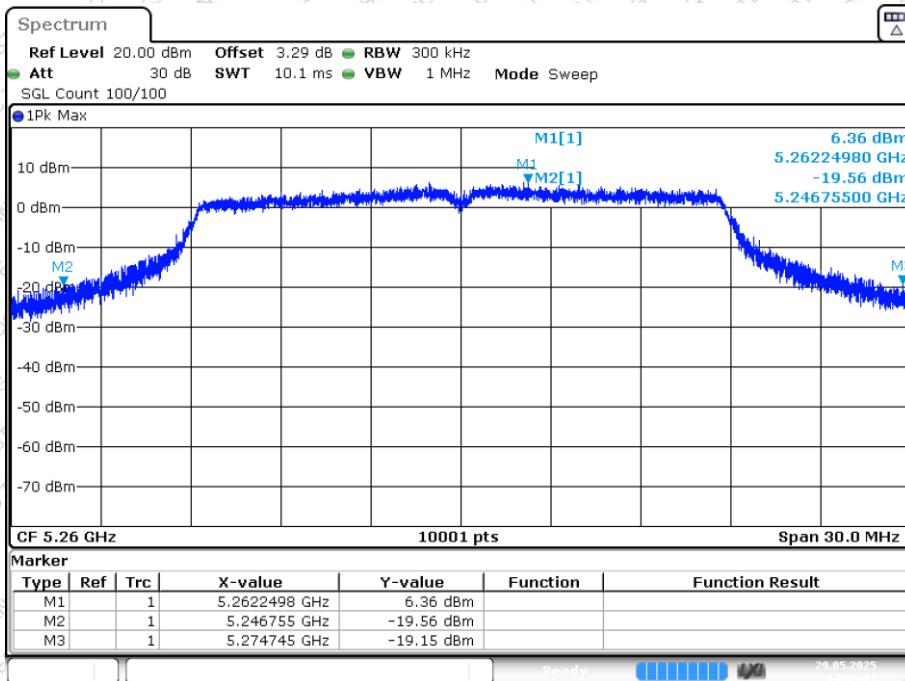




-26dB Bandwidth NVNT n20 5300MHz Ant1

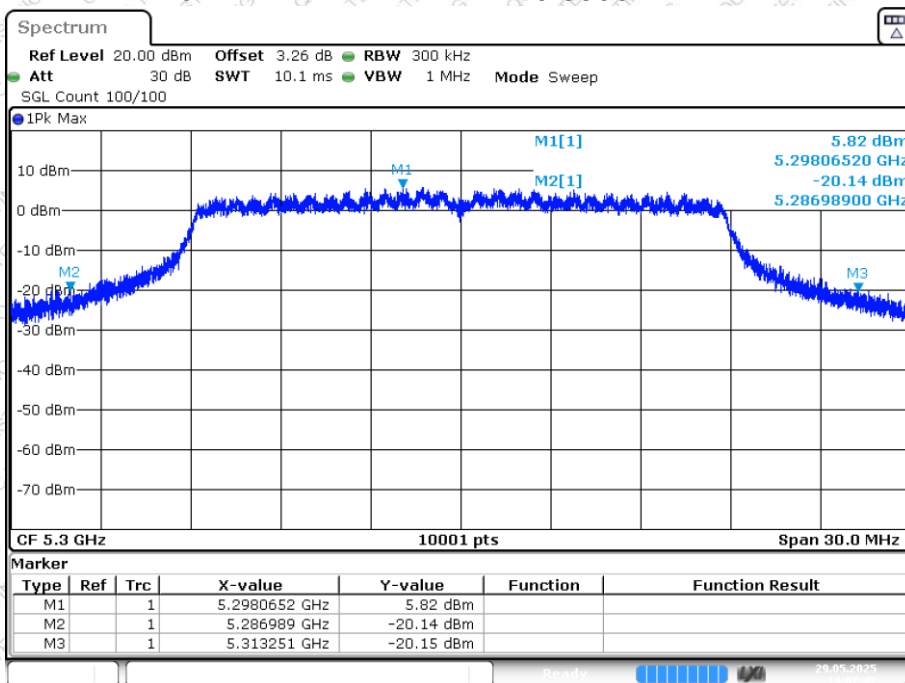


-26dB Bandwidth NVNT n20 5300MHz Ant2

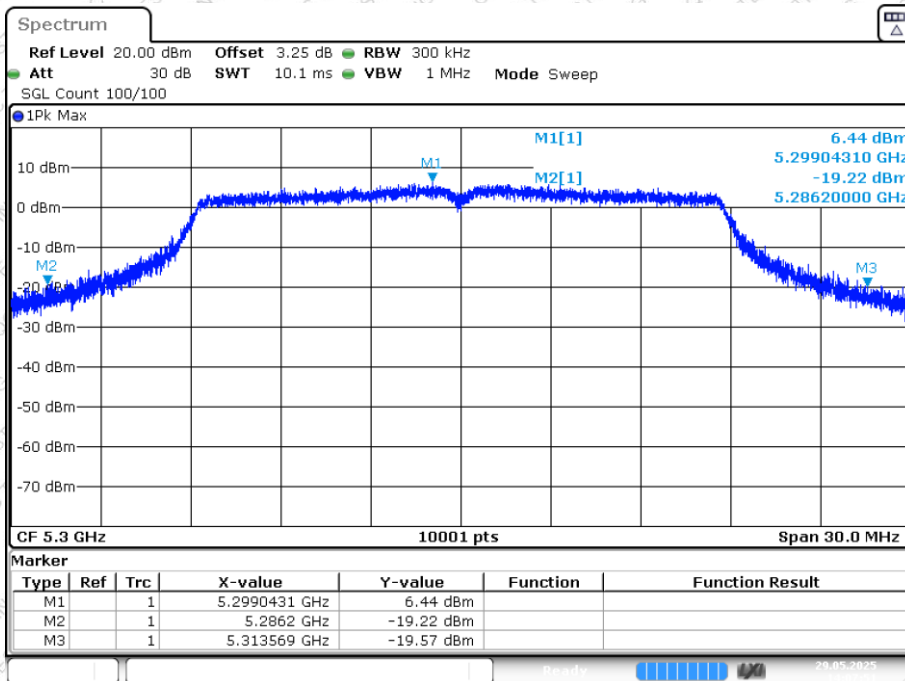




-26dB Bandwidth NVNT n20 5320MHz Ant1

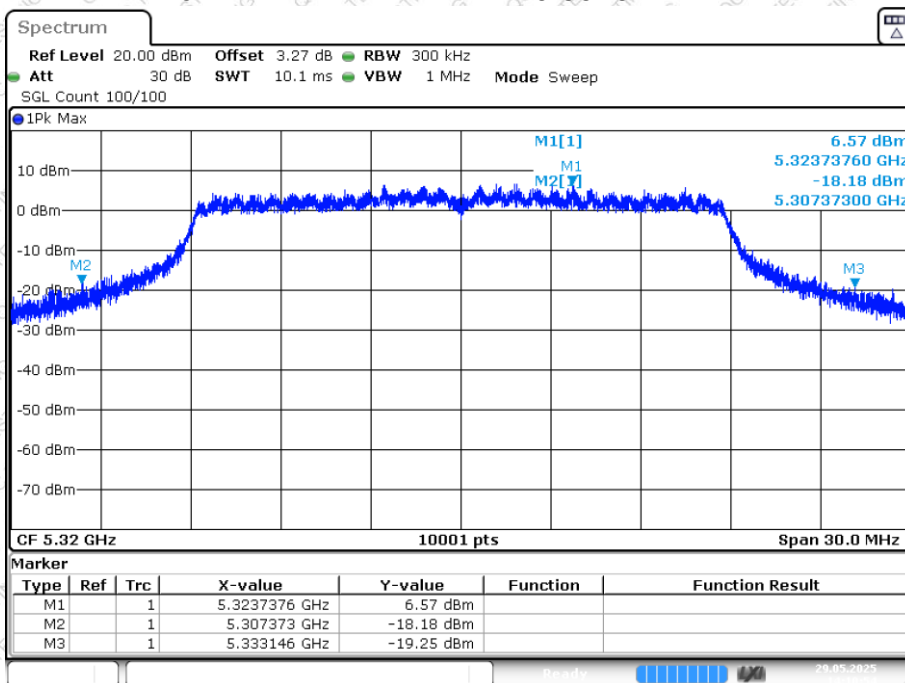


-26dB Bandwidth NVNT n20 5320MHz Ant2

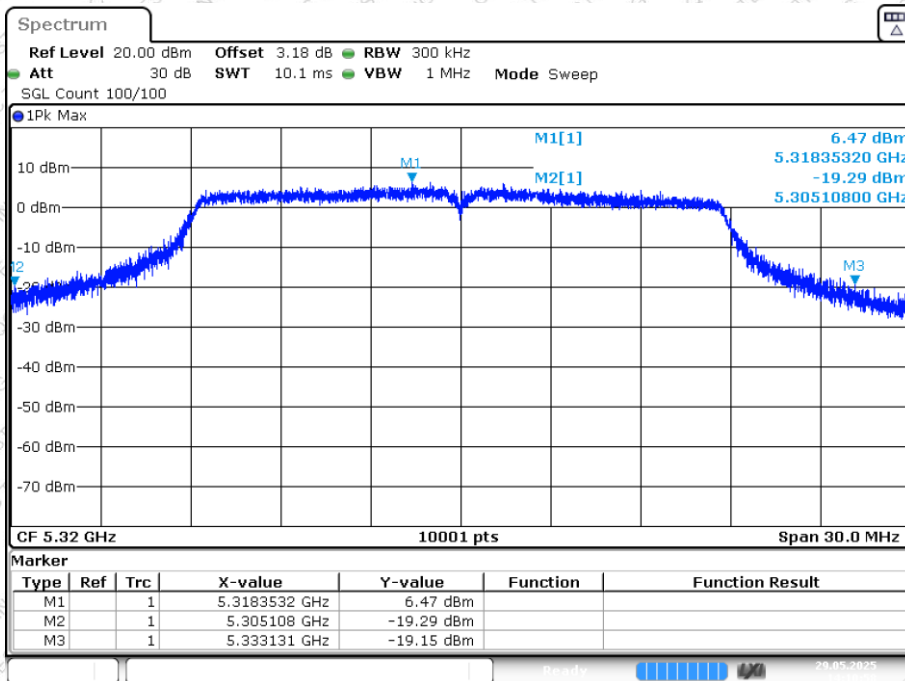




-26dB Bandwidth NVNT n20 5500MHz Ant1

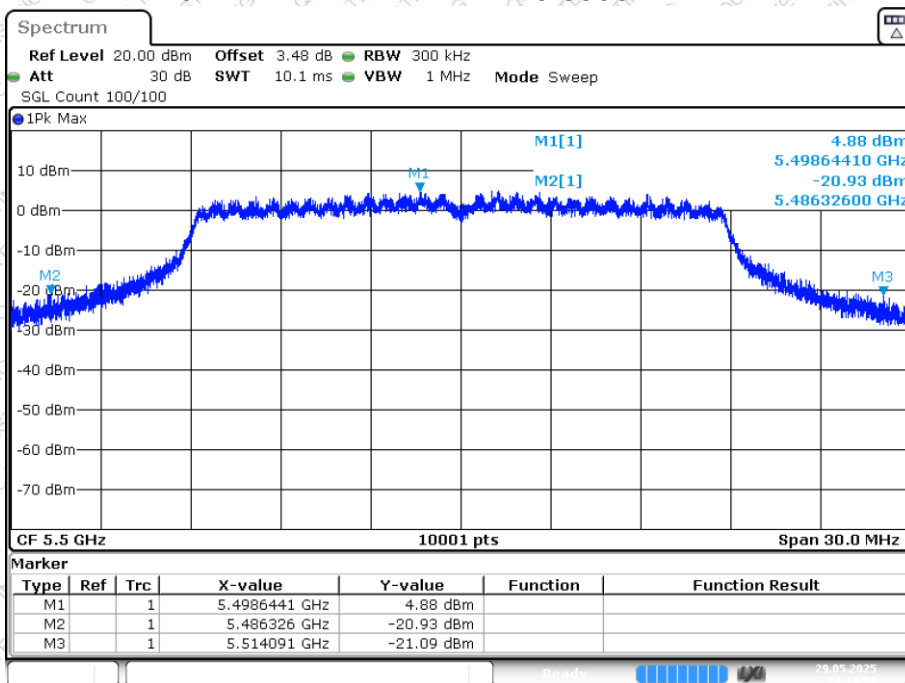

Date: 29 MAY 2025 14:14:59


-26dB Bandwidth NVNT n20 5500MHz Ant2

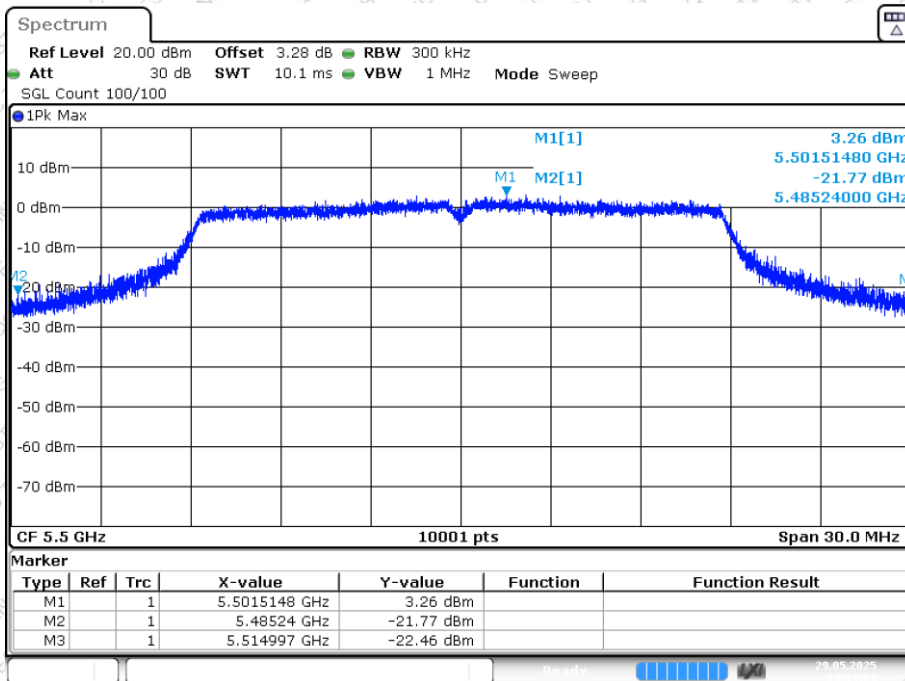


Date: 29 MAY 2025 14:15:03



-26dB Bandwidth NVNT n20 5580MHz Ant1

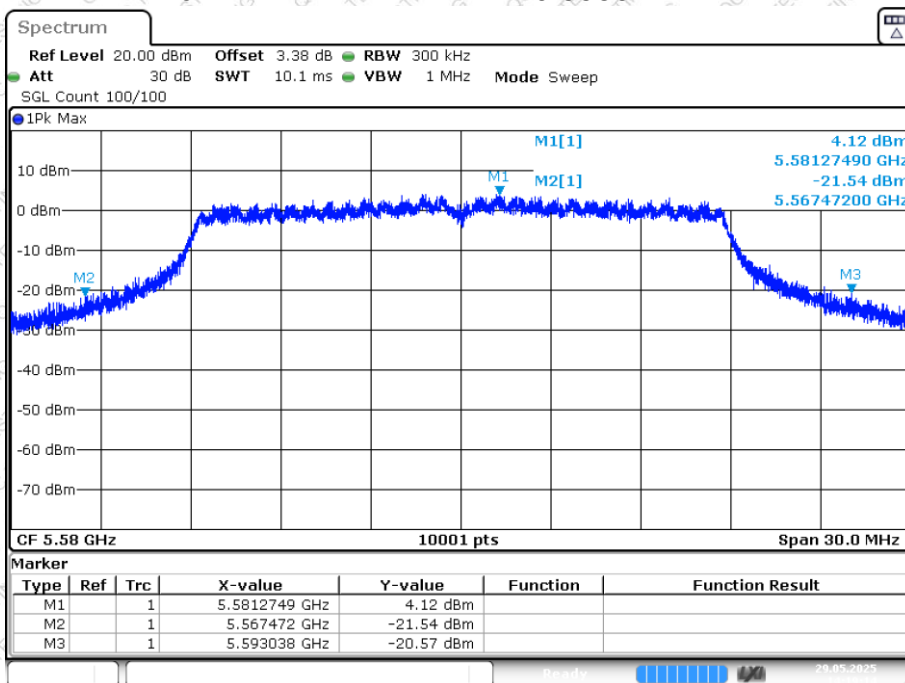


-26dB Bandwidth NVNT n20 5580MHz Ant2

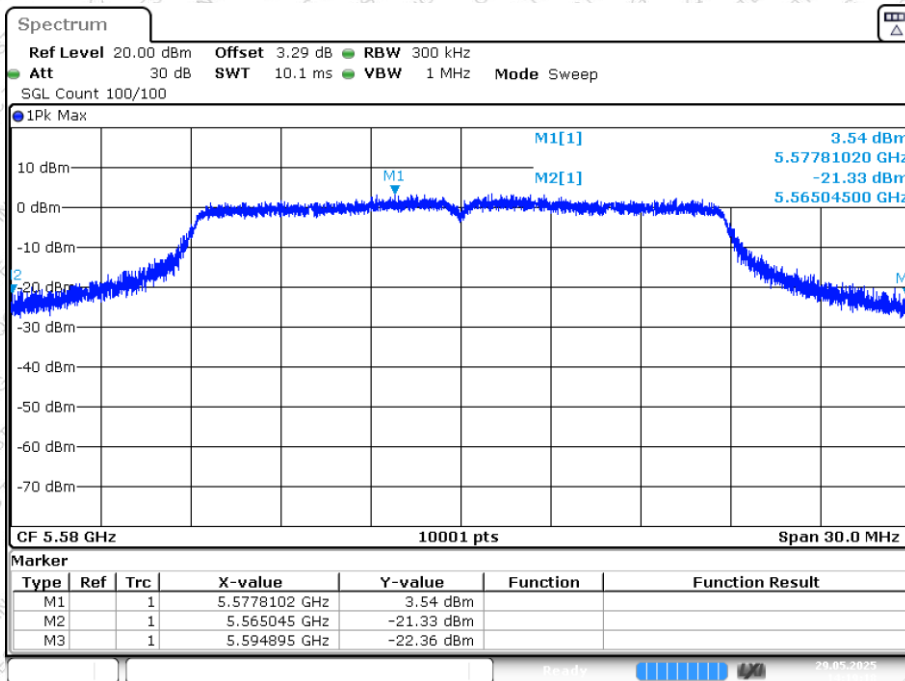




-26dB Bandwidth NVNT n20 5700MHz Ant1

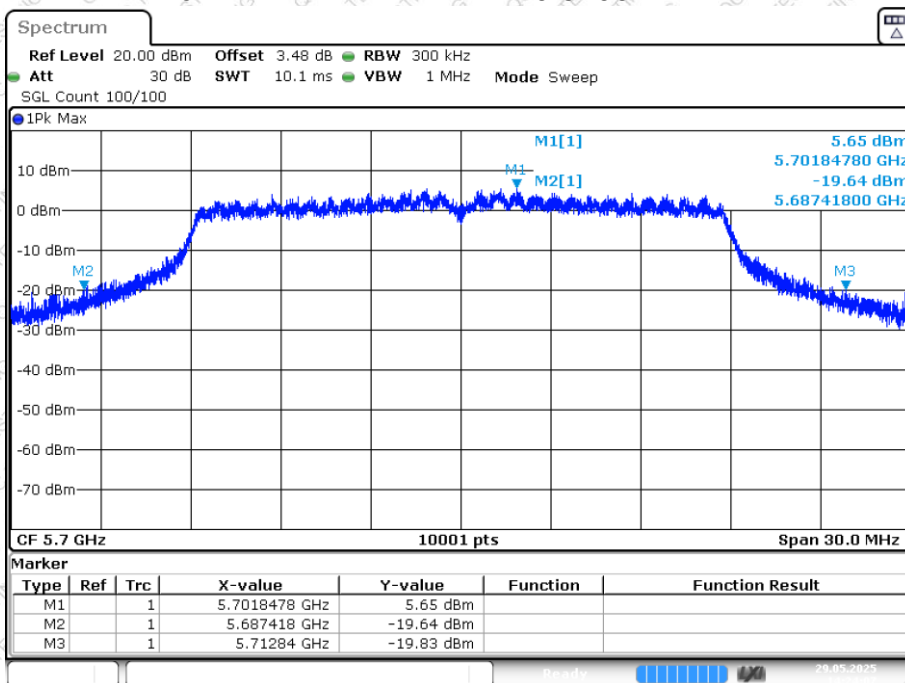


-26dB Bandwidth NVNT n20 5700MHz Ant2

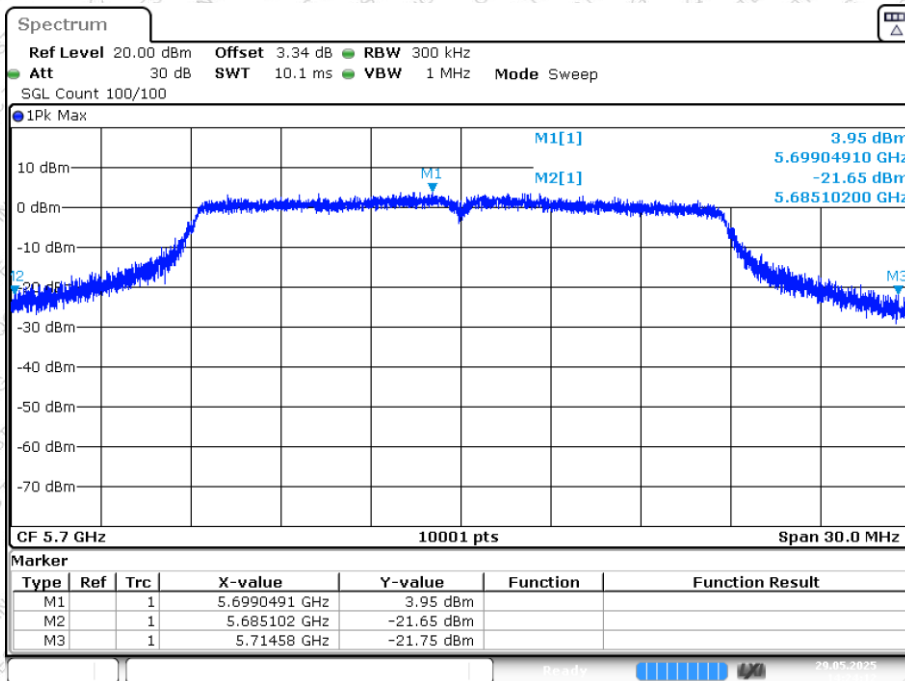




-26dB Bandwidth NVNT n20 5720MHz Ant1

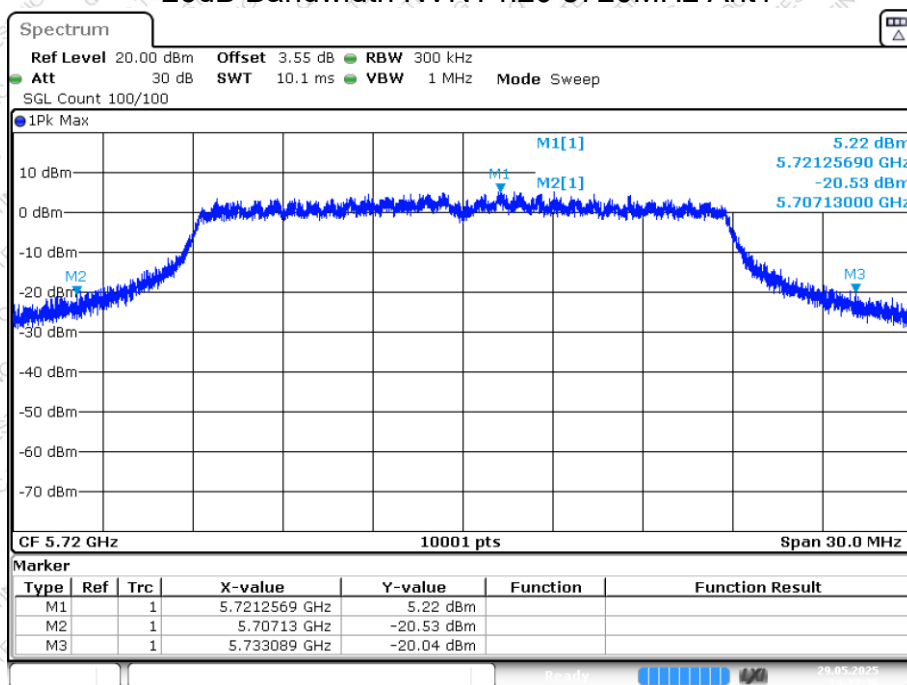


-26dB Bandwidth NVNT n20 5720MHz Ant2

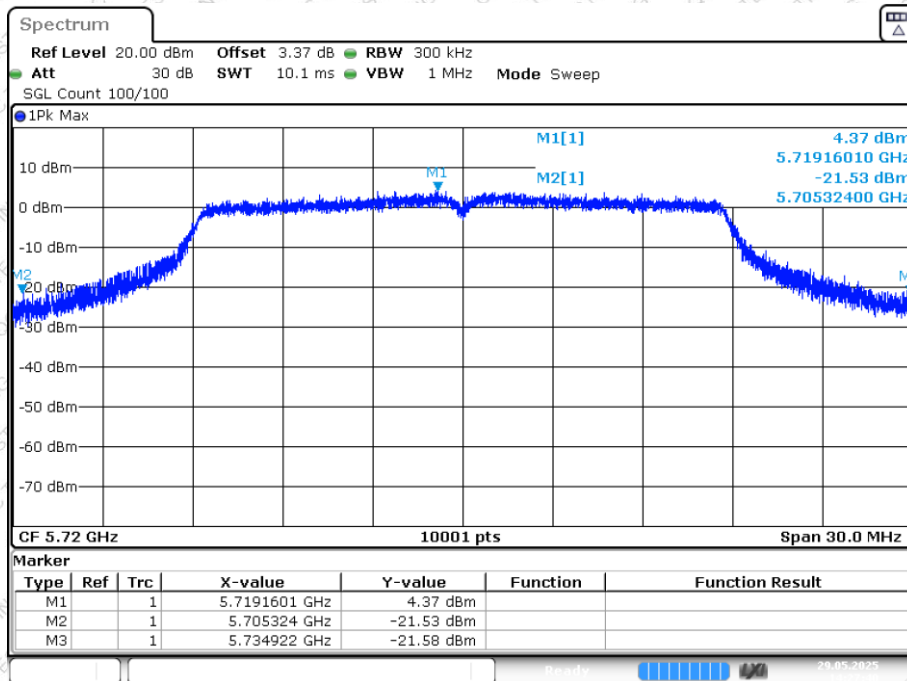




-26dB Bandwidth NVNT n40 5190MHz Ant1

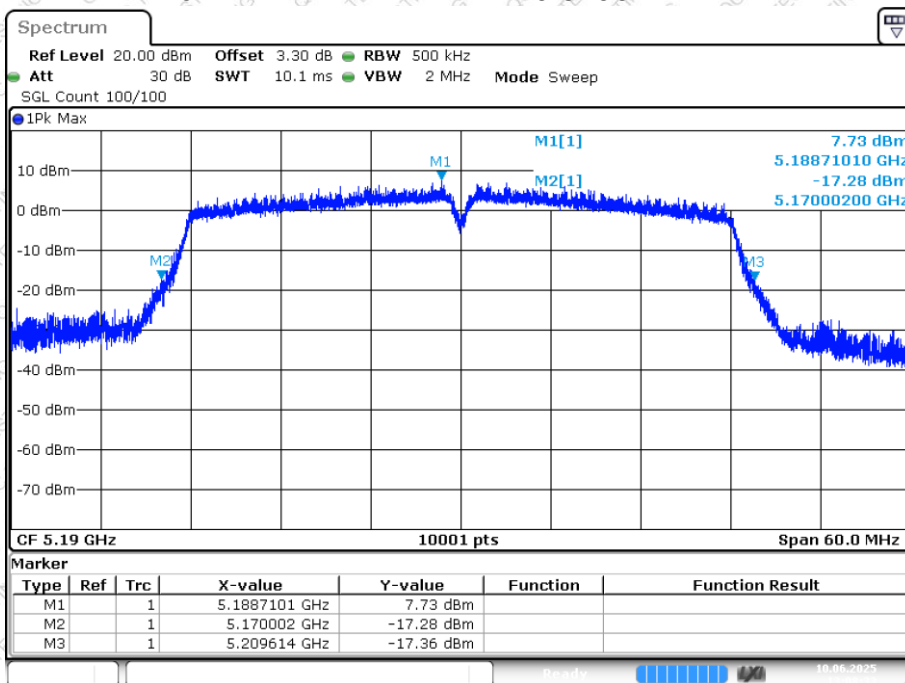


-26dB Bandwidth NVNT n40 5190MHz Ant2

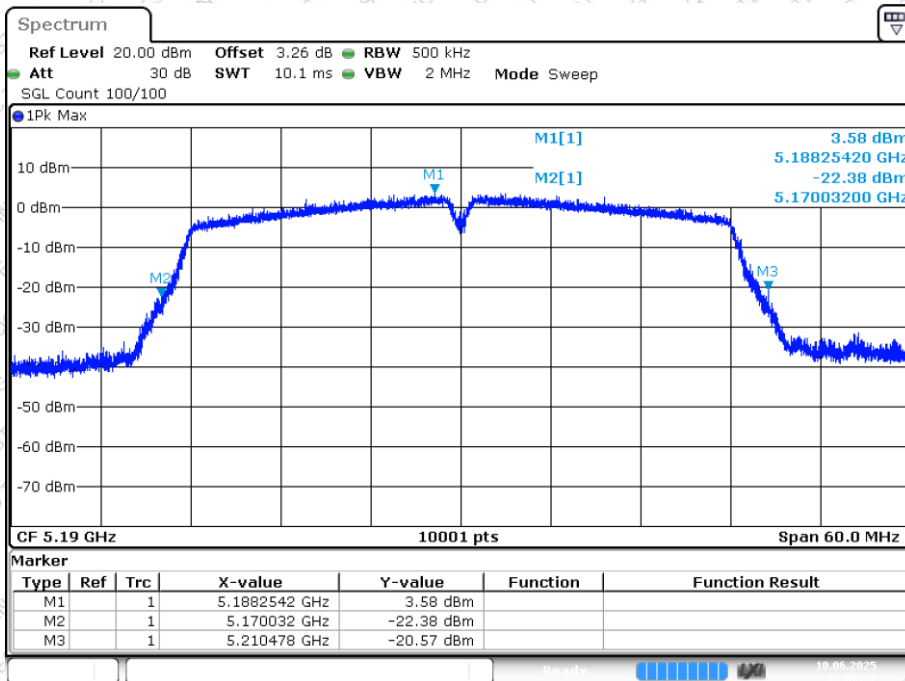




-26dB Bandwidth NVNT n40 5230MHz Ant1

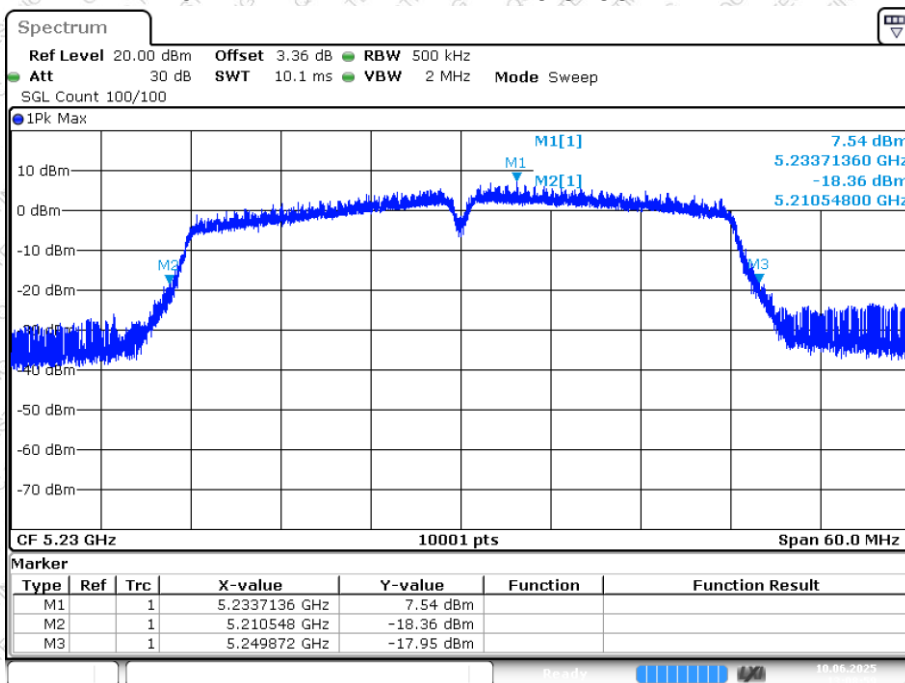


-26dB Bandwidth NVNT n40 5230MHz Ant2

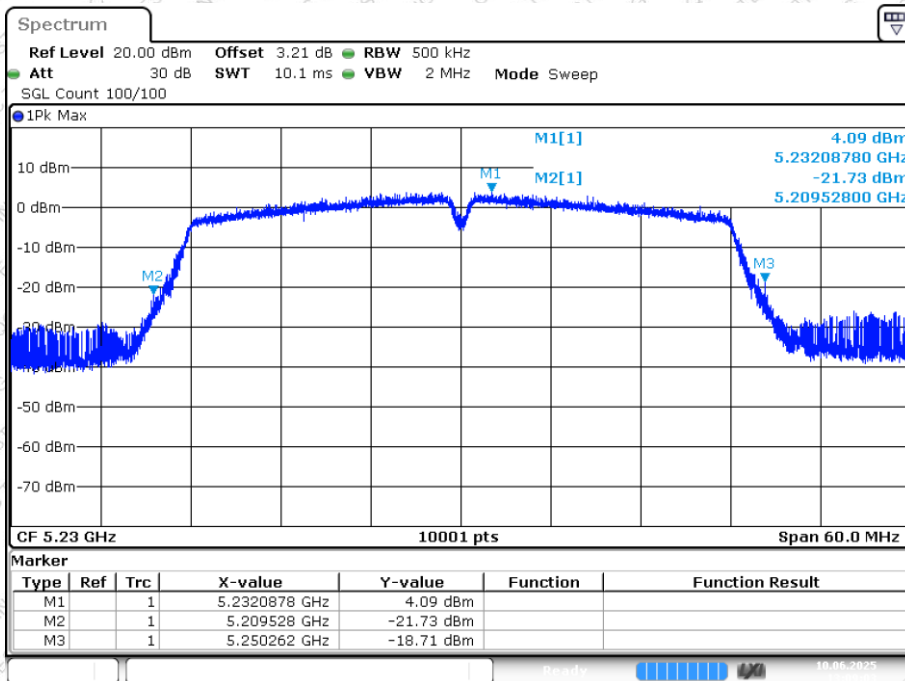




-26dB Bandwidth NVNT n40 5270MHz Ant1

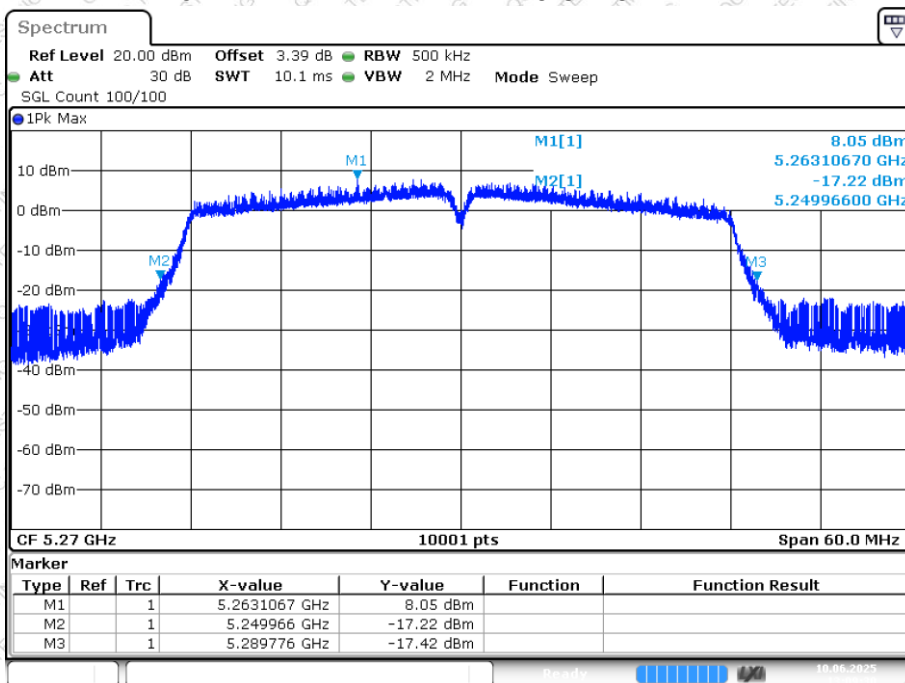

Date: 10. JUN. 2025 13:09:30


-26dB Bandwidth NVNT n40 5270MHz Ant2

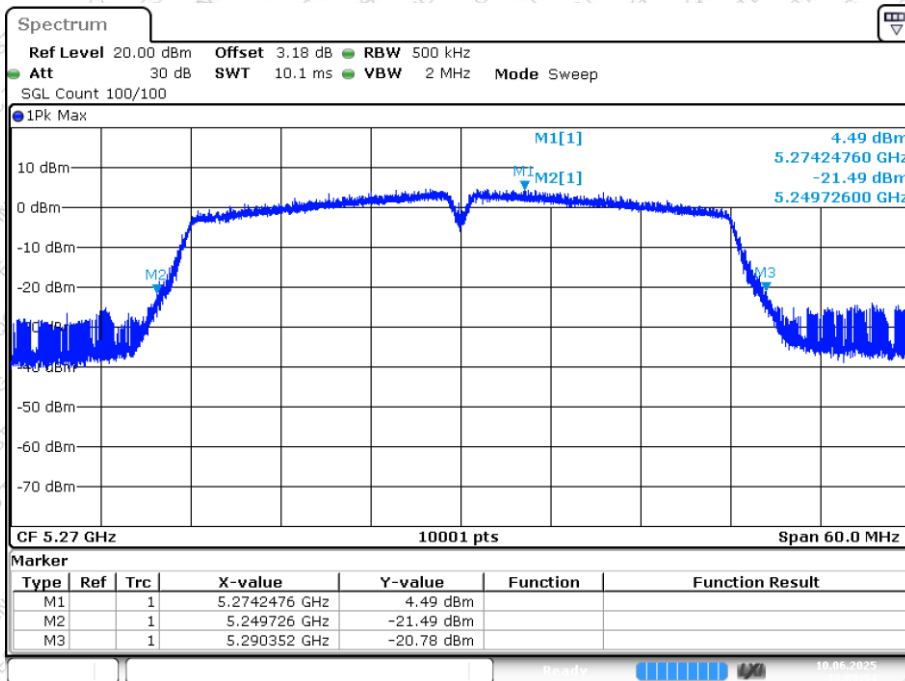

Date: 10. JUN. 2025 13:09:34




-26dB Bandwidth NVNT n40 5310MHz Ant1

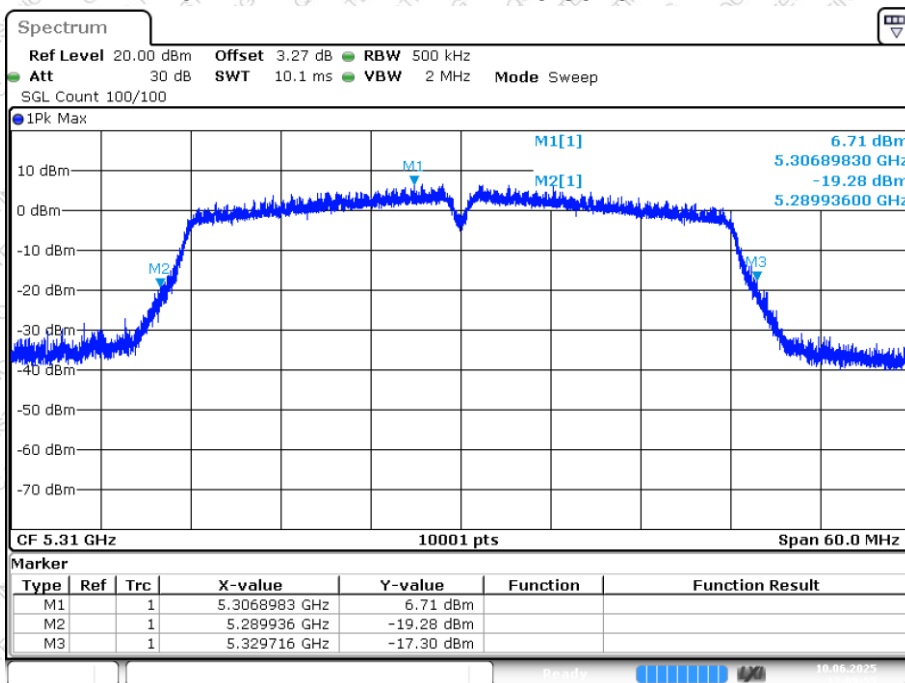

Date: 10 JUN.2025 13:09:56


-26dB Bandwidth NVNT n40 5310MHz Ant2

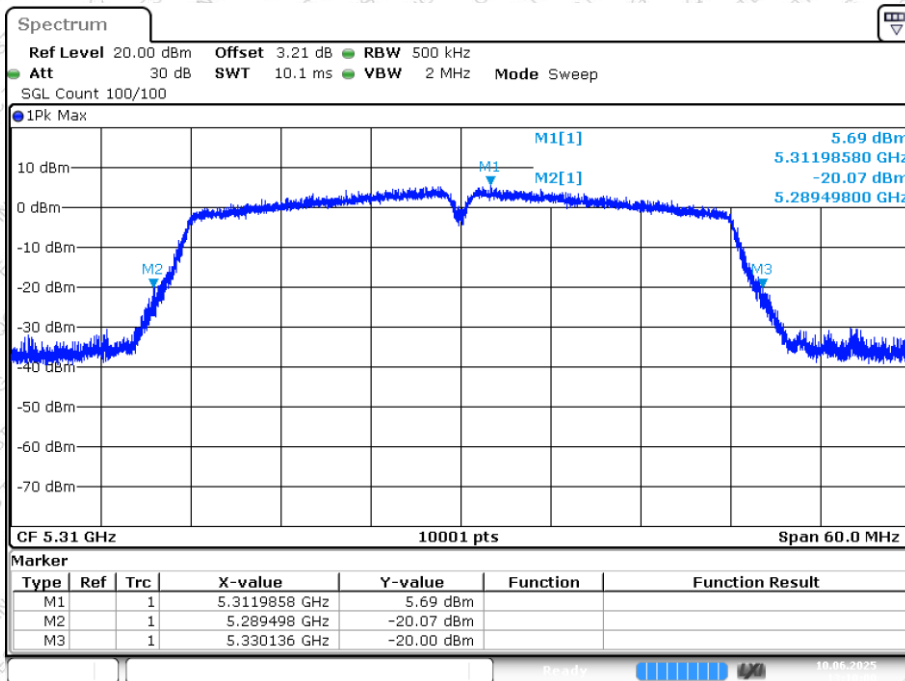

Date: 10 JUN.2025 13:10:00




-26dB Bandwidth NVNT n40 5510MHz Ant1

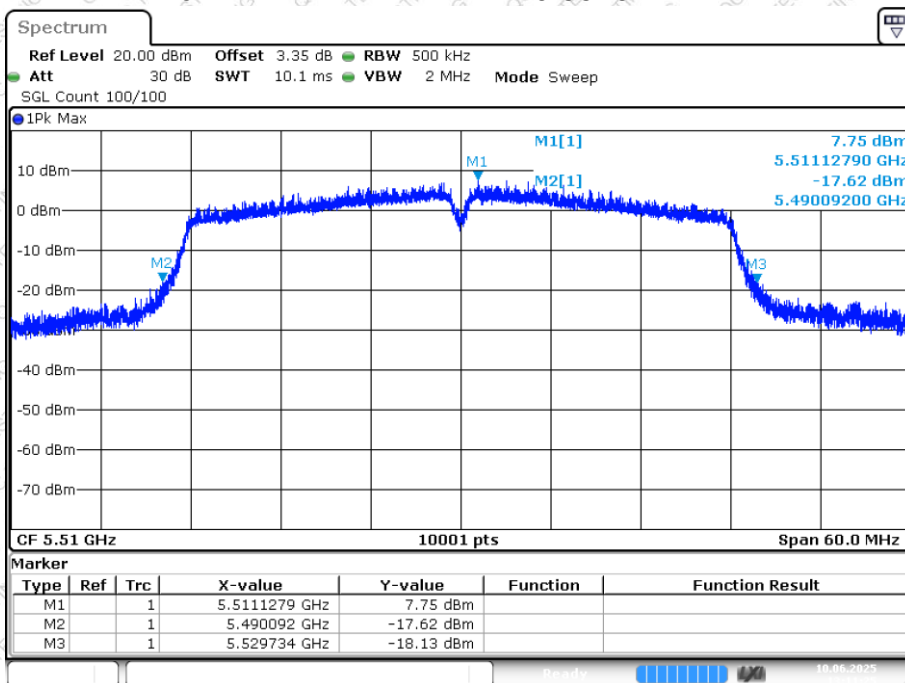

Date: 10 JUN.2025 13:11:25


-26dB Bandwidth NVNT n40 5510MHz Ant2

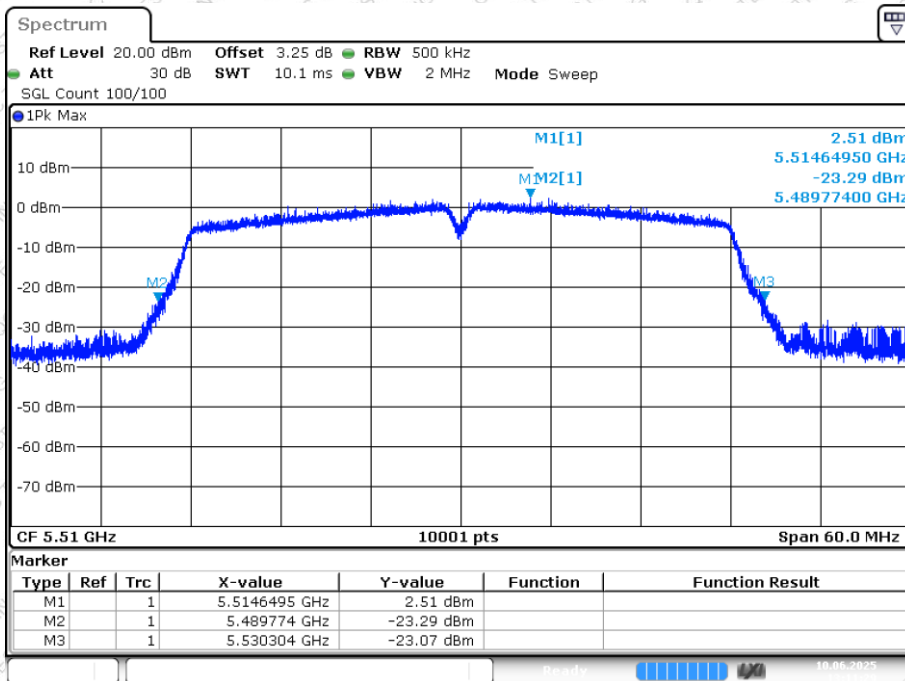


Date: 10 JUN.2025 13:11:29



-26dB Bandwidth NVNT n40 5550MHz Ant1

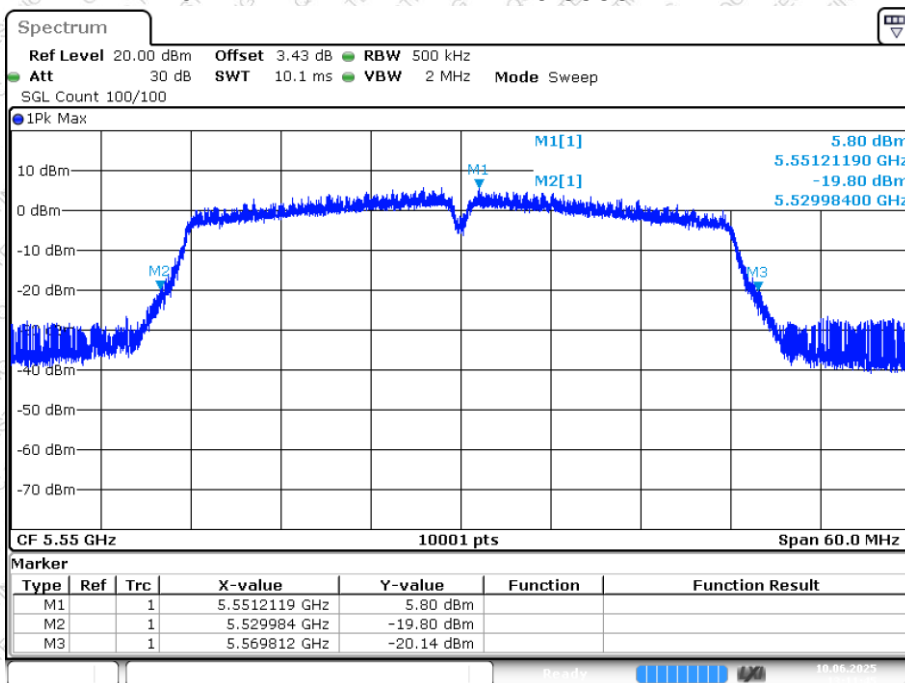


-26dB Bandwidth NVNT n40 5550MHz Ant2

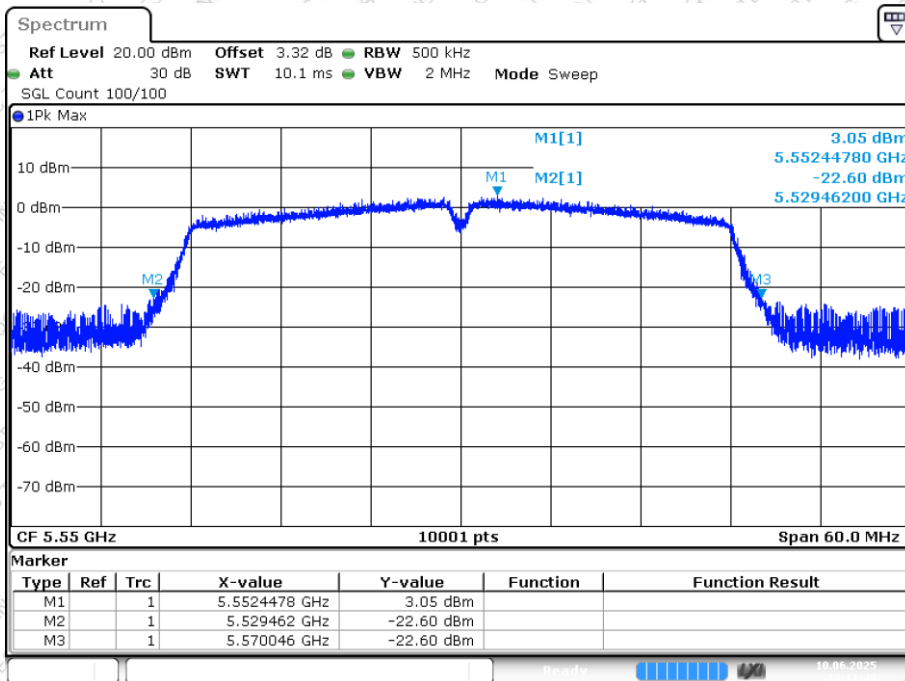




-26dB Bandwidth NVNT n40 5670MHz Ant1

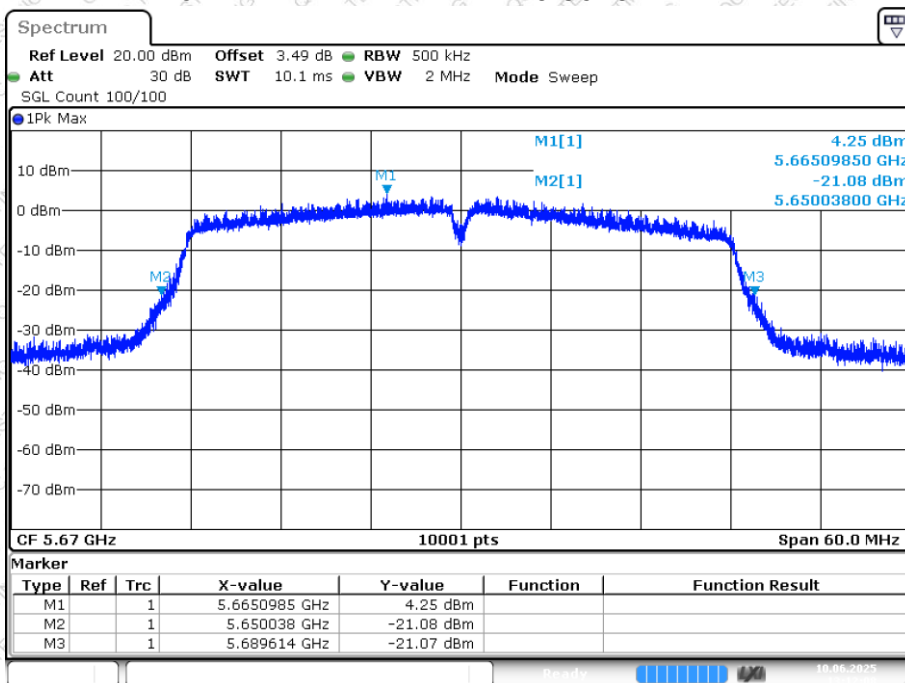

Date: 10. JUN. 2025 13:12:08


-26dB Bandwidth NVNT n40 5670MHz Ant2

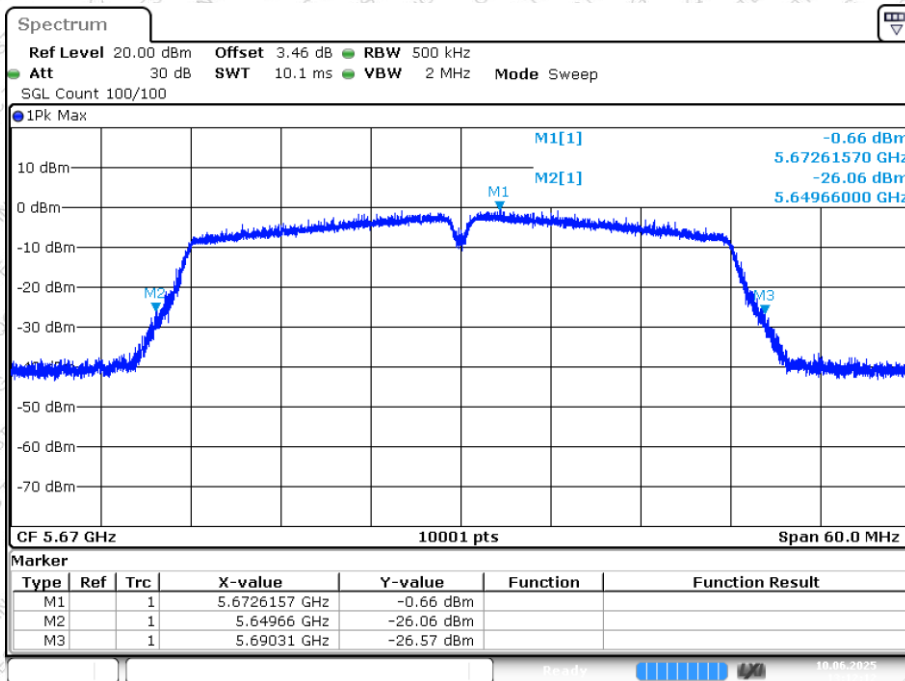


Date: 10. JUN. 2025 13:12:12



-26dB Bandwidth NVNT n40 5710MHz Ant1

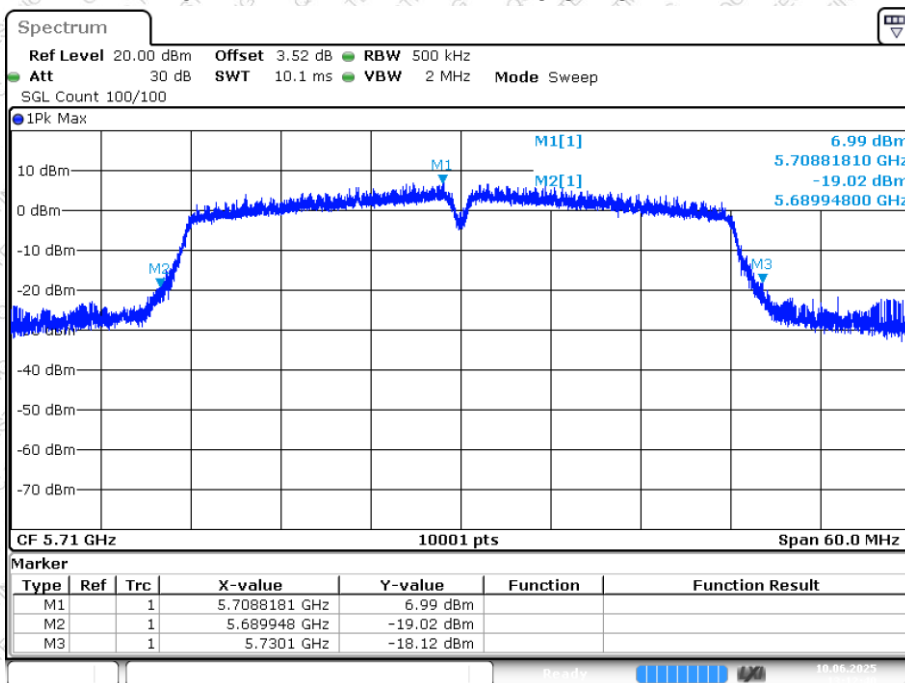


-26dB Bandwidth NVNT n40 5710MHz Ant2

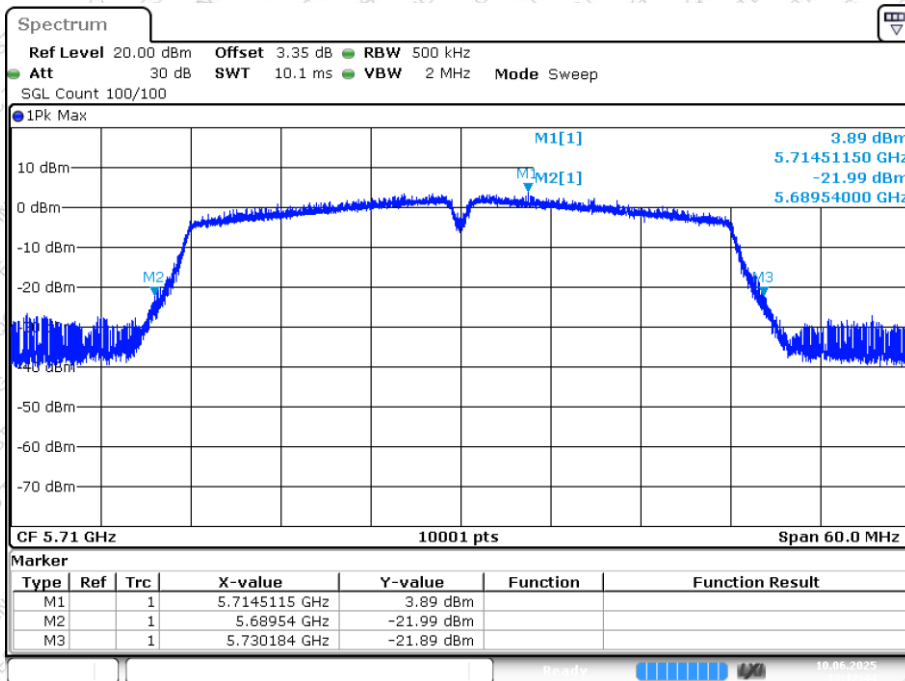




-26dB Bandwidth NVNT ac20 5180MHz Ant1

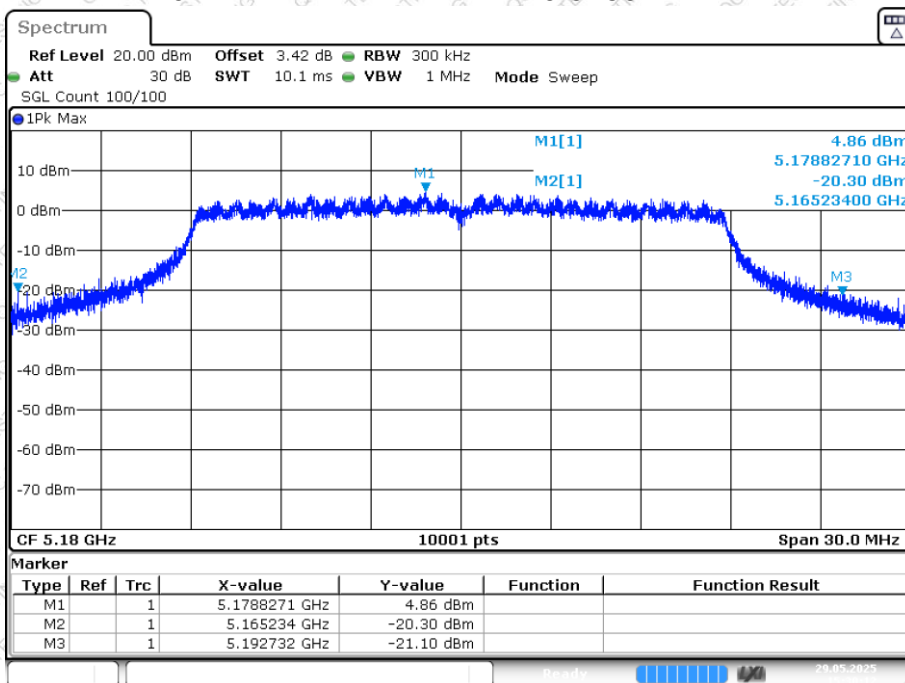


-26dB Bandwidth NVNT ac20 5180MHz Ant2

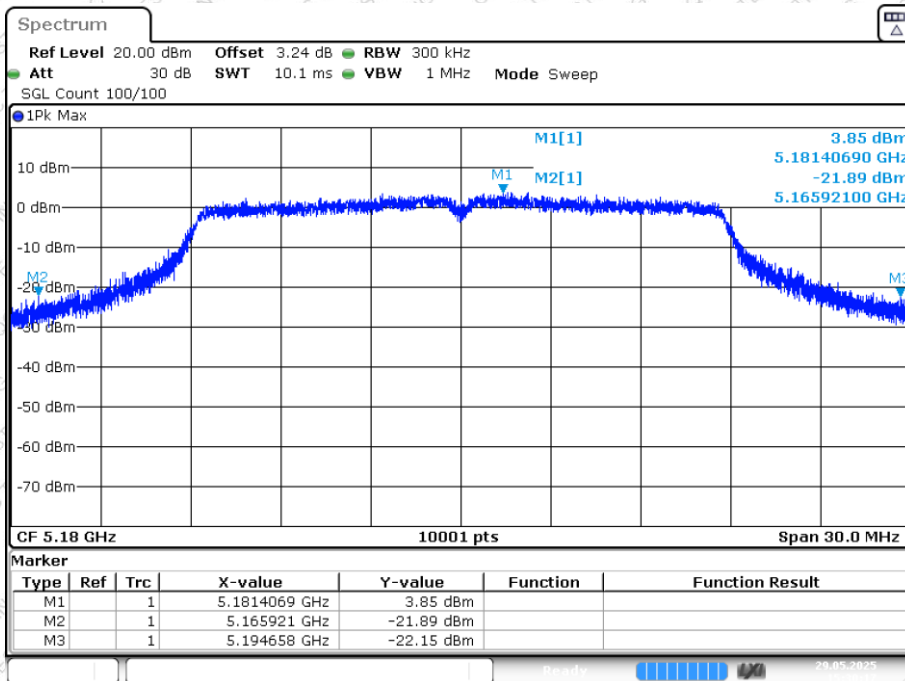




-26dB Bandwidth NVNT ac20 5200MHz Ant1

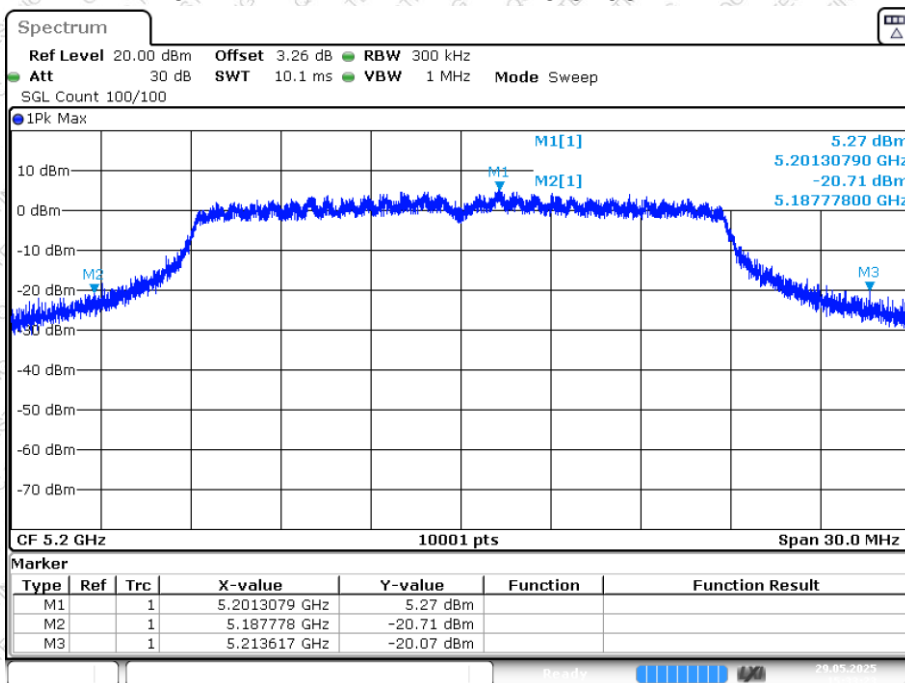

Date: 29 MAY 2025 15:33:23

-26dB Bandwidth NVNT ac20 5200MHz Ant2

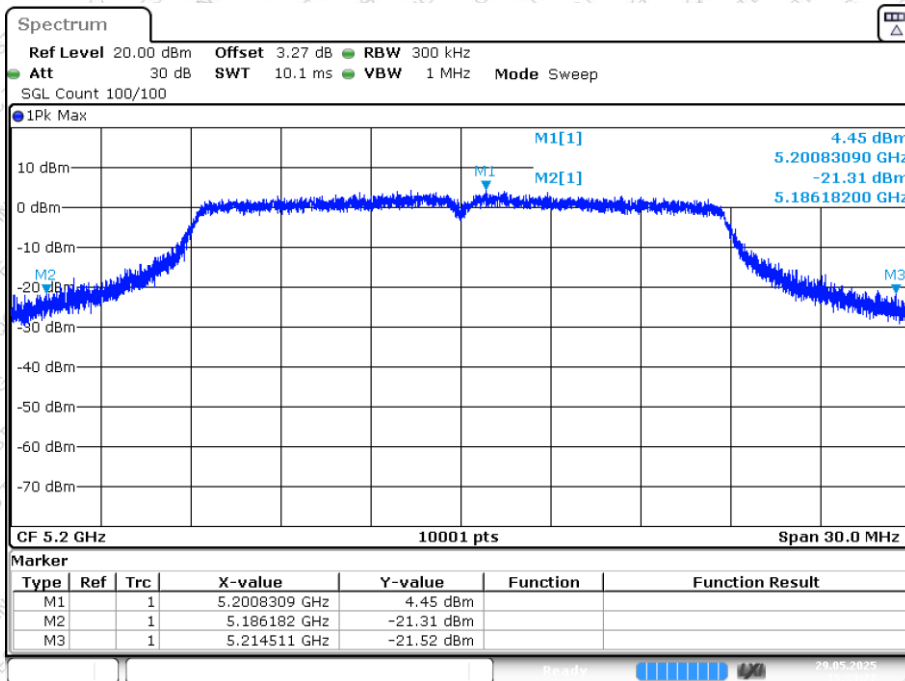

Date: 29 MAY 2025 15:33:27