

FCC RADIO TEST REPORT FCC ID: 2ADWUP4006A

Product: Smart phone

Trade Mark: Turbo D4

Model No.: P4006A

Serial Model: N/A

Report No.: NTEK-2017NT05113227F5

Issue Date: 01 Jun. 2017

Prepared for

ONE DIAMOND ELECTRONICS INC.

1450 Frazee Road, Suite 303, San Diego, California, United States

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen P.R. China

Tel.: +86-755-6115 9388 Fax.: +86-755-6115 6599 Website:http://www.ntek.org.cn



TABLE OF CONTENTS

1 7	TEST RESULT CERTIFICATION	1
2 S	SUMMARY OF TEST RESULTS	4
3 F	FACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
3.3	MEASUREMENT UNCERTAINTY	5
4 (GENERAL DESCRIPTION OF EUT	6
	DESCRIPTION OF TEST MODES	
6 S	ETUP OF EQUIPMENT UNDER TEST	9
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	
6.2	SUPPORT EQUIPMENT	10
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS	11
7 1	TEST REQUIREMENTS	12
7.1	CONDUCTED EMISSIONS TEST	12
7.2	FIELD STRENGTH OF SPURIOUS RADIATION	
7.3	EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER	27
7.4	CONDUCTED OUTPUT POWER	
7.5	FREQUENCY STABILITY	
7.6	PEAK-TO-AVERAGE RATIO	
7.7	26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	
7.8	CONDUCTED BAND EDGECONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL	
7.9	CONDUCTED STURIOUS EIVIISSION AT ANTENNA TERIVITINAL	01





1 TEST RESULT CERTIFICATION

Applicant's name:	ONE DIAMOND ELECTRONICS INC.		
Address:	1450 Frazee Road, Suite 303, San Diego, California, United States		
Manufacturer's Name:	Shanghai Wind Communication Technologies Co.,Ltd.		
Address:	3rd Floor, Building F1, TCL International E City, No. 1001, Zhongshan Park Road, Nanshan District, Shenzhen, P.R.China		
Product description			
Product name:	Smart phone		
Model and/or type reference:	P4006A		
Serial Model:	N/A		

Measurement Procedure Used:

APPLICABLE STANDARDS					
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT				
47 CFR Part 2, Part 22H, Part 24E					
ANSI/ TIA/ EIA-603-D-2010	Complied				
FCC KDB 971168 D01 Power Meas. License Digital Systems v02v02					

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test

11 May 2017 ~ 01 Jun 2017

•	11 May. 2017 ~ 01 Juli. 2017	
:	Eileen Wu.	
	(Eileen Liu)	
:	Jason chen	
	(Jason Chen)	
	San . Chen	
:		
	(Sam Chen)	
	:	Eileen Wu. (Eileen Liu) John Chem (Jason Chen) Sam. Chew



2 SUMMARY OF TEST RESULTS

FCC Part22, Subpart H/ FCC Part24, Subpart E						
FCC Rule	Test Item	Verdict	Remark			
2.1046	Conducted Output Power	PASS				
24.232(d)	Peak-to-Average Ratio	PASS				
2.1049 22.917(b) 24.238(b)	Occupied Bandwidth	PASS				
2.1051 22.917(a) 24.238(a)	Band Edge	PASS				
22.913(a)(2)	Effective Radiated Power	PASS				
24.232(c)	Equivalent Isotropic Radiated Power	PASS				
2.1053 22.917(a) 24.238(a)	Field Strength of Spurious Radiation	PASS				
2.1055 22.355 24.235	Frequency Stability for Temperature & Voltage	PASS				
2.1051 22.917(a) 24.238(a)	Conducted Emission	PASS				

- 1. "N/A" denotes test is not applicable in this Test Report.
- All test items were verified and recorded according to the standards and without any deviation during the test.
- 3. No modifications are made to the EUT during all test items.
- This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



Report No.:NTEK-2017NT05113227F5

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2014.09.04

The Laboratory has been assessed and proved to be in compliance with

CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L5516.

Accredited by Industry Canada, August 29, 2012 The Certificate Registration Number is 9270A-1.

Accredited by FCC, September 6, 2013

The Certificate Registration Number is 238937.

Name of Firm : ShenZhen NTEK Testing Technology Co., Ltd

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang

Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.


No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5dB



Product Feature and Specification					
Equipment	Smart phone				
Trade Mark	Turbo D4				
FCC ID	2ADWUP4006A				
Model No.	P4006A				
Serial Model	N/A				
Model Difference	N/A				
Operating Frequency	☑GSM850: TX824.2MHz~848.8MHz /RX869.2MHz~893.8MHz; ☑UMTS FDD Band V: TX826.4MHz~846.6MHz /RX871.4MHz~891.6MHz; ☑PCS1900: TX1850.2MHz~1909.8MHz /RX1930.2MHz~1989.8MHz; ☑UMTS FDD Band II: TX1852.4MHz~1907.6MHz /RX1932.4MHz~1987.6MHz;				
Modulation					
Number of Channels	 ⊠124 Channels for GSM850; ⊠102 Channels for UMTS FDD Band V; ⊠299 Channels for PCS1900; ⊠277 Channels for UMTS FDD Band II; 				
GPRS Class					
SIM CARD	The Phone has One SIM Card socket ⊠IMEI Code1:357633025689404 □IMEI Code2:				
Antenna Type	FPCB Antenna				
Antenna Gain	1.7 dBi				
	☑DC supply: Battery DC 3.7V/1400mAh or DC 5V from Adapter.				
Power supply	⊠Adapter supply: Model: DCS67-0500500 Input:100~240V 50~60Hz 0.2A Output:5V, 500mA				
HW Version	WG2M81C1-2				
SW Version	P4006A_LATAM_V1.3				

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual. The High Voltage 4.2V and Low Voltage 3.5V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.







Revision History					
Report No.	Version	Description	Issued Date		
NTEK-2017NT05113227F5	Rev.01	Initial issue of report	Jun 01, 2017		



5 DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester(CMU 200) to ensure max power transmission and proper modulation. Three channels (The low channel, the middle channel and the high channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS 850, GSM/GPRS 1900, HSDPA band II, HSDPA band II, HSDPA band V, HSUPA band V modes have been tested during the test. the worst condition (GSM850, GSM1900 RMC 12.2k) be recorded in the test report if no other modes test data.

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

- 1, 30 MHz to 10th harmonic for GSM850/UMTS FDD Band V.
- 2. 30 MHz to 10th harmonic for GSM1900/UMTS FDD Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes						
Band	For Conducted Test Cases	For Radiated Test Cases				
GSM 850	GSM Link	GSM Link				
GSM 1900 GSM Link		GSM Link				
UMTS Band II RMC 12.2Kbps Link		RMC 12.2Kbps Link				
UMTS Band V RMC 12.2Kbps Link		RMC 12.2Kbps Link				


Test Frequency and Channels:


Fraguanay	⊠ GSM 850		⊠GSM 1900				⊠UMTS Band V	
Frequency Band	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH_H	251	848.8	810	1909.8	9538	1907.6	4233	846.6
CH_M	190	836.4	661	1880.0	9400	1880.0	4183	836.4
CH_L	128	824.2	512	1850.2	9262	1852.4	4132	826.4




6 SETUP OF EQUIPMENT UNDER TEST


6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

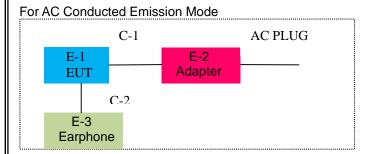


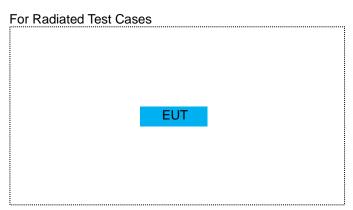



For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission







6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
E-1	Smart phone	N/A	P4006A	2ADWUP4006A	EUT
E-2	Adapter	N/A	DCS67-0500500	N/A	Peripherals
E-3	Earphone	N/A	2688	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	NO	NO	1.2m
C-2	Earphone Cable	NO	NO	0.8m
C-3	RF Cable	NO	NO	0.5m
C-4	RF Cable	NO	NO	0.5m
C-5	RF Cable	NO	NO	0.5m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2016.11.19	2017.11.18	1 year
2	Test Receiver	R&S	ESPI	101318	2016.06.07	2017.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2016.07.06	2017.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.07	2017.06.06	1 year
5	Horn Antenna	EM	EM-AH-1018 0	2011071402	2016.07.06	2017.07.05	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
7	Amplifier	EM	EM-30180	060538	2016.07.06	2017.07.05	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07	1 year
9	Power Meter	R&S	NRVS	100696	2016.07.06	2017.07.05	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.0 5	2016.07.06	2017.07.05	1 year
11	Test Cable	N/A	R-01	N/A	2016.07.06	2017.07.05	1 year
12	Test Cable	N/A	R-02	N/A	2016.07.06	2017.07.05	1 year
13	Test Cable	N/A	R-03	N/A	2016.06.29	2017.06.28	1 year
14	Test Receiver	R&S	ESCI	101160	2016.06.06	2017.06.05	1 year
15	LISN	R&S	ENV216	101313	2016.08.24	2017.08.23	1 year
16	LISN	EMCO	3816/2	00042990	2016.08.24	2017.08.23	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.07	2017.06.06	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2016.06.07	2017.06.06	1 year
19	Test Cable	N/A	C01	N/A	2016.06.08	2017.06.07	1 year
20	Test Cable	N/A	C02	N/A	2016.06.08	2017.06.07	1 year
21	Test Cable	N/A	C03	N/A	2016.06.08	2017.06.07	1 year
22	Attenuator	MCE	24-10-34	BN9258	2016.06.08	2017.06.07	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2016.06.08	2017.06.07	1 year
24	test receiver	R&S	ESCI	a0304218	2016.06.08	2017.06.07	1 year
25	Communication Tester	R&S	CMU200	A0304247	2016.06.08	2017.06.07	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2016.06.08	2017.06.07	1 year

Note: Each piece of equipment is scheduled for calibration once a year.



7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC KDB 971168 D01 v02r02 Section 6.0

7.1.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit			
Frequency(MH2)	Quasi-peak	Average		
0.15-0.5	66-56*	56-46*		
0.5-5.0	56	46		
5.0-30.0	60	50		


Note: 1. *Decreases with the logarithm of the frequency

- 2. The lower limit shall apply at the transition frequencies
- 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

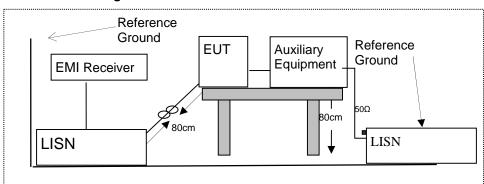

7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
- 2. The EUT was placed on a table which is 0.8m above ground plane.
- 3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- 4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
- 5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 6. LISN at least 80 cm from nearest part of EUT chassis.
- 7. The frequency range from 150KHz to 30MHz was searched.
- Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
- 9. For the actual test configuration, please refer to the related Item -EUT Test Photos.




7.1.6 **Test Results**

EUT:	Smart phone	Model Name:	P4006A
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
LIAST VAITAGE .	DC 5V from Adapter AC 120V/60Hz	Test Mode:	GSM/UMTS Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.1700	45.77	9.70	55.47	64.96	-9.49	QP
0.1700	31.15	9.70	40.85	54.96	-14.11	AVG
0.2260	40.64	9.70	50.34	62.59	-12.25	QP
0.2260	26.28	9.70	35.98	52.59	-16.61	AVG
0.4500	38.16	9.71	47.87	56.87	-9.00	QP
0.4500	27.35	9.71	37.06	46.87	-9.81	AVG
0.5580	37.67	9.71	47.38	56.00	-8.62	QP
0.5580	24.62	9.71	34.33	46.00	-11.67	AVG
0.7258	31.19	9.72	40.91	56.00	-15.09	QP
0.7298	17.17	9.72	26.89	46.00	-19.11	AVG
1.4538	30.03	9.77	39.80	56.00	-16.20	QP
1.4538	15.20	9.77	24.97	46.00	-21.03	AVG

- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

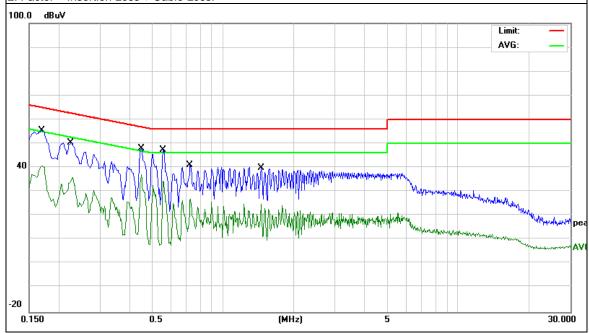




EUT:	Smart phone	Model Name:	P4006A
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
LIAST VOITAGE .	DC 5V from Adapter AC 120V/60Hz	Test Mode:	GSM/UMTS Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Damada
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.1700	45.76	9.80	55.56	64.96	-9.40	QP
0.1700	30.09	9.80	39.89	54.96	-15.07	AVG
0.2260	40.59	9.80	50.39	62.59	-12.20	QP
0.2260	27.26	9.80	37.06	52.59	-15.53	AVG
0.4620	34.78	9.81	44.59	56.66	-12.07	QP
0.4620	21.08	9.81	30.89	46.66	-15.77	AVG
0.5220	34.97	9.81	44.78	56.00	-11.22	QP
0.5220	22.04	9.81	31.85	46.00	-14.15	AVG
0.9858	31.73	9.82	41.55	56.00	-14.45	QP
0.9858	12.09	9.82	21.91	46.00	-24.09	AVG
2.4980	27.70	9.84	37.54	56.00	-18.46	QP
2.4980	12.04	9.84	21.88	46.00	-24.12	AVG

- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

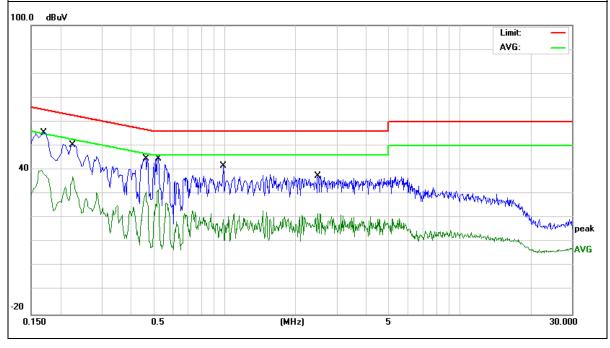




EUT:	Smart phone	Model Name:	P4006A
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
LIAST VIOITANA .	DC 5V from Adapter AC 240V/60Hz	Test Mode:	GSM/UMTS Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Domostic
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.1660	41.30	9.70	51.00	65.15	-14.15	QP
0.1660	25.81	9.70	35.51	55.15	-19.64	AVG
0.4500	36.87	9.71	46.58	56.87	-10.29	QP
0.4500	29.17	9.71	38.88	46.87	-7.99	AVG
0.5060	38.08	9.71	47.79	56.00	-8.21	QP
0.5060	30.32	9.71	40.03	46.00	-5.97	AVG
0.5580	37.08	9.71	46.79	56.00	-9.21	QP
0.5580	27.20	9.71	36.91	46.00	-9.09	AVG
1.0100	34.68	9.82	44.50	56.00	-11.50	QP
1.0100	25.41	9.82	35.23	46.00	-10.77	AVG
1.6220	34.13	9.77	43.90	56.00	-12.10	QP
1.6220	24.70	9.77	34.47	46.00	-11.53	AVG

- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

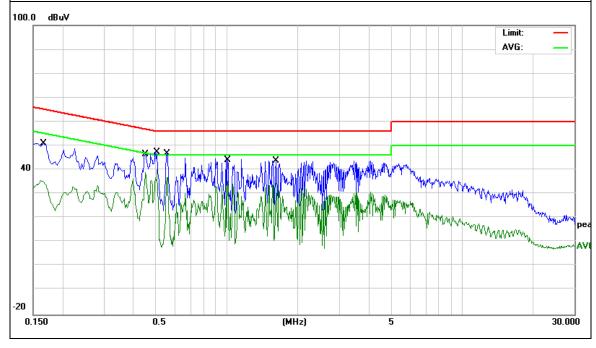




EUT:	Smart phone	Model Name:	P4006A
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
LIEST VOITAGE .	DC 5V from Adapter AC 240V/60Hz	Test Mode:	GSM/UMTS Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Damani
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.1660	41.55	9.80	51.35	65.15	-13.80	QP
0.1660	23.39	9.80	33.19	55.15	-21.96	AVG
0.4500	35.14	9.81	44.95	56.87	-11.92	QP
0.4500	23.74	9.81	33.55	46.87	-13.32	AVG
0.5060	36.19	9.81	46.00	56.00	-10.00	QP
0.5060	25.34	9.81	35.15	46.00	-10.85	AVG
0.5580	32.96	9.81	42.77	56.00	-13.23	QP
0.5580	22.94	9.81	32.75	46.00	-13.25	AVG
1.0660	31.81	9.82	41.63	56.00	-14.37	QP
1.0660	21.26	9.82	31.08	46.00	-14.92	AVG
1.5700	32.00	9.83	41.83	56.00	-14.17	QP
1.5700	20.11	9.83	29.94	46.00	-16.06	AVG

- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

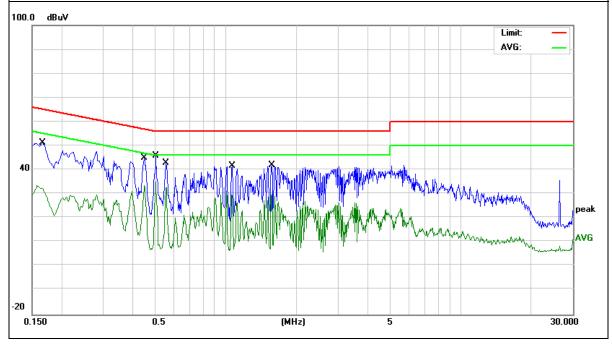



7.2 FIELD STRENGTH OF SPURIOUS RADIATION

7.2.1 Applicable Standard

According to FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI/ TIA-603-D-2010 Section 2.2.12

7.2.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


7.2.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.


7.2.4 Test Configuration

According to the TIA/EIA 603D:2010 test method, The Receiver or Spectrum was scanned from 9 KHz to the 10 harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be a high as 1910 MHz The resolution bandwidth is set as outlined in Part 24.238, Part 22.917. The spectrum is scanne with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDM Band II / WCDMA Band V / GSM 850 / GSM 1900.

TEST CONFIGURATION

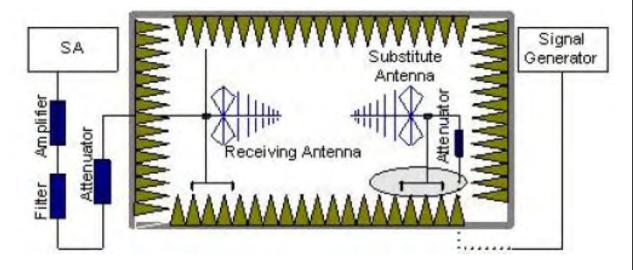



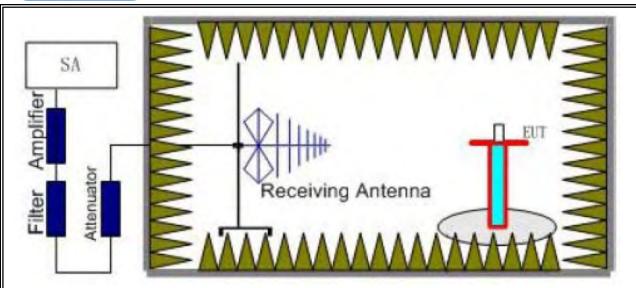

7.2.5 Test Procedure

- 1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 meter. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}) ,the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test. The measurement results are obtained as described below:
- Power(EIRP)=P_{Mea}- P_{Ag} P_{cl} + G_a
 6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.



7.2.6 Test Results

EUT:	Smart phone	Model No.:	P4006A
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	GSM/GPRS850//EGPRS850/GSM/G PRS1900/ EGPRS1900 UMTS band II/ UMTS band V		Susan Su

Radiated Spurious Emission

	GSM 850							
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity	
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)		
		Test Res	sults for Cha	nnel 128/82	4.2 MHz			
1648.4	-54.12	2.8	27.5	-29.42	-13	-16.42	Vertical	
1648.4	-51.13	2.8	27.5	-26.43	-13	-13.43	Horizontal	
2472.6	-52.29	2.91	27.8	-27.4	-13	-14.4	Vertical	
2472.6	-50.97	2.91	27.8	-26.08	-13	-13.08	Horizontal	
3296.8	-52.22	4.02	29.87	-26.37	-13	-13.37	Vertical	
3296.8	-52.64	4.02	29.87	-26.79	-13	-13.79	Horizontal	
		Test Res	sults for Cha	nnel 190/83	6.6 MHz			
1673.2	-50.43	2.8	27.48	-25.75	-13	-12.75	Vertical	
1673.2	-49.97	2.8	27.48	-25.29	-13	-12.29	Horizontal	
2509.8	-52.26	2.91	27.7	-27.47	-13	-14.47	Vertical	
2509.8	-52.23	2.91	27.7	-27.44	-13	-14.44	Horizontal	
3346.4	-51.42	4.02	29.82	-25.62	-13	-12.62	Vertical	
3346.4	-50.55	4.02	29.82	-24.75	-13	-11.75	Horizontal	
		Test Res	sults for Cha	nnel 251/84	8.8 MHz			
1697.6	-54.64	2.8	27.42	-30.02	-13	-17.02	Vertical	
1697.6	-51.95	2.8	27.42	-27.33	-13	-14.33	Horizontal	
2546.4	-53.34	2.91	27.68	-28.57	-13	-15.57	Vertical	
2546.4	-53.36	2.91	27.68	-28.59	-13	-15.59	Horizontal	
3395.2	-49.74	4.02	29.8	-23.96	-13	-10.96	Vertical	
3395.2	-53.31	4.02	29.8	-27.53	-13	-14.53	Horizontal	

- 1. We were tested all Configuration refer 3GPP TS134 121.
- 2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
- 3. Over Limit= Absolute Level (dBm)-Limit(dBm)
- 4.We test both H direction and V direction, recorded worst case direction.



			GPR:	S 850							
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity				
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)					
	Test Results for Channel 128/824.2 MHz										
1648.4	-52.24	2.8	27.5	-27.54	-13	-14.54	Vertical				
1648.4	-54.46	2.8	27.5	-29.76	-13	-16.76	Horizontal				
2472.6	-53.29	2.91	27.8	-28.4	-13	-15.4	Vertical				
2472.6	-51.16	2.91	27.8	-26.27	-13	-13.27	Horizontal				
3296.8	-54.74	4.02	29.87	-28.89	-13	-15.89	Vertical				
3296.8	-53.65	4.02	29.87	-27.8	-13	-14.8	Horizontal				
	Test Results for Channel 190/836.6 MHz										
1673.2	-51.12	2.8	27.48	-26.44	-13	-13.44	Vertical				
1673.2	-50.47	2.8	27.48	-25.79	-13	-12.79	Horizontal				
2509.8	-52.28	2.91	27.7	-27.49	-13	-14.49	Vertical				
2509.8	-49.96	2.91	27.7	-25.17	-13	-12.17	Horizontal				
3346.4	-51.11	4.02	29.82	-25.31	-13	-12.31	Vertical				
3346.4	-52.34	4.02	29.82	-26.54	-13	-13.54	Horizontal				
		Test Res	sults for Cha	nnel 251/84	8.8 MHz						
1697.6	-55.56	2.8	27.42	-30.94	-13	-17.94	Vertical				
1697.6	-51.27	2.8	27.42	-26.65	-13	-13.65	Horizontal				
2546.4	-56.63	2.91	27.68	-31.86	-13	-18.86	Vertical				
2546.4	-53.34	2.91	27.68	-28.57	-13	-15.57	Horizontal				
3395.2	-49.98	4.02	29.8	-24.2	-13	-11.2	Vertical				
3395.2	-51.12	4.02	29.8	-25.34	-13	-12.34	Horizontal				

- We were tested all Configuration refer 3GPP TS134 121.
 Absolute Level = SG Level- Cable Loss+ Antenna Gain
 Over Limit= Absolute Level (dBm)-Limit(dBm)
 We test both H direction and V direction, recorded worst case direction.



			EGPR	RS 850							
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity				
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)					
	Test Results for Channel 128/824.2 MHz										
1648.4	-51.41	2.8	27.5	-26.71	-13	-13.71	Vertical				
1648.4	-49.98	2.8	27.5	-25.28	-13	-12.28	Horizontal				
2472.6	-51.23	2.91	27.8	-26.34	-13	-13.34	Vertical				
2472.6	-47.77	2.91	27.8	-22.88	-13	-9.88	Horizontal				
3296.8	-52.26	4.02	29.87	-26.41	-13	-13.41	Vertical				
3296.8	-52.23	4.02	29.87	-26.38	-13	-13.38	Horizontal				
Test Results for Channel 190/836.6 MHz											
1673.2	-50.01	2.8	27.48	-25.33	-13	-12.33	Vertical				
1673.2	-49.96	2.8	27.48	-25.28	-13	-12.28	Horizontal				
2509.8	-53.34	2.91	27.7	-28.55	-13	-15.55	Vertical				
2509.8	-53.36	2.91	27.7	-28.57	-13	-15.57	Horizontal				
3346.4	-49.74	4.02	29.82	-23.94	-13	-10.94	Vertical				
3346.4	-50.54	4.02	29.82	-24.74	-13	-11.74	Horizontal				
		Test Res	sults for Cha	nnel 251/84	8.8 MHz						
1697.6	-47.46	2.8	27.42	-22.84	-13	-9.84	Vertical				
1697.6	-49.69	2.8	27.42	-25.07	-13	-12.07	Horizontal				
2546.4	-51.21	2.91	27.68	-26.44	-13	-13.44	Vertical				
2546.4	-50.57	2.91	27.68	-25.8	-13	-12.8	Horizontal				
3395.2	-49.97	4.02	29.8	-24.19	-13	-11.19	Vertical				
3395.2	-53.36	4.02	29.8	-27.58	-13	-14.58	Horizontal				

- We were tested all Configuration refer 3GPP TS134 121.
 Absolute Level = SG Level- Cable Loss+ Antenna Gain
 Over Limit= Absolute Level (dBm)-Limit(dBm)
 We test both H direction and V direction, recorded worst case direction.



			GSM	1900						
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity			
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)				
		Test Res	ults for Cha	nnel 512/185	50.2MHz					
3700.4	-52.23	4.04	33.51	-22.76	-13	-9.76	Vertical			
3700.4	-50.46	4.04	33.51	-20.99	-13	-7.99	Horizontal			
5550.6	-52.22	5.24	35.84	-21.62	-13	-8.62	Vertical			
5550.6	-53.73	5.24	35.84	-23.13	-13	-10.13	Horizontal			
	Test Results for Channel 661/1880.0MHz									
3760	-51.11	4.04	33.56	-21.59	-13	-8.59	Vertical			
3760	-51.65	4.04	33.56	-22.13	-13	-9.13	Horizontal			
5640	-52.26	5.24	35.91	-21.59	-13	-8.59	Vertical			
5640	-52.58	5.24	35.91	-21.91	-13	-8.91	Horizontal			
		Test Res	ults for Cha	nnel 810/190	9.8MHz					
3819.6	-54.41	4.04	34	-24.45	-13	-11.45	Vertical			
3819.6	-55.56	4.04	34	-25.6	-13	-12.6	Horizontal			
5729.4	-53.38	5.24	36.04	-22.58	-13	-9.58	Vertical			
5729.4	-55.59	5.24	36.04	-24.79	-13	-11.79	Horizontal			

- 1. We were tested all Configuration refer 3GPP TS134 121.
- 2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
- 3. Over Limit= Absolute Level (dBm)-Limit(dBm)
- 4.We test both H direction and V direction, recorded worst case direction.



			GPRS	S 1900					
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity		
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)			
		Test Res	ults for Cha	nnel 512/185	50.2MHz				
3700.4	-54.47	4.04	33.51	-25	-13	-12	Vertical		
3700.4	-52.26	4.04	33.51	-22.79	-13	-9.79	Horizontal		
5550.6	-52.61	5.24	35.84	-22.01	-13	-9.01	Vertical		
5550.6	-53.39	5.24	35.84	-22.79	-13	-9.79	Horizontal		
Test Results for Channel 661/1880.0MHz									
3760	-50.02	4.04	33.56	-20.5	-13	-7.5	Vertical		
3760	-53.34	4.04	33.56	-23.82	-13	-10.82	Horizontal		
5640	-52.26	5.24	35.91	-21.59	-13	-8.59	Vertical		
5640	-55.58	5.24	35.91	-24.91	-13	-11.91	Horizontal		
		Test Res	ults for Cha	nnel 810/190	09.8MHz				
3819.6	-54.41	4.04	34	-24.45	-13	-11.45	Vertical		
3819.6	-53.36	4.04	34	-23.4	-13	-10.4	Horizontal		
5729.4	-56.69	5.24	36.04	-25.89	-13	-12.89	Vertical		
5729.4	-55.57	5.24	36.04	-24.77	-13	-11.77	Horizontal		

- We were tested all Configuration refer 3GPP TS134 121.
 Absolute Level = SG Level- Cable Loss+ Antenna Gain
- 3. Over Limit= Absolute Level (dBm)-Limit(dBm)
- 4.We test both H direction and V direction, recorded worst case direction.



			EGPR	S 1900						
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity			
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)				
		Test Res	ults for Cha	nnel 512/185	50.2MHz					
3700.4	-55.52	4.04	33.51	-26.05	-13	-13.05	Vertical			
3700.4	-56.64	4.04	33.51	-27.17	-13	-14.17	Horizontal			
5550.6	-54.47	5.24	35.84	-23.87	-13	-10.87	Vertical			
5550.6	-56.59	5.24	35.84	-25.99	-13	-12.99	Horizontal			
	Test Results for Channel 661/1880.0MHz									
3760	-52.28	4.04	33.56	-22.76	-13	-9.76	Vertical			
3760	-52.31	4.04	33.56	-22.79	-13	-9.79	Horizontal			
5640	-52.24	5.24	35.91	-21.57	-13	-8.57	Vertical			
5640	-56.69	5.24	35.91	-26.02	-13	-13.02	Horizontal			
		Test Res	ults for Cha	nnel 810/190	9.8MHz					
3819.6	-55.57	4.04	34	-25.61	-13	-12.61	Vertical			
3819.6	-54.41	4.04	34	-24.45	-13	-11.45	Horizontal			
5729.4	-55.59	5.24	36.04	-24.79	-13	-11.79	Vertical			
5729.4	-56.63	5.24	36.04	-25.83	-13	-12.83	Horizontal			

- 1. We were tested all Configuration refer 3GPP TS134 121.
- 2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
- 3. Over Limit= Absolute Level (dBm)-Limit(dBm)
- 4.We test both H direction and V direction, recorded worst case direction.



			WCDMA	Band II						
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity			
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)				
		Test Res	ults for Char	nel 9262/18	52.4MHz					
3700.8	-52.24	4.04	33.51	-22.77	-13	-9.77	Vertical			
3700.8	-49.98	4.04	33.51	-20.51	-13	-7.51	Horizontal			
5551.2	-55.57	5.24	35.84	-24.97	-13	-11.97	Vertical			
5551.2	-54.43	5.24	35.84	-23.83	-13	-10.83	Horizontal			
	Test Results for Channel 9400/1880MHz									
3760	-54.41	4.04	33.56	-24.89	-13	-11.89	Vertical			
3760	-52.26	4.04	33.56	-22.74	-13	-9.74	Horizontal			
5640	-53.38	5.24	35.91	-22.71	-13	-9.71	Vertical			
5640	-52.97	5.24	35.91	-22.3	-13	-9.3	Horizontal			
		Test Res	ults for Char	nel 9538/19	07.6MHz					
3819.2	-54.47	4.04	34	-24.51	-13	-11.51	Vertical			
3819.2	-56.65	4.04	34	-26.69	-13	-13.69	Horizontal			
5728.8	-56.85	5.24	36.04	-26.05	-13	-13.05	Vertical			
5728.8	-55.52	5.24	36.04	-24.72	-13	-11.72	Horizontal			

- 1. We were tested all Configuration refer 3GPP TS134 121.
- 2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
- 3. Over Limit= Absolute Level (dBm)-Limit(dBm)
- 4.We test both H direction and V direction, recorded worst case direction.



			WCDMA	Band V					
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity		
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)			
		Test Res	ults for Cha	nnel 4233/84	16.6MHz				
1673.2	-51.41	2.8	27.5	-26.71	-13	-13.71	Vertical		
1673.2	52.23	2.8	27.5	76.93	-13	89.93	Horizontal		
2509.8	-54.41	2.91	27.8	-29.52	-13	-16.52	Vertical		
2509.8	-49.96	2.91	27.8	-25.07	-13	-12.07	Horizontal		
3346.4	-52.27	4.02	29.87	-26.42	-13	-13.42	Vertical		
3346.4	-55.56	4.02	29.87	-29.71	-13	-16.71	Horizontal		
Test Results for Channel 4182/836.4MHz									
1672.8	-54.41	2.8	27.48	-29.73	-13	-16.73	Vertical		
1672.8	-52.26	2.8	27.48	-27.58	-13	-14.58	Horizontal		
2509.2	-50.85	2.91	27.7	-26.06	-13	-13.06	Vertical		
2509.2	-53.34	2.91	27.7	-28.55	-13	-15.55	Horizontal		
3345.6	-50.65	4.02	29.82	-24.85	-13	-11.85	Vertical		
3345.6	-50.57	4.02	29.82	-24.77	-13	-11.77	Horizontal		
		Test Res	ults for Cha	nnel 4132/82	26.4MHz				
1652.8	-49.97	2.8	27.42	-25.35	-13	-12.35	Vertical		
1652.8	-48.02	2.8	27.42	-23.4	-13	-10.4	Horizontal		
2479.2	-51.25	2.91	27.68	-26.48	-13	-13.48	Vertical		
2479.2	-50.64	2.91	27.68	-25.87	-13	-12.87	Horizontal		
3305.6	-49.63	4.02	29.8	-23.85	-13	-10.85	Vertical		
3305.6	-50.52	4.02	29.8	-24.74	-13	-11.74	Horizontal		

- We were tested all Configuration refer 3GPP TS134 121.
 Absolute Level = SG Level- Cable Loss+ Antenna Gain
 Over Limit= Absolute Level (dBm)-Limit(dBm)
 We test both H direction and V direction, recorded worst case direction.



7.3 EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER

7.3.1 Applicable Standard

According to FCC KDB 971168 D01 v02r02 Section 5.2.1/ Section 5.2.2.2 and ANSI/ TIA-603-D-2010 Section 2.2.17

7.3.2 Conformance Limit


The substitution method, in ANSI / TIA / EIA-603-D-2010, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Configuration

(a) For E.R.P and E.I.R.P Measurements



7.3.5 Test Procedure

The measurements procedures specified in TIA-603-D-2010 were applied.

In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

ERP/EIRP = SGLevel -Pcl +Ga

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as SGLevel, typically dBW or dBm);

SGLevel = Signal generator output power or PSD, in dBm or dBW;

Ga = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

Pcl = signal attenuation in the connecting cable between the transmitter and antenna, in dB.²

The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.

From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.

The EUT is then put into continuously transmitting mode at its maximum power level.



Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.

This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Substitution antenna and Receiving Antenna:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Character	Note
1	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Receiving Antenna
2	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Receiving Antenna
3	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Substitution antenna
4	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Substitution antenna

Use the following spectrum analyzer settings:

ded the fellething operation analyzer detailings.							
	GSM/GPRS	UMTS band					
Span	500KHz	10MHz					
RBW	10KHz	300KHz					
VBW	30KHz	1MHz					
Detector	RMS	RMS					
Trace	Average	Average					
Average Type	Power	Power					
Sweep Count	100	100					



7.3.6 Test Results

EUT:	Smart phone	Model No.:	P4006A
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/GSM/GPRS/EGPRS 1900/ UMTS band II/ UMTS band V	Test By:	Susan Su

■ Effective Radiated Power

		Radiate	d Power (E	RP) for GS	M850		
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	Н	12.54	2.11	23.84	2.15	32.12	1.62930
836.6	Н	12.98	2.13	23.15	2.15	31.85	1.53109
848.8	Н	13.09	2.13	23.06	2.15	31.87	1.53815
824.2	V	13.25	2.11	23.11	2.15	32.1	1.62181
836.6	V	13.29	2.13	23.07	2.15	32.08	1.61436
848.8	V	13.22	2.13	23.25	2.15	32.19	1.65577

		Radiate	d Power (E	RP) for GPF	RS850		
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	Н	12.54	2.11	23.84	2.15	32.12	1.62930
836.6	Н	13.01	2.13	23.15	2.15	31.88	1.54170
848.8	Н	13.12	2.13	23.06	2.15	31.9	1.54882
824.2	V	13.34	2.11	23.11	2.15	32.19	1.65577
836.6	V	13.26	2.13	23.07	2.15	32.05	1.60325
848.8	V	13.19	2.13	23.25	2.15	32.16	1.64437

	Radiated Power (ERP) for EGPRS850						
Frequency	Polarization	SG	Pcl	Ga Antenna	Correction	ERP	ERP
	Polarization	Level		Gain			
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	Н	6.53	2.11	23.84	2.15	26.11	0.40832
836.6	Н	7.98	2.13	23.15	2.15	26.85	0.48417
848.8	Н	7.94	2.13	23.06	2.15	26.72	0.46989
824.2	V	7.67	2.11	23.11	2.15	26.52	0.44875
836.6	V	7.84	2.13	23.07	2.15	26.63	0.46026
848.8	V	7.02	2.13	23.25	2.15	25.99	0.39719



	Radiated Power (ERP) for UMTS band V						
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
826.4	Н	2.98	2.11	23.84	2.15	22.56	0.18030
835	Н	3.12	2.13	23.15	2.15	21.99	0.15812
846.6	Н	3.22	2.13	23.06	2.15	22	0.15849
826.4	V	3.37	2.11	23.11	2.15	22.22	0.16672
835	V	3.42	2.13	23.07	2.15	22.21	0.16634
846.6	V	3.56	2.13	23.25	2.15	22.53	0.17906

Note:

SG Level= Signal generator output

Pcl= cable loss
Ga= Antenna Gain
Peak EIRP(dBm)= SGLevel -Pcl +Ga
ERP(dBm)=EIRP-2.15



■ Effective Isotropic Radiated Power

	Radiated Power (E.I.R.P) for GSM1900					
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	Н	4.78	3.76	28.24	29.26	0.84333
1880	Н	5.26	3.91	28.22	29.57	0.90573
1909.8	Н	4.87	3.93	28.2	29.14	0.82035
1850.2	V	4.67	3.76	27.32	28.23	0.66527
1880	V	6.03	3.91	27.33	29.45	0.88105
1909.8	V	5.98	3.93	27.31	29.36	0.86298

	Radiated Power (E.I.R.P) for GPRS1900					
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	Н	4.59	3.76	28.24	29.07	0.80724
1880	Н	5.04	3.91	28.22	29.35	0.86099
1909.8	Н	4.67	3.93	28.2	28.94	0.78343
1850.2	V	4.06	3.76	27.32	27.62	0.57810
1880	V	5.32	3.91	27.33	28.74	0.74817
1909.8	V	5.78	3.93	27.31	29.16	0.82414

	Radiated Power (E.I.R.P) for EGPRS1900					
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	Н	1.01	3.76	28.24	25.49	0.35400
1880	Н	1.58	3.91	28.22	25.89	0.38815
1909.8	Н	1.63	3.93	28.2	25.9	0.38905
1850.2	V	1.58	3.76	27.32	25.14	0.32659
1880	V	1.69	3.91	27.33	25.11	0.32434
1909.8	V	1.74	3.93	27.31	25.12	0.32509



Radiated Power (E.I.R.P) for UMTS band II						
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1852.4	Н	-2.65	3.76	28.24	21.83	0.15241
1880	Н	-2.47	3.91	28.22	21.84	0.15276
1907.6	Н	-2.39	3.93	28.2	21.88	0.15417
1852.4	V	-2.42	3.76	27.32	21.14	0.13002
1880	V	-2.59	3.91	27.33	20.83	0.12106
1907.6	V	-2.41	3.93	27.31	20.97	0.12503

Note:

SG Level= Signal generator output Pcl= cable loss Ga= Antenna Gain

Peak EIRP(dBm)= SGLevel -Pcl+Ga.



7.4 CONDUCTED OUTPUT POWER

7.4.1 Applicable Standard

According to FCC Part 2.1046 and FCC Part 22.913(a)(2) and FCC Part 24.232(c) and FCC KDB 971168 D01 v02r02 Section 5.2

7.4.2 Conformance Limit

Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts(38.5dBm).

Mobile and portable stations are limited to 2 watts (33dBm)EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. The frequency band is set as selected frequency,

The RF output of the transmitter was connected to base station simulator.

Set EUT at maximum average power by base station simulator.

Set RBW = 1-5% of the OBW, not to exceed 1 MHz.

Set VBW ≥ 3 x RBW.

Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS (power averaging).

Set sweep trigger to "free run".

Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Add 10 $\log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add 10 $\log (1/0.25) = 6$ dB if the duty cycle is a constant 25%.

Measure lowest, middle, and highest channels for each bandwidth and different modulation.

Measure and record the results in the test report.



7.4.6 Test Results

EUT:	Smart phone	Model No.:	P4006A
Temperature:	20 ℃	Relative Humidity:	48%
	GSM/GPRS/EGPRS 850/GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V	Test By:	Susan Su

Output Power for GSM850

Mode	Frequency(MHz)	Maximum Burst-Average Output Power
	824.2	32.17
GSM850	836.6	32.13
	848.8	32.1
GPRS850	824.2	32.18
(1 Slot)	836.6	32.15
	848.8	32.12
GPRS850	824.2	31.36
(2 Slot)	836.6	31.34
	848.8	31.31
000000	824.2	29.53
GPRS850 (3 Slot)	836.6	29.5
(3 3101)	848.8	29.49
GPRS850	824.2	28.39
(4 Slot)	836.6	28.55
	848.8	28.42
EGPRS850	824.2	26.42
(1 Slot)	836.6	26.16
	848.8	25.88
EGPRS850	824.2	25.17
(2 Slot)	836.6	24.93
	848.8	24.61
EGPRS850	824.2	23.26
(3 Slot)	836.6	22.83
	848.8	22.53
EGPRS850	824.2	21.74
(4 Slot)	836.6	21.76
	848.8	21.16

N/A: Not Applicable



ode	Frequency(MHz)	Maximum Burst-Average Output Power
	1850.2	29.37
GSM1900	1880	29.32
	1909.8	29.3
GPRS1900	1850.2	29.4
(1 Slot)	1880	29.33
	1909.8	29.27
GPRS1900	1850.2	28.45
(2 Slot)	1880	28.42
	1909.8	28.45
GPRS1900	1850.2	26.57
(3 Slot)	1880	26.57
	1909.8	26.59
GPRS1900 (4 Slot)	1850.2	25.43
	1880	25.45
	1909.8	25.57
EGPRS1900	1850.2	25.47
(1 Slot)	1880	24.99
	1909.8	24.37
EGPRS1900	1850.2	23.84
(2 Slot)	1880	23.38
	1909.8	22.79
EGPRS1900	1850.2	21.67
(3 Slot)	1880	21.08
	1909.8	20.37
EGPRS1900	1850.2	20.16
(4 Slot)	1880	19.79
•	1909.8	19.07

N/A: Not Applicable



ode	Frequency(MHz)	Maximum Burst-Average Output Power
WCDMA 1900	1852.4	21.76
RMC	1880	21.88
	1907.6	21.76
14/ODMA 4000	1852.4	21.77
WCDMA 1900	1880	21.85
AMR	1907.6	21.79
HSDPA	1852.4	20.96
Subtest 1	1880	21.09
	1907.6	21.04
HSDPA	1852.4	20.45
Subtest 2	1880	20.58
	1907.6	20.56
HSDPA	1852.4	20.43
Subtest 3	1880	20.59
	1907.6	20.57
HSDPA	1852.4	20.46
Subtest 4	1880	20.61
	1907.6	20.56
HSUPA	1852.4	20.46
Subtest 1	1880	20.62
	1907.6	20.59
HSUPA	1852.4	20.51
Subtest 2	1880	20.61
	1907.6	20.54
HSUPA	1852.4	20.62
Subtest 3	1880	20.66
	1907.6	20.55
HSUPA	1852.4	20.48
Subtest 4	1880	20.64
	1907.6	20.49
HSUPA	1852.4	20.98
Subtest 5	1880	20.98
J	1907.6	21.04



826.4 835 846.6 826.4 835 846.6 826.4	22.66 22.51 22.56 22.56 22.59 22.53
835 846.6 826.4 835 846.6 826.4	22.51 22.56 22.56 22.59 22.53
846.6 826.4 835 846.6 826.4	22.56 22.56 22.59 22.53
826.4 835 846.6 826.4	22.56 22.59 22.53
835 846.6 826.4	22.59 22.53
846.6 826.4	22.53
826.4	
	21.54
835	21.43
	21.53
826.4	21
835	20.91
846.6	21.04
826.4	20.99
835	20.92
846.6	20.98
826.4	21.01
835	20.92
846.6	21.03
826.4	21.06
835	20.92
846.6	21.04
826.4	21.03
835	20.91
846.6	21.03
826.4	21.09
835	21.04
846.6	21.01
826.4	21.1
835	21.06
846.6	21.09
826.4	21.46
835	21.48 21.52
	835 846.6 826.4 835 846.6 826.4 835 846.6 826.4 835 846.6 826.4 835 846.6 826.4 835 846.6 826.4 835



7.5 FREQUENCY STABILITY

7.5.1 Applicable Standard

According to FCC Part 2.1055 and FCC Part 22.355 and FCC Part 24.235 and FCC KDB 971168 D01 Section 9.0

7.5.2 Conformance Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test.

EUT was placed at temperature chamber and connected to an external power supply.

Temperature and voltage condition shall be tested to confirm frequency stability.

For Temperature Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was set up in the thermal chamber and connected with the system simulator.
- 3. With power OFF, the temperature was decreased to -10°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

For Voltage Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 4. The variation in frequency was measured for the worst case.

7.5.6 Test Results

EUT:	Smart phone	Model No.:	P4006A
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS850/GSM/GPRS /EGPRS 1900/UMTS band II/ UMTS band V		Susan Su
Results: PASS		•	



Frequency Error Against Voltage for GSM 850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	25	0.0299
3.7	19	0.0227
4.2	34	0.0406

Frequency Error Against Temperature for GSM 850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	33	0.0394
-20	29	0.0347
-10	24	0.0287
0	34	0.0406
10	31	0.0371
20	49	0.0586
30	41	0.0490
40	29	0.0347
50	35	0.0418

Frequency Error Against Voltage for GPRS850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	16	0.0191
3.7	22	0.0263
4.2	13	0.0155

Frequency Error Against Temperature for GPRS850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	24	0.0287
-20	25	0.0299
-10	21	0.0251
0	19	0.0227
10	30	0.0359
20	32	0.0383
30	29	0.0347
40	24	0.0287
50	26	0.0311



Frequency Error Against Voltage for EGPRS850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	26	0.0311
3.7	34	0.0406
4.2	26	0.0311

Frequency Error Against Temperature for EGPRS850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	33	0.0394
-20	42	0.0502
-10	19	0.0227
0	37	0.0442
10	34	0.0406
20	29	0.0347
30	29	0.0347
40	37	0.0442
50	35	0.0418

Note:

- 1.
- Normal Voltage = 3.7V; Battery End Point (BEP) = 3.5V; Maximum Voltage =4.2V

 The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Frequency Error Against Voltage for PCS 1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	36	0.0191
3.7	30	0.0160
4.2	27	0.0144

Frequency Error Against Temperature for PCS 1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	28	0.0149
-20	27	0.0144
-10	35	0.0186
0	36	0.0191
10	30	0.0160
20	26	0.0138
30	41	0.0218
40	38	0.0202
50	39	0.0207

Frequency Error Against Voltage for GPRS1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	36	0.0191
3.7	41	0.0218
4.2	15	0.0080

Frequency Error Against Temperature for GPRS1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	26	0.0138
-20	29	0.0154
-10	28	0.0149
0	33	0.0176
10	31	0.0165
20	32	0.0170
30	29	0.0154
40	26	0.0138
50	33	0.0176



Frequency Error Against Voltage for EGPRS1900 band					
Voltage (V) Frequency Error (Hz) Frequency Error (ppm)					
3.5 22 0.0117					
3.7 26 0.0138					
4.2 29 0.0154					

Frequency Error Against Temperature for EGPRS1900 band						
Temperature (°C)	Frequency Error (Hz) Frequency Error (ppm)					
-30	33	0.0176				
-20	31	0.0165				
-10	25	0.0133				
0	36	0.0191				
10	24	0.0128				
20	18	0.0096				
30	26	0.0138				
40	32	0.0170				
50	34	0.0181				

Note:

- 1.
- Normal Voltage = 3.7V; Battery End Point (BEP) = 3.5V; Maximum Voltage =4.2V

 The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Frequency Error Against Voltage for UMTS band II						
Voltage (V) Frequency Error (Hz) Frequency Error (ppm)						
3.5	26	0.0138				
3.7	42	0.0223				
4.2	0.0207					

Frequency Error Against Temperature for UMTS band II						
Temperature (°C)	Frequency Error (Hz) Frequency Error (ppm					
-30	37	0.0197				
-20	15	0.0080				
-10	34	0.0181				
0	29	0.0154				
10	30	0.0160				
20	36	0.0191				
30	22	0.0117				
40	28	0.0149				
50	21	0.0112				

Frequency Error Against Voltage for UMTS band V						
Voltage (V) Frequency Error (Hz) Frequency Error (ppm)						
3.5	30	0.0359				
3.7 36 0.0430						
4.2	4.2 26 0.0311					

Frequency Error Against Temperature for UMTS band V						
Temperature (°C)	Frequency Error (Hz) Frequency Error (ppm)					
-30	24	0.0287				
-20	28	0.0335				
-10	41	0.0490				
0	29	0.0347				
10	30	0.0359				
20	36	0.0430				
30	37	0.0442				
40	23	0.0275				
50	34	0.0406				

- 1.
- Normal Voltage = 3.7V; Battery End Point (BEP) = 3.5V; Maximum Voltage =4.2V

 The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



7.6 PEAK-TO-AVERAGE RATIO

7.6.1 Applicable Standard

According to FCC 22.913 and FCC 24.232(d) and FCC KDB 971168 D01 Section 5.7.1

7.6.2 Conformance Limit

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set the number of counts to a value that stabilizes the measured CCDF curve.

Set the measurement interval to 1 ms.

Record the maximum PAPR level associated with a probability of 0.1%.

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function:
- b) Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval as follows:
- 1) for continuous transmissions, set to 1 ms,
- 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

7.6.6 Test Results

EUT:	Smart phone	Model No.:	P4006A
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/GSM/GPRS/EGPRS 1900/UMTS band II/ UMTS band V	Test By:	Susan Su
Results: PASS			




Cellular Band						
Modes		GSM850			GSM1900	
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	9.92	9.38	9.93	9.76	9.16	9.09

Cellular Band						
Modes		GPRS850)		GPRS1900	
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	9.54	9.35	9.56	9.82	9.52	9.26


Cellular Band						
Modes		EGPRS85	0		EGPRS1900	
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	12.62	12.17	11.74	10.83	11.60	11.62

UMTS Band							
Modes	WCDMA Band II (RMC 12.2Kbps)			Modes			=
Channel	9262 (Low)	9400 (Mid)	9538 (High)	4132 (Low)	4175 (Mid)	4233 (High)	
Frequency(MHz)	1852.4	1880	1907.6	826.4	836.6	846.6	
Peak-to-Average Ratio (dB)	2.74	2.16	2.59	2.55	2.07	3.12	




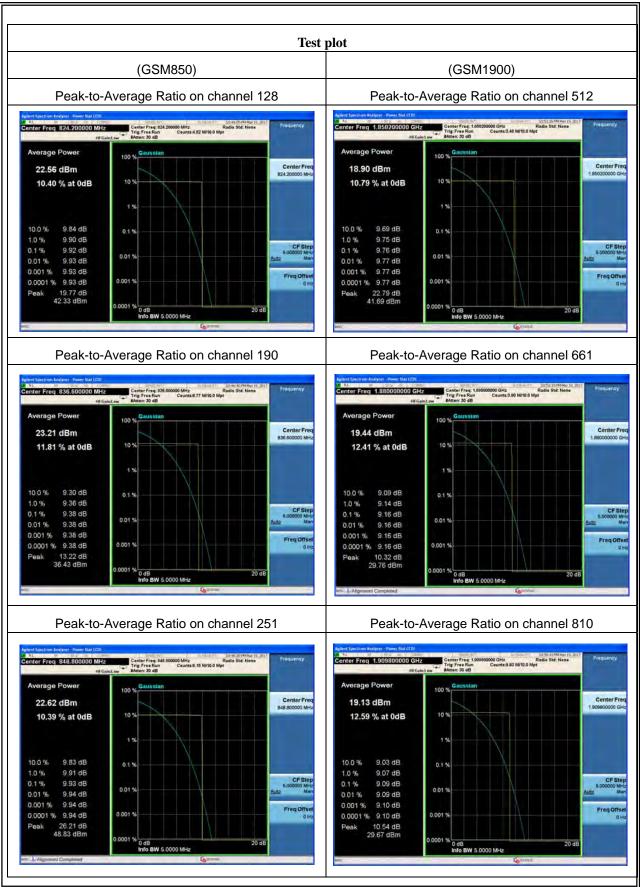




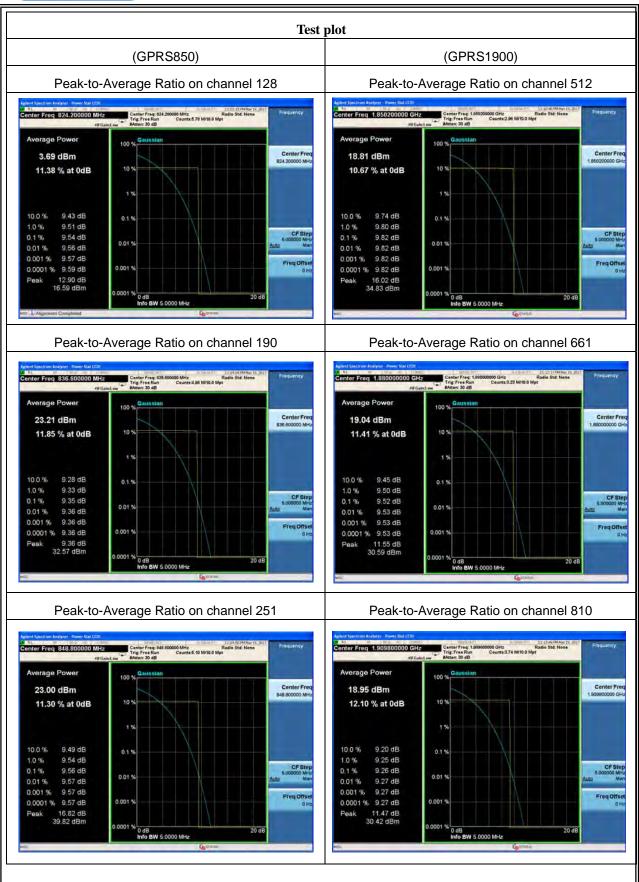



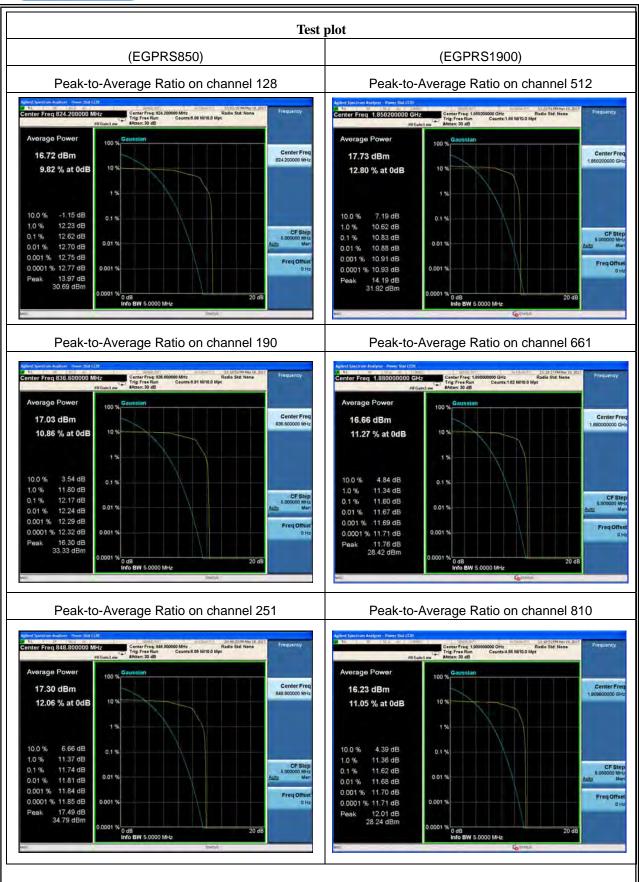



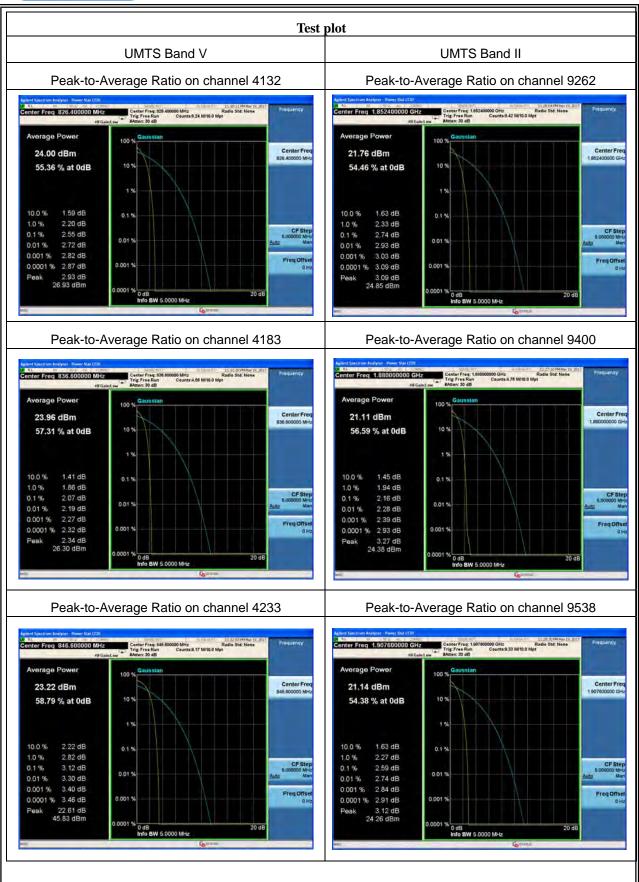



7.7 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

7.7.1 Applicable Standard

According to FCC Part 2.1049 and FCC Part 22H and FCC Part 24E and FCC KDB 971168 D01 Section 4.0

7.7.2 Conformance Limit

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 971168 v02r02 Section 4.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

Set the detection mode to peak, and the trace mode to max hold.

Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value)

Determine the "-26 dB down amplitude" as equal to (Reference Value - X).

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.




7.7.6 Test Results


EUT:	Smart phone	Model No.:	P4006A
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/GSM/GPRS/EGPRS 1900 /UMTS band II/ UMTS band V	Test By:	Susan Su
Results: PASS			

Operation Mode	Channel Number	Channel Frequency (MHz)	26dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)	Verdict
	128	824.2	320.967	242.3698	N/A	PASS
GSM850	190	836.4	321.591	244.9528	N/A	PASS
	251	848.8	322.493	246.9765	N/A	PASS
	512	1850.2	321.232	246.4045	N/A	PASS
GSM1900	661	1880.0	319.574	247.3826	N/A	PASS
	810	1909.8	317.937	244.8611	N/A	PASS
	128	824.2	310.758	242.2396	N/A	PASS
GPRS850	190	836.4	308.813	245.7987	N/A	PASS
	251	848.8	309.160	246.5077	N/A	PASS
	512	1850.2	320.582	247.6179	N/A	PASS
GPRS1900	661	1880.0	321.520	245.1764	N/A	PASS
	810	1909.8	312.288	243.0965	N/A	PASS
	128	824.2	316.199	250.2226	N/A	PASS
EGPRS850	190	836.4	321.452	251.8488	N/A	PASS
	251 848.8 323.669	252.2578	N/A	PASS		
	512	1850.2	316.031	245.6867	N/A	PASS
EGPRS1900	661	1880.0	327.391	241.2016	N/A	PASS
	810	1909.8	317.291	244.6813	N/A	PASS
LIMTC Dond	4132	826.4	4748	4167.9	N/A	PASS
UMTS Band	4183	836.4	4816	4184.5	N/A	PASS
v	4233	846.6	4741	4155.9	N/A	PASS
UMTS Band	9262	1852.4	4795	4179.3	N/A	PASS
II -	9400	1880.0	5510	4225.8	N/A	PASS
II	9538	1907.6	4777	4171.4	N/A	PASS




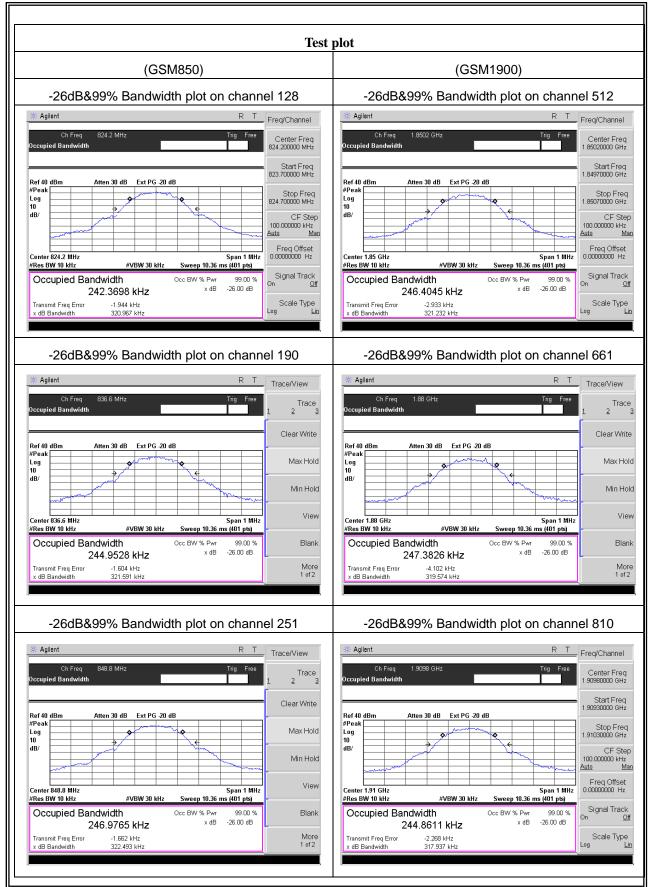



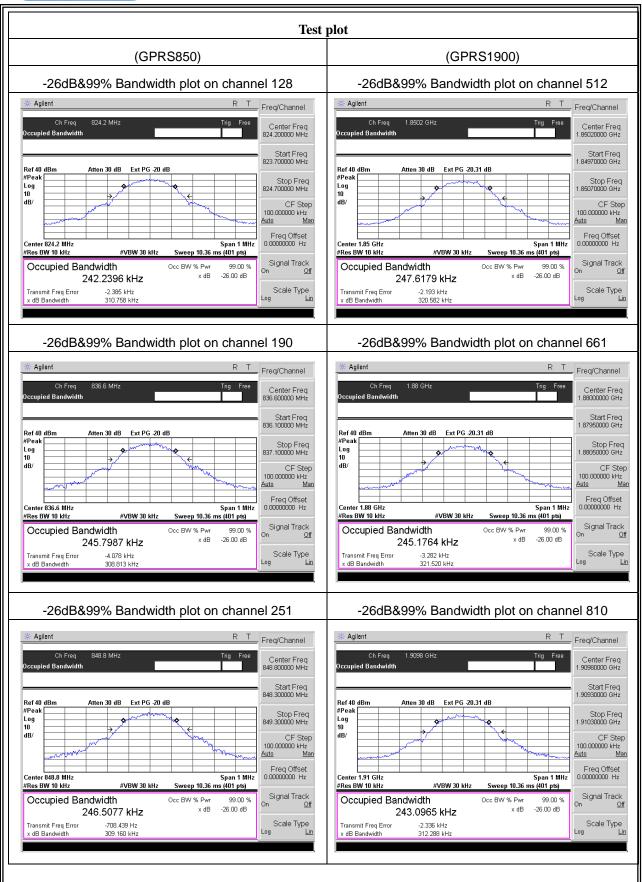



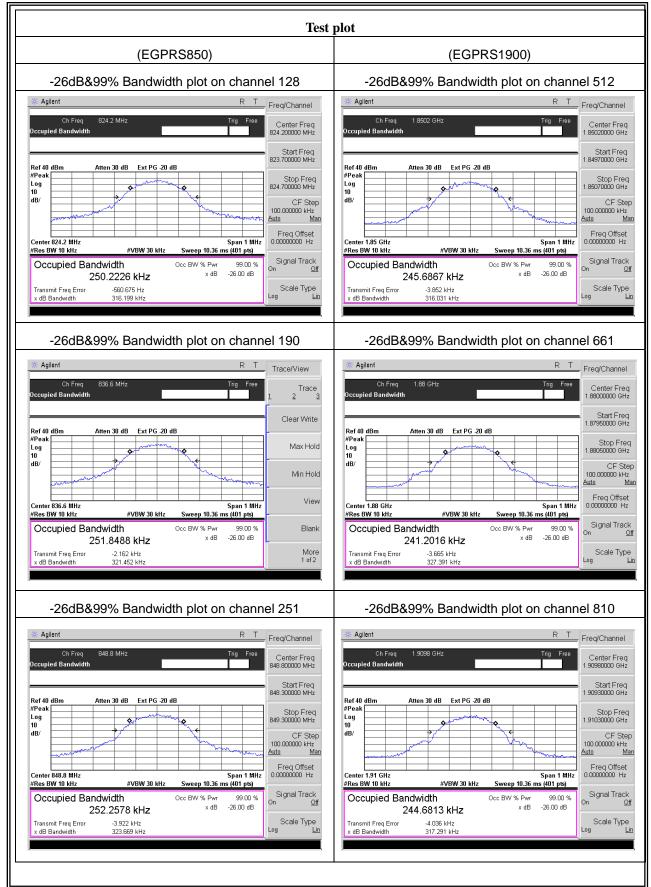







7.8 CONDUCTED BAND EDGE

7.8.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and 24.238(a) and FCC KDB 971168 D01 Section6.0

7.8.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows FCC KDB 971168 v02r02 Section 6.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The band edges of low and high channels for the highest RF powers were measured.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

- = P(W) [43 + 10log(P)] (dB)
- = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
- = -13dBm.


7.8.6 Test Results

EUT:	Smart phone	Model No.:	P4006A
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS850/GSM/GPR S/GPRS 1900/UMTS band II/ UMTS band V		Susan Su
Results: PASS		-	




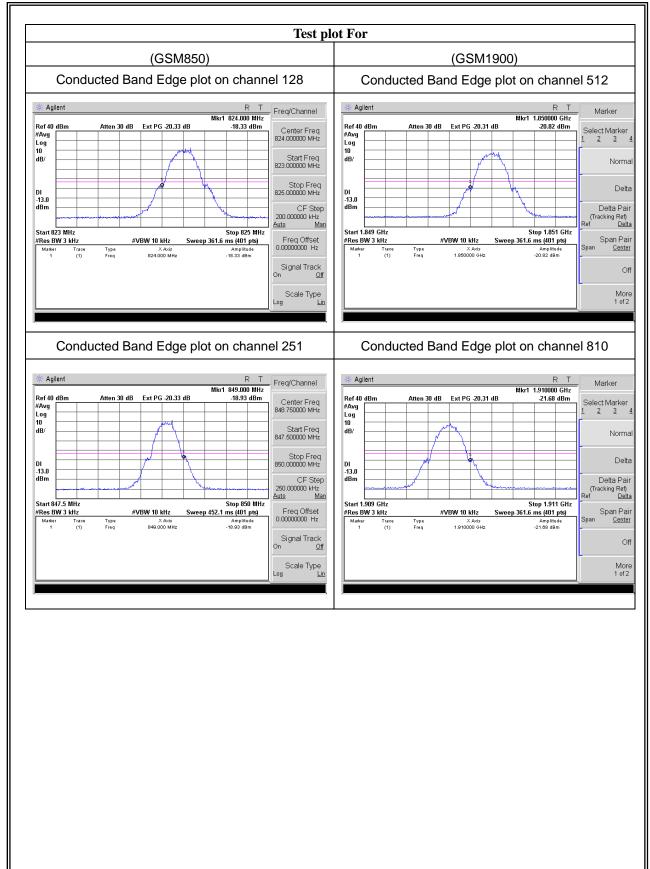




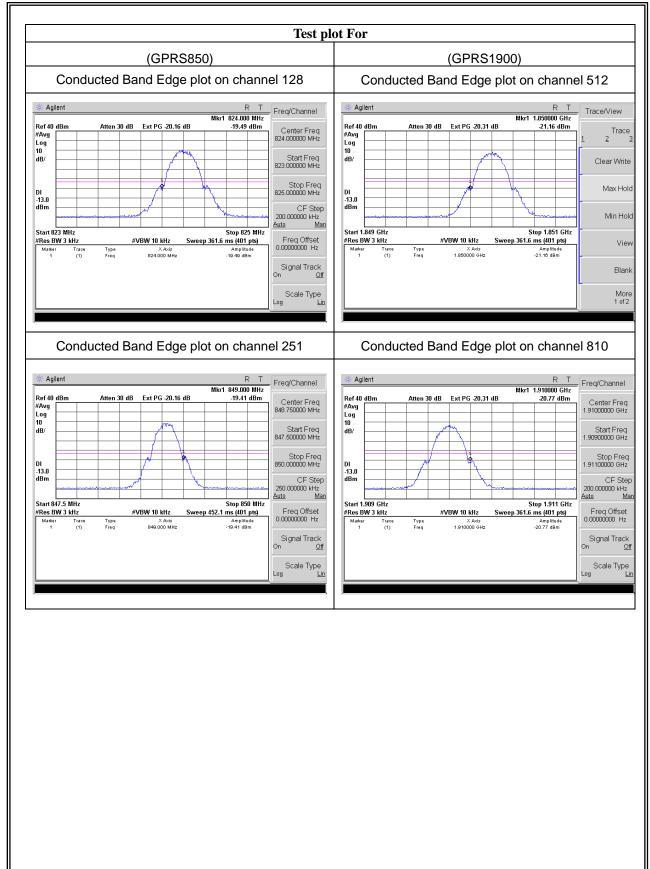



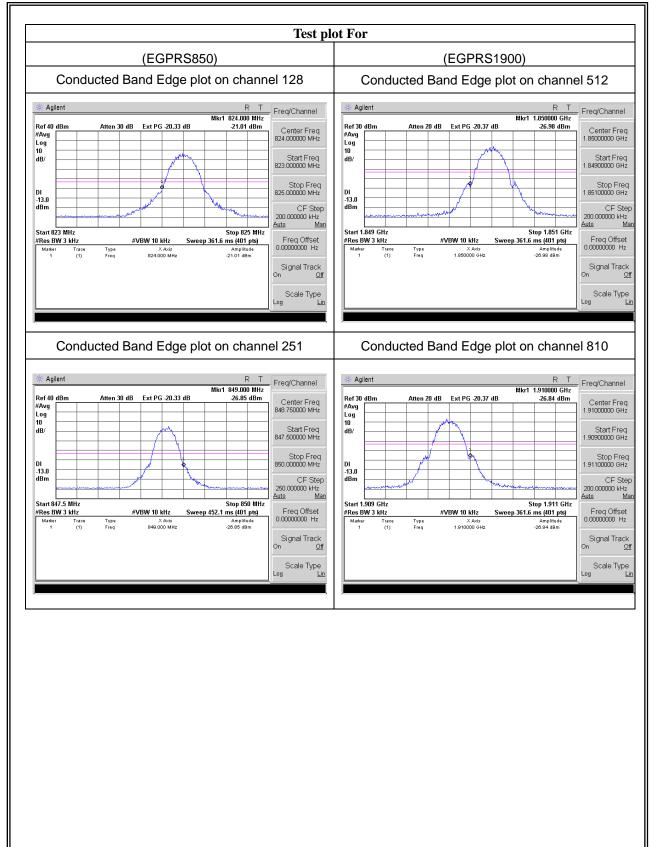



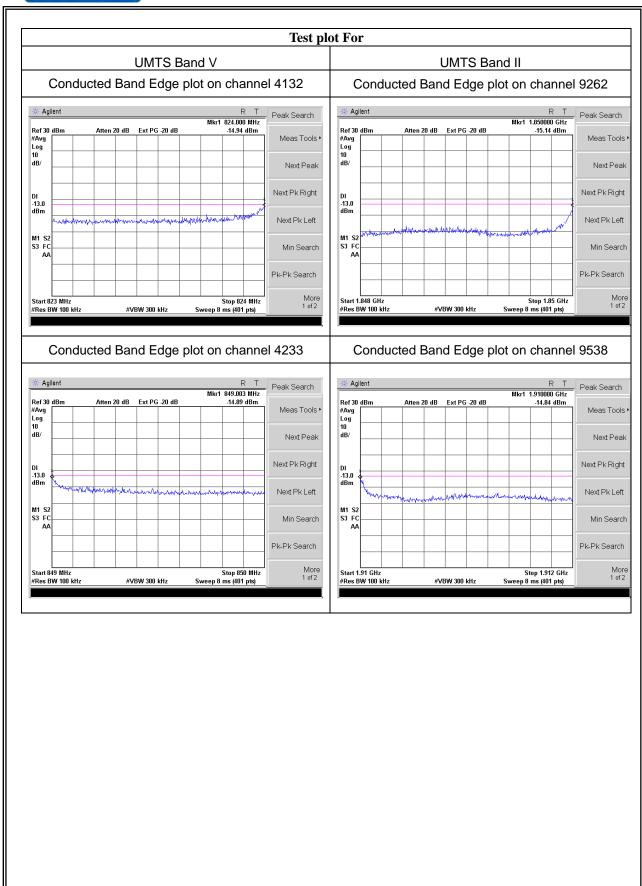





7.9 CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL

7.9.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and Part 24.238(a) and FCC KDB 971168 D01 Section6.0

7.9.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

7.9.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.9.4 Test Setup

Please refer to Section 6.1 of this test report.

7.9.5 Test Procedure

The testing follows FCC KDB 971168 v02r02 Section 6.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The middle channel for the highest RF power within the transmitting frequency was measured.

The conducted spurious emission for the whole frequency range was taken.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

- = P(W) [43 + 10log(P)] (dB)
- = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
- = -13dBm.

7.9.6 Test Results

EUT:	Smart phone	Model No.:	P4006A
Temperature:	20 ℃	Relative Humidity:	48%
	GSM/GPRS/EGPRS 850/GSM/GPRS/EGPRS 1900/UMTS band II/ UMTS band V	Test By:	Susan Su
Results: PASS			



