



FCC RADIO TEST REPORT

FCC ID: 2ADWUP4526A

Product: Smart phone

Trade Mark: Turbo E

Model No.: P4526A

Serial Model: P4526A1

Report No.: NTEK-2017NT04142703F5

Issue Date: 05 Jun. 2017

Prepared for

ONE DIAMOND ELECTRONICS INC.

1450 Frazee Road, Suite 303, San Diego, California, United States

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen P.R. China

Tel.: +86-755-6115 9388

Fax.: +86-755-6115 6599

Website:<http://www.ntek.org.cn>

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS.....	4
3	FACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
3.3	MEASUREMENT UNCERTAINTY	5
4	GENERAL DESCRIPTION OF EUT	6
5	DESCRIPTION OF TEST MODES	8
6	SETUP OF EQUIPMENT UNDER TEST	9
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	9
6.2	SUPPORT EQUIPMENT	10
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS	11
7	TEST REQUIREMENTS	12
7.1	CONDUCTED EMISSIONS TEST	12
7.2	FIELD STRENGTH OF SPURIOUS RADIATION	17
7.3	EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER	27
7.4	CONDUCTED OUTPUT POWER.....	33
7.5	FREQUENCY STABILITY	38
7.6	PEAK-TO-AVERAGE RATIO	44
7.7	26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	50
7.8	CONDUCTED BAND EDGE	56
7.9	CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL.....	61

1 TEST RESULT CERTIFICATION

Applicant's name.....	ONE DIAMOND ELECTRONICS INC.
Address.....	1450 Frazee Road, Suite 303, San Diego, California, United States
Manufacturer's Name	HUIZHOU MIKI COMMUNICATION EQUIPMENT CO.,LTD
Address.....	No, 39, guangtai rd, huinan hi-tech industrial park, zhongkai hi-tech district, huizhou city
Product description	
Product name	Smart phone
Model and/or type reference	P4526A
Serial Model	P4526A1

Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
47 CFR Part 2, Part 22H, Part 24E ANSI/ TIA/ EIA-603-D-2010	Complied
FCC KDB 971168 D01 Power Meas. License Digital Systems v02v02	

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : 14 Apr. 2017 ~ 05 Jun. 2017

Testing Engineer : Lebron Wang
(Lebron Wang)

Technical Manager : Jason Chen
(Jason Chen)

Authorized Signatory : Sam . Chen
(Sam Chen)

2 SUMMARY OF TEST RESULTS**FCC Part22, Subpart H/ FCC Part24, Subpart E**

FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
24.232(d)	Peak-to-Average Ratio	PASS	
2.1049 22.917(b) 24.238(b)	Occupied Bandwidth	PASS	
2.1051 22.917(a) 24.238(a)	Band Edge	PASS	
22.913(a)(2)	Effective Radiated Power	PASS	
24.232(c)	Equivalent Isotropic Radiated Power	PASS	
2.1053 22.917(a) 24.238(a)	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235	Frequency Stability for Temperature & Voltage	PASS	
2.1051 22.917(a) 24.238(a)	Conducted Emission	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. No modifications are made to the EUT during all test items.
4. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2014.09.04
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.

Accredited by Industry Canada, August 29, 2012
The Certificate Registration Number is 9270A-1.

Accredited by FCC, September 6, 2013
The Certificate Registration Number is 238937.

Name of Firm

: Shenzhen NTEK Testing Technology Co., Ltd

Site Location

: 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{\text{C}}(y)$)	2.5dB

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Smart phone
Trade Mark	Turbo E
FCC ID	2ADWUP4526A
Model No.	P4526A
Serial Model	P4526A1
Model Difference	All the model are the same circuit and RF module, except the SIM card and the colour of battery cover.
Operating Frequency	<input checked="" type="checkbox"/> GSM850: TX824.2MHz~848.8MHz /RX869.2MHz~893.8MHz; <input checked="" type="checkbox"/> UMTS FDD Band V: TX826.4MHz~846.6MHz /RX871.4MHz~891.6MHz; <input checked="" type="checkbox"/> PCS1900: TX1850.2MHz~1909.8MHz /RX1930.2MHz~1989.8MHz; <input checked="" type="checkbox"/> UMTS FDD Band II: TX1852.4MHz~1907.6MHz /RX1932.4MHz~1987.6MHz;
Modulation	<input checked="" type="checkbox"/> GMSK for GSM/GPRS; <input checked="" type="checkbox"/> 8PSK for EGPRS(Downlink Only); <input checked="" type="checkbox"/> QPSK for UMTS bands;
Number of Channels	<input checked="" type="checkbox"/> 124 Channels for GSM850; <input checked="" type="checkbox"/> 102 Channels for UMTS FDD Band V; <input checked="" type="checkbox"/> 299 Channels for PCS1900; <input checked="" type="checkbox"/> 277 Channels for UMTS FDD Band II;
GPRS Class	<input checked="" type="checkbox"/> Multi-Class12 <input checked="" type="checkbox"/> Only 4 timeslots are used for GPRS
SIM CARD	The Phone has One SIM Card socket <input checked="" type="checkbox"/> IMEI Code1:357633025689404 <input type="checkbox"/> IMEI Code2:
Antenna Type	FPCB Antenna
Antenna Gain	-5.5 dBi
Power supply	<input checked="" type="checkbox"/> DC supply: Battery DC 3.8V/1700mAh or DC 5V from USB Port. <input checked="" type="checkbox"/> Adapter supply: Model: Polaroid Input:100~240V 50~60Hz 0.2A Output:5V, 1A
HW Version	M8402-006A
SW Version	Polaroid/FW451/v02/20170324

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual. The High Voltage 4.4V and Low Voltage 3.6V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

Revision History

5 DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The low channel, the middle channel and the high channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS 850, GSM/GPRS 1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V modes have been tested during the test. the worst condition (GSM850, GSM1900 RMC 12.2k) be recorded in the test report if no other modes test data.

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850/UMTS FDD Band V.
2. 30 MHz to 10th harmonic for GSM1900/UMTS FDD Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	For Conducted Test Cases	For Radiated Test Cases
GSM 850	GSM Link	GSM Link
GSM 1900	GSM Link	GSM Link
UMTS Band II	RMC 12.2Kbps Link	RMC 12.2Kbps Link
UMTS Band V	RMC 12.2Kbps Link	RMC 12.2Kbps Link


Test Frequency and Channels:

Frequency Band	☒ GSM 850		☒ GSM 1900		☒ UMTS Band II		☒ UMTS Band V	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH_H	251	848.8	810	1909.8	9538	1907.6	4233	846.6
CH_M	190	836.4	661	1880.0	9400	1880.0	4183	836.4
CH_L	128	824.2	512	1850.2	9262	1852.4	4132	826.4


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For AC Conducted Emission Mode

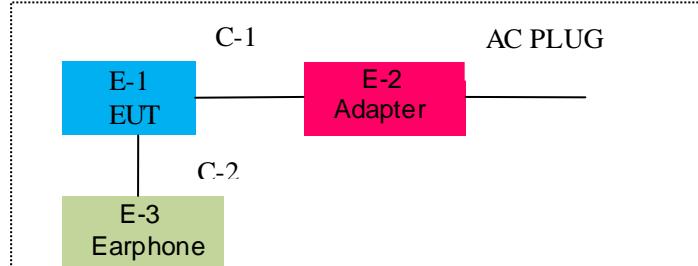


For Radiated Test Cases

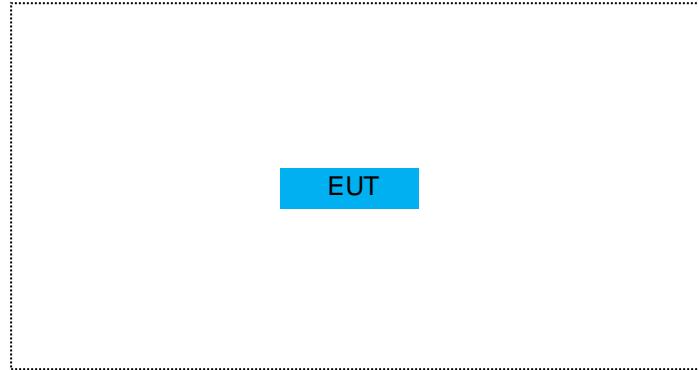


For Conducted Output Power

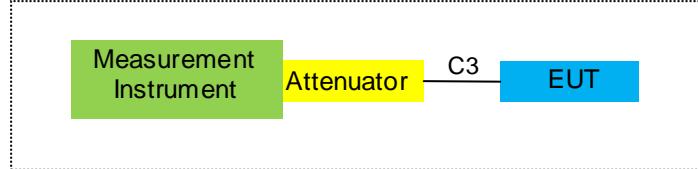

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

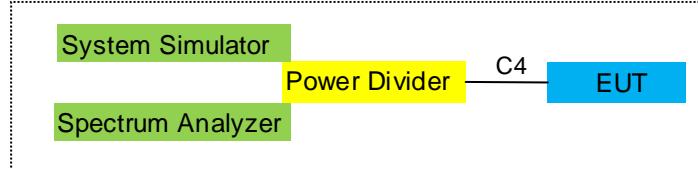

For Frequency Stability

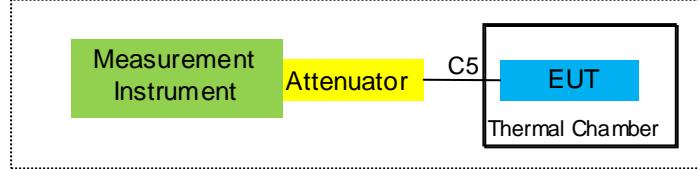

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
E-1	Smart phone	N/A	P4526A	2ADWUP4526A	EUT
E-2	Adapter	N/A	Polaroid	N/A	Peripherals
E-3	Earphone	N/A	2688	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	NO	NO	1.2m
C-2	Earphone Cable	NO	NO	0.8m
C-3	RF Cable	NO	NO	0.5m
C-4	RF Cable	NO	NO	0.5m
C-5	RF Cable	NO	NO	0.5m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in «Length» column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2016.11.19	2017.11.18	1 year
2	Test Receiver	R&S	ESPI	101318	2016.06.07	2017.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2016.07.06	2017.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.07	2017.06.06	1 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2016.07.06	2017.07.05	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
7	Amplifier	EM	EM-30180	060538	2016.07.06	2017.07.05	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07	1 year
9	Power Meter	R&S	NRVS	100696	2016.07.06	2017.07.05	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2016.07.06	2017.07.05	1 year
11	Test Cable	N/A	R-01	N/A	2016.07.06	2017.07.05	1 year
12	Test Cable	N/A	R-02	N/A	2016.07.06	2017.07.05	1 year
13	Test Cable	N/A	R-03	N/A	2016.06.29	2017.06.28	1 year
14	Test Receiver	R&S	ESCI	101160	2016.06.06	2017.06.05	1 year
15	LISN	R&S	ENV216	101313	2016.08.24	2017.08.23	1 year
16	LISN	EMCO	3816/2	00042990	2016.08.24	2017.08.23	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.07	2017.06.06	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2016.06.07	2017.06.06	1 year
19	Test Cable	N/A	C01	N/A	2016.06.08	2017.06.07	1 year
20	Test Cable	N/A	C02	N/A	2016.06.08	2017.06.07	1 year
21	Test Cable	N/A	C03	N/A	2016.06.08	2017.06.07	1 year
22	Attenuator	MCE	24-10-34	BN9258	2016.06.08	2017.06.07	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2016.06.08	2017.06.07	1 year
24	test receiver	R&S	ESCI	a0304218	2016.06.08	2017.06.07	1 year
25	Communication Tester	R&S	CMU200	A0304247	2016.06.08	2017.06.07	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2016.06.08	2017.06.07	1 year

Note: Each piece of equipment is scheduled for calibration once a year.

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC KDB 971168 D01 v02r02 Section 6.0

7.1.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

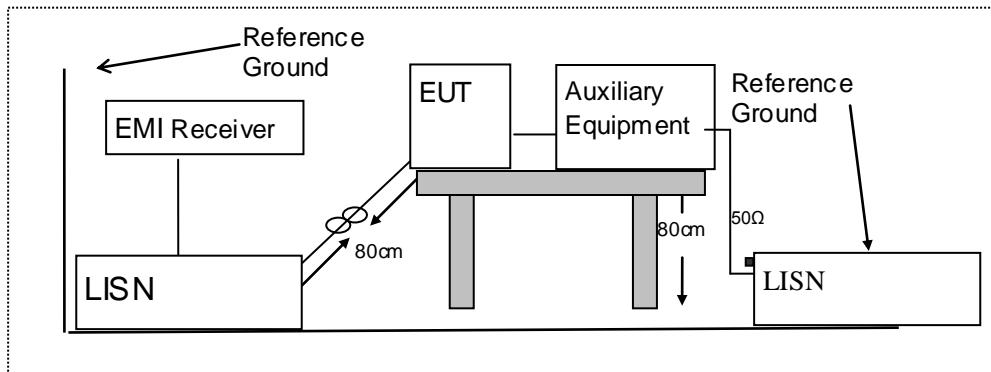

7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


7.1.6 Test Results

EUT:	Smart phone	Model Name :	P4526A
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode:	GSM/UMTS Link

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor (dB)	Measure-ment (dB μ V)	Limits (dB μ V)	Margin (dB)	Remark
0.1700	41.38	0.15	41.53	64.96	-23.43	QP
0.1700	25.80	0.15	25.95	54.96	-29.01	AVG
0.4460	39.68	0.15	39.83	56.95	-17.12	QP
0.4460	29.99	0.15	30.14	46.95	-16.81	AVG
0.8620	35.46	0.20	35.66	56.00	-20.34	QP
0.8620	21.28	0.20	21.48	46.00	-24.52	AVG
2.8020	33.30	0.20	33.50	56.00	-22.50	QP
2.8020	19.20	0.20	19.40	46.00	-26.60	AVG
4.8700	32.14	0.24	32.38	56.00	-23.62	QP
4.8700	15.18	0.24	15.42	46.00	-30.58	AVG
20.2500	22.03	0.39	22.42	60.00	-37.58	QP
20.2500	11.05	0.39	11.44	50.00	-38.56	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

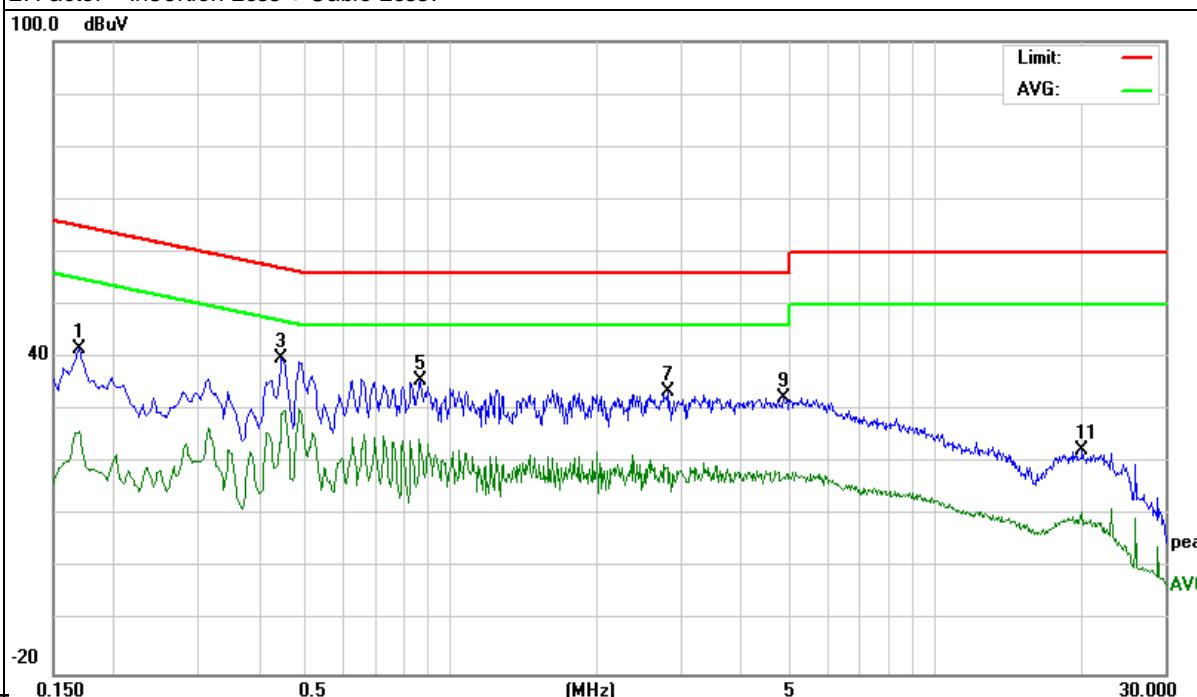


EUT:	Smart phone	Model Name :	P4526A
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode:	GSM/UMTS Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0.1700	38.49	0.13	38.62	64.96	-26.34	QP
0.1700	21.51	0.13	21.64	54.96	-33.32	AVG
0.4460	34.87	0.17	35.04	56.95	-21.91	QP
0.4460	24.56	0.17	24.73	46.95	-22.22	AVG
0.8860	27.78	0.24	28.02	56.00	-27.98	QP
0.8860	14.05	0.24	14.29	46.00	-31.71	AVG
4.0980	27.97	0.22	28.19	56.00	-27.81	QP
4.0980	13.40	0.22	13.62	46.00	-32.38	AVG
5.8380	27.75	0.24	27.99	60.00	-32.01	QP
5.8380	13.16	0.24	13.40	50.00	-36.60	AVG
22.8819	28.06	0.37	28.43	60.00	-31.57	QP
22.8819	8.80	0.37	9.17	50.00	-40.83	AVG

Remark:

1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

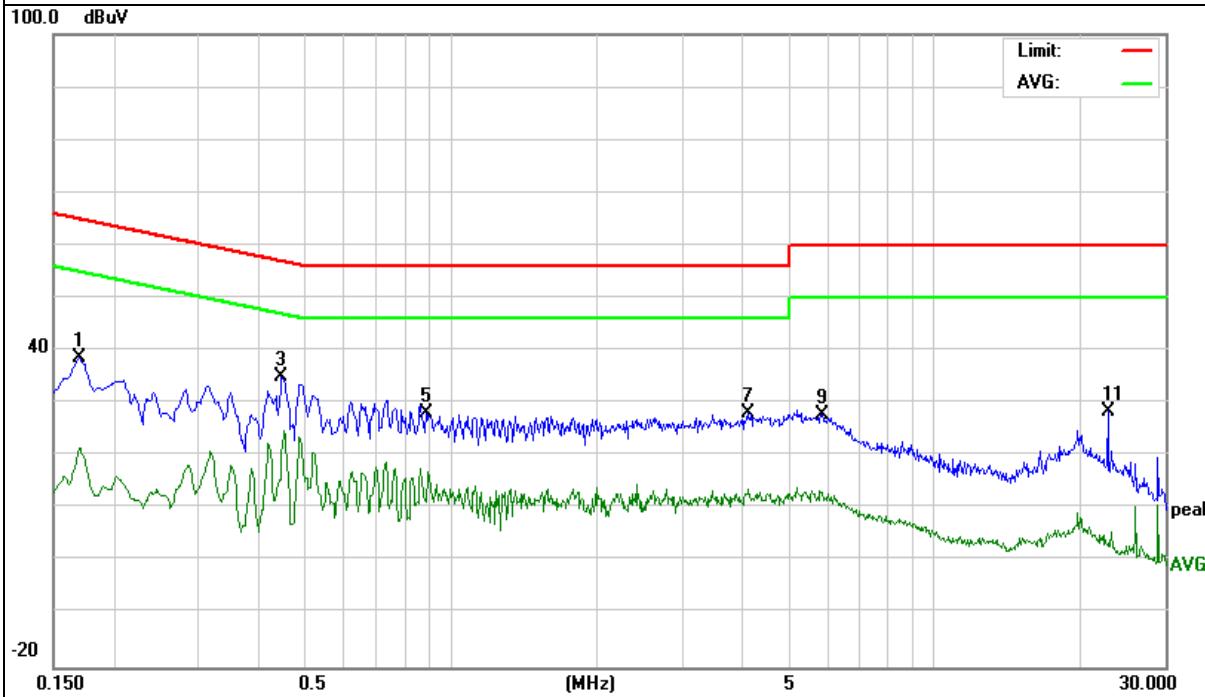


EUT:	Smart phone	Model Name :	P4526A
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 240V/60Hz	Test Mode:	GSM/UMTS Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0.3060	38.60	0.12	38.72	60.08	-21.36	QP
0.3060	28.49	0.12	28.61	50.08	-21.47	AVG
0.5380	39.94	0.15	40.09	56.00	-15.91	QP
0.5380	31.95	0.15	32.10	46.00	-13.90	AVG
1.7980	38.11	0.18	38.29	56.00	-17.71	QP
1.7980	24.53	0.18	24.71	46.00	-21.29	AVG
4.3420	40.12	0.23	40.35	56.00	-15.65	QP
4.3420	26.15	0.23	26.38	46.00	-19.62	AVG
10.1220	25.47	0.29	25.76	60.00	-34.24	QP
10.1220	24.46	0.29	24.75	50.00	-25.25	AVG
22.8900	23.80	0.39	24.19	60.00	-35.81	QP
22.8900	16.31	0.39	16.70	50.00	-33.30	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

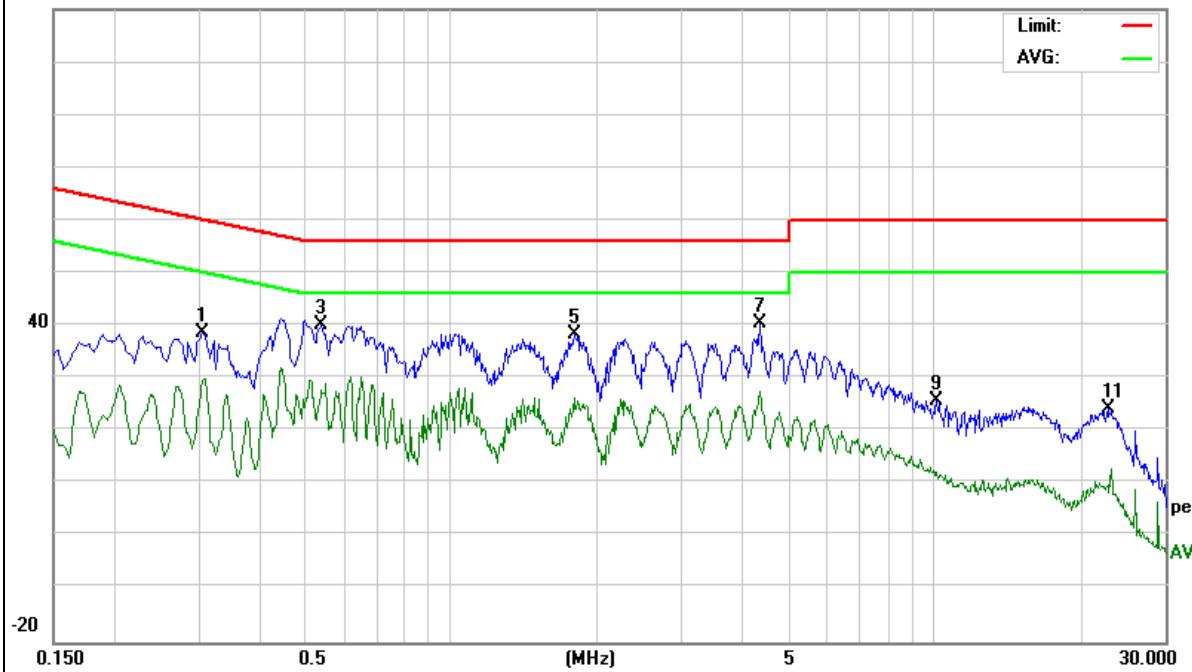100.0 dB μ V


EUT:	Smart phone	Model Name :	P4526A
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 240V/60Hz	Test Mode:	GSM/UMTS Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0.2060	37.93	0.12	38.05	63.36	-25.31	QP
0.2060	18.10	0.12	18.22	53.36	-35.14	AVG
0.4460	35.23	0.17	35.40	56.95	-21.55	QP
0.4460	17.60	0.17	17.77	46.95	-29.18	AVG
1.7660	30.15	0.21	30.36	56.00	-25.64	QP
1.7660	18.55	0.21	18.76	46.00	-27.24	AVG
5.6860	31.26	0.24	31.50	60.00	-28.50	QP
5.6860	15.54	0.24	15.78	50.00	-34.22	AVG
15.8860	22.31	0.32	22.63	60.00	-37.37	QP
15.8860	14.98	0.32	15.30	50.00	-34.70	AVG
23.1660	22.96	0.37	23.33	60.00	-36.67	QP
23.1660	5.87	0.37	6.24	50.00	-43.76	AVG

Remark:

1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

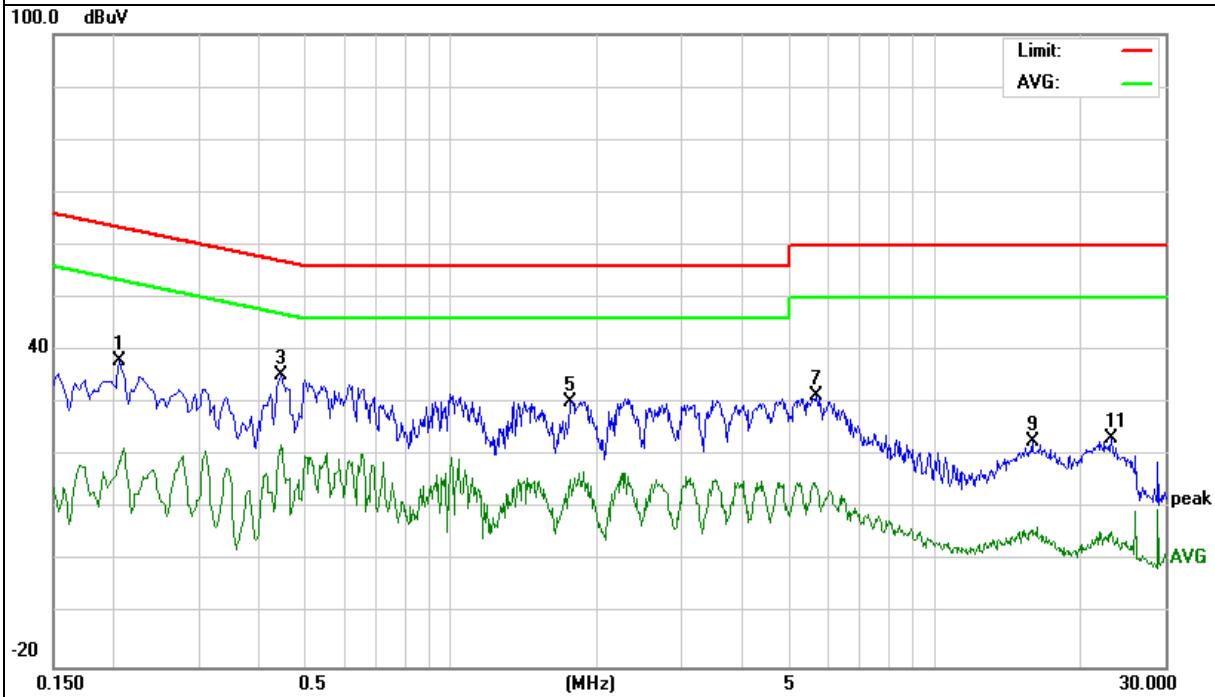

7.2 FIELD STRENGTH OF SPURIOUS RADIATION

7.2.1 Applicable Standard

According to FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI/ TIA-603-D-2010 Section 2.2.12

7.2.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration

According to the TIA/EIA 603D:2010 test method, The Receiver or Spectrum was scanned from 9 KHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II / WCDMA Band V / GSM 850 / GSM 1900.

TEST CONFIGURATION

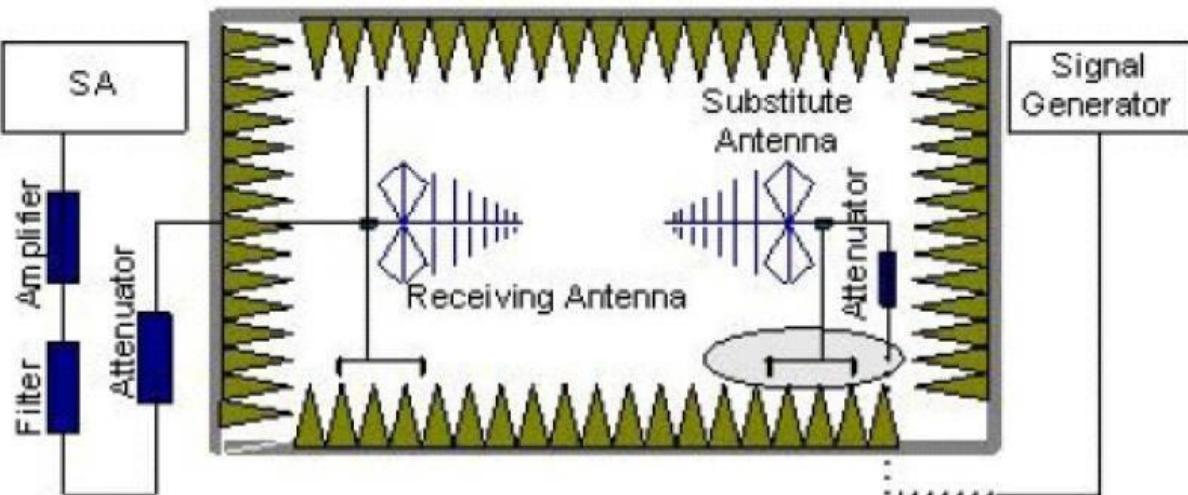

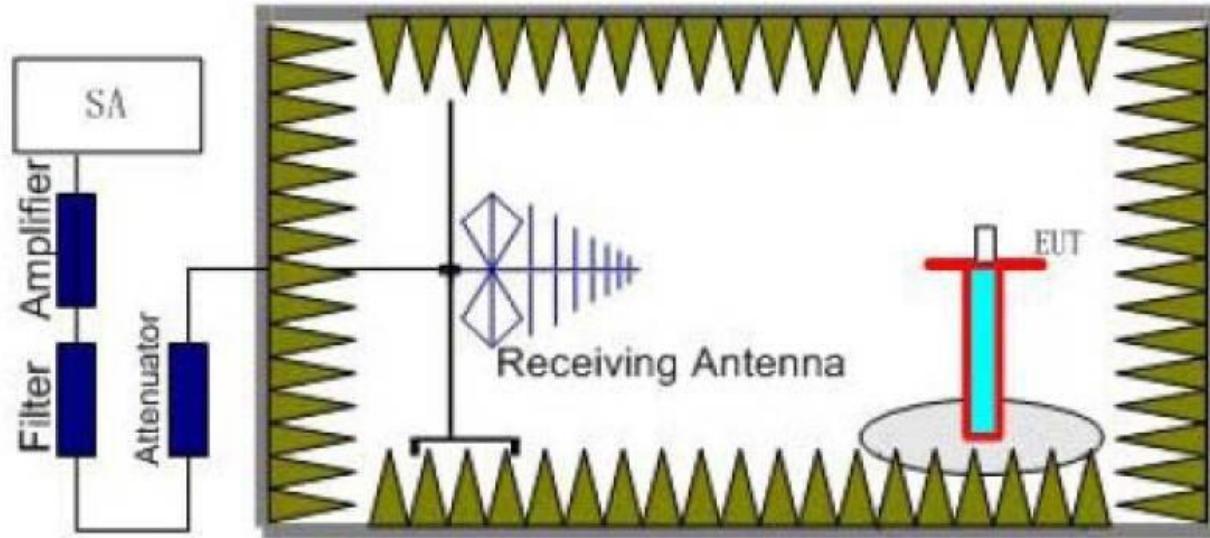

7.2.5 Test Procedure

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 meter. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

7.2.6 Test Results

EUT:	Smart phone	Model No.:	P4526A
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS850//EGPRS850/GSM/G PRS1900/ EGPRS1900 UMTS band II/ UMTS band V	Test By:	Lebron Wang

■ Radiated Spurious Emission

GSM 850							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 128/824.2 MHz							
1648.4	-51.72	2.8	27.5	-27.02	-13	-14.02	Vertical
1648.4	-46.97	2.8	27.5	-22.27	-13	-9.27	Horizontal
2472.6	-56.88	2.91	27.8	-31.99	-13	-18.99	Vertical
2472.6	-52.46	2.91	27.8	-27.57	-13	-14.57	Horizontal
3296.8	-53.28	4.02	29.87	-27.43	-13	-14.43	Vertical
3296.8	-54.28	4.02	29.87	-28.43	-13	-15.43	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-50.55	2.8	27.48	-25.87	-13	-12.87	Vertical
1673.2	-50.09	2.8	27.48	-25.41	-13	-12.41	Horizontal
2509.8	-52.38	2.91	27.7	-27.59	-13	-14.59	Vertical
2509.8	-52.35	2.91	27.7	-27.56	-13	-14.56	Horizontal
3346.4	-51.54	4.02	29.82	-25.74	-13	-12.74	Vertical
3346.4	-50.67	4.02	29.82	-24.87	-13	-11.87	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-54.76	2.8	27.42	-30.14	-13	-17.14	Vertical
1697.6	-52.07	2.8	27.42	-27.45	-13	-14.45	Horizontal
2546.4	-53.46	2.91	27.68	-28.69	-13	-15.69	Vertical
2546.4	-53.48	2.91	27.68	-28.71	-13	-15.71	Horizontal
3395.2	-49.86	4.02	29.8	-24.08	-13	-11.08	Vertical
3395.2	-53.43	4.02	29.8	-27.65	-13	-14.65	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level - Cable Loss + Antenna Gain
3. Over Limit = Absolute Level (dBm) - Limit(dBm)
4. We test both H direction and V direction, recorded worst case direction.

GPRS 850							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 128/824.2 MHz							
1648.4	-52.36	2.8	27.5	-27.66	-13	-14.66	Vertical
1648.4	-54.58	2.8	27.5	-29.88	-13	-16.88	Horizontal
2472.6	-53.41	2.91	27.8	-28.52	-13	-15.52	Vertical
2472.6	-51.28	2.91	27.8	-26.39	-13	-13.39	Horizontal
3296.8	-54.86	4.02	29.87	-29.01	-13	-16.01	Vertical
3296.8	-53.77	4.02	29.87	-27.92	-13	-14.92	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-51.24	2.8	27.48	-26.56	-13	-13.56	Vertical
1673.2	-50.59	2.8	27.48	-25.91	-13	-12.91	Horizontal
2509.8	-52.4	2.91	27.7	-27.61	-13	-14.61	Vertical
2509.8	-50.08	2.91	27.7	-25.29	-13	-12.29	Horizontal
3346.4	-51.23	4.02	29.82	-25.43	-13	-12.43	Vertical
3346.4	-52.46	4.02	29.82	-26.66	-13	-13.66	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-55.68	2.8	27.42	-31.06	-13	-18.06	Vertical
1697.6	-51.39	2.8	27.42	-26.77	-13	-13.77	Horizontal
2546.4	-56.75	2.91	27.68	-31.98	-13	-18.98	Vertical
2546.4	-53.46	2.91	27.68	-28.69	-13	-15.69	Horizontal
3395.2	-50.1	4.02	29.8	-24.32	-13	-11.32	Vertical
3395.2	-51.24	4.02	29.8	-25.46	-13	-12.46	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level - Cable Loss + Antenna Gain
3. Over Limit = Absolute Level (dBm) - Limit(dBm)
4. We test both H direction and V direction, recorded worst case direction.

EGPRS 850							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
1648.4	-51.53	2.8	27.5	-26.83	-13	-13.83	Vertical
1648.4	-50.1	2.8	27.5	-25.4	-13	-12.4	Horizontal
2472.6	-51.35	2.91	27.8	-26.46	-13	-13.46	Vertical
2472.6	-47.89	2.91	27.8	-23	-13	-10	Horizontal
3296.8	-52.38	4.02	29.87	-26.53	-13	-13.53	Vertical
3296.8	-52.35	4.02	29.87	-26.5	-13	-13.5	Horizontal
Test Results for Channel 128/824.2 MHz							
1673.2	-50.13	2.8	27.48	-25.45	-13	-12.45	Vertical
1673.2	-50.08	2.8	27.48	-25.4	-13	-12.4	Horizontal
2509.8	-53.46	2.91	27.7	-28.67	-13	-15.67	Vertical
2509.8	-53.48	2.91	27.7	-28.69	-13	-15.69	Horizontal
3346.4	-49.86	4.02	29.82	-24.06	-13	-11.06	Vertical
3346.4	-50.66	4.02	29.82	-24.86	-13	-11.86	Horizontal
Test Results for Channel 190/836.6 MHz							
1697.6	-47.58	2.8	27.42	-22.96	-13	-9.96	Vertical
1697.6	-49.81	2.8	27.42	-25.19	-13	-12.19	Horizontal
2546.4	-51.33	2.91	27.68	-26.56	-13	-13.56	Vertical
2546.4	-50.69	2.91	27.68	-25.92	-13	-12.92	Horizontal
3395.2	-50.09	4.02	29.8	-24.31	-13	-11.31	Vertical
3395.2	-53.48	4.02	29.8	-27.7	-13	-14.7	Horizontal
Test Results for Channel 251/848.8 MHz							

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level - Cable Loss + Antenna Gain
3. Over Limit = Absolute Level (dBm) - Limit(dBm)
4. We test both H direction and V direction, recorded worst case direction.

GSM 1900							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 512/1850.2MHz							
3700.4	-52.35	4.04	33.51	-22.88	-13	-9.88	Vertical
3700.4	-50.58	4.04	33.51	-21.11	-13	-8.11	Horizontal
5550.6	-52.34	5.24	35.84	-21.74	-13	-8.74	Vertical
5550.6	-53.85	5.24	35.84	-23.25	-13	-10.25	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-51.23	4.04	33.56	-21.71	-13	-8.71	Vertical
3760	-51.77	4.04	33.56	-22.25	-13	-9.25	Horizontal
5640	-52.38	5.24	35.91	-21.71	-13	-8.71	Vertical
5640	-52.7	5.24	35.91	-22.03	-13	-9.03	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-54.53	4.04	34	-24.57	-13	-11.57	Vertical
3819.6	-55.68	4.04	34	-25.72	-13	-12.72	Horizontal
5729.4	-53.5	5.24	36.04	-22.7	-13	-9.7	Vertical
5729.4	-55.71	5.24	36.04	-24.91	-13	-11.91	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)
4. We test both H direction and V direction, recorded worst case direction.

GPRS 1900							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 512/1850.2MHz							
3700.4	-54.59	4.04	33.51	-25.12	-13	-12.12	Vertical
3700.4	-52.38	4.04	33.51	-22.91	-13	-9.91	Horizontal
5550.6	-52.73	5.24	35.84	-22.13	-13	-9.13	Vertical
5550.6	-53.51	5.24	35.84	-22.91	-13	-9.91	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-50.14	4.04	33.56	-20.62	-13	-7.62	Vertical
3760	-53.46	4.04	33.56	-23.94	-13	-10.94	Horizontal
5640	-52.38	5.24	35.91	-21.71	-13	-8.71	Vertical
5640	-55.7	5.24	35.91	-25.03	-13	-12.03	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-54.53	4.04	34	-24.57	-13	-11.57	Vertical
3819.6	-53.48	4.04	34	-23.52	-13	-10.52	Horizontal
5729.4	-56.81	5.24	36.04	-26.01	-13	-13.01	Vertical
5729.4	-55.69	5.24	36.04	-24.89	-13	-11.89	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)
4. We test both H direction and V direction, recorded worst case direction.

EGPRS 1900							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 512/1850.2MHz							
3700.4	-55.64	4.04	33.51	-26.17	-13	-13.17	Vertical
3700.4	-56.76	4.04	33.51	-27.29	-13	-14.29	Horizontal
5550.6	-54.59	5.24	35.84	-23.99	-13	-10.99	Vertical
5550.6	-56.71	5.24	35.84	-26.11	-13	-13.11	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-52.4	4.04	33.56	-22.88	-13	-9.88	Vertical
3760	-52.43	4.04	33.56	-22.91	-13	-9.91	Horizontal
5640	-52.36	5.24	35.91	-21.69	-13	-8.69	Vertical
5640	-56.81	5.24	35.91	-26.14	-13	-13.14	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-55.69	4.04	34	-25.73	-13	-12.73	Vertical
3819.6	-54.53	4.04	34	-24.57	-13	-11.57	Horizontal
5729.4	-55.71	5.24	36.04	-24.91	-13	-11.91	Vertical
5729.4	-56.75	5.24	36.04	-25.95	-13	-12.95	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)
4. We test both H direction and V direction, recorded worst case direction.

WCDMA Band II							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 9262/1852.4MHz							
3700.8	-52.36	4.04	33.51	-22.89	-13	-9.89	Vertical
3700.8	-50.1	4.04	33.51	-20.63	-13	-7.63	Horizontal
5551.2	-55.69	5.24	35.84	-25.09	-13	-12.09	Vertical
5551.2	-54.55	5.24	35.84	-23.95	-13	-10.95	Horizontal
Test Results for Channel 9400/1880MHz							
3760	-54.53	4.04	33.56	-25.01	-13	-12.01	Vertical
3760	-52.38	4.04	33.56	-22.86	-13	-9.86	Horizontal
5640	-53.5	5.24	35.91	-22.83	-13	-9.83	Vertical
5640	-53.09	5.24	35.91	-22.42	-13	-9.42	Horizontal
Test Results for Channel 9538/1907.6MHz							
3819.2	-54.59	4.04	34	-24.63	-13	-11.63	Vertical
3819.2	-56.77	4.04	34	-26.81	-13	-13.81	Horizontal
5728.8	-56.97	5.24	36.04	-26.17	-13	-13.17	Vertical
5728.8	-55.64	5.24	36.04	-24.84	-13	-11.84	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)
4. We test both H direction and V direction, recorded worst case direction.

WCDMA Band V							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 4233/846.6MHz							
1673.2	-51.53	2.8	27.5	-26.83	-13	-13.83	Vertical
1673.2	52.11	2.8	27.5	76.81	-13	89.81	Horizontal
2509.8	-54.53	2.91	27.8	-29.64	-13	-16.64	Vertical
2509.8	-50.08	2.91	27.8	-25.19	-13	-12.19	Horizontal
3346.4	-52.39	4.02	29.87	-26.54	-13	-13.54	Vertical
3346.4	-55.68	4.02	29.87	-29.83	-13	-16.83	Horizontal
Test Results for Channel 4182/836.4MHz							
1672.8	-54.53	2.8	27.48	-29.85	-13	-16.85	Vertical
1672.8	-52.38	2.8	27.48	-27.7	-13	-14.7	Horizontal
2509.2	-50.97	2.91	27.7	-26.18	-13	-13.18	Vertical
2509.2	-53.46	2.91	27.7	-28.67	-13	-15.67	Horizontal
3345.6	-50.77	4.02	29.82	-24.97	-13	-11.97	Vertical
3345.6	-50.69	4.02	29.82	-24.89	-13	-11.89	Horizontal
Test Results for Channel 4132/826.4MHz							
1652.8	-50.09	2.8	27.42	-25.47	-13	-12.47	Vertical
1652.8	-48.14	2.8	27.42	-23.52	-13	-10.52	Horizontal
2479.2	-51.37	2.91	27.68	-26.6	-13	-13.6	Vertical
2479.2	-50.76	2.91	27.68	-25.99	-13	-12.99	Horizontal
3305.6	-49.75	4.02	29.8	-23.97	-13	-10.97	Vertical
3305.6	-50.64	4.02	29.8	-24.86	-13	-11.86	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level - Cable Loss + Antenna Gain
3. Over Limit = Absolute Level (dBm) - Limit(dBm)
4. We test both H direction and V direction, recorded worst case direction.

7.3 EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER

7.3.1 Applicable Standard

According to FCC KDB 971168 D01 v02r02 Section 5.2.1/ Section 5.2.2.2 and ANSI/ TIA-603-D-2010 Section 2.2.17

7.3.2 Conformance Limit


The substitution method, in ANSI / TIA / EIA-603-D-2010, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Configuration

(a) For E.R.P and E.I.R.P Measurements

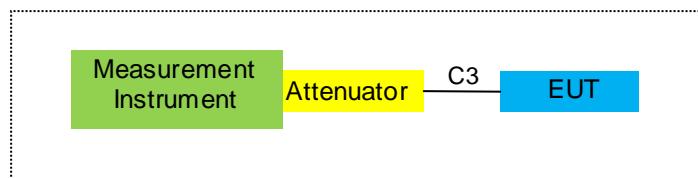

7.3.5 Test Procedure

The measurements procedures specified in TIA-603-D-2010 were applied.

In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_{r}) at the chamber's probe antenna is recorded.

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP/EIRP} = \text{SGLevel} - P_{in} + G_a$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as SGLevel, typically dBW or dBm);

SGLevel = Signal generator output power or PSD, in dBm or dBW;

G_a = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

P_{in} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.²

The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.

From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.

The EUT is then put into continuously transmitting mode at its maximum power level.

Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.

This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).

ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Substitution antenna and Receiving Antenna:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Character	Note
1	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Receiving Antenna
2	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Receiving Antenna
3	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Substitution antenna
4	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Substitution antenna

Use the following spectrum analyzer settings:

	GSM/GPRS	UMTS band
Span	500KHz	10MHz
RBW	10KHz	300KHz
VBW	30KHz	1MHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

7.3.6 Test Results

EUT:	Smart phone	Model No.:	P4526A
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/GSM/GPRS/EGPRS 1900/ UMTS band II/ UMTS band V	Test By:	Lebron Wang

■ Effective Radiated Power

Radiated Power (ERP) for GSM850							
Frequency (MHz)	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP
		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	H	12.42	2.11	23.84	2.15	32	1.58489
836.6	H	12.86	2.13	23.15	2.15	31.73	1.48936
848.8	H	12.97	2.13	23.06	2.15	31.75	1.49624
824.2	V	13.13	2.11	23.11	2.15	31.98	1.57761
836.6	V	13.17	2.13	23.07	2.15	31.96	1.57036
848.8	V	13.1	2.13	23.25	2.15	32.07	1.61065

Radiated Power (ERP) for GPRS850							
Frequency (MHz)	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP
		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	H	12.42	2.11	23.84	2.15	32	1.58489
836.6	H	12.89	2.13	23.15	2.15	31.76	1.49968
848.8	H	13	2.13	23.06	2.15	31.78	1.50661
824.2	V	13.22	2.11	23.11	2.15	32.07	1.61065
836.6	V	13.14	2.13	23.07	2.15	31.93	1.55955
848.8	V	13.07	2.13	23.25	2.15	32.04	1.59956

Radiated Power (ERP) for EGPRS850							
Frequency (MHz)	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP
		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	H	6.41	2.11	23.84	2.15	25.99	0.39719
836.6	H	7.86	2.13	23.15	2.15	26.73	0.47098
848.8	H	7.82	2.13	23.06	2.15	26.6	0.45709
824.2	V	7.55	2.11	23.11	2.15	26.4	0.43652
836.6	V	7.72	2.13	23.07	2.15	26.51	0.44771
848.8	V	6.9	2.13	23.25	2.15	25.87	0.38637

Radiated Power (ERP) for UMTS band V							
Frequency (MHz)	Polarization	SG	Pcl	Ga Antenna Gain	Correction	ERP (dBm)	ERP (W)
		Level (dBm)					
826.4	H	2.86	2.11	23.84	2.15	22.44	0.17539
835	H	3	2.13	23.15	2.15	21.87	0.15382
846.6	H	3.1	2.13	23.06	2.15	21.88	0.15417
826.4	V	3.25	2.11	23.11	2.15	22.1	0.16218
835	V	3.3	2.13	23.07	2.15	22.09	0.16181
846.6	V	3.44	2.13	23.25	2.15	22.41	0.17418

Note:

SG Level= Signal generator output

Pcl= cable loss

Ga= Antenna Gain

Peak EIRP(dBm)= SGLevel -Pcl +Ga

ERP(dBm)=EIRP-2.15

■ Effective Isotropic Radiated Power

Radiated Power (E.I.R.P) for GSM1900						
Frequency (MHz)	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	4.66	3.76	28.24	29.14	0.82035
1880	H	5.14	3.91	28.22	29.45	0.88105
1909.8	H	4.75	3.93	28.2	29.02	0.79799
1850.2	V	4.55	3.76	27.32	28.11	0.64714
1880	V	5.91	3.91	27.33	29.33	0.85704
1909.8	V	5.86	3.93	27.31	29.24	0.83946

Radiated Power (E.I.R.P) for GPRS1900						
Frequency (MHz)	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	4.47	3.76	28.24	28.95	0.78524
1880	H	4.92	3.91	28.22	29.23	0.83753
1909.8	H	4.55	3.93	28.2	28.82	0.76208
1850.2	V	3.94	3.76	27.32	27.5	0.56234
1880	V	5.2	3.91	27.33	28.62	0.72778
1909.8	V	5.66	3.93	27.31	29.04	0.80168

Radiated Power (E.I.R.P) for EGPRS1900						
Frequency (MHz)	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	0.89	3.76	28.24	25.37	0.34435
1880	H	1.46	3.91	28.22	25.77	0.37757
1909.8	H	1.51	3.93	28.2	25.78	0.37844
1850.2	V	1.46	3.76	27.32	25.02	0.31769
1880	V	1.57	3.91	27.33	24.99	0.31550
1909.8	V	1.62	3.93	27.31	25	0.31623

Radiated Power (E.I.R.P) for UMTS band II						
Frequency (MHz)	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
		(dBm)	(dB)	(dB)	(dBm)	(W)
1852.4	H	-2.77	3.76	28.24	21.71	0.14825
1880	H	-2.59	3.91	28.22	21.72	0.14859
1907.6	H	-2.51	3.93	28.2	21.76	0.14997
1852.4	V	-2.54	3.76	27.32	21.02	0.12647
1880	V	-2.71	3.91	27.33	20.71	0.11776
1907.6	V	-2.53	3.93	27.31	20.85	0.12162

Note:

SG Level= Signal generator output

Pcl= cable loss

Ga= Antenna Gain

Peak EIRP(dBm)= SGLevel -Pcl+Ga.

7.4 CONDUCTED OUTPUT POWER

7.4.1 Applicable Standard

According to FCC Part 2.1046 and FCC Part 22.913(a)(2) and FCC Part 24.232(c) and FCC KDB 971168 D01 v02r02 Section 5.2

7.4.2 Conformance Limit

Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts(38.5dBm).

Mobile and portable stations are limited to 2 watts (33dBm)EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. The frequency band is set as selected frequency, The RF output of the transmitter was connected to base station simulator.

Set EUT at maximum average power by base station simulator.

Set RBW = 1-5% of the OBW, not to exceed 1 MHz.

Set VBW $\geq 3 \times$ RBW.

Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS (power averaging).

Set sweep trigger to “free run”.

Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is a constant 25%.

Measure lowest, middle, and highest channels for each bandwidth and different modulation.

Measure and record the results in the test report.

7.4.6 Test Results

EUT:	Smart phone	Model No.:	P4526A
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V	Test By:	Lebron Wang

Output Power for GSM850

Mode	Frequency(MHz)	Maximum Burst-Average Output Power
GSM850	824.2	32.38
	836.6	32.45
	848.8	32.39
GPRS850 (1 Slot)	824.2	32.39
	836.6	32.45
	848.8	32.38
GPRS850 (2 Slot)	824.2	31.77
	836.6	31.83
	848.8	31.75
GPRS850 (3 Slot)	824.2	30.12
	836.6	30.15
	848.8	29.98
GPRS850 (4 Slot)	824.2	29.26
	836.6	29.37
	848.8	28.97
EGPRS850 (1 Slot)	824.2	26.3
	836.6	26.32
	848.8	26.23
EGPRS850 (2 Slot)	824.2	25.14
	836.6	25.2
	848.8	25.12
EGPRS850 (3 Slot)	824.2	23.14
	836.6	23.16
	848.8	23.15
EGPRS850 (4 Slot)	824.2	22.17
	836.6	22.17
	848.8	22.11

N/A: Not Applicable

Output Power for PCS1900

Mode	Frequency(MHz)	Maximum Burst-Average Output Power
GSM1900	1850.2	29.59
	1880	29.43
	1909.8	29.36
GPRS1900 (1 Slot)	1850.2	29.63
	1880	29.48
	1909.8	29.39
GPRS1900 (2 Slot)	1850.2	28.92
	1880	28.81
	1909.8	28.78
GPRS1900 (3 Slot)	1850.2	27.14
	1880	27.08
	1909.8	27.17
GPRS1900 (4 Slot)	1850.2	26.03
	1880	25.97
	1909.8	26.11
EGPRS1900 (1 Slot)	1850.2	25.73
	1880	25.74
	1909.8	25.53
EGPRS1900 (2 Slot)	1850.2	24.32
	1880	24.5
	1909.8	24.16
EGPRS1900 (3 Slot)	1850.2	22.27
	1880	22.4
	1909.8	22.19
EGPRS1900 (4 Slot)	1850.2	21.28
	1880	21.43
	1909.8	21.08

N/A: Not Applicable

Output Power for UMTS BAND II

Mode	Frequency(MHz)	Maximum Burst-Average Output Power
WCDMA 1900 RMC	1852.4	22.83
	1880	22.73
	1907.6	22.89
WCDMA 1900 AMR	1852.4	22.54
	1880	22.51
	1907.6	22.68
HSDPA Subtest 1	1852.4	21.88
	1880	21.83
	1907.6	21.85
HSDPA Subtest 2	1852.4	21.32
	1880	21.27
	1907.6	21.35
HSDPA Subtest 3	1852.4	21.31
	1880	21.27
	1907.6	21.38
HSDPA Subtest 4	1852.4	21.28
	1880	21.26
	1907.6	21.37
HSUPA Subtest 1	1852.4	21.28
	1880	21.25
	1907.6	21.36
HSUPA Subtest 2	1852.4	21.25
	1880	21.21
	1907.6	21.29
HSUPA Subtest 3	1852.4	21.32
	1880	21.18
	1907.6	21.31
HSUPA Subtest 4	1852.4	21.22
	1880	21.29
	1907.6	21.22
HSUPA Subtest 5	1852.4	21.86
	1880	21.85
	1907.6	21.85

Output Power for UMTS BAND V

Mode	Frequency(MHz)	Maximum Burst-Average Output Power
WCDMA 850 RMC	826.4	22.45
	835	22.33
	846.6	22.59
WCDMA 850 AMR	826.4	22.43
	835	22.58
	846.6	22.54
HSDPA Subtest 1	826.4	21.38
	835	21.33
	846.6	21.48
HSDPA Subtest 2	826.4	20.91
	835	20.8
	846.6	20.99
HSDPA Subtest 3	826.4	20.98
	835	20.87
	846.6	21.04
HSDPA Subtest 4	826.4	20.92
	835	20.86
	846.6	21.03
HSUPA Subtest 1	826.4	20.88
	835	20.79
	846.6	21.02
HSUPA Subtest 2	826.4	20.85
	835	20.82
	846.6	21.01
HSUPA Subtest 3	826.4	20.79
	835	20.75
	846.6	21.06
HSUPA Subtest 4	826.4	20.86
	835	20.86
	846.6	21.13
HSUPA Subtest 5	826.4	21.38
	835	21.35
	846.6	21.46

7.5 FREQUENCY STABILITY

7.5.1 Applicable Standard

According to FCC Part 2.1055 and FCC Part 22.355 and FCC Part 24.235 and FCC KDB 971168 D01 Section 9.0

7.5.2 Conformance Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test.

EUT was placed at temperature chamber and connected to an external power supply.

Temperature and voltage condition shall be tested to confirm frequency stability.

For Temperature Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -10°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

For Voltage Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^\circ\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

7.5.6 Test Results

EUT:	Smart phone	Model No.:	P4526A
Temperature:	20 $^\circ\text{C}$	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS850/GSM/GPRS /EGPRS 1900/UMTS band II/ UMTS band V	Test By:	Lebron Wang
Results: PASS			

Frequency Error Against Voltage for GSM 850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	21	0.0251
3.8	16	0.0191
4.4	11	0.0131

Frequency Error Against Temperature for GSM 850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	21	0.0219
-20	19	0.0181
-10	20	0.0239
0	16	0.0191
10	11	0.0131
20	24	0.0287
30	12	0.0143
40	25	0.0299
50	30	0.0359

Frequency Error Against Voltage for GPRS850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	21	0.0251
3.8	25	0.0299
4.4	18	0.0215

Frequency Error Against Temperature for GPRS850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	24	0.0313
-20	25	0.0245
-10	27	0.0323
0	23	0.0275
10	21	0.0251
20	21	0.0251
30	14	0.0167
40	23	0.0275
50	29	0.0347

Frequency Error Against Voltage for EGPRS850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	25	0.0299
3.8	22	0.0263
4.4	33	0.0394

Frequency Error Against Temperature for EGPRS850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	27	0.0315
-20	40	0.0470
-10	28	0.0335
0	41	0.0490
10	26	0.0311
20	29	0.0347
30	25	0.0299
40	19	0.0227
50	23	0.0275

Note:

1. Normal Voltage = 3.8V; Battery End Point (BEP) = 3.6V; Maximum Voltage = 4.4V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for PCS 1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	36	0.0191
3.8	30	0.0160
4.4	26	0.0138

Frequency Error Against Temperature for PCS 1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	28	0.0144
-20	31	0.0165
-10	29	0.0154
0	30	0.0160
10	21	0.0112
20	25	0.0133
30	33	0.0176
40	21	0.0112
50	20	0.0106

Frequency Error Against Voltage for GPRS1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	33	0.0176
3.8	27	0.0144
4.4	31	0.0165

Frequency Error Against Temperature for GPRS1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	35	0.0187
-20	27	0.0148
-10	37	0.0197
0	26	0.0138
10	22	0.0117
20	35	0.0186
30	27	0.0144
40	22	0.0117
50	14	0.0074

Frequency Error Against Voltage for EGPRS1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	30	0.0160
3.8	20	0.0106
4.4	17	0.0090

Frequency Error Against Temperature for EGPRS1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	26	0.0127
-20	18	0.0089
-10	23	0.0122
0	16	0.0085
10	22	0.0117
20	26	0.0138
30	34	0.0181
40	20	0.0106
50	16	0.0085

Note:

1. Normal Voltage = 3.8V; Battery End Point (BEP) = 3.6V; Maximum Voltage =4.4V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for UMTS band II		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	10	0.0053
3.8	17	0.0090
4.4	24	0.0128

Frequency Error Against Temperature for UMTS band II		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	29	0.0187
-20	16	0.0180
-10	15	0.0080
0	31	0.0165
10	18	0.0096
20	16	0.0085
30	23	0.0122
40	17	0.0090
50	22	0.0117

Frequency Error Against Voltage for UMTS band V		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	24	0.0287
3.8	16	0.0191
4.4	17	0.0203

Frequency Error Against Temperature for UMTS band V		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	23	0.0279
-20	21	0.0267
-10	25	0.0299
0	24	0.0287
10	20	0.0239
20	18	0.0215
30	13	0.0155
40	25	0.0299
50	18	0.0215

Note:

1. Normal Voltage = 3.8V; Battery End Point (BEP) = 3.6V; Maximum Voltage = 4.4V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

7.6 PEAK-TO-AVERAGE RATIO

7.6.1 Applicable Standard

According to FCC 22.913 and FCC 24.232(d) and FCC KDB 971168 D01 Section 5.7.1

7.6.2 Conformance Limit

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set the number of counts to a value that stabilizes the measured CCDF curve.

Set the measurement interval to 1 ms.

Record the maximum PAPR level associated with a probability of 0.1%.

a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;

b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;

c) Set the number of counts to a value that stabilizes the measured CCDF curve;

d) Set the measurement interval as follows:

1) for continuous transmissions, set to 1 ms,

2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.

e) Record the maximum PAPR level associated with a probability of 0.1%.

7.6.6 Test Results

EUT:	Smart phone	Model No.:	P4526A
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/GSM/GPRS/EGPRS 1900/UMTS band II/ UMTS band V	Test By:	Lebron Wang
Results: PASS			

Cellular Band						
Modes	GSM850			GSM1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	9.41	9.16	9.13	9.57	9.23	9.18

Cellular Band						
Modes	GPRS850			GPRS1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	9.27	9.93	9.66	9.14	9.70	9.70

Cellular Band						
Modes	EGPRS850			EGPRS1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	12.34	12.17	12.22	12.08	11.28	11.70

UMTS Band						
Modes	WCDMA Band II (RMC 12.2Kbps)			WCDMA Band V (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)	4132 (Low)	4175 (Mid)	4233 (High)
Frequency(MHz)	1852.4	1880	1907.6	826.4	836.6	846.6
Peak-to-Average Ratio (dB)	2.81	2.91	2.71	2.89	3.06	2.92

Test plot


(GSM850)

(GSM1900)


Peak-to-Average Ratio on channel 128



Peak-to-Average Ratio on channel 190

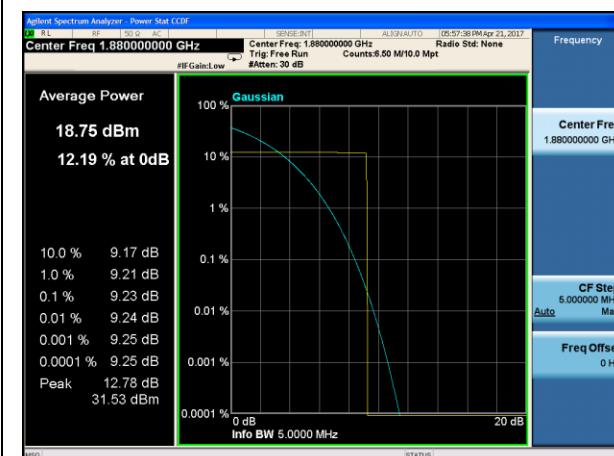


Peak-to-Average Ratio on channel 251

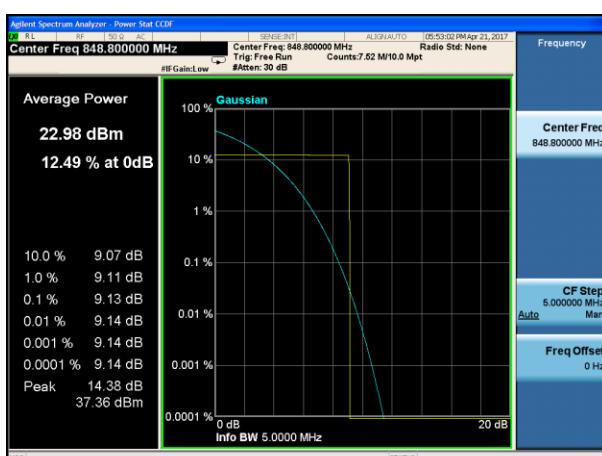

Test plot

(GPRS850)

Peak-to-Average Ratio on channel 128

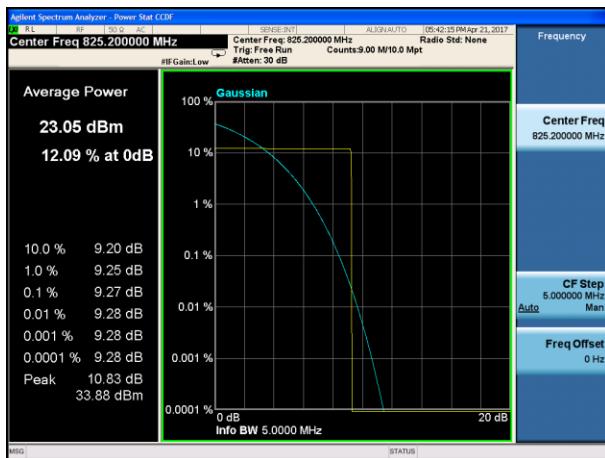

(GPRS 1900)


Peak-to-Average Ratio on channel 512




Peak-to-Average Ratio on channel 190



Peak-to-Average Ratio on channel 661

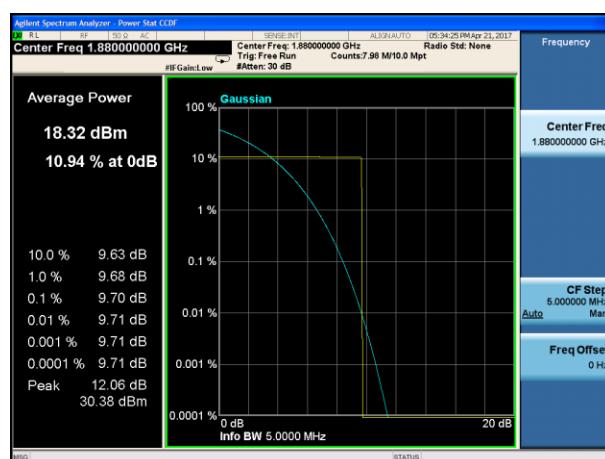

Peak-to-Average Ratio on channel 251

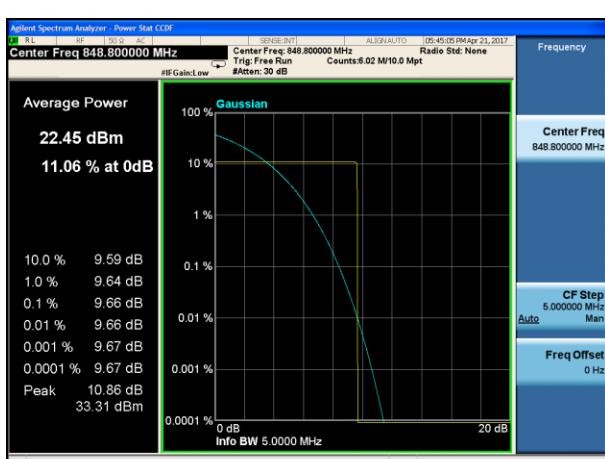

Peak-to-Average Ratio on channel 810



Test plot

(EGPRS 850)

(EGPRS 1900)


Peak-to-Average Ratio on channel 128

Peak-to-Average Ratio on channel 512




Peak-to-Average Ratio on channel 190

Peak-to-Average Ratio on channel 661

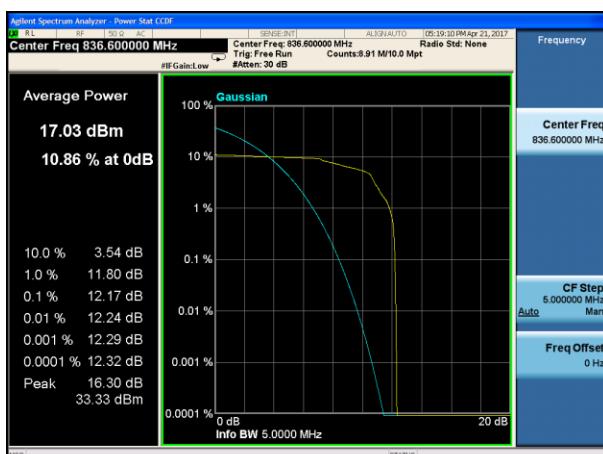

Peak-to-Average Ratio on channel 251

Peak-to-Average Ratio on channel 810

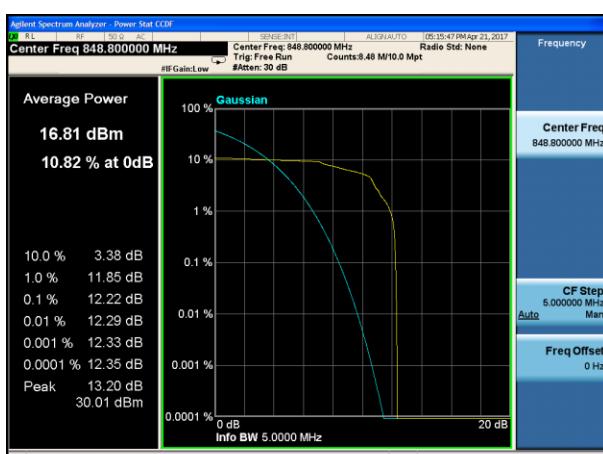


Test plot

UMTS Band V

UMTS Band II


Peak-to-Average Ratio on channel 4132

Peak-to-Average Ratio on channel 9262

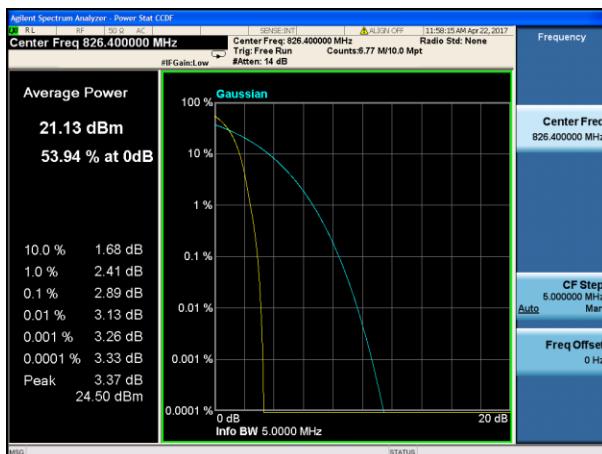


Peak-to-Average Ratio on channel 4183

Peak-to-Average Ratio on channel 9400

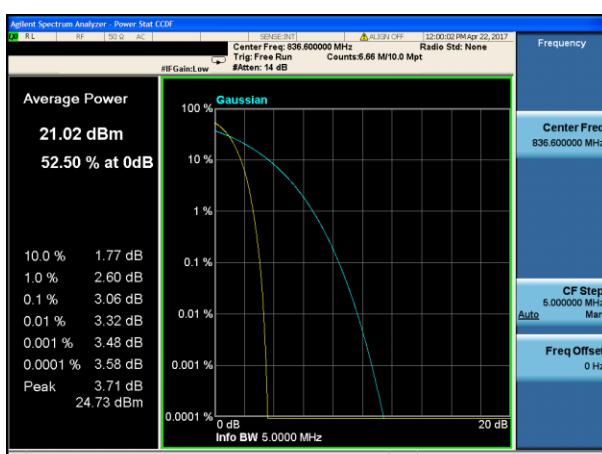

Peak-to-Average Ratio on channel 4233

Peak-to-Average Ratio on channel 9538

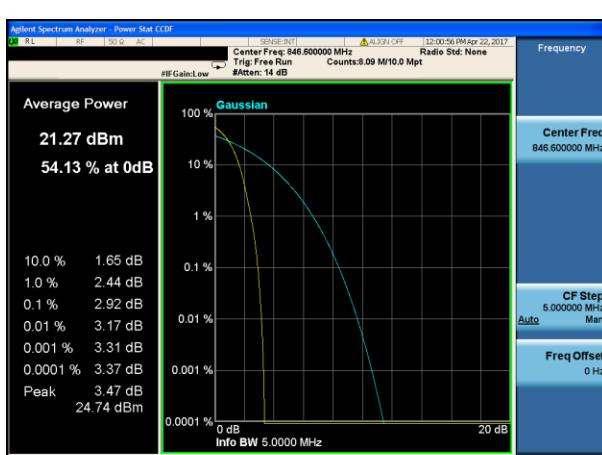

7.7 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

7.7.1 Applicable Standard

According to FCC Part 2.1049 and FCC Part 22H and FCC Part 24E and FCC KDB 971168 D01 Section 4.0

7.7.2 Conformance Limit

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 971168 v02r02 Section 4.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

Set the detection mode to peak, and the trace mode to max hold.

Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value)

Determine the “-26 dB down amplitude” as equal to (Reference Value – X).

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

7.7.6 Test Results

EUT:	Smart phone	Model No.:	P4526A
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/GSM/GPRS/EGPRS 1900 /UMTS band II/ UMTS band V	Test By:	Lebron Wang
Results: PASS			



Operation Mode	Channel Number	Channel Frequency (MHz)	26dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)	Verdict
GSM850	128	824.2	318.838	248.3699	N/A	PASS
	190	836.4	322.456	244.7615	N/A	PASS
	251	848.8	318.433	243.2629	N/A	PASS
GSM1900	512	1850.2	320.832	247.3294	N/A	PASS
	661	1880.0	319.312	245.1745	N/A	PASS
	810	1909.8	321.731	246.0444	N/A	PASS
GPRS850	128	824.2	321.748	244.6543	N/A	PASS
	190	836.4	317.342	242.3352	N/A	PASS
	251	848.8	318.536	244.3712	N/A	PASS
GPRS1900	512	1850.2	318.199	243.2714	N/A	PASS
	661	1880.0	319.549	244.1119	N/A	PASS
	810	1909.8	318.912	245.2565	N/A	PASS
EGPRS850	128	824.2	322.944	247.9490	N/A	PASS
	190	836.4	318.979	243.3374	N/A	PASS
	251	848.8	361.861	248.6116	N/A	PASS
EGPRS1900	512	1850.2	323.836	255.8511	N/A	PASS
	661	1880.0	317.083	246.8799	N/A	PASS
	810	1909.8	324.552	247.3494	N/A	PASS
UMTS Band V	4132	826.4	4914	4208.4	N/A	PASS
	4183	836.4	4883	4203.9	N/A	PASS
	4233	846.6	4887	4206.5	N/A	PASS
UMTS Band II	9262	1852.4	4859	4205.1	N/A	PASS
	9400	1880.0	4887	4206.2	N/A	PASS
	9538	1907.6	4903	4208.1	N/A	PASS

Test plot



(GSM850)

(GSM1900)



-26dB&99% Bandwidth plot on channel 128

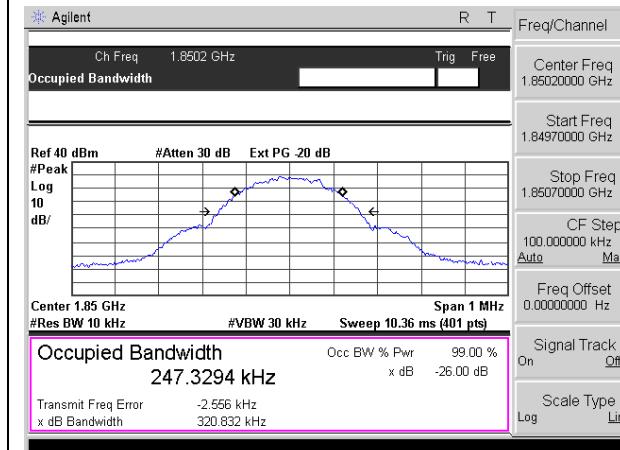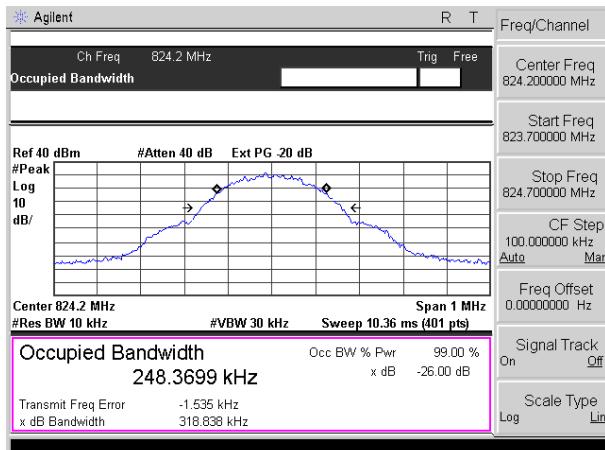

-26dB&99% Bandwidth plot on channel 190

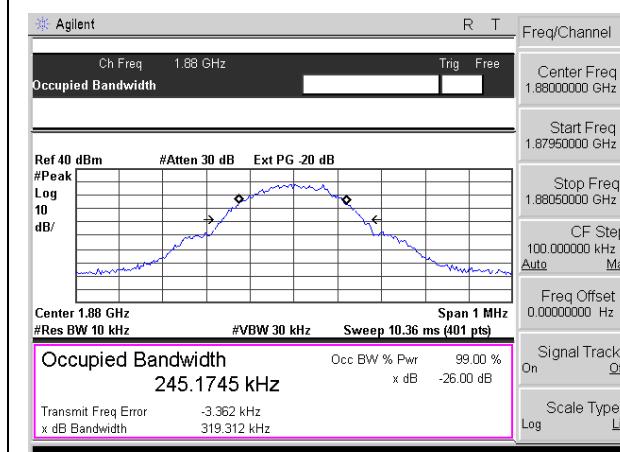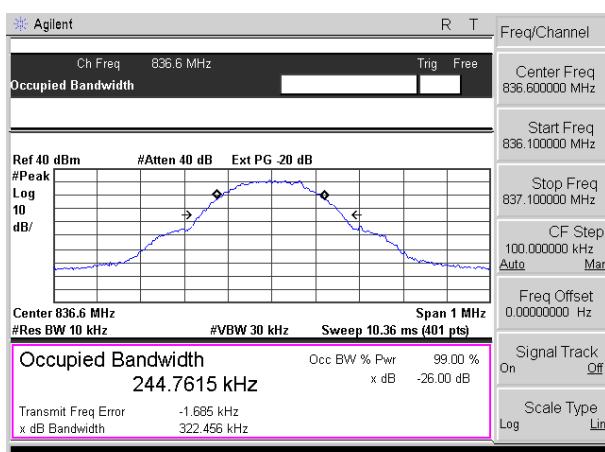

-26dB&99% Bandwidth plot on channel 251

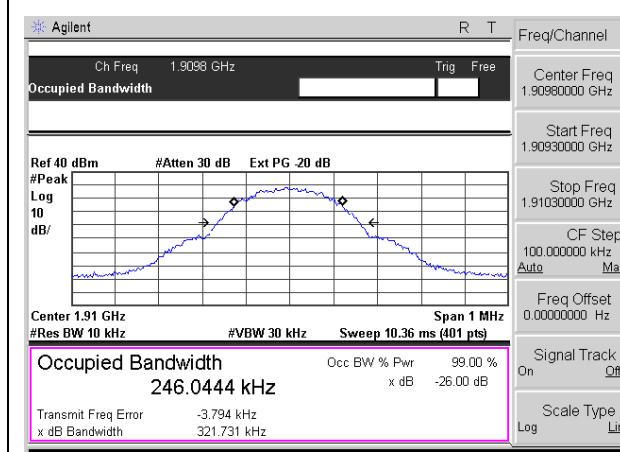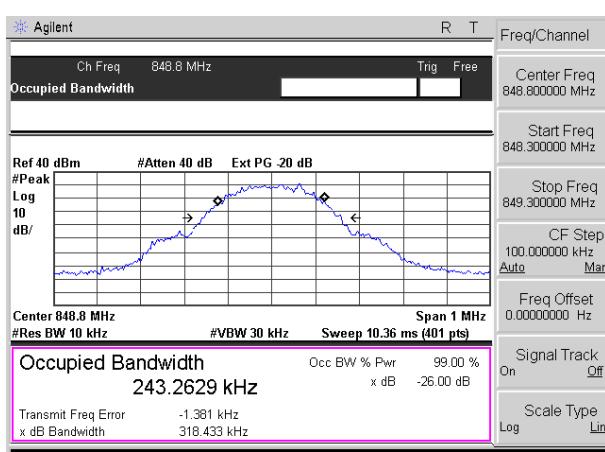



Test plot

(GPRS850)

(GPRS1900)



-26dB&99% Bandwidth plot on channel 128

-26dB&99% Bandwidth plot on channel 512

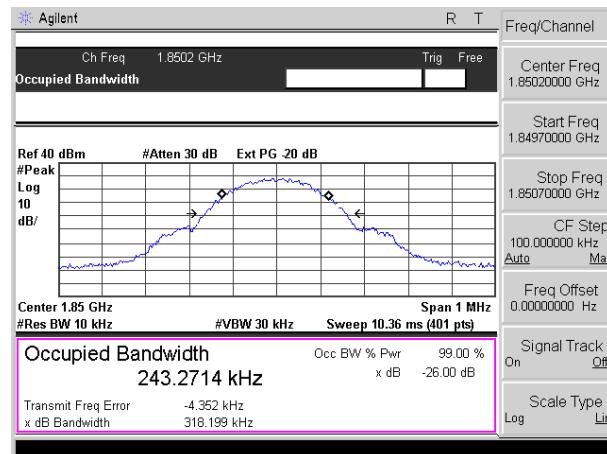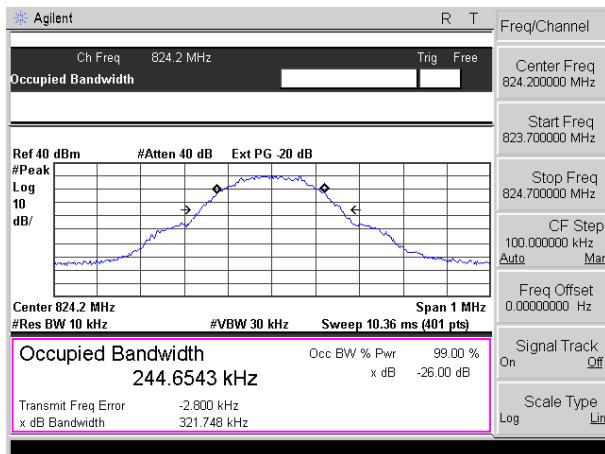



-26dB&99% Bandwidth plot on channel 190

-26dB&99% Bandwidth plot on channel 661

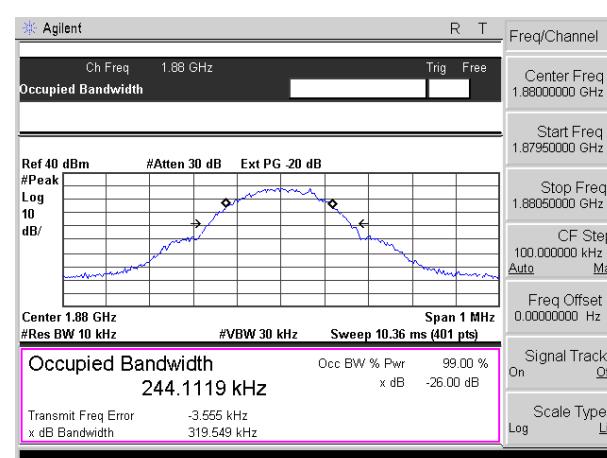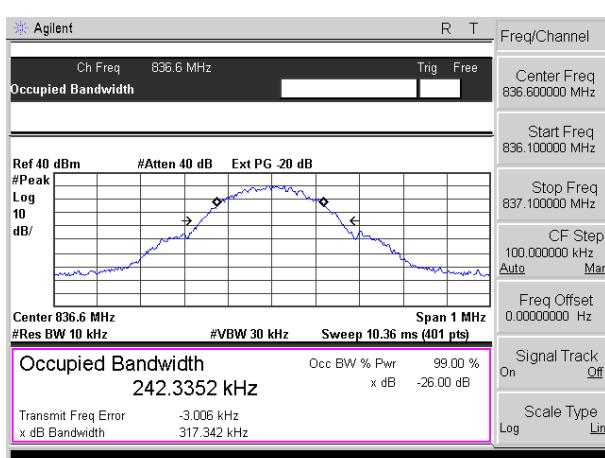

-26dB&99% Bandwidth plot on channel 251

-26dB&99% Bandwidth plot on channel 810

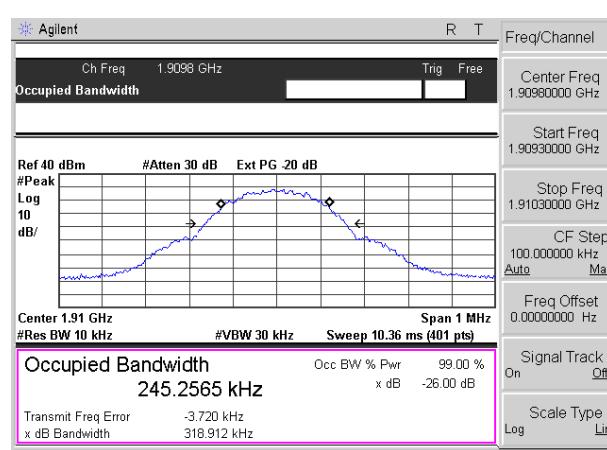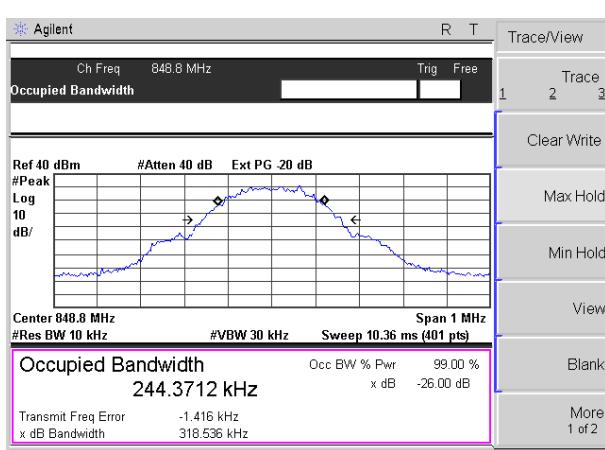



Test plot

(EGPRS850)

(EGPRS1900)



-26dB&99% Bandwidth plot on channel 128

-26dB&99% Bandwidth plot on channel 512

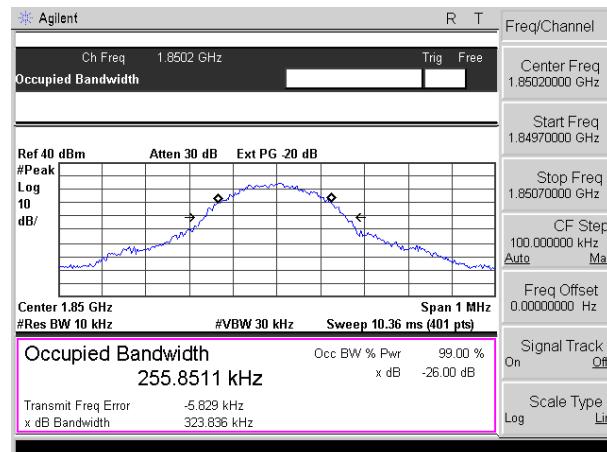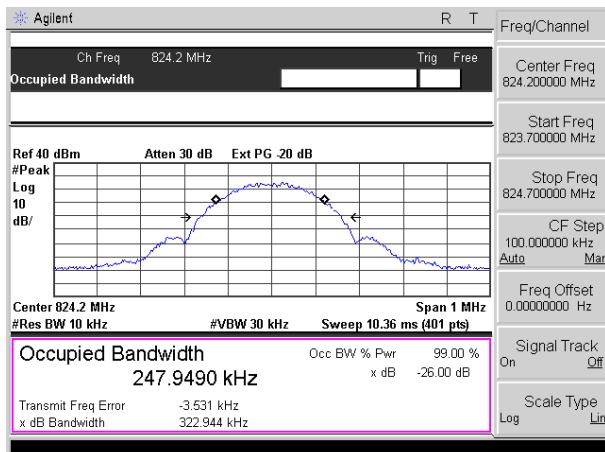



-26dB&99% Bandwidth plot on channel 190

-26dB&99% Bandwidth plot on channel 661

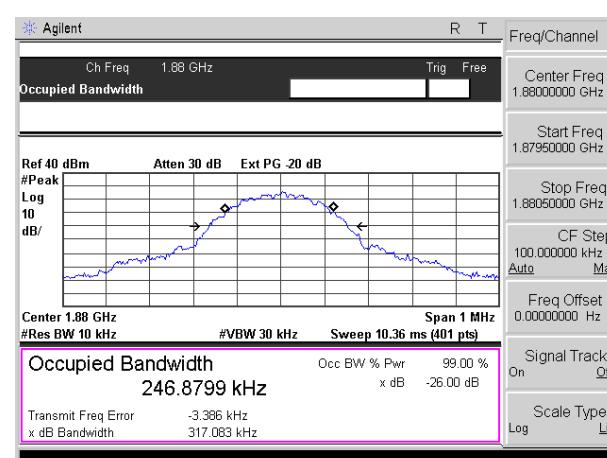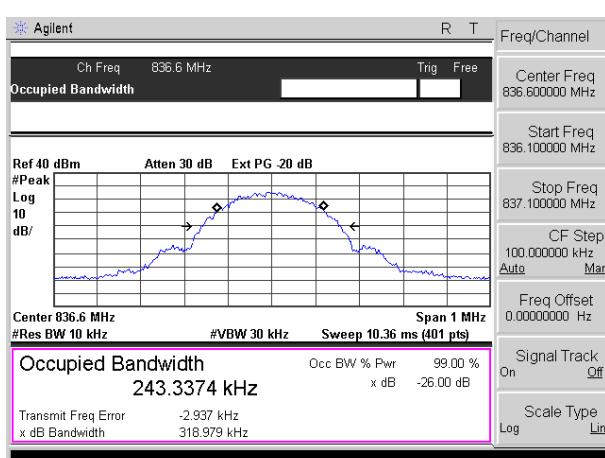

-26dB&99% Bandwidth plot on channel 251

-26dB&99% Bandwidth plot on channel 810

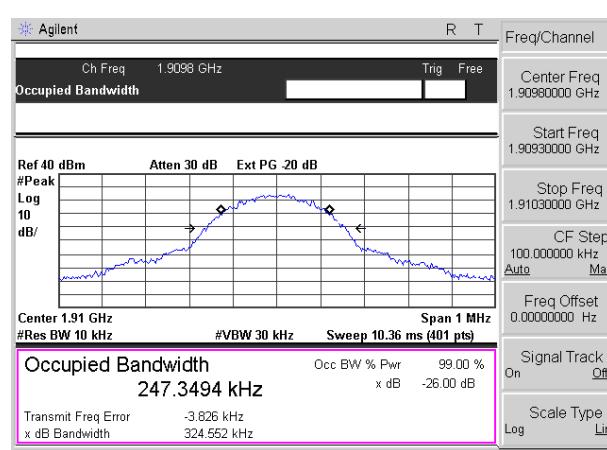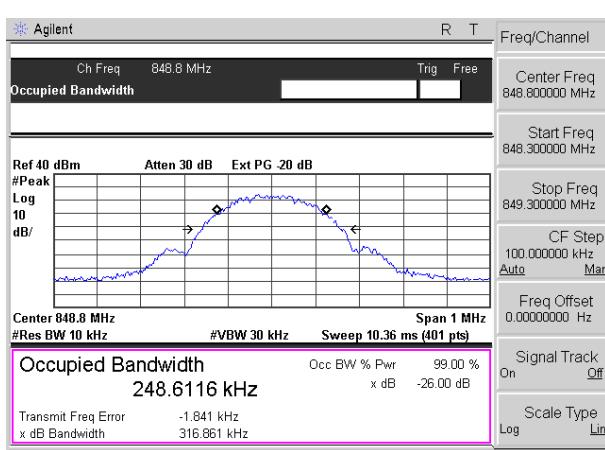



7.8 CONDUCTED BAND EDGE

7.8.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and 24.238(a) and FCC KDB 971168 D01 Section6.0

7.8.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows FCC KDB 971168 v02r02 Section 6.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The band edges of low and high channels for the highest RF powers were measured.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)


$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$


$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$


$$= -13 \text{ dBm.}$$


7.8.6 Test Results

EUT:	Smart phone	Model No.:	P4526A
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/GSM/GPRS 1900/UMTS band II/ UMTS band V	Test By:	Lebron Wang
Results: PASS			

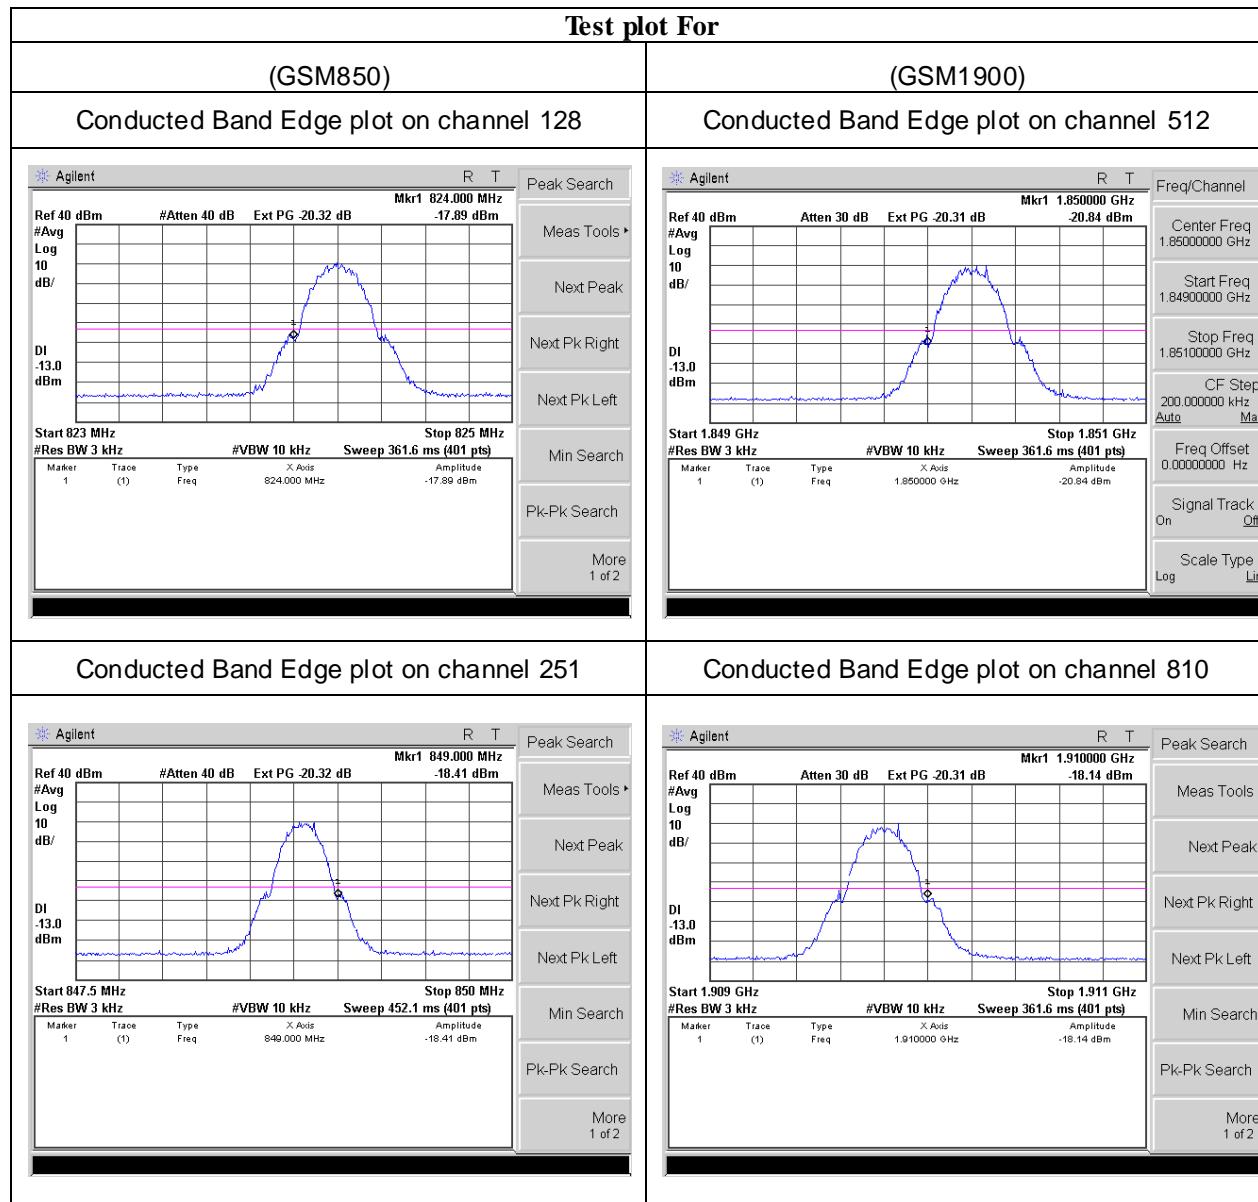

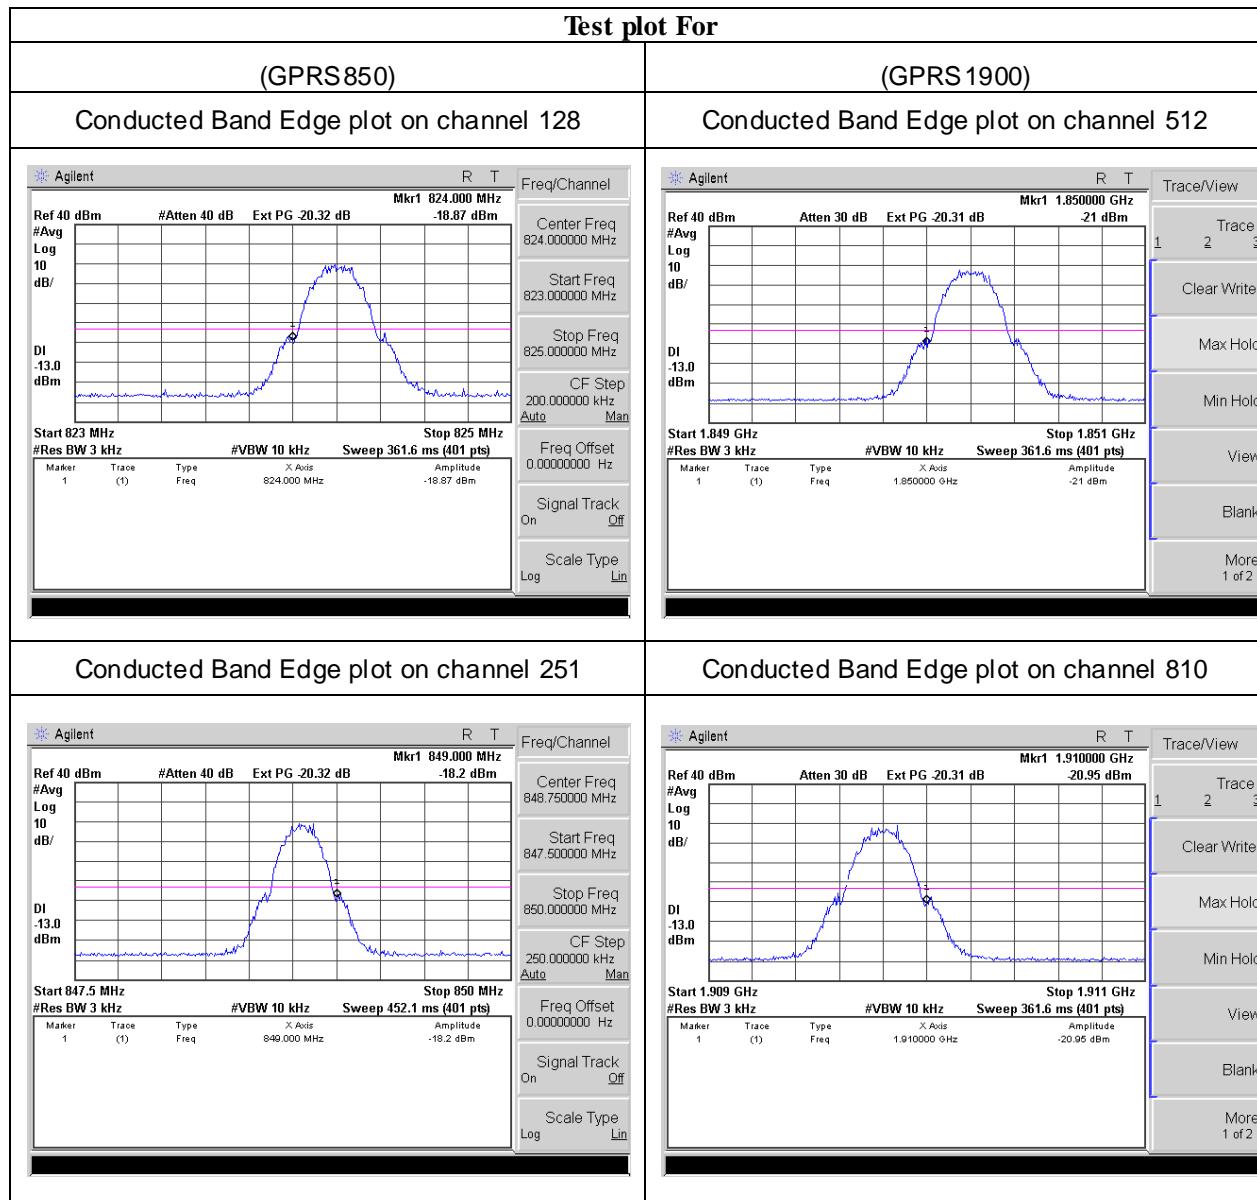

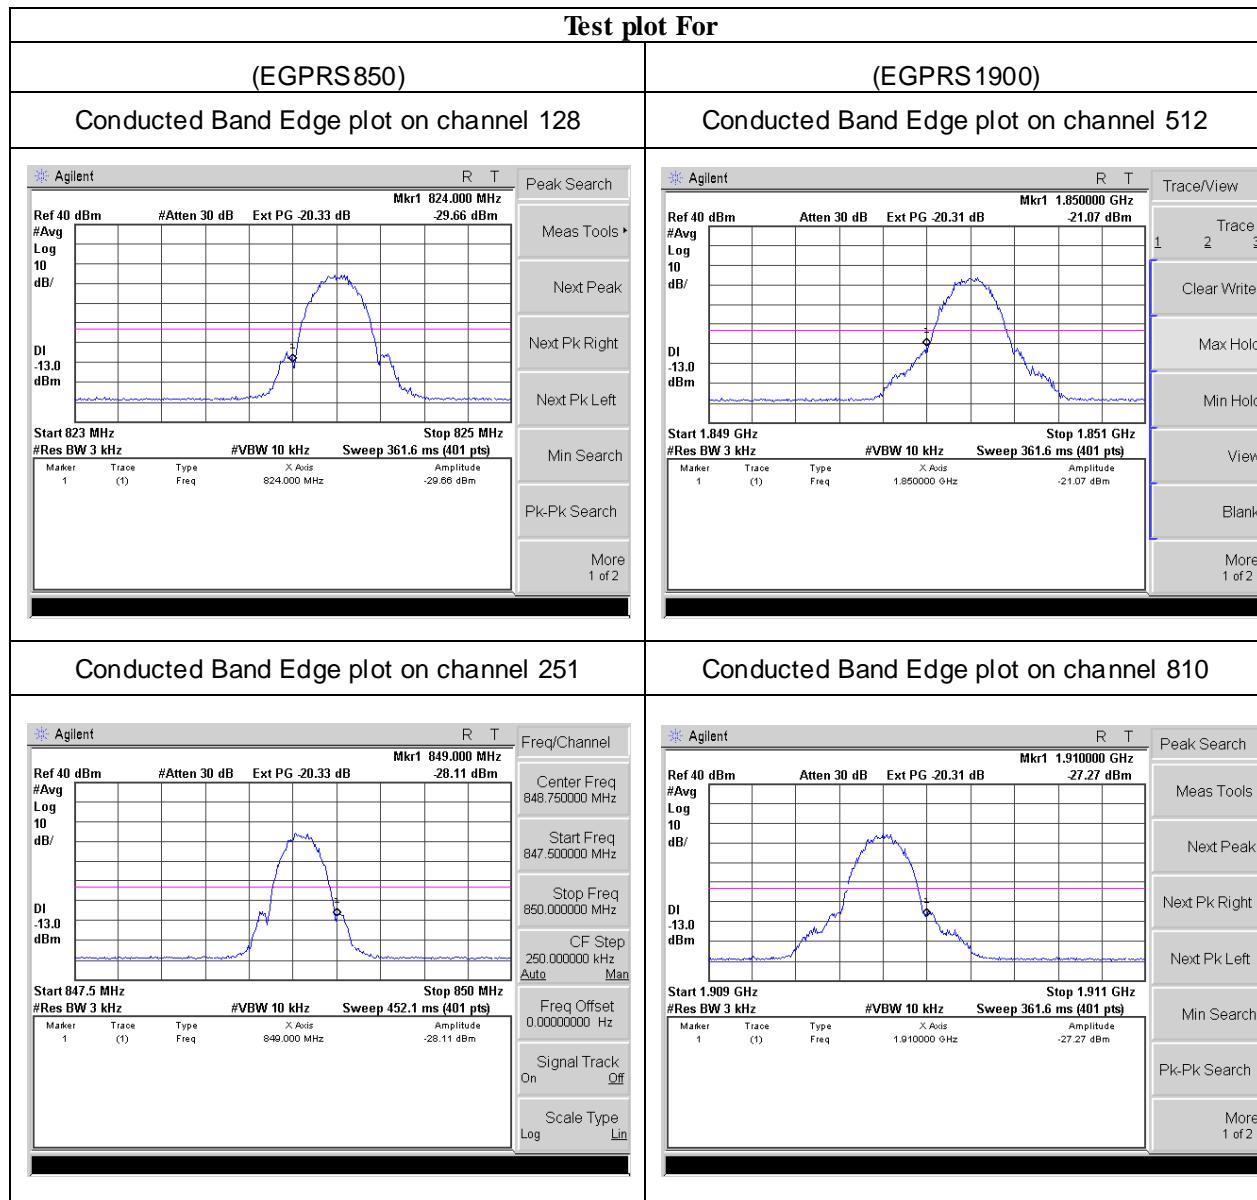

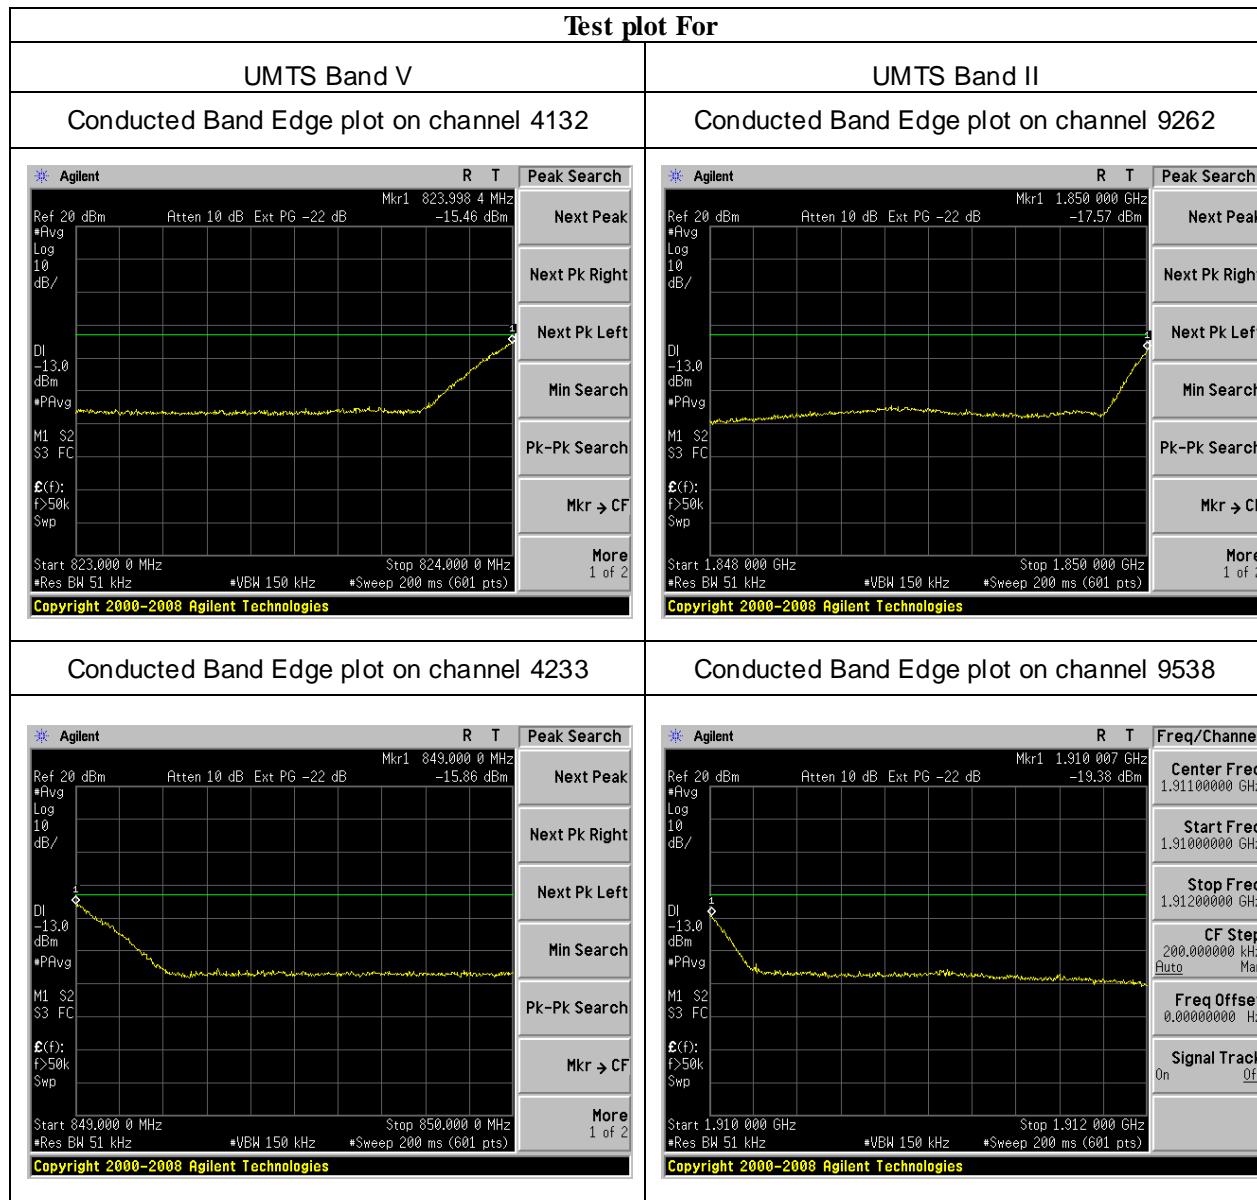

7.9 CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL

7.9.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and Part 24.238(a) and FCC KDB 971168 D01 Section6.0

7.9.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

7.9.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.9.4 Test Setup

Please refer to Section 6.1 of this test report.

7.9.5 Test Procedure

The testing follows FCC KDB 971168 v02r02 Section 6.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The middle channel for the highest RF power within the transmitting frequency was measured.

The conducted spurious emission for the whole frequency range was taken.


The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)


$$\begin{aligned} &= P(W) - [43 + 10\log(P)] \text{ (dB)} \\ &= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} \\ &= -13 \text{ dBm.} \end{aligned}$$


7.9.6 Test Results


EUT:	Smart phone	Model No.:	P4526A
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/GSM/GPRS/EGPRS 1900/UMTS band II/ UMTS band V	Test By:	Lebron Wang
Results: PASS			

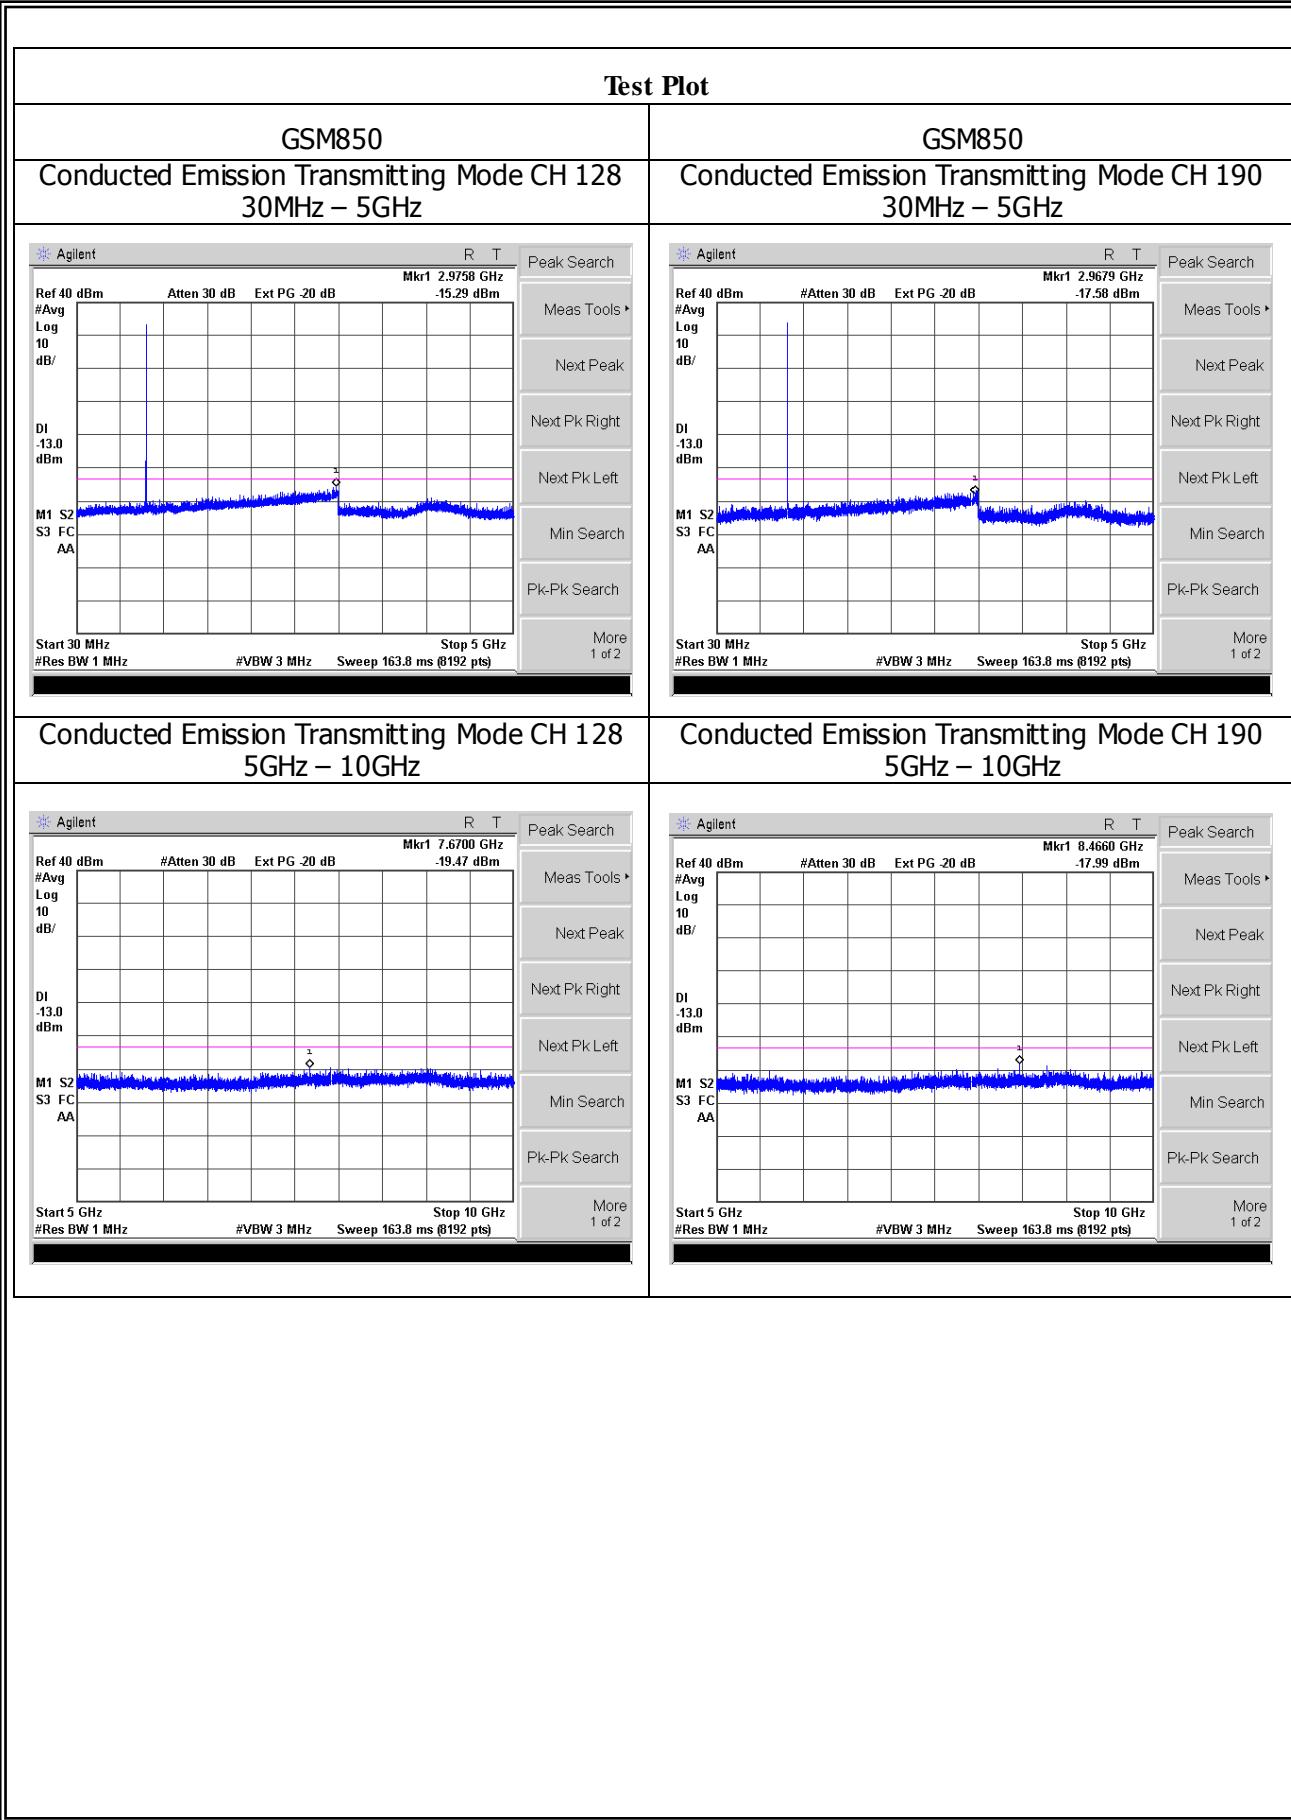


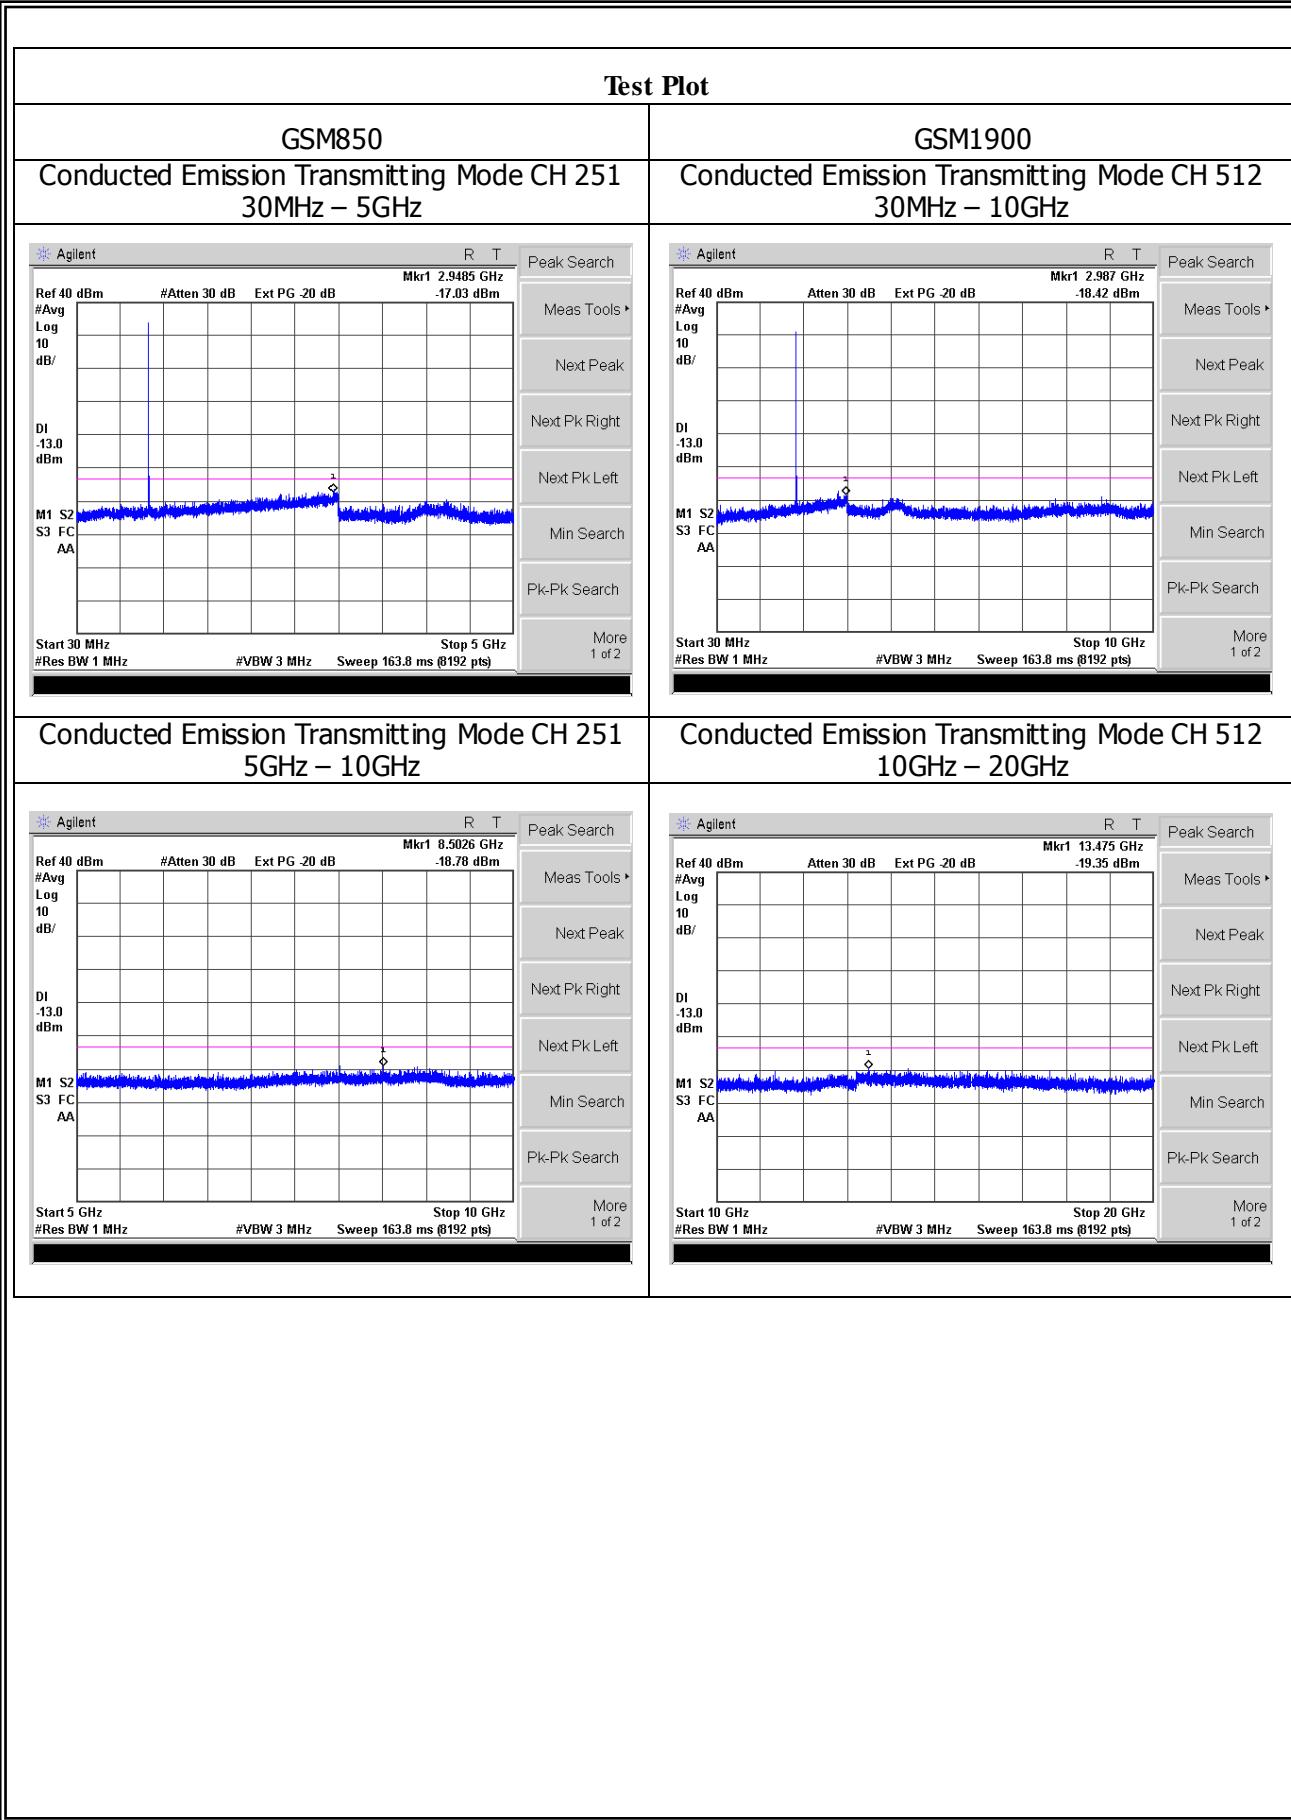


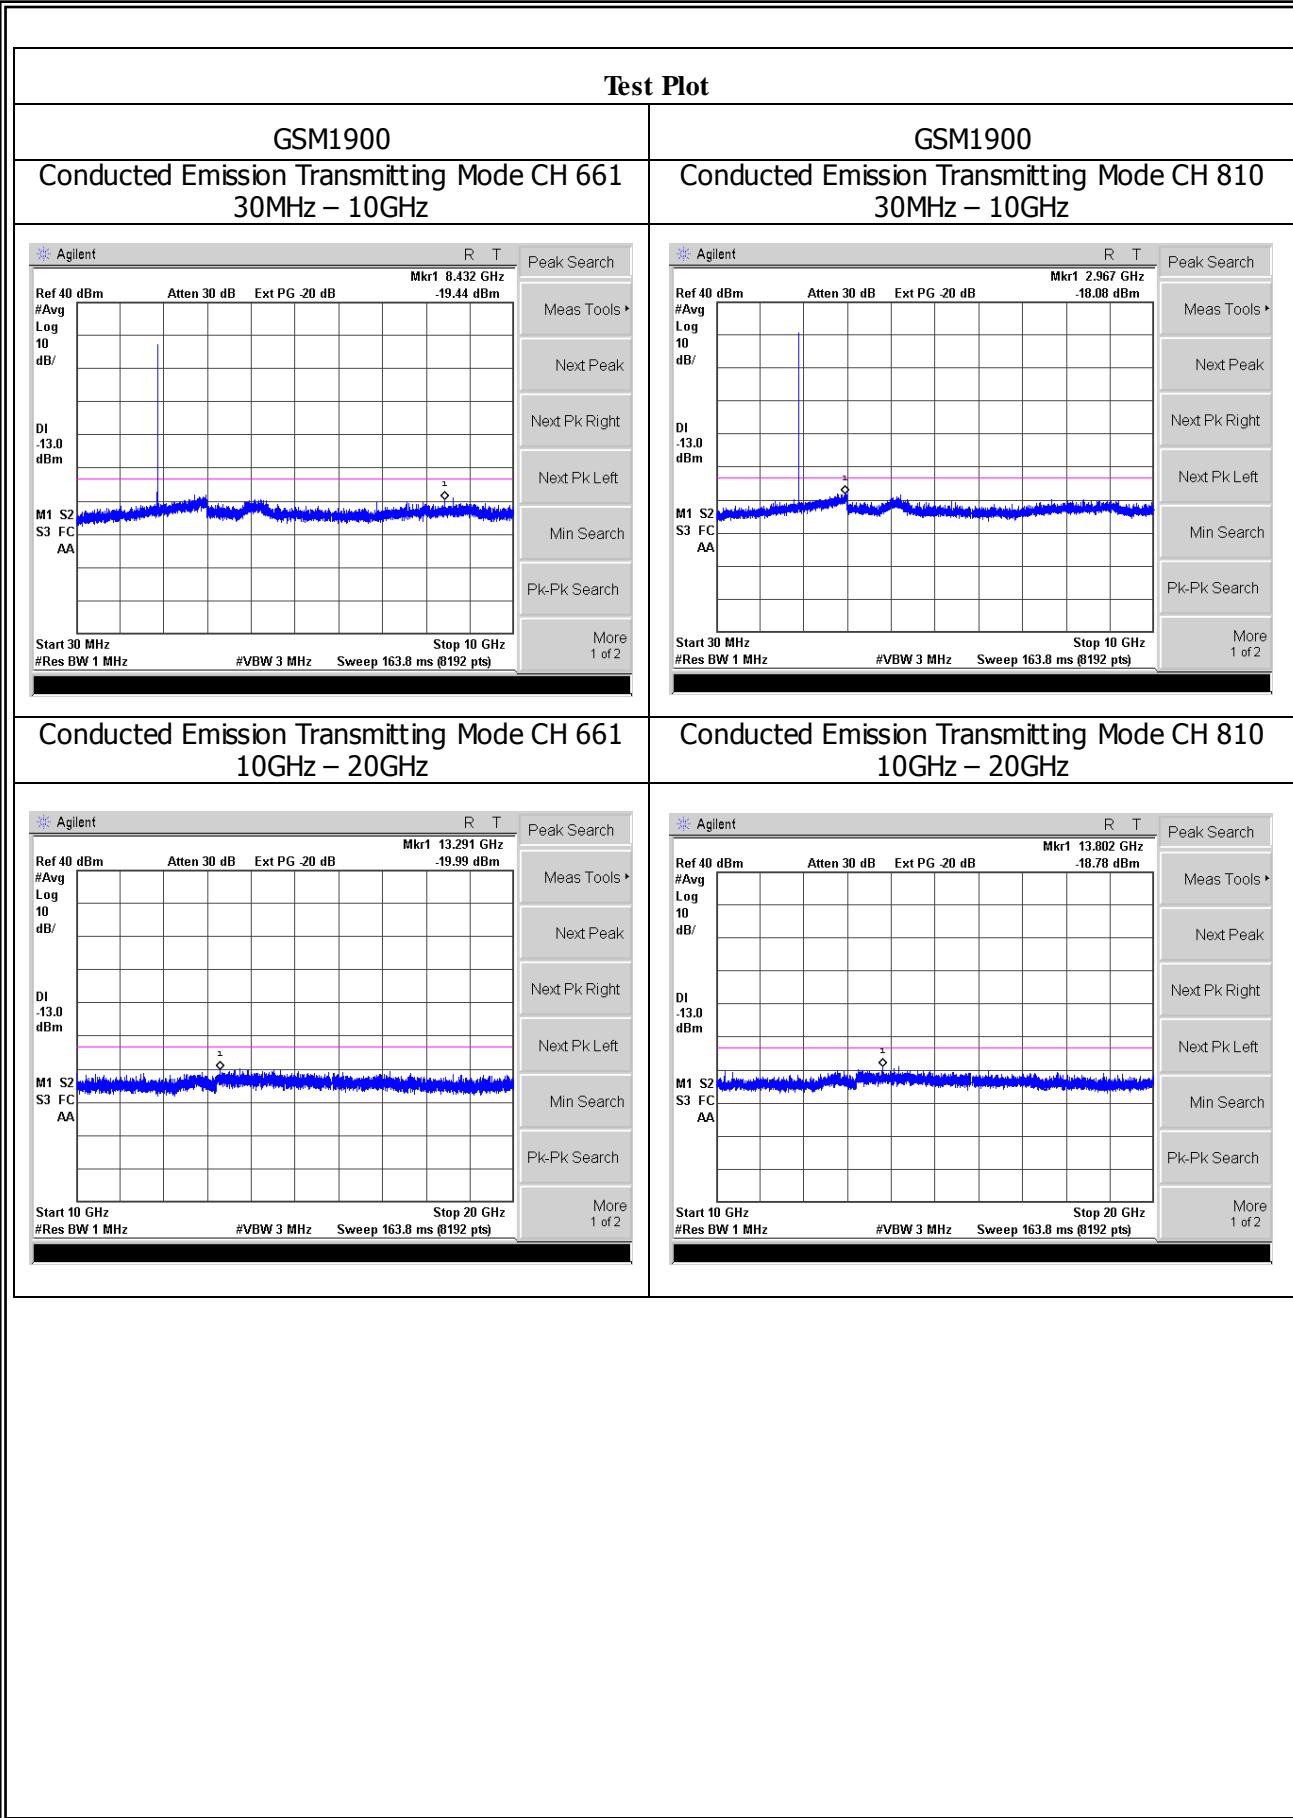


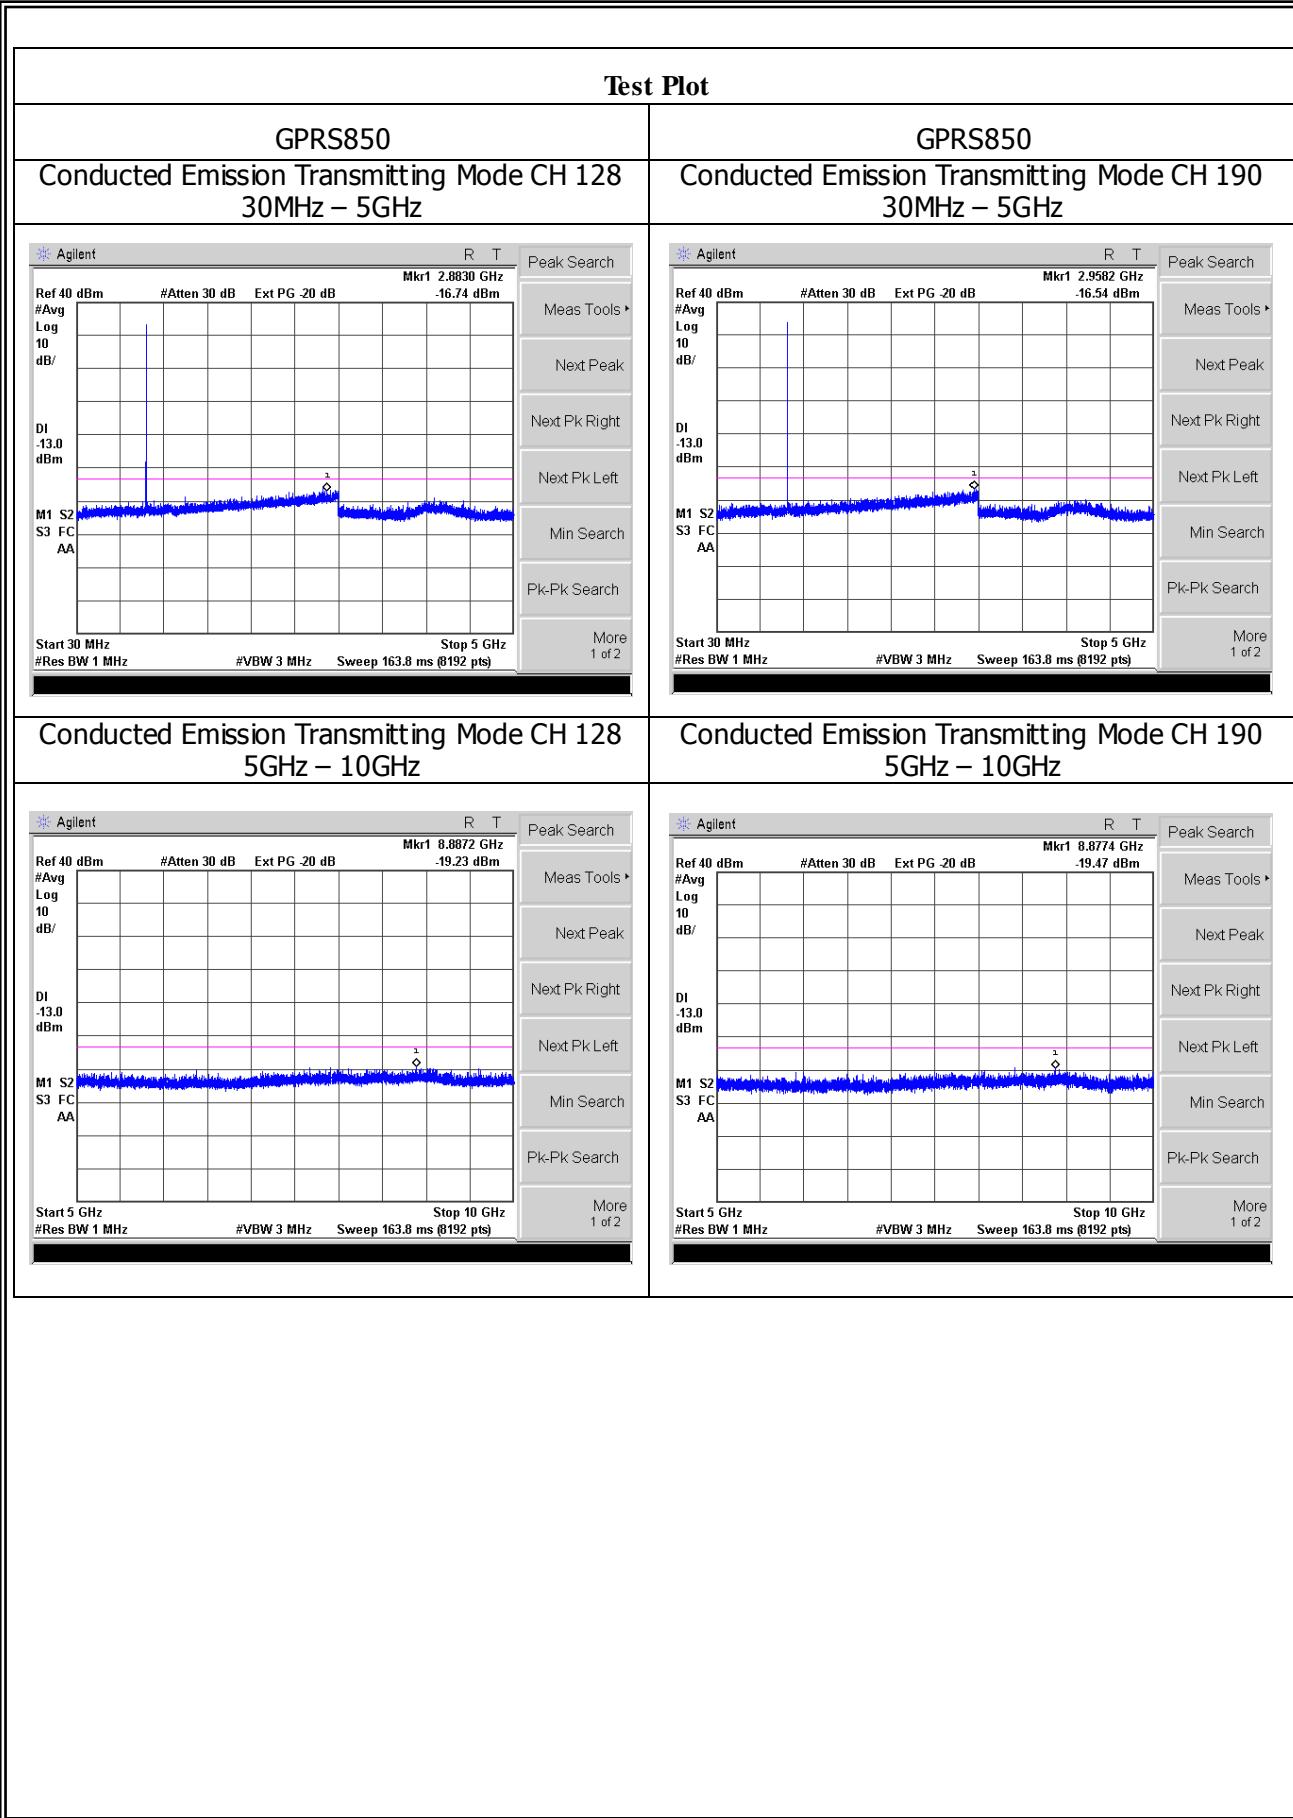


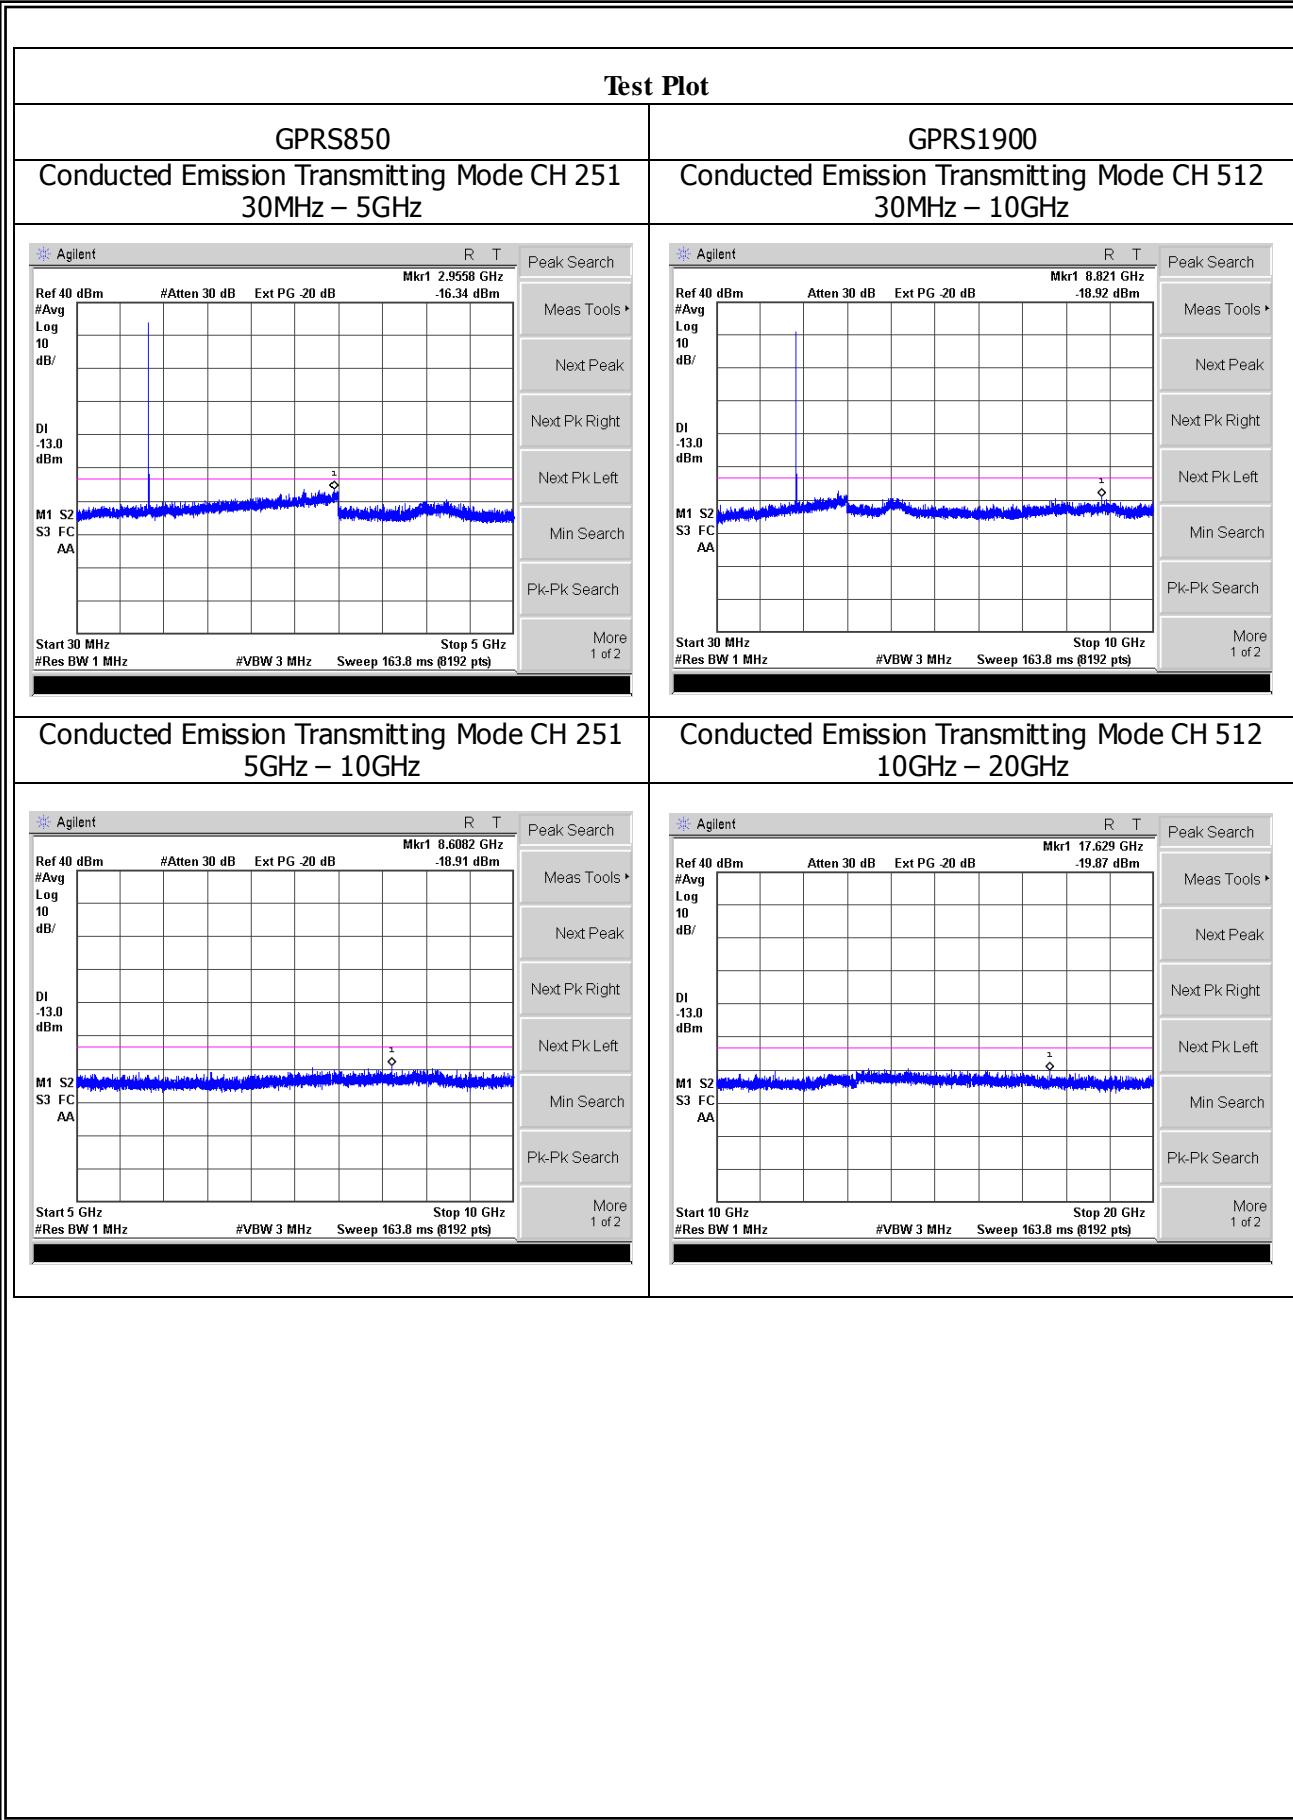


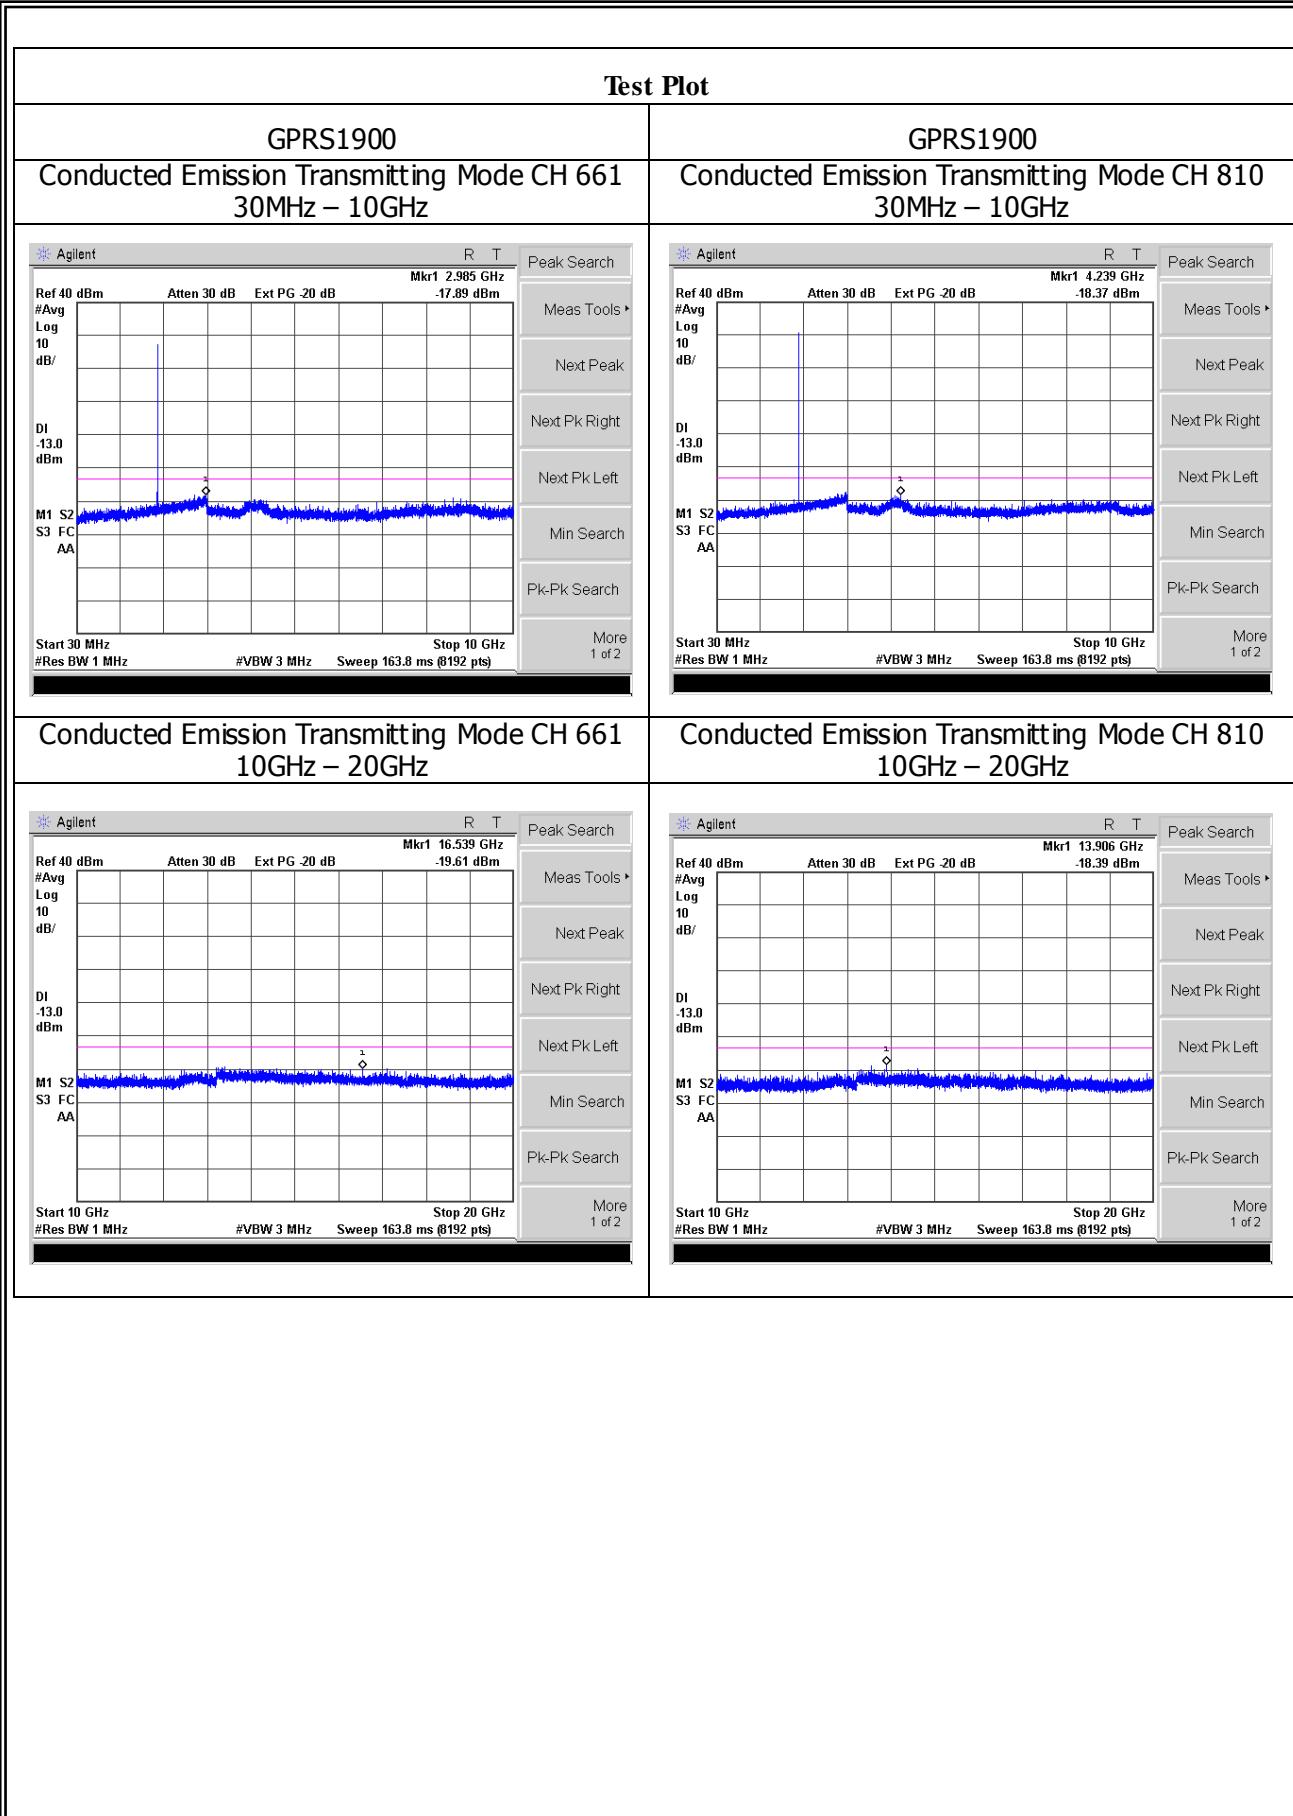


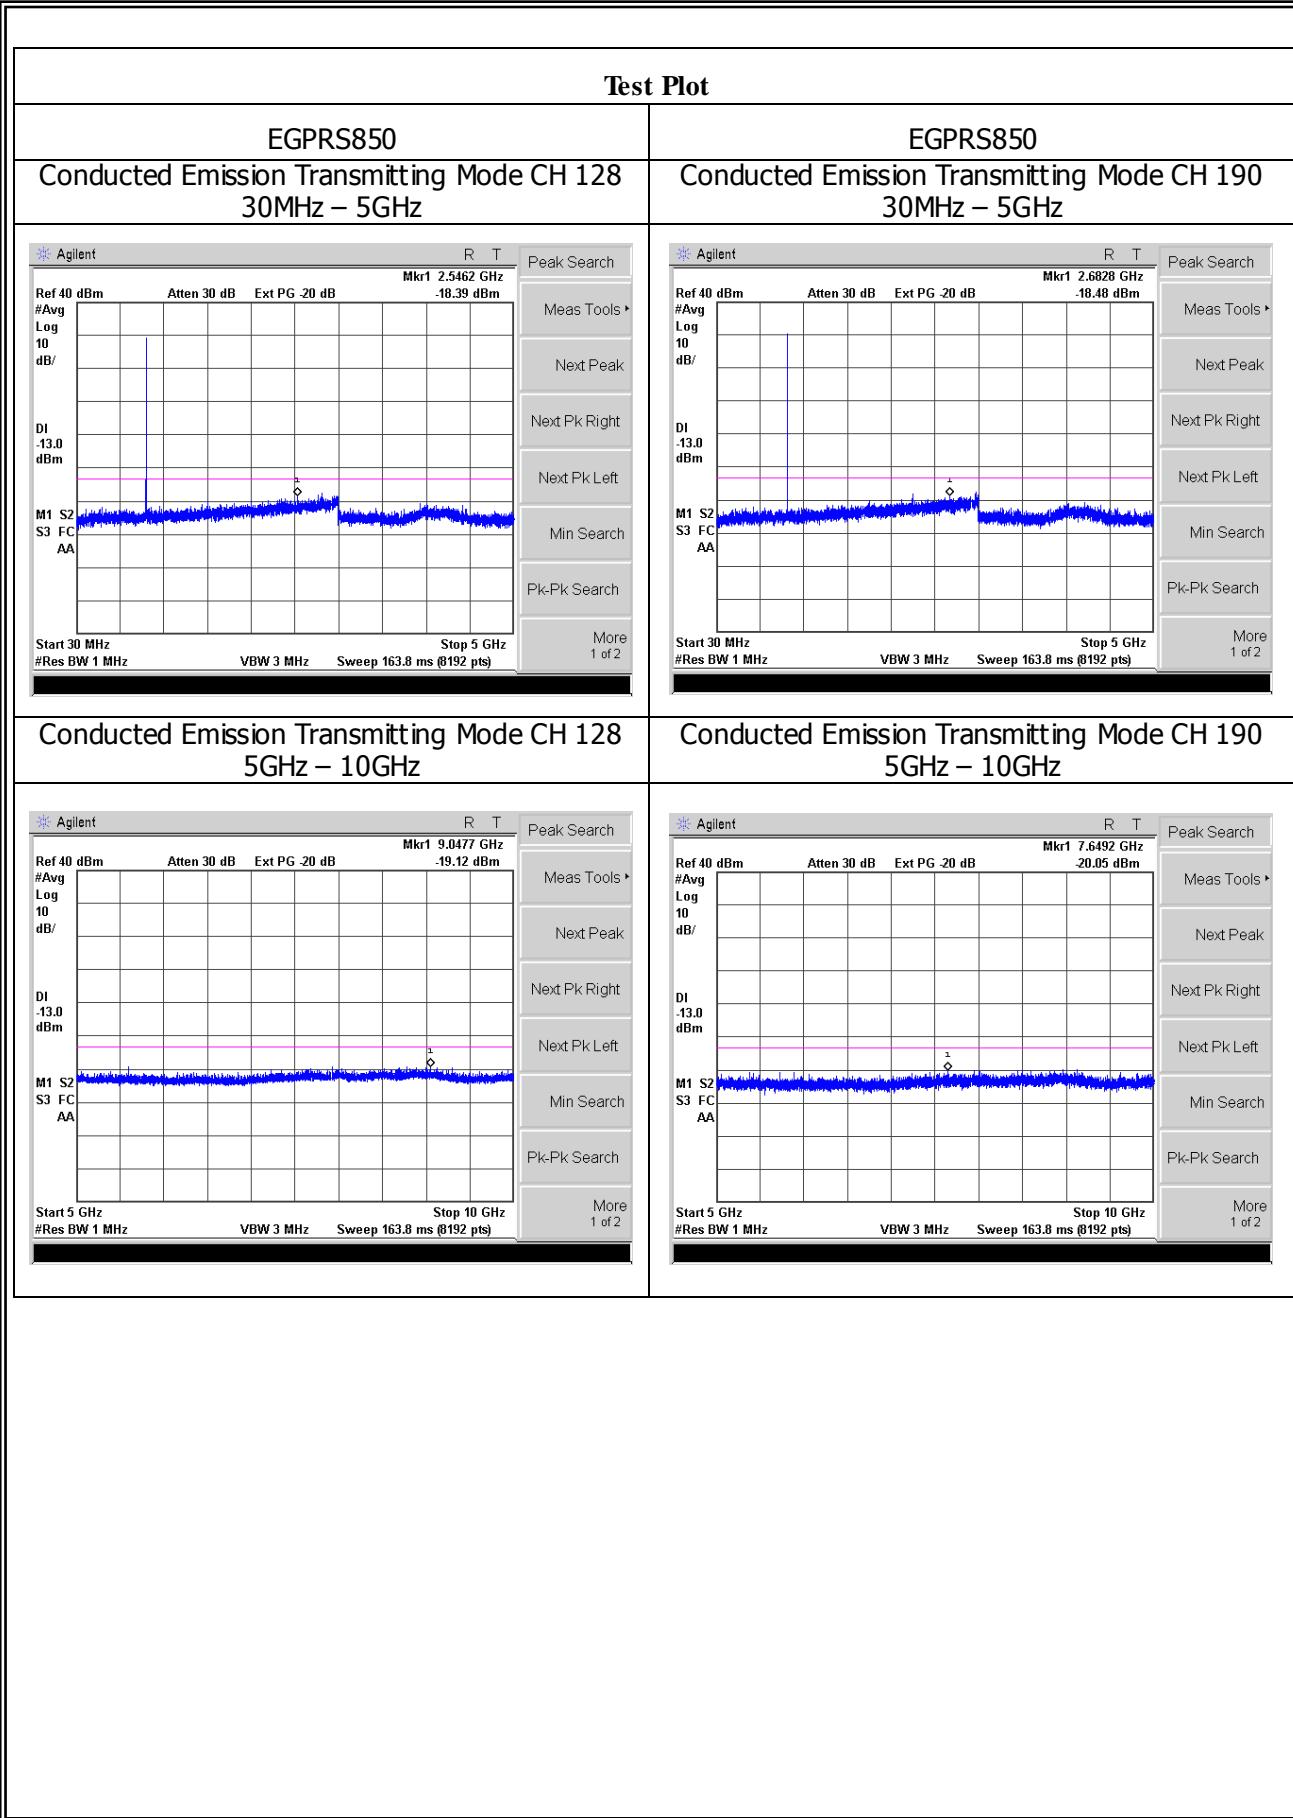


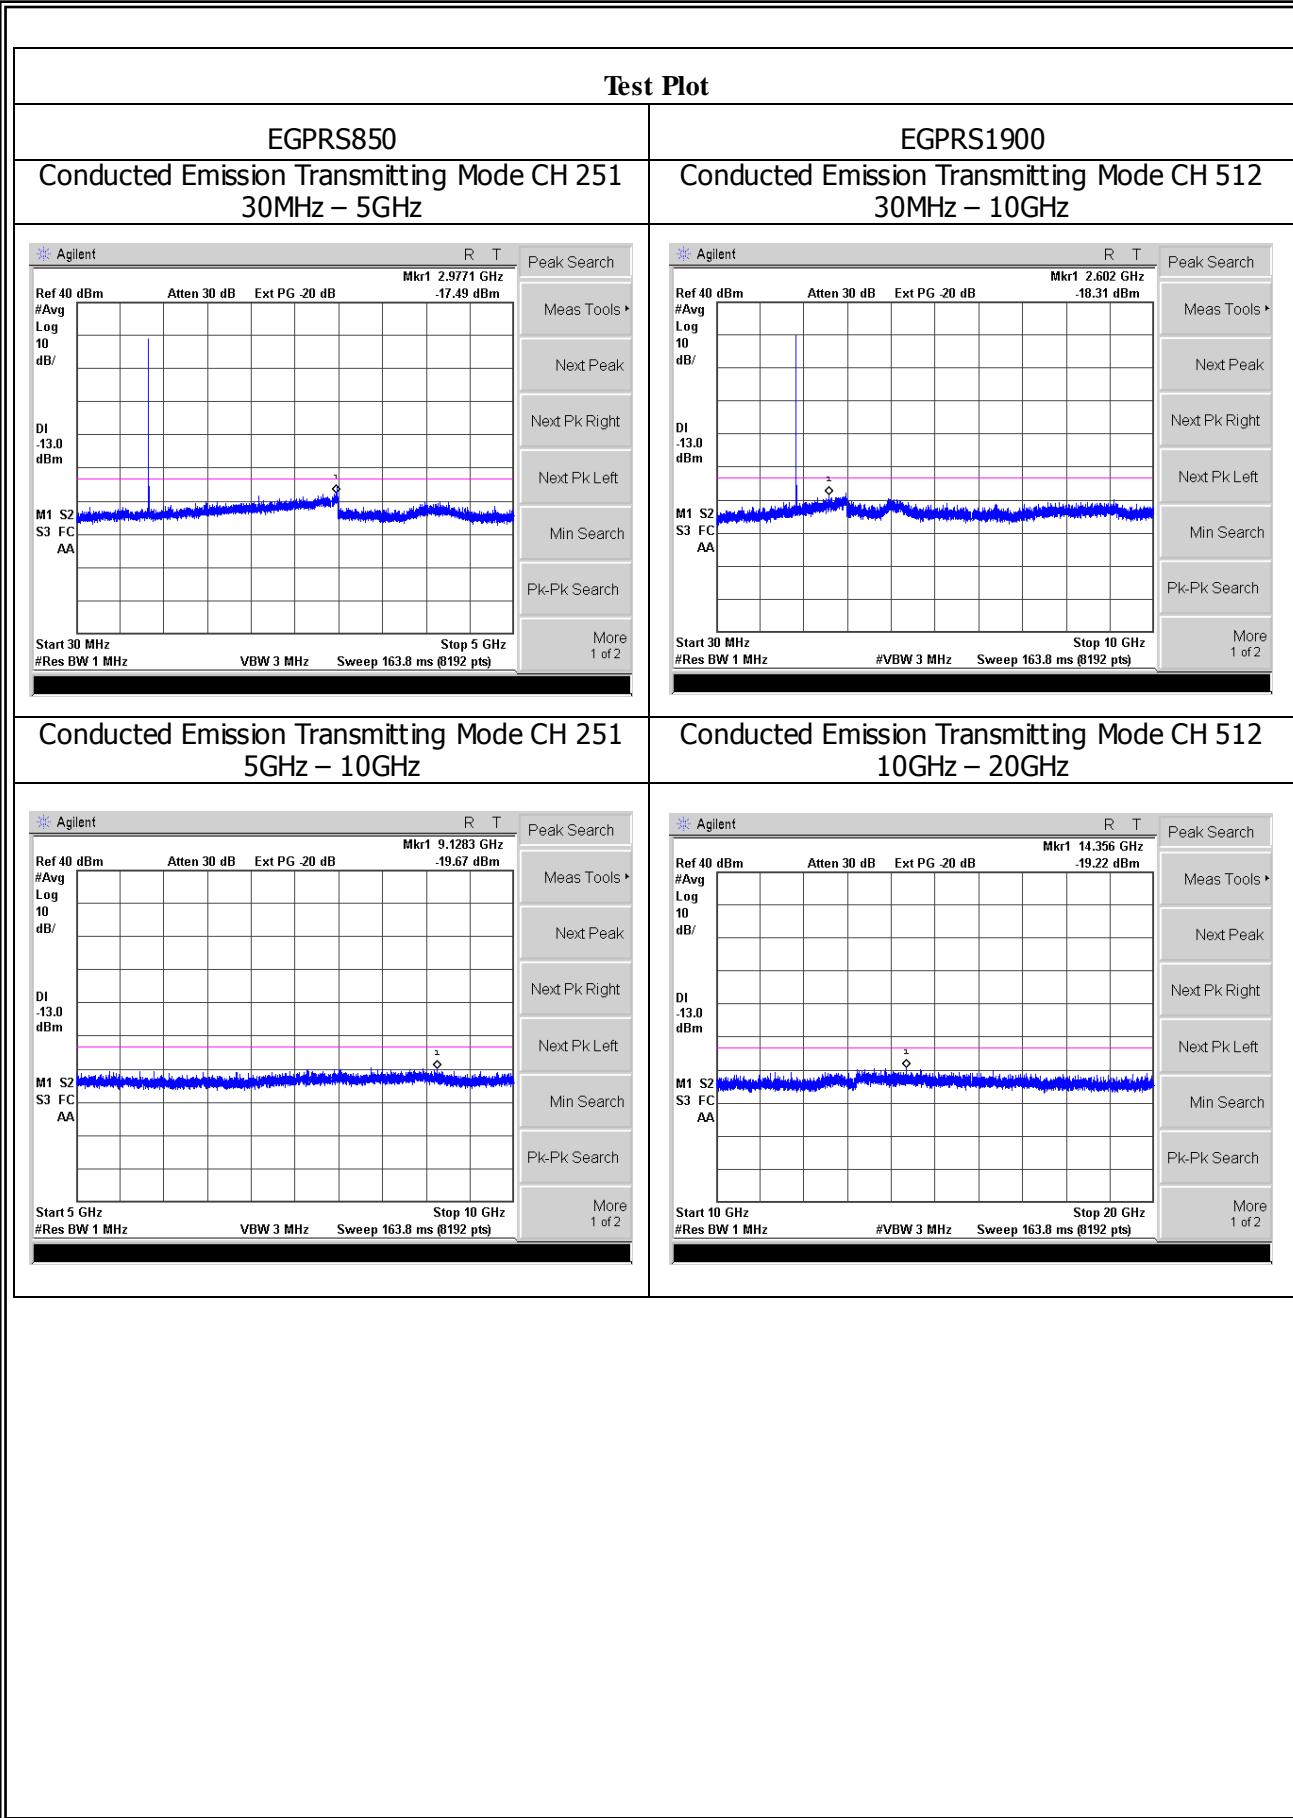

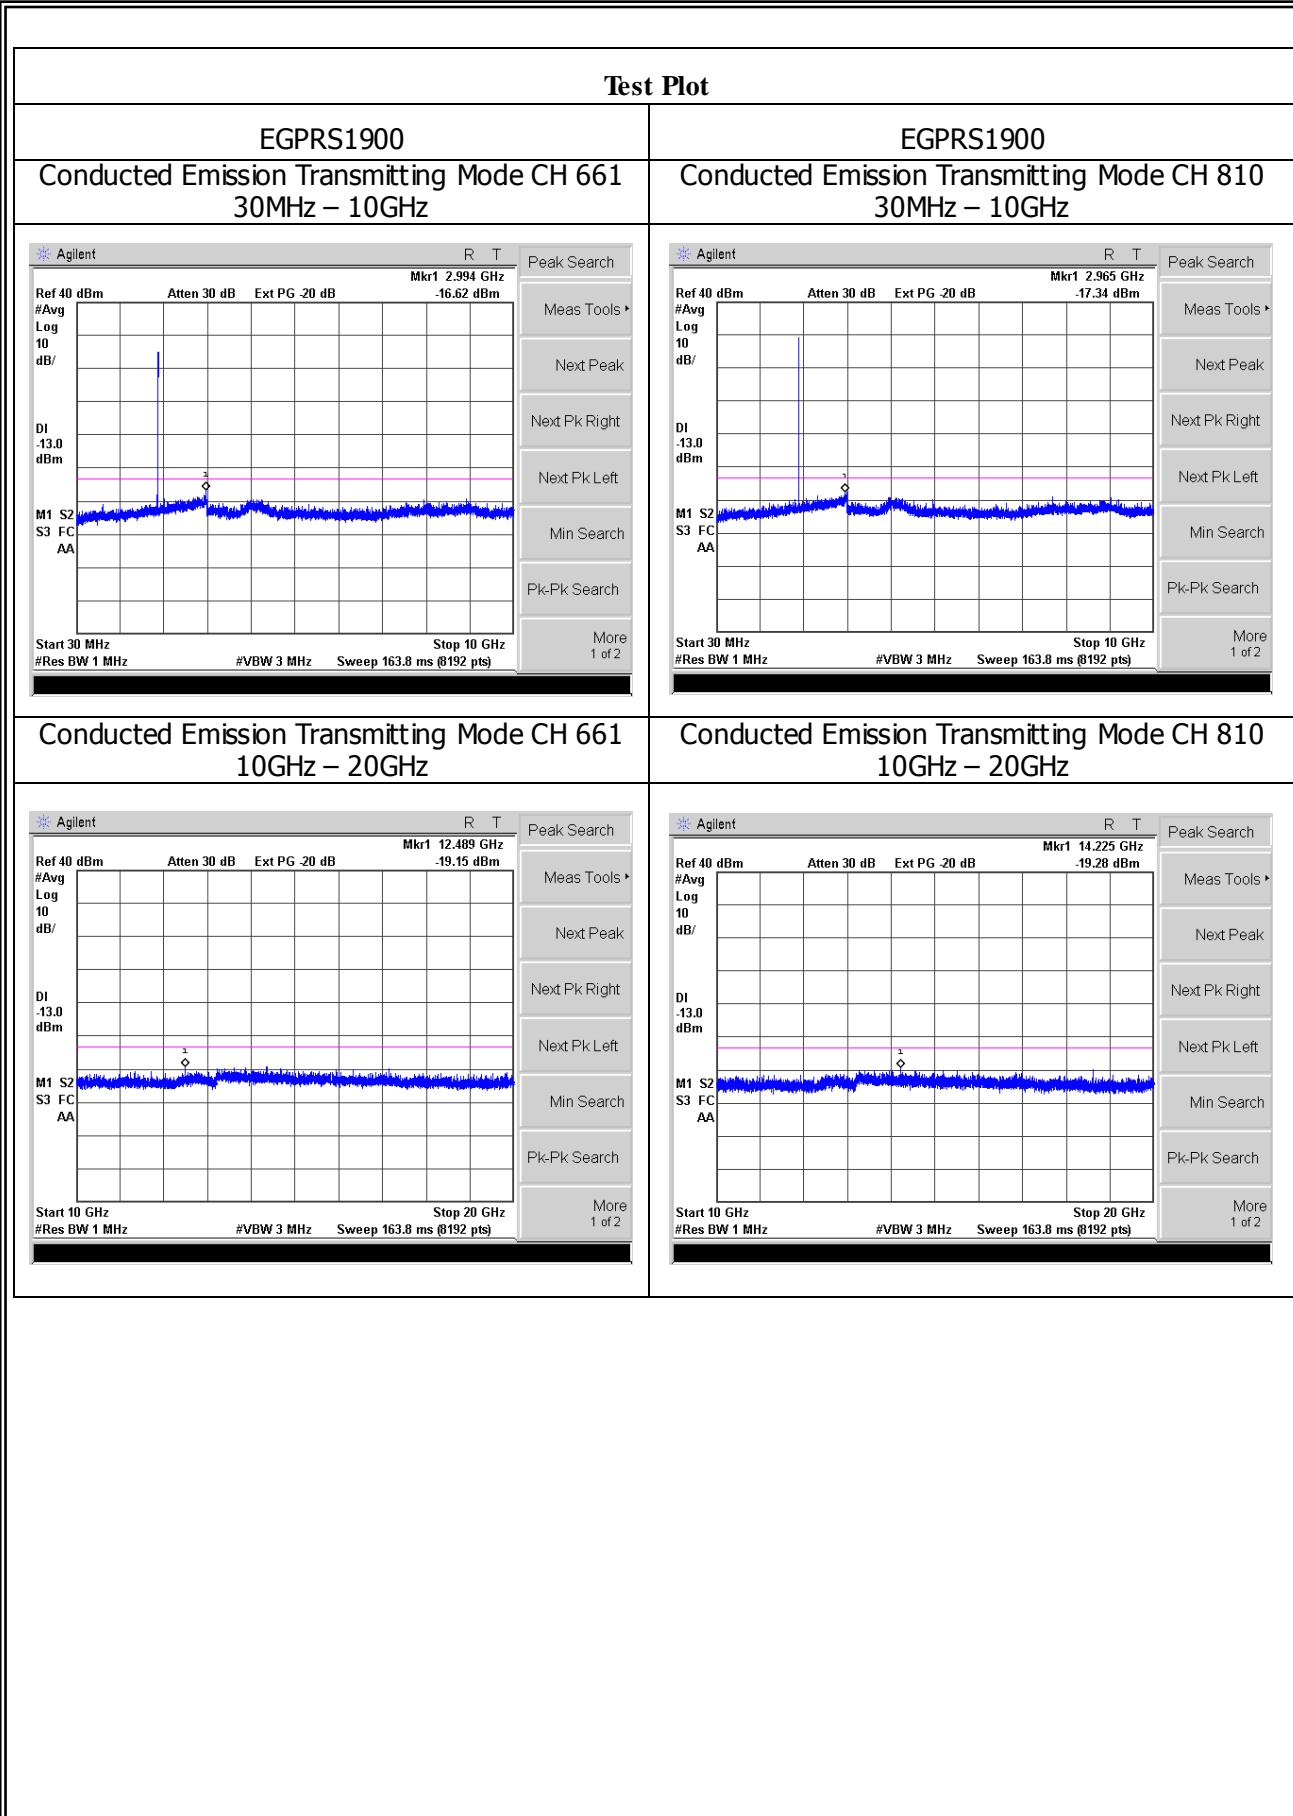

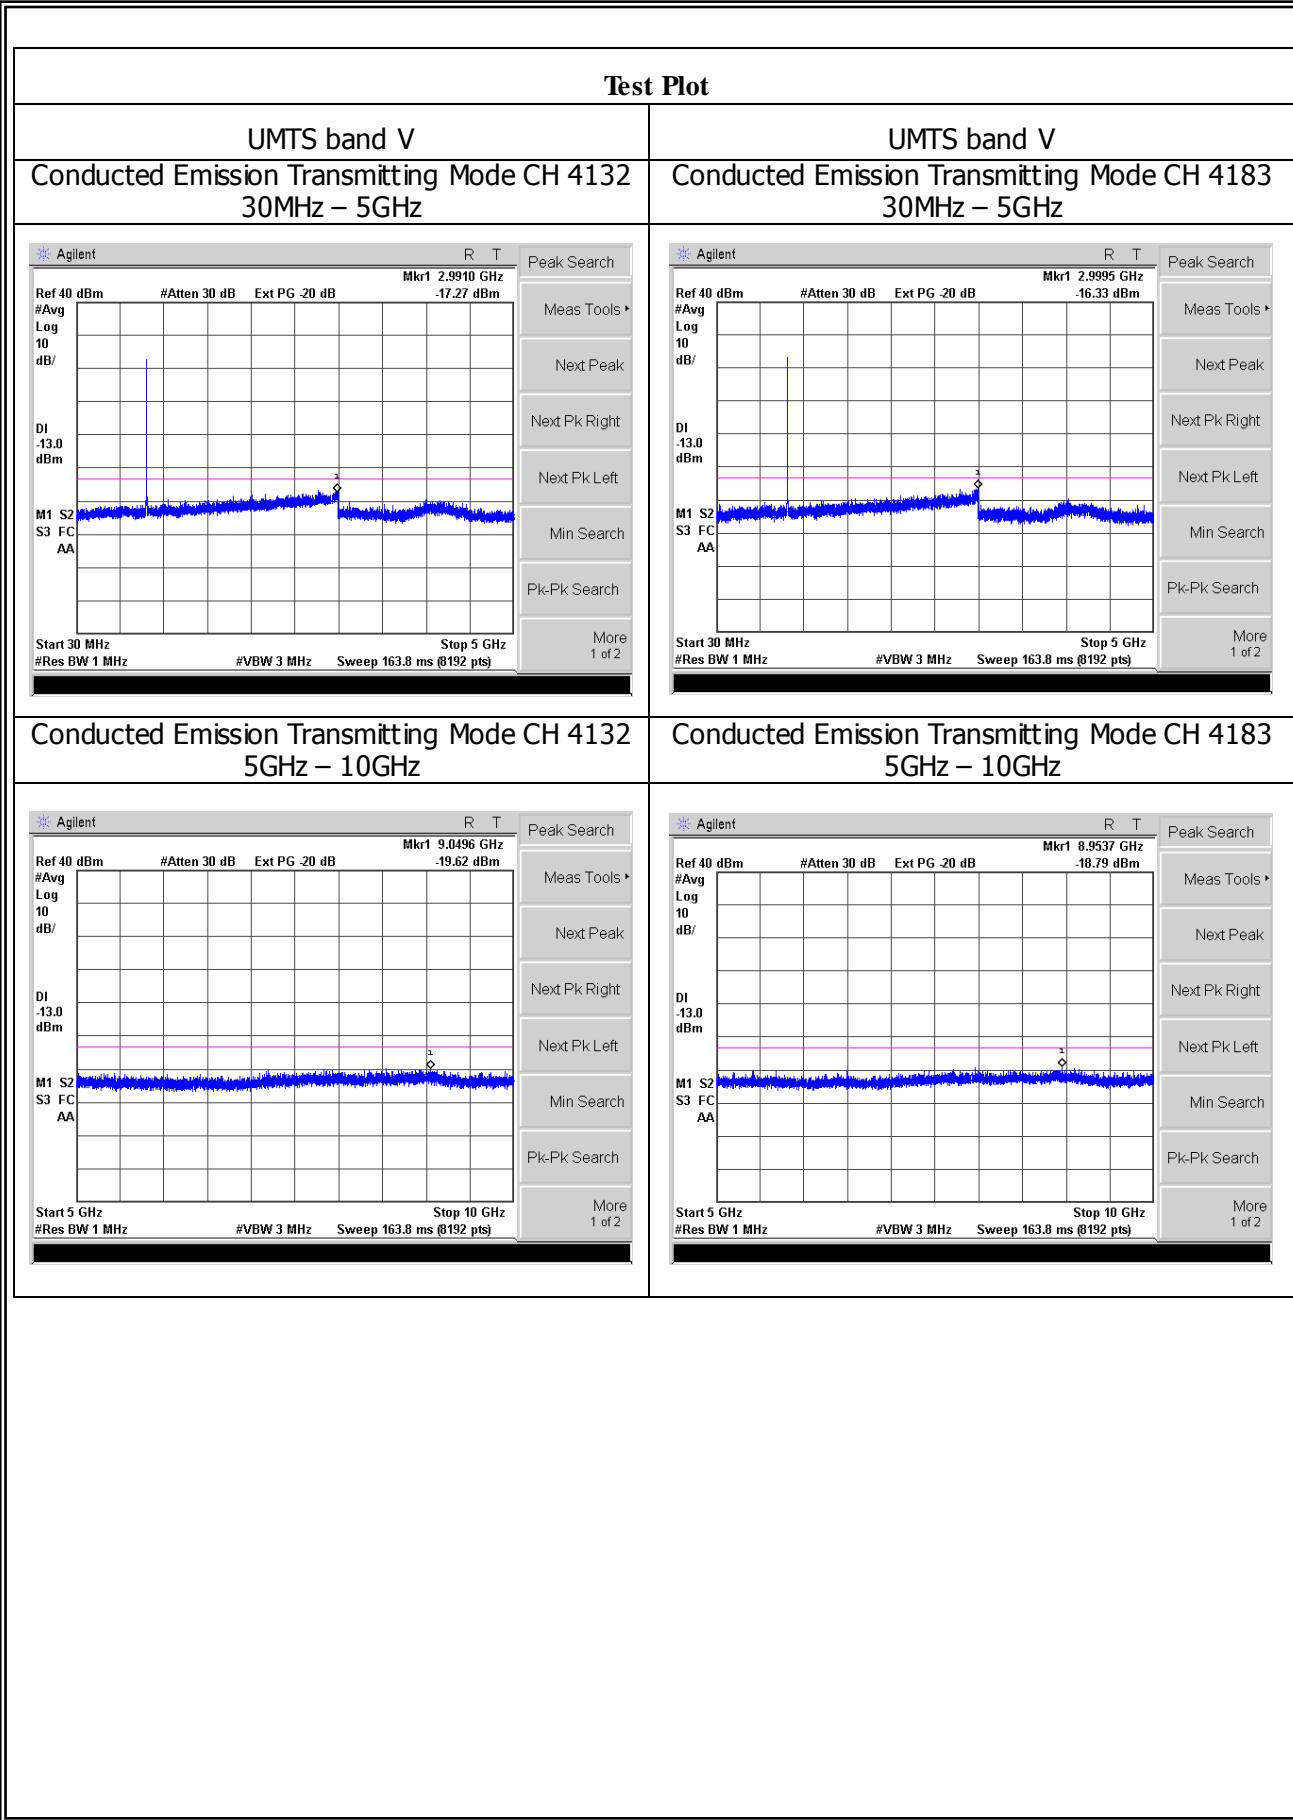

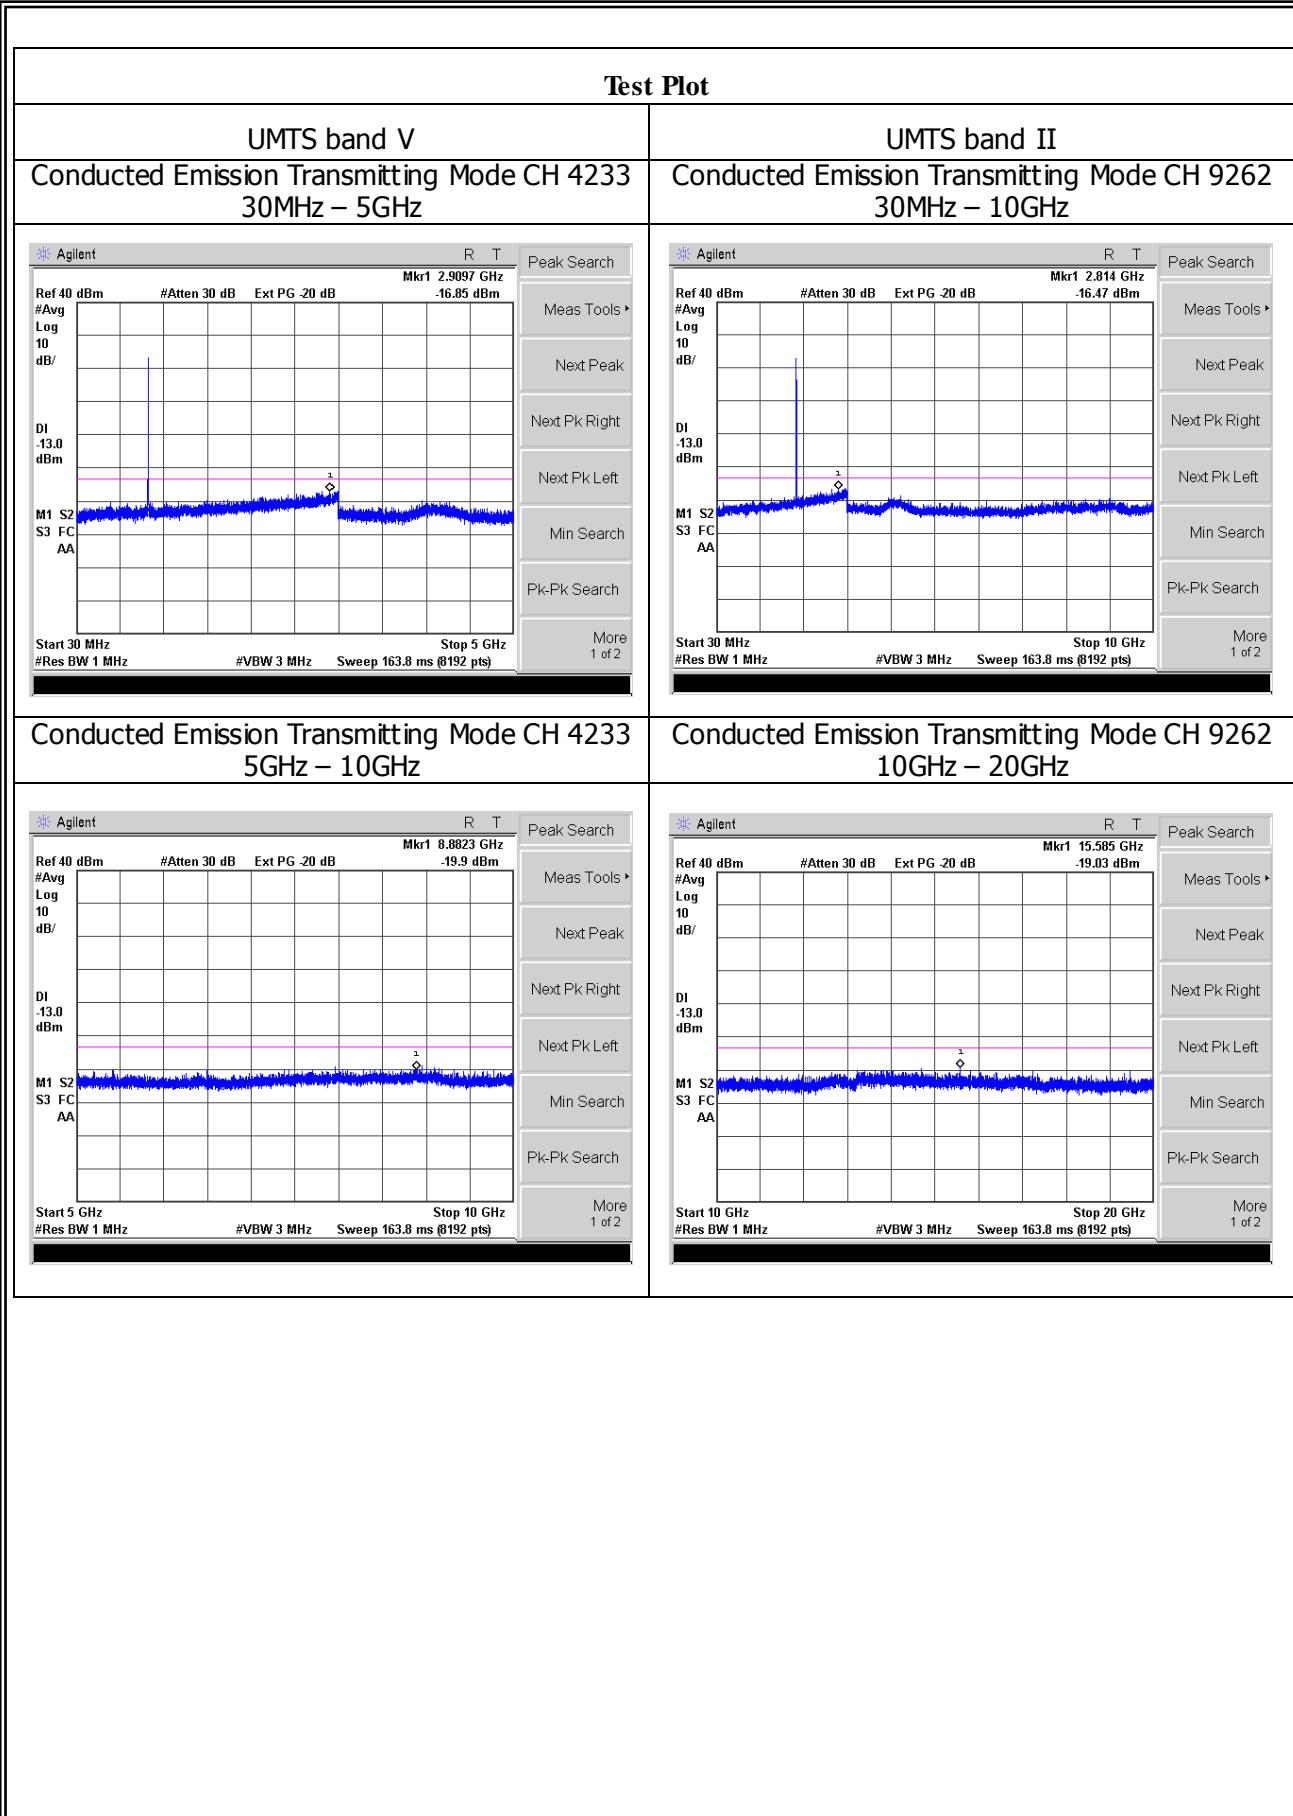

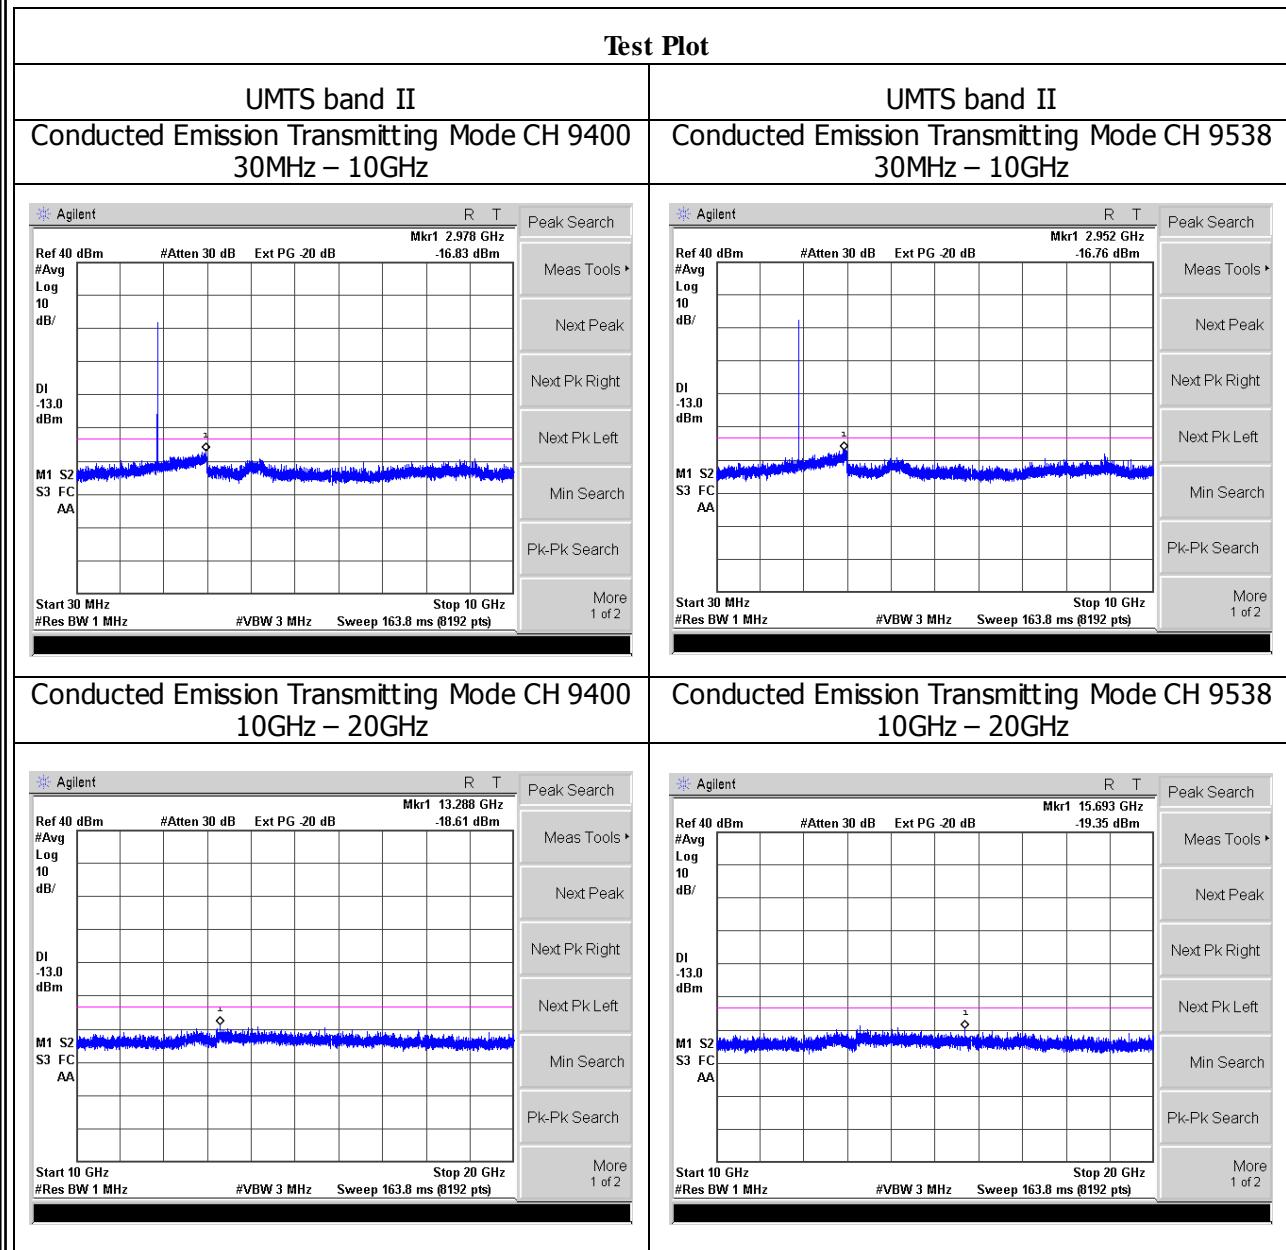

END OF REPORT