



FCC RADIO TEST REPORT FCC ID: 2ADWUPSPCM20A0

Product: Smartphone

Trade Mark: Polaroid

Model No.: PSPCM20A0

Serial Model: N/A

Report No.: SER171213601005E

Issue Date: 05 Jan. 2018

Prepared for

ONE DIAMOND ELECTRONICS INC.

1450 Frazee Road, Suite 303, San Diego, CA 92108, United States.

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen P.R. China

Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599 Website:http://www.ntek.org.cn

Version.1.2 Page 1 of 68





TABLE OF CONTENTS

1	TE	ST RESULT CERTIFICATION	3
2	SU	MMARY OF TEST RESULTS	4
3	FA	CILITIES AND ACCREDITATIONS	5
	3.1	FACILITIES	5
	3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
	3.3	MEASUREMENT UNCERTAINTY	5
4	GE	NERAL DESCRIPTION OF EUT	6
5	DE	SCRIPTION OF TEST MODES	8
6	SE	TUP OF EQUIPMENT UNDER TEST	9
	6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	9
	6.2	SUPPORT EQUIPMENTEQUIPMENTS LIST FOR ALL TEST ITEMS	10
	6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS	11
7	TE	ST REQUIREMENTS	12
	7.1	FIELD STRENGTH OF SPURIOUS RADIATION	12
	7.2	EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER	22
	7.3	CONDUCTED OUTPUT POWER	28
	7.4	FREQUENCY STABILITY	33
	7.5	PEAK-TO-AVERAGE RATIO	39
	7.6	26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	45
	7.7	CONDUCTED BAND EDGE	51
	7.8	CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL	56





TEST RESULT CERTIFICATION

Applicant's name:	ONE DIAMOND ELECTRONICS INC.		
Address:	1450 Frazee Road, Suite 303, San Diego, CA 92108, United States.		
Manufacturer's Name:	Shenzhen X&F Technology Co., Ltd.		
Address	Shenzhen, Nanshan District Science and Technology Park Wandela North Block Building 5&6 Floor		
Product description			
Product name:	Smartphone		
Model and/or type reference:	PSPCM20A0		
Serial Model	N/A		

Measurement Procedure Used:

APPLICABLE STANDARDS					
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT				
47 CFR Part 2, Part 22H, Part 24E					
ANSI/TIA-603-E-2016	Commissed				
FCC KDB 971168 D01 Power Meas License Digital Systems v03	Complied				
ANSI C63.26:2015					

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test	:	13 Dec. 2017 ~ 05 Jan. 2018	
Testing Engineer	: <u></u>	Eileen Wu.	
		(Eileen Liu)	
Technical Manager	:	Jason chen	
· ·		(Jason Chen)	
		San . Chen	
Authorized Signatory	:	Control of the Contro	
		(Sam Chen)	

Version.1.2 Page 3 of 68





2 SUMMARY OF TEST RESULTS

FCC Part22, Subpart H/ FCC Part24, Subpart E						
FCC Rule	FCC Rule Test Item					
2.1046	2.1046 Conducted Output Power					
24.232(d)	Peak-to-Average Ratio	PASS				
2.1049 22.917(b) 24.238(b)	Occupied Bandwidth	PASS				
2.1051 22.917(a) 24.238(a)	Band Edge	PASS				
22.913(a)(2)	Effective Radiated Power	PASS				
24.232(c)	Equivalent Isotropic Radiated Power	PASS				
2.1053 22.917(a) 24.238(a)	Field Strength of Spurious Radiation	PASS				
2.1055 22.355 24.235	Frequency Stability for Temperature & Voltage	PASS				
2.1051 22.917(a) Conducted Emission 24.238(a)		PASS				

Remark:

- 1. "N/A" denotes test is not applicable in this Test Report.
- 2. All test items were verified and recorded according to the standards and without any deviation during the test.
- No modifications are made to the EUT during all test items.
 This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Version.1.2 Page 4 of 68





3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with

CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L5516.

IC-Registration The Certificate Registration Number is 9270A-1.

FCC- Accredited Test Firm Registration Number: 463705.

Designation Number: CN1184

A2LA-Lab. The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for

the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang

Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5dB

Version.1.2 Page 5 of 68





4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification						
Equipment	Smartphone					
Trade Mark	Polaroid					
FCC ID	2ADWUPSPCM20A0					
Model No.	PSPCM20A0					
Serial Model	N/A					
Model Difference	N/A					
Operating Frequency	☐ GSM850: TX824.2MHz~848.8MHz /RX869.2MHz~893.8MHz; ☐ UMTS FDD Band V: TX826.4MHz~846.6MHz /RX871.4MHz~891.6MHz; ☐ PCS1900: TX1850.2MHz~1909.8MHz /RX1930.2MHz~1989.8MHz; ☐ UMTS FDD Band II: TX1852.4MHz~1907.6MHz /RX1932.4MHz~1987.6MHz;					
Modulation						
Number of Channels	 ☑ 124 Channels for GSM850; ☑ 102 Channels for UMTS FDD Band V; ☑ 299 Channels for PCS1900; ☑ 277 Channels for UMTS FDD Band II; 					
GPRS Class						
SIM CARD	The Phone has Two SIM Card socket					
Antenna Type	LDS Antenna					
Antenna Gain	2.0 dBi					
	☑DC supply: Battery DC 3.85V from battery or DC 5V from USB Port.					
Power supply	⊠Adapter supply: Model: RD0501000-USBA-18MG Input: AC 100~240V/50~60Hz, 0.25A Output: DC 5V, 1A					
HW Version	PCM2017					
SW Version	PSPCM20A0_MX					
	ligation features or applification exhibited in Hear's Manual, the ELIT is considered					

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual. The High Voltage 4.4V and Low Voltage 3.6V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

Version.1.2 Page 6 of 68





Revision History

Report No.	Version	Description	Issued Date
SER171213601005E	Rev.01	Initial issue of report	Jan 05, 2018

Version.1.2 Page 7 of 68





5 DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester(CMU 200) to ensure max power transmission and proper modulation. Three channels (The low channel, the middle channel and the high channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS 850, GSM/GPRS 1900, HSDPA band II, HSDPA band II, HSDPA band V, HSUPA band V modes have been tested during the test. the worst condition (GSM850, GSM1900 RMC 12.2k) be recorded in the test report if no other modes test data.

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

- 1. 30 MHz to 10th harmonic for GSM850/UMTS FDD Band V.
- 2. 30 MHz to 10th harmonic for GSM1900/UMTS FDD Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes					
Band For Conducted Test Cases		For Radiated Test Cases			
GSM 850 GSM Link		GSM Link			
GSM 1900 GSM Link		GSM Link			
UMTS Band II	RMC 12.2Kbps Link	RMC 12.2Kbps Link			
UMTS Band V RMC 12.2Kbps Link		RMC 12.2Kbps Link			

Test Frequency and Channels:

rest requerity and Charmers.								
Frequency	☐ GSM 850		⊠GSM 1900				⊠UMTS Band V	
Band	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH_H	251	848.8	810	1909.8	9538	1907.6	4233	846.6
CH_M	190	836.4	661	1880.0	9400	1880.0	4183	836.4
CH_L	128	824.2	512	1850.2	9262	1852.4	4132	826.4


Version.1.2 Page 8 of 68






6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

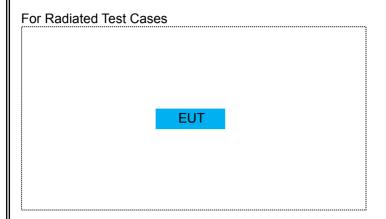


For Conducted Output Power



For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission



For Frequency Stability

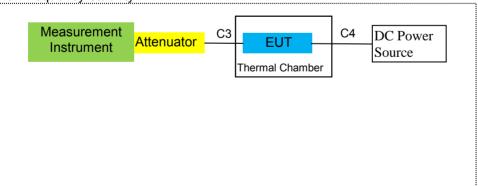

Version.1.2 Page 9 of 68





6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
E-1	Smartphone	Polaroid	PSPCM20A0	2ADWUPSPCM20A0	EUT

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	RF Cable	NO	NO	0.5m
C-2	RF Cable	NO	NO	0.5m
C-3	RF Cable	NO	NO	0.5m
C-4	DC Cable	NO	NO	1.0m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

Version.1.2 Page 10 of 68





6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2017.11.10	2018.11.09	1 year
2	Test Receiver	R&S	ESPI	101318	2017.06.06	2018.06.05	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2017.04.09	2018.04.08	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2017.06.06	2018.06.05	1 year
5	Horn Antenna	EM	EM-AH-1018 0	2011071402	2017.07.06	2018.07.05	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2017.04.09	2018.04.08	1 year
7	Amplifier	EM	EM-30180	060538	2017.08.09	2018.08.08	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2017.06.06	2018.06.05	1 year
9	Power Meter	R&S	NRVS	100696	2017.08.09	2018.08.08	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.0 5	2017.06.06	2018.06.05	1 year
11	Test Cable	N/A	R-01	N/A	2017.04.21	2020.04.20	3 year
12	Test Cable	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year
13	Test Cable	N/A	R-03	N/A	2017.04.21	2020.04.20	3 year
14	Test Receiver	R&S	ESCI	101160	2017.06.06	2018.06.05	1 year
15	LISN	R&S	ENV216	101313	2017.04.19	2018.04.18	1 year
16	LISN	EMCO	3816/2	00042990	2017.06.06	2018.06.05	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2017.06.06	2018.06.05	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2017.04.21	2020.04.20	3 year
19	Test Cable	N/A	C01	N/A	2017.04.21	2020.04.20	3 year
20	Test Cable	N/A	C02	N/A	2017.04.21	2020.04.20	3 year
21	Test Cable	N/A	C03	N/A	2017.04.19	2018.04.18	1 year
22	Attenuator	MCE	24-10-34	BN9258	2017.04.10	2018.04.09	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2017.06.06	2018.06.05	1 year
24	test receiver	R&S	ESCI	a0304218	2017.06.06	2018.06.05	1 year
25	Communication Tester	R&S	CMU200	A0304247	2017.11.10	2018.11.09	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2017.06.06	2018.06.05	1 year
27	DC Power Source	N/A	PS-6005D	2017040292 3	2017.06.06	2020.06.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

Version.1.2 Page 11 of 68





7 TEST REQUIREMENTS

7.1 FIELD STRENGTH OF SPURIOUS RADIATION

7.1.1 Applicable Standard

According to FCC KDB 971168 D01 v03 Section 5.8 and ANSI/TIA-603-E-2016 Section 2.2.12

7.1.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration


According to the ANSI/TIA-603-E-2016 test method, The Receiver or Spectrum was scanned from 9 KHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz The resolution bandwidth is set as outlined in Part 24.238, Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II / WCDMA Band V / GSM 850 / GSM 1900.

TEST CONFIGURATION

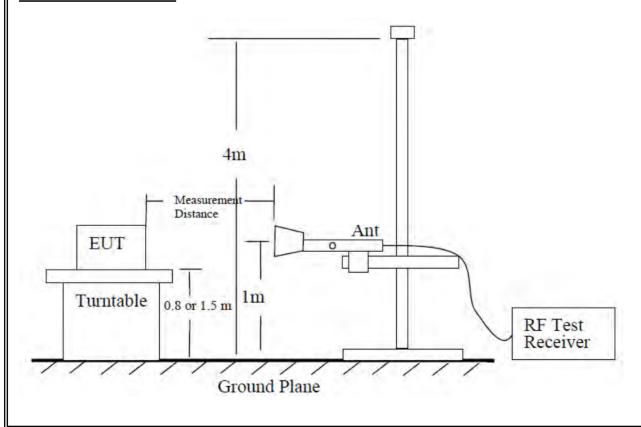

Version.1.2 Page 12 of 68



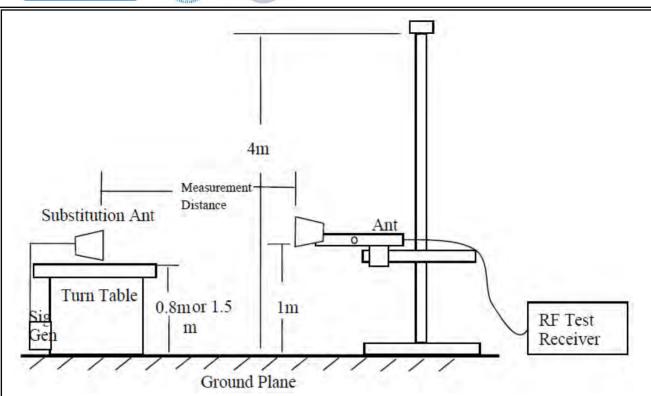

7.1.5 Test Procedure

- 1. EUT was placed on a 0.8 meter(For frequency above 1G, EUT should be placed on 1.5m) high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 meter. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (SG Level) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (SG Level) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Cable Loss) ,the Substitution Antenna Gain should be recorded after test.

The measurement results are obtained as described below:

Power(EIRP)= SG Level- Cable Loss+ Antenna Gain

Version.1.2 Page 13 of 68





- Report No.: SER171213601005E
- 6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.

7.1.6 Test Results

EUT:	Smartphone	Model No.:	PSPCM20A0
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS850/ GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V	Test By:	Eileen Liu

■ Radiated Spurious Emission

			GSN	<i>1</i> 850						
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity			
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)				
Test Results for Channel 128/824.2 MHz										
1648.4	-52.26	2.80	27.50	-27.56	-13	-14.56	Vertical			
1648.4	-50.67	2.80	27.50	-25.97	-13	-12.97	Horizontal			
2472.6	-51.14	2.91	27.80	-26.25	-13	-13.25	Vertical			
2472.6	-50.59	2.91	27.80	-25.70	-13	-12.70	Horizontal			
3296.8	-49.96	4.02	29.87	-24.11	-13	-11.11	Vertical			
3296.8	-53.36	4.02	29.87	-27.51	-13	-14.51	Horizontal			
	Test Results for Channel 190/836.6 MHz									
1673.2	-50.44	2.80	27.48	-25.76	-13	-12.76	Vertical			
1673.2	-51.11	2.80	27.48	-26.43	-13	-13.43	Horizontal			
2509.8	-52.56	2.91	27.70	-27.77	-13	-14.77	Vertical			
2509.8	-50.48	2.91	27.70	-25.69	-13	-12.69	Horizontal			
3346.4	-51.44	4.02	29.82	-25.64	-13	-12.64	Vertical			
3346.4	-52.26	4.02	29.82	-26.46	-13	-13.46	Horizontal			
		Test Res	sults for Cha	nnel 251/848	8.8 MHz					
1697.6	-48.87	2.80	27.42	-24.25	-13	-11.25	Vertical			
1697.6	-50.59	2.80	27.42	-25.97	-13	-12.97	Horizontal			
2546.4	-52.21	2.91	27.68	-27.44	-13	-14.44	Vertical			
2546.4	-50.61	2.91	27.68	-25.84	-13	-12.84	Horizontal			
3395.2	-53.26	4.02	29.8	-27.48	-13	-14.48	Vertical			
3395.2	-52.74	4.02	29.8	-26.96	-13	-13.96	Horizontal			

Remark:

- 1. We were tested all Configuration refer 3GPP TS134 121.
- 2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
- 3. Over Limit= Absolute Level (dBm)-Limit(dBm)
- 4.We test both H direction and V direction, recorded worst case direction.

Version.1.2 Page 14 of 68





	CDDCoro									
			GPR.	S 850	1					
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity			
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)				
	Test Results for Channel 128/824.2 MHz									
1648.4	-49.98	2.80	27.50	-25.28	-13	-12.28	Vertical			
1648.4	-50.56	2.80	27.50	-25.86	-13	-12.86	Horizontal			
2472.6	-52.25	2.91	27.80	-27.36	-13	-14.36	Vertical			
2472.6	-51.14	2.91	27.80	-26.25	-13	-13.25	Horizontal			
3296.8	-53.26	4.02	29.87	-27.41	-13	-14.41	Vertical			
3296.8	-51.11	4.02	29.87	-25.26	-13	-12.26	Horizontal			
	Test Results for Channel 190/836.6 MHz									
1673.2	-51.26	2.80	27.48	-26.58	-13	-13.58	Vertical			
1673.2	-52.58	2.80	27.48	-27.90	-13	-14.90	Horizontal			
2509.8	-53.33	2.91	27.70	-28.54	-13	-15.54	Vertical			
2509.8	-50.72	2.91	27.70	-25.93	-13	-12.93	Horizontal			
3346.4	-51.14	4.02	29.82	-25.34	-13	-12.34	Vertical			
3346.4	-52.26	4.02	29.82	-26.46	-13	-13.46	Horizontal			
		Test Res	sults for Cha	nnel 251/84	8.8 MHz					
1697.6	-51.16	2.80	27.42	-26.54	-13	-13.54	Vertical			
1697.6	-48.87	2.80	27.42	-24.25	-13	-11.25	Horizontal			
2546.4	-50.95	2.91	27.68	-26.18	-13	-13.18	Vertical			
2546.4	-48.62	2.91	27.68	-23.85	-13	-10.85	Horizontal			
3395.2	-49.96	4.02	29.80	-24.18	-13	-11.18	Vertical			
3395.2	-50.23	4.02	29.80	-24.45	-13	-11.45	Horizontal			

- We were tested all Configuration refer 3GPP TS134 121.
 Absolute Level = SG Level- Cable Loss+ Antenna Gain

- Over Limit= Absolute Level (dBm)-Limit(dBm)
 We test both H direction and V direction, recorded worst case direction.

Version.1.2 Page 15 of 68





	EGPRS 850									
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity			
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)				
	Test Results for Channel 128/824.2 MHz									
1648.4	-50.56	2.80	27.50	-25.86	-13	-12.86	Vertical			
1648.4	-51.11	2.80	27.50	-26.41	-13	-13.41	Horizontal			
2472.6	-51.75	2.91	27.80	-26.86	-13	-13.86	Vertical			
2472.6	-52.24	2.91	27.80	-27.35	-13	-14.35	Horizontal			
3296.8	-50.53	4.02	29.87	-24.68	-13	-11.68	Vertical			
3296.8	-50.64	4.02	29.87	-24.79	-13	-11.79	Horizontal			
	Test Results for Channel 190/836.6 MHz									
1673.2	-51.14	2.80	27.48	-26.46	-13	-13.46	Vertical			
1673.2	-52.56	2.80	27.48	-27.88	-13	-14.88	Horizontal			
2509.8	-49.98	2.91	27.70	-25.19	-13	-12.19	Vertical			
2509.8	-50.52	2.91	27.70	-25.73	-13	-12.73	Horizontal			
3346.4	-50.64	4.02	29.82	-24.84	-13	-11.84	Vertical			
3346.4	-52.27	4.02	29.82	-26.47	-13	-13.47	Horizontal			
		Test Res	sults for Cha	nnel 251/848	8.8 MHz					
1697.6	-52.26	2.80	27.42	-27.64	-13	-14.64	Vertical			
1697.6	-51.14	2.80	27.42	-26.52	-13	-13.52	Horizontal			
2546.4	-50.24	2.91	27.68	-25.47	-13	-12.47	Vertical			
2546.4	-52.26	2.91	27.68	-27.49	-13	-14.49	Horizontal			
3395.2	-51.31	4.02	29.80	-25.53	-13	-12.53	Vertical			
3395.2	-50.59	4.02	29.80	-24.81	-13	-11.81	Horizontal			

Remark:

- We were tested all Configuration refer 3GPP TS134 121.
 Absolute Level = SG Level- Cable Loss+ Antenna Gain
 Over Limit= Absolute Level (dBm)-Limit(dBm)

- 4.We test both H direction and V direction, recorded worst case direction.

Version.1.2 Page 16 of 68





			GSM	1900					
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity		
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)			
		Test Res	sults for Cha	nnel 512/18	50.2MHz				
3700.4	-56.94	4.04	33.51	-27.47	-13	-14.47	Vertical		
3700.4	-57.44	4.04	33.51	-27.97	-13	-14.97	Horizontal		
5550.6	-56.39	5.24	35.84	-25.79	-13	-12.79	Vertical		
5550.6	-57.11	5.24	35.84	-26.51	-13	-13.51	Horizontal		
	Test Results for Channel 661/1880.0MHz								
3760.0	-56.59	4.04	33.56	-27.07	-13	-14.07	Vertical		
3760.0	-56.65	4.04	33.56	-27.13	-13	-14.13	Horizontal		
5640.0	-54.41	5.24	35.91	-23.74	-13	-10.74	Vertical		
5640.0	-59.98	5.24	35.91	-29.31	-13	-16.31	Horizontal		
		Test Res	sults for Cha	nnel 810/190)9.8MHz				
3819.6	-57.74	4.04	34.0	-27.78	-13	-14.78	Vertical		
3819.6	-58.52	4.04	34.00	-28.56	-13	-15.56	Horizontal		
5729.4	-59.01	5.24	36.04	-28.21	-13	-15.21	Vertical		
5729.4	-58.22	5.24	36.04	-27.42	-13	-14.42	Horizontal		

Remark:

- We were tested all Configuration refer 3GPP TS134 121.
 Absolute Level = SG Level- Cable Loss+ Antenna Gain

- Over Limit= Absolute Level (dBm)-Limit(dBm)
 We test both H direction and V direction, recorded worst case direction.

Version.1.2 Page 17 of 68





			GPRS	S 1900					
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity		
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)			
		Test Res	sults for Cha	nnel 512/185	50.2MHz				
3700.4	-56.95	4.04	33.51	-27.48	-13	-14.48	Vertical		
3700.4	-57.47	4.04	33.51	-28.00	-13	-15.00	Horizontal		
5550.6	-56.58	5.24	35.84	-25.98	-13	-12.98	Vertical		
5550.6	-56.64	5.24	35.84	-26.04	-13	-13.04	Horizontal		
	Test Results for Channel 661/1880.0MHz								
3760.0	-55.52	4.04	33.56	-26.00	-13	-13.00	Vertical		
3760.0	-56.96	4.04	33.56	-27.44	-13	-14.44	Horizontal		
5640.0	-57.41	5.24	35.91	-26.74	-13	-13.74	Vertical		
5640.0	-58.95	5.24	35.91	-28.28	-13	-15.28	Horizontal		
		Test Res	sults for Cha	nnel 810/190	09.8MHz				
3819.6	-57.14	4.04	34.00	-27.18	-13	-14.18	Vertical		
3819.6	-56.59	4.04	34.00	-26.63	-13	-13.63	Horizontal		
5729.4	-55.85	5.24	36.04	-25.05	-13	-12.05	Vertical		
5729.4	-58.98	5.24	36.04	-28.18	-13	-15.18	Horizontal		

Remark:

- 1. We were tested all Configuration refer 3GPP TS134 121.
- Absolute Level = SG Level- Cable Loss+ Antenna Gain
 Over Limit= Absolute Level (dBm)-Limit(dBm)
- 4.We test both H direction and V direction, recorded worst case direction.

Version.1.2 Page 18 of 68





			EGPR	S 1900					
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity		
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)			
		Test Res	sults for Cha	nnel 512/18	50.2MHz				
3700.4	-57.45	4.04	33.51	-27.98	-13	-14.98	Vertical		
3700.4	-58.54	4.04	33.51	-29.07	-13	-16.07	Horizontal		
5550.6	-53.32	5.24	35.84	-22.72	-13	-9.72	Vertical		
5550.6	-54.46	5.24	35.84	-23.86	-13	-10.86	Horizontal		
	Test Results for Channel 661/1880.0MHz								
3760.0	-52.19	4.04	33.56	-22.67	-13	-9.67	Vertical		
3760.0	-59.98	4.04	33.56	-30.46	-13	-17.46	Horizontal		
5640.0	-55.65	5.24	35.91	-24.98	-13	-11.98	Vertical		
5640.0	-54.47	5.24	35.91	-23.80	-13	-10.80	Horizontal		
		Test Res	sults for Cha	nnel 810/190	9.8MHz				
3819.6	-56.58	4.04	34.00	-26.62	-13	-13.62	Vertical		
3819.6	-57.48	4.04	34.00	-27.52	-13	-14.52	Horizontal		
5729.4	-60.41	5.24	36.04	-29.61	-13	-16.61	Vertical		
5729.4	-61.15	5.24	36.04	-30.35	-13	-17.35	Horizontal		

Remark:

- 1. We were tested all Configuration refer 3GPP TS134 121.
- Absolute Level = SG Level- Cable Loss+ Antenna Gain
 Over Limit= Absolute Level (dBm)-Limit(dBm)
- 4.We test both H direction and V direction, recorded worst case direction.

Version.1.2 Page 19 of 68





			WCDMA	Band II					
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity		
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)			
		Test Res	ults for Char	nel 9262/18	52.4MHz				
3700.8	-59.55	4.04	33.51	-30.08	-13	-17.08	Vertical		
3700.8	-57.41	4.04	33.51	-27.94	-13	-14.94	Horizontal		
5551.2	-56.85	5.24	35.84	-26.25	-13	-13.25	Vertical		
5551.2	-56.98	5.24	35.84	-26.38	-13	-13.38	Horizontal		
	Test Results for Channel 9400/1880MHz								
3760.0	-57.41	4.04	33.56	-27.89	-13	-14.89	Vertical		
3760.0	-57.89	4.04	33.56	-28.37	-13	-15.37	Horizontal		
5640.0	-60.23	5.24	35.91	-29.56	-13	-16.56	Vertical		
5640.0	-59.98	5.24	35.91	-29.31	-13	-16.31	Horizontal		
		Test Res	ults for Char	nel 9538/19	07.6MHz				
3819.2	-56.41	4.04	34.00	-26.45	-13	-13.45	Vertical		
3819.2	-57.48	4.04	34.00	-27.52	-13	-14.52	Horizontal		
5728.8	-58.95	5.24	36.04	-28.15	-13	-15.15	Vertical		
5728.8	-59.31	5.24	36.04	-28.51	-13	-15.51	Horizontal		

Remark:

- 1. We were tested all Configuration refer 3GPP TS134 121.
- Absolute Level = SG Level- Cable Loss+ Antenna Gain
 Over Limit= Absolute Level (dBm)-Limit(dBm)
- 4.We test both H direction and V direction, recorded worst case direction.

Version.1.2 Page 20 of 68





	WCDMA Band V										
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity				
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)					
	Test Results for Channel 4233/846.6MHz										
1673.2	-51.13	2.80	27.50	-26.43	-13	-13.43	Vertical				
1673.2	-52.24	2.80	27.50	-27.54	-13	-14.54	Horizontal				
2509.8	-53.64	2.91	27.80	-28.75	-13	-15.75	Vertical				
2509.8	-50.59	2.91	27.80	-25.70	-13	-12.70	Horizontal				
3346.4	-51.11	4.02	29.87	-25.26	-13	-12.26	Vertical				
3346.4	-50.52	4.02	29.87	-24.67	-13	-11.67	Horizontal				
	Test Results for Channel 4182/836.4MHz										
1672.8	-52.26	2.80	27.48	-27.58	-13	-14.58	Vertical				
1672.8	-48.97	2.80	27.48	-24.29	-13	-11.29	Horizontal				
2509.2	-50.53	2.91	27.70	-25.74	-13	-12.74	Vertical				
2509.2	-49.96	2.91	27.70	-25.17	-13	-12.17	Horizontal				
3345.6	-51.13	4.02	29.82	-25.33	-13	-12.33	Vertical				
3345.6	-52.24	4.02	29.82	-26.44	-13	-13.44	Horizontal				
		Test Res	ults for Cha	nnel 4132/82	26.4MHz						
1652.8	-50.64	2.80	27.42	-26.02	-13	-13.02	Vertical				
1652.8	-52.12	2.80	27.42	-27.5	-13	-14.5	Horizontal				
2479.2	-50.32	2.91	27.68	-25.55	-13	-12.55	Vertical				
2479.2	-53.26	2.91	27.68	-28.49	-13	-15.49	Horizontal				
3305.6	-51.41	4.02	29.80	-25.63	-13	-12.63	Vertical				
3305.6	-56.95	4.02	29.80	-31.17	-13	-18.17	Horizontal				

- We were tested all Configuration refer 3GPP TS134 121.
 Absolute Level = SG Level- Cable Loss+ Antenna Gain

- Over Limit= Absolute Level (dBm)-Limit(dBm)
 We test both H direction and V direction, recorded worst case direction.

Version.1.2 Page 21 of 68





7.2 EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER

7.2.1 Applicable Standard

According to FCC KDB 971168 D01 v03 Section 5.2.1/ Section 5.2.2.2 and ANSI/TIA-603-E-2016 Section 2.2.17

7.2.2 Conformance Limit


The substitution method, in ANSI/TIA-603-E-2016, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

7.2.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration

(a) For E.R.P and E.I.R.P Measurements



7.2.5 Test Procedure

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.

In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

ERP/EIRP = SGLevel -Pcl +Ga

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as SGLevel, typically dBW or dBm);

SGLevel = Signal generator output power or PSD, in dBm or dBW;

Ga = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

Pcl = signal attenuation in the connecting cable between the transmitter and antenna, in dB.²

The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.

From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.

The EUT is then put into continuously transmitting mode at its maximum power level.

Version.1.2 Page 22 of 68





Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.

This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Substitution antenna and Receiving Antenna:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Character	Note
1	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Receiving Antenna
2	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Receiving Antenna
3	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Substitution antenna
4	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Substitution antenna

Use the following spectrum analyzer settings:

ose the following spectrum analyzer settings.							
	GSM/GPRS	UMTS band					
Span	500KHz	10MHz					
RBW	10KHz	300KHz					
VBW	30KHz	1MHz					
Detector	RMS	RMS					
Trace	Average	Average					
Average Type	Power	Power					
Sweep Count	100	100					

Version.1.2 Page 23 of 68





7.2.6 Test Results

EUT:	Smartphone	Model No.:	PSPCM20A0
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS850/ GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V	Test By:	Eileen Liu

■ Effective Radiated Power

Radiated Power (ERP) for GSM850								
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP	
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)	
824.2	Н	14.33	2.11	23.84	2.15	33.91	2.46037	
836.6	Н	14.59	2.13	23.15	2.15	33.46	2.21820	
848.8	Н	14.79	2.13	23.06	2.15	33.57	2.27510	
824.2	V	14.85	2.11	23.11	2.15	33.70	2.34423	
836.6	V	14.97	2.13	23.07	2.15	33.76	2.37684	
848.8	V	14.74	2.13	23.25	2.15	33.71	2.34963	

	Radiated Power (ERP) for GPRS850								
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP		
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)		
824.2	Н	14.12	2.11	23.84	2.15	33.70	2.34423		
836.6	Н	14.63	2.13	23.15	2.15	33.50	2.23872		
848.8	Н	14.26	2.13	23.06	2.15	33.04	2.01372		
824.2	V	14.75	2.11	23.11	2.15	33.60	2.29087		
836.6	V	14.66	2.13	23.07	2.15	33.45	2.21309		
848.8	V	14.78	2.13	23.25	2.15	33.75	2.37137		

Radiated Power (ERP) for EGPRS850									
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP		
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)		
824.2	Н	9.48	2.11	23.84	2.15	29.06	0.80538		
836.6	Н	10.02	2.13	23.15	2.15	28.89	0.77446		
848.8	Н	10.13	2.13	23.06	2.15	28.91	0.77804		
824.2	V	10.41	2.11	23.11	2.15	29.26	0.84333		
836.6	V	10.98	2.13	23.07	2.15	29.77	0.94842		
848.8	V	10.88	2.13	23.25	2.15	29.85	0.96605		

Version.1.2 Page 24 of 68





Radiated Power (ERP) for UMTS band V									
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP		
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)		
826.4	Н	3.85	2.11	23.84	2.15	23.43	0.22029		
835	Н	4.58	2.13	23.15	2.15	23.45	0.22131		
846.6	Н	4.84	2.13	23.06	2.15	23.62	0.23014		
826.4	V	4.77	2.11	23.11	2.15	23.62	0.23014		
835	V	4.91	2.13	23.07	2.15	23.70	0.23442		
846.6	V	4.88	2.13	23.25	2.15	23.85	0.24266		

Note:

SG Level= Signal generator output Pcl= cable loss Ga= Antenna Gain Peak EIRP(dBm)= SGLevel -Pcl +Ga ERP(dBm)=EIRP-2.15

Version.1.2 Page 25 of 68





■ Effective Isotropic Radiated Power

	Radiated Power (E.I.R.P) for GSM1900						
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP	
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)	
1850.2	Н	7.32	3.76	28.24	31.80	1.51356	
1880	Н	7.05	3.91	28.22	31.36	1.36773	
1909.8	Н	7.26	3.93	28.20	31.53	1.42233	
1850.2	V	7.28	3.76	27.32	30.84	1.21339	
1880	V	7.69	3.91	27.33	31.11	1.29122	
1909.8	V	7.91	3.93	27.31	31.29	1.34586	

	Radiated Power (E.I.R.P) for GPRS1900							
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP		
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)		
1850.2	Н	7.12	3.76	28.24	31.60	1.44544		
1880	Н	7.11	3.91	28.22	31.42	1.38676		
1909.8	Н	7.28	3.93	28.20	31.55	1.42889		
1850.2	V	7.63	3.76	27.32	31.19	1.31522		
1880	V	7.78	3.91	27.33	31.20	1.31826		
1909.8	V	7.86	3.93	27.31	31.24	1.33045		

	Radiated Power (E.I.R.P) for EGPRS1900							
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP		
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)		
1850.2	Н	4.59	3.76	28.24	29.07	0.80724		
1880	Н	4.44	3.91	28.22	28.75	0.74989		
1909.8	Н	4.74	3.93	28.20	29.01	0.79616		
1850.2	V	4.79	3.76	27.32	28.35	0.68391		
1880	V	4.89	3.91	27.33	28.31	0.67764		
1909.8	V	4.93	3.93	27.31	28.31	0.67764		

Version.1.2 Page 26 of 68





	Radiated Power (E.I.R.P) for UMTS band II							
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP		
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)		
1852.4	Н	-0.04	3.76	28.24	24.44	0.27797		
1880	Н	-0.63	3.91	28.22	23.68	0.23335		
1907.6	Н	-0.24	3.93	28.20	24.03	0.25293		
1852.4	V	0.52	3.76	27.32	24.08	0.25586		
1880	V	0.01	3.91	27.33	23.43	0.22029		
1907.6	V	0.09	3.93	27.31	23.47	0.22233		

Note:

SG Level= Signal generator output Pcl= cable loss

Pcl= cable loss
Ga= Antenna Gain

Peak EIRP(dBm)= SGLevel -Pcl+Ga.

Version.1.2 Page 27 of 68





7.3 CONDUCTED OUTPUT POWER

7.3.1 Applicable Standard

According to FCC Part 2.1046 and FCC Part 22.913(a)(2) and FCC Part 24.232(c) and FCC KDB 971168 D01 v03 Section 5.2

7.3.2 Conformance Limit

Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts(38.5dBm).

Mobile and portable stations are limited to 2 watts (33dBm)EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. The frequency band is set as selected frequency, The RF output of the transmitter was connected to base station simulator.

Set EUT at maximum average power by base station simulator.

Set RBW = 1-5% of the OBW, not to exceed 1 MHz.

Set VBW ≥ 3 × RBW.

Number of points in sweep \geq 2 × span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS (power averaging).

Set sweep trigger to "free run".

Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add 10 log (1/0.25) = 6 dB if the duty cycle is a constant 25%

Measure lowest, middle, and highest channels for each bandwidth and different modulation.

Measure and record the results in the test report.

Version.1.2 Page 28 of 68





7.3.6 Test Results

EUT:	Smartphone	Model No.:	PSPCM20A0
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS850/ GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V	Test By:	Eileen Liu

Output Power for GSM850

Mode	Frequency	Maximum Burst-Average Output Power
	(MHz)	
	824.2	32.47
SSM850	836.6	32.52
	848.8	32.49
PRS850	824.2	32.47
(1 Slot)	836.6	32.53
	848.8	32.52
PRS850	824.2	31.74
(2 Slot)	836.6	31.77
	848.8	31.78
PRS850	824.2	29.96
(3 Slot)	836.6	29.92
	848.8	29.93
PRS850	824.2	28.78
(4 Slot)	836.6	28.89
	848.8	28.92
GPRS850	824.2	27.11
(1 Slot)	836.6	27.13
	848.8	27.09
GPRS850	824.2	26.31
(2 Slot)	836.6	26.28
	848.8	26.19
GPRS850	824.2	24.41
(3 Slot)	836.6	24.49
	848.8	24.48
SPRS850	824.2	23.36
(4 Slot)	836.6	
GPRS850 (4 Slot)	824.2 836.6 848.8	23.36 23.34 23.21

N/A: Not Applicable

Version.1.2 Page 29 of 68





1909.8

Report No.: SER171213601005E

	"Maladala"	
utput Power for PCS1	1900	
Mode	Frequency (MHz)	Maximum Burst-Average Output Power
	1850.2	29.98
GSM1900	1880	29.71
	1909.8	29.59
GPRS1900	1850.2	29.97
(1 Slot)	1880	29.72
	1909.8	29.58
GPRS1900	1850.2	28.89
(2 Slot)	1880	28.96
	1909.8	28.81
GPRS1900	1850.2	27.45
(3 Slot)	1880	27.2
Γ	1909.8	27.06
GPRS1900	1850.2	26.67
(4 Slot)	1880	26.42
	1909.8	26.38
EGPRS1900	1850.2	27.89
(1 Slot)	1880	27.84
	1909.8	27.51
EGPRS1900	1850.2	26.65
(2 Slot)	1880	26.5
Γ	1909.8	26.04
EGPRS1900	1850.2	24.56
(3 Slot)	1880	24.41
F	1909.8	23.95
EGPRS1900	1850.2	23.41
(4 Slot)	1880	23.13
<u> </u>		

N/A: Not Applicable

Version.1.2 Page 30 of 68

22.81





	2dolaho.		
Output Power for UMTS BAND II			
Mode	Frequency(MHz)	Maximum Burst-Average Output Power	
WCDMA 1900	1852.4	22.42	
RMC	1880	22.65	
	1907.6	22.73	
14/OD144 4000	1852.4	22.45	
WCDMA 1900	1880	22.61	
AMR	1907.6	22.69	
HSDPA	1852.4	21.41	
Subtest 1	1880	21.65	
	1907.6	21.73	
HSDPA	1852.4	20.94	
Subtest 2	1880	21.22	
	1907.6	21.31	
HSDPA	1852.4	20.98	
Subtest 3	1880	21.25	
	1907.6	21.31	
HSDPA	1852.4	20.88	
Subtest 4	1880	21.21	
	1907.6	21.27	
HSUPA	1852.4	21.17	
Subtest 1	1880	21.42	
	1907.6	21.51	
HSUPA	1852.4	21.11	
Subtest 2	1880	21.41	
	1907.6	21.46	
HSUPA	1852.4	21.15	
Subtest 3	1880	21.35	
	1907.6	21.58	
HSUPA	1852.4	21.09	
Subtest 4	1880	21.33	
	1907.6	21.64	
HSUPA	1852.4	21.45	
Subtest 5	1880	21.65	
	1907.6	21.71	
	1001.0	Z 1.1 1	

Version.1.2 Page 31 of 68





Output Power for UMTS BAND V

Mode	Frequency(MHz)	Maximum Burst-Average Output Power
WCDMA 850	826.4	21.95
RMC	835	21.87
	846.6	21.97
WODMA 050	826.4	21.94
WCDMA 850 AMR	835	21.95
AIVIR	846.6	21.89
HSDPA	826.4	20.98
Subtest 1	835	20.86
	846.6	21.00
HSDPA	826.4	20.48
Subtest 2	835	20.37
	846.6	20.48
HSDPA	826.4	20.48
Subtest 3	835	20.28
	846.6	20.42
HSDPA	826.4	20.52
Subtest 4	835	20.35
	846.6	20.38
HSUPA	826.4	20.43
Subtest 1	835	20.36
	846.6	20.49
HSUPA	826.4	20.35
Subtest 2	835	20.31
	846.6	20.44
HSUPA	826.4	20.38
Subtest 3	835	20.41
	846.6	20.45
HSUPA	826.4	20.35
Subtest 4	835	20.35
	846.6	20.56
HSUPA	826.4	20.99
Subtest 5	835	20.85
	846.6	20.94

Version.1.2 Page 32 of 68





7.4 FREQUENCY STABILITY

7.4.1 Applicable Standard

According to FCC Part 2.1055 and FCC Part 22.355 and FCC Part 24.235 and FCC KDB 971168 D01 Section 9.0

7.4.2 Conformance Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test.

EUT was placed at temperature chamber and connected to an external power supply.

Temperature and voltage condition shall be tested to confirm frequency stability.

For Temperature Variation

- 1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
- The EUT was set up in the thermal chamber and connected with the system simulator.
- 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

For Voltage Variation

- 1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
- 2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 4. The variation in frequency was measured for the worst case.

7.4.6 Test Results

EUT:	Smartphone	Model No.:	PSPCM20A0
Temperature:	20 ℃	Relative Humidity:	48%
	GSM/GPRS/EGPRS850/ GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V	Test By:	Eileen Liu
Results: PASS			

Version.1.2 Page 33 of 68





Frequency Error Against Voltage for GSM 850 band			
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	
3.66	32	0.0383	
3.85	35	0.0418	
4.43	44	0.0526	

Frequency Error Against Temperature for GSM 850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	39	0.0466
-20	45	0.0538
-10	21	0.0251
0	29	0.0347
10	36	0.0430
20	37	0.0442
30	33	0.0394
40	30	0.0359
50	34	0.0406

Frequency Error Against Voltage for GPRS850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.66	31	0.0371
3.85	35	0.0418
4.43	29	0.0347

Frequency Error Against Temperature for GPRS850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	34	0.0406
-20	35	0.0418
-10	33	0.0394
0	22	0.0263
10	27	0.0323
20	25	0.0299
30	30	0.0359
40	38	0.0454
50	34	0.0406

Version.1.2 Page 34 of 68





Frequency Error Against Voltage for EGPRS850 band			
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	
3.66	26	0.0311	
3.85	25	0.0299	
4.43	30	0.0359	

Frequency Error Against Temperature for EGPRS850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	31	0.0371
-20	28	0.0335
-10	25	0.0299
0	27	0.0323
10	21	0.0251
20	26	0.0311
30	32	0.0383
40	30	0.0359
50	34	0.0406

Note:

- Normal Voltage = 3.85V; Battery End Point (BEP) = 3.66V; Maximum Voltage =4.43V
 The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Version.1.2 Page 35 of 68





Frequency Error Against Voltage for PCS 1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.66	33	0.0176
3.85	34	0.0181
4.43	30	0.0160

Frequency Error Against Temperature for PCS 1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	29	0.0154
-20	26	0.0138
-10	25	0.0133
0	21	0.0112
10	19	0.0101
20	33	0.0176
30	23	0.0122
40	26	0.0138
50	27	0.0144

Frequency Error Against Voltage for GPRS1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.66	23	0.0122
3.85	29	0.0154
4.43	22	0.0117

Frequency Error Against Temperature for GPRS1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	24	0.0128
-20	27	0.0144
-10	21	0.0112
0	26	0.0138
10	25	0.0133
20	19	0.0101
30	28	0.0149
40	23	0.0122
50	26	0.0138

Version.1.2 Page 36 of 68





Fre	Frequency Error Against Voltage for EGPRS1900 band					
Voltage (V)	Voltage (V) Frequency Error (Hz) Frequency Error (ppm)					
3.66	0.0165					
3.85 22 0.0117						
4.43	4.43 26 0.0138					

Frequency Error Against Temperature for EGPRS1900 band						
Temperature (°C)	Frequency Error (Hz) Frequency Error (ppm)					
-30	29	0.0154				
-20	25	0.0133				
-10	24	0.0128				
0	27	0.0144				
10	22	0.0117				
20	30	0.0160				
30	31	0.0165				
40	22	0.0117				
50	26	0.0138				

Note:

- Normal Voltage = 3.85V; Battery End Point (BEP) = 3.66V; Maximum Voltage =4.43V

 The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Version.1.2 Page 37 of 68





	Frequency Error Against Voltage for UMTS band II					
Voltage (V)	Voltage (V) Frequency Error (Hz) Frequency Error (ppm)					
3.66	29	0.0154				
3.85 33 0.0176						
4.43 31 0.0165						

Frequency Error Against Temperature for UMTS band II						
Temperature (°C)	Frequency Error (Hz) Frequency Error (ppm					
-30	26	0.0138				
-20	25	0.0133				
-10	28	0.0149				
0	29	0.0154				
10	21	0.0112				
20	30	0.0160				
30	27	0.0144				
40	19	0.0101				
50	11	0.0059				

Frequency Error Against Voltage for UMTS band V						
Voltage (V)	Voltage (V) Frequency Error (Hz) Frequency Error (ppm)					
3.66	25	0.0299				
3.85 22 0.0263						
4.43	29	0.0347				

Frequency Error Against Temperature for UMTS band V						
Temperature (°C)	Frequency Error (Hz) Frequency Error (ppm)					
-30	13	0.0155				
-20	17	0.0203				
-10	15	0.0179				
0	20	0.0239				
10	23	0.0275				
20	22	0.0263				
30	26	0.0311				
40	24	0.0287				
50	22	0.0263				

Note:

- Normal Voltage = 3.85V; Battery End Point (BEP) = 3.66V; Maximum Voltage =4.43V

 The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Version.1.2 Page 38 of 68





7.5 PEAK-TO-AVERAGE RATIO

7.5.1 Applicable Standard

According to FCC 22.913 and FCC 24.232(d) and FCC KDB 971168 D01 Section 5.7.1

7.5.2 Conformance Limit

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set the number of counts to a value that stabilizes the measured CCDF curve.

Set the measurement interval to 1 ms.

Record the maximum PAPR level associated with a probability of 0.1%.

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve:
- d) Set the measurement interval as follows:
- 1) for continuous transmissions, set to 1 ms,
- 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

7.5.6 Test Results

EUT:	Smartphone	Model No.:	PSPCM20A0
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	GSM/GPRS/ EGPRS 850/ GSM/GPRS/ EGPRS 1900 /UMTS band II/ UMTS band V	Test By:	Eileen Liu
Results: PASS		_	

Version.1.2 Page 39 of 68





	Cellular Band					
Modes		GSM850			GSM1900	
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	2.64	2.64	2.64	2.67	2.67	2.68


Cellular Band						
Modes		GPRS850)		GPRS1900	
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	2.62	2.62	2.62	2.67	2.68	2.69

Cellular Band							
Modes		EGPRS850			EGPRS1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)	
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8	
Peak-to-Average Ratio (dB)	5.34	5.31	5.31	5.83	5.77	5.84	

UMTS Band						
Modes		WCDMA Bar (RMC 12.2Kt			WCDMA Band RMC 12.2Kbp	
Channel	9262 (Low)	9400 (Mid)	9538 (High)	4132 (Low)	4175 (Mid)	4233 (High)
Frequency(MHz)	1852.4	1880	1907.6	826.4	836.6	846.6
Peak-to-Average Ratio (dB)	2.69	2.69	2.67	2.65	2.64	2.69


Version.1.2 Page 40 of 68



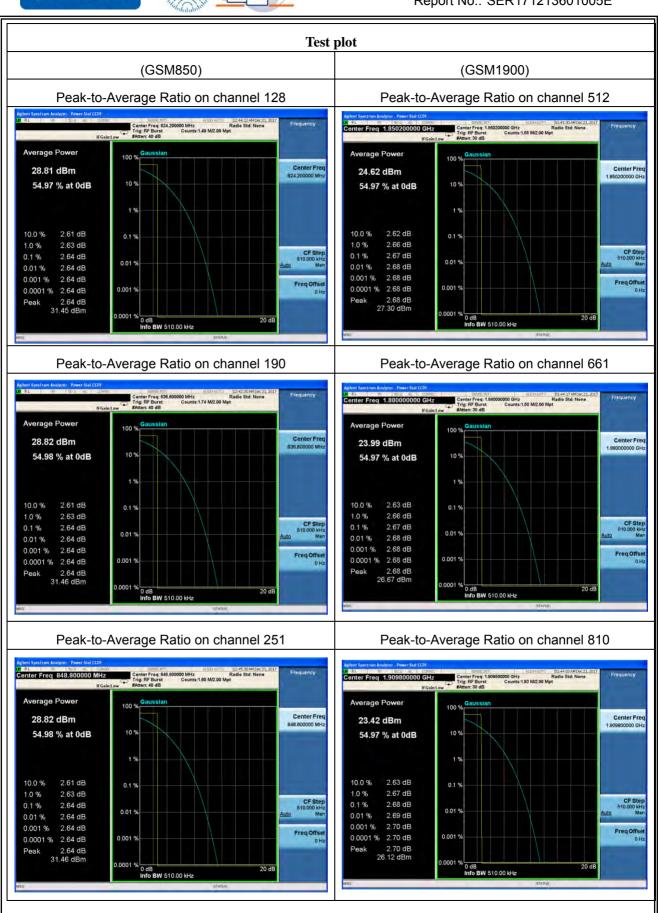


Version.1.2 Page 41 of 68



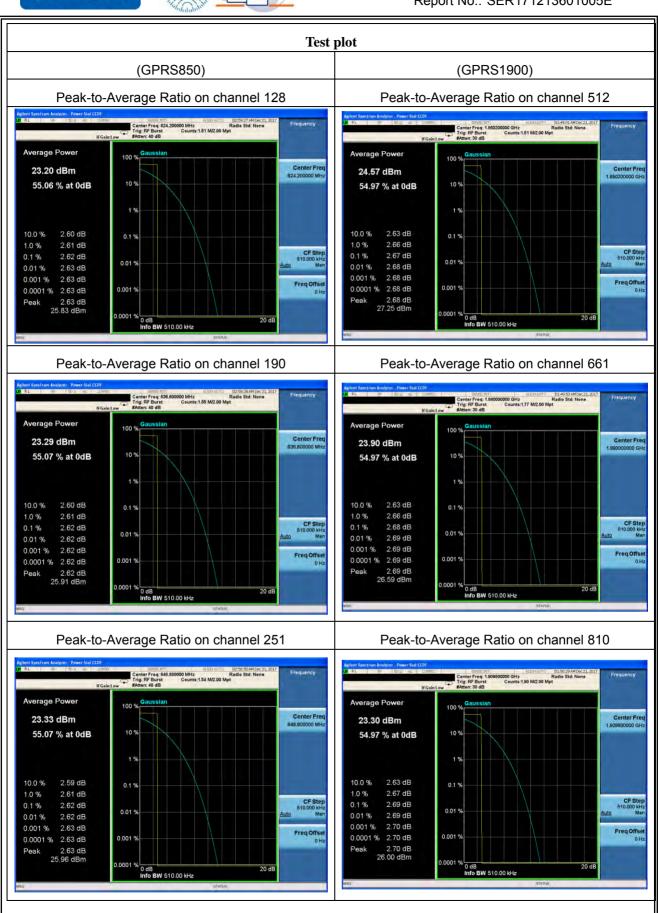

Version.1.2 Page 42 of 68



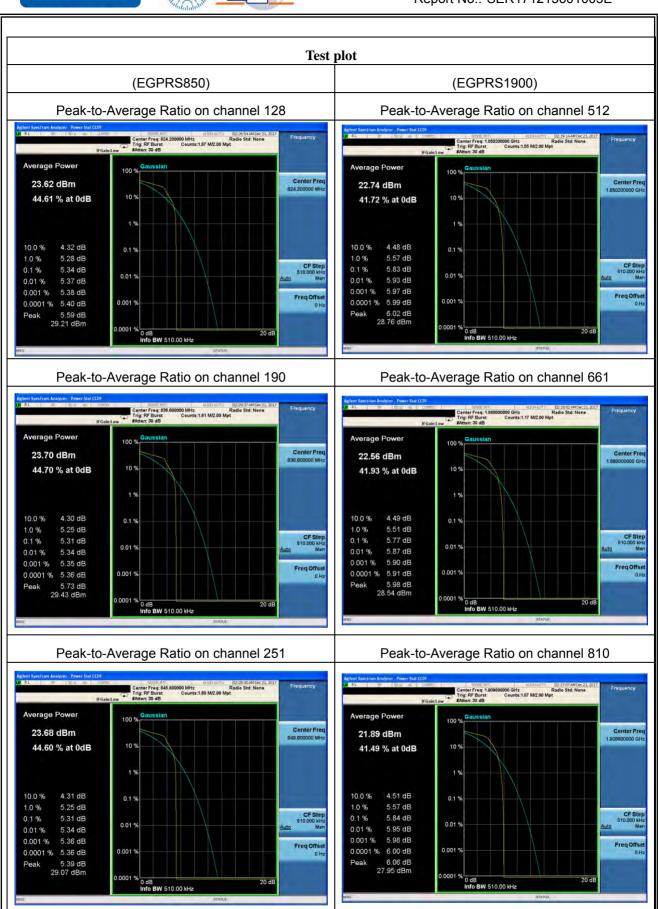


Version.1.2 Page 43 of 68



NTEK

Report No.: SER171213601005E

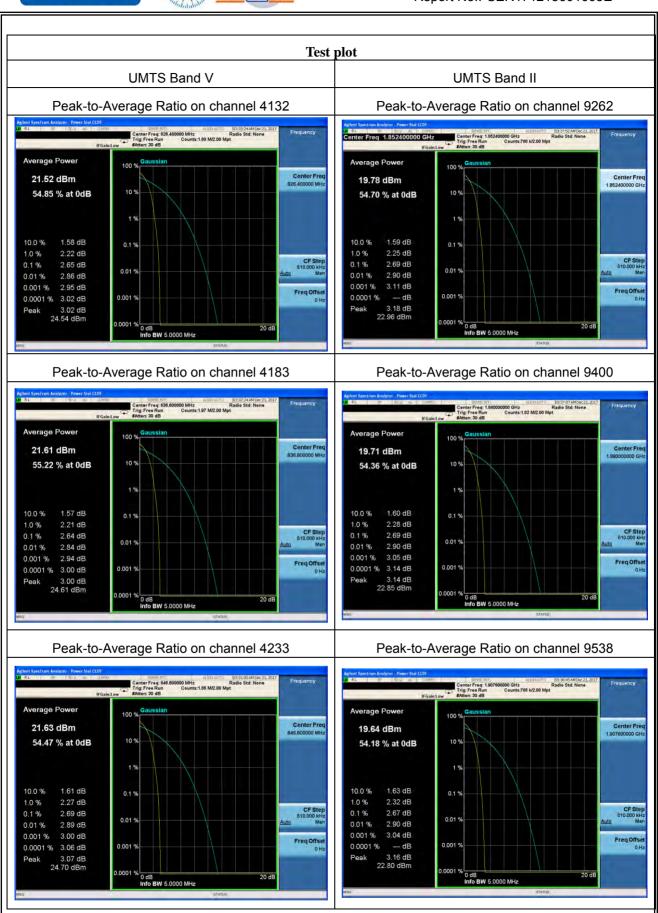

Version.1.2 Page 44 of 68





7.6 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

7.6.1 Applicable Standard

According to FCC Part 2.1049 and FCC Part 22H and FCC Part 24E and FCC KDB 971168 D01 Section 4.0

7.6.2 Conformance Limit

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 4.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

Set the detection mode to peak, and the trace mode to max hold.

Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value)

Determine the "-26 dB down amplitude" as equal to (Reference Value – X).

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

Version.1.2 Page 45 of 68





7.6.6 Test Results


EUT:	Smartphone	Model No.:	PSPCM20A0
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/ GSM/GPRS/EGPRS 1900 /UMTS band II/ UMTS band V	Test By:	Eileen Liu
Results: PASS			

Operation Mode	Channel Number	Channel Frequency (MHz)	26dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)	Verdict
GSM850	128	824.2	321.9	244.00	N/A	PASS
	190	836.4	324.8	247.23	N/A	PASS
	251	848.8	320.0	245.89	N/A	PASS
GSM1900	512	1850.2	319.0	245.47	N/A	PASS
	661	1880.0	311.9	247.63	N/A	PASS
	810	1909.8	319.5	245.53	N/A	PASS
	128	824.2	321.6	245.64	N/A	PASS
GPRS850	190	836.4	320.2	245.20	N/A	PASS
	251	848.8	318.6	242.75	N/A	PASS
GPRS1900	512	1850.2	317.9	244.16	N/A	PASS
	661	1880.0	323.5	245.07	N/A	PASS
	810	1909.8	321.2	244.12	N/A	PASS
	128	824.2	324.0	253.10	N/A	PASS
EGPRS850	190	836.4	318.7	250.98	N/A	PASS
	251	848.8	319.0	248.02	N/A	PASS
EGPRS1900	512	1850.2	316.9	249.99	N/A	PASS
	661	1880.0	316.1	246.17	N/A	PASS
	810	1909.8	318.0	245.77	N/A	PASS
LIMTC Dand	4132	826.4	4901	4209.4	N/A	PASS
UMTS Band V	4183	836.4	4902	4207.7	N/A	PASS
	4233	846.6	4900	4204.6	N/A	PASS
UMTS Band II	9262	1852.4	4892	4209.5	N/A	PASS
	9400	1880.0	4896	4205.5	N/A	PASS
	9538	1907.6	4897	4214.8	N/A	PASS

Version.1.2 Page 46 of 68






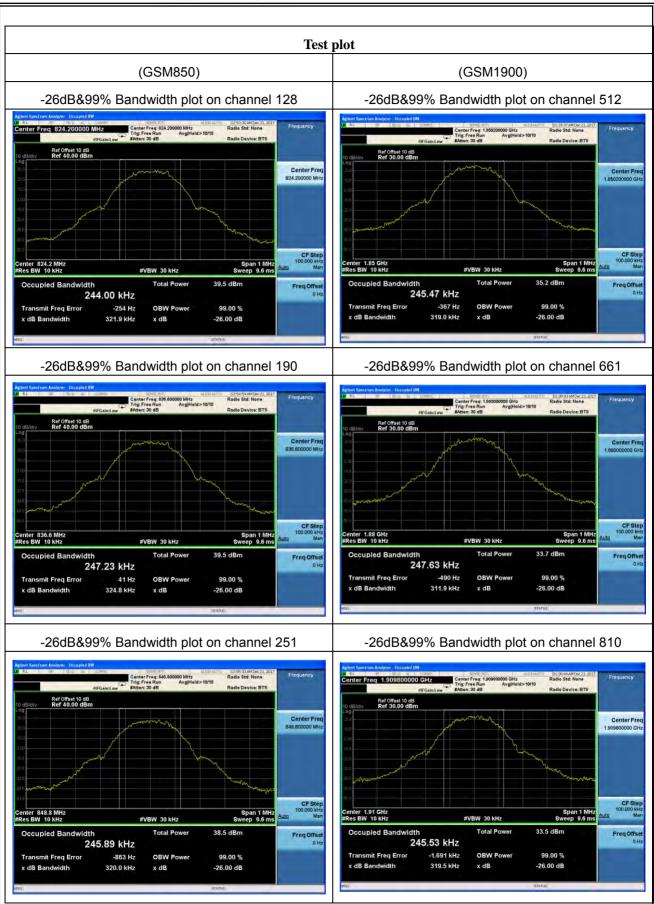

Version.1.2 Page 47 of 68






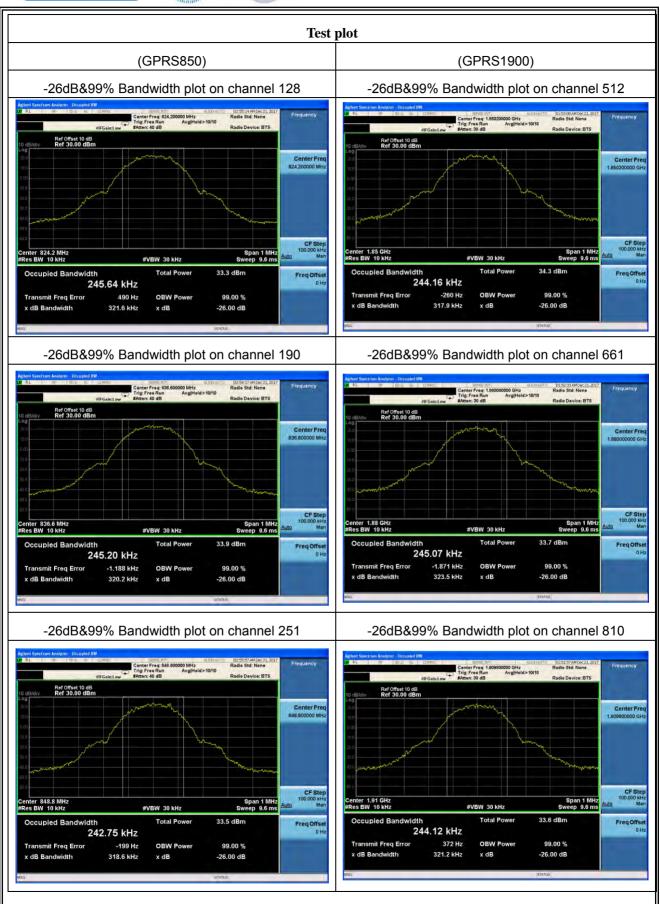

Version.1.2 Page 48 of 68





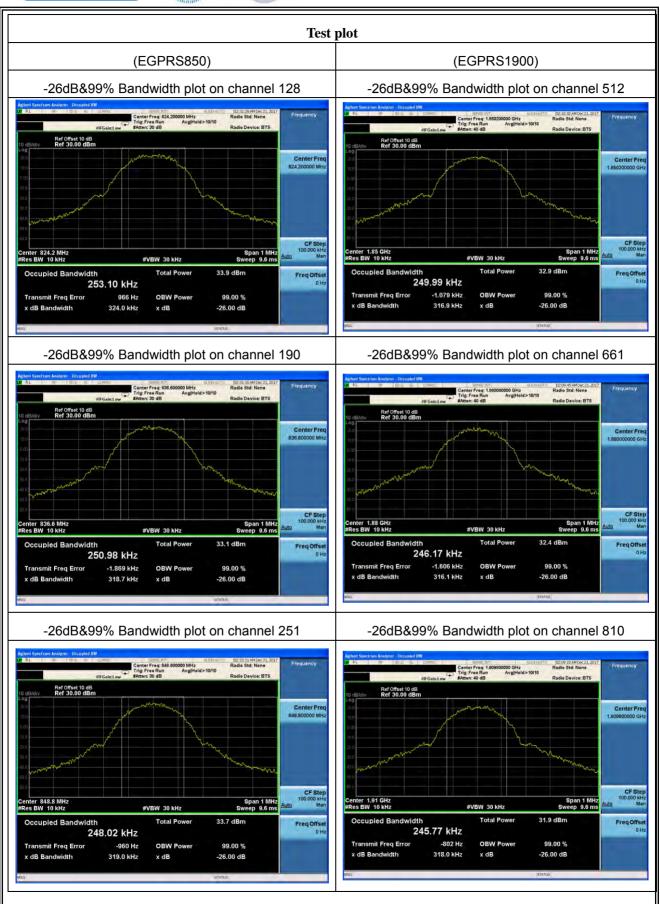

Version.1.2 Page 49 of 68







Version.1.2 Page 50 of 68





7.7 CONDUCTED BAND EDGE

7.7.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and 24.238(a) and FCC KDB 971168 D01 Section6.0

7.7.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 6.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The band edges of low and high channels for the highest RF powers were measured.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

- = P(W) [43 + 10log(P)] (dB)
- = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
- = -13dBm.


7.7.6 Test Results

EUT:	Smartphone	Model No.:	PSPCM20A0		
Temperature:	20 ℃	Relative Humidity:	48%		
l est Mode:	GSM/GPRS/EGPRS850/ GSM/GPRS/EGPRS 1900/ UMTS band II/ UMTS band V	Test By:	Eileen Liu		
Results: PASS					

Version.1.2 Page 51 of 68






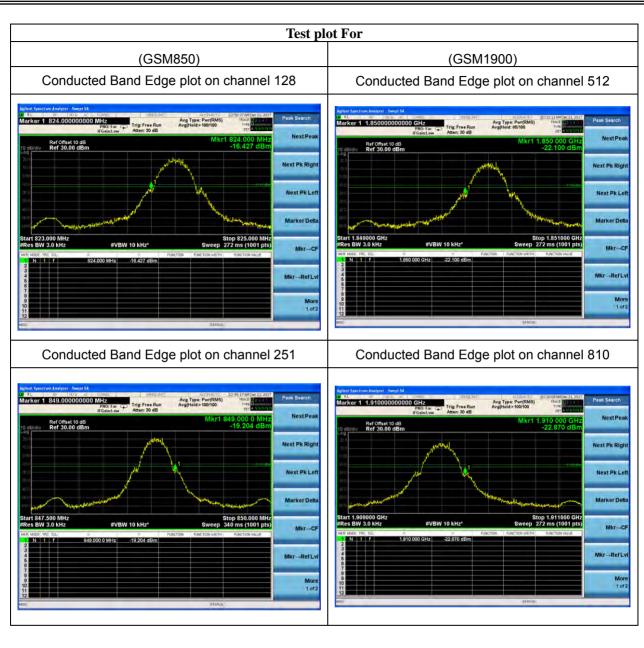

Version.1.2 Page 52 of 68






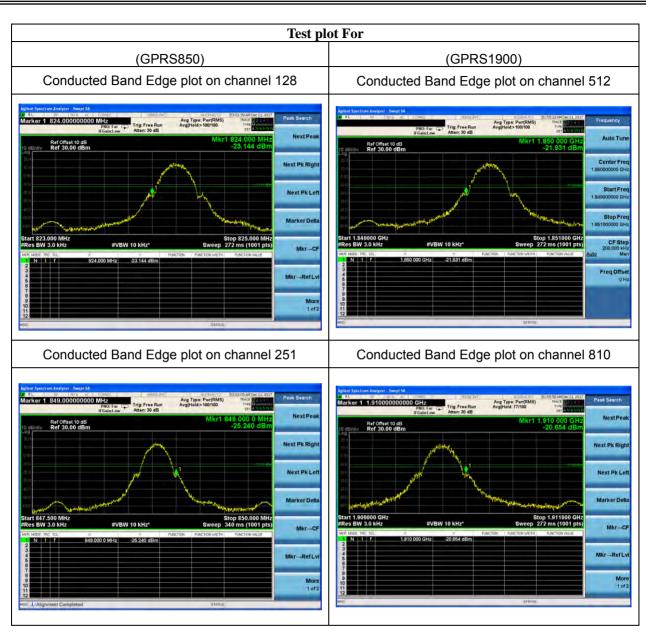

Version.1.2 Page 53 of 68






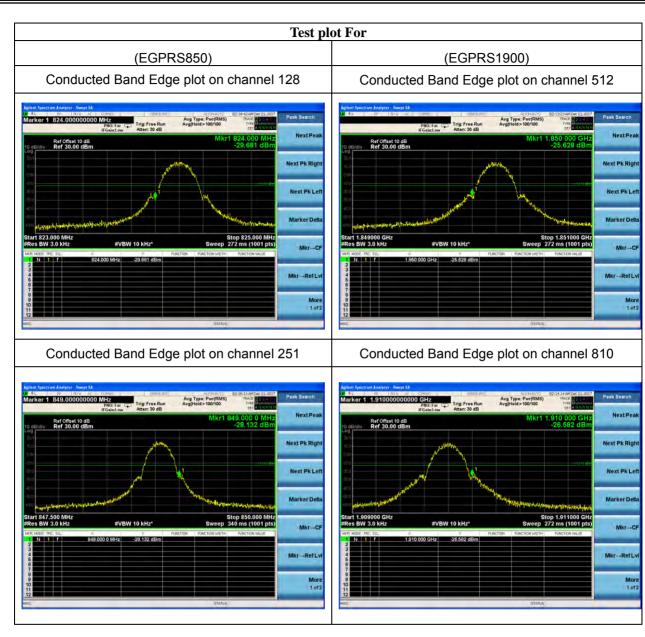

Version.1.2 Page 54 of 68





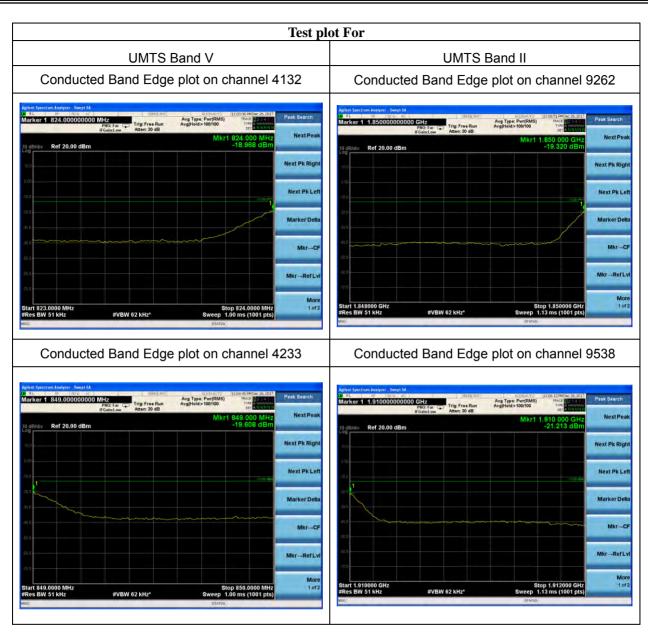

Version.1.2 Page 55 of 68





7.8 CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL

7.8.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and Part 24.238(a) and FCC KDB 971168 D01 Section6.0

7.8.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 6.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The middle channel for the highest RF power within the transmitting frequency was measured.

The conducted spurious emission for the whole frequency range was taken.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

- = P(W) [43 + 10log(P)] (dB)
- $= [30 + 10\log(P)] (dBm) [43 + 10\log(P)] (dB)$
- = -13dBm.

7.8.6 Test Results

EUT:	Smartphone	Model No.:	PSPCM20A0
Temperature:	20 ℃	Relative Humidity:	48%
	GSM/GPRS/EGPRS 850/ GSM/GPRS/EGPRS 1900/ UMTS band II/ UMTS band V	Test By:	Eileen Liu
Results: PASS			

Version.1.2 Page 56 of 68







GSM850 GSM850


Conducted Emission Transmitting Mode CH 128 30MHz - 5GHz Conducted Emission Transmitting Mode CH 190 30MHz – 5GHz






Conducted Emission Transmitting Mode CH 128 5GHz – 10GHz

Conducted Emission Transmitting Mode CH 190 5GHz – 10GHz





Version.1.2 Page 57 of 68








GSM850

GSM1900

Conducted Emission Transmitting Mode CH 251 30MHz **-** 5GHz


Conducted Emission Transmitting Mode CH 512 30MHz - 10GHz





Conducted Emission Transmitting Mode CH 251 5GHz **–** 10GHz

Conducted Emission Transmitting Mode CH 512 10GHz **–** 20GHz





Version.1.2 Page 58 of 68







GSM1900

Conducted Emission Transmitting Mode CH 661 30MHz – 10GHz GSM1900


Conducted Emission Transmitting Mode CH 810 30MHz – 10GHz





Conducted Emission Transmitting Mode CH 661 10GHz – 20GHz

Conducted Emission Transmitting Mode CH 810 10GHz – 20GHz





Version.1.2 Page 59 of 68








GPRS850 GPRS850


Conducted Emission Transmitting Mode CH 128 30MHz - 5GHz Conducted Emission Transmitting Mode CH 190 30MHz – 5GHz






Conducted Emission Transmitting Mode CH 128 5GHz – 10GHz

Conducted Emission Transmitting Mode CH 190 5GHz – 10GHz





Version.1.2 Page 60 of 68









GPRS850

Conducted Emission Transmitting Mode CH 251 30MHz – 5GHz GPRS1900


Conducted Emission Transmitting Mode CH 512 30MHz – 10GHz





Conducted Emission Transmitting Mode CH 251 5GHz – 10GHz

Conducted Emission Transmitting Mode CH 512 10GHz – 20GHz





Version.1.2 Page 61 of 68








GPRS1900

Conducted Emission Transmitting Mode CH 661 30MHz – 10GHz GPRS1900

Conducted Emission Transmitting Mode CH 810 30MHz – 10GHz





Conducted Emission Transmitting Mode CH 661 10GHz – 20GHz

Conducted Emission Transmitting Mode CH 810 10GHz – 20GHz





Version.1.2 Page 62 of 68





EGPRS850

Conducted Emission Transmitting Mode CH 128 30MHz - 5GHz EGPRS850


Conducted Emission Transmitting Mode CH 190 30MHz – 5GHz






Conducted Emission Transmitting Mode CH 128 5GHz – 10GHz

Conducted Emission Transmitting Mode CH 190 5GHz – 10GHz





Version.1.2 Page 63 of 68








EGPRS850

Conducted Emission Transmitting Mode CH 251 30MHz - 5GHz EGPRS1900


Conducted Emission Transmitting Mode CH 512 30MHz – 10GHz





Conducted Emission Transmitting Mode CH 251 5GHz – 10GHz

Conducted Emission Transmitting Mode CH 512 10GHz – 20GHz





Version.1.2 Page 64 of 68








EGPRS1900

Conducted Emission Transmitting Mode CH 661 30MHz – 10GHz EGPRS1900


Conducted Emission Transmitting Mode CH 810 30MHz – 10GHz





Conducted Emission Transmitting Mode CH 661 10GHz – 20GHz

Conducted Emission Transmitting Mode CH 810 10GHz – 20GHz





Version.1.2 Page 65 of 68








Test Plot

UMTS band V

UMTS band V


Conducted Emission Transmitting Mode CH 4132 30MHz – 5GHz Conducted Emission Transmitting Mode CH 4183 30MHz – 5GHz





Conducted Emission Transmitting Mode CH 4132 5GHz – 10GHz

Conducted Emission Transmitting Mode CH 4183 5GHz – 10GHz





Version.1.2 Page 66 of 68






Test Plot

UMTS band V

Conducted Emission Transmitting Mode CH 4233 30MHz – 5GHz UMTS band II


Conducted Emission Transmitting Mode CH 9262 30MHz – 10GHz





Conducted Emission Transmitting Mode CH 4233 5GHz – 10GHz

Conducted Emission Transmitting Mode CH 9262 10GHz – 20GHz





Version.1.2 Page 67 of 68






Test Plot


UMTS band II

Emission Transmitting Mode CH

Conducted Emission Transmitting Mode CH 9400 30MHz – 10GHz UMTS band II

Conducted Emission Transmitting Mode CH 9538 30MHz – 10GHz






Conducted Emission Transmitting Mode CH 9400 10GHz – 20GHz

Conducted Emission Transmitting Mode CH 9538 10GHz – 20GHz





END OF REPORT

Version.1.2 Page 68 of 68