

TABLE OF CONTENTS

1 Transmitter Radiated Power for NR FR1	2
2 Frequency stability for NR FR1 (Voltage:3.45V, Temperature:-10°C Worst data)	4
3 Peak-to-Average Ratio for NR FR1	6
4 Occupied bandwidth for NR FR1	30
5 Band edge for NR FR1	38
6 Out-of-band emissions for NR FR1	48

1 Transmitter Radiated Power for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Verdict
n38	30	10	515000	1@1	DFT_BPSK	23.41	-1.55	21.86	33.01	Pass
n38	30	10	515000	24@0	DFT_QPSK	22.35	-1.55	20.80	33.01	Pass
n38	30	10	515000	12@6	DFT_QPSK	23.4	-1.55	21.85	33.01	Pass
n38	30	10	515000	1@1	DFT_QPSK	23.32	-1.55	21.77	33.01	Pass
n38	30	10	515000	1@22	DFT_QPSK	23.32	-1.55	21.77	33.01	Pass
n38	30	10	515000	1@1	DFT_QAM16	22.44	-1.55	20.89	33.01	Pass
n38	30	10	515000	1@1	DFT_QAM64	17.09	-1.55	15.54	33.01	Pass
n38	30	10	515000	1@1	DFT_QAM256	18.41	-1.55	16.86	33.01	Pass
n38	30	10	515000	1@1	CP_QPSK	21.7	-1.55	20.15	33.01	Pass
n38	30	10	519000	1@1	DFT_BPSK	23.17	-1.55	21.62	33.01	Pass
n38	30	10	519000	24@0	DFT_QPSK	22.21	-1.55	20.66	33.01	Pass
n38	30	10	519000	12@6	DFT_QPSK	23.2	-1.55	21.65	33.01	Pass
n38	30	10	519000	1@1	DFT_QPSK	22.27	-1.55	20.72	33.01	Pass
n38	30	10	519000	1@22	DFT_QPSK	23.18	-1.55	21.63	33.01	Pass
n38	30	10	519000	1@1	DFT_QAM16	21.84	-1.55	20.29	33.01	Pass
n38	30	10	519000	1@1	DFT_QAM64	20.96	-1.55	19.41	33.01	Pass
n38	30	10	519000	1@1	DFT_QAM256	18.67	-1.55	17.12	33.01	Pass
n38	30	10	519000	1@1	CP_QPSK	20.19	-1.55	18.64	33.01	Pass
n38	30	10	523000	1@1	DFT_BPSK	23.49	-1.55	21.94	33.01	Pass
n38	30	10	523000	24@0	DFT_QPSK	22.35	-1.55	20.80	33.01	Pass
n38	30	10	523000	12@6	DFT_QPSK	21.21	-1.55	19.66	33.01	Pass
n38	30	10	523000	1@1	DFT_QPSK	23.39	-1.55	21.84	33.01	Pass
n38	30	10	523000	1@22	DFT_QPSK	23.53	-1.55	21.98	33.01	Pass
n38	30	10	523000	1@1	DFT_QAM16	22.63	-1.55	21.08	33.01	Pass
n38	30	10	523000	1@1	DFT_QAM64	20.97	-1.55	19.42	33.01	Pass
n38	30	10	523000	1@1	DFT_QAM256	16.79	-1.55	15.24	33.01	Pass
n38	30	10	523000	1@1	CP_QPSK	22.51	-1.55	20.96	33.01	Pass
n38	30	15	515500	1@1	DFT_BPSK	23.16	-1.55	21.61	33.01	Pass
n38	30	15	515500	36@0	DFT_QPSK	22.35	-1.55	20.80	33.01	Pass
n38	30	15	515500	18@9	DFT_QPSK	23.33	-1.55	21.78	33.01	Pass
n38	30	15	515500	1@1	DFT_QPSK	23.11	-1.55	21.56	33.01	Pass
n38	30	15	515500	1@36	DFT_QPSK	23.06	-1.55	21.51	33.01	Pass
n38	30	15	515500	1@1	DFT_QAM16	22.42	-1.55	20.87	33.01	Pass
n38	30	15	515500	1@1	DFT_QAM64	20.3	-1.55	18.75	33.01	Pass
n38	30	15	515500	1@1	DFT_QAM256	18.58	-1.55	17.03	33.01	Pass
n38	30	15	515500	1@1	CP_QPSK	22.09	-1.55	20.54	33.01	Pass
n38	30	15	519000	1@1	DFT_BPSK	23.15	-1.55	21.60	33.01	Pass

WSCT-A2LA-R&E240300009A

n38	30	15	519000	36@0	DFT_QPSK	22.25	-1.55	20.70	33.01	Pass
n38	30	15	519000	18@9	DFT_QPSK	19.38	-1.55	17.83	33.01	Pass
n38	30	15	519000	1@1	DFT_QPSK	23.03	-1.55	21.48	33.01	Pass
n38	30	15	519000	1@36	DFT_QPSK	23.03	-1.55	21.48	33.01	Pass
n38	30	15	519000	1@1	DFT_QAM16	21.92	-1.55	20.37	33.01	Pass
n38	30	15	519000	1@1	DFT_QAM64	20.68	-1.55	19.13	33.01	Pass
n38	30	15	519000	1@1	DFT_QAM256	18.41	-1.55	16.86	33.01	Pass
n38	30	15	519000	1@1	CP_QPSK	21.68	-1.55	20.13	33.01	Pass
n38	30	15	522500	1@1	DFT_BPSK	23.04	-1.55	21.49	33.01	Pass
n38	30	15	522500	36@0	DFT_QPSK	22.38	-1.55	20.83	33.01	Pass
n38	30	15	522500	18@9	DFT_QPSK	23.33	-1.55	21.78	33.01	Pass
n38	30	15	522500	1@1	DFT_QPSK	19.28	-1.55	17.73	33.01	Pass
n38	30	15	522500	1@36	DFT_QPSK	23.3	-1.55	21.75	33.01	Pass
n38	30	15	522500	1@1	DFT_QAM16	21.86	-1.55	20.31	33.01	Pass
n38	30	15	522500	1@1	DFT_QAM64	20.38	-1.55	18.83	33.01	Pass
n38	30	15	522500	1@1	DFT_QAM256	14.72	-1.55	13.17	33.01	Pass
n38	30	15	522500	1@1	CP_QPSK	21.86	-1.55	20.31	33.01	Pass
n38	30	20	516000	1@1	DFT_BPSK	23.18	-1.55	21.63	33.01	Pass
n38	30	20	516000	50@0	DFT_QPSK	22.27	-1.55	20.72	33.01	Pass
n38	30	20	516000	25@12	DFT_QPSK	23.34	-1.55	21.79	33.01	Pass
n38	30	20	516000	1@1	DFT_QPSK	19.22	-1.55	17.67	33.01	Pass
n38	30	20	516000	1@49	DFT_QPSK	23.07	-1.55	21.52	33.01	Pass
n38	30	20	516000	1@1	DFT_QAM16	22.16	-1.55	20.61	33.01	Pass
n38	30	20	516000	1@1	DFT_QAM64	20.63	-1.55	19.08	33.01	Pass
n38	30	20	516000	1@1	DFT_QAM256	14.88	-1.55	13.33	33.01	Pass
n38	30	20	516000	1@1	CP_QPSK	22.2	-1.55	20.65	33.01	Pass
n38	30	20	519000	1@1	DFT_BPSK	23.27	-1.55	21.72	33.01	Pass
n38	30	20	519000	50@0	DFT_QPSK	22.19	-1.55	20.64	33.01	Pass
n38	30	20	519000	25@12	DFT_QPSK	23.21	-1.55	21.66	33.01	Pass
n38	30	20	519000	1@1	DFT_QPSK	23.21	-1.55	21.66	33.01	Pass
n38	30	20	519000	1@49	DFT_QPSK	23.19	-1.55	21.64	33.01	Pass
n38	30	20	519000	1@1	DFT_QAM16	21.35	-1.55	19.80	33.01	Pass
n38	30	20	519000	1@1	DFT_QAM64	20.44	-1.55	18.89	33.01	Pass
n38	30	20	519000	1@1	DFT_QAM256	18.46	-1.55	16.91	33.01	Pass
n38	30	20	519000	1@1	CP_QPSK	21.26	-1.55	19.71	33.01	Pass
n38	30	20	522000	1@1	DFT_BPSK	23.11	-1.55	21.56	33.01	Pass
n38	30	20	522000	50@0	DFT_QPSK	22.32	-1.55	20.77	33.01	Pass
n38	30	20	522000	25@12	DFT_QPSK	22.43	-1.55	20.88	33.01	Pass
n38	30	20	522000	1@1	DFT_QPSK	23.22	-1.55	21.67	33.01	Pass
n38	30	20	522000	1@49	DFT_QPSK	23.43	-1.55	21.88	33.01	Pass
n38	30	20	522000	1@1	DFT_QAM16	22.2	-1.55	20.65	33.01	Pass
n38	30	20	522000	1@1	DFT_QAM64	20.71	-1.55	19.16	33.01	Pass
n38	30	20	522000	1@1	DFT_QAM256	16.53	-1.55	14.98	33.01	Pass
n38	30	20	522000	1@1	CP_QPSK	21.82	-1.55	20.27	33.01	Pass

2 Frequency stability for NR FR1(Voltage:3.45V, Temperature:-10° C Worst data)

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
n38	30	10	515000	12@6	DFT_BPSK	-0.42	-0.00016	-2.5	2.5	PASS
n38	30	10	515000	1@1	DFT_BPSK	-0.27	-0.00010	-2.5	2.5	PASS
n38	30	10	515000	1@22	DFT_BPSK	-1.19	-0.00046	-2.5	2.5	PASS
n38	30	10	515000	12@6	DFT_QPSK	-5.56	-0.00216	-2.5	2.5	PASS
n38	30	10	515000	1@1	DFT_QPSK	-5.49	-0.00213	-2.5	2.5	PASS
n38	30	10	515000	1@22	DFT_QPSK	-4.98	-0.00193	-2.5	2.5	PASS
n38	30	10	519000	12@6	DFT_BPSK	-1.05	-0.00040	-2.5	2.5	PASS
n38	30	10	519000	1@1	DFT_BPSK	0.67	0.00026	-2.5	2.5	PASS
n38	30	10	519000	1@22	DFT_BPSK	0.63	0.00024	-2.5	2.5	PASS
n38	30	10	519000	12@6	DFT_QPSK	-2.56	-0.00099	-2.5	2.5	PASS
n38	30	10	519000	1@1	DFT_QPSK	-2.81	-0.00108	-2.5	2.5	PASS
n38	30	10	519000	1@22	DFT_QPSK	-1.93	-0.00074	-2.5	2.5	PASS
n38	30	10	523000	12@6	DFT_BPSK	-3.49	-0.00133	-2.5	2.5	PASS
n38	30	10	523000	1@1	DFT_BPSK	-4.41	-0.00169	-2.5	2.5	PASS
n38	30	10	523000	1@22	DFT_BPSK	-3.34	-0.00128	-2.5	2.5	PASS
n38	30	10	523000	12@6	DFT_QPSK	-5.09	-0.00195	-2.5	2.5	PASS
n38	30	10	523000	1@1	DFT_QPSK	-6.01	-0.00230	-2.5	2.5	PASS
n38	30	10	523000	1@22	DFT_QPSK	-6.09	-0.00233	-2.5	2.5	PASS
n38	30	15	515500	18@9	DFT_BPSK	-1.47	-0.00057	-2.5	2.5	PASS
n38	30	15	515500	1@1	DFT_BPSK	-2.35	-0.00091	-2.5	2.5	PASS
n38	30	15	515500	1@36	DFT_BPSK	-1.48	-0.00057	-2.5	2.5	PASS
n38	30	15	515500	18@9	DFT_QPSK	-4.80	-0.00186	-2.5	2.5	PASS
n38	30	15	515500	1@1	DFT_QPSK	-2.79	-0.00108	-2.5	2.5	PASS
n38	30	15	515500	1@36	DFT_QPSK	-3.33	-0.00129	-2.5	2.5	PASS
n38	30	15	519000	18@9	DFT_BPSK	-0.46	-0.00018	-2.5	2.5	PASS
n38	30	15	519000	1@1	DFT_BPSK	-2.96	-0.00114	-2.5	2.5	PASS
n38	30	15	519000	1@36	DFT_BPSK	0.16	0.00006	-2.5	2.5	PASS
n38	30	15	519000	18@9	DFT_QPSK	-2.82	-0.00109	-2.5	2.5	PASS
n38	30	15	519000	1@1	DFT_QPSK	-3.12	-0.00120	-2.5	2.5	PASS
n38	30	15	519000	1@36	DFT_QPSK	-3.62	-0.00139	-2.5	2.5	PASS
n38	30	15	522500	18@9	DFT_BPSK	-2.34	-0.00090	-2.5	2.5	PASS
n38	30	15	522500	1@1	DFT_BPSK	-2.42	-0.00093	-2.5	2.5	PASS
n38	30	15	522500	1@36	DFT_BPSK	-0.89	-0.00034	-2.5	2.5	PASS
n38	30	15	522500	18@9	DFT_QPSK	-3.76	-0.00144	-2.5	2.5	PASS
n38	30	15	522500	1@1	DFT_QPSK	-2.86	-0.00109	-2.5	2.5	PASS
n38	30	15	522500	1@36	DFT_QPSK	-2.98	-0.00114	-2.5	2.5	PASS
n38	30	20	516000	25@12	DFT_BPSK	-4.73	-0.00183	-2.5	2.5	PASS
n38	30	20	516000	1@1	DFT_BPSK	-0.27	-0.00010	-2.5	2.5	PASS
n38	30	20	516000	1@49	DFT_BPSK	-2.30	-0.00089	-2.5	2.5	PASS


n38	30	20	516000	25@12	DFT_QPSK	-5.28	-0.00205	-2.5	2.5	PASS
n38	30	20	516000	1@1	DFT_QPSK	-7.27	-0.00282	-2.5	2.5	PASS
n38	30	20	516000	1@49	DFT_QPSK	-7.49	-0.00290	-2.5	2.5	PASS
n38	30	20	519000	25@12	DFT_BPSK	-2.28	-0.00088	-2.5	2.5	PASS
n38	30	20	519000	1@1	DFT_BPSK	-4.02	-0.00155	-2.5	2.5	PASS
n38	30	20	519000	1@49	DFT_BPSK	-1.48	-0.00057	-2.5	2.5	PASS
n38	30	20	519000	25@12	DFT_QPSK	1.30	0.00050	-2.5	2.5	PASS
n38	30	20	519000	1@1	DFT_QPSK	0.87	0.00034	-2.5	2.5	PASS
n38	30	20	519000	1@49	DFT_QPSK	1.31	0.00050	-2.5	2.5	PASS
n38	30	20	522000	25@12	DFT_BPSK	-0.94	-0.00036	-2.5	2.5	PASS
n38	30	20	522000	1@1	DFT_BPSK	-1.27	-0.00049	-2.5	2.5	PASS
n38	30	20	522000	1@49	DFT_BPSK	-0.02	-0.00001	-2.5	2.5	PASS
n38	30	20	522000	25@12	DFT_QPSK	-2.27	-0.00087	-2.5	2.5	PASS
n38	30	20	522000	1@1	DFT_QPSK	-2.69	-0.00103	-2.5	2.5	PASS
n38	30	20	522000	1@49	DFT_QPSK	-3.15	-0.00121	-2.5	2.5	PASS

3 Peak-to-Average Ratio for NR FR1


Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result (dB)	high Limit (dB)	Verdict
n38	30	10	515000	24@0	DFT_BPSK	4.05	13	PASS
n38	30	10	515000	24@0	DFT_QPSK	5.32	13	PASS
n38	30	10	515000	24@0	DFT_QAM16	6.00	13	PASS
n38	30	10	515000	24@0	DFT_QAM64	6.47	13	PASS
n38	30	10	515000	24@0	DFT_QAM256	6.96	13	PASS
n38	30	10	519000	24@0	DFT_BPSK	4.31	13	PASS
n38	30	10	519000	24@0	DFT_QPSK	5.25	13	PASS
n38	30	10	519000	24@0	DFT_QAM16	6.07	13	PASS
n38	30	10	519000	24@0	DFT_QAM64	6.36	13	PASS
n38	30	10	519000	24@0	DFT_QAM256	6.95	13	PASS
n38	30	10	523000	24@0	DFT_BPSK	4.83	13	PASS
n38	30	10	523000	24@0	DFT_QPSK	5.61	13	PASS
n38	30	10	523000	24@0	DFT_QAM16	6.23	13	PASS
n38	30	10	523000	24@0	DFT_QAM64	6.72	13	PASS
n38	30	10	523000	24@0	DFT_QAM256	7.06	13	PASS
n38	30	15	515500	36@0	DFT_BPSK	4.39	13	PASS
n38	30	15	515500	36@0	DFT_QPSK	5.25	13	PASS
n38	30	15	515500	36@0	DFT_QAM16	5.95	13	PASS
n38	30	15	515500	36@0	DFT_QAM64	6.35	13	PASS
n38	30	15	515500	36@0	DFT_QAM256	7.08	13	PASS
n38	30	15	519000	36@0	DFT_BPSK	4.32	13	PASS
n38	30	15	519000	36@0	DFT_QPSK	5.56	13	PASS
n38	30	15	519000	36@0	DFT_QAM16	6.11	13	PASS
n38	30	15	519000	36@0	DFT_QAM64	6.45	13	PASS
n38	30	15	519000	36@0	DFT_QAM256	7.09	13	PASS
n38	30	15	522500	36@0	DFT_BPSK	4.43	13	PASS
n38	30	15	522500	36@0	DFT_QPSK	5.64	13	PASS
n38	30	15	522500	36@0	DFT_QAM16	6.28	13	PASS
n38	30	15	522500	36@0	DFT_QAM64	6.83	13	PASS
n38	30	15	522500	36@0	DFT_QAM256	6.99	13	PASS
n38	30	20	516000	50@0	DFT_BPSK	4.53	13	PASS
n38	30	20	516000	50@0	DFT_QPSK	5.69	13	PASS
n38	30	20	516000	50@0	DFT_QAM16	6.38	13	PASS
n38	30	20	516000	50@0	DFT_QAM64	6.38	13	PASS
n38	30	20	516000	50@0	DFT_QAM256	7.04	13	PASS
n38	30	20	519000	50@0	DFT_BPSK	4.56	13	PASS
n38	30	20	519000	50@0	DFT_QPSK	5.81	13	PASS
n38	30	20	519000	50@0	DFT_QAM16	6.38	13	PASS
n38	30	20	519000	50@0	DFT_QAM64	6.47	13	PASS
n38	30	20	519000	50@0	DFT_QAM256	6.94	13	PASS

n38	30	20	522000	50@0	DFT_BPSK	5.00	13	PASS
n38	30	20	522000	50@0	DFT_QPSK	5.75	13	PASS
n38	30	20	522000	50@0	DFT_QAM16	6.24	13	PASS
n38	30	20	522000	50@0	DFT_QAM64	6.61	13	PASS
n38	30	20	522000	50@0	DFT_QAM256	7.06	13	PASS


n38 SCS=30kHz DFT_BPSK BW=10MHz Channel=515000 RB=24@0

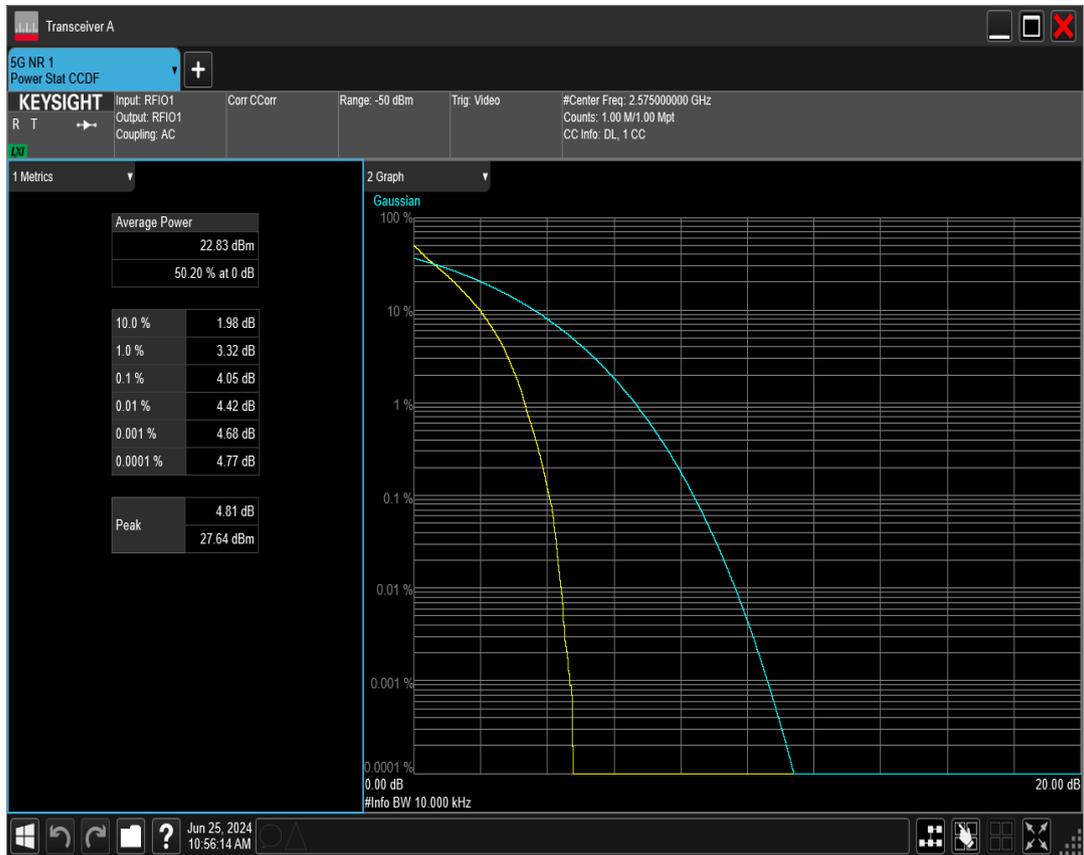


n38 SCS=30kHz DFT_BPSK BW=10MHz Channel=519000 RB=24@0

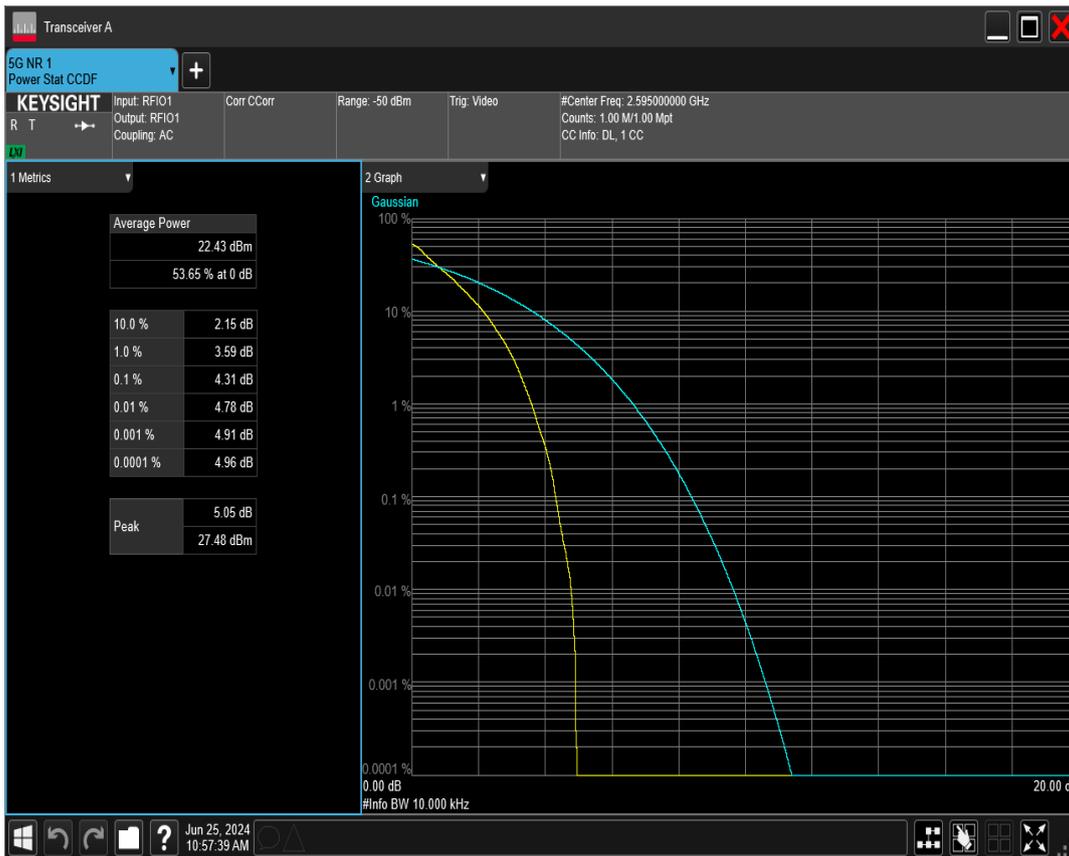


n38 SCS=30kHz DFT_BPSK BW=10MHz Channel=523000 RB=24@0

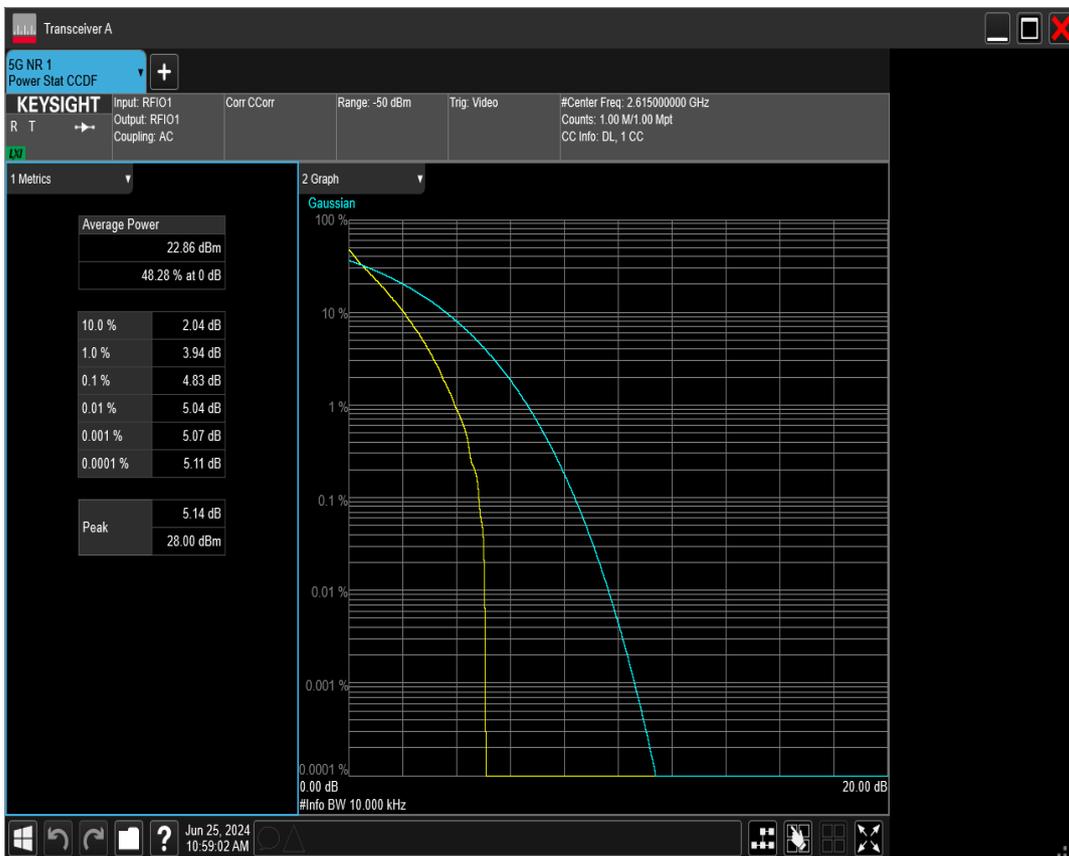


n38 SCS=30kHz DFT_BPSK BW=15MHz Channel=515500 RB=36@0

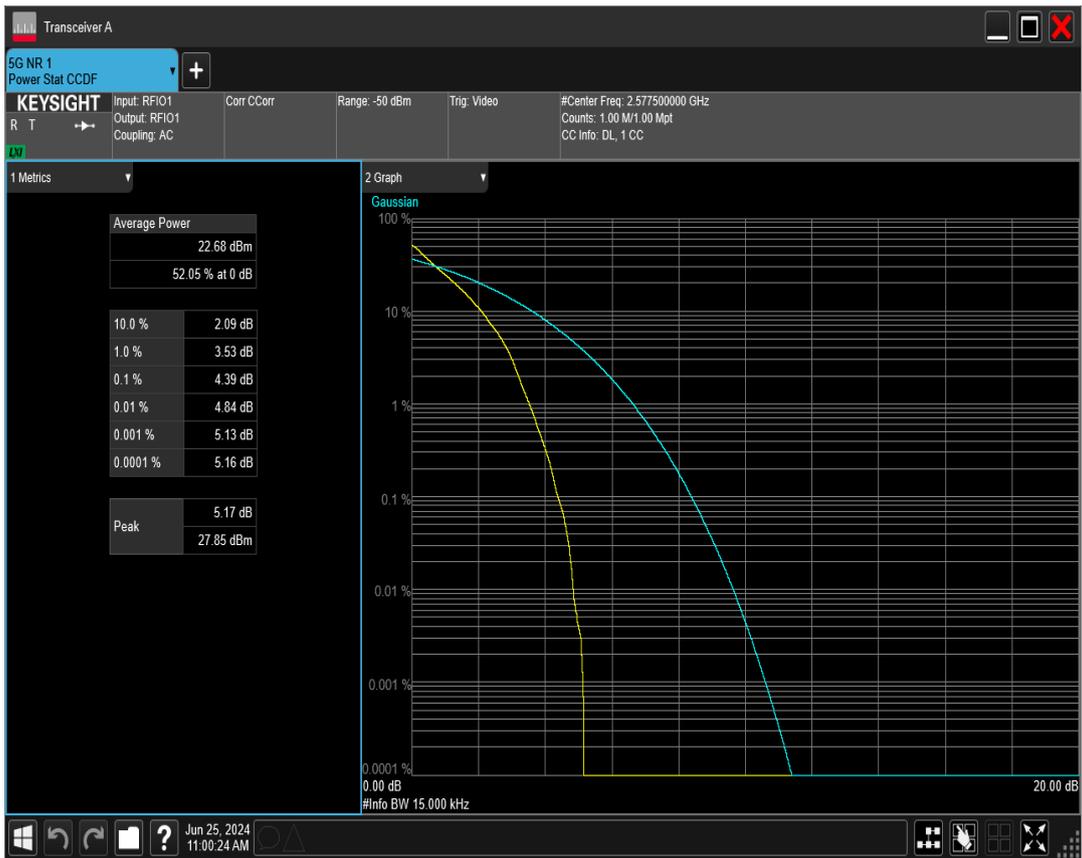


n38 SCS=30kHz DFT_BPSK BW=15MHz Channel=519000 RB=36@0

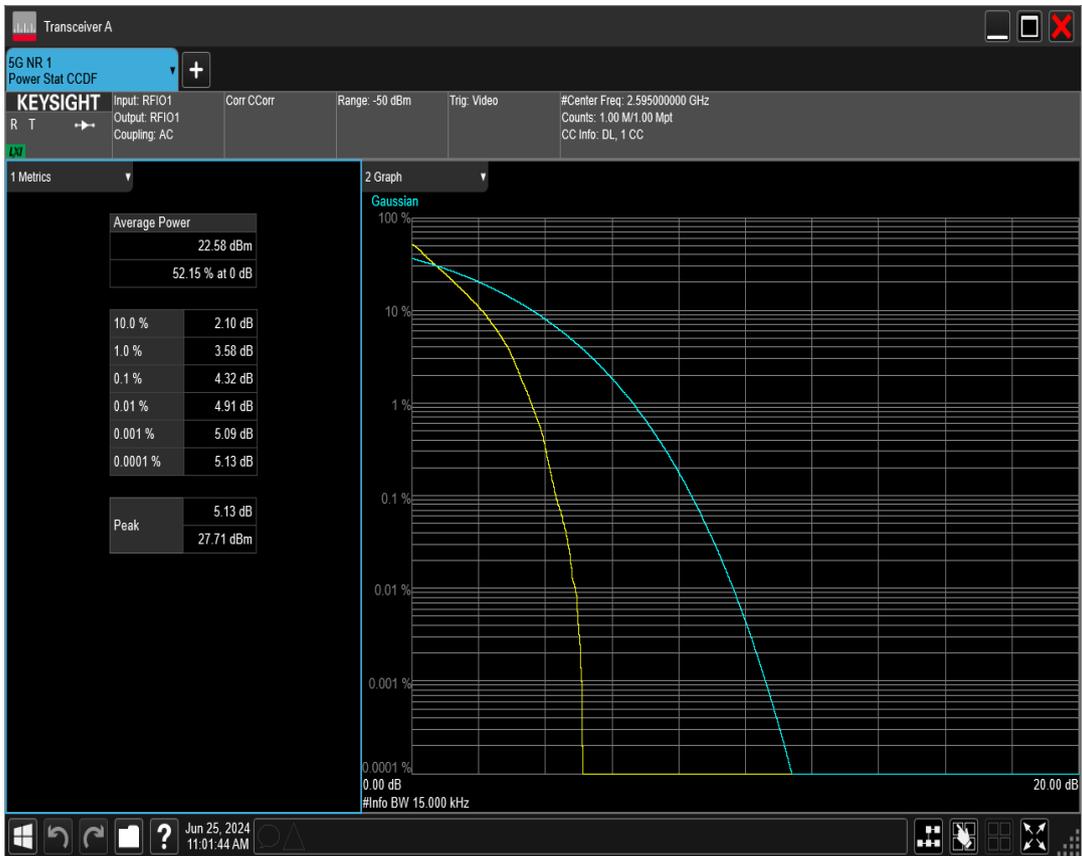


n38 SCS=30kHz DFT_BPSK BW=15MHz Channel=522500 RB=36@0

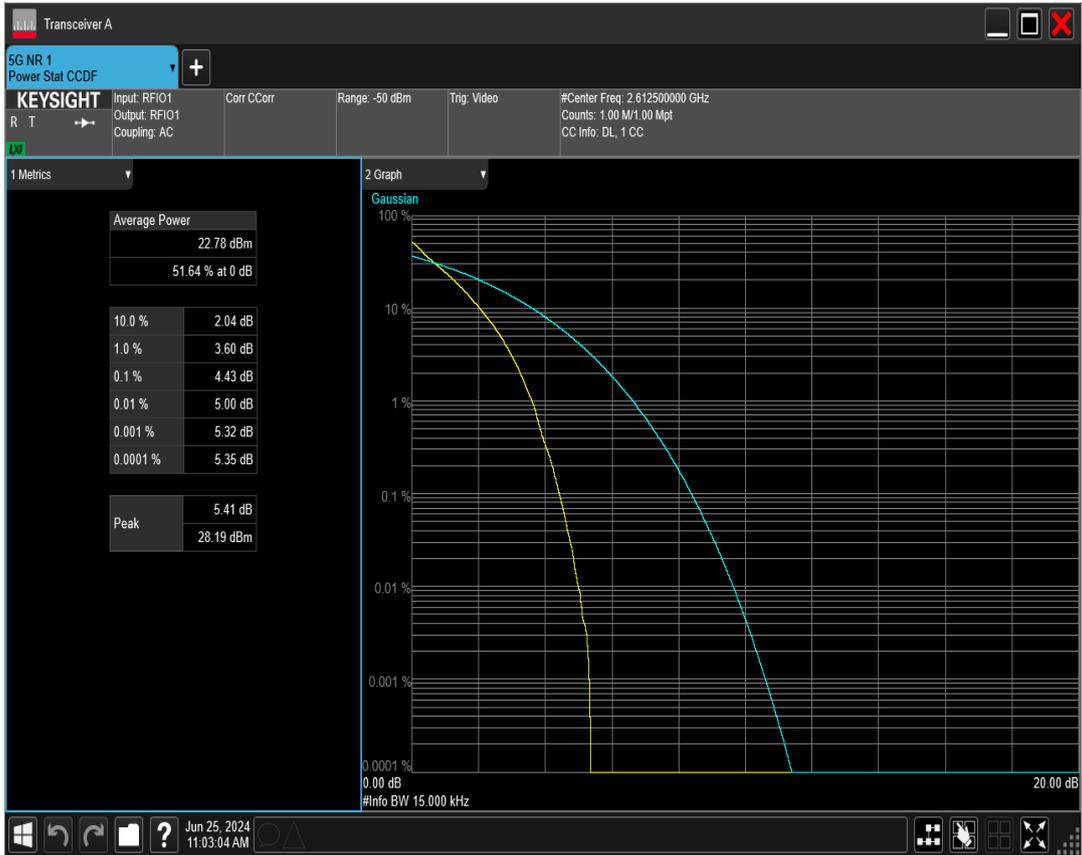


n38 SCS=30kHz DFT_BPSK BW=20MHz Channel=516000 RB=50@0

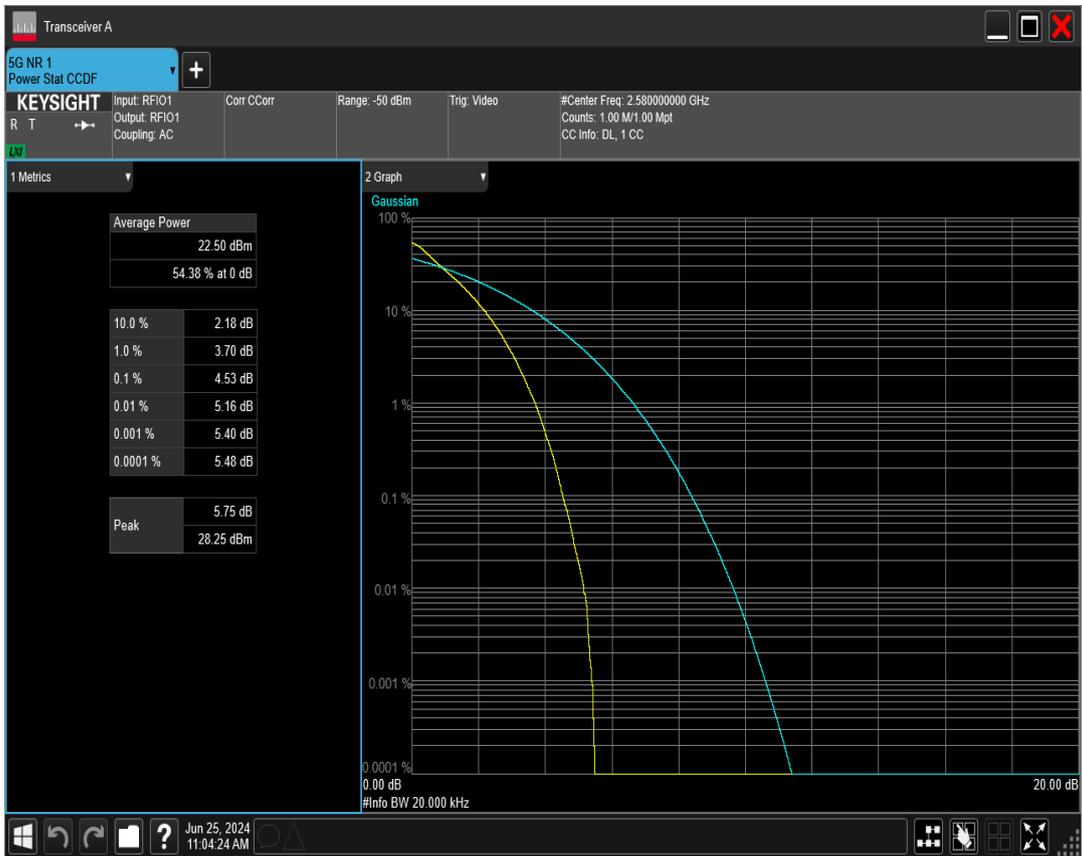


n38 SCS=30kHz DFT_BPSK BW=20MHz Channel=519000 RB=50@0

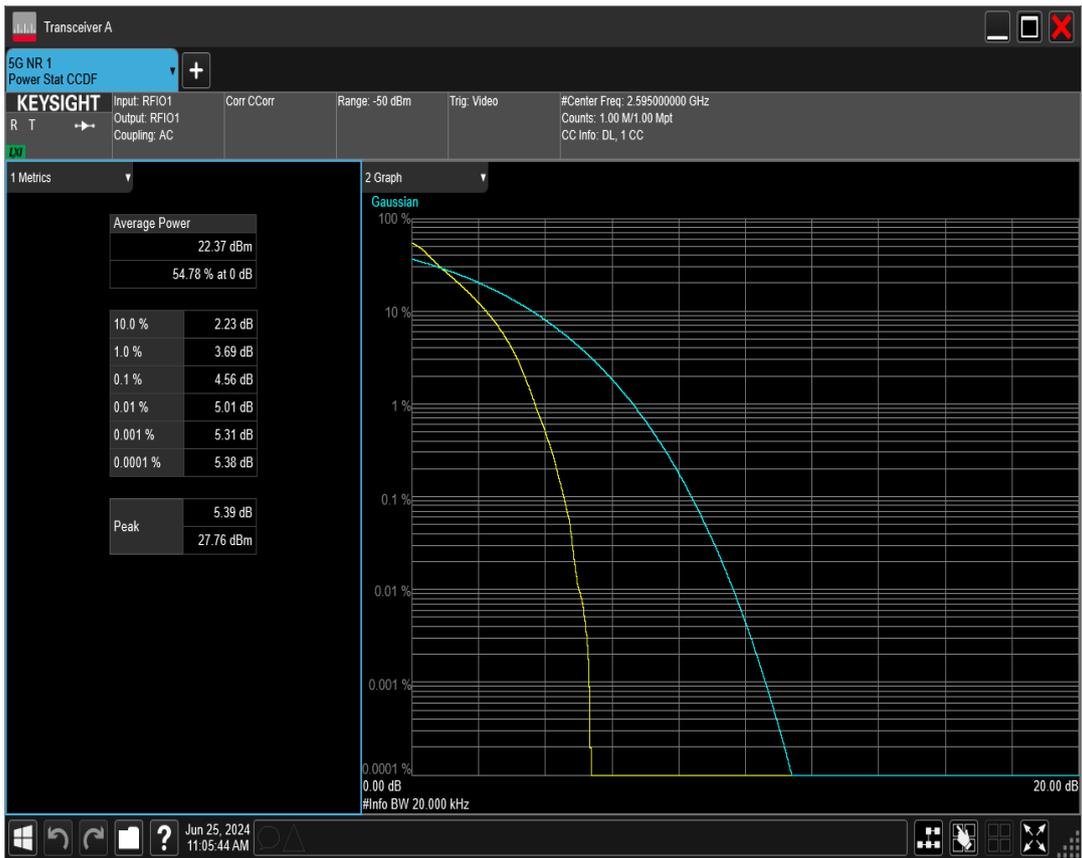


n38 SCS=30kHz DFT_BPSK BW=20MHz Channel=522000 RB=50@0

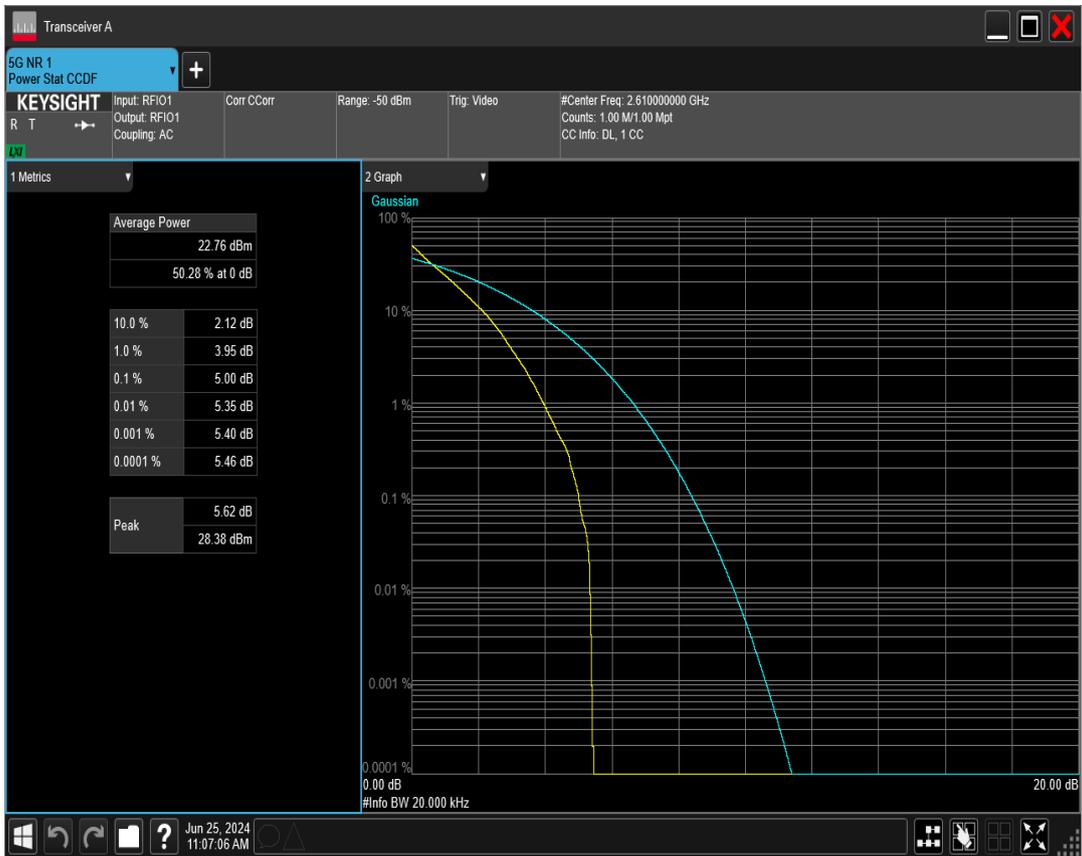


n38 SCS=30kHz DFT_QAM16 BW=10MHz Channel=515000 RB=24@0

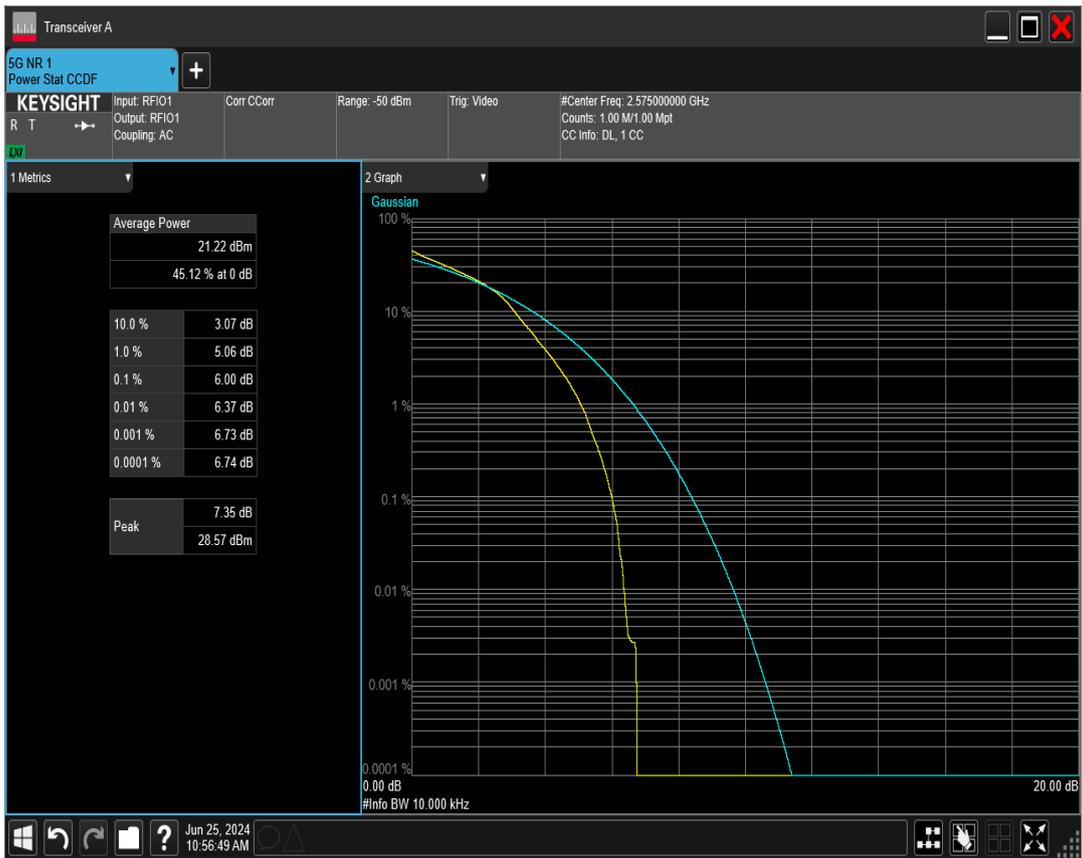


n38 SCS=30kHz DFT_QAM16 BW=10MHz Channel=519000 RB=24@0

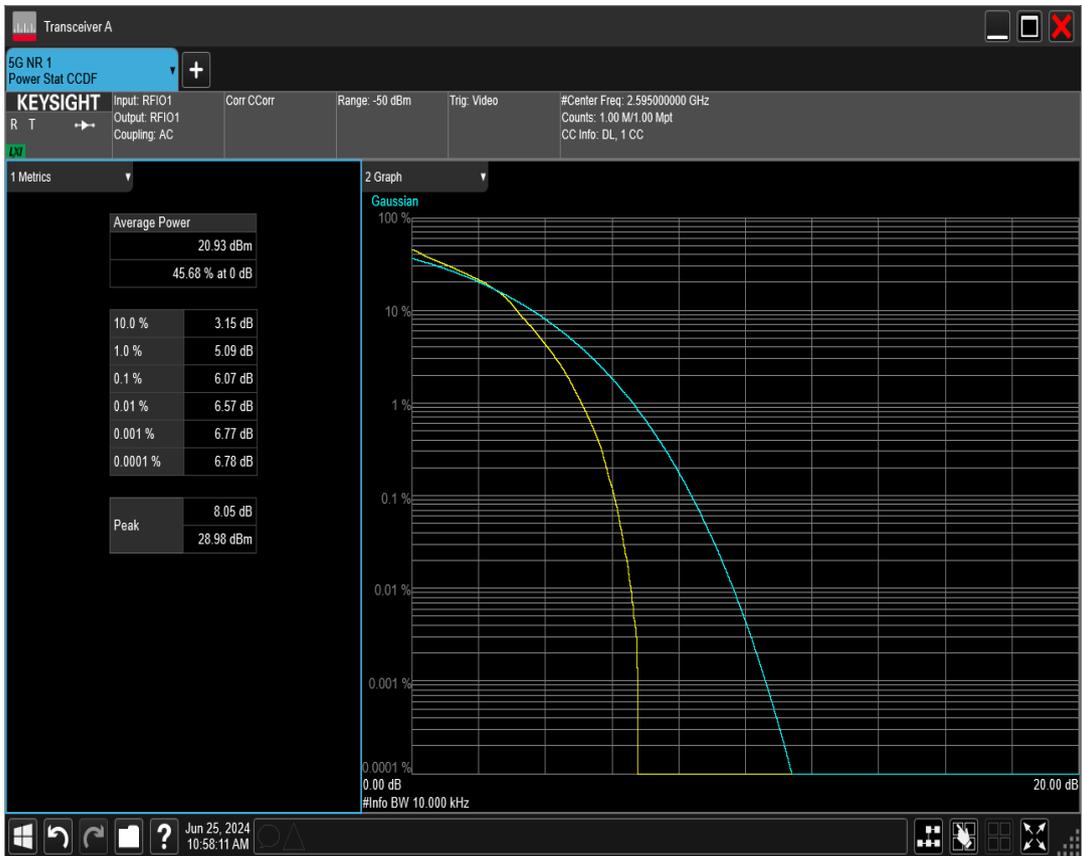


n38 SCS=30kHz DFT_QAM16 BW=10MHz Channel=523000 RB=24@0

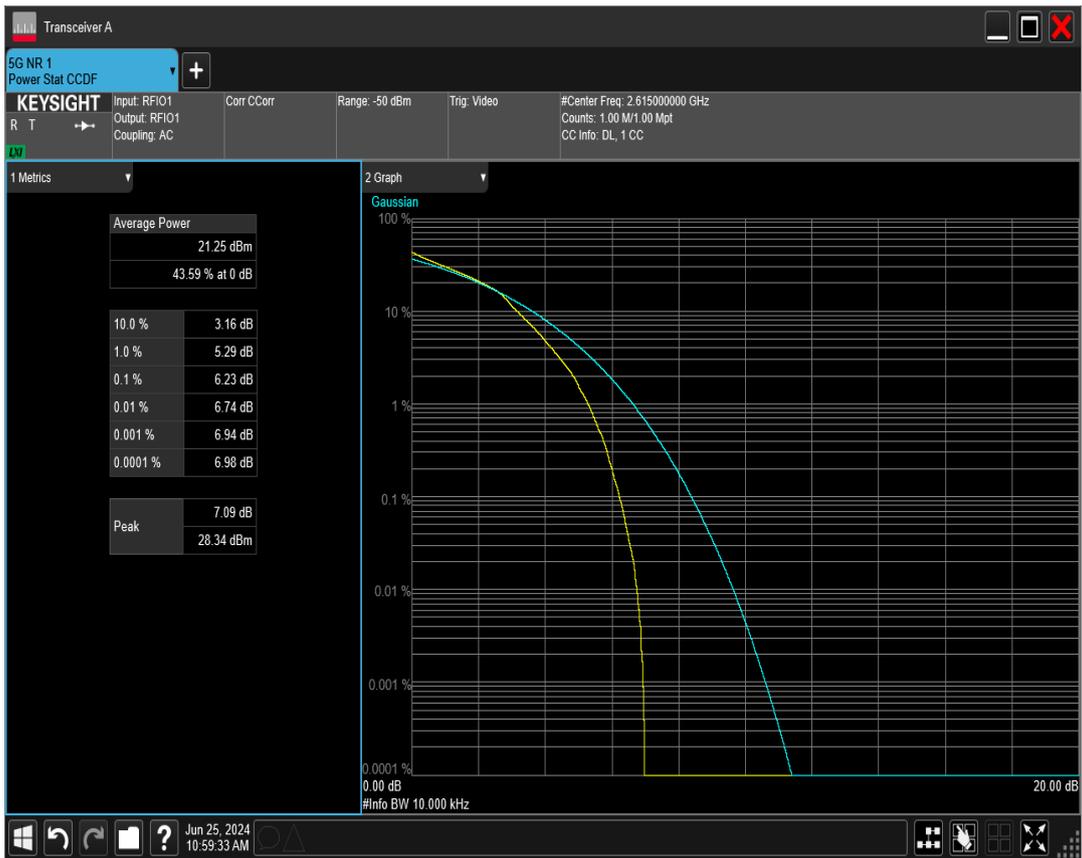


n38 SCS=30kHz DFT_QAM16 BW=15MHz Channel=515500 RB=36 @0

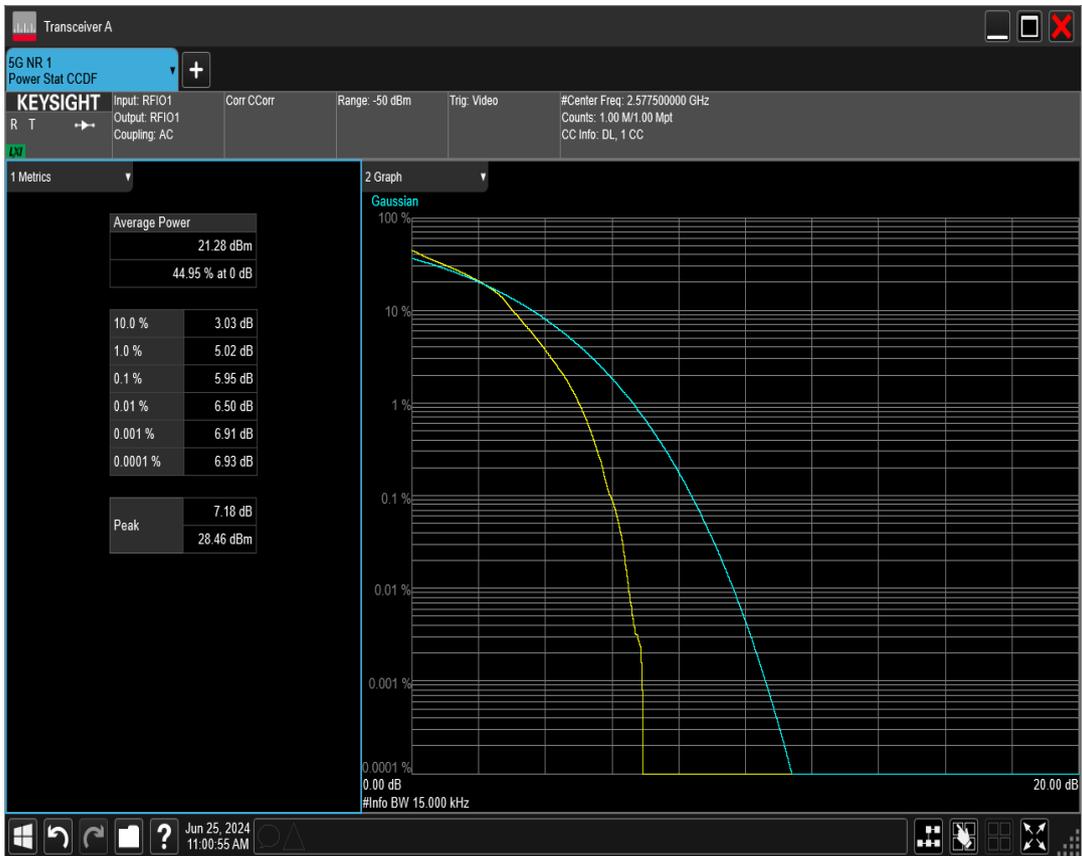


n38 SCS=30kHz DFT_QAM16 BW=15MHz Channel=519000 RB=36 @0

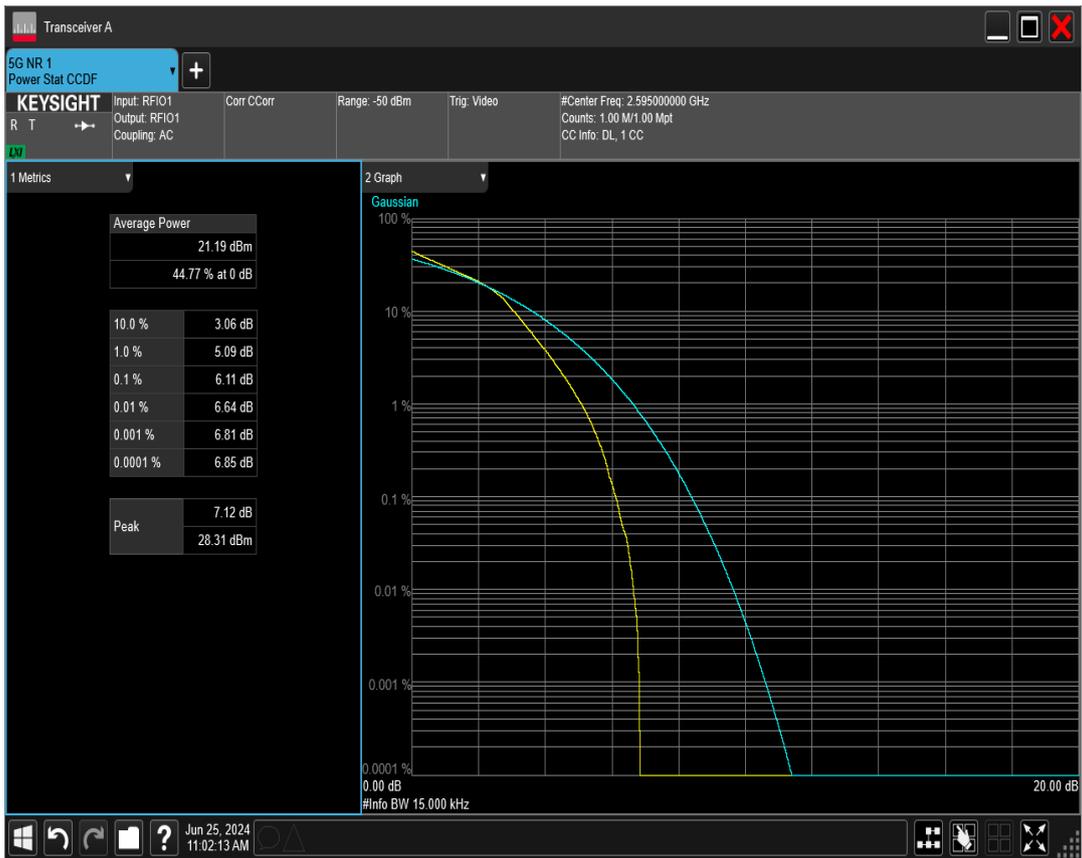


n38 SCS=30kHz DFT_QAM16 BW=15MHz Channel=522500 RB=36@0

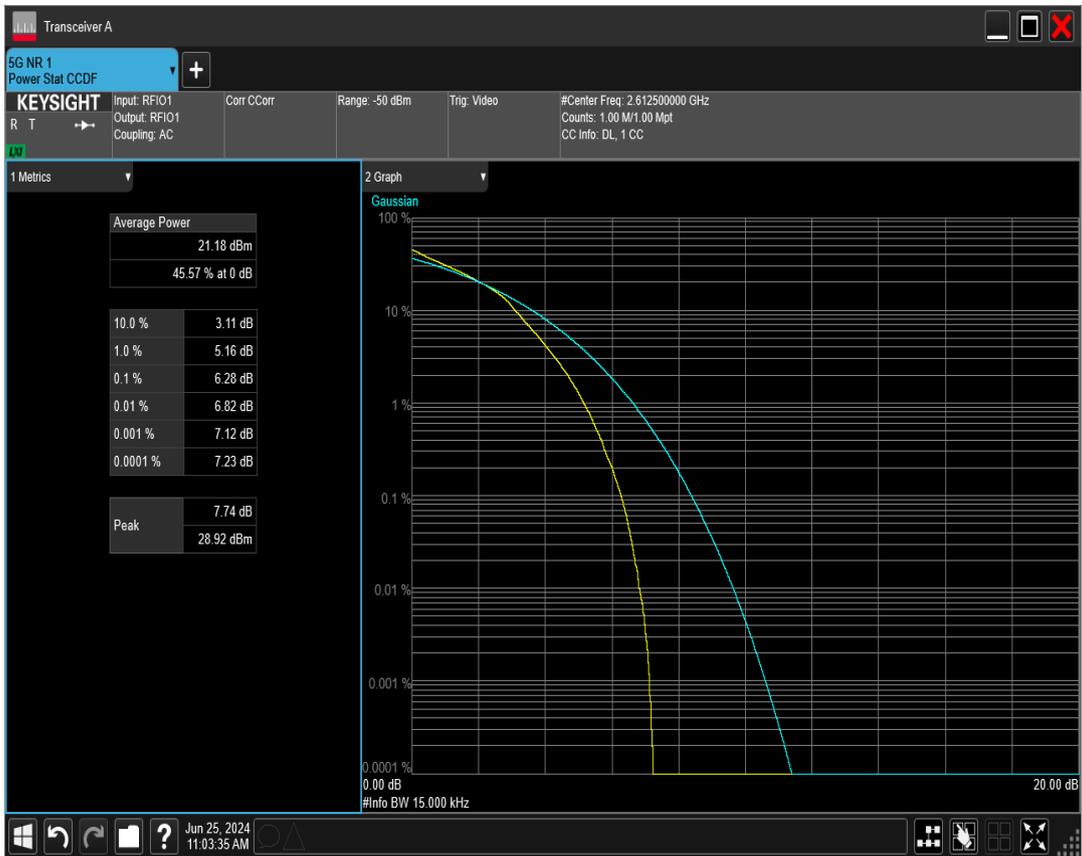


n38 SCS=30kHz DFT_QAM16 BW=20MHz Channel=516000 RB=50@0

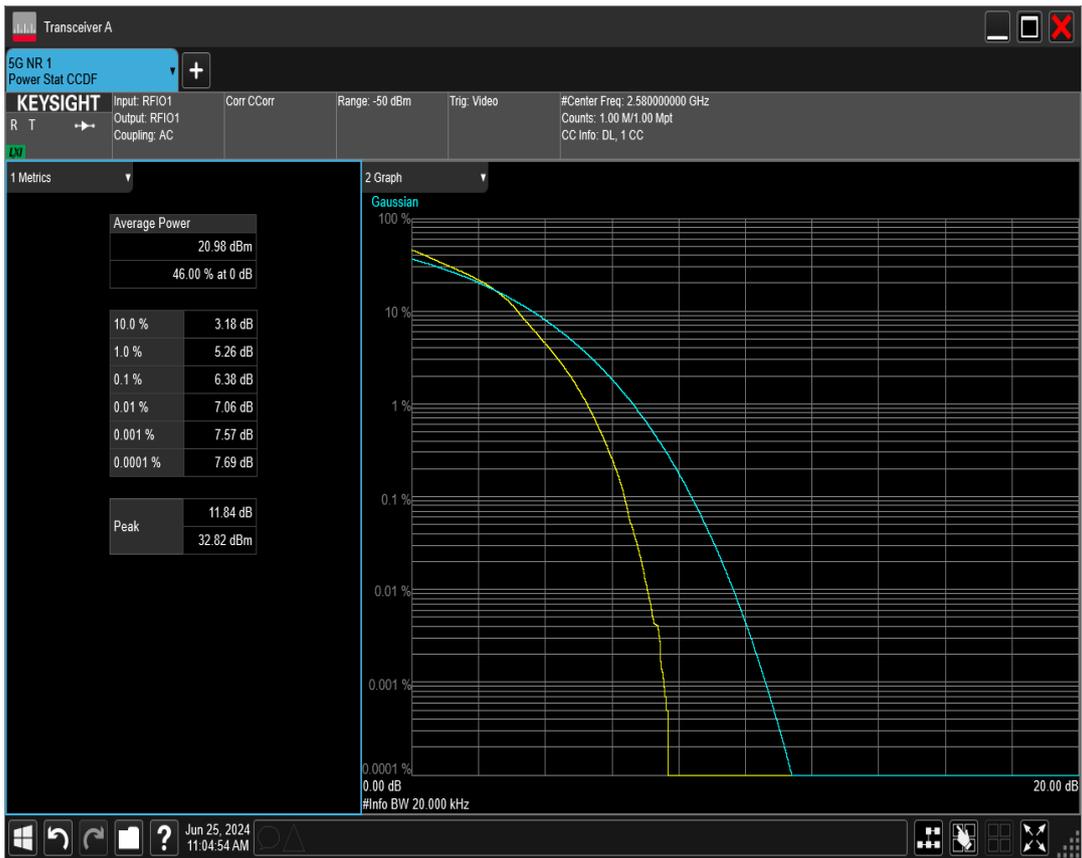


n38 SCS=30kHz DFT_QAM16 BW=20MHz Channel=519000 RB=50 @0

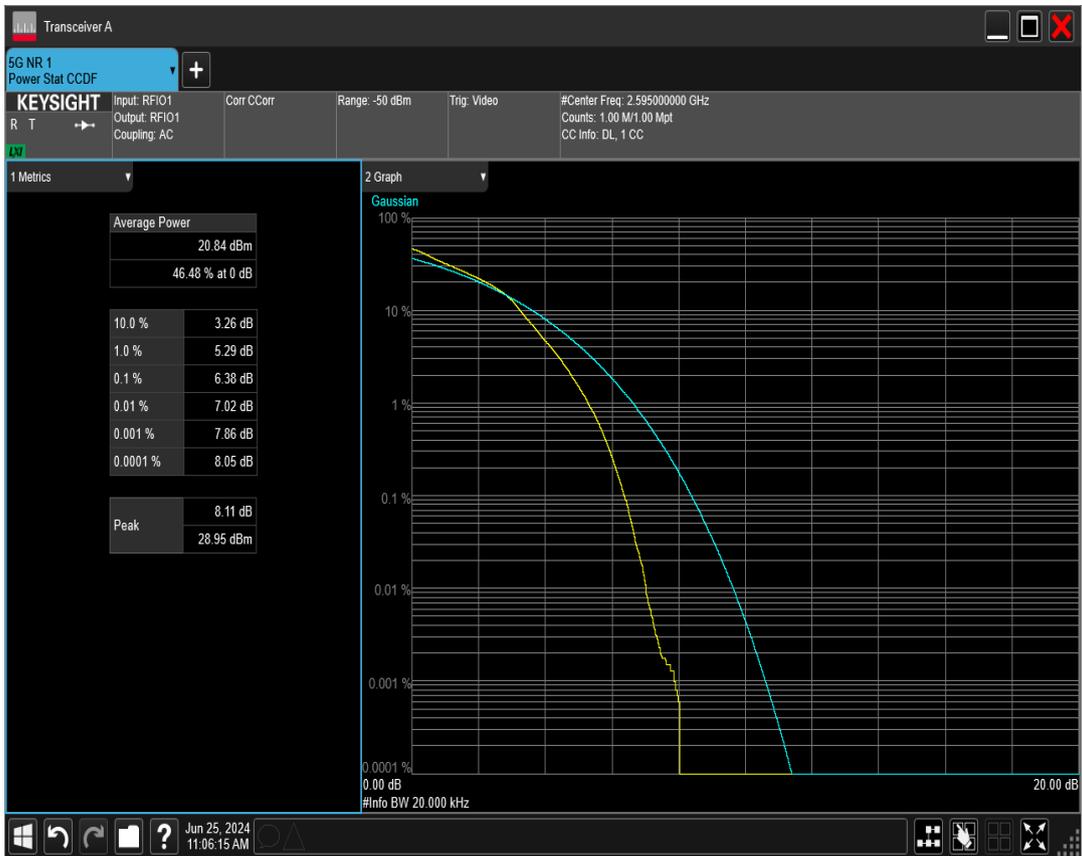


n38 SCS=30kHz DFT_QAM16 BW=20MHz Channel=522000 RB=50 @0

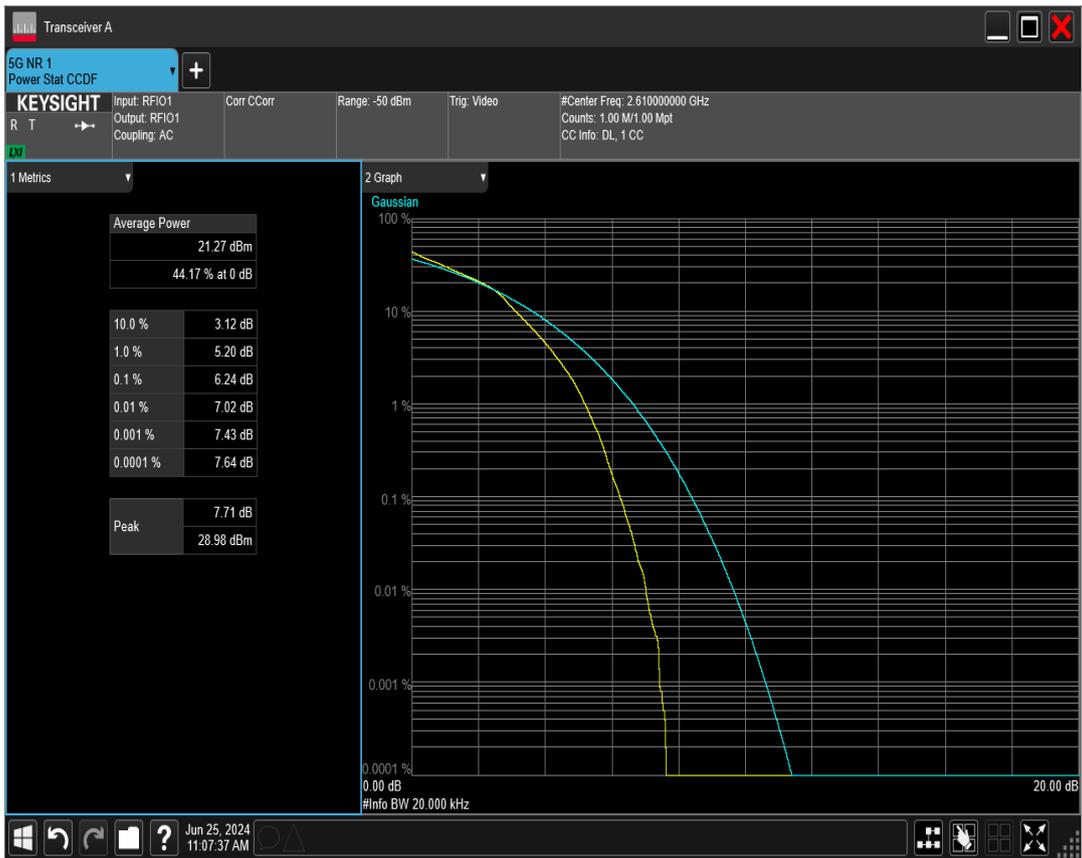


n38 SCS=30kHz DFT_QAM256 BW=10MHz Channel=515000 RB=24 @0

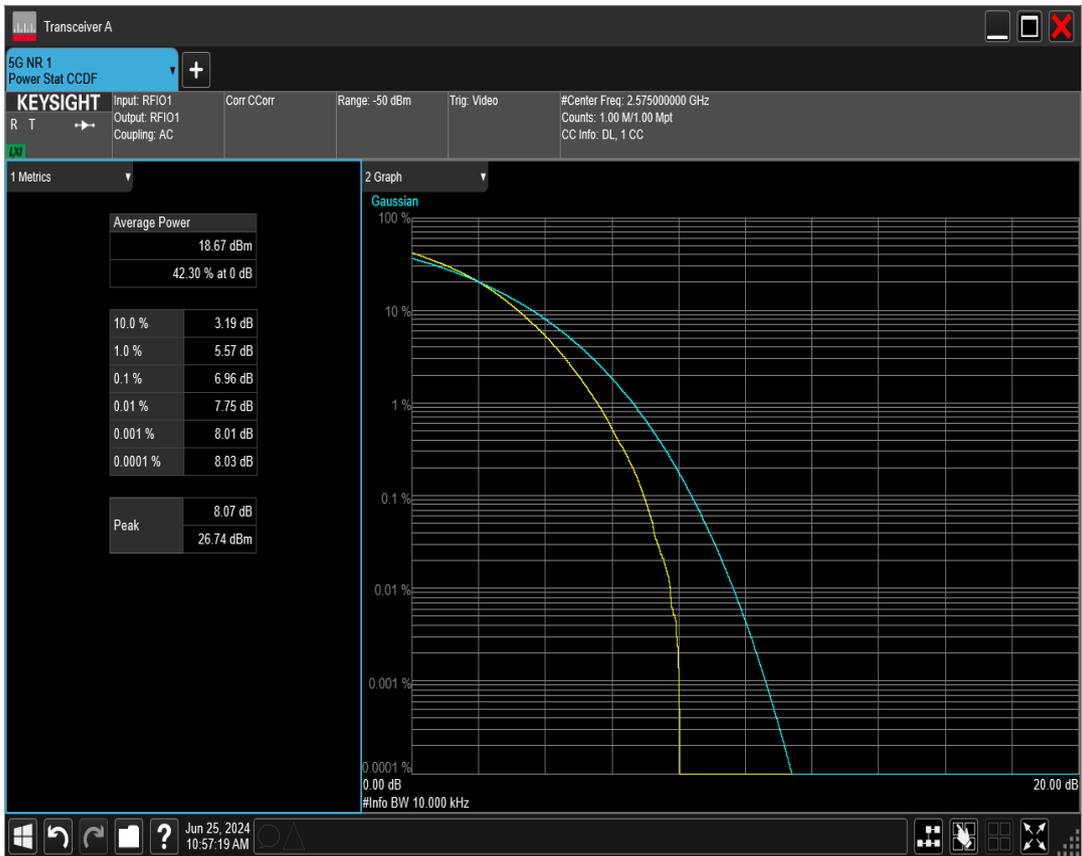


n38 SCS=30kHz DFT_QAM256 BW=10MHz Channel=519000 RB=24 @0

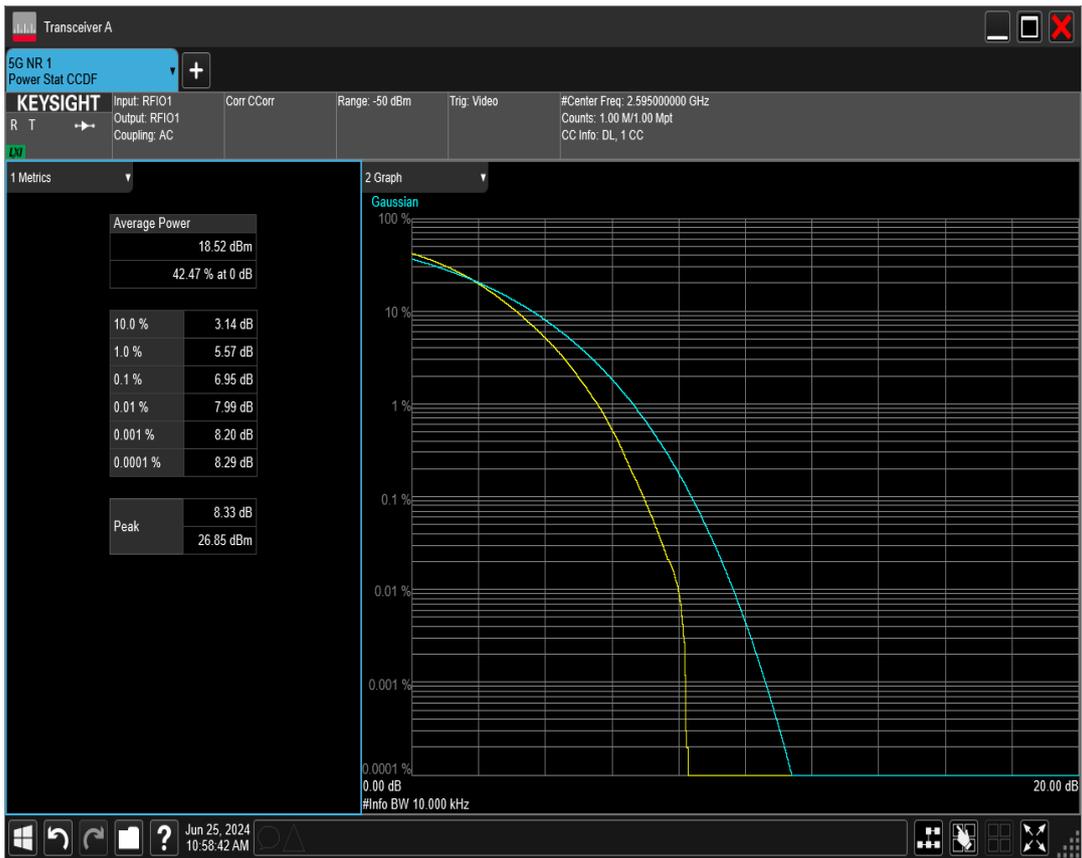


n38 SCS=30kHz DFT_QAM256 BW=10MHz Channel=523000 RB=24 @0

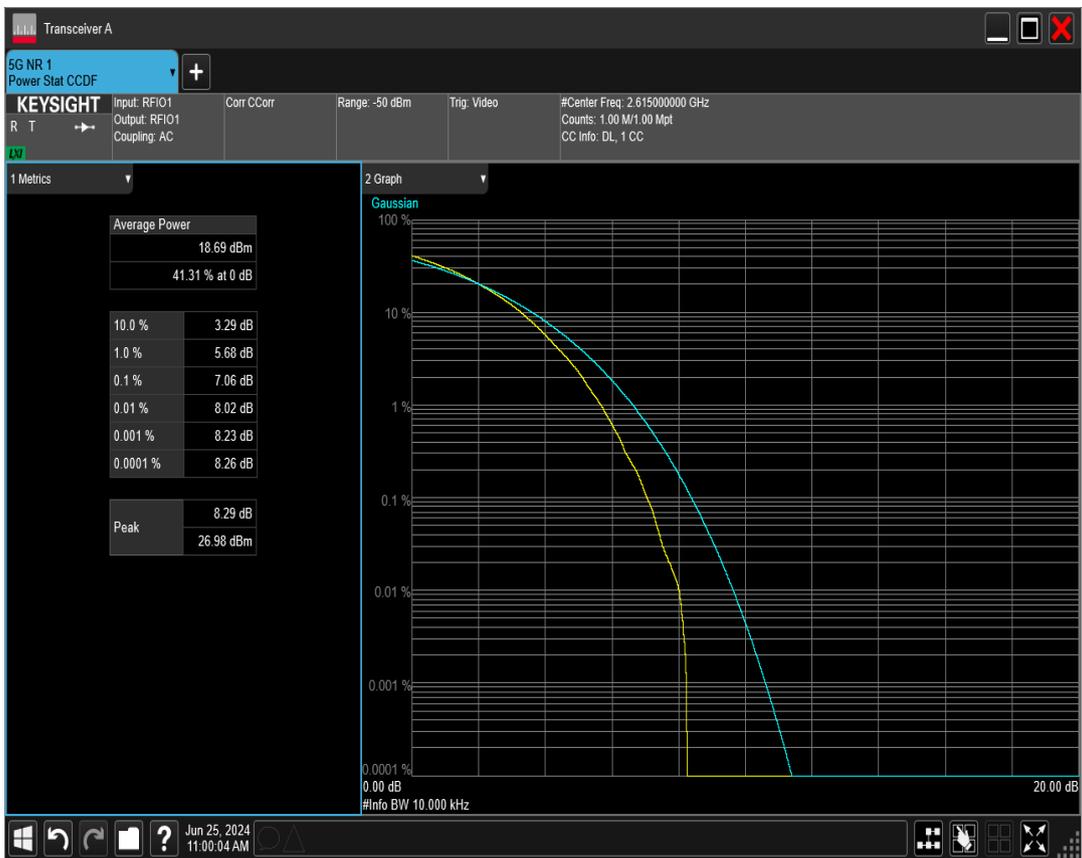


n38 SCS=30kHz DFT_QAM256 BW=15MHz Channel=515500 RB=36 @0

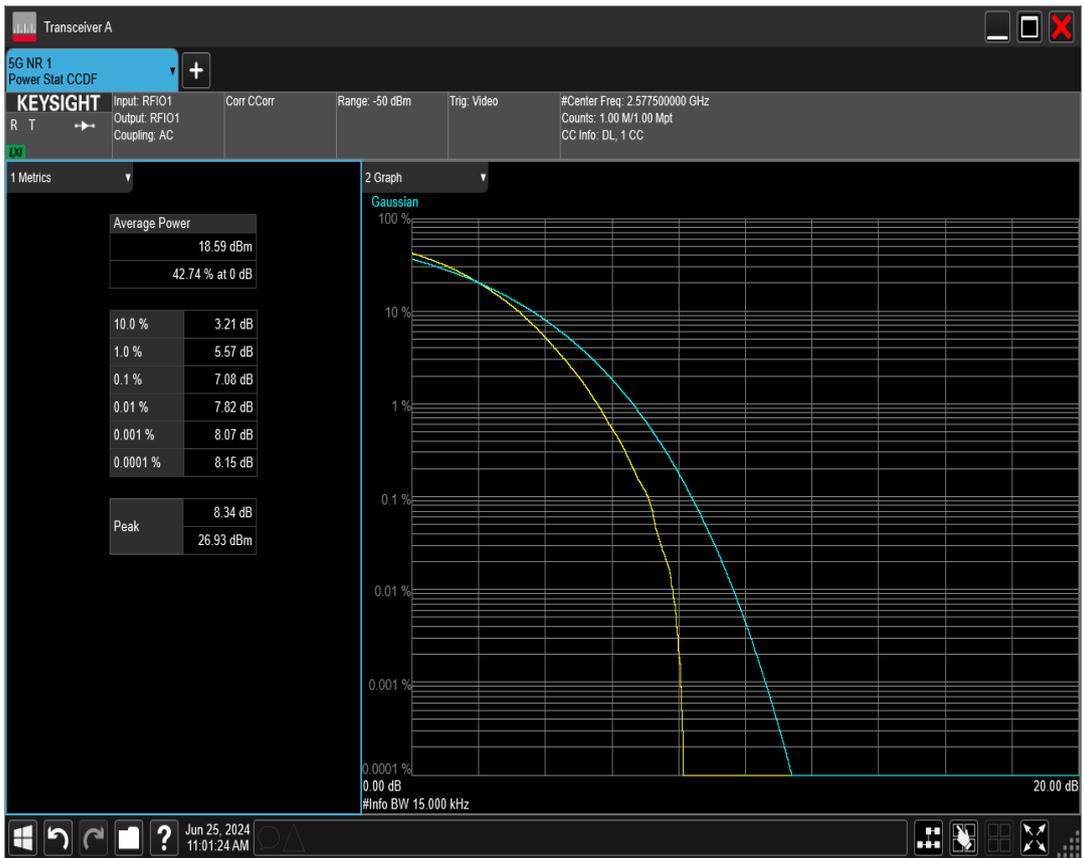


n38 SCS=30kHz DFT_QAM256 BW=15MHz Channel=519000 RB=36@0

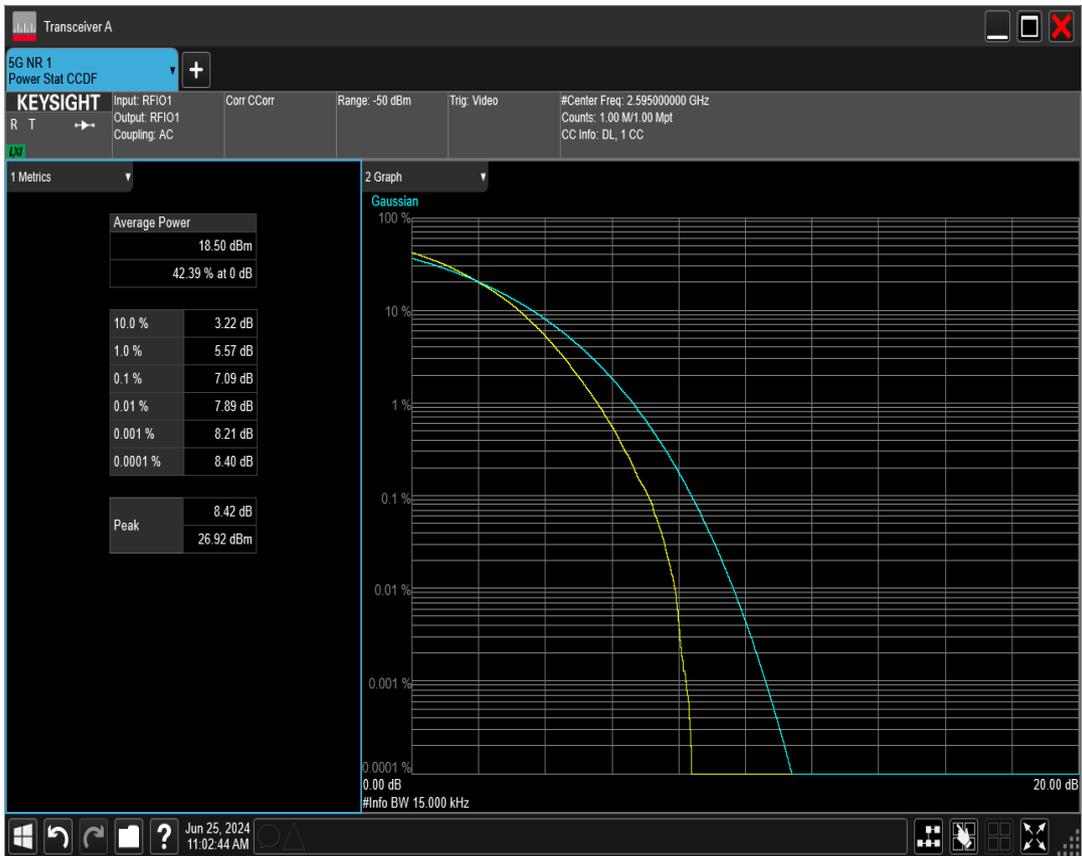


n38 SCS=30kHz DFT_QAM256 BW=15MHz Channel=522500 RB=36@0

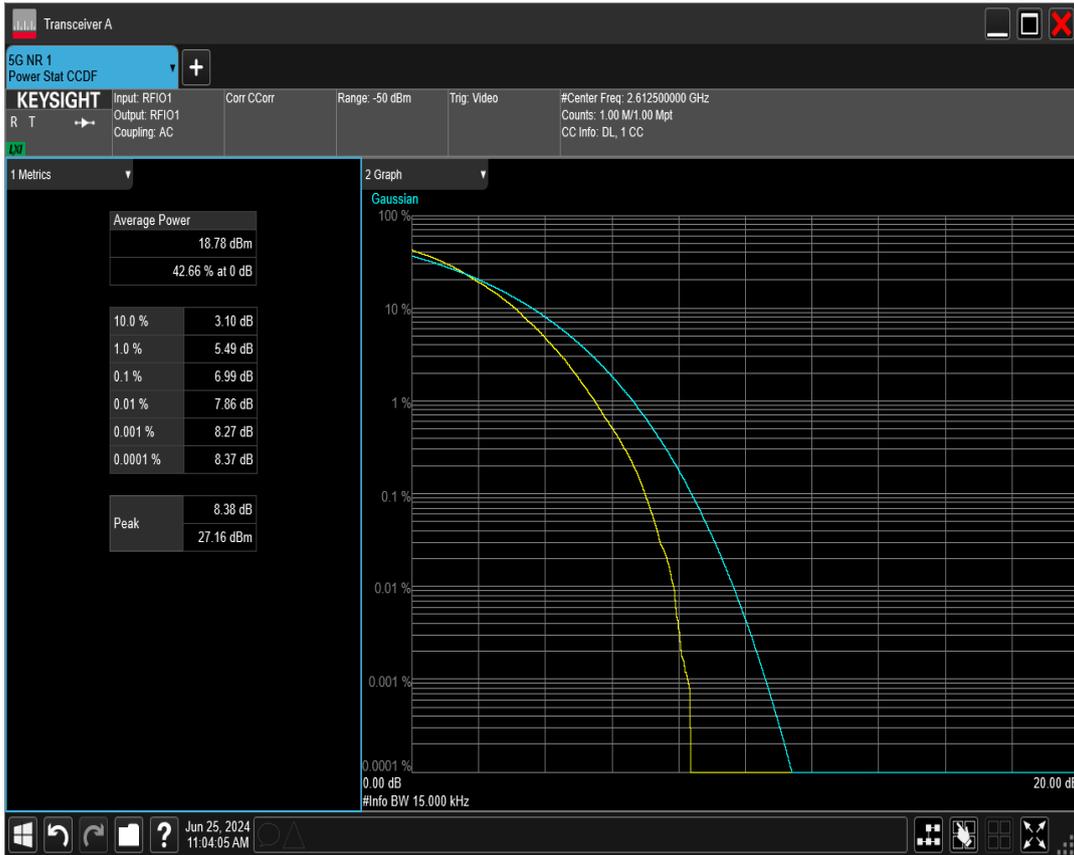


n38 SCS=30kHz DFT_QAM256 BW=20MHz Channel=516000 RB=50 @0

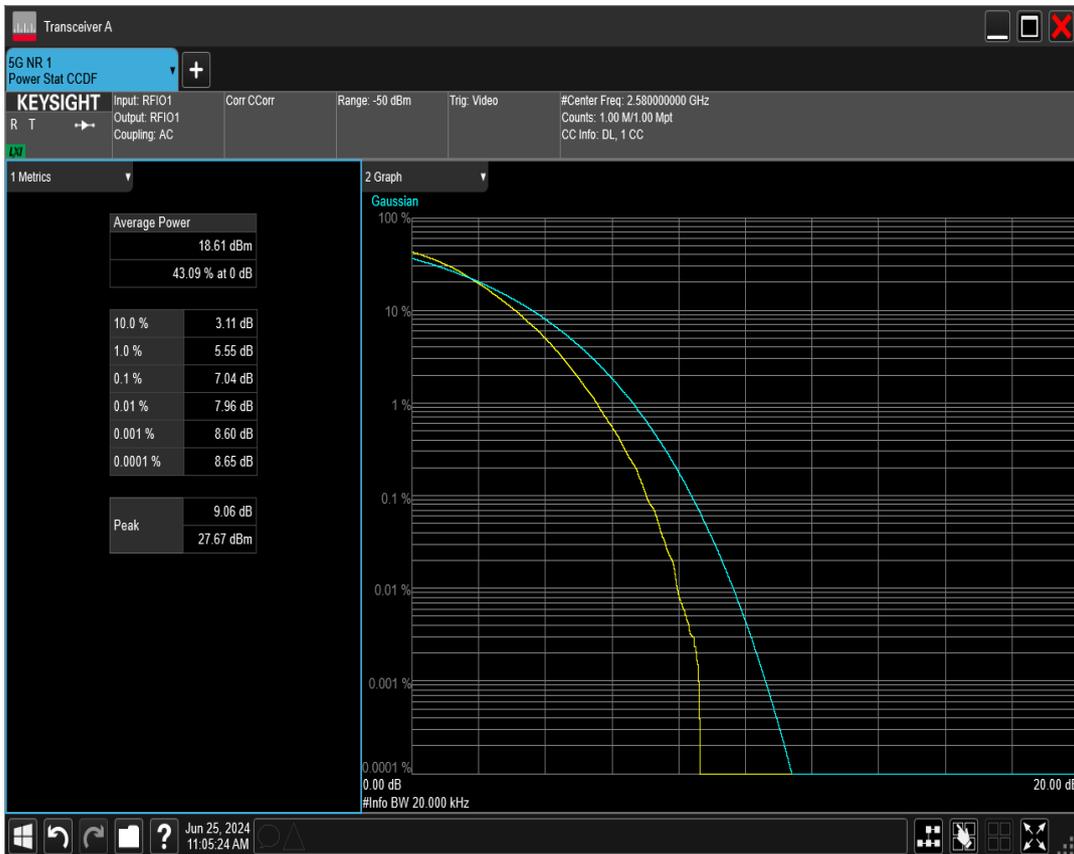


n38 SCS=30kHz DFT_QAM256 BW=20MHz Channel=519000 RB=50 @0

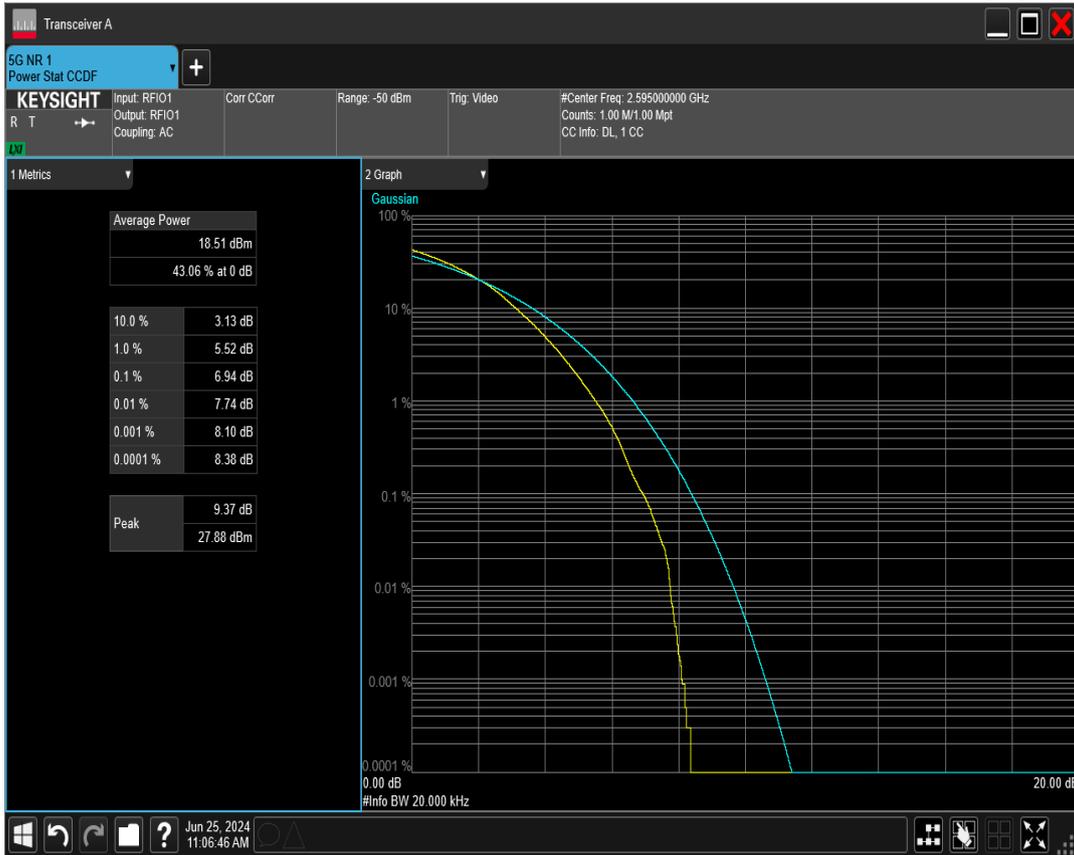


n38 SCS=30kHz DFT_QAM256 BW=20MHz Channel=522000 RB=50 @0

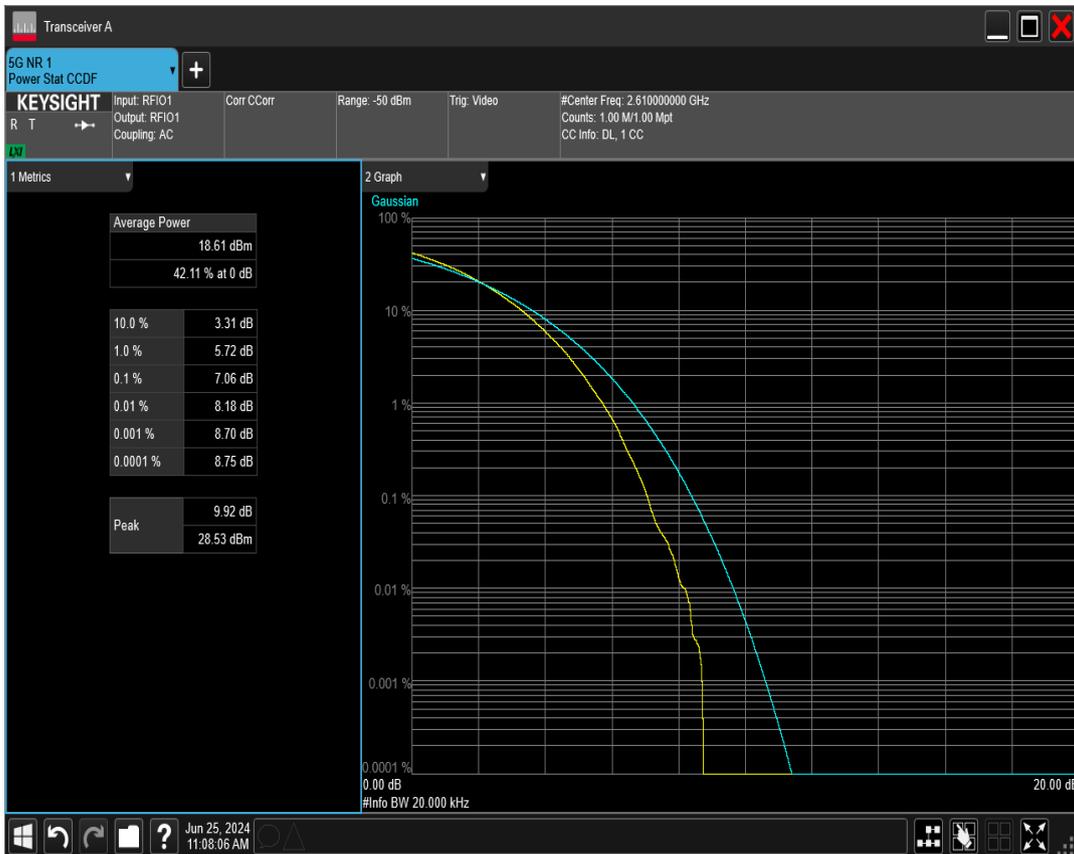


n38 SCS=30kHz DFT_QAM64 BW=10MHz Channel=515000 RB=24 @0

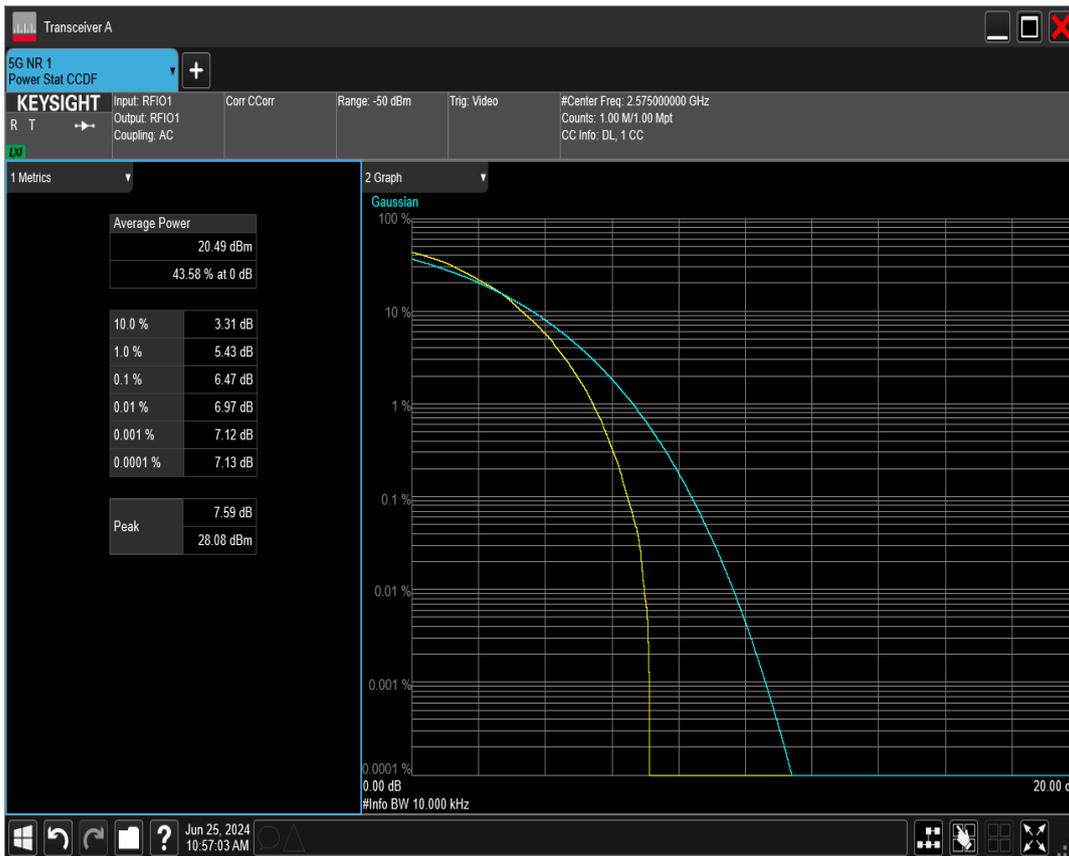


n38 SCS=30kHz DFT_QAM64 BW=10MHz Channel=519000 RB=24@0

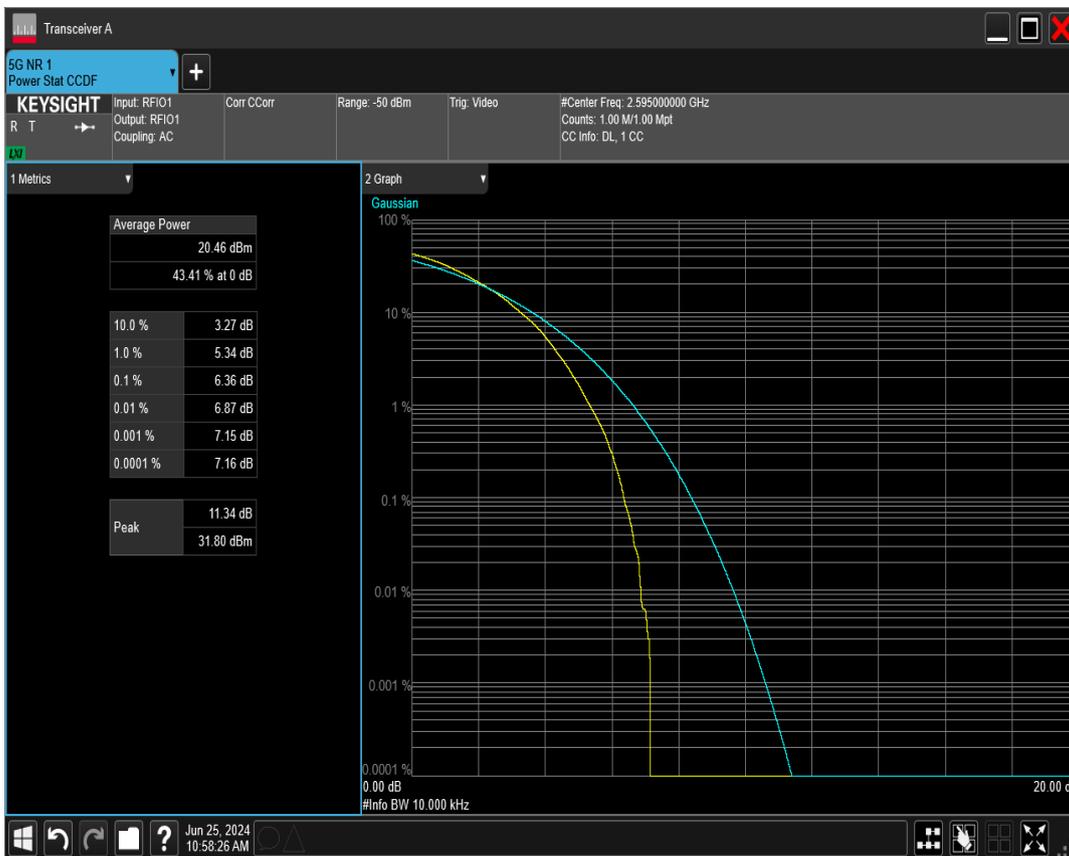


n38 SCS=30kHz DFT_QAM64 BW=10MHz Channel=523000 RB=24@0

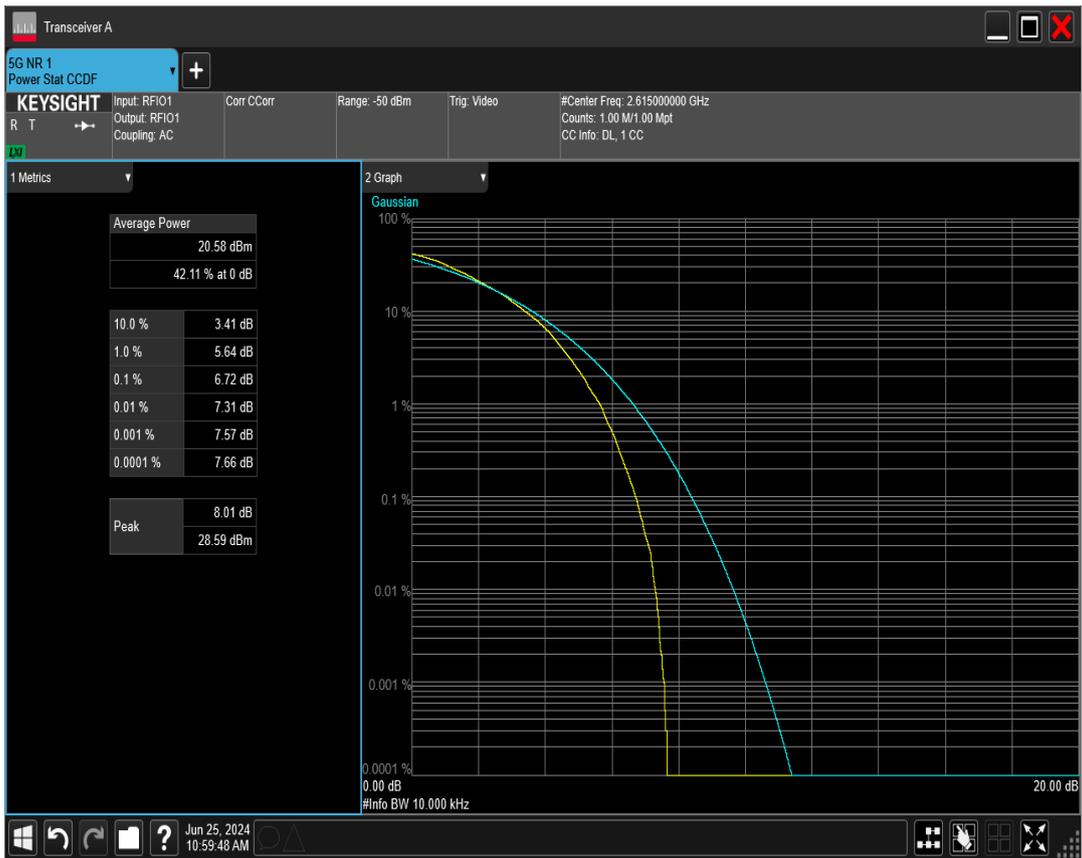


n38 SCS=30kHz DFT_QAM64 BW=15MHz Channel=515500 RB=36@0

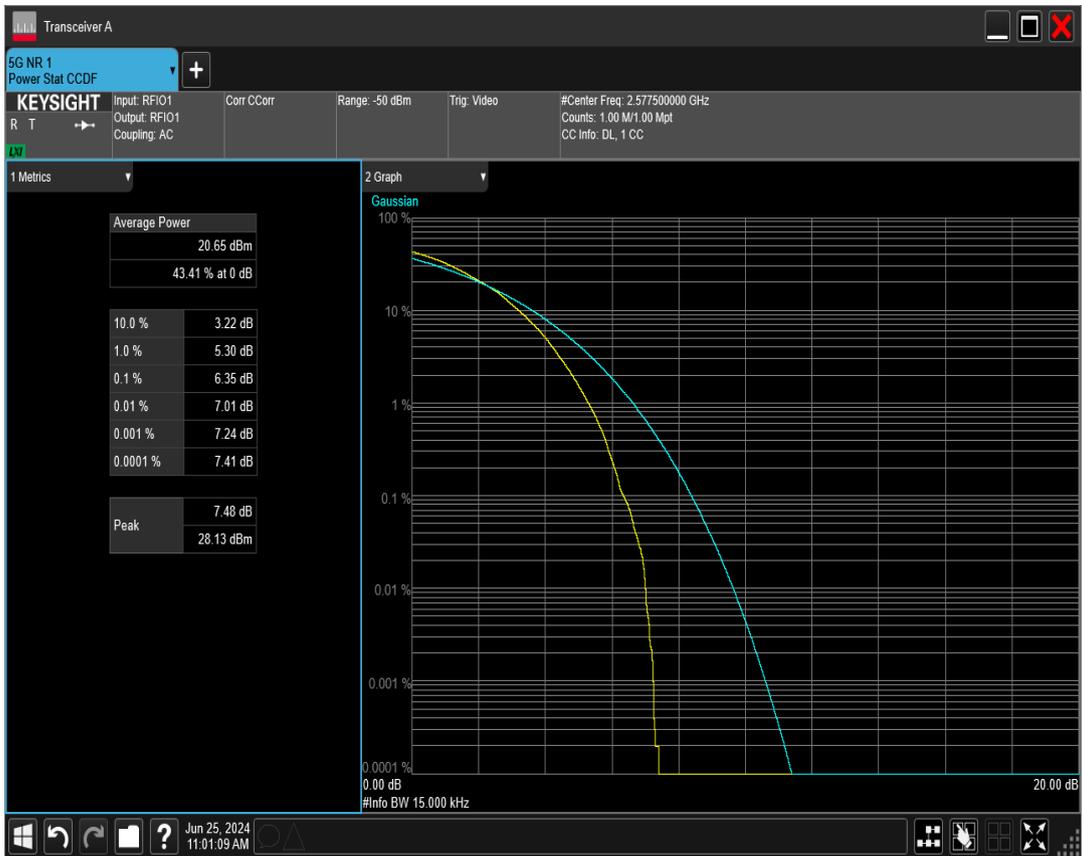


n38 SCS=30kHz DFT_QAM64 BW=15MHz Channel=519000 RB=36@0

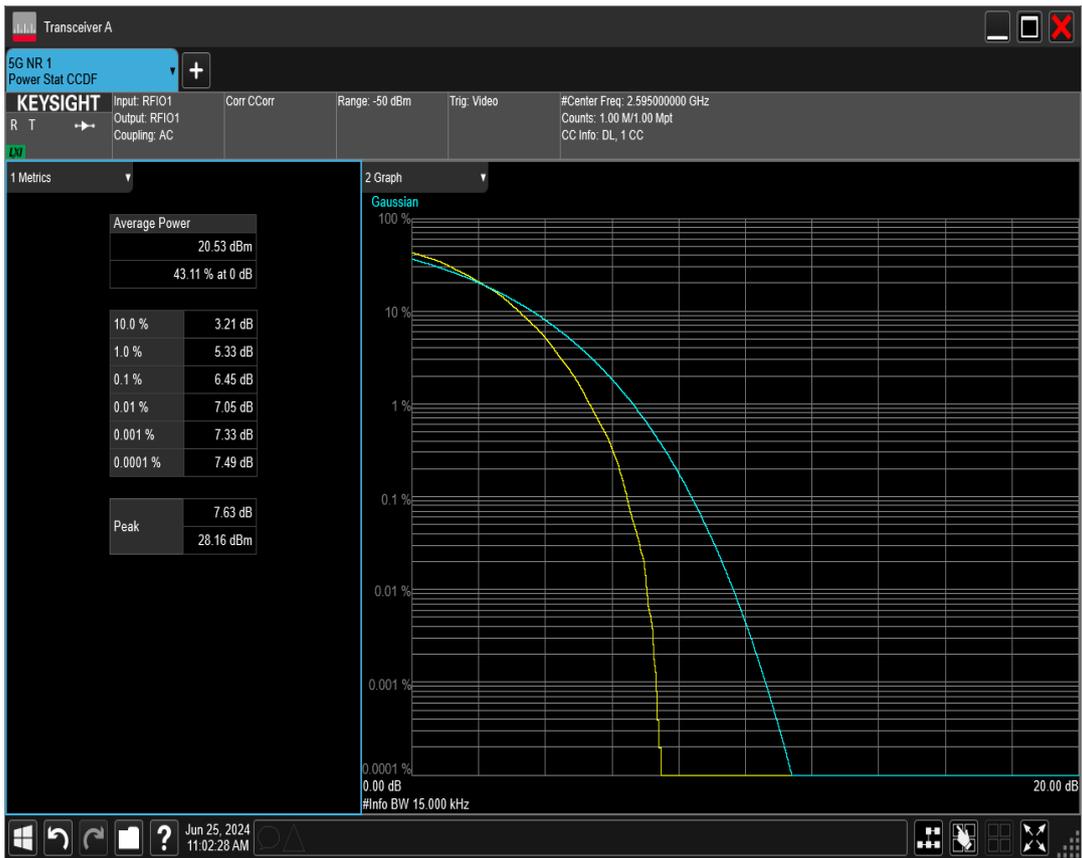


n38 SCS=30kHz DFT_QAM64 BW=15MHz Channel=522500 RB=36@0

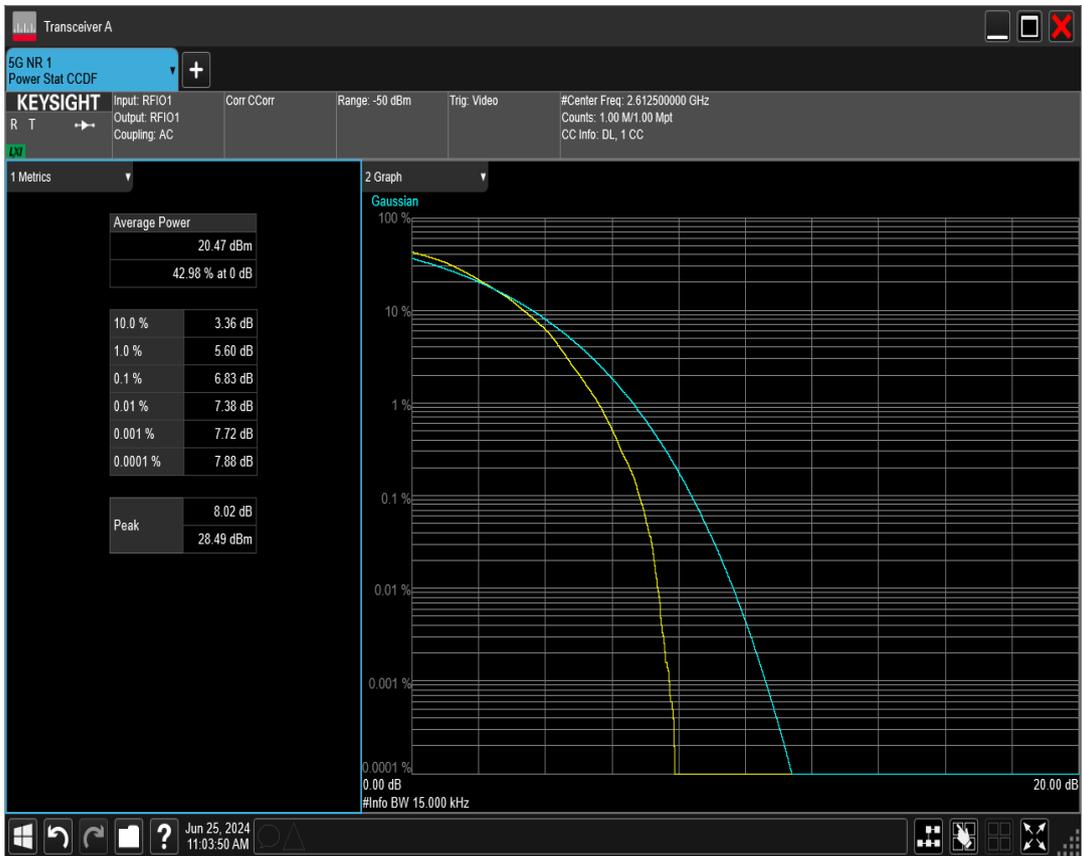



n38 SCS=30kHz DFT_QAM64 BW=20MHz Channel=516000 RB=50@0

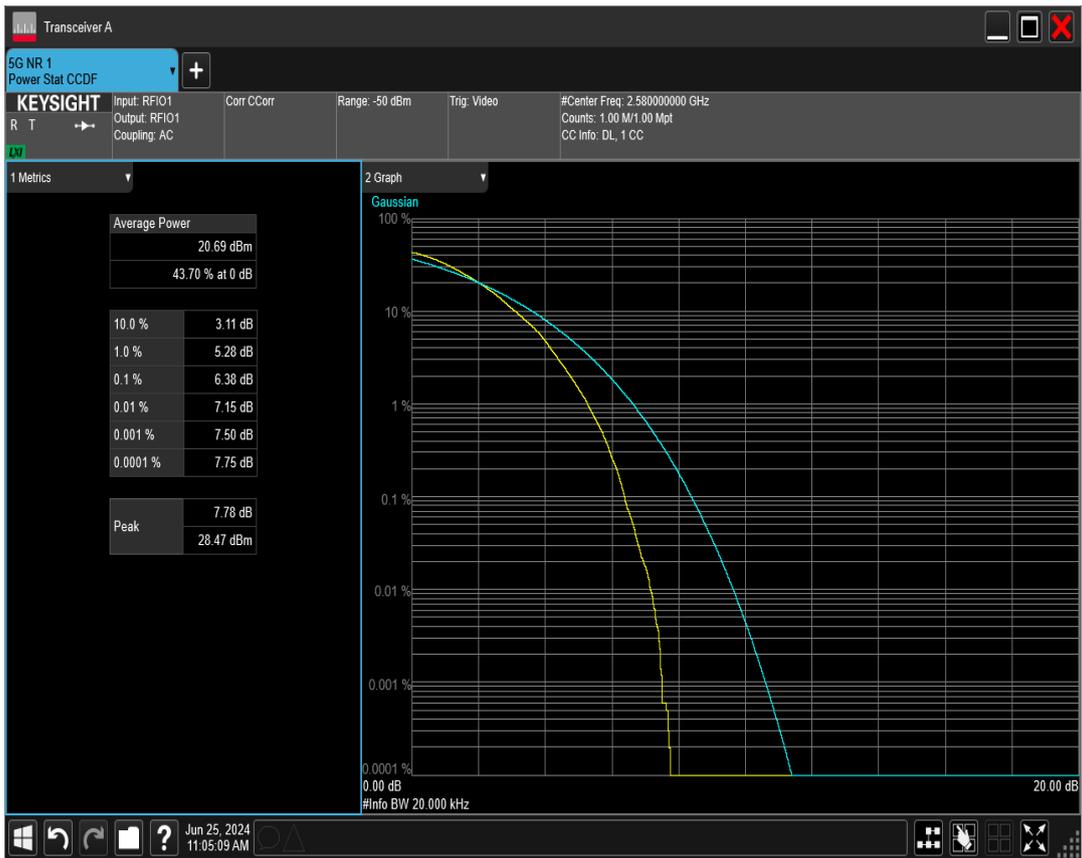


n38 SCS=30kHz DFT_QAM64 BW=20MHz Channel=519000 RB=50 @0

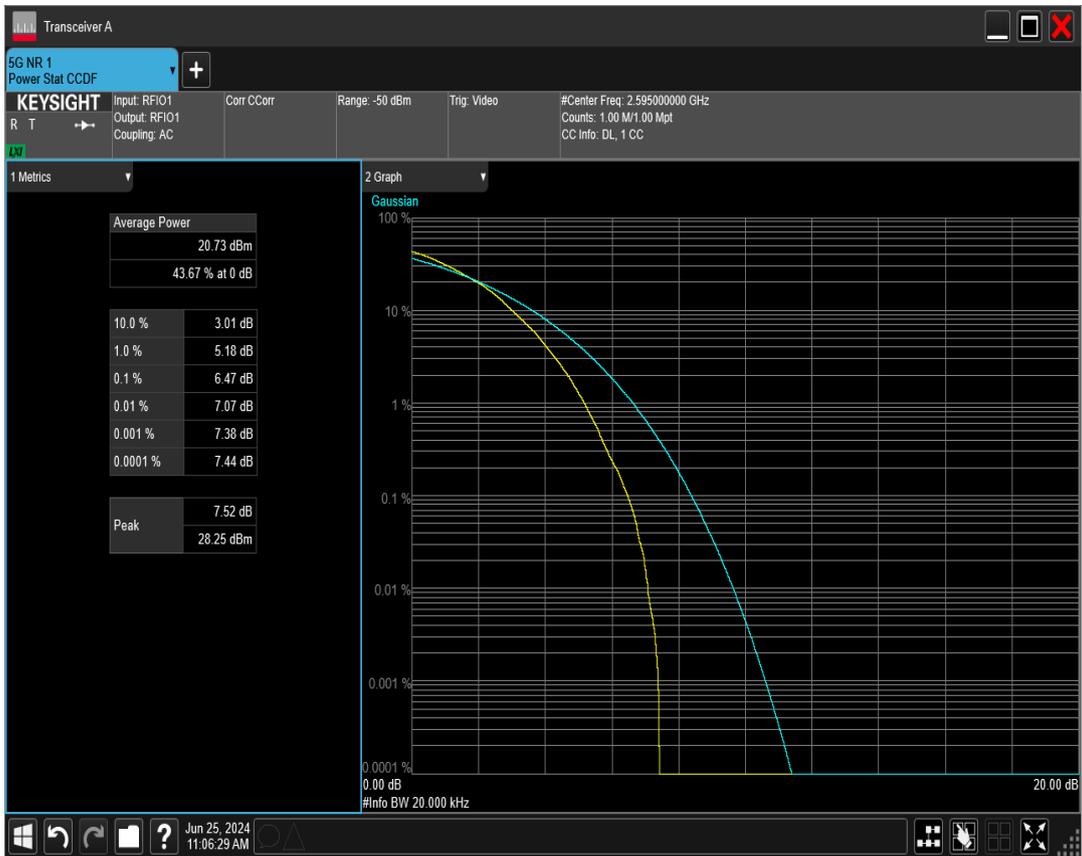


n38 SCS=30kHz DFT_QAM64 BW=20MHz Channel=522000 RB=50 @0

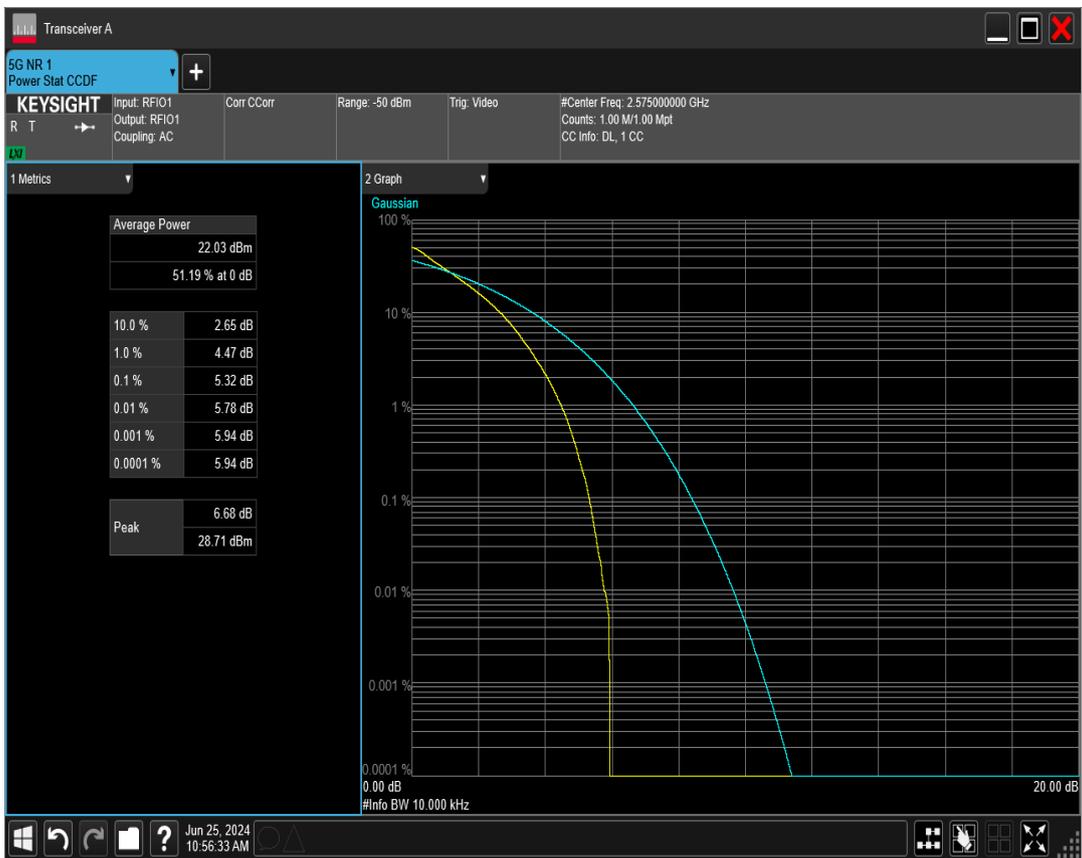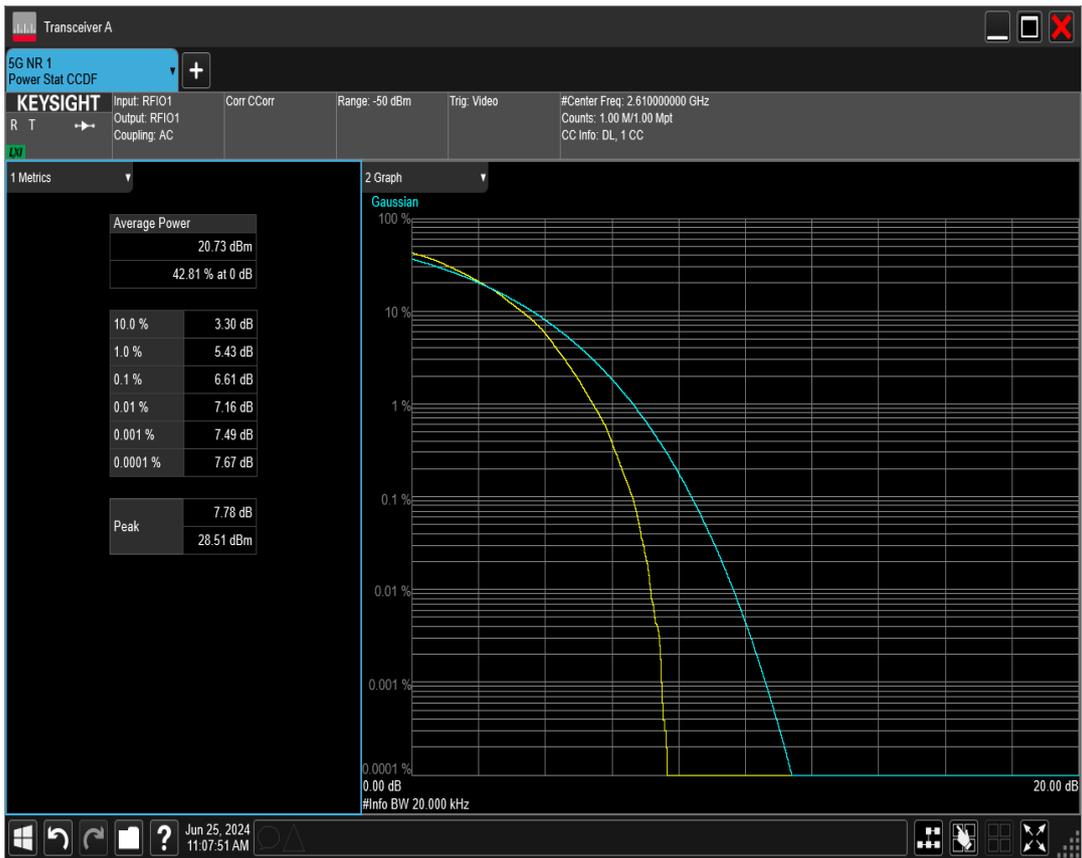


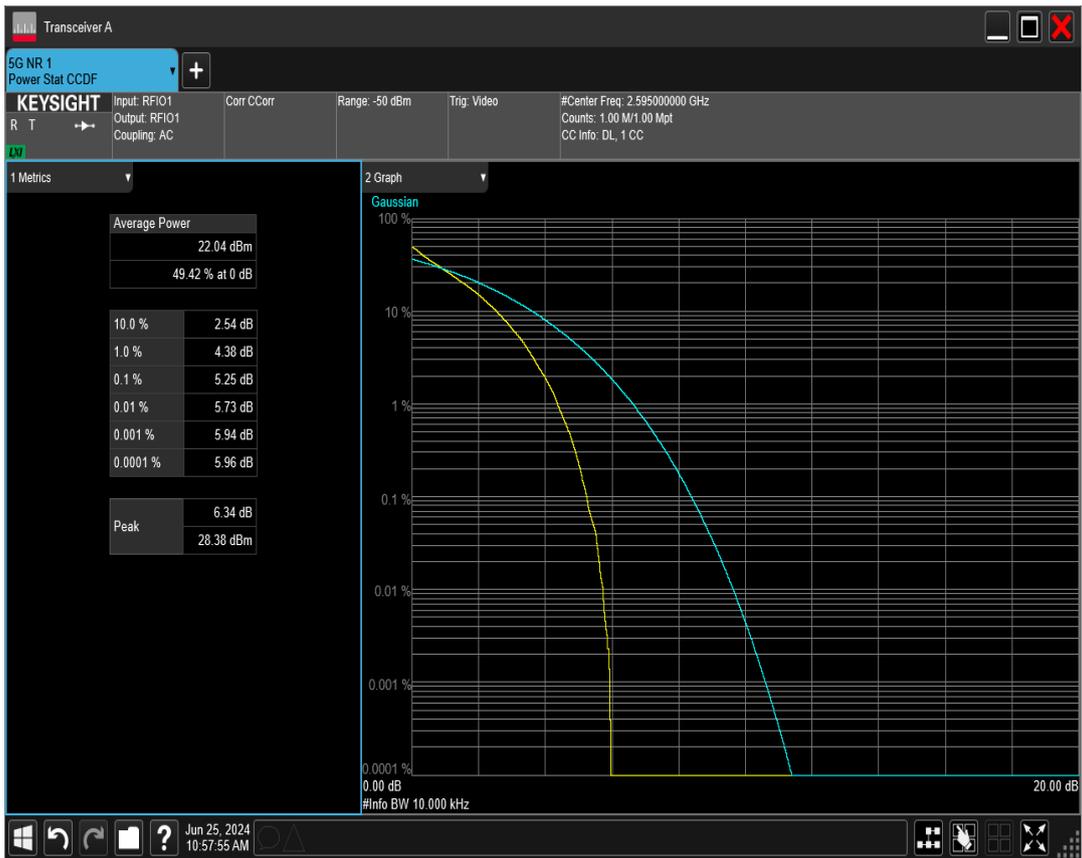


n38 SCS=30kHz DFT_QPSK BW=10MHz Channel=523000 RB=24 @0

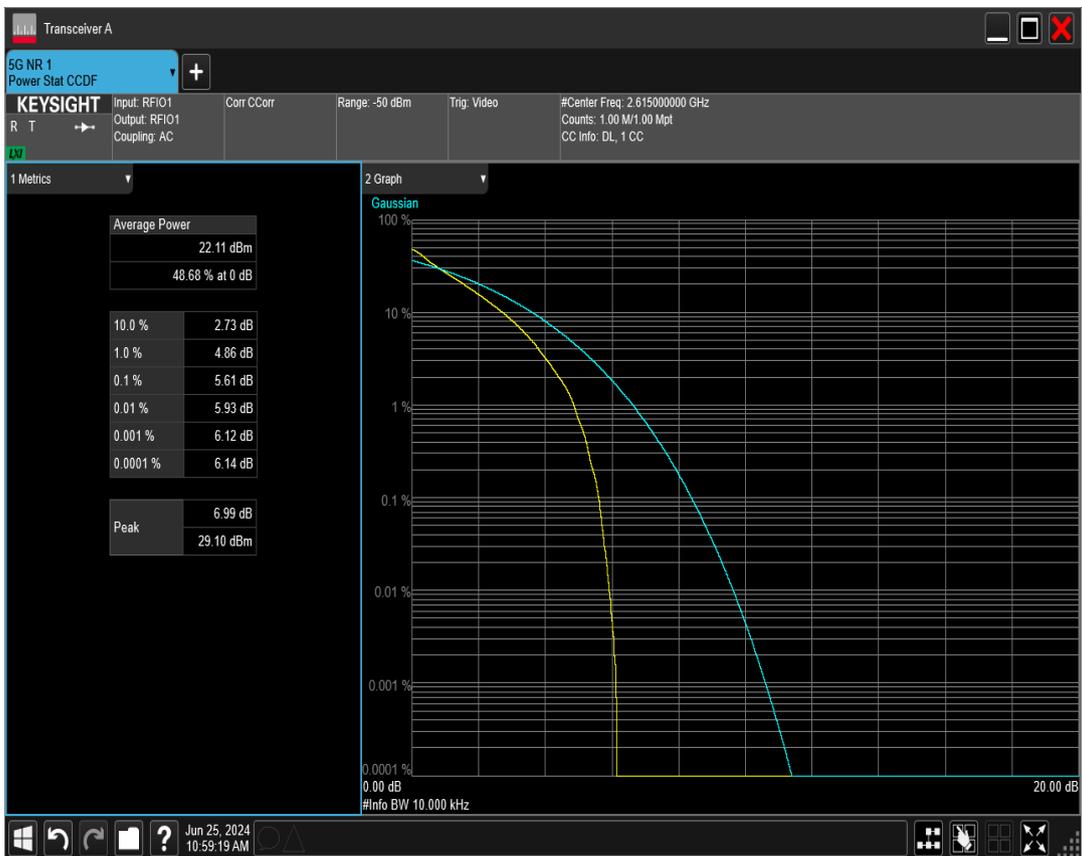


n38 SCS=30kHz DFT_QPSK BW=15MHz Channel=515500 RB=36 @0

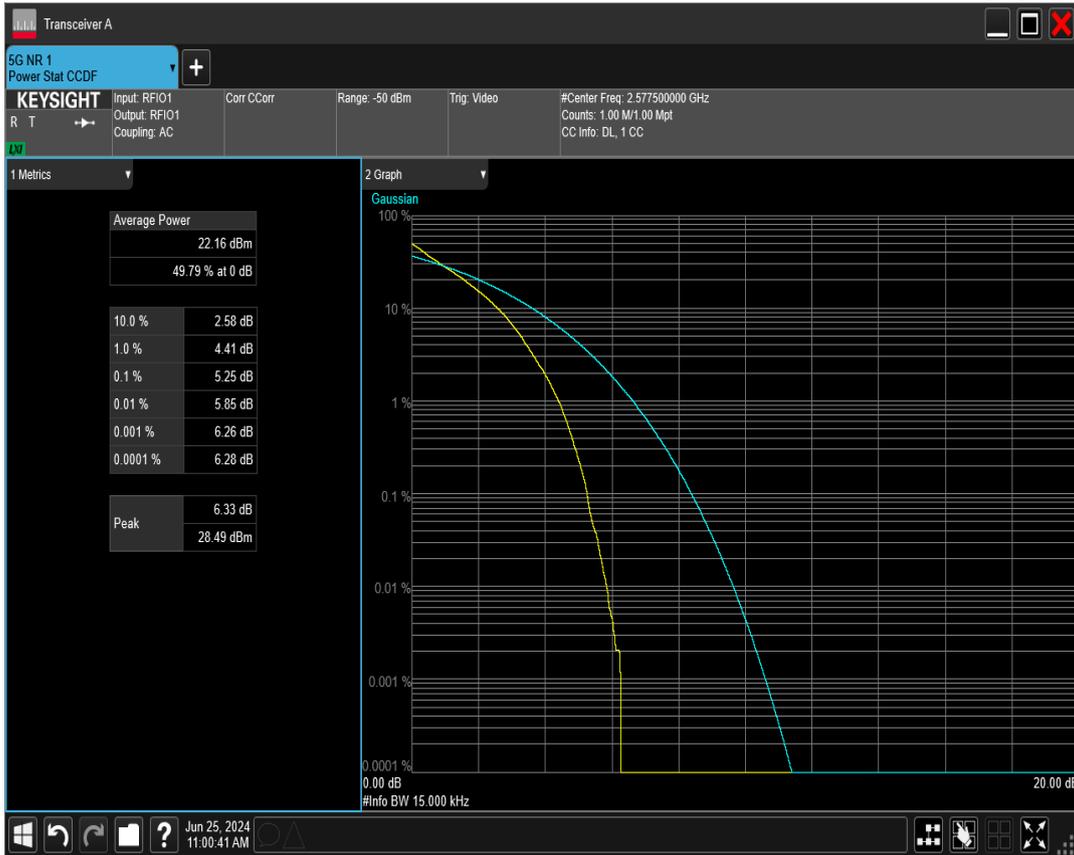


n38 SCS=30kHz DFT_QPSK BW=15MHz Channel=519000 RB=36 @0

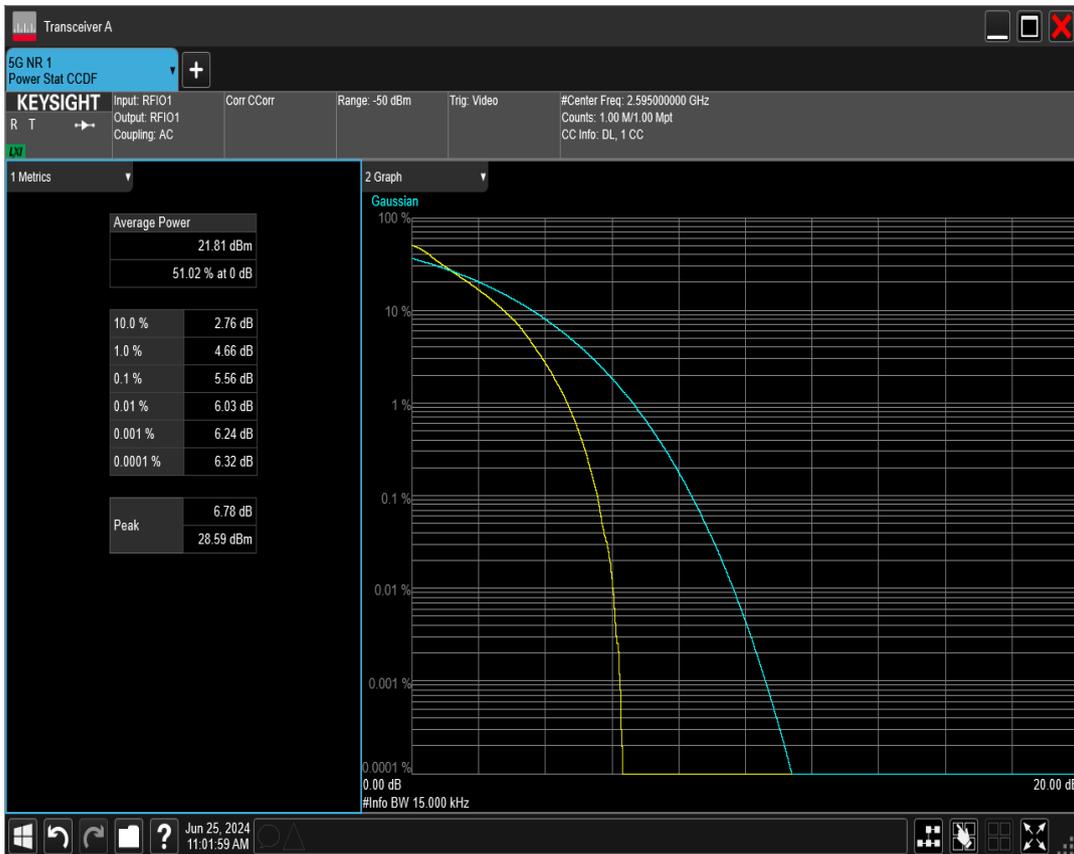


n38 SCS=30kHz DFT_QPSK BW=15MHz Channel=522500 RB=36 @0

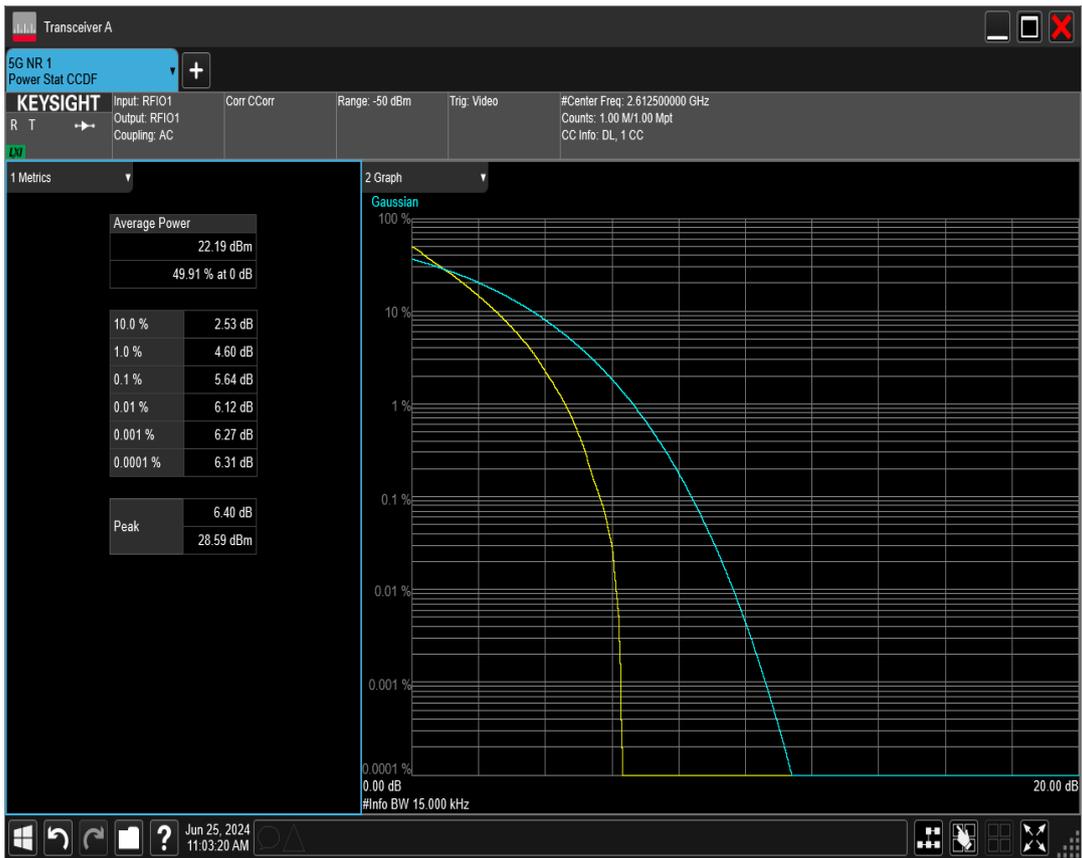


n38 SCS=30kHz DFT_QPSK BW=20MHz Channel=516000 RB=50@0

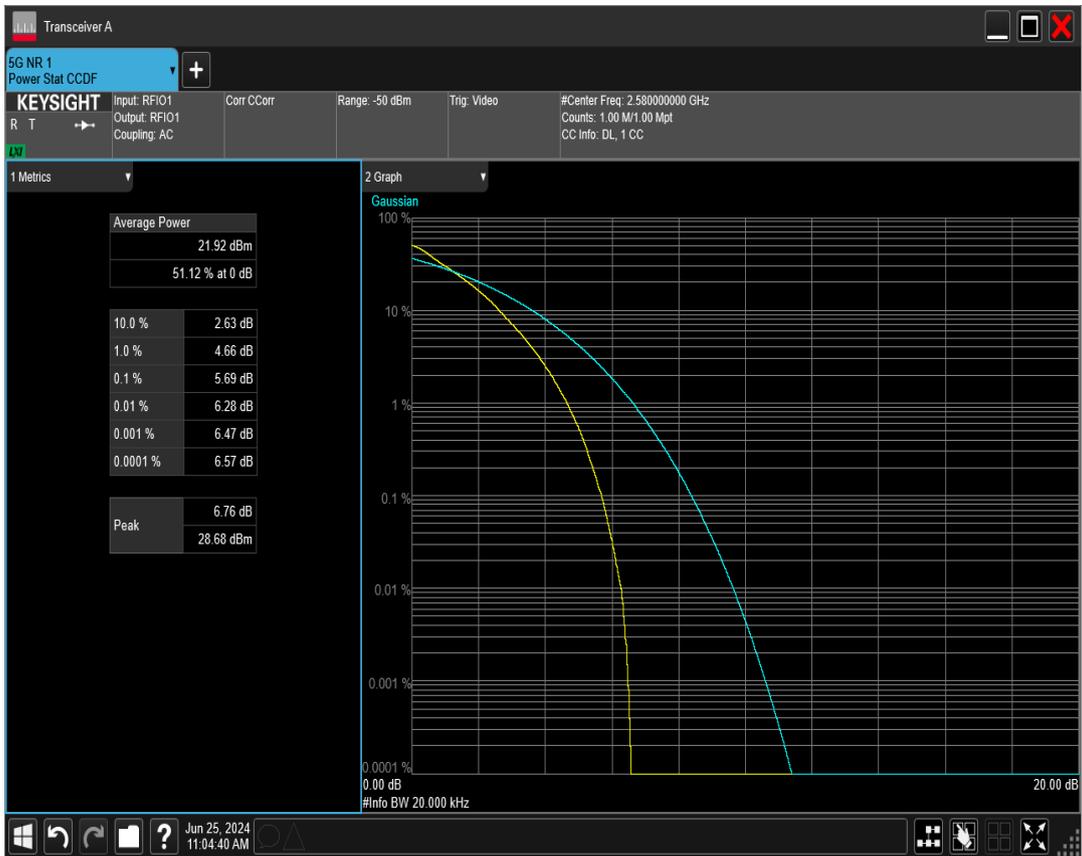

n38 SCS=30kHz DFT_QPSK BW=20MHz Channel=519000 RB=50@0

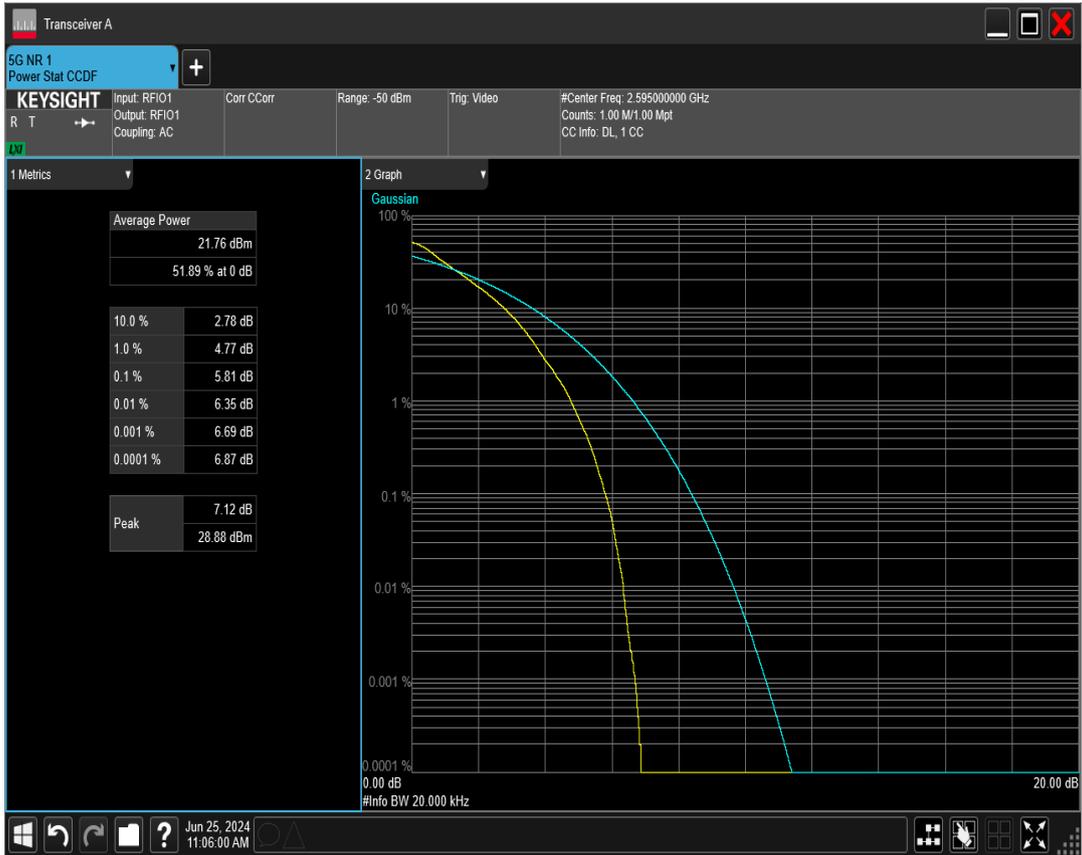

n38 SCS=30kHz DFT_QPSK BW=20MHz Channel=522000 RB=50@0

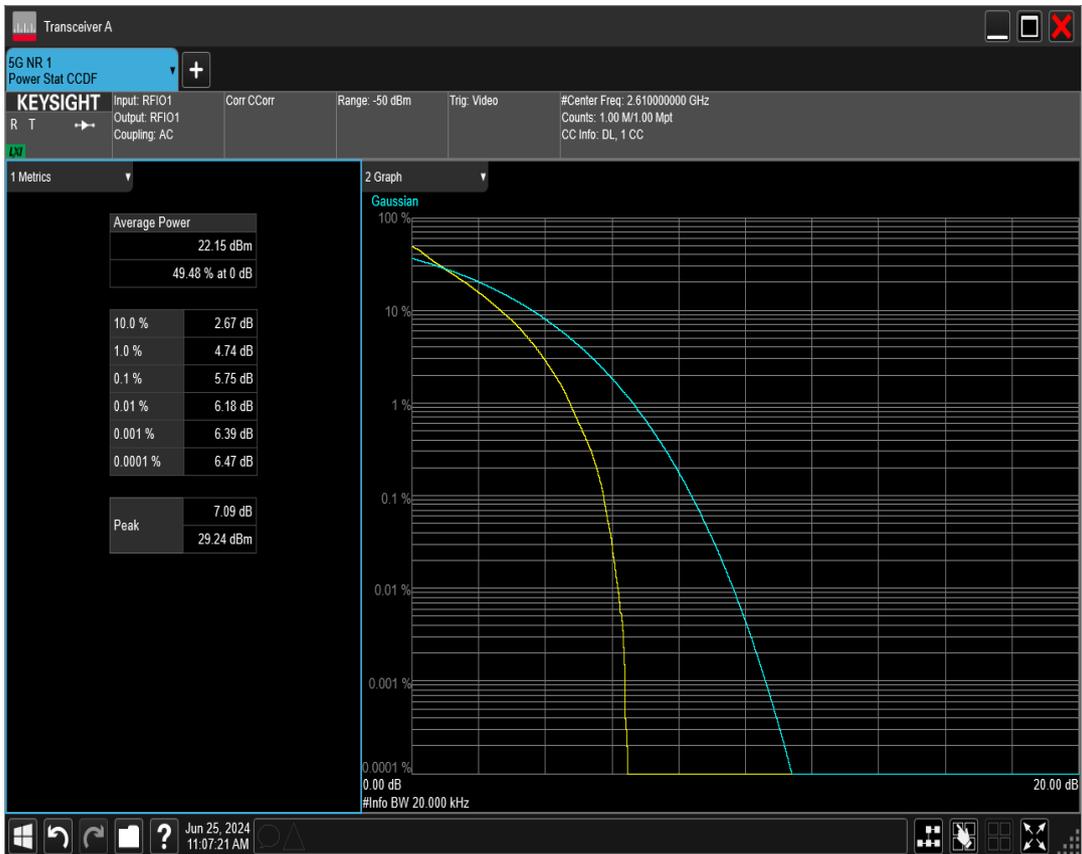

4 Occupied bandwidth for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	99% OBW (MHz)	-26dB EBW (MHz)	Verdict
n38	30	10	519000	24@0	DFT_BPSK	8.590	8.930	PASS
n38	30	10	519000	24@0	DFT_QPSK	8.560	8.920	PASS
n38	30	10	519000	24@0	DFT_QAM16	8.550	8.900	PASS
n38	30	10	519000	24@0	DFT_QAM64	8.550	8.910	PASS
n38	30	10	519000	24@0	DFT_QAM256	8.560	8.990	PASS
n38	30	15	519000	36@0	DFT_BPSK	13.410	13.260	PASS
n38	30	15	519000	36@0	DFT_QPSK	13.400	13.310	PASS
n38	30	15	519000	36@0	DFT_QAM16	13.440	13.250	PASS
n38	30	15	519000	36@0	DFT_QAM64	13.460	13.330	PASS
n38	30	15	519000	36@0	DFT_QAM256	13.420	13.250	PASS
n38	30	20	519000	50@0	DFT_BPSK	18.030	18.290	PASS
n38	30	20	519000	50@0	DFT_QPSK	18.080	18.270	PASS
n38	30	20	519000	50@0	DFT_QAM16	18.080	18.260	PASS
n38	30	20	519000	50@0	DFT_QAM64	18.070	18.260	PASS
n38	30	20	519000	50@0	DFT_QAM256	18.030	18.360	PASS

n38 SCS=30kHz DFT_BPSK BW=10MHz Channel=519000 RB=24@0



n38 SCS=30kHz DFT_BPSK BW=15MHz Channel=519000 RB=36@0



n38 SCS=30kHz DFT_BPSK BW=20MHz Channel=519000 RB=50@0



n38 SCS=30kHz DFT_QAM16 BW=10MHz Channel=519000 RB=24@0



n38 SCS=30kHz DFT_QAM16 BW=15MHz Channel=519000 RB=36@0



n38 SCS=30kHz DFT_QAM16 BW=20MHz Channel=519000 RB=50@0



n38 SCS=30kHz DFT_QAM256 BW=10MHz Channel=519000 RB=24@0



n38 SCS=30kHz DFT_QAM256 BW=15MHz Channel=519000 RB=36@0



n38 SCS=30kHz DFT_QAM256 BW=20MHz Channel=519000 RB=50@0



n38 SCS=30kHz DFT_QAM64 BW=10MHz Channel=519000 RB=24@0



n38 SCS=30kHz DFT_QAM64 BW=15MHz Channel=519000 RB=36@0



n38 SCS=30kHz DFT_QAM64 BW=20MHz Channel=519000 RB=50@0



n38 SCS=30kHz DFT_QPSK BW=10MHz Channel=519000 RB=24@0



n38 SCS=30kHz DFT_QPSK BW=15MHz Channel=519000 RB=36@0




n38 SCS=30kHz DFT_QPSK BW=20MHz Channel=519000 RB=50@0




5 Band edge for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
n38	30	10	515000	24@0	CP_QPSK	2558.56	-38.02	-25	PASS
n38	30	10	515000	1@0	CP_QPSK	2558.46	-40.76	-25	PASS
n38	30	10	515000	1@23	CP_QPSK	2559.77	-40.82	-25	PASS
n38	30	10	523000	24@0	CP_QPSK	2621.49	-21.25	-10	PASS
n38	30	10	523000	1@0	CP_QPSK	2630.73	-40.51	-25	PASS
n38	30	10	523000	1@23	CP_QPSK	2630.41	-40.50	-25	PASS
n38	30	15	515500	38@0	CP_QPSK	2554.89	-37.80	-25	PASS
n38	30	15	515500	1@0	CP_QPSK	2553.05	-40.67	-25	PASS
n38	30	15	515500	1@37	CP_QPSK	2553.54	-40.71	-25	PASS
n38	30	15	522500	38@0	CP_QPSK	2635.06	-38.92	-25	PASS
n38	30	15	522500	1@0	CP_QPSK	2636.40	-40.45	-25	PASS
n38	30	15	522500	1@37	CP_QPSK	2635.10	-40.51	-25	PASS
n38	30	20	516000	51@0	CP_QPSK	2549.89	-38.84	-25	PASS
n38	30	20	516000	1@0	CP_QPSK	2547.64	-40.70	-25	PASS
n38	30	20	516000	1@50	CP_QPSK	2548.96	-40.73	-25	PASS
n38	30	20	522000	51@0	CP_QPSK	2640.13	-39.72	-25	PASS
n38	30	20	522000	1@0	CP_QPSK	2643.35	-40.60	-25	PASS
n38	30	20	522000	1@50	CP_QPSK	2642.30	-40.60	-25	PASS


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=515000 RB=1@0

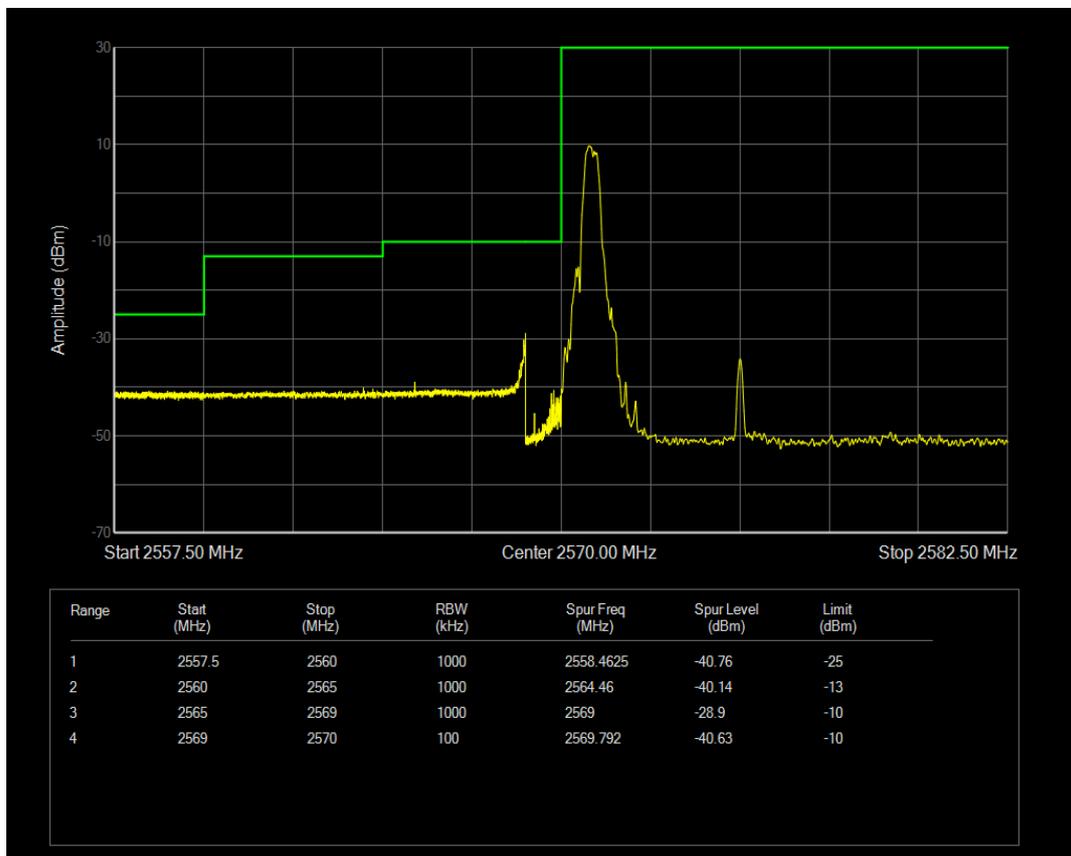


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=515000 RB=1@23

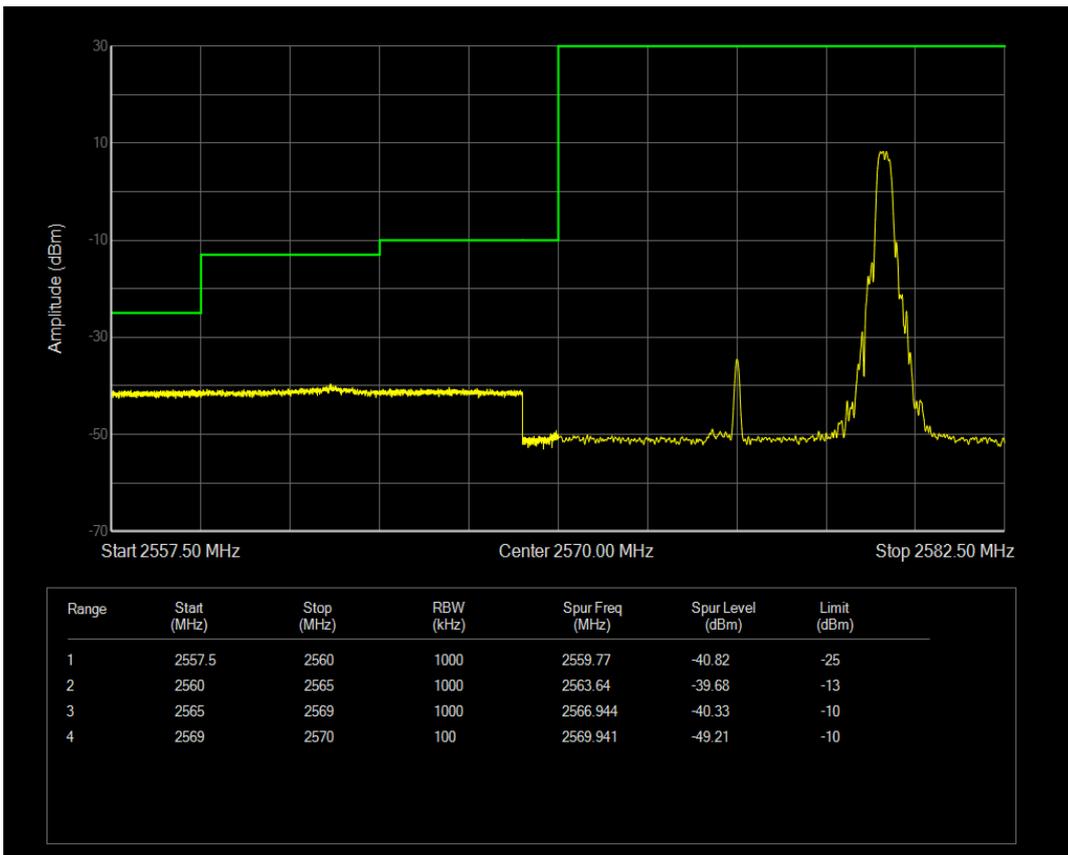


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=515000 RB=24@0

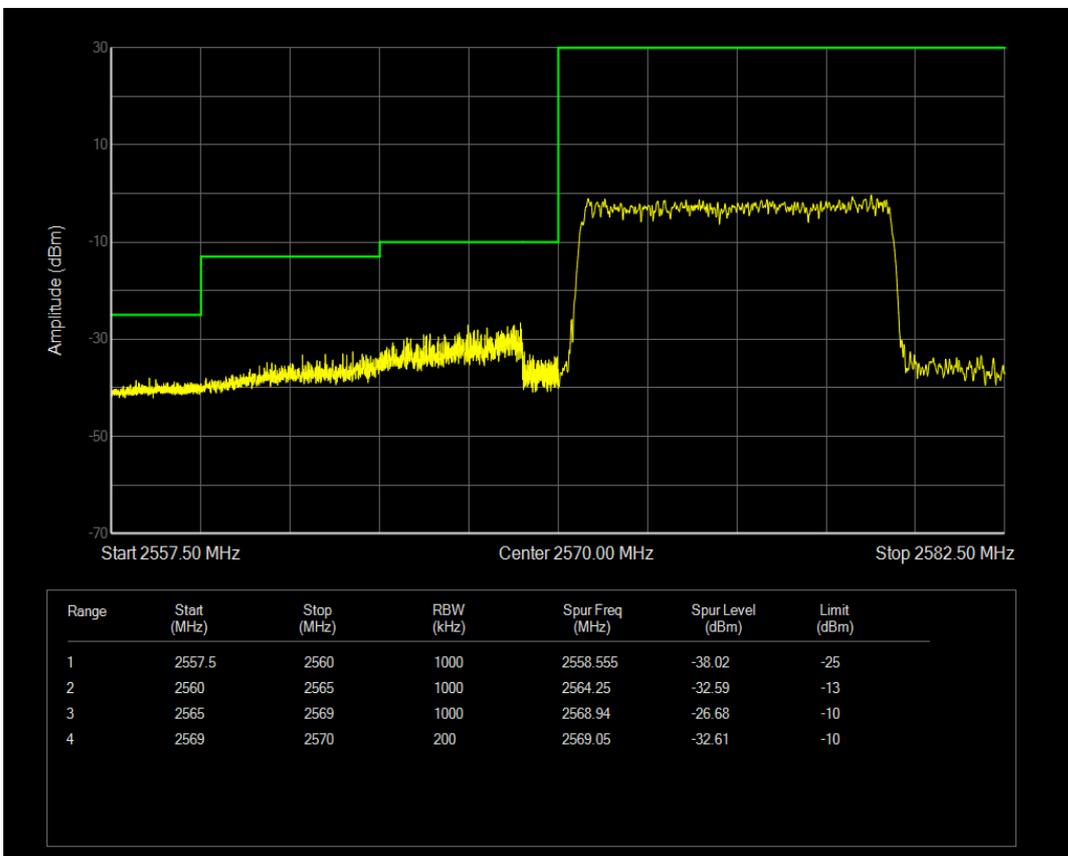


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=523000 RB=1@0

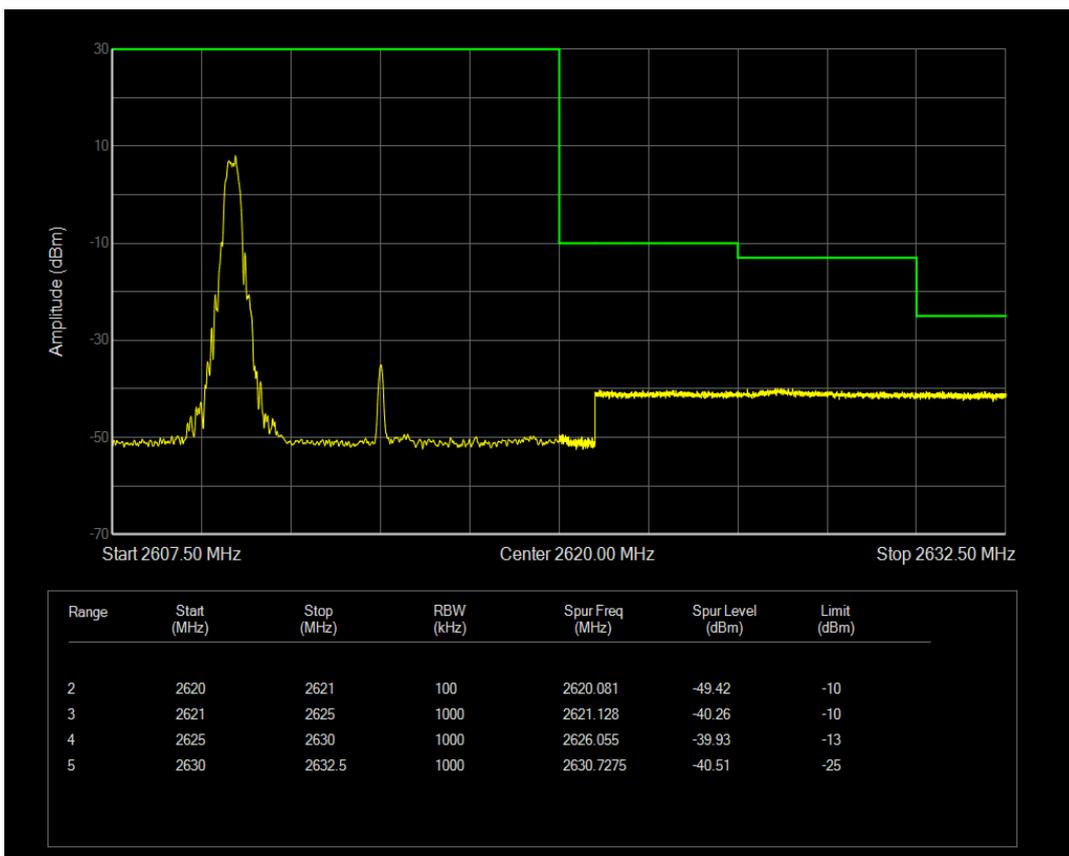


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=523000 RB=1@23

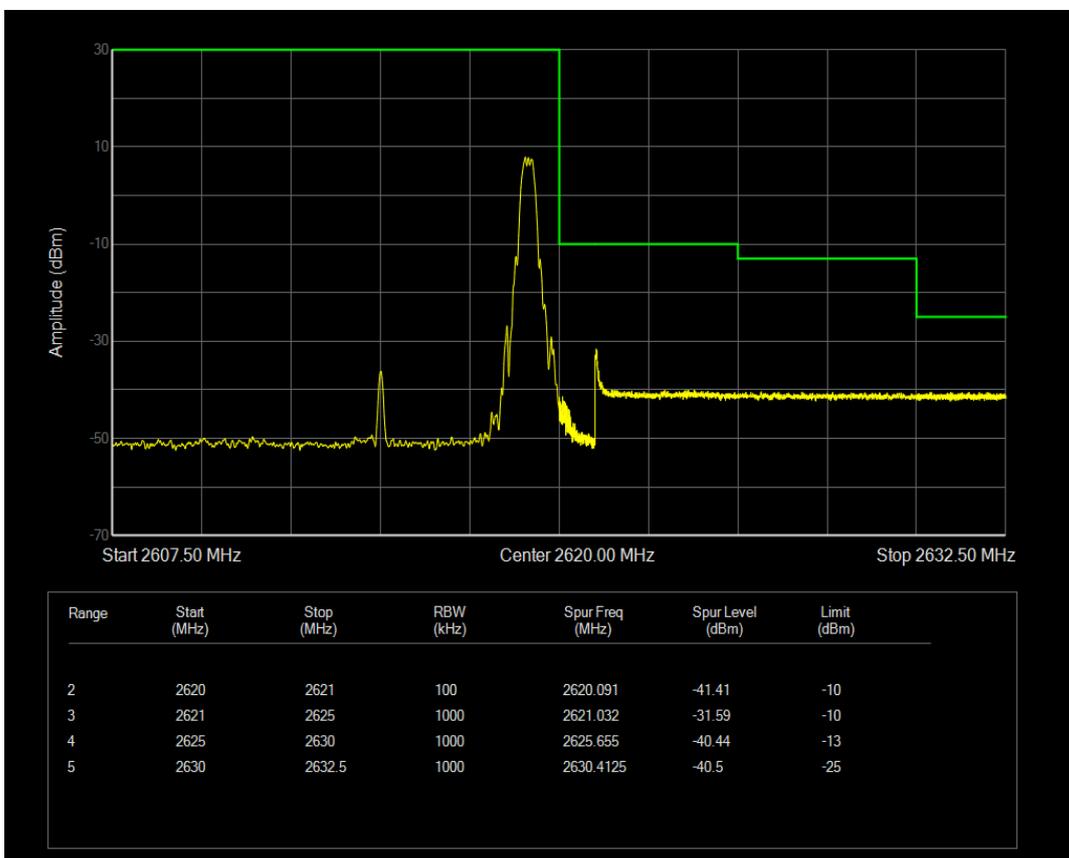


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=523000 RB=24@0

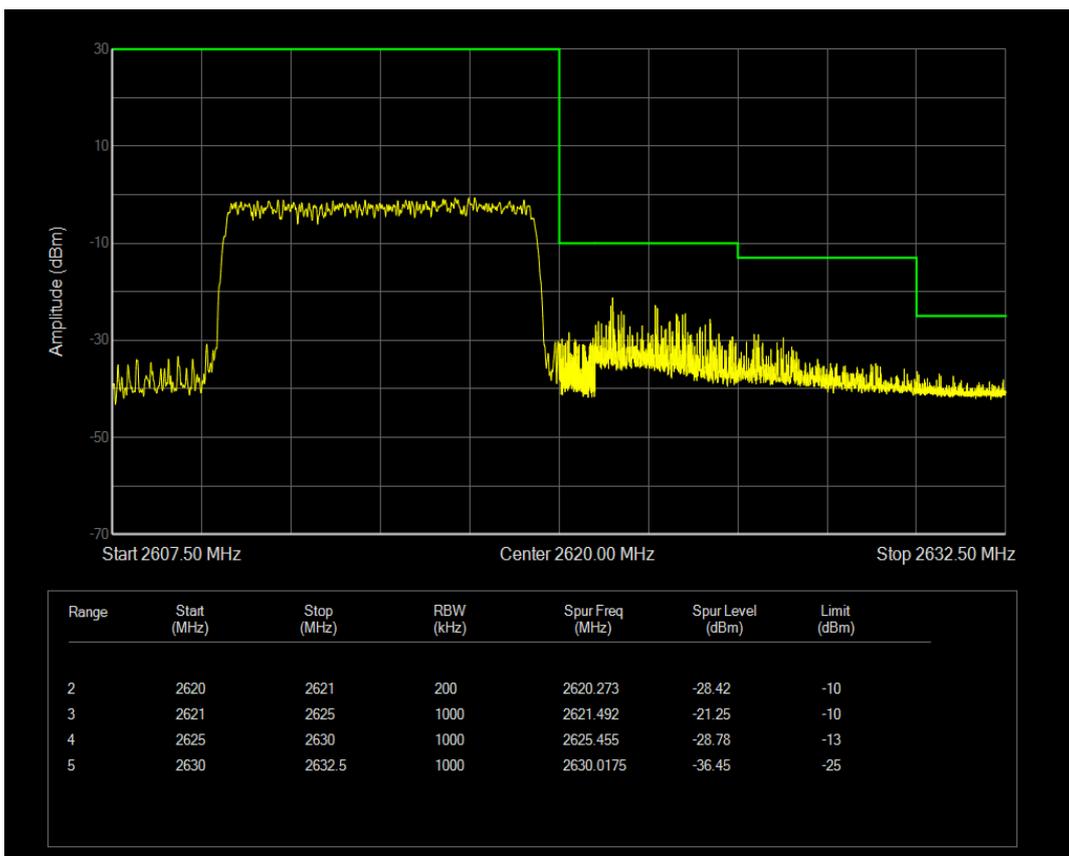


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=515500 RB=1@0

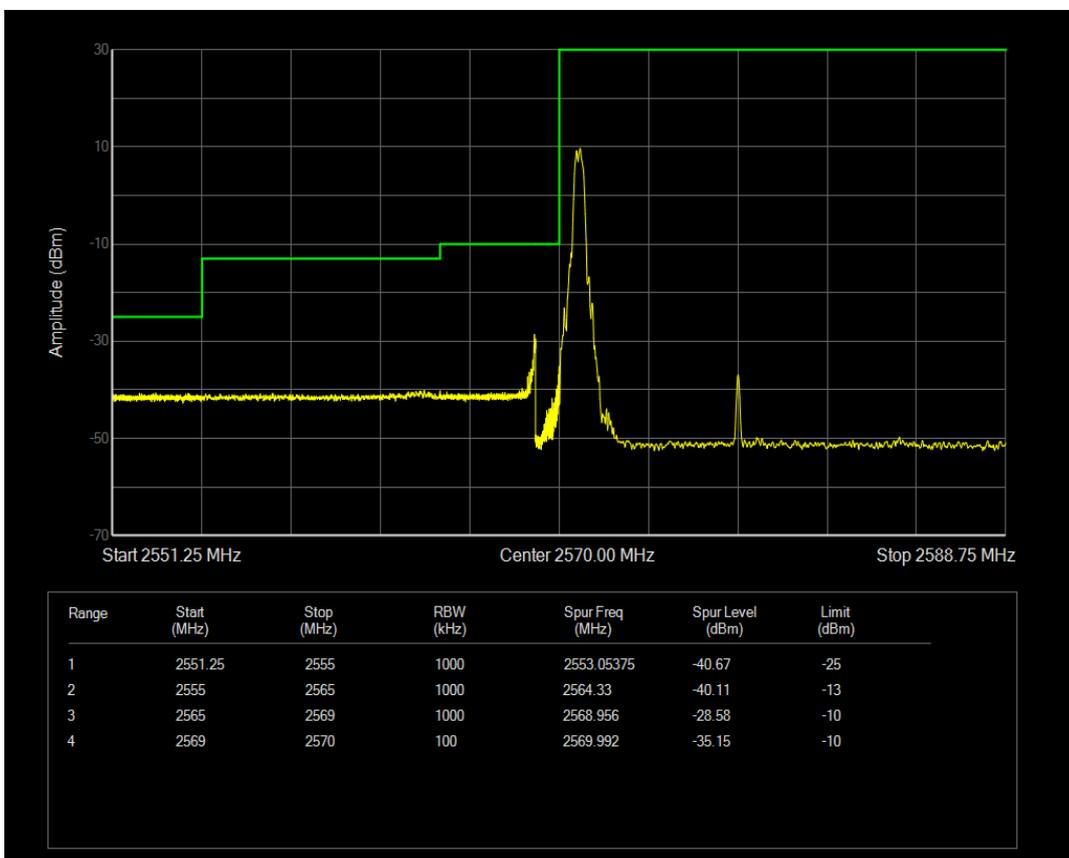


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=515500 RB=1@37

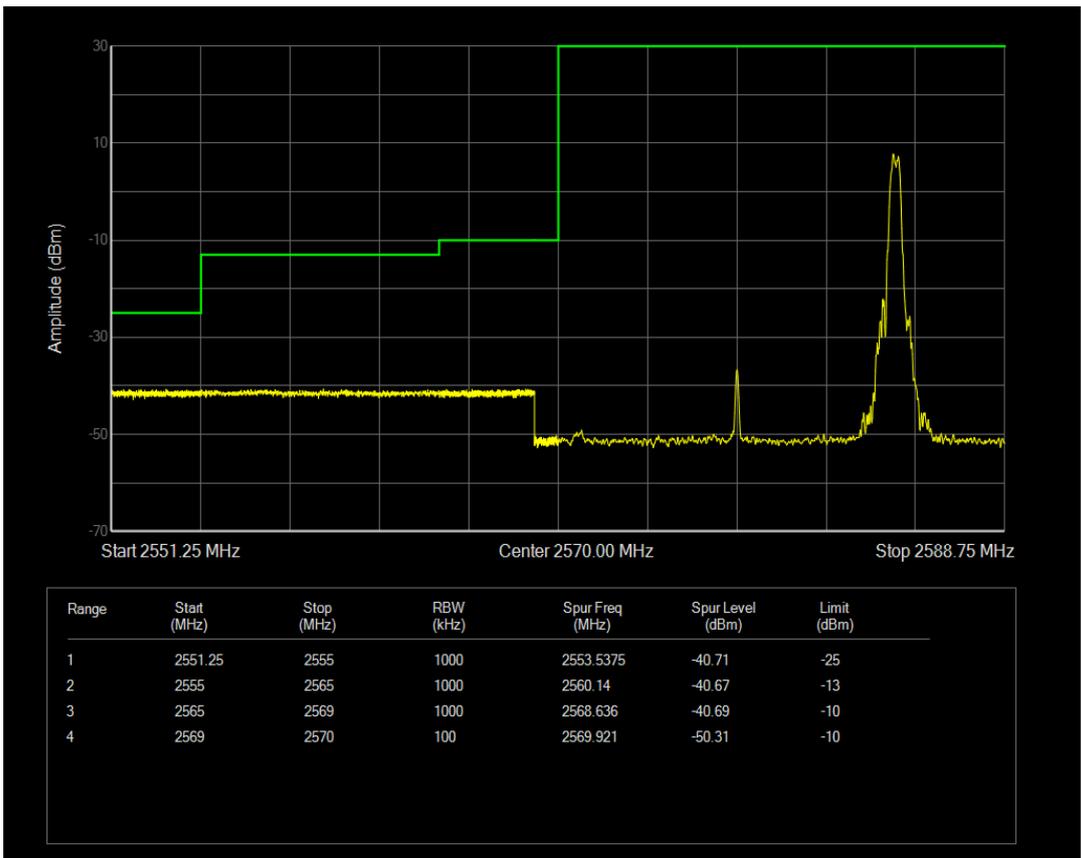


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=515500 RB=38@0

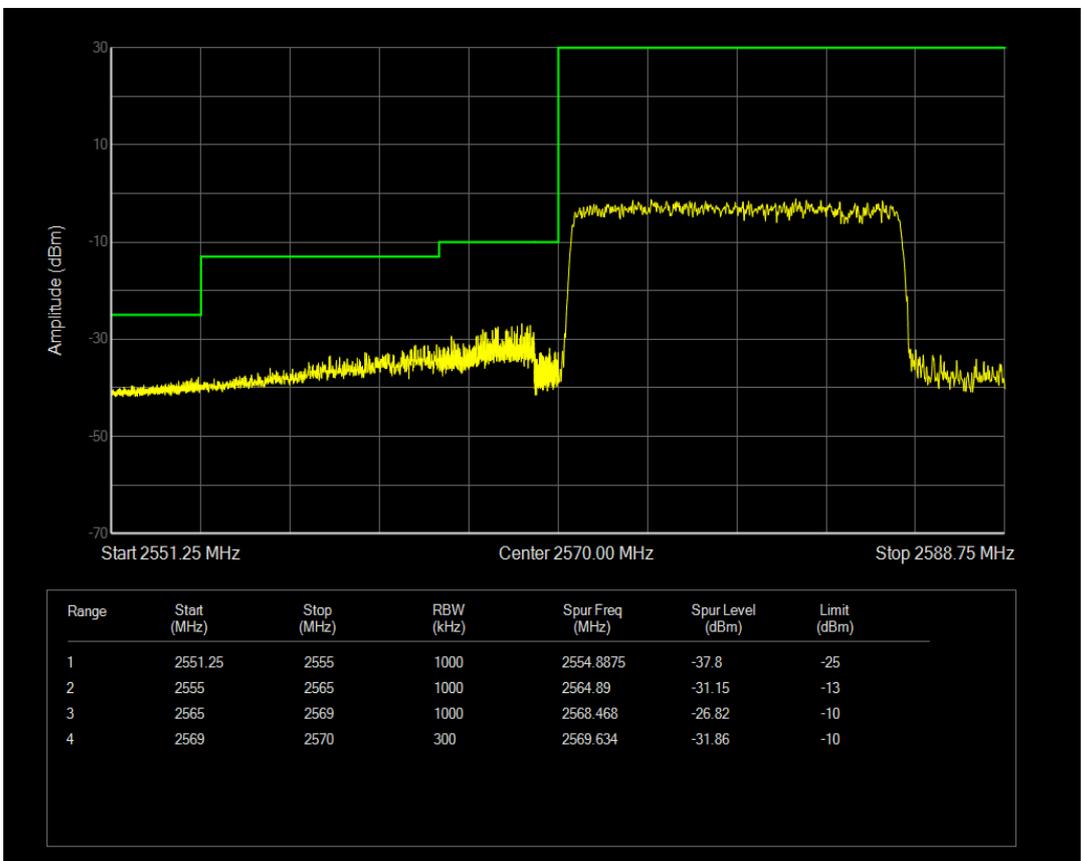


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=522500 RB=1@0

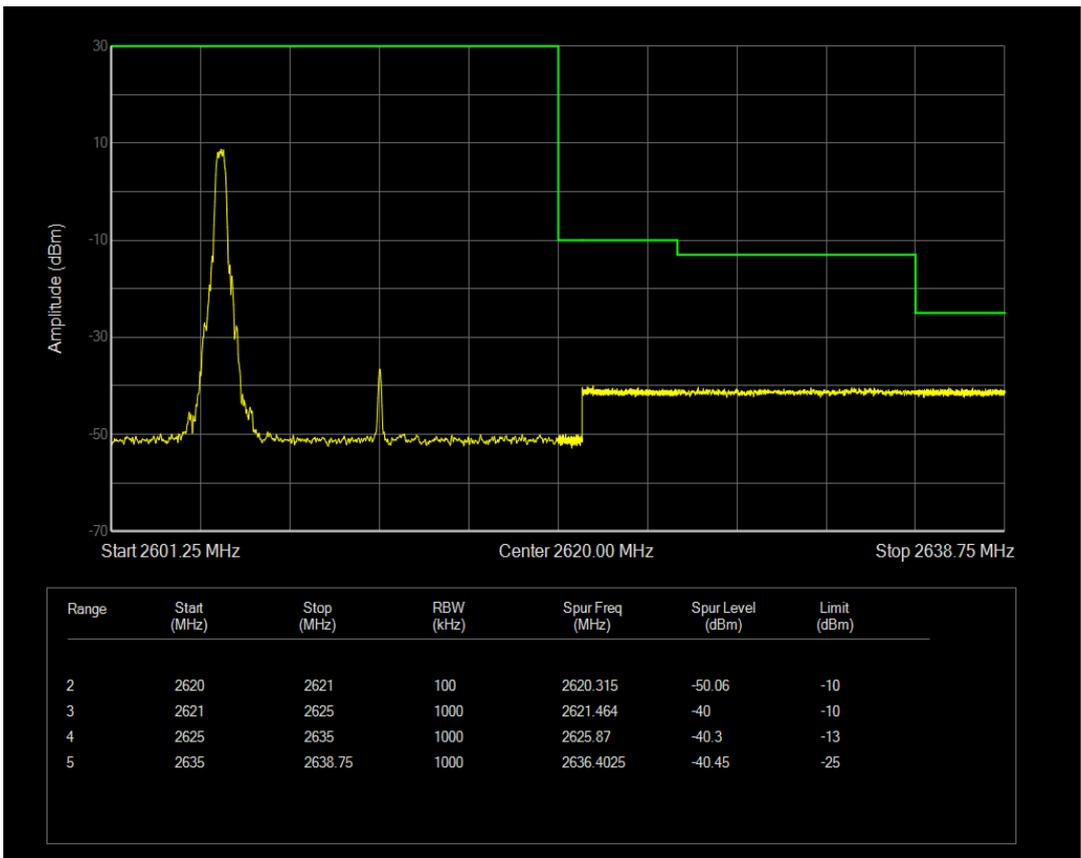


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=522500 RB=1@37

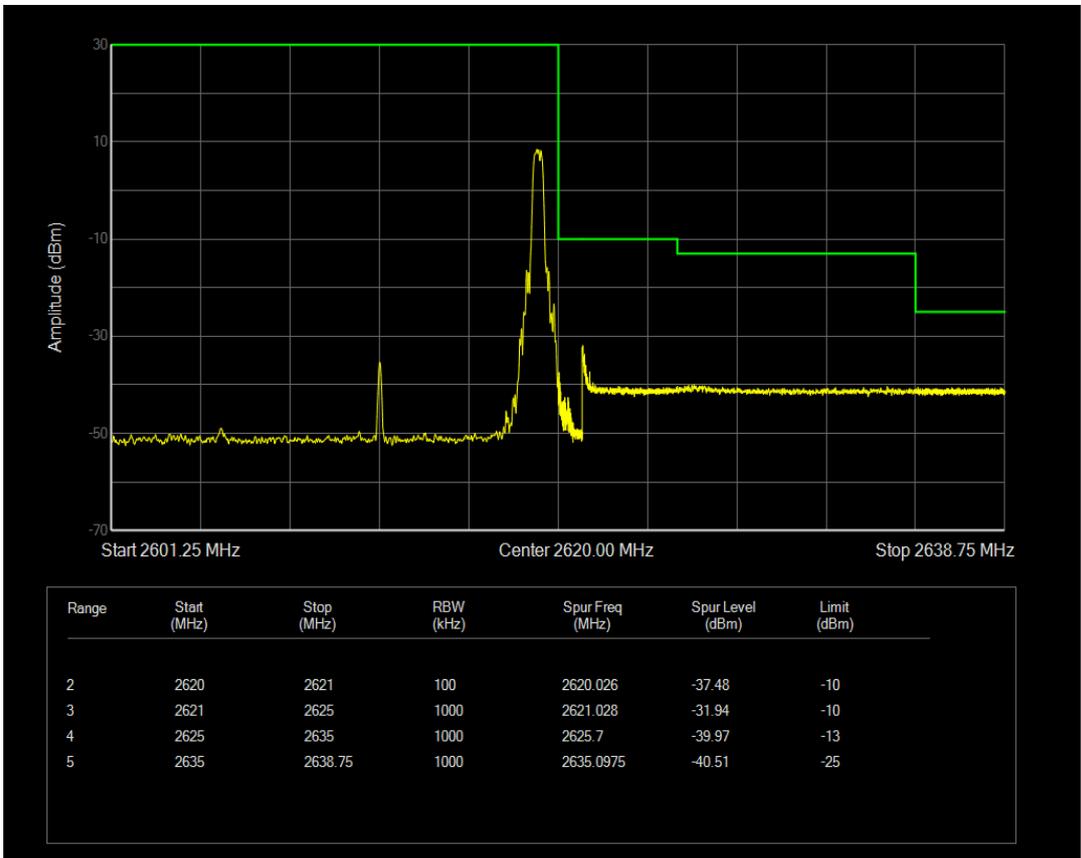


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=522500 RB=38@0

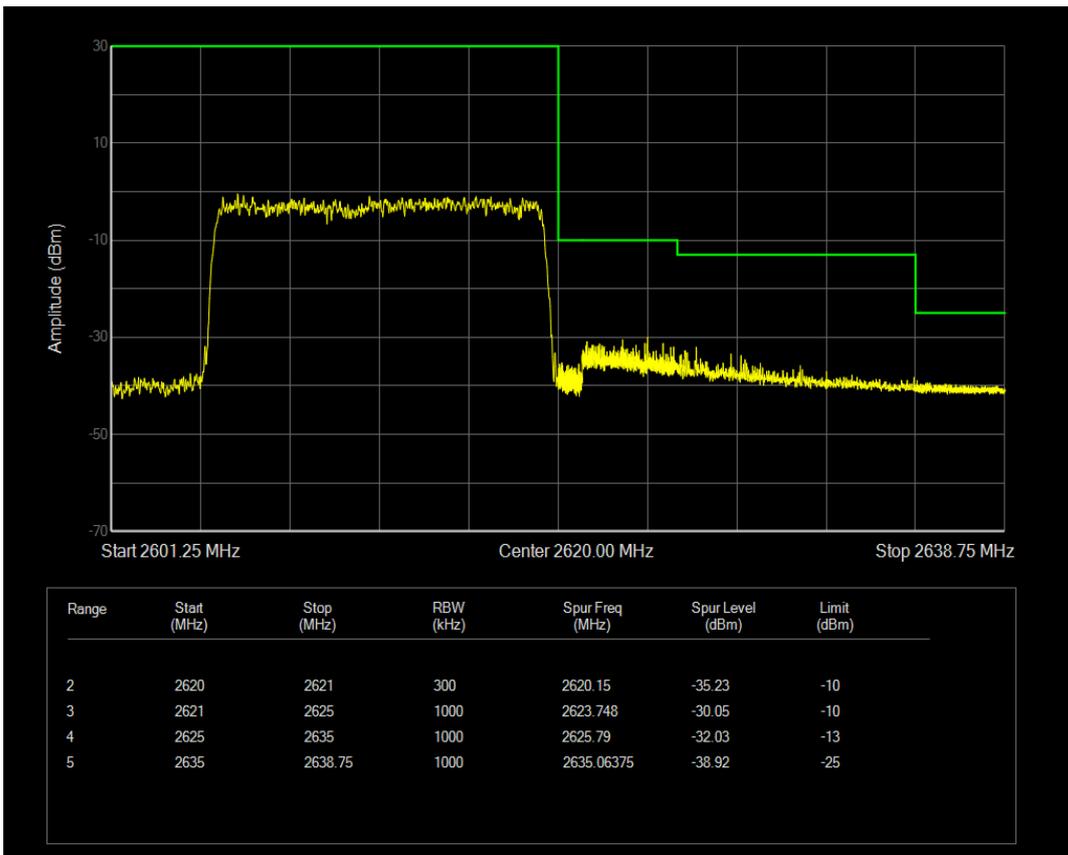


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=516000 RB=1@0

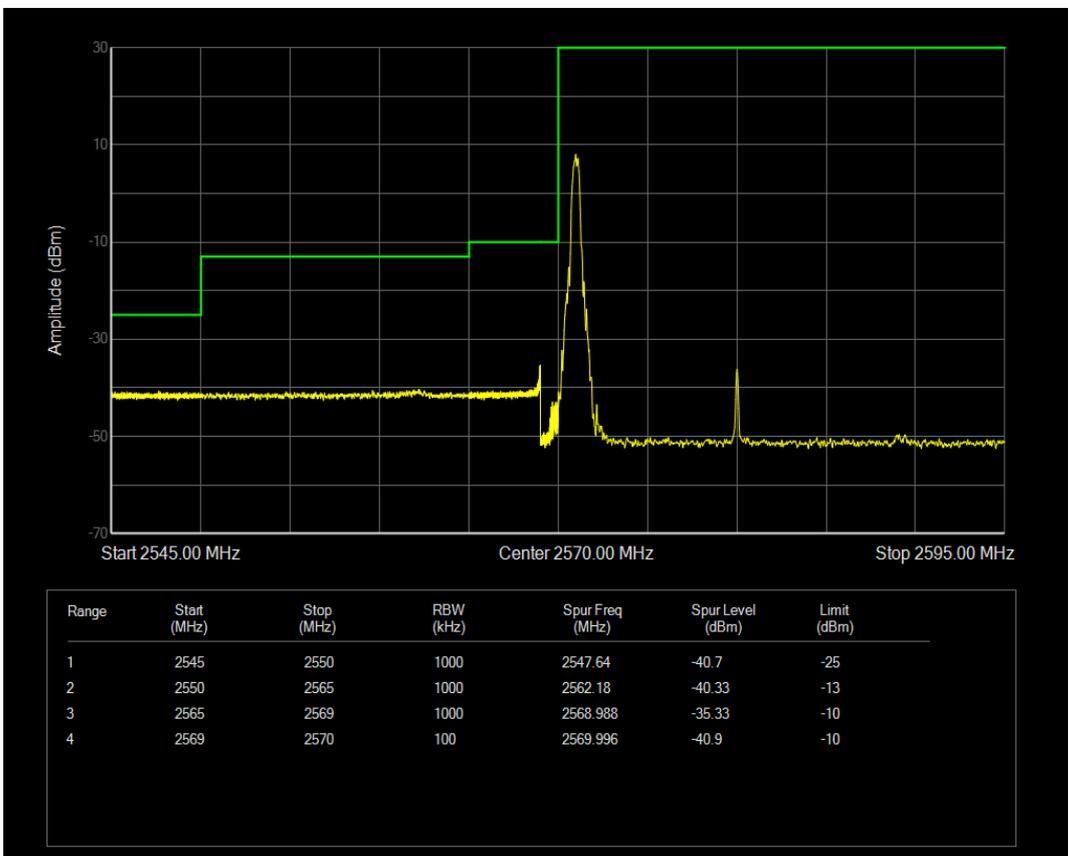


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=516000 RB=1 @50

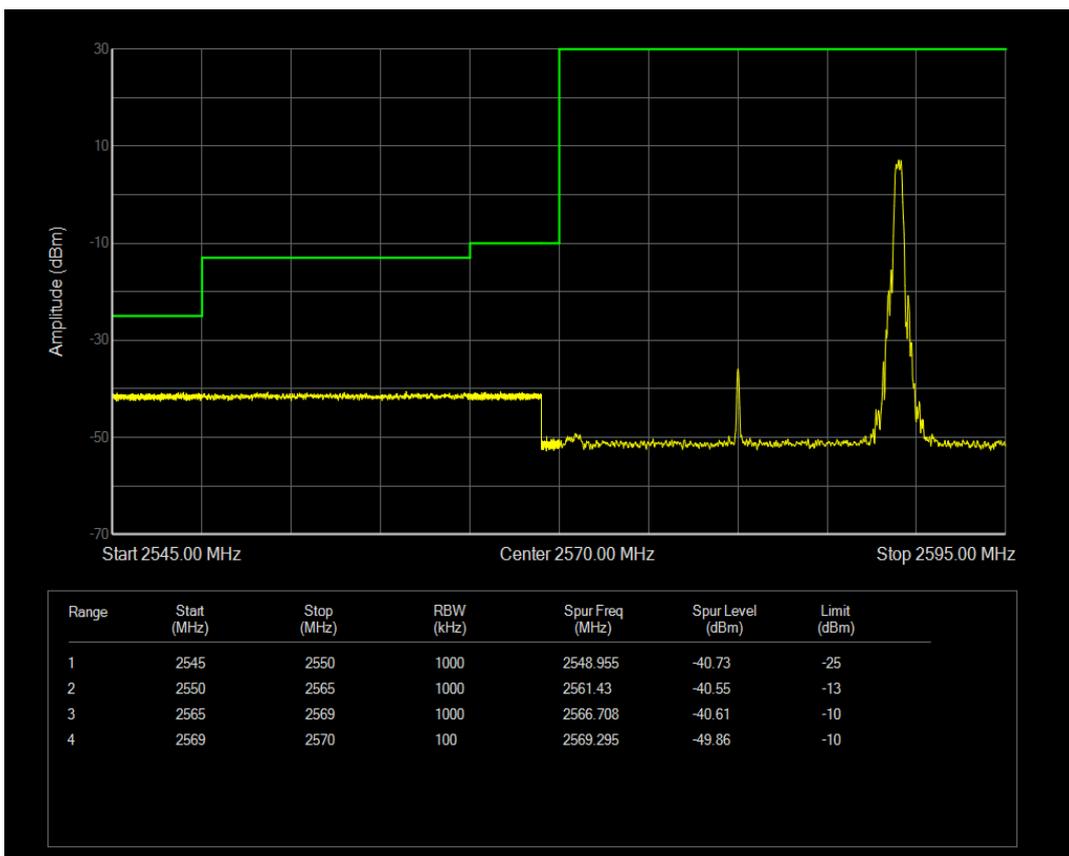


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=516000 RB=51 @0

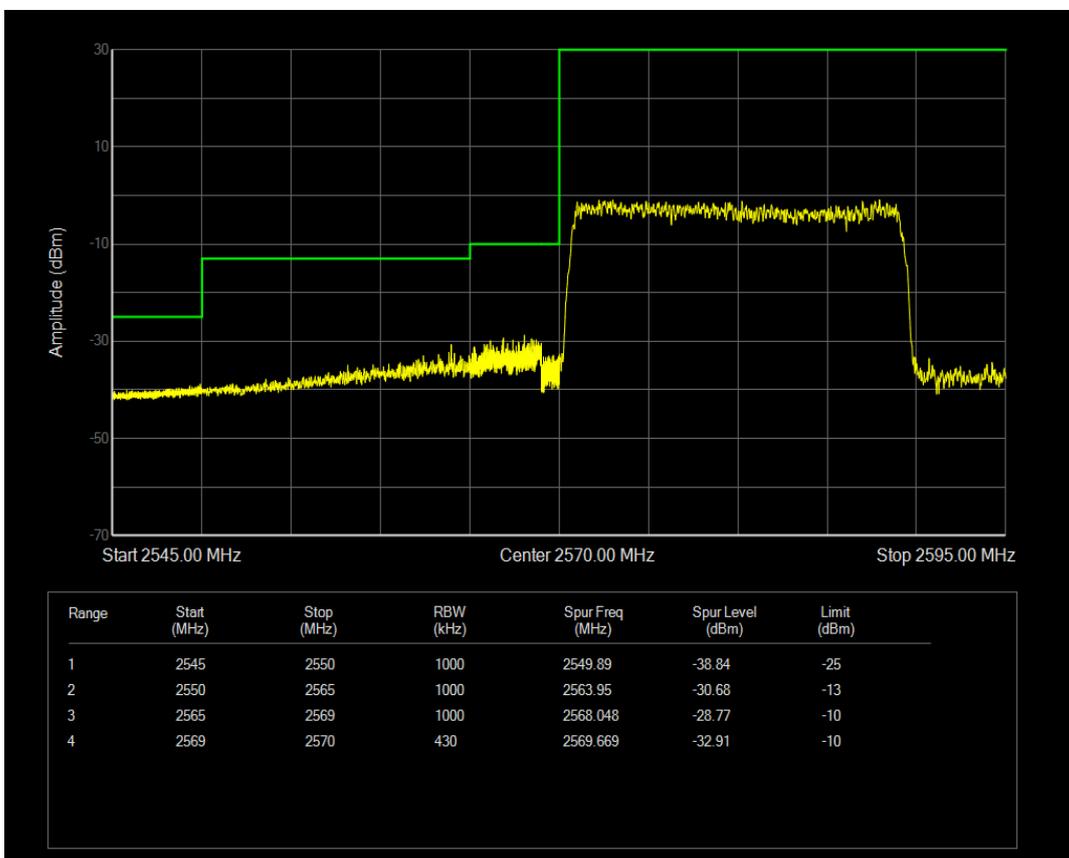


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=522000 RB=1 @0

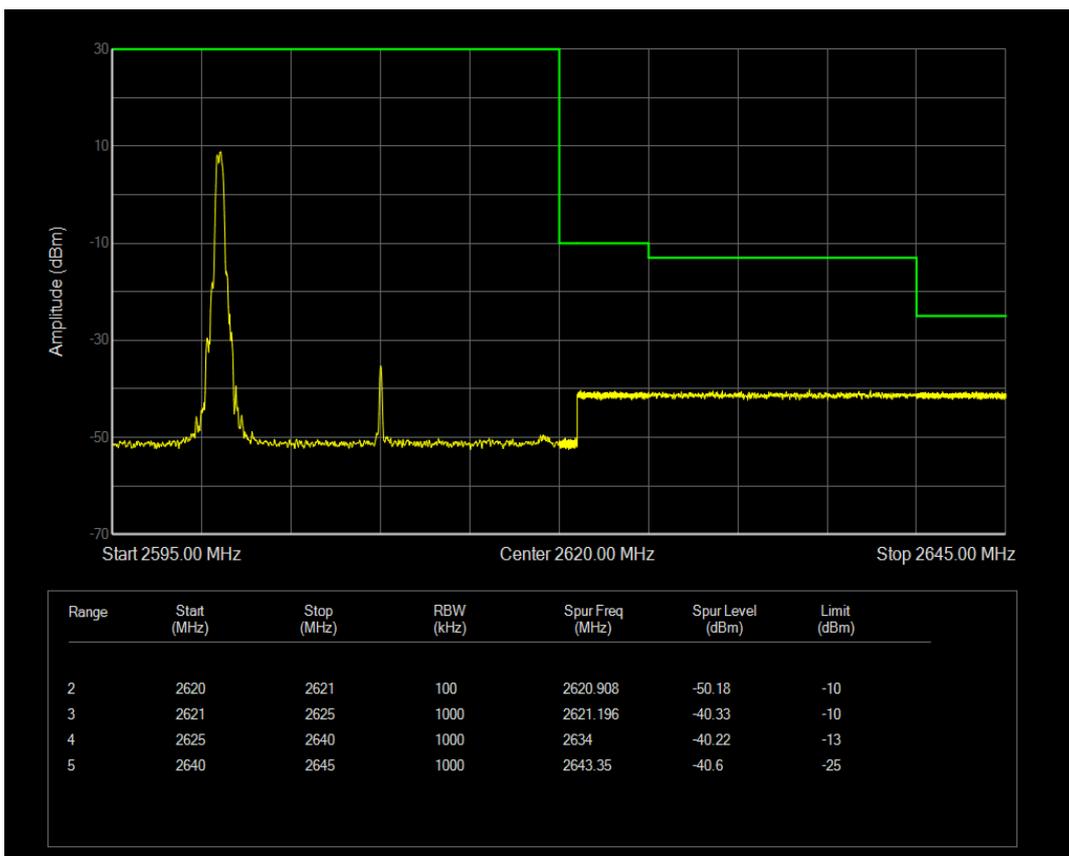

n38 SCS=30kHz CP_QPSK BW=20MHz Channel=522000 RB=1 @50

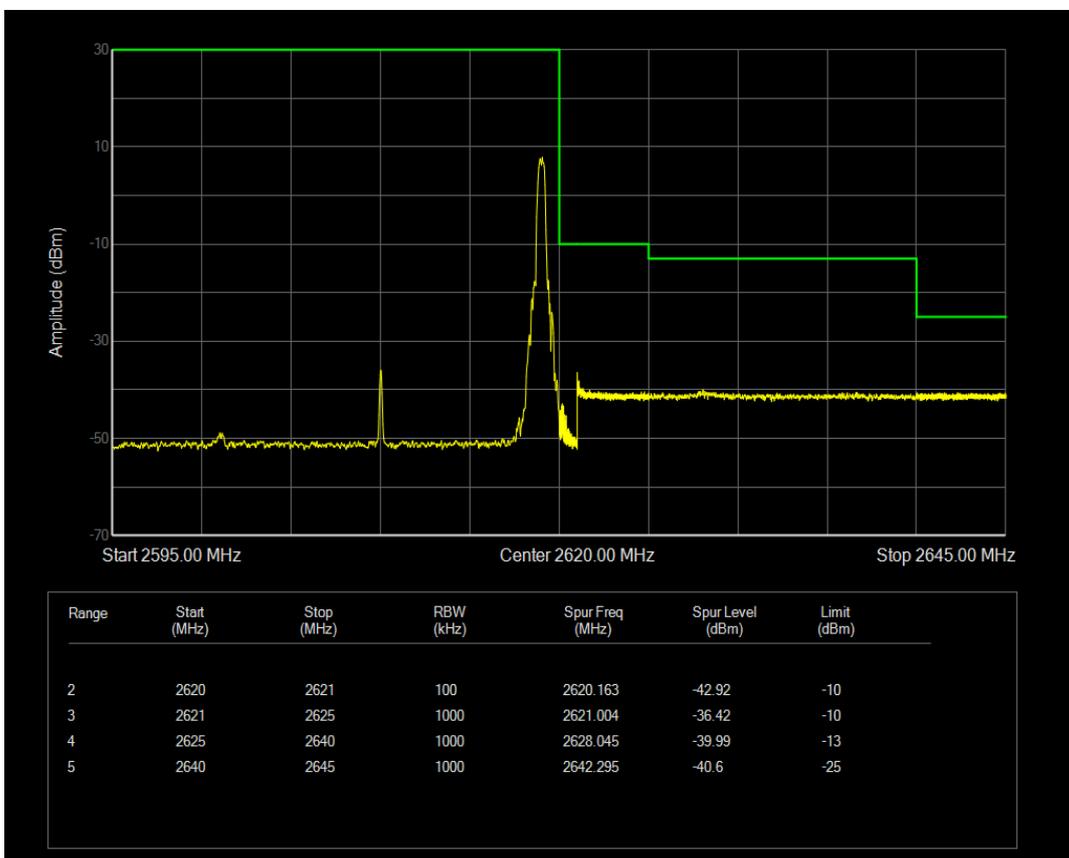


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=522000 RB=51 @0

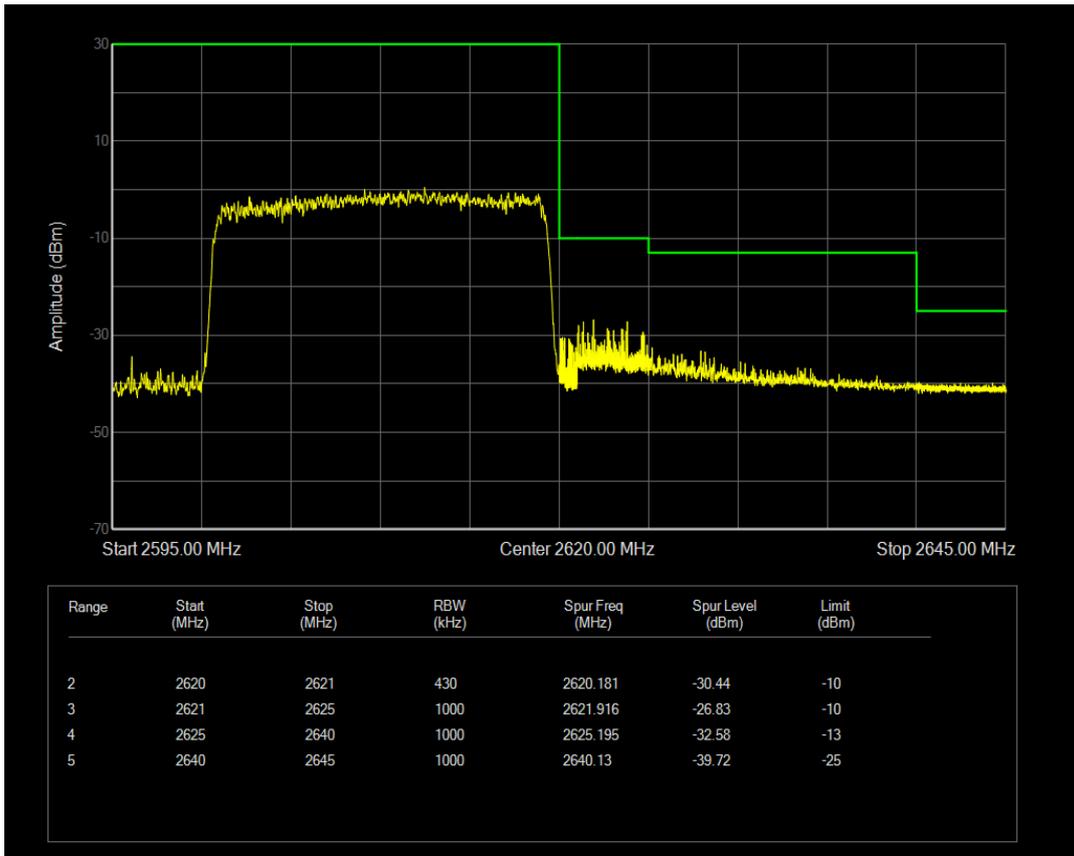


6 Out-of-band emissions for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
n38	30	10	515000	24@0	CP_QPSK	26216.10	-36.86	-25	PASS
n38	30	10	515000	1@0	CP_QPSK	25403.60	-36.80	-25	PASS
n38	30	10	515000	1@23	CP_QPSK	26286.30	-36.42	-25	PASS
n38	30	10	523000	24@0	CP_QPSK	25553.75	-37.00	-25	PASS
n38	30	10	523000	1@0	CP_QPSK	26168.00	-36.50	-25	PASS
n38	30	10	523000	1@23	CP_QPSK	25575.85	-36.94	-25	PASS
n38	30	15	515500	38@0	CP_QPSK	26632.75	-37.38	-25	PASS
n38	30	15	515500	1@0	CP_QPSK	25685.70	-36.27	-25	PASS
n38	30	15	515500	1@37	CP_QPSK	26465.05	-36.82	-25	PASS
n38	30	15	522500	38@0	CP_QPSK	25776.05	-37.23	-25	PASS
n38	30	15	522500	1@0	CP_QPSK	26227.15	-36.49	-25	PASS
n38	30	15	522500	1@37	CP_QPSK	25508.90	-37.07	-25	PASS
n38	30	20	516000	51@0	CP_QPSK	25359.40	-37.19	-25	PASS
n38	30	20	516000	1@0	CP_QPSK	25671.40	-37.35	-25	PASS
n38	30	20	516000	1@50	CP_QPSK	26219.35	-36.40	-25	PASS
n38	30	20	522000	51@0	CP_QPSK	26095.20	-37.20	-25	PASS
n38	30	20	522000	1@0	CP_QPSK	25583.65	-36.95	-25	PASS
n38	30	20	522000	1@50	CP_QPSK	25835.20	-37.34	-25	PASS


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=515000 RB=1@0

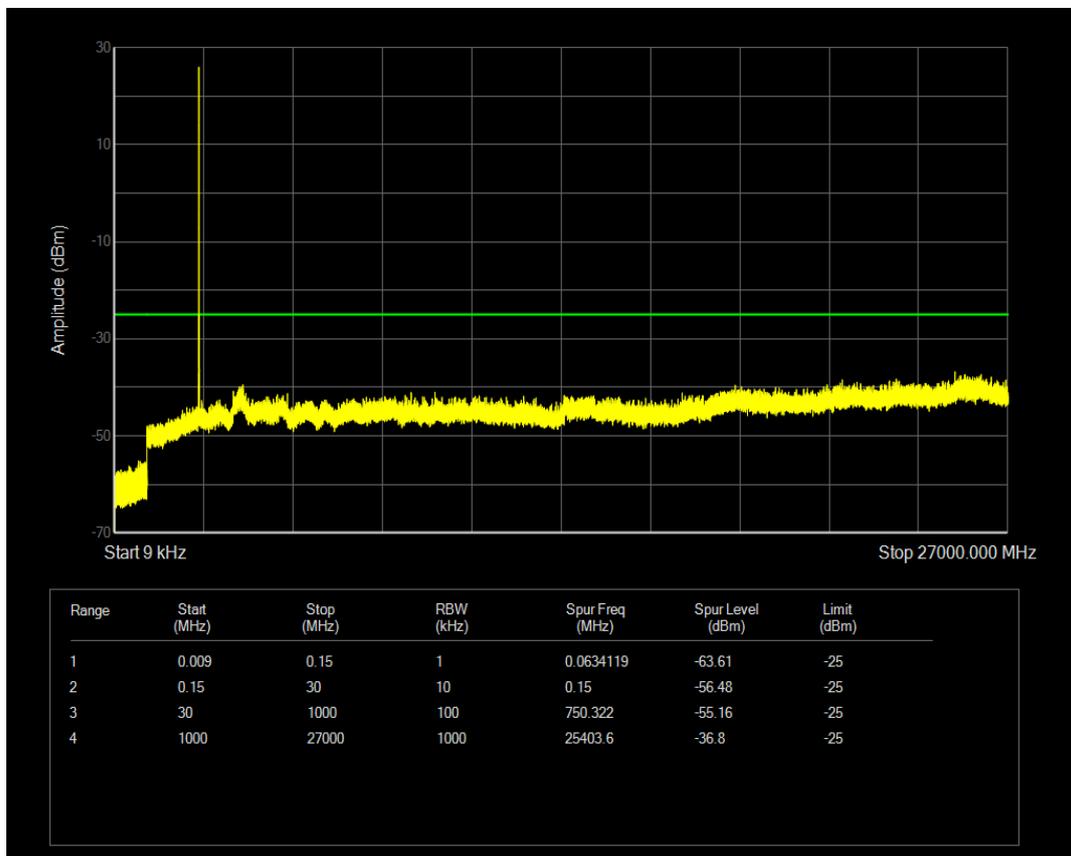


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=515000 RB=1 @23

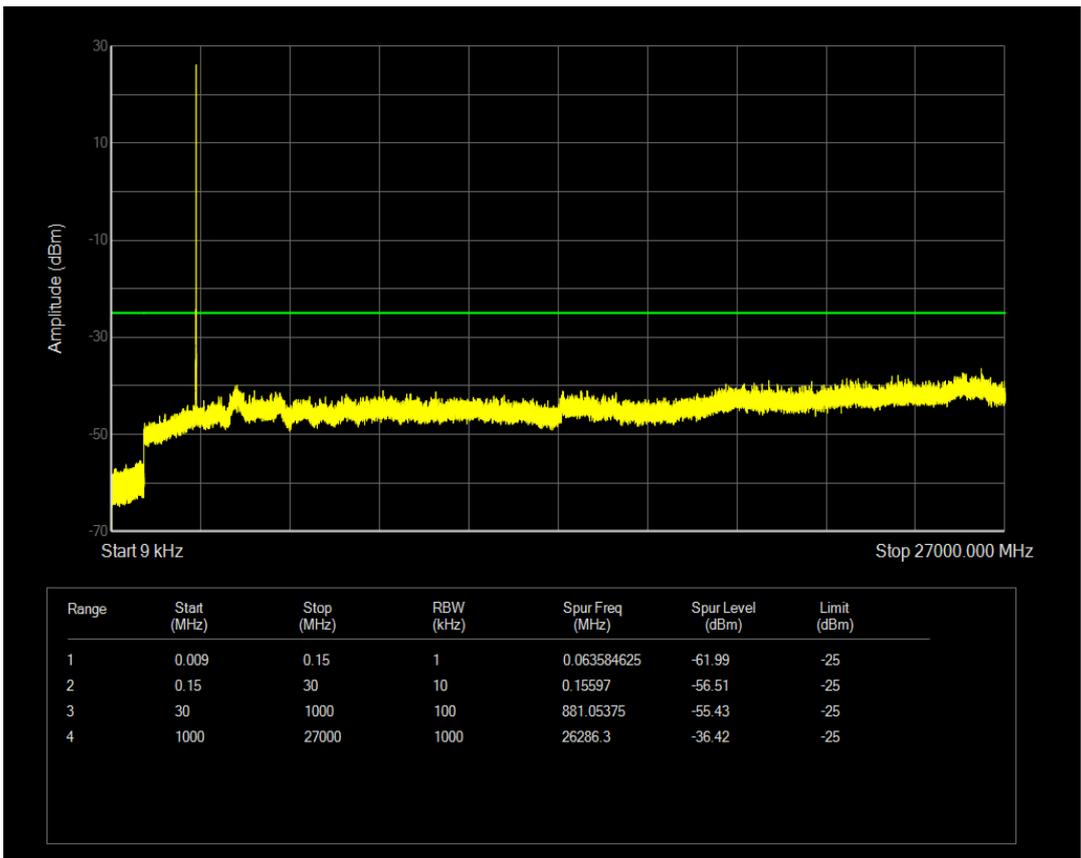


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=515000 RB=24 @0

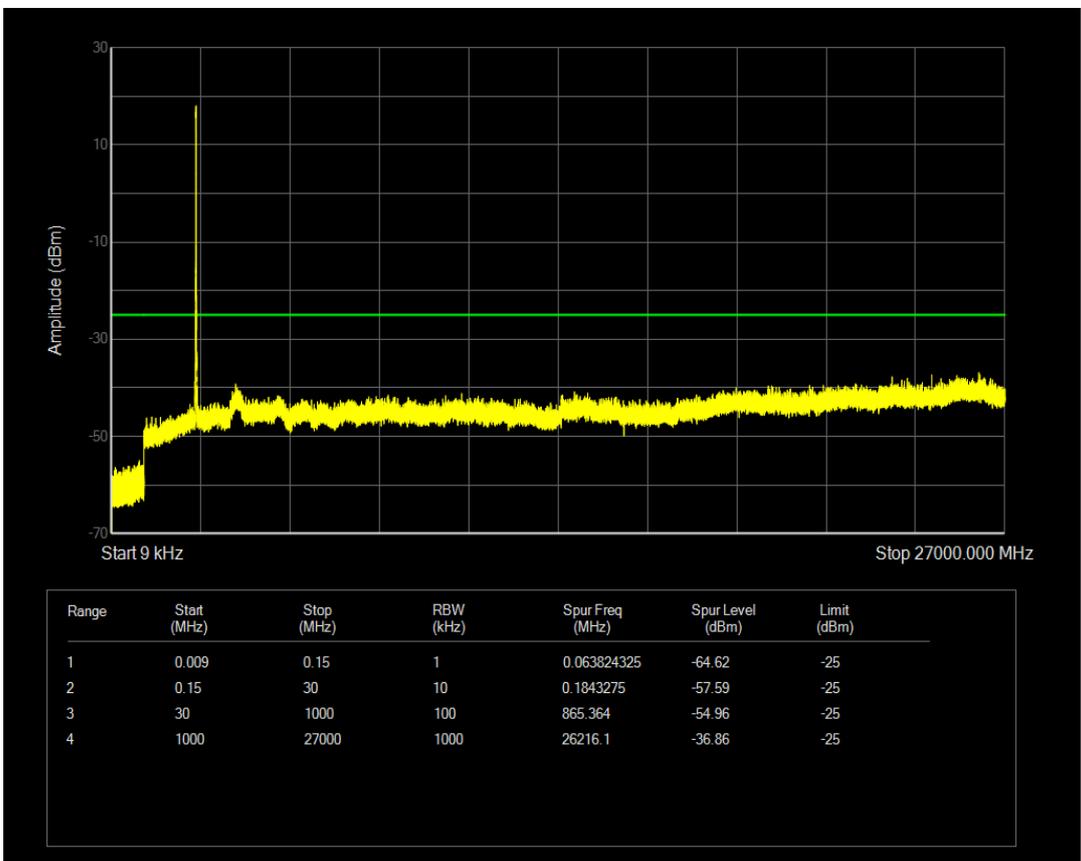


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=523000 RB=1@0

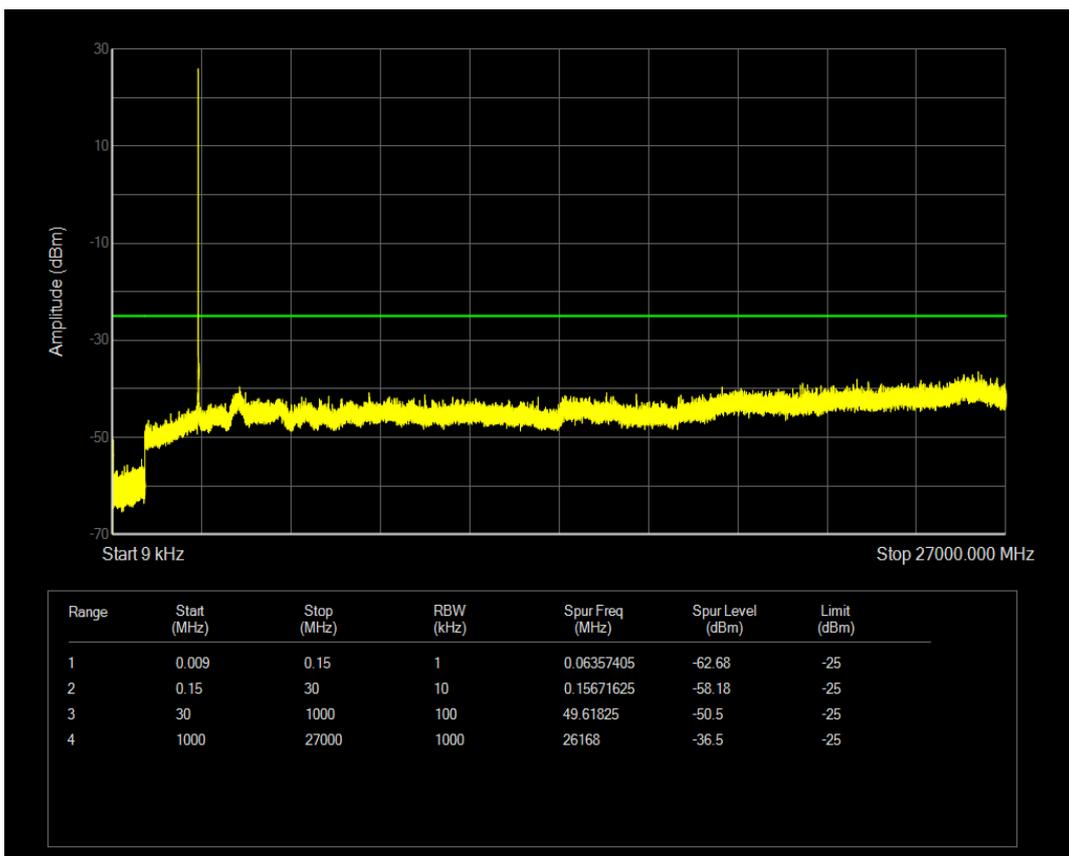


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=523000 RB=1@23

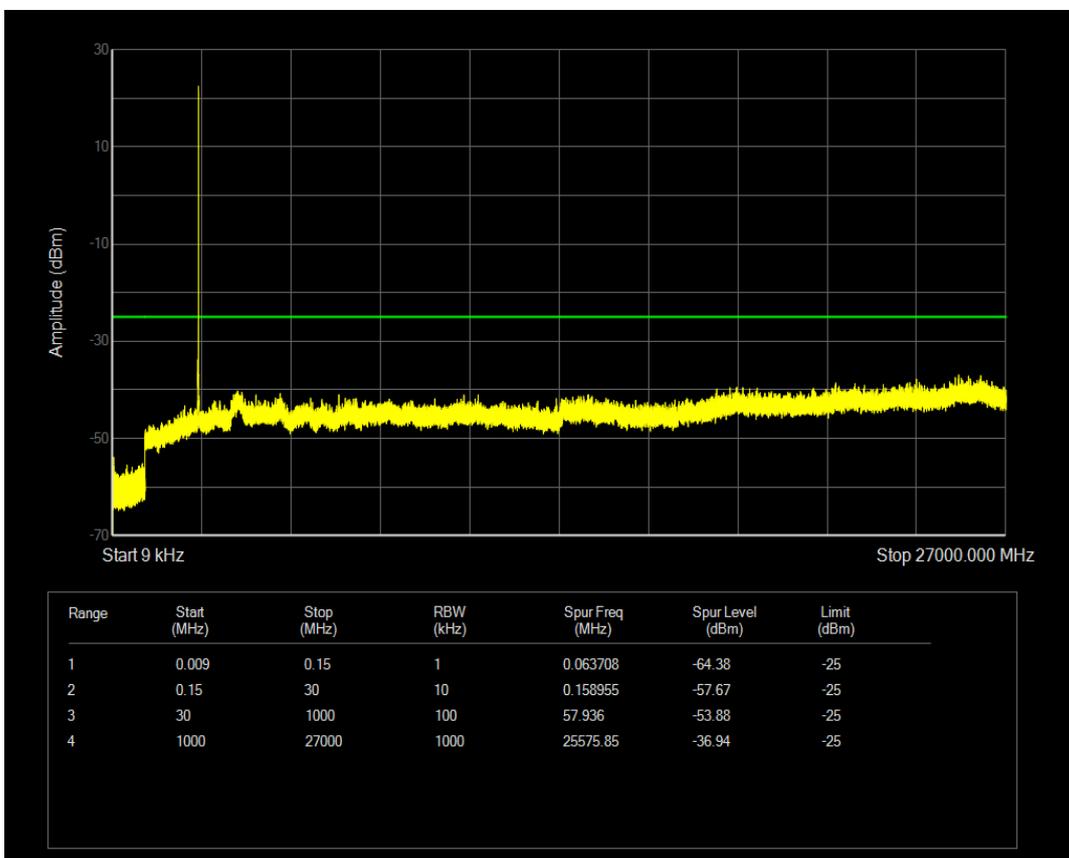


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=523000 RB=24@0

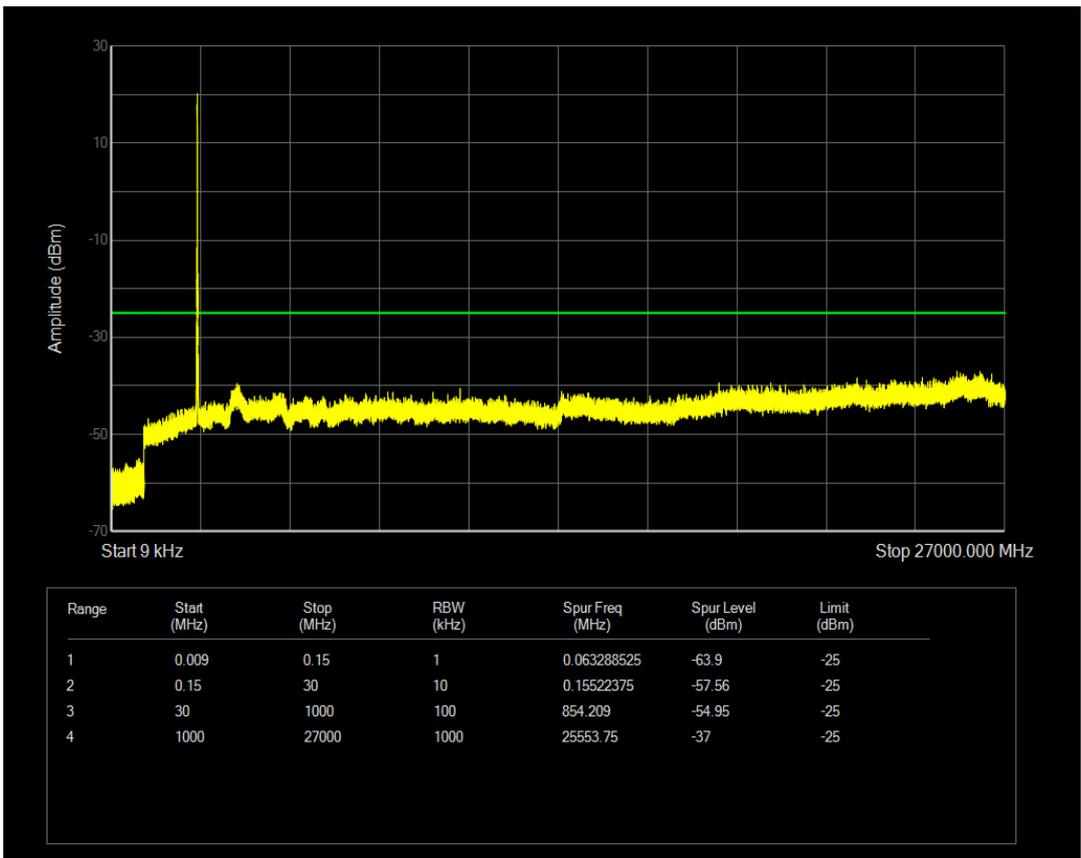


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=515500 RB=1@0

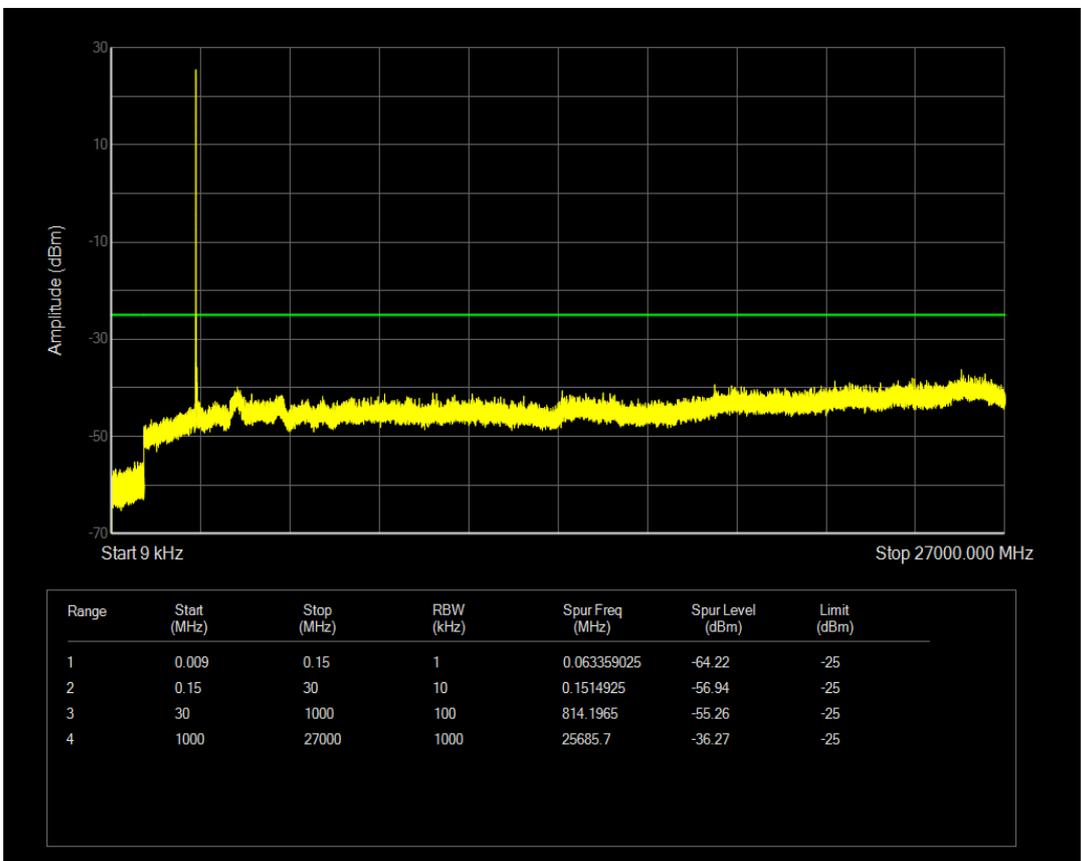


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=515500 RB=1 @37

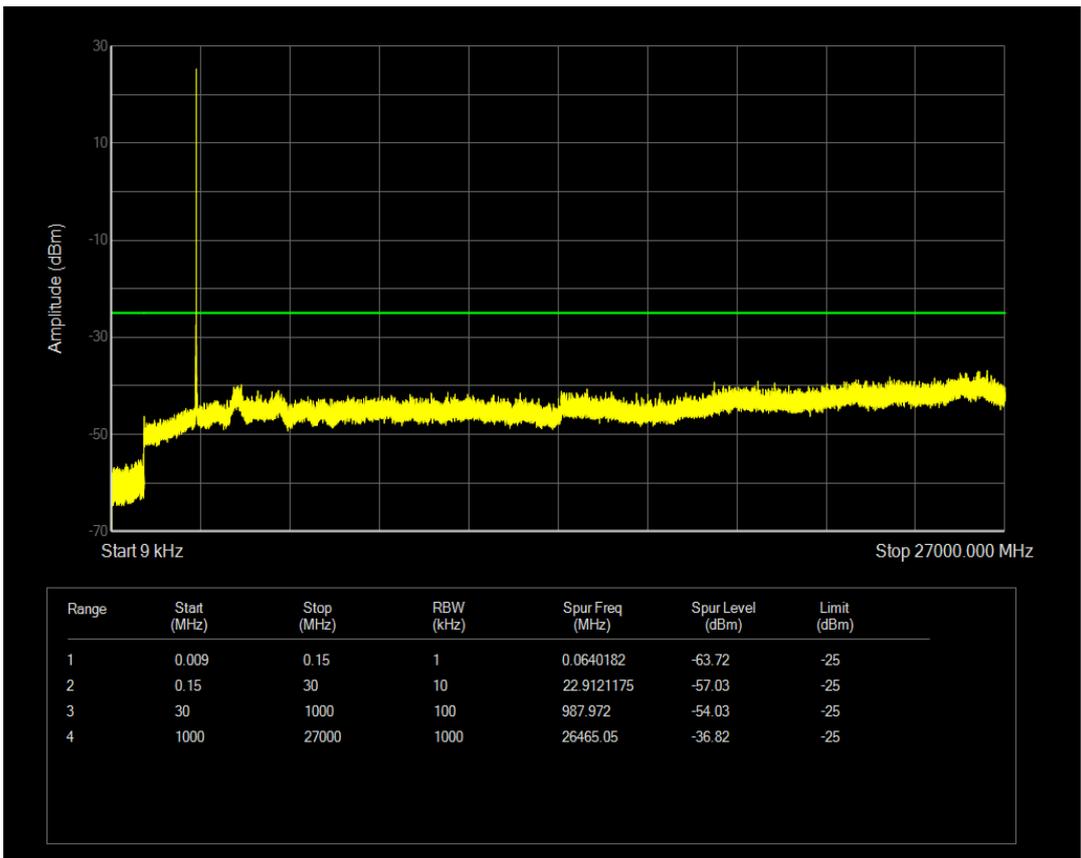


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=515500 RB=38 @0

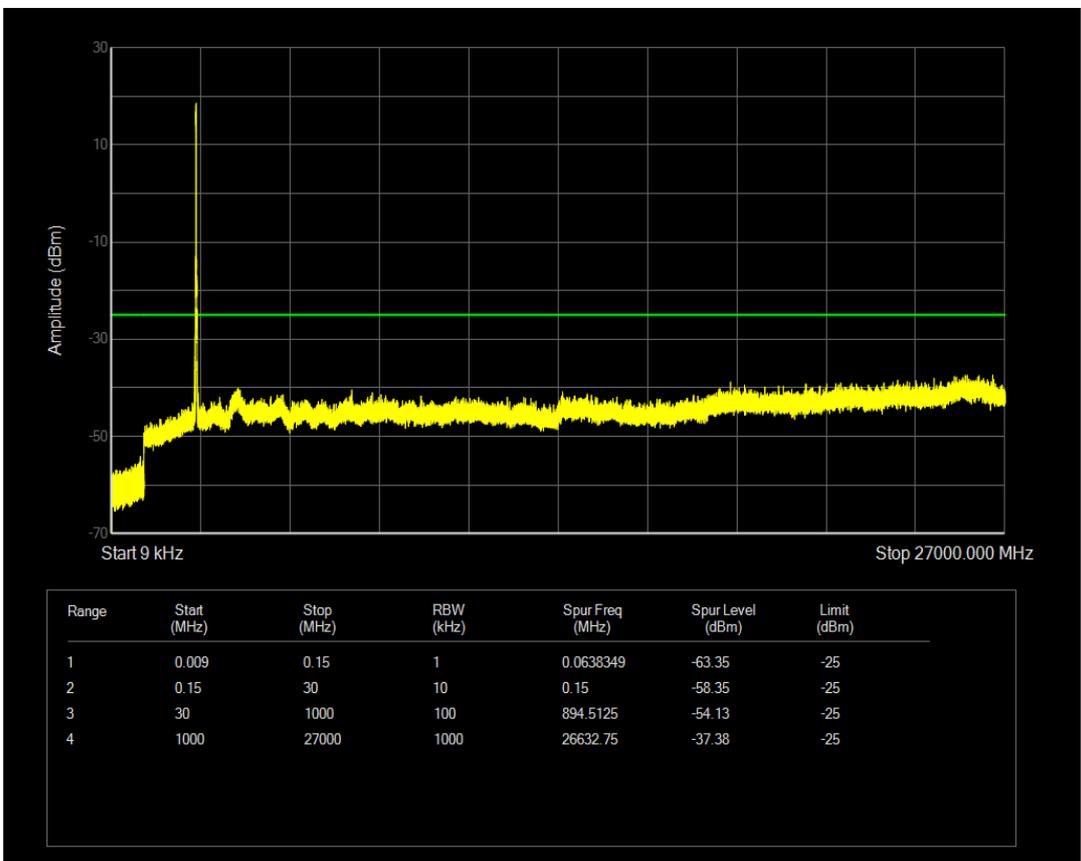


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=522500 RB=1@0

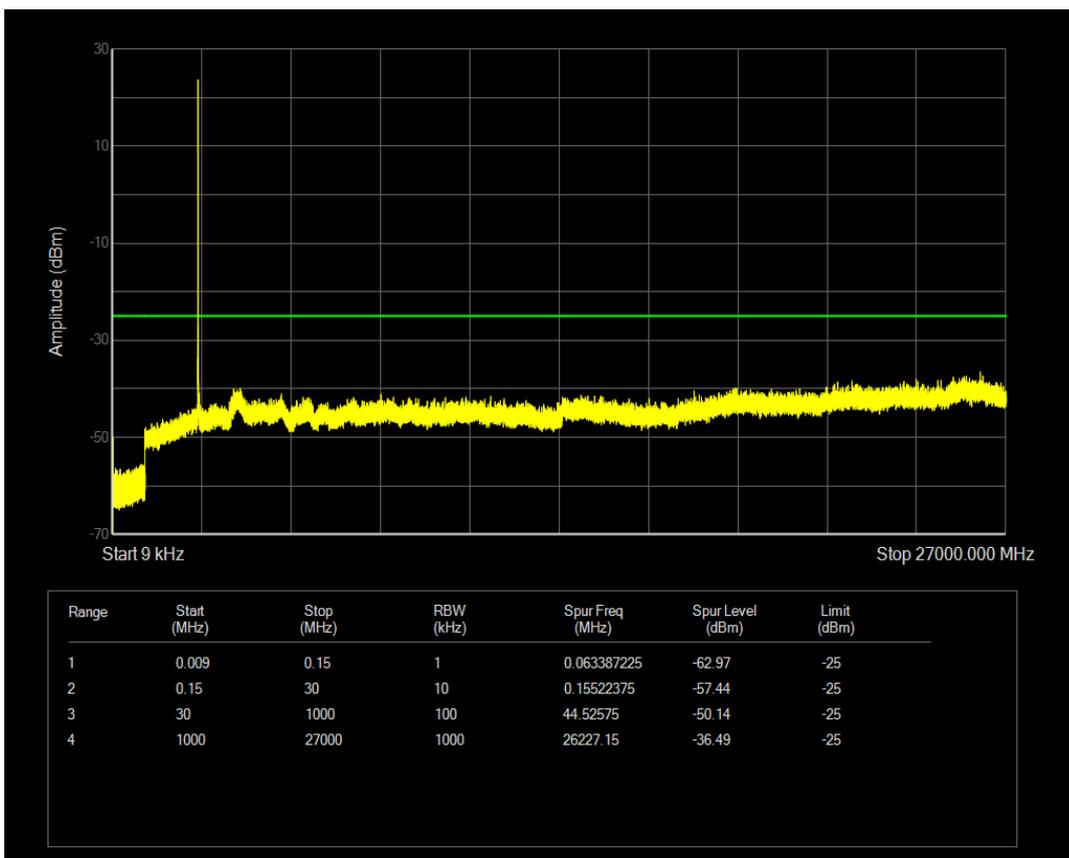


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=522500 RB=1@37

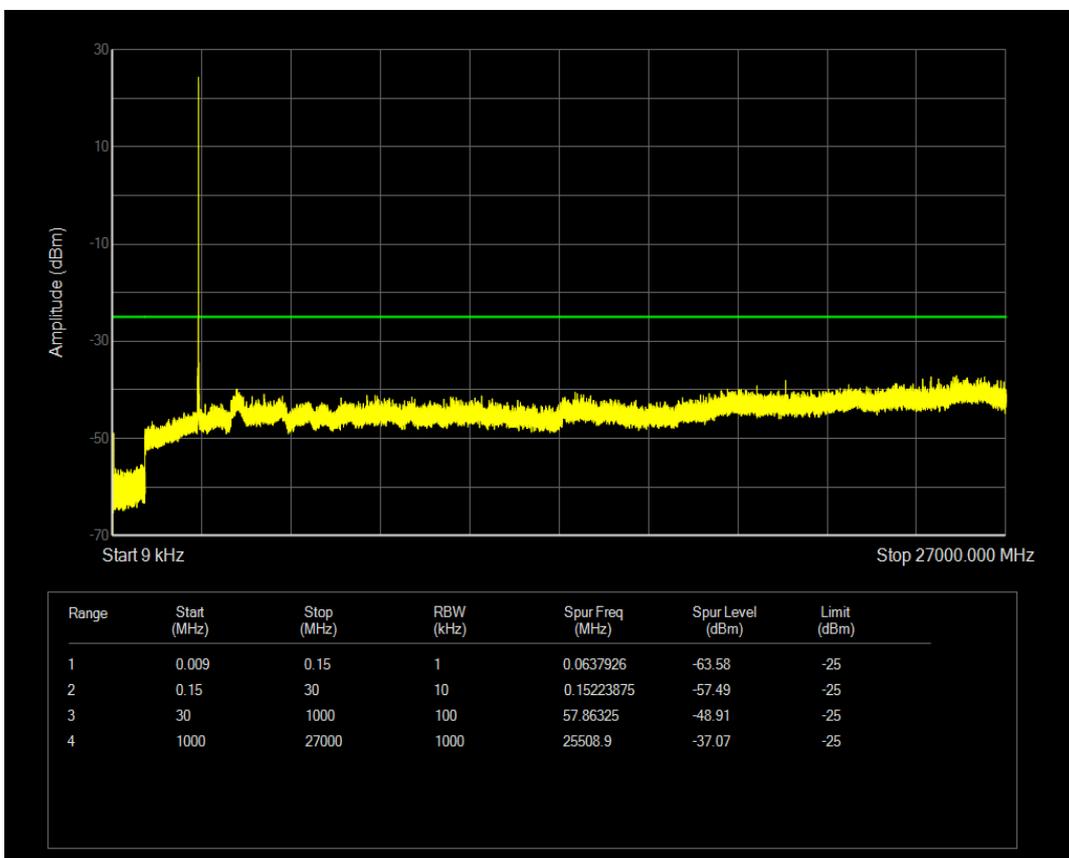


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=522500 RB=38@0

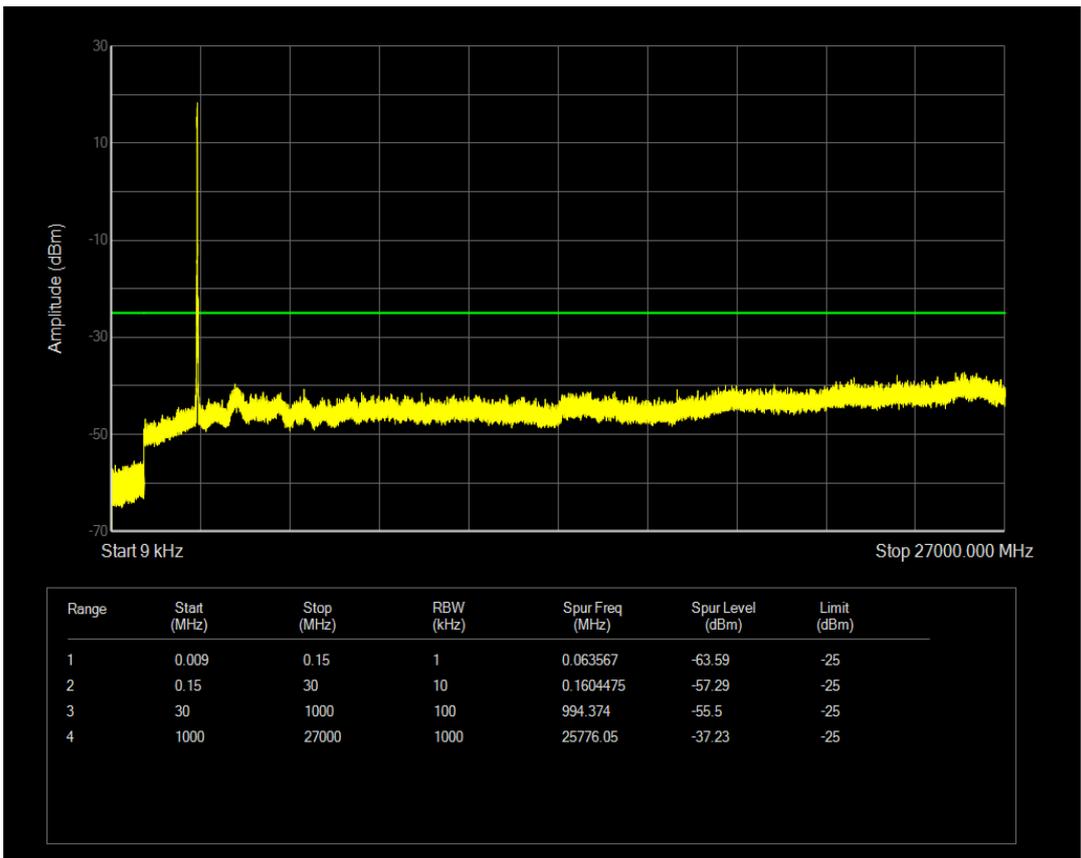


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=516000 RB=1@0

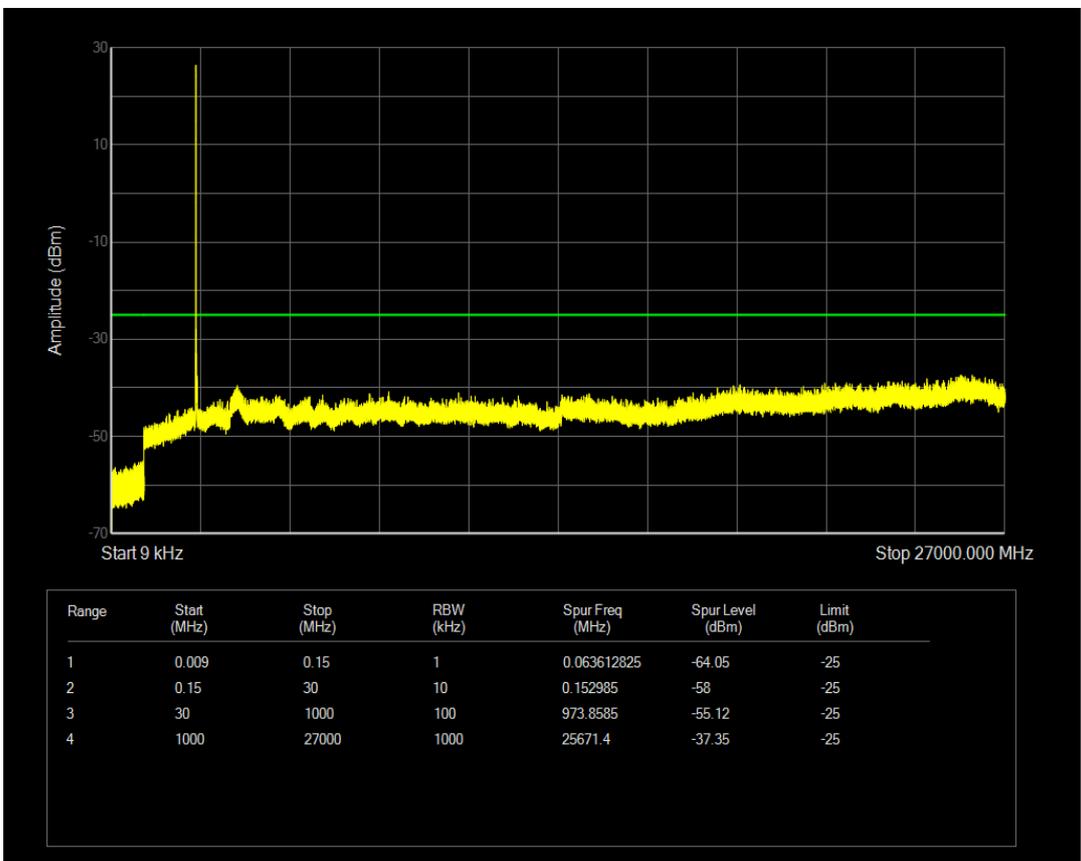


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=516000 RB=1 @50

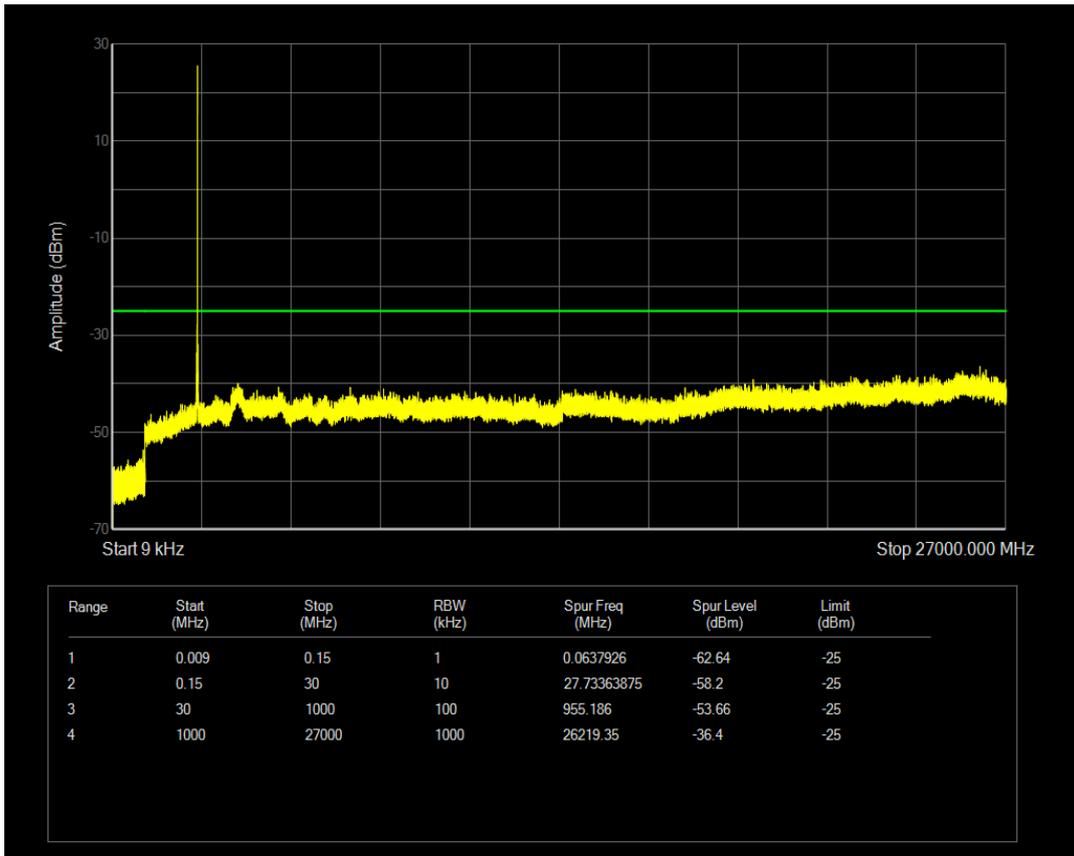


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=516000 RB=51 @0

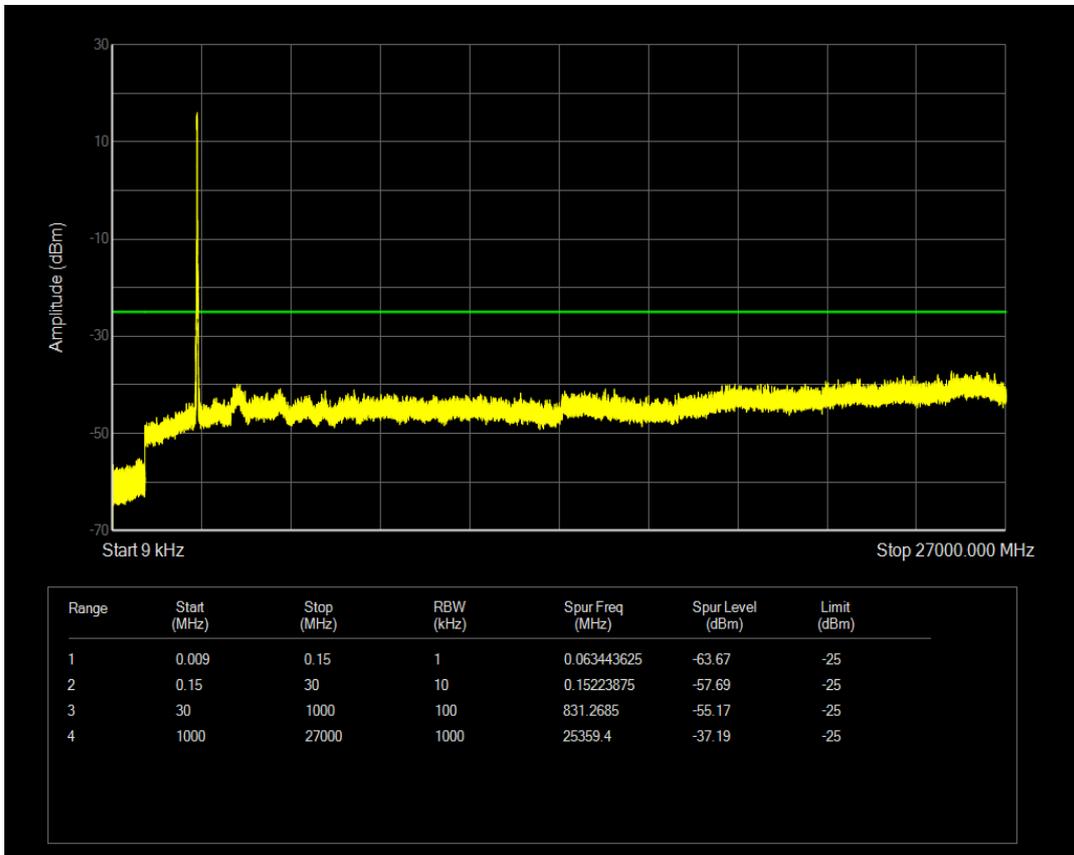

n38 SCS=30kHz CP_QPSK BW=20MHz Channel=522000 RB=1@0

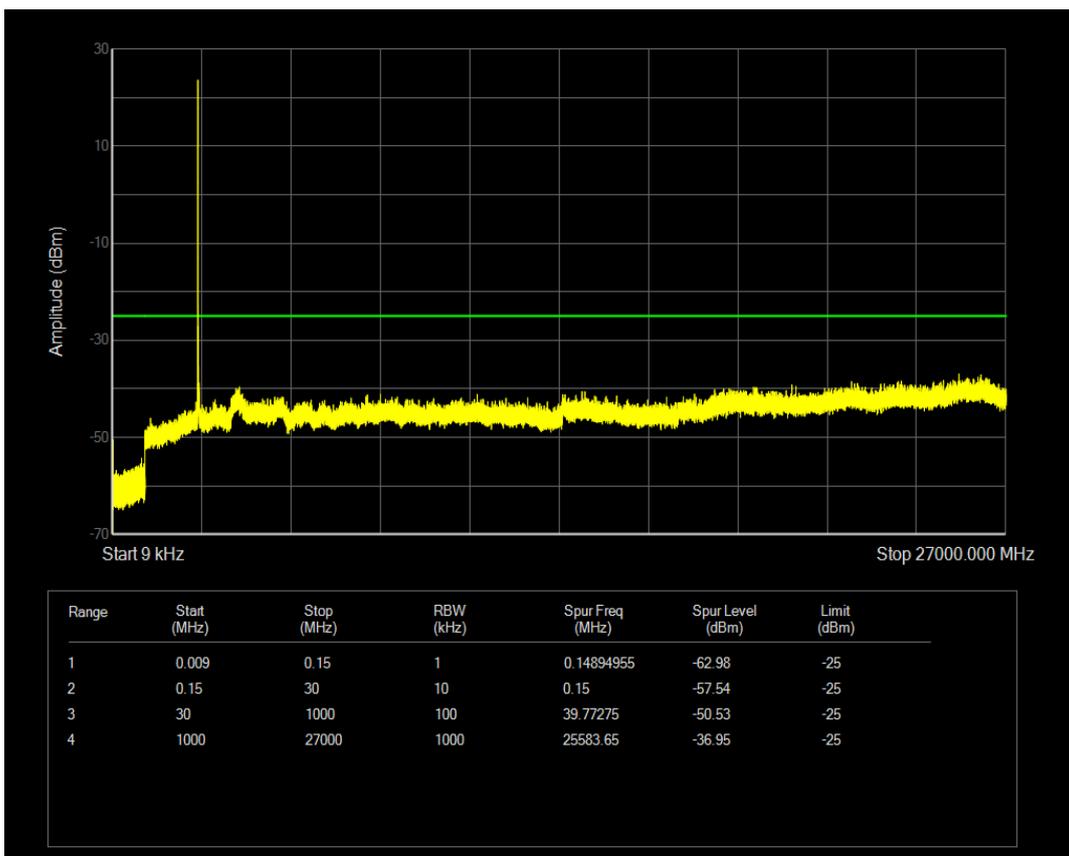

n38 SCS=30kHz CP_QPSK BW=20MHz Channel=522000 RB=1@50

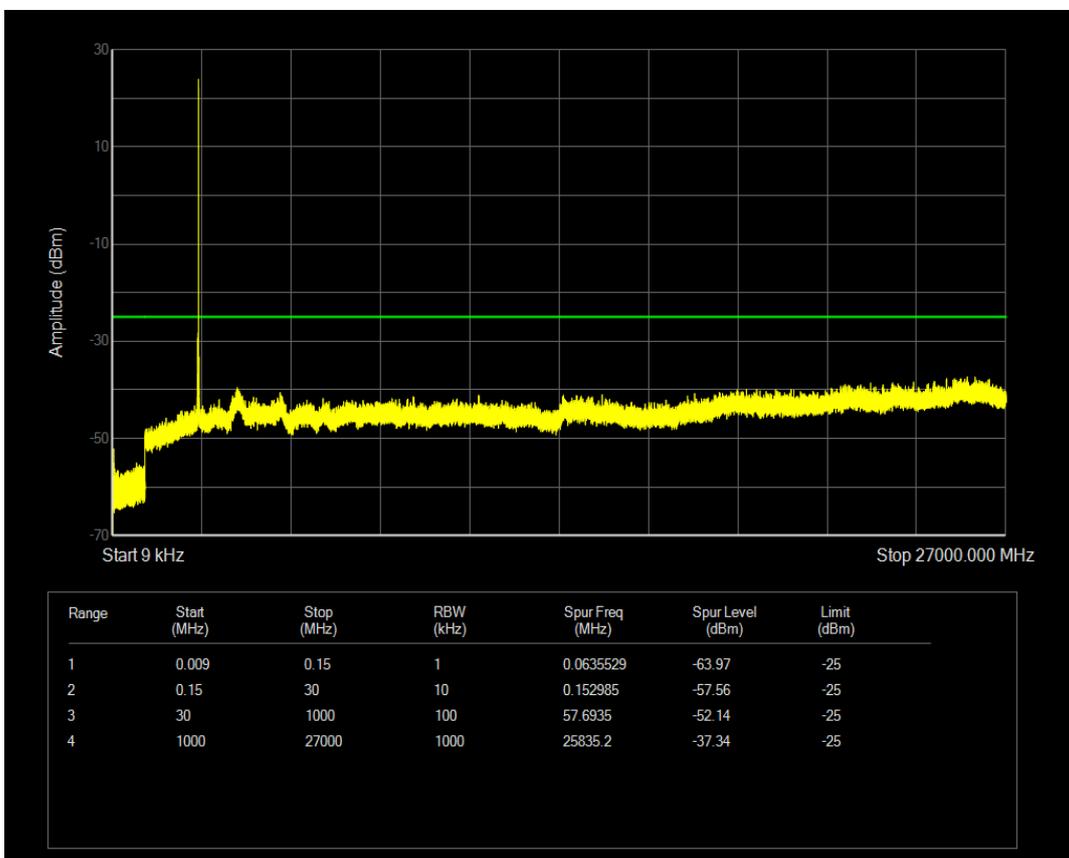

n38 SCS=30kHz CP_QPSK BW=20MHz Channel=522000 RB=51 @0

