





Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1056.000000	---	27.75	54.00	26.25	500.0	100.0	V	309.0	-20.9
1245.700000	35.81	---	68.20	32.39	500.0	200.0	V	340.0	-20.0
1566.300000	---	27.22	54.00	26.78	500.0	100.0	V	2.0	-18.9
1834.400000	36.07	---	68.20	32.13	500.0	100.0	H	230.0	-18.5
2429.866667	39.10	---	68.20	29.10	500.0	100.0	H	152.0	-16.5
2693.533333	---	29.01	54.00	24.99	500.0	100.0	V	0.0	-16.1
3418.033333	39.72	---	68.20	28.48	500.0	200.0	V	340.0	-14.8
3609.133333	---	29.79	54.00	24.21	500.0	100.0	H	250.0	-14.4
5140.500000	---	37.76	54.00	16.24	500.0	100.0	V	287.0	-9.5
5525.500000	45.89	---	68.20	22.31	500.0	100.0	V	335.0	-8.4
6820.266667	48.84	---	68.20	19.36	500.0	100.0	H	350.0	-3.8
7645.100000	---	36.69	54.00	17.31	500.0	100.0	H	334.0	-3.8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH60

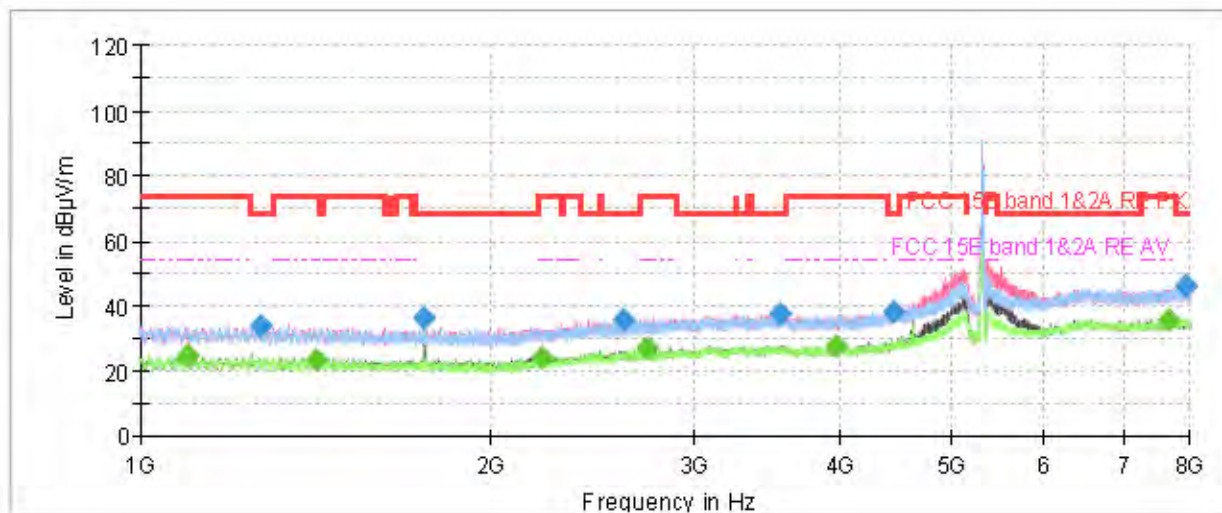

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

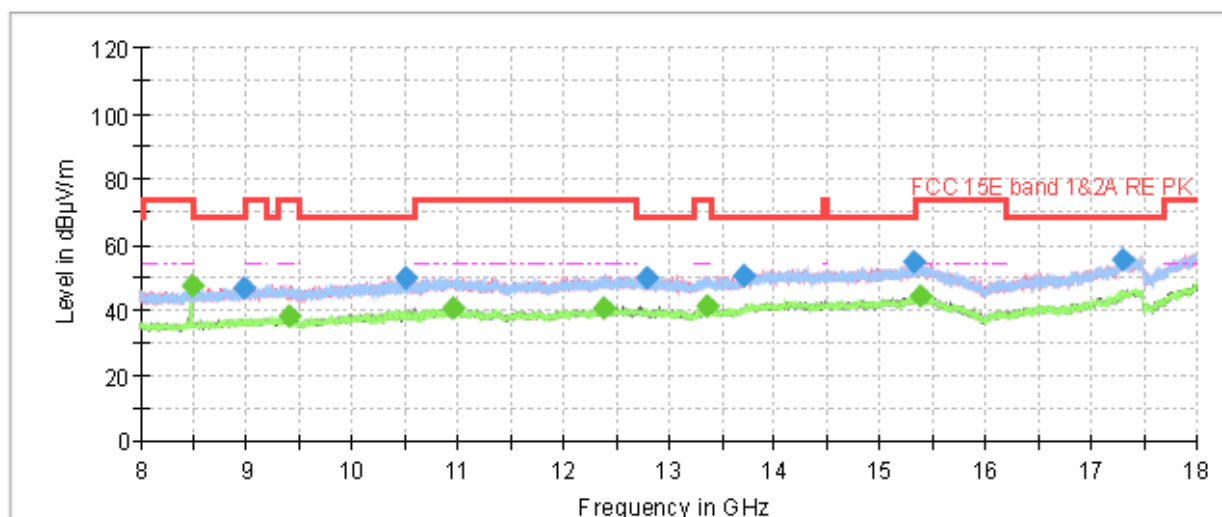


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1096.600000	---	24.40	54.00	29.60	500.0	100.0	H	275.0	-20.6
1267.866667	33.92	---	68.20	34.28	500.0	200.0	H	259.0	-19.9
1415.100000	---	23.68	54.00	30.32	500.0	200.0	V	0.0	-19.4
1754.366667	36.07	---	68.20	32.13	500.0	200.0	V	247.0	-18.6
2219.166667	---	23.79	54.00	30.21	500.0	100.0	V	0.0	-17.3
2599.500000	35.99	---	68.20	32.21	500.0	100.0	V	262.0	-16.1
2731.333333	---	26.93	54.00	27.07	500.0	100.0	V	355.0	-16.1
3552.433333	37.49	---	68.20	30.71	500.0	200.0	H	0.0	-14.5
3967.300000	---	27.51	54.00	26.49	500.0	200.0	V	206.0	-13.5
4444.700000	38.42	---	68.20	29.78	500.0	200.0	V	0.0	-11.6
7676.833333	---	35.46	54.00	18.54	500.0	200.0	V	349.0	-3.7
7938.166667	46.00	---	68.20	22.20	500.0	100.0	H	44.0	-2.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH64

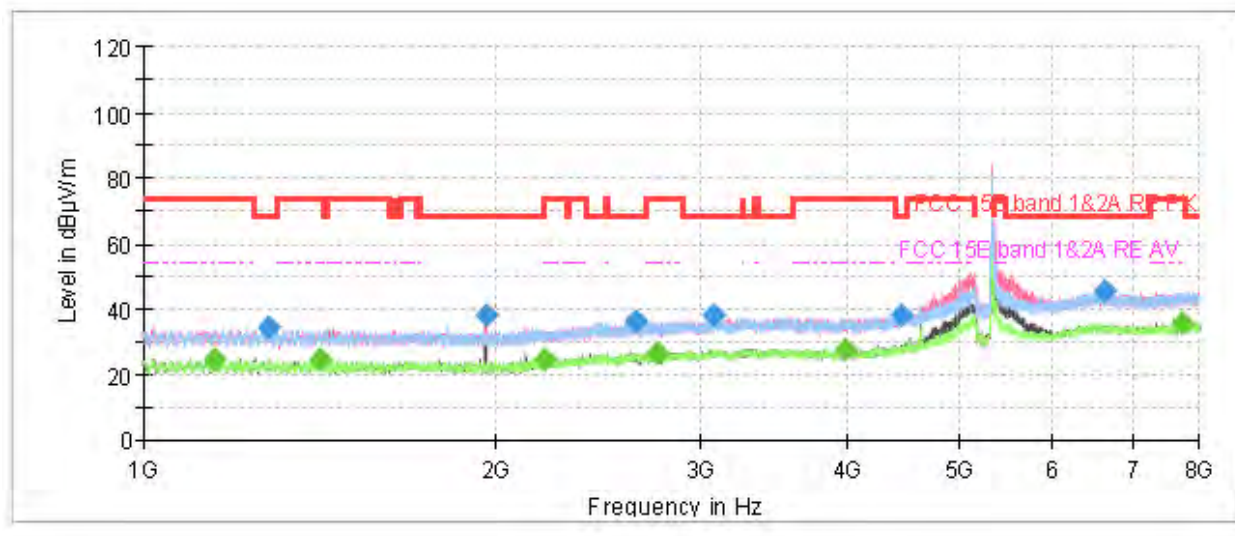

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

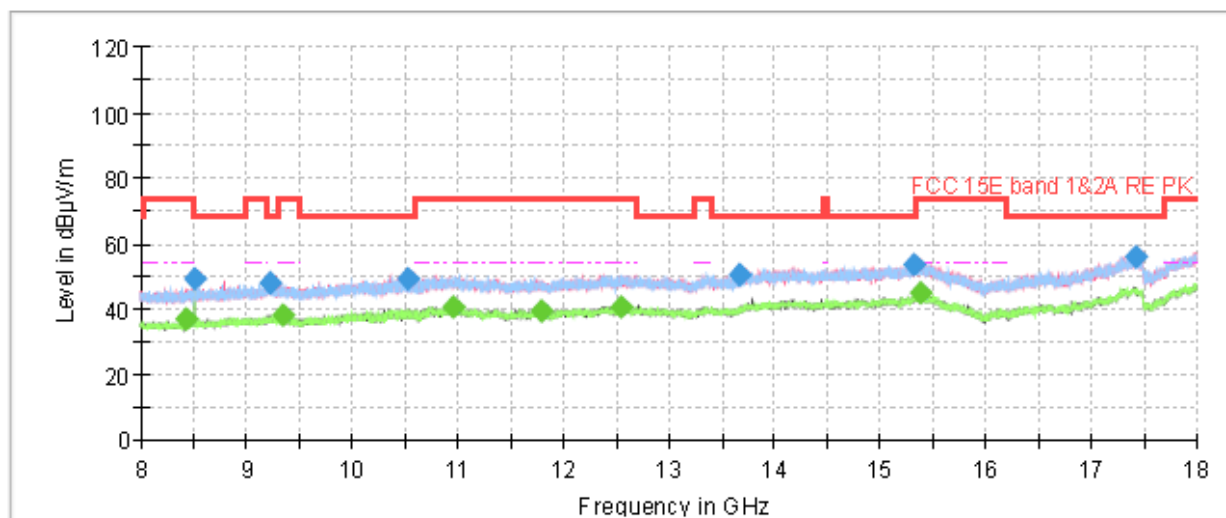


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1151.666667	---	24.82	54.00	29.18	500.0	100.0	H	58.0	-20.4
1281.866667	34.27	---	68.20	33.93	500.0	200.0	V	0.0	-19.9
1414.633333	---	24.70	54.00	29.30	500.0	100.0	V	177.0	-19.4
1964.366667	38.22	---	68.20	29.98	500.0	100.0	V	136.0	-18.4
2203.533333	---	24.79	54.00	29.21	500.0	200.0	V	57.0	-17.3
2632.400000	36.43	---	68.20	31.77	500.0	100.0	H	84.0	-16.1
2750.000000	---	26.71	54.00	27.29	500.0	200.0	V	82.0	-16.1
3070.833333	38.26	---	68.20	29.94	500.0	200.0	H	0.0	-15.6
3989.933333	---	27.93	54.00	26.07	500.0	200.0	V	0.0	-13.4
4446.333333	37.91	---	68.20	30.29	500.0	100.0	H	3.0	-11.6
6621.000000	45.72	---	68.20	22.48	500.0	200.0	V	136.0	-3.6
7730.500000	---	35.74	54.00	18.26	500.0	200.0	H	135.0	-3.7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH100

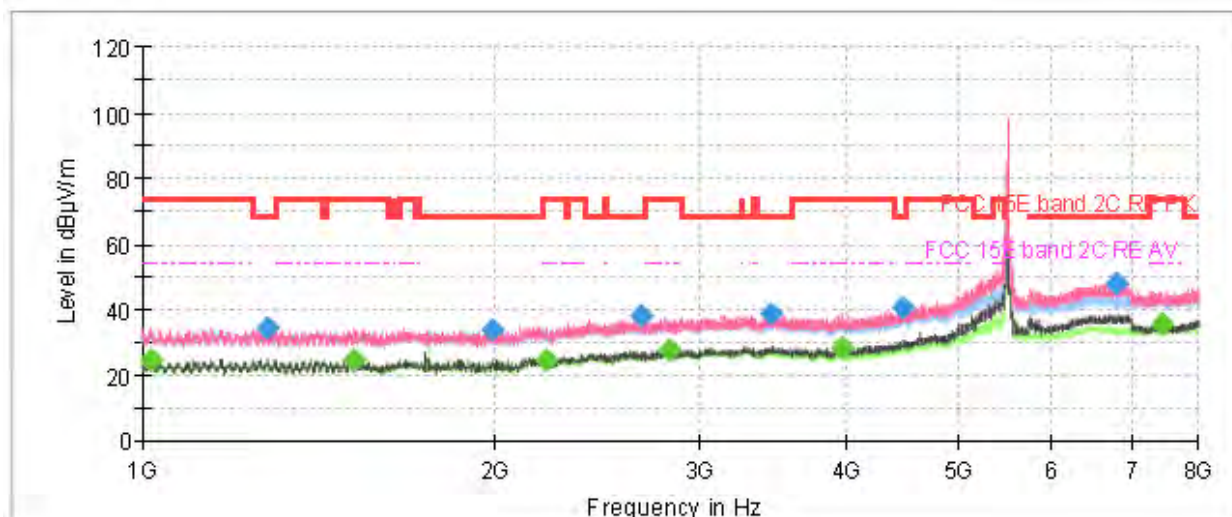

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

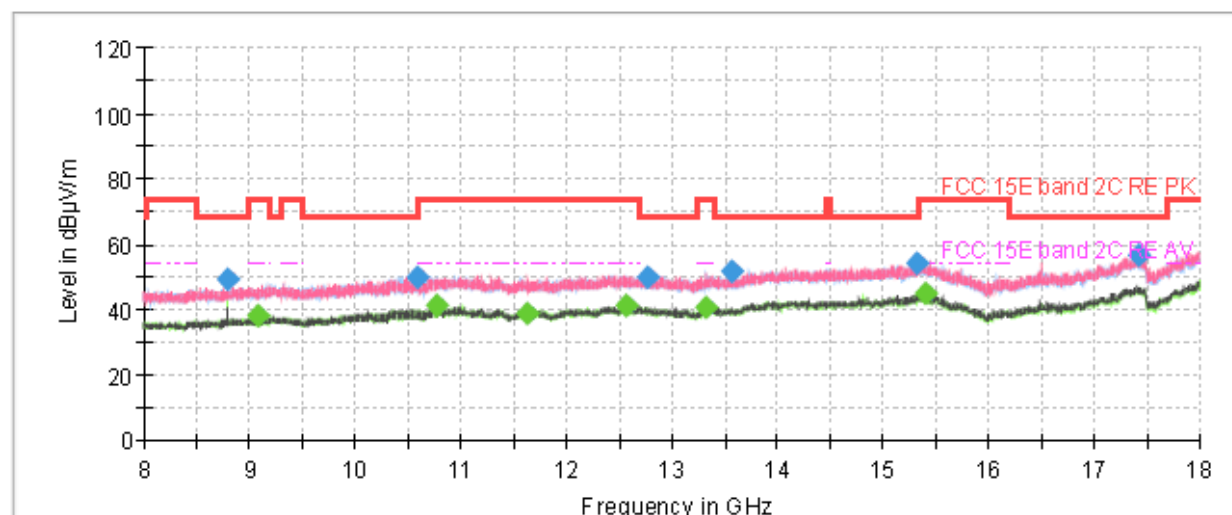


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1017.500000	---	24.65	54.00	29.35	500.0	100.0	H	337.0	-21.0
1277.900000	34.32	---	68.20	33.88	500.0	200.0	H	0.0	-19.9
1518.000000	---	24.81	54.00	29.19	500.0	100.0	V	0.0	-19.1
1990.500000	34.06	---	68.20	34.14	500.0	100.0	V	51.0	-18.2
2219.166667	---	24.84	54.00	29.16	500.0	100.0	V	6.0	-17.3
2667.166667	37.86	---	68.20	30.34	500.0	100.0	V	130.0	-16.0
2817.900000	---	27.88	54.00	26.12	500.0	100.0	V	51.0	-16.0
3440.900000	38.86	---	68.20	29.34	500.0	100.0	V	215.0	-14.8
3965.200000	---	28.27	54.00	25.73	500.0	100.0	V	17.0	-13.5
4472.933333	40.50	---	68.20	27.70	500.0	100.0	V	17.0	-11.5
6801.833333	48.14	---	68.20	20.06	500.0	100.0	V	144.0	-3.8
7452.366667	---	35.88	54.00	18.12	500.0	100.0	V	64.0	-4.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH120

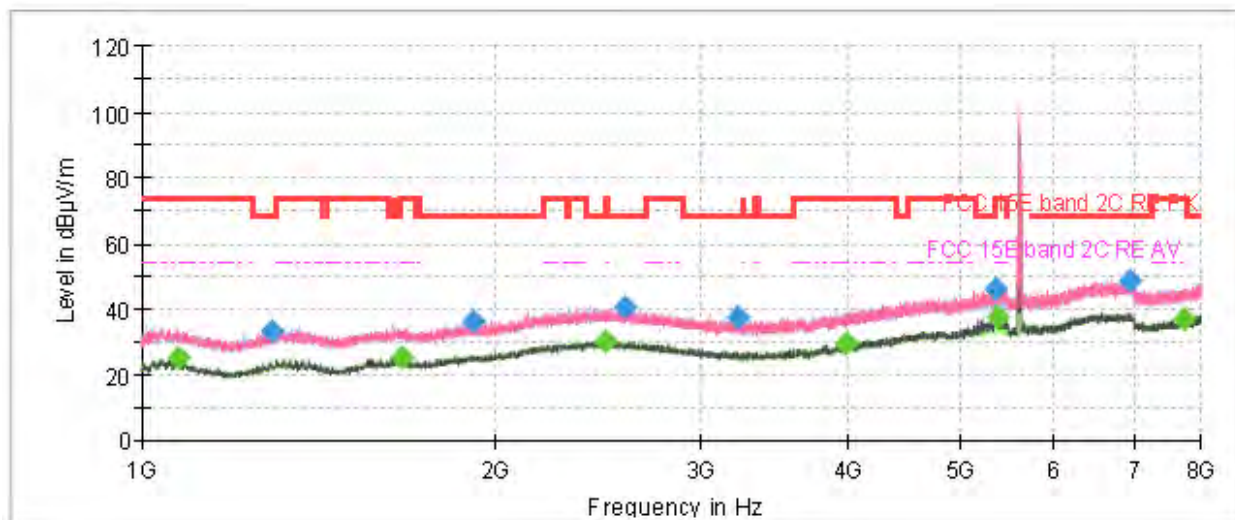

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

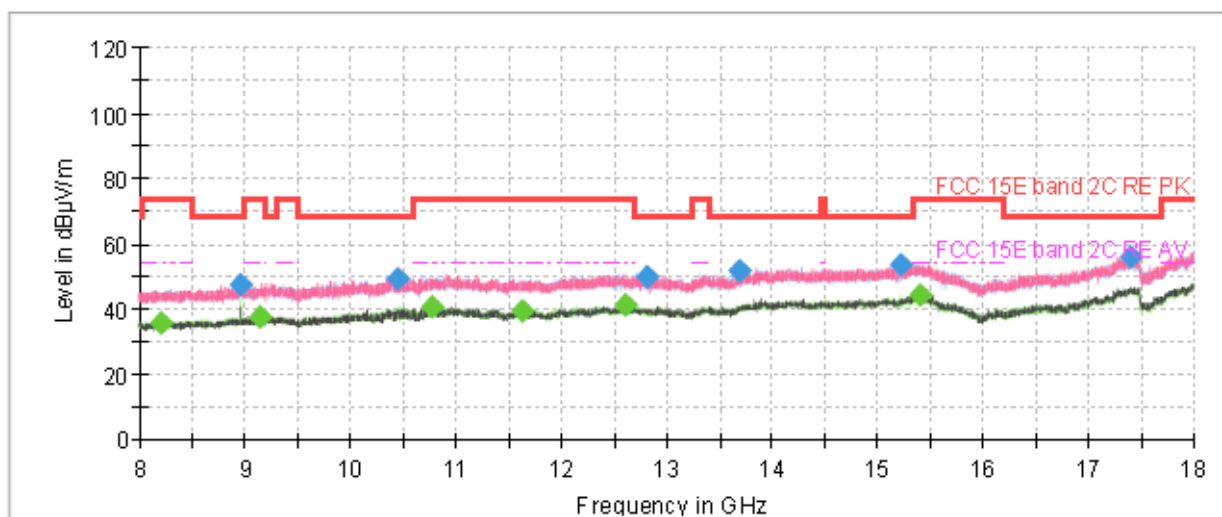


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1075.366667	---	25.45	54.00	28.55	500.0	100.0	V	148.0	-20.8
1293.300000	33.47	---	68.20	34.73	500.0	100.0	V	6.0	-19.8
1667.566667	---	25.13	54.00	28.87	500.0	200.0	H	4.0	-18.8
1917.700000	36.49	---	68.20	31.71	500.0	200.0	H	47.0	-18.3
2486.100000	---	30.23	54.00	23.77	500.0	100.0	H	0.0	-16.3
2585.733333	40.31	---	68.20	27.89	500.0	200.0	V	359.0	-16.1
3219.466667	37.73	---	68.20	30.47	500.0	200.0	H	0.0	-15.1
3990.866667	---	29.35	54.00	24.65	500.0	200.0	H	21.0	-13.4
5348.166667	46.37	---	68.20	21.83	500.0	100.0	V	307.0	-8.7
5366.133333	---	37.58	54.00	16.42	500.0	200.0	V	292.0	-8.7
6944.633333	48.57	---	68.20	19.63	500.0	100.0	V	121.0	-3.8
7748.700000	---	36.91	54.00	17.09	500.0	100.0	H	345.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH140

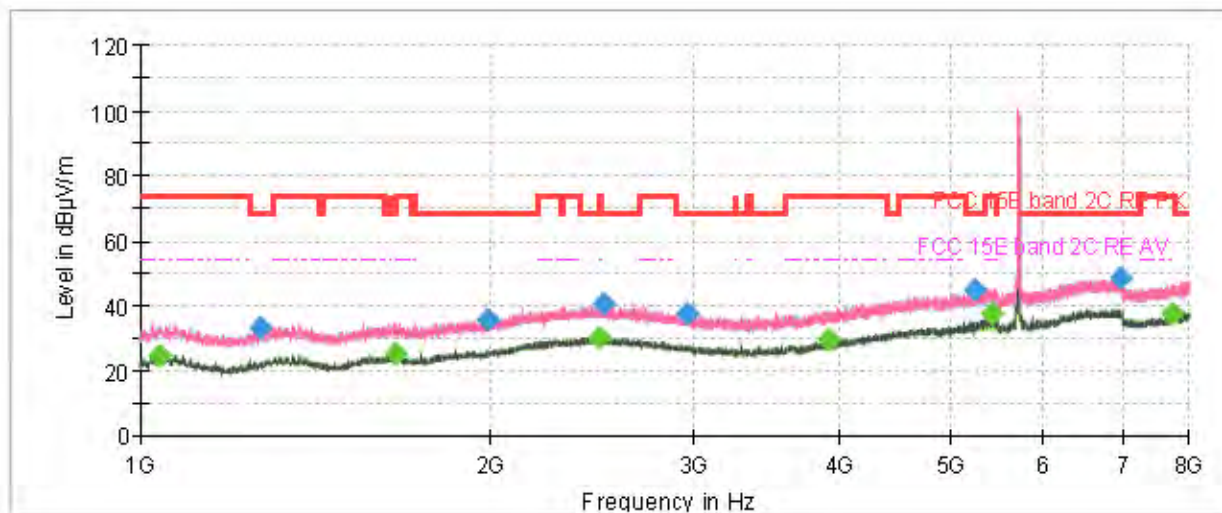

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

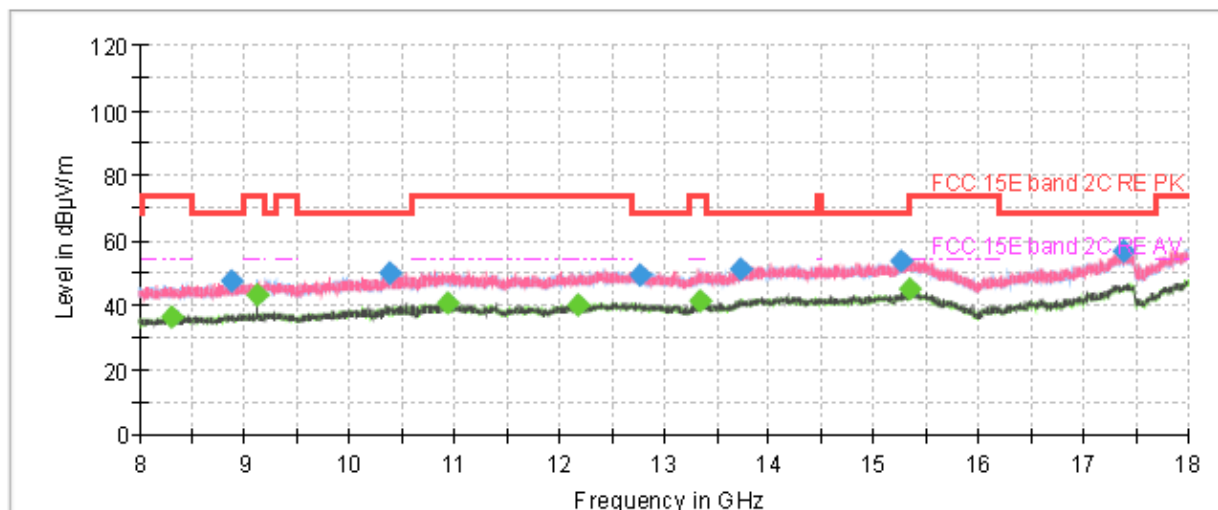


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1040.833333	---	24.68	54.00	29.32	500.0	100.0	H	356.0	-21.0
1266.700000	33.13	---	68.20	35.07	500.0	200.0	H	8.0	-19.9
1660.566667	---	24.98	54.00	29.02	500.0	200.0	V	288.0	-18.8
1990.266667	35.90	---	68.20	32.30	500.0	100.0	V	150.0	-18.2
2484.466667	---	30.08	54.00	23.92	500.0	100.0	H	305.0	-16.3
2505.000000	40.70	---	68.20	27.50	500.0	200.0	H	149.0	-16.3
2959.766667	37.80	---	68.20	30.40	500.0	100.0	V	6.0	-15.9
3924.133333	---	29.41	54.00	24.59	500.0	200.0	H	67.0	-13.6
5235.233333	44.99	---	68.20	23.21	500.0	200.0	V	325.0	-9.3
5412.566667	---	37.44	54.00	16.56	500.0	200.0	V	310.0	-8.7
6991.766667	48.64	---	68.20	19.56	500.0	200.0	H	88.0	-3.9
7727.933333	---	37.41	54.00	16.59	500.0	100.0	H	358.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH149

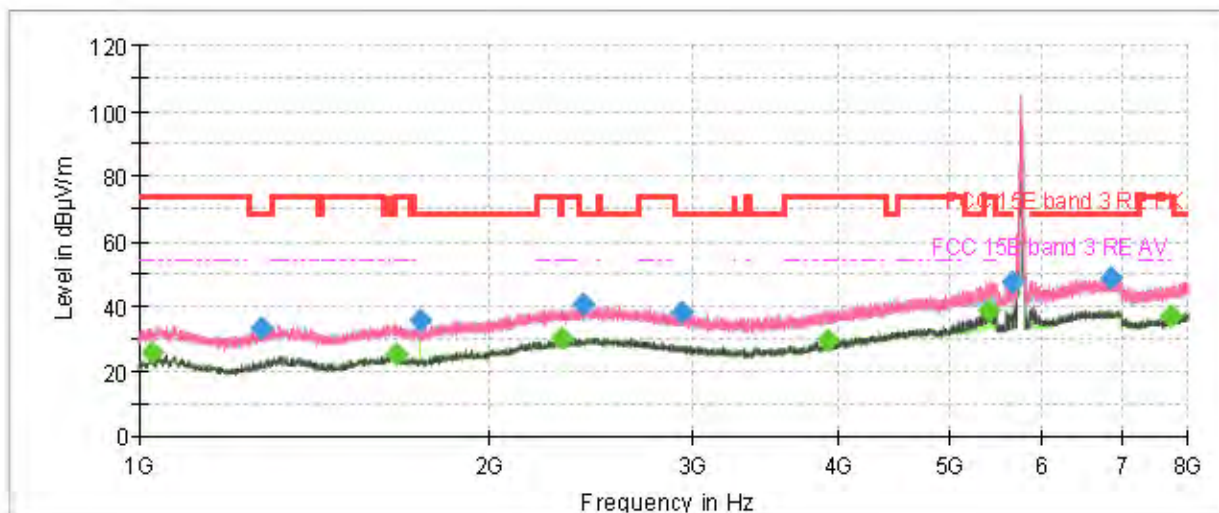

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

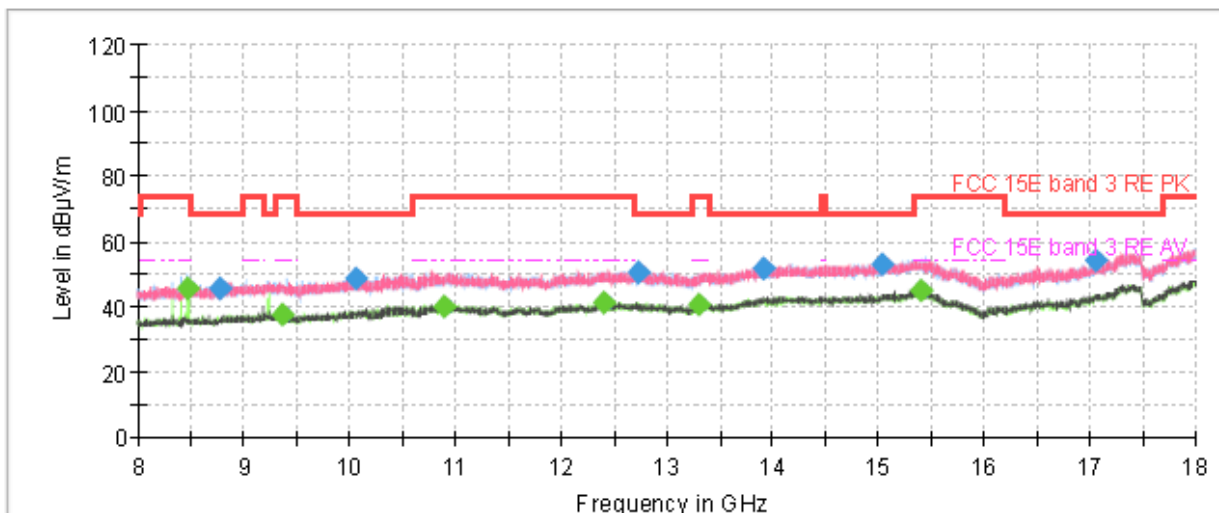


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1024.966667	---	25.56	54.00	28.44	500.0	200.0	V	356.0	-21.0
1272.066667	33.01	---	68.20	35.19	500.0	200.0	H	146.0	-19.9
1667.333333	---	24.95	54.00	29.05	500.0	200.0	H	0.0	-18.8
1746.200000	35.92	---	68.20	32.28	500.0	200.0	H	260.0	-18.6
2313.900000	---	30.11	54.00	23.89	500.0	100.0	V	359.0	-16.9
2408.866667	40.48	---	68.20	27.72	500.0	200.0	H	20.0	-16.5
2936.666667	38.00	---	68.20	30.20	500.0	200.0	H	46.0	-15.9
3921.333333	---	29.61	54.00	24.39	500.0	200.0	H	84.0	-13.6
5382.466667	---	38.65	54.00	15.35	500.0	200.0	V	198.0	-8.7
5633.066667	47.49	---	68.20	20.71	500.0	200.0	H	188.0	-8.1
6878.133333	48.39	---	68.20	19.81	500.0	100.0	V	15.0	-3.8
7736.100000	---	36.64	54.00	17.36	500.0	200.0	H	4.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH157

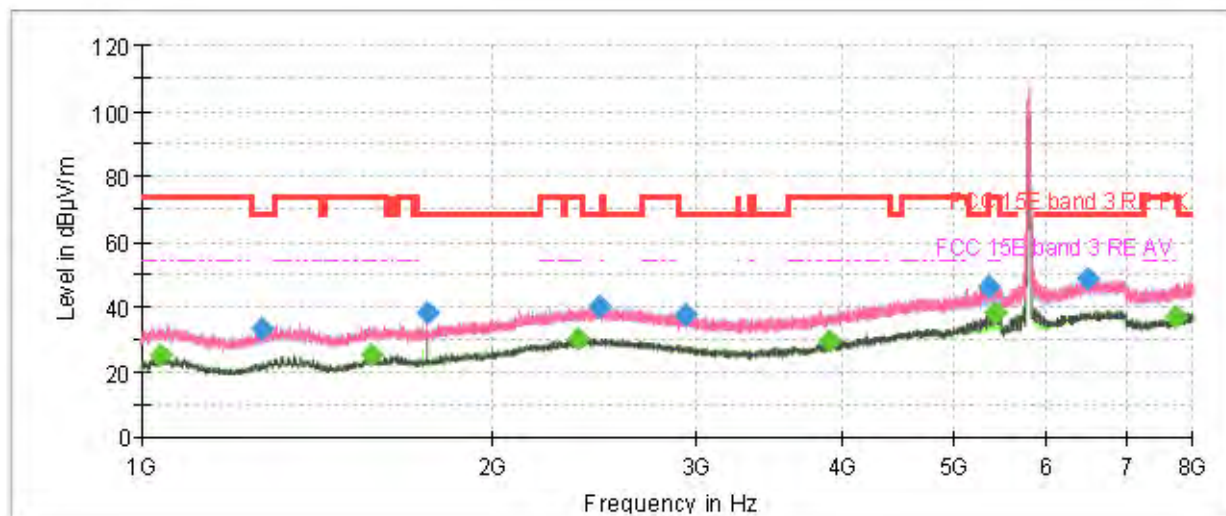

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

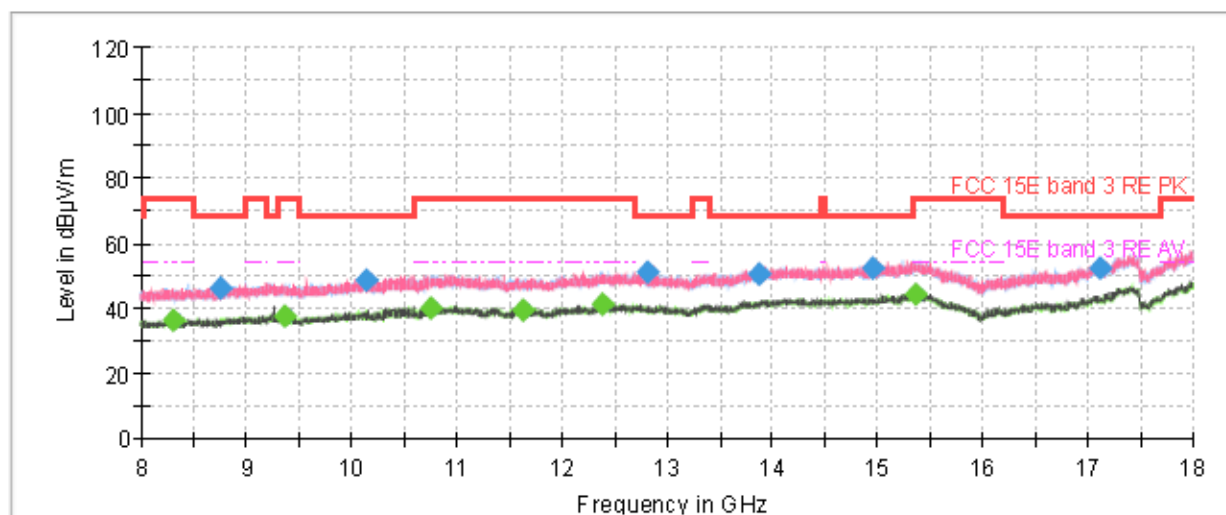


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1040.366667	---	25.24	54.00	28.76	500.0	200.0	H	2.0	-21.0
1270.666667	33.45	---	68.20	34.75	500.0	100.0	V	21.0	-19.9
1578.200000	---	25.20	54.00	28.80	500.0	100.0	H	247.0	-18.9
1761.833333	37.89	---	68.20	30.31	500.0	100.0	V	0.0	-18.6
2371.533333	---	30.22	54.00	23.78	500.0	200.0	V	51.0	-16.6
2468.833333	39.79	---	68.20	28.41	500.0	200.0	V	0.0	-16.3
2928.966667	37.25	---	68.20	30.95	500.0	100.0	H	266.0	-16.0
3902.666667	---	29.49	54.00	24.51	500.0	100.0	V	91.0	-13.7
5336.033333	46.28	---	68.20	21.92	500.0	200.0	V	180.0	-8.8
5406.266667	---	38.14	54.00	15.86	500.0	100.0	V	196.0	-8.7
6503.633333	48.52	---	68.20	19.69	500.0	100.0	V	91.0	-3.7
7743.333333	---	36.71	54.00	17.29	500.0	200.0	H	8.0	-3.6


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH165

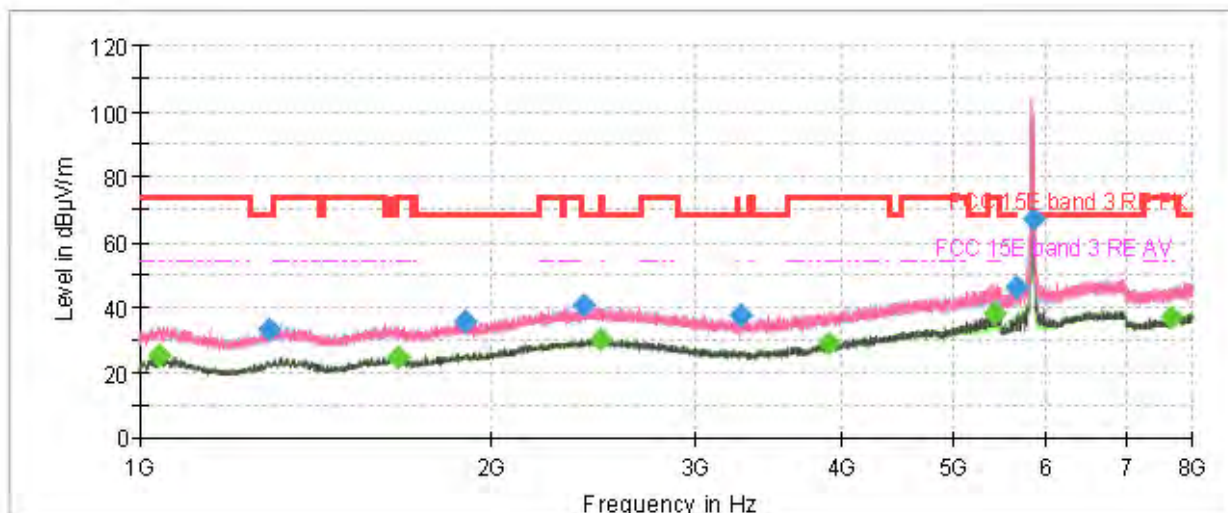

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

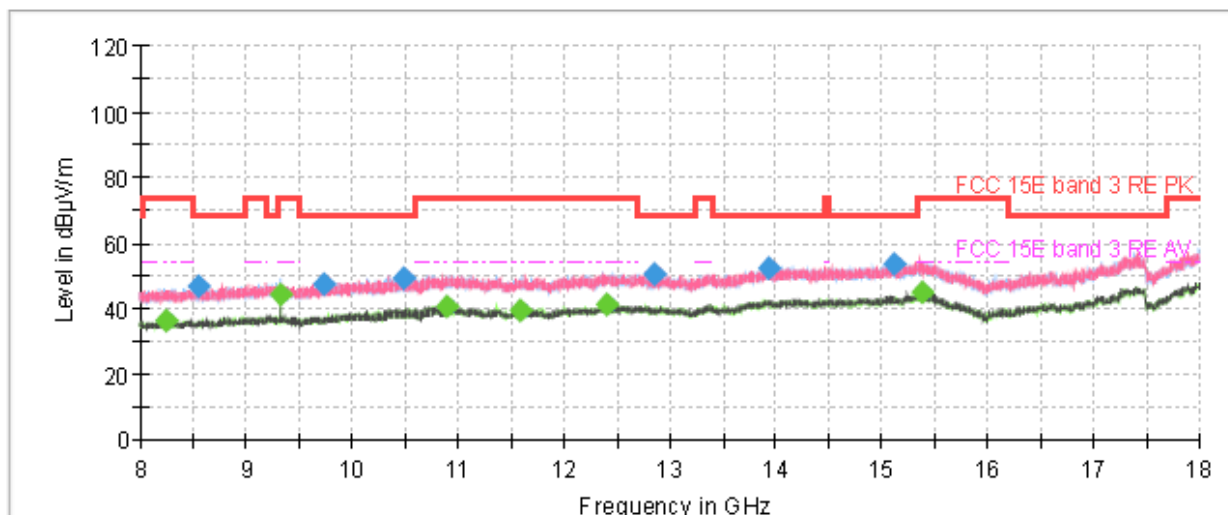


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1039.900000	---	25.36	54.00	28.64	500.0	200.0	H	44.0	-21.0
1289.800000	33.15	---	68.20	35.05	500.0	200.0	V	352.0	-19.8
1668.733333	---	24.64	54.00	29.36	500.0	100.0	V	2.0	-18.8
1897.866667	35.69	---	68.20	32.51	500.0	100.0	H	338.0	-18.4
2397.433333	40.42	---	68.20	27.78	500.0	200.0	H	11.0	-16.5
2487.266667	---	29.88	54.00	24.12	500.0	200.0	H	102.0	-16.3
3275.933333	37.50	---	68.20	30.70	500.0	200.0	V	352.0	-15.0
3892.400000	---	29.18	54.00	24.82	500.0	100.0	H	289.0	-13.7
5421.200000	---	38.35	54.00	15.65	500.0	200.0	V	199.0	-8.6
5643.100000	46.06	---	68.20	22.14	500.0	200.0	V	249.0	-8.0
5851.466667	67.32	---	68.20	0.88	500.0	100.0	H	137.0	-7.4
7656.300000	---	36.85	54.00	17.15	500.0	200.0	V	338.0	-3.8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH36

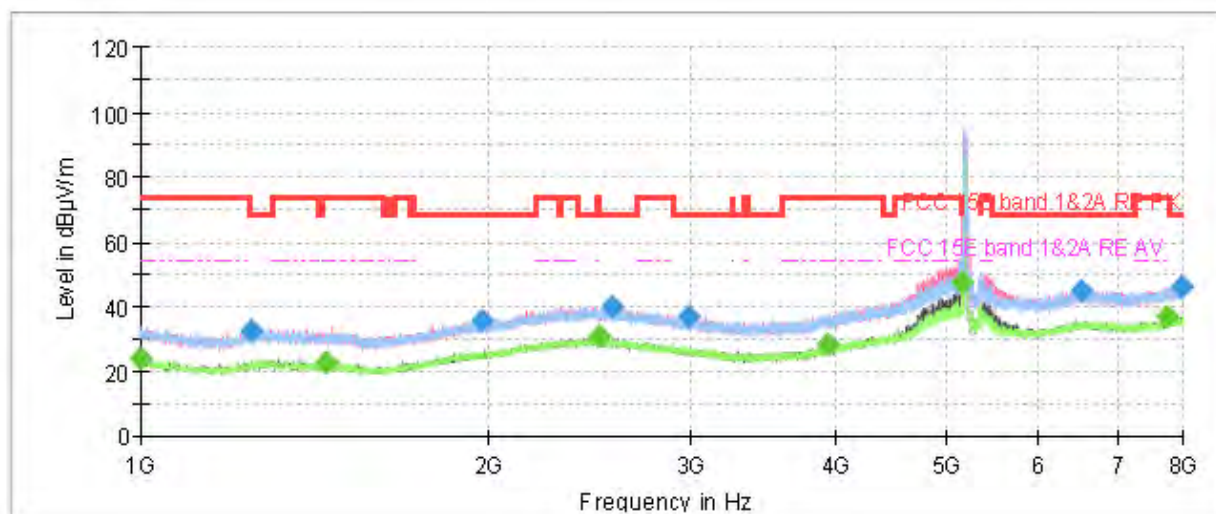

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

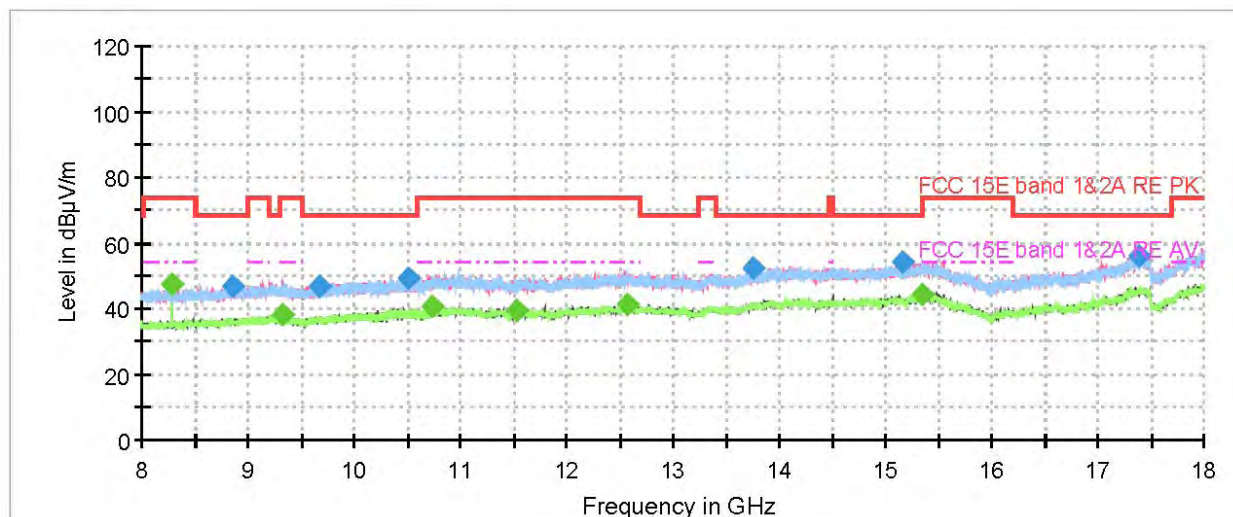


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1002.100000	---	24.22	54.00	29.78	500.0	100.0	H	135.0	-21.1
1249.200000	32.74	---	68.20	35.46	500.0	200.0	V	358.0	-20.0
1447.066667	---	22.90	54.00	31.10	500.0	100.0	V	101.0	-19.3
1976.266667	35.56	---	68.20	32.64	500.0	200.0	H	223.0	-18.3
2490.066667	---	30.73	54.00	23.27	500.0	100.0	H	358.0	-16.3
2557.733333	40.04	---	68.20	28.16	500.0	200.0	H	223.0	-16.2
2982.166667	37.04	---	68.20	31.16	500.0	100.0	V	4.0	-15.8
3937.900000	---	28.37	54.00	25.63	500.0	200.0	H	4.0	-13.6
5145.400000	---	47.54	54.00	6.46	500.0	100.0	V	308.0	-9.5
6515.066667	45.16	---	68.20	23.04	500.0	200.0	H	65.0	-3.7
7744.500000	---	36.97	54.00	17.03	500.0	200.0	H	47.0	-3.6
7965.933333	46.21	---	68.20	21.99	500.0	100.0	H	177.0	-2.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH40

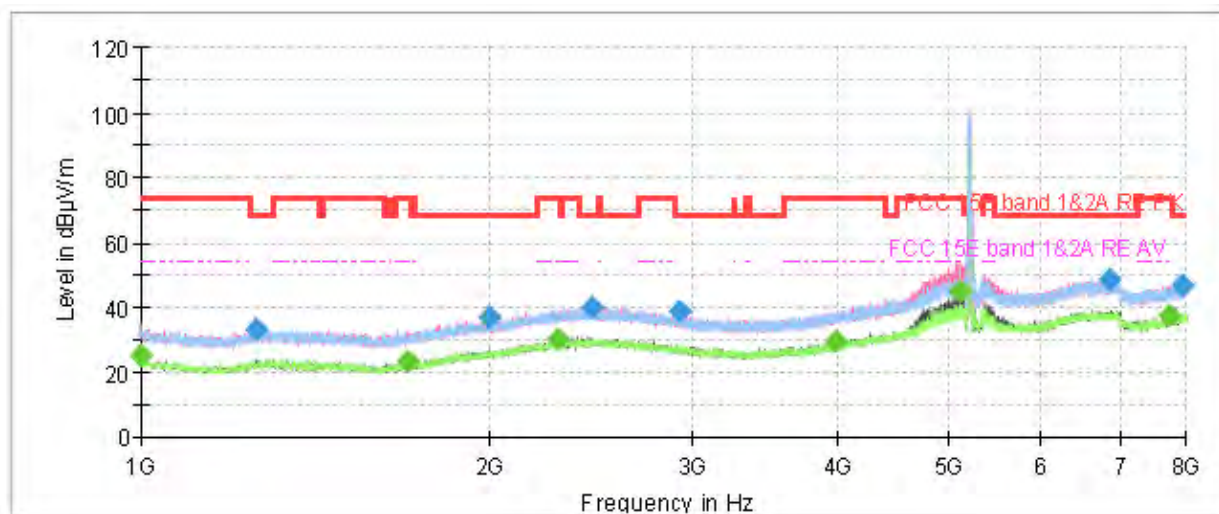

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

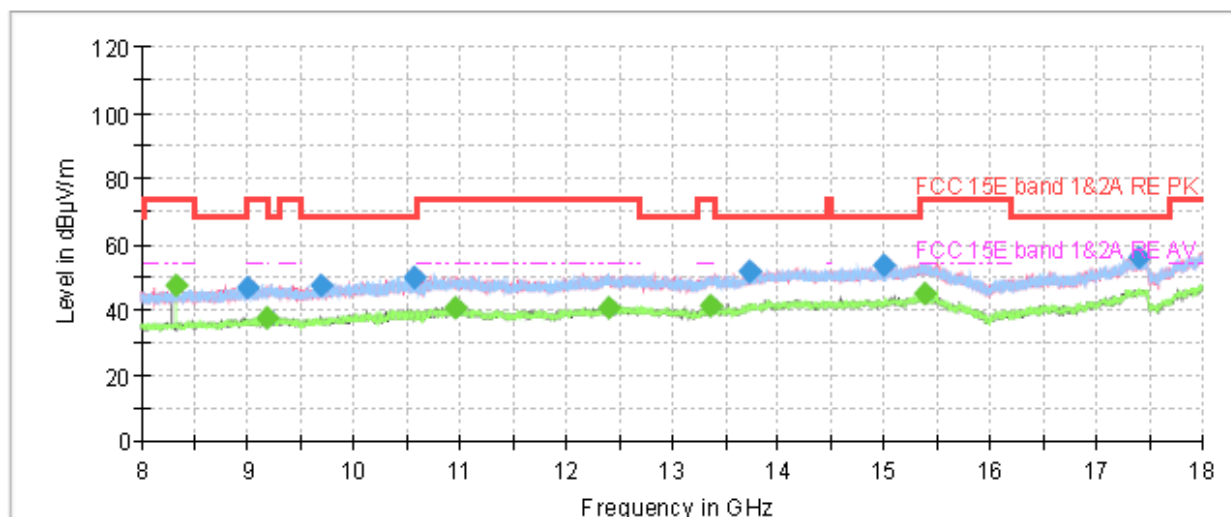


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1000.000000	---	25.04	54.00	28.96	500.0	200.0	V	156.0	-21.1
1260.633333	33.44	---	68.20	34.76	500.0	100.0	H	359.0	-20.0
1703.033333	---	23.41	54.00	30.59	500.0	200.0	H	2.0	-18.6
1999.833333	36.68	---	68.20	31.52	500.0	200.0	H	0.0	-18.2
2293.133333	---	30.22	54.00	23.78	500.0	200.0	V	359.0	-16.9
2449.000000	40.11	---	68.20	28.09	500.0	200.0	H	24.0	-16.4
2921.033333	38.52	---	68.20	29.68	500.0	200.0	H	0.0	-16.0
3982.233333	---	29.32	54.00	24.68	500.0	200.0	V	358.0	-13.4
5087.766667	---	44.71	54.00	9.29	500.0	100.0	V	308.0	-9.7
6865.300000	48.45	---	68.20	19.75	500.0	200.0	V	345.0	-3.8
7725.133333	---	37.24	54.00	16.76	500.0	200.0	H	2.0	-3.7
7927.433333	47.00	---	68.20	21.20	500.0	200.0	V	355.0	-2.8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH48

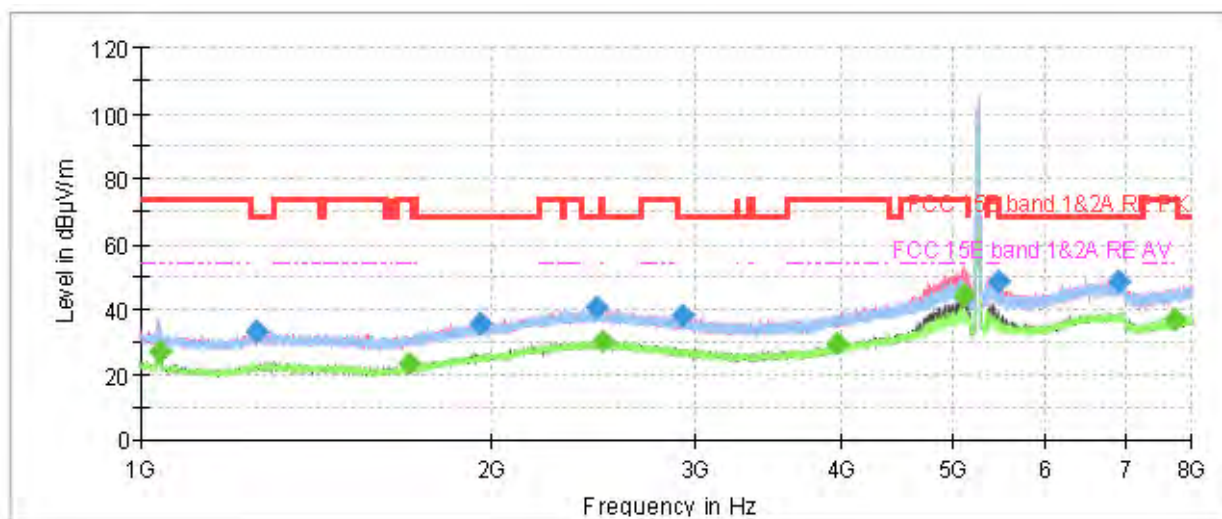

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

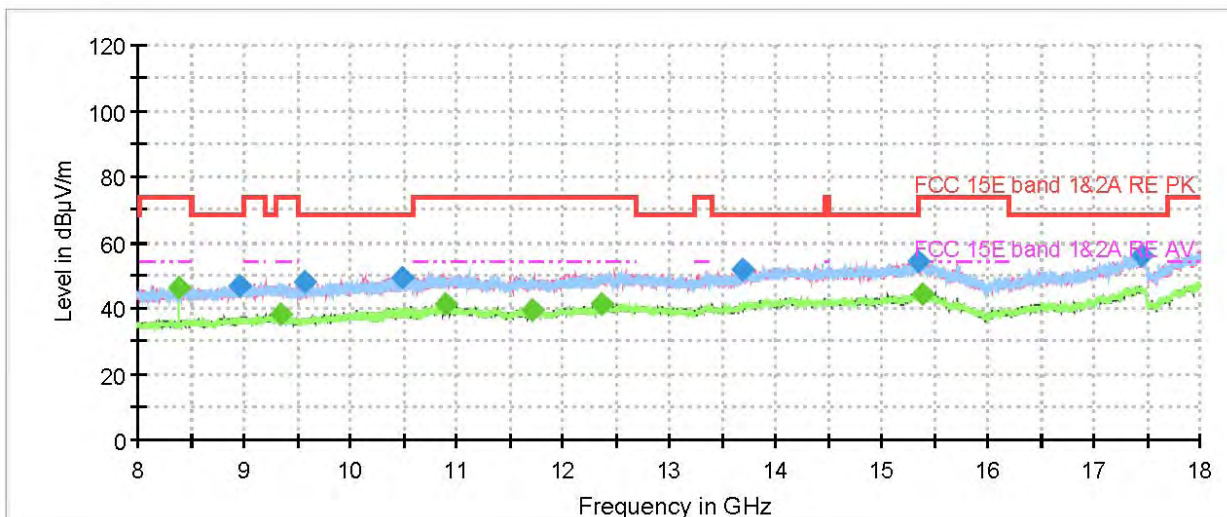


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1036.866667	---	27.38	54.00	26.62	500.0	100.0	V	198.0	-21.0
1259.700000	33.35	---	68.20	34.85	500.0	100.0	H	346.0	-20.0
1701.866667	---	23.45	54.00	30.55	500.0	200.0	H	93.0	-18.6
1960.633333	35.86	---	68.20	32.34	500.0	100.0	V	136.0	-18.4
2462.300000	40.40	---	68.20	27.80	500.0	100.0	V	95.0	-16.3
2493.566667	---	30.21	54.00	23.79	500.0	100.0	H	0.0	-16.3
2920.333333	37.90	---	68.20	30.30	500.0	100.0	V	16.0	-16.0
3965.666667	---	29.84	54.00	24.16	500.0	200.0	V	358.0	-13.5
5094.766667	---	44.21	54.00	9.79	500.0	100.0	V	262.0	-9.7
5461.100000	48.31	---	68.20	19.89	500.0	100.0	V	239.0	-8.6
6912.200000	48.63	---	68.20	19.57	500.0	100.0	H	346.0	-3.8
7737.266667	---	36.86	54.00	17.14	500.0	100.0	V	136.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH52

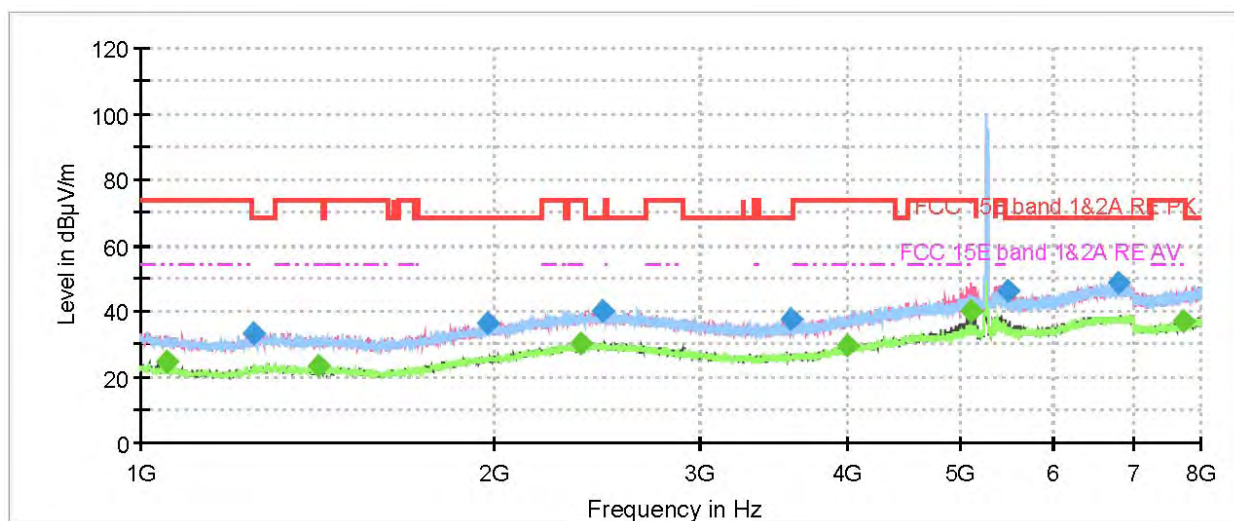

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

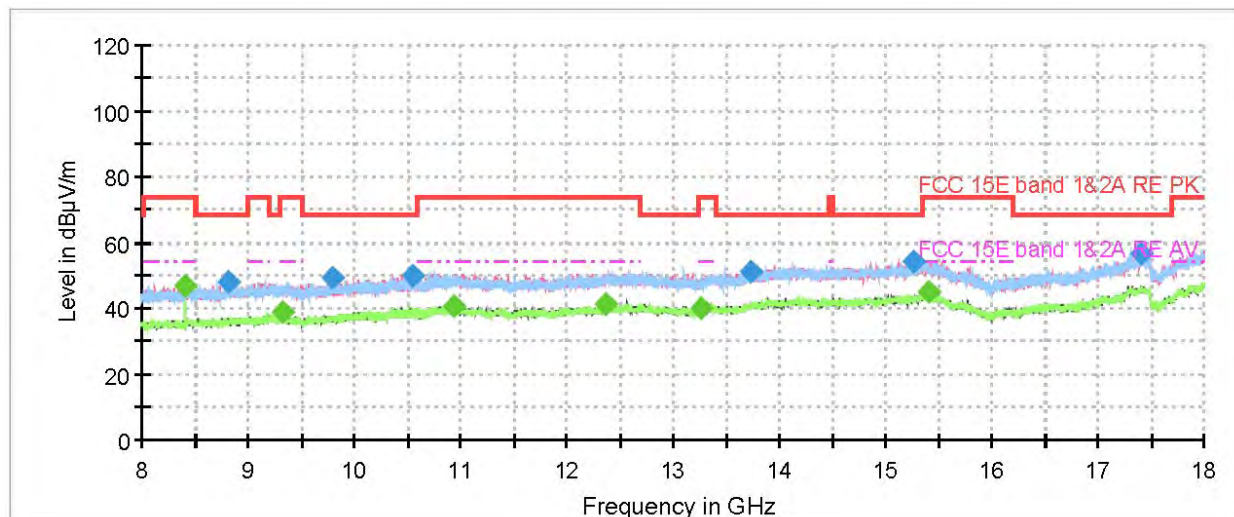


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1053.666667	---	24.52	54.00	29.48	500.0	100.0	H	176.0	-21.0
1246.166667	32.99	---	68.20	35.21	500.0	200.0	H	0.0	-20.0
1416.033333	---	23.45	54.00	30.55	500.0	100.0	V	23.0	-19.3
1976.500000	36.23	---	68.20	31.97	500.0	100.0	H	345.0	-18.3
2371.300000	---	30.30	54.00	23.70	500.0	100.0	H	322.0	-16.6
2477.933333	39.80	---	68.20	28.40	500.0	100.0	V	150.0	-16.3
3574.600000	37.84	---	68.20	30.36	500.0	100.0	H	322.0	-14.5
3999.033333	---	29.34	54.00	24.66	500.0	200.0	V	265.0	-13.3
5095.933333	---	40.04	54.00	13.96	500.0	100.0	V	264.0	-9.7
5473.466667	46.02	---	68.20	22.18	500.0	200.0	V	242.0	-8.6
6795.766667	48.78	---	68.20	19.42	500.0	100.0	H	322.0	-3.8
7744.266667	---	36.64	54.00	17.36	500.0	200.0	V	358.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH60

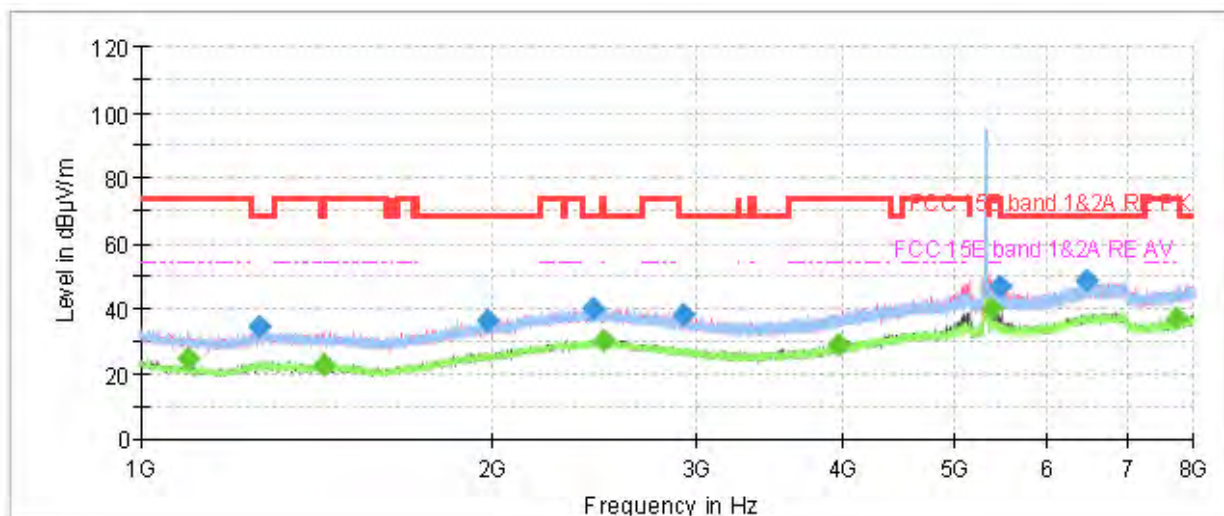

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

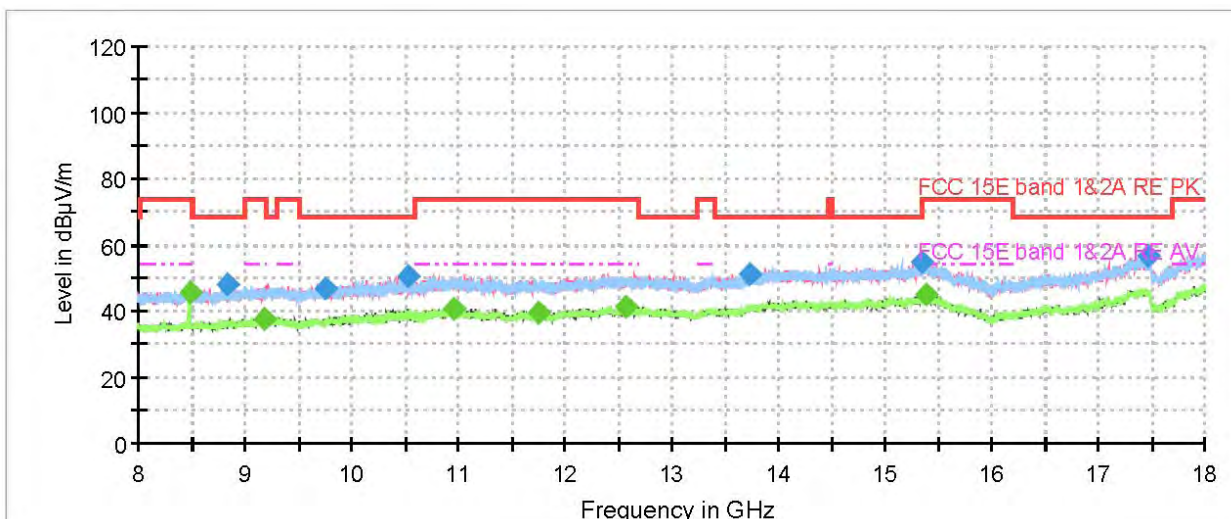


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1097.066667	---	24.51	54.00	29.49	500.0	100.0	V	285.0	-20.6
1265.300000	34.38	---	68.20	33.82	500.0	100.0	V	14.0	-20.0
1436.566667	---	23.07	54.00	30.93	500.0	100.0	V	24.0	-19.3
1983.966667	36.18	---	68.20	32.02	500.0	100.0	V	14.0	-18.3
2439.433333	40.14	---	68.20	28.06	500.0	200.0	V	93.0	-16.5
2491.000000	---	30.46	54.00	23.54	500.0	100.0	V	50.0	-16.3
2918.233333	37.90	---	68.20	30.30	500.0	100.0	V	184.0	-16.1
3970.566667	---	29.01	54.00	24.99	500.0	100.0	H	247.0	-13.5
5366.133333	---	40.12	54.00	13.88	500.0	100.0	V	285.0	-8.7
5463.666667	46.74	---	68.20	21.46	500.0	200.0	V	236.0	-8.6
6464.200000	48.32	---	68.20	19.88	500.0	100.0	V	184.0	-4.0
7734.233333	---	36.92	54.00	17.08	500.0	100.0	V	2.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH64

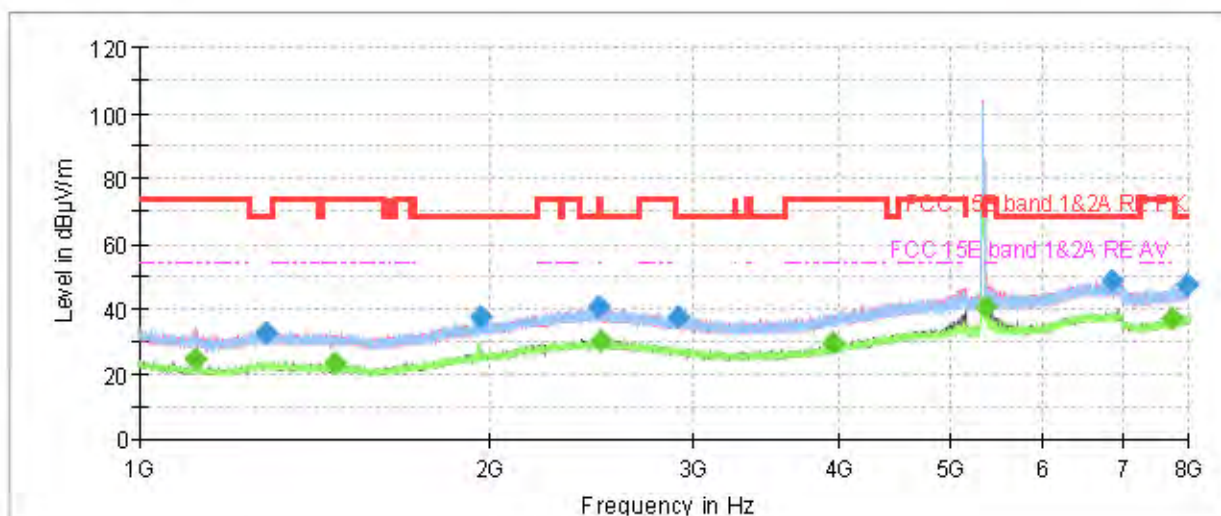

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

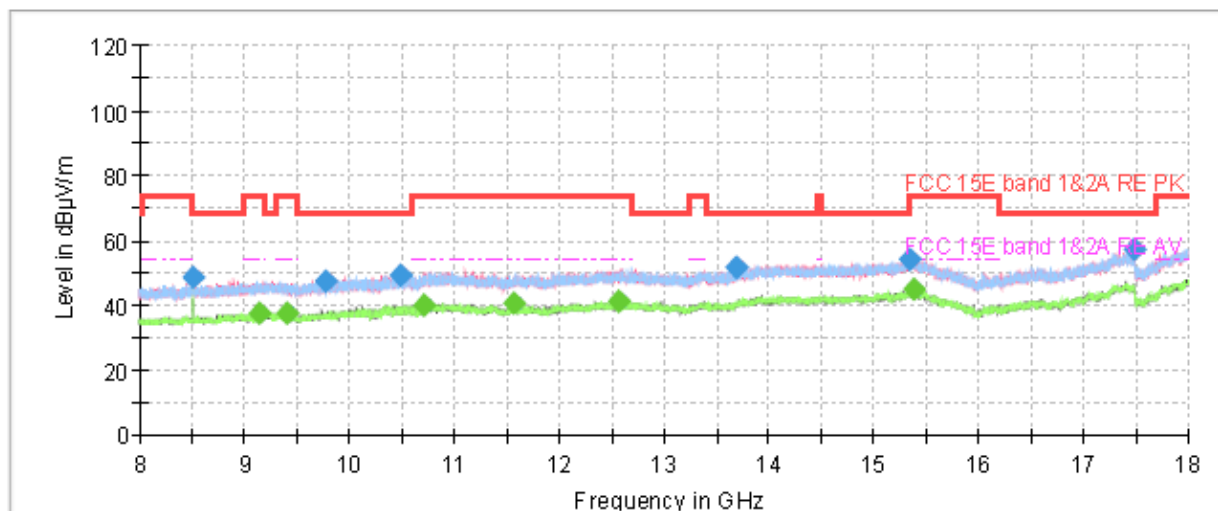


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1117.833333	---	24.84	54.00	29.16	500.0	200.0	V	243.0	-20.6
1284.666667	32.64	---	68.20	35.56	500.0	200.0	V	352.0	-19.8
1469.933333	---	23.47	54.00	30.53	500.0	100.0	V	0.0	-19.3
1963.433333	37.52	---	68.20	30.68	500.0	200.0	V	347.0	-18.4
2480.033333	40.79	---	68.20	27.41	500.0	100.0	H	56.0	-16.3
2498.233333	---	30.35	54.00	23.65	500.0	100.0	H	0.0	-16.3
2905.633333	37.82	---	68.20	30.38	500.0	100.0	V	2.0	-16.1
3955.166667	---	29.34	54.00	24.66	500.0	100.0	V	2.0	-13.5
5350.500000	---	40.54	54.00	13.46	500.0	100.0	V	254.0	-8.7
6868.333333	48.41	---	68.20	19.79	500.0	200.0	V	352.0	-3.8
7726.766667	---	36.72	54.00	17.28	500.0	200.0	V	326.0	-3.7
7965.000000	47.41	---	68.20	20.79	500.0	100.0	V	167.0	-2.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH100

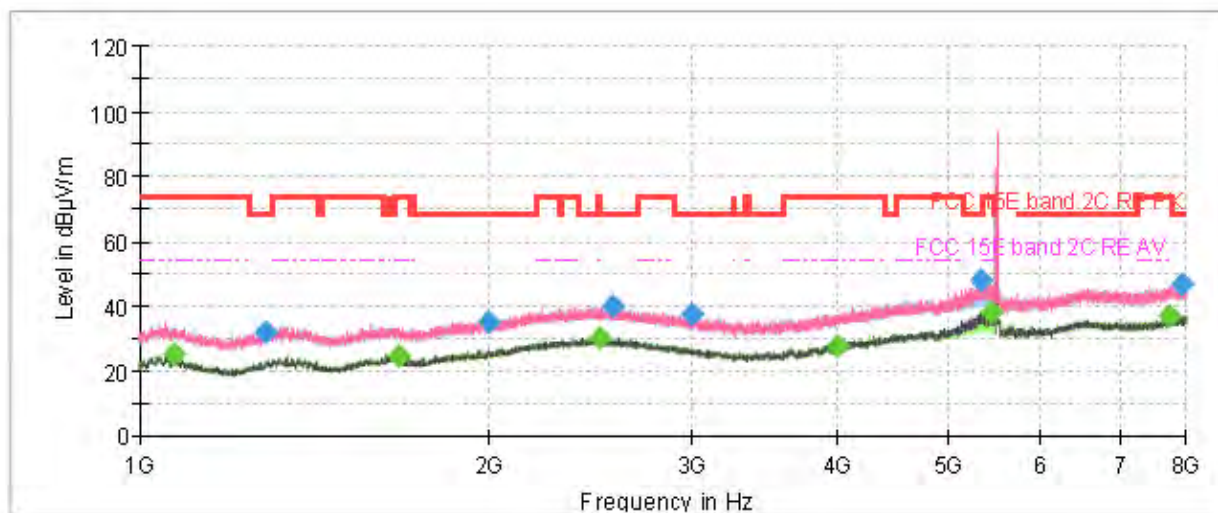

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

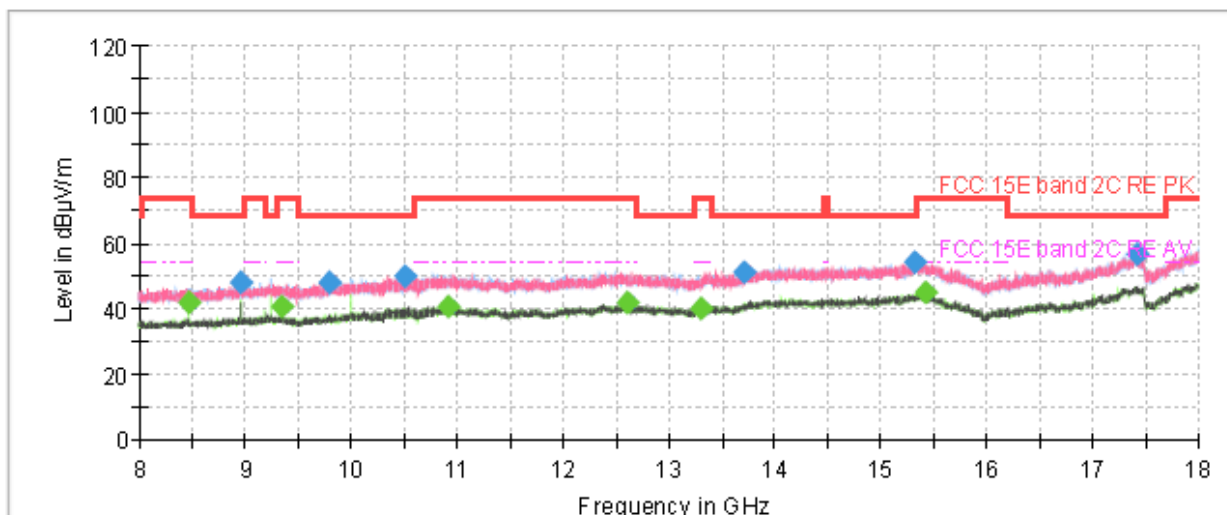


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1071.166667	---	25.26	54.00	28.74	500.0	100.0	H	309.0	-20.8
1287.233333	32.31	---	68.20	35.89	500.0	100.0	V	0.0	-19.8
1671.533333	---	24.48	54.00	29.52	500.0	100.0	V	277.0	-18.8
1998.433333	35.34	---	68.20	32.86	500.0	100.0	H	2.0	-18.2
2494.266667	---	30.01	54.00	23.99	500.0	100.0	H	200.0	-16.3
2556.100000	40.30	---	68.20	27.90	500.0	200.0	V	143.0	-16.2
2993.600000	37.31	---	68.20	30.89	500.0	100.0	V	358.0	-15.8
3998.566667	---	27.99	54.00	26.01	500.0	100.0	H	200.0	-13.3
5328.800000	48.04	---	68.20	20.16	500.0	100.0	V	297.0	-8.8
5424.000000	---	38.03	54.00	15.97	500.0	200.0	V	204.0	-8.6
7727.466667	---	36.68	54.00	17.32	500.0	200.0	V	0.0	-3.7
7921.366667	46.72	---	68.20	21.48	500.0	200.0	H	232.0	-2.8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH120

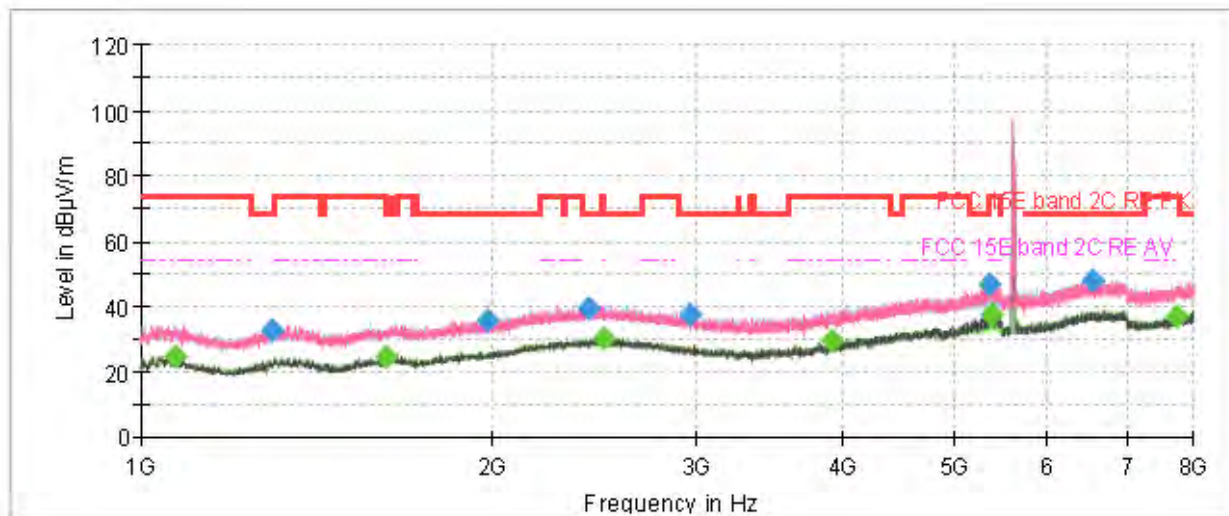

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

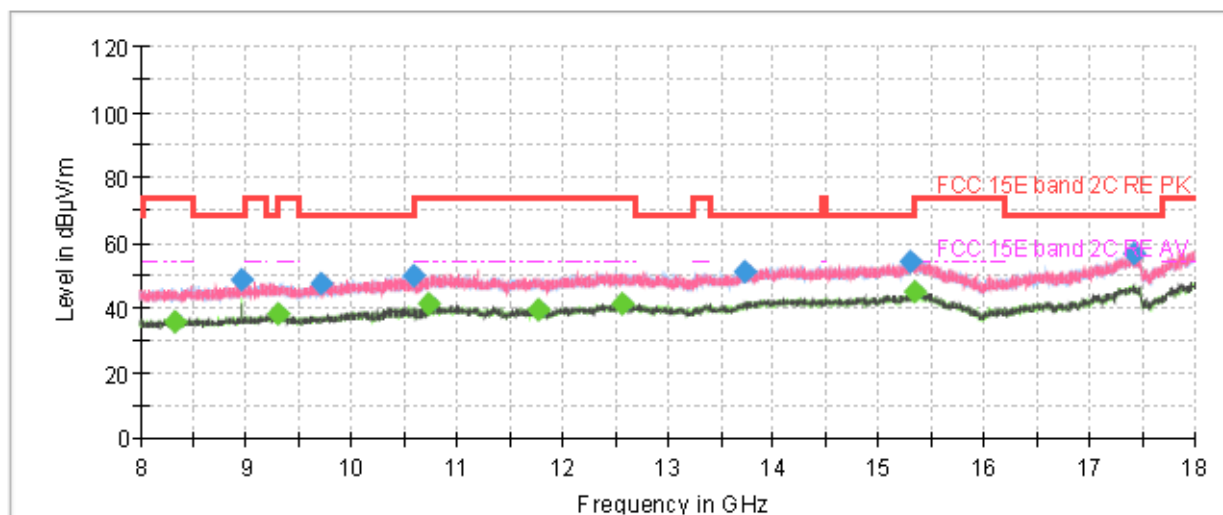


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1069.066667	---	24.85	54.00	29.15	500.0	200.0	V	332.0	-20.8
1297.266667	32.49	---	68.20	35.71	500.0	100.0	H	152.0	-19.8
1621.366667	---	24.53	54.00	29.47	500.0	100.0	V	295.0	-18.8
1986.066667	35.47	---	68.20	32.73	500.0	100.0	V	359.0	-18.2
2424.733333	39.62	---	68.20	28.58	500.0	100.0	H	152.0	-16.5
2495.433333	---	30.19	54.00	23.81	500.0	100.0	H	2.0	-16.3
2954.633333	37.73	---	68.20	30.47	500.0	200.0	H	294.0	-15.9
3908.966667	---	29.31	54.00	24.69	500.0	100.0	H	89.0	-13.7
5333.466667	47.03	---	68.20	21.17	500.0	100.0	V	295.0	-8.8
5372.900000	---	37.34	54.00	16.66	500.0	200.0	V	302.0	-8.7
6538.633333	48.28	---	68.20	19.92	500.0	100.0	H	32.0	-3.7
7746.600000	---	36.96	54.00	17.04	500.0	100.0	H	152.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH140

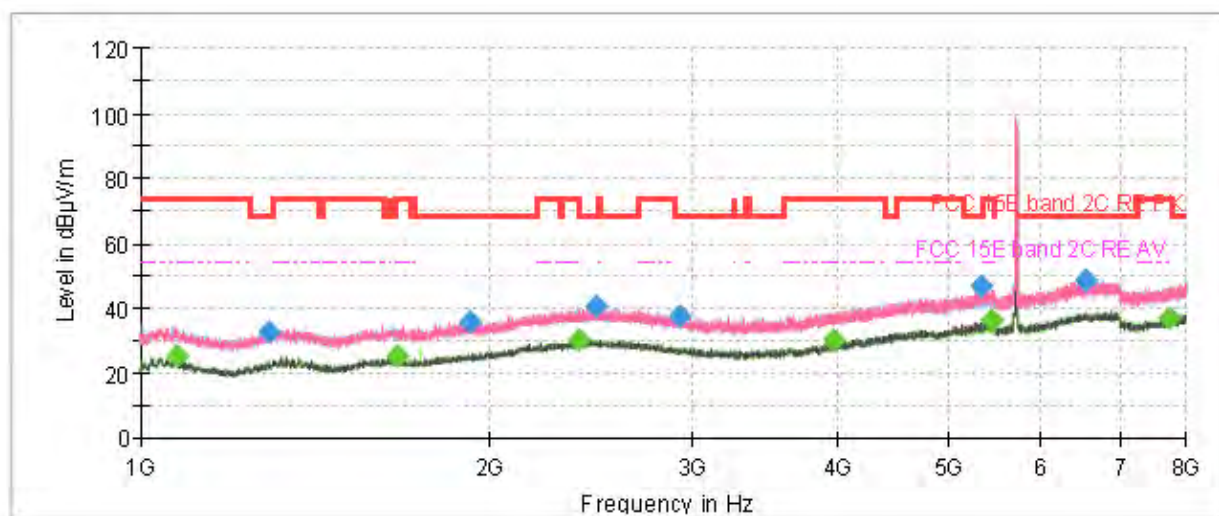

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

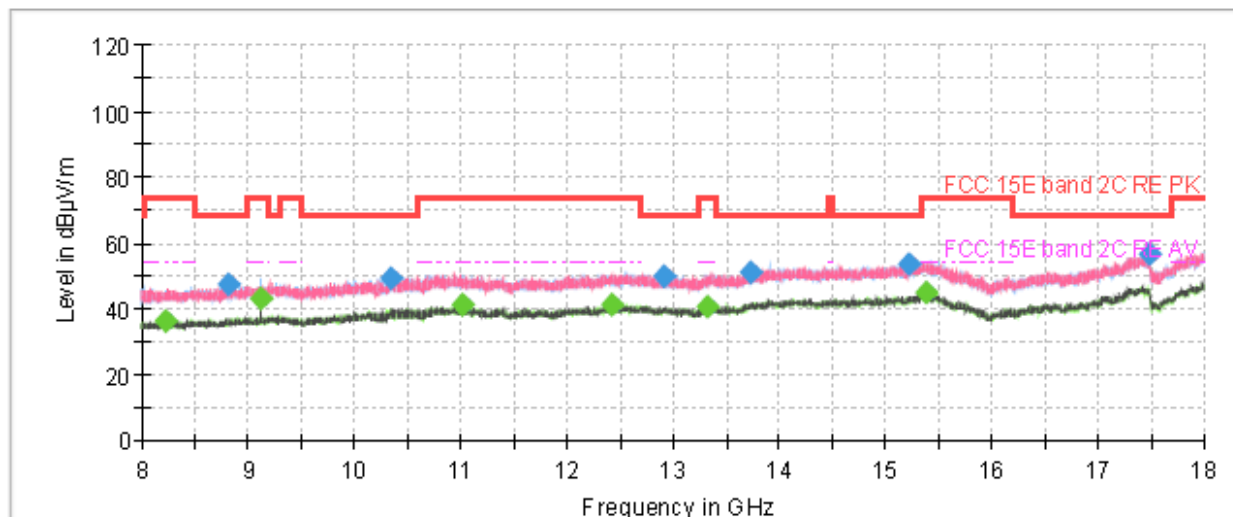


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1075.133333	---	25.24	54.00	28.76	500.0	200.0	H	356.0	-20.8
1288.866667	32.53	---	68.20	35.67	500.0	200.0	H	0.0	-19.8
1669.200000	---	25.30	54.00	28.70	500.0	100.0	H	52.0	-18.8
1927.266667	35.57	---	68.20	32.63	500.0	100.0	H	15.0	-18.3
2387.633333	---	30.23	54.00	23.77	500.0	100.0	H	0.0	-16.5
2469.766667	40.34	---	68.20	27.86	500.0	200.0	H	321.0	-16.3
2924.066667	37.77	---	68.20	30.43	500.0	100.0	H	176.0	-16.0
3969.866667	---	30.07	54.00	23.93	500.0	100.0	H	176.0	-13.5
5326.000000	46.84	---	68.20	21.36	500.0	100.0	V	283.0	-8.9
5424.466667	---	36.48	54.00	17.52	500.0	200.0	V	287.0	-8.6
6558.933333	48.41	---	68.20	19.79	500.0	100.0	H	0.0	-3.7
7747.066667	---	37.03	54.00	16.97	500.0	200.0	V	153.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH149

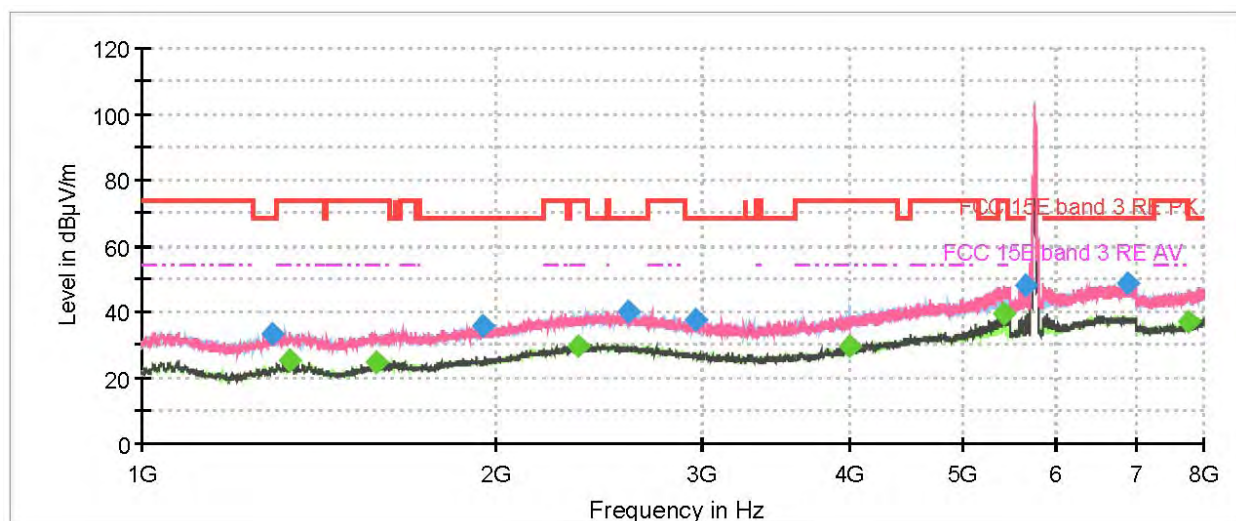

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

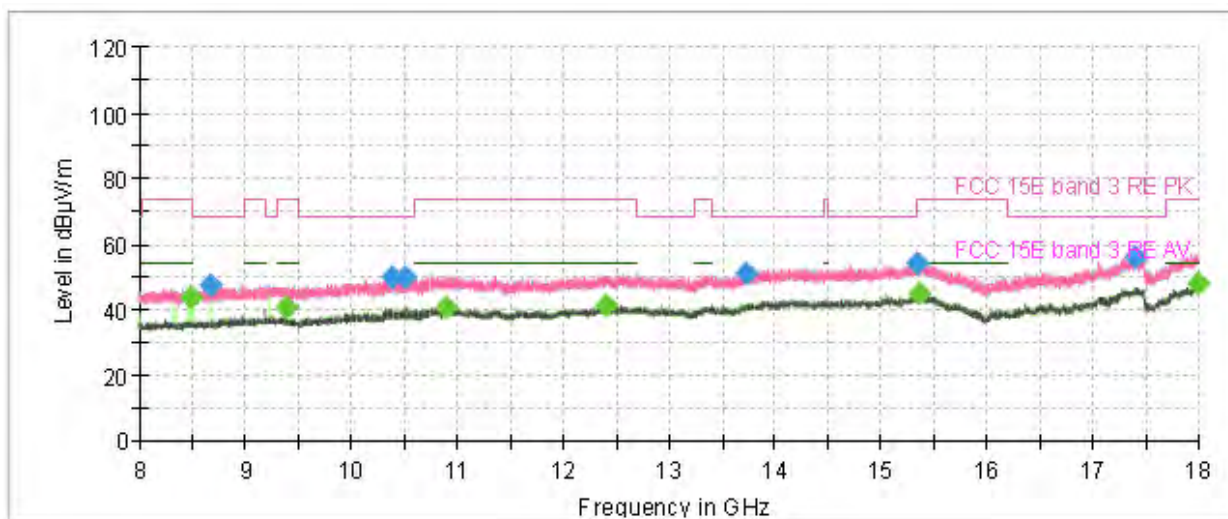


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1289.800000	33.35	---	68.20	34.85	500.0	100.0	V	357.0	-19.8
1335.533333	---	25.05	54.00	28.95	500.0	200.0	V	14.0	-19.7
1582.633333	---	24.53	54.00	29.47	500.0	200.0	H	318.0	-18.9
1948.500000	35.39	---	68.20	32.81	500.0	100.0	V	333.0	-18.4
2347.266667	---	29.81	54.00	24.19	500.0	100.0	H	23.0	-16.8
2596.466667	39.82	---	68.20	28.38	500.0	100.0	H	14.0	-16.1
2955.333333	37.65	---	68.20	30.55	500.0	100.0	V	0.0	-15.9
3992.266667	---	29.37	54.00	24.63	500.0	200.0	V	2.0	-13.3
5414.900000	---	39.58	54.00	14.42	500.0	200.0	V	190.0	-8.7
5635.166667	47.74	---	68.20	20.46	500.0	200.0	H	239.0	-8.1
6896.100000	48.57	---	68.20	19.63	500.0	200.0	V	0.0	-3.8
7749.400000	---	37.00	54.00	17.00	500.0	100.0	H	35.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH157

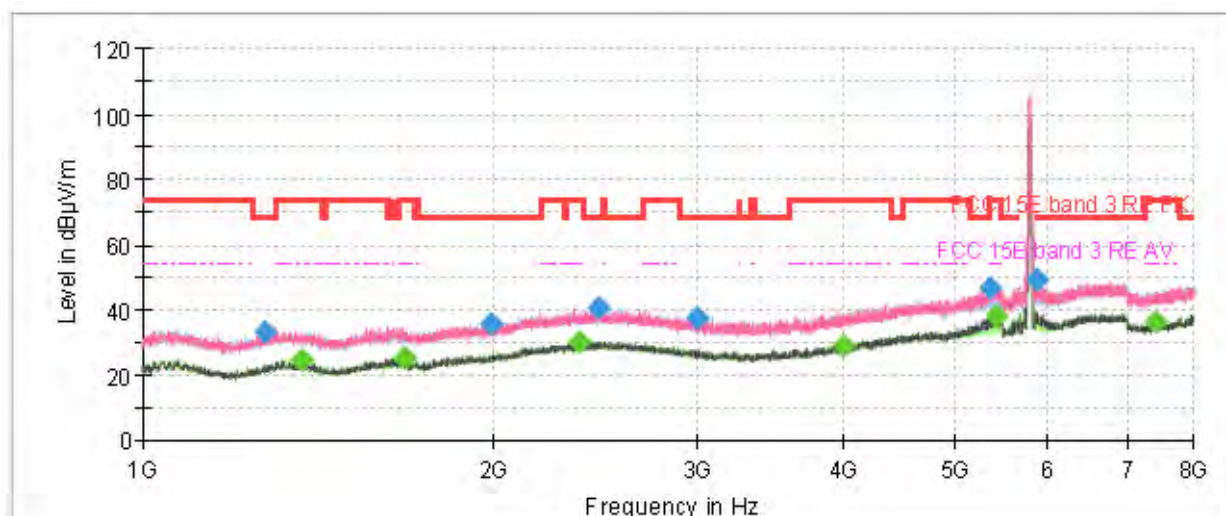

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

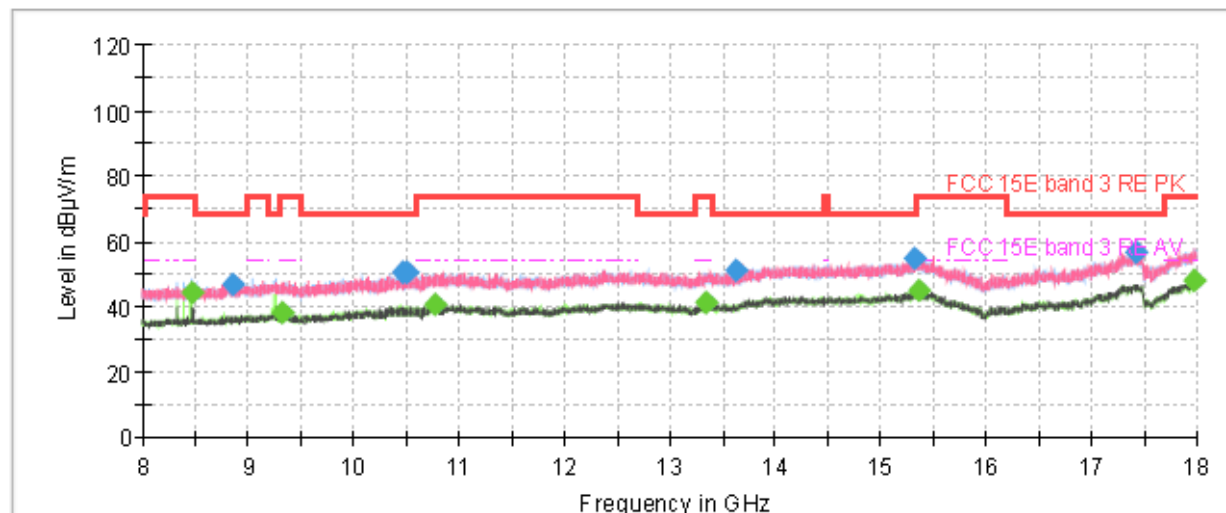


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1273.933333	32.99	---	68.20	35.21	500.0	100.0	H	0.0	-19.9
1370.533333	---	24.80	54.00	29.20	500.0	100.0	H	64.0	-19.6
1676.900000	---	25.14	54.00	28.86	500.0	100.0	H	190.0	-18.7
1992.600000	35.47	---	68.20	32.73	500.0	100.0	V	358.0	-18.2
2370.133333	---	30.08	54.00	23.92	500.0	100.0	H	85.0	-16.6
2464.866667	40.58	---	68.20	27.62	500.0	100.0	V	308.0	-16.3
2995.933333	37.54	---	68.20	30.66	500.0	100.0	H	105.0	-15.8
3999.033333	---	29.13	54.00	24.87	500.0	200.0	V	5.0	-13.3
5337.900000	46.86	---	68.20	21.34	500.0	200.0	V	197.0	-8.8
5413.266667	---	38.31	54.00	15.69	500.0	200.0	V	197.0	-8.7
5865.700000	49.35	---	68.20	18.85	500.0	100.0	V	308.0	-7.4
7417.600000	---	36.62	54.00	17.38	500.0	100.0	H	64.0	-4.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH165

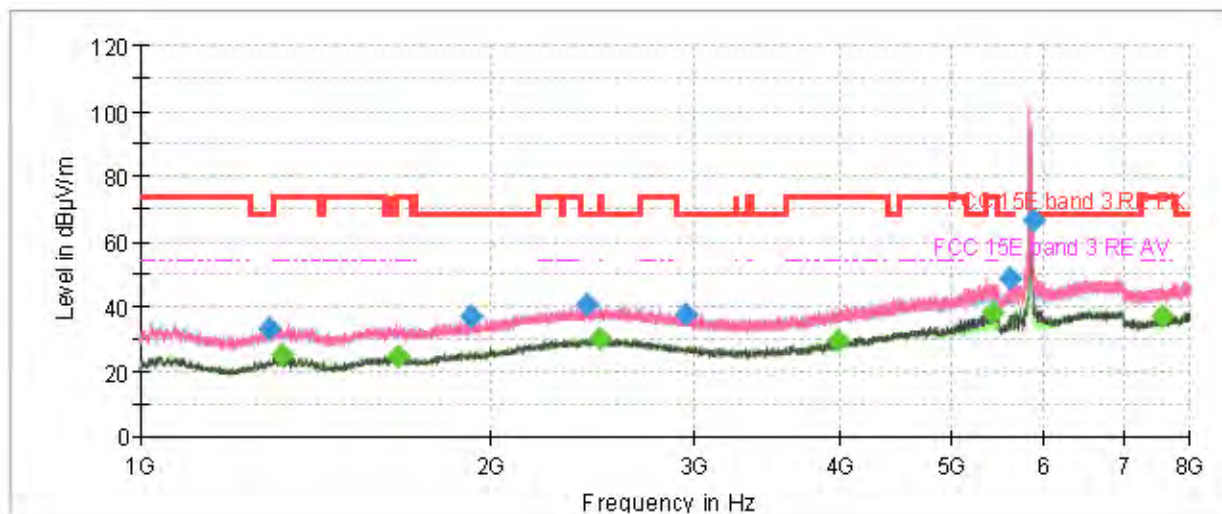

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

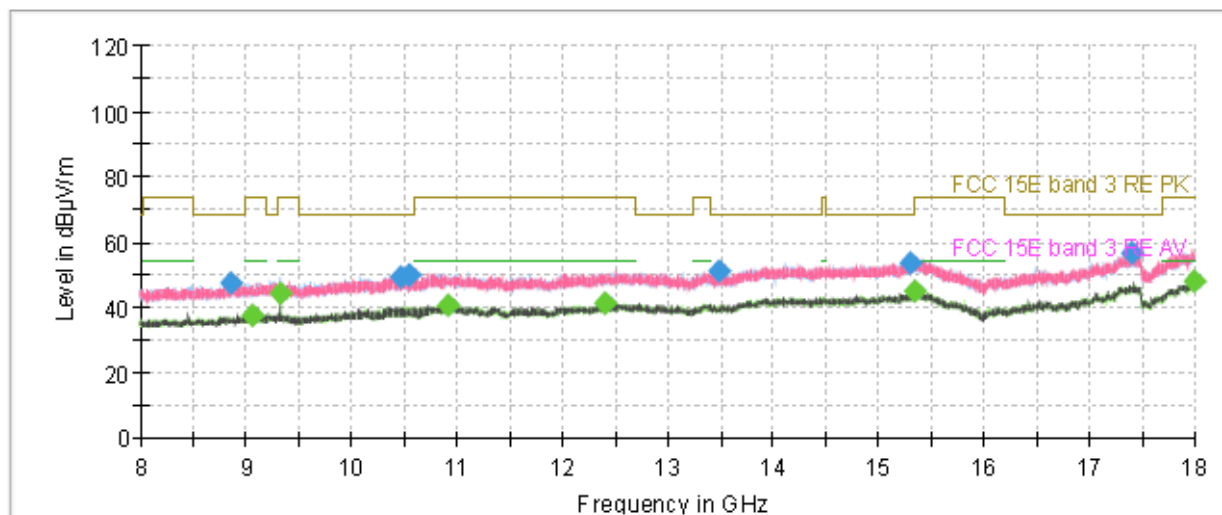


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1288.166667	33.18	---	68.20	35.02	500.0	100.0	H	69.0	-19.8
1322.466667	---	24.96	54.00	29.04	500.0	100.0	H	14.0	-19.7
1668.733333	---	24.51	54.00	29.49	500.0	100.0	H	267.0	-18.8
1926.566667	37.16	---	68.20	31.04	500.0	200.0	V	1.0	-18.3
2423.800000	40.56	---	68.20	27.64	500.0	100.0	V	98.0	-16.5
2485.866667	---	30.29	54.00	23.71	500.0	200.0	H	285.0	-16.3
2946.933333	37.57	---	68.20	30.63	500.0	200.0	V	110.0	-15.9
3986.433333	---	29.55	54.00	24.45	500.0	100.0	H	8.0	-13.4
5417.233333	---	38.41	54.00	15.59	500.0	100.0	V	272.0	-8.6
5596.666667	48.52	---	68.20	19.68	500.0	100.0	V	272.0	-8.1
5859.400000	66.69	---	68.20	1.51	500.0	200.0	V	286.0	-7.4
7559.700000	---	36.93	54.00	17.07	500.0	200.0	V	24.0	-4.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH38

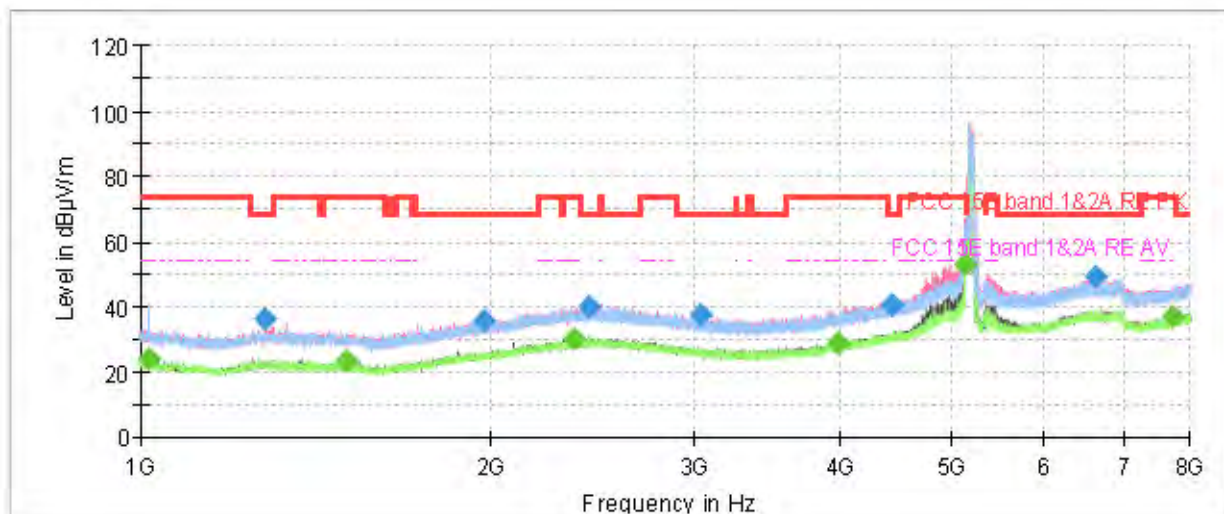

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

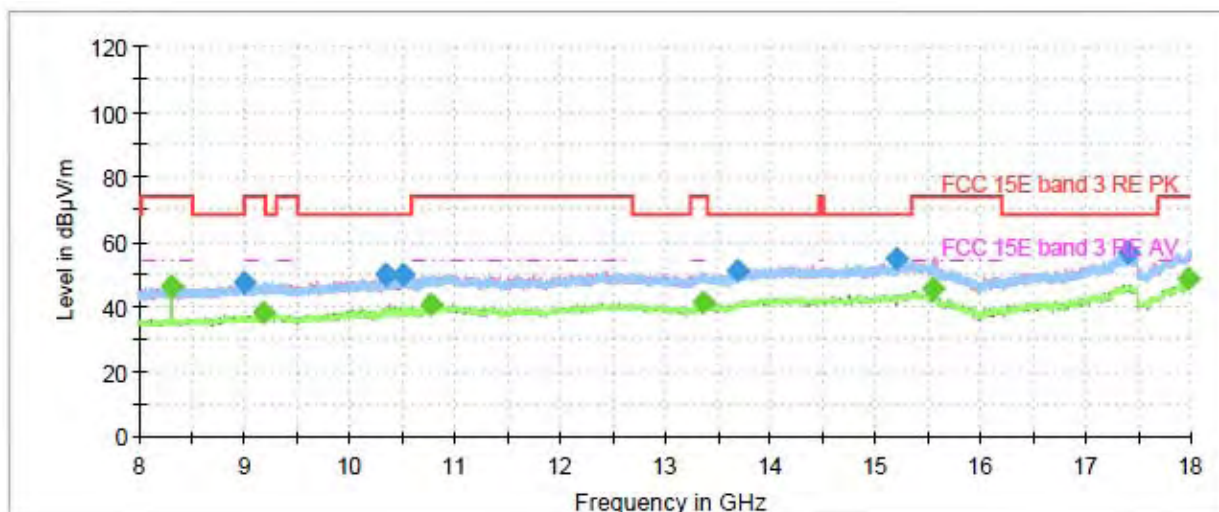


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1015.166667	---	24.08	54.00	29.92	500.0	200.0	V	112.0	-21.0
1281.866670	36.52	---	68.20	31.68	500.0	200.0	H	117.0	-21.0
1505.400000	---	23.26	54.00	30.74	500.0	200.0	V	26.0	-19.1
1971.366667	35.77	---	68.20	32.43	500.0	200.0	V	53.0	-18.3
2363.366667	---	30.42	54.00	23.58	500.0	200.0	V	53.0	-16.7
2437.100000	40.27	---	68.20	27.93	500.0	200.0	V	134.0	-16.5
3029.300000	37.31	---	68.20	30.89	500.0	200.0	V	112.0	-15.7
3985.266667	---	28.91	54.00	25.09	500.0	200.0	V	5.0	-13.4
4438.166667	40.79	---	68.20	27.41	500.0	200.0	H	359.0	-11.7
5125.100000	---	53.04	54.00	0.96	500.0	200.0	V	197.0	-9.5
6639.433333	48.95	---	68.20	19.25	500.0	200.0	V	72.0	-3.5
7722.333333	---	36.71	54.00	17.29	500.0	200.0	H	359.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH46

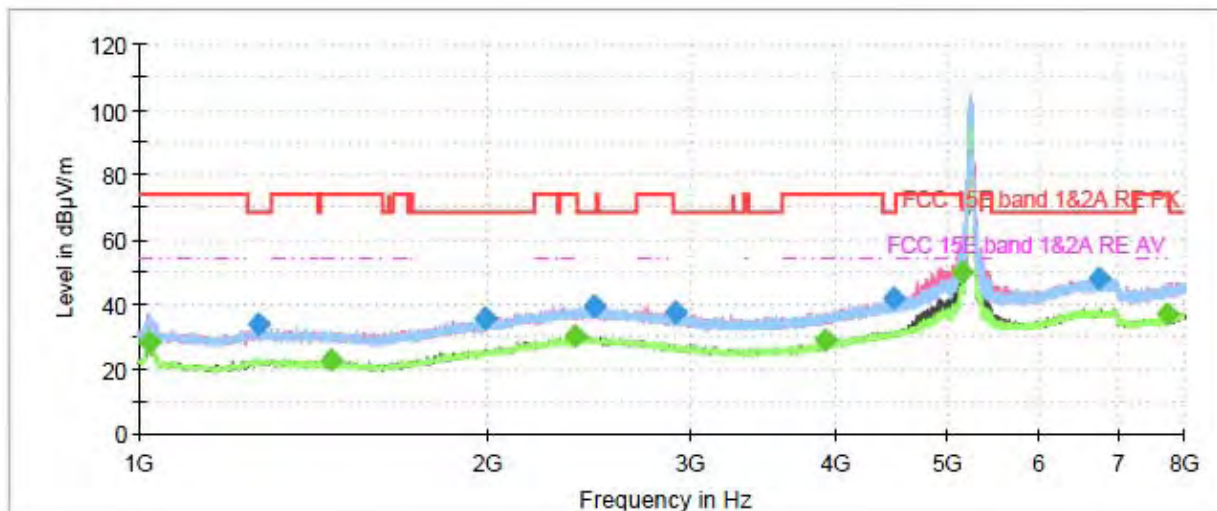

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

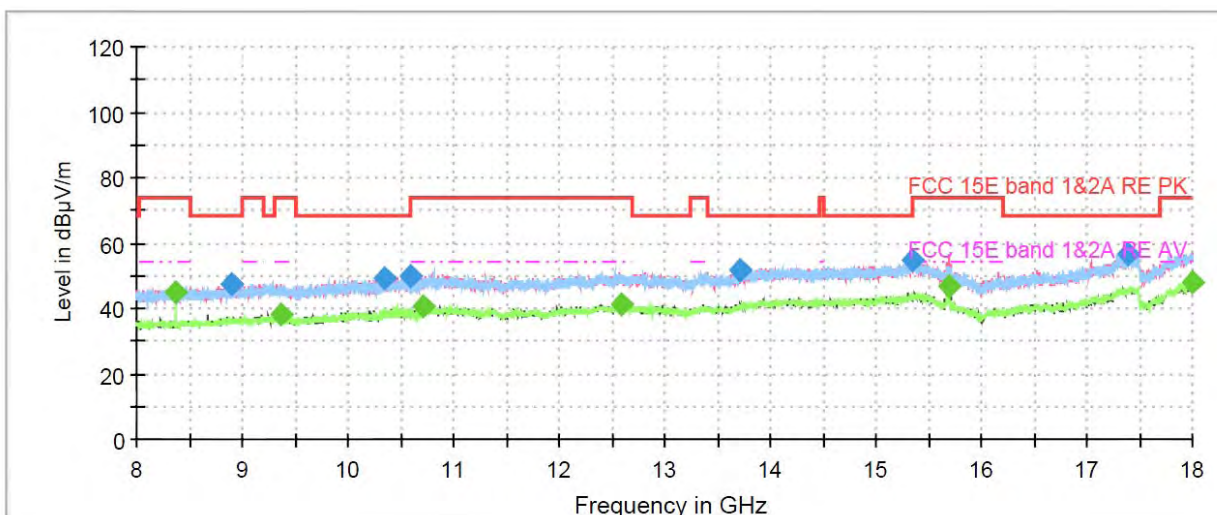


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1020.766667	---	28.61	54.00	25.39	500.0	100.0	H	181.0	-21.0
1269.500000	33.88	---	68.20	34.32	500.0	200.0	V	4.0	-19.9
1464.800000	---	22.92	54.00	31.08	500.0	200.0	H	75.0	-19.3
1995.166667	35.88	---	68.20	32.32	500.0	100.0	H	353.0	-18.2
2384.600000	---	30.27	54.00	23.73	500.0	200.0	V	141.0	-16.5
2474.200000	39.67	---	68.20	28.53	500.0	200.0	H	340.0	-16.3
2905.633333	37.68	---	68.20	30.52	500.0	200.0	V	101.0	-16.1
3915.033333	---	28.80	54.00	25.20	500.0	200.0	H	358.0	-13.7
4478.766667	41.79	---	68.20	26.41	500.0	100.0	V	101.0	-11.5
5140.500000	---	49.94	54.00	4.06	500.0	100.0	V	282.0	-9.5
6762.866667	48.00	---	68.20	20.20	500.0	100.0	H	0.0	-3.7
7729.800000	---	36.66	54.00	17.34	500.0	200.0	V	0.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH54

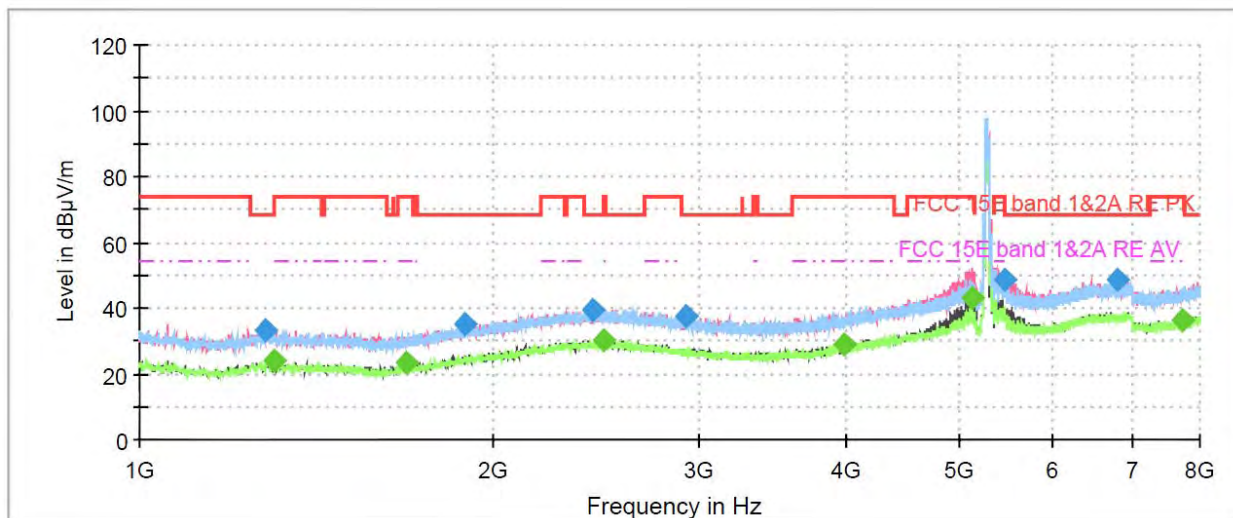

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

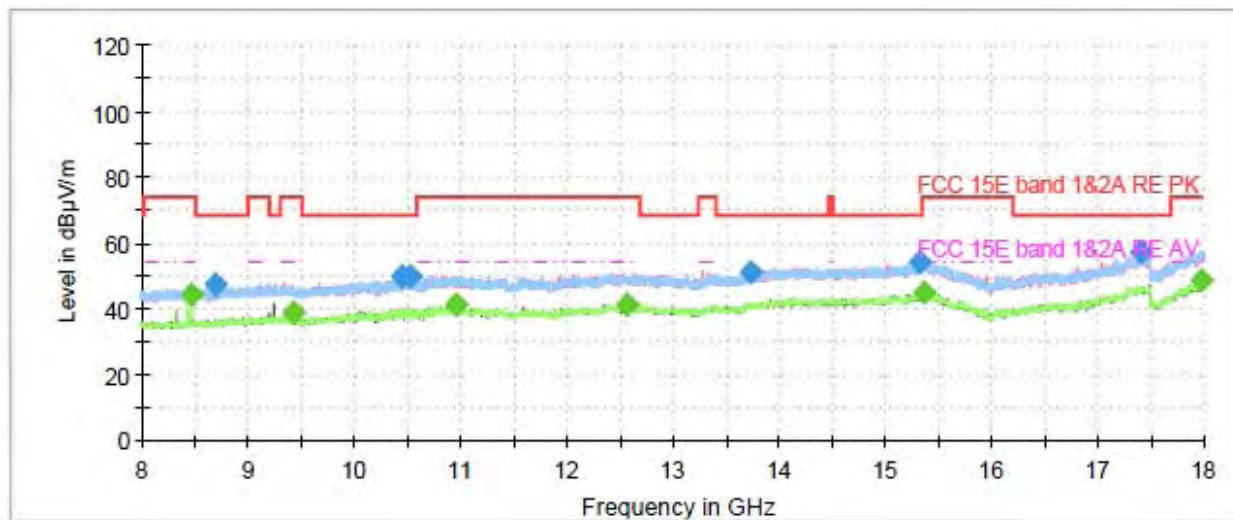


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1281.400000	33.40	---	68.20	34.80	500.0	200.0	V	21.0	-19.9
1301.933333	---	23.85	54.00	30.15	500.0	100.0	H	0.0	-19.8
1690.200000	---	23.20	54.00	30.80	500.0	200.0	V	33.0	-18.6
1893.900000	35.30	---	68.20	32.90	500.0	200.0	V	332.0	-18.4
2429.633333	39.64	---	68.20	28.56	500.0	200.0	H	214.0	-16.5
2486.100000	---	30.13	54.00	23.87	500.0	200.0	H	72.0	-16.3
2920.100000	37.36	---	68.20	30.84	500.0	100.0	H	355.0	-16.0
3988.766667	---	29.04	54.00	24.96	500.0	200.0	V	71.0	-13.4
5111.100000	---	42.89	54.00	11.11	500.0	200.0	V	268.0	-9.6
5460.400000	48.83	---	68.20	19.37	500.0	100.0	V	309.0	-8.6
6793.666667	48.37	---	68.20	19.83	500.0	100.0	H	214.0	-3.8
7726.300000	---	36.55	54.00	17.46	500.0	200.0	V	197.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH62

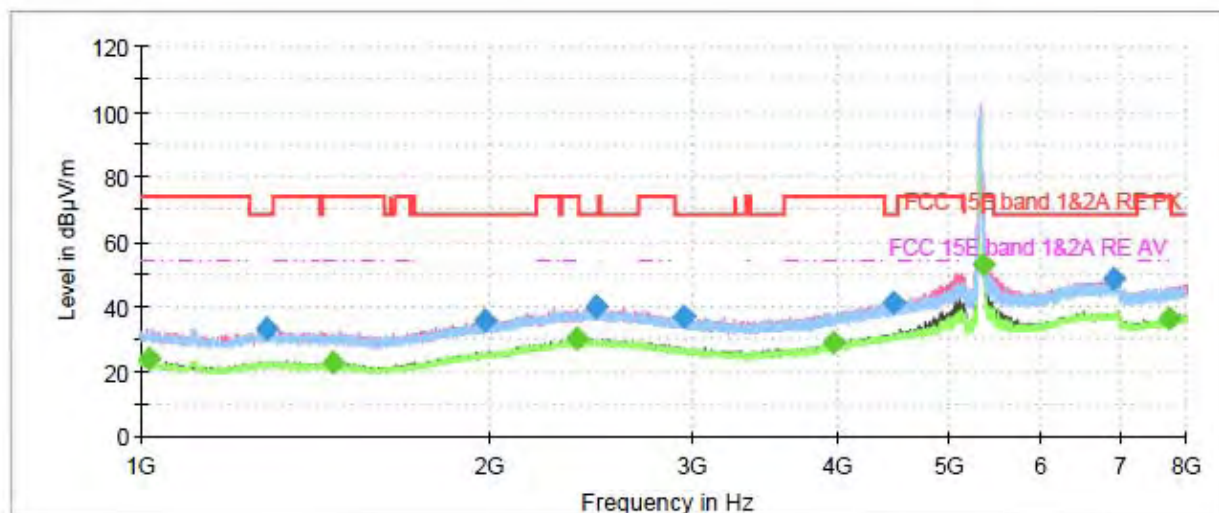

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

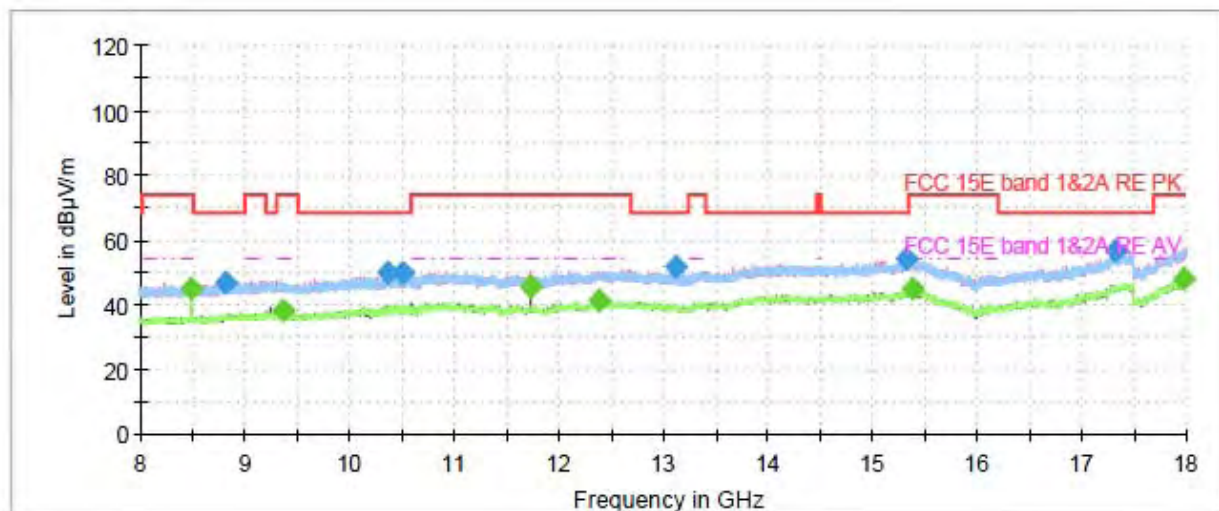


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1016.100000	---	24.28	54.00	29.72	500.0	100.0	V	95.0	-21.0
1286.766667	33.14	---	68.20	35.06	500.0	200.0	H	119.0	-19.8
1464.100000	---	23.01	54.00	30.99	500.0	200.0	H	355.0	-19.3
1982.800000	35.73	---	68.20	32.47	500.0	200.0	H	0.0	-18.3
2376.433333	---	30.22	54.00	23.78	500.0	200.0	V	1.0	-16.6
2471.866667	39.96	---	68.20	28.24	500.0	200.0	V	0.0	-16.3
2947.866667	36.81	---	68.20	31.39	500.0	200.0	H	345.0	-15.9
3966.366667	---	28.81	54.00	25.19	500.0	100.0	H	0.0	-13.5
4476.900000	41.25	---	68.20	26.95	500.0	100.0	H	336.0	-11.5
5350.733333	---	53.17	54.00	0.83	500.0	200.0	V	239.0	-8.7
6931.100000	48.35	---	68.20	19.85	500.0	100.0	V	16.0	-3.8
7725.133333	---	36.52	54.00	17.48	500.0	200.0	H	98.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH102

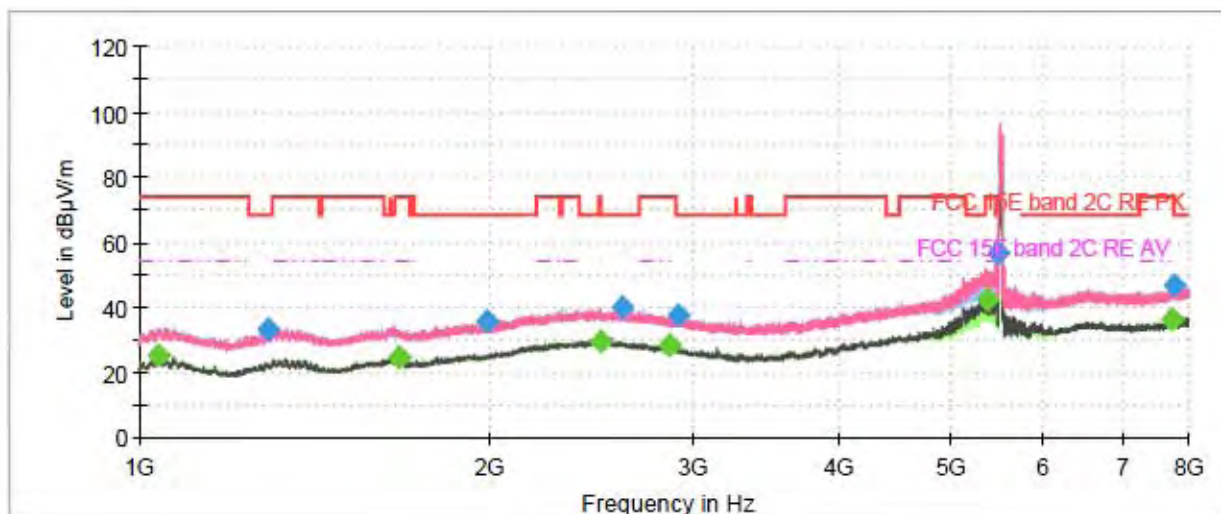

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

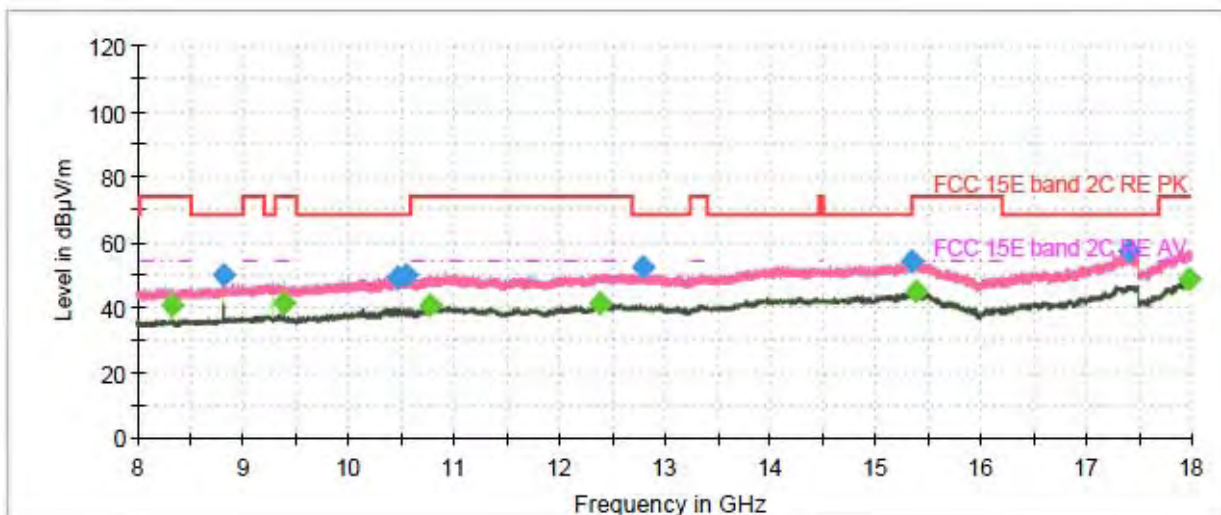


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1038.966667	---	25.30	54.00	28.70	500.0	200.0	H	356.0	-21.0
1288.400000	33.01	---	68.20	35.19	500.0	100.0	H	348.0	-19.8
1671.533333	---	24.69	54.00	29.31	500.0	100.0	H	7.0	-18.8
1988.866667	35.78	---	68.20	32.42	500.0	100.0	V	262.0	-18.2
2493.333333	---	29.79	54.00	24.21	500.0	100.0	H	247.0	-16.3
2601.366667	39.93	---	68.20	28.27	500.0	200.0	H	299.0	-16.1
2854.066667	---	28.36	54.00	25.64	500.0	200.0	H	358.0	-16.0
2903.066667	37.30	---	68.20	30.90	500.0	100.0	V	354.0	-16.1
5375.000000	---	42.44	54.00	11.56	500.0	200.0	V	202.0	-8.7
5469.033333	56.75	---	68.20	11.45	500.0	100.0	V	318.0	-8.6
7741.000000	---	36.47	54.00	17.53	500.0	200.0	V	117.0	-3.6
7760.133333	46.54	---	68.20	21.66	500.0	100.0	H	20.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH118

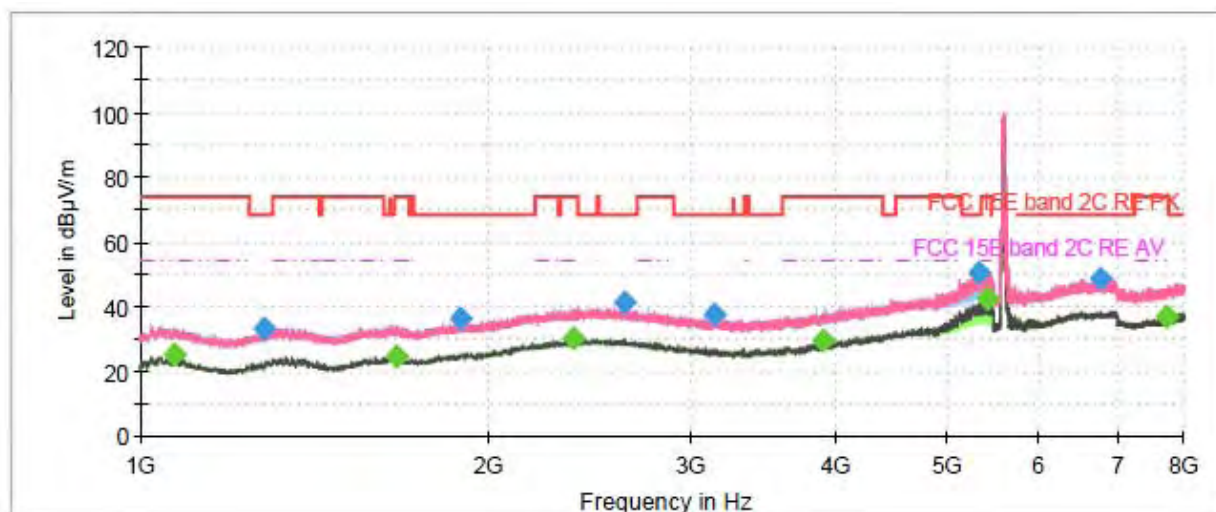

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

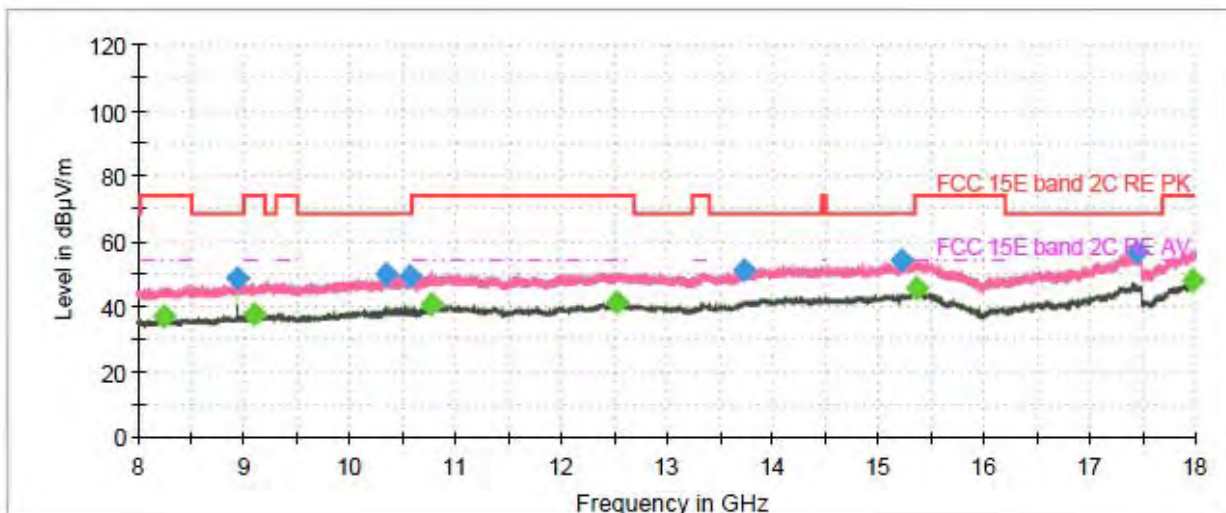


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1070.000000	---	24.93	54.00	29.07	500.0	200.0	H	11.0	-20.8
1281.400000	33.28	---	68.20	34.92	500.0	100.0	H	35.0	-19.9
1667.333333	---	24.74	54.00	29.26	500.0	200.0	H	72.0	-18.8
1890.633333	36.02	---	68.20	32.18	500.0	200.0	H	358.0	-18.4
2368.500000	---	29.91	54.00	24.09	500.0	100.0	V	326.0	-16.6
2628.200000	41.05	---	68.20	27.15	500.0	200.0	H	358.0	-16.1
3140.133333	37.69	---	68.20	30.51	500.0	200.0	V	111.0	-15.4
3905.233333	---	29.42	54.00	24.58	500.0	200.0	H	358.0	-13.7
5326.700000	50.20	---	68.20	18.00	500.0	100.0	V	290.0	-8.9
5415.133333	---	42.21	54.00	11.79	500.0	200.0	V	195.0	-8.7
6784.800000	48.77	---	68.20	19.43	500.0	100.0	V	338.0	-3.8
7729.100000	---	36.93	54.00	17.07	500.0	200.0	V	2.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH134

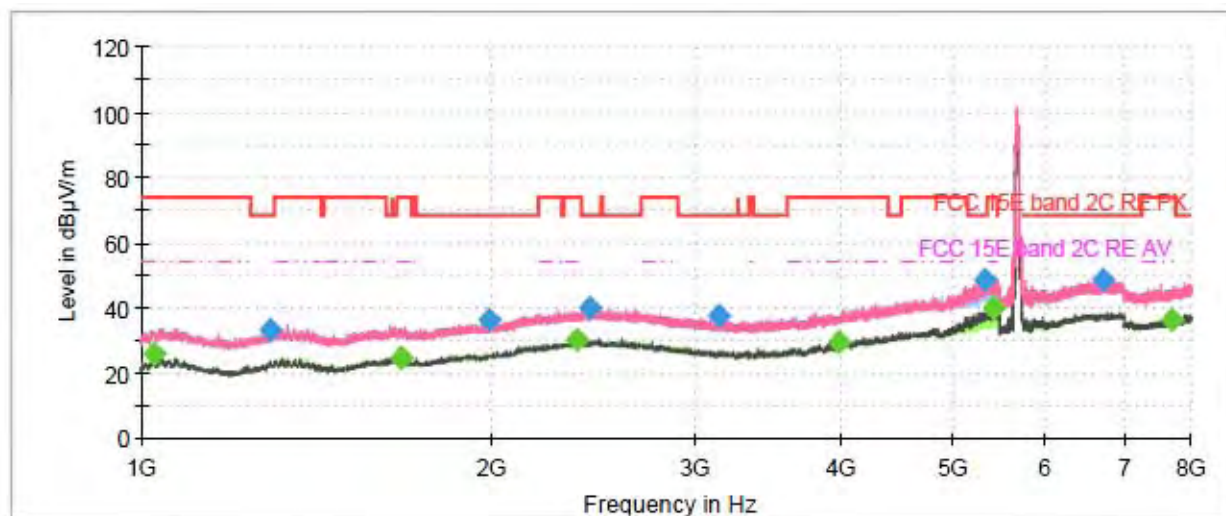

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

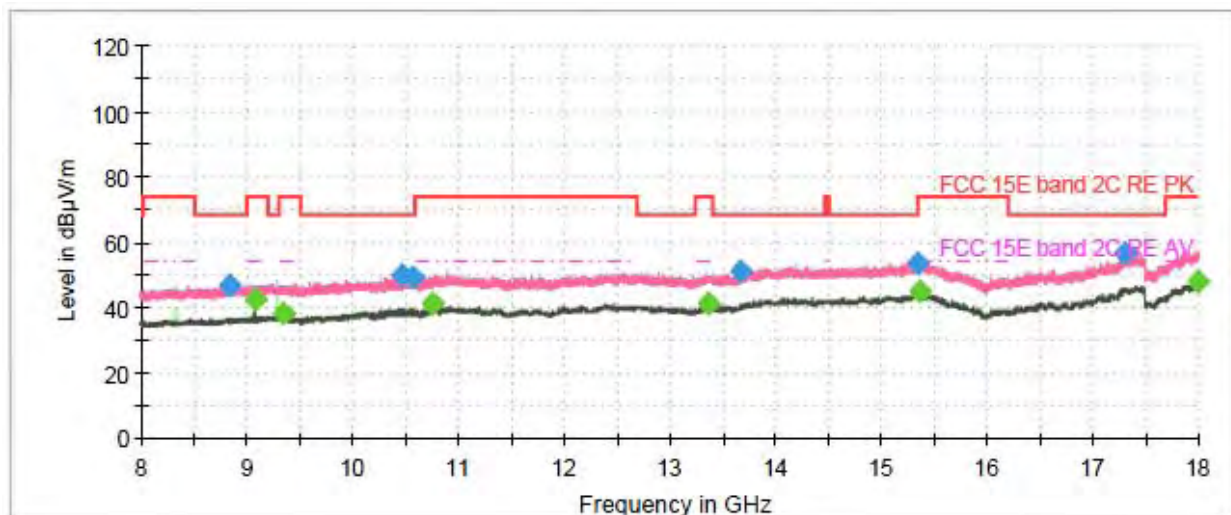


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1024.500000	---	25.88	54.00	28.12	500.0	200.0	V	194.0	-21.0
1290.966667	33.30	---	68.20	34.90	500.0	100.0	H	89.0	-19.8
1676.200000	---	24.88	54.00	29.12	500.0	100.0	V	216.0	-18.7
1988.633333	36.15	---	68.20	32.05	500.0	200.0	H	324.0	-18.2
2368.033333	---	30.07	54.00	23.93	500.0	100.0	H	69.0	-16.6
2434.300000	39.86	---	68.20	28.34	500.0	200.0	H	346.0	-16.5
3140.366667	37.64	---	68.20	30.56	500.0	200.0	V	4.0	-15.4
3988.533333	---	29.74	54.00	24.26	500.0	100.0	V	355.0	-13.4
5325.300000	48.85	---	68.20	19.35	500.0	200.0	V	194.0	-8.9
5416.766667	---	40.06	54.00	13.94	500.0	200.0	V	194.0	-8.6
6722.966667	48.68	---	68.20	19.52	500.0	100.0	H	9.0	-3.6
7689.200000	---	36.62	54.00	17.38	500.0	200.0	V	72.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH151

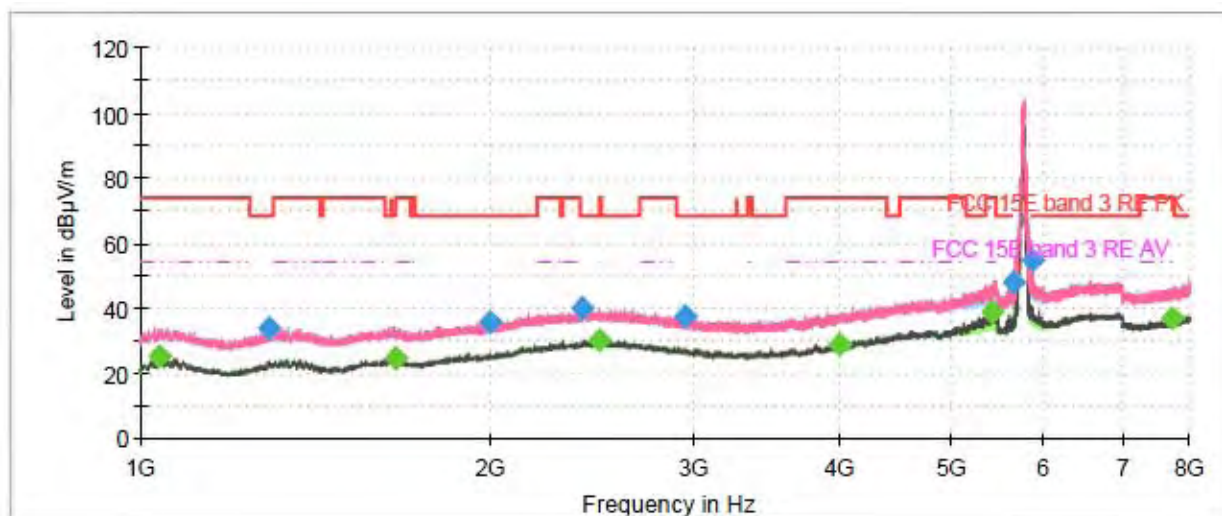

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

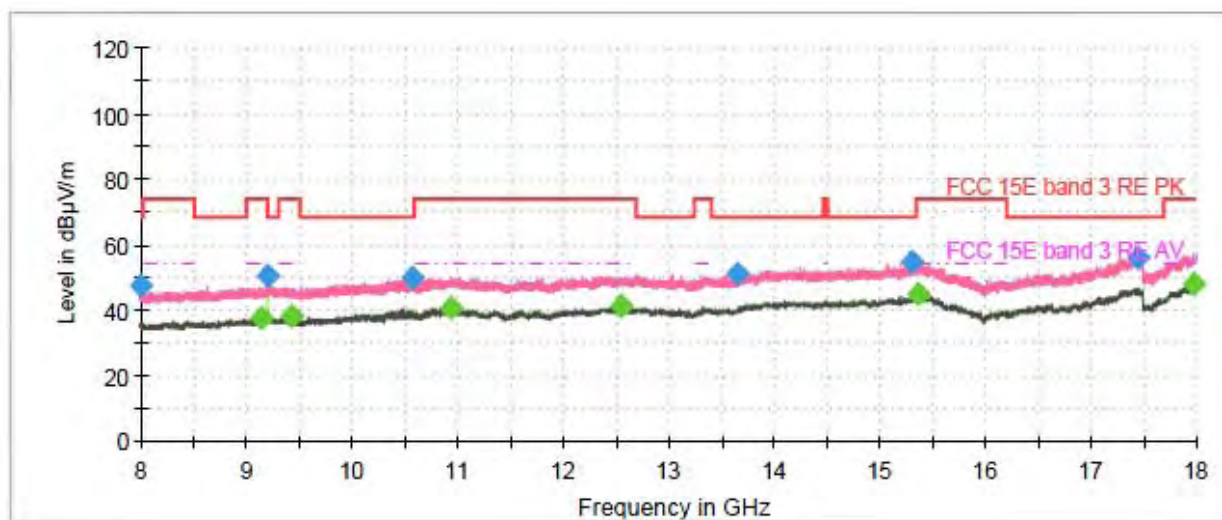


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1039.900000	---	25.06	54.00	28.94	500.0	200.0	H	134.0	-21.0
1288.166667	34.00	---	68.20	34.21	500.0	100.0	V	325.0	-19.8
1660.333333	---	24.64	54.00	29.36	500.0	200.0	V	3.0	-18.8
1996.566667	35.77	---	68.20	32.43	500.0	100.0	H	70.0	-18.2
2399.766667	39.95	---	68.20	28.25	500.0	200.0	V	0.0	-16.5
2487.500000	---	30.22	54.00	23.78	500.0	100.0	V	251.0	-16.3
2941.100000	37.69	---	68.20	30.51	500.0	100.0	V	309.0	-15.9
3995.066667	---	29.05	54.00	24.95	500.0	100.0	V	356.0	-13.3
5414.900000	---	38.63	54.00	15.37	500.0	200.0	V	307.0	-8.7
5636.100000	47.95	---	68.20	20.25	500.0	100.0	H	195.0	-8.1
5860.333333	54.65	---	68.20	13.55	500.0	200.0	V	240.0	-7.4
7744.033333	---	36.85	54.00	17.16	500.0	200.0	V	3.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH159

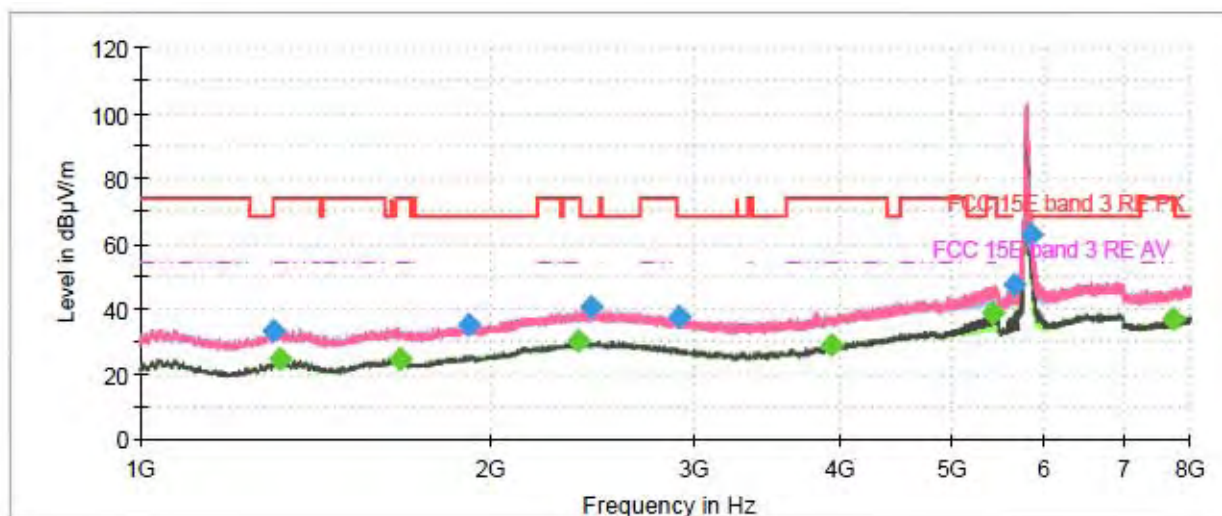

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

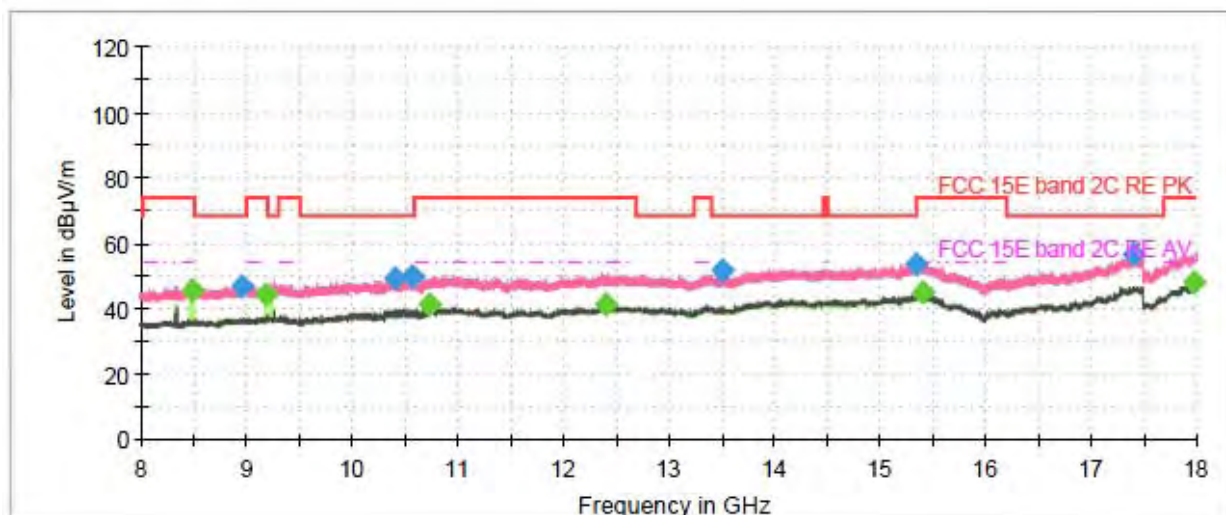


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1299.366667	33.06	---	68.20	35.14	500.0	200.0	H	264.0	-19.8
1320.133333	---	24.86	54.00	29.14	500.0	100.0	V	71.0	-19.7
1672.000000	---	24.71	54.00	29.29	500.0	200.0	H	359.0	-18.8
1916.766667	35.31	---	68.20	32.89	500.0	100.0	V	0.0	-18.3
2385.066667	---	30.13	54.00	23.87	500.0	100.0	H	2.0	-16.5
2444.800000	40.60	---	68.20	27.60	500.0	200.0	H	351.0	-16.5
2902.600000	37.66	---	68.20	30.54	500.0	100.0	V	358.0	-16.0
3927.633333	---	29.20	54.00	24.80	500.0	100.0	V	0.0	-13.6
5414.200000	---	38.78	54.00	15.22	500.0	100.0	V	270.0	-8.7
5636.566667	47.16	---	68.20	21.04	500.0	200.0	H	172.0	-8.1
5852.166667	63.05	---	68.20	5.15	500.0	200.0	H	344.0	-7.4
7722.800000	---	36.85	54.00	17.15	500.0	100.0	H	24.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (HT80) CH42

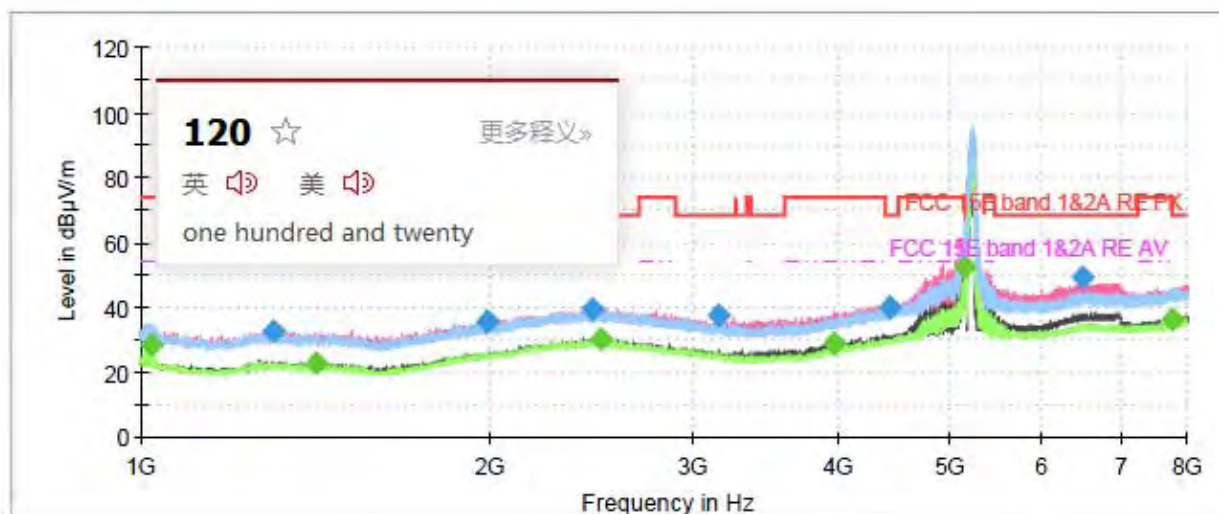

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

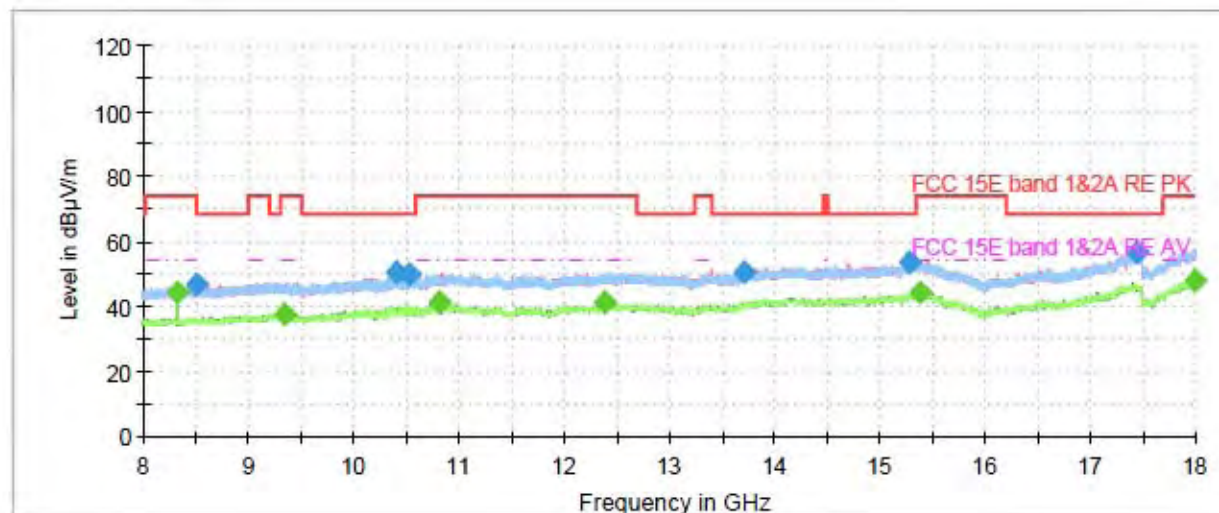


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1019.366667	---	28.57	54.00	25.43	500.0	200.0	H	186.0	-21.0
1299.133333	32.79	---	68.20	35.41	500.0	200.0	V	101.0	-19.8
1414.633333	---	22.96	54.00	31.04	500.0	100.0	V	6.0	-19.4
1990.500000	35.67	---	68.20	32.53	500.0	100.0	V	59.0	-18.2
2449.233333	39.50	---	68.20	28.70	500.0	200.0	H	355.0	-16.4
2490.766667	---	29.92	54.00	24.08	500.0	200.0	V	169.0	-16.3
3152.033333	37.66	---	68.20	30.54	500.0	200.0	V	1.0	-15.3
3961.466667	---	29.01	54.00	24.99	500.0	100.0	V	29.0	-13.5
4425.333333	40.21	---	68.20	27.99	500.0	200.0	V	0.0	-11.7
5139.100000	---	52.07	54.00	1.93	500.0	200.0	V	288.0	-9.5
6503.866667	49.01	---	68.20	19.19	500.0	100.0	V	29.0	-3.7
7749.866667	---	36.45	54.00	17.55	500.0	200.0	V	3.0	-3.6


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (HT80) CH58

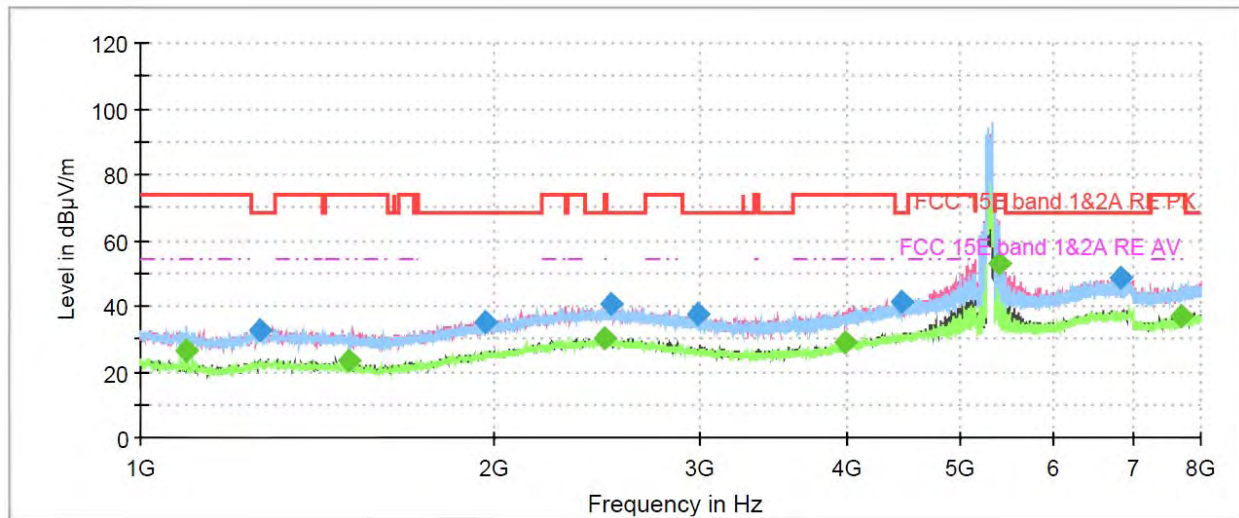

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

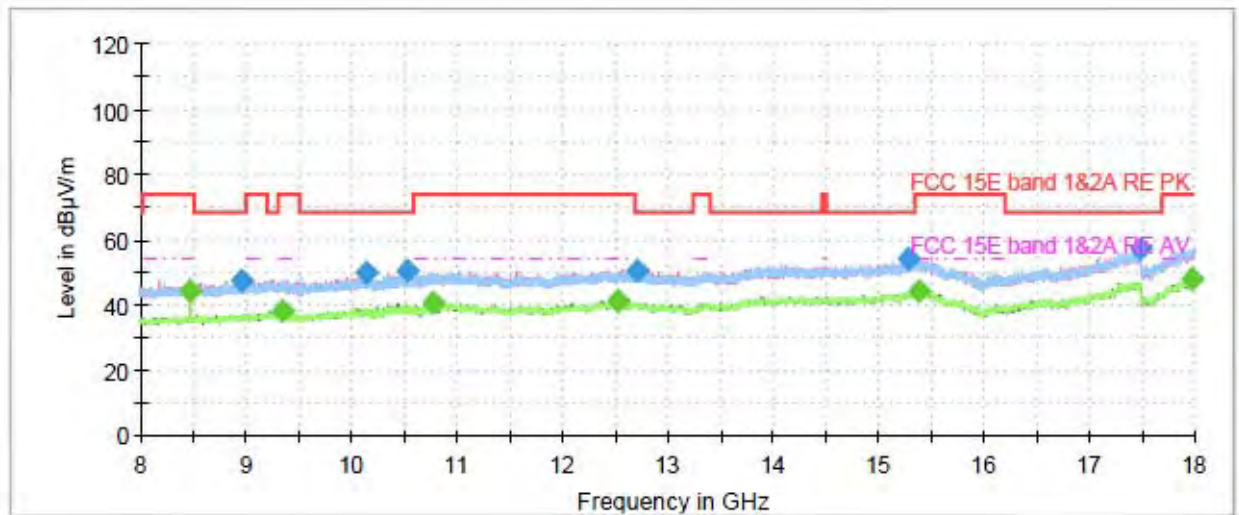


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1094.266667	---	26.16	54.00	27.84	500.0	200.0	H	222.0	-20.7
1265.300000	32.86	---	68.20	35.34	500.0	200.0	V	3.0	-20.0
1502.833333	---	23.27	54.00	30.73	500.0	100.0	V	3.0	-19.1
1969.966667	35.35	---	68.20	32.85	500.0	100.0	V	1.0	-18.3
2487.733333	---	30.04	54.00	23.96	500.0	200.0	H	356.0	-16.3
2517.366667	40.49	---	68.20	27.71	500.0	200.0	H	0.0	-16.3
2987.766667	37.41	---	68.20	30.79	500.0	200.0	V	0.0	-15.8
3986.900000	---	29.06	54.00	24.94	500.0	100.0	V	31.0	-13.4
4450.533333	41.47	---	68.20	26.73	500.0	100.0	V	145.0	-11.6
5382.700000	---	52.62	54.00	1.38	500.0	100.0	V	240.0	-8.7
6847.100000	48.62	---	68.20	19.58	500.0	200.0	V	240.0	-3.8
7707.166667	---	36.67	54.00	17.33	500.0	200.0	V	11.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (HT80) CH106

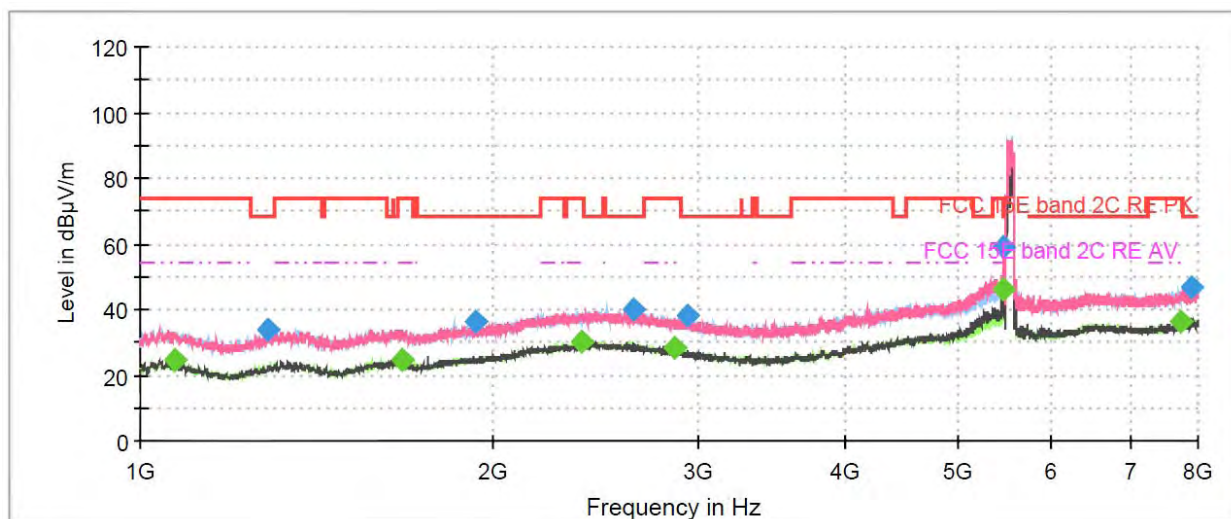

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

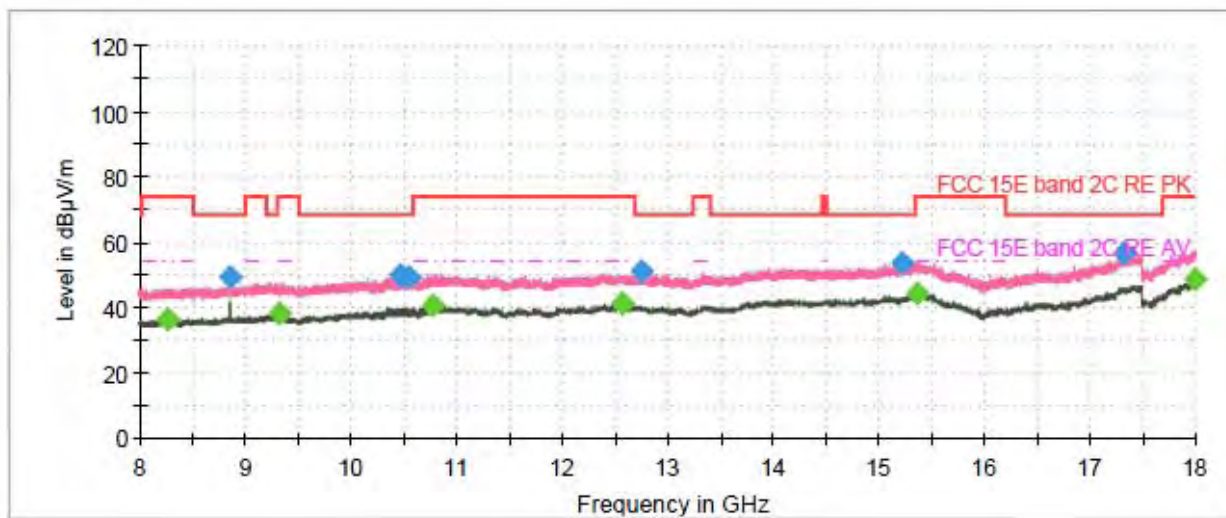


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1071.633333	---	24.73	54.00	29.27	500.0	100.0	H	12.0	-20.8
1287.233333	33.98	---	68.20	34.22	500.0	100.0	H	2.0	-19.8
1672.700000	---	24.58	54.00	29.42	500.0	200.0	H	157.0	-18.8
1937.066667	36.03	---	68.20	32.17	500.0	200.0	H	333.0	-18.3
2384.133333	---	30.31	54.00	23.69	500.0	200.0	H	0.0	-16.5
2632.633333	39.77	---	68.20	28.43	500.0	200.0	V	10.0	-16.1
2854.066667	---	28.59	54.00	25.41	500.0	200.0	V	305.0	-16.0
2932.933333	37.97	---	68.20	30.23	500.0	100.0	H	31.0	-15.9
5457.133333	---	46.12	54.00	7.88	500.0	200.0	H	355.0	-8.6
5466.000000	58.95	---	68.20	9.25	500.0	200.0	V	0.0	-8.6
7746.133333	---	36.52	54.00	17.48	500.0	100.0	H	46.0	-3.6
7914.600000	46.74	---	68.20	21.46	500.0	100.0	V	358.0	-2.8


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (HT80) CH122

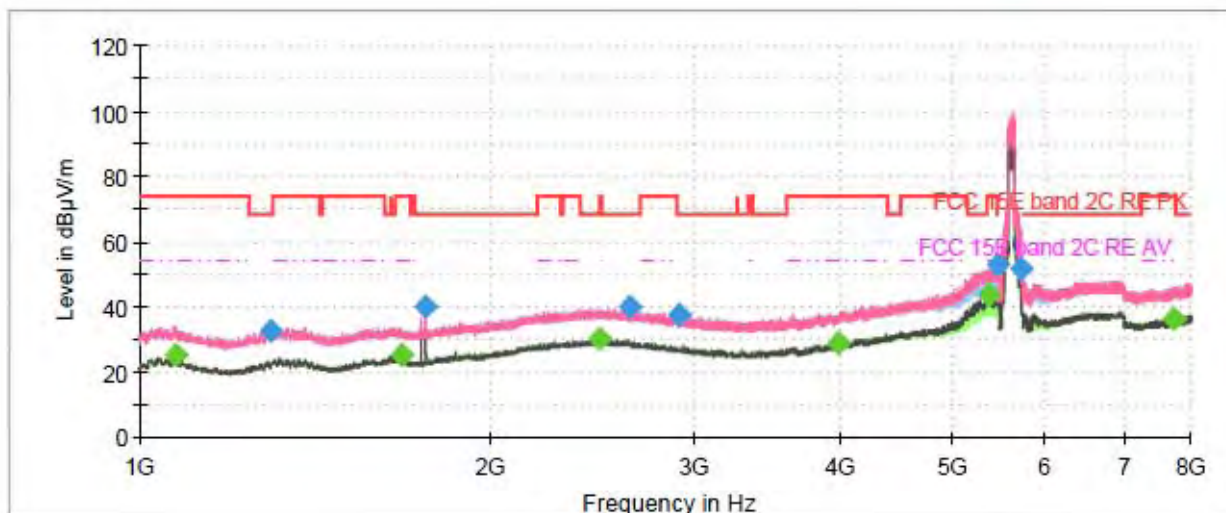

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

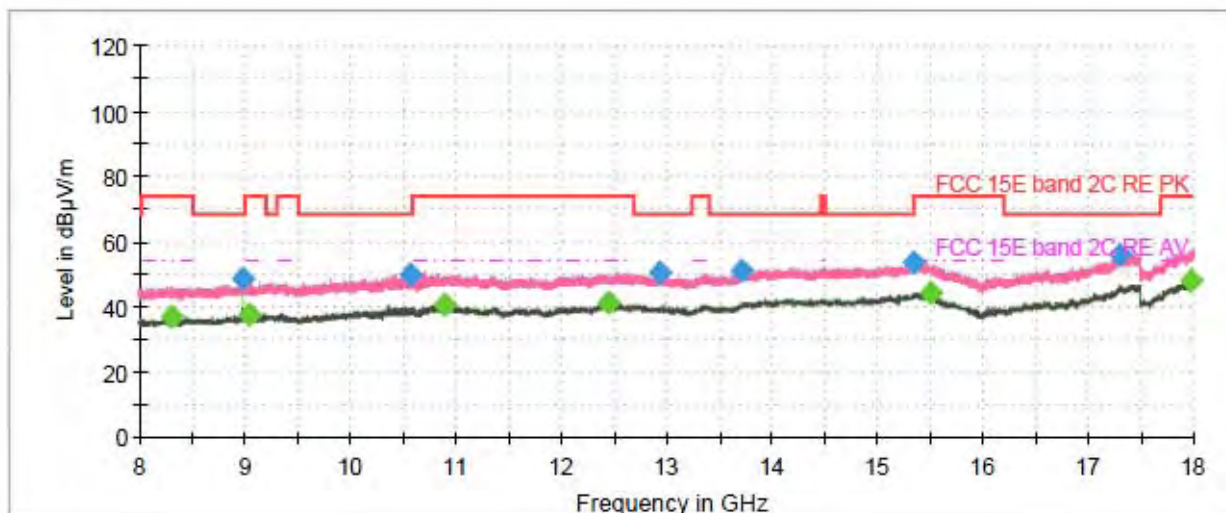


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1074.433333	---	24.94	54.00	29.06	500.0	200.0	H	200.0	-20.8
1298.433333	32.80	---	68.20	35.40	500.0	100.0	V	309.0	-19.8
1676.666667	---	25.16	54.00	28.84	500.0	100.0	H	89.0	-18.7
1763.000000	39.70	---	68.20	28.50	500.0	200.0	V	45.0	-18.6
2484.700000	---	30.11	54.00	23.89	500.0	100.0	H	89.0	-16.3
2636.366667	40.12	---	68.20	28.08	500.0	100.0	V	26.0	-16.1
2906.566667	37.49	---	68.20	30.71	500.0	100.0	V	356.0	-16.1
3988.766667	---	29.14	54.00	24.86	500.0	100.0	H	14.0	-13.4
5361.933333	---	43.46	54.00	10.54	500.0	200.0	V	310.0	-8.7
5466.000000	52.80	---	68.20	15.40	500.0	200.0	V	0.0	-8.6
5725.700000	51.93	---	68.20	16.27	500.0	100.0	H	4.0	-7.9
7748.000000	---	36.59	54.00	17.41	500.0	100.0	V	309.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (HT80) CH138

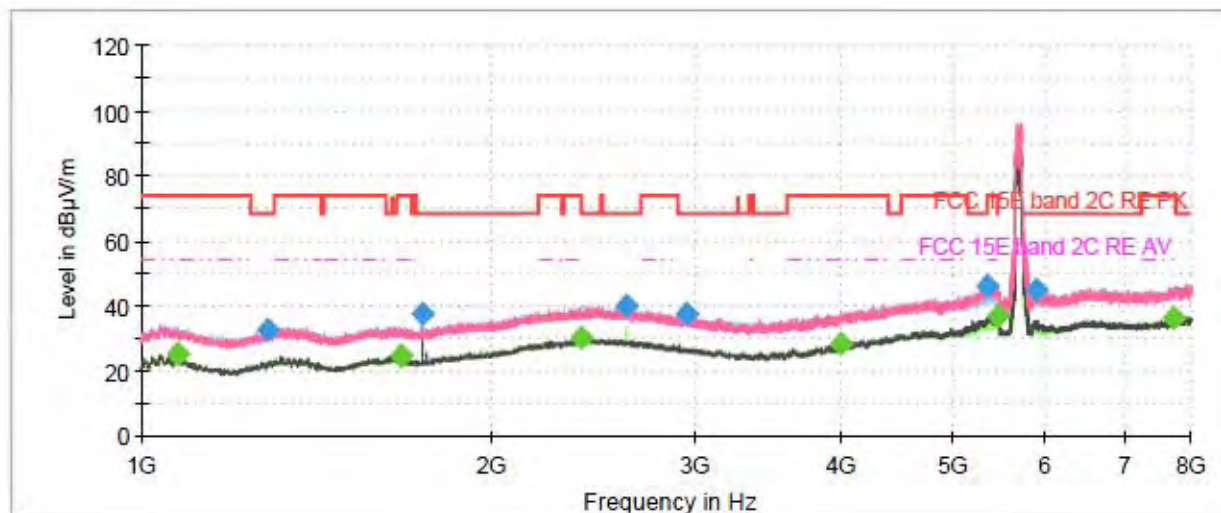

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

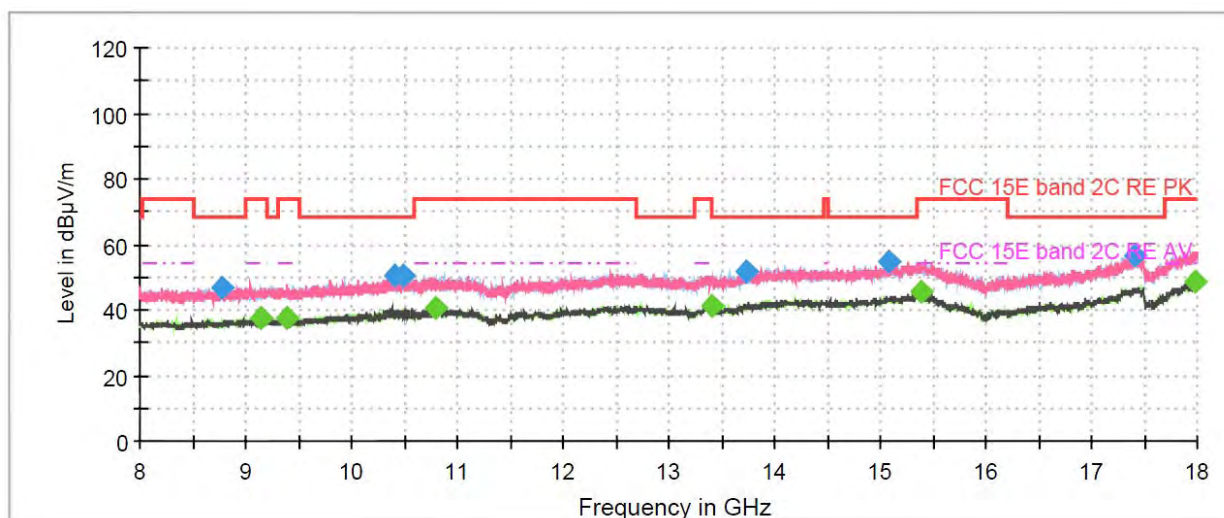


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1073.266667	---	25.50	54.00	28.50	500.0	200.0	H	339.0	-20.8
1286.300000	32.58	---	68.20	35.62	500.0	100.0	V	0.0	-19.8
1673.866667	---	24.39	54.00	29.61	500.0	200.0	H	1.0	-18.7
1746.666667	37.37	---	68.20	30.83	500.0	100.0	V	143.0	-18.6
2386.233333	---	30.31	54.00	23.69	500.0	100.0	V	358.0	-16.5
2615.366667	40.11	---	68.20	28.09	500.0	100.0	H	9.0	-16.1
2947.400000	37.34	---	68.20	30.86	500.0	100.0	V	357.0	-15.9
3999.033333	---	28.12	54.00	25.88	500.0	200.0	H	114.0	-13.3
5343.966667	46.12	---	68.20	22.08	500.0	200.0	V	0.0	-8.8
5446.400000	---	37.14	54.00	16.87	500.0	200.0	V	31.0	-8.6
5886.700000	44.88	---	68.20	23.32	500.0	200.0	V	7.0	-7.3
7732.366667	---	36.57	54.00	17.43	500.0	200.0	V	21.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (HT80) CH155

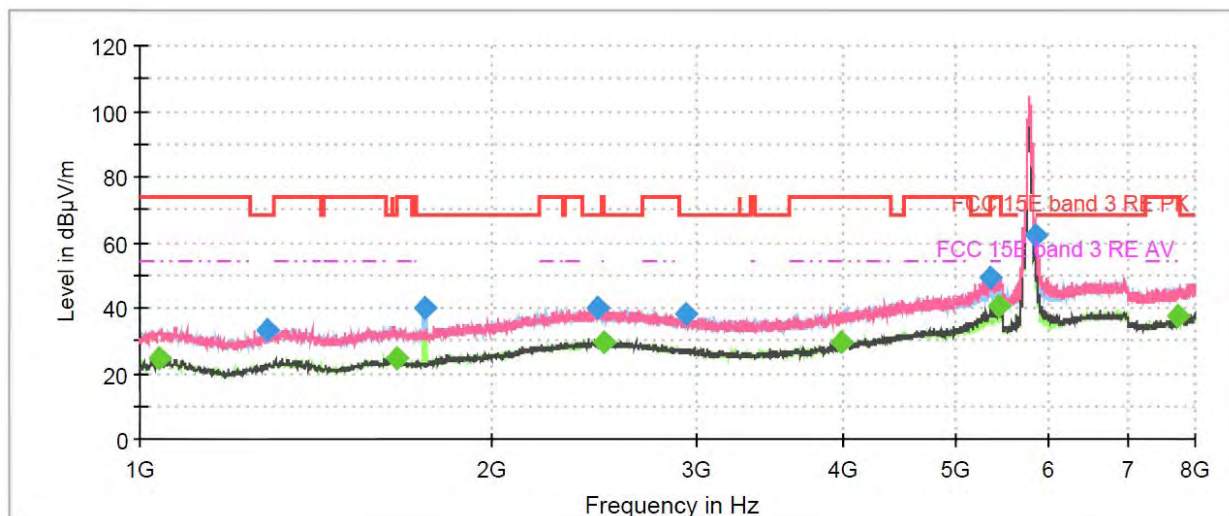

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

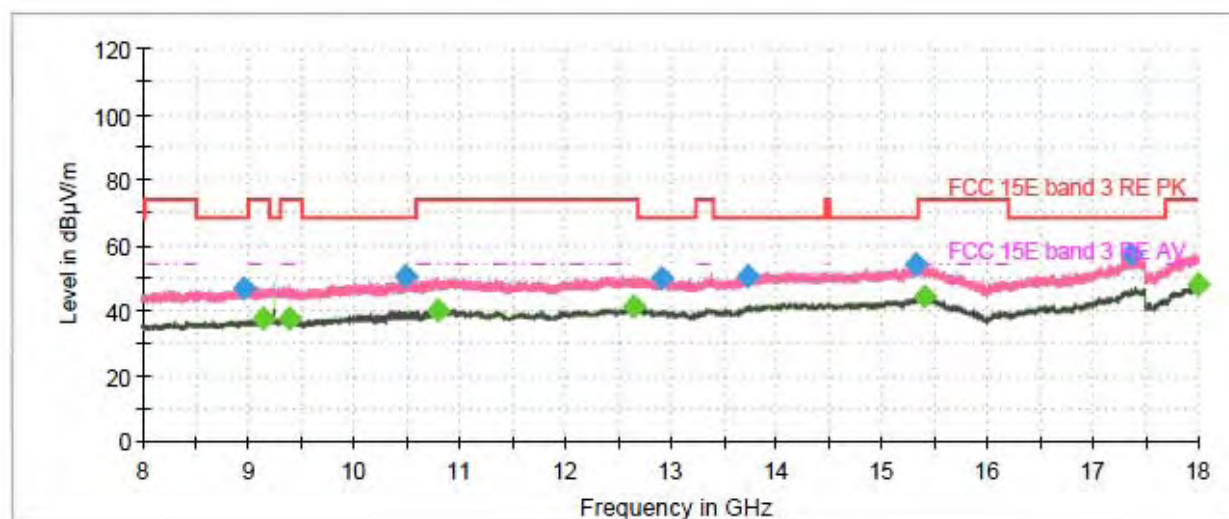


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1041.066667	---	24.89	54.00	29.11	500.0	100.0	V	356.0	-21.0
1284.666667	33.04	---	68.20	35.16	500.0	100.0	V	316.0	-19.8
1661.966667	---	24.56	54.00	29.44	500.0	200.0	H	95.0	-18.8
1754.600000	40.15	---	68.20	28.05	500.0	200.0	H	198.0	-18.6
2463.933333	40.23	---	68.20	27.97	500.0	100.0	H	47.0	-16.3
2494.033333	---	29.63	54.00	24.37	500.0	100.0	V	76.0	-16.3
2938.300000	37.85	---	68.20	30.35	500.0	200.0	V	144.0	-15.9
3983.400000	---	29.32	54.00	24.68	500.0	100.0	H	47.0	-13.4
5348.166667	49.14	---	68.20	19.06	500.0	200.0	V	2.0	-8.7
5428.666667	---	40.74	54.00	13.26	500.0	200.0	V	308.0	-8.6
5850.066667	62.07	---	68.20	6.13	500.0	100.0	V	0.0	-7.4
7748.700000	---	37.46	54.00	16.54	500.0	200.0	H	317.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE20) CH36

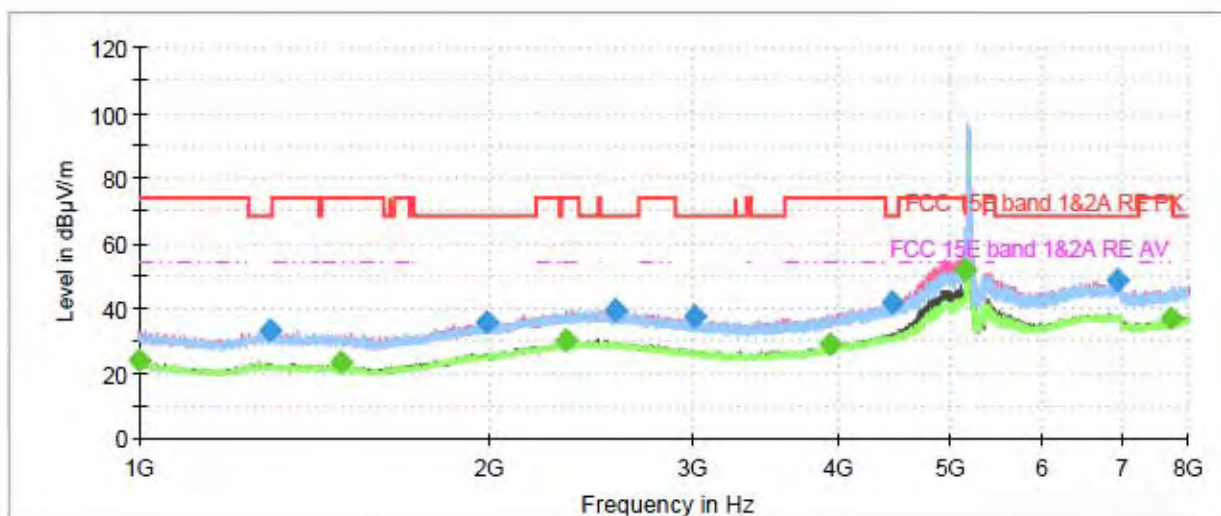

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

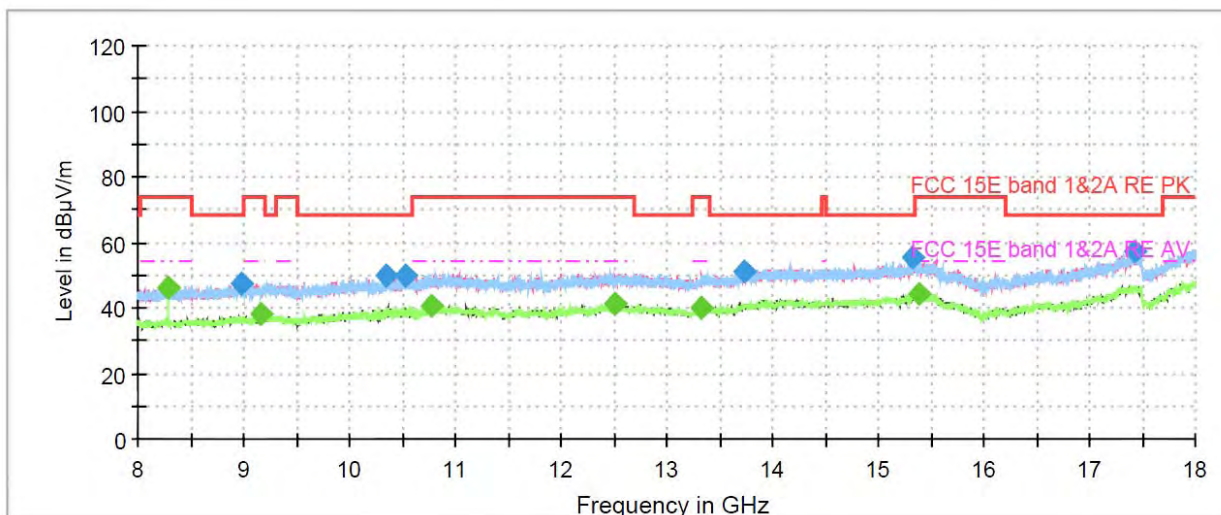


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1000.233333	---	24.10	54.00	29.90	500.0	200.0	H	302.0	-21.1
1297.733333	33.33	---	68.20	34.87	500.0	200.0	H	0.0	-19.8
1488.833333	---	23.24	54.00	30.76	500.0	200.0	H	217.0	-19.2
1993.766667	35.71	---	68.20	32.49	500.0	200.0	V	219.0	-18.2
2331.633333	---	29.97	54.00	24.03	500.0	200.0	V	1.0	-16.9
2566.133333	39.61	---	68.20	28.59	500.0	200.0	H	319.0	-16.2
3006.666667	37.63	---	68.20	30.57	500.0	200.0	V	3.0	-15.7
3934.166667	---	28.87	54.00	25.13	500.0	200.0	V	3.0	-13.6
4456.600000	41.64	---	68.20	26.56	500.0	200.0	V	307.0	-11.6
5147.966667	---	51.57	54.00	2.43	500.0	200.0	V	358.0	-9.5
6941.600000	48.45	---	68.20	19.75	500.0	200.0	H	359.0	-3.8
7741.233333	---	36.96	54.00	17.04	500.0	200.0	H	355.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE20) CH40

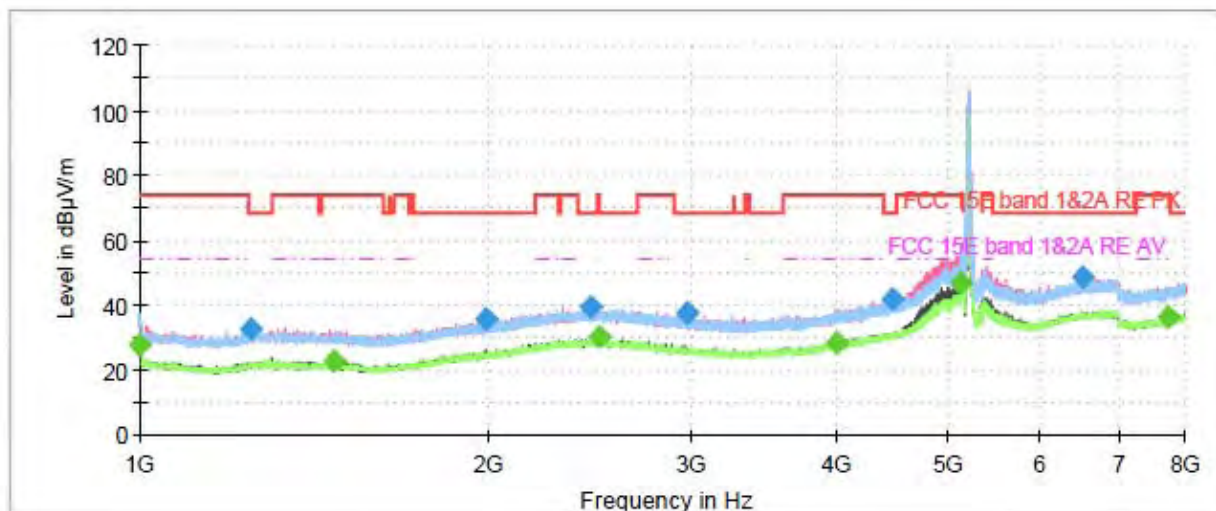

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

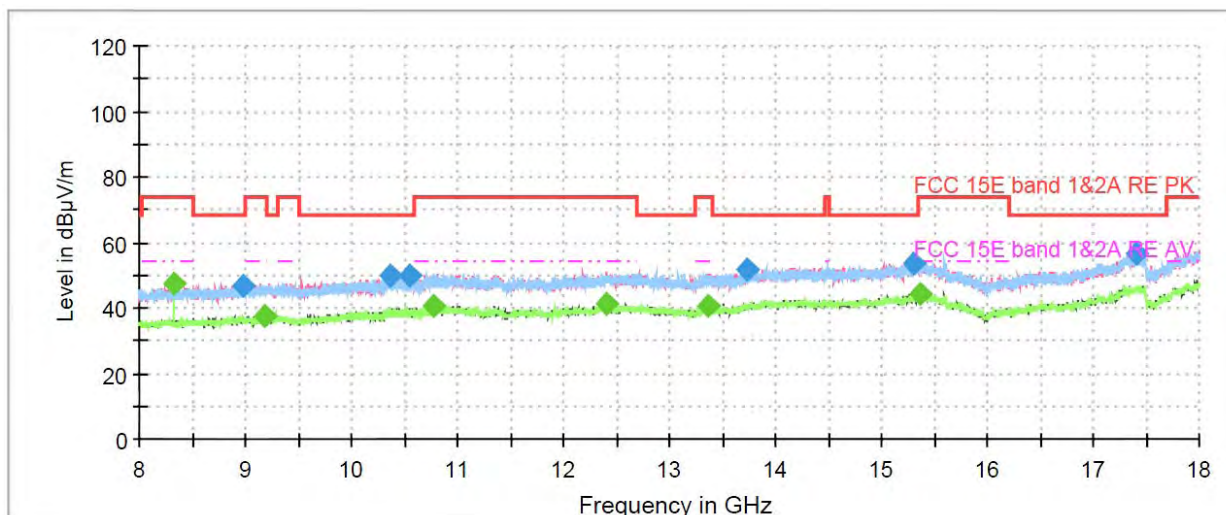


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1000.233333	---	27.71	54.00	26.29	500.0	200.0	H	0.0	-21.1
1245.700000	32.58	---	68.20	35.62	500.0	100.0	H	94.0	-20.0
1472.966667	---	22.69	54.00	31.31	500.0	200.0	H	264.0	-19.3
1990.966667	35.45	---	68.20	32.75	500.0	100.0	V	10.0	-18.2
2448.766667	39.13	---	68.20	29.07	500.0	200.0	H	116.0	-16.4
2490.300000	---	30.10	54.00	23.90	500.0	200.0	V	94.0	-16.3
2974.000000	37.49	---	68.20	30.71	500.0	200.0	H	313.0	-15.9
3998.100000	---	28.58	54.00	25.42	500.0	200.0	V	0.0	-13.3
4471.766667	41.81	---	68.20	26.39	500.0	200.0	V	94.0	-11.5
5115.300000	---	46.86	54.00	7.14	500.0	100.0	V	237.0	-9.6
6514.600000	48.78	---	68.20	19.42	500.0	100.0	V	56.0	-3.7
7748.700000	---	36.34	54.00	17.66	500.0	200.0	V	134.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE20) CH48

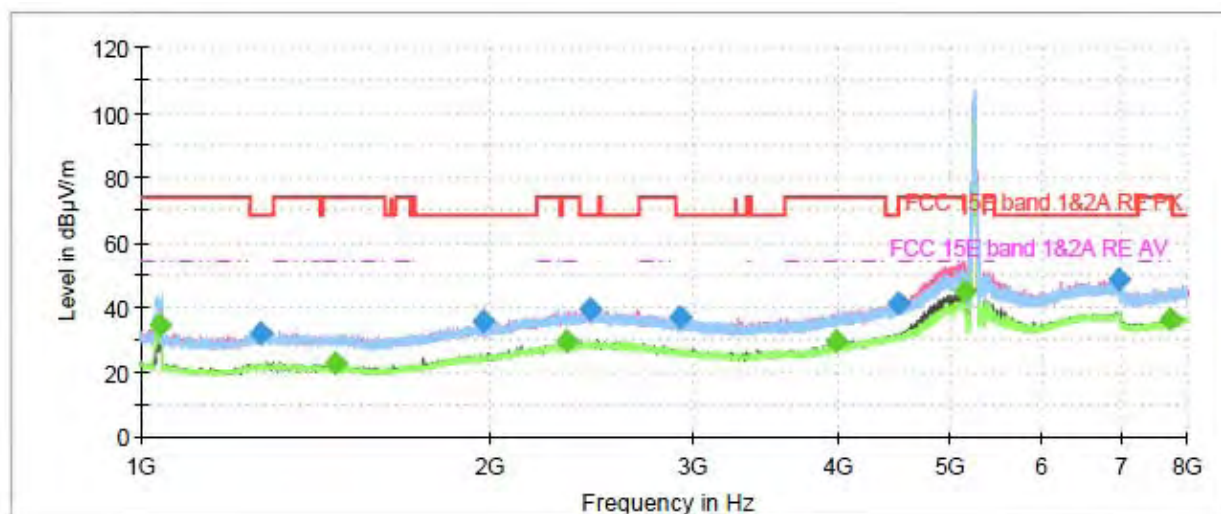

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

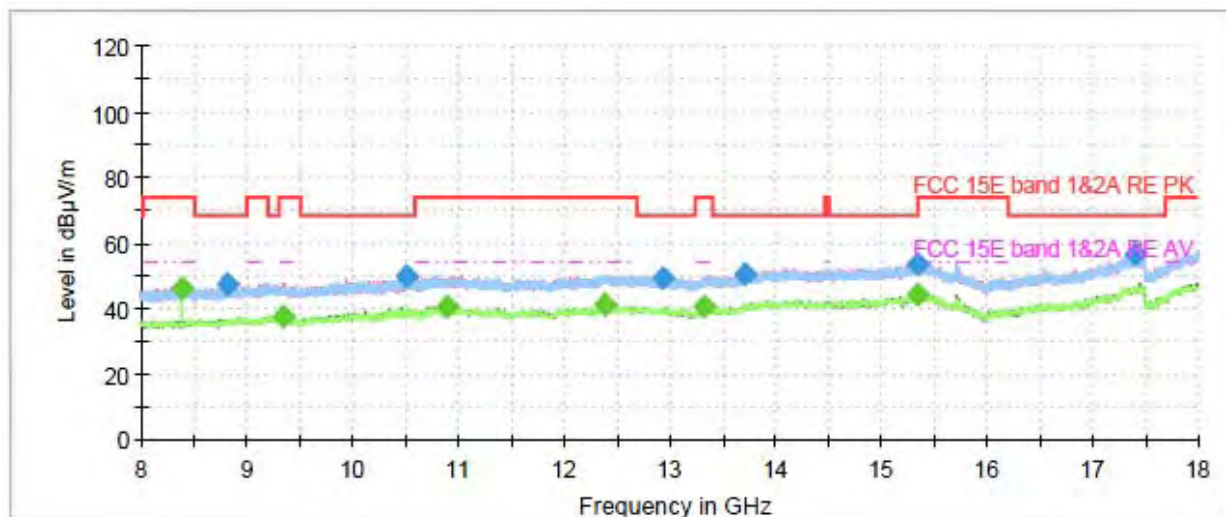


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1038.966667	---	34.40	54.00	19.60	500.0	100.0	H	311.0	-21.0
1271.133333	31.81	---	68.20	36.39	500.0	200.0	V	348.0	-19.9
1472.266667	---	22.88	54.00	31.12	500.0	200.0	H	1.0	-19.3
1977.200000	35.76	---	68.20	32.44	500.0	200.0	V	182.0	-18.3
2334.200000	---	29.67	54.00	24.33	500.0	200.0	V	222.0	-16.9
2441.766667	39.69	---	68.20	28.51	500.0	100.0	H	0.0	-16.5
2917.300000	37.13	---	68.20	31.07	500.0	100.0	V	222.0	-16.1
3991.100000	---	29.41	54.00	24.59	500.0	200.0	H	35.0	-13.4
4496.266667	41.52	---	68.20	26.68	500.0	200.0	H	116.0	-11.4
5136.766667	---	44.73	54.00	9.27	500.0	200.0	V	299.0	-9.5
6988.733333	48.87	---	68.20	19.33	500.0	200.0	H	54.0	-3.9
7725.833333	---	36.37	54.00	17.63	500.0	200.0	H	0.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE20) CH52

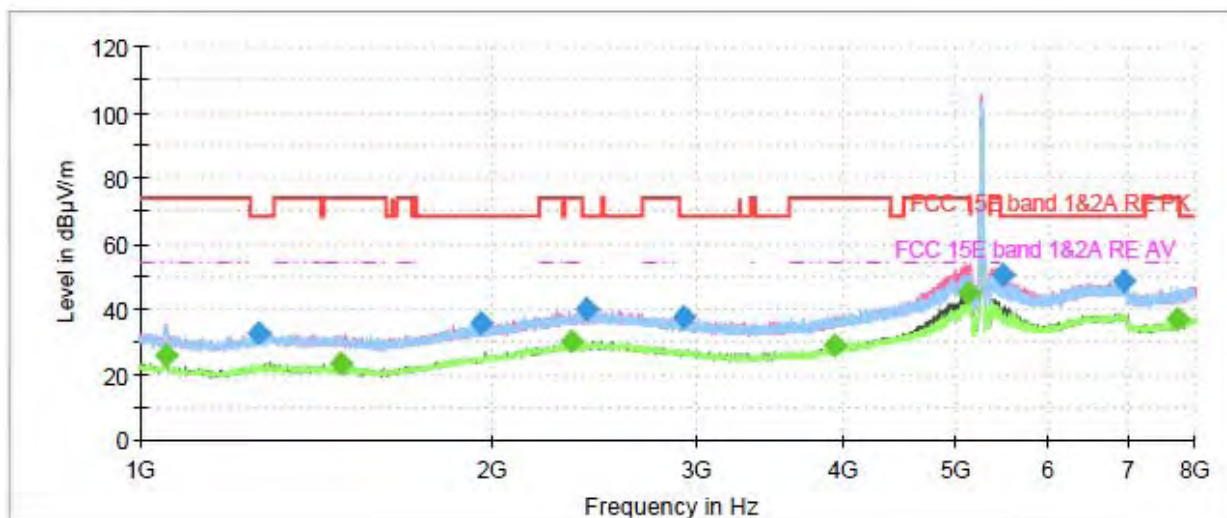

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

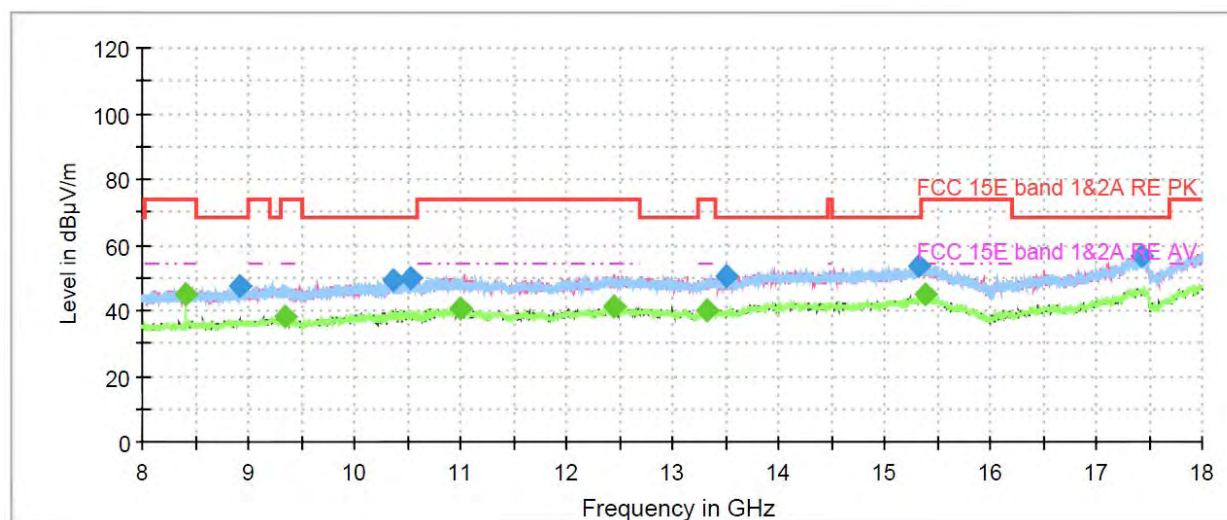


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1051.800000	---	26.12	54.00	27.88	500.0	200.0	V	235.0	-21.0
1262.266667	32.45	---	68.20	35.75	500.0	200.0	H	359.0	-20.0
1483.700000	---	23.12	54.00	30.88	500.0	200.0	H	99.0	-19.2
1960.633333	35.87	---	68.20	32.33	500.0	200.0	H	2.0	-18.4
2345.400000	---	30.17	54.00	23.83	500.0	200.0	V	195.0	-16.8
2409.800000	39.94	---	68.20	28.26	500.0	100.0	V	0.0	-16.5
2920.100000	37.52	---	68.20	30.68	500.0	100.0	V	114.0	-16.0
3935.566667	---	28.72	54.00	25.28	500.0	200.0	V	92.0	-13.6
5108.066667	---	45.15	54.00	8.85	500.0	200.0	V	216.0	-9.6
5476.966667	50.50	---	68.20	17.70	500.0	100.0	V	345.0	-8.6
6964.933333	48.89	---	68.20	19.31	500.0	200.0	H	4.0	-3.8
7733.066667	---	36.77	54.00	17.23	500.0	100.0	H	308.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE20) CH60

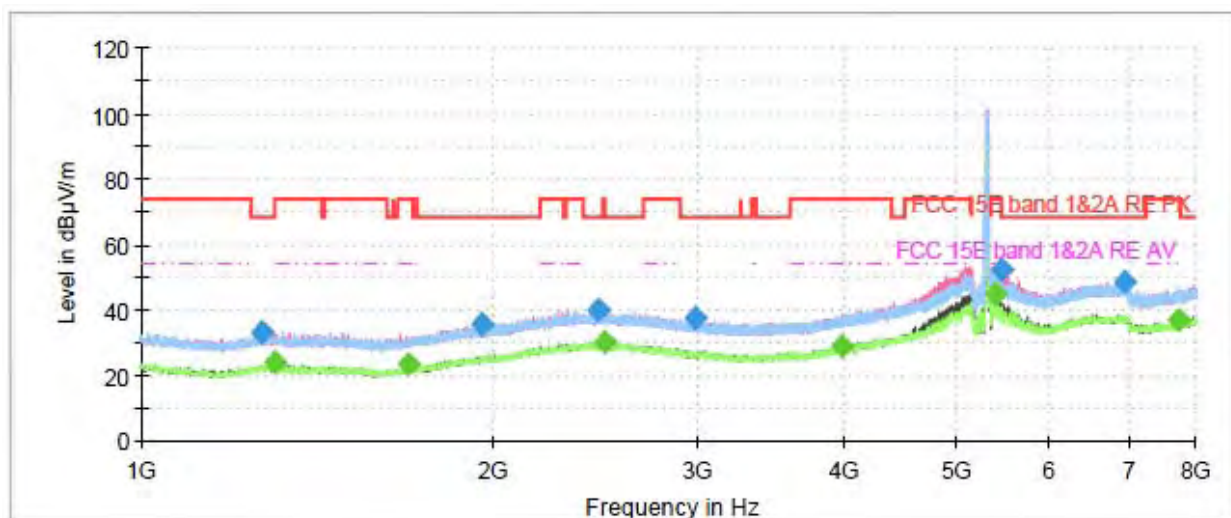

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

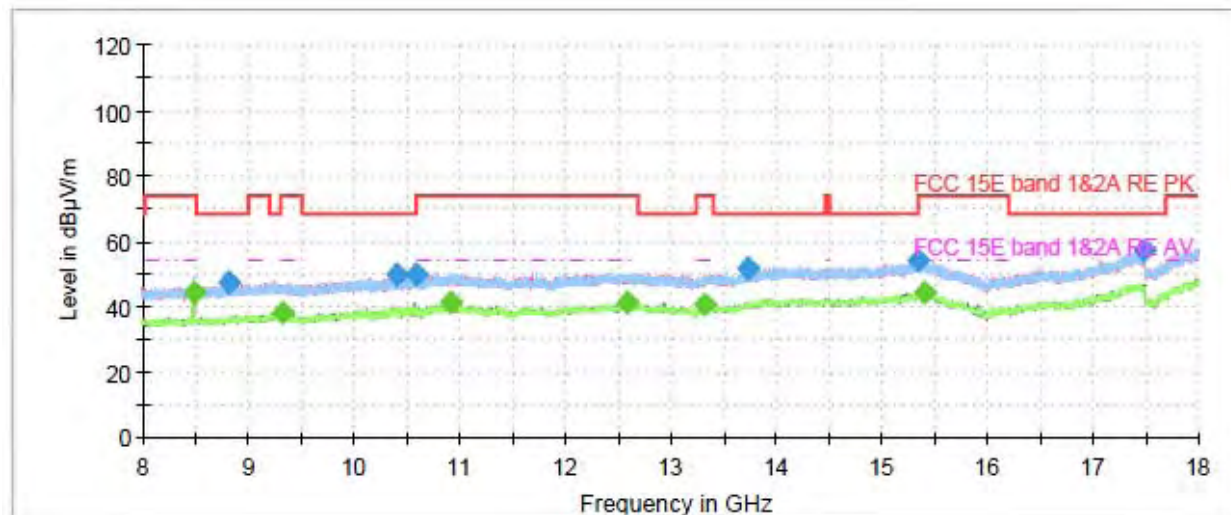


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1267.866667	32.96	---	68.20	35.24	500.0	200.0	V	184.0	-19.9
1301.933333	---	24.18	54.00	29.82	500.0	100.0	V	225.0	-19.8
1694.866667	---	23.18	54.00	30.82	500.0	200.0	V	0.0	-18.6
1955.033333	35.69	---	68.20	32.51	500.0	200.0	H	0.0	-18.4
2465.566667	39.82	---	68.20	28.38	500.0	200.0	H	279.0	-16.3
2491.933333	---	29.92	54.00	24.08	500.0	100.0	V	204.0	-16.3
2980.766667	37.36	---	68.20	30.84	500.0	200.0	V	7.0	-15.8
3987.600000	---	28.75	54.00	25.25	500.0	200.0	V	4.0	-13.4
5385.966667	---	44.93	54.00	9.07	500.0	200.0	V	225.0	-8.7
5465.766667	52.16	---	68.20	16.04	500.0	200.0	V	225.0	-8.6
6937.866667	48.69	---	68.20	19.51	500.0	200.0	H	340.0	-3.8
7734.700000	---	36.64	54.00	17.36	500.0	200.0	V	99.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE20) CH64

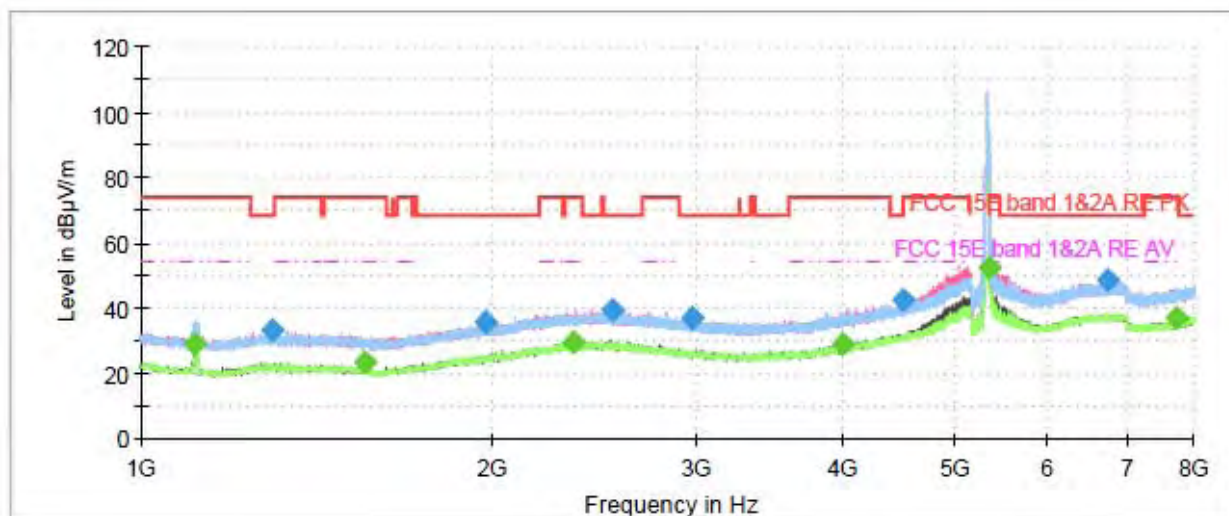

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

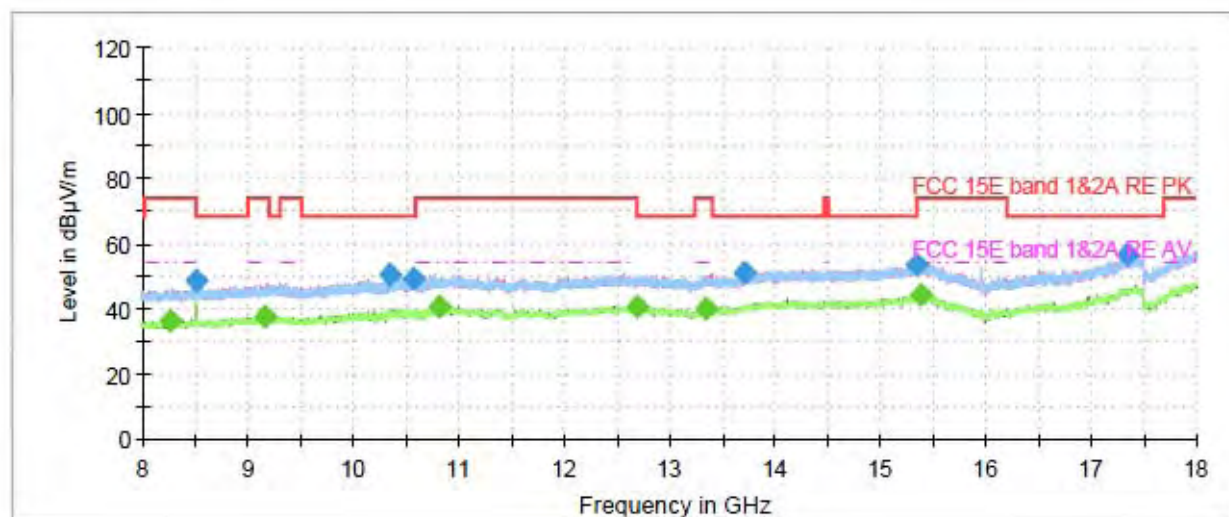


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1110.366667	---	28.64	54.00	25.36	500.0	200.0	H	289.0	-20.6
1298.900000	33.45	---	68.20	34.75	500.0	200.0	V	30.0	-19.8
1553.233333	---	23.14	54.00	30.86	500.0	200.0	H	21.0	-18.9
1975.800000	35.43	---	68.20	32.77	500.0	100.0	V	356.0	-18.3
2350.766667	---	29.29	54.00	24.71	500.0	100.0	H	64.0	-16.8
2533.700000	39.51	---	68.20	28.69	500.0	200.0	H	104.0	-16.3
2964.433333	36.99	---	68.20	31.21	500.0	200.0	H	13.0	-15.9
3998.800000	---	28.83	54.00	25.17	500.0	200.0	H	2.0	-13.3
4496.966667	42.31	---	68.20	25.89	500.0	200.0	V	314.0	-11.4
5350.033333	---	52.10	54.00	1.90	500.0	200.0	V	239.0	-8.7
6747.466667	48.32	---	68.20	19.88	500.0	100.0	H	289.0	-3.6
7744.966667	---	36.81	54.00	17.19	500.0	200.0	V	314.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE20) CH100

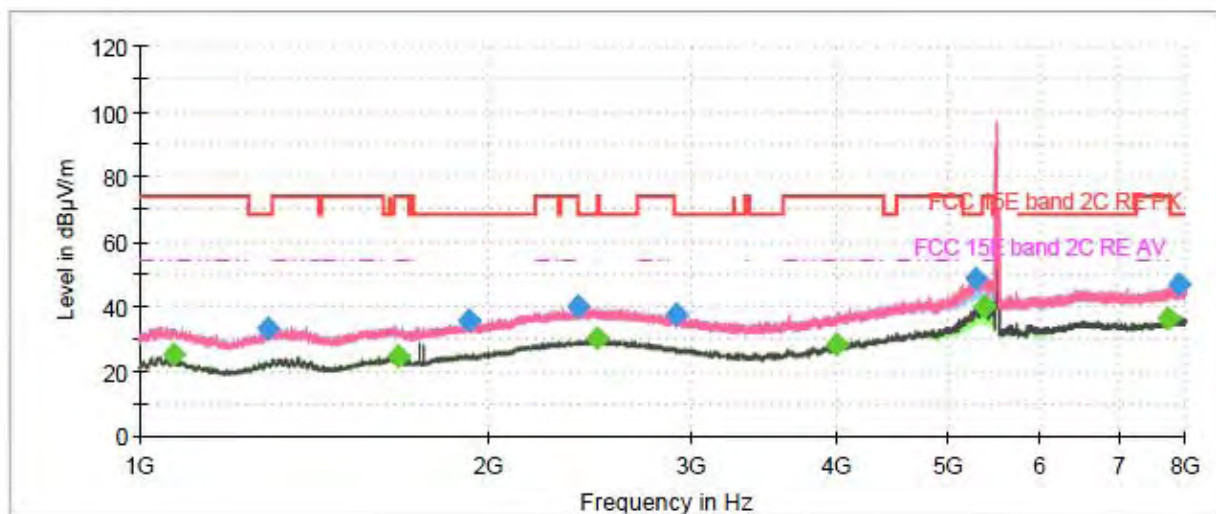

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

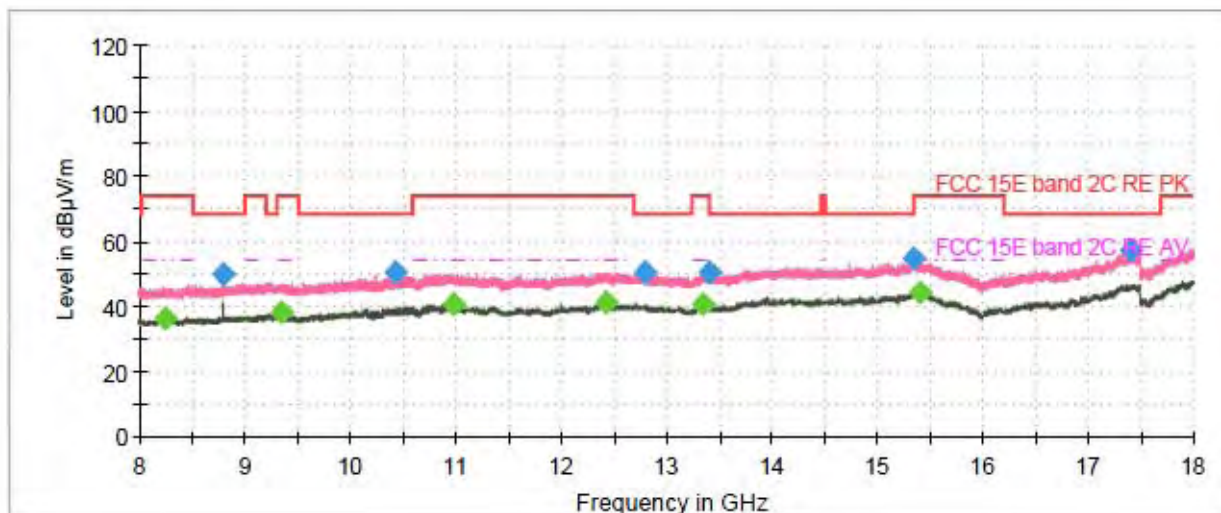


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1070.233333	---	25.08	54.00	28.92	500.0	200.0	V	98.0	-20.8
1289.333333	33.17	---	68.20	35.03	500.0	200.0	H	175.0	-19.8
1673.633333	---	24.62	54.00	29.38	500.0	200.0	V	286.0	-18.7
1925.633333	35.57	---	68.20	32.63	500.0	100.0	V	359.0	-18.3
2393.000000	39.74	---	68.20	28.46	500.0	200.0	V	98.0	-16.5
2485.400000	---	30.04	54.00	23.96	500.0	100.0	V	341.0	-16.3
2902.133333	37.84	---	68.20	30.36	500.0	200.0	H	352.0	-16.0
3999.733333	---	28.50	54.00	25.50	500.0	100.0	H	186.0	-13.3
5265.566667	48.71	---	68.20	19.49	500.0	200.0	V	2.0	-9.2
5365.200000	---	40.08	54.00	13.92	500.0	200.0	V	198.0	-8.7
7747.300000	---	36.32	54.00	17.68	500.0	200.0	V	0.0	-3.6
7910.400000	47.03	---	68.20	21.17	500.0	200.0	V	219.0	-2.9

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE20) CH120

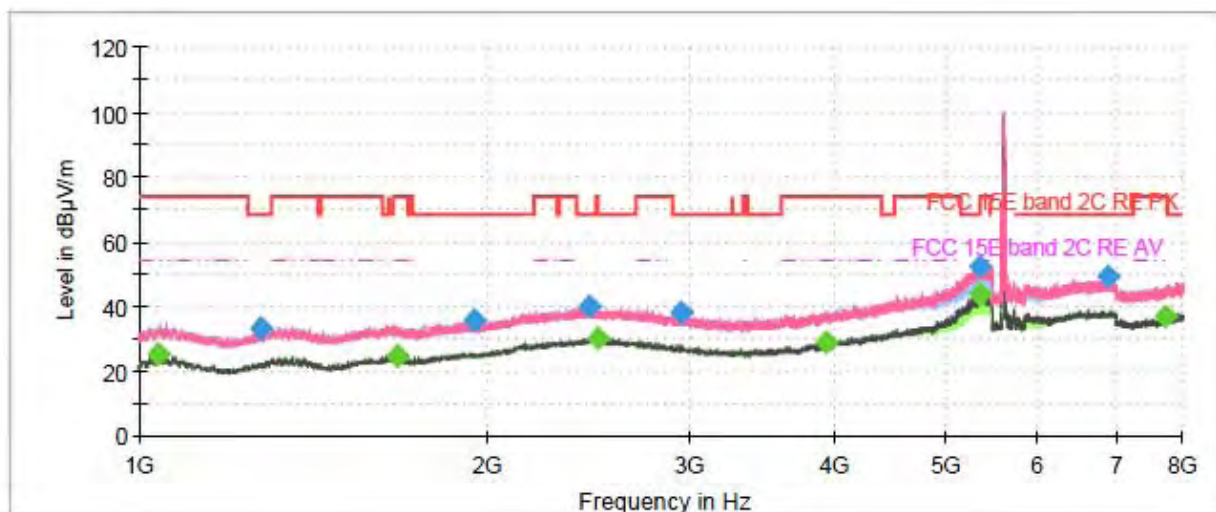

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

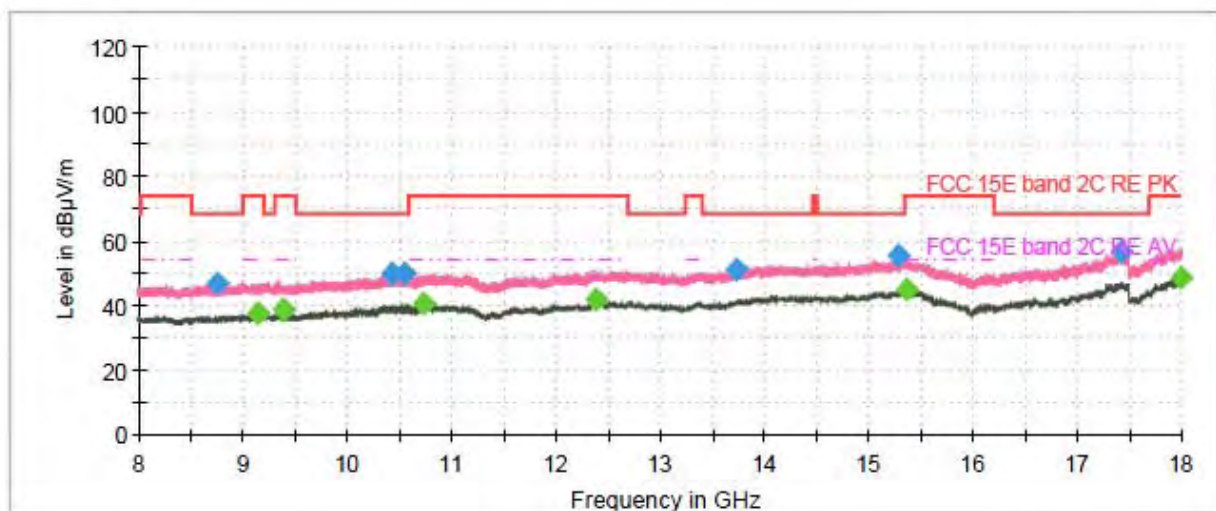


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1038.733333	---	24.96	54.00	29.04	500.0	100.0	H	169.0	-21.0
1272.300000	33.28	---	68.20	34.92	500.0	100.0	H	0.0	-19.9
1672.933333	---	24.91	54.00	29.09	500.0	200.0	H	322.0	-18.8
1946.166667	35.99	---	68.20	32.21	500.0	100.0	V	358.0	-18.4
2456.933333	40.05	---	68.20	28.15	500.0	200.0	V	86.0	-16.4
2494.500000	---	30.09	54.00	23.91	500.0	200.0	V	149.0	-16.3
2943.666667	38.01	---	68.20	30.19	500.0	200.0	V	107.0	-15.9
3924.833333	---	29.06	54.00	24.94	500.0	100.0	H	13.0	-13.6
5342.800000	52.37	---	68.20	15.83	500.0	200.0	V	2.0	-8.8
5352.133333	---	43.40	54.00	10.60	500.0	200.0	V	0.0	-8.7
6885.600000	49.09	---	68.20	19.11	500.0	200.0	H	304.0	-3.8
7747.300000	---	36.72	54.00	17.28	500.0	200.0	H	29.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE20) CH140

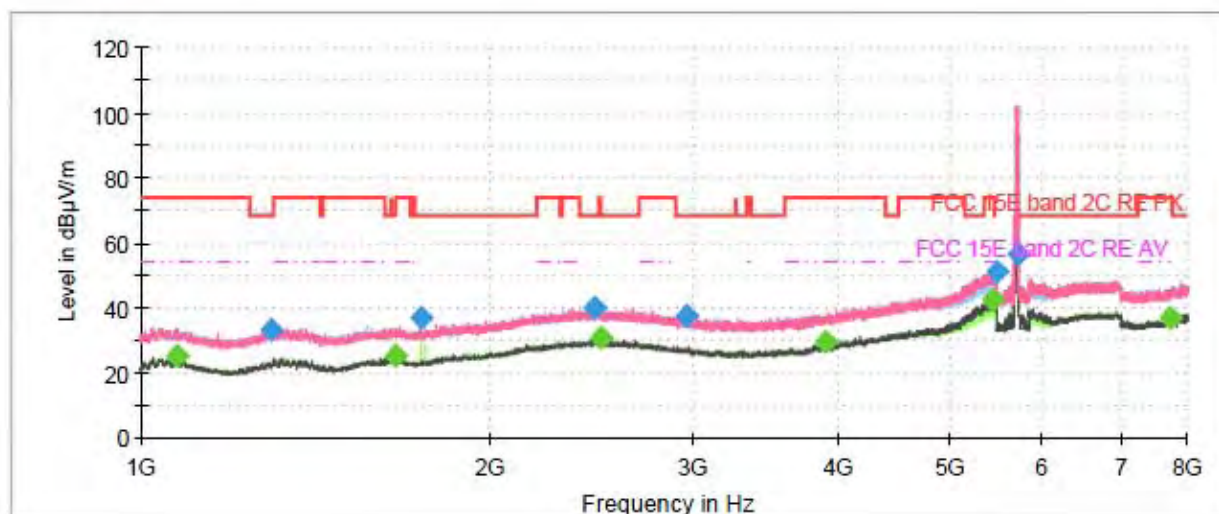

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

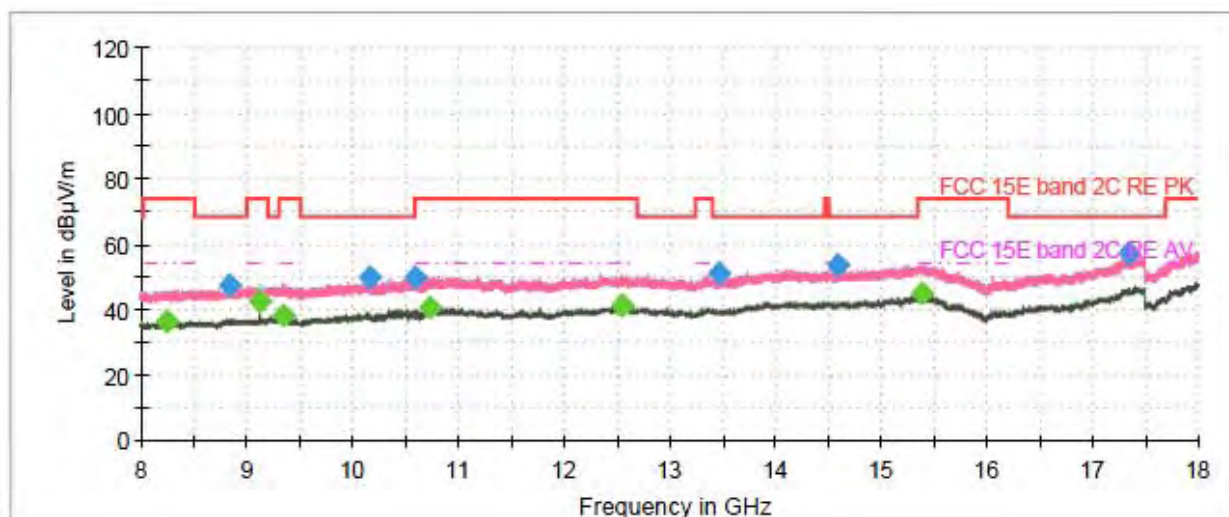


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1073.033333	---	25.08	54.00	28.92	500.0	200.0	H	118.0	-20.8
1295.400000	33.03	---	68.20	35.17	500.0	100.0	H	0.0	-19.8
1661.266667	---	24.92	54.00	29.08	500.0	100.0	H	335.0	-18.8
1746.433333	36.75	---	68.20	31.45	500.0	200.0	H	139.0	-18.6
2468.366667	39.91	---	68.20	28.29	500.0	100.0	V	50.0	-16.3
2499.400000	---	30.48	54.00	23.52	500.0	100.0	V	50.0	-16.3
2958.366667	37.70	---	68.20	30.50	500.0	200.0	V	170.0	-15.9
3903.833333	---	29.26	54.00	24.74	500.0	100.0	H	344.0	-13.7
5431.233333	---	42.27	54.00	11.73	500.0	200.0	V	344.0	-8.6
5469.733333	50.78	---	68.20	17.42	500.0	200.0	V	344.0	-8.6
5725.466667	56.86	---	68.20	11.34	500.0	200.0	V	269.0	-7.9
7746.133333	---	36.80	54.00	17.20	500.0	100.0	V	2.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE20) CH149

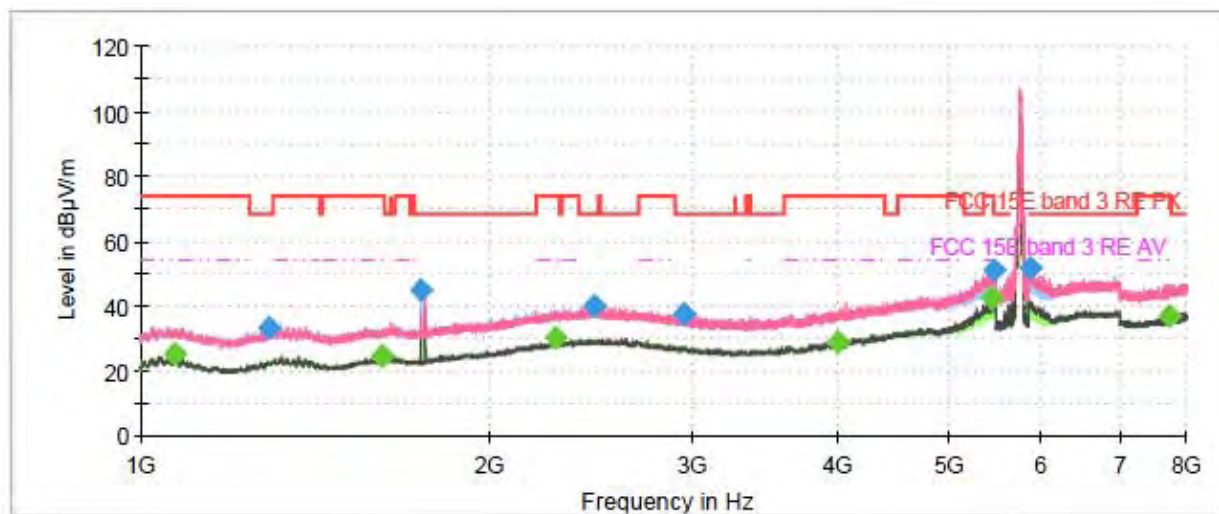

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

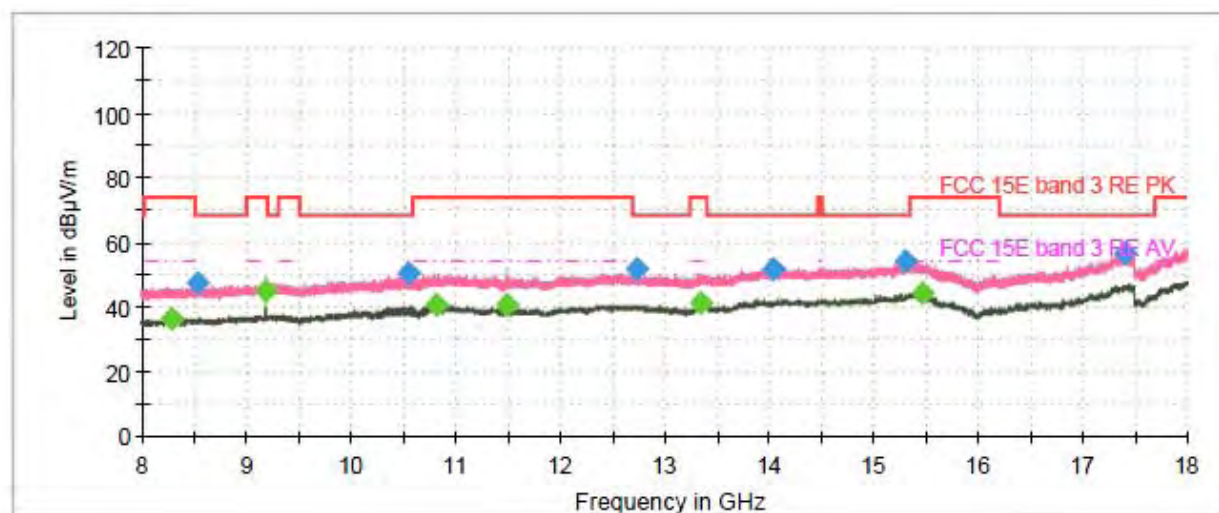


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1072.100000	---	25.03	54.00	28.97	500.0	200.0	H	0.0	-20.8
1290.733333	32.99	---	68.20	35.21	500.0	100.0	H	0.0	-19.8
1616.000000	---	24.53	54.00	29.47	500.0	200.0	H	75.0	-18.9
1748.766667	44.70	---	68.20	23.50	500.0	200.0	H	242.0	-18.6
2277.266667	---	29.99	54.00	24.01	500.0	100.0	V	149.0	-17.0
2460.900000	40.09	---	68.20	28.11	500.0	200.0	H	8.0	-16.3
2949.733333	37.47	---	68.20	30.73	500.0	200.0	H	17.0	-15.9
3997.166667	---	29.08	54.00	24.92	500.0	100.0	V	47.0	-13.3
5434.033333	---	42.20	54.00	11.80	500.0	200.0	V	0.0	-8.6
5462.033333	51.19	---	68.20	17.01	500.0	200.0	V	0.0	-8.6
5863.600000	51.54	---	68.20	16.66	500.0	200.0	V	263.0	-7.4
7748.700000	---	36.82	54.00	17.18	500.0	100.0	V	4.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE20) CH157

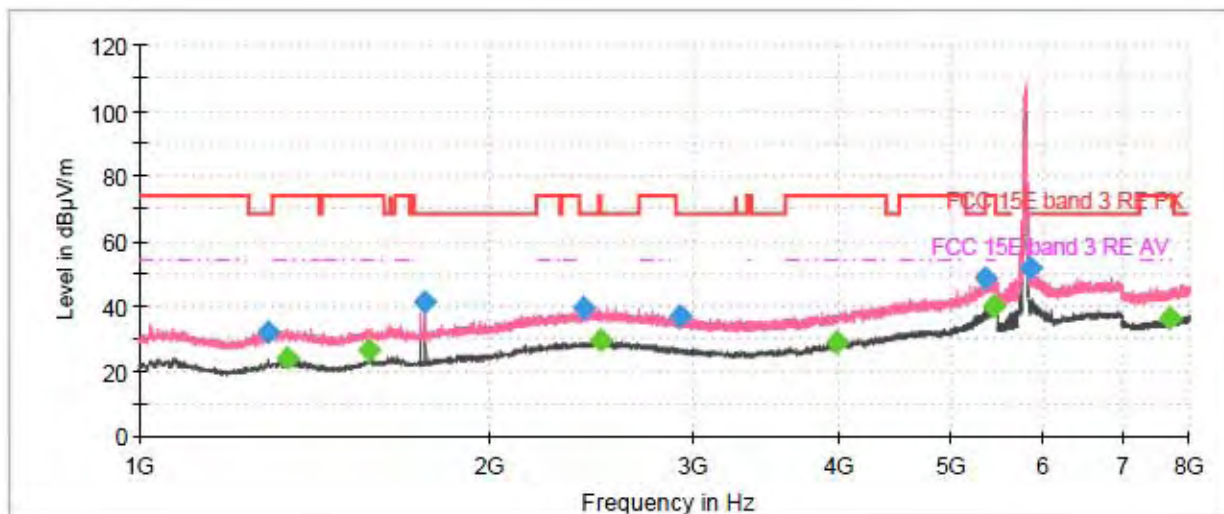

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

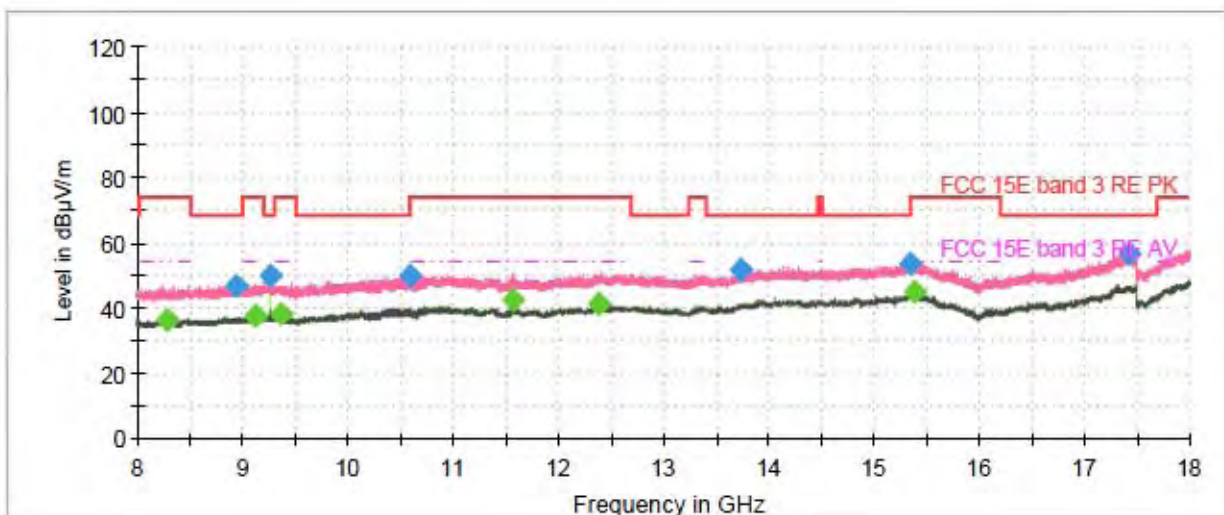


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1289.800000	32.18	---	68.20	36.02	500.0	100.0	V	12.0	-19.8
1338.333333	---	24.21	54.00	29.79	500.0	200.0	V	122.0	-19.6
1577.966667	---	26.63	54.00	27.37	500.0	200.0	V	165.0	-18.9
1763.233333	41.49	---	68.20	26.71	500.0	100.0	V	4.0	-18.6
2411.433333	39.51	---	68.20	28.69	500.0	200.0	V	0.0	-16.5
2496.133333	---	29.51	54.00	24.49	500.0	100.0	V	62.0	-16.3
2920.100000	37.08	---	68.20	31.12	500.0	100.0	V	2.0	-16.0
3985.033333	---	29.04	54.00	24.96	500.0	100.0	V	0.0	-13.4
5349.333333	48.82	---	68.20	19.38	500.0	200.0	V	0.0	-8.7
5434.733333	---	39.81	54.00	14.19	500.0	200.0	V	204.0	-8.6
5851.233333	51.54	---	68.20	16.66	500.0	100.0	V	184.0	-7.4
7695.266667	---	36.02	54.00	17.98	500.0	100.0	V	2.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE20) CH165

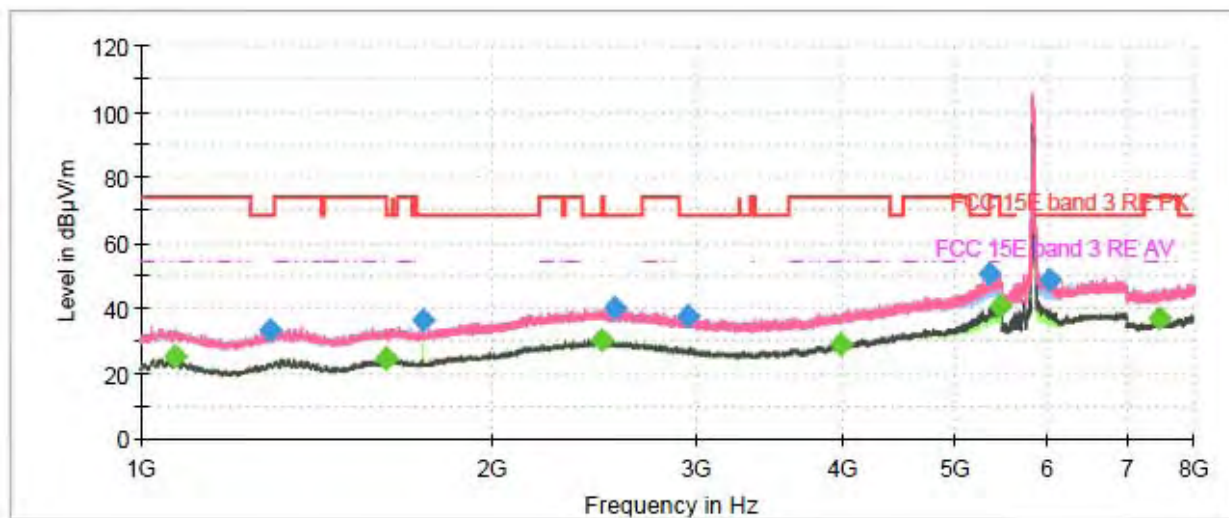

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

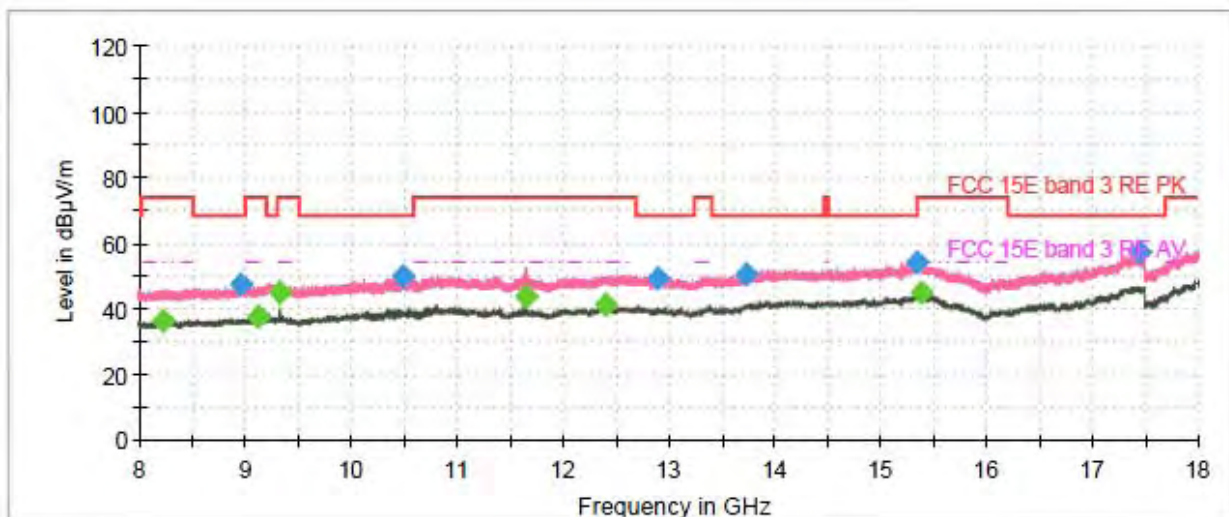


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1069.766667	---	25.05	54.00	28.95	500.0	100.0	H	257.0	-20.8
1291.900000	33.39	---	68.20	34.81	500.0	100.0	H	356.0	-19.8
1620.433333	---	24.80	54.00	29.20	500.0	100.0	H	356.0	-18.8
1746.900000	36.40	---	68.20	31.80	500.0	200.0	H	5.0	-18.6
2488.900000	---	30.06	54.00	23.94	500.0	100.0	V	11.0	-16.3
2547.700000	40.30	---	68.20	27.90	500.0	100.0	V	42.0	-16.2
2946.466667	37.51	---	68.20	30.69	500.0	200.0	H	0.0	-15.9
3990.633333	---	29.16	54.00	24.84	500.0	100.0	H	356.0	-13.4
5348.633333	50.68	---	68.20	17.52	500.0	200.0	V	2.0	-8.7
5444.766667	---	40.82	54.00	13.18	500.0	200.0	V	290.0	-8.6
6007.100000	48.59	---	68.20	19.61	500.0	200.0	V	0.0	-6.9
7461.933333	---	36.82	54.00	17.18	500.0	100.0	H	329.0	-4.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE40) CH38

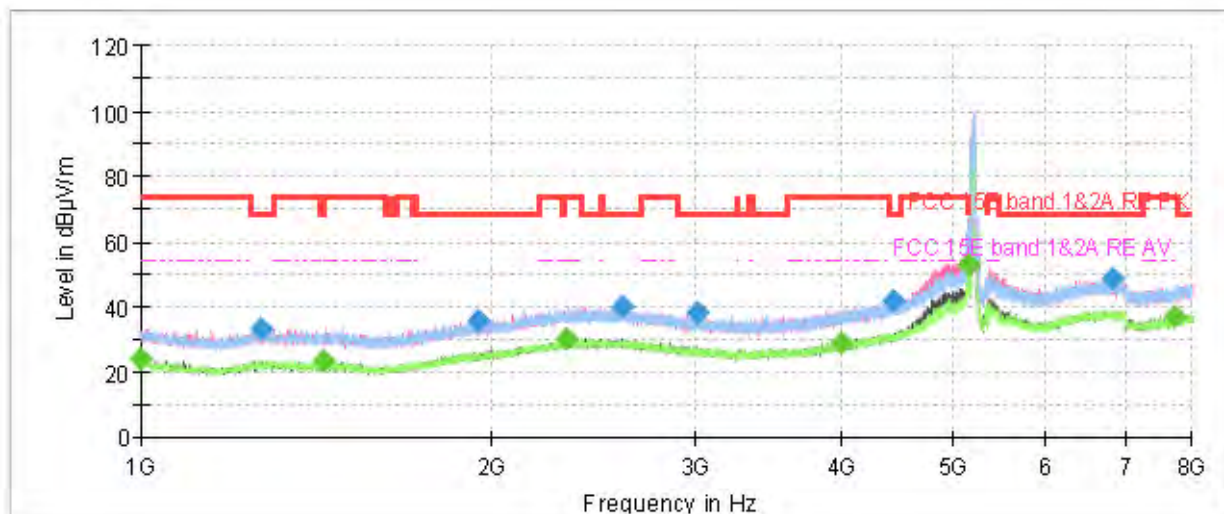

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

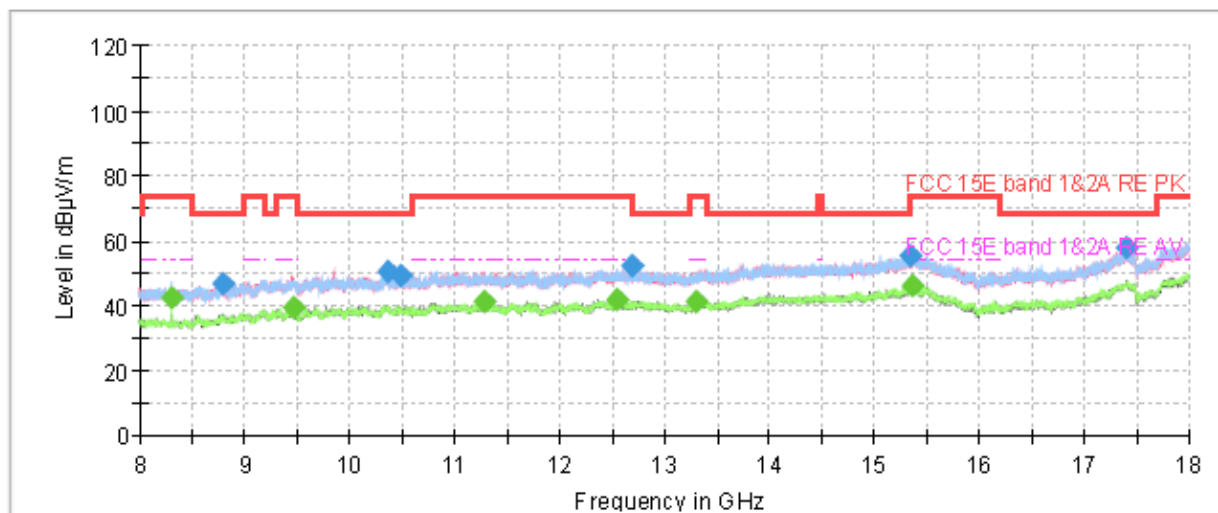


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1000.000000	---	24.09	54.00	29.91	500.0	200.0	V	182.0	-21.1
1271.366667	33.40	---	68.20	34.80	500.0	200.0	V	21.0	-19.9
1435.633333	---	23.32	54.00	30.68	500.0	200.0	V	310.0	-19.3
1952.700000	35.63	---	68.20	32.57	500.0	100.0	H	328.0	-18.4
2320.200000	---	30.24	54.00	23.76	500.0	100.0	V	202.0	-16.9
2589.000000	39.76	---	68.20	28.44	500.0	200.0	V	83.0	-16.1
3012.500000	38.40	---	68.20	29.80	500.0	200.0	H	356.0	-15.7
3996.233333	---	28.86	54.00	25.14	500.0	200.0	H	260.0	-13.3
4431.166667	41.83	---	68.20	26.37	500.0	200.0	H	353.0	-11.7
5146.100000	---	53.15	54.00	0.85	500.0	200.0	V	287.0	-9.5
6828.666667	48.85	---	68.20	19.35	500.0	200.0	H	328.0	-3.8
7727.000000	---	37.20	54.00	16.80	500.0	100.0	V	0.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE40) CH46

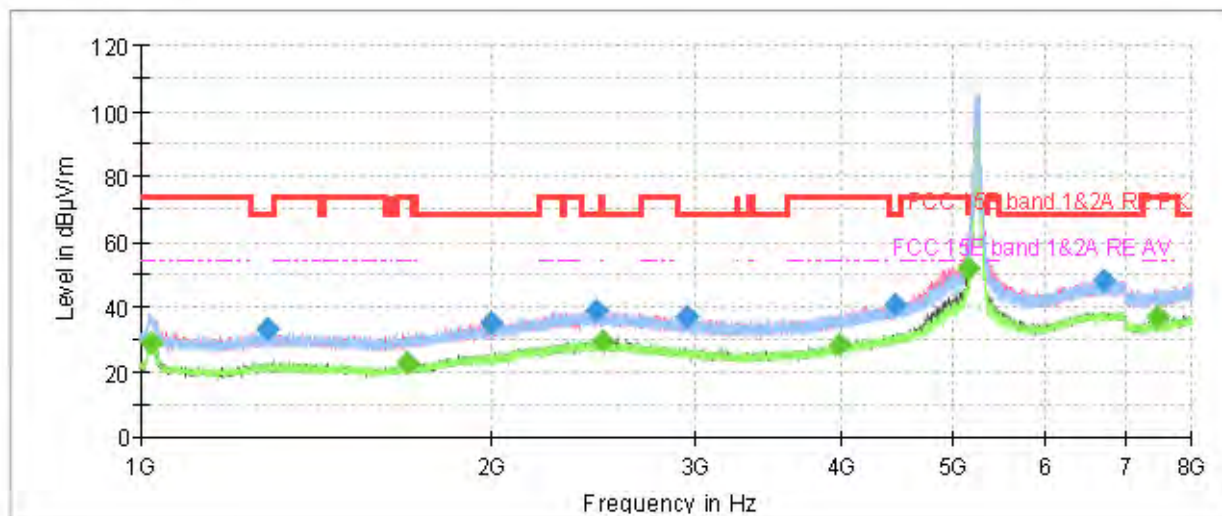

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

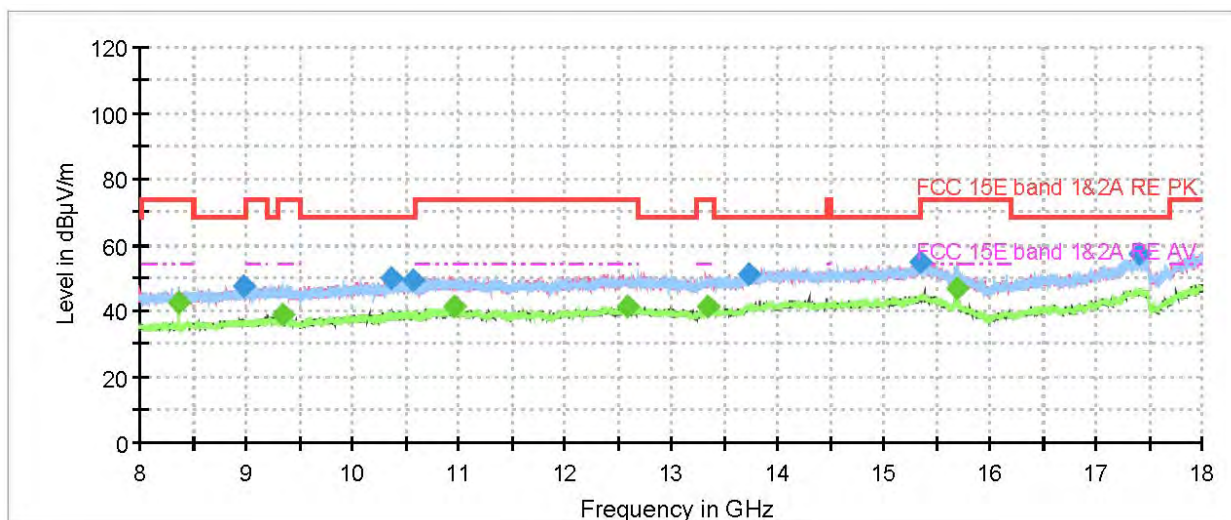


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1023.333333	---	28.65	54.00	25.35	500.0	100.0	H	178.0	-21.0
1286.300000	32.95	---	68.20	35.25	500.0	200.0	H	118.0	-19.8
1690.900000	---	22.59	54.00	31.41	500.0	200.0	V	267.0	-18.6
1998.666667	34.92	---	68.20	33.28	500.0	100.0	H	0.0	-18.2
2459.033333	38.95	---	68.20	29.25	500.0	200.0	V	32.0	-16.4
2495.900000	---	29.43	54.00	24.57	500.0	100.0	V	125.0	-16.3
2942.500000	36.81	---	68.20	31.39	500.0	200.0	V	64.0	-15.9
3991.100000	---	28.47	54.00	25.53	500.0	200.0	V	2.0	-13.4
4446.100000	40.71	---	68.20	27.49	500.0	200.0	V	47.0	-11.6
5145.866667	---	51.67	54.00	2.33	500.0	200.0	H	159.0	-9.5
6731.133333	48.15	---	68.20	20.05	500.0	200.0	V	47.0	-3.6
7462.400000	---	36.71	54.00	17.29	500.0	200.0	V	125.0	-4.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE40) CH54

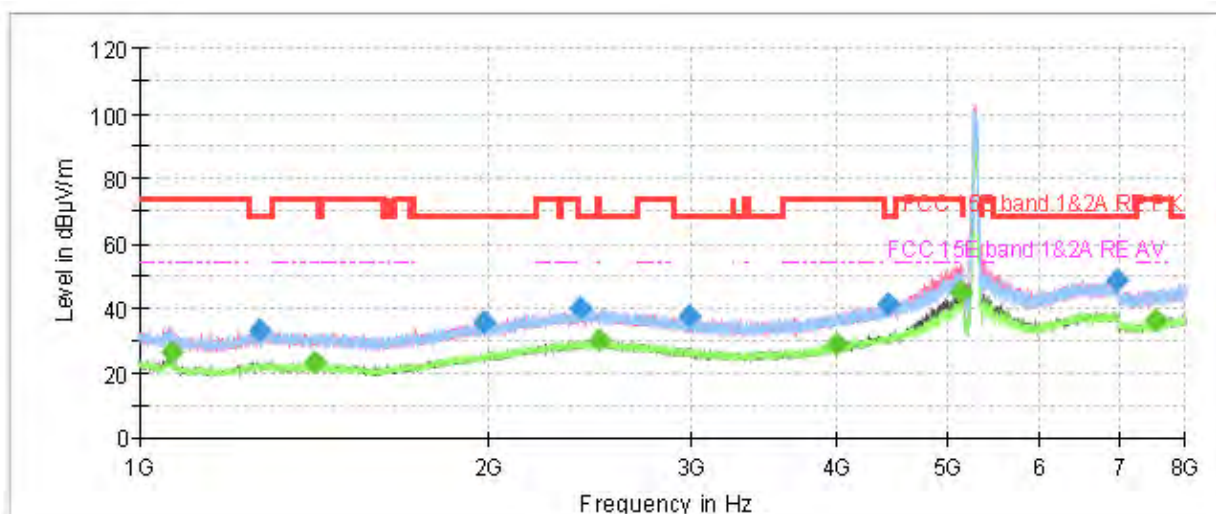

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

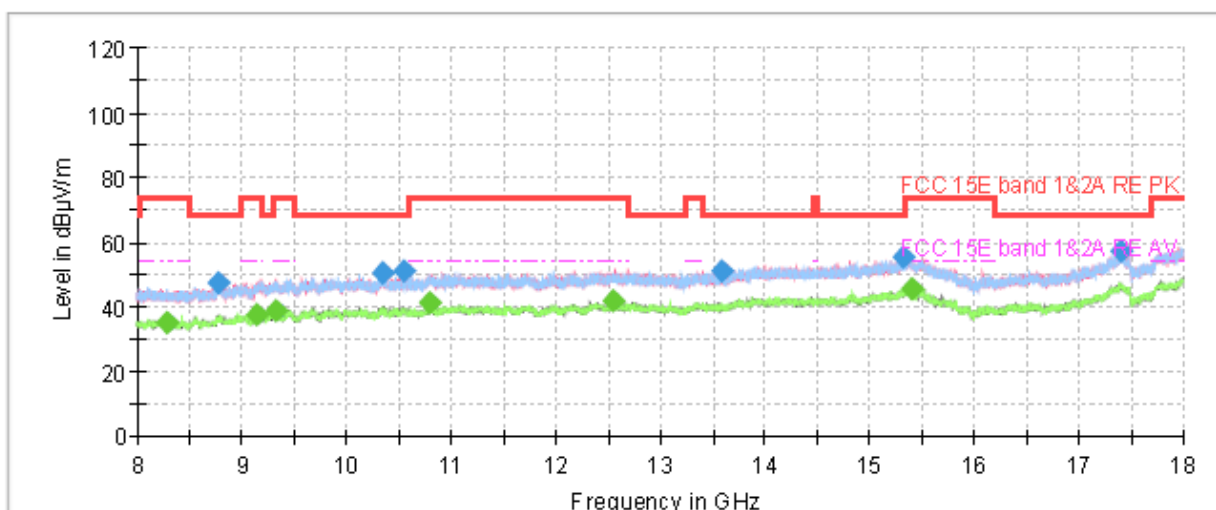


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1064.866667	---	26.37	54.00	27.63	500.0	200.0	V	0.0	-20.9
1266.933333	32.99	---	68.20	35.21	500.0	200.0	H	359.0	-19.9
1419.066667	---	23.22	54.00	30.78	500.0	100.0	V	132.0	-19.3
1985.600000	35.49	---	68.20	32.71	500.0	200.0	V	91.0	-18.3
2399.766667	39.82	---	68.20	28.38	500.0	100.0	H	98.0	-16.5
2494.500000	---	29.96	54.00	24.04	500.0	200.0	V	9.0	-16.3
2982.400000	37.31	---	68.20	30.89	500.0	200.0	H	0.0	-15.8
3999.033333	---	29.07	54.00	24.93	500.0	200.0	H	245.0	-13.3
4439.100000	41.44	---	68.20	26.76	500.0	100.0	H	0.0	-11.7
5115.300000	---	44.71	54.00	9.29	500.0	100.0	V	236.0	-9.6
6968.200000	48.83	---	68.20	19.37	500.0	200.0	H	226.0	-3.8
7543.133333	---	36.55	54.00	17.45	500.0	200.0	H	354.0	-4.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE40) CH62

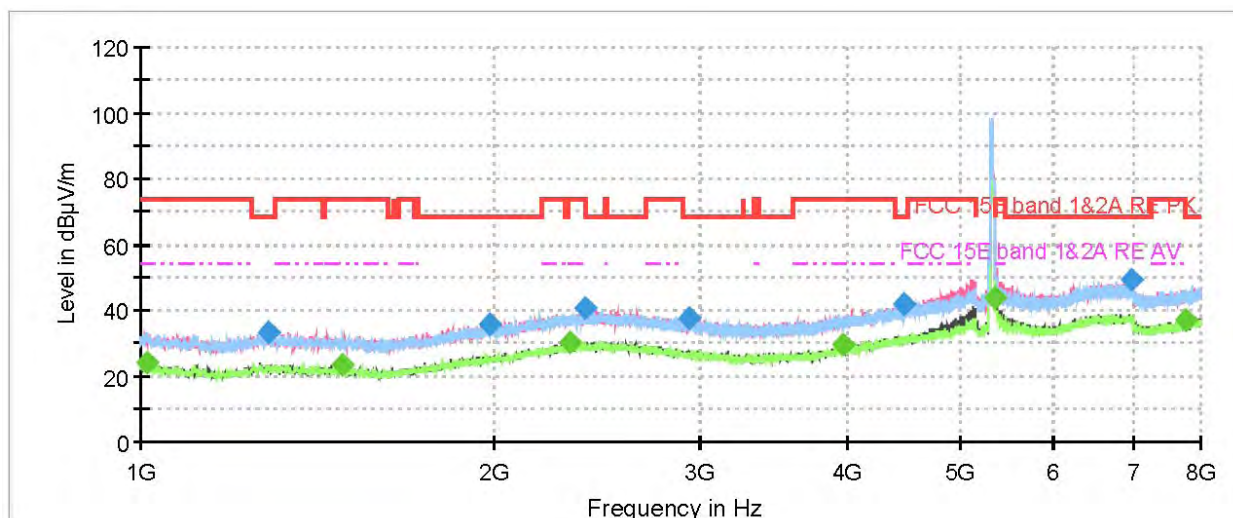

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

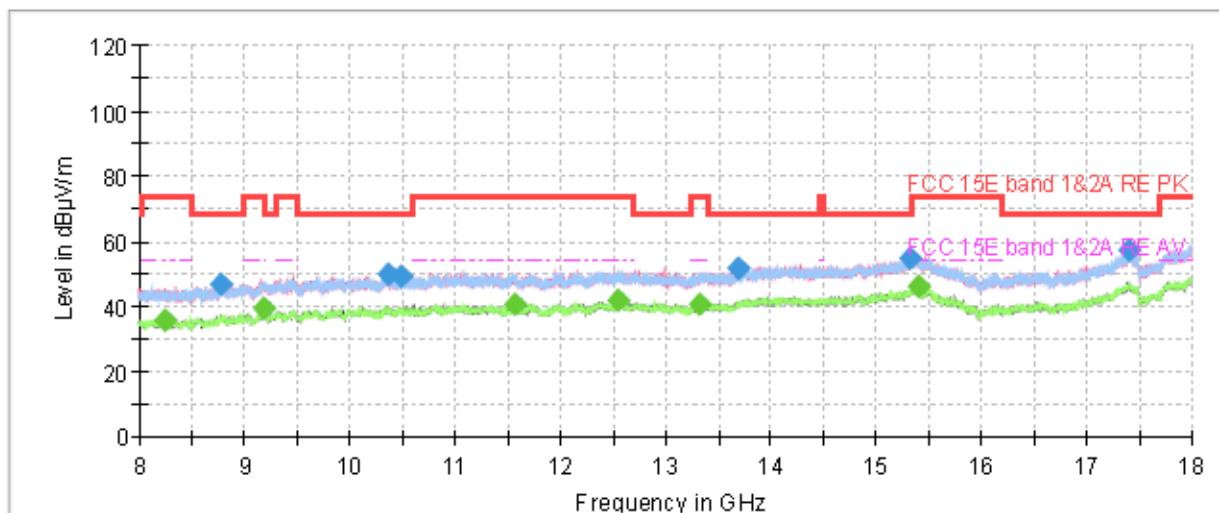


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1013.066667	---	24.20	54.00	29.80	500.0	200.0	H	346.0	-21.0
1283.500000	33.17	---	68.20	35.03	500.0	100.0	V	1.0	-19.8
1486.266667	---	23.65	54.00	30.35	500.0	100.0	H	252.0	-19.2
1982.100000	35.57	---	68.20	32.63	500.0	200.0	V	334.0	-18.3
2321.833333	---	29.98	54.00	24.02	500.0	200.0	V	280.0	-16.9
2390.666667	40.35	---	68.20	27.85	500.0	200.0	H	0.0	-16.5
2937.133333	37.43	---	68.20	30.77	500.0	200.0	V	134.0	-15.9
3962.866667	---	29.51	54.00	24.50	500.0	200.0	V	1.0	-13.5
4458.233333	42.06	---	68.20	26.14	500.0	200.0	V	3.0	-11.6
5351.200000	---	43.86	54.00	10.14	500.0	200.0	V	258.0	-8.7
6970.300000	49.05	---	68.20	19.15	500.0	200.0	H	0.0	-3.8
7748.933333	---	36.71	54.00	17.29	500.0	100.0	V	3.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE40) CH102

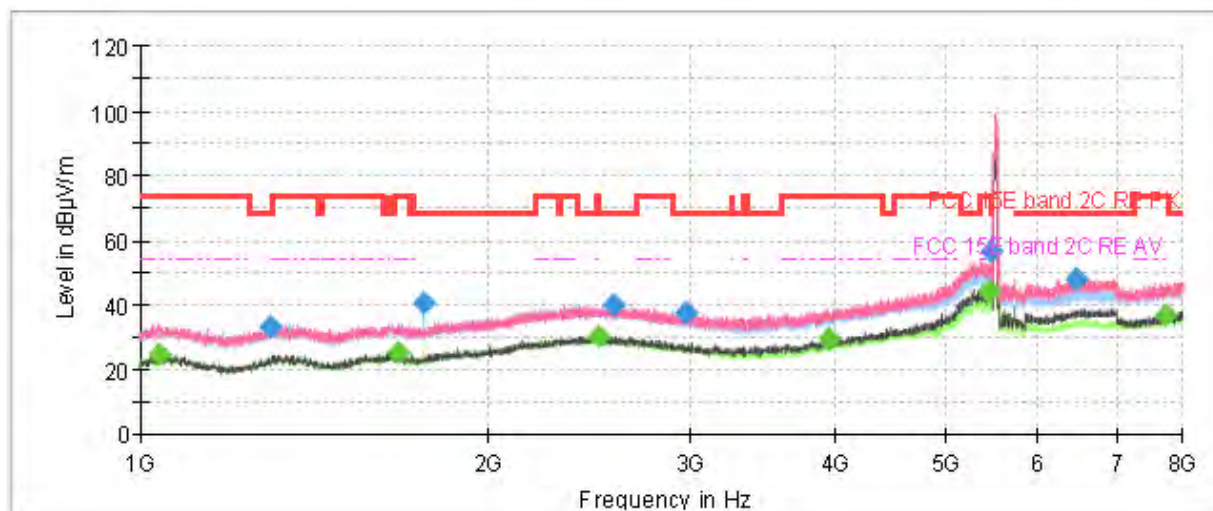

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

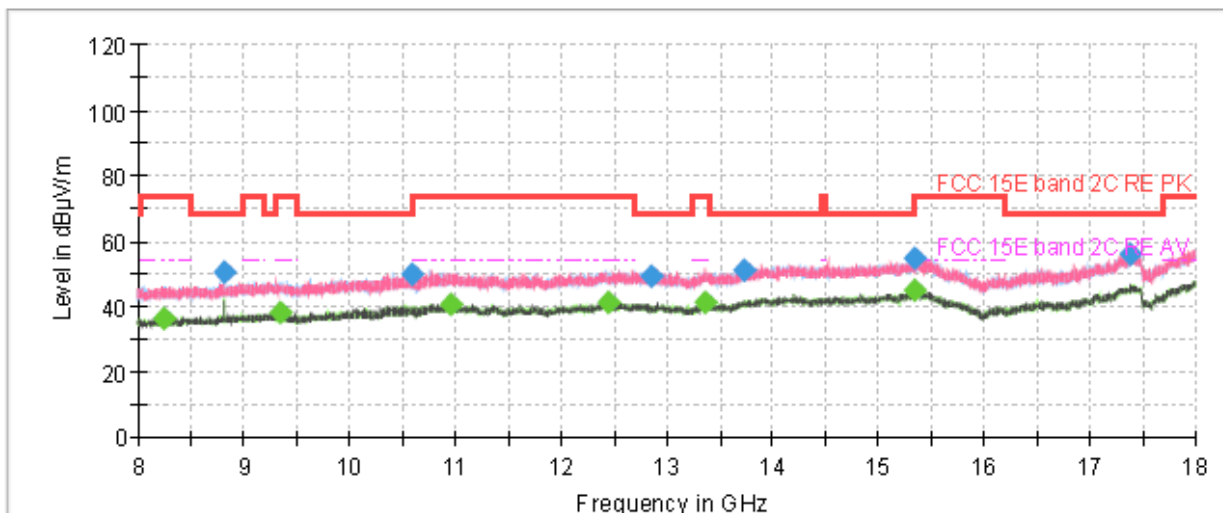


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1039.666667	---	24.83	54.00	29.17	500.0	100.0	V	314.0	-21.0
1298.200000	32.97	---	68.20	35.23	500.0	100.0	H	2.0	-19.8
1670.366667	---	25.32	54.00	28.68	500.0	200.0	V	124.0	-18.8
1762.533333	40.80	---	68.20	27.40	500.0	100.0	H	86.0	-18.6
2491.000000	---	30.14	54.00	23.86	500.0	200.0	V	82.0	-16.3
2574.533333	39.99	---	68.20	28.21	500.0	100.0	H	66.0	-16.2
2976.100000	37.31	---	68.20	30.89	500.0	100.0	V	290.0	-15.9
3957.033333	---	29.33	54.00	24.67	500.0	100.0	V	348.0	-13.5
5442.433333	---	44.48	54.00	9.52	500.0	200.0	V	286.0	-8.6
5464.600000	56.66	---	68.20	11.54	500.0	200.0	V	0.0	-8.6
6473.533333	48.22	---	68.20	19.98	500.0	100.0	V	348.0	-3.9
7725.833333	---	36.76	54.00	17.24	500.0	100.0	V	0.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE40) CH118

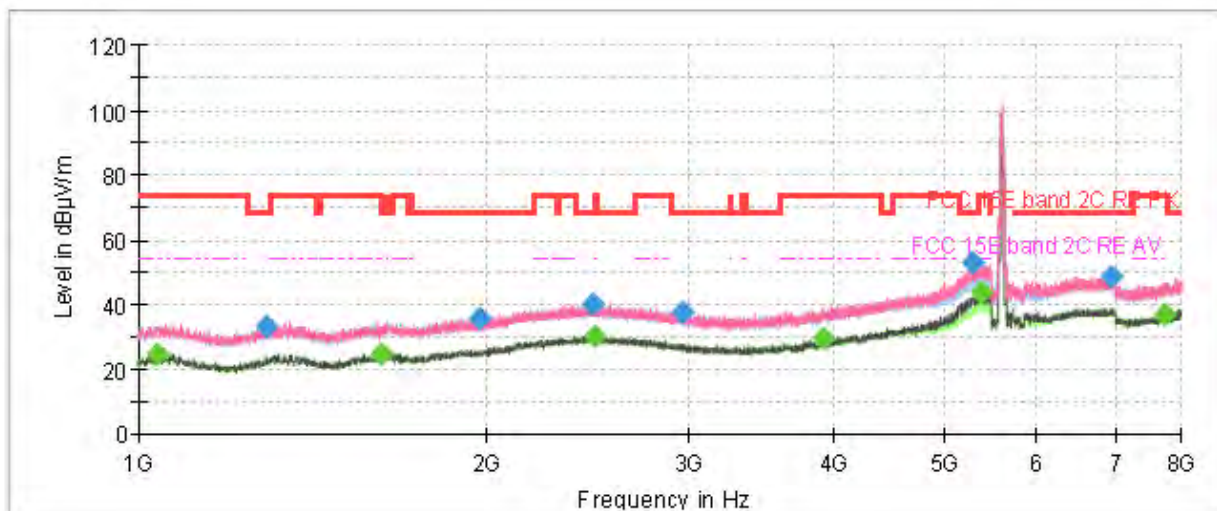

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

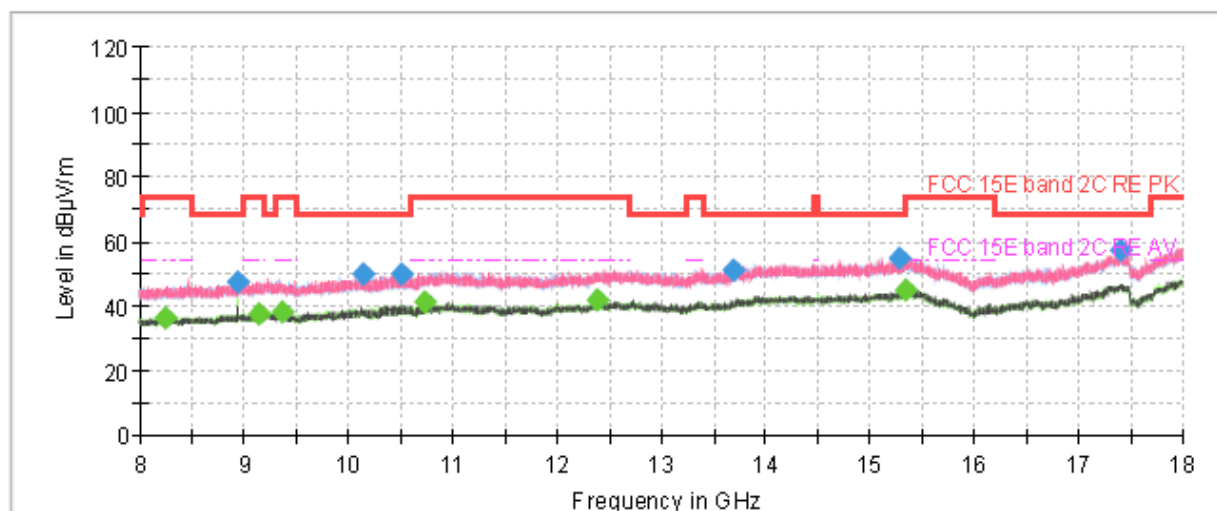


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1039.200000	---	24.86	54.00	29.14	500.0	200.0	H	0.0	-21.0
1290.266667	32.93	---	68.20	35.27	500.0	100.0	V	336.0	-19.8
1622.766667	---	24.69	54.00	29.31	500.0	100.0	H	32.0	-18.8
1971.133333	35.80	---	68.20	32.40	500.0	200.0	H	343.0	-18.3
2477.466667	39.76	---	68.20	28.44	500.0	100.0	V	9.0	-16.3
2486.800000	---	30.32	54.00	23.68	500.0	100.0	H	0.0	-16.3
2958.366667	37.72	---	68.20	30.48	500.0	200.0	V	46.0	-15.9
3919.233333	---	29.79	54.00	24.21	500.0	100.0	V	73.0	-13.6
5276.066667	53.05	---	68.20	15.15	500.0	200.0	V	359.0	-9.1
5366.833333	---	43.48	54.00	10.52	500.0	200.0	V	311.0	-8.7
6961.666667	48.71	---	68.20	19.49	500.0	200.0	H	359.0	-3.8
7729.100000	---	36.84	54.00	17.16	500.0	200.0	V	0.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE40) CH134

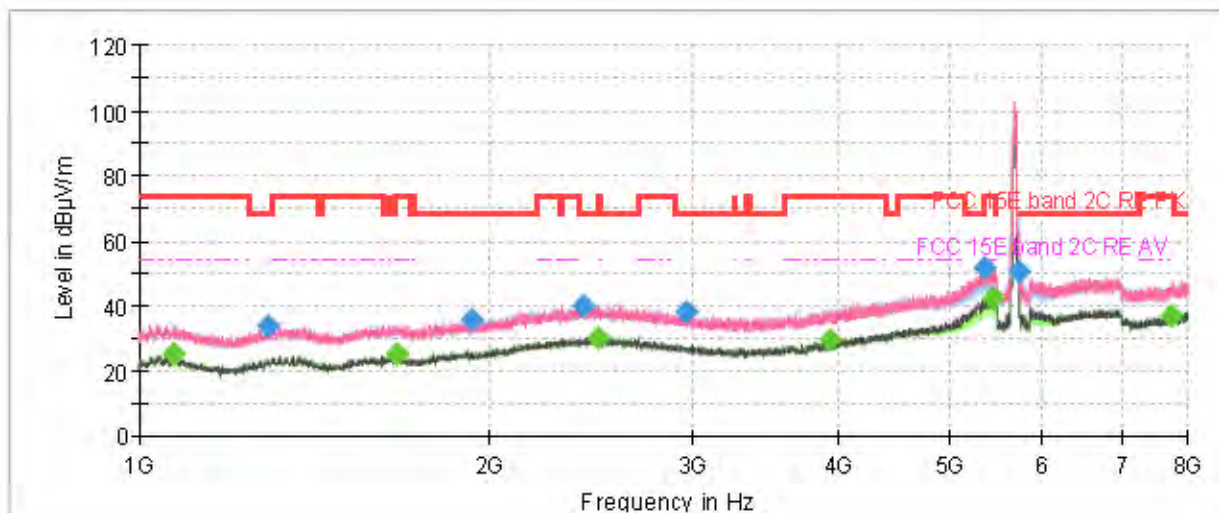

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

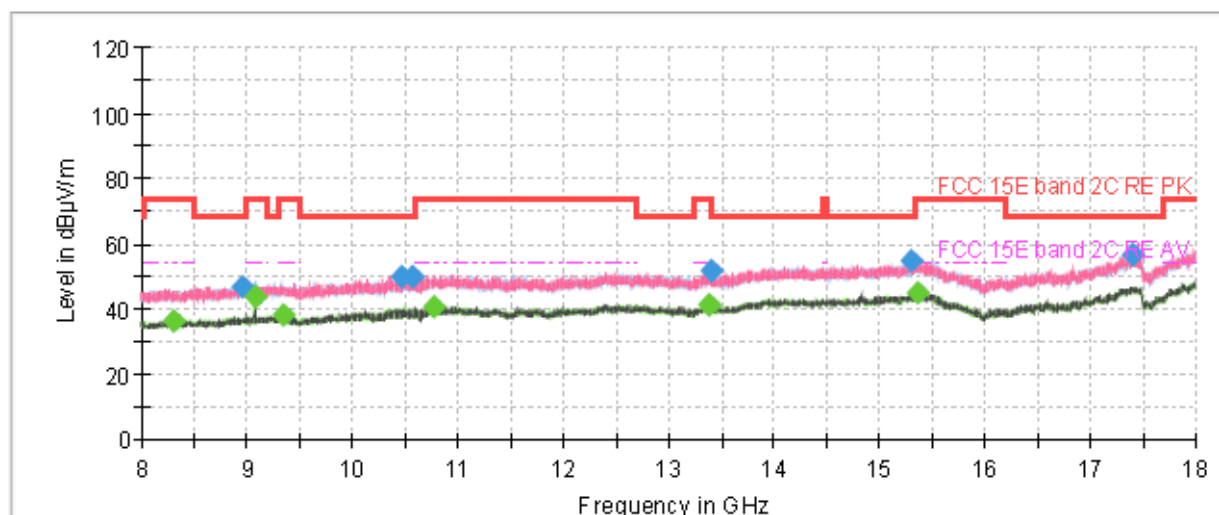


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1072.333333	---	25.09	54.00	28.91	500.0	200.0	V	104.0	-20.8
1292.833333	34.13	---	68.20	34.07	500.0	200.0	V	0.0	-19.8
1665.933333	---	25.09	54.00	28.91	500.0	200.0	V	64.0	-18.8
1934.733333	35.89	---	68.20	32.31	500.0	100.0	H	6.0	-18.3
2413.766667	40.22	---	68.20	27.98	500.0	100.0	H	3.0	-16.5
2485.633333	---	29.86	54.00	24.14	500.0	100.0	H	89.0	-16.3
2953.933333	38.04	---	68.20	30.16	500.0	200.0	V	8.0	-15.9
3925.300000	---	29.32	54.00	24.68	500.0	200.0	H	356.0	-13.6
5349.100000	51.56	---	68.20	16.64	500.0	200.0	V	0.0	-8.7
5433.333333	---	42.63	54.00	11.37	500.0	200.0	V	2.0	-8.6
5725.933333	50.57	---	68.20	17.63	500.0	200.0	V	283.0	-7.9
7733.766667	---	36.81	54.00	17.19	500.0	200.0	V	32.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE40) CH151

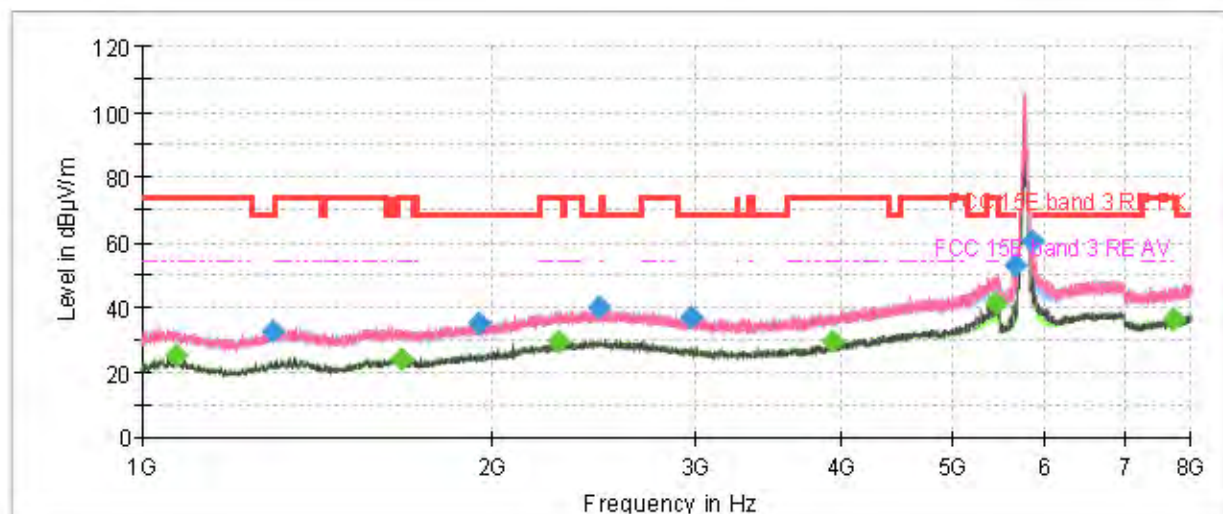

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

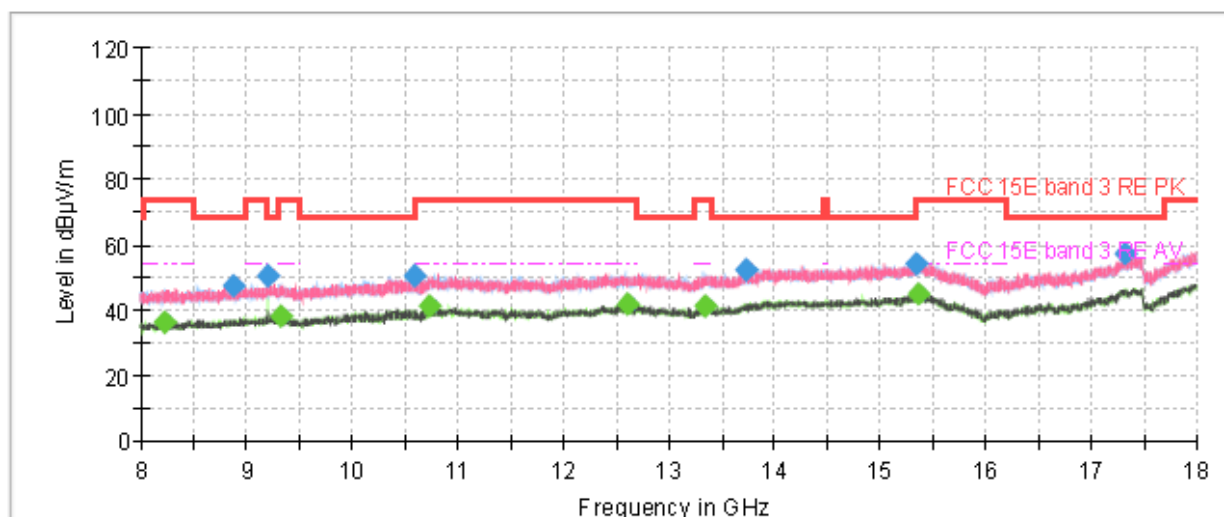


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1071.866667	---	25.07	54.00	28.93	500.0	100.0	H	6.0	-20.8
1294.700000	32.39	---	68.20	35.81	500.0	100.0	H	44.0	-19.8
1669.900000	---	24.24	54.00	29.76	500.0	200.0	H	358.0	-18.8
1946.400000	35.16	---	68.20	33.04	500.0	100.0	V	315.0	-18.4
2286.600000	---	29.43	54.00	24.57	500.0	200.0	H	358.0	-16.9
2471.400000	39.78	---	68.20	28.42	500.0	100.0	V	52.0	-16.3
2974.933333	37.08	---	68.20	31.12	500.0	100.0	H	0.0	-15.9
3936.266667	---	29.48	54.00	24.52	500.0	200.0	V	0.0	-13.6
5433.566667	---	41.21	54.00	12.79	500.0	200.0	V	0.0	-8.6
5637.266667	53.02	---	68.20	15.18	500.0	200.0	V	246.0	-8.1
5850.766667	60.27	---	68.20	7.93	500.0	200.0	V	0.0	-7.4
7743.566667	---	36.53	54.00	17.47	500.0	100.0	H	63.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE40) CH159

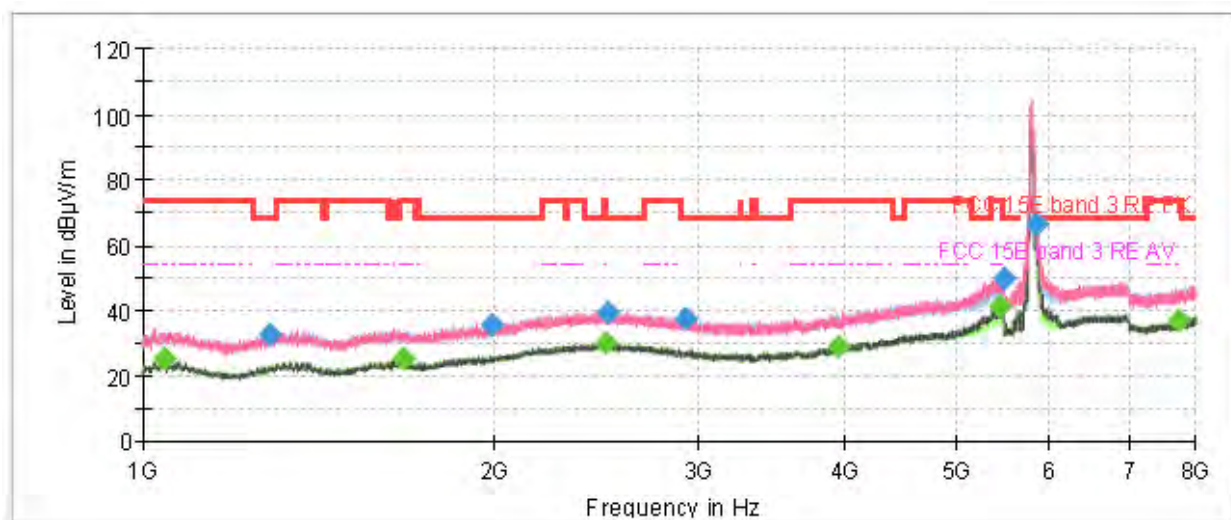

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

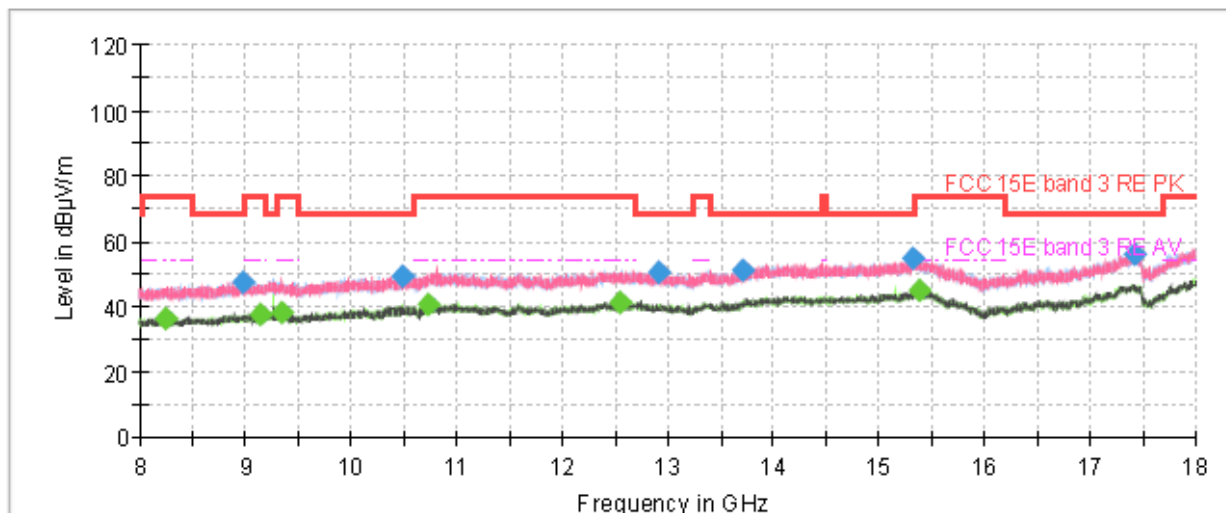


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1042.000000	---	25.22	54.00	28.78	500.0	100.0	H	10.0	-21.0
1286.766667	32.67	---	68.20	35.53	500.0	100.0	V	276.0	-19.8
1671.533333	---	25.45	54.00	28.55	500.0	100.0	H	81.0	-18.8
1987.933333	35.47	---	68.20	32.73	500.0	100.0	H	10.0	-18.2
2492.633333	---	30.05	54.00	23.95	500.0	200.0	V	3.0	-16.3
2503.600000	39.59	---	68.20	28.61	500.0	100.0	H	0.0	-16.3
2919.166667	37.60	---	68.20	30.60	500.0	100.0	H	0.0	-16.0
3946.533333	---	29.11	54.00	24.90	500.0	100.0	V	297.0	-13.6
5432.166667	---	41.16	54.00	12.84	500.0	200.0	V	0.0	-8.6
5468.333333	49.82	---	68.20	18.38	500.0	200.0	V	3.0	-8.6
5851.233333	66.60	---	68.20	1.60	500.0	200.0	V	286.0	-7.4
7727.233333	---	36.71	54.00	17.29	500.0	200.0	H	195.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE80) CH42

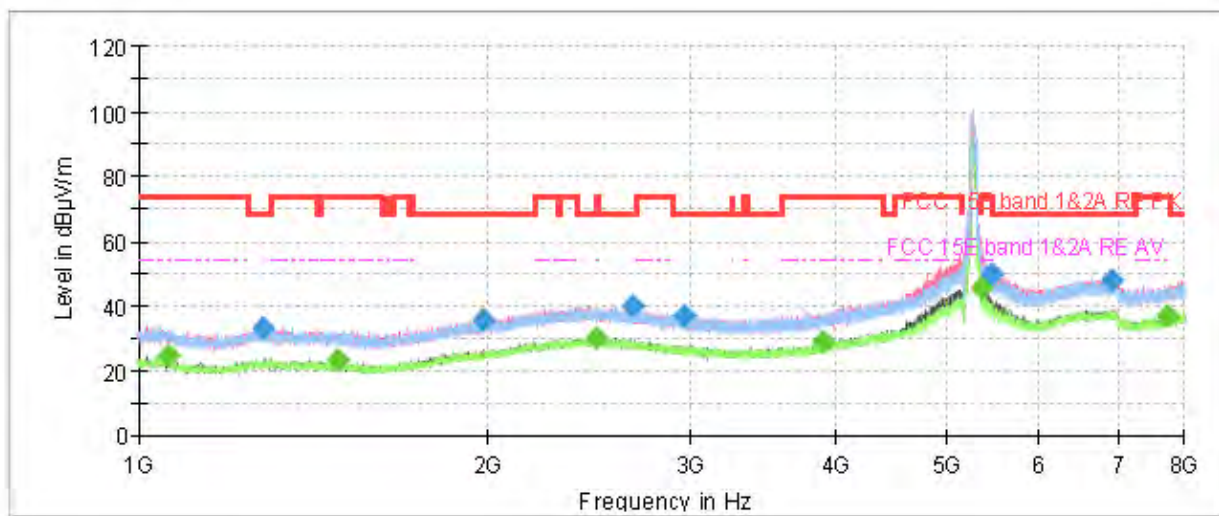

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

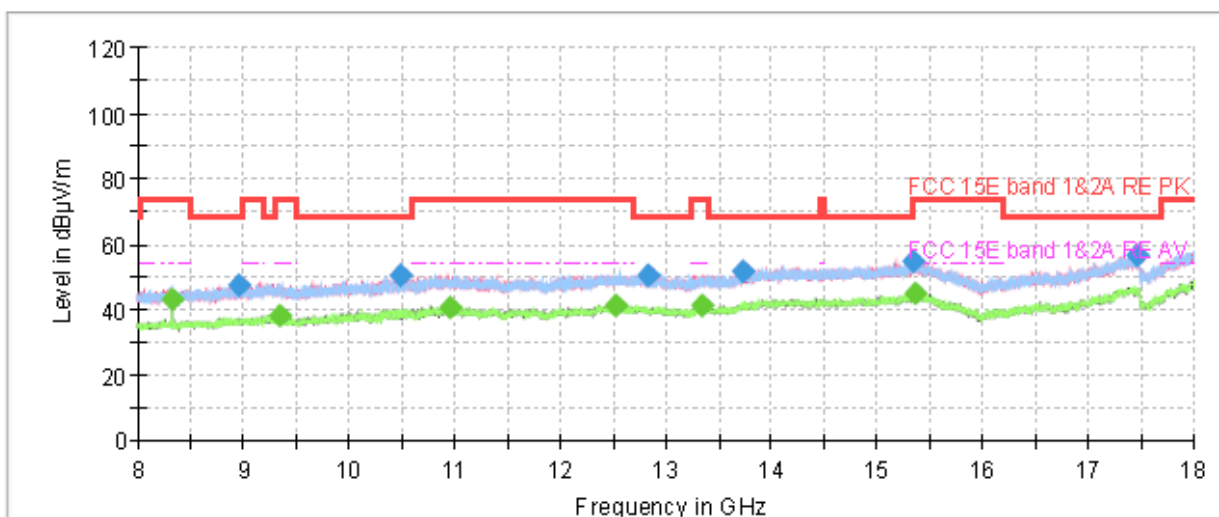


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1059.266667	---	24.59	54.00	29.41	500.0	100.0	V	358.0	-20.9
1280.000000	33.25	---	68.20	34.95	500.0	200.0	H	355.0	-19.9
1483.466667	---	23.19	54.00	30.81	500.0	100.0	H	351.0	-19.2
1979.300000	35.38	---	68.20	32.82	500.0	200.0	H	344.0	-18.3
2484.233333	---	30.15	54.00	23.85	500.0	200.0	H	355.0	-16.3
2666.466667	39.92	---	68.20	28.28	500.0	200.0	V	154.0	-16.0
2958.366667	37.20	---	68.20	31.00	500.0	100.0	V	114.0	-15.9
3904.300000	---	28.78	54.00	25.22	500.0	200.0	H	359.0	-13.7
5350.966667	---	45.36	54.00	8.64	500.0	100.0	V	175.0	-8.7
5464.133333	50.01	---	68.20	18.19	500.0	100.0	V	292.0	-8.6
6923.400000	48.15	---	68.20	20.05	500.0	100.0	H	359.0	-3.8
7727.700000	---	36.86	54.00	17.14	500.0	200.0	V	73.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE80) CH58

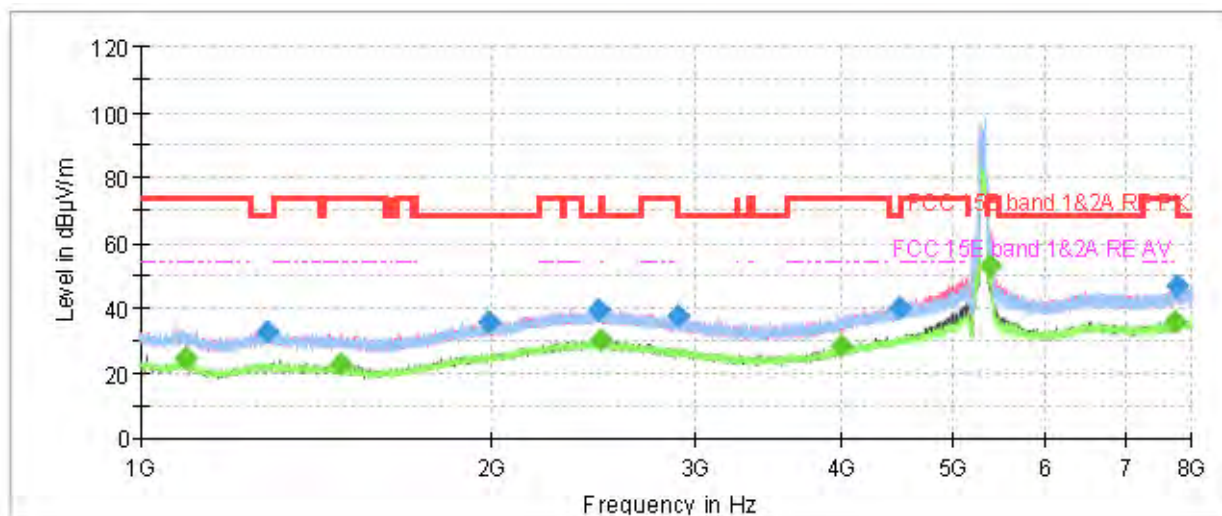

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

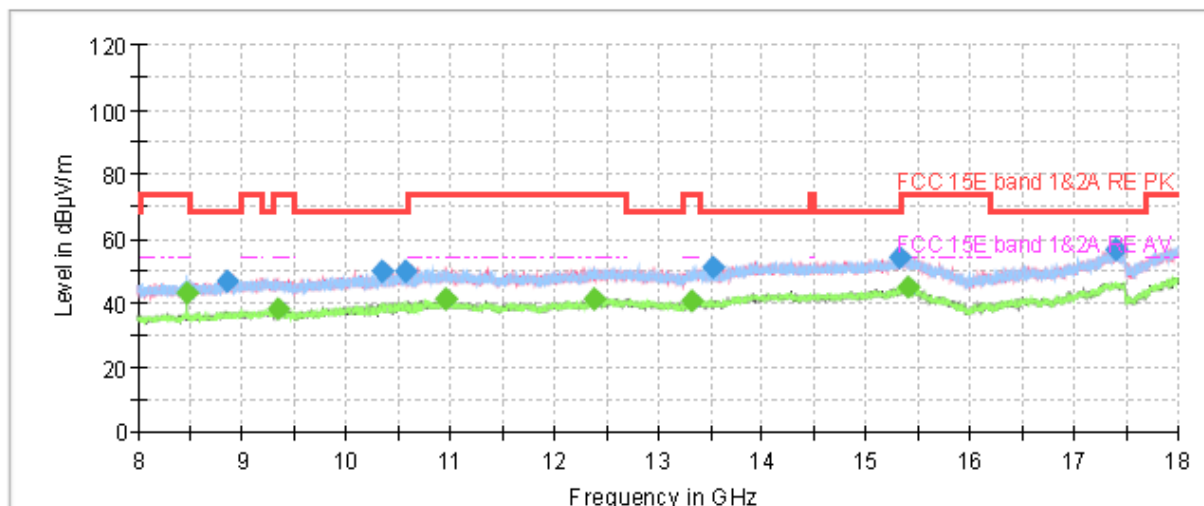


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1094.500000	---	24.88	54.00	29.12	500.0	200.0	V	139.0	-20.7
1287.466667	32.57	---	68.20	35.63	500.0	200.0	V	80.0	-19.8
1486.266667	---	22.71	54.00	31.29	500.0	100.0	V	0.0	-19.2
1995.400000	35.76	---	68.20	32.44	500.0	100.0	H	348.0	-18.2
2471.633333	39.37	---	68.20	28.83	500.0	100.0	H	299.0	-16.3
2484.233333	---	30.03	54.00	23.97	500.0	200.0	H	358.0	-16.3
2900.966667	37.37	---	68.20	30.83	500.0	200.0	H	329.0	-16.0
3999.500000	---	28.22	54.00	25.78	500.0	200.0	H	92.0	-13.3
4477.833333	40.11	---	68.20	28.09	500.0	200.0	V	199.0	-11.5
5357.733333	---	52.98	54.00	1.02	500.0	100.0	H	280.0	-8.7
7746.366667	---	35.98	54.00	18.02	500.0	200.0	H	356.0	-3.6
7762.700000	46.86	---	68.20	21.34	500.0	200.0	V	139.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE80) CH106

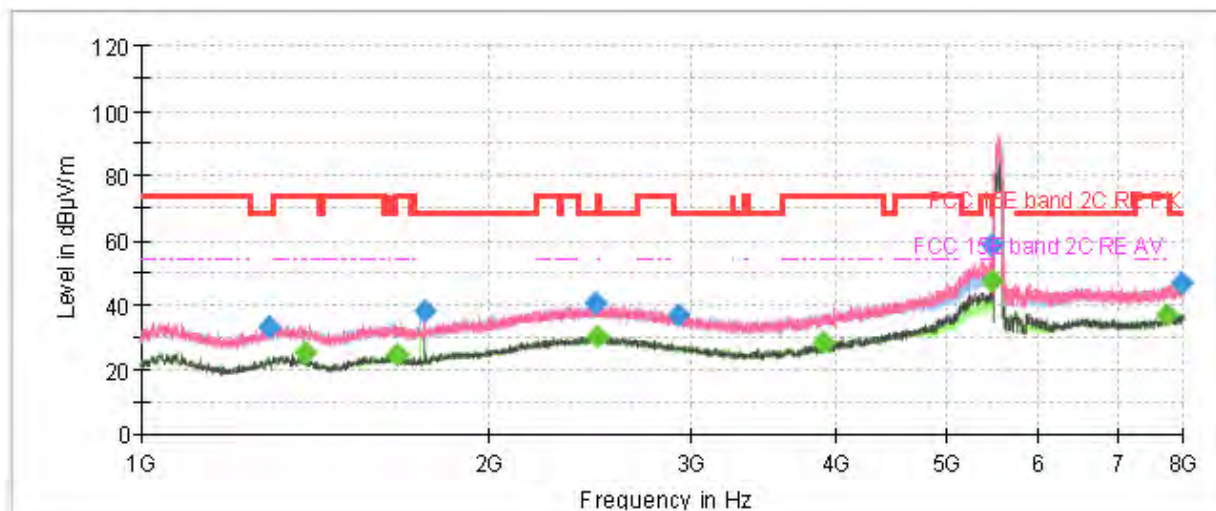

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

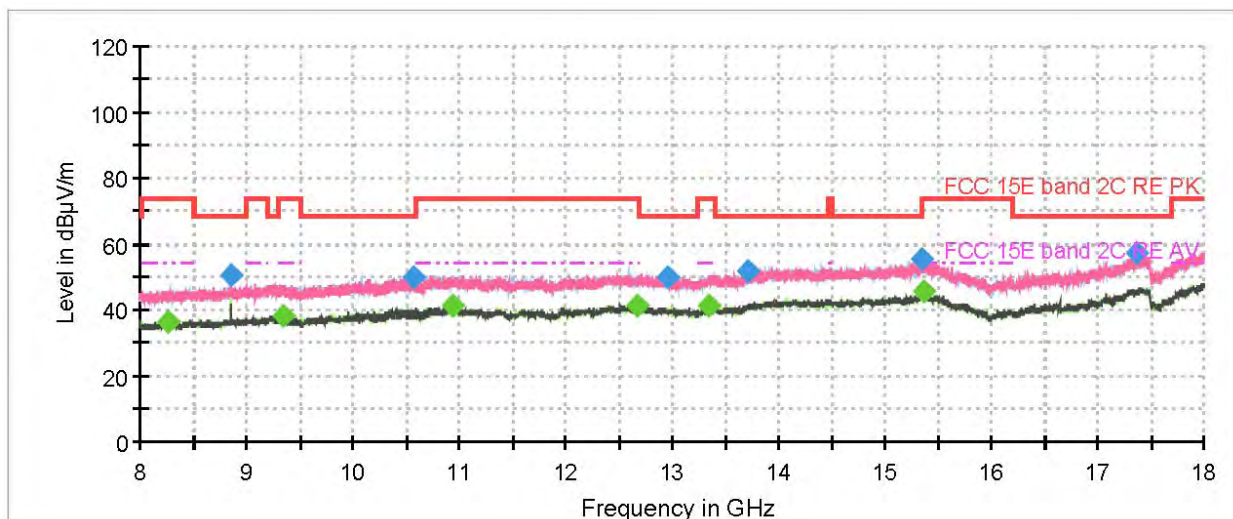


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1290.966667	33.18	---	68.20	35.02	500.0	100.0	V	11.0	-19.8
1388.266667	---	25.12	54.00	28.88	500.0	200.0	V	192.0	-19.6
1665.466667	---	24.63	54.00	29.37	500.0	200.0	H	1.0	-18.8
1763.233333	38.11	---	68.20	30.09	500.0	100.0	V	308.0	-18.6
2469.066667	40.32	---	68.20	27.88	500.0	200.0	H	58.0	-16.3
2485.400000	---	30.05	54.00	23.95	500.0	100.0	H	214.0	-16.3
2919.166667	37.06	---	68.20	31.14	500.0	200.0	V	325.0	-16.0
3903.366667	---	28.35	54.00	25.65	500.0	200.0	V	132.0	-13.7
5457.600000	---	47.35	54.00	6.65	500.0	200.0	H	6.0	-8.6
5465.300000	58.32	---	68.20	9.88	500.0	200.0	V	355.0	-8.6
7739.366667	---	36.63	54.00	17.37	500.0	200.0	H	96.0	-3.6
7980.400000	46.79	---	68.20	21.41	500.0	100.0	V	0.0	-2.5


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE80) CH122

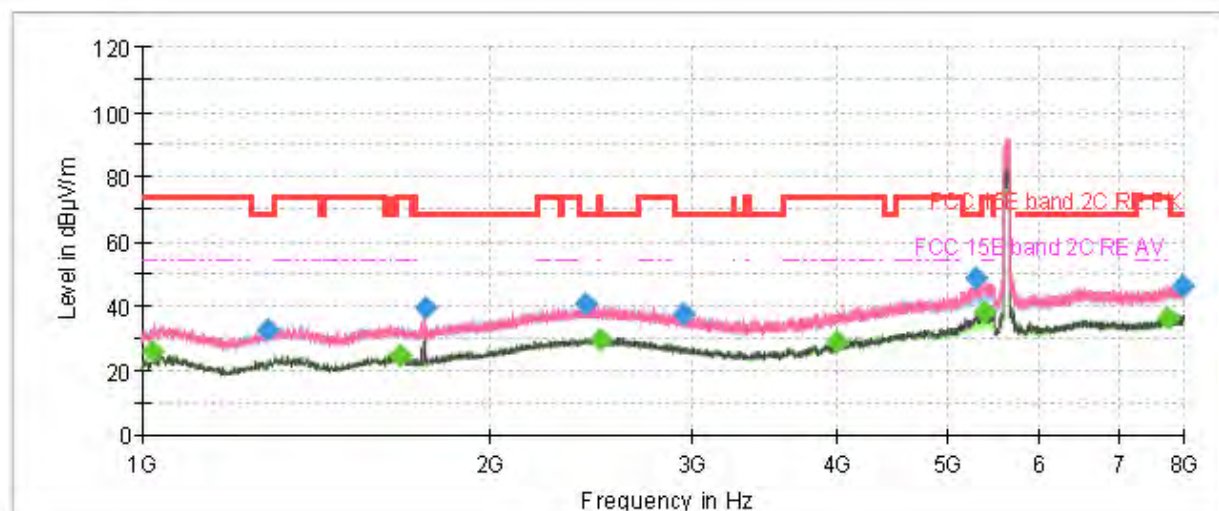

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

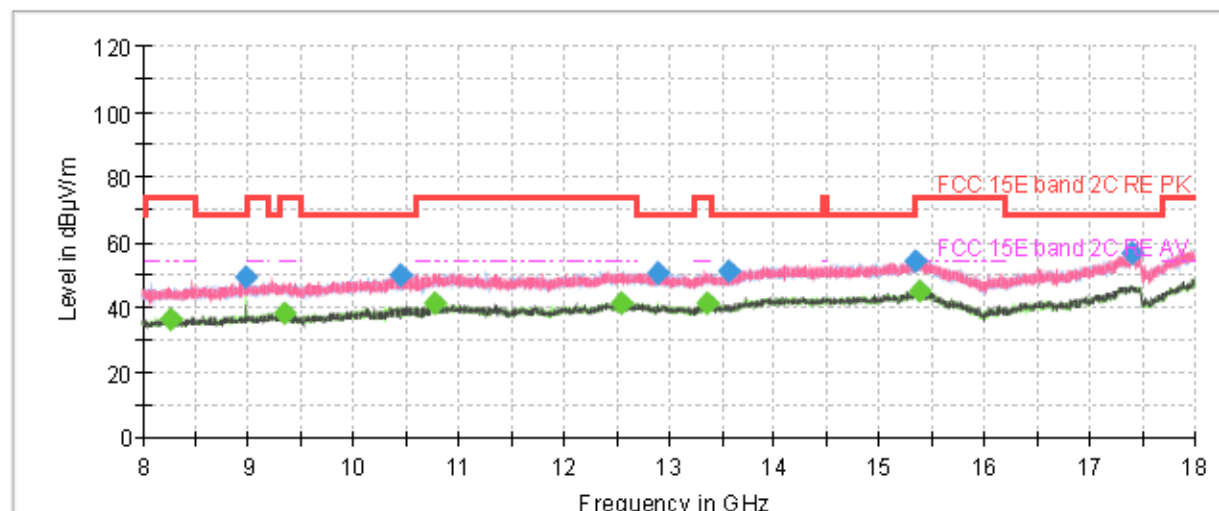


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1022.866667	---	25.59	54.00	28.41	500.0	200.0	V	315.0	-21.0
1285.833333	32.88	---	68.20	35.32	500.0	200.0	V	279.0	-19.8
1672.000000	---	24.71	54.00	29.29	500.0	200.0	H	207.0	-18.8
1762.300000	39.17	---	68.20	29.03	500.0	200.0	V	70.0	-18.6
2419.600000	40.33	---	68.20	27.87	500.0	100.0	V	105.0	-16.5
2498.233333	---	29.78	54.00	24.22	500.0	200.0	H	288.0	-16.3
2949.033333	37.27	---	68.20	30.93	500.0	100.0	V	84.0	-15.9
3999.033333	---	29.01	54.00	24.99	500.0	100.0	V	0.0	-13.3
5284.233333	48.41	---	68.20	19.79	500.0	200.0	V	218.0	-9.1
5374.533333	---	38.33	54.00	15.67	500.0	200.0	V	279.0	-8.7
7736.800000	---	36.61	54.00	17.39	500.0	200.0	V	339.0	-3.6
7981.333333	46.34	---	68.20	21.86	500.0	200.0	H	24.0	-2.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE80) CH138

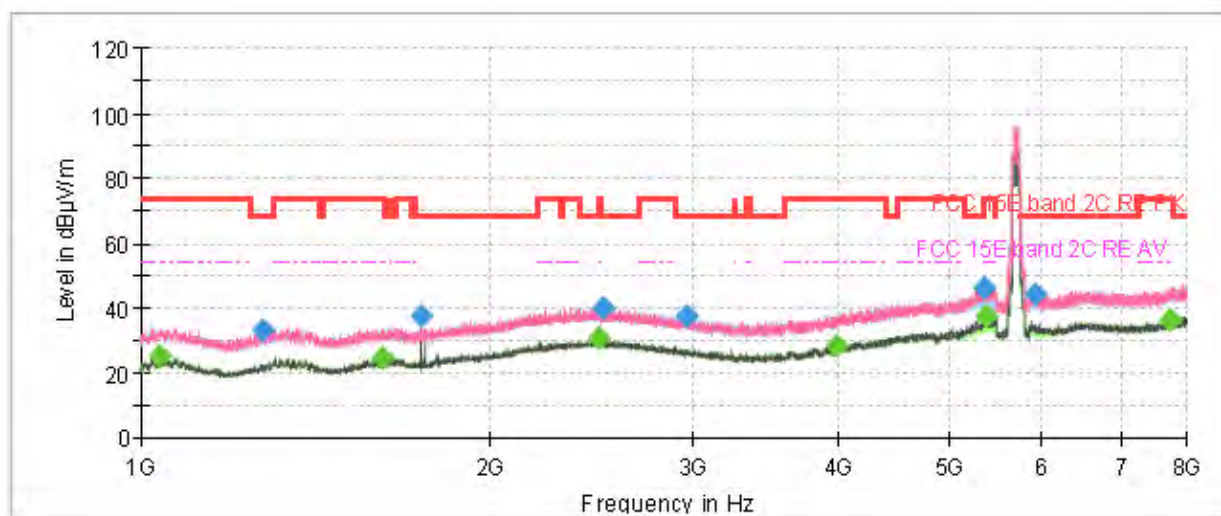

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

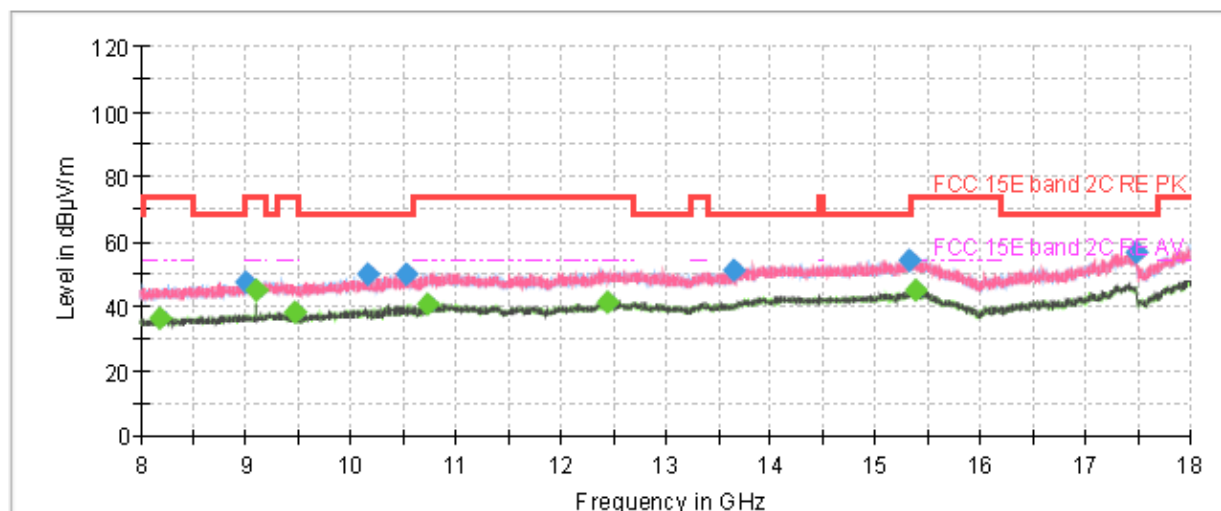


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1038.266667	---	25.27	54.00	28.73	500.0	200.0	H	310.0	-21.0
1272.300000	33.53	---	68.20	34.67	500.0	200.0	H	60.0	-19.9
1617.166667	---	24.67	54.00	29.33	500.0	100.0	H	259.0	-18.9
1748.533333	37.82	---	68.20	30.38	500.0	100.0	H	118.0	-18.6
2487.033333	---	30.61	54.00	23.39	500.0	100.0	V	1.0	-16.3
2501.266667	40.01	---	68.20	28.19	500.0	200.0	V	293.0	-16.3
2955.566667	37.31	---	68.20	30.89	500.0	200.0	H	310.0	-15.9
3982.933333	---	28.02	54.00	25.98	500.0	200.0	V	2.0	-13.4
5348.166667	46.05	---	68.20	22.15	500.0	200.0	V	0.0	-8.7
5370.800000	---	37.48	54.00	16.52	500.0	200.0	V	274.0	-8.7
5907.233333	44.57	---	68.20	23.63	500.0	200.0	V	234.0	-7.3
7746.600000	---	36.48	54.00	17.52	500.0	100.0	V	224.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ax (HE80) CH155

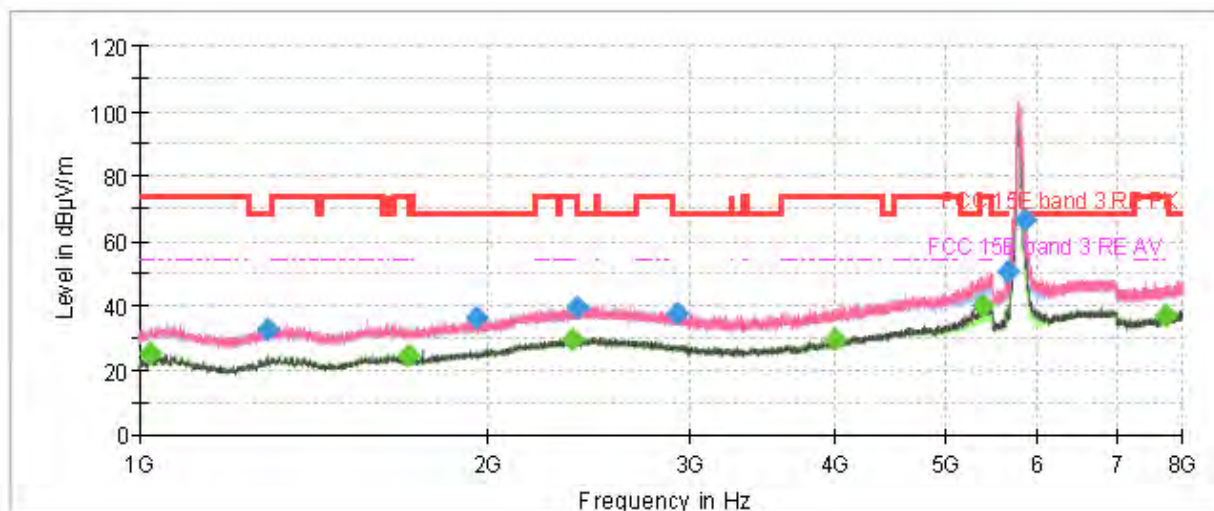

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

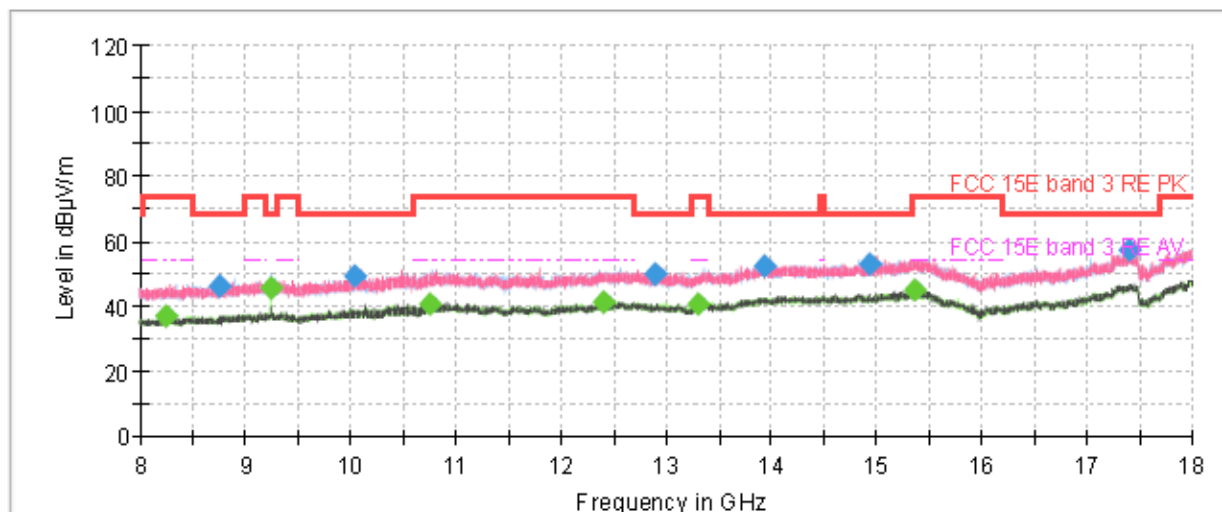

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1022.400000	---	25.07	54.00	28.93	500.0	100.0	H	134.0	-21.0
1292.133333	32.66	---	68.20	35.54	500.0	100.0	H	307.0	-19.8
1708.633333	---	24.71	54.00	29.29	500.0	200.0	V	176.0	-18.6
1958.300000	36.32	---	68.20	31.88	500.0	200.0	V	52.0	-18.4
2372.466667	---	29.71	54.00	24.29	500.0	200.0	H	140.0	-16.6
2393.233333	39.66	---	68.20	28.54	500.0	200.0	V	341.0	-16.5
2925.700000	37.75	---	68.20	30.45	500.0	100.0	V	13.0	-16.0
3999.266667	---	29.34	54.00	24.66	500.0	100.0	H	357.0	-13.3
5364.500000	---	40.21	54.00	13.79	500.0	200.0	V	295.0	-8.7
5645.433333	50.28	---	68.20	17.92	500.0	100.0	H	307.0	-8.0
5850.533333	66.71	---	68.20	1.49	500.0	200.0	V	353.0	-7.4
7733.300000	---	36.87	54.00	17.13	500.0	100.0	H	271.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Galtronics:

Continuous TX mode:

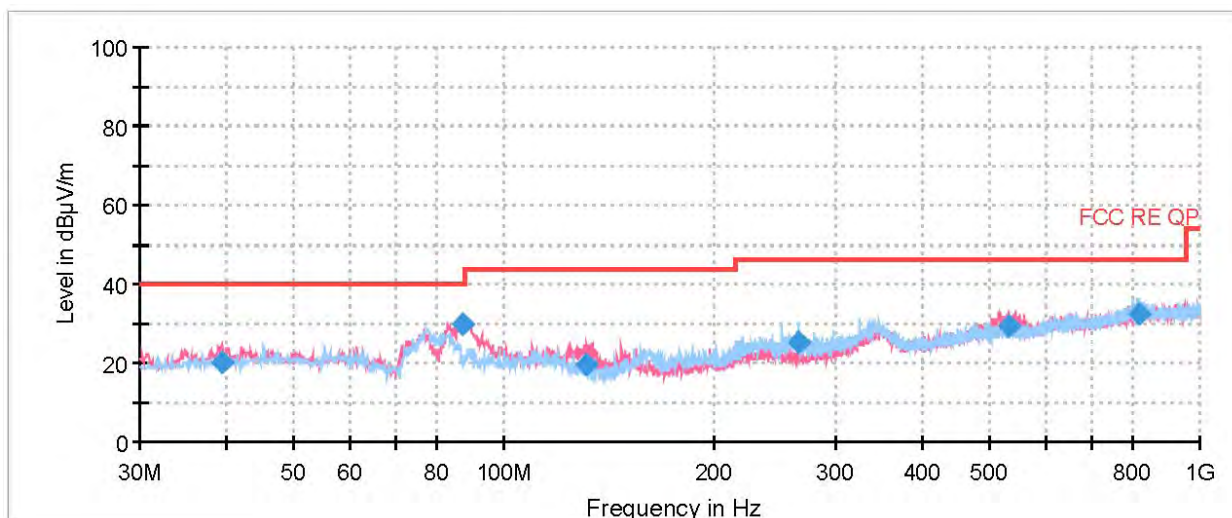


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
39.297500	20.22	121.0	V	274.0	13.5	19.78	40.00
87.632500	29.76	105.0	V	110.0	10.3	10.24	40.00
131.443750	19.26	105.0	V	164.0	9.8	24.24	43.50
265.265000	25.20	105.0	H	86.0	14.1	20.80	46.00
532.175000	29.12	100.0	V	154.0	19.8	16.88	46.00
817.603750	32.30	100.0	H	67.0	23.6	13.70	46.00


Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

802.11a CH36

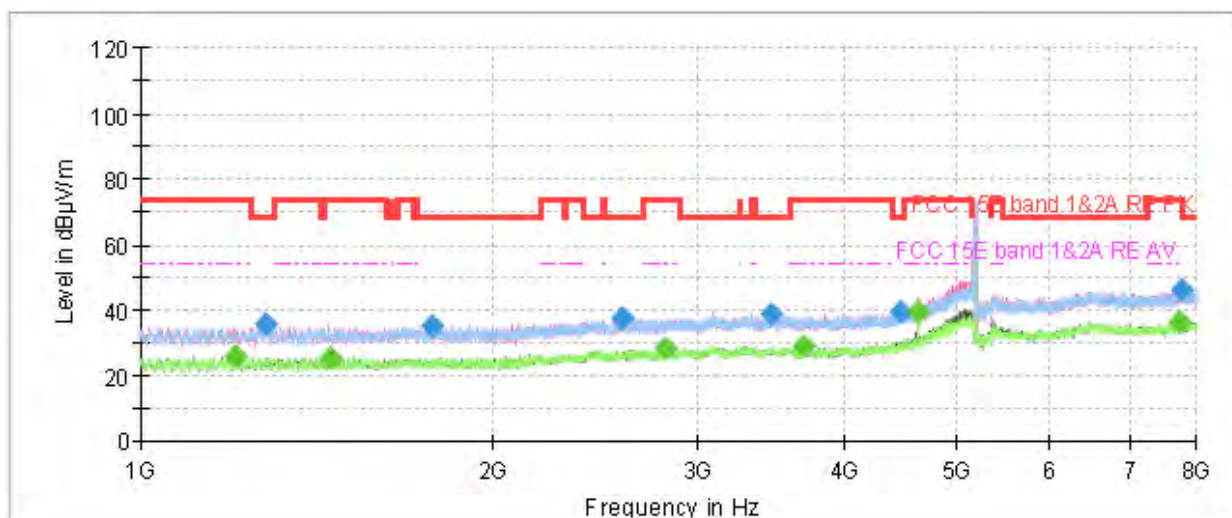

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

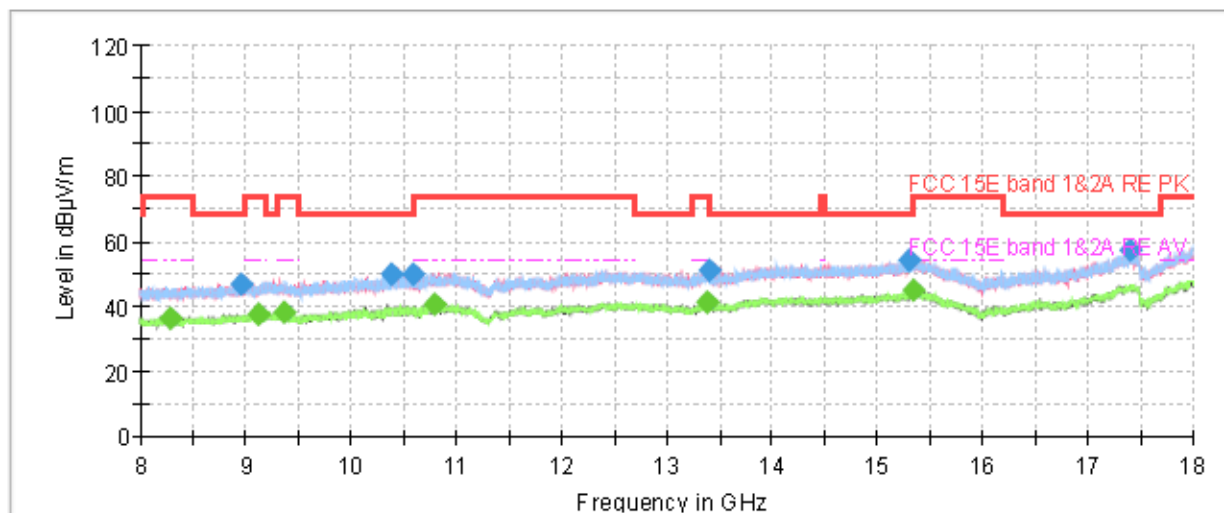


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1206.966667	---	25.59	54.00	28.41	1000.000	200.0	V	86.0	-20.3
1280.233333	35.72	---	68.20	32.48	1000.000	200.0	V	1.0	-19.9
1450.800000	---	25.27	54.00	28.73	1000.000	100.0	H	136.0	-19.4
1773.500000	35.04	---	68.20	33.16	1000.000	200.0	H	123.0	-18.6
2585.733333	37.60	---	68.20	30.60	1000.000	200.0	H	217.0	-16.1
2805.766667	---	28.10	54.00	25.90	1000.000	200.0	H	0.0	-16.0
3463.066667	38.85	---	68.20	29.35	1000.000	200.0	V	22.0	-14.8
3696.400000	---	28.75	54.00	25.25	1000.000	100.0	V	0.0	-14.2
4458.700000	39.19	---	68.20	29.01	1000.000	200.0	V	14.0	-11.6
4625.066667	---	39.46	54.00	14.54	1000.000	200.0	V	60.0	-10.8
7723.966667	---	36.12	54.00	17.88	1000.000	100.0	H	84.0	-3.7
7780.666667	45.95	---	68.20	22.25	1000.000	200.0	V	335.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH40

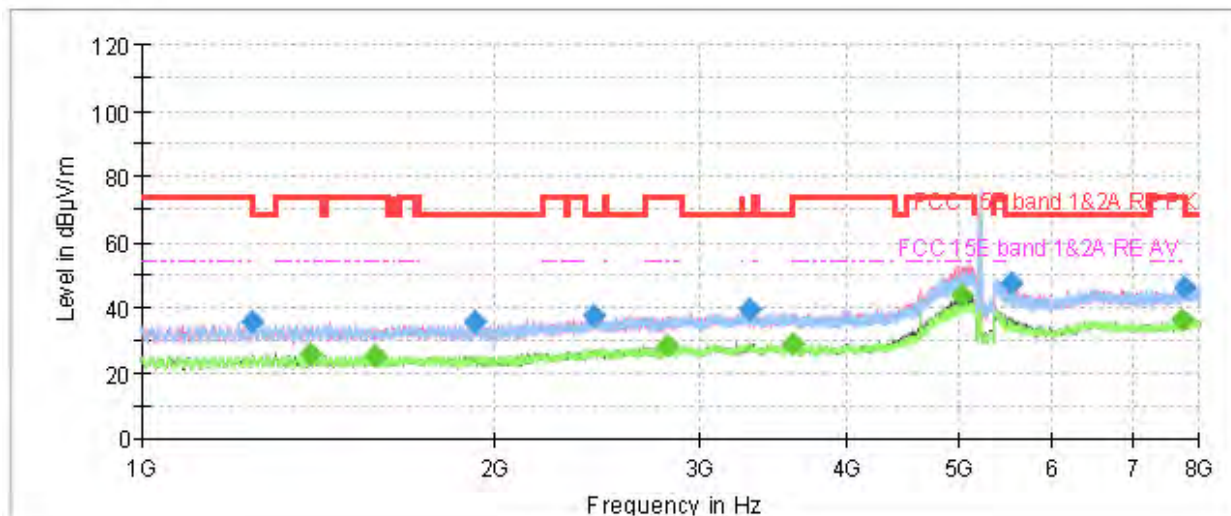

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

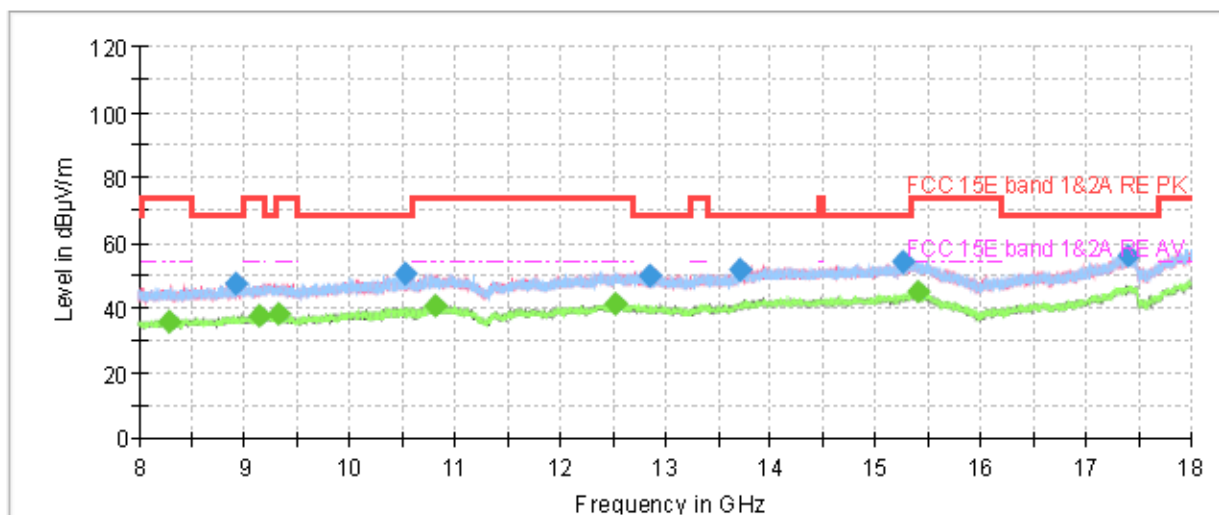


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1243.833333	35.57	---	68.20	32.63	500.0	200.0	H	251.0	-20.0
1394.566667	---	25.96	54.00	28.04	500.0	200.0	H	347.0	-19.6
1583.100000	---	25.42	54.00	28.58	500.0	200.0	H	173.0	-18.9
1921.900000	35.51	---	68.20	32.69	500.0	200.0	H	0.0	-18.3
2431.966667	37.32	---	68.20	30.88	500.0	200.0	V	141.0	-16.5
2807.633333	---	28.05	54.00	25.95	500.0	100.0	V	345.0	-16.0
3307.433333	39.08	---	68.20	29.12	500.0	100.0	V	178.0	-15.1
3602.366667	---	28.73	54.00	25.27	500.0	100.0	H	0.0	-14.4
5002.833333	---	43.70	54.00	10.30	500.0	200.0	V	276.0	-10.3
5526.200000	47.47	---	68.20	20.73	500.0	200.0	V	50.0	-8.4
7743.566667	---	36.17	54.00	17.83	500.0	100.0	V	326.0	-3.6
7776.700000	45.90	---	68.20	22.30	500.0	200.0	V	2.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH48

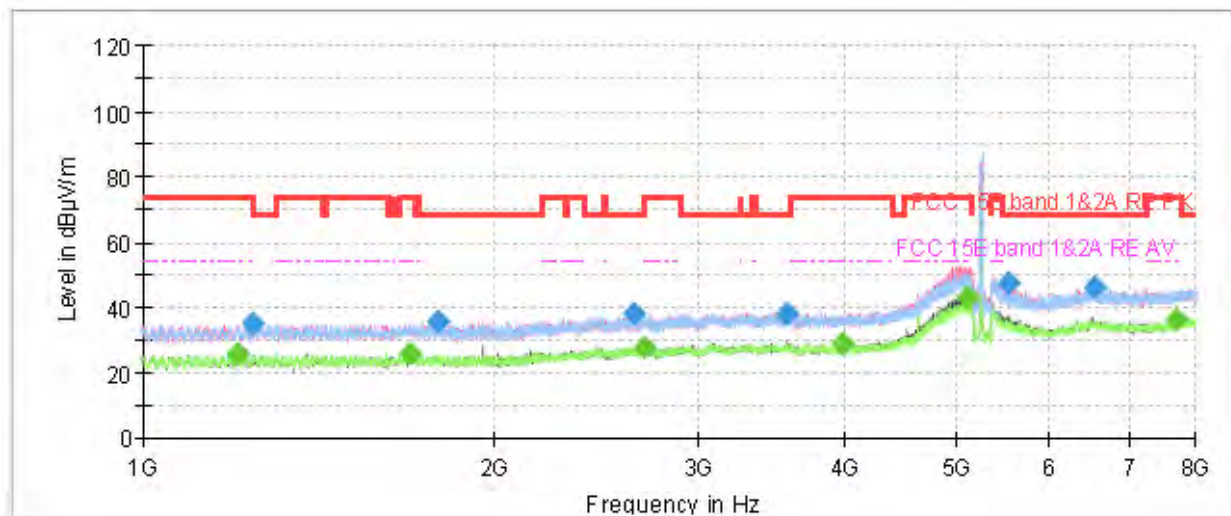

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

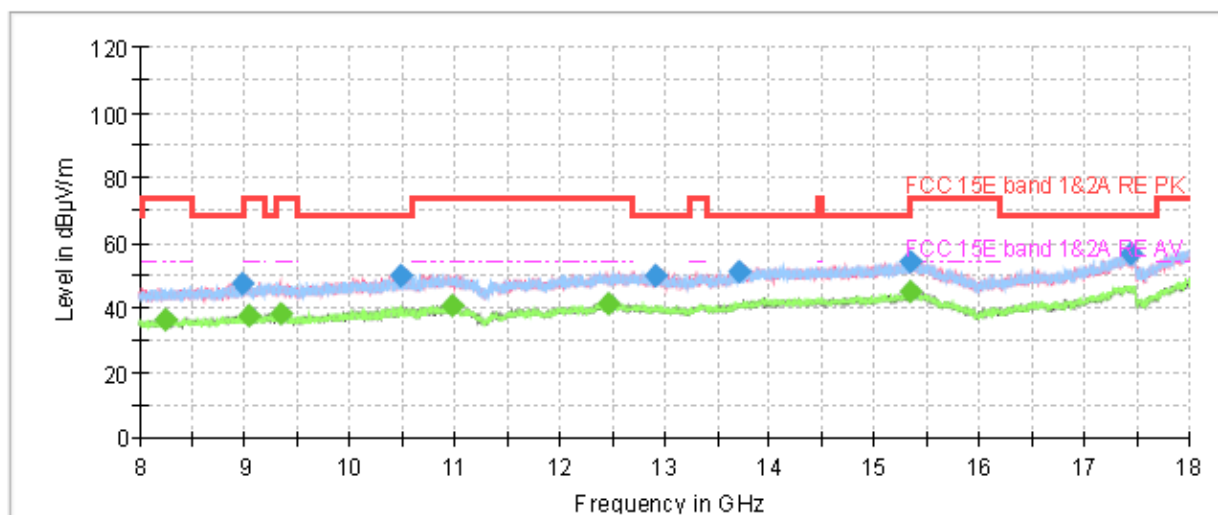


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1207.666667	---	25.99	54.00	28.01	1000.000	200.0	V	104.0	-20.2
1244.066667	35.32	---	68.20	32.88	1000.000	200.0	V	2.0	-20.0
1697.433333	---	25.54	54.00	28.46	1000.000	100.0	H	11.0	-18.6
1792.400000	35.62	---	68.20	32.58	1000.000	100.0	H	39.0	-18.5
2634.033333	38.10	---	68.20	30.10	1000.000	100.0	V	337.0	-16.1
2694.700000	---	27.78	54.00	26.22	1000.000	100.0	V	313.0	-16.1
3564.566667	38.43	---	68.20	29.77	1000.000	100.0	H	131.0	-14.5
3991.100000	---	28.89	54.00	25.11	1000.000	100.0	V	110.0	-13.4
5090.333333	---	43.31	54.00	10.69	1000.000	100.0	V	287.0	-9.7
5514.766667	47.28	---	68.20	20.92	1000.000	200.0	V	104.0	-8.4
6539.333333	46.02	---	68.20	22.18	1000.000	100.0	H	238.0	-3.7
7707.866667	---	36.24	54.00	17.76	1000.000	200.0	H	356.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH52

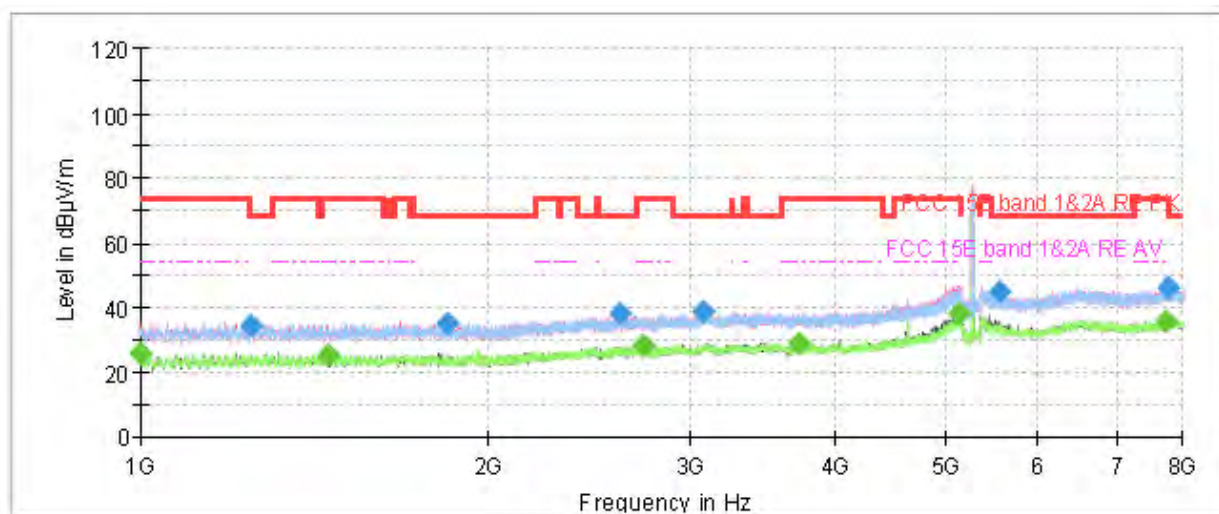

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

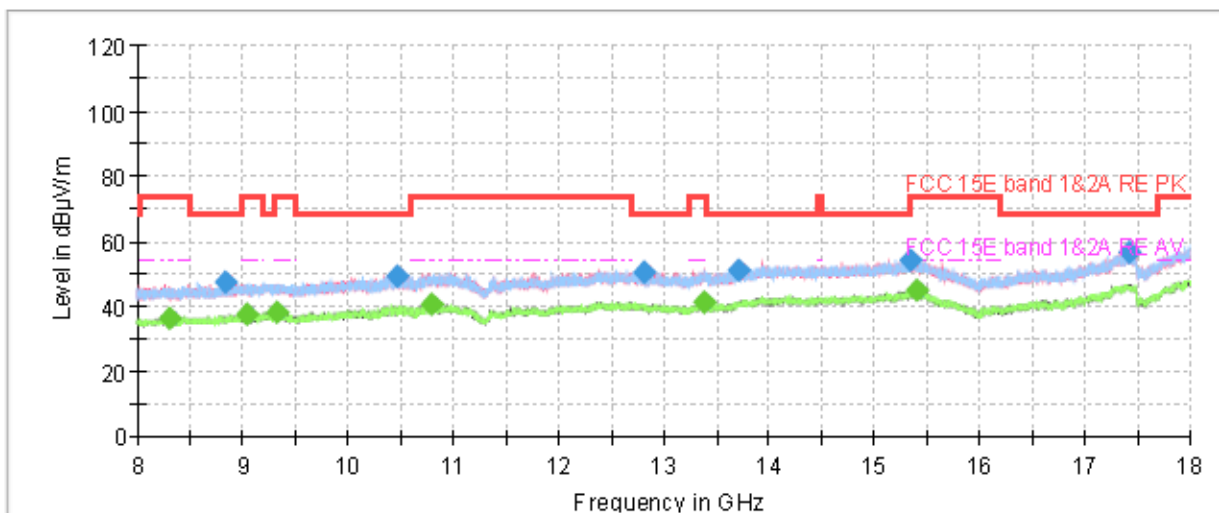


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1001.866667	---	25.68	54.00	28.32	1000.000	100.0	H	143.0	-21.1
1245.933333	34.62	---	68.20	33.58	1000.000	100.0	V	125.0	-20.0
1451.033333	---	25.29	54.00	28.71	1000.000	200.0	V	8.0	-19.4
1848.400000	35.06	---	68.20	33.14	1000.000	200.0	V	150.0	-18.4
2601.600000	37.92	---	68.20	30.28	1000.000	200.0	H	333.0	-16.1
2728.766667	---	28.13	54.00	25.87	1000.000	100.0	H	6.0	-16.1
3070.366667	39.05	---	68.20	29.15	1000.000	200.0	H	309.0	-15.6
3719.266667	---	28.85	54.00	25.15	1000.000	200.0	H	67.0	-14.2
5112.500000	---	38.36	54.00	15.64	1000.000	200.0	V	44.0	-9.6
5540.433333	44.91	---	68.20	23.29	1000.000	200.0	V	111.0	-8.3
7733.300000	---	35.89	54.00	18.11	1000.000	100.0	V	258.0	-3.7
7757.333333	46.38	---	68.20	21.82	1000.000	200.0	H	333.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH60

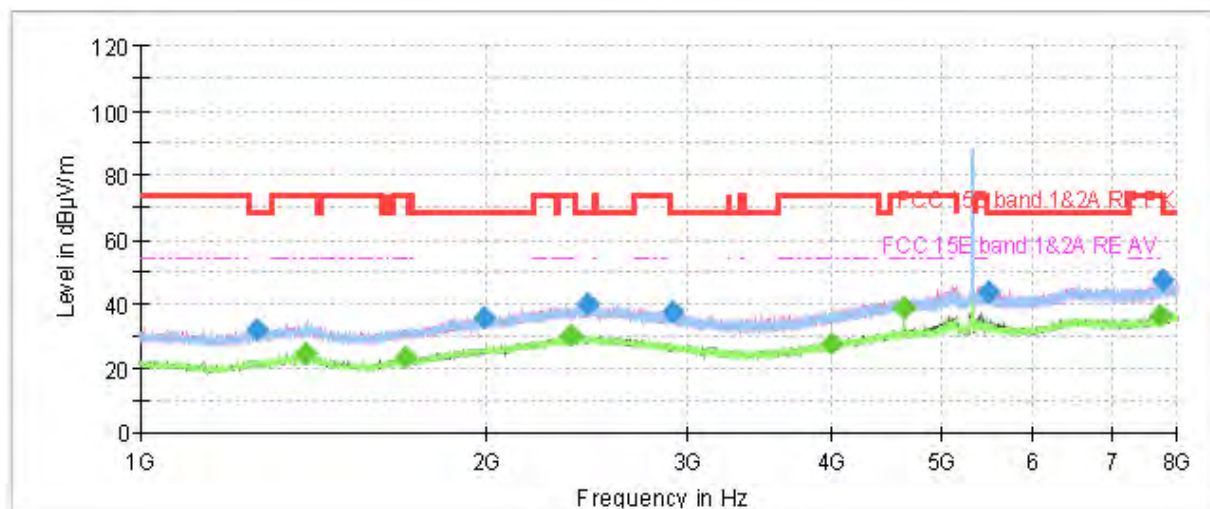

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

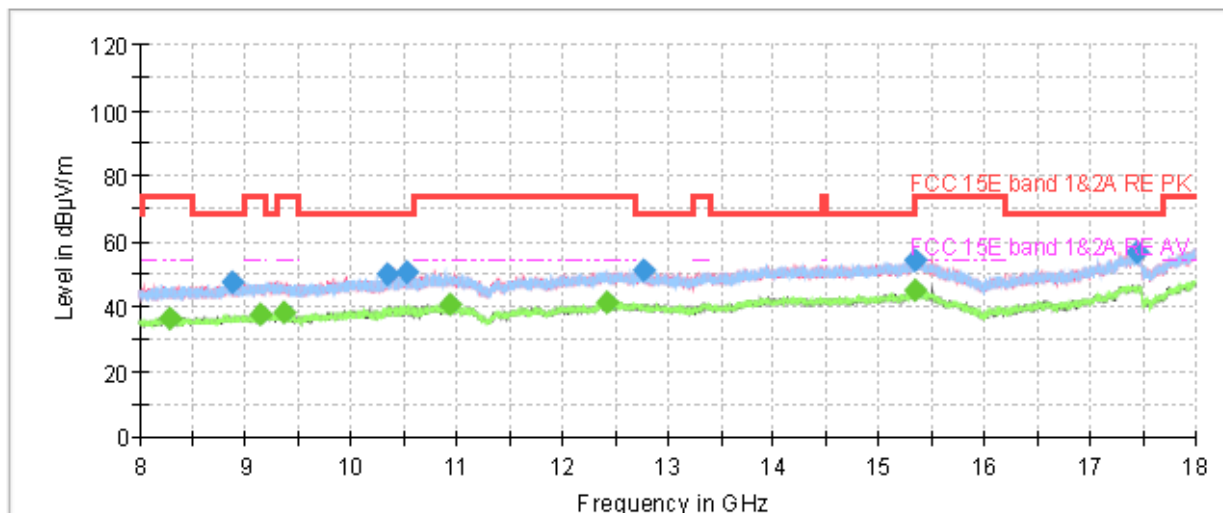


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1265.766667	31.77	---	68.20	36.43	500.0	200.0	H	355.0	-20.0
1393.400000	---	24.57	54.00	29.43	500.0	200.0	H	214.0	-19.6
1701.166667	---	23.52	54.00	30.48	500.0	200.0	H	1.0	-18.6
1989.333333	35.88	---	68.20	32.32	500.0	200.0	V	8.0	-18.2
2368.033333	---	29.97	54.00	24.03	500.0	200.0	V	258.0	-16.6
2452.033333	39.82	---	68.20	28.38	500.0	200.0	H	282.0	-16.4
2903.766667	37.53	---	68.20	30.67	500.0	100.0	V	359.0	-16.1
3994.833333	---	27.94	54.00	26.06	500.0	200.0	V	1.0	-13.3
4624.833333	---	38.58	54.00	15.42	500.0	200.0	V	92.0	-10.8
5470.900000	43.93	---	68.20	24.27	500.0	200.0	H	359.0	-8.6
7748.233333	---	36.22	54.00	17.78	500.0	200.0	V	348.0	-3.6
7770.166667	47.41	---	68.20	20.79	500.0	200.0	V	46.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH64

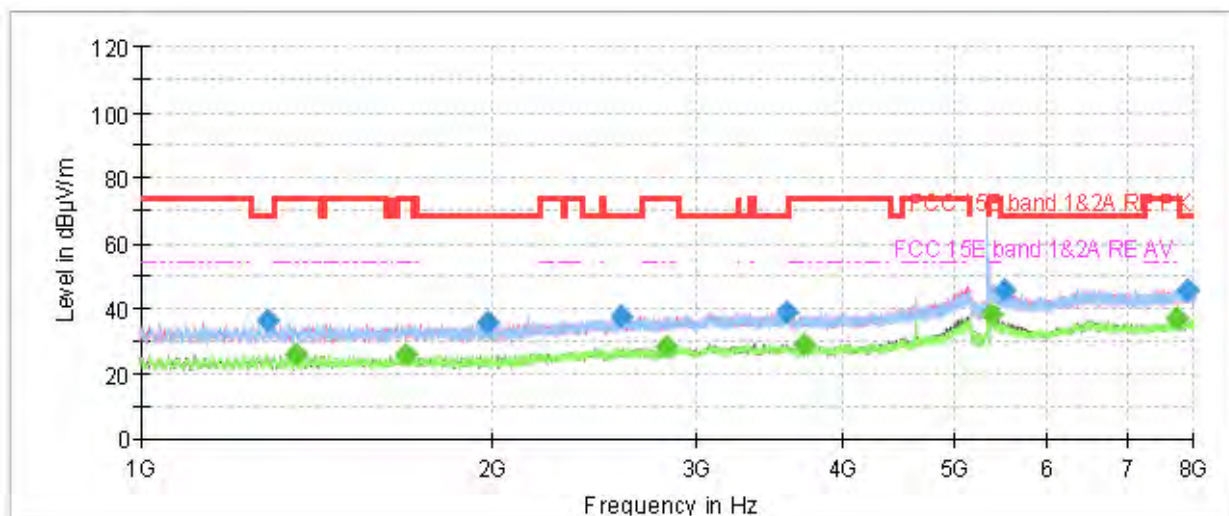

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

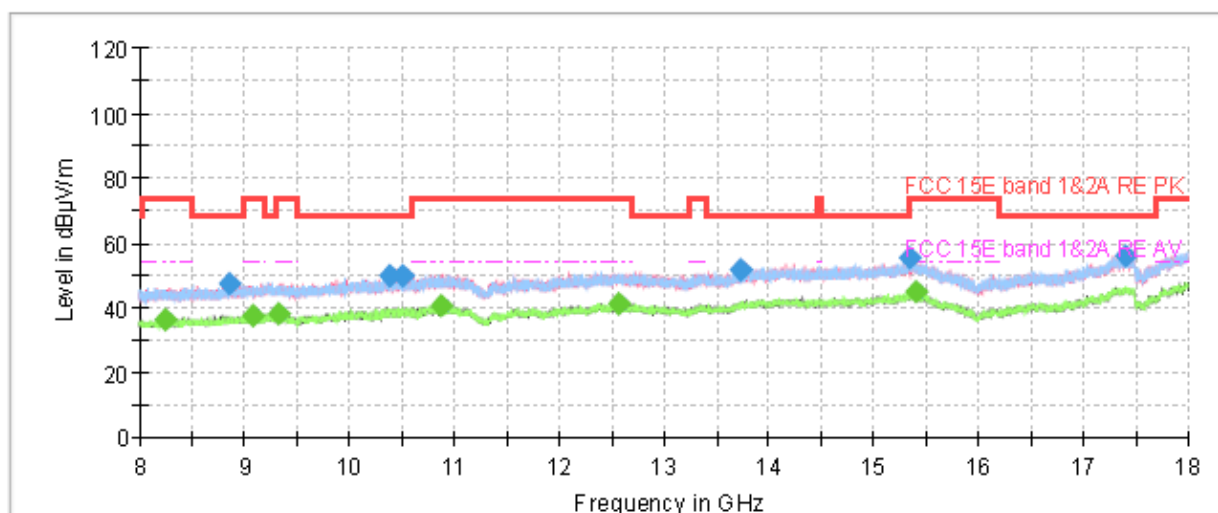


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1284.433333	36.18	---	68.20	32.02	1000.000	100.0	H	247.0	-19.8
1358.400000	---	25.54	54.00	28.46	1000.000	200.0	V	0.0	-19.6
1683.900000	---	25.60	54.00	28.40	1000.000	200.0	H	55.0	-18.7
1979.766667	35.58	---	68.20	32.62	1000.000	200.0	V	8.0	-18.3
2581.300000	37.75	---	68.20	30.45	1000.000	200.0	H	268.0	-16.1
2824.200000	---	28.06	54.00	25.94	1000.000	100.0	H	0.0	-16.1
3578.100000	38.88	---	68.20	29.32	1000.000	200.0	V	14.0	-14.5
3700.366667	---	28.92	54.00	25.08	1000.000	200.0	H	358.0	-14.2
5359.600000	---	38.40	54.00	15.60	1000.000	200.0	H	0.0	-8.7
5503.800000	45.37	---	68.20	22.83	1000.000	200.0	V	98.0	-8.5
7733.300000	---	36.90	54.00	17.10	1000.000	100.0	H	34.0	-3.7
7911.800000	45.75	---	68.20	22.45	1000.000	200.0	H	0.0	-2.9


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH100

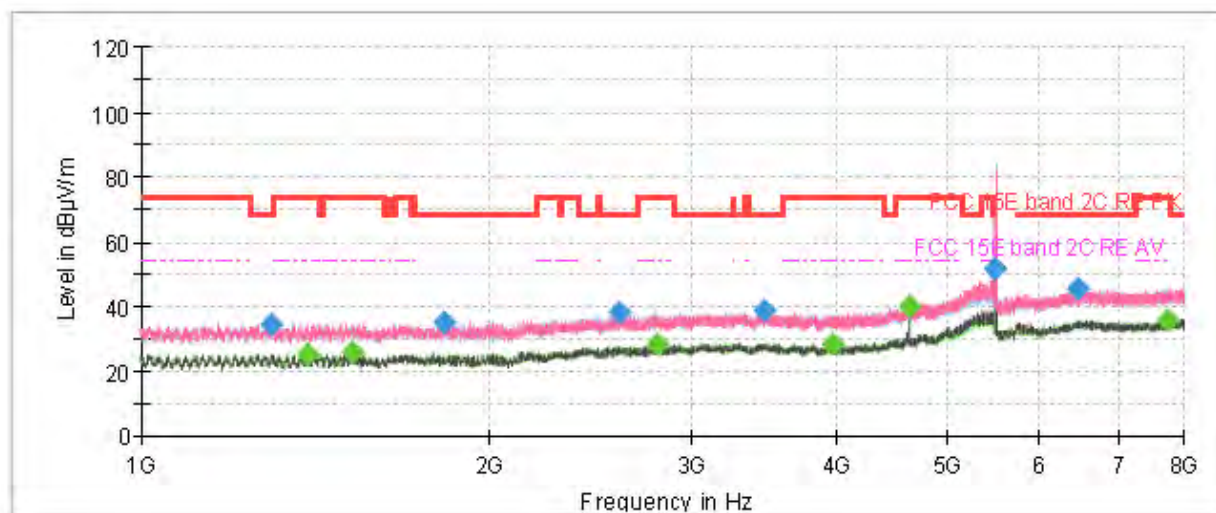

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

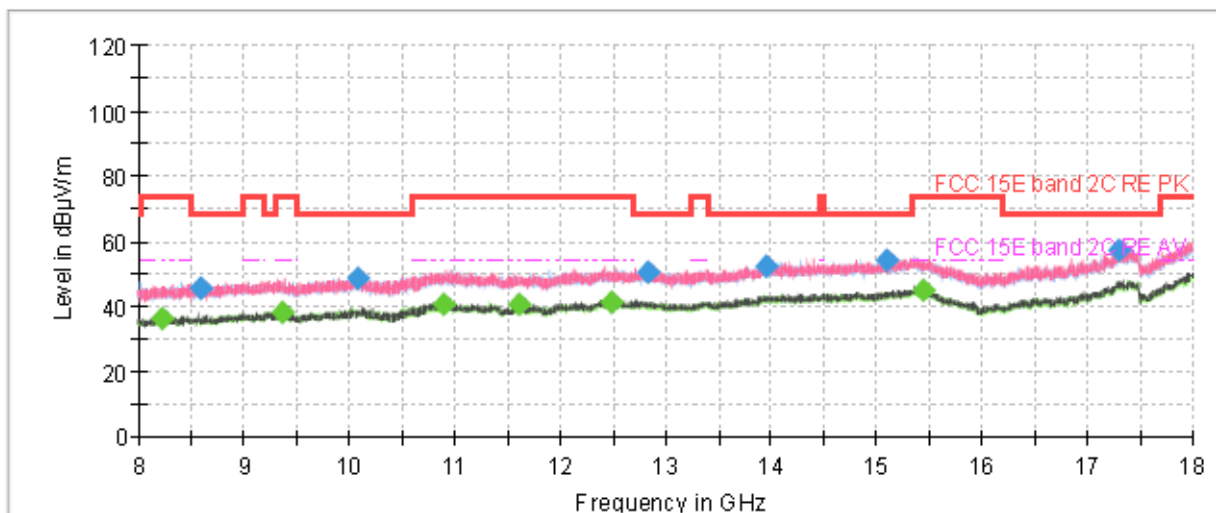


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1294.700000	34.65	---	68.20	33.55	500.0	200.0	H	40.0	-19.8
1393.866667	---	25.30	54.00	28.70	500.0	200.0	V	160.0	-19.6
1525.466667	---	25.95	54.00	28.05	500.0	200.0	H	0.0	-19.0
1827.166667	34.91	---	68.20	33.29	500.0	100.0	V	131.0	-18.5
2592.733333	38.11	---	68.20	30.09	500.0	200.0	H	215.0	-16.1
2801.100000	---	28.43	54.00	25.57	500.0	200.0	H	357.0	-16.0
3464.233333	38.50	---	68.20	29.70	500.0	200.0	V	0.0	-14.8
3963.333333	---	28.44	54.00	25.56	500.0	200.0	V	20.0	-13.5
4625.066667	---	40.26	54.00	13.74	500.0	100.0	V	90.0	-10.8
5469.966667	51.65	---	68.20	16.55	500.0	100.0	V	119.0	-8.6
6463.266667	45.71	---	68.20	22.49	500.0	200.0	H	0.0	-4.0
7737.500000	---	35.60	54.00	18.40	500.0	200.0	V	2.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH120

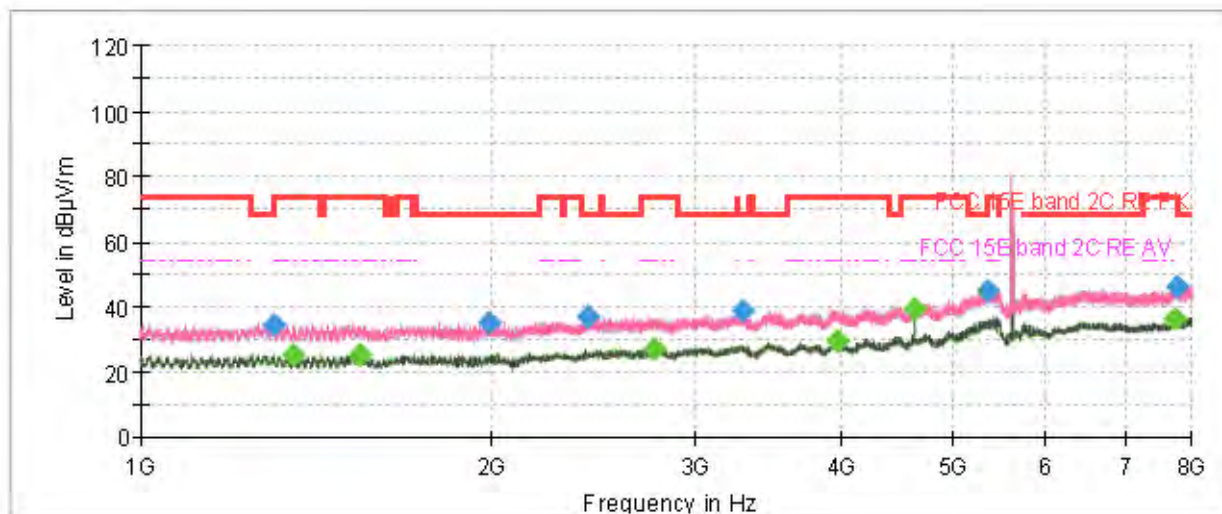

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

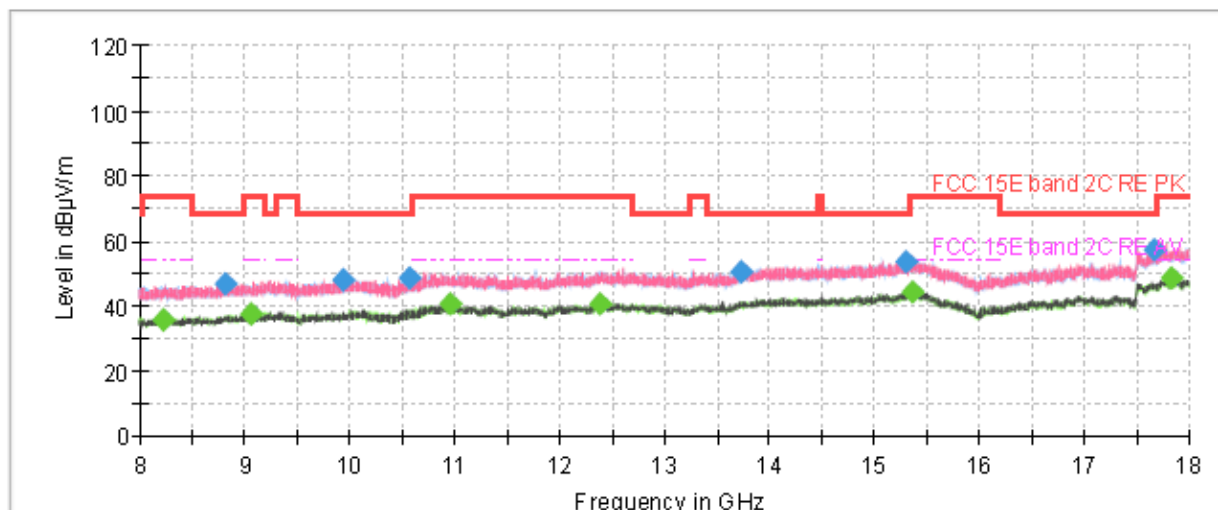


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1299.833333	34.32	---	68.20	33.88	500.0	200.0	V	351.0	-19.8
1355.133333	---	25.26	54.00	28.74	500.0	100.0	V	191.0	-19.6
1540.866667	---	25.39	54.00	28.61	500.0	100.0	V	163.0	-19.0
1994.700000	35.02	---	68.20	33.18	500.0	200.0	V	259.0	-18.2
2426.600000	37.09	---	68.20	31.11	500.0	100.0	H	1.0	-16.5
2763.066667	---	27.12	54.00	26.88	500.0	100.0	H	322.0	-16.1
3287.366667	38.67	---	68.20	29.53	500.0	100.0	V	0.0	-15.0
3965.666667	---	29.68	54.00	24.32	500.0	200.0	H	16.0	-13.5
4625.300000	---	39.08	54.00	14.92	500.0	200.0	V	92.0	-10.8
5347.233333	45.11	---	68.20	23.09	500.0	200.0	V	108.0	-8.7
7726.766667	---	36.41	54.00	17.59	500.0	200.0	H	303.0	-3.7
7767.133333	46.33	---	68.20	21.87	500.0	100.0	H	174.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH140

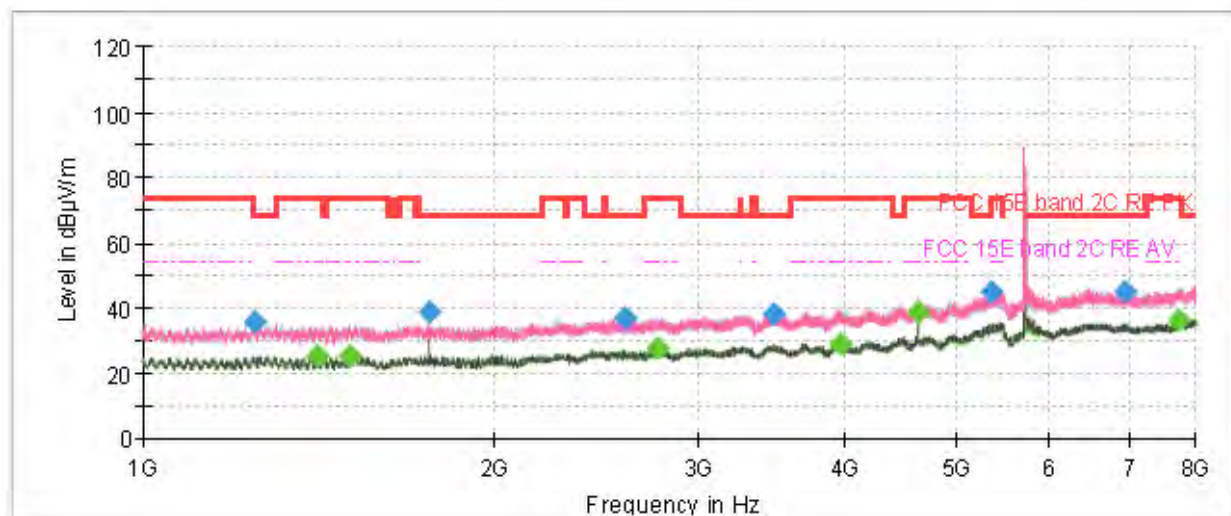

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

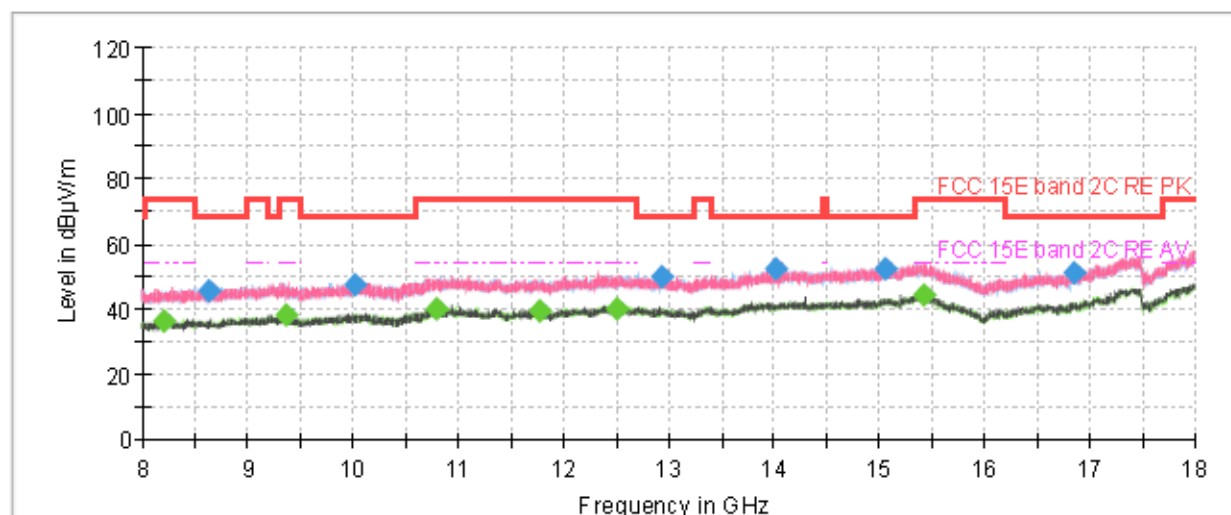


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1245.000000	35.68	---	68.20	32.52	500.0	200.0	V	191.0	-20.0
1412.766667	---	25.21	54.00	28.79	500.0	100.0	H	178.0	-19.4
1506.333333	---	25.38	54.00	28.62	500.0	100.0	H	260.0	-19.1
1763.233333	38.65	---	68.20	29.55	500.0	100.0	V	244.0	-18.6
2592.966667	36.77	---	68.20	31.43	500.0	200.0	H	111.0	-16.1
2762.366667	---	27.85	54.00	26.15	500.0	200.0	H	0.0	-16.1
3474.500000	38.43	---	68.20	29.77	500.0	100.0	H	346.0	-14.7
3963.333333	---	29.18	54.00	24.82	500.0	200.0	H	0.0	-13.5
4625.066667	---	38.70	54.00	15.30	500.0	200.0	V	92.0	-10.8
5331.366667	45.12	---	68.20	23.08	500.0	200.0	V	164.0	-8.8
6939.733333	45.00	---	68.20	23.20	500.0	200.0	V	164.0	-3.8
7719.300000	---	36.39	54.00	17.61	500.0	100.0	H	0.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH149

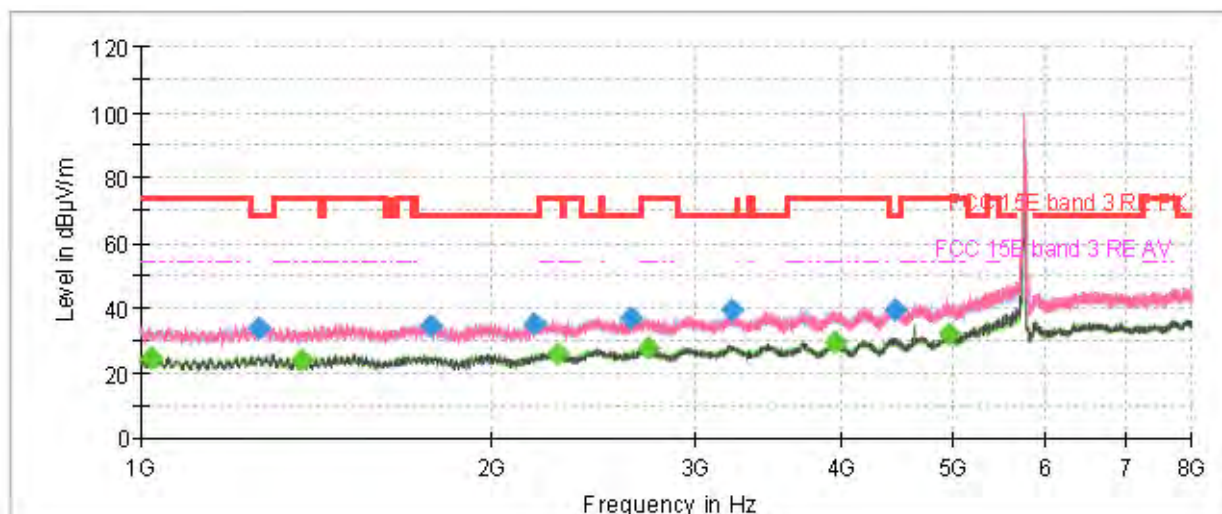

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

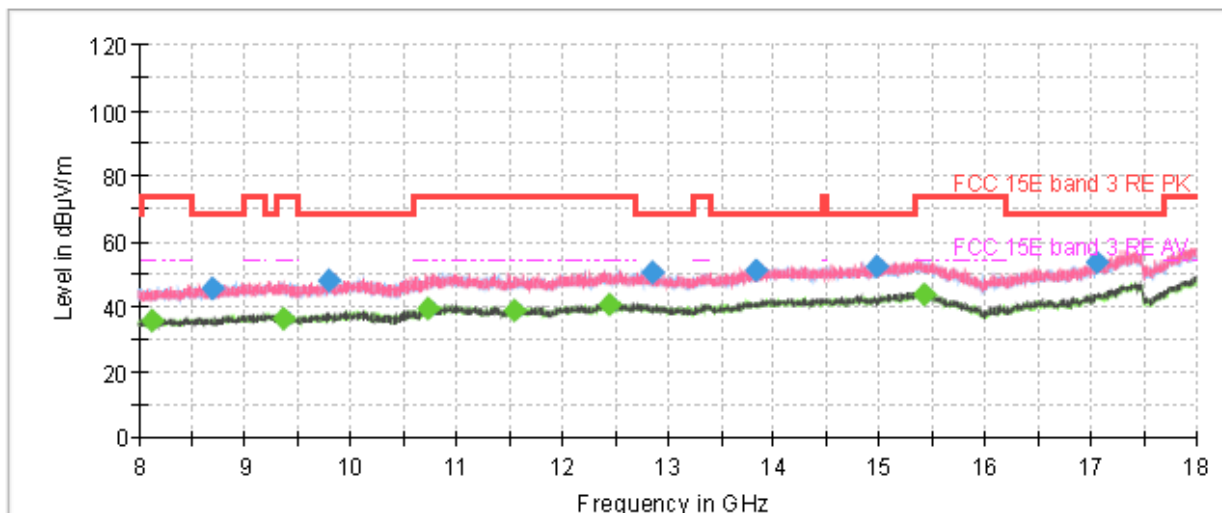


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1020.066667	---	24.73	54.00	29.27	500.0	200.0	H	97.0	-21.0
1262.966667	33.58	---	68.20	34.62	500.0	100.0	H	214.0	-20.0
1375.433333	---	24.15	54.00	29.85	500.0	200.0	H	166.0	-19.6
1774.433333	34.67	---	68.20	33.53	500.0	100.0	V	3.0	-18.6
2181.133333	35.24	---	68.20	32.96	500.0	100.0	H	344.0	-17.3
2279.366667	---	25.85	54.00	28.15	500.0	200.0	H	179.0	-17.0
2638.466667	36.70	---	68.20	31.50	500.0	200.0	H	234.0	-16.1
2727.133333	---	27.71	54.00	26.29	500.0	100.0	H	354.0	-16.1
3221.100000	39.30	---	68.20	28.90	500.0	100.0	V	0.0	-15.1
3947.466667	---	29.27	54.00	24.73	500.0	100.0	V	64.0	-13.6
4454.966667	39.65	---	68.20	28.55	500.0	100.0	H	131.0	-11.6
4944.733333	---	31.90	54.00	22.10	500.0	200.0	H	261.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH157

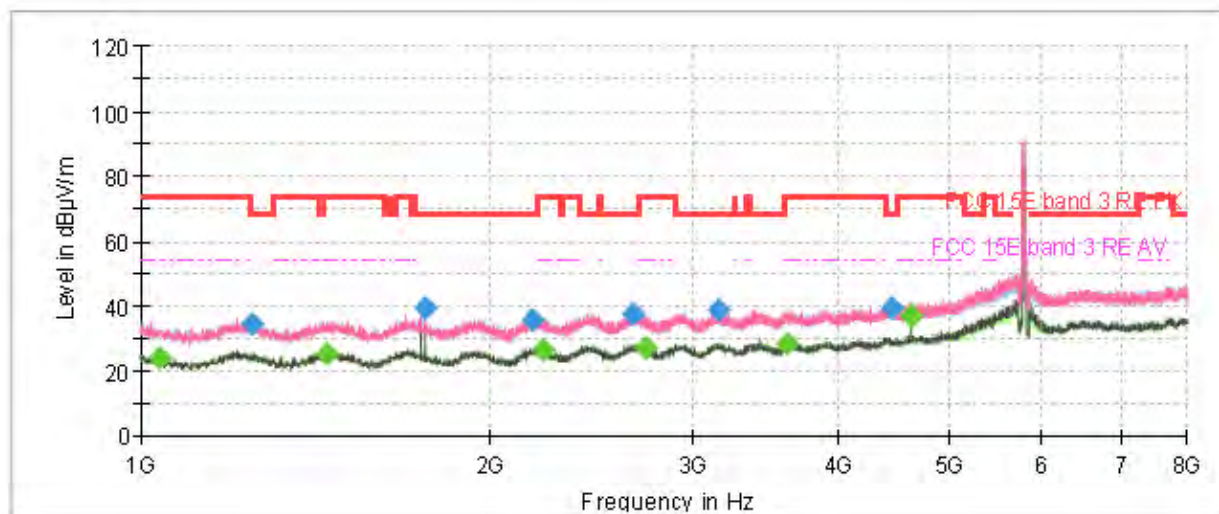

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

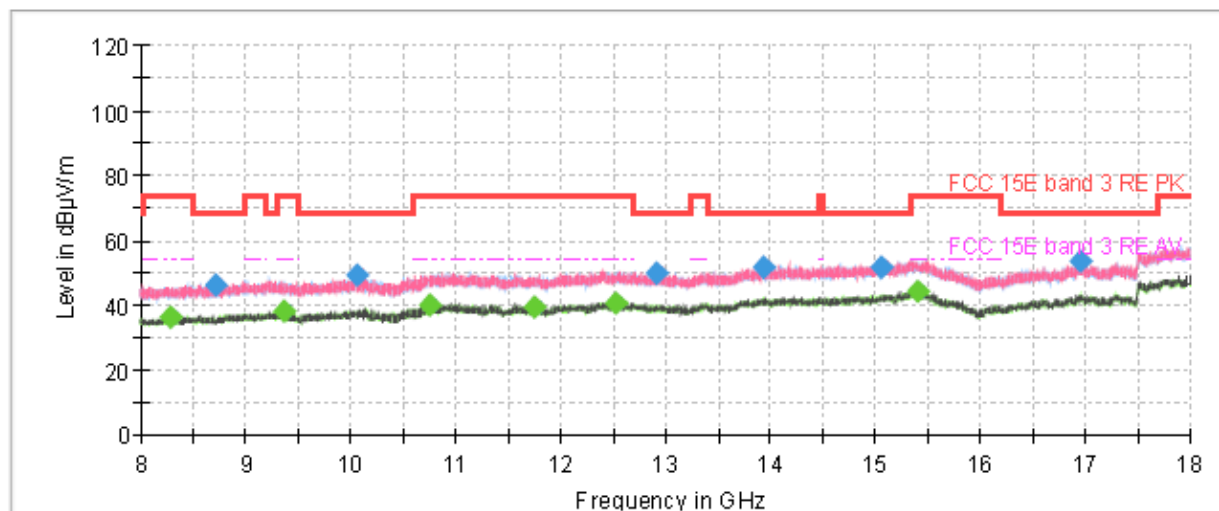


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1038.966667	---	24.12	54.00	29.88	500.0	100.0	H	167.0	-21.0
1249.433333	34.59	---	68.20	33.61	500.0	100.0	V	92.0	-20.0
1445.666667	---	25.48	54.00	28.52	500.0	200.0	H	220.0	-19.3
1763.233333	39.35	---	68.20	28.85	500.0	100.0	V	173.0	-18.6
2178.566667	35.74	---	68.20	32.46	500.0	200.0	H	220.0	-17.4
2222.900000	---	26.51	54.00	27.49	500.0	100.0	H	266.0	-17.3
2659.233333	37.53	---	68.20	30.67	500.0	100.0	H	358.0	-16.0
2730.866667	---	26.93	54.00	27.07	500.0	200.0	V	321.0	-16.1
3146.666667	38.50	---	68.20	29.70	500.0	200.0	H	12.0	-15.4
3611.000000	---	28.56	54.00	25.44	500.0	100.0	V	27.0	-14.4
4449.600000	39.45	---	68.20	28.75	500.0	200.0	V	213.0	-11.6
4625.066667	---	36.99	54.00	17.01	500.0	200.0	H	164.0	-10.8


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH165

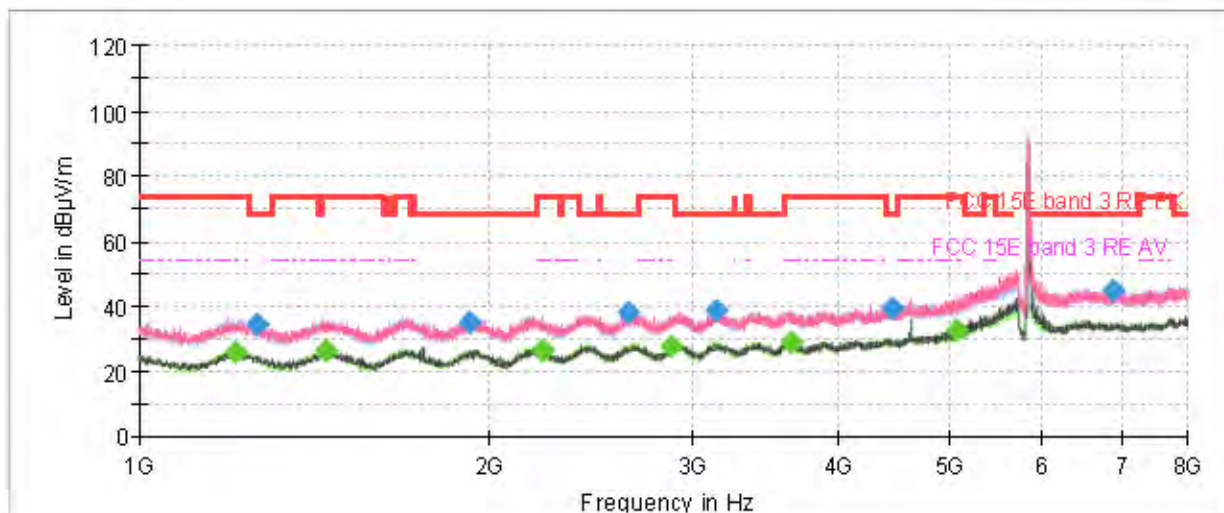

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

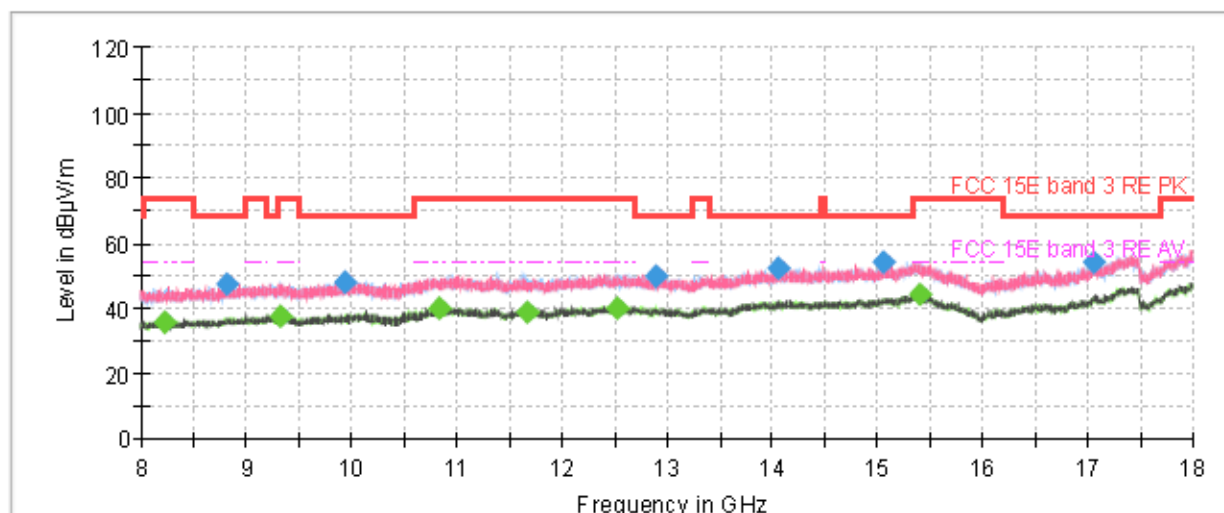


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1212.566667	---	25.92	54.00	28.08	500.0	100.0	H	340.0	-20.2
1265.066667	34.51	---	68.20	33.69	500.0	100.0	V	15.0	-20.0
1449.633333	---	26.31	54.00	27.69	500.0	100.0	H	356.0	-19.4
1928.200000	35.35	---	68.20	32.85	500.0	100.0	H	127.0	-18.3
2220.566667	---	26.63	54.00	27.37	500.0	200.0	H	274.0	-17.3
2641.733333	38.41	---	68.20	29.79	500.0	100.0	H	223.0	-16.1
2876.933333	---	27.47	54.00	26.53	500.0	100.0	H	141.0	-16.0
3134.766667	38.50	---	68.20	29.70	500.0	200.0	H	16.0	-15.5
3639.933333	---	29.15	54.00	24.85	500.0	100.0	H	0.0	-14.4
4447.033333	39.08	---	68.20	29.12	500.0	200.0	H	176.0	-11.6
5062.333333	---	32.45	54.00	21.55	500.0	200.0	V	175.0	-9.8
6891.666667	44.86	---	68.20	23.34	500.0	100.0	V	0.0	-3.8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH36

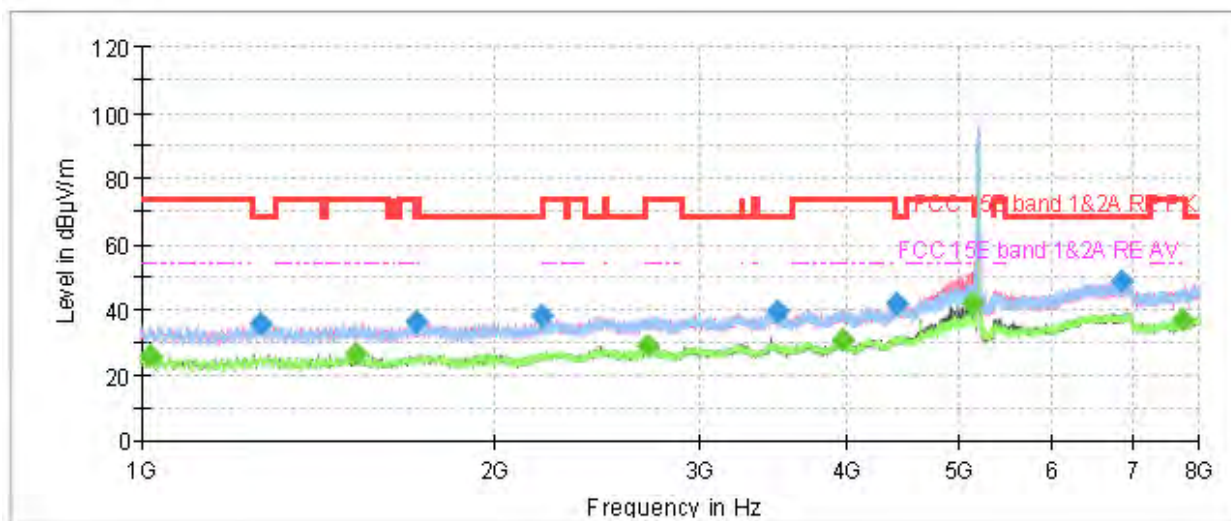

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

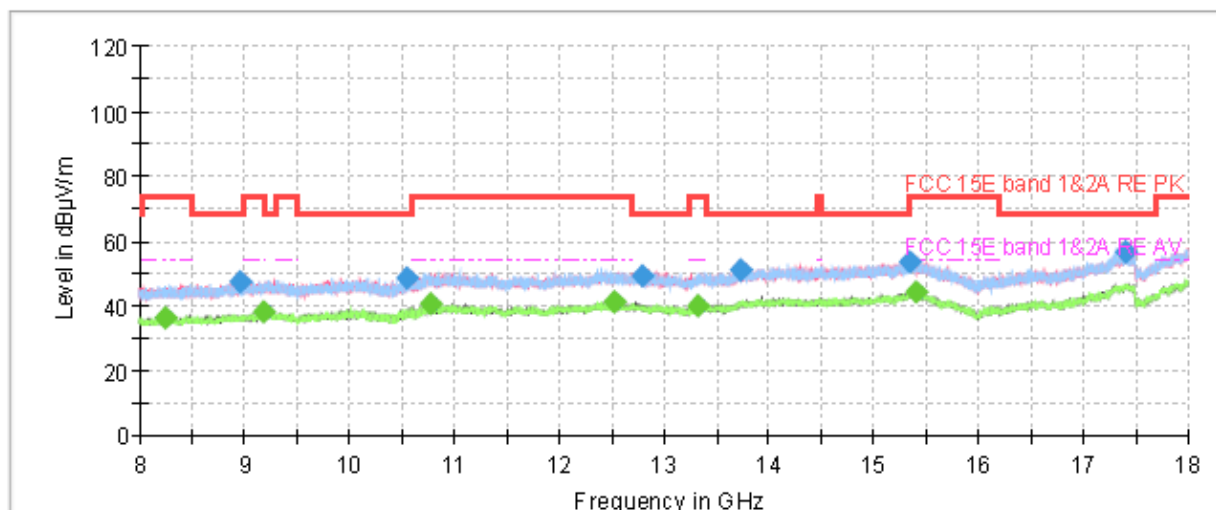


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1017.733333	---	25.72	54.00	28.28	500.0	200.0	H	313.0	-21.0
1261.333333	35.63	---	68.20	32.57	500.0	200.0	H	11.0	-20.0
1525.466667	---	26.35	54.00	27.65	500.0	200.0	V	69.0	-19.0
1717.266667	36.08	---	68.20	32.12	500.0	200.0	H	298.0	-18.6
2195.600000	38.20	---	68.20	30.00	500.0	100.0	H	4.0	-17.3
2708.466667	---	28.71	54.00	25.29	500.0	100.0	H	137.0	-16.1
3496.666667	39.66	---	68.20	28.54	500.0	100.0	H	68.0	-14.6
3963.333333	---	30.52	54.00	23.48	500.0	100.0	H	12.0	-13.5
4418.566667	41.64	---	68.20	26.56	500.0	100.0	H	41.0	-11.7
5109.233333	---	41.98	54.00	12.02	500.0	100.0	V	295.0	-9.6
6867.866667	48.56	---	68.20	19.64	500.0	100.0	H	4.0	-3.8
7733.300000	---	36.73	54.00	17.27	500.0	100.0	H	2.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH40

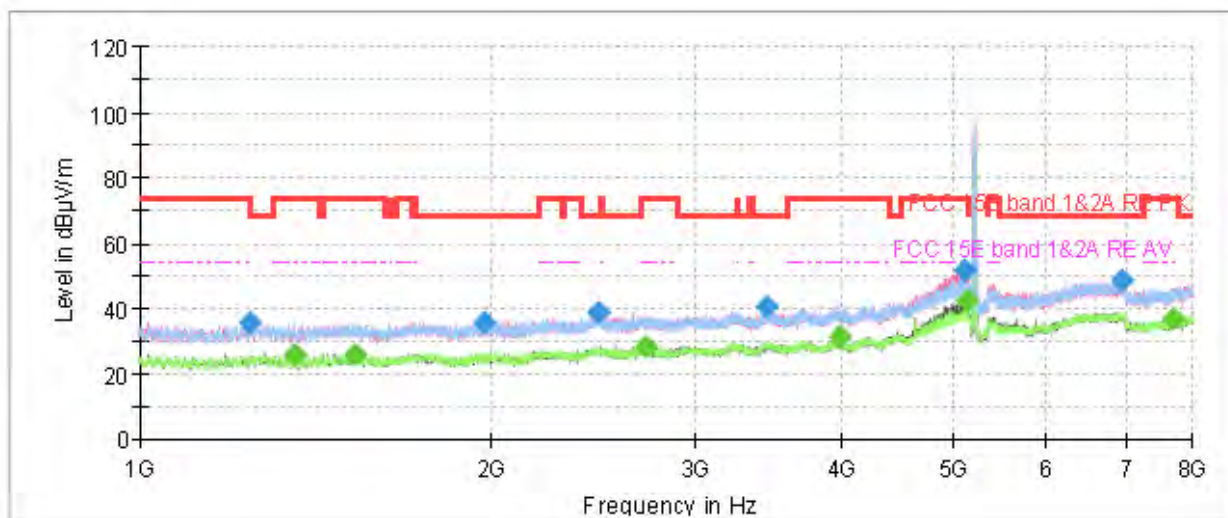

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

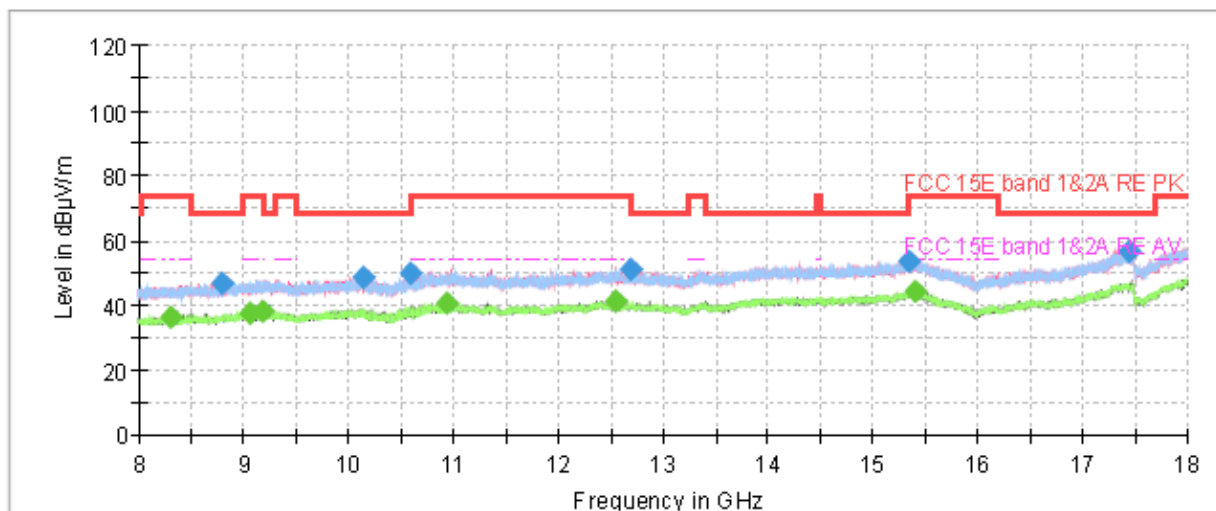


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1243.366667	35.59	---	68.20	32.61	500.0	100.0	H	2.0	-20.0
1355.600000	---	25.74	54.00	28.26	500.0	200.0	V	69.0	-19.6
1527.100000	---	25.86	54.00	28.14	500.0	200.0	V	124.0	-19.0
1975.100000	35.98	---	68.20	32.22	500.0	100.0	V	104.0	-18.3
2471.633333	38.84	---	68.20	29.36	500.0	100.0	H	10.0	-16.3
2711.033333	---	28.40	54.00	25.60	500.0	200.0	V	240.0	-16.1
3441.366667	40.78	---	68.20	27.42	500.0	200.0	H	355.0	-14.8
3984.566667	---	31.14	54.00	22.86	500.0	100.0	H	211.0	-13.4
5105.266667	51.66	---	74.00	22.34	500.0	100.0	V	294.0	-9.6
5113.666667	---	42.22	54.00	11.78	500.0	100.0	V	294.0	-9.6
6952.800000	48.40	---	68.20	19.80	500.0	100.0	H	166.0	-3.8
7711.600000	---	36.99	54.00	17.01	500.0	200.0	H	355.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH48

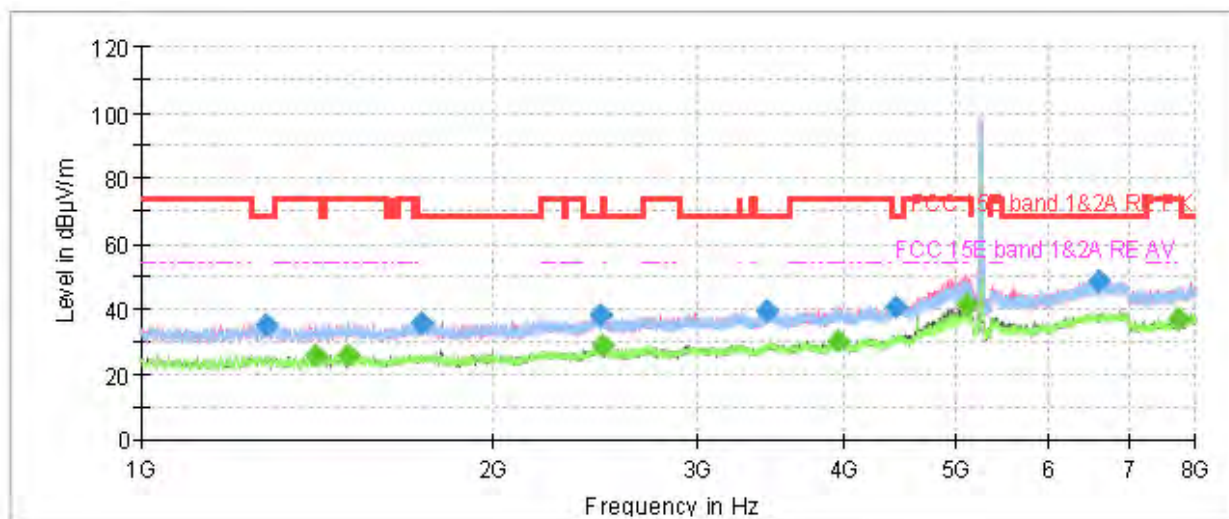

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

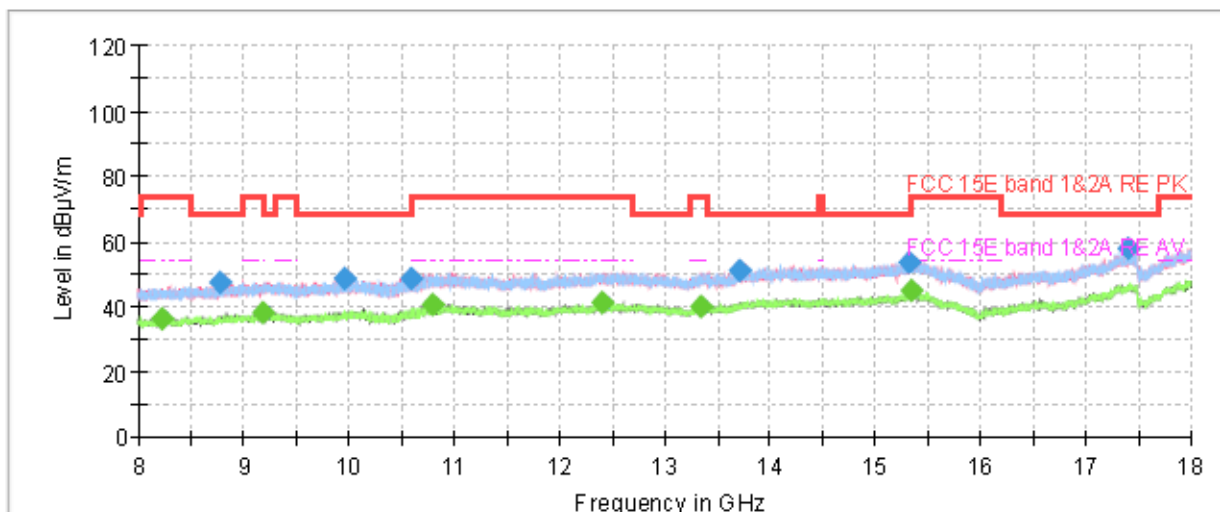


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1281.866667	35.37	---	68.20	32.83	500.0	200.0	H	351.0	-19.9
1413.233333	---	25.89	54.00	28.11	500.0	200.0	H	324.0	-19.4
1505.866667	---	25.86	54.00	28.14	500.0	200.0	V	64.0	-19.1
1735.466667	35.98	---	68.20	32.22	500.0	200.0	H	112.0	-18.6
2469.533333	37.99	---	68.20	30.21	500.0	200.0	H	309.0	-16.3
2486.100000	---	28.76	54.00	25.24	500.0	100.0	V	358.0	-16.3
3427.366667	39.45	---	68.20	28.75	500.0	100.0	H	0.0	-14.7
3950.500000	---	30.43	54.00	23.57	500.0	100.0	V	340.0	-13.5
4426.733333	40.83	---	68.20	27.37	500.0	100.0	V	348.0	-11.7
5105.266667	---	41.40	54.00	12.60	500.0	100.0	V	302.0	-9.6
6603.266667	48.64	---	68.20	19.56	500.0	200.0	V	166.0	-3.6
7720.000000	---	36.85	54.00	17.15	500.0	100.0	H	319.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH52

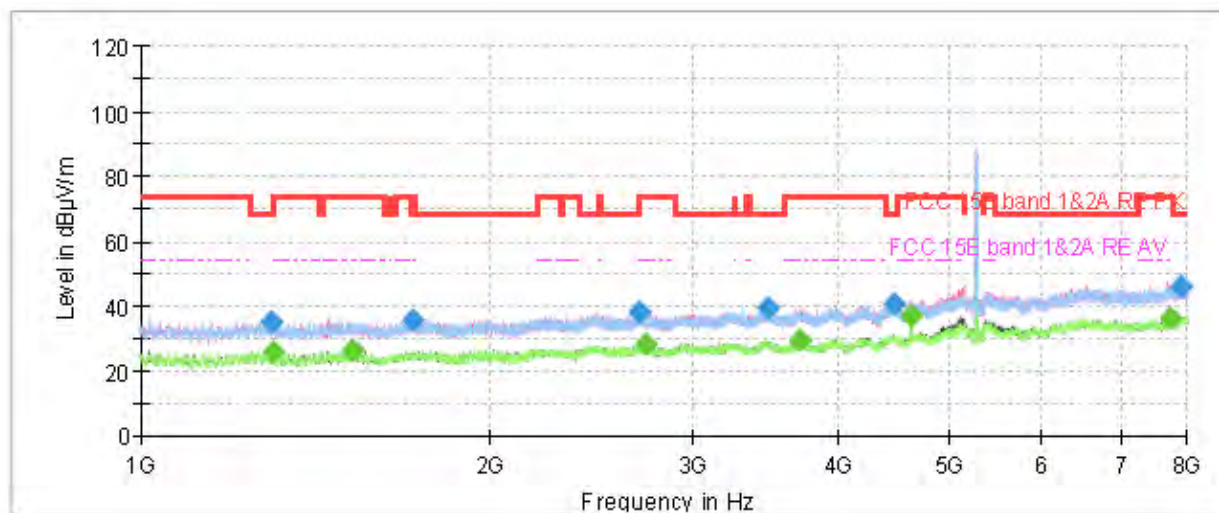

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

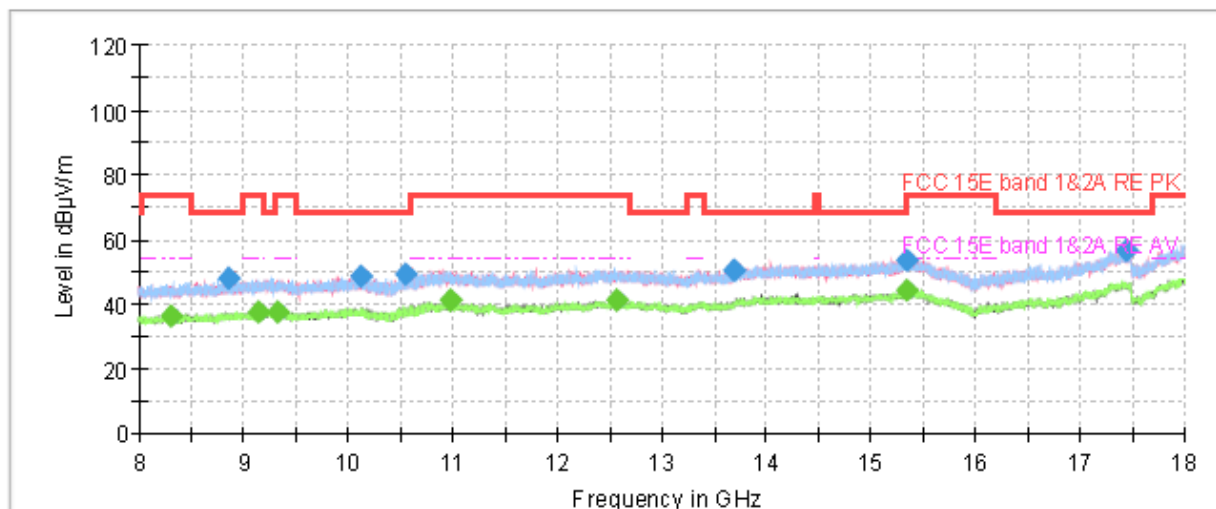


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1297.966667	34.92	---	68.20	33.28	500.0	100.0	H	55.0	-19.8
1300.533333	---	25.89	54.00	28.11	500.0	200.0	H	293.0	-19.8
1524.300000	---	26.26	54.00	27.74	500.0	100.0	H	109.0	-19.0
1717.033333	35.85	---	68.20	32.35	500.0	200.0	V	0.0	-18.6
2688.166667	37.93	---	68.20	30.27	500.0	200.0	H	0.0	-16.1
2728.766667	---	28.03	54.00	25.97	500.0	100.0	H	190.0	-16.1
3478.466667	39.35	---	68.20	28.85	500.0	200.0	H	42.0	-14.7
3702.700000	---	29.73	54.00	24.27	500.0	100.0	H	349.0	-14.2
4468.500000	40.88	---	68.20	27.32	500.0	200.0	V	92.0	-11.5
4625.300000	---	36.84	54.00	17.16	500.0	200.0	H	156.0	-10.8
7717.900000	---	36.49	54.00	17.51	500.0	200.0	H	349.0	-3.7
7912.500000	46.07	---	68.20	22.13	500.0	200.0	H	56.0	-2.9

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH60

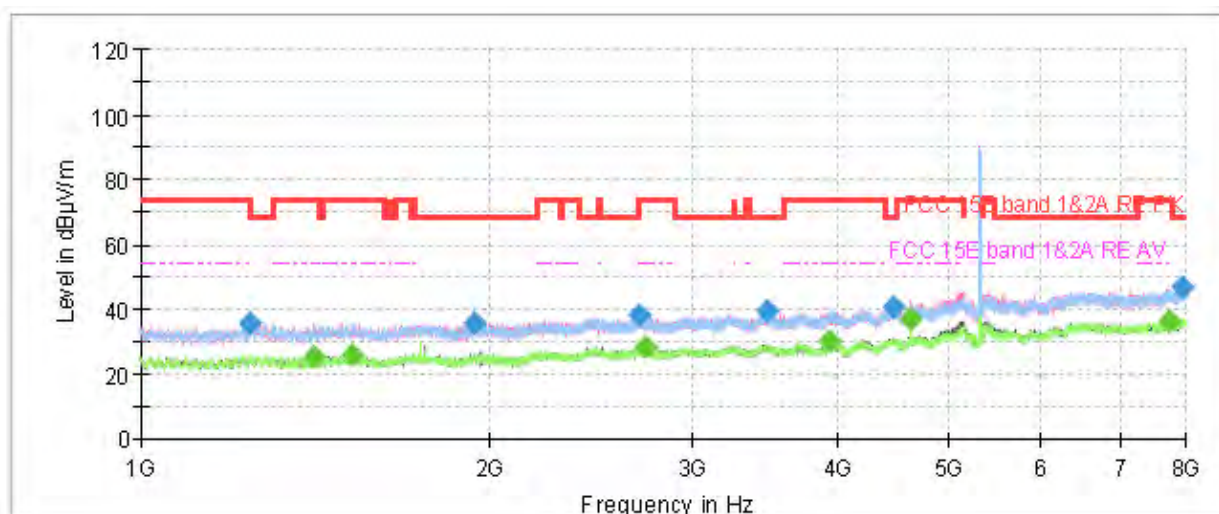

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

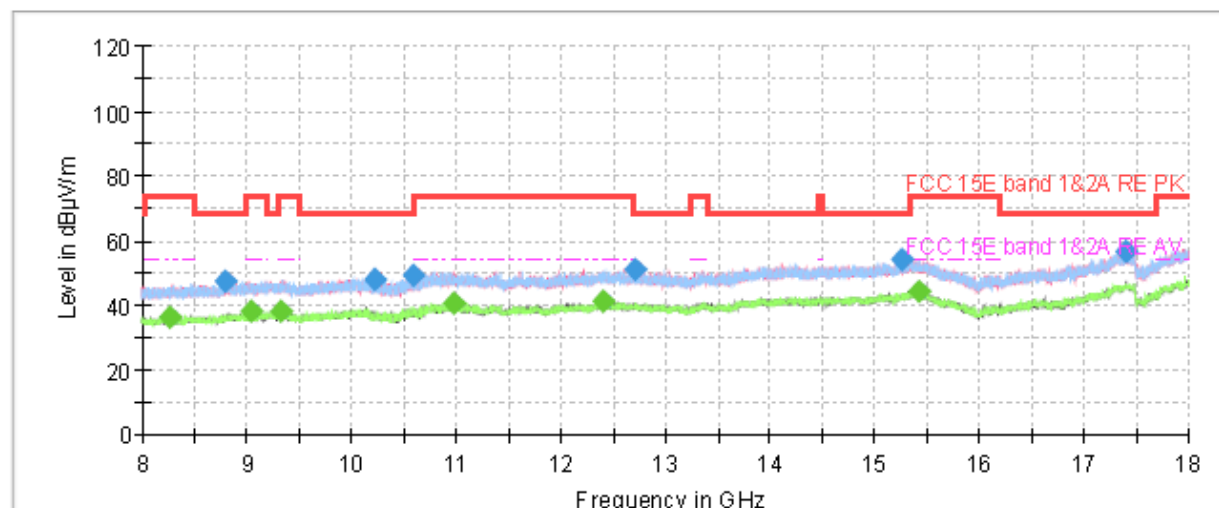


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1244.766667	35.62	---	68.20	32.58	500.0	100.0	V	0.0	-20.0
1413.933333	---	25.49	54.00	28.51	500.0	200.0	H	323.0	-19.4
1524.766667	---	25.72	54.00	28.28	500.0	100.0	H	221.0	-19.0
1942.433333	35.50	---	68.20	32.70	500.0	100.0	V	294.0	-18.4
2688.400000	37.91	---	68.20	30.29	500.0	200.0	V	0.0	-16.1
2730.400000	---	28.41	54.00	25.59	500.0	200.0	H	269.0	-16.1
3474.733333	39.17	---	68.20	29.03	500.0	200.0	H	187.0	-14.7
3940.466667	---	29.92	54.00	24.08	500.0	100.0	V	212.0	-13.6
4474.100000	40.54	---	68.20	27.66	500.0	100.0	V	356.0	-11.5
4625.300000	---	37.19	54.00	16.81	500.0	200.0	V	52.0	-10.8
7731.666667	---	36.49	54.00	17.51	500.0	200.0	V	349.0	-3.7
7937.000000	46.52	---	68.20	21.68	500.0	200.0	H	214.0	-2.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH64

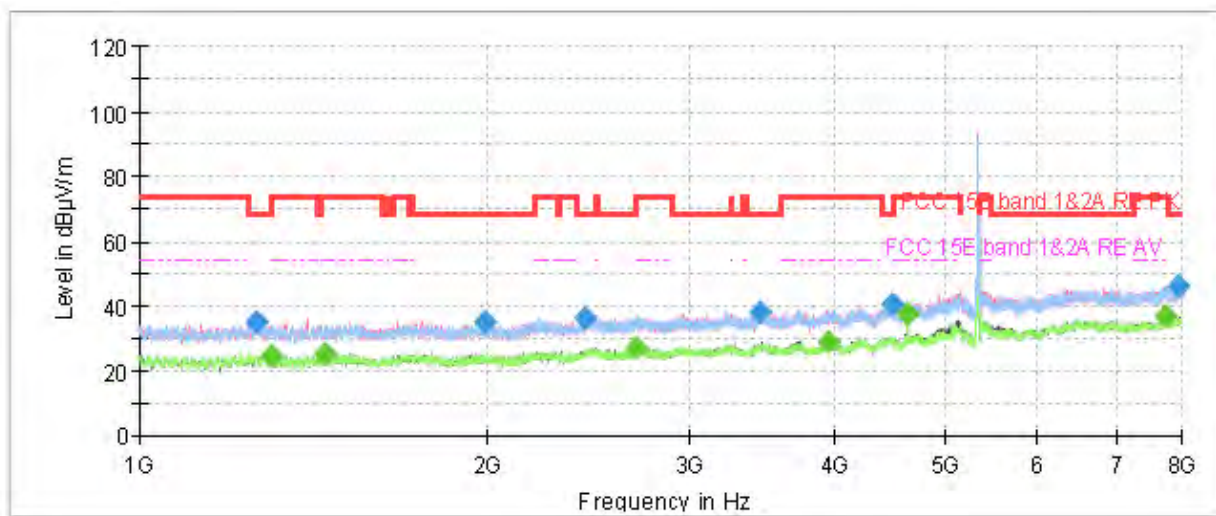

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

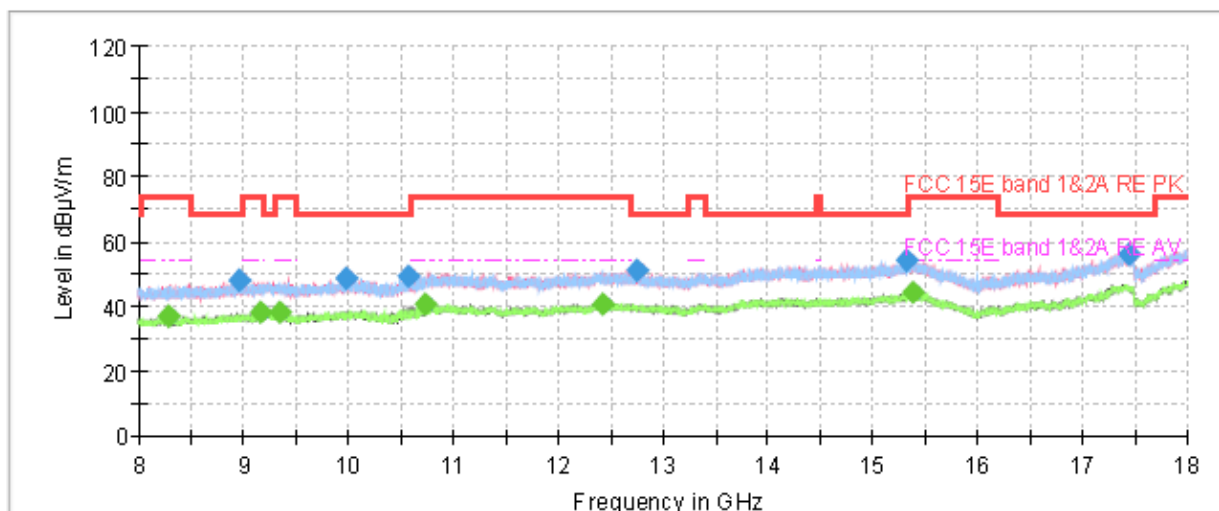


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1264.833333	35.35	---	68.20	32.85	500.0	100.0	V	0.0	-20.0
1301.700000	---	24.88	54.00	29.12	500.0	200.0	V	158.0	-19.8
1448.700000	---	25.08	54.00	28.92	500.0	200.0	H	328.0	-19.3
1994.000000	35.00	---	68.20	33.20	500.0	200.0	V	10.0	-18.2
2434.766667	36.28	---	68.20	31.92	500.0	200.0	V	240.0	-16.5
2691.666667	---	27.38	54.00	26.62	500.0	200.0	V	117.0	-16.1
3447.433333	38.28	---	68.20	29.92	500.0	100.0	H	143.0	-14.8
3954.466667	---	29.22	54.00	24.78	500.0	100.0	H	15.0	-13.5
4492.766667	40.31	---	68.20	27.89	500.0	200.0	H	27.0	-11.4
4625.066667	---	37.49	54.00	16.51	500.0	200.0	V	76.0	-10.8
7729.100000	---	36.81	54.00	17.19	500.0	100.0	H	3.0	-3.7
7924.400000	46.43	---	68.20	21.77	500.0	100.0	H	143.0	-2.8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH100

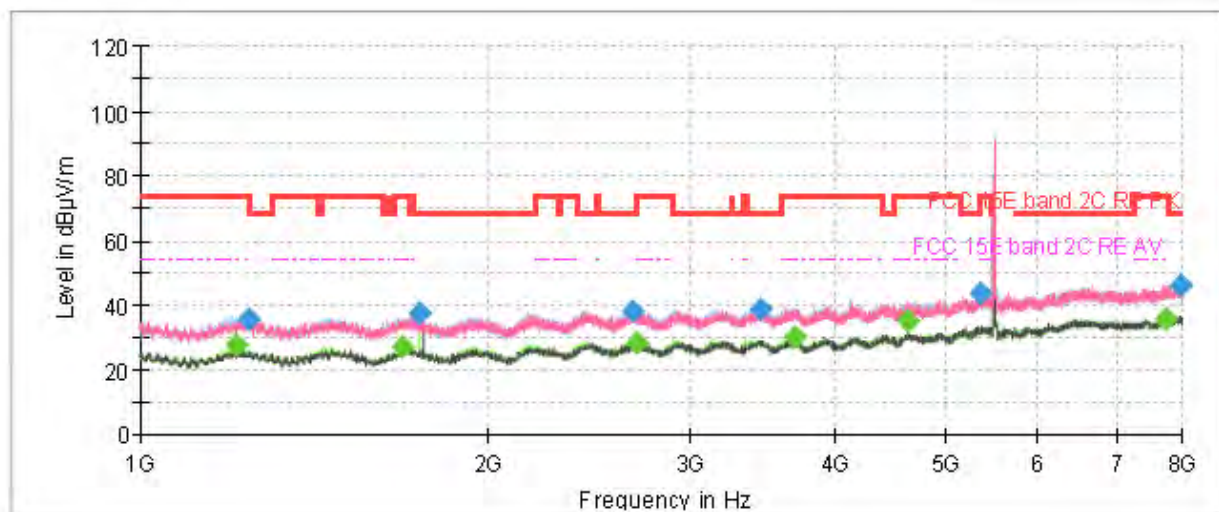

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

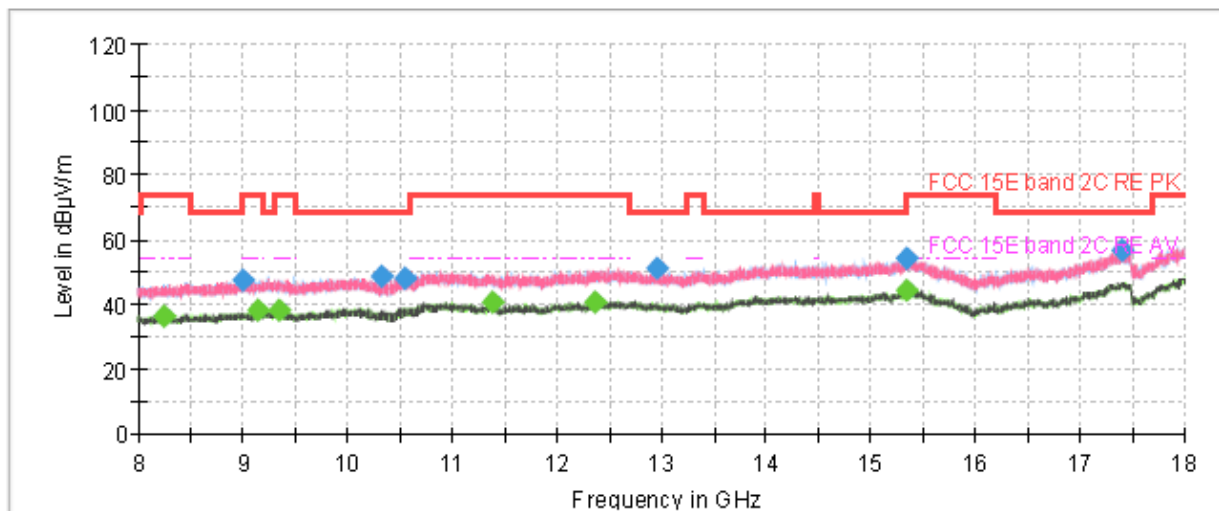


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1208.366667	---	27.52	54.00	26.48	500.0	100.0	H	155.0	-20.2
1242.666667	35.49	---	68.20	32.71	500.0	200.0	H	92.0	-20.0
1690.433333	---	27.29	54.00	26.71	500.0	100.0	H	100.0	-18.6
1746.900000	37.71	---	68.20	30.49	500.0	100.0	H	100.0	-18.6
2670.433333	38.38	---	68.20	29.82	500.0	100.0	H	358.0	-16.0
2692.133333	---	28.25	54.00	25.75	500.0	100.0	H	26.0	-16.1
3449.766667	38.97	---	68.20	29.23	500.0	100.0	V	49.0	-14.8
3681.700000	---	30.03	54.00	23.97	500.0	200.0	H	92.0	-14.3
4625.300000	---	34.89	54.00	19.11	500.0	200.0	H	148.0	-10.8
5331.600000	43.38	---	68.20	24.82	500.0	100.0	V	184.0	-8.8
7726.533333	---	35.89	54.00	18.11	500.0	100.0	V	283.0	-3.7
7965.933333	46.42	---	68.20	21.78	500.0	200.0	H	107.0	-2.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH120

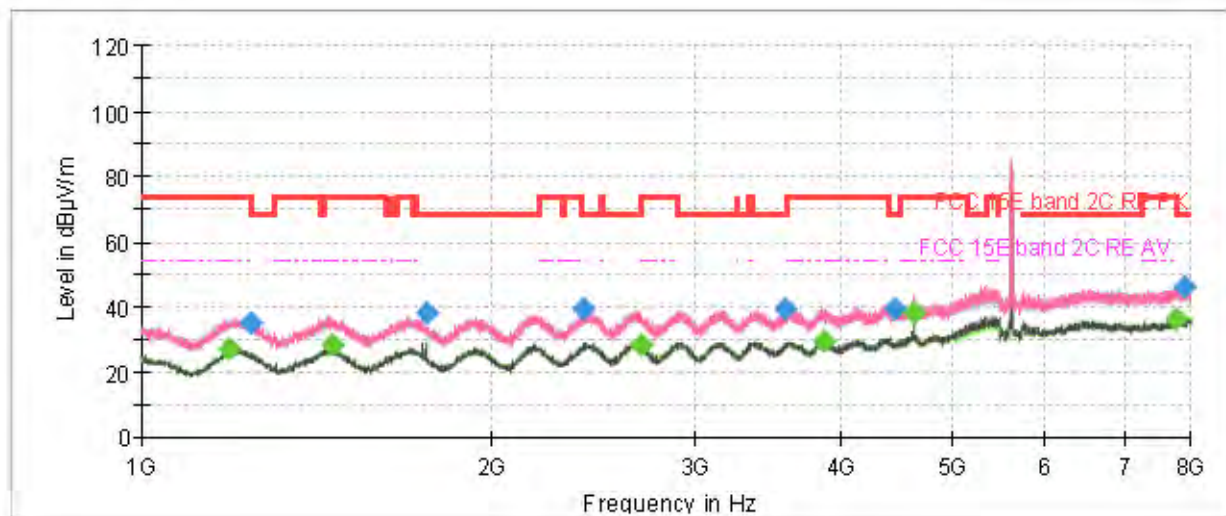

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

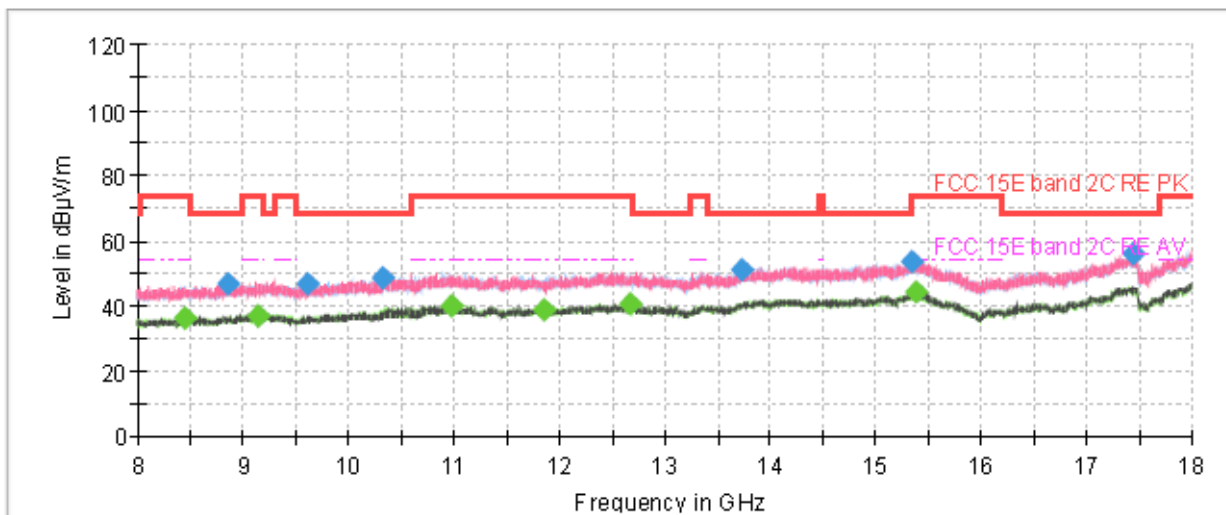


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1191.800000	---	27.33	54.00	26.67	500.0	100.0	V	12.0	-20.3
1243.600000	34.83	---	68.20	33.37	500.0	200.0	V	210.0	-20.0
1457.333333	---	28.06	54.00	25.94	500.0	100.0	H	197.0	-19.4
1763.466667	38.34	---	68.20	29.86	500.0	200.0	H	318.0	-18.6
2398.600000	39.33	---	68.20	28.87	500.0	200.0	V	335.0	-16.5
2691.666667	---	28.52	54.00	25.48	500.0	100.0	V	231.0	-16.1
3584.866667	39.23	---	68.20	28.97	500.0	200.0	V	355.0	-14.4
3864.400000	---	29.71	54.00	24.29	500.0	100.0	H	304.0	-13.9
4449.133333	39.17	---	68.20	29.03	500.0	100.0	H	224.0	-11.6
4625.066667	---	38.38	54.00	15.62	500.0	200.0	H	121.0	-10.8
7749.866667	---	36.28	54.00	17.72	500.0	200.0	H	232.0	-3.6
7887.533333	46.41	---	68.20	21.79	500.0	100.0	H	348.0	-3.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH140

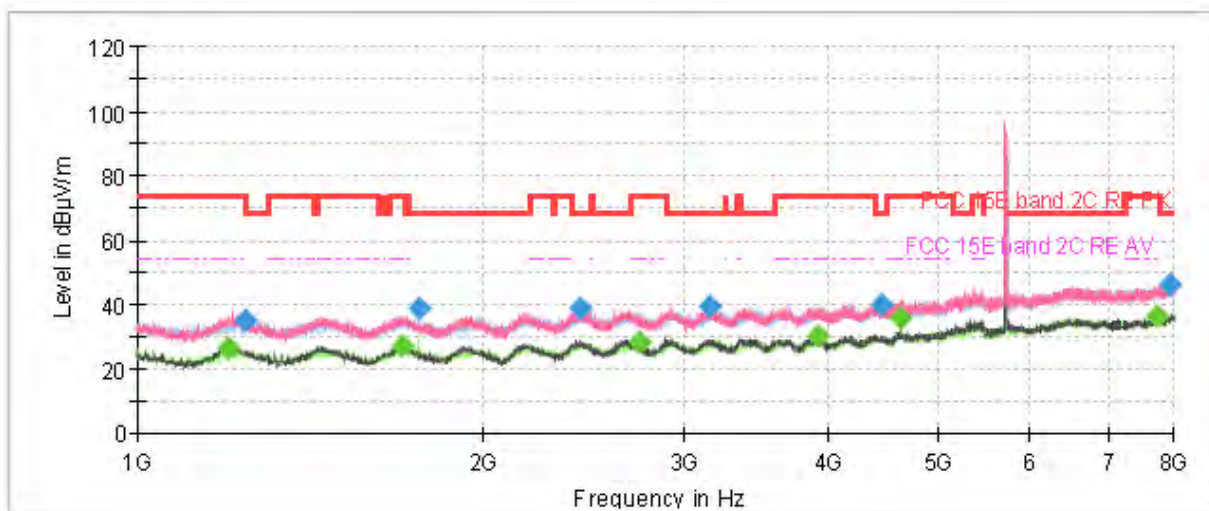

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

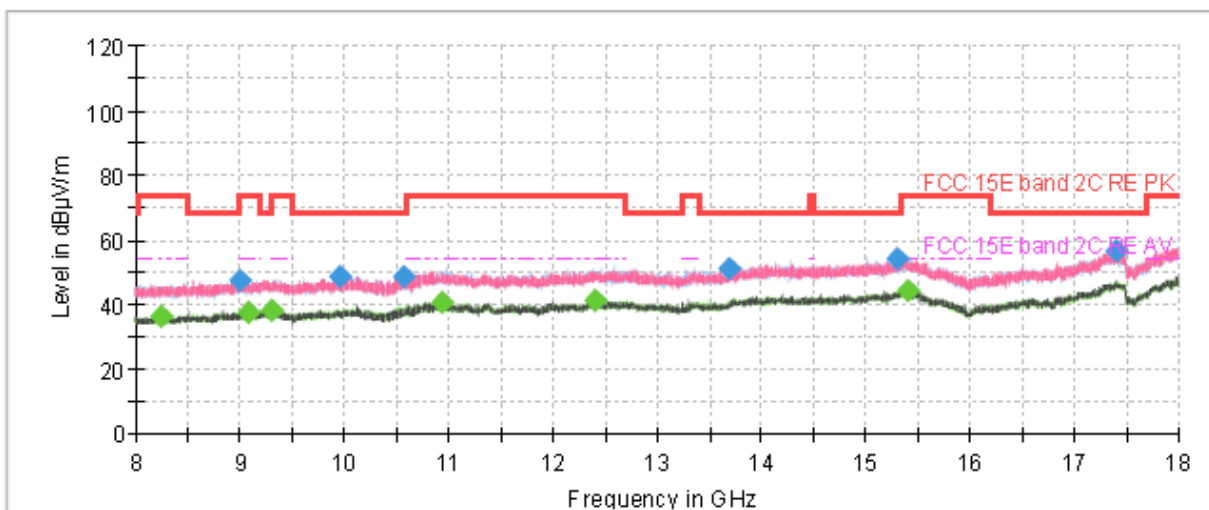


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1199.266667	---	26.59	54.00	27.41	500.0	100.0	V	148.0	-20.3
1244.300000	35.22	---	68.20	32.98	500.0	100.0	V	176.0	-20.0
1698.833333	---	27.25	54.00	26.75	500.0	100.0	V	231.0	-18.6
1763.700000	38.70	---	68.20	29.50	500.0	100.0	H	255.0	-18.6
2428.000000	38.97	---	68.20	29.23	500.0	100.0	V	0.0	-16.5
2745.100000	---	28.26	54.00	25.74	500.0	100.0	H	296.0	-16.1
3151.333333	39.26	---	68.20	28.94	500.0	100.0	V	135.0	-15.3
3923.900000	---	29.94	54.00	24.06	500.0	200.0	V	354.0	-13.6
4441.433333	39.70	---	68.20	28.50	500.0	200.0	H	275.0	-11.7
4625.066667	---	35.98	54.00	18.02	500.0	200.0	V	59.0	-10.8
7736.333333	---	36.35	54.00	17.65	500.0	100.0	V	54.0	-3.7
7947.033333	46.35	---	68.20	21.85	500.0	100.0	V	41.0	-2.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH149

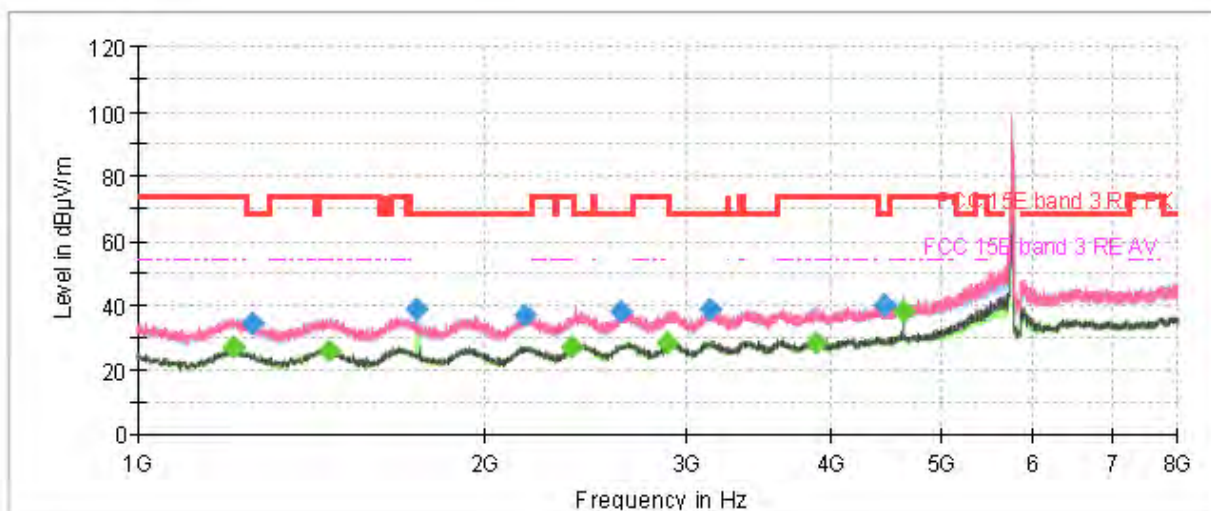

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

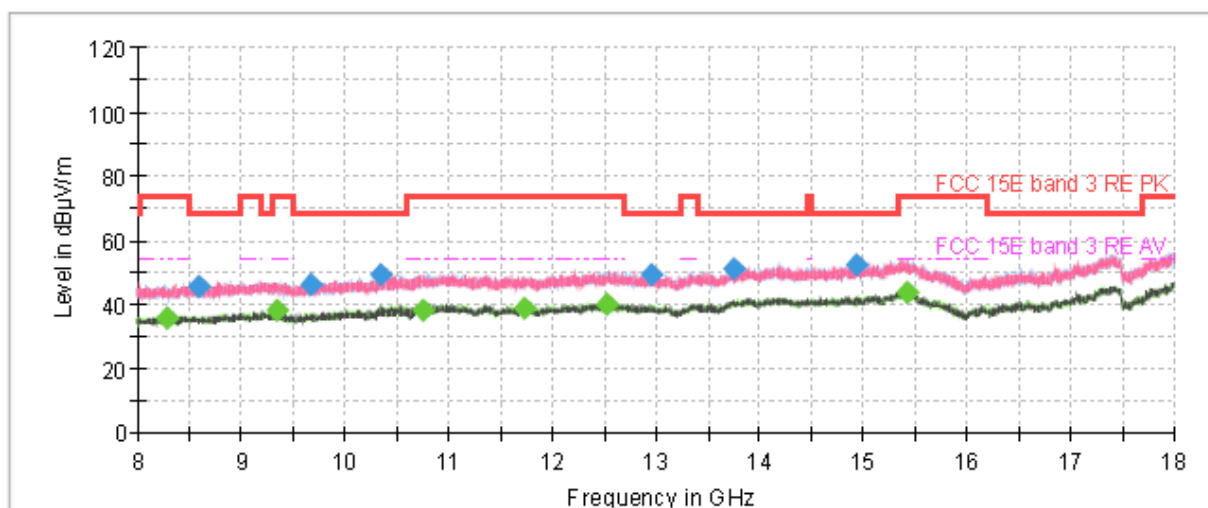


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1211.866667	---	26.92	54.00	27.08	500.0	200.0	H	152.0	-20.2
1256.433333	34.53	---	68.20	33.67	500.0	100.0	H	0.0	-20.0
1469.233333	---	25.81	54.00	28.19	500.0	200.0	V	108.0	-19.3
1746.666667	39.05	---	68.20	29.15	500.0	200.0	H	207.0	-18.6
2168.533333	37.21	---	68.20	30.99	500.0	100.0	H	0.0	-17.4
2380.866667	---	27.25	54.00	26.75	500.0	200.0	H	84.0	-16.6
2628.666667	37.90	---	68.20	30.30	500.0	200.0	H	152.0	-16.1
2881.833333	---	28.34	54.00	25.66	500.0	200.0	V	357.0	-16.0
3135.700000	38.64	---	68.20	29.56	500.0	200.0	H	57.0	-15.5
3880.500000	---	28.60	54.00	25.40	500.0	100.0	H	185.0	-13.8
4454.733333	39.73	---	68.20	28.47	500.0	100.0	V	48.0	-11.6
4625.066667	---	37.93	54.00	16.07	500.0	200.0	H	152.0	-10.8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH157

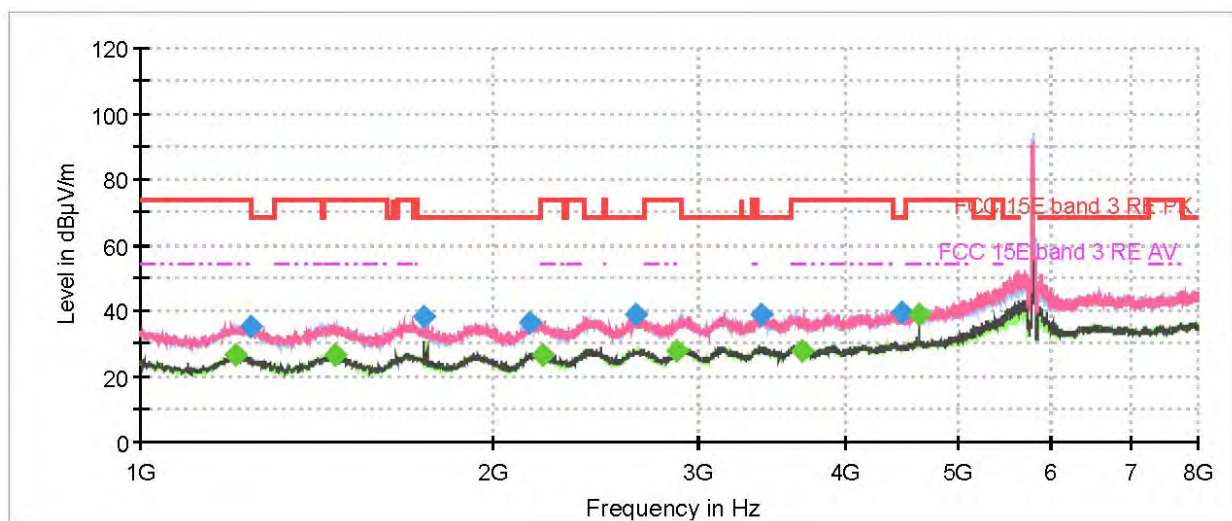

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

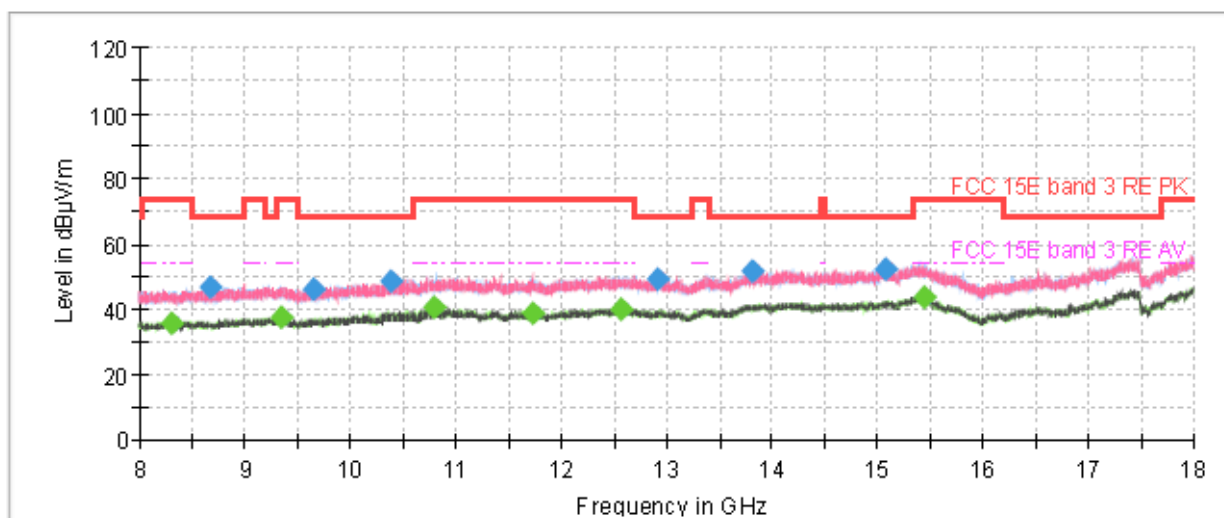


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1207.433333	---	26.48	54.00	27.52	500.0	200.0	H	10.0	-20.2
1241.500000	35.27	---	68.20	32.93	500.0	100.0	V	302.0	-20.0
1464.100000	---	26.62	54.00	27.38	500.0	200.0	V	108.0	-19.3
1748.300000	37.99	---	68.20	30.21	500.0	200.0	V	17.0	-18.6
2149.166667	36.33	---	68.20	31.87	500.0	200.0	V	346.0	-17.5
2206.800000	---	26.63	54.00	27.37	500.0	100.0	H	196.0	-17.3
2644.300000	38.70	---	68.20	29.50	500.0	100.0	H	183.0	-16.1
2876.700000	---	27.47	54.00	26.53	500.0	200.0	H	2.0	-16.0
3390.500000	38.96	---	68.20	29.24	500.0	100.0	H	196.0	-14.9
3668.166667	---	27.95	54.00	26.05	500.0	200.0	H	2.0	-14.5
4459.166667	39.20	---	68.20	29.00	500.0	100.0	V	63.0	-11.6
4625.066667	---	38.92	54.00	15.08	500.0	200.0	V	93.0	-10.8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH165

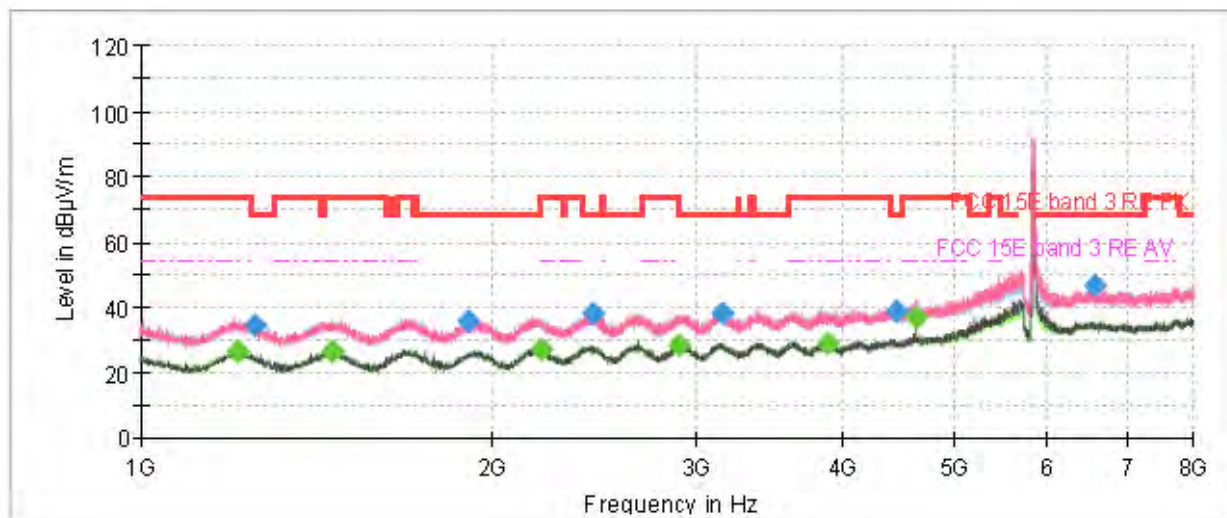

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

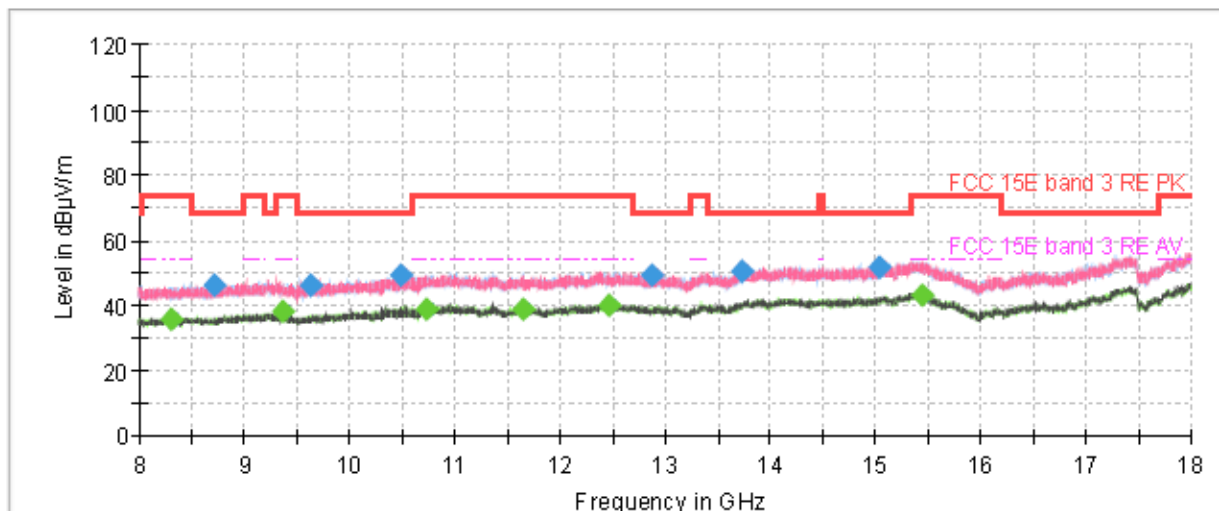


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1210.933333	---	26.28	54.00	27.72	500.0	200.0	H	0.0	-20.2
1251.066667	34.24	---	68.20	33.96	500.0	100.0	V	130.0	-20.0
1458.033333	---	26.31	54.00	27.69	500.0	100.0	H	0.0	-19.4
1911.866667	35.85	---	68.20	32.35	500.0	100.0	V	0.0	-18.4
2205.400000	---	26.85	54.00	27.15	500.0	100.0	H	331.0	-17.3
2438.266667	38.11	---	68.20	30.09	500.0	200.0	V	133.0	-16.5
2897.700000	---	28.49	54.00	25.51	500.0	100.0	H	28.0	-16.0
3149.466667	37.94	---	68.20	30.26	500.0	200.0	H	134.0	-15.4
3888.900000	---	29.03	54.00	24.97	500.0	200.0	V	356.0	-13.7
4440.500000	39.06	---	68.20	29.14	500.0	200.0	H	10.0	-11.7
4625.066667	---	36.90	54.00	17.10	500.0	200.0	H	161.0	-10.8
6576.666667	46.50	---	68.20	21.70	500.0	100.0	V	0.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH38

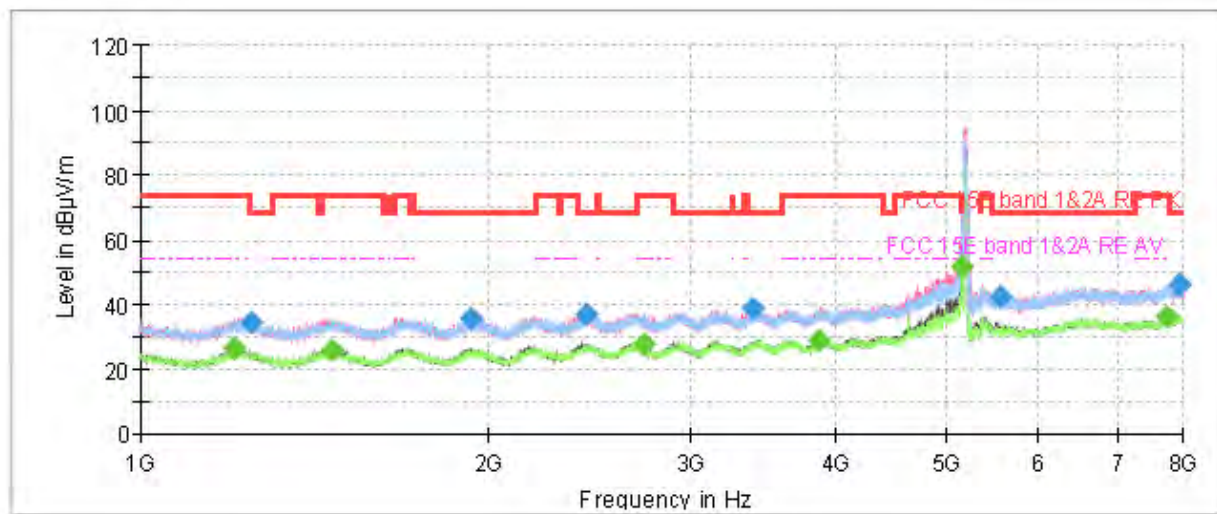

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

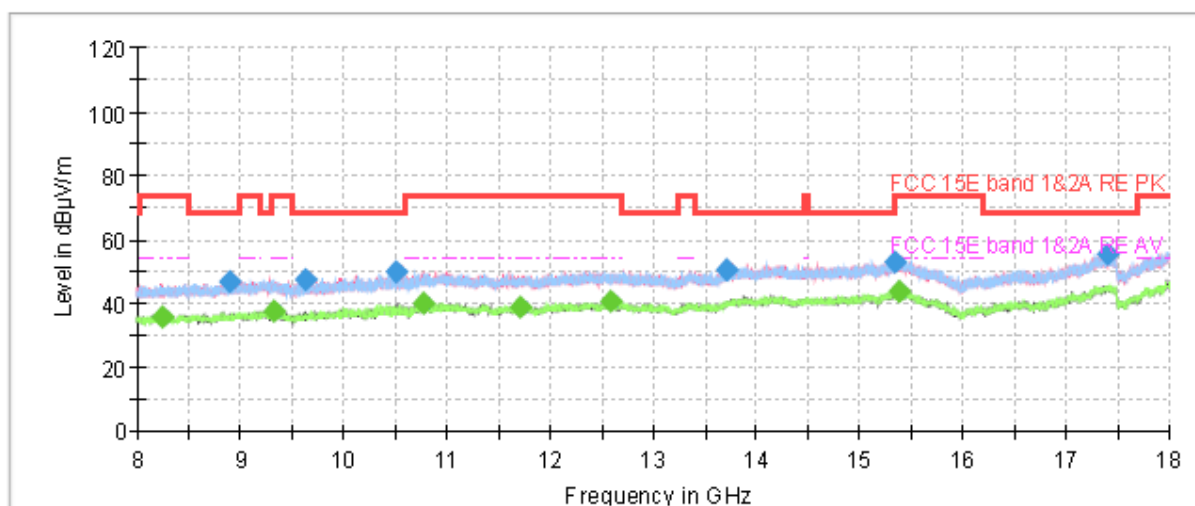


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1205.100000	---	26.59	54.00	27.41	500.0	100.0	V	10.0	-20.3
1246.633333	34.41	---	68.20	33.79	500.0	200.0	H	41.0	-20.0
1463.166667	---	26.15	54.00	27.85	500.0	100.0	V	286.0	-19.3
1936.600000	35.80	---	68.20	32.40	500.0	100.0	V	0.0	-18.3
2431.266667	37.23	---	68.20	30.97	500.0	100.0	V	0.0	-16.5
2730.633333	---	27.68	54.00	26.32	500.0	200.0	V	358.0	-16.1
3387.233333	38.58	---	68.20	29.62	500.0	100.0	V	38.0	-14.9
3870.933333	---	29.16	54.00	24.84	500.0	100.0	V	4.0	-13.8
5149.600000	---	51.44	54.00	2.56	500.0	200.0	H	358.0	-9.4
5556.300000	42.27	---	68.20	25.93	500.0	100.0	V	302.0	-8.3
7733.300000	---	36.08	54.00	17.92	500.0	200.0	V	319.0	-3.7
7932.100000	46.08	---	68.20	22.12	500.0	200.0	H	94.0	-2.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH46

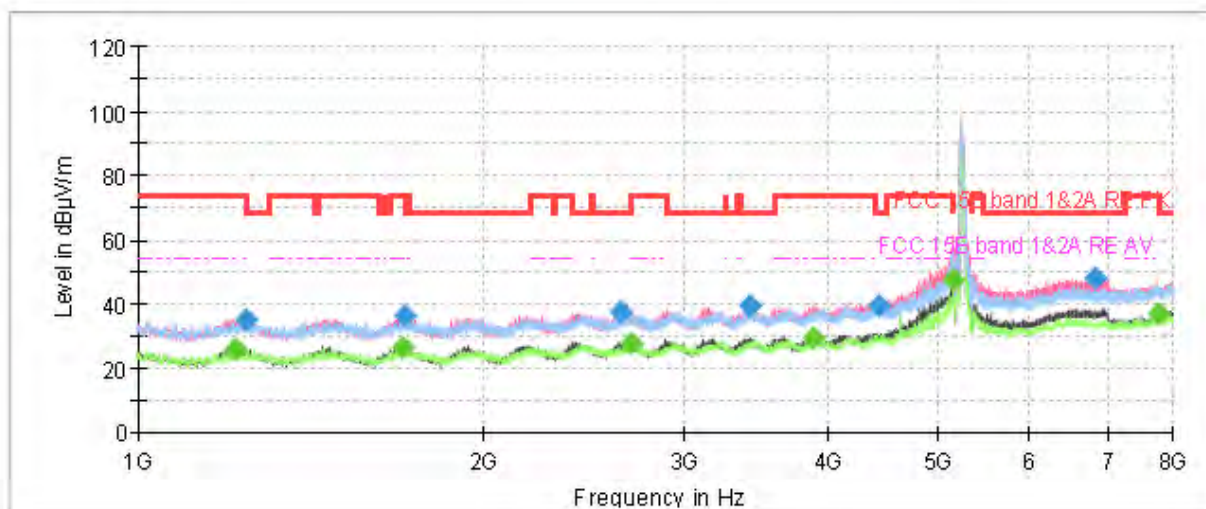

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

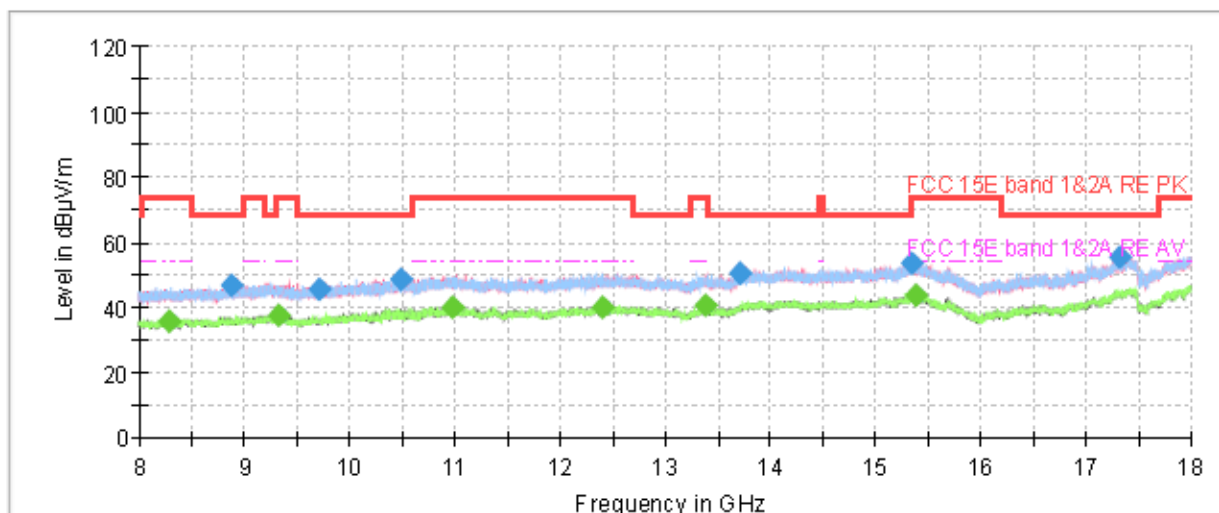


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1216.533333	---	25.98	54.00	28.02	500.0	200.0	V	275.0	-20.2
1243.600000	35.30	---	68.20	32.90	500.0	200.0	H	17.0	-20.0
1702.333333	---	26.51	54.00	27.49	500.0	200.0	V	340.0	-18.6
1710.033333	36.25	---	68.20	31.95	500.0	200.0	V	289.0	-18.6
2639.166667	37.47	---	68.20	30.73	500.0	200.0	V	289.0	-16.1
2690.033333	---	27.73	54.00	26.27	500.0	200.0	V	358.0	-16.1
3424.800000	39.08	---	68.20	29.12	500.0	200.0	V	356.0	-14.7
3878.166667	---	29.78	54.00	24.22	500.0	200.0	V	358.0	-13.8
4435.833333	39.68	---	68.20	28.52	500.0	200.0	V	303.0	-11.7
5144.233333	---	47.21	54.00	6.79	500.0	200.0	V	330.0	-9.5
6848.733333	48.16	---	68.20	20.04	500.0	200.0	V	356.0	-3.8
7749.633333	---	36.94	54.00	17.06	500.0	200.0	V	348.0	-3.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH54

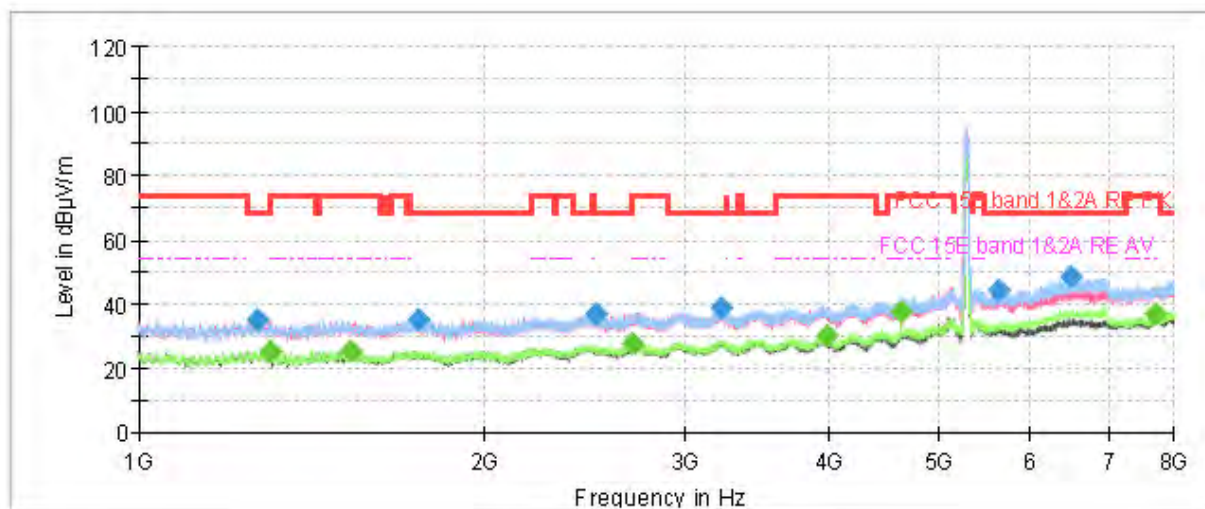

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

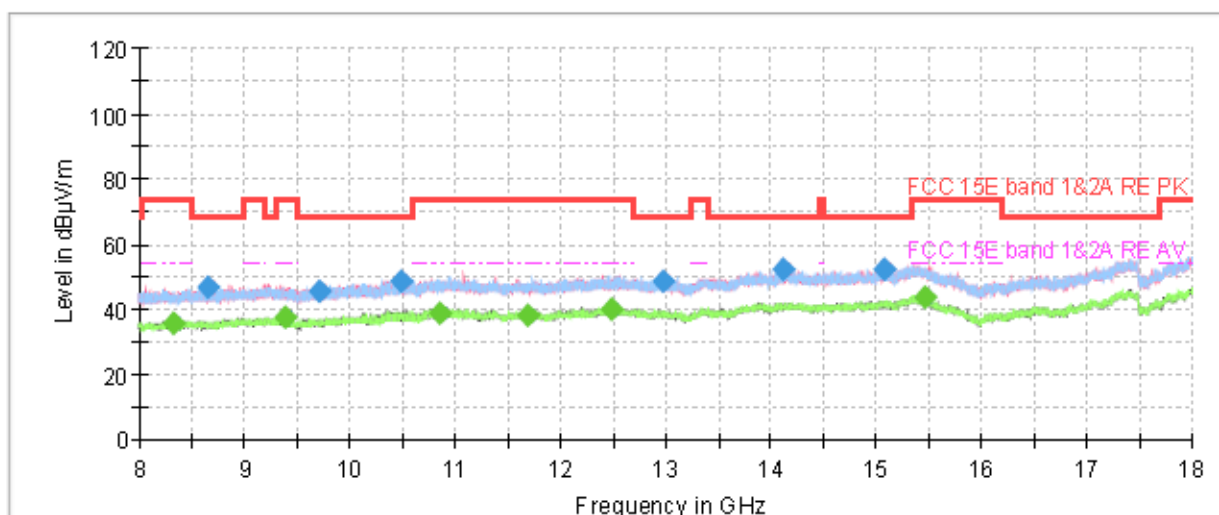


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1267.400000	34.79	---	68.20	33.41	500.0	200.0	H	46.0	-19.9
1303.800000	---	25.18	54.00	28.82	500.0	100.0	H	214.0	-19.8
1527.100000	---	25.40	54.00	28.60	500.0	200.0	H	14.0	-19.0
1753.666667	34.91	---	68.20	33.29	500.0	100.0	H	344.0	-18.6
2507.333333	37.15	---	68.20	31.05	500.0	100.0	H	354.0	-16.3
2694.700000	---	27.80	54.00	26.20	500.0	200.0	H	8.0	-16.1
3226.000000	38.52	---	68.20	29.68	500.0	200.0	V	240.0	-15.1
3985.733333	---	30.14	54.00	23.86	500.0	200.0	H	99.0	-13.4
4625.066667	---	37.37	54.00	16.63	500.0	200.0	H	60.0	-10.8
5624.666667	44.40	---	68.20	23.80	500.0	200.0	H	5.0	-8.1
6483.566667	48.42	---	68.20	19.78	500.0	200.0	H	14.0	-3.9
7714.400000	---	36.72	54.00	17.28	500.0	200.0	H	140.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH62

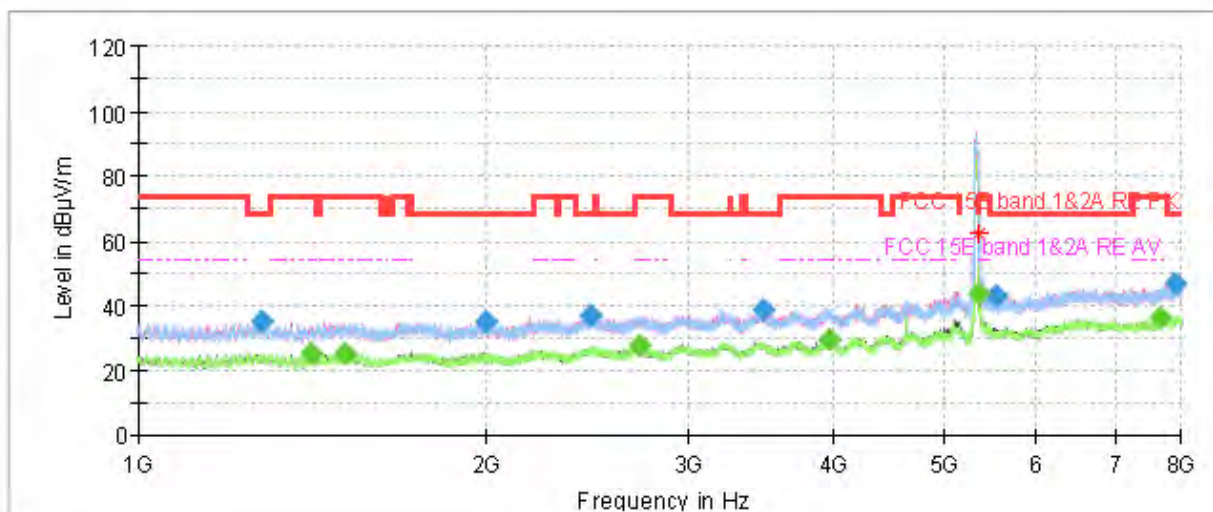

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

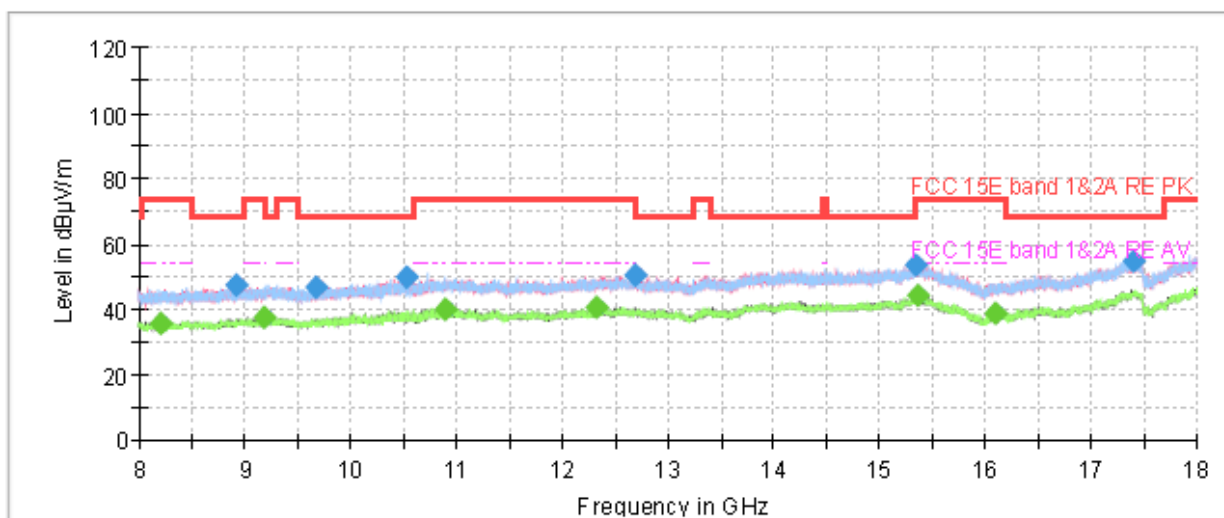


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1279.766667	35.08	---	68.20	33.12	500.0	100.0	V	29.0	-19.9
1413.933333	---	25.48	54.00	28.52	500.0	200.0	H	190.0	-19.4
1508.433333	---	25.26	54.00	28.74	500.0	100.0	V	0.0	-19.1
1999.133333	35.18	---	68.20	33.02	500.0	200.0	H	25.0	-18.2
2466.033333	36.85	---	68.20	31.35	500.0	200.0	V	330.0	-16.3
2711.033333	---	27.73	54.00	26.27	500.0	100.0	V	318.0	-16.1
3482.200000	38.96	---	68.20	29.24	500.0	200.0	H	132.0	-14.7
3965.900000	---	29.54	54.00	24.46	500.0	200.0	H	1.0	-13.5
5350.033333	---	43.46	54.00	10.54	500.0	200.0	H	1.0	-8.7
5518.033333	43.19	---	68.20	25.01	500.0	200.0	H	10.0	-8.7
7669.833333	---	36.36	54.00	17.64	500.0	200.0	V	72.0	-3.7
7902.233333	46.52	---	68.20	21.68	500.0	100.0	H	358.0	-2.9

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH102

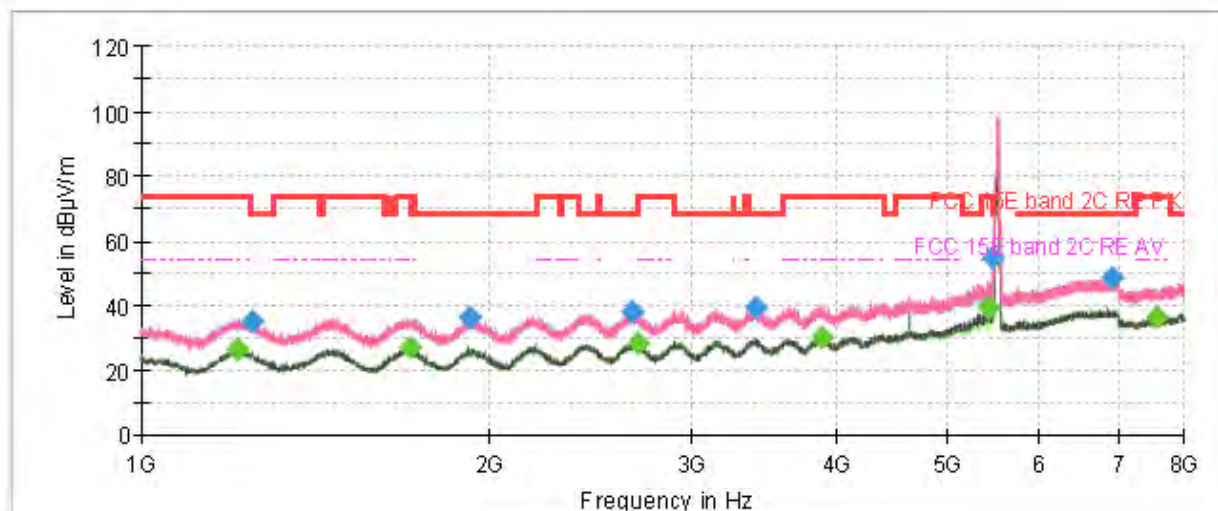

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

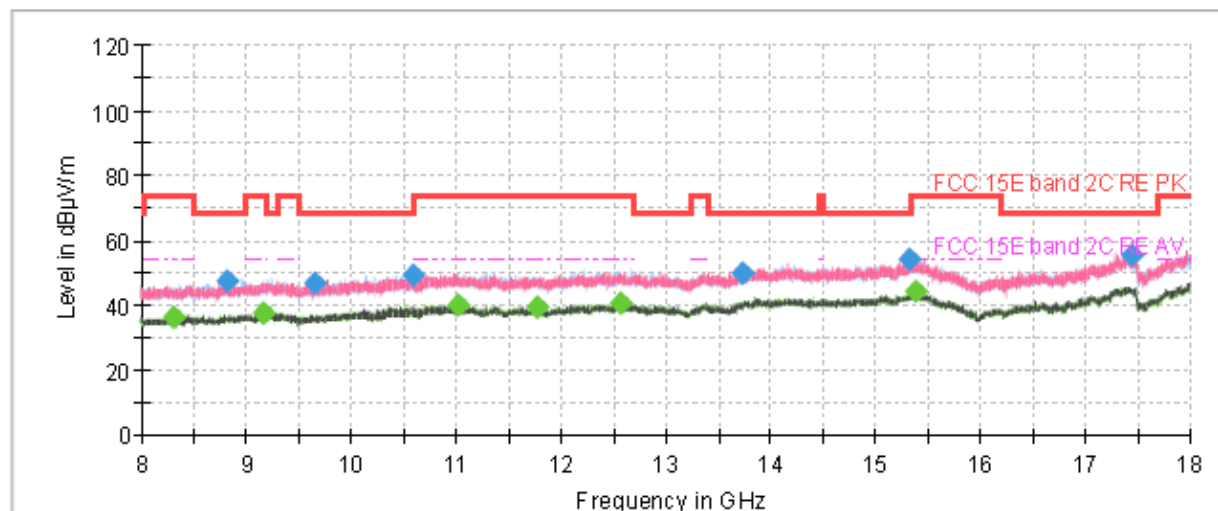


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1212.333333	---	26.36	54.00	27.64	500.0	200.0	H	128.0	-20.2
1249.433333	34.96	---	68.20	33.24	500.0	200.0	H	233.0	-20.0
1707.000000	---	27.04	54.00	26.96	500.0	200.0	H	27.0	-18.6
1925.166667	36.24	---	68.20	31.96	500.0	200.0	V	4.0	-18.3
2654.100000	38.26	---	68.20	29.94	500.0	100.0	V	331.0	-16.1
2695.633333	---	28.02	54.00	25.98	500.0	200.0	V	19.0	-16.1
3404.966667	39.19	---	68.20	29.01	500.0	100.0	V	193.0	-14.8
3877.233333	---	30.09	54.00	23.91	500.0	100.0	H	1.0	-13.8
5413.733333	---	39.43	54.00	14.57	500.0	200.0	V	125.0	-8.7
5462.500000	54.50	---	68.20	13.70	500.0	200.0	V	320.0	-8.6
6929.233333	48.42	---	68.20	19.78	500.0	100.0	H	2.0	-3.8
7576.733333	---	36.39	54.00	17.61	500.0	100.0	V	353.0	-4.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH118

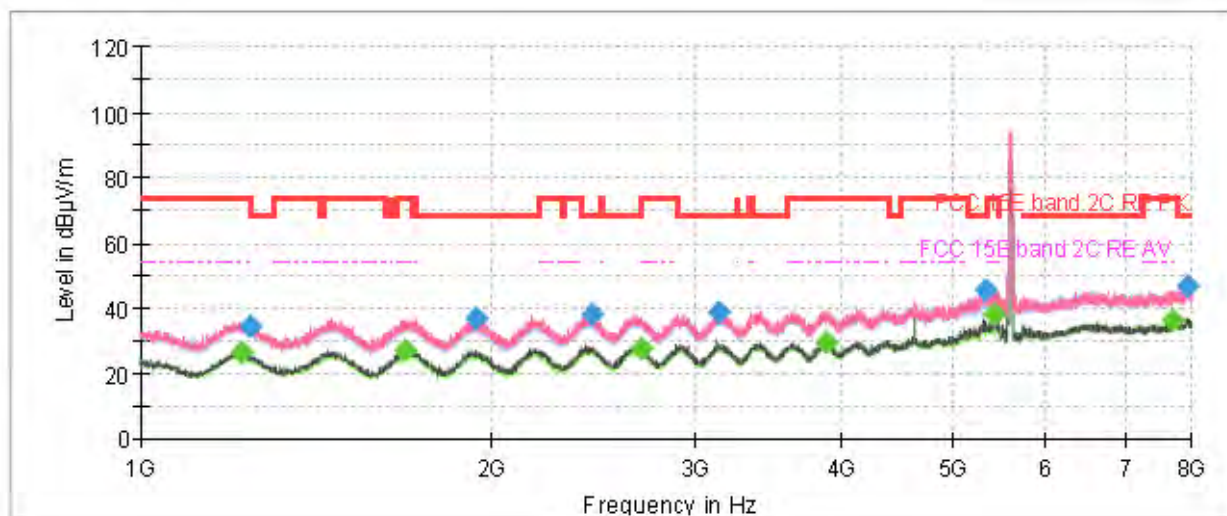

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

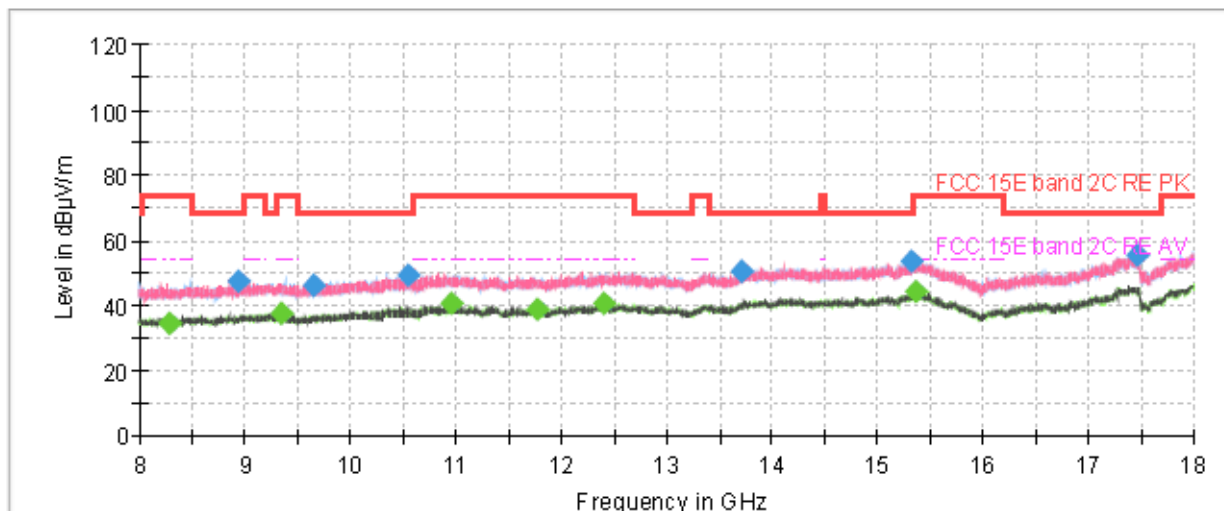


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1221.200000	---	26.49	54.00	27.51	500.0	100.0	V	277.0	-20.2
1241.033333	34.75	---	68.20	33.45	500.0	100.0	H	192.0	-20.0
1686.700000	---	27.36	54.00	26.64	500.0	100.0	V	155.0	-18.7
1937.300000	36.64	---	68.20	31.57	500.0	100.0	V	27.0	-18.3
2439.900000	38.35	---	68.20	29.85	500.0	100.0	V	42.0	-16.5
2691.433333	---	27.71	54.00	26.29	500.0	100.0	V	210.0	-16.1
3137.333333	38.76	---	68.20	29.44	500.0	100.0	H	206.0	-15.4
3878.633333	---	29.63	54.00	24.37	500.0	100.0	V	210.0	-13.8
5321.566667	45.31	---	68.20	22.89	500.0	200.0	V	121.0	-8.9
5414.666667	---	38.18	54.00	15.82	500.0	200.0	V	121.0	-8.7
7704.366667	---	36.22	54.00	17.78	500.0	100.0	V	114.0	-3.7
7927.666667	47.05	---	68.20	21.15	500.0	100.0	H	150.0	-2.8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH134

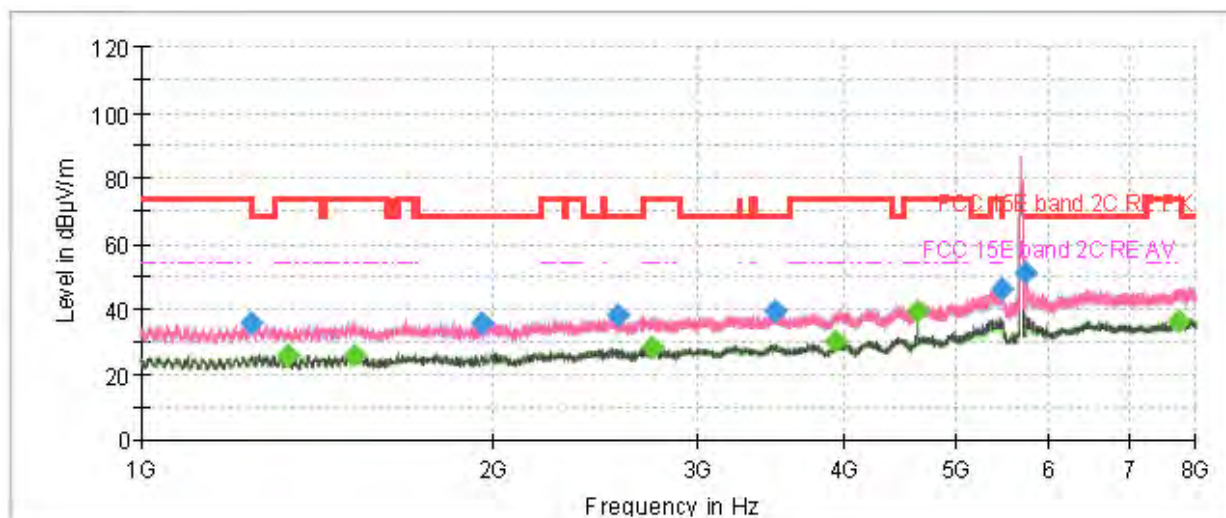

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

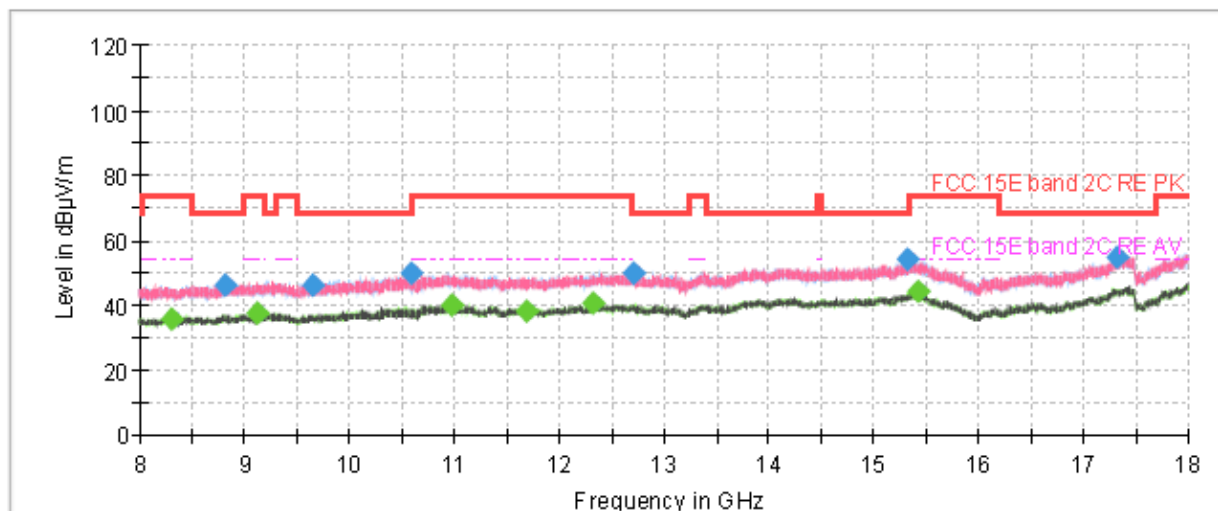


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1243.366667	35.90	---	68.20	32.30	500.0	100.0	H	0.0	-20.0
1335.533333	---	25.98	54.00	28.02	500.0	100.0	H	0.0	-19.7
1521.966667	---	26.13	54.00	27.87	500.0	200.0	V	173.0	-19.0
1955.966667	35.92	---	68.20	32.28	500.0	100.0	H	10.0	-18.4
2556.333333	38.45	---	68.20	29.75	500.0	200.0	V	258.0	-16.2
2742.533333	---	28.48	54.00	25.52	500.0	200.0	H	277.0	-16.1
3489.900000	39.41	---	68.20	28.79	500.0	100.0	V	281.0	-14.7
3940.000000	---	29.96	54.00	24.04	500.0	100.0	H	10.0	-13.6
4625.066667	---	39.43	54.00	14.57	500.0	200.0	V	104.0	-10.8
5463.433333	46.18	---	68.20	22.02	500.0	200.0	V	63.0	-8.6
5725.933333	51.20	---	68.20	17.00	500.0	200.0	V	63.0	-7.9
7722.566667	---	36.33	54.00	17.67	500.0	200.0	H	358.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH151

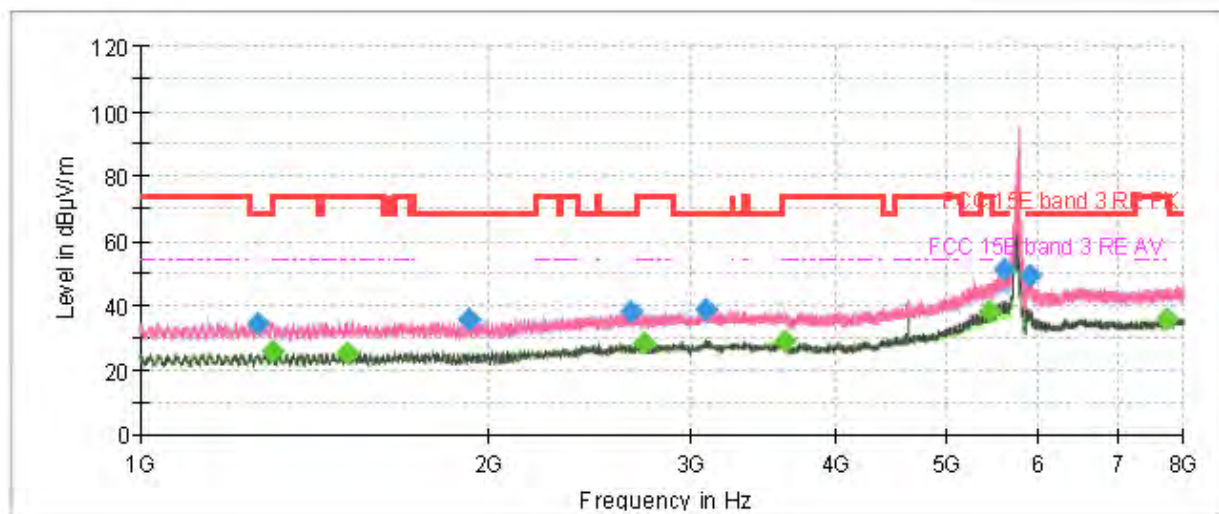

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

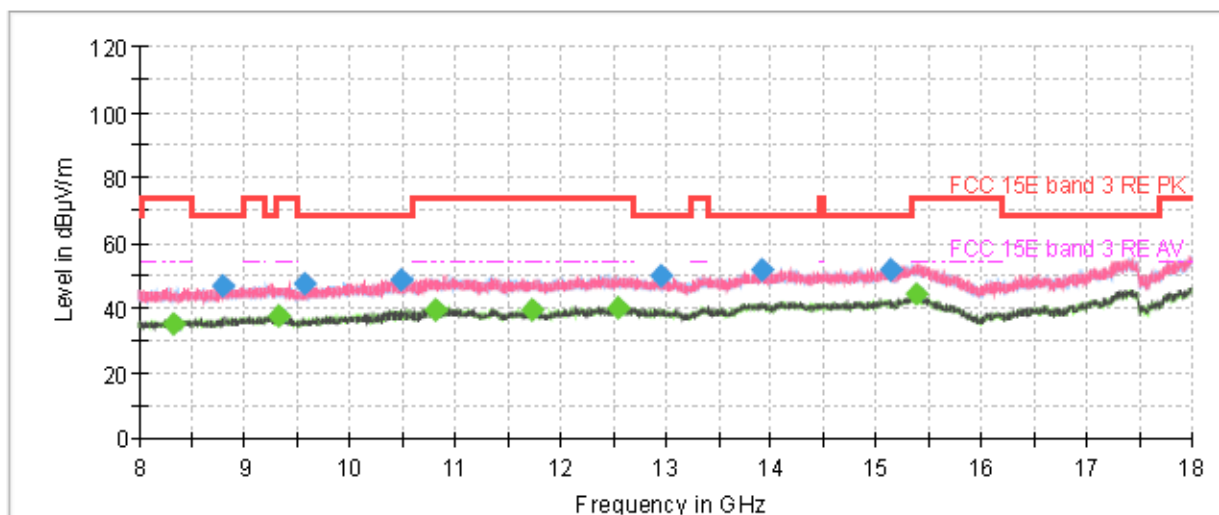

Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1264.600000	34.61	---	68.20	33.59	500.0	200.0	H	10.0	-20.0
1301.933333	---	25.58	54.00	28.42	500.0	100.0	H	28.0	-19.8
1508.200000	---	25.35	54.00	28.65	500.0	100.0	V	127.0	-19.1
1924.700000	35.91	---	68.20	32.29	500.0	100.0	V	332.0	-18.3
2658.300000	37.91	---	68.20	30.29	500.0	200.0	V	0.0	-16.0
2730.633333	---	28.24	54.00	25.76	500.0	200.0	V	217.0	-16.1
3083.200000	38.92	---	68.20	29.28	500.0	200.0	V	217.0	-15.6
3607.266667	---	29.00	54.00	25.00	500.0	200.0	H	0.0	-14.4
5428.666667	---	37.87	54.00	16.13	500.0	200.0	V	114.0	-8.6
5594.566667	51.05	---	68.20	17.15	500.0	200.0	V	92.0	-8.1
5885.766667	48.99	---	68.20	19.21	500.0	200.0	V	70.0	-7.3
7720.466667	---	35.70	54.00	18.30	500.0	200.0	H	39.0	-3.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)