



# **RADIO TEST REPORT**

Report No: STS1511172F01

Issued for

AMS COMMUNICATIONS INC

11029 Harry Hines Blvd, Suite B 118, Dallas Tx 75229, USA

A B

Product Name:	MOBILE PHONE
Brand Name:	LUSH
Model No.:	Lush Q
Series Model:	N/A
FCC ID:	2AE2XLUSHQ
Test Standard:	FCC Part 22H and 24E

Any reproduction of this document must be done in full. No single part of this document may be repropermission from STS, All Test Data Presented in this report is only applicable to presented Test sample.







# **TEST RESULT CERTIFICATION**

Applicant's name:	AMS COM	MUNICATIONS INC
Address:	11029 Harr	y Hines Blvd,Suite B 118, Dallas Tx 75229,USA
Manufacture's Name:	SHENZHE	N HONGKAIJIAWEI TECHNOLOGY CO.,LTD
Address:	11/F,BLOC DISTRICT,	K 3,JINCHENG INDUSTRIAL PARK,LONGHUA NEW SHENZHEN,CHINA
Product name:	MOBILE PI	HONE
Brand name:	LUSH	
Model and/or type reference:	Lush Q	
Standards:	FCC Part 2	2H and 24E
Test procedure	TIA 603 C	
under test (EUT) is in compliant sample identified in the report. This report shall not be reprodu	ce with the	ted by STS and the test results show that the equipment FCC requirements. And it is applicable only to the tested in full, without the written approval of STS, this document only, and shall be noted in the revision of the document.
Date of Test		
Date of performance of tests	27 Nov. 20	015 ~03 Dec. 2015
Date of Issue	04 Dec. 2	015
Test Result	Pass	
Testing Engi	neer :	(Jin Ming)
Technical Ma	anager :	(Vita Li)
Authorized S	Signatory:	Trong Yours

(Bovey Yang)



TABLE OF CONTENTS	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 PRODUCT DESCRIPTION	7
2.2 RELATED SUBMITTAL(S) / GRANT (S)	8
2.3 SPECIAL ACCESSORIES	8
2.4 EUT CONFIGURATION	8
2.5 EUT EXERCISE	8
2.6 CONFIGURATION OF EUT SYSTEM	9
2.7 MEASUREMENT INSTRUMENTS	10
3. DESCRIPTION OF TEST MODES	10
4. OUTPUT POWER	11
4.1 CONDUCTED OUTPUT POWER	11
4.2 POWER-ADDED EFFICIENCY	15
4.3 RADIATED OUTPUT POWER	21
5. SPURIOUS EMISSION	24
5.1 SPURIOUS EMISSION	24
5.2 RADIATED SPURIOUS EMISSION	26
6. FREQUENCY STABILITY	30
6.1 MEASUREMENT METHOD	30
6.2 PROVISIONS APPLICABLE	31
6.3 MEASUREMENT RESULT	32
7. OCCUPIED BANDWIDTH	34
7.1 MEASUREMENT METHOD	34
7.2 PROVISIONS APPLICABLE	34
7.3 MEASUREMENT RESULT	34
8. EMISSION BANDWIDTH	35
8.1 MEASUREMENT METHOD	35
8.2 PROVISIONS APPLICABLE	35
8.3 MEASUREMENT RESULT	35
9. BAND EDGE	36
9.1 MEASUREMENT METHOD	36



	4 of 59	Report No.: STS1511172F01
9.2 PROVISIONS APPLICABLE		36
9.3 MEASUREMENT RESULT		36
APPENDIX I		37
TEST PLOTS FOR CONDUCTED SPU	IRIOUS EMISSION	37
APPENDIX II		47
TEST PLOTS FOR OCCUPIED BAND\	WIDTH (99%)	47
EMISSION BANDWIDTH (-26DBC)		47
APPENDIX III		55
TEST PLOTS FOR BAND EDGES		55
APPENDIX IV		59
PHOTOS OF TEST SETUP		59



# **Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	04 Dec. 2015	STS1511172F01	ALL	Initial Issue





## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of ansi C63.10: 2009; TIA 603 C and fcc cfr 47 rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057

Item Number		Item Description	FCC Rules	
4	Output	Conducted output power	22.042(a) / 24.222 (b)	
'	Power	Radiated output power	22.913(a) / 24.232 (b)	
	Courious	Conducted		
2	Spurious Emission	spurious emission	2.1051 / 22.917 / 24.238	
		Radiated spurious emission		
3	Frequency S	Stability	2.1055 /24.235	
4	Occupied Ba	andwidth	2.1049 (h)(i)	
5	Emission Bandwidth		22.917(b) / 24.238 (b)	
6	Band Edge		22.917(b) / 24.238 (b)	

## NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

#### 1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add.: 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,

Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649;

FCC Registration No.: 842334; IC Registration No.: 12108A-1

# 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $\mathbf{y} \pm \mathbf{U}$ , where expended uncertainty  $\mathbf{U}$  is based on a standard uncertainty multiplied by a coverage factor of  $\mathbf{k=2}$ , providing a level of confidence of approximately  $\mathbf{95}$  %  $^{\circ}$ 

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	±2.88dB
2	Conducted Emission (150KHz-30MHz)	±2.67dB
3	RF power,conducted	±0.70dB
4	Spurious emissions,conducted	±1.19dB
5	All emissions,radiated(<1G) 30MHz-200MHz	±2.83dB
6	All emissions,radiated(<1G) 200MHz-1000MHz	±2.94dB
7	All emissions,radiated(>1G)	±3.03dB
8	Temperature	±0.5°C
9	Humidity	±2%



# 2. GENERAL INFORMATION

# 2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	MOBILE PHONE			
Hardware version:	S3132_MBPCB_V1.1			
Software version:	S3132_149C_A_ML_MEM3232_H2001_V0.3.pac			
FCC ID:	2AE2XLUSHQ			
	⊠GSM 850 ⊠PCS 1900 (U.S. Bands)			
	☐GSM 900 ☐DCS 1800 (Non-U.S. Bands)			
Frequency Bands:	U.S. Bands:			
Troqueriey Barraer	☐UMTS FDD Band II ☐UMTS FDD Band V			
	Non-U.S. Bands:			
	☐UMTS FDD Band I ☐UMTS FDD Band VIII			
Max RF Output Power:	GSM850:29.42 dBm,GSM1900:25.01dBm			
Type of Emission:	GSM(850):321KGXW: GSM(1900):315KGXW GPRS(850):317KGXW; GPRS(1900):318KGXW			
Description test modes (worst case)	Support single SIM card			
Antenna:	PIFA Antenna			
Antenna gain:	0 dBi			
Power Supply:	DC 3.7V by battery or DC 5.0V supplied by adapter			
Battery parameter:	Capacitance: 600mA, Rated Voltage: 3.7V			
Adapter Input:	AC100-240V, 50Hz, 200mA			
Adapter Output:	DC 5.0V, 500mA			
GPRS Class	Multi-Class12			
Extreme Vol. Limits:	DC3.5V to 4.2 V (Nominal DC3.7V)			
Extreme Temp. Tolerance	-10℃ to +45℃			
** Note: The High Voltage 4.2V and Low Voltage 3.5V was declared by manufacturer, The EUT				
couldn't be operate normally with higher or lower voltage.				



# 2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: 2AE2XLUSHQ filing to comply with the fcc part 22H&24E.

# 2.3 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with eut intended for fcc grant together.

# 2.4 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.5 EUT EXERCISE


The Transmitter was operated in the maximum output power mode through Communication Tester.

The TX frequency was fixed which was for the purpose of the measurements.



## 2.6 CONFIGURATION OF EUT SYSTEM

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.



9 of 59

Table 2-1 Equipment Used in EUT System

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-1	MOBILE PHONE	LUSH	Lush Q	N/A	EUT
E-2	Adapter	LUSH	N/A	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable	NO	99cm	N/A

## Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>"Length\_"</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".
- (4) PC is the FCC DOC is approved.



## 2.7 MEASUREMENT INSTRUMENTS

The radiated emission testing was performed according to the procedures of ansi 2009; TIA 603C and fcc cfr 47 rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2015.10.25	2016.10.24
Test Receiver	R&S	ESCI	101427	2015.10.25	2016.10.24
Communication Tester	Agilent	8960	MY48360751	2015.11.20	2016.11.19
Communication Tester	R&S	CMU200	112012	2015.10.25	2016.10.24
Test Receiver	R&S	ESCI	102086	2015.10.25	2016.10.24
Bilog Antenna (measurement)	TESEQ	CBL6111D (30MHz-1GHz)	34678	2015.11.25	2016.11.24
Horn Antenna (measurement)	Schwarzbeck	BBHA 9120D(1201) (1GHz-18GHz)	9120D-1343	2015.03.06	2016.03.05
STS-E048	MXA SIGNAL Analyzer	Agilent	N9020A	2015.10.25	2016.10.24
Logarithm -Antenna(substituted)	Schwarzbeck	VUSLP 9111 (200MHz-4GHz)	9111-512	2015.09.03	2016.09.02
Horn-Antenna(substituted)	Schwarzbeck	BBHA9120D (1GHz-18GHz)	D:266	2015.03.06	2016.03.05

## 3. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS850, GSM/GPRS1900 modes have been tested during the test. the worst condition (GPRS 850) be recorded in the test report if no other modes test data.



## 4. OUTPUT POWER

# 4.1 CONDUCTED OUTPUT POWER

# 4.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS 850, GSM/GPRS1900) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

## 4.1.2 MEASUREMENT RESULT

## GSM 850:

Mode	Frequency	/ (MHz)	Peak Power	AVG Power
		824.2	28.91	28.43
	Low Voltage	836.6	28.90	28.57
		848.8	29.39	28.82
		824.2	28.96	28.52
GSM850	Nomal Voltage	836.6	28.98	28.61
		848.8	29.42	28.96
		824.2	28.87	28.52
	High Voltage	836.6	28.76	28.61
		848.8	29.31	28.96
		824.2	28.71	28.43
	Low Voltage	836.6	28.79	28.59
		848.8	29.16	29.07
000000		824.2	28.75	28.47
GPRS850	Nomal Voltage	836.6	28.81	28.62
(1 Slot)		848.8	29.24	29.10
		824.2	28.73	28.41
	High Voltage	836.6	28.80	28.57
		848.8	29.21	29.08
		824.2	27.83	27.45
	Low Voltage	836.6	28.00	27.53
		848.8	28.21	28.21
		824.2	27.92	27.50
GPRS850	Nomal Voltage	836.6	28.01	27.66
(2 Slot)		848.8	28.28	28.26
		824.2	27.79	27.47
	High Voltage	836.6	28.00	27.58
		848.8	28.27	28.29



		12 of 59	Report N	o.: STS1511172F01
		824.2	26.47	26.11
	Low Voltage	836.6	26.61	26.45
		848.8	27.01	26.87
000000		824.2	26.53	26.13
GPRS850	Nomal Voltage	836.6	26.64	26.46
(3 Slot)		848.8	27.07	26.90
		824.2	26.49	26.09
	High Voltage	836.6	26.62	26.38
		848.8	27.05	26.82
		824.2	25.93	25.42
	Low Voltage	836.6	26.11	25.63
		848.8	26.42	26.19
CDDCoco		824.2	26.00	25.55
GPRS850	Nomal Voltage	836.6	26.13	25.77
(4 Slot)		848.8	26.50	26.37
		824.2	25.91	25.43
	High Voltage	836.6	26.07	25.65
		848.8	26.42	26.20



# PCS 1900:

Mode	Frequenc	y (MHz)	Peak Power	AVG Power
		1850.2	24.93	24.21
	Low Voltage	1880	24.17	23.75
		1909.8	24.91	24.01
		1850.2	25.01	24.31
GSM1900	Nomal Voltage	1880	24.25	23.87
		1909.8	24.98	24.06
		1850.2	24.91	24.21
	High Voltage	1880	24.15	23.71
		1909.8	24.87	23.96
		1850.2	24.71	24.11
	Low Voltage	1880	24.00	23.42
		1909.8	24.43	24.27
CDDC4000		1850.2	24.82	24.17
GPRS1900 (1 Slot)	Nomal Voltage	1880	24.01	23.52
		1909.8	24.53	24.34
		1850.2	24.75	24.13
	High Voltage	1880	23.95	23.43
		1909.8	24.45	24.25
		1850.2	23.85	23.11
	Low Voltage	1880	23.03	22.62
		1909.8	23.51	23.31
GPRS1900		1850.2	23.98	23.18
(2 Slot)	Nomal Voltage	1880	23.10	22.69
(2 3101)		1909.8	23.54	23.39
		1850.2	23.90	23.15
	High Voltage	1880	23.01	22.63
		1909.8	23.47	23.30
		1850.2	22.60	21.75
	Low Voltage	1880	21.72	21.41
GPRS1900		1909.8	22.11	21.96
(3 Slot)		1850.2	22.71	21.86
	Nomal Voltage	1880	21.83	21.47
		1909.8	22.18	22.01



		14 01 59	14 of 59 Report No.: \$1515	
	High Voltage	1850.2	22.61	21.79
		1880	21.75	21.38
		1909.8	22.07	21.96
		1850.2	22.11	21.11
	Low Voltage	1880	21.21	20.83
		1909.8	21.57	21.28
CDDC4000		1850.2	22.18	21.17
GPRS1900	Nomal Voltage	1880	21.27	20.96
(4 Slot)		1909.8	21.64	21.32
		1850.2	22.13	21.12
	High Voltage	1880	21.19	20.81
		1909.8	21.56	21.25



#### 4.2 POWER-ADDED EFFICIENCY

- a.) Look to the schematic. See where the final amplification device connects to the B+ power. In general, it is usually the same as the battery voltage. (V<sub>battery</sub>)
- b.) Measure the current during the time the product is in receive mode. This will be the combination current of the logic circuits and the receiver. (I<sub>receive</sub>)
- c.) Measure the current when the device is transmitting at full power. This is the combined current of the transmitter, receiver and logic circuits. (I<sub>transmitter</sub>)
- d.) The current during final amplification is simple  $(I_{transmit}) (I_{receive}) = (I_{finals})$
- e.) Power-Added Efficiency= Pout put power/V\*I<sub>finals</sub>

**GSM 850** 

 $V_{battery}$ =4.18v

 $I_{receive} = 0.09A$ 

I<sub>transmitter</sub>=0.67A

P<sub>out</sub>=28.96dBm=0.787W

Power-Added Efficiency =0.324

GSM 1900

V<sub>battery</sub>=4.18v

I<sub>receive</sub>=0.08A

 $I_{transmitter} = 0.48A$ 

Pout=24.34dBm=0.271W

Power-Added Efficiency =0.162



# 4.3 PEAK-TO-AVERAGE RADIO (PAR) OF TRANSMITTER


## 4.2.1 STANDARD APPLICABLE

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 4.2.2 TEST PROCEDURE

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded.

Test Configuration for the emission bandwidth testing:

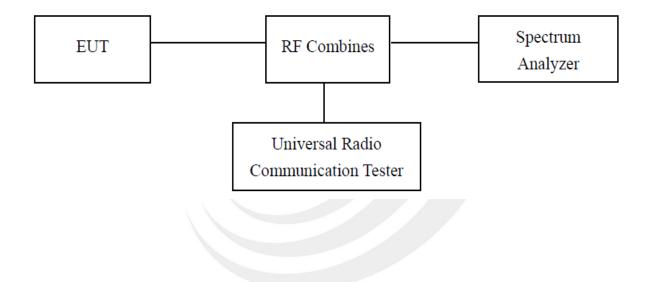



# 4.2.3 SUMMARY OF TEST RESULTS

# GSM 850:

Mode	Frequency (MHz)		Peak Power	AVG Power	PAR	Limit
		824.2	28.91	28.43	0.48	13.00
	Low Voltage	836.6	28.90	28.57	0.33	13.00
		848.8	29.39	28.82	0.57	13.00
	Nomal	824.2	28.96	28.52	0.44	13.00
GSM850		836.6	28.98	28.61	0.37	13.00
	Voltage	848.8	29.42	28.96	0.46	13.00
		824.2	28.87	28.52	0.35	13.00
	High Voltage	836.6	28.76	28.61	0.15	13.00
		848.8	29.31	28.96	0.35	13.00
		824.2	28.71	28.43	0.28	13.00
	Low Voltage	836.6	28.79	28.59	0.2	13.00
		848.8	29.16	29.07	0.09	13.00
CDDC050	Nemal	824.2	28.75	28.47	0.28	13.00
GPRS850	Nomal Voltage	836.6	28.81	28.62	0.19	13.00
(1 Slot)		848.8	29.24	29.10	0.14	13.00
	High Voltage	824.2	28.73	28.41	0.32	13.00
		836.6	28.80	28.57	0.23	13.00
		848.8	29.21	29.08	0.13	13.00
		824.2	27.83	27.45	0.38	13.00
	Low Voltage	836.6	28.00	27.53	0.47	13.00
		848.8	28.21	28.21	0.00	13.00
000000		824.2	27.92	27.50	0.42	13.00
GPRS850	Nomal	836.6	28.01	27.66	0.35	13.00
(2 Slot)	Voltage	848.8	28.28	28.26	0.02	13.00
		824.2	27.79	27.47	0.32	13.00
	High Voltage	836.6	28.00	27.58	0.42	13.00
		848.8	28.27	28.29	-0.02	13.00
		824.2	26.47	26.11	0.36	13.00
	Low Voltage	836.6	26.61	26.45	0.16	13.00
GPRS850		848.8	27.01	26.87	0.14	13.00
(3 Slot)		824.2	26.53	26.13	0.4	13.00
. ,	Nomal	836.6	26.64	26.46	0.18	13.00
	Voltage	848.8	27.07	26.90	0.17	13.00



High Voltage

836.6

848.8

		'				
	High Voltage	824.2	26.49	26.09	0.4	13.00
		836.6	26.62	26.38	0.24	13.00
		848.8	27.05	26.82	0.23	13.00
		824.2	25.93	25.42	0.51	13.00
GPRS850 (4 Slot)	Low Voltage	836.6	26.11	25.63	0.48	13.00
		848.8	26.42	26.19	0.23	13.00
	Nemal	824.2	26.00	25.55	0.45	13.00
	Nomal	836.6	26.13	25.77	0.36	13.00
	Voltage	848.8	26.50	26.37	0.13	13.00
		824.2	25 91	25 43	0.48	13.00

26.07

26.42

25.65

26.20

18 of 59

Report No.: STS1511172F01

0.42

0.22

13.00

13.00



# PCS 1900:

Mode	Frequen	cy (MHz)	Peak Power	AVG Power	PAR	Limit
		1850.2	24.93	24.21	0.72	13.00
	Low	1880	24.17	23.75	0.42	13.00
	Voltage	1909.8	24.91	24.01	0.90	13.00
	Nieren	1850.2	25.01	24.31	0.70	13.00
GSM1900	Nomal	1880	24.25	23.87	0.38	13.00
	Voltage	1909.8	24.98	24.06	0.92	13.00
	Llimb	1850.2	24.91	24.21	0.70	13.00
	High	1880	24.15	23.71	0.44	13.00
	Voltage	1909.8	24.87	23.96	0.91	13.00
	Low	1850.2	24.71	24.11	0.60	13.00
	Low	1880	24.00	23.42	0.58	13.00
	Voltage	1909.8	24.43	24.27	0.16	13.00
CDDC4000	Nomal Voltage	1850.2	24.82	24.17	0.65	13.00
GPRS1900		1880	24.01	23.52	0.49	13.00
(1 Slot)		1909.8	24.53	24.34	0.19	13.00
	High Voltage	1850.2	24.75	24.13	0.62	13.00
		1880	23.95	23.43	0.52	13.00
		1909.8	24.45	24.25	0.20	13.00
	Low	1850.2	23.85	23.11	0.74	13.00
	Low	1880	23.03	22.62	0.41	13.00
	Voltage	1909.8	23.51	23.31	0.20	13.00
CDDC4000	Named	1850.2	23.98	23.18	0.80	13.00
GPRS1900	Nomal	1880	23.10	22.69	0.41	13.00
(2 Slot)	Voltage	1909.8	23.54	23.39	0.15	13.00
	Lliab	1850.2	23.90	23.15	0.75	13.00
	High	1880	23.01	22.63	0.38	13.00
	Voltage	1909.8	23.47	23.30	0.17	13.00
	Low	1850.2	22.60	21.75	0.85	13.00
	Low	1880	21.72	21.41	0.31	13.00
GPRS1900	Voltage	1909.8	22.11	21.96	0.15	13.00
(3 Slot)		1850.2	22.71	21.86	0.85	13.00
,	Nomal	1880	21.83	21.47	0.36	13.00
	Voltage	1909.8	22.18	22.01	0.17	13.00



	I II ada	1850.2	22.61	21.79	0.82	13.00
	High	1880	21.75	21.38	0.37	13.00
	Voltage	1909.8	22.07	21.96	0.11	13.00
	Low	1850.2	22.11	21.11	1.00	13.00
	Low Voltage	1880	21.21	20.83	0.38	13.00
		1909.8	21.57	21.28	0.29	13.00
GPRS1900	Nomal — Voltage —	1850.2	22.18	21.17	1.01	13.00
(4 Slot)		1880	21.27	20.96	0.31	13.00
(4 3101)		1909.8	21.64	21.32	0.32	13.00
		1850.2	22.13	21.12	1.01	13.00
	High	1880	21.19	20.81	0.38	13.00
	Voltage	1909.8	21.56	21.25	0.31	13.00



## 4.3 RADIATED OUTPUT POWER

#### 4.3.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS850, GSM/GPRS1900) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The measurements procedures specified in TIA-603C-2009 were applied.

- 1.In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- 2. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. The ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- 3. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5. The EUT is then put into continuously transmitting mode at its maximum power level.
- 6.Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 8.ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi..
  9.Both Horizontal And Vertical Antenna Polarities Were Tested And Performed Pretest To Three Orthogonal Axis. The Worst Case Emissions Were Reported

# 4.3.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850	<=38.45 dBm (7W)
PCS 1900	<=33 dBm (2W)



# 4.3.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850 MHZ						
		Res	sult			
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion		
		(dBm)	Of Max. ERP			
	824.2	24.18	Horizontal	Pass		
	824.2	26.04	Vertical	Pass		
CCMOEO	836.6	24.09	Horizontal	Pass		
GSM850	836.6	26.17	Vertical	Pass		
	848.8	24.20	Horizontal	Pass		
	848.8	26.16	Vertical	Pass		

Radiated Power (ERP) for GPRS 850 MHZ						
		Res	Result			
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion		
		(dBm)	Of Max. ERP			
	824.2	24.15	Horizontal	Pass		
	824.2	26.20	Vertical	Pass		
GPRS850	836.6	24.10	Horizontal	Pass		
GPR3000	836.6	26.19	Vertical	Pass		
	848.8	24.13	Horizontal	Pass		
	848.8	26.03	Vertical	Pass		



Radiated Power (EIRP) for PCS 1900 MHZ						
		Res	Result			
Mode	Frequency	Max. Peak	Polarization	Conclusion		
		E.I.R.P.(dBm)	Of Max. E.I.R.P.			
	1850.2	19.96	Horizontal	Pass		
	1850.2	22.01	Vertical	Pass		
PCS1900	1880.0	19.82	Horizontal	Pass		
PC31900	1880.0	21.84	Vertical	Pass		
	1909.8	19.98	Horizontal	Pass		
	1909.8	21.85	Vertical	Pass		

Radiated Power (EIRP) for GPRS 1900 MHZ					
		Result			
Mode	Frequency	Max. Peak	Polarization	Conclusion	
		E.I.R.P.(dBm)	Of Max. E.I.R.P.		
	1850.2	19.06	Horizontal	Pass	
	1850.2	21.05	Vertical	Pass	
GPRS 1900 -	1880.0	19.12	Horizontal	Pass	
GPRS 1900 F	1880.0	21.08	Vertical	Pass	
	1909.8	19.06	Horizontal	Pass	
	1909.8	21.09	Vertical	Pass	



#### 5. SPURIOUS EMISSION

## 5.1 SPURIOUS EMISSION

#### 5.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1.Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 20 GHz.
- 2. Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM/GPRS 850 MHz		
Channel Frequency (MHz)		
128	824.2	
190	836.6	
251	848.8	

Typical Channels for testing of PCS/ GPRS 1900 MHz			
Channel Frequency (MHz)			
512	1850.2		
661	1880.0		
810	1909.8		



# 5.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

# 5.1.3 MEASUREMENT RESULT

PLEASE REFER TO: APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

Note: 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.






## 5.2 RADIATED SPURIOUS EMISSION

#### 5.2.1 MEASUREMENT METHOD


The measurements procedures specified in TIA-603C-2009 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GSM/GPRS850, GSM/GPRS1900) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, RSE=Rx (dBuV) +CL (dB) +SA (dB) +Gain (dBi) -107 (dBuV to dBm) The SA is calibrated using following setup.

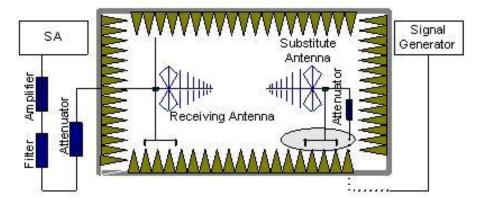

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

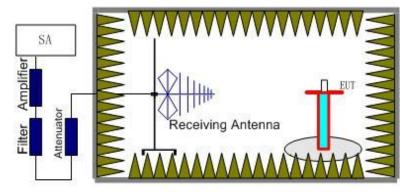



Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz),GSM850 band (824.2MHz, 836.6MHz, 848.8MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A<sub>Rpl</sub> is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power=P<sub>Mea</sub>+A<sub>Rpl</sub>

## 5.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode.



# 5.2.3 MEASUREMENT RESULT GSM 850:

	The	Worst Tast F	Paculte Channe	el 128/824.2 MHz		
- (1411)			1	ı		D 1 "
Frequency(MHz)	Power(dBm)	ARpl	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin(dBm)	Polarity
1648.521	-35.51	-4.65	-40.16	-13	-27.16	Horizontal
2472.565	-36.33	-2.21	-38.54	-13	-25.54	Horizontal
3296.676	-31.62	0.21	-31.41	-13	-18.41	Horizontal
1648.272	-38.36	-4.65	-43.01	-13	-30.01	Vertical
2472.654	-41.45	-2.21	-43.66	-13	-30.66	Vertical
3296.425	-42.34	0.21	-42.55	-13	-29.55	Vertical
	The	Worst Test F	Results Channe	el 190/836.6 MHz	-	
Frequency(MHz)	Power(dBm)	ARpl	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin(dBm)	Polarity
1673.331	-36.65	-4.65	-41.3	-13	-28.3	Horizontal
2509.769	-42.67	-2.21	-44.88	-13	-31.88	Horizontal
3346.357	-38.74	0.21	-38.53	-13	-25.53	Horizontal
1673.685	-37.86	-4.65	-42.51	-13	-29.51	Vertical
2509.396	-31.68	-2.21	-33.89	-13	-20.89	Vertical
3346.426	-36.73	0.21	-36.52	-13	-23.52	Vertical
	The	Worst Test F	Results Channe	el 251/848.8 MHz		
Frequency(MHz)	Power(dBm)	ARpl	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin(dBm)	Polarity
1697.665	-35.72	-4.65	-40.37	-13	-27.37	Horizontal
2546.334	-43.33	-2.21	-45.54	-13	-32.54	Horizontal
3395.378	-42.65	0.21	-42.44	-13	-29.44	Horizontal
1697.664	-35.57	-4.65	-40.22	-13	-27.22	Vertical
2546.526	-41.29	-2.21	-43.5	-13	-30.5	Vertical
3395.265	-37.95	0.21	-37.74	-13	-24.74	Vertical

Note: Below 30MHZ no Spurious found and The GSM modes is the worst condition.



# PCS 1900:

The Worst Test Results for Channel 512/1850.2MHz						
Frequency(MHz)	Power(dBm)	ARpl	P <sub>Mea</sub> (dBm)	Limit (dBm)	Margin(dBm)	Polarity
3700.436	-33.41	0.33	-33.08	-13	-20.08	Horizontal
5550.693	-35.83	4.01	-31.82	-13	-18.82	Horizontal
7400.634	-42.46	10.7	-31.76	-13	-18.76	Horizontal
3700.584	-34.52	0.33	-34.19	-13	-21.19	Vertical
5550.240	-35.61	4.01	-31.6	-13	-18.6	Vertical
7400.459	-41.83	10.7	-31.13	-13	-18.13	Vertical
	The V	Vorst Test Res	ults for Chann	el 661/1880.0MI	-lz	
Frequency(MHz)	Power(dBm)	ARpl	Р <sub>меа</sub> (dВm)	Limit (dBm)	Margin(dBm)	Polarity
3760.357	-36.57	0.33	-36.24	-13	-23.24	Horizontal
5640.239	-32.76	4.01	-28.75	-13	-15.75	Horizontal
7520.419	-42.62	10.7	-31.92	-13	-18.92	Horizontal
3760.643	-31.29	0.33	-30.96	-13	-17.96	Vertical
5640.427	-36.33	4.01	-32.32	-13	-19.32	Vertical
7520.693	-37.42	10.7	-26.72	-13	-13.72	Vertical
	The V	Vorst Test Res	ults for Chann	el 810/1909.8MI	-lz	
Frequency(MHz)	Power(dBm)	ARpl	Р <sub>меа</sub> (dВm)	Limit (dBm)	Margin(dBm)	Polarity
3819.593	-32.37	0.33	-32.04	-13	-19.04	Horizontal
5729.653	-35.62	4.01	-31.61	-13	-18.61	Horizontal
7639.762	-37.69	10.7	-26.99	-13	-13.99	Horizontal
3819.447	-32.43	0.33	-32.1	-13	-19.1	Vertical
5729.791	-41.54	4.01	-37.53	-13	-24.53	Vertical
7639.321	-38.25	10.7	-27.55	-13	-14.55	Vertical

Note: Below 30MHZ no Spurious found and The GSM modes is the worst condition.





#### 6. FREQUENCY STABILITY

#### 6.1 MEASUREMENT METHOD

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out. Note: only result the worst condition of each test mode.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1. Measure the carrier frequency at room temperature.
- 2. Subject the EUT to overnight soak at -30℃.
- 3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band, channel 190 for GSM 850 band measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4. Repeat the above measurements at 10°C increments from -20°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6. Subject the EUT to overnight soak at +50°C.
- 7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8. Repeat the above measurements at  $10^{\circ}$ C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- .At all temperature levels hold the temperature to  $\pm$ 0.5°C during the measurement procedure.



#### **6.2 PROVISIONS APPLICABLE**

## 6.2.1 FOR HAND CARRIED BATTERY POWERED EQUIPMENT

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.3VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

## 6.2.2 FOR EQUIPMENT POWERED BY PRIMARY SUPPLY VOLTAGE

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20oC.



# 6.3 MEASUREMENT RESULT

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C

Frequency Error Against Voltage for GSM 850 band				
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)		
3.4	-24	-0.029		
3.7	34	0.041		
4.2	23	0.028		

Frequenc	Frequency Error Against Temperature for GSM 850 band				
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)			
-30	16	0.019			
-20	-13	-0.016			
-10	-35	-0.042			
0	34	0.041			
10	-16	-0.019			
20	17	0.020			
30	-26	-0.031			
40	25	0.030			
50	27	0.032			

Frequency Error Against Voltage for GPRS850 band				
Voltage(V) Frequency error(Hz) Frequency error(ppm)				
3.4	-11	-0.013		
3.7	24	0.029		
4.2	27	0.032		



Frequency Error Against Temperature for GPRS850 band				
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)		
-30	-17	-0.020		
-20	31	0.037		
-10	-13	-0.016		
0	-27	-0.032		
10	17	0.020		
20	11	0.013		
30	-23	-0.028		
40	28	0.033		
50	19	0.023		

Frequency Error Against Voltage for GSM1900 band				
Voltage(V)	Frequency error(Hz) Frequency error(ppm)			
3.4	21	0.011		
3.7	27	0.014		
4.2	17	0.009		

Frequency Error Against Temperature for GSM1900 band			
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)	
-30	-17	-0.009	
-20	-23	-0.012	
-10	19	0.010	
0	26	0.014	
10	23	0.012	
20	25	0.013	
30	33	0.018	
40	-14	-0.007	
50	-22	-0.012	

Frequency Error Against Voltage for GPRS1900 band				
Voltage(V) Frequency error(Hz) Frequency error(ppm)				
3.4	34	0.018		
3.7	-17	-0.009		
4.2	24	0.013		



## 7. OCCUPIED BANDWIDTH

# 7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

# 7.2 PROVISIONS APPLICABLE

Limits applicated report test result only.

# 7.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 band				
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
Low Channel	824.2	248.00		
Middle Channel	836.6	244.77		
High Channel	848.8	246.11		
Occupied Bandwidth (99%) for GPRS 850 band				
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
Low Channel	824.2	241.16		
Middle Channel	836.6	245.50		
High Channel	848.8	242.38		

Occupied Bandwidth (99%) for GSM1900 band					
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)			
Low Channel	1850.2	246.37			
Middle Channel	1880.0	242.81			
High Channel	1909.8	242.58			
Occupied Bandwidth (99%) for GPRS1900 band					
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)			
Low Channel	1850.2	245.11			
Middle Channel	1880.0	245.63			
High Channel	1909.8	242.98			



## 8. EMISSION BANDWIDTH

# 8.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

## 8.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

## 8.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM850 band				
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)		
Low Channel	824.2	320.9		
Middle Channel	836.6	307.5		
High Channel	848.8	317.9		
Emission Bandwidth (-26dBc) for GPRS850 band				
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)		
Low Channel	824.2	317.7		
Middle Channel	836.6	314.5		
High Channel	848.8	317.4		

Emission Bandwidth (-26dBc) for GSM1900 band				
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)		
Low Channel	1850.2	314.5		
Middle Channel	1880.0	306.8		
High Channel	1909.8	313.7		
Emission Bandwidth (-26dBc) for GPRS1900 band				
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)		
Low Channel	1850.2	315.4		
Middle Channel	1880.0	308.7		
High Channel	1909.8	318.4		



## 9. BAND EDGE

# 9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

# 9.2 PROVISIONS APPLICABLE

as Specified in FCC rules of 22.917(b) and 24.238(b)

# 9.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges





# **APPENDIX I**


# TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

CONDUCTED EMISSION IN GSM 850 BAND

Conducted Emission Transmitting Mode CH 128 30MHz - 9GHz




# Conducted Emission Transmitting Mode CH 190 30MHz - 9GHz

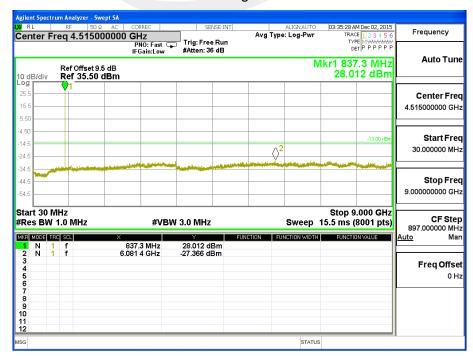




# Conducted Emission Transmitting Mode CH 251 30MHz - 9GHz

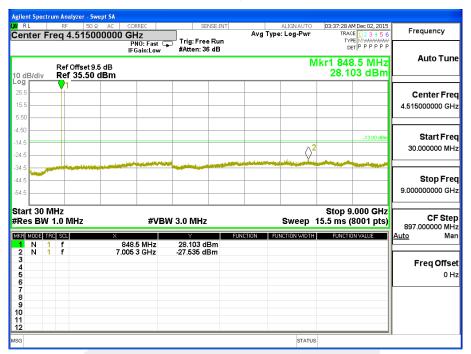




#### CONDUCTED EMISSION IN GPRS 850 BAND

#### Conducted Emission Transmitting Mode CH 128 30MHz – 9GHz

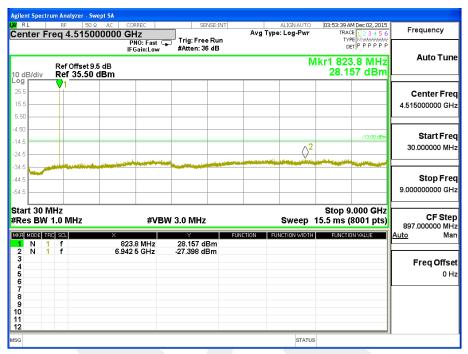


#### Conducted Emission Transmitting Mode CH 190 30MHz – 9GHz

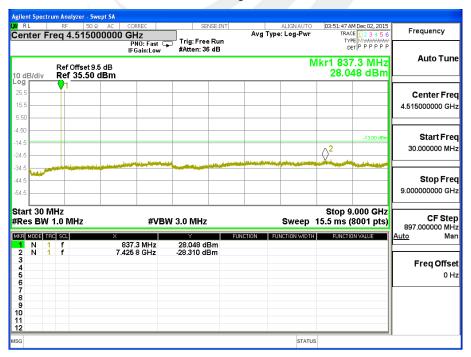




# Conducted Emission Transmitting Mode CH 251 30MHz - 9GHz

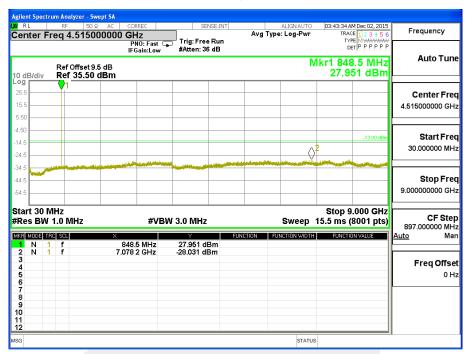



#### CONDUCTED EMISSION IN GSM1900 BAND


#### Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

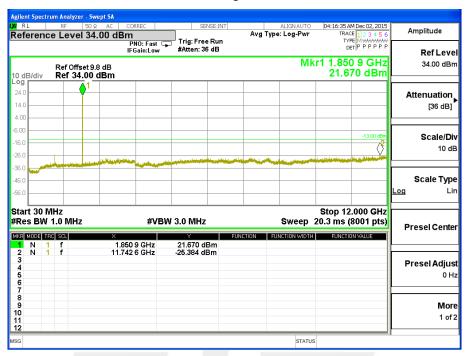







# Conducted Emission Transmitting Mode CH 661 30MHz - 20GHz

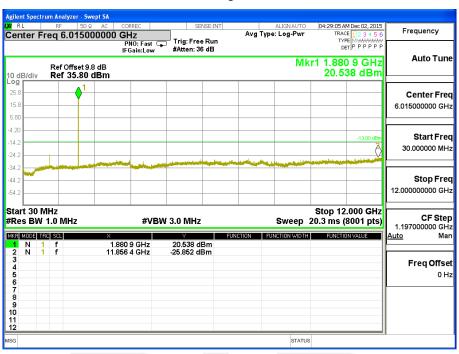

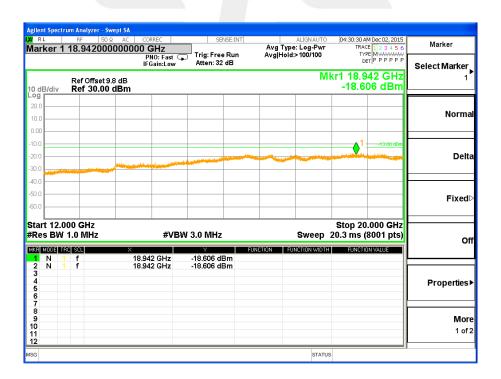



# Conducted Emission Transmitting Mode CH 810 30MHz - 20GHz

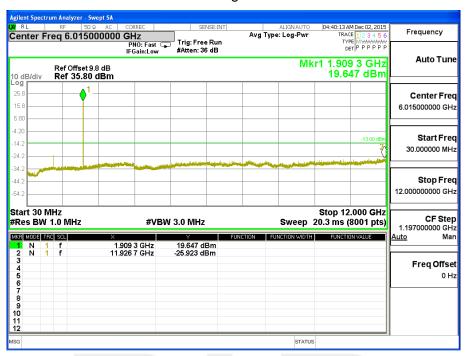







#### CONDUCTED EMISSION IN GPRS1900 BAND


#### Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

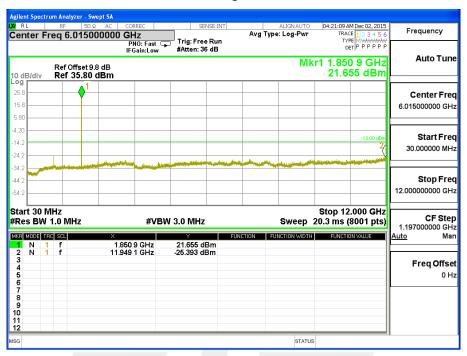

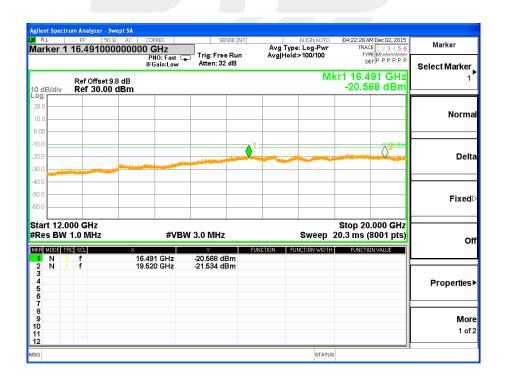




# Conducted Emission Transmitting Mode CH 661 30MHz - 20GHz

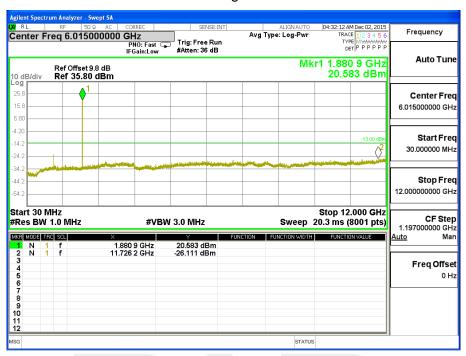





# Conducted Emission Transmitting Mode CH 810 30MHz - 20GHz

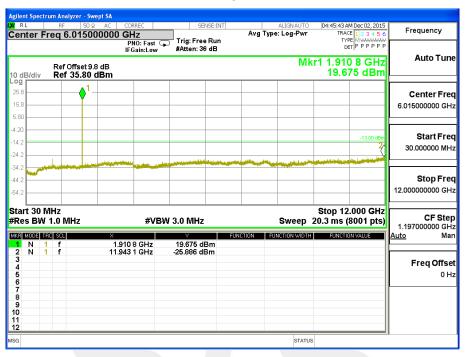






# **APPENDIX II**

# TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) EMISSION BANDWIDTH (-26dBC)

Occupied Bandwidth (99%) GSM 850 BAND CH 128

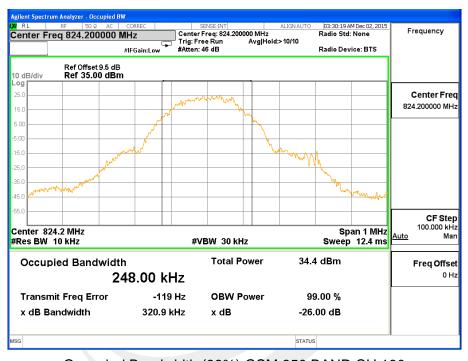


# Occupied Bandwidth (99%) GSM 850 BAND CH 190






# Occupied Bandwidth (99%) GSM 850 BAND CH 251

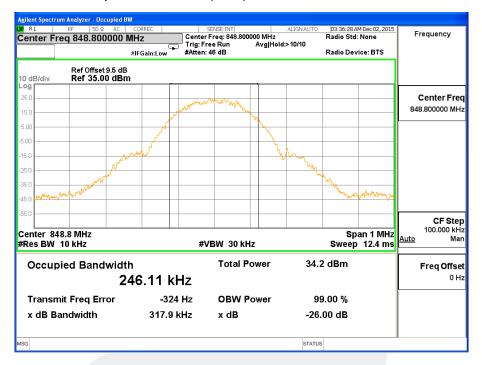




# Occupied Bandwidth (99%) GPRS 850 BAND CH 128

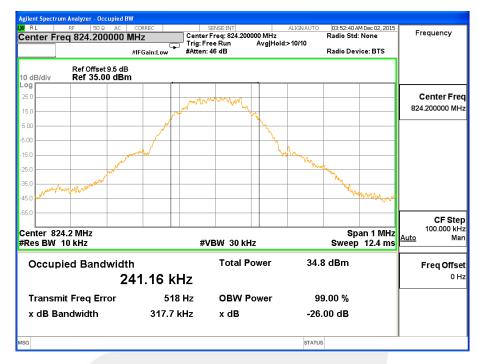


# Occupied Bandwidth (99%) GPRS 850 BAND CH 190

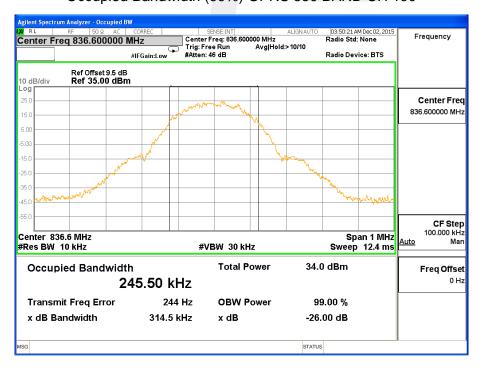




# Occupied Bandwidth (99%) GRPS 850 BAND CH 251

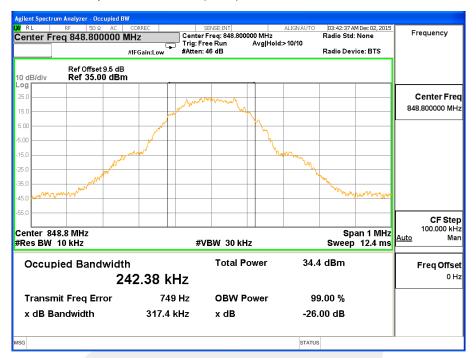




# Occupied Bandwidth (99%) PCS 1900 BAND CH 512

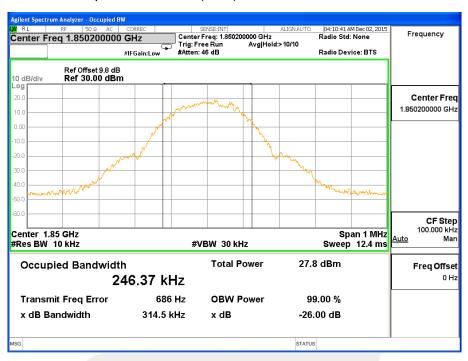


# Occupied Bandwidth (99%) PCS 1900 BAND CH 661

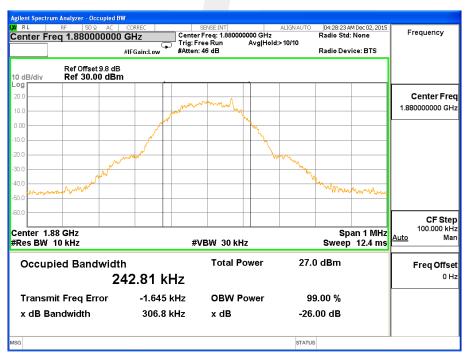




# Occupied Bandwidth (99%) PCS 1900 BAND CH 810

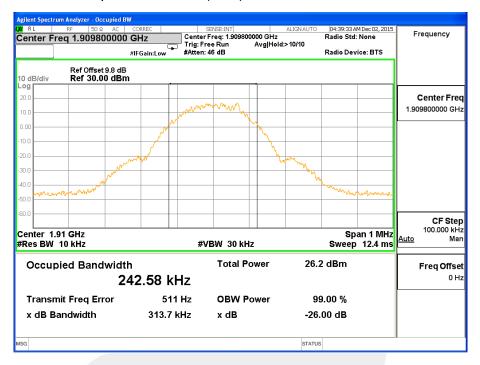




# Occupied Bandwidth (99%) GPRS 1900 BAND CH 512

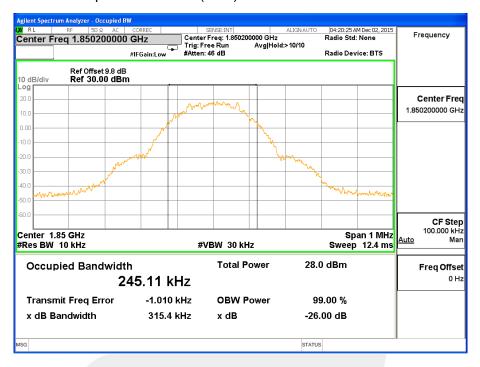


# Occupied Bandwidth (99%) GPRS 1900 BAND CH 661

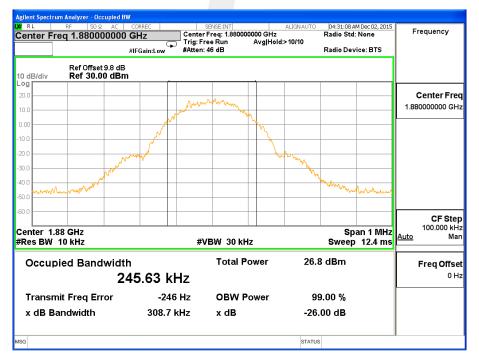




# Occupied Bandwidth (99%) GPRS 1900 BAND CH 810

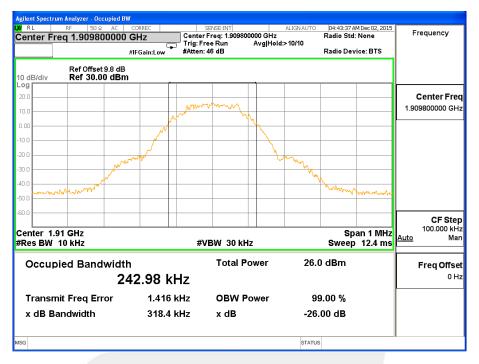



# APPENDIX III TEST PLOTS FOR BAND EDGES

Low Band Edge GSM 850 BAND CH 128

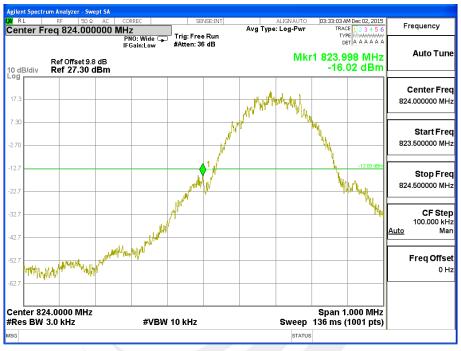

Note:Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB


High Band Edge GSM 850 BAND CH 251



Note:Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB



#### Low Band Edge GPRS 850 BAND CH 128

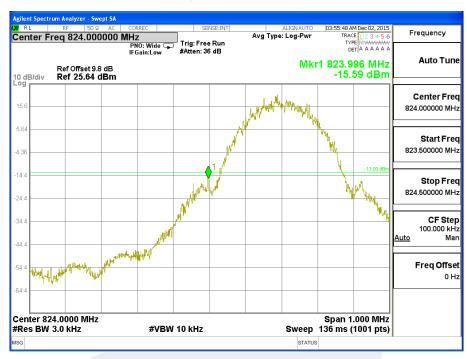

Note:Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB


High Band Edge GPRS 850 BAND CH 251



Note:Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB



#### Low Band Edge PCS 1900 BAND CH 512

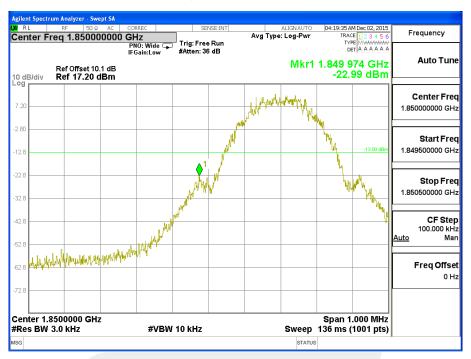

Note:Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB


High Band Edge PCS 1900 BAND CH 810



Note:Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB



#### Low Band Edge GPRS 1900 BAND CH 512

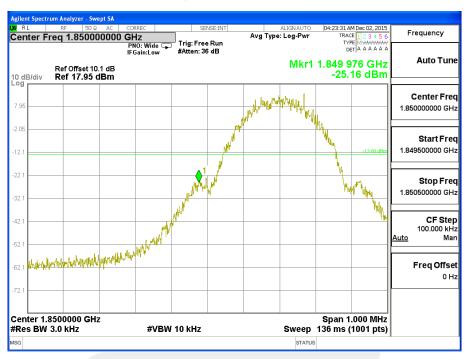

Note:Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB

High Band Edge GPRS 1900 BAND CH 810



Note:Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB



# **APPENDIX IV**

# **PHOTOS OF TEST SETUP**

RADIATED SPURIOUS EMISSION





\* \* \* \* \* END OF THE REPORT \* \* \* \*