



Test Graphs

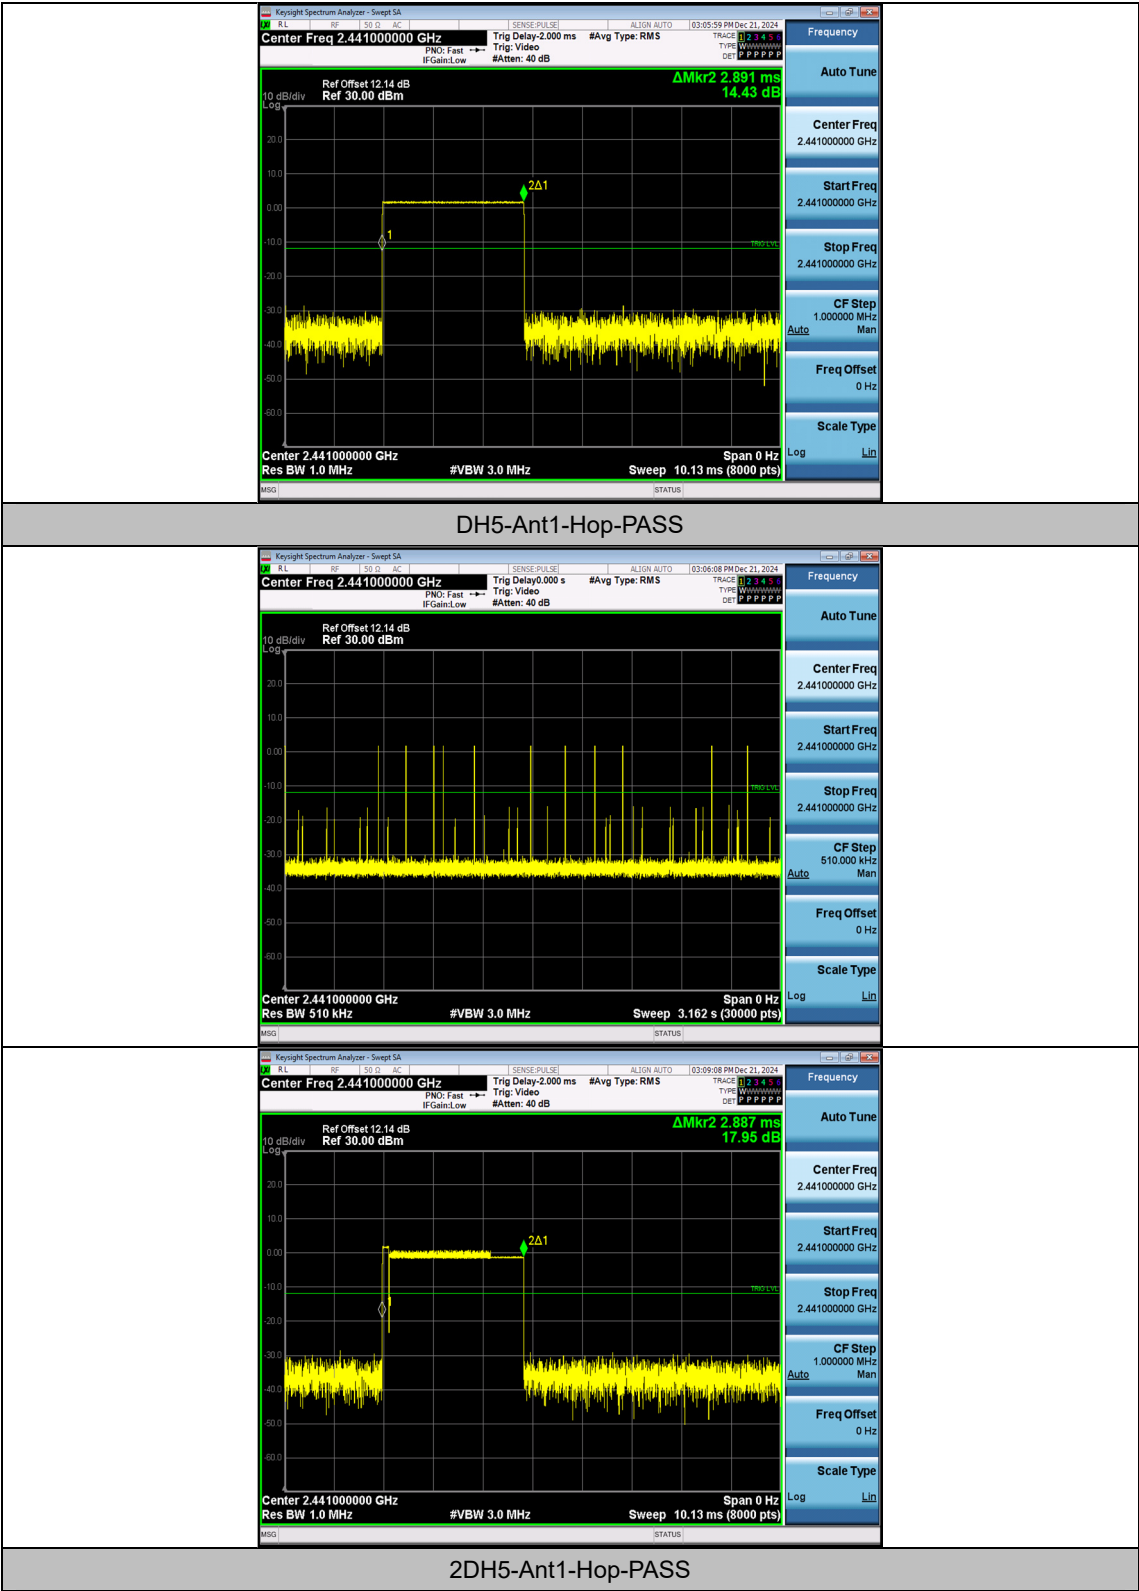

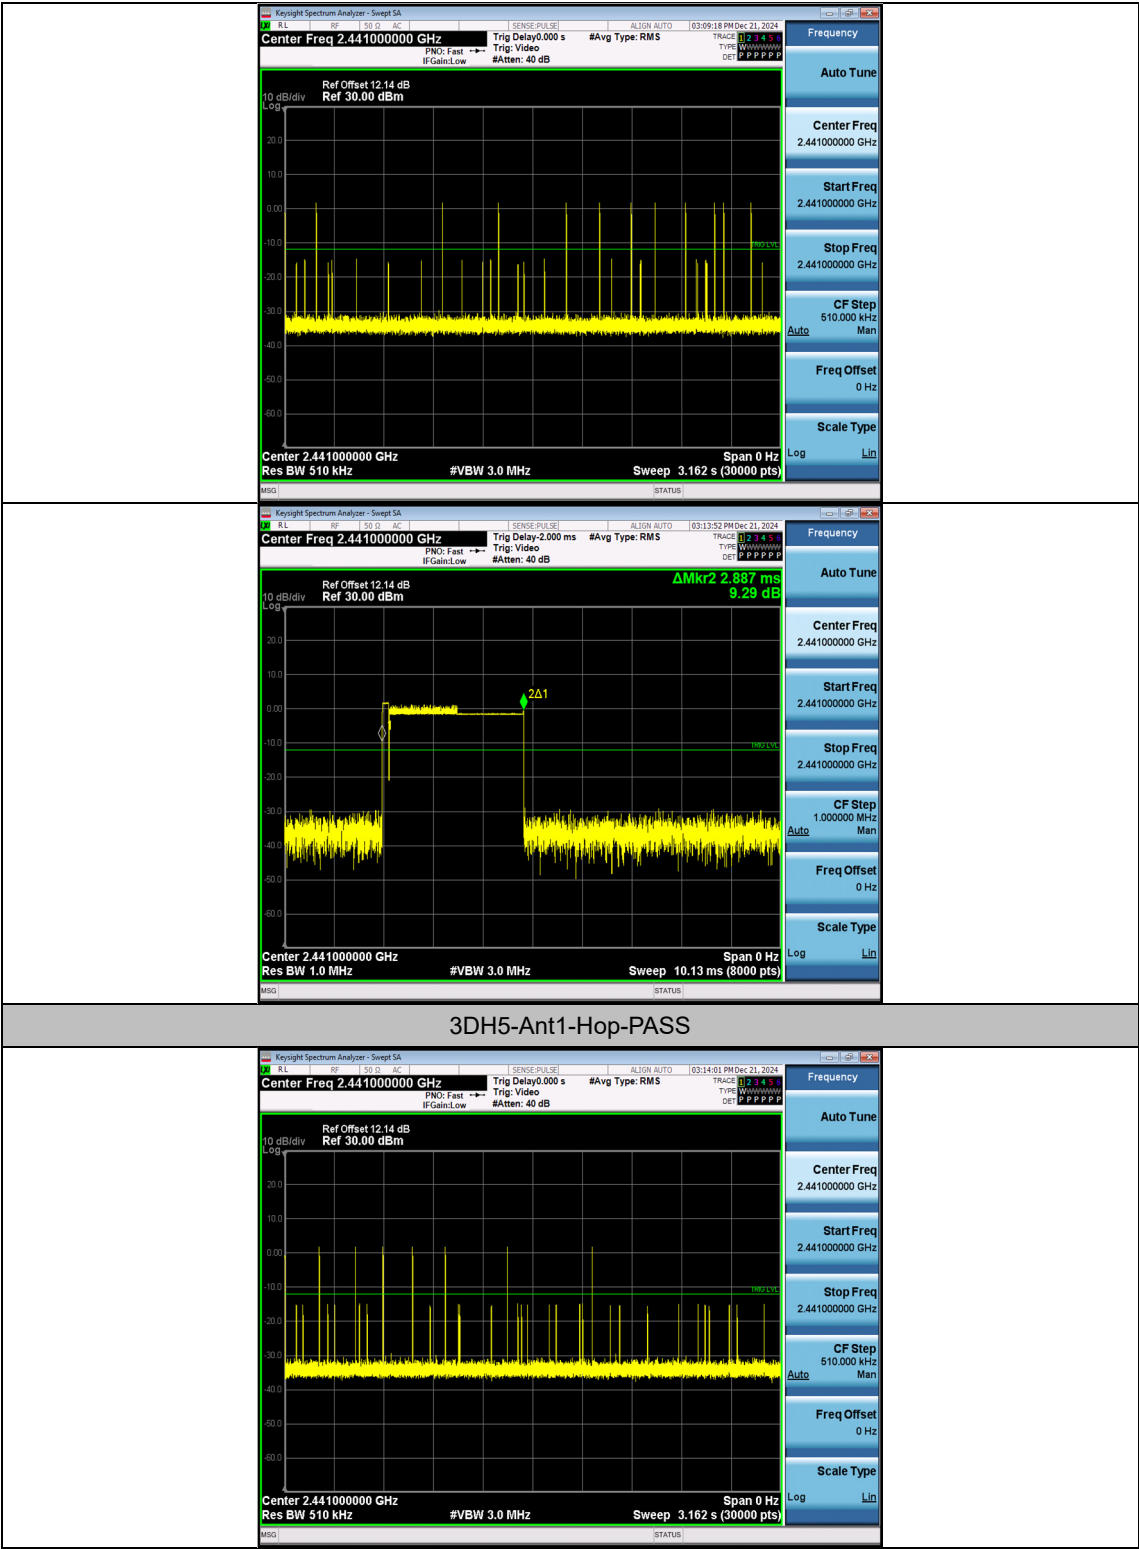


Appendix E: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

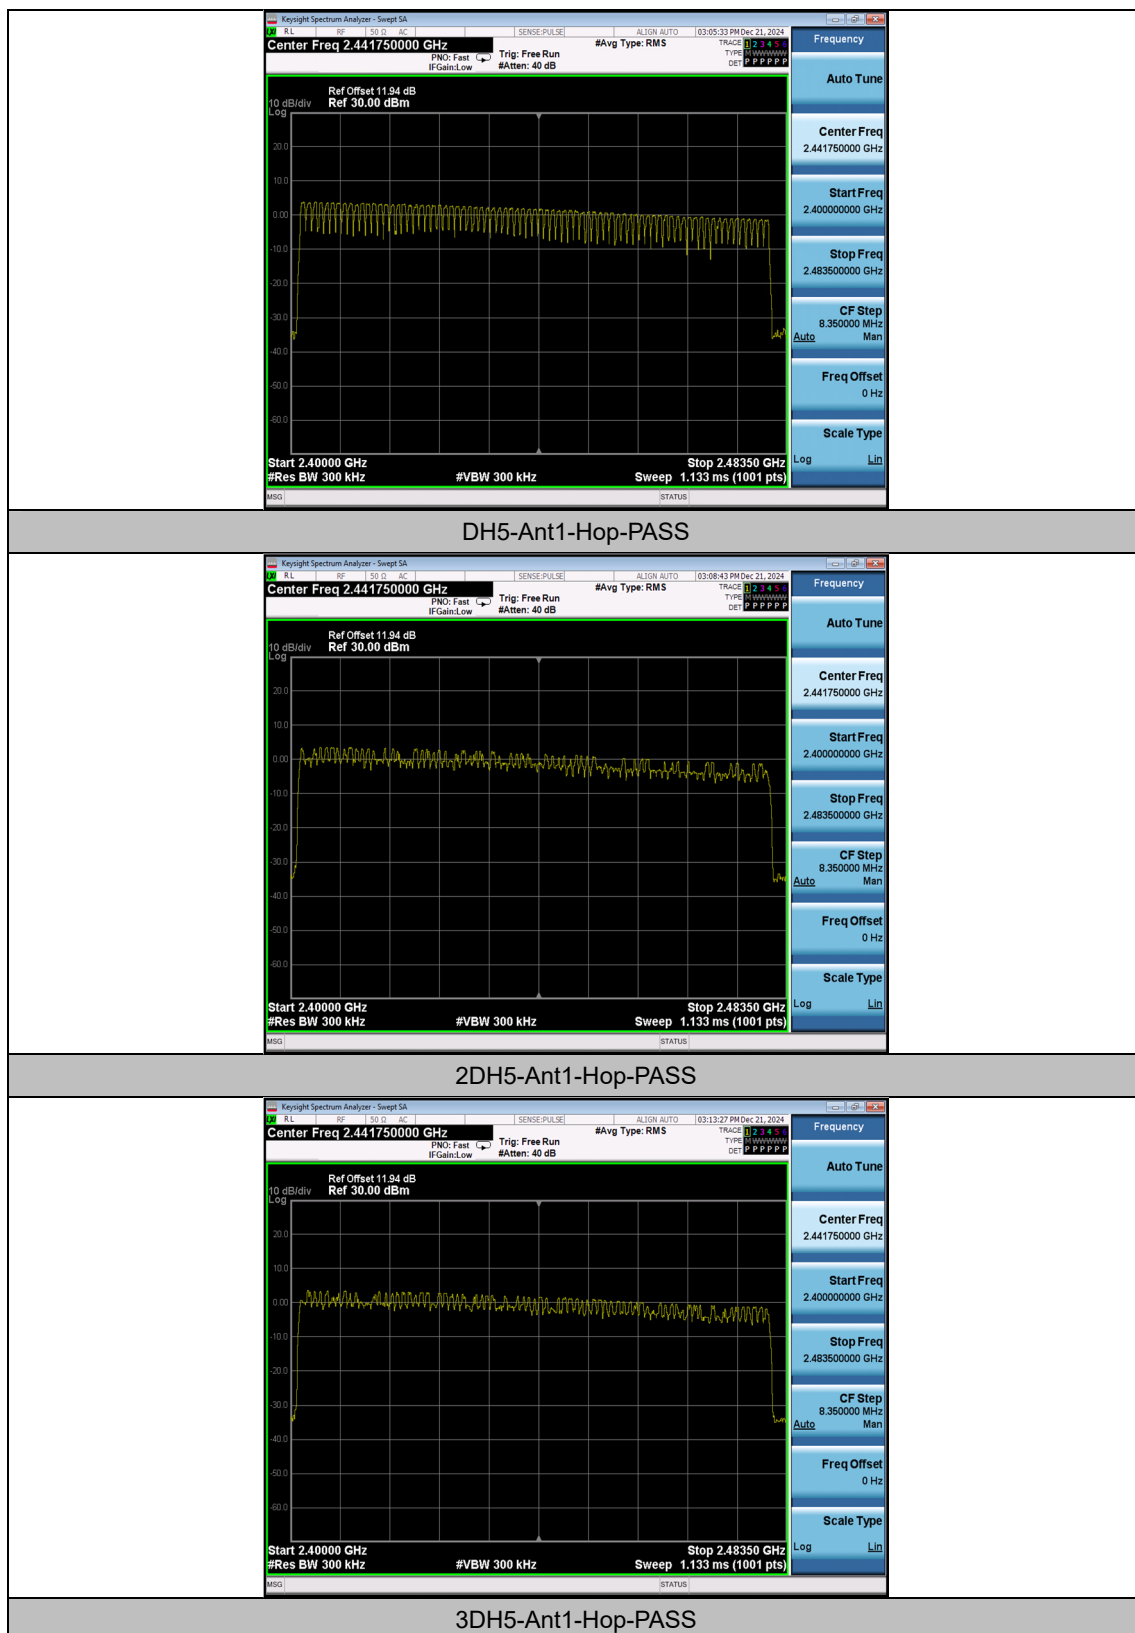



Appendix F: Reference level measurement


Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
DH5	Ant1	2402	2401.85	3.97
DH5	Ant1	2441	2441.18	1.92
DH5	Ant1	2480	2480.18	-1.26
2DH5	Ant1	2402	2402.21	3.02
2DH5	Ant1	2441	2441.02	1.43
2DH5	Ant1	2480	2479.84	-1.28
3DH5	Ant1	2402	2401.84	3.77
3DH5	Ant1	2441	2441.18	1.75
3DH5	Ant1	2480	2480.18	-1.35

Test Graphs

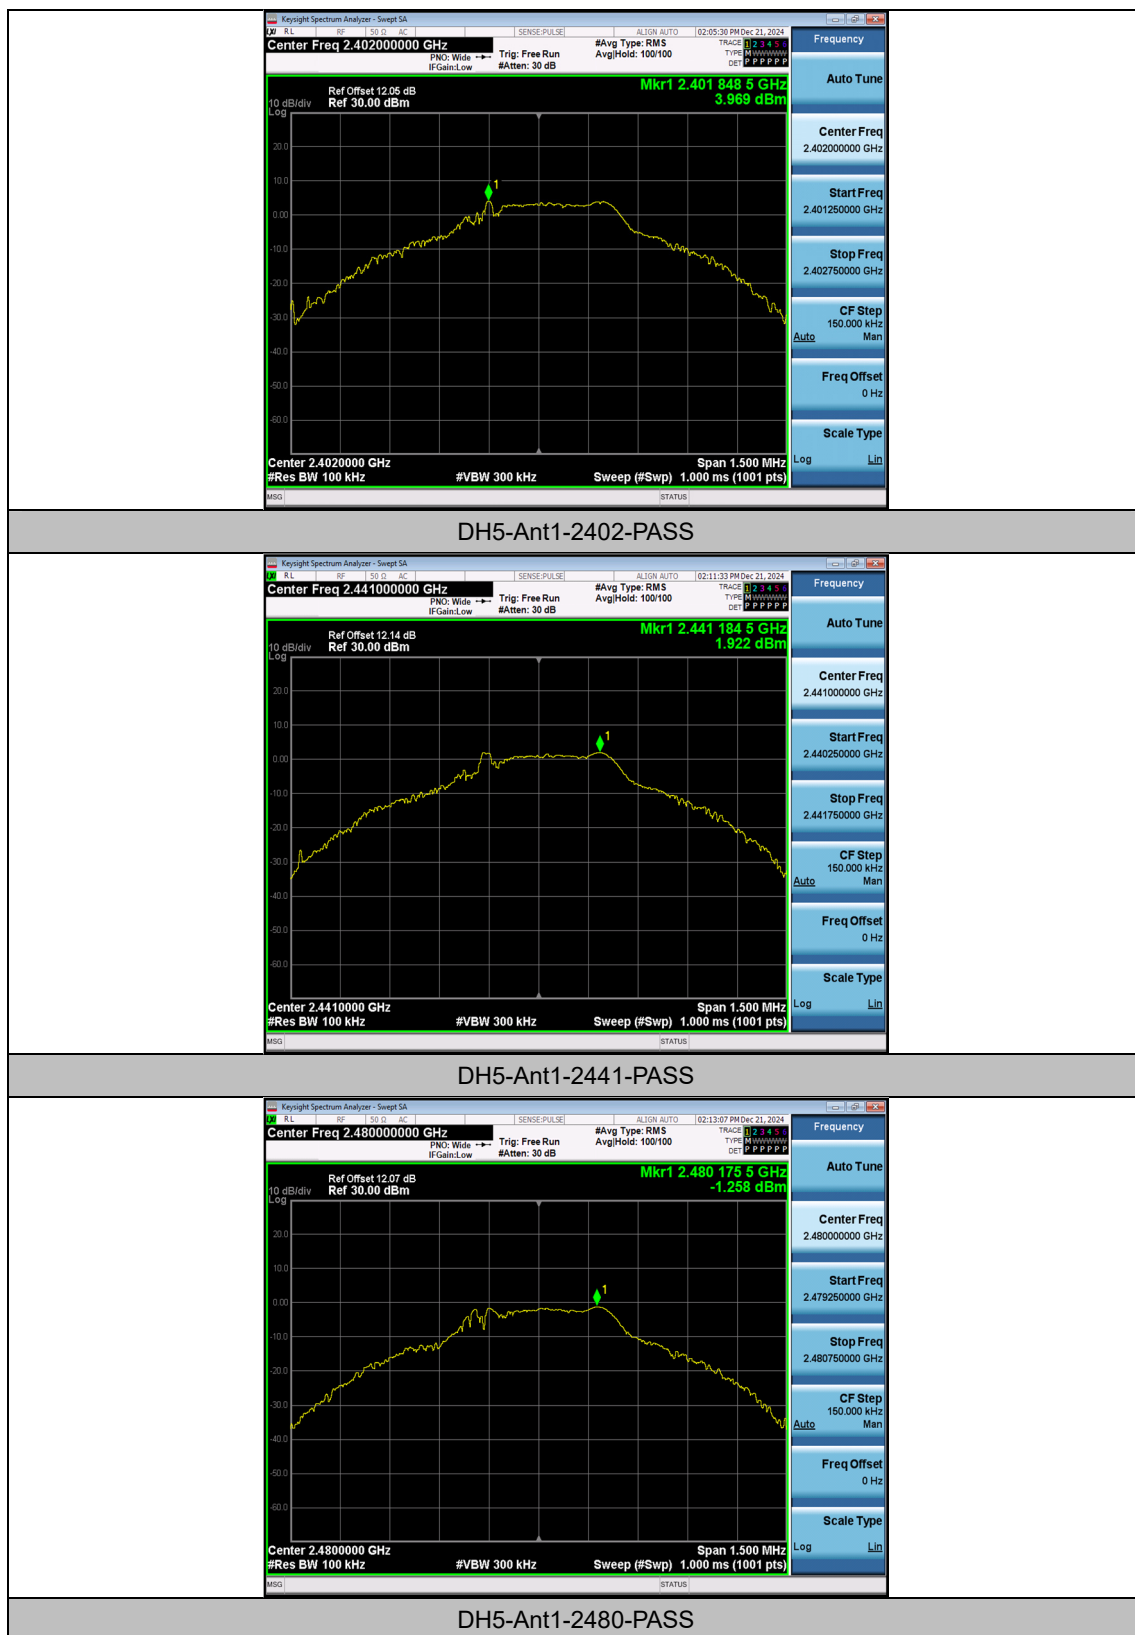

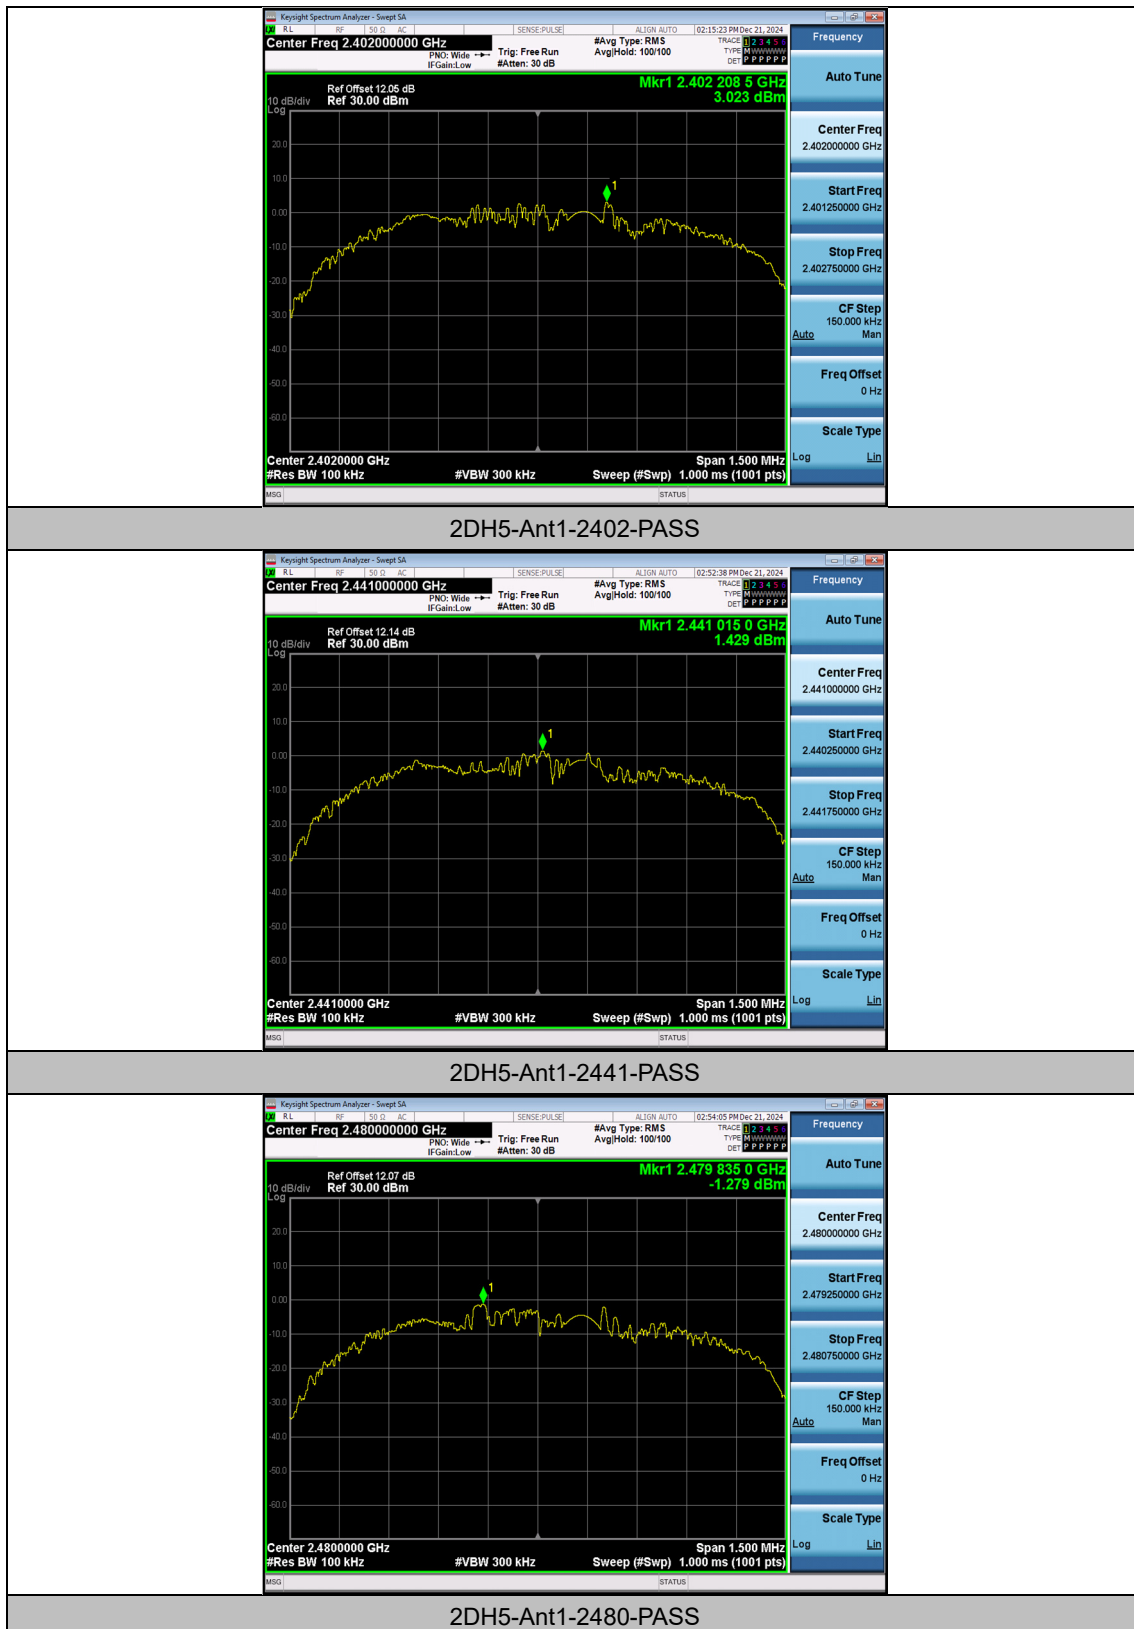

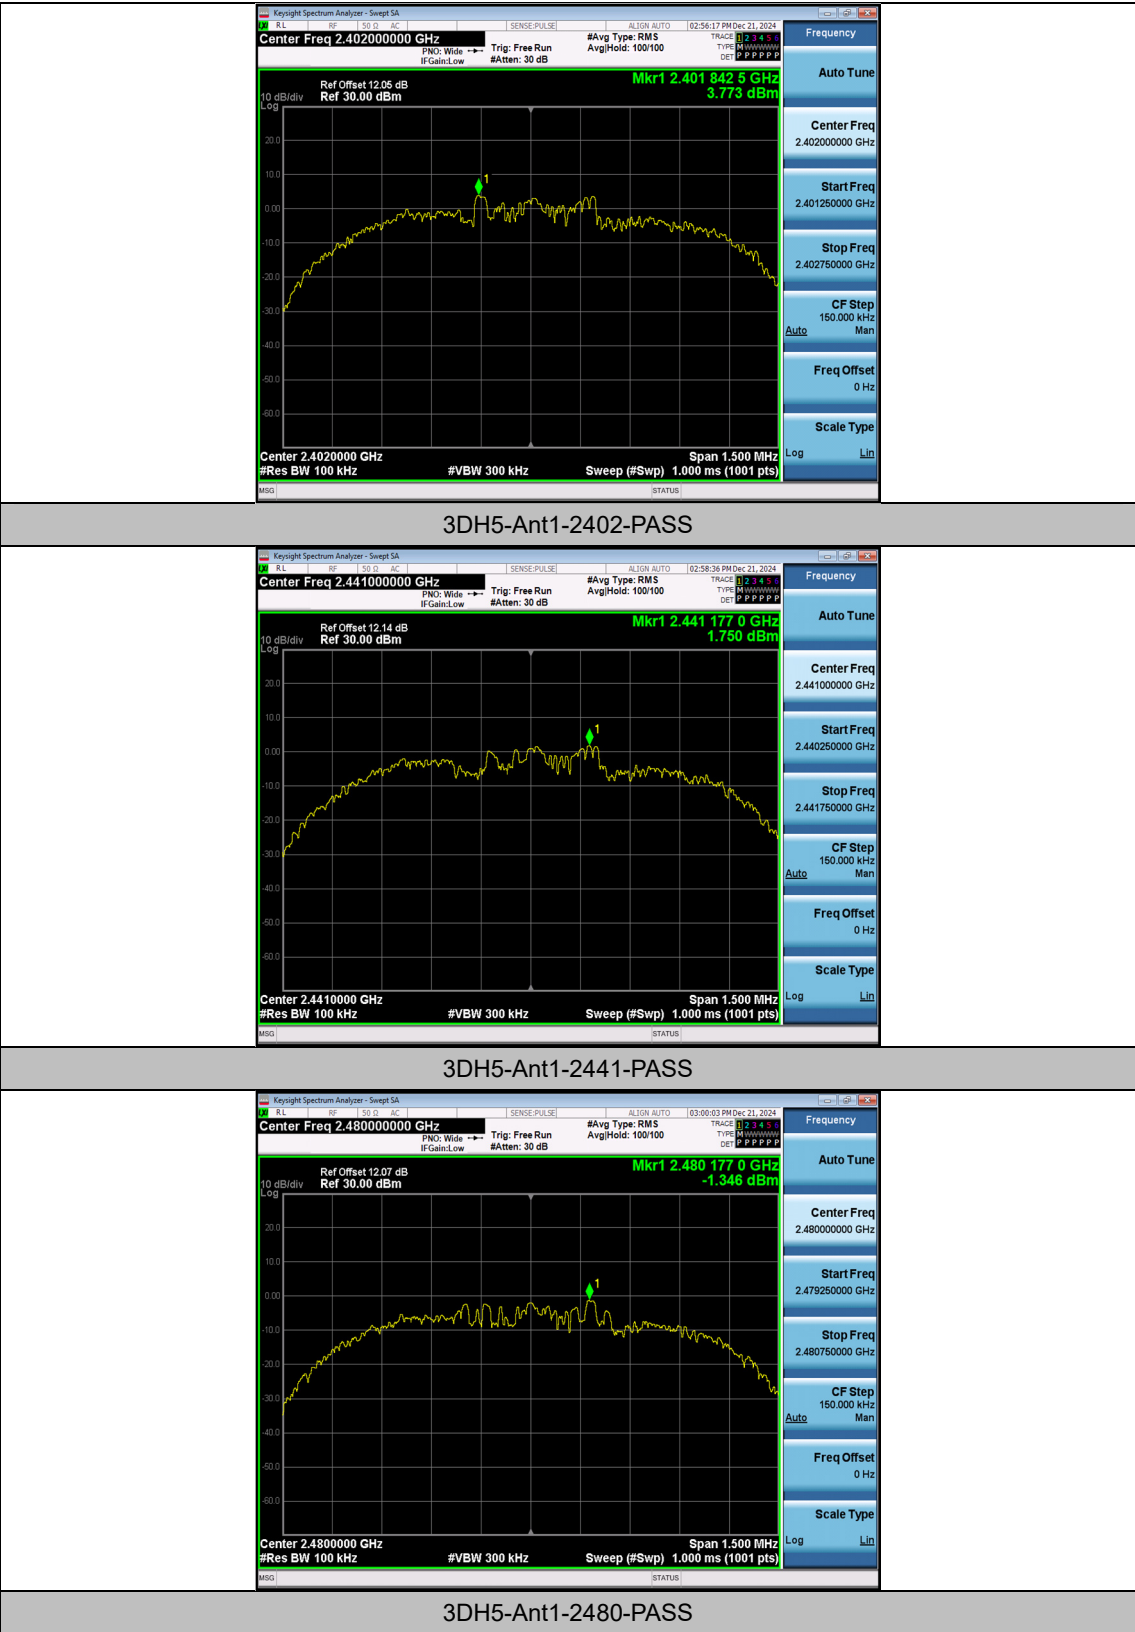

Appendix G: Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	3.97	-40.26	≤-16.03	PASS
DH5	Ant1	High	2480	-1.26	-46.45	≤-21.26	PASS
DH5	Ant1	Low	Hop_2402	2.91	-40.1	≤-17.1	PASS
DH5	Ant1	High	Hop_2480	-1.09	-45.14	≤-21.09	PASS
2DH5	Ant1	Low	2402	3.02	-42.47	≤-16.98	PASS
2DH5	Ant1	High	2480	-1.28	-46.63	≤-21.28	PASS
2DH5	Ant1	Low	Hop_2402	0.22	-41.78	≤-19.79	PASS
2DH5	Ant1	High	Hop_2480	-3.96	-45.3	≤-23.96	PASS
3DH5	Ant1	Low	2402	3.77	-40.72	≤-16.23	PASS
3DH5	Ant1	High	2480	-1.35	-47.13	≤-21.35	PASS
3DH5	Ant1	Low	Hop_2402	-0.05	-41.09	≤-20.05	PASS
3DH5	Ant1	High	Hop_2480	-2.27	-45.68	≤-22.27	PASS

Test Graphs

