



Test Graphs

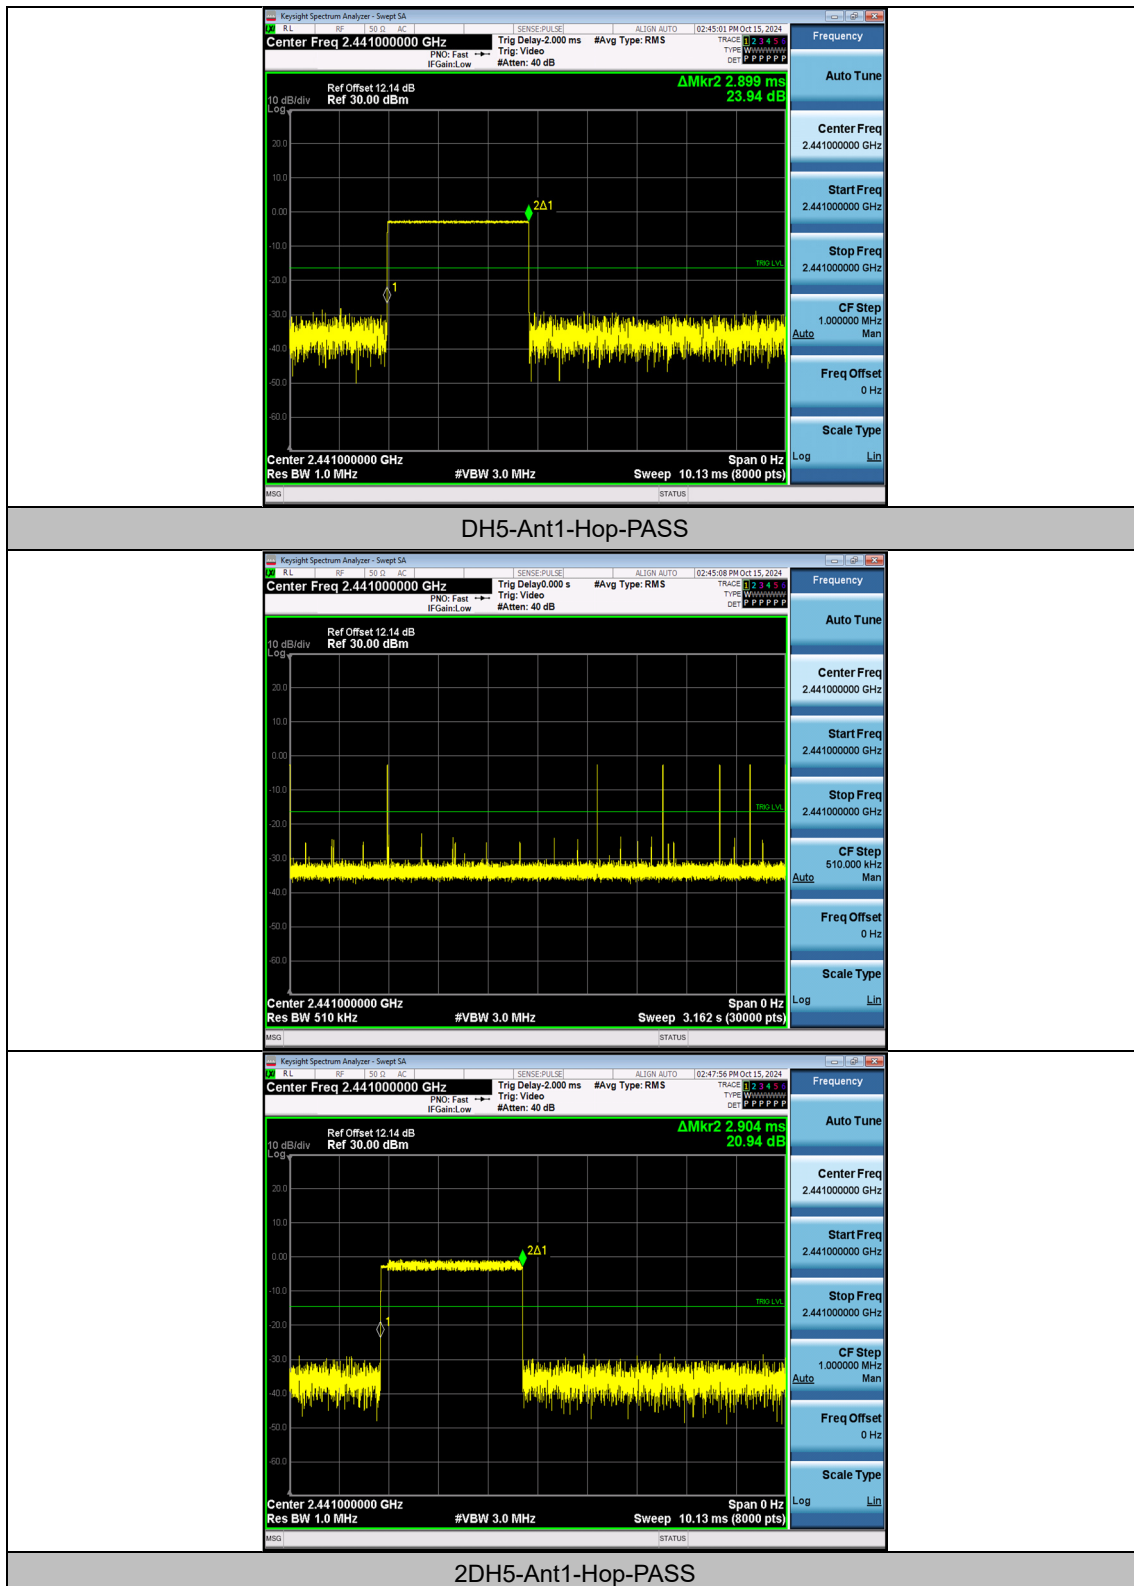

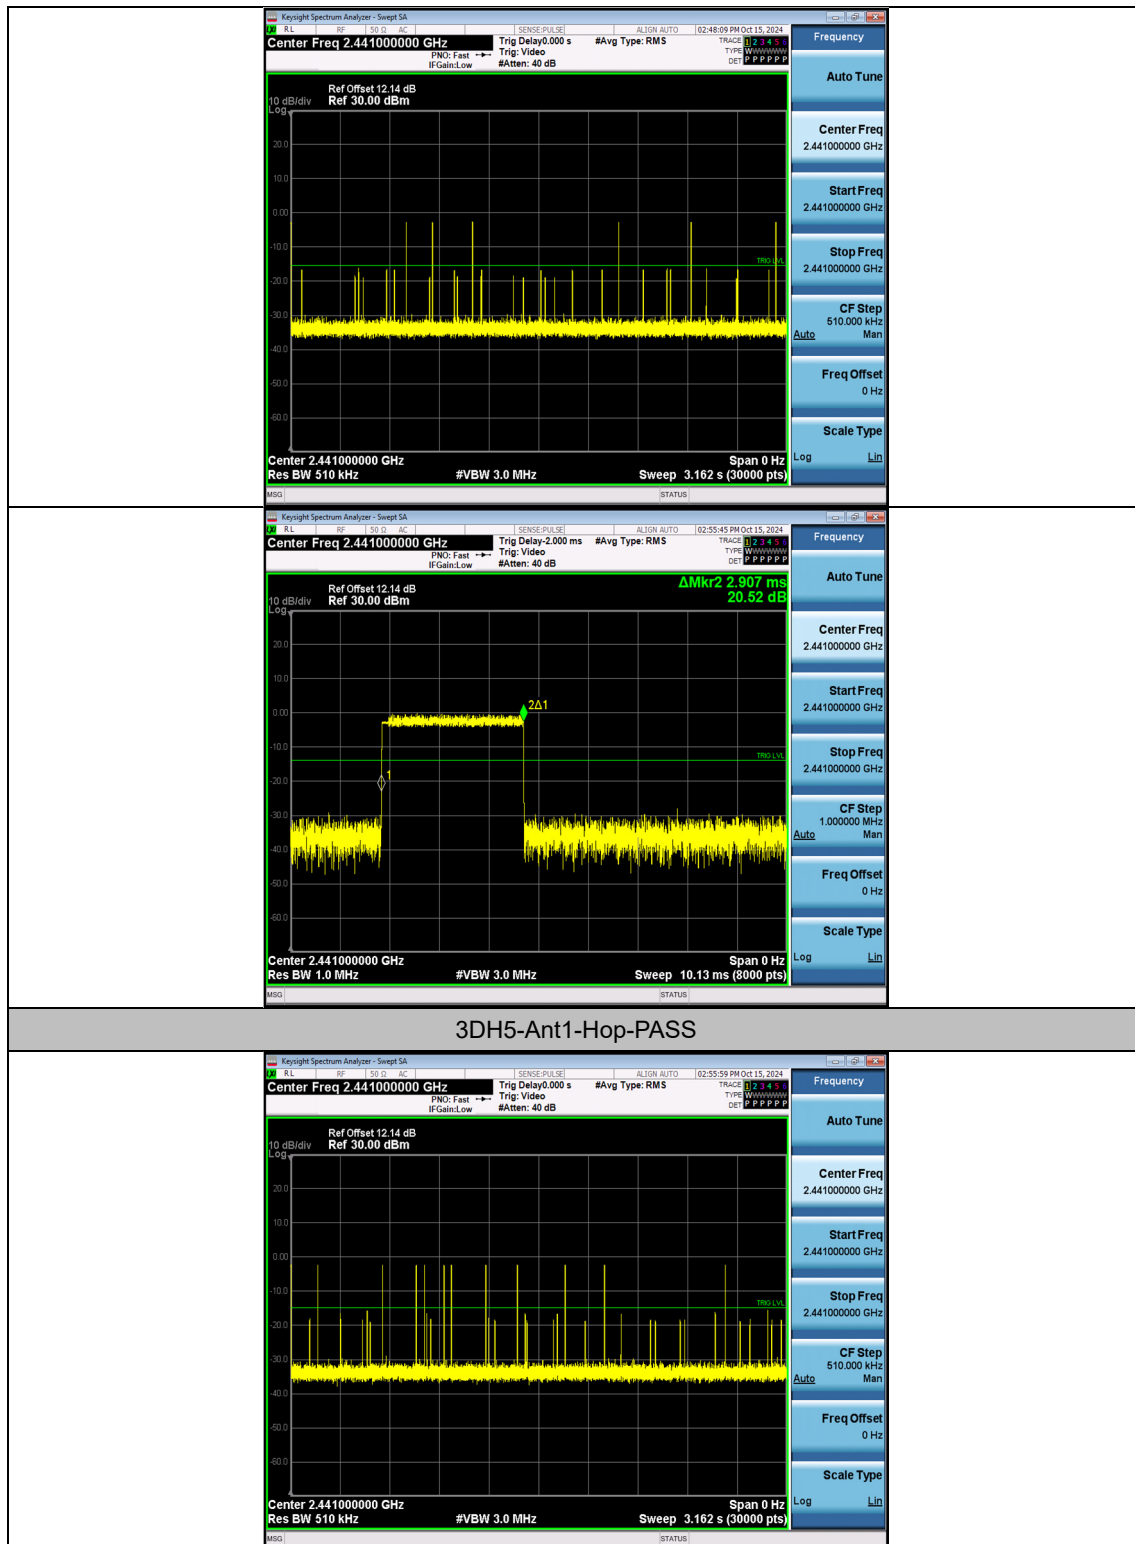


Appendix E: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

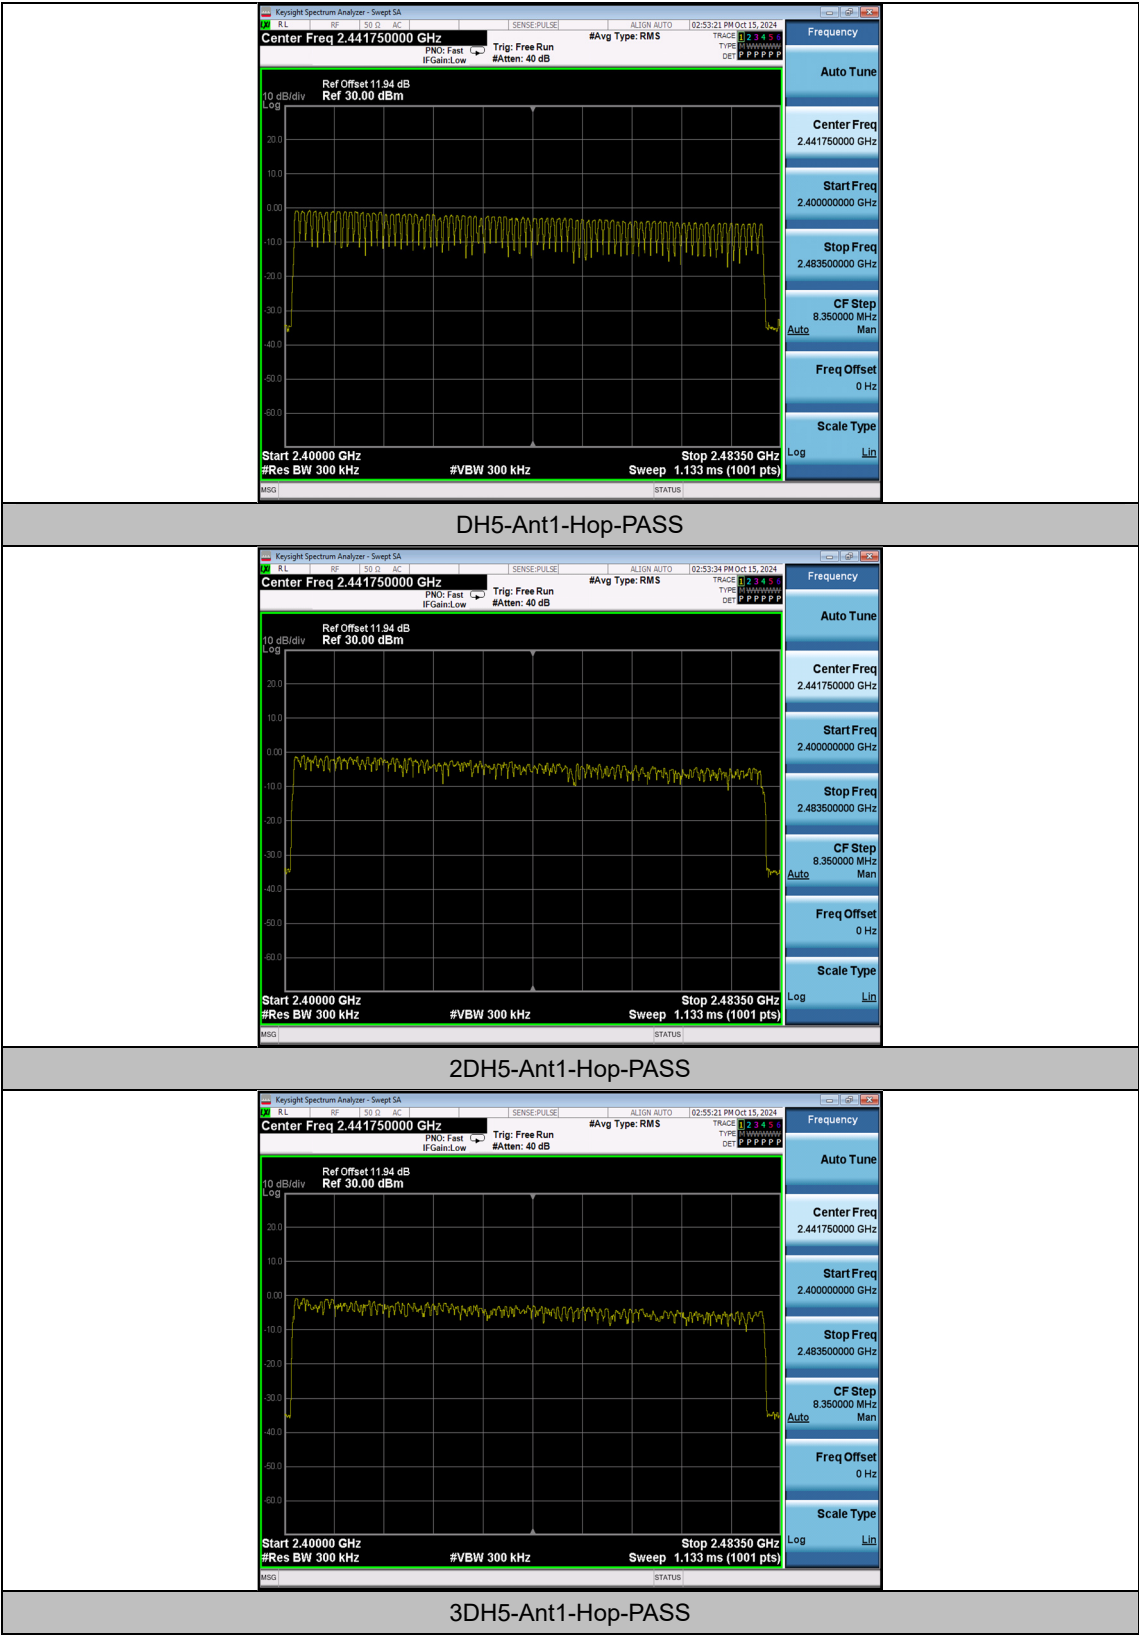



Appendix F: Reference level measurement


Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
DH5	Ant1	2402	2401.87	-0.87
DH5	Ant1	2441	2440.87	-2.95
DH5	Ant1	2480	2479.88	-4.79
2DH5	Ant1	2402	2402.16	-1.09
2DH5	Ant1	2441	2441.16	-3.01
2DH5	Ant1	2480	2480.04	-5.42
3DH5	Ant1	2402	2402.03	-0.88
3DH5	Ant1	2441	2441.17	-3.29
3DH5	Ant1	2480	2480.03	-4.77

Test Graphs

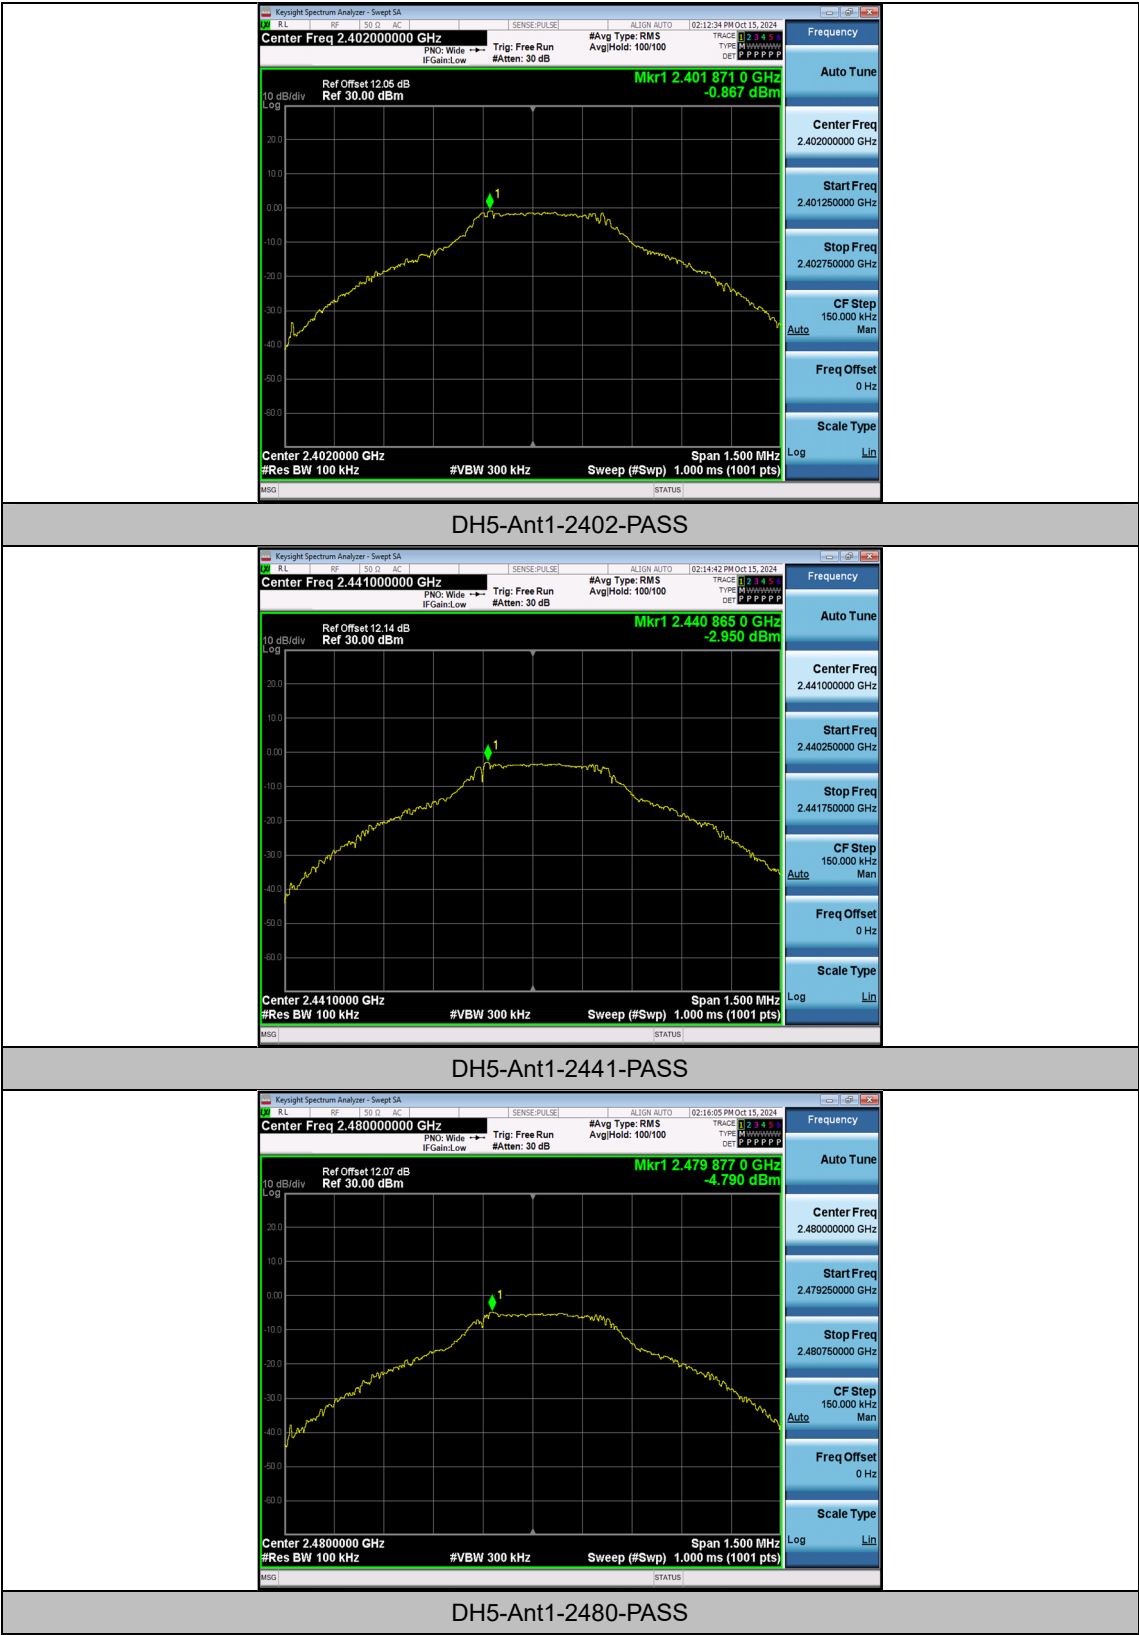

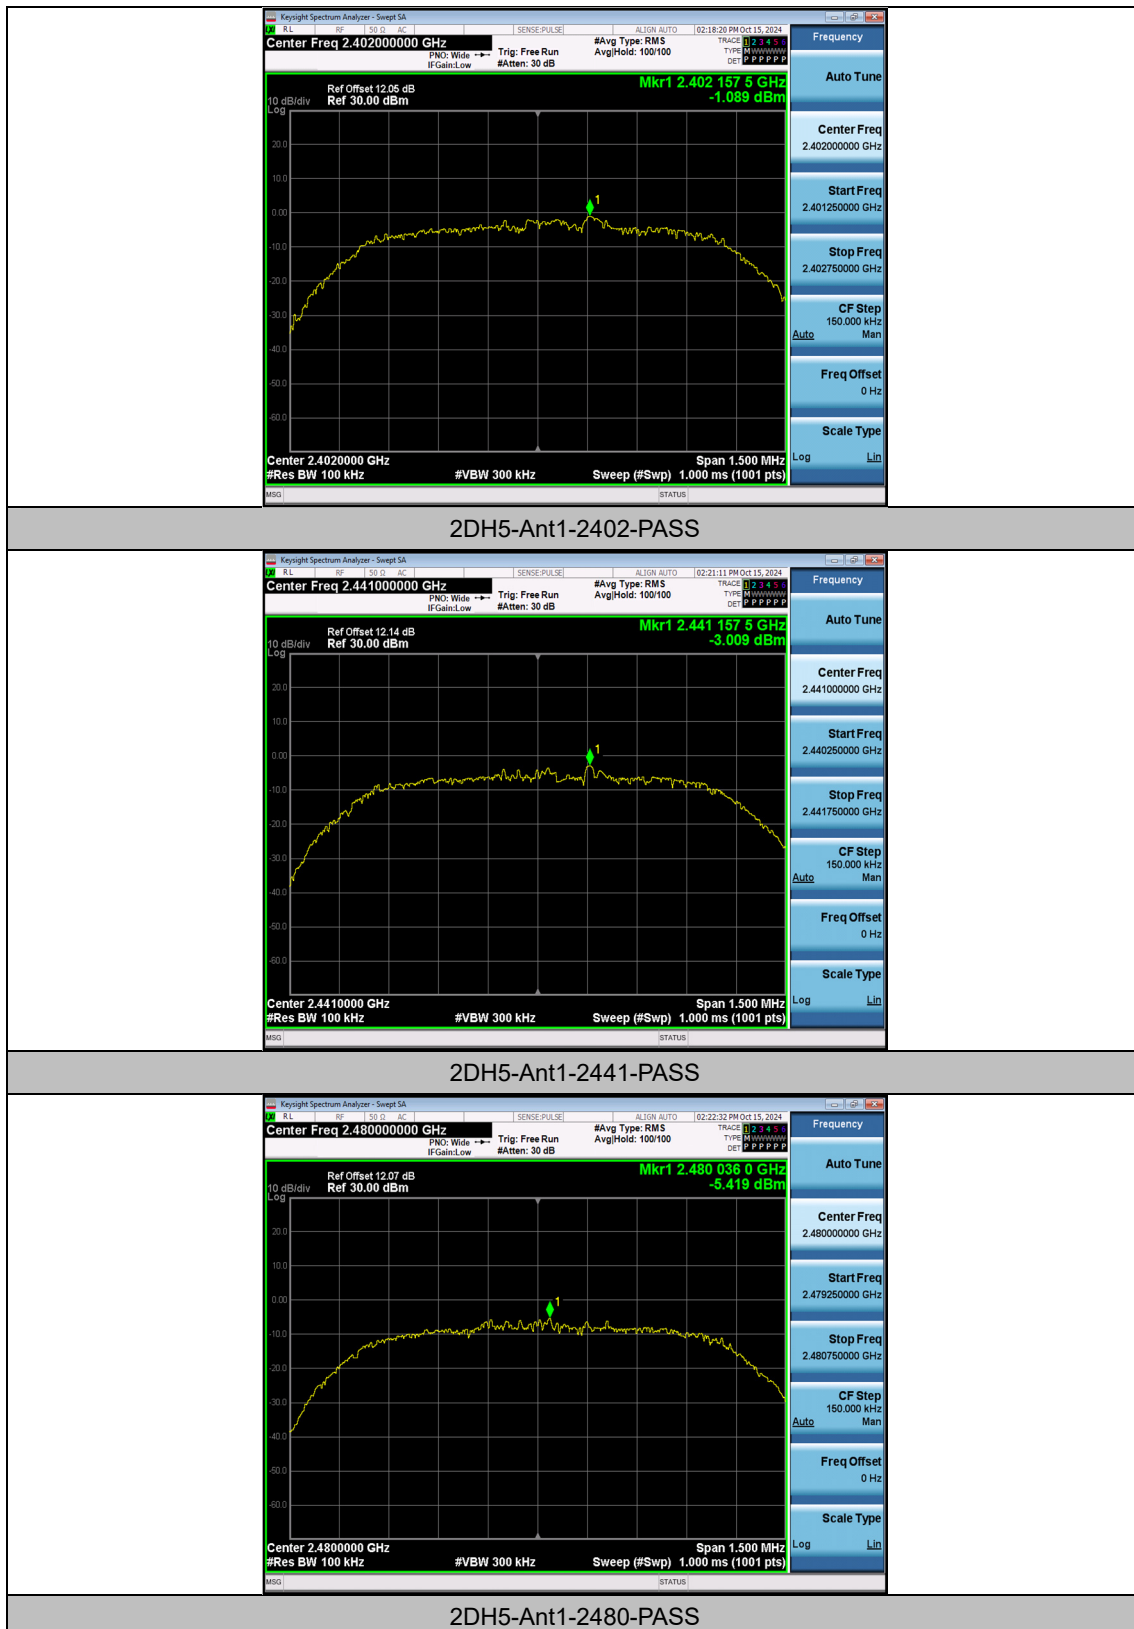

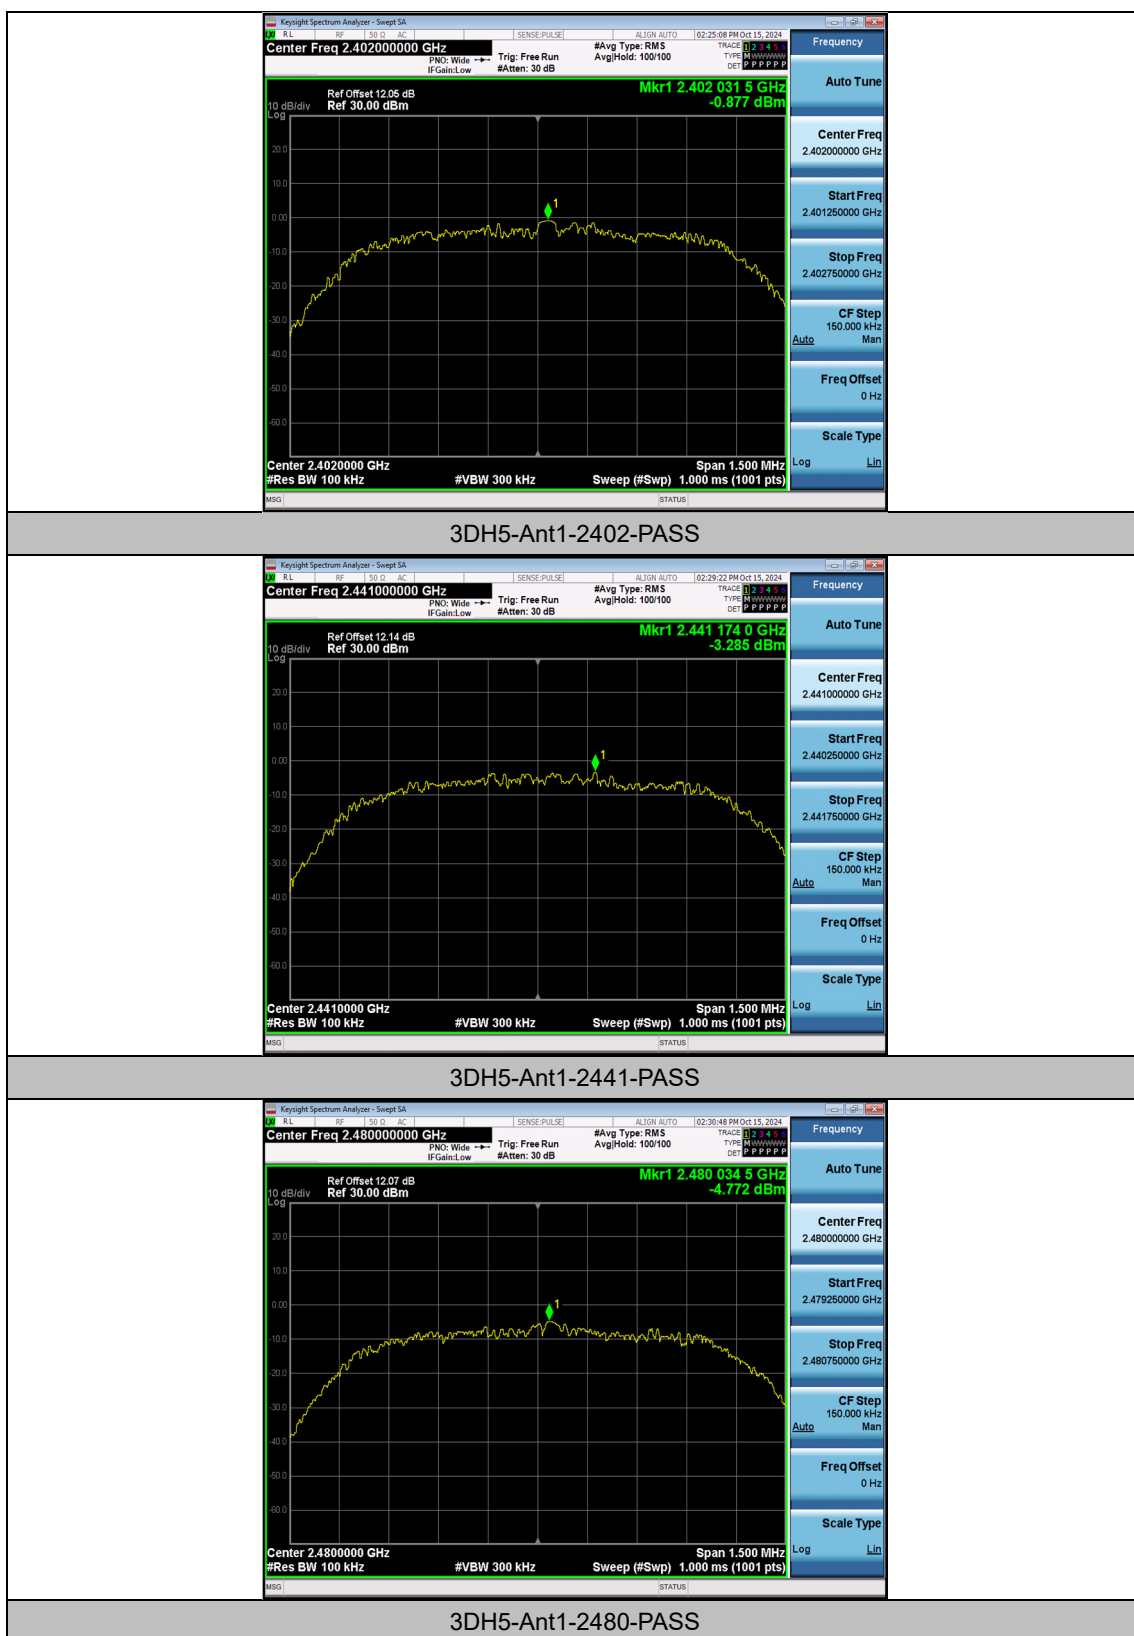

Appendix G: Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-0.87	-46.32	≤-20.87	PASS
DH5	Ant1	High	2480	-4.79	-47.03	≤-24.79	PASS
DH5	Ant1	Low	Hop_2402	-1.68	-46.46	≤-21.68	PASS
DH5	Ant1	High	Hop_2480	-5.21	-46.6	≤-25.21	PASS
2DH5	Ant1	Low	2402	-1.09	-46.97	≤-21.09	PASS
2DH5	Ant1	High	2480	-5.42	-46.82	≤-25.42	PASS
2DH5	Ant1	Low	Hop_2402	-4.30	-47.01	≤-24.3	PASS
2DH5	Ant1	High	Hop_2480	-6.16	-46.38	≤-26.16	PASS
3DH5	Ant1	Low	2402	-0.88	-47.26	≤-20.88	PASS
3DH5	Ant1	High	2480	-4.77	-46.42	≤-24.77	PASS
3DH5	Ant1	Low	Hop_2402	-2.24	-46.51	≤-22.24	PASS
3DH5	Ant1	High	Hop_2480	-4.64	-46.36	≤-24.64	PASS

Test Graphs

