



Test Graphs

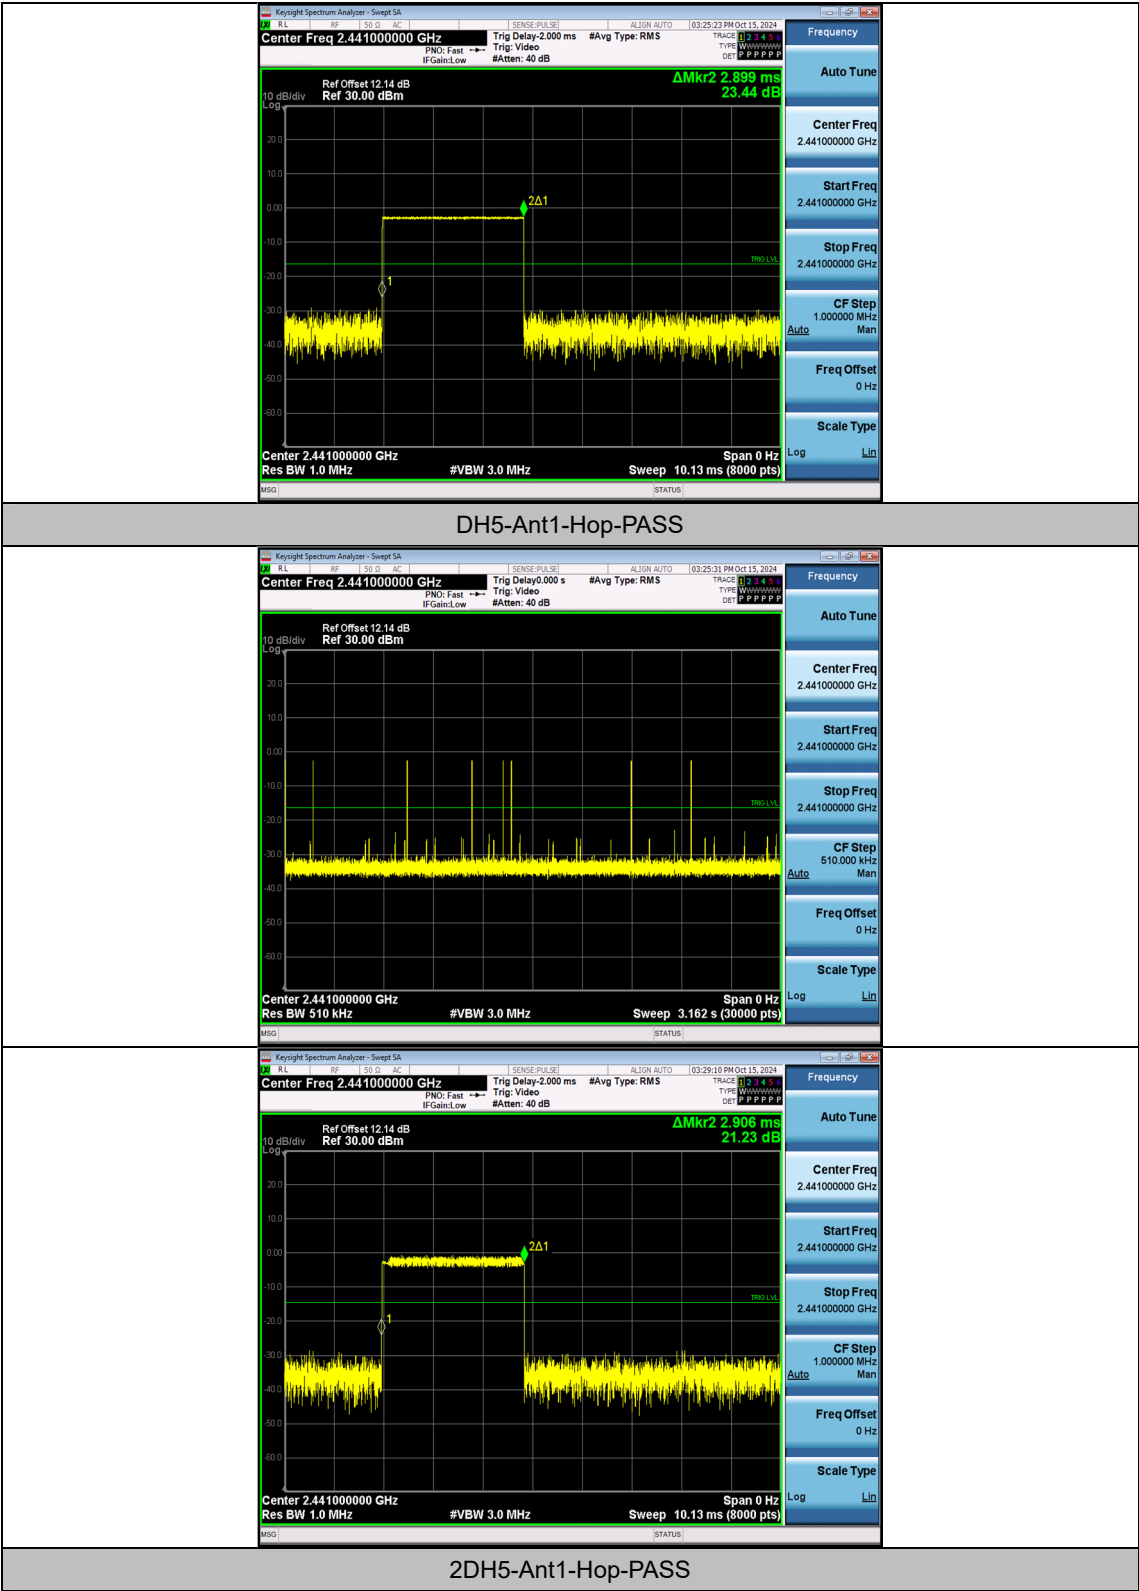

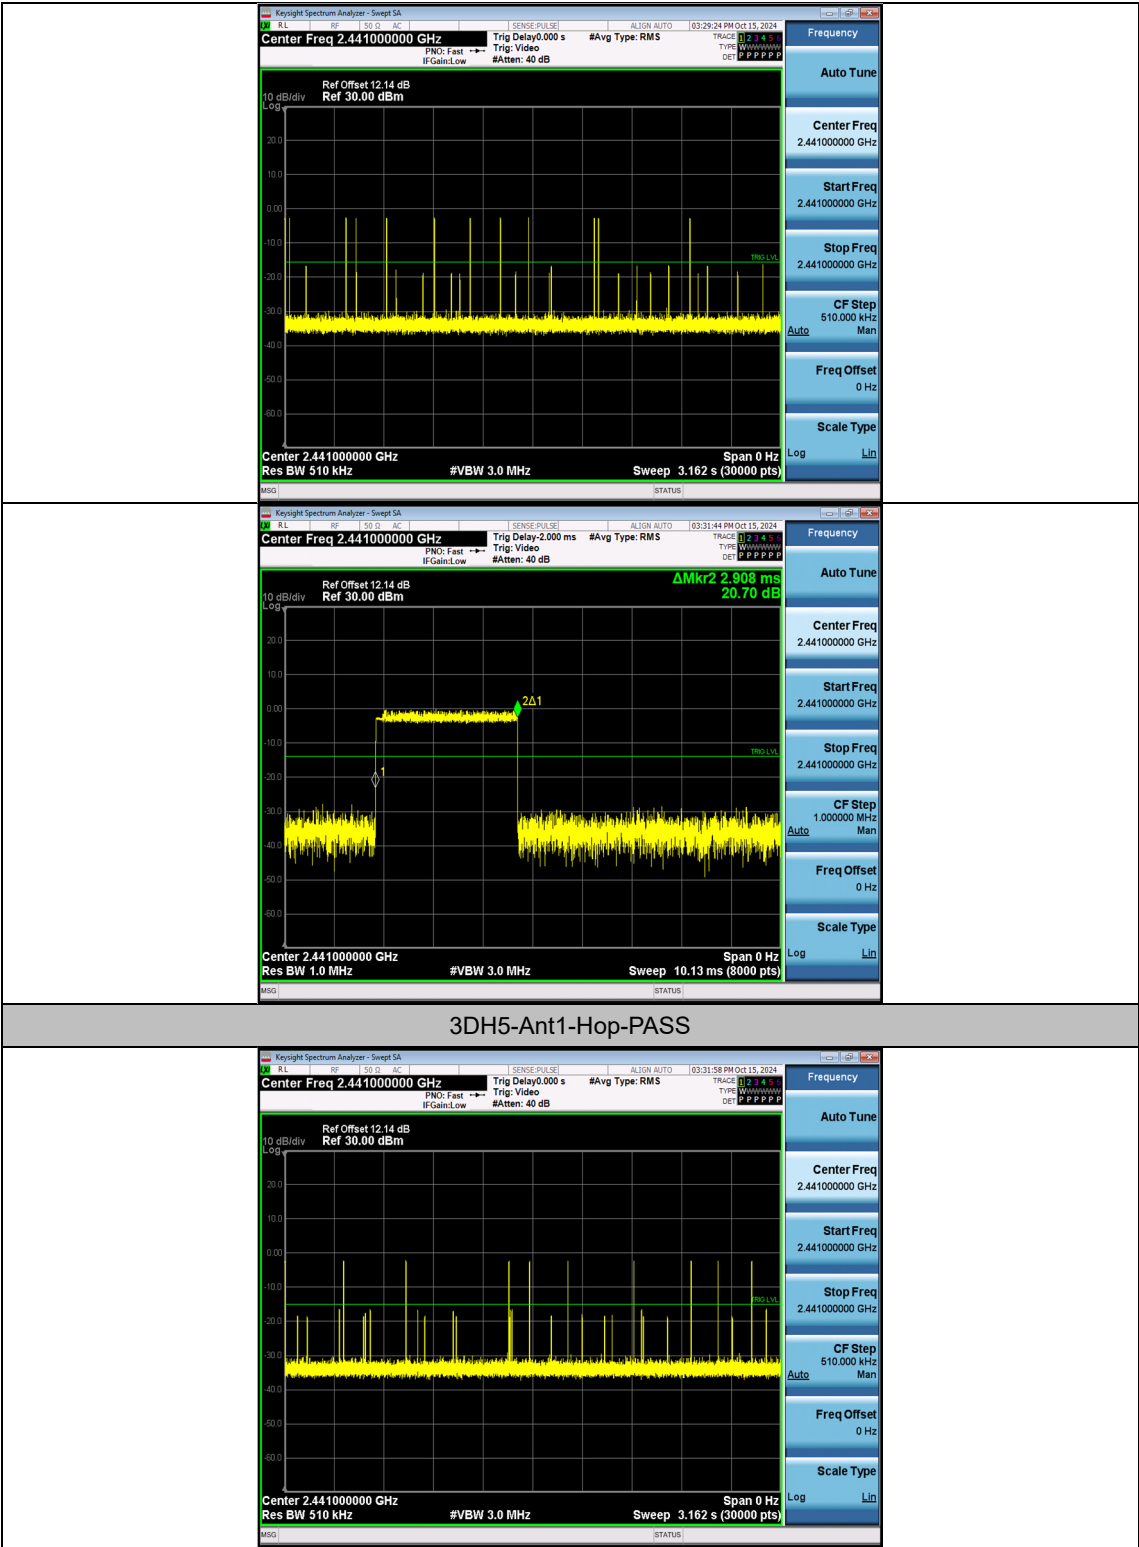


Appendix E: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

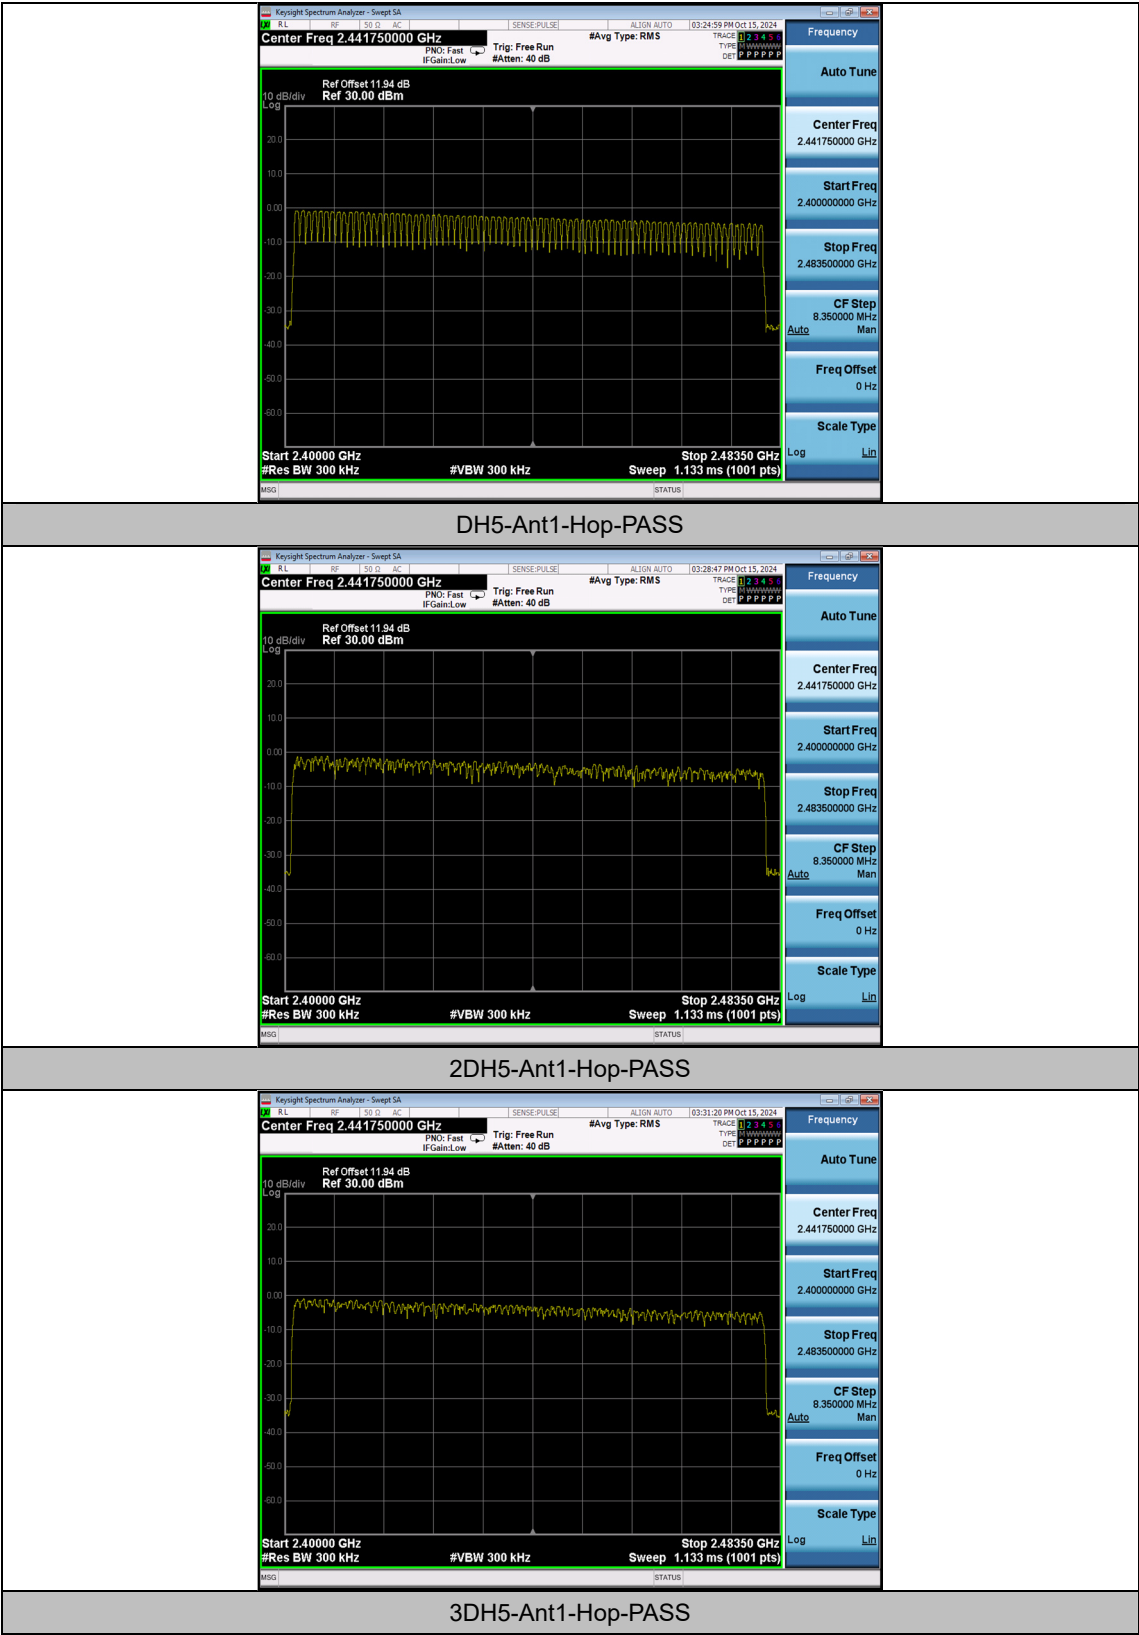



Appendix F: Reference level measurement


Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
DH5	Ant1	2402	2401.87	-0.88
DH5	Ant1	2441	2440.87	-2.81
DH5	Ant1	2480	2480.17	-5.14
2DH5	Ant1	2402	2402.02	-1.49
2DH5	Ant1	2441	2441.02	-3.52
2DH5	Ant1	2480	2480.17	-5.11
3DH5	Ant1	2402	2402.03	-0.91
3DH5	Ant1	2441	2441.20	-3.13
3DH5	Ant1	2480	2480.04	-4.85

Test Graphs

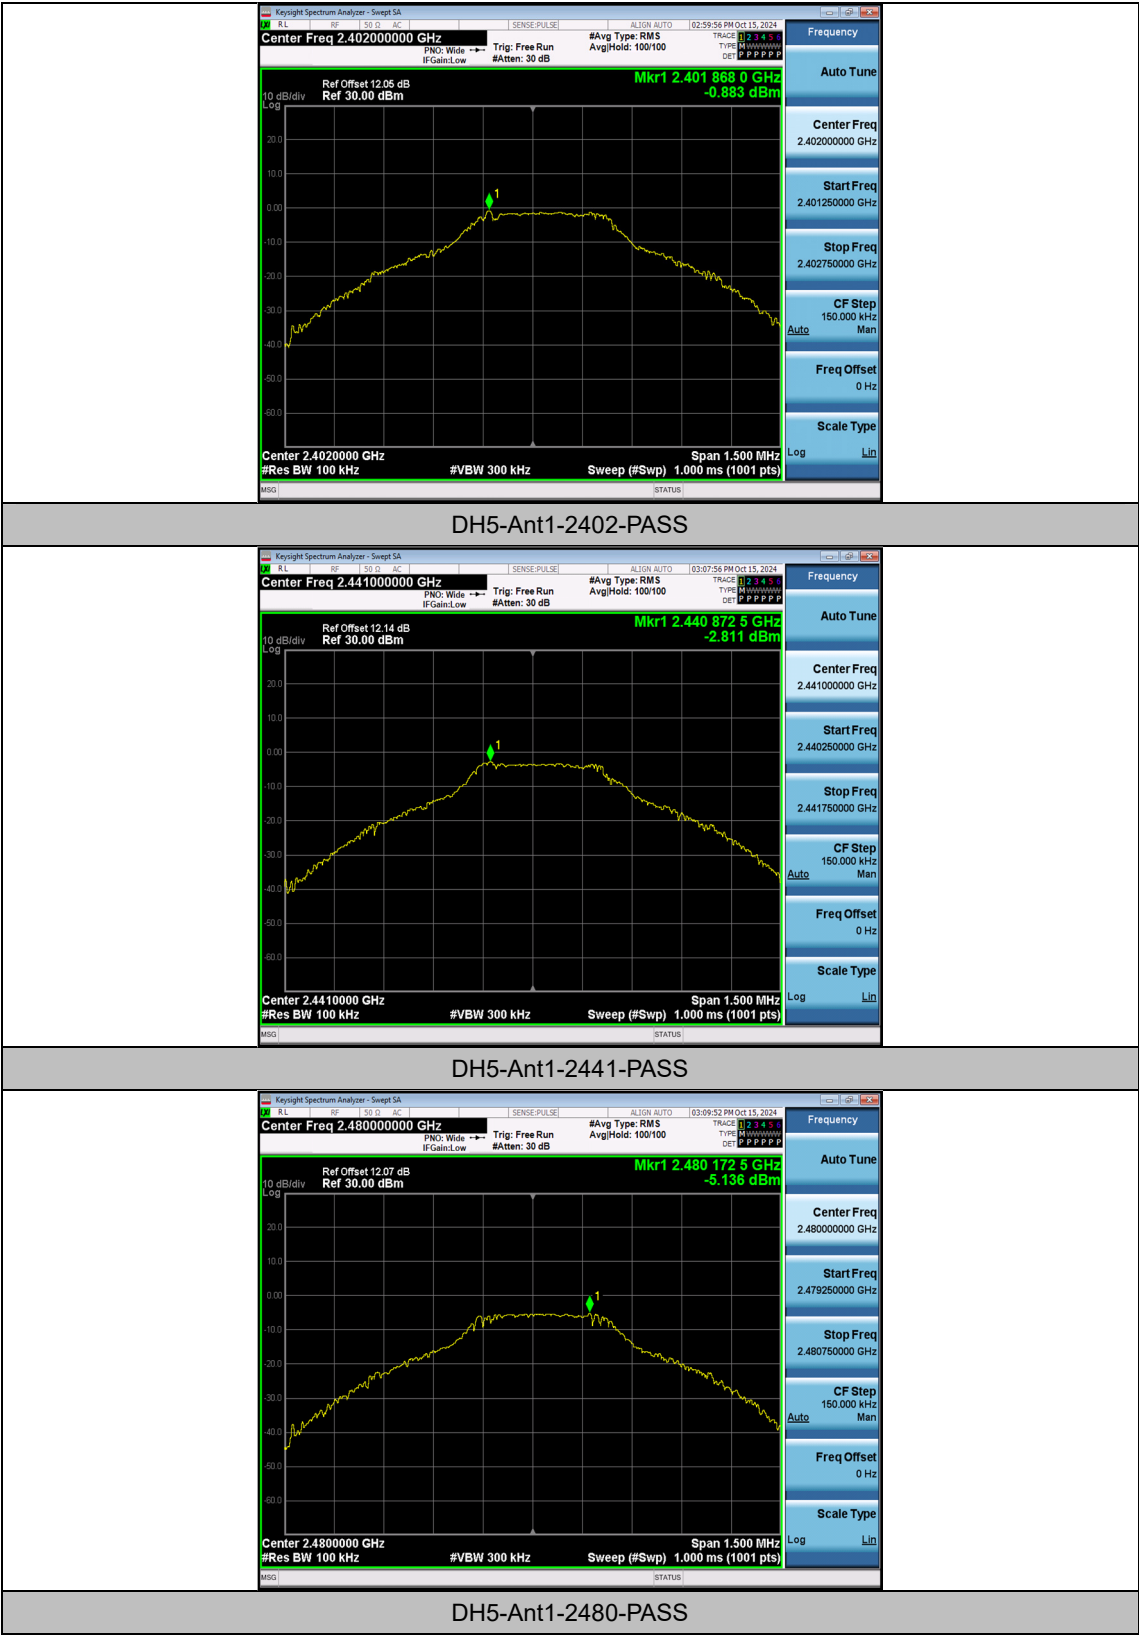

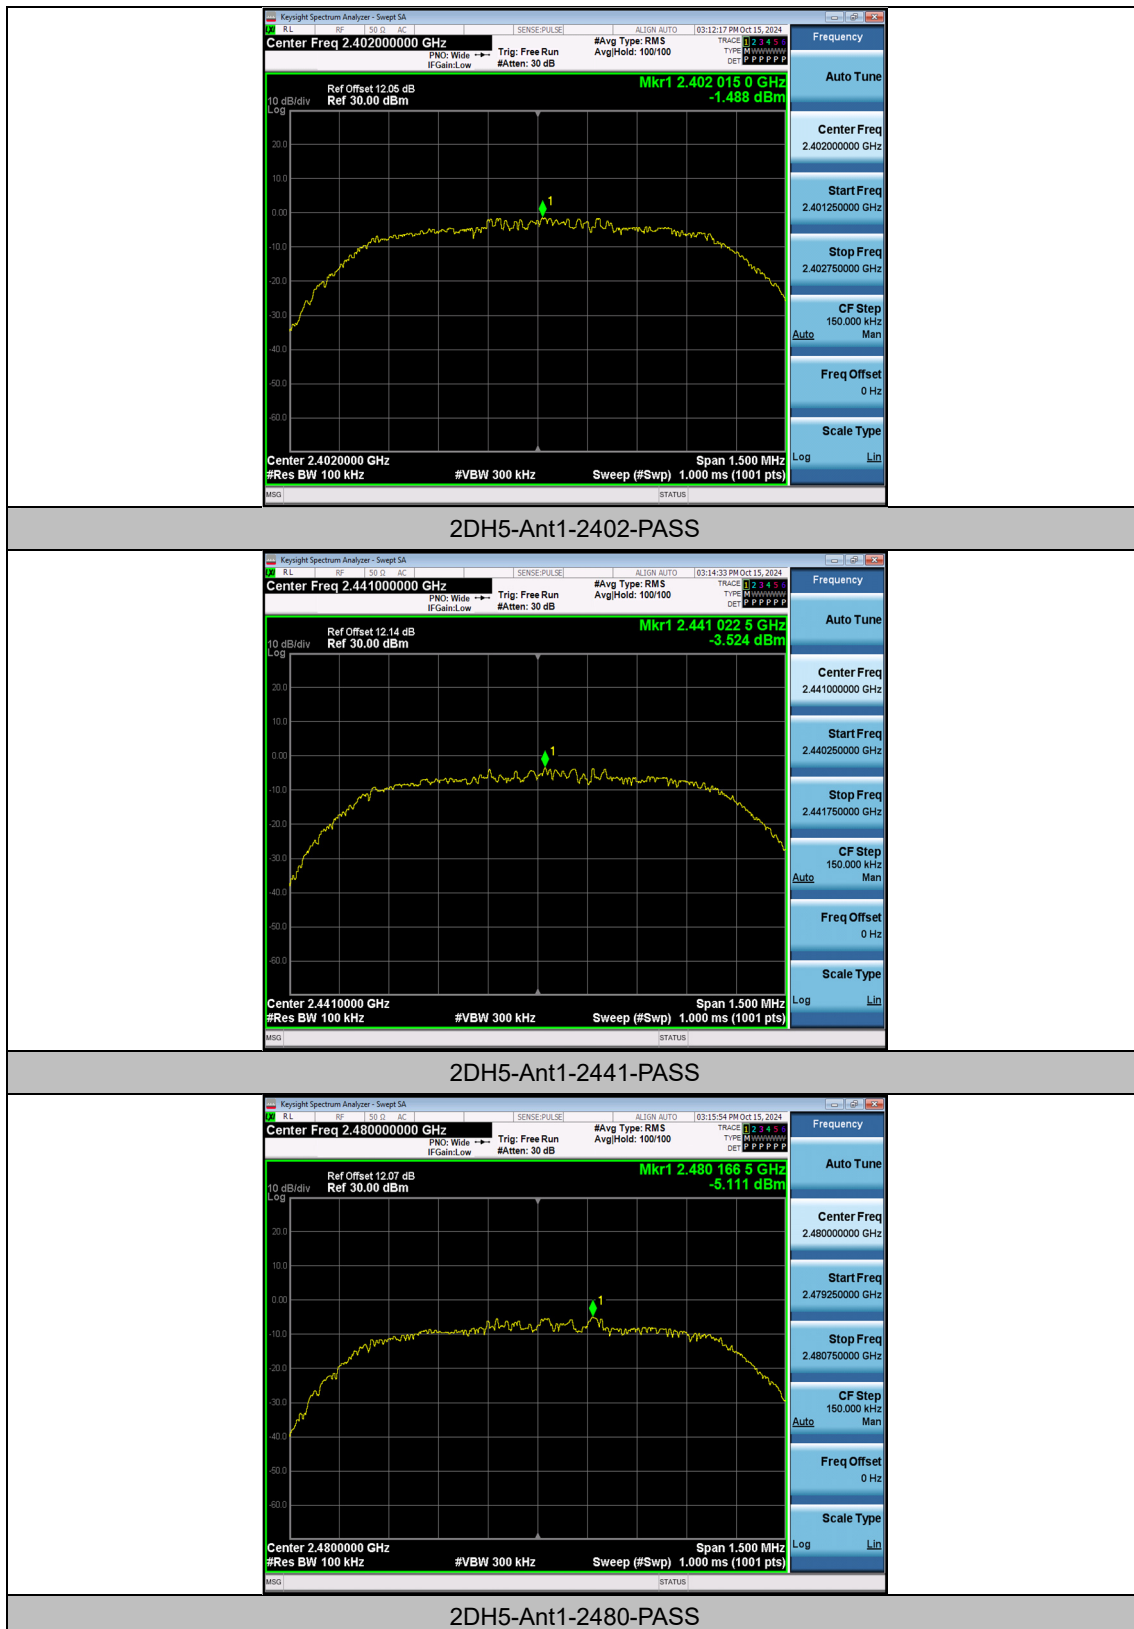

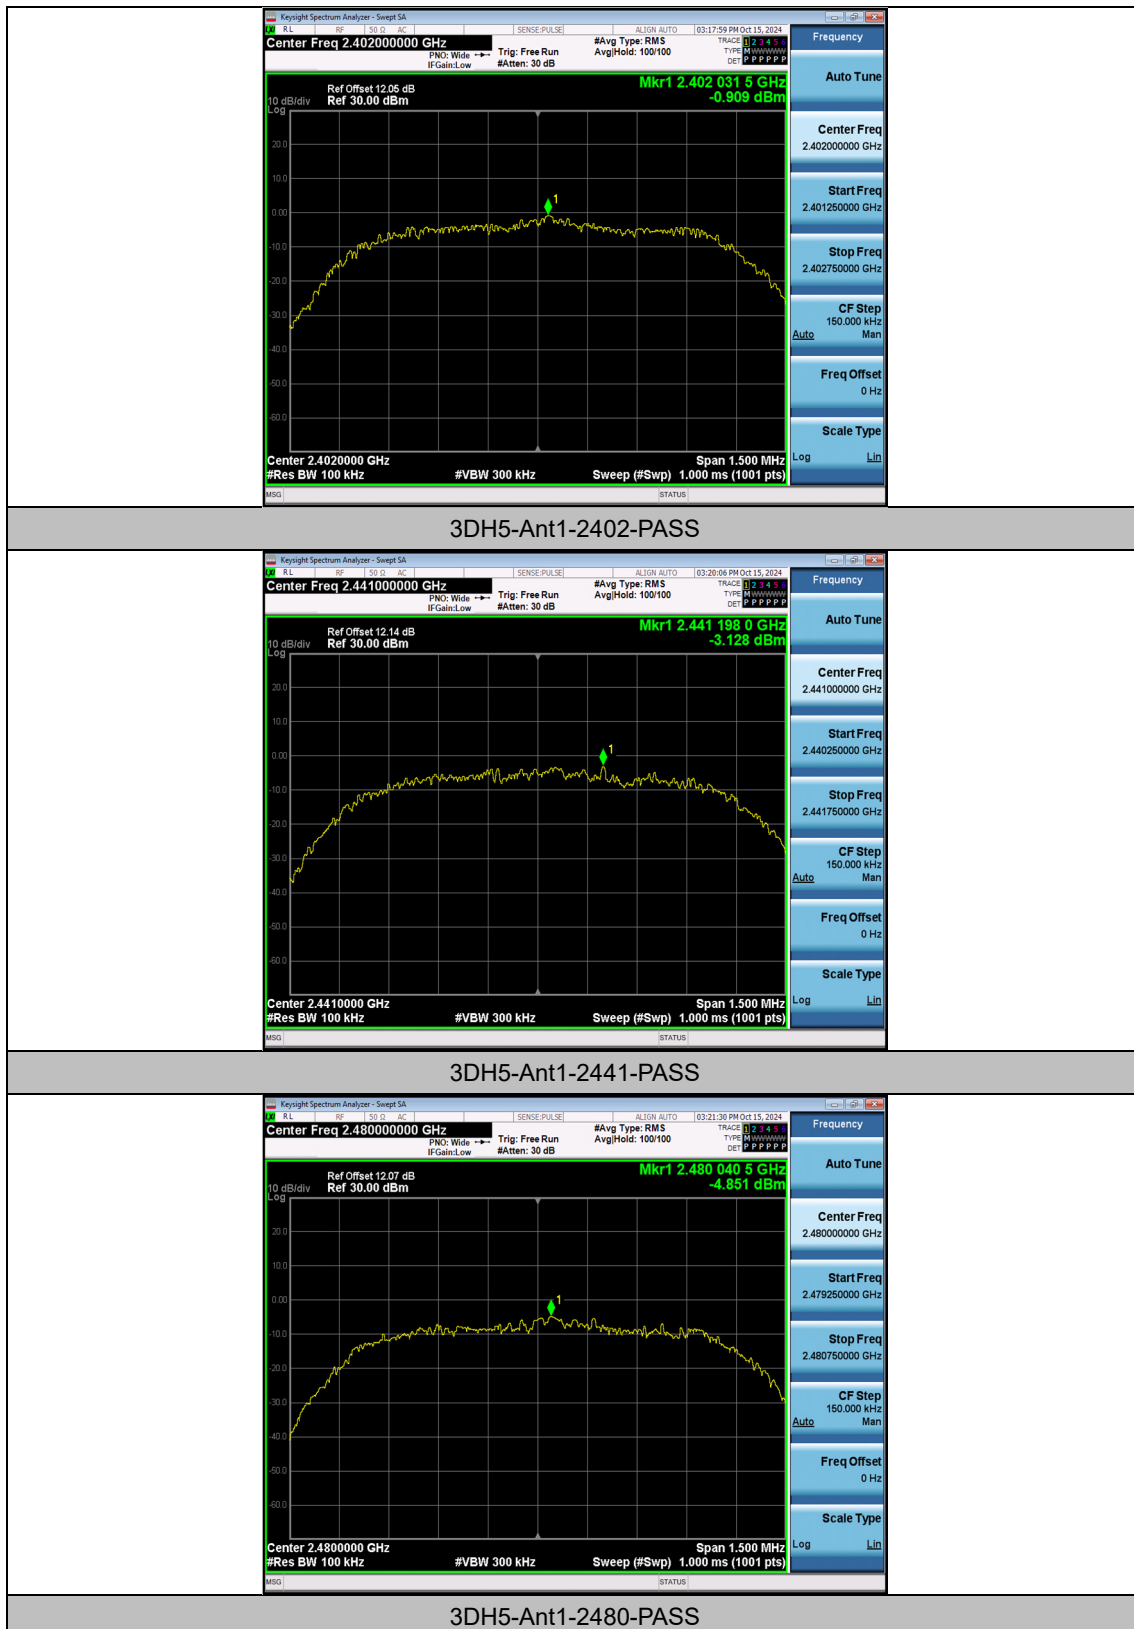

Appendix G: Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-0.88	-46.47	≤ -20.88	PASS
DH5	Ant1	High	2480	-5.14	-46.7	≤ -25.14	PASS
DH5	Ant1	Low	Hop_2402	-1.80	-46.78	≤ -21.8	PASS
DH5	Ant1	High	Hop_2480	-5.07	-47.2	≤ -25.07	PASS
2DH5	Ant1	Low	2402	-1.49	-46.7	≤ -21.49	PASS
2DH5	Ant1	High	2480	-5.11	-46.53	≤ -25.11	PASS
2DH5	Ant1	Low	Hop_2402	-3.40	-47.02	≤ -23.4	PASS
2DH5	Ant1	High	Hop_2480	-5.38	-46.39	≤ -25.38	PASS
3DH5	Ant1	Low	2402	-0.91	-46.51	≤ -20.91	PASS
3DH5	Ant1	High	2480	-4.85	-47.01	≤ -24.85	PASS
3DH5	Ant1	Low	Hop_2402	-4.06	-46.98	≤ -24.06	PASS
3DH5	Ant1	High	Hop_2480	-6.95	-45.63	≤ -26.95	PASS

Test Graphs

