



RF TEST REPORT

Report No.: SET2020-00468

Product: DV601

IC: 25914-DV601

FCC ID: 2AEDLDV601

Model No.: DV601

Applicant: ROSCO,INC

Address: 90-21 144TH PLACE JAMAICA, NY 11435.

Dates of Testing: 01/01/2021 —02/23/2021

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street,
Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338

Fax: 86 755 26627238

This test report consists of 352 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product: DV601

Brand Name.....: DV6

Trade Name: DV6

Applicant: ROSCO,INC

Applicant Address: 90-21 144TH PLACE JAMAICA, NY 11435.

Manufacturer: ROSCO,INC

Manufacturer Address: 90-21 144TH PLACE JAMAICA, NY 11435.

Test Standards: FCC:47 CFR Part 2/22/24/27/90

IC: RSS-130, issue 2

RSS-132, Issue 3

RSS-133, Issue 6

RSS-139, issue 3

RSS-140, issue 1

Test Result.....: PASS

Tested by

Vincent

2021.02.23

Vincent, Test Engineer

Reviewed by.....:

Chris You

2021.02.23

Chris You, Senior Engineer

Approved by.....:

Shuangwen Zhang

2021.02.23

Shuangwen Zhang, Manager

Table of Contents

1.	GENERAL INFORMATION	5
1.1	EUT Description.....	5
1.2	Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator.....	6
1.3	Test Standards and Results.....	9
1.4	Test Configuration of Equipment Under Test	11
1.5	Measurement Results Explanation Example.....	13
1.6	Facilities and Accreditations	13
2.	TEST REQUIREMENTS	14
2.1	Conducted RF Output Power.....	14
2.2	Peak to Average Ratio	15
2.3	99% Occupied Bandwidth and 26dB Bandwidth	17
2.4	Frequency Stability	19
2.5	Conducted Out of Band Emissions.....	22
2.6	Conducted Band Edge	25
2.7	Transmitter Radiated Power (EIRP/ERP).....	27
2.8	Radiated Out of Band Emissions	37
2.9	Transmit antenna	46
3.	LIST OF MEASURING EQUIPMENT	47
4.	UNCERTAINTY OF EVALUATION	48
	Appendix A	49
1.1	Conducted RF Output Power.....	49
1.2	Peak To Average Ratio	94
1.3	99% Occupied Bandwidth.....	99
1.4	26dB Bandwidth	113
1.5	Frequency Stability	127
1.6	Conducted Out of Band Emissions.....	131
1.7	Conducted Band Edge	193



Change History		
Issue	Date	Reason for change
1.0	2021.02.23	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Type	DV601
Hardware Version	REV A
Software Version	2.1.0
EUT supports Radios application	LTE Band 2/4/5/12/13/14/66/71
Frequency Range(Tx)	LTE Band 2: 1850.7MHz~1909.3MHz LTE Band 4: 1710.7MHz~1754.3MHz LTE Band 5: 824.7MHz~848.3MHz LTE Band 12: 699.7MHz~715.3MHz LTE Band 13: 779.5MHz~784.5MHz LTE Band 14: 790.5MHz~795.5MHz LTE Band 66: 1710.7MHz~1779.3MHz LTE Band 71: 665.5 MHz~695.5MHz
Maximum Output Power to Antenna	LTE Band 2: 23.46dBm LTE Band 4: 23.13dBm LTE Band 5: 24.43dBm LTE Band 12: 24.20dBm LTE Band 13: 24.53dBm LTE Band 14: 24.37 dBm LTE Band 66: 23.99dBm LTE Band 71: 22.95 dBm
Bandwidth	LTE Band 2: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz LTE Band 4: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz LTE Band 5: 1.4MHz/3MHz/5MHz/10MHz LTE Band 12: 1.4MHz/3MHz/5MHz/10MHz LTE Band 13: 5MHz/10MHz LTE Band 14: 5MHz/10MHz LTE Band 66: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz LTE Band 71: 5MHz/10MHz/15MHz/20MHz
Modulation Type	QPSK/16QAM/64QAM(downlink only)
Antenna Type	PIFA
Power supply	DC 12V

1.2 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

Band	Type of Modulation	BW (MHz)	Emission Designator	Frequency Tolerance (ppm)	Maximum ERP/EIRP(W)
LTE Band 2	QPSK	1.4	1M09G7D	—	0.257
LTE Band 2	16QAM	1.4	1M09W7D	—	0.254
LTE Band 2	QPSK	3	2M68G7D	—	0.236
LTE Band 2	16QAM	3	2M68W7D	—	0.234
LTE Band 2	QPSK	5	4M49G7D	—	0.171
LTE Band 2	16QAM	5	4M49W7D	—	0.172
LTE Band 2	QPSK	10	8M91G7D	0.006	0.177
LTE Band 2	16QAM	10	8M91W7D	—	0.187
LTE Band 2	QPSK	15	13M4G7D	—	0.150
LTE Band 2	16QAM	15	13M4W7D	—	0.151
LTE Band 2	QPSK	20	17M9G7D	—	0.192
LTE Band 2	16QAM	20	17M9W7D	—	0.193
LTE Band 4	QPSK	1.4	1M09G7D	—	0.219
LTE Band 4	16QAM	1.4	1M08W7D	—	0.155
LTE Band 4	QPSK	3	2M68G7D	—	0.217
LTE Band 4	16QAM	3	2M68W7D	—	0.159
LTE Band 4	QPSK	5	4M49G7D	—	0.216
LTE Band 4	16QAM	5	4M49W7D	—	0.156
LTE Band 4	QPSK	10	8M92G7D	0.004	0.194
LTE Band 4	16QAM	10	8M91W7D	—	0.173
LTE Band 4	QPSK	15	13M4G7D	—	0.242
LTE Band 4	16QAM	15	13M4W7D	—	0.149
LTE Band 4	QPSK	20	17M8G7D	—	0.225
LTE Band 4	16QAM	20	17M8W7D	—	0.187



LTE Band 5	QPSK	1.4	1M09G7D	—	0.172
LTE Band 5	16QAM	1.4	1M09W7D	—	0.143
LTE Band 5	QPSK	3	2M68G7D	—	0.169
LTE Band 5	16QAM	3	2M68W7D	—	0.143
LTE Band 5	QPSK	5	4M49G7D	—	0.171
LTE Band 5	16QAM	5	4M48W7D	—	0.134
LTE Band 5	QPSK	10	8M90G7D	0.005	0.180
LTE Band 5	16QAM	10	8M90W7D	—	0.132
LTE Band 12	QPSK	1.4	1M09G7D	—	0.231
LTE Band 12	16QAM	1.4	1M09W7D	—	0.190
LTE Band 12	QPSK	3	2M68G7D	—	0.208
LTE Band 12	16QAM	3	2M68W7D	—	0.193
LTE Band 12	QPSK	5	4M49G7D	—	0.239
LTE Band 12	16QAM	5	4M48W7D	—	0.195
LTE Band 12	QPSK	10	8M90G7D	0.005	0.210
LTE Band 12	16QAM	10	8M90W7D	—	0.172
LTE Band 13	QPSK	5	4M48G7D	—	0.265
LTE Band 13	16QAM	5	4M49W7D	—	0.248
LTE Band 13	QPSK	10	8M91G7D	0.005	0.251
LTE Band 13	16QAM	10	8M90W7D	—	0.237
LTE Band 14	QPSK	5	4M48G7D	—	0.266
LTE Band 14	16QAM	5	4M49W7D	—	0.248
LTE Band 14	QPSK	10	8M90G7D	0.006	0.255
LTE Band 14	16QAM	10	8M90W7D	—	0.238
LTE Band 66	QPSK	1.4	1M09G7D	—	0.194
LTE Band 66	16QAM	1.4	1M09W7D	—	0.156
LTE Band 66	QPSK	3	2M69G7D	—	0.196
LTE Band 66	16QAM	3	2M68W7D	—	0.140
LTE Band 66	QPSK	5	4M49G7D	—	0.165



LTE Band 66	16QAM	5	4M49W7D	—	0.142
LTE Band 66	QPSK	10	8M91G7D	0.005	0.206
LTE Band 66	16QAM	10	8M90W7D	—	0.179
LTE Band 66	QPSK	15	13M4G7D	—	0.162
LTE Band 66	16QAM	15	13M4W7D	—	0.132
LTE Band 66	QPSK	20	17M8G7D	—	0.165
LTE Band 66	16QAM	20	17M8W7D	—	0.135
LTE Band 71	QPSK	5	4M49G7D	—	0.198
LTE Band 71	16QAM	5	4M49W7D	—	0.129
LTE Band 71	QPSK	10	8M90G7D	0.029	0.184
LTE Band 71	16QAM	10	8M90W7D	—	0.135
LTE Band 71	QPSK	15	13M4G7D	—	0.205
LTE Band 71	16QAM	15	13M4W7D	—	0.168
LTE Band 71	QPSK	20	17M9G7D	—	0.193
LTE Band 71	16QAM	20	17M8W7D	—	0.166



1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2/22/24/27/90 and RSS-130, issue 2RSS-132, Issue 3RSS-133, Issue 6RSS-139, issue 3RSS-140, issue 1for the EUT FCC ID and IC Certification:

1. ANSI/TIA/EIA-603-D-2010

2. FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01

Test detailed items/section required by FCC/IC rules and results are as below:

No.	FCC Rule	IC Rule	Description	Limit	Result
1	2.1046	N/A	Conducted RF Output Power	Reporting Only	PASS
2	§24.232(d)	RSS-130, 4.4 RSS-132, 5.4 RSS-133, 6.4 RSS-139, 6.5 RSS-140, 4.3	Peak to Average Radio	<13dB	PASS
3	§22.913(a)(2)	RSS-132, 5.4	Effective Radiated Power (Band 5)	FCC:ERP< 7Watt IC: ERP< 11.5Watt	PASS
	§24.232(c)	RSS-133,6.4	Equivalent Isotropic Radiated Power (Band 2)	EIRP < 2Watt	PASS
	§27.50(b)(10) §27.50(c)(10) §90.541	RSS-130,4.4 RSS-140,4.3	Effective Radiated Power (Band 12/13/14/71)	FCC:ERP< 3Watt IC:ERP< 5Watt for band 12/13 3Watt for band 14	PASS
	§27.50(d)(4)	RSS-139,6.5	Equivalent Isotropic Radiated Power (Band 4) (Band 66)	EIRP < 1Watt	PASS
4	2.1049	RSS-GEN,6.7	Occupied Bandwidth	Reporting Only	PASS
5	§2.1051 §22.917(a) §24.238(a)	RSS-130,4.6 RSS-132,5.5 RSS-133,6.5	Conducted Band Edge Measurement (Band	FCC:< 43+10log10(P[watt])	PASS



	§27.53(c)(2) §27.53(g) §27.53(h) 2.1051	RSS-139,6.6 RSS-140,4.4	2/4/5/12/13/14/66/71)	FCC:< 43+10log10(P[watt]) IC:for Band13/14 refer to RSS-130,4.6 RSS-140,4.4	
6	2.1051 §22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h) 90.543(c)	RSS-130,4.6 RSS-132,5.5 RSS-133,6.5 RSS-139,6.6 RSS-140,4.4	Conducted Spurious Emission Measurement (Band 2/4/5/12/13/14/66/71)	FCC:< 43+10log10(P[watt]) IC:for Band13/14 refer to RSS-130,4.6 RSS-140,4.4	PASS
7	2.1053 §22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h) 90.543(c)	RSS-130,4.6 RSS-132,5.5 RSS-133,6.5 RSS-139,6.6 RSS-140,4.4	Radiated Spurious Emission (Band 2/4/5/12/13/13/66/71)	FCC:< 43+10log10(P[watt]) IC:for Band13/14 refer to RSS-130,4.6 RSS-140,4.4	PASS
8	2.1055 22.335 24.235 27.54 90.539	RSS-130,4.3 RSS-132,5.3 RSS-133,6.4 RSS-139,6.4 RSS-140,4.2 RSS-GEN,6.11	Frequency Stability	<2.5ppm Within the Authorized Band	PASS
9	/	RSS-GEN,6.8	Transmit antenna	Refer to RSS-GEN,6. 8	PASS

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.4 Test Configuration of Equipment Under Test

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth(MHz)						Modulation		RB#			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	5	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	12	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	13			✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	14			✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	66	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	71			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak-to-Average Ratio	2						✓		✓	✓		✓	✓	✓	✓
	4						✓		✓	✓		✓	✓	✓	✓
	5														
	12														
	13														
	14														
	66						✓		✓	✓		✓	✓	✓	✓
	71						✓		✓	✓		✓	✓	✓	✓
26dB and 99% Bandwidth	2	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
	4	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
	5	✓	✓	✓	✓			✓	✓			✓		✓	
	12	✓	✓	✓	✓			✓	✓			✓		✓	
	13			✓	✓			✓	✓			✓		✓	
	14			✓	✓			✓	✓			✓		✓	
	66	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
	71			✓	✓	✓	✓	✓	✓			✓		✓	
Conducted Band Edge	2	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	5	✓	✓	✓	✓			✓	✓	✓		✓	✓		✓
	12	✓	✓	✓	✓			✓	✓	✓		✓	✓		✓
	13			✓	✓			✓	✓	✓		✓	✓		✓
	14			✓	✓			✓	✓	✓		✓	✓		✓



	66	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	71														
Conducted Spurious Emission	2	✓	✓	✓	✓	✓	✓	✓		✓			✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓		✓			✓	✓	✓
	5	✓	✓	✓	✓			✓		✓			✓	✓	✓
	12	✓	✓	✓	✓			✓		✓			✓	✓	✓
	13			✓	✓			✓		✓			✓	✓	✓
	14			✓	✓			✓		✓			✓	✓	✓
	66	✓	✓	✓	✓	✓	✓	✓		✓			✓	✓	✓
	71			✓	✓	✓	✓	✓		✓			✓	✓	✓
Frequency Stability	2				✓			✓				✓		✓	
	4				✓			✓				✓		✓	
	5				✓			✓				✓		✓	
	12				✓			✓				✓		✓	
	13				✓			✓				✓		✓	
	14				✓			✓				✓		✓	
	66				✓			✓				✓		✓	
	71				✓			✓				✓		✓	
ERP/EIRP	2	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	5	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	12	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	13			✓	✓			✓	✓	✓			✓	✓	✓
	14			✓	✓			✓	✓	✓			✓	✓	✓
	66	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	71			✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Radiated Spurious Emission	2	Worst case												✓	
	4	Worst case												✓	
	5	Worst case												✓	
	12	Worst case												✓	
	13	Worst case												✓	
	14	Worst case												✓	
	66	Worst case												✓	
	71	Worst case												✓	
Note:1. The mark “ ✓ ” means that this configuration is chosen for testing.															



1.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7dB and 10dB attenuator.

Example:

$$\begin{aligned}\text{Offset (dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7 + 10 = 17 \text{ (dB)}\end{aligned}$$

1.6 Facilities and Accreditations

1.6.1 Test Facilities

CNAS-Lab Code: L1659

CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until June 30th, 2021.

ISED Registration: 11185A-1

CAB identifier: CN0064

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until June 30th, 2021

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.6.2 Test Environment Conditions

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa

During the measurement, the environmental conditions were within the listed ranges:

2. TEST REQUIREMENTS

2.1 Conducted RF Output Power


2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.1.3 Test Setup

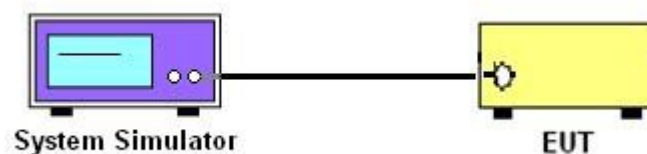

2.1.4 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

2.1.5 Test Results

Please refer to Appendix A for detail

2.2 Peak to Average Ratio


2.2.1 Definition

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.2.3 Test Description

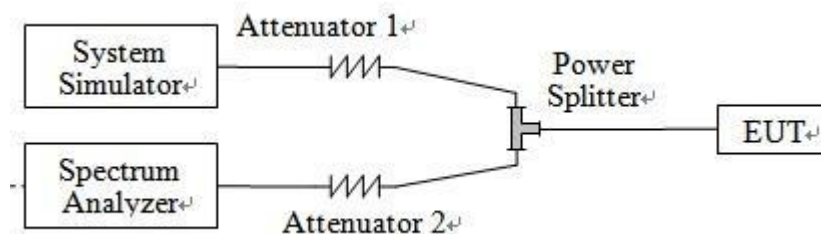

2.2.4 Test Procedures

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



2.2.5 Test Results of Peak-to-Average Ratio

Please refer to Appendix A for detail

2.3 99% Occupied Bandwidth and 26dB Bandwidth

2.3.1 Definition


According to FCC section 2.1049 and RSS GEN6.7, the occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

2.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.3.3 Test Setup

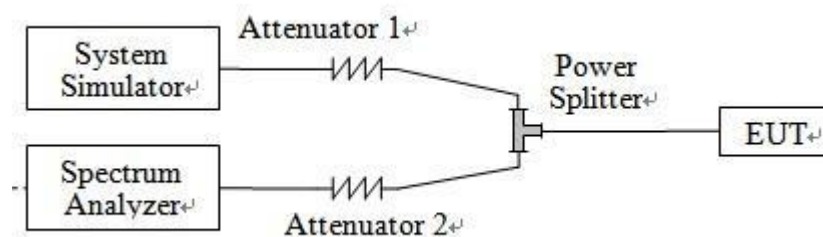

2.3.4 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.



2.3.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A for detail

2.4 Frequency Stability

2.4.1 Requirement

According to FCC/IC requirement, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency. According to FCC section 2.1055, the test conditions are:


(a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .

(b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3 Test Setup

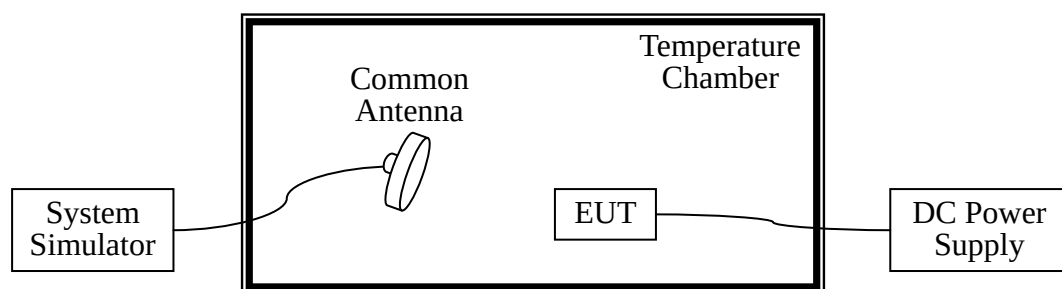

2.4.4 Test Procedures

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized



before testing. Power was applied and the maximum change in frequency was recorded within one minute.

3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. The nominal, highest and lowest extreme voltages were tested, which are specified by the applicant; the normal temperature here used is 25°C.
5. The variation in frequency was measured for the worst case.



2.4.5 Test Result of Frequency Stability

Please refer to Appendix A for detail

2.5 Conducted Out of Band Emissions

2.5.1 Requirement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.


It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

IC:for Band13/14 refer to RSS-130,4.6, RSS-140,4.4

2.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.5.3 Test Setup

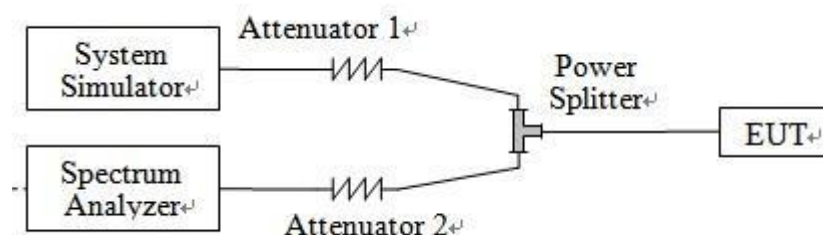

2.5.4 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.

6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$
$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$
$$= -13\text{dBm}.$$
8. For 9KHz to 30MHz: the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



2.5.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A for detail

2.6 Conducted Band Edge

2.6.1 Description of Conducted Band Edge Measurement

22.917(a)

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

24.238(a)

For operations in the 1850 -1910 MHz band, the FCC limit is $43 + 10\log_{10}(P [\text{Watts}])$ dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(g)

For operations in the 698 – 746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 100 kHz bandwidth. However, in the 100kHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least 30kHz may be employed.

27.53(c)(2)

For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:


(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

IC rule:for Band13/14 refer to RSS-130,4.6RSS-140,4.4, other band the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

2.6.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.6.3 Test Setup

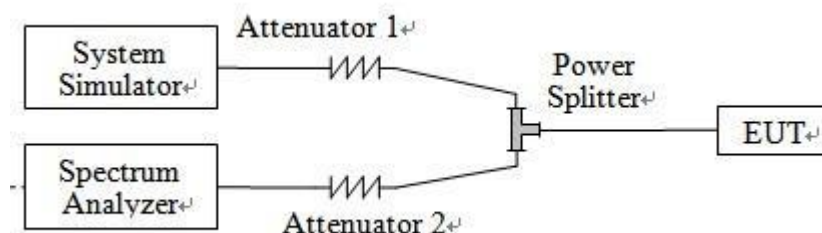

2.6.4 Test Procedures

1. The testing follows FCC KDB 971168 v03r01 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

2.6.5 Test Result of Conducted Band Edge

Please refer to Appendix A for detail

2.7 Transmitter Radiated Power (EIRP/ERP)

2.7.1 Requirement


Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03r01. Mobile and portable (hand-held) stations operating are limited to average ERP of 7 watts (FCC)/11.5 watts (IC) with LTE band 5 and 3 watts with LTE band 12/13/14. For IC :5 watts with LTE Band 12/13.

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03r01. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 2 and 1 watt with LTE band 4 and 66.

2.7.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.7.3 Test Setup

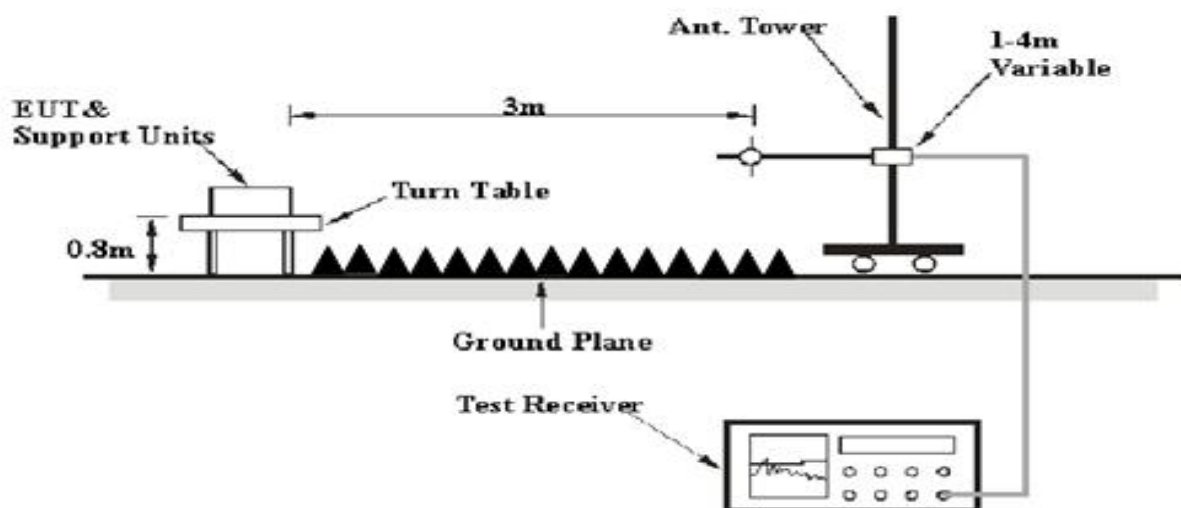

2.7.4 Test Procedures

1. The EUT was placed on a turntable with 1.5 meter height in a fully anechoic chamber.
2. The EUT was set at 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer which used a channel power option across EUT's signal bandwidth per section 4.0 of KDB 971168 D01v03r01.
4. The table was rotated 360 degrees to determine the position of the highest radiated power.
5. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
6. Taking the record of maximum ERP/EIRP.
7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
8. The conducted power at the terminal of the dipole antenna is measured.
9. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
10. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm): Input power to substitution antenna.

G_s (dBi or dBd): Substitution antenna Gain.

$E_t = R_t + AF$

$E_s = R_s + AF$

AF (dB/m): Receive antenna factor

R_t : The highest received signal in spectrum analyzer for EUT.

R_s : The highest received signal in spectrum analyzer for substitution antenna.

**2.7.5 Test Result of ERP/EIRP****1. LTE Band 2 Test Verdict:**

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
2	1.4	QPSK	1	3	1850.7	23.73	PASS
2	1.4	QPSK	1	3	1880	24.1	PASS
2	1.4	QPSK	1	3	1909.3	23.78	PASS
2	1.4	16QAM	1	0	1850.7	22.87	PASS
2	1.4	16QAM	1	0	1880	23.37	PASS
2	1.4	16QAM	1	0	1909.3	24.04	PASS
2	3	QPSK	1	8	1851.5	23.41	PASS
2	3	QPSK	1	8	1880	23.45	PASS
2	3	QPSK	1	8	1908.5	23.73	PASS
2	3	16QAM	1	0	1851.5	23.69	PASS
2	3	16QAM	1	0	1880	23.66	PASS
2	3	16QAM	1	0	1908.5	23.67	PASS
2	5	QPSK	1	0	1852.5	22.33	PASS
2	5	QPSK	1	0	1880	22.3	PASS
2	5	QPSK	1	0	1907.5	22.32	PASS
2	5	16QAM	1	24	1852.5	22.36	PASS
2	5	16QAM	1	24	1880	22.35	PASS
2	5	16QAM	1	24	1907.5	22.33	PASS
2	10	QPSK	1	49	1855	22.45	PASS
2	10	QPSK	1	49	1880	22.47	PASS
2	10	QPSK	1	49	1905	22.44	PASS
2	10	16QAM	1	0	1855	22.7	PASS
2	10	16QAM	1	0	1880	22.68	PASS
2	10	16QAM	1	0	1905	22.71	PASS
2	15	QPSK	1	74	1857.5	21.74	PASS
2	15	QPSK	1	74	1880	21.71	PASS
2	15	QPSK	1	74	1902.5	21.76	PASS
2	15	16QAM	1	0	1857.5	21.78	PASS
2	15	16QAM	1	0	1880	21.76	PASS
2	15	16QAM	1	0	1902.5	21.79	PASS
2	20	QPSK	1	0	1860	22.81	PASS
2	20	QPSK	1	0	1880	22.83	PASS
2	20	QPSK	1	0	1900	22.82	PASS
2	20	16QAM	1	0	1860	22.86	PASS
2	20	16QAM	1	0	1880	22.83	PASS
2	20	16QAM	1	0	1900	22.73	PASS



2. LTE Band 4 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
4	1.4	QPSK	1	0	1710.7	23.39	PASS
4	1.4	QPSK	1	0	1732.5	23.37	PASS
4	1.4	QPSK	1	0	1754.3	23.4	PASS
4	1.4	16QAM	1	3	1710.7	21.8	PASS
4	1.4	16QAM	1	3	1732.5	21.81	PASS
4	1.4	16QAM	1	3	1754.3	21.89	PASS
4	3	QPSK	1	0	1711.5	23.35	PASS
4	3	QPSK	1	0	1732.5	23.33	PASS
4	3	QPSK	1	0	1753.5	23.36	PASS
4	3	16QAM	1	14	1711.5	21.95	PASS
4	3	16QAM	1	14	1732.5	21.99	PASS
4	3	16QAM	1	14	1753.5	22.02	PASS
4	5	QPSK	1	0	1712.5	23.34	PASS
4	5	QPSK	1	0	1732.5	23.28	PASS
4	5	QPSK	1	0	1752.5	23.35	PASS
4	5	16QAM	1	0	1712.5	21.93	PASS
4	5	16QAM	1	0	1732.5	21.86	PASS
4	5	16QAM	1	0	1752.5	21.94	PASS
4	10	QPSK	1	0	1715	22.87	PASS
4	10	QPSK	1	0	1732.5	22.76	PASS
4	10	QPSK	1	0	1750	22.85	PASS
4	10	16QAM	1	24	1715	22.36	PASS
4	10	16QAM	1	24	1732.5	22.34	PASS
4	10	16QAM	1	24	1750	22.37	PASS
4	15	QPSK	1	74	1717.5	23.73	PASS
4	15	QPSK	1	74	1732.5	23.83	PASS
4	15	QPSK	1	74	1747.5	23.77	PASS
4	15	16QAM	1	74	1717.5	21.61	PASS
4	15	16QAM	1	74	1732.5	21.64	PASS
4	15	16QAM	1	74	1747.5	21.72	PASS
4	20	QPSK	1	0	1720	23.52	PASS
4	20	QPSK	1	0	1732.5	23.46	PASS
4	20	QPSK	1	0	1745	23.45	PASS
4	20	16QAM	1	0	1720	22.7	PASS
4	20	16QAM	1	0	1732.5	22.65	PASS
4	20	16QAM	1	0	1745	22.72	PASS



3. LTE Band 5 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	ERP (dBm)	Verdict
			RB Size	RB Offset			
5	1.4	QPSK	1	3	824.7	22.28	PASS
5	1.4	QPSK	1	3	836.5	22.36	PASS
5	1.4	QPSK	1	3	848.3	22.29	PASS
5	1.4	16QAM	1	3	824.7	21.49	PASS
5	1.4	16QAM	1	3	836.5	21.4	PASS
5	1.4	16QAM	1	3	848.3	21.54	PASS
5	3	QPSK	1	0	825.5	22.27	PASS
5	3	QPSK	1	0	836.5	22.16	PASS
5	3	QPSK	1	0	847.5	22.28	PASS
5	3	16QAM	1	0	825.5	21.49	PASS
5	3	16QAM	1	0	836.5	21.54	PASS
5	3	16QAM	1	0	847.5	21.47	PASS
5	5	QPSK	1	0	826.5	22.33	PASS
5	5	QPSK	1	0	836.5	22.22	PASS
5	5	QPSK	1	0	846.5	22.28	PASS
5	5	16QAM	1	0	826.5	21.27	PASS
5	5	16QAM	1	0	836.5	21.2	PASS
5	5	16QAM	1	0	846.5	21.28	PASS
5	10	QPSK	1	49	829.0	22.53	PASS
5	10	QPSK	1	49	836.5	22.51	PASS
5	10	QPSK	1	49	844.0	22.56	PASS
5	10	16QAM	1	0	829.0	21.2	PASS
5	10	16QAM	1	0	836.5	21.13	PASS
5	10	16QAM	1	0	844.0	21.21	PASS



4.LTE Band 12 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	ERP (dBm)	Verdict
			RB Size	RB Offset			
12	1.4	QPSK	1	0	699.7	23.62	PASS
12	1.4	QPSK	1	0	707.5	23.60	PASS
12	1.4	QPSK	1	0	715.3	23.63	PASS
12	1.4	16QAM	1	0	699.7	22.78	PASS
12	1.4	16QAM	1	0	707.5	22.77	PASS
12	1.4	16QAM	1	0	715.3	22.75	PASS
12	3	QPSK	1	0	700.5	23.18	PASS
12	3	QPSK	1	0	707.5	23.17	PASS
12	3	QPSK	1	0	714.5	23.15	PASS
12	3	16QAM	1	8	700.5	22.83	PASS
12	3	16QAM	1	8	707.5	22.85	PASS
12	3	16QAM	1	8	714.5	22.86	PASS
12	5	QPSK	1	24	701.5	23.78	PASS
12	5	QPSK	1	24	707.5	23.76	PASS
12	5	QPSK	1	24	713.5	23.74	PASS
12	5	16QAM	1	0	701.5	22.88	PASS
12	5	16QAM	1	0	707.5	22.91	PASS
12	5	16QAM	1	0	713.5	22.90	PASS
12	10	QPSK	1	49	704	23.19	PASS
12	10	QPSK	1	49	707.5	23.21	PASS
12	10	QPSK	1	49	711	23.23	PASS
12	10	16QAM	1	0	704	22.36	PASS
12	10	16QAM	1	0	707.5	22.35	PASS
12	10	16QAM	1	0	711	22.32	PASS



5.LTE Band 13 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	ERP (dBm)	Verdict
			RB Size	RB Offset			
13	5	QPSK	1	0	779.5	24.23	PASS
13	5	QPSK	1	0	782	24.11	PASS
13	5	QPSK	1	0	784.5	24.02	PASS
13	5	16QAM	1	24	779.5	23.95	PASS
13	5	16QAM	1	24	782	23.87	PASS
13	5	16QAM	1	24	784.5	23.47	PASS
13	10	QPSK	1	49	782	24.00	PASS
13	10	16QAM	1	0	782	23.74	PASS



6.LTE Band 14 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	ERP (dBm)	Verdict
			RB Size	RB Offset			
14	5	QPSK	1	0	790.5	24.19	PASS
14	5	QPSK	1	0	793	24.25	PASS
14	5	QPSK	1	0	795.5	24.11	PASS
14	5	16QAM	1	24	790.5	23.75	PASS
14	5	16QAM	1	24	793	23.95	PASS
14	5	16QAM	1	24	795.5	23.77	PASS
14	10	QPSK	1	49	793	24.07	PASS
14	10	16QAM	1	0	793	23.76	PASS



6. LTE Band 66 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
66	1.4	QPSK	1	0	1710.7	22.8	PASS
66	1.4	QPSK	1	0	1732.5	22.88	PASS
66	1.4	QPSK	1	0	1754.3	22.83	PASS
66	1.4	16QAM	1	3	1710.7	21.9	PASS
66	1.4	16QAM	1	3	1732.5	21.93	PASS
66	1.4	16QAM	1	3	1754.3	21.9	PASS
66	3	QPSK	1	0	1711.5	22.91	PASS
66	3	QPSK	1	0	1732.5	22.92	PASS
66	3	QPSK	1	0	1753.5	22.9	PASS
66	3	16QAM	1	14	1711.5	21.46	PASS
66	3	16QAM	1	14	1732.5	21.44	PASS
66	3	16QAM	1	14	1753.5	21.42	PASS
66	5	QPSK	1	0	1712.5	22.15	PASS
66	5	QPSK	1	0	1732.5	22.14	PASS
66	5	QPSK	1	0	1752.5	22.17	PASS
66	5	16QAM	1	0	1712.5	21.53	PASS
66	5	16QAM	1	0	1732.5	21.49	PASS
66	5	16QAM	1	0	1752.5	21.51	PASS
66	10	QPSK	1	0	1715	22.86	PASS
66	10	QPSK	1	0	1732.5	23.14	PASS
66	10	QPSK	1	0	1750	23.13	PASS
66	10	16QAM	1	24	1715	22.5	PASS
66	10	16QAM	1	24	1732.5	22.52	PASS
66	10	16QAM	1	24	1750	22.49	PASS
66	15	QPSK	1	74	1717.5	22.06	PASS
66	15	QPSK	1	74	1732.5	22.09	PASS
66	15	QPSK	1	74	1747.5	22.07	PASS
66	15	16QAM	1	74	1717.5	21.2	PASS
66	15	16QAM	1	74	1732.5	21.15	PASS
66	15	16QAM	1	74	1747.5	21.17	PASS
66	20	QPSK	1	0	1720	22.13	PASS
66	20	QPSK	1	0	1732.5	22.16	PASS
66	20	QPSK	1	0	1745	22.18	PASS
66	20	16QAM	1	0	1720	21.27	PASS
66	20	16QAM	1	0	1732.5	21.3	PASS
66	20	16QAM	1	0	1745	21.29	PASS



7. LTE Band 71 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
71	5	QPSK	1	0	665.5	22.93	PASS
71	5	QPSK	1	0	680.5	22.97	PASS
71	5	QPSK	1	0	695.5	22.03	PASS
71	5	16QAM	1	0	665.5	21.09	PASS
71	5	16QAM	1	0	680.5	21.02	PASS
71	5	16QAM	1	0	695.5	21.07	PASS
71	10	QPSK	1	0	668	22.65	PASS
71	10	QPSK	1	0	680.5	22.48	PASS
71	10	QPSK	1	0	693	22.39	PASS
71	10	16QAM	1	24	668	21.31	PASS
71	10	16QAM	1	24	680.5	21.24	PASS
71	10	16QAM	1	24	693	21.22	PASS
71	15	QPSK	1	74	670.5	23.12	PASS
71	15	QPSK	1	74	680.5	22.89	PASS
71	15	QPSK	1	74	690.5	23.08	PASS
71	15	16QAM	1	74	670.5	22.25	PASS
71	15	16QAM	1	74	680.5	21.97	PASS
71	15	16QAM	1	74	690.5	21.28	PASS
71	20	QPSK	1	0	673	22.83	PASS
71	20	QPSK	1	0	683	22.77	PASS
71	20	QPSK	1	0	688	22.86	PASS
71	20	16QAM	1	0	673	22.13	PASS
71	20	16QAM	1	0	683	22.18	PASS
71	20	16QAM	1	0	688	22.20	PASS

2.8 Radiated Out of Band Emissions

2.8.1 Requirement

The radiated spurious emission was measured by substitution method according to ANSI / TIA /EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Additional requirement for IC Rule: RSS130, 4.6

equipment operating in the frequency bands 746-756 MHz and 777-787 MHz shall also comply with the following restrictions:

(a) The power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least:

- (i) $76 + 10 \log_{10} p(\text{watts})$, dB, for base and fixed equipment, and
- (ii) $65 + 10 \log_{10} p(\text{watts})$, dB, for mobile and portable equipment.

(b) The e.i.r.p. in the band 1559-1610 MHz shall not exceed -70 dBW/MHz for wideband signal and -80 dBW for discrete emission with bandwidth less than 700 Hz.

Additional requirement for IC Rule: RSS140, 4.4

The power of any unwanted emission outside the bands 758-768MHz and 788-798 MHz shall be attenuated below the transmitter output power P in dBW as follows, where p is the transmitter outputpower in watts:

a)For any frequency between 769-775 MHz and 799-806 MHz: $76+10 \log (p)$, dB in a 6.25 kHz band for fixed and base station equipment

ii) $65+ 10 \log (p)$, dB in a 6.25 kHz band for mobile and portable/hand-held equipment

b)For any frequency between 775-788 MHz, above 806 MHz, and below 758 MHz:

$43 +10 \log (p)$, dB in a bandwidth of 100 kHz or greater. However,in the 100 kHz bandsimmediately outside and adjacent to the frequency bands 758-768 MHz and 788-798 MHz, aresolution bandwidth of 30 kHz may be employed.


In addition, the equivalent isotropically radiated power (e.i.r.p.) of all emissions,including harmonics inthe band 1559-1610 MHz, shall not exceed -70 dBWMHz for wideband emissions, and-80 dBW/KHZfor discrete emissions of less than 700 Hz bandwidth.

2.8.2 Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.8.3 Test Setup


For radiated emissions from 9kHz to 30MHz

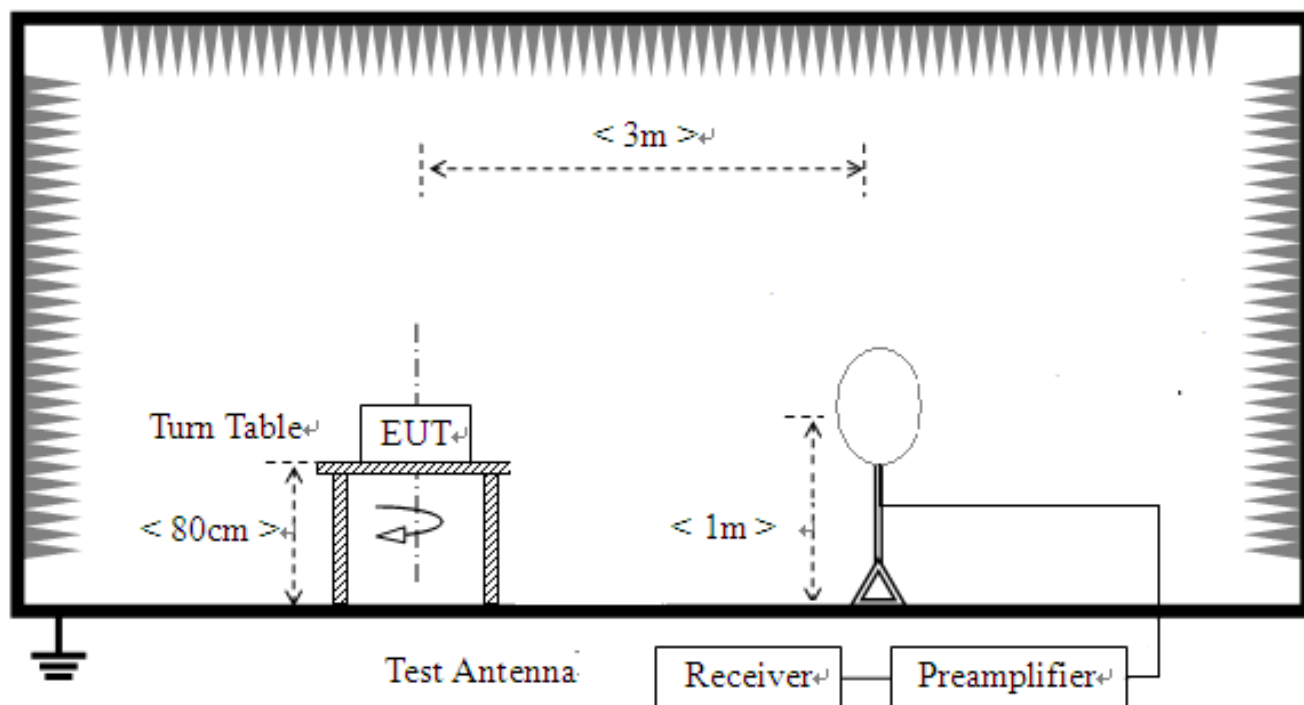

For radiated emissions from 30MHz to 1GHz

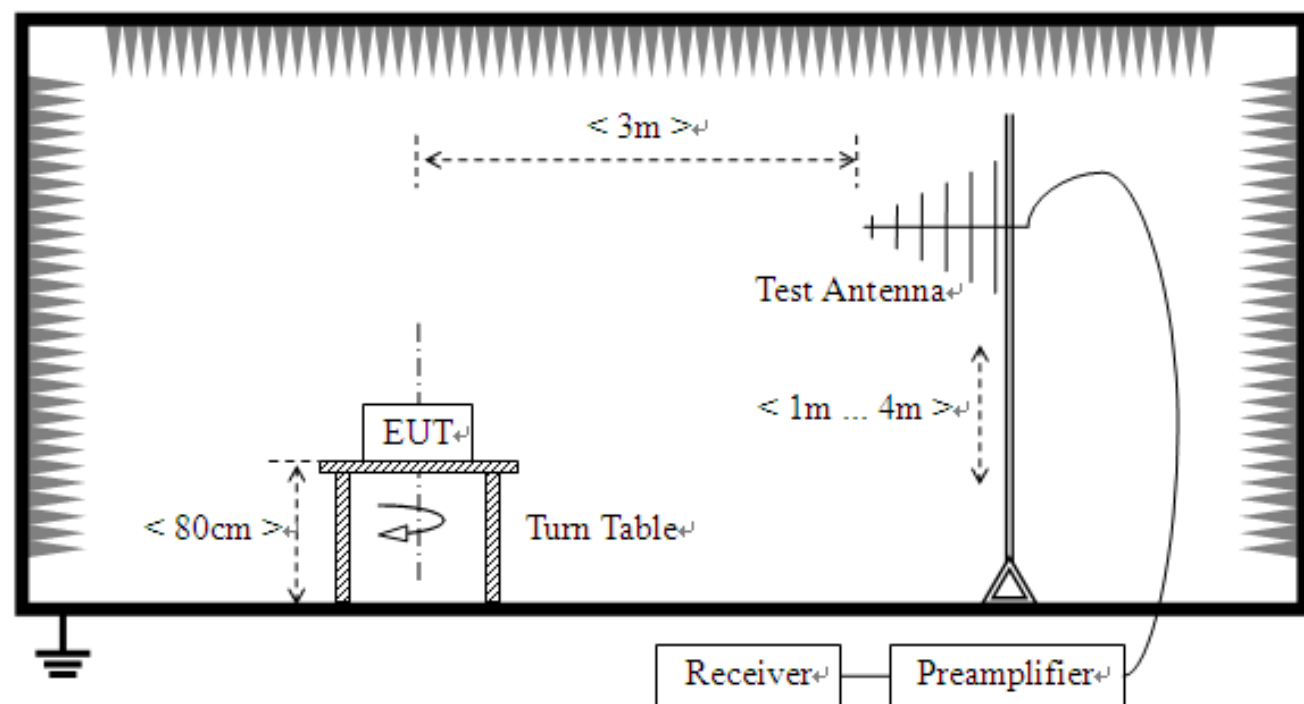

For radiated emissions above 1GHz

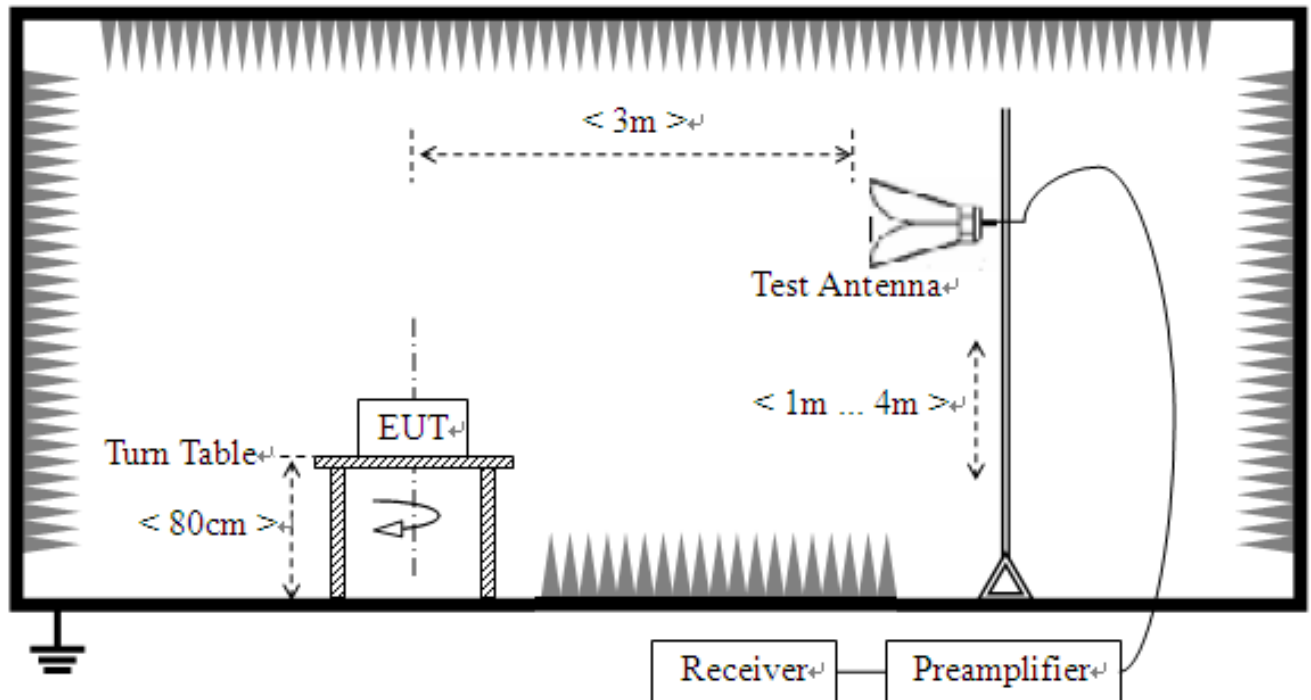

2.8.4 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. All Spurious Emission tests were performed in X, Y, Z axis direction and low, middle,

- high channel. And only the worst axis test condition was recorded in this test report.
11. The spectrum is measured from 9 KHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. The worst case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
 12. The maximum RB configurations of the Radiated Spurious Emissions as RB Size 1, RB Offset 0

2.8.5 Test Result (Plots) of Radiated Spurious Emission

Note: 1. within 30MHz-1GHz were found more than 20dB below limit line

Note: 2. Absolute Level=Reading Level + Factor

LTE Band 2 QPSK 20MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	61.0462	-91.31	-71.13	-13.00	58.13	20.18	Horizontal
2	623.370	-103.36	-70.33	-13.00	57.33	33.03	Horizontal
3	899.099	-103.39	-66.23	-13.00	53.23	37.16	Horizontal
4	3191.13	-57.05	-47.46	-13.00	34.46	9.59	Horizontal
5	3748.94	-59.08	-48.72	-13.00	35.72	10.36	Horizontal
6	5363.87	-60.11	-45.38	-13.00	32.38	14.73	Horizontal

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	67.8376	-92.12	-71.16	-13.00	58.16	20.96	Vertical
2	755.123	-104.06	-68.17	-13.00	55.17	35.89	Vertical
3	899.099	-103.39	-66.23	-13.00	53.23	37.16	Vertical
4	3046.80	-58.31	-49.65	-13.00	36.65	8.66	Vertical
5	3748.94	-59.08	-48.72	-13.00	35.72	10.36	Vertical
6	4987.44	-59.64	-45.45	-13.00	32.45	14.19	Vertical

LTE Band 4 QPSK 20MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	364.985	-98.79	-70.35	-13.00	57.35	28.44	Horizontal
2	665.015	-104.69	-69.93	-13.00	56.93	34.76	Horizontal
3	932.032	-104.43	-67.12	-13.00	54.12	37.31	Horizontal
4	3219.48	-57.91	-48.55	-13.00	35.55	9.36	Horizontal
5	3882.81	-57.87	-48.24	-13.00	35.24	9.63	Horizontal
6	5794.77	-56.98	-40.84	-13.00	27.84	16.14	Horizontal

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	64.9550	-90.44	-69.81	-13.00	56.81	20.63	Vertical
2	677.637	-104.25	-70.82	-13.00	57.82	33.43	Vertical
3	904.844	-103.93	-66.64	-13.00	53.64	37.29	Vertical
4	3160.95	-58.86	-49.71	-13.00	36.71	9.15	Vertical
5	3765.75	-59.16	-48.81	-13.00	35.81	10.35	Vertical
6	4970.48	-59.74	-45.68	-13.00	32.68	14.06	Vertical

LTE Band 5 QPSK 10MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	38.7387	-92.40	-71.91	-13.00	58.91	20.49	Horizontal
2	130.981	-96.42	-74.5	-13.00	61.5	21.92	Horizontal
3	660.160	-103.20	-69.21	-13.00	56.21	33.99	Horizontal
4	1822.91	-57.48	-58.22	-13.00	45.22	-0.74	Horizontal
5	2704.60	-56.52	-51.14	-13.00	38.14	5.38	Horizontal
6	3862.55	-58.72	-49.58	-13.00	36.58	9.14	Horizontal

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	42.6226	-91.26	-71.26	-13.00	58.26	20.00	Vertical
2	93.1131	-102.67	-78.75	-13.00	65.75	23.92	Vertical
3	604.814	-103.61	-69.96	-13.00	56.96	33.65	Vertical
4	1229.23	-57.93	-59.75	-13.00	46.75	-1.82	Vertical
5	2252.00	-56.81	-53.8	-13.00	40.8	3.01	Vertical
6	3821.41	-58.31	-49.28	-13.00	36.28	9.03	Vertical

` LTE Band 12 QPSK 10MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	36.7968	-82.30	-59.95	-13.00	46.95	22.35	Horizontal
3	61.0711	-88.94	-69.61	-13.00	56.61	19.33	Horizontal
4	771.525	-92.74	-56.17	-13.00	43.17	36.57	Horizontal
5	798.637	-91.53	-54.9	-13.00	41.9	36.63	Horizontal
6	1476.23	-57.30	-58.96	-13.00	45.96	-1.66	Horizontal
7	2080.54	-57.34	-53.18	-13.00	40.18	4.16	Horizontal
Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	36.7968	-84.11	-63.52	-13.00	50.52	20.59	Vertical
3	62.0420	-88.13	-67.84	-13.00	54.84	20.29	Vertical
4	771.525	-93.39	-56.82	-13.00	43.82	36.57	Vertical
5	798.637	-89.87	-53.24	-13.00	40.24	36.63	Vertical
6	1213.10	-57.92	-59.52	-13.00	46.52	-1.60	Vertical
7	1728.36	-57.62	-57.92	-13.00	44.92	-0.30	Vertical

LTE Band 13 QPSK 10MHz BW Middle Channel `

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	36.7968	-83.78	-61.43	-13.00	48.43	22.35	Horizontal
2	773.745	-94.74	-58.14	-35.00	23.14	36.60	Horizontal
3	801.993	-93.65	-56.8	-35.00	21.8	36.85	Horizontal
4	1170.08	-58.23	-61.03	-13.00	48.03	-2.80	Horizontal
5	1601.73	-58.74	-58.02	-40.00	18.02	0.72	Horizontal
6	2706.85	-57.87	-51.91	-13.00	38.91	5.96	Horizontal
Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	36.7968	-82.14	-61.55	-13.00	48.55	20.59	Vertical
2	773.745	-93.23	-56.63	-35.00	21.63	36.60	Vertical
3	801.954	-89.74	-52.89	-35.00	17.89	36.85	Vertical
4	1297.14	-56.31	-58.85	-13.00	45.85	-2.54	Vertical
5	1601.84	-57.75	-57.03	-40.00	17.03	0.72	Vertical
6	2582.79	-57.86	-52.10	-13.00	39.10	5.76	Vertical

LTE Band 14 QPSK 10MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	30.4852	-85.71	-59.26	-13.00	46.26	26.45	Horizontal
2	326.483	-90.44	-61.69	-13.00	48.69	28.75	Horizontal
3	773.758	-93.65	-57.08	-35.00	22.08	36.57	Horizontal
4	805.657	-89.74	-52.89	-35.00	17.89	36.85	Horizontal
5	1608.27	-56.59	-55.96	-40.00	15.96	0.63	Horizontal
6	3165.08	-57.60	-48.76	-13.00	35.76	8.84	Horizontal

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	30.4852	-85.68	-61.64	-13.00	48.64	24.04	Vertical
2	99.8749	-85.83	-59.21	-13.00	46.21	26.62	Vertical
3	773.749	-92.57	-56.00	-35.00	21	36.57	Vertical
4	805.725	-90.74	-53.89	-35.00	18.89	36.85	Vertical
5	1608.27	-57.95	-57.32	-40.00	17.32	0.63	Vertical
6	5063.53	-60.02	-46.08	-13.00	33.08	13.94	Vertical

LTE Band 66 QPSK 20MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	499.768	-104.94	-72.31	-13.00	59.31	32.63	Horizontal
2	650.536	-103.95	-69.12	-13.00	56.12	34.83	Horizontal
3	790.438	-104.05	-67.65	-13.00	54.65	36.40	Horizontal
4	3768.45	-58.67	-48.19	-13.00	35.19	10.48	Horizontal
5	5861.22	-59.02	-42.75	-13.00	29.75	16.27	Horizontal
6	7983.24	-60.20	-36.59	-13.00	23.59	23.61	Horizontal

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	36.7968	-89.32	-66.97	-13.00	53.97	22.35	Horizontal
2	52.3323	-84.64	-65.39	-13.00	52.39	19.25	Horizontal
3	56.2162	-84.21	-64.92	-13.00	51.92	19.29	Horizontal
4	665.986	-102.62	-67.87	-13.00	54.87	34.75	Horizontal
5	3775.51	-58.23	-47.73	-13.00	34.73	10.50	Horizontal
6	5336.29	-59.17	-44.34	-13.00	31.34	14.83	Horizontal



LTE Band 71 QPSK 20MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	31.9410	-87.07	-64.25	-13.00	51.25	22.82	Horizontal
2	61.0555	-89.09	-70.69	-13.00	57.69	18.40	Horizontal
3	104.242	-99.48	-81.15	-13.00	68.15	18.33	Horizontal
4	2741.87	-56.04	-48.08	-13.00	35.08	7.96	Horizontal
5	7179.58	-58.89	-41.99	-13.00	28.99	16.90	Horizontal
6	10466.2	-61.74	-37.82	-13.00	24.82	23.92	Horizontal

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	31.9410	-87.50	-66.94	-13.00	53.94	20.56	Vertical
2	61.0555	-88.82	-69.57	-13.00	56.57	19.25	Vertical
3	2691.84	-57.25	-48.32	-13.00	35.32	8.93	Vertical
4	5078.53	-59.49	-45.41	-13.00	32.41	14.08	Vertical
5	7967.48	-59.49	-41.77	-13.00	28.77	17.72	Vertical
6	10316.1	-61.25	-37.40	-13.00	24.40	23.85	Vertical

2.9 Transmit antenna

2.9.1 Applicable Standard

According to RSS GEN issue5 6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below). When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

2.9.2 Antenna Information

Antenna Category: Internal Antenna

A internal Antenna was soldered to the antenna port of EUT via an adaptor cable, can't be removed.

Antenna General Information:

No.	EUT	Operating frequency range	Ant. Type	Ant. Gain (Max)
1	DV601	LTE Band 2: 1850.7MHz~1909.3MHz LTE Band 4: 1710.7MHz~1754.3MHz LTE Band 5: 824.7MHz~848.3MHz LTE Band 12: 699.7MHz~715.3MHz LTE Band 13: 779.5MHz~784.5MHz LTE Band 14: 790.5MHz~795.5MHz LTE Band 66: 1710.7MHz~1779.3MHz LTE Band 71: 665.5 MHz~695.5MHz	PIFA	3.5dBi

2.9.3 Result: comply

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



3. LIST OF MEASURING EQUIPMENT

Description	Manufacturer	Model	Serial No.	Cal. Date	Due Date	Remark
EMI Test Receiver	R&S	ESU8	A0805559	2020.04.03	2021.04.02	Radiation
Loop Antenna	Schwarz beck	HFH2-Z2	100047	2019.04.26	2022.04.25	Radiation
Broadband antenna (30MHz~1GHz)	Schwarbeck	BBHA 9120 J	A190503537	2019.01.07	2022.01.14	Radiation
Broadband antenna (30MHz~1GHz)	R&S	HK116	A130701424	2018.01.19	2021.01.18	Radiation
Double ridge horn antenna (1GHz~18GHz)	R&S	HF906	100150	2019.04.27	2022.04.26	Radiation
Double ridge horn antenna (1GHz~18GHz)	R&S	HF906	100149	2019.04.17	2022.04.16	Radiation
Horn antenna (18GHz~26.5GHz)	AR	AT4510	A0804450	2020.06.19	2023.06.18	Radiation
Horn antenna (18GHz~26.5GHz)	AR	AT4003A	0329293	2020.09.17	2021.09.16	Radiation
Amplifier 30M~1GHz	MILMEGA	80RF1000-10004	A140101634	2020.03.24	2021.03.23	Radiation
Amplifier 1G~18GHz	MILMEGA	AS0104R-800/40 0	A160302517	2020.03.24	2021.03.23	Radiation
Spectrum Analyzer	KEYSIGHT	N9030A	A160702554	2020.05.18	2021.05.17	Conducted
Test Receiver	R&S	ESIB26	A0304218	2020.04.29	2021.04.28	Conducted
Temperature chamber	XSM	DNF810C	A0501375	2020.05.26	2021.05.25	Conducted
Wideband Radio Communication tester	R&S	CMW500	A130101034	2019.07.30	2021.07.29	Conducted
Power Supply	R&S	WYJ-60100	A141102031	2020.01.16	2023.01.15	Conducted



4. UNCERTAINTY OF EVALUATION

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence . The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150KHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	2.6dB
---	-------

Uncertainty of Radiated Emission Measurement (30MHz~1GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	2.4dB
---	-------

Uncertainty of Radiated Emission Measurement (1GHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	2.8dB
---	-------



Appendix A

1.1 Conducted RF Output Power

1.1.1 Test Result and Data

Conducted Output Power NormalTC_NormalVol							
Band	Range	BandWidth	RB size/offset	Frequency (MHz)	Modulation	Power (dBm)	Result
FDD02	LowRange	1.4	OneRB_high	1850.7	QPSK	23.32	Pass
FDD02	LowRange	1.4	OneRB_high	1850.7	Q16	22.30	Pass
FDD02	LowRange	1.4	OneRB_low	1850.7	QPSK	23.36	Pass
FDD02	LowRange	1.4	OneRB_low	1850.7	Q16	22.53	Pass
FDD02	LowRange	1.4	OneRB_middle	1850.7	QPSK	23.46	Pass
FDD02	LowRange	1.4	OneRB_middle	1850.7	Q16	22.53	Pass
FDD02	LowRange	1.4	HalfRB_low	1850.7	QPSK	23.09	Pass
FDD02	LowRange	1.4	HalfRB_low	1850.7	Q16	22.19	Pass
FDD02	LowRange	1.4	HalfRB_middle	1850.7	QPSK	22.99	Pass
FDD02	LowRange	1.4	HalfRB_middle	1850.7	Q16	22.36	Pass
FDD02	LowRange	1.4	HalfRB_high	1850.7	QPSK	22.97	Pass
FDD02	LowRange	1.4	HalfRB_high	1850.7	Q16	21.91	Pass
FDD02	LowRange	1.4	fullRB	1850.7	QPSK	22.13	Pass
FDD02	LowRange	1.4	fullRB	1850.7	Q16	21.30	Pass
FDD02	LowRange	3	OneRB_high	1851.5	QPSK	20.95	Pass
FDD02	LowRange	3	OneRB_high	1851.5	Q16	21.94	Pass
FDD02	LowRange	3	OneRB_low	1851.5	QPSK	21.26	Pass
FDD02	LowRange	3	OneRB_low	1851.5	Q16	23.05	Pass
FDD02	LowRange	3	OneRB_middle	1851.5	QPSK	22.47	Pass
FDD02	LowRange	3	OneRB_middle	1851.5	Q16	22.91	Pass
FDD02	LowRange	3	HalfRB_low	1851.5	QPSK	22.27	Pass
FDD02	LowRange	3	HalfRB_low	1851.5	Q16	22.94	Pass
FDD02	LowRange	3	HalfRB_middle	1851.5	QPSK	22.64	Pass
FDD02	LowRange	3	HalfRB_middle	1851.5	Q16	21.98	Pass



FDD02	LowRange	3	HalfRB_high	1851.5	QPSK	21.08	Pass
FDD02	LowRange	3	HalfRB_high	1851.5	Q16	21.97	Pass
FDD02	LowRange	3	fullRB	1851.5	QPSK	21.12	Pass
FDD02	LowRange	3	fullRB	1851.5	Q16	22.18	Pass
FDD02	LowRange	5	OneRB_high	1852.5	QPSK	23.05	Pass
FDD02	LowRange	5	OneRB_high	1852.5	Q16	22.12	Pass
FDD02	LowRange	5	OneRB_low	1852.5	QPSK	22.84	Pass
FDD02	LowRange	5	OneRB_low	1852.5	Q16	21.74	Pass
FDD02	LowRange	5	OneRB_middle	1852.5	QPSK	22.87	Pass
FDD02	LowRange	5	OneRB_middle	1852.5	Q16	21.92	Pass
FDD02	LowRange	5	HalfRB_low	1852.5	QPSK	21.93	Pass
FDD02	LowRange	5	HalfRB_low	1852.5	Q16	21.08	Pass
FDD02	LowRange	5	HalfRB_middle	1852.5	QPSK	21.91	Pass
FDD02	LowRange	5	HalfRB_middle	1852.5	Q16	21.08	Pass
FDD02	LowRange	5	HalfRB_high	1852.5	QPSK	22.08	Pass
FDD02	LowRange	5	HalfRB_high	1852.5	Q16	20.95	Pass
FDD02	LowRange	5	fullRB	1852.5	QPSK	21.94	Pass
FDD02	LowRange	5	fullRB	1852.5	Q16	21.26	Pass
FDD02	LowRange	10	OneRB_high	1855	QPSK	23.05	Pass
FDD02	LowRange	10	OneRB_high	1855	Q16	22.47	Pass
FDD02	LowRange	10	OneRB_low	1855	QPSK	22.91	Pass
FDD02	LowRange	10	OneRB_low	1855	Q16	22.27	Pass
FDD02	LowRange	10	OneRB_middle	1855	QPSK	22.94	Pass
FDD02	LowRange	10	OneRB_middle	1855	Q16	22.64	Pass
FDD02	LowRange	10	HalfRB_low	1855	QPSK	21.98	Pass
FDD02	LowRange	10	HalfRB_low	1855	Q16	21.08	Pass
FDD02	LowRange	10	HalfRB_middle	1855	QPSK	21.97	Pass
FDD02	LowRange	10	HalfRB_middle	1855	Q16	21.12	Pass
FDD02	LowRange	10	HalfRB_high	1855	QPSK	22.18	Pass
FDD02	LowRange	10	HalfRB_high	1855	Q16	21.28	Pass
FDD02	LowRange	10	fullRB	1855	QPSK	21.95	Pass
FDD02	LowRange	10	fullRB	1855	Q16	20.99	Pass



FDD02	LowRange	15	OneRB_high	1857.5	QPSK	23.00	Pass
FDD02	LowRange	15	OneRB_high	1857.5	Q16	22.91	Pass
FDD02	LowRange	15	OneRB_low	1857.5	QPSK	22.77	Pass
FDD02	LowRange	15	OneRB_low	1857.5	Q16	22.30	Pass
FDD02	LowRange	15	OneRB_middle	1857.5	QPSK	23.02	Pass
FDD02	LowRange	15	OneRB_middle	1857.5	Q16	22.46	Pass
FDD02	LowRange	15	HalfRB_low	1857.5	QPSK	21.67	Pass
FDD02	LowRange	15	HalfRB_low	1857.5	Q16	21.59	Pass
FDD02	LowRange	15	HalfRB_middle	1857.5	QPSK	21.59	Pass
FDD02	LowRange	15	HalfRB_middle	1857.5	Q16	21.59	Pass
FDD02	LowRange	15	HalfRB_high	1857.5	QPSK	22.27	Pass
FDD02	LowRange	15	HalfRB_high	1857.5	Q16	22.19	Pass
FDD02	LowRange	15	fullRB	1857.5	QPSK	21.84	Pass
FDD02	LowRange	15	fullRB	1857.5	Q16	21.05	Pass
FDD02	LowRange	20	OneRB_high	1860	QPSK	22.69	Pass
FDD02	LowRange	20	OneRB_high	1860	Q16	22.31	Pass
FDD02	LowRange	20	OneRB_low	1860	QPSK	22.49	Pass
FDD02	LowRange	20	OneRB_low	1860	Q16	22.22	Pass
FDD02	LowRange	20	OneRB_middle	1860	QPSK	23.26	Pass
FDD02	LowRange	20	OneRB_middle	1860	Q16	22.69	Pass
FDD02	LowRange	20	HalfRB_low	1860	QPSK	21.90	Pass
FDD02	LowRange	20	HalfRB_low	1860	Q16	20.93	Pass
FDD02	LowRange	20	HalfRB_middle	1860	QPSK	21.89	Pass
FDD02	LowRange	20	HalfRB_middle	1860	Q16	20.99	Pass
FDD02	LowRange	20	HalfRB_high	1860	QPSK	22.09	Pass
FDD02	LowRange	20	HalfRB_high	1860	Q16	21.16	Pass
FDD02	LowRange	20	fullRB	1860	QPSK	21.88	Pass
FDD02	LowRange	20	fullRB	1860	Q16	20.96	Pass
FDD02	MidRange	1.4	OneRB_high	1880	QPSK	23.08	Pass
FDD02	MidRange	1.4	OneRB_high	1880	Q16	22.35	Pass
FDD02	MidRange	1.4	OneRB_low	1880	QPSK	23.11	Pass
FDD02	MidRange	1.4	OneRB_low	1880	Q16	22.31	Pass



FDD02	MidRange	1.4	OneRB_middle	1880	QPSK	22.92	Pass
FDD02	MidRange	1.4	OneRB_middle	1880	Q16	22.42	Pass
FDD02	MidRange	1.4	HalfRB_low	1880	QPSK	23.00	Pass
FDD02	MidRange	1.4	HalfRB_low	1880	Q16	22.06	Pass
FDD02	MidRange	1.4	HalfRB_middle	1880	QPSK	23.00	Pass
FDD02	MidRange	1.4	HalfRB_middle	1880	Q16	22.06	Pass
FDD02	MidRange	1.4	HalfRB_high	1880	QPSK	22.90	Pass
FDD02	MidRange	1.4	HalfRB_high	1880	Q16	22.30	Pass
FDD02	MidRange	1.4	fullRB	1880	QPSK	22.06	Pass
FDD02	MidRange	1.4	fullRB	1880	Q16	21.17	Pass
FDD02	MidRange	3	OneRB_high	1880	QPSK	23.14	Pass
FDD02	MidRange	3	OneRB_high	1880	Q16	22.39	Pass
FDD02	MidRange	3	OneRB_low	1880	QPSK	22.94	Pass
FDD02	MidRange	3	OneRB_low	1880	Q16	22.20	Pass
FDD02	MidRange	3	OneRB_middle	1880	QPSK	22.79	Pass
FDD02	MidRange	3	OneRB_middle	1880	Q16	22.26	Pass
FDD02	MidRange	3	HalfRB_low	1880	QPSK	21.94	Pass
FDD02	MidRange	3	HalfRB_low	1880	Q16	21.44	Pass
FDD02	MidRange	3	HalfRB_middle	1880	QPSK	22.03	Pass
FDD02	MidRange	3	HalfRB_middle	1880	Q16	21.34	Pass
FDD02	MidRange	3	HalfRB_high	1880	QPSK	21.94	Pass
FDD02	MidRange	3	HalfRB_high	1880	Q16	21.06	Pass
FDD02	MidRange	3	fullRB	1880	QPSK	21.99	Pass
FDD02	MidRange	3	fullRB	1880	Q16	21.05	Pass
FDD02	MidRange	5	OneRB_high	1880	QPSK	23.02	Pass
FDD02	MidRange	5	OneRB_high	1880	Q16	21.36	Pass
FDD02	MidRange	5	OneRB_low	1880	QPSK	22.81	Pass
FDD02	MidRange	5	OneRB_low	1880	Q16	21.53	Pass
FDD02	MidRange	5	OneRB_middle	1880	QPSK	22.83	Pass
FDD02	MidRange	5	OneRB_middle	1880	Q16	21.60	Pass
FDD02	MidRange	5	HalfRB_low	1880	QPSK	21.96	Pass
FDD02	MidRange	5	HalfRB_low	1880	Q16	21.05	Pass



FDD02	MidRange	5	HalfRB_middle	1880	QPSK	21.97	Pass
FDD02	MidRange	5	HalfRB_middle	1880	Q16	20.93	Pass
FDD02	MidRange	5	HalfRB_high	1880	QPSK	21.98	Pass
FDD02	MidRange	5	HalfRB_high	1880	Q16	21.18	Pass
FDD02	MidRange	5	fullRB	1880	QPSK	21.99	Pass
FDD02	MidRange	5	fullRB	1880	Q16	21.17	Pass
FDD02	MidRange	10	OneRB_high	1880	QPSK	22.86	Pass
FDD02	MidRange	10	OneRB_high	1880	Q16	22.29	Pass
FDD02	MidRange	10	OneRB_low	1880	QPSK	23.04	Pass
FDD02	MidRange	10	OneRB_low	1880	Q16	22.87	Pass
FDD02	MidRange	10	OneRB_middle	1880	QPSK	23.09	Pass
FDD02	MidRange	10	OneRB_middle	1880	Q16	22.65	Pass
FDD02	MidRange	10	HalfRB_low	1880	QPSK	22.03	Pass
FDD02	MidRange	10	HalfRB_low	1880	Q16	21.17	Pass
FDD02	MidRange	10	HalfRB_middle	1880	QPSK	22.04	Pass
FDD02	MidRange	10	HalfRB_middle	1880	Q16	21.17	Pass
FDD02	MidRange	10	HalfRB_high	1880	QPSK	22.02	Pass
FDD02	MidRange	10	HalfRB_high	1880	Q16	21.15	Pass
FDD02	MidRange	10	fullRB	1880	QPSK	22.02	Pass
FDD02	MidRange	10	fullRB	1880	Q16	21.11	Pass
FDD02	MidRange	15	OneRB_high	1880	QPSK	22.92	Pass
FDD02	MidRange	15	OneRB_high	1880	Q16	22.45	Pass
FDD02	MidRange	15	OneRB_low	1880	QPSK	23.10	Pass
FDD02	MidRange	15	OneRB_low	1880	Q16	22.29	Pass
FDD02	MidRange	15	OneRB_middle	1880	QPSK	22.91	Pass
FDD02	MidRange	15	OneRB_middle	1880	Q16	22.38	Pass
FDD02	MidRange	15	HalfRB_low	1880	QPSK	22.27	Pass
FDD02	MidRange	15	HalfRB_low	1880	Q16	22.21	Pass
FDD02	MidRange	15	HalfRB_middle	1880	QPSK	22.21	Pass
FDD02	MidRange	15	HalfRB_middle	1880	Q16	22.21	Pass
FDD02	MidRange	15	HalfRB_high	1880	QPSK	22.25	Pass
FDD02	MidRange	15	HalfRB_high	1880	Q16	22.23	Pass



FDD02	MidRange	15	fullRB	1880	QPSK	22.10	Pass
FDD02	MidRange	15	fullRB	1880	Q16	21.21	Pass
FDD02	MidRange	20	OneRB_high	1880	QPSK	22.94	Pass
FDD02	MidRange	20	OneRB_high	1880	Q16	22.47	Pass
FDD02	MidRange	20	OneRB_low	1880	QPSK	23.22	Pass
FDD02	MidRange	20	OneRB_low	1880	Q16	22.41	Pass
FDD02	MidRange	20	OneRB_middle	1880	QPSK	22.88	Pass
FDD02	MidRange	20	OneRB_middle	1880	Q16	22.42	Pass
FDD02	MidRange	20	HalfRB_low	1880	QPSK	22.13	Pass
FDD02	MidRange	20	HalfRB_low	1880	Q16	21.23	Pass
FDD02	MidRange	20	HalfRB_middle	1880	QPSK	22.06	Pass
FDD02	MidRange	20	HalfRB_middle	1880	Q16	21.23	Pass
FDD02	MidRange	20	HalfRB_high	1880	QPSK	22.02	Pass
FDD02	MidRange	20	HalfRB_high	1880	Q16	21.23	Pass
FDD02	MidRange	20	fullRB	1880	QPSK	22.09	Pass
FDD02	MidRange	20	fullRB	1880	Q16	21.09	Pass
FDD02	HighRange	1.4	OneRB_high	1909.3	QPSK	22.42	Pass
FDD02	HighRange	1.4	OneRB_high	1909.3	Q16	21.68	Pass
FDD02	HighRange	1.4	OneRB_low	1909.3	QPSK	22.65	Pass
FDD02	HighRange	1.4	OneRB_low	1909.3	Q16	21.94	Pass
FDD02	HighRange	1.4	OneRB_middle	1909.3	QPSK	22.48	Pass
FDD02	HighRange	1.4	OneRB_middle	1909.3	Q16	21.79	Pass
FDD02	HighRange	1.4	HalfRB_low	1909.3	QPSK	22.56	Pass
FDD02	HighRange	1.4	HalfRB_low	1909.3	Q16	21.71	Pass
FDD02	HighRange	1.4	HalfRB_middle	1909.3	QPSK	22.55	Pass
FDD02	HighRange	1.4	HalfRB_middle	1909.3	Q16	21.70	Pass
FDD02	HighRange	1.4	HalfRB_high	1909.3	QPSK	22.35	Pass
FDD02	HighRange	1.4	HalfRB_high	1909.3	Q16	21.52	Pass
FDD02	HighRange	1.4	fullRB	1909.3	QPSK	22.40	Pass
FDD02	HighRange	1.4	fullRB	1909.3	Q16	21.31	Pass
FDD02	HighRange	3	OneRB_high	1908.5	QPSK	23.05	Pass
FDD02	HighRange	3	OneRB_high	1908.5	Q16	22.47	Pass



FDD02	HighRange	3	OneRB_low	1908.5	QPSK	22.91	Pass
FDD02	HighRange	3	OneRB_low	1908.5	Q16	22.27	Pass
FDD02	HighRange	3	OneRB_middle	1908.5	QPSK	22.94	Pass
FDD02	HighRange	3	OneRB_middle	1908.5	Q16	22.64	Pass
FDD02	HighRange	3	HalfRB_low	1908.5	QPSK	21.98	Pass
FDD02	HighRange	3	HalfRB_low	1908.5	Q16	21.08	Pass
FDD02	HighRange	3	HalfRB_middle	1908.5	QPSK	21.97	Pass
FDD02	HighRange	3	HalfRB_middle	1908.5	Q16	21.12	Pass
FDD02	HighRange	3	HalfRB_high	1908.5	QPSK	22.18	Pass
FDD02	HighRange	3	HalfRB_high	1908.5	Q16	21.28	Pass
FDD02	HighRange	3	fullRB	1908.5	QPSK	21.95	Pass
FDD02	HighRange	3	fullRB	1908.5	Q16	20.99	Pass
FDD02	HighRange	5	OneRB_high	1907.5	QPSK	22.55	Pass
FDD02	HighRange	5	OneRB_high	1907.5	Q16	21.59	Pass
FDD02	HighRange	5	OneRB_low	1907.5	QPSK	23.02	Pass
FDD02	HighRange	5	OneRB_low	1907.5	Q16	21.83	Pass
FDD02	HighRange	5	OneRB_middle	1907.5	QPSK	22.94	Pass
FDD02	HighRange	5	OneRB_middle	1907.5	Q16	21.67	Pass
FDD02	HighRange	5	HalfRB_low	1907.5	QPSK	22.10	Pass
FDD02	HighRange	5	HalfRB_low	1907.5	Q16	21.33	Pass
FDD02	HighRange	5	HalfRB_middle	1907.5	QPSK	22.11	Pass
FDD02	HighRange	5	HalfRB_middle	1907.5	Q16	21.17	Pass
FDD02	HighRange	5	HalfRB_high	1907.5	QPSK	22.05	Pass
FDD02	HighRange	5	HalfRB_high	1907.5	Q16	21.18	Pass
FDD02	HighRange	5	fullRB	1907.5	QPSK	22.23	Pass
FDD02	HighRange	5	fullRB	1907.5	Q16	21.27	Pass
FDD02	HighRange	10	OneRB_high	1905	QPSK	21.85	Pass
FDD02	HighRange	10	OneRB_high	1905	Q16	21.50	Pass
FDD02	HighRange	10	OneRB_low	1905	QPSK	23.13	Pass
FDD02	HighRange	10	OneRB_low	1905	Q16	22.59	Pass
FDD02	HighRange	10	OneRB_middle	1905	QPSK	22.98	Pass
FDD02	HighRange	10	OneRB_middle	1905	Q16	22.60	Pass



FDD02	HighRange	10	HalfRB_low	1905	QPSK	22.34	Pass
FDD02	HighRange	10	HalfRB_low	1905	Q16	21.41	Pass
FDD02	HighRange	10	HalfRB_middle	1905	QPSK	22.25	Pass
FDD02	HighRange	10	HalfRB_middle	1905	Q16	21.41	Pass
FDD02	HighRange	10	HalfRB_high	1905	QPSK	22.07	Pass
FDD02	HighRange	10	HalfRB_high	1905	Q16	21.40	Pass
FDD02	HighRange	10	fullRB	1905	QPSK	22.21	Pass
FDD02	HighRange	10	fullRB	1905	Q16	21.36	Pass
FDD02	HighRange	15	OneRB_high	1902.5	QPSK	21.85	Pass
FDD02	HighRange	15	OneRB_high	1902.5	Q16	21.50	Pass
FDD02	HighRange	15	OneRB_low	1902.5	QPSK	23.08	Pass
FDD02	HighRange	15	OneRB_low	1902.5	Q16	22.36	Pass
FDD02	HighRange	15	OneRB_middle	1902.5	QPSK	23.01	Pass
FDD02	HighRange	15	OneRB_middle	1902.5	Q16	22.53	Pass
FDD02	HighRange	15	HalfRB_low	1902.5	QPSK	22.30	Pass
FDD02	HighRange	15	HalfRB_low	1902.5	Q16	22.29	Pass
FDD02	HighRange	15	HalfRB_middle	1902.5	QPSK	22.28	Pass
FDD02	HighRange	15	HalfRB_middle	1902.5	Q16	22.28	Pass
FDD02	HighRange	15	HalfRB_high	1902.5	QPSK	21.45	Pass
FDD02	HighRange	15	HalfRB_high	1902.5	Q16	21.42	Pass
FDD02	HighRange	15	fullRB	1902.5	QPSK	22.09	Pass
FDD02	HighRange	15	fullRB	1902.5	Q16	21.22	Pass
FDD02	HighRange	20	OneRB_high	1900	QPSK	21.71	Pass
FDD02	HighRange	20	OneRB_high	1900	Q16	21.10	Pass
FDD02	HighRange	20	OneRB_low	1900	QPSK	23.12	Pass
FDD02	HighRange	20	OneRB_low	1900	Q16	22.40	Pass
FDD02	HighRange	20	OneRB_middle	1900	QPSK	23.36	Pass
FDD02	HighRange	20	OneRB_middle	1900	Q16	22.67	Pass
FDD02	HighRange	20	HalfRB_low	1900	QPSK	22.13	Pass
FDD02	HighRange	20	HalfRB_low	1900	Q16	21.29	Pass
FDD02	HighRange	20	HalfRB_middle	1900	QPSK	22.24	Pass
FDD02	HighRange	20	HalfRB_middle	1900	Q16	21.29	Pass



FDD02	HighRange	20	HalfRB_high	1900	QPSK	22.04	Pass
FDD02	HighRange	20	HalfRB_high	1900	Q16	21.17	Pass
FDD02	HighRange	20	fullRB	1900	QPSK	22.02	Pass
FDD02	HighRange	20	fullRB	1900	Q16	21.13	Pass
FDD04	LowRange	1.4	OneRB_high	1710.7	QPSK	21.86	Pass
FDD04	LowRange	1.4	OneRB_high	1710.7	Q16	21.08	Pass
FDD04	LowRange	1.4	OneRB_low	1710.7	QPSK	21.83	Pass
FDD04	LowRange	1.4	OneRB_low	1710.7	Q16	21.23	Pass
FDD04	LowRange	1.4	OneRB_middle	1710.7	QPSK	21.86	Pass
FDD04	LowRange	1.4	OneRB_middle	1710.7	Q16	21.25	Pass
FDD04	LowRange	1.4	HalfRB_low	1710.7	QPSK	21.86	Pass
FDD04	LowRange	1.4	HalfRB_low	1710.7	Q16	20.94	Pass
FDD04	LowRange	1.4	HalfRB_middle	1710.7	QPSK	21.75	Pass
FDD04	LowRange	1.4	HalfRB_middle	1710.7	Q16	21.15	Pass
FDD04	LowRange	1.4	HalfRB_high	1710.7	QPSK	21.92	Pass
FDD04	LowRange	1.4	HalfRB_high	1710.7	Q16	21.03	Pass
FDD04	LowRange	1.4	fullRB	1710.7	QPSK	20.86	Pass
FDD04	LowRange	1.4	fullRB	1710.7	Q16	20.25	Pass
FDD04	LowRange	3	OneRB_high	1711.5	QPSK	22.05	Pass
FDD04	LowRange	3	OneRB_high	1711.5	Q16	21.18	Pass
FDD04	LowRange	3	OneRB_low	1711.5	QPSK	22.23	Pass
FDD04	LowRange	3	OneRB_low	1711.5	Q16	21.27	Pass
FDD04	LowRange	3	OneRB_middle	1711.5	QPSK	21.85	Pass
FDD04	LowRange	3	OneRB_middle	1711.5	Q16	21.50	Pass
FDD04	LowRange	3	HalfRB_low	1711.5	QPSK	23.13	Pass
FDD04	LowRange	3	HalfRB_low	1711.5	Q16	22.59	Pass
FDD04	LowRange	3	HalfRB_middle	1711.5	QPSK	22.98	Pass
FDD04	LowRange	3	HalfRB_middle	1711.5	Q16	22.60	Pass
FDD04	LowRange	3	HalfRB_high	1711.5	QPSK	22.34	Pass
FDD04	LowRange	3	HalfRB_high	1711.5	Q16	21.41	Pass
FDD04	LowRange	3	fullRB	1711.5	QPSK	22.25	Pass
FDD04	LowRange	3	fullRB	1711.5	Q16	21.41	Pass



FDD04	LowRange	5	OneRB_high	1712.5	QPSK	21.77	Pass
FDD04	LowRange	5	OneRB_high	1712.5	Q16	20.27	Pass
FDD04	LowRange	5	OneRB_low	1712.5	QPSK	21.97	Pass
FDD04	LowRange	5	OneRB_low	1712.5	Q16	20.53	Pass
FDD04	LowRange	5	OneRB_middle	1712.5	QPSK	21.89	Pass
FDD04	LowRange	5	OneRB_middle	1712.5	Q16	20.94	Pass
FDD04	LowRange	5	HalfRB_low	1712.5	QPSK	21.05	Pass
FDD04	LowRange	5	HalfRB_low	1712.5	Q16	20.14	Pass
FDD04	LowRange	5	HalfRB_middle	1712.5	QPSK	20.96	Pass
FDD04	LowRange	5	HalfRB_middle	1712.5	Q16	20.07	Pass
FDD04	LowRange	5	HalfRB_high	1712.5	QPSK	20.91	Pass
FDD04	LowRange	5	HalfRB_high	1712.5	Q16	20.00	Pass
FDD04	LowRange	5	fullRB	1712.5	QPSK	20.89	Pass
FDD04	LowRange	5	fullRB	1712.5	Q16	20.04	Pass
FDD04	LowRange	10	OneRB_high	1715	QPSK	21.78	Pass
FDD04	LowRange	10	OneRB_high	1715	Q16	21.67	Pass
FDD04	LowRange	10	OneRB_low	1715	QPSK	22.00	Pass
FDD04	LowRange	10	OneRB_low	1715	Q16	21.23	Pass
FDD04	LowRange	10	OneRB_middle	1715	QPSK	21.82	Pass
FDD04	LowRange	10	OneRB_middle	1715	Q16	21.50	Pass
FDD04	LowRange	10	HalfRB_low	1715	QPSK	20.84	Pass
FDD04	LowRange	10	HalfRB_low	1715	Q16	19.99	Pass
FDD04	LowRange	10	HalfRB_middle	1715	QPSK	20.85	Pass
FDD04	LowRange	10	HalfRB_middle	1715	Q16	20.08	Pass
FDD04	LowRange	10	HalfRB_high	1715	QPSK	20.82	Pass
FDD04	LowRange	10	HalfRB_high	1715	Q16	20.04	Pass
FDD04	LowRange	10	fullRB	1715	QPSK	20.93	Pass
FDD04	LowRange	10	fullRB	1715	Q16	19.94	Pass
FDD04	LowRange	15	OneRB_high	1717.5	QPSK	22.02	Pass
FDD04	LowRange	15	OneRB_high	1717.5	Q16	21.30	Pass
FDD04	LowRange	15	OneRB_low	1717.5	QPSK	21.81	Pass
FDD04	LowRange	15	OneRB_low	1717.5	Q16	21.24	Pass



FDD04	LowRange	15	OneRB_middle	1717.5	QPSK	21.77	Pass
FDD04	LowRange	15	OneRB_middle	1717.5	Q16	21.04	Pass
FDD04	LowRange	15	HalfRB_low	1717.5	QPSK	21.27	Pass
FDD04	LowRange	15	HalfRB_low	1717.5	Q16	21.28	Pass
FDD04	LowRange	15	HalfRB_middle	1717.5	QPSK	21.27	Pass
FDD04	LowRange	15	HalfRB_middle	1717.5	Q16	20.99	Pass
FDD04	LowRange	15	HalfRB_high	1717.5	QPSK	21.16	Pass
FDD04	LowRange	15	HalfRB_high	1717.5	Q16	21.16	Pass
FDD04	LowRange	15	fullRB	1717.5	QPSK	20.78	Pass
FDD04	LowRange	15	fullRB	1717.5	Q16	19.98	Pass
FDD04	LowRange	20	OneRB_high	1720	QPSK	22.11	Pass
FDD04	LowRange	20	OneRB_high	1720	Q16	21.46	Pass
FDD04	LowRange	20	OneRB_low	1720	QPSK	21.51	Pass
FDD04	LowRange	20	OneRB_low	1720	Q16	20.97	Pass
FDD04	LowRange	20	OneRB_middle	1720	QPSK	21.65	Pass
FDD04	LowRange	20	OneRB_middle	1720	Q16	21.06	Pass
FDD04	LowRange	20	HalfRB_low	1720	QPSK	20.82	Pass
FDD04	LowRange	20	HalfRB_low	1720	Q16	19.90	Pass
FDD04	LowRange	20	HalfRB_middle	1720	QPSK	20.82	Pass
FDD04	LowRange	20	HalfRB_middle	1720	Q16	19.90	Pass
FDD04	LowRange	20	HalfRB_high	1720	QPSK	20.86	Pass
FDD04	LowRange	20	HalfRB_high	1720	Q16	20.03	Pass
FDD04	LowRange	20	fullRB	1720	QPSK	20.80	Pass
FDD04	LowRange	20	fullRB	1720	Q16	19.83	Pass
FDD04	MidRange	1.4	OneRB_high	1732.5	QPSK	22.10	Pass
FDD04	MidRange	1.4	OneRB_high	1732.5	Q16	21.44	Pass
FDD04	MidRange	1.4	OneRB_low	1732.5	QPSK	21.89	Pass
FDD04	MidRange	1.4	OneRB_low	1732.5	Q16	21.25	Pass
FDD04	MidRange	1.4	OneRB_middle	1732.5	QPSK	22.26	Pass
FDD04	MidRange	1.4	OneRB_middle	1732.5	Q16	21.57	Pass
FDD04	MidRange	1.4	HalfRB_low	1732.5	QPSK	22.10	Pass
FDD04	MidRange	1.4	HalfRB_low	1732.5	Q16	21.25	Pass



FDD04	MidRange	1.4	HalfRB_middle	1732.5	QPSK	22.10	Pass
FDD04	MidRange	1.4	HalfRB_middle	1732.5	Q16	21.05	Pass
FDD04	MidRange	1.4	HalfRB_high	1732.5	QPSK	22.03	Pass
FDD04	MidRange	1.4	HalfRB_high	1732.5	Q16	21.21	Pass
FDD04	MidRange	1.4	fullRB	1732.5	QPSK	21.02	Pass
FDD04	MidRange	1.4	fullRB	1732.5	Q16	20.13	Pass
FDD04	MidRange	3	OneRB_high	1732.5	QPSK	22.06	Pass
FDD04	MidRange	3	OneRB_high	1732.5	Q16	21.36	Pass
FDD04	MidRange	3	OneRB_low	1732.5	QPSK	22.05	Pass
FDD04	MidRange	3	OneRB_low	1732.5	Q16	21.27	Pass
FDD04	MidRange	3	OneRB_middle	1732.5	QPSK	22.08	Pass
FDD04	MidRange	3	OneRB_middle	1732.5	Q16	21.34	Pass
FDD04	MidRange	3	HalfRB_low	1732.5	QPSK	20.98	Pass
FDD04	MidRange	3	HalfRB_low	1732.5	Q16	20.23	Pass
FDD04	MidRange	3	HalfRB_middle	1732.5	QPSK	20.99	Pass
FDD04	MidRange	3	HalfRB_middle	1732.5	Q16	20.24	Pass
FDD04	MidRange	3	HalfRB_high	1732.5	QPSK	21.12	Pass
FDD04	MidRange	3	HalfRB_high	1732.5	Q16	20.18	Pass
FDD04	MidRange	3	fullRB	1732.5	QPSK	21.07	Pass
FDD04	MidRange	3	fullRB	1732.5	Q16	20.03	Pass
FDD04	MidRange	5	OneRB_high	1732.5	QPSK	22.01	Pass
FDD04	MidRange	5	OneRB_high	1732.5	Q16	20.69	Pass
FDD04	MidRange	5	OneRB_low	1732.5	QPSK	21.83	Pass
FDD04	MidRange	5	OneRB_low	1732.5	Q16	20.55	Pass
FDD04	MidRange	5	OneRB_middle	1732.5	QPSK	22.05	Pass
FDD04	MidRange	5	OneRB_middle	1732.5	Q16	20.66	Pass
FDD04	MidRange	5	HalfRB_low	1732.5	QPSK	20.92	Pass
FDD04	MidRange	5	HalfRB_low	1732.5	Q16	20.04	Pass
FDD04	MidRange	5	HalfRB_middle	1732.5	QPSK	20.92	Pass
FDD04	MidRange	5	HalfRB_middle	1732.5	Q16	20.03	Pass
FDD04	MidRange	5	HalfRB_high	1732.5	QPSK	21.09	Pass
FDD04	MidRange	5	HalfRB_high	1732.5	Q16	20.12	Pass



FDD04	MidRange	5	fullRB	1732.5	QPSK	20.93	Pass
FDD04	MidRange	5	fullRB	1732.5	Q16	20.15	Pass
FDD04	MidRange	10	OneRB_high	1732.5	QPSK	21.86	Pass
FDD04	MidRange	10	OneRB_high	1732.5	Q16	21.09	Pass
FDD04	MidRange	10	OneRB_low	1732.5	QPSK	22.10	Pass
FDD04	MidRange	10	OneRB_low	1732.5	Q16	21.25	Pass
FDD04	MidRange	10	OneRB_middle	1732.5	QPSK	22.20	Pass
FDD04	MidRange	10	OneRB_middle	1732.5	Q16	21.67	Pass
FDD04	MidRange	10	HalfRB_low	1732.5	QPSK	20.89	Pass
FDD04	MidRange	10	HalfRB_low	1732.5	Q16	20.19	Pass
FDD04	MidRange	10	HalfRB_middle	1732.5	QPSK	20.98	Pass
FDD04	MidRange	10	HalfRB_middle	1732.5	Q16	20.19	Pass
FDD04	MidRange	10	HalfRB_high	1732.5	QPSK	20.98	Pass
FDD04	MidRange	10	HalfRB_high	1732.5	Q16	20.01	Pass
FDD04	MidRange	10	fullRB	1732.5	QPSK	20.90	Pass
FDD04	MidRange	10	fullRB	1732.5	Q16	19.97	Pass
FDD04	MidRange	15	OneRB_high	1732.5	QPSK	21.92	Pass
FDD04	MidRange	15	OneRB_high	1732.5	Q16	21.88	Pass
FDD04	MidRange	15	OneRB_low	1732.5	QPSK	21.91	Pass
FDD04	MidRange	15	OneRB_low	1732.5	Q16	21.39	Pass
FDD04	MidRange	15	OneRB_middle	1732.5	QPSK	22.14	Pass
FDD04	MidRange	15	OneRB_middle	1732.5	Q16	21.99	Pass
FDD04	MidRange	15	HalfRB_low	1732.5	QPSK	21.02	Pass
FDD04	MidRange	15	HalfRB_low	1732.5	Q16	21.19	Pass
FDD04	MidRange	15	HalfRB_middle	1732.5	QPSK	21.18	Pass
FDD04	MidRange	15	HalfRB_middle	1732.5	Q16	21.18	Pass
FDD04	MidRange	15	HalfRB_high	1732.5	QPSK	21.21	Pass
FDD04	MidRange	15	HalfRB_high	1732.5	Q16	21.13	Pass
FDD04	MidRange	15	fullRB	1732.5	QPSK	20.89	Pass
FDD04	MidRange	15	fullRB	1732.5	Q16	19.99	Pass
FDD04	MidRange	20	OneRB_high	1732.5	QPSK	21.85	Pass
FDD04	MidRange	20	OneRB_high	1732.5	Q16	21.30	Pass



FDD04	MidRange	20	OneRB_low	1732.5	QPSK	21.77	Pass
FDD04	MidRange	20	OneRB_low	1732.5	Q16	21.42	Pass
FDD04	MidRange	20	OneRB_middle	1732.5	QPSK	22.41	Pass
FDD04	MidRange	20	OneRB_middle	1732.5	Q16	21.72	Pass
FDD04	MidRange	20	HalfRB_low	1732.5	QPSK	20.94	Pass
FDD04	MidRange	20	HalfRB_low	1732.5	Q16	20.10	Pass
FDD04	MidRange	20	HalfRB_middle	1732.5	QPSK	20.94	Pass
FDD04	MidRange	20	HalfRB_middle	1732.5	Q16	20.01	Pass
FDD04	MidRange	20	HalfRB_high	1732.5	QPSK	21.04	Pass
FDD04	MidRange	20	HalfRB_high	1732.5	Q16	20.12	Pass
FDD04	MidRange	20	fullRB	1732.5	QPSK	20.94	Pass
FDD04	MidRange	20	fullRB	1732.5	Q16	20.12	Pass
FDD04	HighRange	1.4	OneRB_high	1754.3	QPSK	22.07	Pass
FDD04	HighRange	1.4	OneRB_high	1754.3	Q16	21.46	Pass
FDD04	HighRange	1.4	OneRB_low	1754.3	QPSK	21.96	Pass
FDD04	HighRange	1.4	OneRB_low	1754.3	Q16	21.36	Pass
FDD04	HighRange	1.4	OneRB_middle	1754.3	QPSK	22.08	Pass
FDD04	HighRange	1.4	OneRB_middle	1754.3	Q16	21.59	Pass
FDD04	HighRange	1.4	HalfRB_low	1754.3	QPSK	22.04	Pass
FDD04	HighRange	1.4	HalfRB_low	1754.3	Q16	21.13	Pass
FDD04	HighRange	1.4	HalfRB_middle	1754.3	QPSK	22.04	Pass
FDD04	HighRange	1.4	HalfRB_middle	1754.3	Q16	21.03	Pass
FDD04	HighRange	1.4	HalfRB_high	1754.3	QPSK	22.01	Pass
FDD04	HighRange	1.4	HalfRB_high	1754.3	Q16	21.12	Pass
FDD04	HighRange	1.4	fullRB	1754.3	QPSK	21.04	Pass
FDD04	HighRange	1.4	fullRB	1754.3	Q16	20.18	Pass
FDD04	HighRange	3	OneRB_high	1753.5	QPSK	20.53	Pass
FDD04	HighRange	3	OneRB_high	1753.5	Q16	21.89	Pass
FDD04	HighRange	3	OneRB_low	1753.5	QPSK	20.94	Pass
FDD04	HighRange	3	OneRB_low	1753.5	Q16	21.05	Pass
FDD04	HighRange	3	OneRB_middle	1753.5	QPSK	20.14	Pass
FDD04	HighRange	3	OneRB_middle	1753.5	Q16	20.96	Pass



FDD04	HighRange	3	HalfRB_low	1753.5	QPSK	20.07	Pass
FDD04	HighRange	3	HalfRB_low	1753.5	Q16	20.91	Pass
FDD04	HighRange	3	HalfRB_middle	1753.5	QPSK	20.00	Pass
FDD04	HighRange	3	HalfRB_middle	1753.5	Q16	20.89	Pass
FDD04	HighRange	3	HalfRB_high	1753.5	QPSK	20.04	Pass
FDD04	HighRange	3	HalfRB_high	1753.5	Q16	21.78	Pass
FDD04	HighRange	3	fullRB	1753.5	QPSK	21.67	Pass
FDD04	HighRange	3	fullRB	1753.5	Q16	22.00	Pass
FDD04	HighRange	5	OneRB_high	1752.5	QPSK	22.37	Pass
FDD04	HighRange	5	OneRB_high	1752.5	Q16	21.34	Pass
FDD04	HighRange	5	OneRB_low	1752.5	QPSK	22.21	Pass
FDD04	HighRange	5	OneRB_low	1752.5	Q16	21.17	Pass
FDD04	HighRange	5	OneRB_middle	1752.5	QPSK	22.05	Pass
FDD04	HighRange	5	OneRB_middle	1752.5	Q16	21.21	Pass
FDD04	HighRange	5	HalfRB_low	1752.5	QPSK	21.24	Pass
FDD04	HighRange	5	HalfRB_low	1752.5	Q16	20.26	Pass
FDD04	HighRange	5	HalfRB_middle	1752.5	QPSK	21.15	Pass
FDD04	HighRange	5	HalfRB_middle	1752.5	Q16	20.17	Pass
FDD04	HighRange	5	HalfRB_high	1752.5	QPSK	21.21	Pass
FDD04	HighRange	5	HalfRB_high	1752.5	Q16	20.40	Pass
FDD04	HighRange	5	fullRB	1752.5	QPSK	21.14	Pass
FDD04	HighRange	5	fullRB	1752.5	Q16	20.29	Pass
FDD04	HighRange	10	OneRB_high	1750	QPSK	22.29	Pass
FDD04	HighRange	10	OneRB_high	1750	Q16	22.01	Pass
FDD04	HighRange	10	OneRB_low	1750	QPSK	22.01	Pass
FDD04	HighRange	10	OneRB_low	1750	Q16	21.30	Pass
FDD04	HighRange	10	OneRB_middle	1750	QPSK	21.85	Pass
FDD04	HighRange	10	OneRB_middle	1750	Q16	21.66	Pass
FDD04	HighRange	10	HalfRB_low	1750	QPSK	20.93	Pass
FDD04	HighRange	10	HalfRB_low	1750	Q16	20.08	Pass
FDD04	HighRange	10	HalfRB_middle	1750	QPSK	20.94	Pass
FDD04	HighRange	10	HalfRB_middle	1750	Q16	20.07	Pass



FDD04	HighRange	10	HalfRB_high	1750	QPSK	20.98	Pass
FDD04	HighRange	10	HalfRB_high	1750	Q16	20.13	Pass
FDD04	HighRange	10	fullRB	1750	QPSK	20.96	Pass
FDD04	HighRange	10	fullRB	1750	Q16	19.97	Pass
FDD04	HighRange	15	OneRB_high	1747.5	QPSK	22.11	Pass
FDD04	HighRange	15	OneRB_high	1747.5	Q16	21.33	Pass
FDD04	HighRange	15	OneRB_low	1747.5	QPSK	22.13	Pass
FDD04	HighRange	15	OneRB_low	1747.5	Q16	21.43	Pass
FDD04	HighRange	15	OneRB_middle	1747.5	QPSK	21.94	Pass
FDD04	HighRange	15	OneRB_middle	1747.5	Q16	21.58	Pass
FDD04	HighRange	15	HalfRB_low	1747.5	QPSK	22.16	Pass
FDD04	HighRange	15	HalfRB_low	1747.5	Q16	22.16	Pass
FDD04	HighRange	15	HalfRB_middle	1747.5	QPSK	22.16	Pass
FDD04	HighRange	15	HalfRB_middle	1747.5	Q16	22.15	Pass
FDD04	HighRange	15	HalfRB_high	1747.5	QPSK	21.29	Pass
FDD04	HighRange	15	HalfRB_high	1747.5	Q16	21.31	Pass
FDD04	HighRange	15	fullRB	1747.5	QPSK	21.00	Pass
FDD04	HighRange	15	fullRB	1747.5	Q16	19.94	Pass
FDD04	HighRange	20	OneRB_high	1745	QPSK	21.93	Pass
FDD04	HighRange	20	OneRB_high	1745	Q16	21.42	Pass
FDD04	HighRange	20	OneRB_low	1745	QPSK	22.21	Pass
FDD04	HighRange	20	OneRB_low	1745	Q16	21.55	Pass
FDD04	HighRange	20	OneRB_middle	1745	QPSK	21.70	Pass
FDD04	HighRange	20	OneRB_middle	1745	Q16	21.46	Pass
FDD04	HighRange	20	HalfRB_low	1745	QPSK	21.12	Pass
FDD04	HighRange	20	HalfRB_low	1745	Q16	20.20	Pass
FDD04	HighRange	20	HalfRB_middle	1745	QPSK	21.12	Pass
FDD04	HighRange	20	HalfRB_middle	1745	Q16	20.20	Pass
FDD04	HighRange	20	HalfRB_high	1745	QPSK	20.98	Pass
FDD04	HighRange	20	HalfRB_high	1745	Q16	20.07	Pass
FDD04	HighRange	20	fullRB	1745	QPSK	21.08	Pass
FDD04	HighRange	20	fullRB	1745	Q16	20.10	Pass



FDD05	LowRange	1.4	OneRB_high	824.7	QPSK	24.26	Pass
FDD05	LowRange	1.4	OneRB_high	824.7	Q16	23.52	Pass
FDD05	LowRange	1.4	OneRB_low	824.7	QPSK	24.35	Pass
FDD05	LowRange	1.4	OneRB_low	824.7	Q16	23.67	Pass
FDD05	LowRange	1.4	OneRB_middle	824.7	QPSK	24.31	Pass
FDD05	LowRange	1.4	OneRB_middle	824.7	Q16	23.56	Pass
FDD05	LowRange	1.4	HalfRB_low	824.7	QPSK	24.43	Pass
FDD05	LowRange	1.4	HalfRB_low	824.7	Q16	23.24	Pass
FDD05	LowRange	1.4	HalfRB_middle	824.7	QPSK	24.34	Pass
FDD05	LowRange	1.4	HalfRB_middle	824.7	Q16	23.28	Pass
FDD05	LowRange	1.4	HalfRB_high	824.7	QPSK	24.37	Pass
FDD05	LowRange	1.4	HalfRB_high	824.7	Q16	23.37	Pass
FDD05	LowRange	1.4	fullRB	824.7	QPSK	23.26	Pass
FDD05	LowRange	1.4	fullRB	824.7	Q16	22.18	Pass
FDD05	LowRange	3	OneRB_high	825.5	QPSK	21.43	Pass
FDD05	LowRange	3	OneRB_high	825.5	Q16	21.94	Pass
FDD05	LowRange	3	OneRB_low	825.5	QPSK	21.58	Pass
FDD05	LowRange	3	OneRB_low	825.5	Q16	22.16	Pass
FDD05	LowRange	3	OneRB_middle	825.5	QPSK	22.16	Pass
FDD05	LowRange	3	OneRB_middle	825.5	Q16	22.16	Pass
FDD05	LowRange	3	HalfRB_low	825.5	QPSK	22.15	Pass
FDD05	LowRange	3	HalfRB_low	825.5	Q16	21.29	Pass
FDD05	LowRange	3	HalfRB_middle	825.5	QPSK	21.31	Pass
FDD05	LowRange	3	HalfRB_middle	825.5	Q16	21.00	Pass
FDD05	LowRange	3	HalfRB_high	825.5	QPSK	19.94	Pass
FDD05	LowRange	3	HalfRB_high	825.5	Q16	21.93	Pass
FDD05	LowRange	3	fullRB	825.5	QPSK	21.42	Pass
FDD05	LowRange	3	fullRB	825.5	Q16	22.21	Pass
FDD05	LowRange	5	OneRB_high	826.5	QPSK	23.95	Pass
FDD05	LowRange	5	OneRB_high	826.5	Q16	22.57	Pass
FDD05	LowRange	5	OneRB_low	826.5	QPSK	24.10	Pass
FDD05	LowRange	5	OneRB_low	826.5	Q16	22.74	Pass



FDD05	LowRange	5	OneRB_middle	826.5	QPSK	24.12	Pass
FDD05	LowRange	5	OneRB_middle	826.5	Q16	22.78	Pass
FDD05	LowRange	5	HalfRB_low	826.5	QPSK	23.14	Pass
FDD05	LowRange	5	HalfRB_low	826.5	Q16	21.90	Pass
FDD05	LowRange	5	HalfRB_middle	826.5	QPSK	23.14	Pass
FDD05	LowRange	5	HalfRB_middle	826.5	Q16	22.14	Pass
FDD05	LowRange	5	HalfRB_high	826.5	QPSK	23.03	Pass
FDD05	LowRange	5	HalfRB_high	826.5	Q16	22.10	Pass
FDD05	LowRange	5	fullRB	826.5	QPSK	23.13	Pass
FDD05	LowRange	5	fullRB	826.5	Q16	22.07	Pass
FDD05	LowRange	10	OneRB_high	829	QPSK	23.88	Pass
FDD05	LowRange	10	OneRB_high	829	Q16	23.40	Pass
FDD05	LowRange	10	OneRB_low	829	QPSK	24.22	Pass
FDD05	LowRange	10	OneRB_low	829	Q16	23.46	Pass
FDD05	LowRange	10	OneRB_middle	829	QPSK	24.19	Pass
FDD05	LowRange	10	OneRB_middle	829	Q16	23.82	Pass
FDD05	LowRange	10	HalfRB_low	829	QPSK	23.20	Pass
FDD05	LowRange	10	HalfRB_low	829	Q16	22.24	Pass
FDD05	LowRange	10	HalfRB_middle	829	QPSK	23.21	Pass
FDD05	LowRange	10	HalfRB_middle	829	Q16	22.24	Pass
FDD05	LowRange	10	HalfRB_high	829	QPSK	23.13	Pass
FDD05	LowRange	10	HalfRB_high	829	Q16	22.13	Pass
FDD05	LowRange	10	fullRB	829	QPSK	23.12	Pass
FDD05	LowRange	10	fullRB	829	Q16	22.19	Pass
FDD05	MidRange	1.4	OneRB_high	836.5	QPSK	24.00	Pass
FDD05	MidRange	1.4	OneRB_high	836.5	Q16	23.39	Pass
FDD05	MidRange	1.4	OneRB_low	836.5	QPSK	24.09	Pass
FDD05	MidRange	1.4	OneRB_low	836.5	Q16	23.46	Pass
FDD05	MidRange	1.4	OneRB_middle	836.5	QPSK	24.10	Pass
FDD05	MidRange	1.4	OneRB_middle	836.5	Q16	23.60	Pass
FDD05	MidRange	1.4	HalfRB_low	836.5	QPSK	24.12	Pass
FDD05	MidRange	1.4	HalfRB_low	836.5	Q16	23.07	Pass



FDD05	MidRange	1.4	HalfRB_middle	836.5	QPSK	24.02	Pass
FDD05	MidRange	1.4	HalfRB_middle	836.5	Q16	23.07	Pass
FDD05	MidRange	1.4	HalfRB_high	836.5	QPSK	24.05	Pass
FDD05	MidRange	1.4	HalfRB_high	836.5	Q16	23.31	Pass
FDD05	MidRange	1.4	fullRB	836.5	QPSK	22.97	Pass
FDD05	MidRange	1.4	fullRB	836.5	Q16	22.16	Pass
FDD05	MidRange	3	OneRB_high	836.5	QPSK	24.02	Pass
FDD05	MidRange	3	OneRB_high	836.5	Q16	23.43	Pass
FDD05	MidRange	3	OneRB_low	836.5	QPSK	24.09	Pass
FDD05	MidRange	3	OneRB_low	836.5	Q16	23.33	Pass
FDD05	MidRange	3	OneRB_middle	836.5	QPSK	23.86	Pass
FDD05	MidRange	3	OneRB_middle	836.5	Q16	23.22	Pass
FDD05	MidRange	3	HalfRB_low	836.5	QPSK	22.99	Pass
FDD05	MidRange	3	HalfRB_low	836.5	Q16	22.13	Pass
FDD05	MidRange	3	HalfRB_middle	836.5	QPSK	22.99	Pass
FDD05	MidRange	3	HalfRB_middle	836.5	Q16	22.13	Pass
FDD05	MidRange	3	HalfRB_high	836.5	QPSK	23.02	Pass
FDD05	MidRange	3	HalfRB_high	836.5	Q16	22.37	Pass
FDD05	MidRange	3	fullRB	836.5	QPSK	23.08	Pass
FDD05	MidRange	3	fullRB	836.5	Q16	22.06	Pass
FDD05	MidRange	5	OneRB_high	836.5	QPSK	24.04	Pass
FDD05	MidRange	5	OneRB_high	836.5	Q16	22.43	Pass
FDD05	MidRange	5	OneRB_low	836.5	QPSK	23.97	Pass
FDD05	MidRange	5	OneRB_low	836.5	Q16	22.49	Pass
FDD05	MidRange	5	OneRB_middle	836.5	QPSK	23.90	Pass
FDD05	MidRange	5	OneRB_middle	836.5	Q16	23.00	Pass
FDD05	MidRange	5	HalfRB_low	836.5	QPSK	23.02	Pass
FDD05	MidRange	5	HalfRB_low	836.5	Q16	22.01	Pass
FDD05	MidRange	5	HalfRB_middle	836.5	QPSK	23.02	Pass
FDD05	MidRange	5	HalfRB_middle	836.5	Q16	21.90	Pass
FDD05	MidRange	5	HalfRB_high	836.5	QPSK	22.99	Pass
FDD05	MidRange	5	HalfRB_high	836.5	Q16	21.89	Pass



FDD05	MidRange	5	fullRB	836.5	QPSK	22.97	Pass
FDD05	MidRange	5	fullRB	836.5	Q16	22.00	Pass
FDD05	MidRange	10	OneRB_high	836.5	QPSK	24.00	Pass
FDD05	MidRange	10	OneRB_high	836.5	Q16	23.58	Pass
FDD05	MidRange	10	OneRB_low	836.5	QPSK	24.15	Pass
FDD05	MidRange	10	OneRB_low	836.5	Q16	23.47	Pass
FDD05	MidRange	10	OneRB_middle	836.5	QPSK	24.23	Pass
FDD05	MidRange	10	OneRB_middle	836.5	Q16	23.69	Pass
FDD05	MidRange	10	HalfRB_low	836.5	QPSK	23.06	Pass
FDD05	MidRange	10	HalfRB_low	836.5	Q16	22.07	Pass
FDD05	MidRange	10	HalfRB_middle	836.5	QPSK	23.13	Pass
FDD05	MidRange	10	HalfRB_middle	836.5	Q16	22.06	Pass
FDD05	MidRange	10	HalfRB_high	836.5	QPSK	23.17	Pass
FDD05	MidRange	10	HalfRB_high	836.5	Q16	22.20	Pass
FDD05	MidRange	10	fullRB	836.5	QPSK	23.14	Pass
FDD05	MidRange	10	fullRB	836.5	Q16	22.00	Pass
FDD05	HighRange	1.4	OneRB_high	848.3	QPSK	24.18	Pass
FDD05	HighRange	1.4	OneRB_high	848.3	Q16	23.59	Pass
FDD05	HighRange	1.4	OneRB_low	848.3	QPSK	24.21	Pass
FDD05	HighRange	1.4	OneRB_low	848.3	Q16	23.57	Pass
FDD05	HighRange	1.4	OneRB_middle	848.3	QPSK	24.36	Pass
FDD05	HighRange	1.4	OneRB_middle	848.3	Q16	23.74	Pass
FDD05	HighRange	1.4	HalfRB_low	848.3	QPSK	24.19	Pass
FDD05	HighRange	1.4	HalfRB_low	848.3	Q16	23.25	Pass
FDD05	HighRange	1.4	HalfRB_middle	848.3	QPSK	24.09	Pass
FDD05	HighRange	1.4	HalfRB_middle	848.3	Q16	23.25	Pass
FDD05	HighRange	1.4	HalfRB_high	848.3	QPSK	24.13	Pass
FDD05	HighRange	1.4	HalfRB_high	848.3	Q16	23.28	Pass
FDD05	HighRange	1.4	fullRB	848.3	QPSK	23.25	Pass
FDD05	HighRange	1.4	fullRB	848.3	Q16	22.26	Pass
FDD05	HighRange	3	OneRB_high	847.5	QPSK	23.14	Pass
FDD05	HighRange	3	OneRB_high	847.5	Q16	22.14	Pass



FDD05	HighRange	3	OneRB_low	847.5	QPSK	23.03	Pass
FDD05	HighRange	3	OneRB_low	847.5	Q16	22.10	Pass
FDD05	HighRange	3	OneRB_middle	847.5	QPSK	23.13	Pass
FDD05	HighRange	3	OneRB_middle	847.5	Q16	22.07	Pass
FDD05	HighRange	3	HalfRB_low	847.5	QPSK	23.88	Pass
FDD05	HighRange	3	HalfRB_low	847.5	Q16	23.40	Pass
FDD05	HighRange	3	HalfRB_middle	847.5	QPSK	24.22	Pass
FDD05	HighRange	3	HalfRB_middle	847.5	Q16	23.46	Pass
FDD05	HighRange	3	HalfRB_high	847.5	QPSK	24.19	Pass
FDD05	HighRange	3	HalfRB_high	847.5	Q16	23.82	Pass
FDD05	HighRange	3	fullRB	847.5	QPSK	23.20	Pass
FDD05	HighRange	3	fullRB	847.5	Q16	22.24	Pass
FDD05	HighRange	5	OneRB_high	846.5	QPSK	24.04	Pass
FDD05	HighRange	5	OneRB_high	846.5	Q16	22.66	Pass
FDD05	HighRange	5	OneRB_low	846.5	QPSK	24.09	Pass
FDD05	HighRange	5	OneRB_low	846.5	Q16	22.70	Pass
FDD05	HighRange	5	OneRB_middle	846.5	QPSK	24.10	Pass
FDD05	HighRange	5	OneRB_middle	846.5	Q16	22.50	Pass
FDD05	HighRange	5	HalfRB_low	846.5	QPSK	23.17	Pass
FDD05	HighRange	5	HalfRB_low	846.5	Q16	22.07	Pass
FDD05	HighRange	5	HalfRB_middle	846.5	QPSK	23.10	Pass
FDD05	HighRange	5	HalfRB_middle	846.5	Q16	22.07	Pass
FDD05	HighRange	5	HalfRB_high	846.5	QPSK	23.14	Pass
FDD05	HighRange	5	HalfRB_high	846.5	Q16	22.08	Pass
FDD05	HighRange	5	fullRB	846.5	QPSK	23.16	Pass
FDD05	HighRange	5	fullRB	846.5	Q16	22.23	Pass
FDD05	HighRange	10	OneRB_high	844	QPSK	24.01	Pass
FDD05	HighRange	10	OneRB_high	844	Q16	23.52	Pass
FDD05	HighRange	10	OneRB_low	844	QPSK	24.14	Pass
FDD05	HighRange	10	OneRB_low	844	Q16	23.56	Pass
FDD05	HighRange	10	OneRB_middle	844	QPSK	24.12	Pass
FDD05	HighRange	10	OneRB_middle	844	Q16	23.72	Pass



FDD05	HighRange	10	HalfRB_low	844	QPSK	23.16	Pass
FDD05	HighRange	10	HalfRB_low	844	Q16	22.29	Pass
FDD05	HighRange	10	HalfRB_middle	844	QPSK	23.18	Pass
FDD05	HighRange	10	HalfRB_middle	844	Q16	22.30	Pass
FDD05	HighRange	10	HalfRB_high	844	QPSK	23.17	Pass
FDD05	HighRange	10	HalfRB_high	844	Q16	22.27	Pass
FDD05	HighRange	10	fullRB	844	QPSK	23.21	Pass
FDD05	HighRange	10	fullRB	844	Q16	22.20	Pass
FDD12	LowRange	1.4	OneRB_high	699.7	QPSK	23.83	Pass
FDD12	LowRange	1.4	OneRB_high	699.7	Q16	23.14	Pass
FDD12	LowRange	1.4	OneRB_low	699.7	QPSK	23.85	Pass
FDD12	LowRange	1.4	OneRB_low	699.7	Q16	23.15	Pass
FDD12	LowRange	1.4	OneRB_middle	699.7	QPSK	23.72	Pass
FDD12	LowRange	1.4	OneRB_middle	699.7	Q16	23.15	Pass
FDD12	LowRange	1.4	HalfRB_low	699.7	QPSK	23.72	Pass
FDD12	LowRange	1.4	HalfRB_low	699.7	Q16	22.90	Pass
FDD12	LowRange	1.4	HalfRB_middle	699.7	QPSK	23.89	Pass
FDD12	LowRange	1.4	HalfRB_middle	699.7	Q16	22.53	Pass
FDD12	LowRange	1.4	HalfRB_high	699.7	QPSK	23.79	Pass
FDD12	LowRange	1.4	HalfRB_high	699.7	Q16	22.46	Pass
FDD12	LowRange	1.4	fullRB	699.7	QPSK	22.75	Pass
FDD12	LowRange	1.4	fullRB	699.7	Q16	21.99	Pass
FDD12	LowRange	3	OneRB_high	700.5	QPSK	23.17	Pass
FDD12	LowRange	3	OneRB_high	700.5	Q16	22.07	Pass
FDD12	LowRange	3	OneRB_low	700.5	QPSK	23.10	Pass
FDD12	LowRange	3	OneRB_low	700.5	Q16	22.07	Pass
FDD12	LowRange	3	OneRB_middle	700.5	QPSK	23.14	Pass
FDD12	LowRange	3	OneRB_middle	700.5	Q16	22.08	Pass
FDD12	LowRange	3	HalfRB_low	700.5	QPSK	23.16	Pass
FDD12	LowRange	3	HalfRB_low	700.5	Q16	22.23	Pass
FDD12	LowRange	3	HalfRB_middle	700.5	QPSK	24.01	Pass
FDD12	LowRange	3	HalfRB_middle	700.5	Q16	23.52	Pass



FDD12	LowRange	3	HalfRB_high	700.5	QPSK	24.14	Pass
FDD12	LowRange	3	HalfRB_high	700.5	Q16	23.56	Pass
FDD12	LowRange	3	fullRB	700.5	QPSK	24.12	Pass
FDD12	LowRange	3	fullRB	700.5	Q16	23.72	Pass
FDD12	LowRange	5	OneRB_high	701.5	QPSK	23.71	Pass
FDD12	LowRange	5	OneRB_high	701.5	Q16	22.83	Pass
FDD12	LowRange	5	OneRB_low	701.5	QPSK	23.83	Pass
FDD12	LowRange	5	OneRB_low	701.5	Q16	22.94	Pass
FDD12	LowRange	5	OneRB_middle	701.5	QPSK	23.83	Pass
FDD12	LowRange	5	OneRB_middle	701.5	Q16	22.49	Pass
FDD12	LowRange	5	HalfRB_low	701.5	QPSK	22.77	Pass
FDD12	LowRange	5	HalfRB_low	701.5	Q16	21.88	Pass
FDD12	LowRange	5	HalfRB_middle	701.5	QPSK	22.77	Pass
FDD12	LowRange	5	HalfRB_middle	701.5	Q16	21.88	Pass
FDD12	LowRange	5	HalfRB_high	701.5	QPSK	22.82	Pass
FDD12	LowRange	5	HalfRB_high	701.5	Q16	21.75	Pass
FDD12	LowRange	5	fullRB	701.5	QPSK	22.93	Pass
FDD12	LowRange	5	fullRB	701.5	Q16	22.11	Pass
FDD12	LowRange	10	OneRB_high	704	QPSK	24.20	Pass
FDD12	LowRange	10	OneRB_high	704	Q16	23.27	Pass
FDD12	LowRange	10	OneRB_low	704	QPSK	23.70	Pass
FDD12	LowRange	10	OneRB_low	704	Q16	23.03	Pass
FDD12	LowRange	10	OneRB_middle	704	QPSK	23.83	Pass
FDD12	LowRange	10	OneRB_middle	704	Q16	23.56	Pass
FDD12	LowRange	10	HalfRB_low	704	QPSK	22.83	Pass
FDD12	LowRange	10	HalfRB_low	704	Q16	21.83	Pass
FDD12	LowRange	10	HalfRB_middle	704	QPSK	22.67	Pass
FDD12	LowRange	10	HalfRB_middle	704	Q16	21.83	Pass
FDD12	LowRange	10	HalfRB_high	704	QPSK	23.00	Pass
FDD12	LowRange	10	HalfRB_high	704	Q16	21.84	Pass
FDD12	LowRange	10	fullRB	704	QPSK	22.69	Pass
FDD12	LowRange	10	fullRB	704	Q16	21.69	Pass



FDD12	MidRange	1.4	OneRB_high	707.5	QPSK	24.03	Pass
FDD12	MidRange	1.4	OneRB_high	707.5	Q16	23.05	Pass
FDD12	MidRange	1.4	OneRB_low	707.5	QPSK	23.78	Pass
FDD12	MidRange	1.4	OneRB_low	707.5	Q16	23.26	Pass
FDD12	MidRange	1.4	OneRB_middle	707.5	QPSK	24.07	Pass
FDD12	MidRange	1.4	OneRB_middle	707.5	Q16	23.59	Pass
FDD12	MidRange	1.4	HalfRB_low	707.5	QPSK	23.92	Pass
FDD12	MidRange	1.4	HalfRB_low	707.5	Q16	23.22	Pass
FDD12	MidRange	1.4	HalfRB_middle	707.5	QPSK	24.13	Pass
FDD12	MidRange	1.4	HalfRB_middle	707.5	Q16	23.22	Pass
FDD12	MidRange	1.4	HalfRB_high	707.5	QPSK	24.08	Pass
FDD12	MidRange	1.4	HalfRB_high	707.5	Q16	22.92	Pass
FDD12	MidRange	1.4	fullRB	707.5	QPSK	22.96	Pass
FDD12	MidRange	1.4	fullRB	707.5	Q16	22.10	Pass
FDD12	MidRange	3	OneRB_high	707.5	QPSK	23.78	Pass
FDD12	MidRange	3	OneRB_high	707.5	Q16	23.05	Pass
FDD12	MidRange	3	OneRB_low	707.5	QPSK	23.86	Pass
FDD12	MidRange	3	OneRB_low	707.5	Q16	23.16	Pass
FDD12	MidRange	3	OneRB_middle	707.5	QPSK	23.92	Pass
FDD12	MidRange	3	OneRB_middle	707.5	Q16	23.22	Pass
FDD12	MidRange	3	HalfRB_low	707.5	QPSK	22.92	Pass
FDD12	MidRange	3	HalfRB_low	707.5	Q16	22.39	Pass
FDD12	MidRange	3	HalfRB_middle	707.5	QPSK	22.92	Pass
FDD12	MidRange	3	HalfRB_middle	707.5	Q16	22.31	Pass
FDD12	MidRange	3	HalfRB_high	707.5	QPSK	23.02	Pass
FDD12	MidRange	3	HalfRB_high	707.5	Q16	22.12	Pass
FDD12	MidRange	3	fullRB	707.5	QPSK	22.95	Pass
FDD12	MidRange	3	fullRB	707.5	Q16	21.92	Pass
FDD12	MidRange	5	OneRB_high	707.5	QPSK	23.65	Pass
FDD12	MidRange	5	OneRB_high	707.5	Q16	22.78	Pass
FDD12	MidRange	5	OneRB_low	707.5	QPSK	23.71	Pass
FDD12	MidRange	5	OneRB_low	707.5	Q16	22.53	Pass



FDD12	MidRange	5	OneRB_middle	707.5	QPSK	23.97	Pass
FDD12	MidRange	5	OneRB_middle	707.5	Q16	22.45	Pass
FDD12	MidRange	5	HalfRB_low	707.5	QPSK	22.93	Pass
FDD12	MidRange	5	HalfRB_low	707.5	Q16	21.84	Pass
FDD12	MidRange	5	HalfRB_middle	707.5	QPSK	22.93	Pass
FDD12	MidRange	5	HalfRB_middle	707.5	Q16	21.94	Pass
FDD12	MidRange	5	HalfRB_high	707.5	QPSK	23.02	Pass
FDD12	MidRange	5	HalfRB_high	707.5	Q16	21.95	Pass
FDD12	MidRange	5	fullRB	707.5	QPSK	22.89	Pass
FDD12	MidRange	5	fullRB	707.5	Q16	22.12	Pass
FDD12	MidRange	10	OneRB_high	707.5	QPSK	23.81	Pass
FDD12	MidRange	10	OneRB_high	707.5	Q16	23.08	Pass
FDD12	MidRange	10	OneRB_low	707.5	QPSK	23.58	Pass
FDD12	MidRange	10	OneRB_low	707.5	Q16	23.59	Pass
FDD12	MidRange	10	OneRB_middle	707.5	QPSK	24.03	Pass
FDD12	MidRange	10	OneRB_middle	707.5	Q16	23.43	Pass
FDD12	MidRange	10	HalfRB_low	707.5	QPSK	22.87	Pass
FDD12	MidRange	10	HalfRB_low	707.5	Q16	22.03	Pass
FDD12	MidRange	10	HalfRB_middle	707.5	QPSK	22.83	Pass
FDD12	MidRange	10	HalfRB_middle	707.5	Q16	21.99	Pass
FDD12	MidRange	10	HalfRB_high	707.5	QPSK	23.04	Pass
FDD12	MidRange	10	HalfRB_high	707.5	Q16	22.02	Pass
FDD12	MidRange	10	fullRB	707.5	QPSK	22.95	Pass
FDD12	MidRange	10	fullRB	707.5	Q16	22.02	Pass
FDD12	HighRange	1.4	OneRB_high	715.3	QPSK	24.00	Pass
FDD12	HighRange	1.4	OneRB_high	715.3	Q16	23.35	Pass
FDD12	HighRange	1.4	OneRB_low	715.3	QPSK	23.68	Pass
FDD12	HighRange	1.4	OneRB_low	715.3	Q16	22.92	Pass
FDD12	HighRange	1.4	OneRB_middle	715.3	QPSK	24.09	Pass
FDD12	HighRange	1.4	OneRB_middle	715.3	Q16	23.23	Pass
FDD12	HighRange	1.4	HalfRB_low	715.3	QPSK	23.83	Pass
FDD12	HighRange	1.4	HalfRB_low	715.3	Q16	22.92	Pass



FDD12	HighRange	1.4	HalfRB_middle	715.3	QPSK	23.76	Pass
FDD12	HighRange	1.4	HalfRB_middle	715.3	Q16	23.10	Pass
FDD12	HighRange	1.4	HalfRB_high	715.3	QPSK	23.99	Pass
FDD12	HighRange	1.4	HalfRB_high	715.3	Q16	22.91	Pass
FDD12	HighRange	1.4	fullRB	715.3	QPSK	22.81	Pass
FDD12	HighRange	1.4	fullRB	715.3	Q16	21.66	Pass
FDD12	HighRange	3	OneRB_high	714.5	QPSK	22.94	Pass
FDD12	HighRange	3	OneRB_high	714.5	Q16	23.83	Pass
FDD12	HighRange	3	OneRB_low	714.5	QPSK	22.49	Pass
FDD12	HighRange	3	OneRB_low	714.5	Q16	22.77	Pass
FDD12	HighRange	3	OneRB_middle	714.5	QPSK	21.88	Pass
FDD12	HighRange	3	OneRB_middle	714.5	Q16	22.77	Pass
FDD12	HighRange	3	HalfRB_low	714.5	QPSK	21.88	Pass
FDD12	HighRange	3	HalfRB_low	714.5	Q16	22.82	Pass
FDD12	HighRange	3	HalfRB_middle	714.5	QPSK	21.75	Pass
FDD12	HighRange	3	HalfRB_middle	714.5	Q16	22.93	Pass
FDD12	HighRange	3	HalfRB_high	714.5	QPSK	22.11	Pass
FDD12	HighRange	3	HalfRB_high	714.5	Q16	24.20	Pass
FDD12	HighRange	3	fullRB	714.5	QPSK	22.94	Pass
FDD12	HighRange	3	fullRB	714.5	Q16	23.83	Pass
FDD12	HighRange	5	OneRB_high	713.5	QPSK	23.76	Pass
FDD12	HighRange	5	OneRB_high	713.5	Q16	22.95	Pass
FDD12	HighRange	5	OneRB_low	713.5	QPSK	23.98	Pass
FDD12	HighRange	5	OneRB_low	713.5	Q16	23.07	Pass
FDD12	HighRange	5	OneRB_middle	713.5	QPSK	23.65	Pass
FDD12	HighRange	5	OneRB_middle	713.5	Q16	22.75	Pass
FDD12	HighRange	5	HalfRB_low	713.5	QPSK	22.90	Pass
FDD12	HighRange	5	HalfRB_low	713.5	Q16	21.96	Pass
FDD12	HighRange	5	HalfRB_middle	713.5	QPSK	22.84	Pass
FDD12	HighRange	5	HalfRB_middle	713.5	Q16	21.96	Pass
FDD12	HighRange	5	HalfRB_high	713.5	QPSK	22.70	Pass
FDD12	HighRange	5	HalfRB_high	713.5	Q16	21.79	Pass



FDD12	HighRange	5	fullRB	713.5	QPSK	22.60	Pass
FDD12	HighRange	5	fullRB	713.5	Q16	21.75	Pass
FDD12	HighRange	10	OneRB_high	711	QPSK	23.65	Pass
FDD12	HighRange	10	OneRB_high	711	Q16	23.26	Pass
FDD12	HighRange	10	OneRB_low	711	QPSK	23.88	Pass
FDD12	HighRange	10	OneRB_low	711	Q16	23.29	Pass
FDD12	HighRange	10	OneRB_middle	711	QPSK	23.99	Pass
FDD12	HighRange	10	OneRB_middle	711	Q16	23.58	Pass
FDD12	HighRange	10	HalfRB_low	711	QPSK	23.02	Pass
FDD12	HighRange	10	HalfRB_low	711	Q16	22.07	Pass
FDD12	HighRange	10	HalfRB_middle	711	QPSK	22.92	Pass
FDD12	HighRange	10	HalfRB_middle	711	Q16	22.07	Pass
FDD12	HighRange	10	HalfRB_high	711	QPSK	22.62	Pass
FDD12	HighRange	10	HalfRB_high	711	Q16	21.68	Pass
FDD12	HighRange	10	fullRB	711	QPSK	22.92	Pass
FDD12	HighRange	10	fullRB	711	Q16	21.94	Pass
FDD13	LowRange	5	OneRB_high	779.5	QPSK	24.38	Pass
FDD13	LowRange	5	OneRB_high	779.5	Q16	23.04	Pass
FDD13	LowRange	5	OneRB_low	779.5	QPSK	24.21	Pass
FDD13	LowRange	5	OneRB_low	779.5	Q16	22.66	Pass
FDD13	LowRange	5	OneRB_middle	779.5	QPSK	24.36	Pass
FDD13	LowRange	5	OneRB_middle	779.5	Q16	22.98	Pass
FDD13	LowRange	5	HalfRB_low	779.5	QPSK	23.44	Pass
FDD13	LowRange	5	HalfRB_low	779.5	Q16	22.43	Pass
FDD13	LowRange	5	HalfRB_middle	779.5	QPSK	23.44	Pass
FDD13	LowRange	5	HalfRB_middle	779.5	Q16	22.43	Pass
FDD13	LowRange	5	HalfRB_high	779.5	QPSK	23.43	Pass
FDD13	LowRange	5	HalfRB_high	779.5	Q16	22.43	Pass
FDD13	LowRange	5	fullRB	779.5	QPSK	23.45	Pass
FDD13	LowRange	5	fullRB	779.5	Q16	22.49	Pass
FDD13	LowRange	10	OneRB_high	782	QPSK	24.26	Pass
FDD13	LowRange	10	OneRB_high	782	Q16	23.51	Pass



FDD13	LowRange	10	OneRB_low	782	QPSK	24.52	Pass
FDD13	LowRange	10	OneRB_low	782	Q16	23.74	Pass
FDD13	LowRange	10	OneRB_middle	782	QPSK	24.33	Pass
FDD13	LowRange	10	OneRB_middle	782	Q16	23.35	Pass
FDD13	LowRange	10	HalfRB_low	782	QPSK	23.44	Pass
FDD13	LowRange	10	HalfRB_low	782	Q16	22.67	Pass
FDD13	LowRange	10	HalfRB_middle	782	QPSK	23.51	Pass
FDD13	LowRange	10	HalfRB_middle	782	Q16	22.47	Pass
FDD13	LowRange	10	HalfRB_high	782	QPSK	23.44	Pass
FDD13	LowRange	10	HalfRB_high	782	Q16	22.51	Pass
FDD13	LowRange	10	fullRB	782	QPSK	23.40	Pass
FDD13	LowRange	10	fullRB	782	Q16	22.40	Pass
FDD13	MidRange	5	OneRB_high	782	QPSK	24.39	Pass
FDD13	MidRange	5	OneRB_high	782	Q16	23.13	Pass
FDD13	MidRange	5	OneRB_low	782	QPSK	24.46	Pass
FDD13	MidRange	5	OneRB_low	782	Q16	23.03	Pass
FDD13	MidRange	5	OneRB_middle	782	QPSK	24.44	Pass
FDD13	MidRange	5	OneRB_middle	782	Q16	22.96	Pass
FDD13	MidRange	5	HalfRB_low	782	QPSK	23.42	Pass
FDD13	MidRange	5	HalfRB_low	782	Q16	22.43	Pass
FDD13	MidRange	5	HalfRB_middle	782	QPSK	23.43	Pass
FDD13	MidRange	5	HalfRB_middle	782	Q16	22.52	Pass
FDD13	MidRange	5	HalfRB_high	782	QPSK	23.43	Pass
FDD13	MidRange	5	HalfRB_high	782	Q16	22.41	Pass
FDD13	MidRange	5	fullRB	782	QPSK	23.43	Pass
FDD13	MidRange	5	fullRB	782	Q16	22.47	Pass
FDD13	MidRange	10	OneRB_high	782	QPSK	24.37	Pass
FDD13	MidRange	10	OneRB_high	782	Q16	23.86	Pass
FDD13	MidRange	10	OneRB_low	782	QPSK	24.43	Pass
FDD13	MidRange	10	OneRB_low	782	Q16	23.79	Pass
FDD13	MidRange	10	OneRB_middle	782	QPSK	24.28	Pass
FDD13	MidRange	10	OneRB_middle	782	Q16	24.16	Pass



FDD13	MidRange	10	HalfRB_low	782	QPSK	23.49	Pass
FDD13	MidRange	10	HalfRB_low	782	Q16	22.53	Pass
FDD13	MidRange	10	HalfRB_middle	782	QPSK	23.40	Pass
FDD13	MidRange	10	HalfRB_middle	782	Q16	22.49	Pass
FDD13	MidRange	10	HalfRB_high	782	QPSK	23.42	Pass
FDD13	MidRange	10	HalfRB_high	782	Q16	22.54	Pass
FDD13	MidRange	10	fullRB	782	QPSK	23.39	Pass
FDD13	MidRange	10	fullRB	782	Q16	22.54	Pass
FDD13	HighRange	5	OneRB_high	784.5	QPSK	24.36	Pass
FDD13	HighRange	5	OneRB_high	784.5	Q16	24.04	Pass
FDD13	HighRange	5	OneRB_low	784.5	QPSK	24.51	Pass
FDD13	HighRange	5	OneRB_low	784.5	Q16	23.78	Pass
FDD13	HighRange	5	OneRB_middle	784.5	QPSK	24.22	Pass
FDD13	HighRange	5	OneRB_middle	784.5	Q16	23.58	Pass
FDD13	HighRange	5	HalfRB_low	784.5	QPSK	23.39	Pass
FDD13	HighRange	5	HalfRB_low	784.5	Q16	22.31	Pass
FDD13	HighRange	5	HalfRB_middle	784.5	QPSK	23.40	Pass
FDD13	HighRange	5	HalfRB_middle	784.5	Q16	22.31	Pass
FDD13	HighRange	5	HalfRB_high	784.5	QPSK	23.37	Pass
FDD13	HighRange	5	HalfRB_high	784.5	Q16	22.52	Pass
FDD13	HighRange	5	fullRB	784.5	QPSK	23.39	Pass
FDD13	HighRange	5	fullRB	784.5	Q16	22.48	Pass
FDD13	HighRange	10	OneRB_high	782	QPSK	24.42	Pass
FDD13	HighRange	10	OneRB_high	782	Q16	23.72	Pass
FDD13	HighRange	10	OneRB_low	782	QPSK	24.61	Pass
FDD13	HighRange	10	OneRB_low	782	Q16	23.50	Pass
FDD13	HighRange	10	OneRB_middle	782	QPSK	24.53	Pass
FDD13	HighRange	10	OneRB_middle	782	Q16	23.36	Pass
FDD13	HighRange	10	HalfRB_low	782	QPSK	23.53	Pass
FDD13	HighRange	10	HalfRB_low	782	Q16	22.61	Pass
FDD13	HighRange	10	HalfRB_middle	782	QPSK	23.45	Pass
FDD13	HighRange	10	HalfRB_middle	782	Q16	22.61	Pass



FDD13	HighRange	10	HalfRB_high	782	QPSK	23.47	Pass
FDD13	HighRange	10	HalfRB_high	782	Q16	22.53	Pass
FDD13	HighRange	10	fullRB	782	QPSK	23.41	Pass
FDD13	HighRange	10	fullRB	782	Q16	22.51	Pass
FDD14	LowRange	5	OneRB_high	790.5	QPSK	24.03	Pass
FDD14	LowRange	5	OneRB_high	790.5	Q16	22.60	Pass
FDD14	LowRange	5	OneRB_low	790.5	QPSK	24.11	Pass
FDD14	LowRange	5	OneRB_low	790.5	Q16	22.86	Pass
FDD14	LowRange	5	OneRB_middle	790.5	QPSK	24.00	Pass
FDD14	LowRange	5	OneRB_middle	790.5	Q16	22.79	Pass
FDD14	LowRange	5	HalfRB_low	790.5	QPSK	23.20	Pass
FDD14	LowRange	5	HalfRB_low	790.5	Q16	22.26	Pass
FDD14	LowRange	5	HalfRB_middle	790.5	QPSK	23.31	Pass
FDD14	LowRange	5	HalfRB_middle	790.5	Q16	22.07	Pass
FDD14	LowRange	5	HalfRB_high	790.5	QPSK	23.23	Pass
FDD14	LowRange	5	HalfRB_high	790.5	Q16	22.30	Pass
FDD14	LowRange	5	fullRB	790.5	QPSK	23.26	Pass
FDD14	LowRange	5	fullRB	790.5	Q16	22.50	Pass
FDD14	LowRange	10	OneRB_high	793	QPSK	24.33	Pass
FDD14	LowRange	10	OneRB_high	793	Q16	22.83	Pass
FDD14	LowRange	10	OneRB_low	793	QPSK	24.27	Pass
FDD14	LowRange	10	OneRB_low	793	Q16	23.46	Pass
FDD14	LowRange	10	OneRB_middle	793	QPSK	24.37	Pass
FDD14	LowRange	10	OneRB_middle	793	Q16	23.08	Pass
FDD14	LowRange	10	HalfRB_low	793	QPSK	23.30	Pass
FDD14	LowRange	10	HalfRB_low	793	Q16	22.36	Pass
FDD14	LowRange	10	HalfRB_middle	793	QPSK	23.30	Pass
FDD14	LowRange	10	HalfRB_middle	793	Q16	22.36	Pass
FDD14	LowRange	10	HalfRB_high	793	QPSK	23.24	Pass
FDD14	LowRange	10	HalfRB_high	793	Q16	22.33	Pass
FDD14	LowRange	10	fullRB	793	QPSK	23.25	Pass
FDD14	LowRange	10	fullRB	793	Q16	22.35	Pass



FDD14	MidRange	5	OneRB_high	793	QPSK	24.20	Pass
FDD14	MidRange	5	OneRB_high	793	Q16	23.00	Pass
FDD14	MidRange	5	OneRB_low	793	QPSK	24.08	Pass
FDD14	MidRange	5	OneRB_low	793	Q16	22.80	Pass
FDD14	MidRange	5	OneRB_middle	793	QPSK	24.08	Pass
FDD14	MidRange	5	OneRB_middle	793	Q16	22.90	Pass
FDD14	MidRange	5	HalfRB_low	793	QPSK	23.20	Pass
FDD14	MidRange	5	HalfRB_low	793	Q16	22.24	Pass
FDD14	MidRange	5	HalfRB_middle	793	QPSK	23.20	Pass
FDD14	MidRange	5	HalfRB_middle	793	Q16	22.20	Pass
FDD14	MidRange	5	HalfRB_high	793	QPSK	23.33	Pass
FDD14	MidRange	5	HalfRB_high	793	Q16	22.16	Pass
FDD14	MidRange	5	fullRB	793	QPSK	23.23	Pass
FDD14	MidRange	5	fullRB	793	Q16	22.47	Pass
FDD14	MidRange	10	OneRB_high	793	QPSK	24.24	Pass
FDD14	MidRange	10	OneRB_high	793	Q16	23.32	Pass
FDD14	MidRange	10	OneRB_low	793	QPSK	24.22	Pass
FDD14	MidRange	10	OneRB_low	793	Q16	23.63	Pass
FDD14	MidRange	10	OneRB_middle	793	QPSK	24.30	Pass
FDD14	MidRange	10	OneRB_middle	793	Q16	23.91	Pass
FDD14	MidRange	10	HalfRB_low	793	QPSK	23.26	Pass
FDD14	MidRange	10	HalfRB_low	793	Q16	22.29	Pass
FDD14	MidRange	10	HalfRB_middle	793	QPSK	23.26	Pass
FDD14	MidRange	10	HalfRB_middle	793	Q16	22.37	Pass
FDD14	MidRange	10	HalfRB_high	793	QPSK	23.20	Pass
FDD14	MidRange	10	HalfRB_high	793	Q16	22.35	Pass
FDD14	MidRange	10	fullRB	793	QPSK	23.29	Pass
FDD14	MidRange	10	fullRB	793	Q16	22.30	Pass
FDD14	HighRange	5	OneRB_high	795.5	QPSK	24.06	Pass
FDD14	HighRange	5	OneRB_high	795.5	Q16	23.79	Pass
FDD14	HighRange	5	OneRB_low	795.5	QPSK	24.16	Pass
FDD14	HighRange	5	OneRB_low	795.5	Q16	23.49	Pass



FDD14	HighRange	5	OneRB_middle	795.5	QPSK	24.29	Pass
FDD14	HighRange	5	OneRB_middle	795.5	Q16	23.86	Pass
FDD14	HighRange	5	HalfRB_low	795.5	QPSK	23.30	Pass
FDD14	HighRange	5	HalfRB_low	795.5	Q16	22.24	Pass
FDD14	HighRange	5	HalfRB_middle	795.5	QPSK	23.22	Pass
FDD14	HighRange	5	HalfRB_middle	795.5	Q16	22.20	Pass
FDD14	HighRange	5	HalfRB_high	795.5	QPSK	23.28	Pass
FDD14	HighRange	5	HalfRB_high	795.5	Q16	21.98	Pass
FDD14	HighRange	5	fullRB	795.5	QPSK	23.23	Pass
FDD14	HighRange	5	fullRB	795.5	Q16	22.30	Pass
FDD14	HighRange	10	OneRB_high	793	QPSK	24.31	Pass
FDD14	HighRange	10	OneRB_high	793	Q16	22.88	Pass
FDD14	HighRange	10	OneRB_low	793	QPSK	24.06	Pass
FDD14	HighRange	10	OneRB_low	793	Q16	23.24	Pass
FDD14	HighRange	10	OneRB_middle	793	QPSK	24.16	Pass
FDD14	HighRange	10	OneRB_middle	793	Q16	23.32	Pass
FDD14	HighRange	10	HalfRB_low	793	QPSK	23.26	Pass
FDD14	HighRange	10	HalfRB_low	793	Q16	22.44	Pass
FDD14	HighRange	10	HalfRB_middle	793	QPSK	23.26	Pass
FDD14	HighRange	10	HalfRB_middle	793	Q16	22.43	Pass
FDD14	HighRange	10	HalfRB_high	793	QPSK	23.24	Pass
FDD14	HighRange	10	HalfRB_high	793	Q16	22.31	Pass
FDD14	HighRange	10	fullRB	793	QPSK	23.21	Pass
FDD14	HighRange	10	fullRB	793	Q16	22.28	Pass
FDD66	LowRange	1.4	OneRB_high	1710.7	QPSK	22.12	Pass
FDD66	LowRange	1.4	OneRB_high	1710.7	Q16	21.25	Pass
FDD66	LowRange	1.4	OneRB_low	1710.7	QPSK	22.02	Pass
FDD66	LowRange	1.4	OneRB_low	1710.7	Q16	21.20	Pass
FDD66	LowRange	1.4	OneRB_middle	1710.7	QPSK	22.24	Pass
FDD66	LowRange	1.4	OneRB_middle	1710.7	Q16	21.08	Pass
FDD66	LowRange	1.4	HalfRB_low	1710.7	QPSK	22.00	Pass
FDD66	LowRange	1.4	HalfRB_low	1710.7	Q16	21.02	Pass



FDD66	LowRange	1.4	HalfRB_middle	1710.7	QPSK	21.99	Pass
FDD66	LowRange	1.4	HalfRB_middle	1710.7	Q16	21.19	Pass
FDD66	LowRange	1.4	HalfRB_high	1710.7	QPSK	22.05	Pass
FDD66	LowRange	1.4	HalfRB_high	1710.7	Q16	21.05	Pass
FDD66	LowRange	1.4	fullRB	1710.7	QPSK	21.13	Pass
FDD66	LowRange	1.4	fullRB	1710.7	Q16	20.27	Pass
FDD66	LowRange	3	OneRB_high	1711.5	QPSK	23.88	Pass
FDD66	LowRange	3	OneRB_high	1711.5	Q16	23.29	Pass
FDD66	LowRange	3	OneRB_low	1711.5	QPSK	23.99	Pass
FDD66	LowRange	3	OneRB_low	1711.5	Q16	23.58	Pass
FDD66	LowRange	3	OneRB_middle	1711.5	QPSK	23.02	Pass
FDD66	LowRange	3	OneRB_middle	1711.5	Q16	22.07	Pass
FDD66	LowRange	3	HalfRB_low	1711.5	QPSK	22.92	Pass
FDD66	LowRange	3	HalfRB_low	1711.5	Q16	22.07	Pass
FDD66	LowRange	3	HalfRB_middle	1711.5	QPSK	22.62	Pass
FDD66	LowRange	3	HalfRB_middle	1711.5	Q16	21.68	Pass
FDD66	LowRange	3	HalfRB_high	1711.5	QPSK	22.92	Pass
FDD66	LowRange	3	HalfRB_high	1711.5	Q16	21.94	Pass
FDD66	LowRange	3	fullRB	1711.5	QPSK	22.38	Pass
FDD66	LowRange	3	fullRB	1711.5	Q16	21.04	Pass
FDD66	LowRange	5	OneRB_high	1712.5	QPSK	24.21	Pass
FDD66	LowRange	5	OneRB_high	1712.5	Q16	23.88	Pass
FDD66	LowRange	5	OneRB_low	1712.5	QPSK	22.06	Pass
FDD66	LowRange	5	OneRB_low	1712.5	Q16	20.84	Pass
FDD66	LowRange	5	OneRB_middle	1712.5	QPSK	21.92	Pass
FDD66	LowRange	5	OneRB_middle	1712.5	Q16	20.86	Pass
FDD66	LowRange	5	HalfRB_low	1712.5	QPSK	21.01	Pass
FDD66	LowRange	5	HalfRB_low	1712.5	Q16	20.09	Pass
FDD66	LowRange	5	HalfRB_middle	1712.5	QPSK	21.01	Pass
FDD66	LowRange	5	HalfRB_middle	1712.5	Q16	20.08	Pass
FDD66	LowRange	5	HalfRB_high	1712.5	QPSK	20.85	Pass
FDD66	LowRange	5	HalfRB_high	1712.5	Q16	19.83	Pass



FDD66	LowRange	5	fullRB	1712.5	QPSK	20.99	Pass
FDD66	LowRange	5	fullRB	1712.5	Q16	19.95	Pass
FDD66	LowRange	10	OneRB_high	1715	QPSK	21.88	Pass
FDD66	LowRange	10	OneRB_high	1715	Q16	21.08	Pass
FDD66	LowRange	10	OneRB_low	1715	QPSK	22.09	Pass
FDD66	LowRange	10	OneRB_low	1715	Q16	21.00	Pass
FDD66	LowRange	10	OneRB_middle	1715	QPSK	21.95	Pass
FDD66	LowRange	10	OneRB_middle	1715	Q16	20.84	Pass
FDD66	LowRange	10	HalfRB_low	1715	QPSK	20.98	Pass
FDD66	LowRange	10	HalfRB_low	1715	Q16	20.25	Pass
FDD66	LowRange	10	HalfRB_middle	1715	QPSK	21.07	Pass
FDD66	LowRange	10	HalfRB_middle	1715	Q16	20.31	Pass
FDD66	LowRange	10	HalfRB_high	1715	QPSK	20.92	Pass
FDD66	LowRange	10	HalfRB_high	1715	Q16	20.18	Pass
FDD66	LowRange	10	fullRB	1715	QPSK	21.05	Pass
FDD66	LowRange	10	fullRB	1715	Q16	20.06	Pass
FDD66	LowRange	15	OneRB_high	1717.5	QPSK	20.99	Pass
FDD66	LowRange	15	OneRB_high	1717.5	Q16	21.04	Pass
FDD66	LowRange	15	OneRB_low	1717.5	QPSK	21.88	Pass
FDD66	LowRange	15	OneRB_low	1717.5	Q16	21.08	Pass
FDD66	LowRange	15	OneRB_middle	1717.5	QPSK	21.86	Pass
FDD66	LowRange	15	OneRB_middle	1717.5	Q16	20.96	Pass
FDD66	LowRange	15	HalfRB_low	1717.5	QPSK	21.11	Pass
FDD66	LowRange	15	HalfRB_low	1717.5	Q16	21.03	Pass
FDD66	LowRange	15	HalfRB_middle	1717.5	QPSK	21.00	Pass
FDD66	LowRange	15	HalfRB_middle	1717.5	Q16	20.99	Pass
FDD66	LowRange	15	HalfRB_high	1717.5	QPSK	21.04	Pass
FDD66	LowRange	15	HalfRB_high	1717.5	Q16	21.03	Pass
FDD66	LowRange	15	fullRB	1717.5	QPSK	20.99	Pass
FDD66	LowRange	15	fullRB	1717.5	Q16	20.16	Pass
FDD66	LowRange	20	OneRB_high	1720	QPSK	20.99	Pass
FDD66	LowRange	20	OneRB_high	1720	Q16	21.04	Pass



FDD66	LowRange	20	OneRB_low	1720	QPSK	21.79	Pass
FDD66	LowRange	20	OneRB_low	1720	Q16	21.23	Pass
FDD66	LowRange	20	OneRB_middle	1720	QPSK	21.96	Pass
FDD66	LowRange	20	OneRB_middle	1720	Q16	21.81	Pass
FDD66	LowRange	20	HalfRB_low	1720	QPSK	20.96	Pass
FDD66	LowRange	20	HalfRB_low	1720	Q16	20.14	Pass
FDD66	LowRange	20	HalfRB_middle	1720	QPSK	21.04	Pass
FDD66	LowRange	20	HalfRB_middle	1720	Q16	20.13	Pass
FDD66	LowRange	20	HalfRB_high	1720	QPSK	21.27	Pass
FDD66	LowRange	20	HalfRB_high	1720	Q16	20.25	Pass
FDD66	LowRange	20	fullRB	1720	QPSK	21.11	Pass
FDD66	LowRange	20	fullRB	1720	Q16	20.20	Pass
FDD66	MidRange	1.4	OneRB_high	1745	QPSK	22.29	Pass
FDD66	MidRange	1.4	OneRB_high	1745	Q16	20.98	Pass
FDD66	MidRange	1.4	OneRB_low	1745	QPSK	22.18	Pass
FDD66	MidRange	1.4	OneRB_low	1745	Q16	21.37	Pass
FDD66	MidRange	1.4	OneRB_middle	1745	QPSK	22.46	Pass
FDD66	MidRange	1.4	OneRB_middle	1745	Q16	21.40	Pass
FDD66	MidRange	1.4	HalfRB_low	1745	QPSK	22.29	Pass
FDD66	MidRange	1.4	HalfRB_low	1745	Q16	21.35	Pass
FDD66	MidRange	1.4	HalfRB_middle	1745	QPSK	22.28	Pass
FDD66	MidRange	1.4	HalfRB_middle	1745	Q16	21.46	Pass
FDD66	MidRange	1.4	HalfRB_high	1745	QPSK	22.24	Pass
FDD66	MidRange	1.4	HalfRB_high	1745	Q16	21.45	Pass
FDD66	MidRange	1.4	fullRB	1745	QPSK	21.25	Pass
FDD66	MidRange	1.4	fullRB	1745	Q16	20.65	Pass
FDD66	MidRange	3	OneRB_high	1745	QPSK	22.22	Pass
FDD66	MidRange	3	OneRB_high	1745	Q16	21.55	Pass
FDD66	MidRange	3	OneRB_low	1745	QPSK	22.44	Pass
FDD66	MidRange	3	OneRB_low	1745	Q16	22.24	Pass
FDD66	MidRange	3	OneRB_middle	1745	QPSK	22.25	Pass
FDD66	MidRange	3	OneRB_middle	1745	Q16	21.84	Pass



FDD66	MidRange	3	HalfRB_low	1745	QPSK	21.32	Pass
FDD66	MidRange	3	HalfRB_low	1745	Q16	20.52	Pass
FDD66	MidRange	3	HalfRB_middle	1745	QPSK	21.25	Pass
FDD66	MidRange	3	HalfRB_middle	1745	Q16	20.72	Pass
FDD66	MidRange	3	HalfRB_high	1745	QPSK	21.18	Pass
FDD66	MidRange	3	HalfRB_high	1745	Q16	20.45	Pass
FDD66	MidRange	3	fullRB	1745	QPSK	21.28	Pass
FDD66	MidRange	3	fullRB	1745	Q16	20.35	Pass
FDD66	MidRange	5	OneRB_high	1745	QPSK	22.12	Pass
FDD66	MidRange	5	OneRB_high	1745	Q16	21.13	Pass
FDD66	MidRange	5	OneRB_low	1745	QPSK	22.29	Pass
FDD66	MidRange	5	OneRB_low	1745	Q16	20.91	Pass
FDD66	MidRange	5	OneRB_middle	1745	QPSK	22.19	Pass
FDD66	MidRange	5	OneRB_middle	1745	Q16	21.19	Pass
FDD66	MidRange	5	HalfRB_low	1745	QPSK	21.25	Pass
FDD66	MidRange	5	HalfRB_low	1745	Q16	20.27	Pass
FDD66	MidRange	5	HalfRB_middle	1745	QPSK	21.17	Pass
FDD66	MidRange	5	HalfRB_middle	1745	Q16	20.27	Pass
FDD66	MidRange	5	HalfRB_high	1745	QPSK	21.17	Pass
FDD66	MidRange	5	HalfRB_high	1745	Q16	20.36	Pass
FDD66	MidRange	5	fullRB	1745	QPSK	21.30	Pass
FDD66	MidRange	5	fullRB	1745	Q16	20.40	Pass
FDD66	MidRange	10	OneRB_high	1745	QPSK	22.13	Pass
FDD66	MidRange	10	OneRB_high	1745	Q16	21.55	Pass
FDD66	MidRange	10	OneRB_low	1745	QPSK	22.51	Pass
FDD66	MidRange	10	OneRB_low	1745	Q16	22.34	Pass
FDD66	MidRange	10	OneRB_middle	1745	QPSK	22.35	Pass
FDD66	MidRange	10	OneRB_middle	1745	Q16	21.81	Pass
FDD66	MidRange	10	HalfRB_low	1745	QPSK	21.31	Pass
FDD66	MidRange	10	HalfRB_low	1745	Q16	20.50	Pass
FDD66	MidRange	10	HalfRB_middle	1745	QPSK	21.26	Pass
FDD66	MidRange	10	HalfRB_middle	1745	Q16	20.40	Pass



FDD66	MidRange	10	HalfRB_high	1745	QPSK	21.14	Pass
FDD66	MidRange	10	HalfRB_high	1745	Q16	20.29	Pass
FDD66	MidRange	10	fullRB	1745	QPSK	21.37	Pass
FDD66	MidRange	10	fullRB	1745	Q16	20.34	Pass
FDD66	MidRange	15	OneRB_high	1745	QPSK	22.25	Pass
FDD66	MidRange	15	OneRB_high	1745	Q16	21.62	Pass
FDD66	MidRange	15	OneRB_low	1745	QPSK	22.51	Pass
FDD66	MidRange	15	OneRB_low	1745	Q16	21.86	Pass
FDD66	MidRange	15	OneRB_middle	1745	QPSK	22.17	Pass
FDD66	MidRange	15	OneRB_middle	1745	Q16	21.71	Pass
FDD66	MidRange	15	HalfRB_low	1745	QPSK	22.51	Pass
FDD66	MidRange	15	HalfRB_low	1745	Q16	22.51	Pass
FDD66	MidRange	15	HalfRB_middle	1745	QPSK	22.50	Pass
FDD66	MidRange	15	HalfRB_middle	1745	Q16	22.50	Pass
FDD66	MidRange	15	HalfRB_high	1745	QPSK	21.60	Pass
FDD66	MidRange	15	HalfRB_high	1745	Q16	21.58	Pass
FDD66	MidRange	15	fullRB	1745	QPSK	21.24	Pass
FDD66	MidRange	15	fullRB	1745	Q16	20.37	Pass
FDD66	MidRange	20	OneRB_high	1745	QPSK	22.11	Pass
FDD66	MidRange	20	OneRB_high	1745	Q16	21.55	Pass
FDD66	MidRange	20	OneRB_low	1745	QPSK	22.51	Pass
FDD66	MidRange	20	OneRB_low	1745	Q16	22.05	Pass
FDD66	MidRange	20	OneRB_middle	1745	QPSK	22.14	Pass
FDD66	MidRange	20	OneRB_middle	1745	Q16	21.66	Pass
FDD66	MidRange	20	HalfRB_low	1745	QPSK	21.44	Pass
FDD66	MidRange	20	HalfRB_low	1745	Q16	20.50	Pass
FDD66	MidRange	20	HalfRB_middle	1745	QPSK	21.37	Pass
FDD66	MidRange	20	HalfRB_middle	1745	Q16	20.45	Pass
FDD66	MidRange	20	HalfRB_high	1745	QPSK	21.18	Pass
FDD66	MidRange	20	HalfRB_high	1745	Q16	20.27	Pass
FDD66	MidRange	20	fullRB	1745	QPSK	21.27	Pass
FDD66	MidRange	20	fullRB	1745	Q16	20.30	Pass



FDD66	HighRange	1.4	OneRB_high	1779.3	QPSK	21.79	Pass
FDD66	HighRange	1.4	OneRB_high	1779.3	Q16	22.41	Pass
FDD66	HighRange	1.4	OneRB_low	1779.3	QPSK	21.74	Pass
FDD66	HighRange	1.4	OneRB_low	1779.3	Q16	21.35	Pass
FDD66	HighRange	1.4	OneRB_middle	1779.3	QPSK	22.43	Pass
FDD66	HighRange	1.4	OneRB_middle	1779.3	Q16	21.50	Pass
FDD66	HighRange	1.4	HalfRB_low	1779.3	QPSK	22.49	Pass
FDD66	HighRange	1.4	HalfRB_low	1779.3	Q16	21.74	Pass
FDD66	HighRange	1.4	HalfRB_middle	1779.3	QPSK	22.53	Pass
FDD66	HighRange	1.4	HalfRB_middle	1779.3	Q16	21.79	Pass
FDD66	HighRange	1.4	HalfRB_high	1779.3	QPSK	22.41	Pass
FDD66	HighRange	1.4	HalfRB_high	1779.3	Q16	21.71	Pass
FDD66	HighRange	1.4	fullRB	1779.3	QPSK	21.54	Pass
FDD66	HighRange	1.4	fullRB	1779.3	Q16	20.66	Pass
FDD66	HighRange	3	OneRB_high	1778.5	QPSK	20.55	Pass
FDD66	HighRange	3	OneRB_high	1778.5	Q16	21.48	Pass
FDD66	HighRange	3	OneRB_low	1778.5	QPSK	22.96	Pass
FDD66	HighRange	3	OneRB_low	1778.5	Q16	21.80	Pass
FDD66	HighRange	3	OneRB_middle	1778.5	QPSK	22.47	Pass
FDD66	HighRange	3	OneRB_middle	1778.5	Q16	21.23	Pass
FDD66	HighRange	3	HalfRB_low	1778.5	QPSK	21.71	Pass
FDD66	HighRange	3	HalfRB_low	1778.5	Q16	20.91	Pass
FDD66	HighRange	3	HalfRB_middle	1778.5	QPSK	21.71	Pass
FDD66	HighRange	3	HalfRB_middle	1778.5	Q16	20.99	Pass
FDD66	HighRange	3	HalfRB_high	1778.5	QPSK	21.49	Pass
FDD66	HighRange	3	HalfRB_high	1778.5	Q16	20.55	Pass
FDD66	HighRange	3	fullRB	1778.5	QPSK	21.48	Pass
FDD66	HighRange	3	fullRB	1778.5	Q16	20.74	Pass
FDD66	HighRange	5	OneRB_high	1777.5	QPSK	21.63	Pass
FDD66	HighRange	5	OneRB_high	1777.5	Q16	20.64	Pass
FDD66	HighRange	5	OneRB_low	1777.5	QPSK	22.72	Pass
FDD66	HighRange	5	OneRB_low	1777.5	Q16	21.69	Pass



FDD66	HighRange	5	OneRB_middle	1777.5	QPSK	22.59	Pass
FDD66	HighRange	5	OneRB_middle	1777.5	Q16	21.74	Pass
FDD66	HighRange	5	HalfRB_low	1777.5	QPSK	21.62	Pass
FDD66	HighRange	5	HalfRB_low	1777.5	Q16	20.74	Pass
FDD66	HighRange	5	HalfRB_middle	1777.5	QPSK	21.63	Pass
FDD66	HighRange	5	HalfRB_middle	1777.5	Q16	20.64	Pass
FDD66	HighRange	5	HalfRB_high	1777.5	QPSK	21.45	Pass
FDD66	HighRange	5	HalfRB_high	1777.5	Q16	20.65	Pass
FDD66	HighRange	5	fullRB	1777.5	QPSK	21.67	Pass
FDD66	HighRange	5	fullRB	1777.5	Q16	20.74	Pass
FDD66	HighRange	10	OneRB_high	1775	QPSK	21.66	Pass
FDD66	HighRange	10	OneRB_high	1775	Q16	20.90	Pass
FDD66	HighRange	10	OneRB_low	1775	QPSK	22.87	Pass
FDD66	HighRange	10	OneRB_low	1775	Q16	22.23	Pass
FDD66	HighRange	10	OneRB_middle	1775	QPSK	23.01	Pass
FDD66	HighRange	10	OneRB_middle	1775	Q16	22.24	Pass
FDD66	HighRange	10	HalfRB_low	1775	QPSK	21.73	Pass
FDD66	HighRange	10	HalfRB_low	1775	Q16	20.91	Pass
FDD66	HighRange	10	HalfRB_middle	1775	QPSK	21.66	Pass
FDD66	HighRange	10	HalfRB_middle	1775	Q16	20.90	Pass
FDD66	HighRange	10	HalfRB_high	1775	QPSK	21.60	Pass
FDD66	HighRange	10	HalfRB_high	1775	Q16	20.90	Pass
FDD66	HighRange	10	fullRB	1775	QPSK	21.67	Pass
FDD66	HighRange	10	fullRB	1775	Q16	20.81	Pass
FDD66	HighRange	15	OneRB_high	1772.5	QPSK	20.69	Pass
FDD66	HighRange	15	OneRB_high	1772.5	Q16	20.70	Pass
FDD66	HighRange	15	OneRB_low	1772.5	QPSK	22.43	Pass
FDD66	HighRange	15	OneRB_low	1772.5	Q16	21.59	Pass
FDD66	HighRange	15	OneRB_middle	1772.5	QPSK	22.81	Pass
FDD66	HighRange	15	OneRB_middle	1772.5	Q16	21.66	Pass
FDD66	HighRange	15	HalfRB_low	1772.5	QPSK	20.69	Pass
FDD66	HighRange	15	HalfRB_low	1772.5	Q16	20.70	Pass



FDD66	HighRange	15	HalfRB_middle	1772.5	QPSK	20.80	Pass
FDD66	HighRange	15	HalfRB_middle	1772.5	Q16	20.79	Pass
FDD66	HighRange	15	HalfRB_high	1772.5	QPSK	20.58	Pass
FDD66	HighRange	15	HalfRB_high	1772.5	Q16	20.73	Pass
FDD66	HighRange	15	fullRB	1772.5	QPSK	21.67	Pass
FDD66	HighRange	15	fullRB	1772.5	Q16	20.68	Pass
FDD66	HighRange	20	OneRB_high	1770	QPSK	20.55	Pass
FDD66	HighRange	20	OneRB_high	1770	Q16	21.57	Pass
FDD66	HighRange	20	OneRB_low	1770	QPSK	22.16	Pass
FDD66	HighRange	20	OneRB_low	1770	Q16	22.07	Pass
FDD66	HighRange	20	OneRB_middle	1770	QPSK	22.89	Pass
FDD66	HighRange	20	OneRB_middle	1770	Q16	22.72	Pass
FDD66	HighRange	20	HalfRB_low	1770	QPSK	21.58	Pass
FDD66	HighRange	20	HalfRB_low	1770	Q16	20.55	Pass
FDD66	HighRange	20	HalfRB_middle	1770	QPSK	21.57	Pass
FDD66	HighRange	20	HalfRB_middle	1770	Q16	20.64	Pass
FDD66	HighRange	20	HalfRB_high	1770	QPSK	21.69	Pass
FDD66	HighRange	20	HalfRB_high	1770	Q16	20.82	Pass
FDD66	HighRange	20	fullRB	1770	QPSK	21.61	Pass
FDD66	HighRange	20	fullRB	1770	Q16	20.72	Pass

LTE Band 71

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
133147	5	QPSK	1	LOW	0	34.77	22.69	Pass
133147	5	QPSK	1	MID	0	34.77	22.69	Pass
133147	5	QPSK	1	HIGH	0	34.77	22.6	Pass
133147	5	QPSK	12	LOW	0	34.77	21.96	Pass
133147	5	QPSK	12	MID	0	34.77	21.87	Pass
133147	5	QPSK	12	HIGH	0	34.77	21.84	Pass
133147	5	QPSK	25	LOW	0	34.77	21.97	Pass
133147	5	Q16	1	LOW	0	34.77	21.83	Pass
133147	5	Q16	1	MID	0	34.77	21.67	Pass
133147	5	Q16	1	HIGH	0	34.77	21.42	Pass



UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
133147	5	Q16	12	LOW	0	34.77	21.1	Pass
133147	5	Q16	12	MID	0	34.77	21.85	Pass
133147	5	Q16	12	HIGH	0	34.77	21.81	Pass
133147	5	Q16	25	LOW	0	34.77	21.08	Pass
133297	5	QPSK	1	LOW	0	34.77	22.9	Pass
133297	5	QPSK	1	MID	0	34.77	22.76	Pass
133297	5	QPSK	1	HIGH	0	34.77	22.78	Pass
133297	5	QPSK	12	LOW	0	34.77	21.99	Pass
133297	5	QPSK	12	MID	0	34.77	21.84	Pass
133297	5	QPSK	12	HIGH	0	34.77	21.83	Pass
133297	5	QPSK	25	LOW	0	34.77	21.95	Pass
133297	5	Q16	1	LOW	0	34.77	22	Pass
133297	5	Q16	1	MID	0	34.77	21.56	Pass
133297	5	Q16	1	HIGH	0	34.77	21.52	Pass
133297	5	Q16	12	LOW	0	34.77	21.11	Pass
133297	5	Q16	12	MID	0	34.77	21.89	Pass
133297	5	Q16	12	HIGH	0	34.77	21.88	Pass
133297	5	Q16	25	LOW	0	34.77	21.02	Pass
133447	5	QPSK	1	LOW	0	34.77	22.8	Pass
133447	5	QPSK	1	MID	0	34.77	22.78	Pass
133447	5	QPSK	1	HIGH	0	34.77	22.91	Pass
133447	5	QPSK	12	LOW	0	34.77	21.97	Pass
133447	5	QPSK	12	MID	0	34.77	21.97	Pass
133447	5	QPSK	12	HIGH	0	34.77	22.07	Pass
133447	5	QPSK	25	LOW	0	34.77	21.95	Pass
133447	5	Q16	1	LOW	0	34.77	21.91	Pass
133447	5	Q16	1	MID	0	34.77	21.89	Pass
133447	5	Q16	1	HIGH	0	34.77	21.85	Pass
133447	5	Q16	12	LOW	0	34.77	21.91	Pass
133447	5	Q16	12	MID	0	34.77	21.89	Pass
133447	5	Q16	12	HIGH	0	34.77	21.87	Pass
133447	5	Q16	25	LOW	0	34.77	21.91	Pass
133172	10	QPSK	1	LOW	0	34.77	22.95	Pass
133172	10	QPSK	1	MID	0	34.77	22.08	Pass
133172	10	QPSK	1	HIGH	0	34.77	22	Pass
133172	10	QPSK	25	LOW	0	34.77	21.95	Pass
133172	10	QPSK	25	MID	0	34.77	22.01	Pass



UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
133172	10	QPSK	25	HIGH	0	34.77	21.85	Pass
133172	10	QPSK	50	LOW	0	34.77	21.92	Pass
133172	10	Q16	1	LOW	0	34.77	21.86	Pass
133172	10	Q16	1	MID	0	34.77	21.99	Pass
133172	10	Q16	1	HIGH	0	34.77	22.51	Pass
133172	10	Q16	25	LOW	0	34.77	21	Pass
133172	10	Q16	25	MID	0	34.77	21.03	Pass
133172	10	Q16	25	HIGH	0	34.77	21.98	Pass
133172	10	Q16	50	LOW	0	34.77	21.02	Pass
133297	10	QPSK	1	LOW	0	34.77	22.01	Pass
133297	10	QPSK	1	MID	0	34.77	22.83	Pass
133297	10	QPSK	1	HIGH	0	34.77	22.02	Pass
133297	10	QPSK	25	LOW	0	34.77	21.99	Pass
133297	10	QPSK	25	MID	0	34.77	21.85	Pass
133297	10	QPSK	25	HIGH	0	34.77	21.85	Pass
133297	10	QPSK	50	LOW	0	34.77	21.97	Pass
133297	10	Q16	1	LOW	0	34.77	21.68	Pass
133297	10	Q16	1	MID	0	34.77	21.44	Pass
133297	10	Q16	1	HIGH	0	34.77	21.23	Pass
133297	10	Q16	25	LOW	0	34.77	21.21	Pass
133297	10	Q16	25	MID	0	34.77	21.97	Pass
133297	10	Q16	25	HIGH	0	34.77	21.87	Pass
133297	10	Q16	50	LOW	0	34.77	21.08	Pass
133422	10	QPSK	1	LOW	0	34.77	22.05	Pass
133422	10	QPSK	1	MID	0	34.77	22.46	Pass
133422	10	QPSK	1	HIGH	0	34.77	22.12	Pass
133422	10	QPSK	25	LOW	0	34.77	21.98	Pass
133422	10	QPSK	25	MID	0	34.77	22.09	Pass
133422	10	QPSK	25	HIGH	0	34.77	22.21	Pass
133422	10	QPSK	50	LOW	0	34.77	22.04	Pass
133422	10	Q16	1	LOW	0	34.77	21.93	Pass
133422	10	Q16	1	MID	0	34.77	22.06	Pass
133422	10	Q16	1	HIGH	0	34.77	22.12	Pass
133422	10	Q16	25	LOW	0	34.77	21.15	Pass
133422	10	Q16	25	MID	0	34.77	21.25	Pass
133422	10	Q16	25	HIGH	0	34.77	21.27	Pass
133422	10	Q16	50	LOW	0	34.77	21.06	Pass



UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
133197	15	QPSK	1	LOW	0	34.77	22.93	Pass
133197	15	QPSK	1	MID	0	34.77	22.06	Pass
133197	15	QPSK	1	HIGH	0	34.77	22.06	Pass
133197	15	QPSK	36	LOW	0	34.77	21.81	Pass
133197	15	QPSK	36	MID	0	34.77	22.05	Pass
133197	15	QPSK	36	HIGH	0	34.77	22.02	Pass
133197	15	QPSK	75	LOW	0	34.77	21.76	Pass
133197	15	Q16	1	LOW	0	34.77	22.01	Pass
133197	15	Q16	1	MID	0	34.77	21.61	Pass
133197	15	Q16	1	HIGH	0	34.77	22.66	Pass
133197	15	Q16	36	LOW	0	34.77	20.93	Pass
133197	15	Q16	36	MID	0	34.77	20.98	Pass
133197	15	Q16	36	HIGH	0	34.77	21.12	Pass
133197	15	Q16	75	LOW	0	34.77	20.87	Pass
133297	15	QPSK	1	LOW	0	34.77	22.77	Pass
133297	15	QPSK	1	MID	0	34.77	22.9	Pass
133297	15	QPSK	1	HIGH	0	34.77	22.75	Pass
133297	15	QPSK	36	LOW	0	34.77	22.06	Pass
133297	15	QPSK	36	MID	0	34.77	21.95	Pass
133297	15	QPSK	36	HIGH	0	34.77	21.91	Pass
133297	15	QPSK	75	LOW	0	34.77	21.94	Pass
133297	15	Q16	1	LOW	0	34.77	22.05	Pass
133297	15	Q16	1	MID	0	34.77	21.47	Pass
133297	15	Q16	1	HIGH	0	34.77	21.42	Pass
133297	15	Q16	36	LOW	0	34.77	21.11	Pass
133297	15	Q16	36	MID	0	34.77	21.08	Pass
133297	15	Q16	36	HIGH	0	34.77	21.04	Pass
133297	15	Q16	75	LOW	0	34.77	21.07	Pass
133397	15	QPSK	1	LOW	0	34.77	22.86	Pass
133397	15	QPSK	1	MID	0	34.77	22.83	Pass
133397	15	QPSK	1	HIGH	0	34.77	22.95	Pass
133397	15	QPSK	36	LOW	0	34.77	21.96	Pass
133397	15	QPSK	36	MID	0	34.77	22.03	Pass
133397	15	QPSK	36	HIGH	0	34.77	22.16	Pass
133397	15	QPSK	75	LOW	0	34.77	21.96	Pass
133397	15	Q16	1	LOW	0	34.77	22.11	Pass
133397	15	Q16	1	MID	0	34.77	22.17	Pass



UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
133397	15	Q16	1	HIGH	0	34.77	22.01	Pass
133397	15	Q16	36	LOW	0	34.77	21.03	Pass
133397	15	Q16	36	MID	0	34.77	20.99	Pass
133397	15	Q16	36	HIGH	0	34.77	21.23	Pass
133397	15	Q16	75	LOW	0	34.77	21.17	Pass
133222	20	QPSK	1	LOW	0	34.77	22.86	Pass
133222	20	QPSK	1	MID	0	34.77	22.22	Pass
133222	20	QPSK	1	HIGH	0	34.77	22.11	Pass
133222	20	QPSK	50	LOW	0	34.77	21.88	Pass
133222	20	QPSK	50	MID	0	34.77	22.1	Pass
133222	20	QPSK	50	HIGH	0	34.77	21.98	Pass
133222	20	QPSK	100	LOW	0	34.77	22	Pass
133222	20	Q16	1	LOW	0	34.77	21.54	Pass
133222	20	Q16	1	MID	0	34.77	22.31	Pass
133222	20	Q16	1	HIGH	0	34.77	21.75	Pass
133222	20	Q16	50	LOW	0	34.77	21.06	Pass
133222	20	Q16	50	MID	0	34.77	21.14	Pass
133222	20	Q16	50	HIGH	0	34.77	20.97	Pass
133222	20	Q16	100	LOW	0	34.77	21.06	Pass
133297	20	QPSK	1	LOW	0	34.77	22.9	Pass
133297	20	QPSK	1	MID	0	34.77	22.08	Pass
133297	20	QPSK	1	HIGH	0	34.77	22.14	Pass
133297	20	QPSK	50	LOW	0	34.77	22.06	Pass
133297	20	QPSK	50	MID	0	34.77	21.97	Pass
133297	20	QPSK	50	HIGH	0	34.77	21.99	Pass
133297	20	QPSK	100	LOW	0	34.77	22.08	Pass
133297	20	Q16	1	LOW	0	34.77	21.57	Pass
133297	20	Q16	1	MID	0	34.77	21.74	Pass
133297	20	Q16	1	HIGH	0	34.77	21.68	Pass
133297	20	Q16	50	LOW	0	34.77	21.11	Pass
133297	20	Q16	50	MID	0	34.77	21.05	Pass
133297	20	Q16	50	HIGH	0	34.77	21.01	Pass
133297	20	Q16	100	LOW	0	34.77	21.01	Pass
133372	20	QPSK	1	LOW	0	34.77	22.67	Pass
133372	20	QPSK	1	MID	0	34.77	22.13	Pass
133372	20	QPSK	1	HIGH	0	34.77	22.05	Pass
133372	20	QPSK	50	LOW	0	34.77	21.82	Pass









UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
133372	20	QPSK	50	MID	0	34.77	21.98	Pass
133372	20	QPSK	50	HIGH	0	34.77	22.08	Pass
133372	20	QPSK	100	LOW	0	34.77	21.89	Pass
133372	20	Q16	1	LOW	0	34.77	21.54	Pass
133372	20	Q16	1	MID	0	34.77	21.86	Pass
133372	20	Q16	1	HIGH	0	34.77	21.73	Pass
133372	20	Q16	50	LOW	0	34.77	20.75	Pass
133372	20	Q16	50	MID	0	34.77	21.06	Pass
133372	20	Q16	50	HIGH	0	34.77	21.06	Pass
133372	20	Q16	100	LOW	0	34.77	20.98	Pass















1.2 Peak To Average Ratio

1.2.1 Test Result and Data


PeakToAveragePowerRatio NormalTC_NormalVol							
Band	Range	BandWidth	RbMode	Modulation	PAPR (dBm)	Limit (dBm)	Result
FDD02	LowRange	20	OneRB_high	Q16	4.87	13.00	Pass
FDD02	LowRange	20	fullRB	Q16	5.87	13.00	Pass
FDD02	MidRange	20	OneRB_high	Q16	5.63	13.00	Pass
FDD02	MidRange	20	fullRB	Q16	6.08	13.00	Pass
FDD02	HighRange	20	OneRB_high	Q16	5.54	13.00	Pass
FDD02	HighRange	20	fullRB	Q16	5.71	13.00	Pass
FDD04	LowRange	20	OneRB_high	Q16	5.63	13.00	Pass
FDD04	LowRange	20	fullRB	Q16	6.04	13.00	Pass
FDD04	MidRange	20	OneRB_high	Q16	5.35	13.00	Pass
FDD04	MidRange	20	fullRB	Q16	5.37	13.00	Pass
FDD04	HighRange	20	OneRB_high	Q16	5.63	13.00	Pass
FDD04	HighRange	20	fullRB	Q16	5.86	13.00	Pass
FDD66	LowRange	20	OneRB_high	Q16	5.63	13.00	Pass
FDD66	LowRange	20	fullRB	Q16	6.04	13.00	Pass
FDD66	MidRange	20	OneRB_high	Q16	5.34	13.00	Pass
FDD66	MidRange	20	fullRB	Q16	5.35	13.00	Pass
FDD66	HighRange	20	OneRB_high	Q16	4.95	13.00	Pass
FDD66	HighRange	20	fullRB	Q16	5.73	13.00	Pass
FDD71	LowRange	20	OneRB_high	Q16	4.81	13.00	Pass
FDD71	LowRange	20	fullRB	Q16	4.2	13.00	Pass
FDD71	MidRange	20	OneRB_high	Q16	5.51	13.00	Pass
FDD71	MidRange	20	fullRB	Q16	4.83	13.00	Pass
FDD71	HighRange	20	OneRB_high	Q16	4.71	13.00	Pass
FDD71	HighRange	20	fullRB	Q16	3.83	13.00	Pass

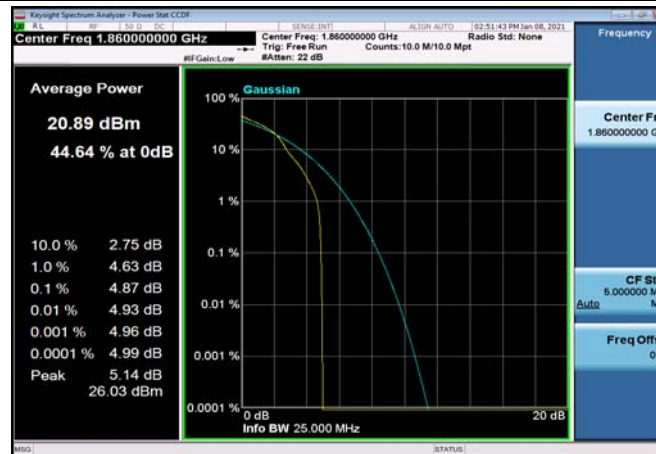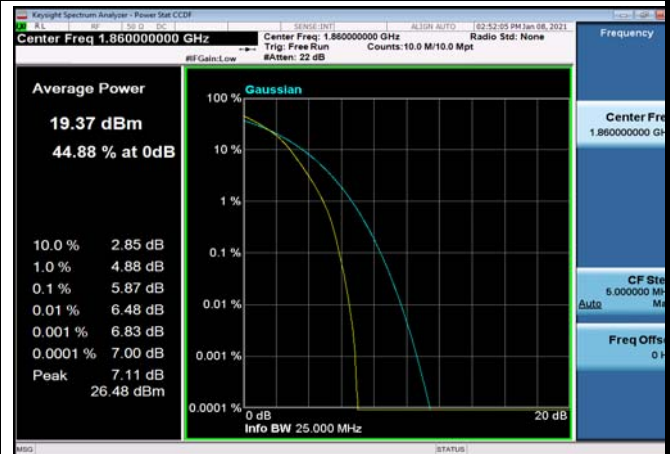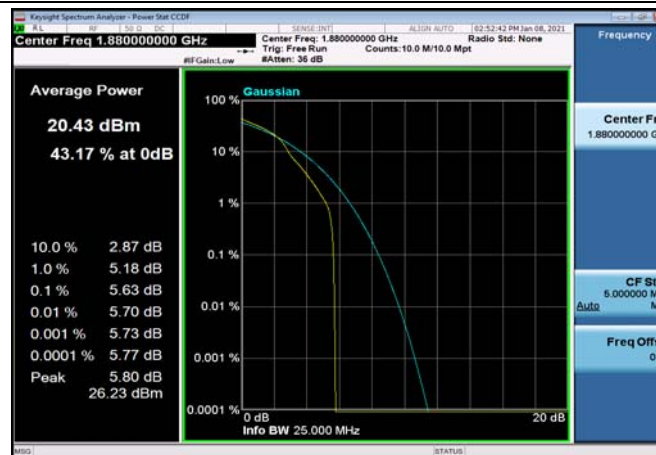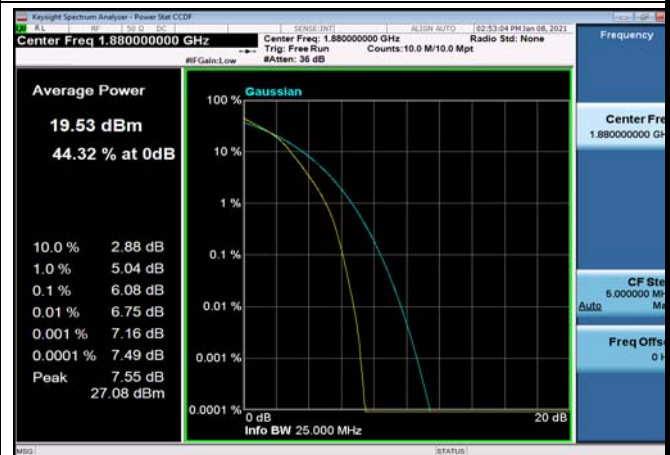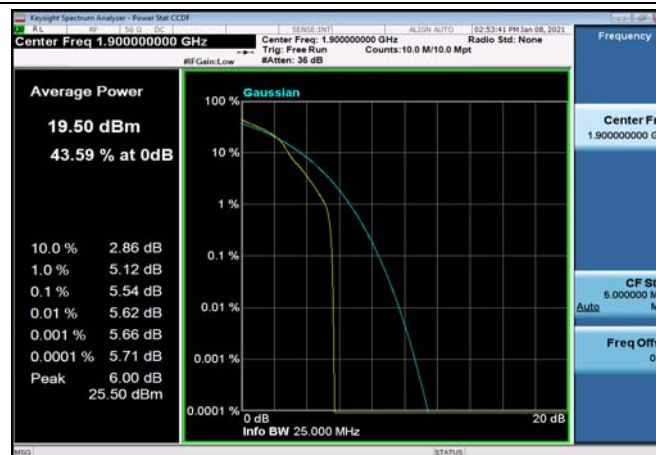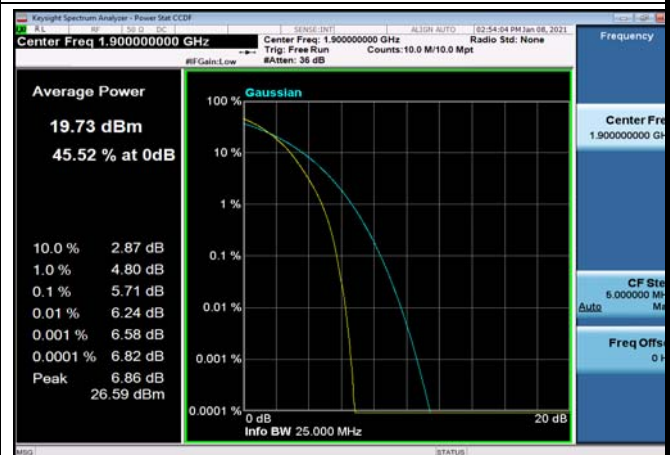FDD02_LowRange_20MHz_1860_OneRB
_high_Q16

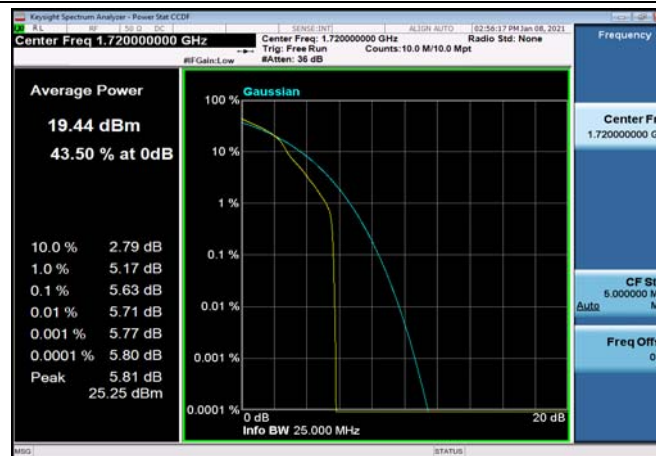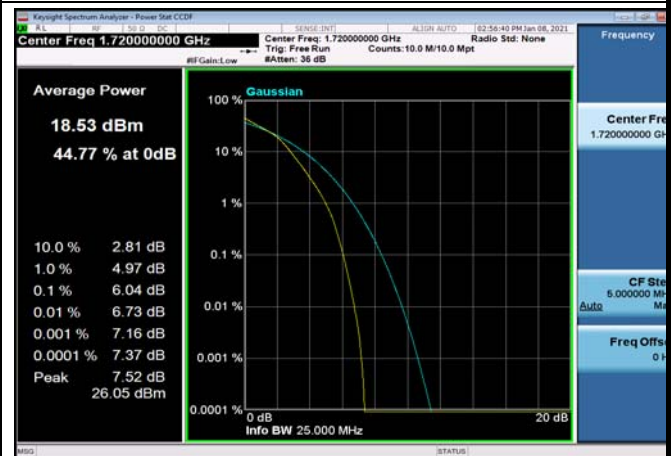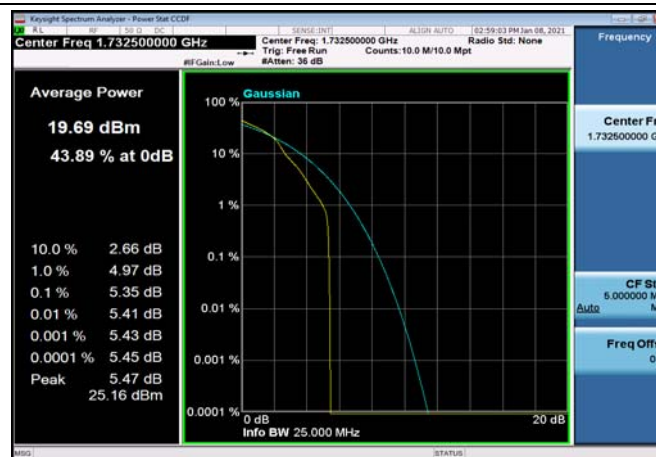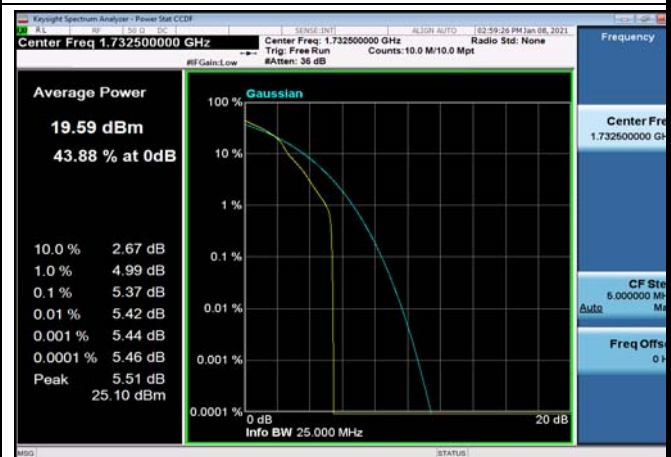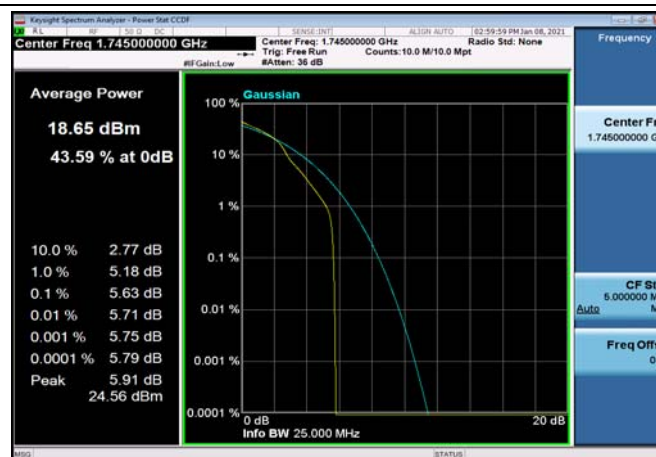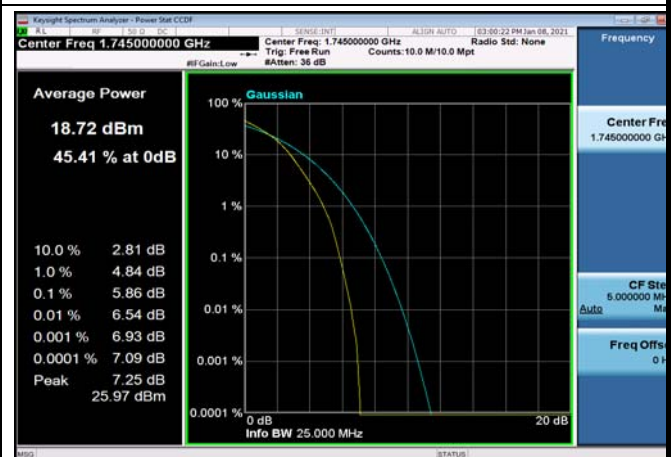FDD02_LowRange_20MHz_1860_fullRB
_Q16

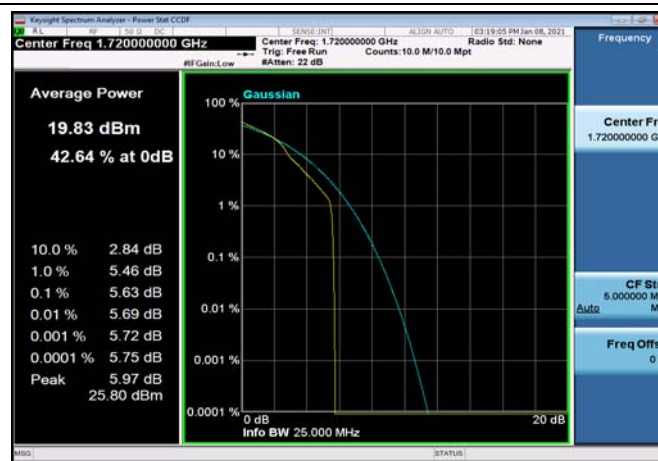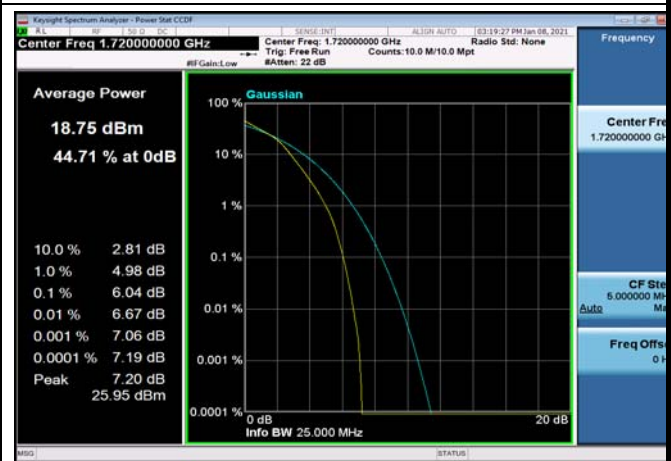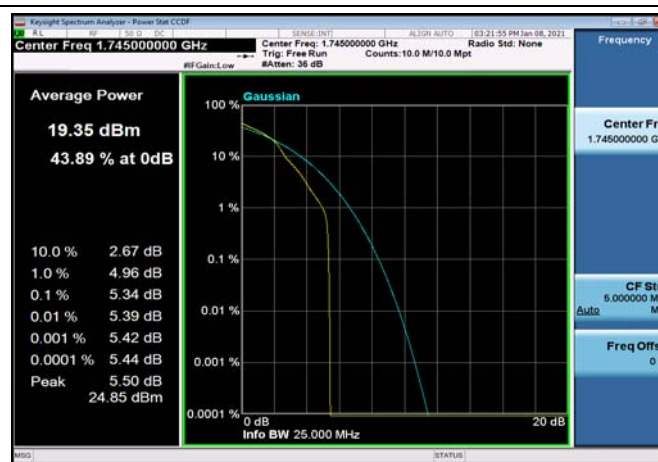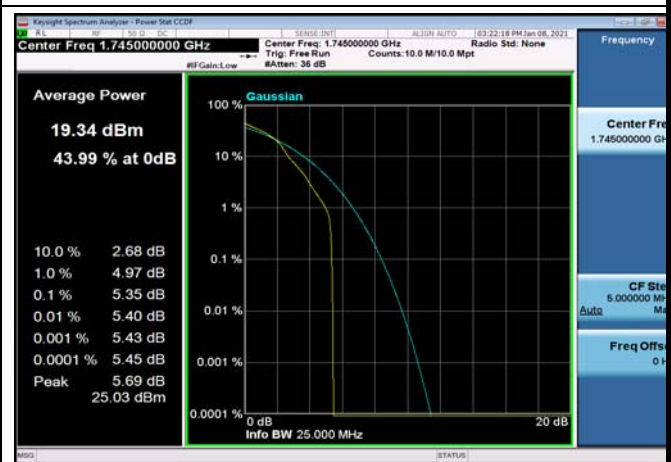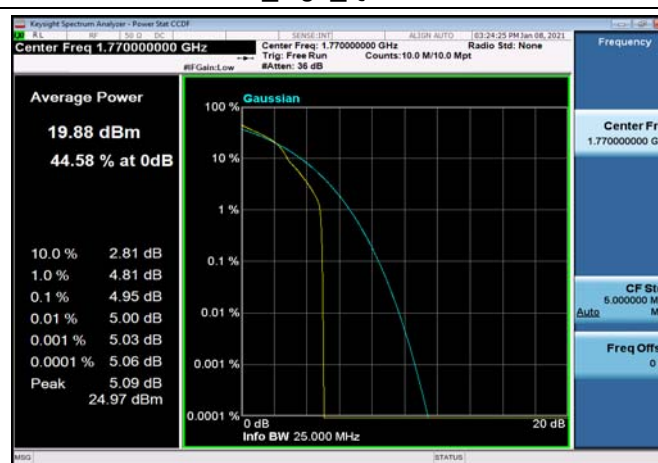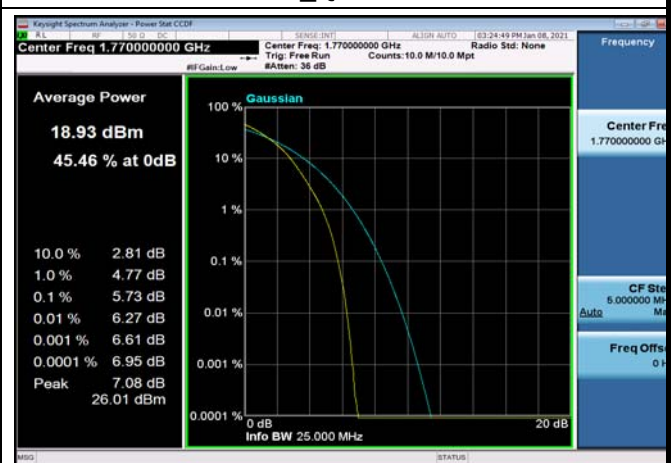FDD02_MidRange_20MHz_1880_OneRB
_high_Q16

FDD02_MidRange_20MHz_1880_fullRB
_Q16

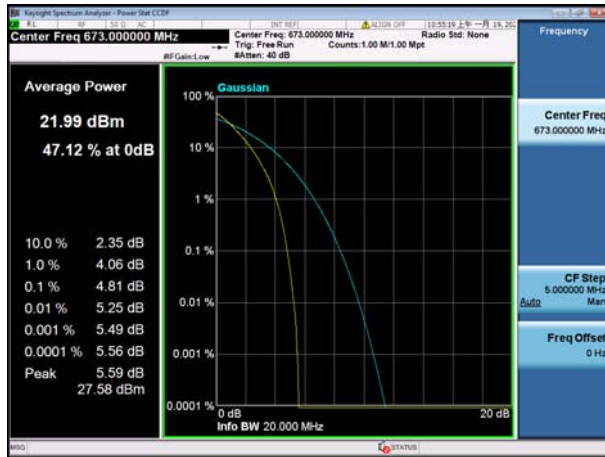FDD02_HighRange_20MHz_1900_OneRB
_high_Q16

FDD02_HighRange_20MHz_1900_fullRB
_Q16


FDD04_LowRange_20MHz_1720_OneRB
_high_Q16FDD04_LowRange_20MHz_1720_fullRB
_Q16FDD04_MidRange_20MHz_1732.5_OneRB
_high_Q16FDD04_MidRange_20MHz_1732.5_fullRB
_Q16FDD04_HighRange_20MHz_1745_OneRB
_high_Q16FDD04_HighRange_20MHz_1745_fullRB
_Q16

FDD66_LowRange_20MHz_1720_OneRB
_high_Q16FDD66_LowRange_20MHz_1720_fullRB
_Q16FDD66_MidRange_20MHz_1745_OneRB
_high_Q16FDD66_MidRange_20MHz_1745_fullRB
_Q16FDD66_HighRange_20MHz_1770_OneRB
_high_Q16FDD66_HighRange_20MHz_1770_fullRB
_Q16

FDD71_LowRange_20MHz_673_OneRB
_high_Q16




FDD71_LowRange_20MHz_673_fullIRB
_Q16




FDD71_MidRange_20MHz_683_OneRB
_high_Q16




FDD71_MidRange_20MHz_683_fullIRB
_Q16

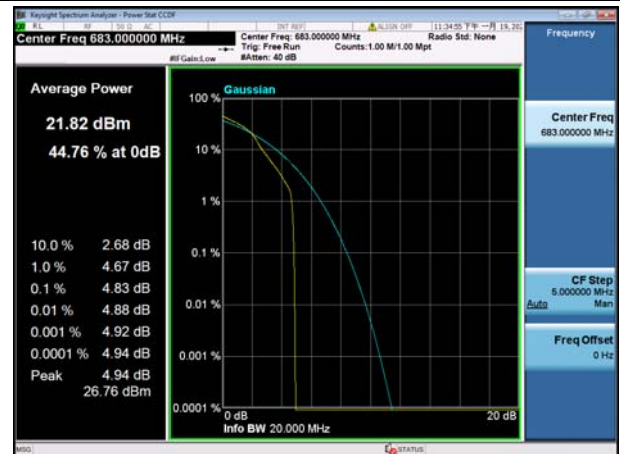

FDD71_HighRange_20MHz_688_OneRB
_high_Q16

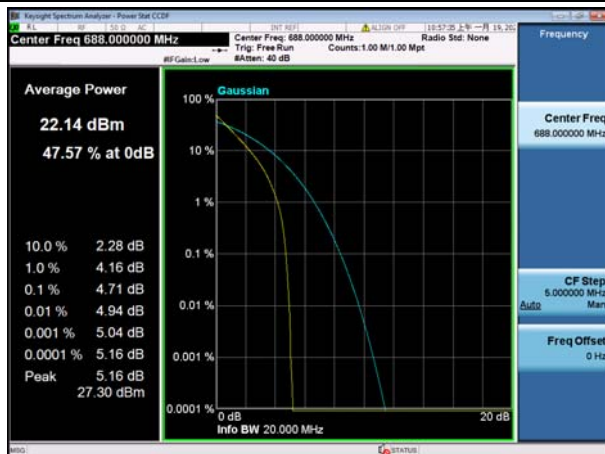

FDD71_HighRange_20MHz_688_fullIRB
_Q16

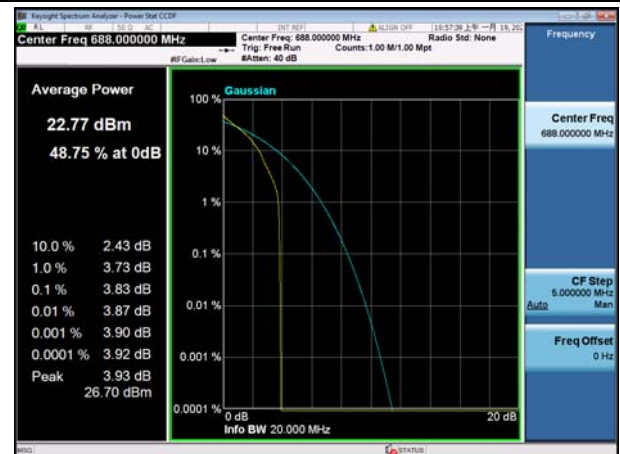



1.3 99% Occupied Bandwidth

1.3.1 Test Result and Data

Occupied Bandwidth NormalTC_NormalVol					
Band	Range	BandWidth	Frequency (MHz)	Modulation	Occupied Bandwidth(99%) (MHz)
FDD02	MidRange	1.4	1880	QPSK	1.09
FDD02	MidRange	1.4	1880	Q16	1.086
FDD02	MidRange	3	1880	QPSK	2.68
FDD02	MidRange	3	1880	Q16	2.678
FDD02	MidRange	5	1880	QPSK	4.492
FDD02	MidRange	5	1880	Q16	4.488
FDD02	MidRange	10	1880	QPSK	8.917
FDD02	MidRange	10	1880	Q16	8.907
FDD02	MidRange	15	1880	QPSK	13.426
FDD02	MidRange	15	1880	Q16	13.426
FDD02	MidRange	20	1880	QPSK	17.86
FDD02	MidRange	20	1880	Q16	17.853
FDD04	MidRange	1.4	1732.5	QPSK	1.086
FDD04	MidRange	1.4	1732.5	Q16	1.084
FDD04	MidRange	3	1732.5	QPSK	2.68
FDD04	MidRange	3	1732.5	Q16	2.678
FDD04	MidRange	5	1732.5	QPSK	4.489
FDD04	MidRange	5	1732.5	Q16	4.487
FDD04	MidRange	10	1732.5	QPSK	8.916
FDD04	MidRange	10	1732.5	Q16	8.907
FDD04	MidRange	15	1732.5	QPSK	13.413
FDD04	MidRange	15	1732.5	Q16	13.413
FDD04	MidRange	20	1732.5	QPSK	17.828
FDD04	MidRange	20	1732.5	Q16	17.826
FDD05	MidRange	1.4	836.5	QPSK	1.085




FDD05	MidRange	1.4	836.5	Q16	1.085
FDD05	MidRange	3	836.5	QPSK	2.678
FDD05	MidRange	3	836.5	Q16	2.677
FDD05	MidRange	5	836.5	QPSK	4.487
FDD05	MidRange	5	836.5	Q16	4.484
FDD05	MidRange	10	836.5	QPSK	8.901
FDD05	MidRange	10	836.5	Q16	8.899
FDD12	MidRange	1.4	707.5	QPSK	1.086
FDD12	MidRange	1.4	707.5	Q16	1.085
FDD12	MidRange	3	707.5	QPSK	2.679
FDD12	MidRange	3	707.5	Q16	2.676
FDD12	MidRange	5	707.5	QPSK	4.488
FDD12	MidRange	5	707.5	Q16	4.484
FDD12	MidRange	10	707.5	QPSK	8.902
FDD12	MidRange	10	707.5	Q16	8.895
FDD13	MidRange	5	782	QPSK	4.48
FDD13	MidRange	5	782	Q16	4.485
FDD13	MidRange	10	782	QPSK	8.907
FDD13	MidRange	10	782	Q16	8.898
FDD14	MidRange	5	793	QPSK	4.481
FDD14	MidRange	5	793	Q16	4.485
FDD14	MidRange	10	793	QPSK	8.904
FDD14	MidRange	10	793	Q16	8.897
FDD66	MidRange	1.4	1745	QPSK	1.09
FDD66	MidRange	1.4	1745	Q16	1.087
FDD66	MidRange	3	1745	QPSK	2.685
FDD66	MidRange	3	1745	Q16	2.679
FDD66	MidRange	5	1745	QPSK	4.488
FDD66	MidRange	5	1745	Q16	4.488
FDD66	MidRange	10	1745	QPSK	8.91
FDD66	MidRange	10	1745	Q16	8.903
FDD66	MidRange	15	1745	QPSK	13.397




FDD66	MidRange	15	1745	Q16	13.397
FDD66	MidRange	20	1745	QPSK	17.797
FDD66	MidRange	20	1745	Q16	17.795
FDD71	MidRange	5	680.5	QPSK	4.49
FDD71	MidRange	5	680.5	Q16	4.49
FDD71	MidRange	10	680.5	QPSK	8.90
FDD71	MidRange	10	680.5	Q16	8.90
FDD71	MidRange	15	680.5	QPSK	13.41
FDD71	MidRange	15	680.5	Q16	13.39
FDD71	MidRange	20	683	QPSK	17.85
FDD71	MidRange	20	683	Q16	17.84


FDD02_MidRange_1.4_1880_QPSK

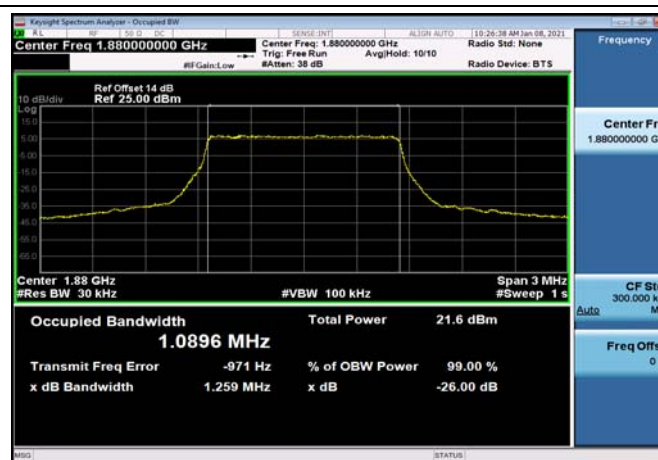


FDD02_MidRange_1.4_1880_Q16

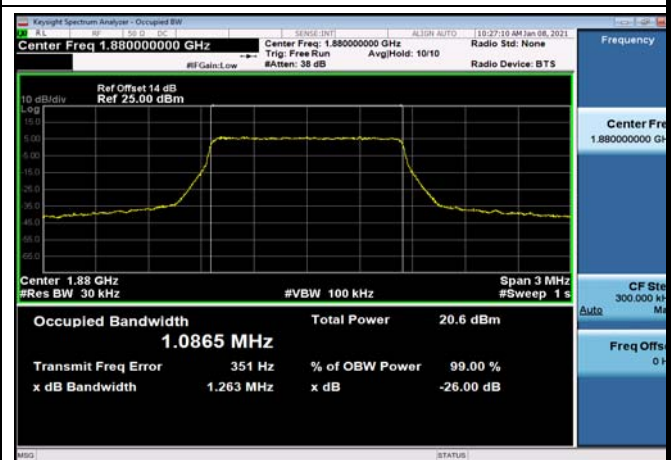

FDD02_MidRange_3_1880_QPSK

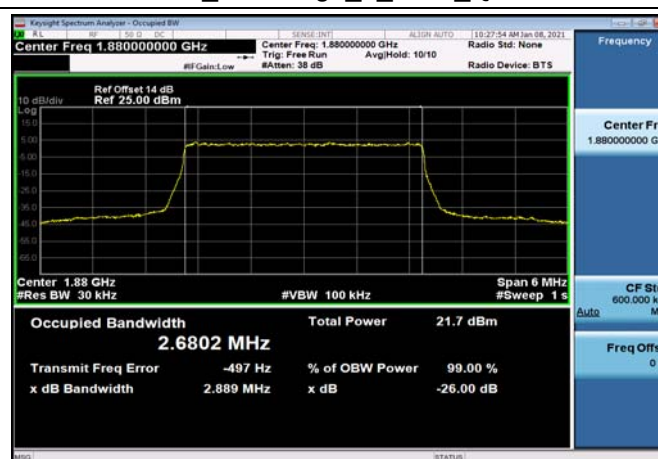


FDD02_MidRange_3_1880_Q16

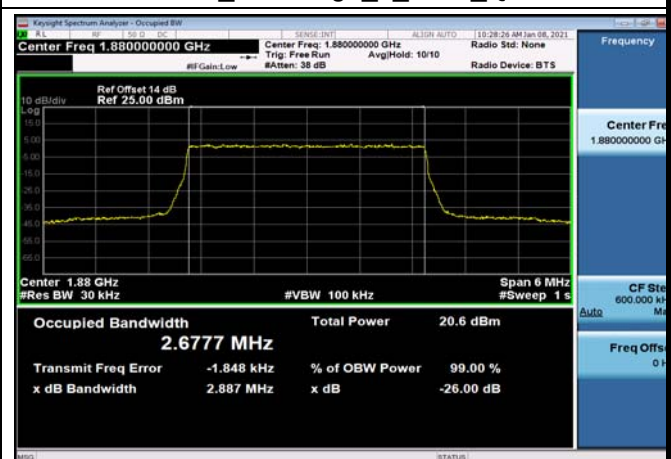





FDD02_MidRange_5_1880_QPSK

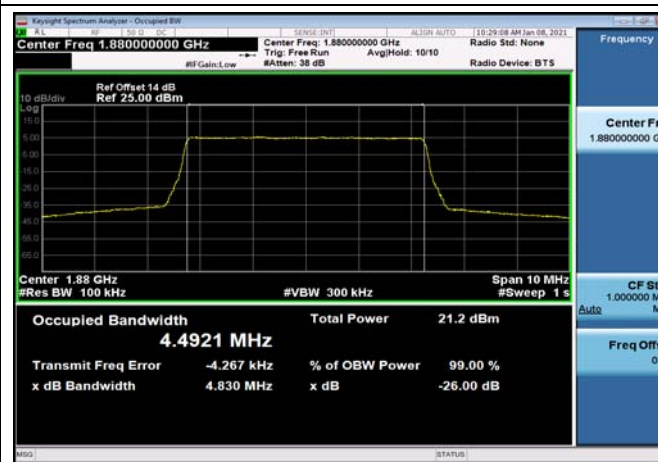


FDD02_MidRange_5_1880_Q16

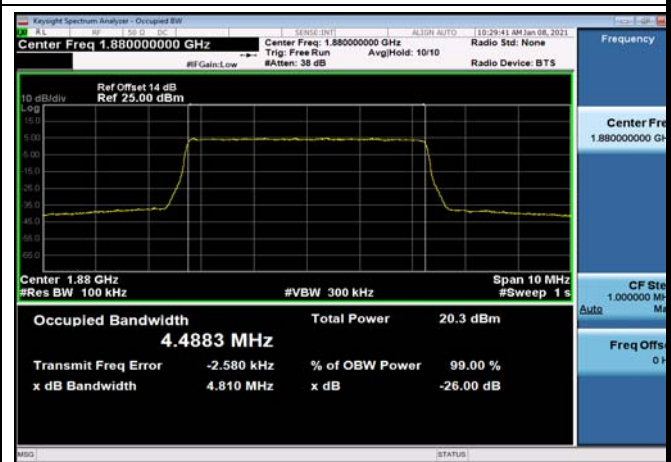


FDD02_MidRange_10_1880_QPSK

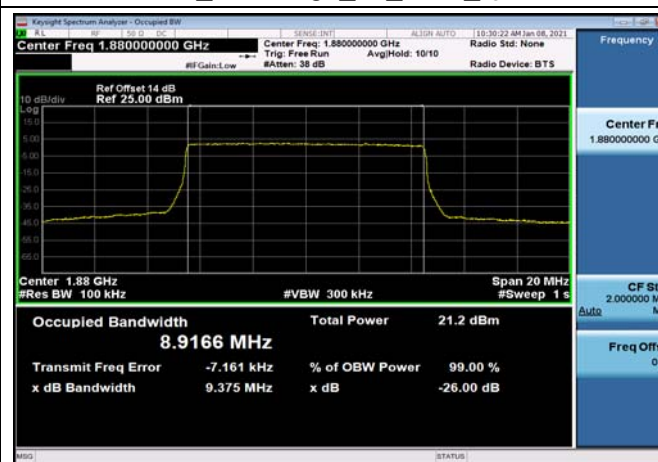


FDD02_MidRange_10_1880_Q16

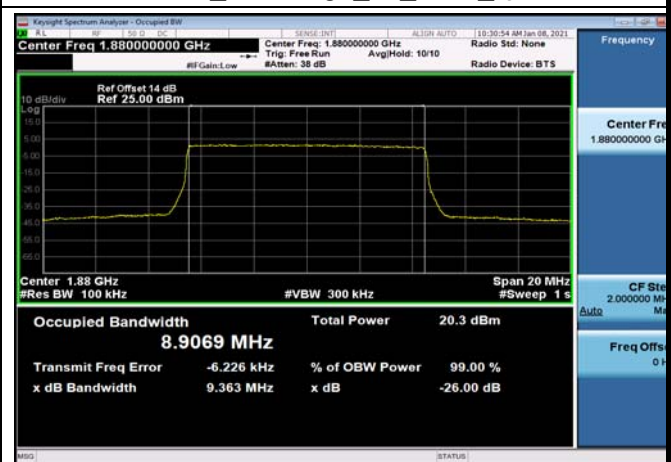

FDD02_MidRange_15_1880_QPSK

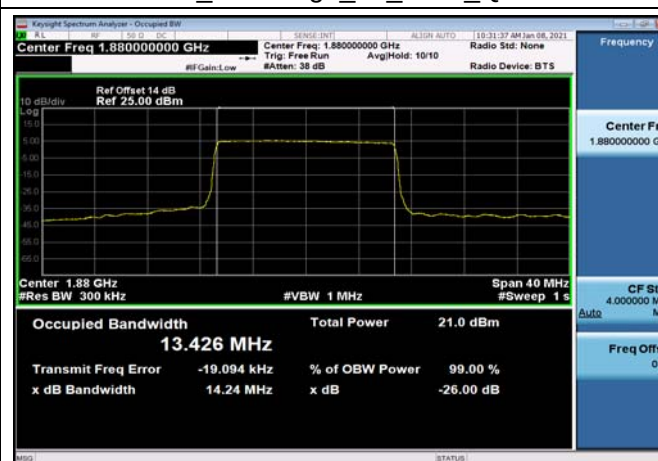


FDD02_MidRange_15_1880_Q16

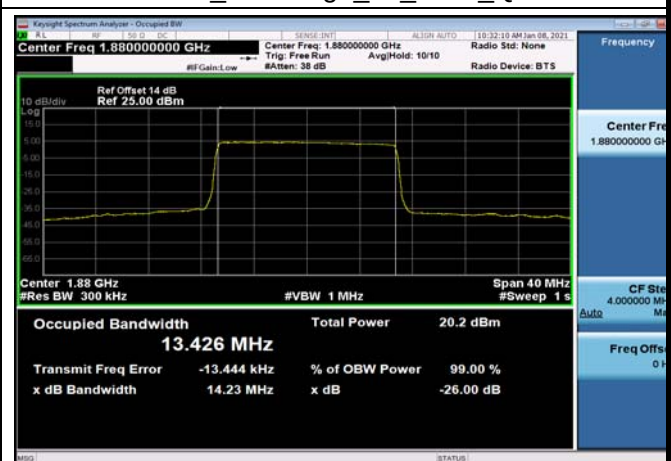





FDD02_MidRange_20_1880_QPSK

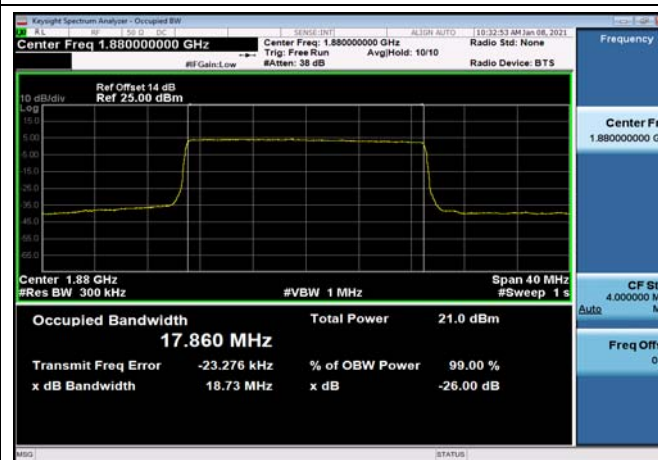


FDD02_MidRange_20_1880_Q16

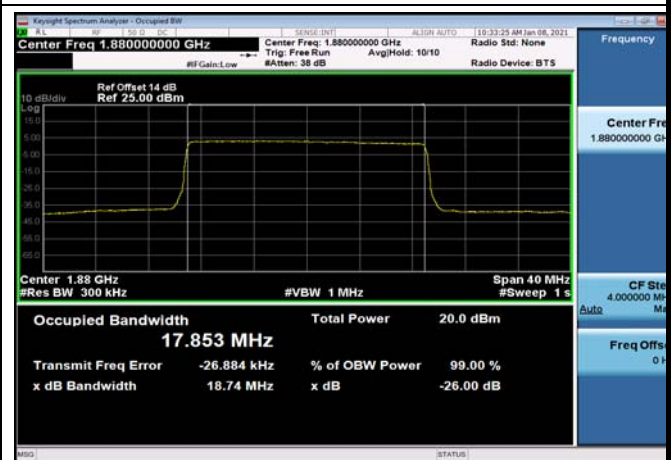


FDD04_MidRange_1.4_1732.5_QPSK

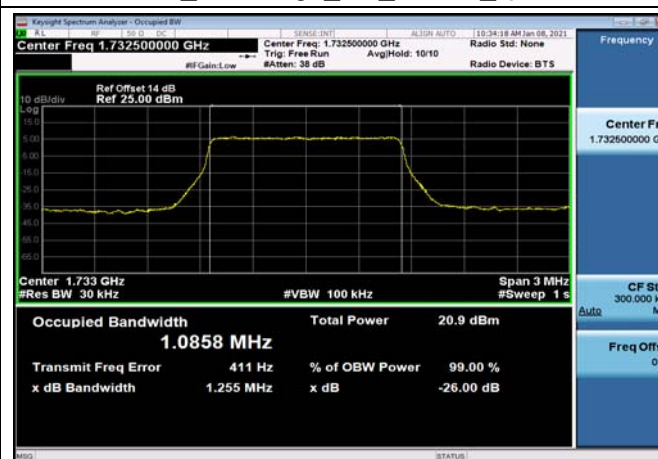


FDD04_MidRange_1.4_1732.5_Q16

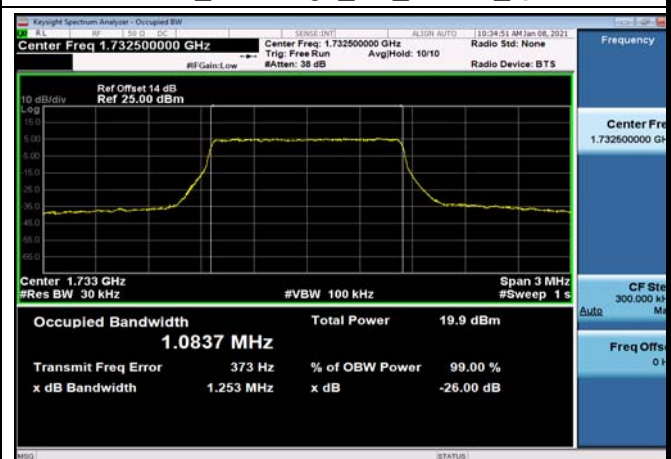

FDD04_MidRange_3_1732.5_QPSK

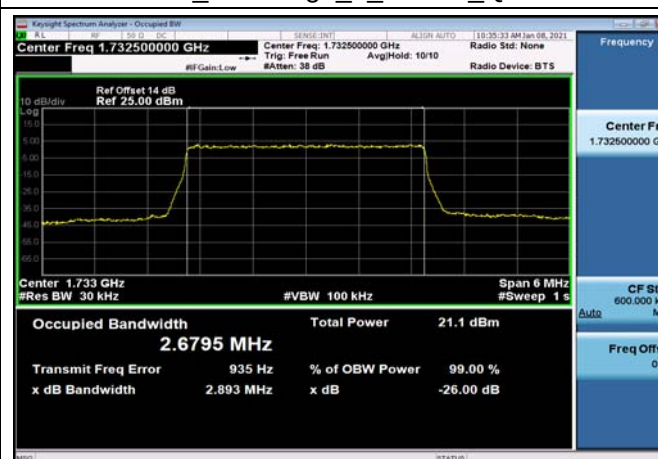


FDD04_MidRange_3_1732.5_Q16

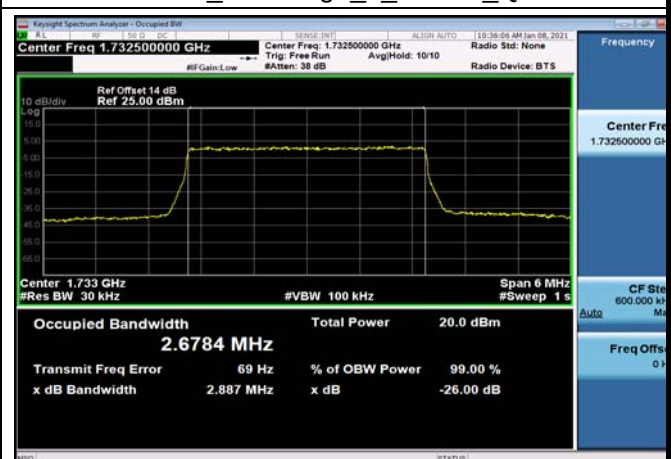





FDD04_MidRange_5_1732.5_QPSK

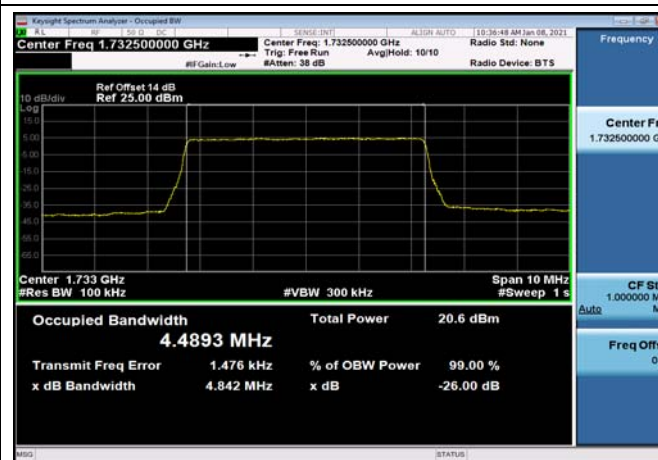


FDD04_MidRange_5_1732.5_Q16

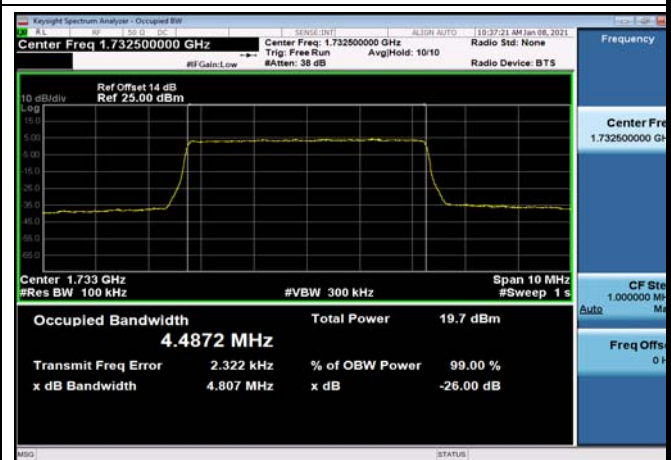


FDD04_MidRange_10_1732.5_QPSK

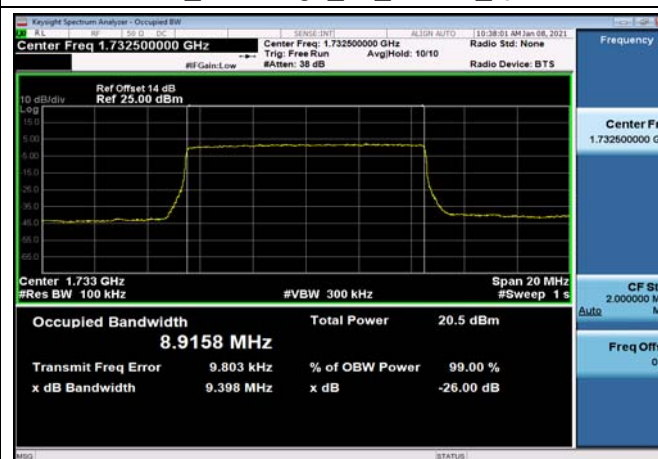


FDD04_MidRange_10_1732.5_Q16

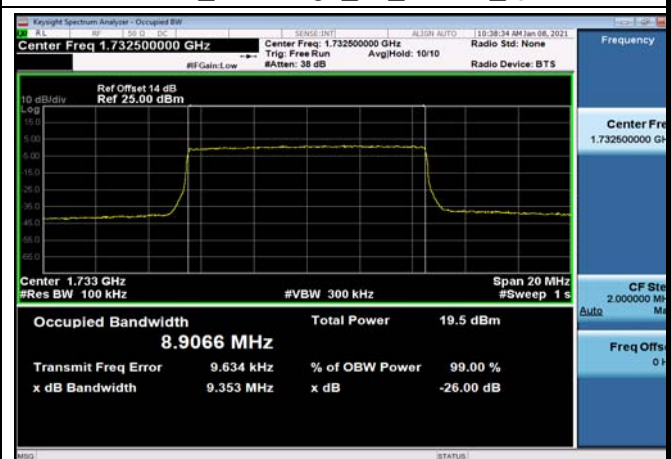

FDD04_MidRange_15_1732.5_QPSK

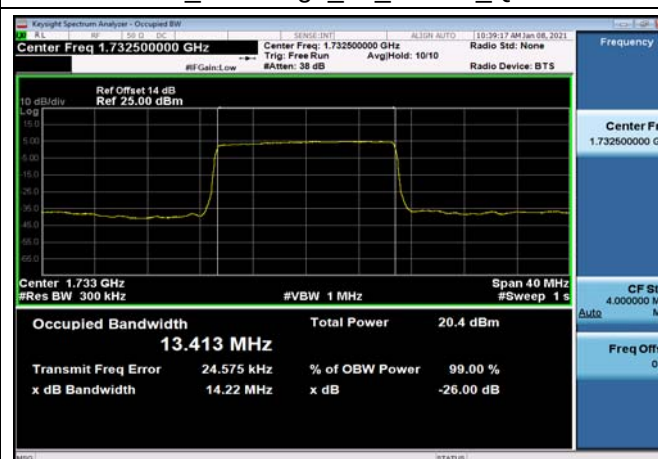


FDD04_MidRange_15_1732.5_Q16

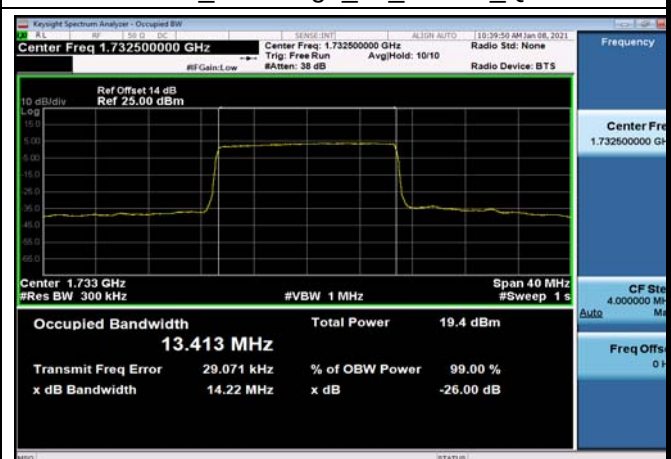





FDD04_MidRange_20_1732.5_QPSK

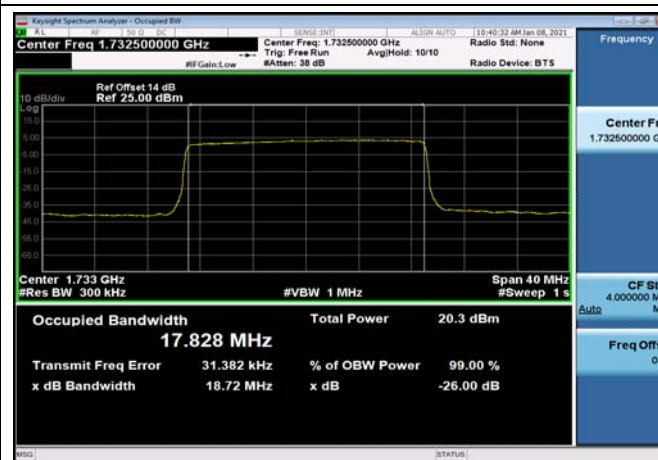


FDD04_MidRange_20_1732.5_Q16

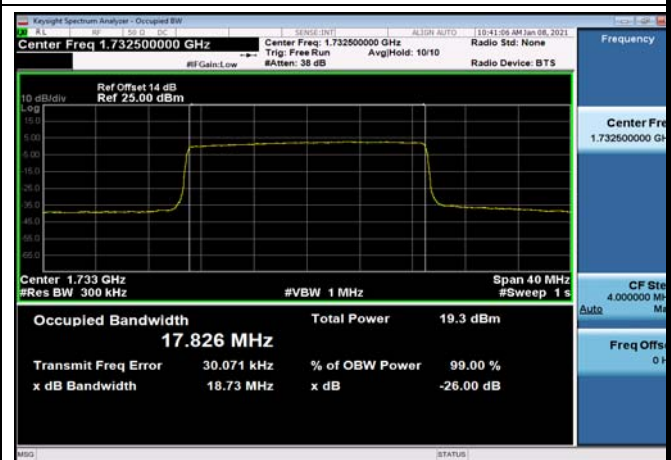


FDD05_MidRange_1.4_836.5_QPSK

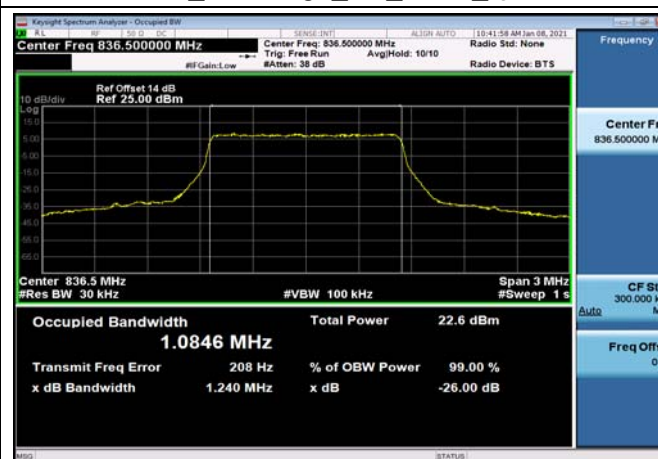


FDD05_MidRange_1.4_836.5_Q16

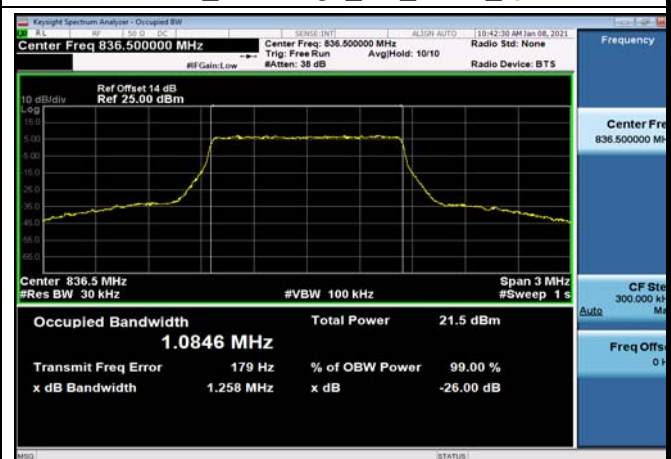

FDD05_MidRange_3_836.5_QPSK

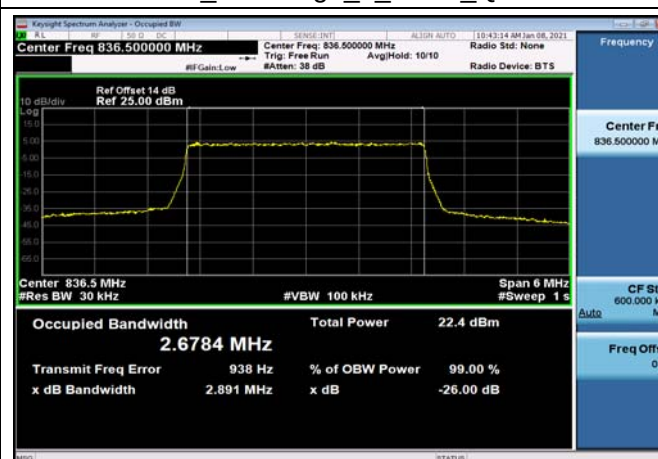


FDD05_MidRange_3_836.5_Q16

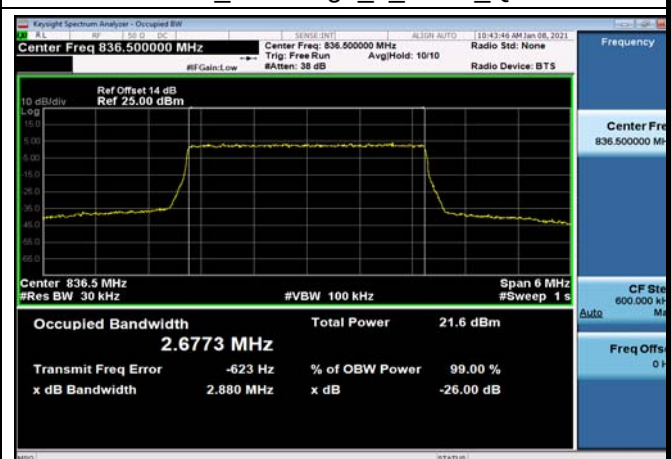





FDD05_MidRange_5_836.5_QPSK

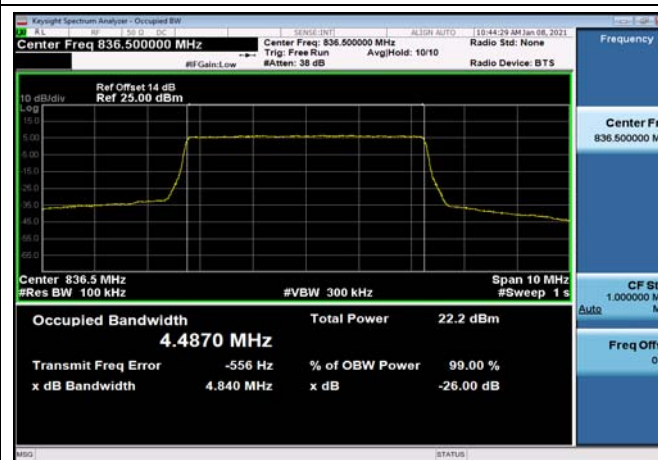


FDD05_MidRange_5_836.5_Q16

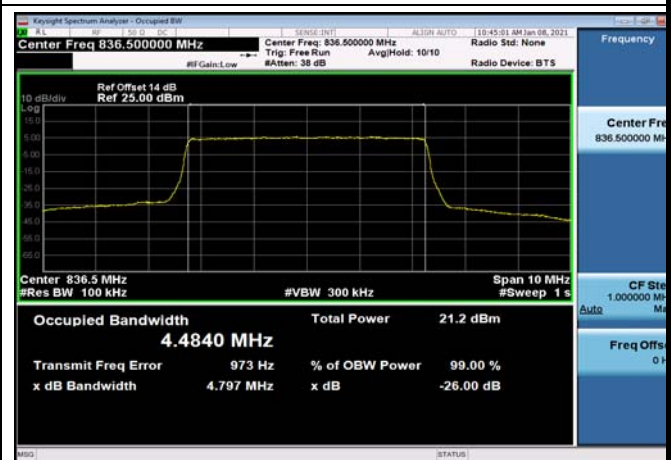

FDD05_MidRange_10_836.5_QPSK

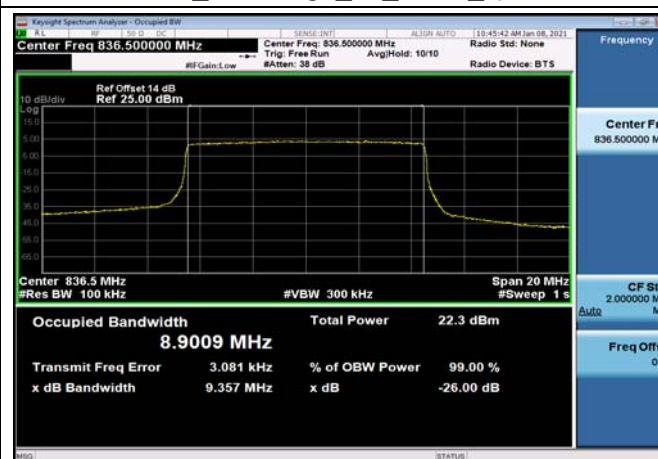


FDD05_MidRange_10_836.5_Q16

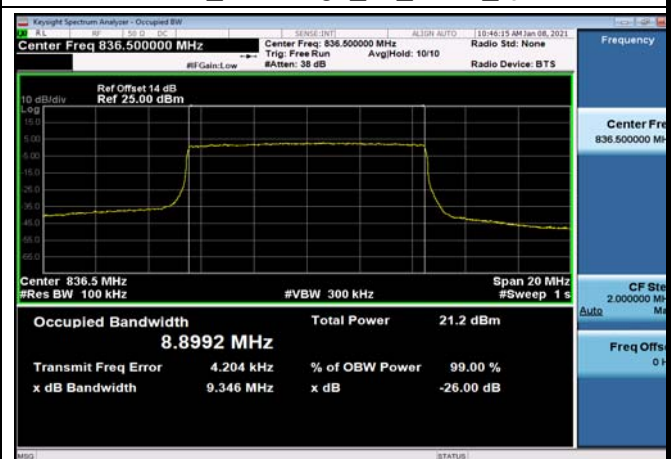

FDD12_MidRange_1.4_707.5_QPSK




FDD12_MidRange_1.4_707.5_Q16

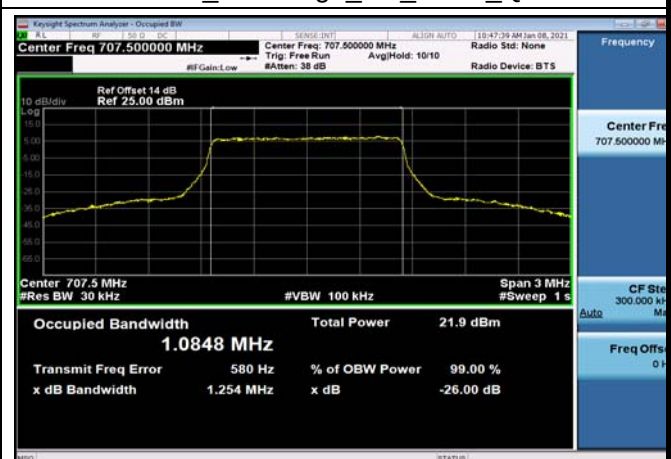





FDD12_MidRange_3_707.5_QPSK

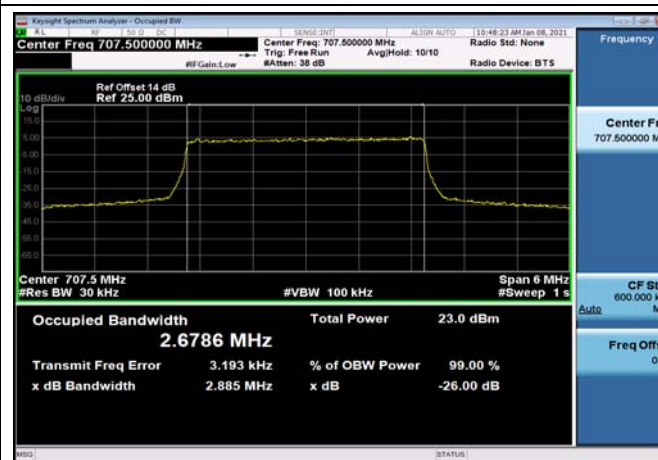


FDD12_MidRange_3_707.5_Q16

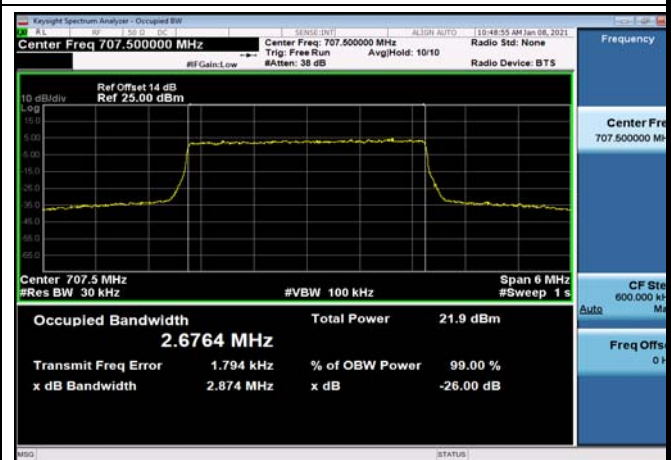


FDD12_MidRange_5_707.5_QPSK

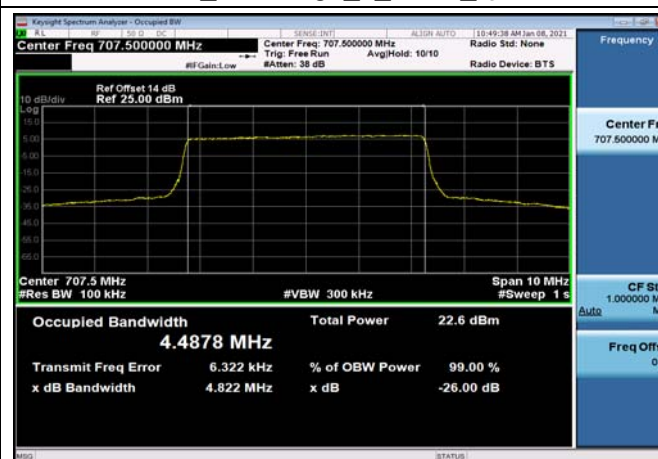


FDD12_MidRange_5_707.5_Q16

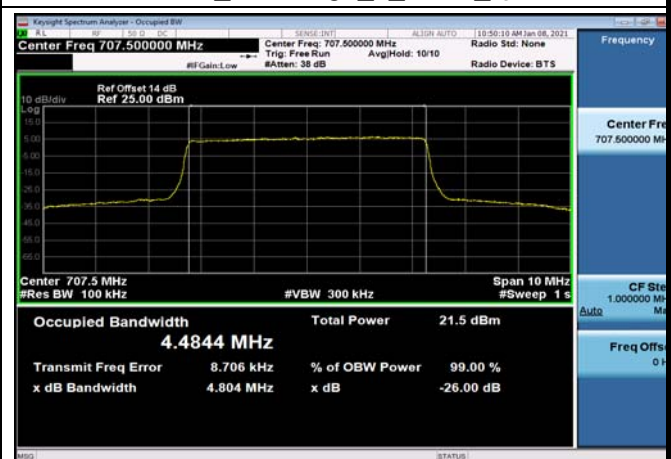

FDD12_MidRange_10_707.5_QPSK

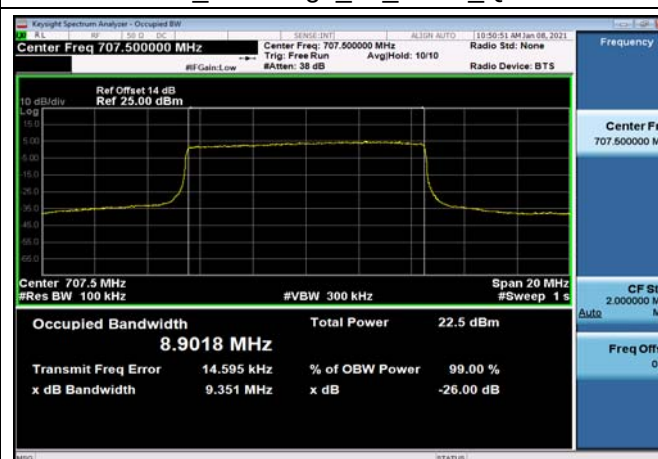


FDD12_MidRange_10_707.5_Q16

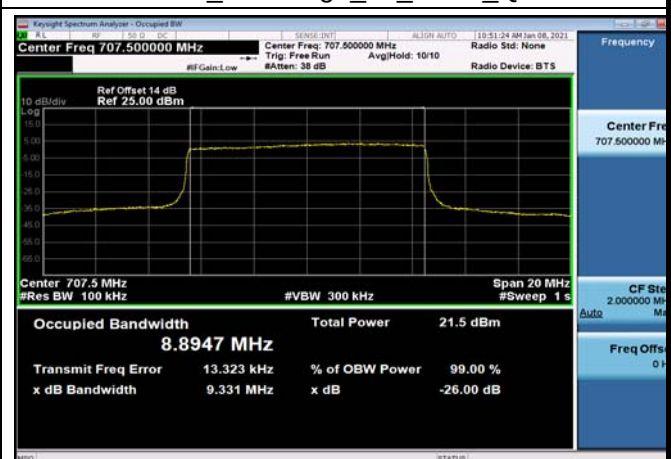



FDD13_MidRange_5_782_QPSK

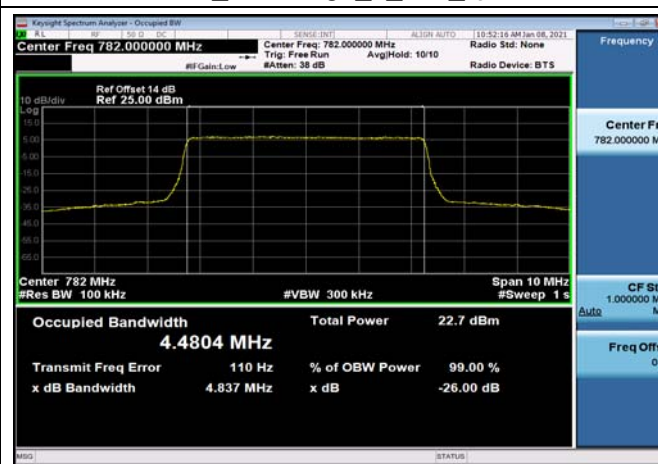


FDD13_MidRange_5_782_Q16




FDD13_MidRange_10_782_QPSK




FDD13_MidRange_10_782_Q16

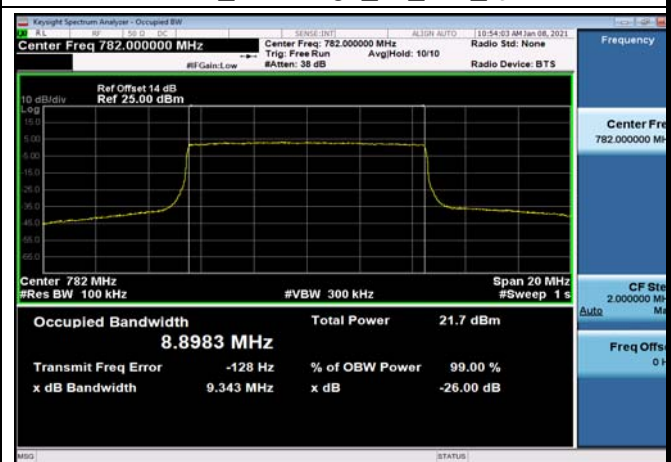

FDD14_MidRange_5_793_QPSK

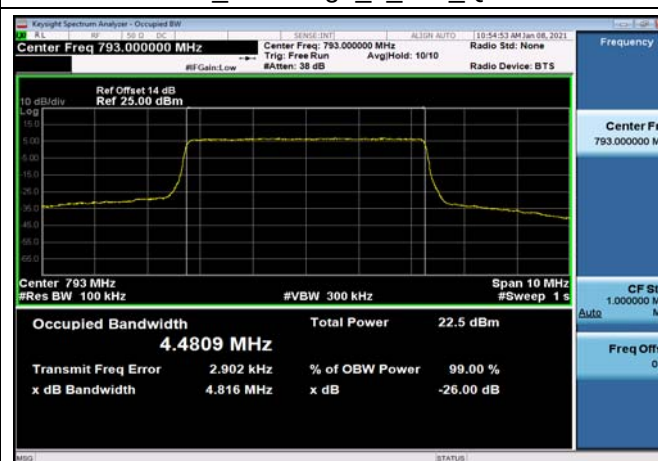

FDD14_MidRange_5_793_Q16

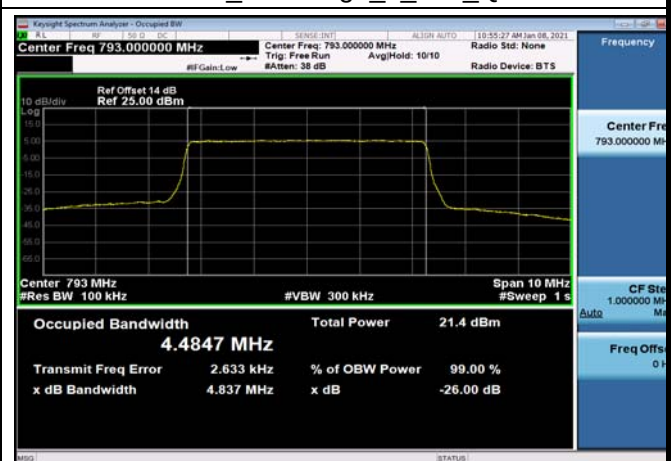


FDD14_MidRange_10_793_QPSK



FDD14_MidRange_10_793_Q16




FDD66_MidRange_1.4_1745_QPSK

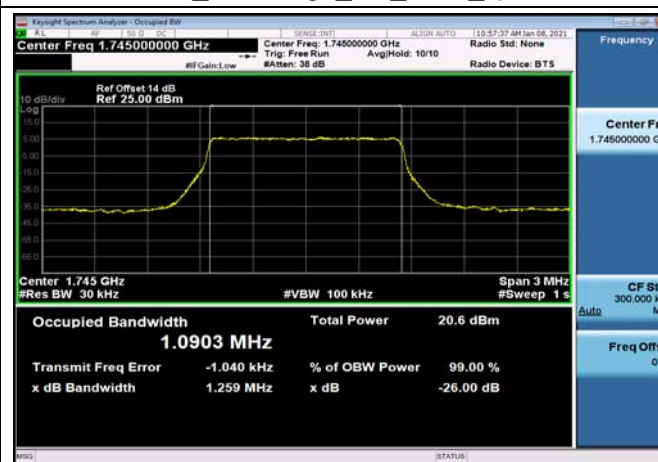


FDD66_MidRange_1.4_1745_Q16




FDD66_MidRange_3_1745_QPSK

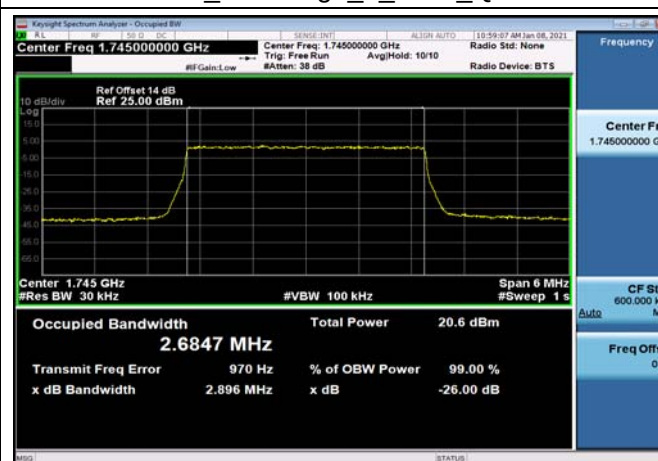


FDD66_MidRange_3_1745_Q16

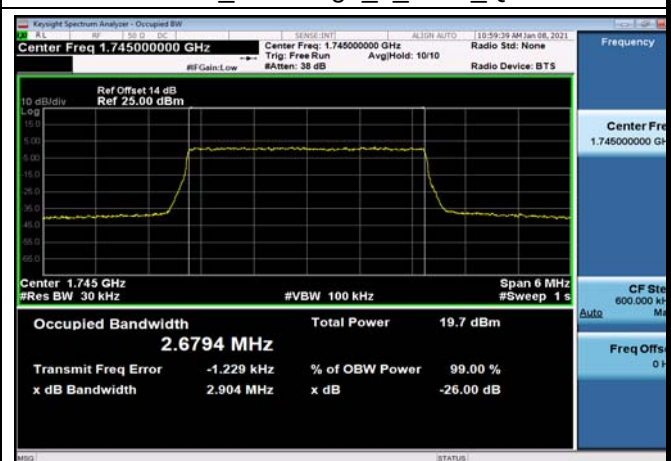


FDD66_MidRange_5_1745_QPSK

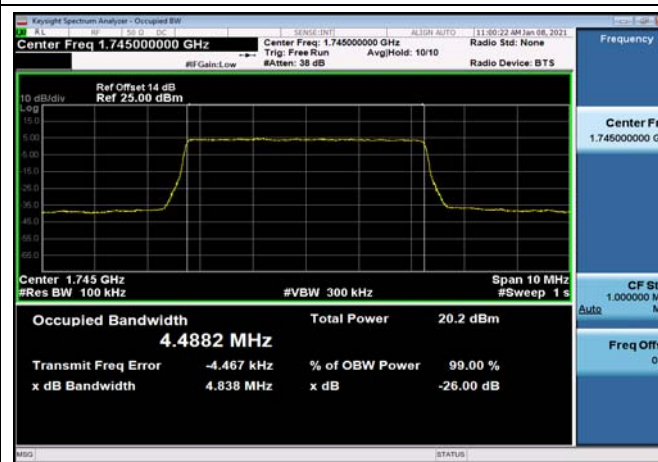

FDD66_MidRange_5_1745_Q16

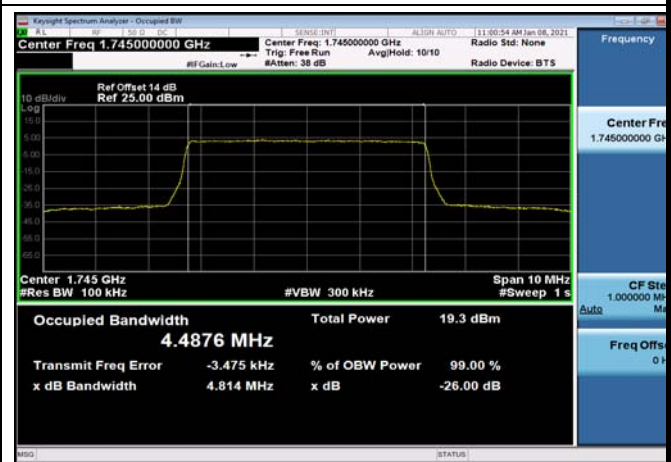


FDD66_MidRange_10_1745_QPSK

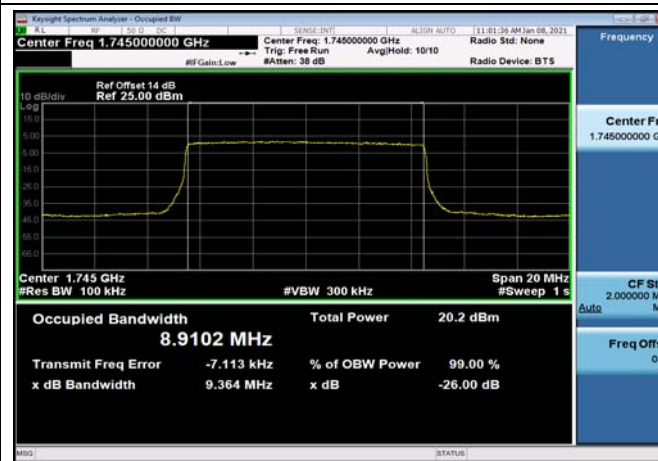


FDD66_MidRange_10_1745_Q16



FDD66_MidRange_15_1745_QPSK

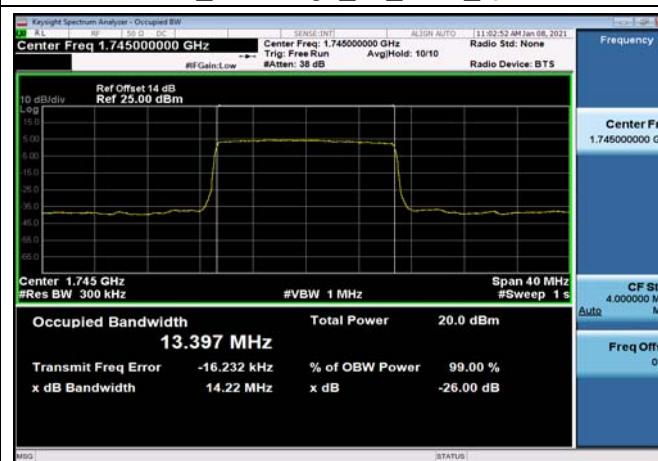


FDD66_MidRange_15_1745_Q16

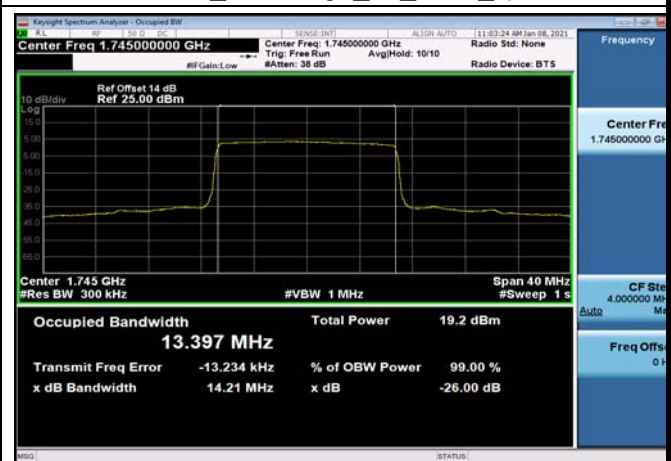




FDD66_MidRange_20_1745_QPSK

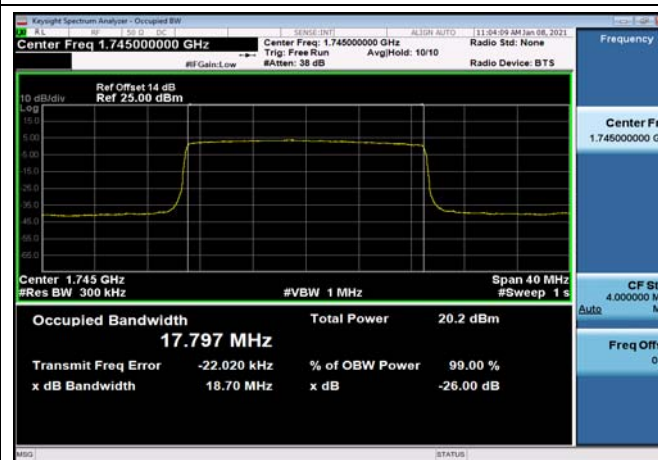

FDD66_MidRange_20_1745_Q16

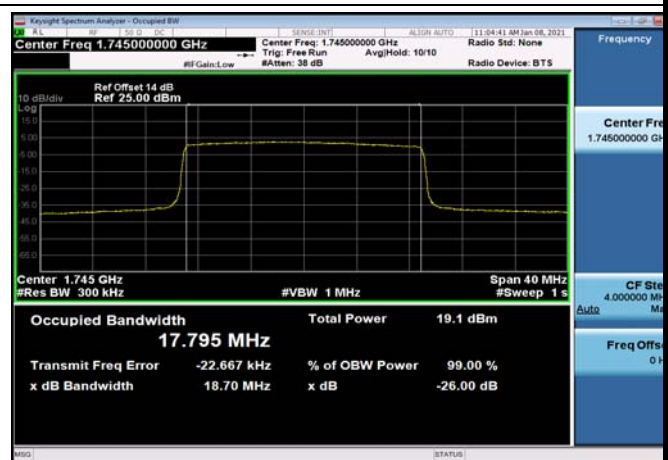


FDD71_MidRange_5_680.5_QPSK




FDD71_MidRange_5_680.5_Q16



FDD71_MidRange_10_680.5_QPSK

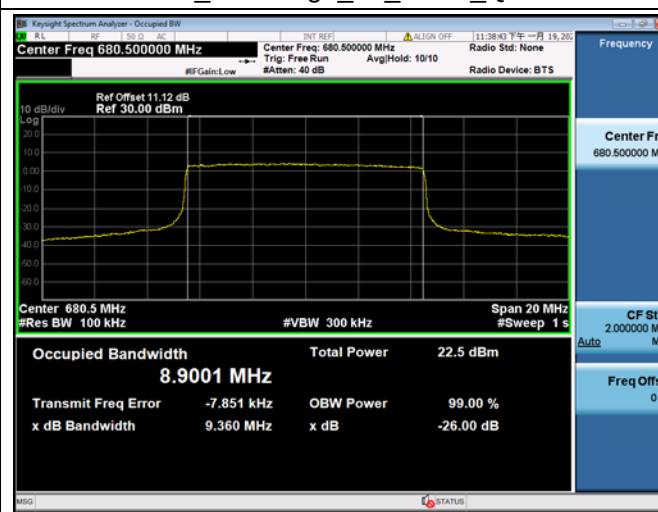

FDD71_MidRange_10_680.5_Q16

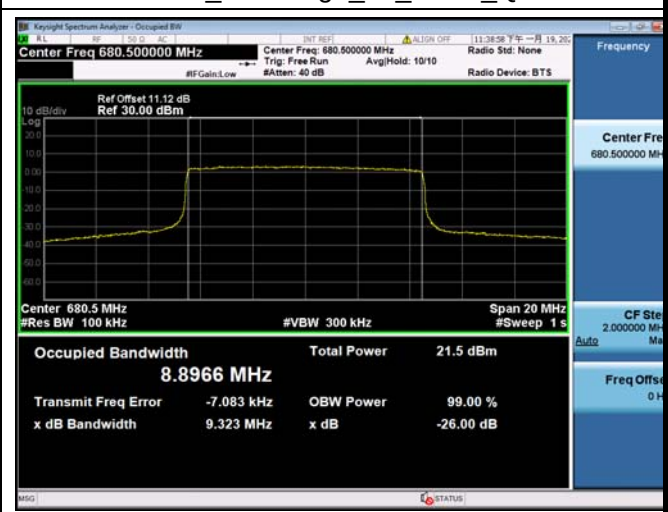




FDD71_MidRange_15_680.5_QPSK




FDD71_MidRange_15_680.5_Q16

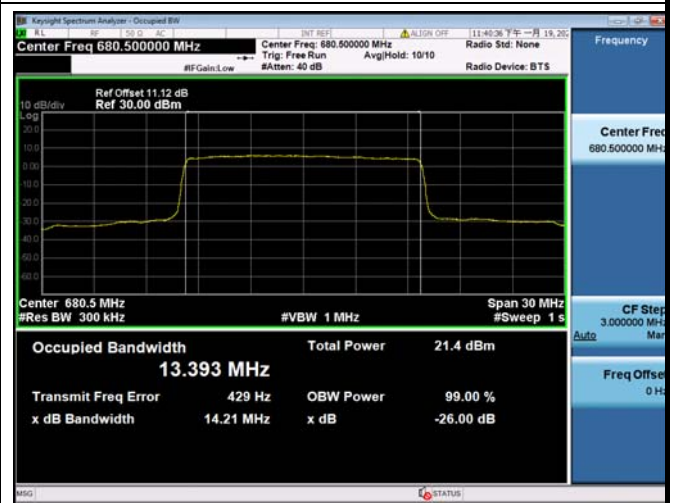

FDD71_MidRange_20_683_QPSK



FDD71_MidRange_20_683_Q16

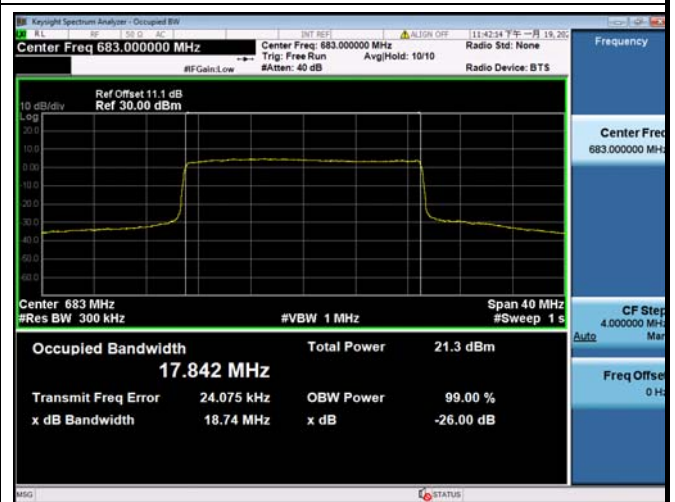



1.4 26dB Bandwidth

1.4.1 Test Result and Data

Emission Bandwidth NormalTC_NormalVol					
Band	Range	BandWidth	Frequency (MHz)	Modulation	EmissionBandwidth (MHz)
FDD02	MidRange	1.4	1880	QPSK	1.26
FDD02	MidRange	1.4	1880	Q16	1.27
FDD02	MidRange	3	1880	QPSK	2.97
FDD02	MidRange	3	1880	Q16	2.96
FDD02	MidRange	5	1880	QPSK	4.85
FDD02	MidRange	5	1880	Q16	4.81
FDD02	MidRange	10	1880	QPSK	9.39
FDD02	MidRange	10	1880	Q16	9.36
FDD02	MidRange	15	1880	QPSK	14.23
FDD02	MidRange	15	1880	Q16	14.23
FDD02	MidRange	20	1880	QPSK	18.73
FDD02	MidRange	20	1880	Q16	18.74
FDD04	MidRange	1.4	1732.5	QPSK	1.25
FDD04	MidRange	1.4	1732.5	Q16	1.26
FDD04	MidRange	3	1732.5	QPSK	2.96
FDD04	MidRange	3	1732.5	Q16	2.96
FDD04	MidRange	5	1732.5	QPSK	4.84
FDD04	MidRange	5	1732.5	Q16	4.81
FDD04	MidRange	10	1732.5	QPSK	9.36
FDD04	MidRange	10	1732.5	Q16	9.35
FDD04	MidRange	15	1732.5	QPSK	14.23
FDD04	MidRange	15	1732.5	Q16	14.22
FDD04	MidRange	20	1732.5	QPSK	18.72
FDD04	MidRange	20	1732.5	Q16	18.72
FDD05	MidRange	1.4	836.5	QPSK	1.24
FDD05	MidRange	1.4	836.5	Q16	1.26




FDD05	MidRange	3	836.5	QPSK	2.97
FDD05	MidRange	3	836.5	Q16	2.96
FDD05	MidRange	5	836.5	QPSK	4.84
FDD05	MidRange	5	836.5	Q16	4.8
FDD05	MidRange	10	836.5	QPSK	9.33
FDD05	MidRange	10	836.5	Q16	9.33
FDD12	MidRange	1.4	707.5	QPSK	1.25
FDD12	MidRange	1.4	707.5	Q16	1.26
FDD12	MidRange	3	707.5	QPSK	2.96
FDD12	MidRange	3	707.5	Q16	2.96
FDD12	MidRange	5	707.5	QPSK	4.83
FDD12	MidRange	5	707.5	Q16	4.81
FDD12	MidRange	10	707.5	QPSK	9.34
FDD12	MidRange	10	707.5	Q16	9.33
FDD13	MidRange	5	782	QPSK	4.82
FDD13	MidRange	5	782	Q16	4.83
FDD13	MidRange	10	782	QPSK	9.36
FDD13	MidRange	10	782	Q16	9.34
FDD14	MidRange	5	793	QPSK	4.83
FDD14	MidRange	5	793	Q16	4.83
FDD14	MidRange	10	793	QPSK	9.38
FDD14	MidRange	10	793	Q16	9.35
FDD66	MidRange	1.4	1745	QPSK	1.26
FDD66	MidRange	1.4	1745	Q16	1.27
FDD66	MidRange	3	1745	QPSK	2.97
FDD66	MidRange	3	1745	Q16	2.97
FDD66	MidRange	5	1745	QPSK	4.86
FDD66	MidRange	5	1745	Q16	4.81
FDD66	MidRange	10	1745	QPSK	9.38
FDD66	MidRange	10	1745	Q16	9.36
FDD66	MidRange	15	1745	QPSK	14.21
FDD66	MidRange	15	1745	Q16	14.21




FDD66	MidRange	20	1745	QPSK	18.7
FDD66	MidRange	20	1745	Q16	18.71
FDD71	MidRange	5	680.5	QPSK	4.84
FDD71	MidRange	5	680.5	Q16	4.84
FDD71	MidRange	10	680.5	QPSK	9.36
FDD71	MidRange	10	680.5	Q16	9.32
FDD71	MidRange	15	680.5	QPSK	14.22
FDD71	MidRange	15	680.5	Q16	14.21
FDD71	MidRange	20	683	QPSK	18.74
FDD71	MidRange	20	683	Q16	18.74




FDD02_MidRange_1.4MHz_1880MHz_QPSK

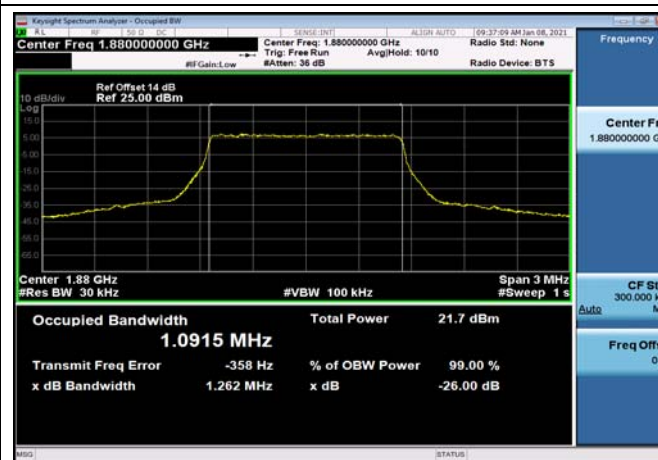


FDD02_MidRange_1.4MHz_1880MHz_Q16

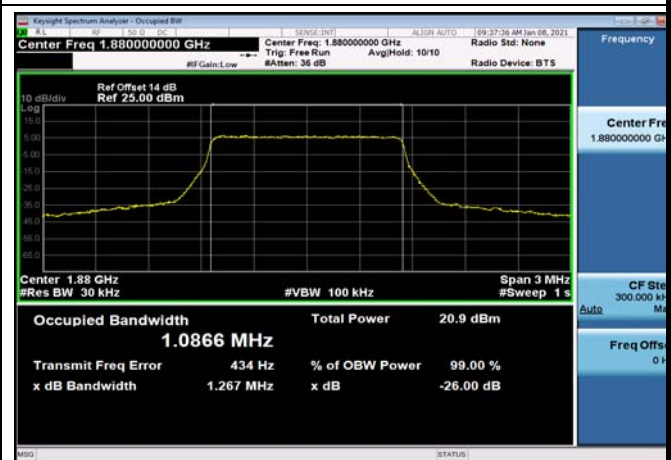


FDD02_MidRange_3MHz_1880MHz_QPSK

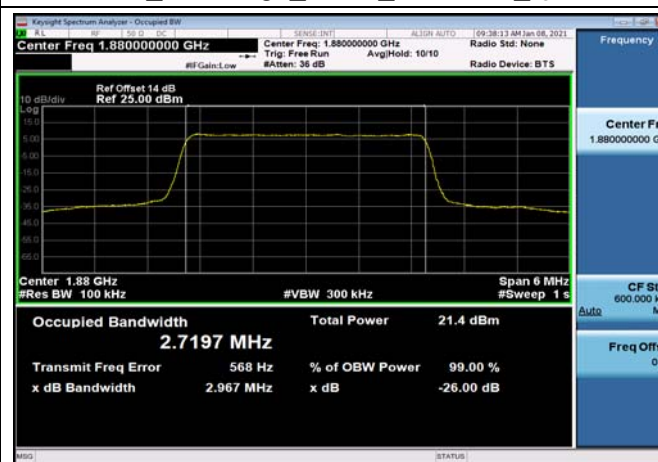


FDD02_MidRange_3MHz_1880MHz_Q16

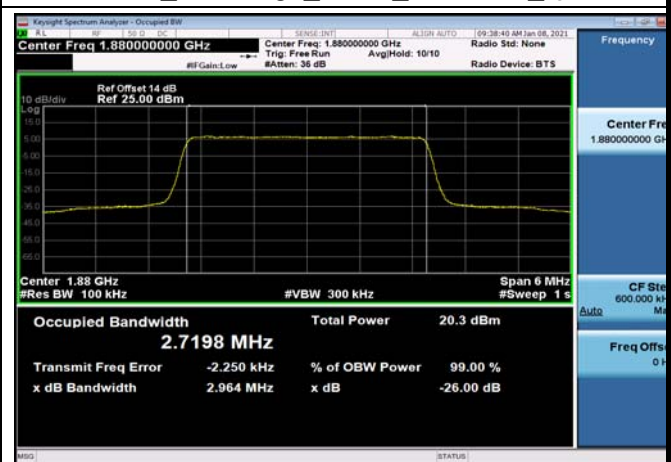

FDD02_MidRange_5MHz_1880MHz_QPSK

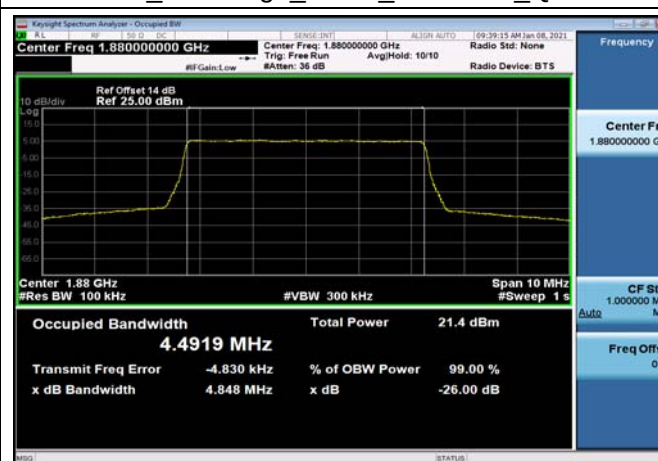


FDD02_MidRange_5MHz_1880MHz_Q16

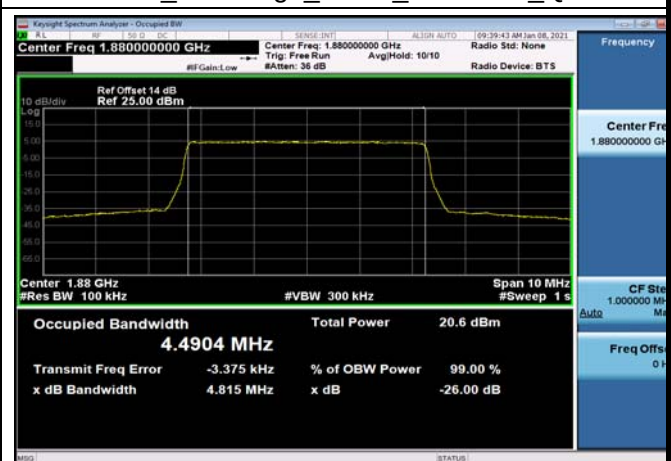





FDD02_MidRange_10MHz_1880MHz_QPSK

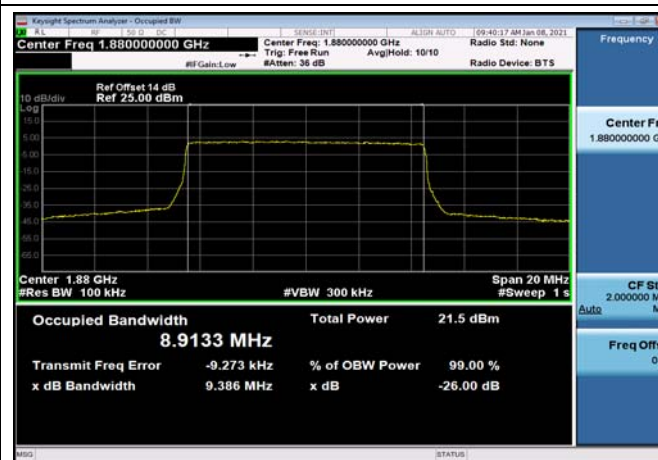


FDD02_MidRange_10MHz_1880MHz_Q16

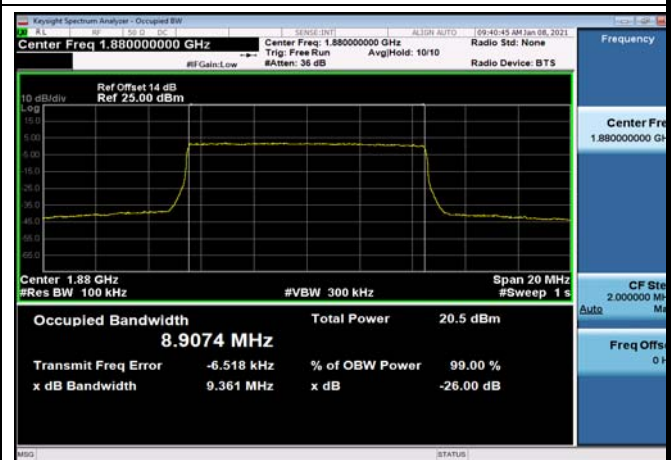


FDD02_MidRange_15MHz_1880MHz_QPSK

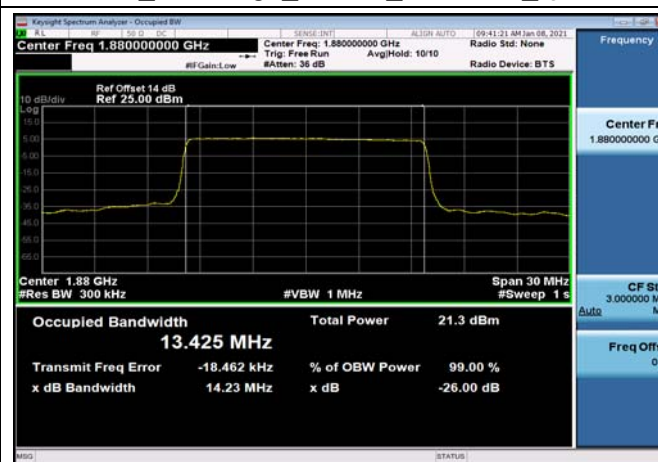


FDD02_MidRange_15MHz_1880MHz_Q16


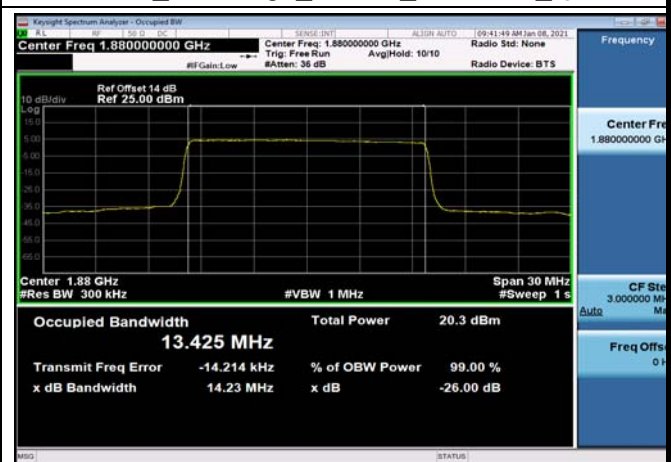


FDD02_MidRange_20MHz_1880MHz_QPSK

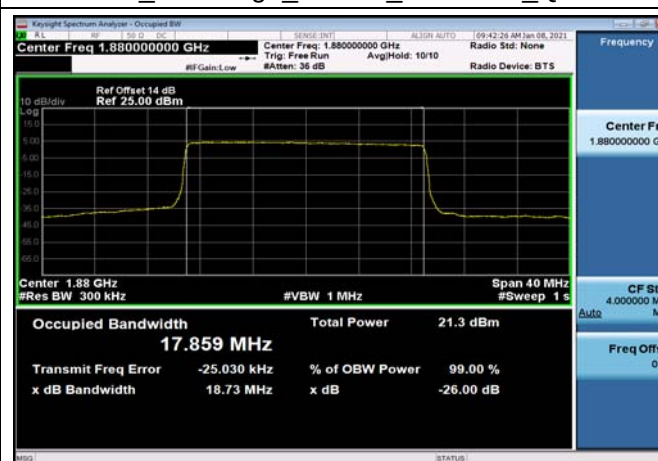


FDD02_MidRange_20MHz_1880MHz_Q16

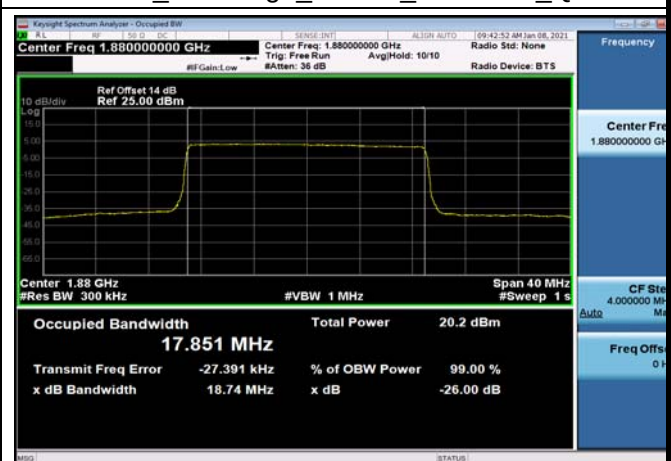


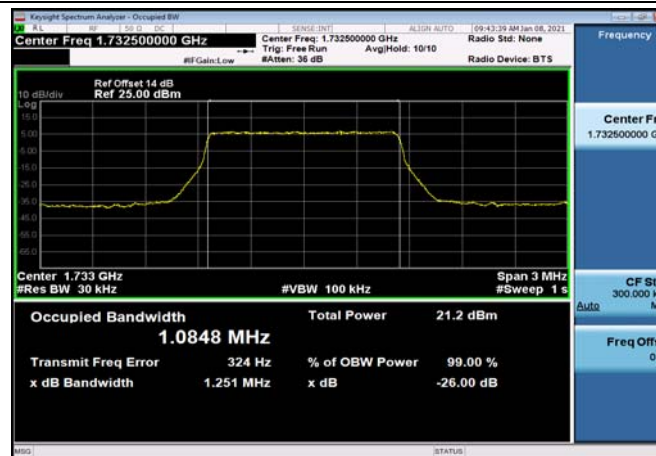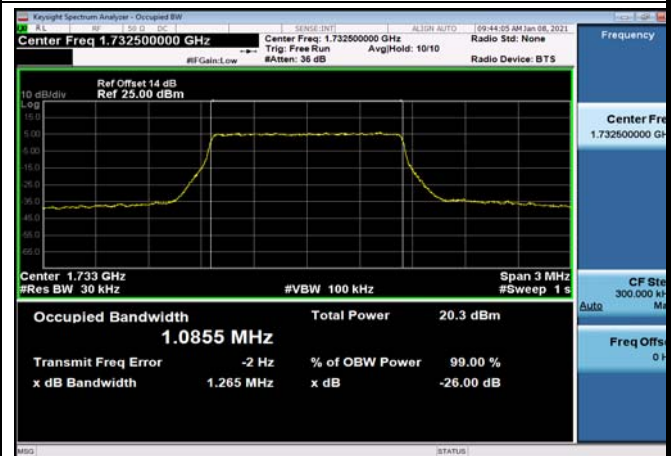FDD04_MidRange_1.4MHz_1732.5MHz
_QPSKFDD04_MidRange_1.4MHz_1732.5MHz
_Q16


FDD04_MidRange_3MHz_1732.5MHz_QPSK

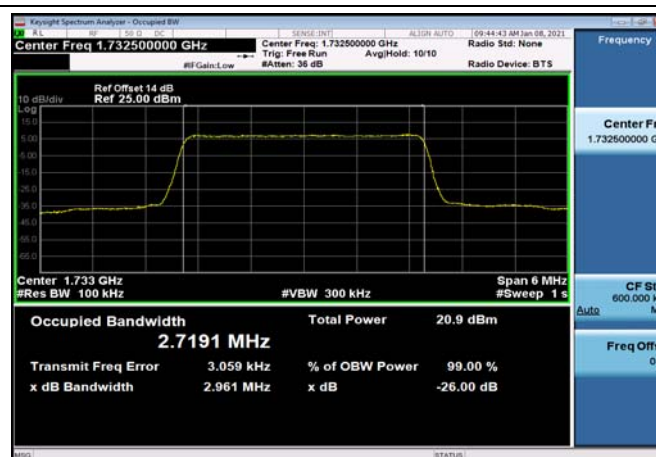


FDD04_MidRange_3MHz_1732.5MHz_Q16






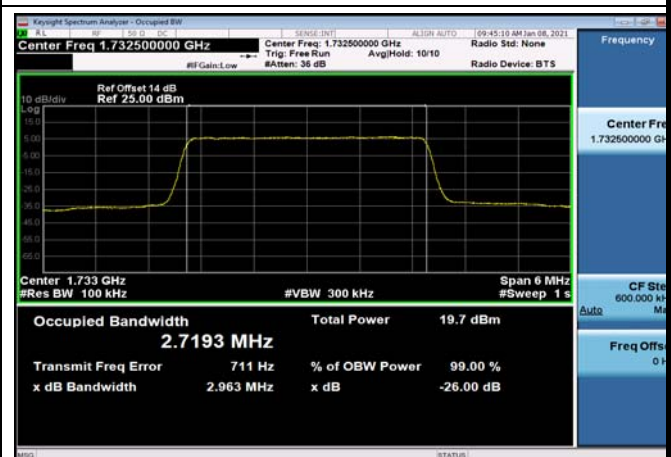




FDD04_MidRange_5MHz_1732.5MHz_QPSK

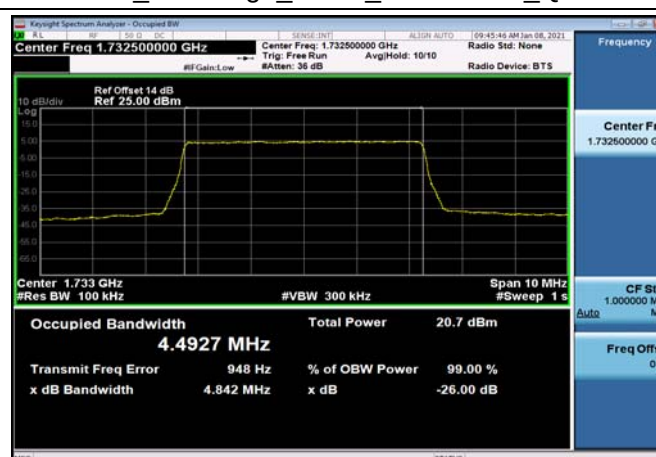


FDD04_MidRange_5MHz_1732.5MHz_Q16

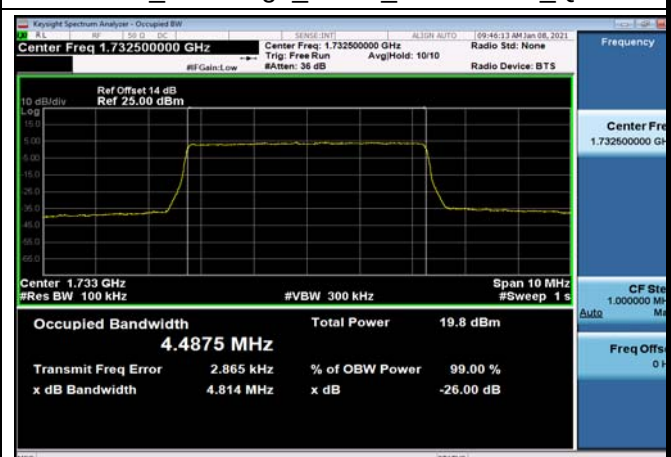

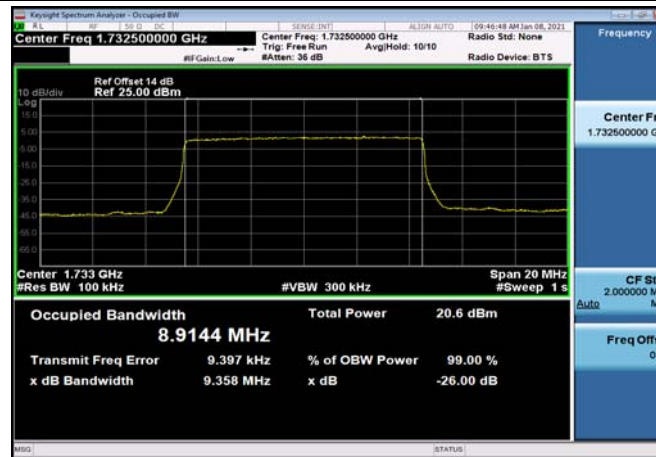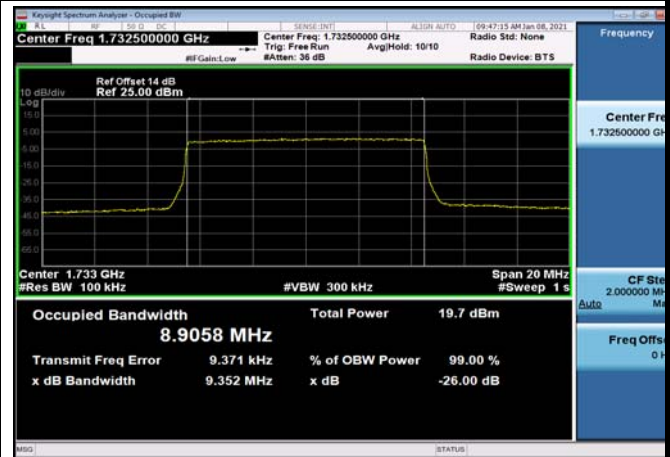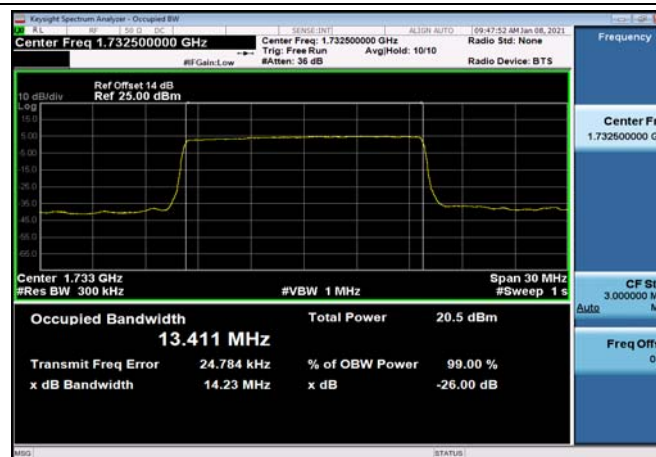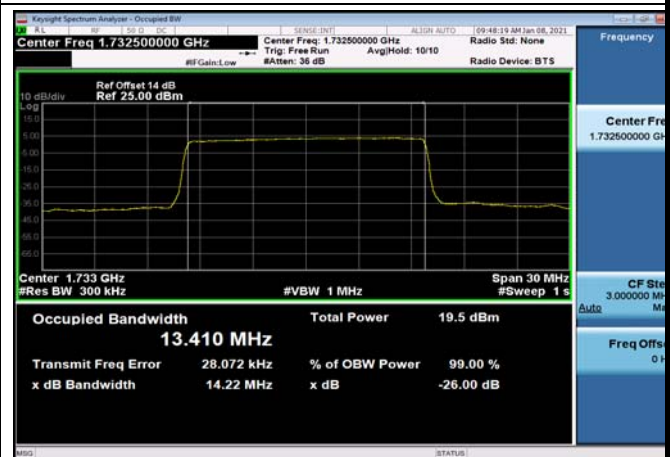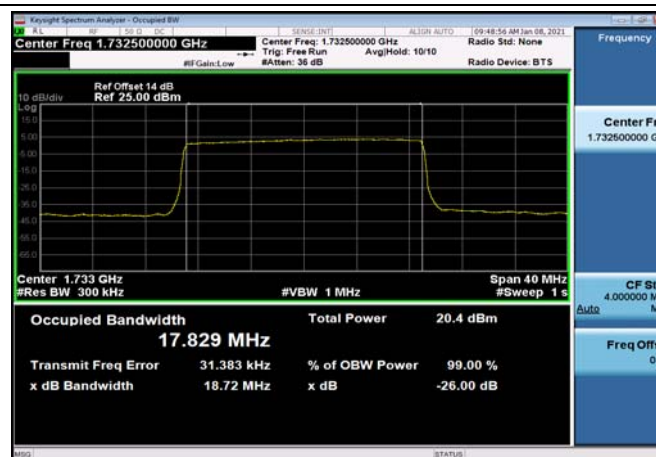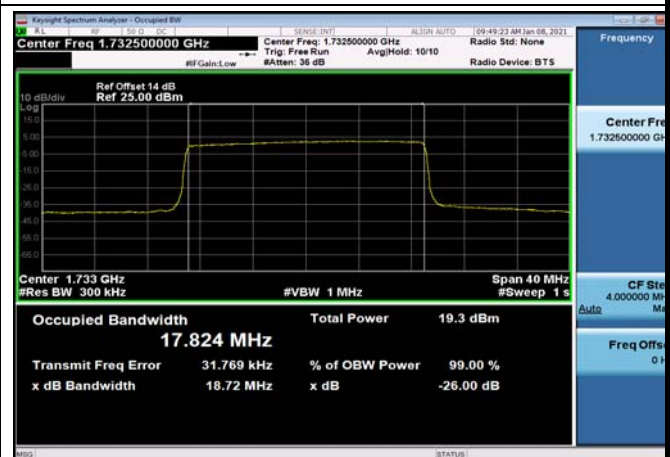
FDD04_MidRange_10MHz_1732.5MHz
_QPSK

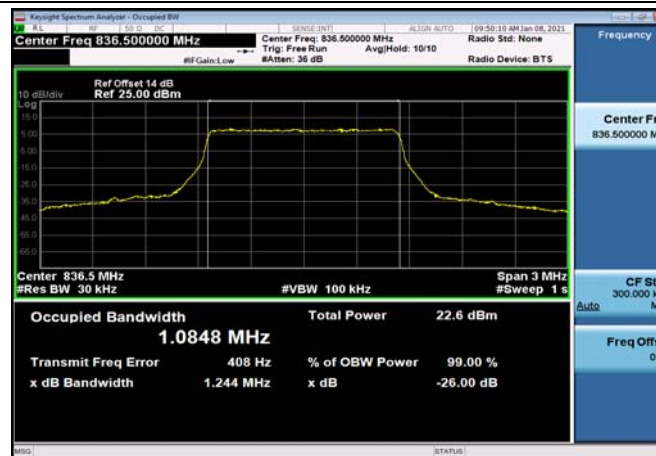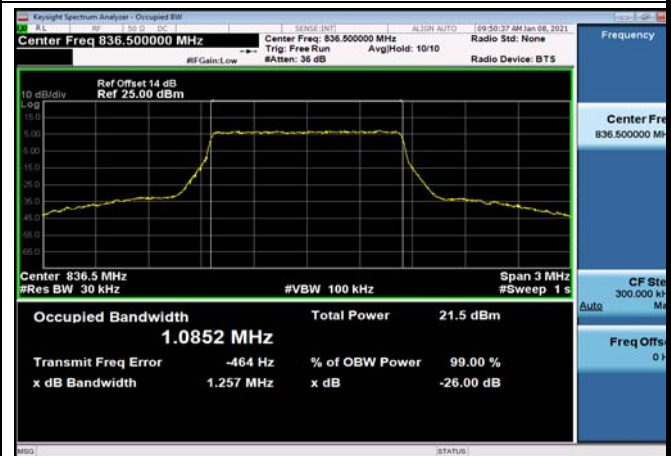FDD04_MidRange_10MHz_1732.5MHz
_Q16

FDD04_MidRange_15MHz_1732.5MHz
_QPSK

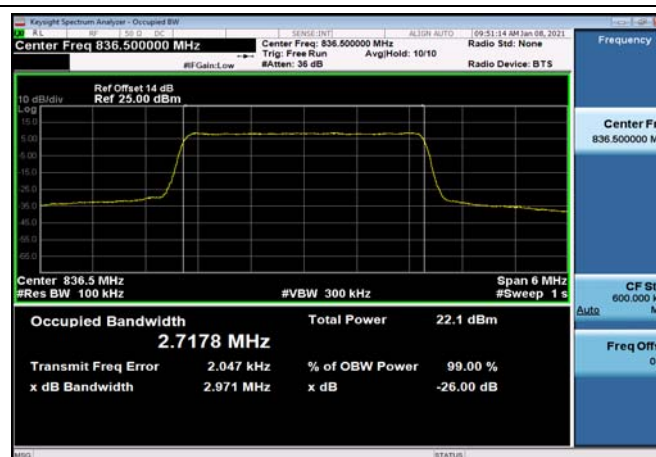FDD04_MidRange_15MHz_1732.5MHz
_Q16

FDD04_MidRange_20MHz_1732.5MHz
_QPSK

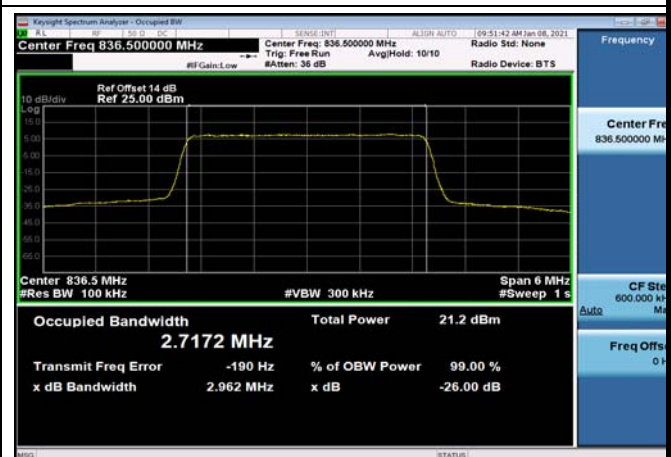FDD04_MidRange_20MHz_1732.5MHz
_Q16


FDD05_MidRange_1.4MHz_836.5MHz
_QPSKFDD05_MidRange_1.4MHz_836.5MHz
_Q16


FDD05_MidRange_3MHz_836.5MHz_QPSK



FDD05_MidRange_3MHz_836.5MHz_Q16



FDD05_MidRange_5MHz_836.5MHz_QPSK

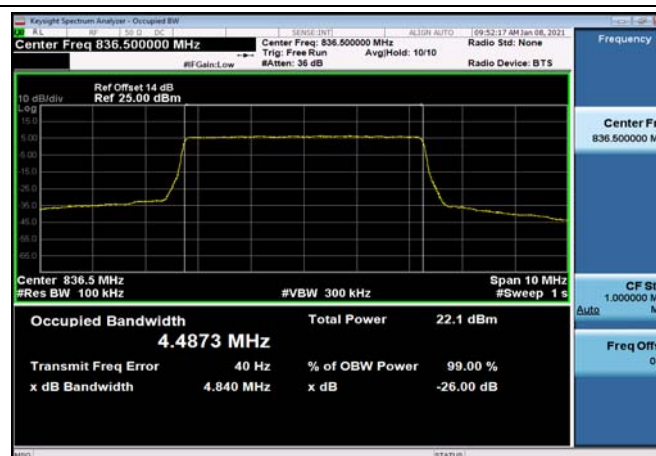

FDD05_MidRange_5MHz_836.5MHz_Q16

