

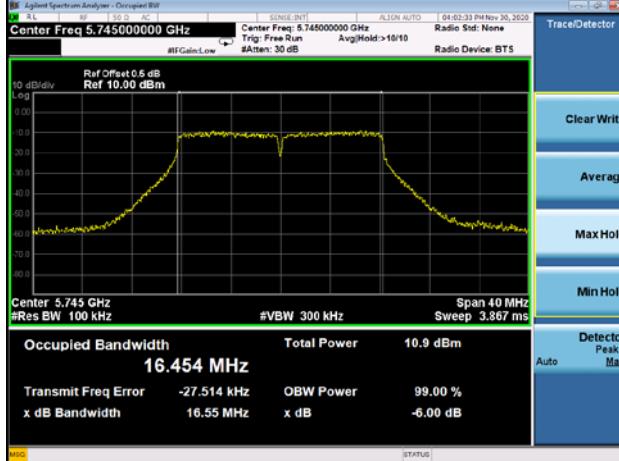


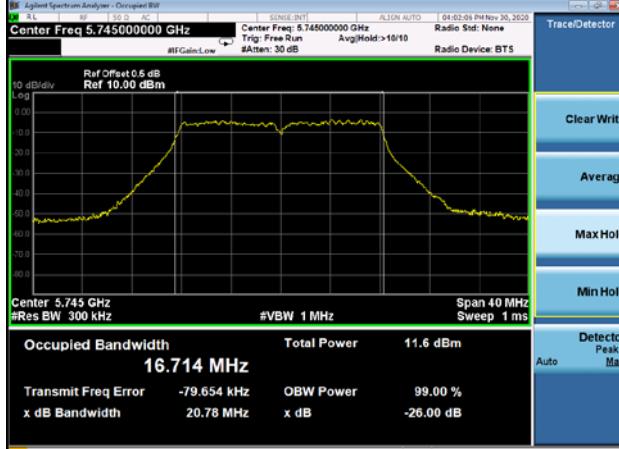


5725-5850MHz


Mode:	802.11a
5745MHz 6dB bandwidth	 <p>Occupied Bandwidth: 16.454 MHz Transmit Freq Error: -27.514 kHz x dB Bandwidth: 16.55 MHz Total Power: 10.9 dBm OBW Power: 99.00 % x dB: -6.00 dB</p>
5745MHz 99% bandwidth	 <p>Occupied Bandwidth: 16.714 MHz Transmit Freq Error: -79.654 kHz x dB Bandwidth: 20.78 MHz Total Power: 11.6 dBm OBW Power: 99.00 % x dB: -26.00 dB</p>
5785MHz 6dB bandwidth	 <p>Occupied Bandwidth: 16.446 MHz Transmit Freq Error: -34.950 kHz x dB Bandwidth: 16.56 MHz Total Power: 11.6 dBm OBW Power: 99.00 % x dB: -6.00 dB</p>

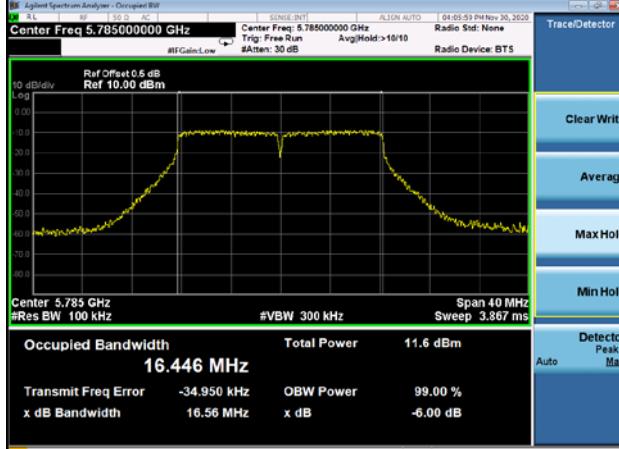


5785MHz  
99% bandwidth

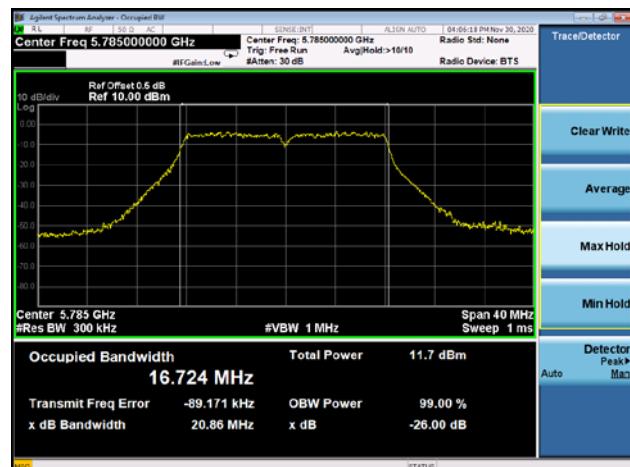

5825MHz  
6dB bandwidth

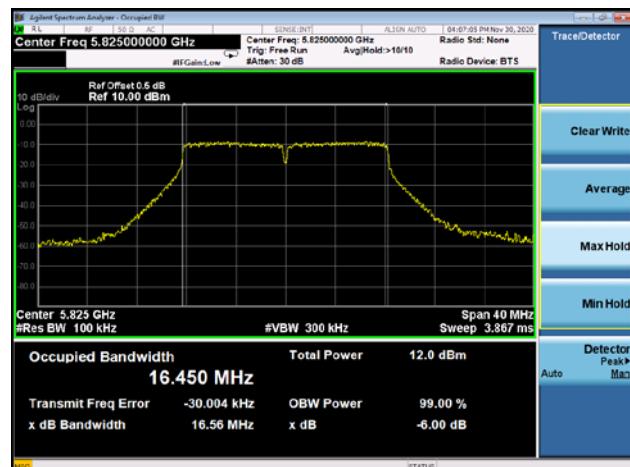

5825MHz  
99% bandwidth

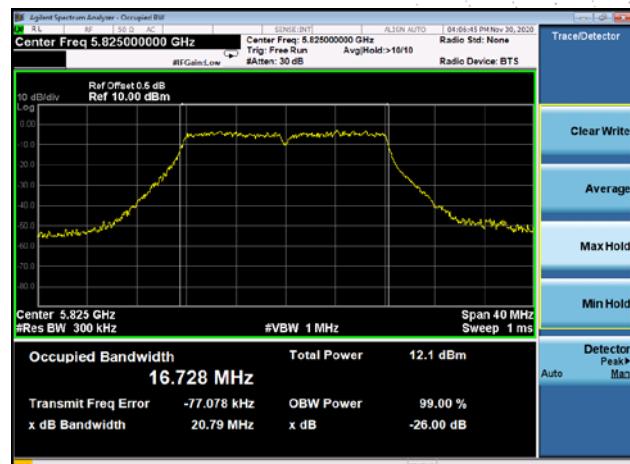





Mode:	802.11n-HT20
5745MHz 6dB bandwidth	 <p>Ref Offset 0.5 dB Ref 10.00 dBm</p> <p>Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.367 ms</p> <p>Occupied Bandwidth 17.621 MHz Total Power 8.73 dBm</p> <p>Transmit Freq Error -10.814 kHz OBW Power 99.00 % x dB Bandwidth 17.72 MHz x dB -6.00 dB</p> <p>Trace/Detector Clear Write Average Max Hold Min Hold Detector Peak&gt; Max Auto</p>
5745MHz 99% bandwidth	 <p>Ref Offset 0.5 dB Ref 10.00 dBm</p> <p>Center 5.745 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 17.746 MHz Total Power 8.62 dBm</p> <p>Transmit Freq Error -13.187 kHz OBW Power 99.00 % x dB Bandwidth 21.41 MHz x dB -26.00 dB</p> <p>Trace/Detector Clear Write Average Max Hold Min Hold Detector Peak&gt; Max Auto</p>
5785MHz 6dB bandwidth	 <p>Ref Offset 0.5 dB Ref 10.00 dBm</p> <p>Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.367 ms</p> <p>Occupied Bandwidth 17.618 MHz Total Power 9.53 dBm</p> <p>Transmit Freq Error -22.519 kHz OBW Power 99.00 % x dB Bandwidth 17.69 MHz x dB -6.00 dB</p> <p>Trace/Detector Clear Write Average Max Hold Min Hold Detector Peak&gt; Max Auto</p>




5785MHz  
99% bandwidth

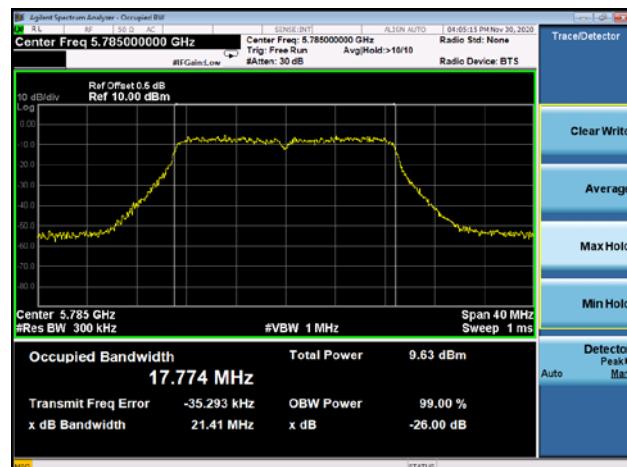

5825MHz  
6dB bandwidth

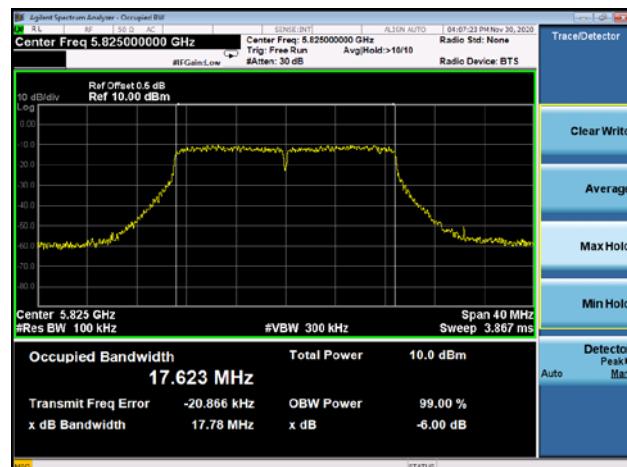


5825MHz  
99% bandwidth



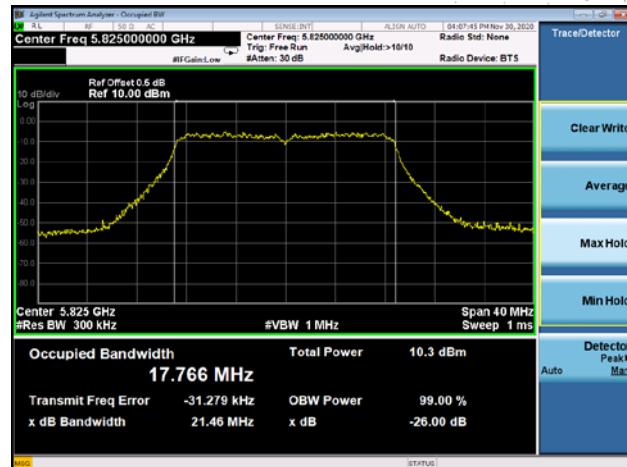




Mode:	802.11n-HT40
5755 MHz 6dB bandwidth	 <p>Occupied Bandwidth: 36.198 MHz Total Power: 11.8 dBm Transmit Freq Error: -4.729 kHz x dB Bandwidth: 36.55 MHz OBW Power: 99.00 % x dB: -6.00 dB</p>
5755 MHz 99% bandwidth	 <p>Occupied Bandwidth: 36.964 MHz Total Power: 12.6 dBm Transmit Freq Error: 6.687 kHz x dB Bandwidth: 43.94 MHz OBW Power: 99.00 % x dB: -26.00 dB</p>
5795 MHz 6dB bandwidth	 <p>Occupied Bandwidth: 36.223 MHz Total Power: 12.1 dBm Transmit Freq Error: -16.211 kHz x dB Bandwidth: 36.58 MHz OBW Power: 99.00 % x dB: -6.00 dB</p>

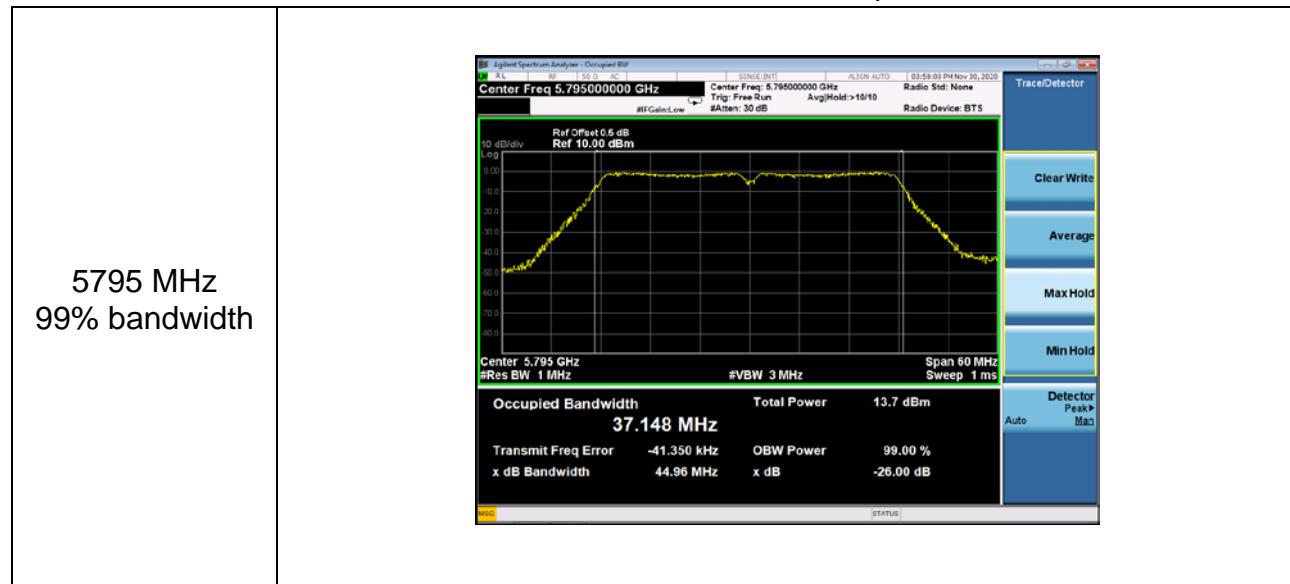

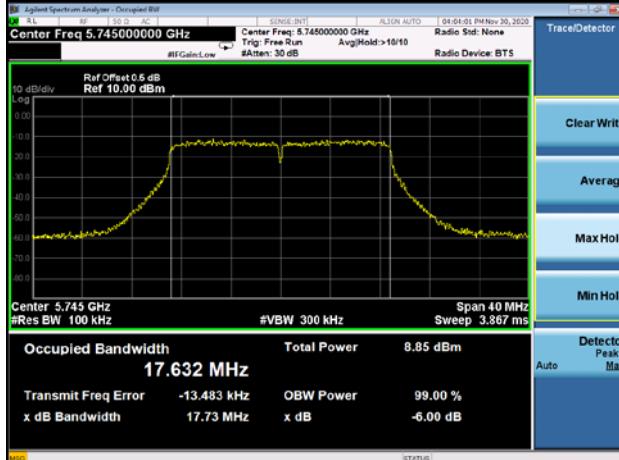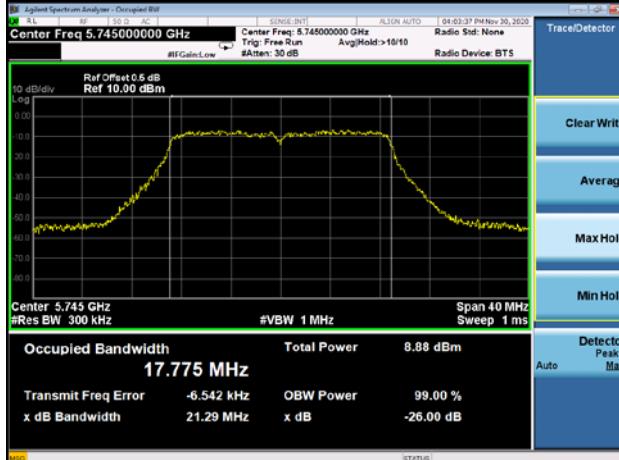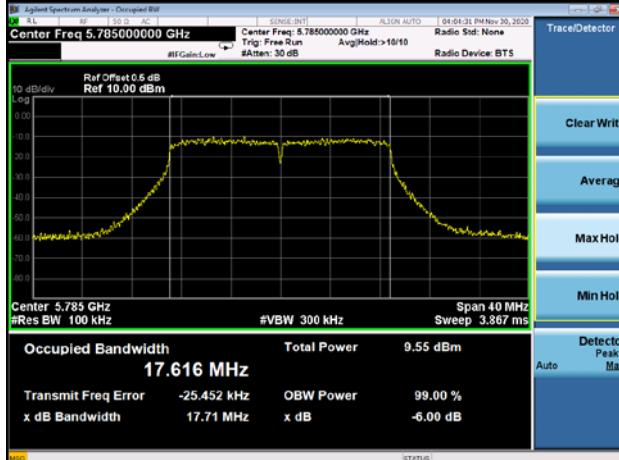


Mode:	802.11ac-HT20
5745MHz 6dB bandwidth	 <p>Occupied Bandwidth <b>17.632 MHz</b></p> <p>Total Power <b>8.85 dBm</b></p> <p>Transmit Freq Error <b>-13.483 kHz</b></p> <p>x dB Bandwidth <b>17.73 MHz</b></p> <p>OBW Power <b>99.00 %</b></p> <p>x dB <b>-6.00 dB</b></p>
5745MHz 99% bandwidth	 <p>Occupied Bandwidth <b>17.775 MHz</b></p> <p>Total Power <b>8.88 dBm</b></p> <p>Transmit Freq Error <b>-6.542 kHz</b></p> <p>x dB Bandwidth <b>21.29 MHz</b></p> <p>OBW Power <b>99.00 %</b></p> <p>x dB <b>-26.00 dB</b></p>
5785MHz 6dB bandwidth	 <p>Occupied Bandwidth <b>17.616 MHz</b></p> <p>Total Power <b>9.55 dBm</b></p> <p>Transmit Freq Error <b>-25.452 kHz</b></p> <p>x dB Bandwidth <b>17.71 MHz</b></p> <p>OBW Power <b>99.00 %</b></p> <p>x dB <b>-6.00 dB</b></p>




5785MHz  
99% bandwidth



5825MHz  
6dB bandwidth

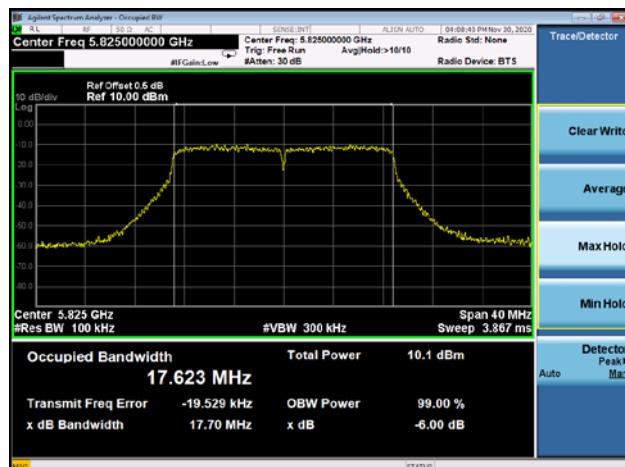

5825MHz  
99% bandwidth

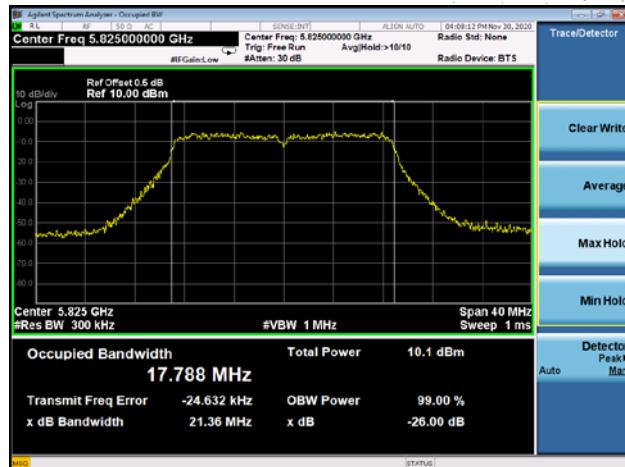





Mode:

802.11ac-HT40


5755 MHz  
6dB bandwidth



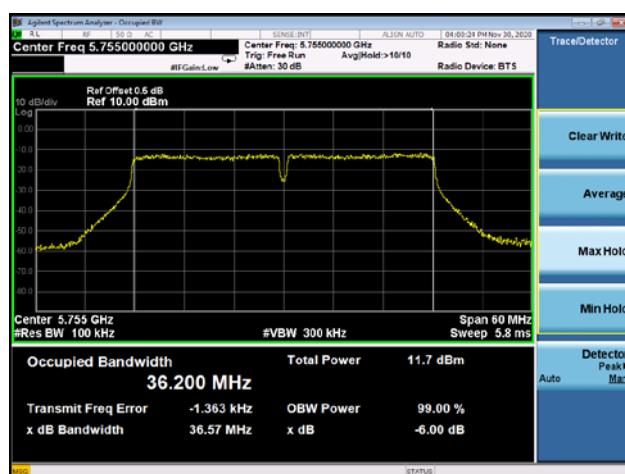


5755 MHz  
99% bandwidth

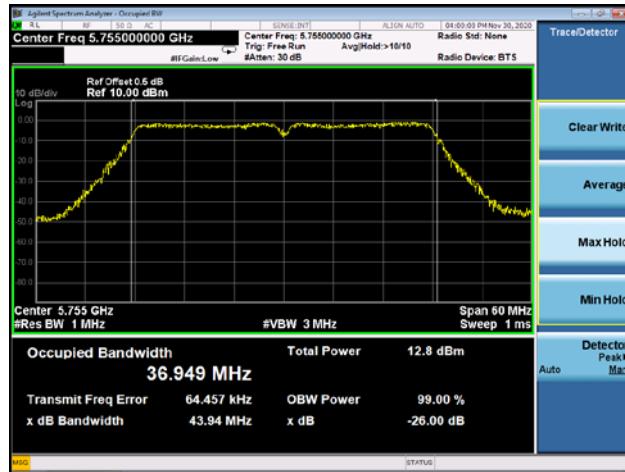

5795 MHz  
6dB bandwidth

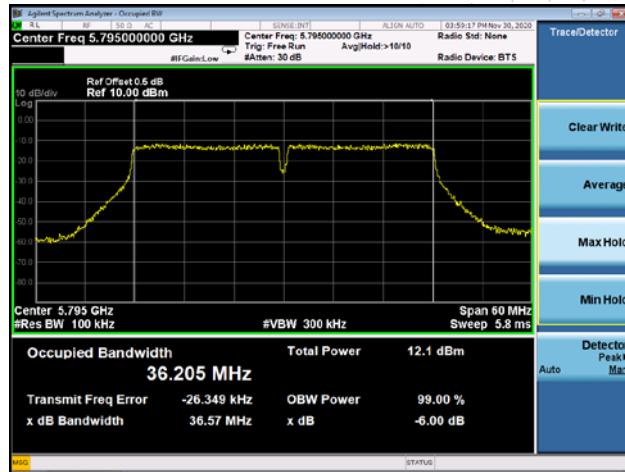

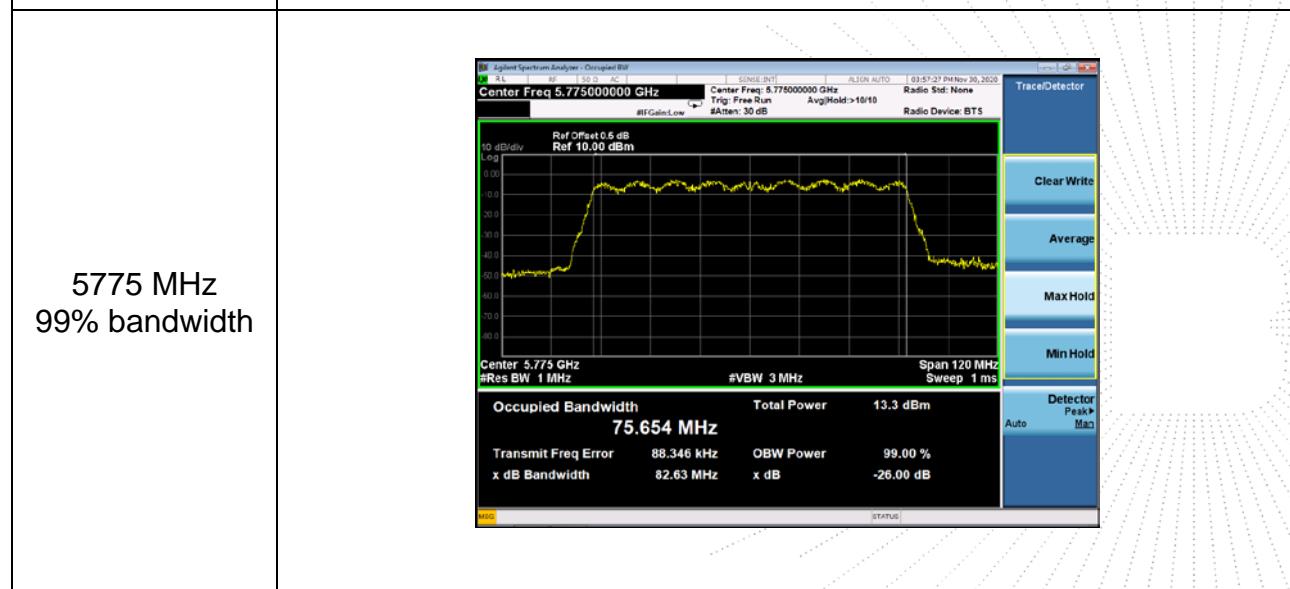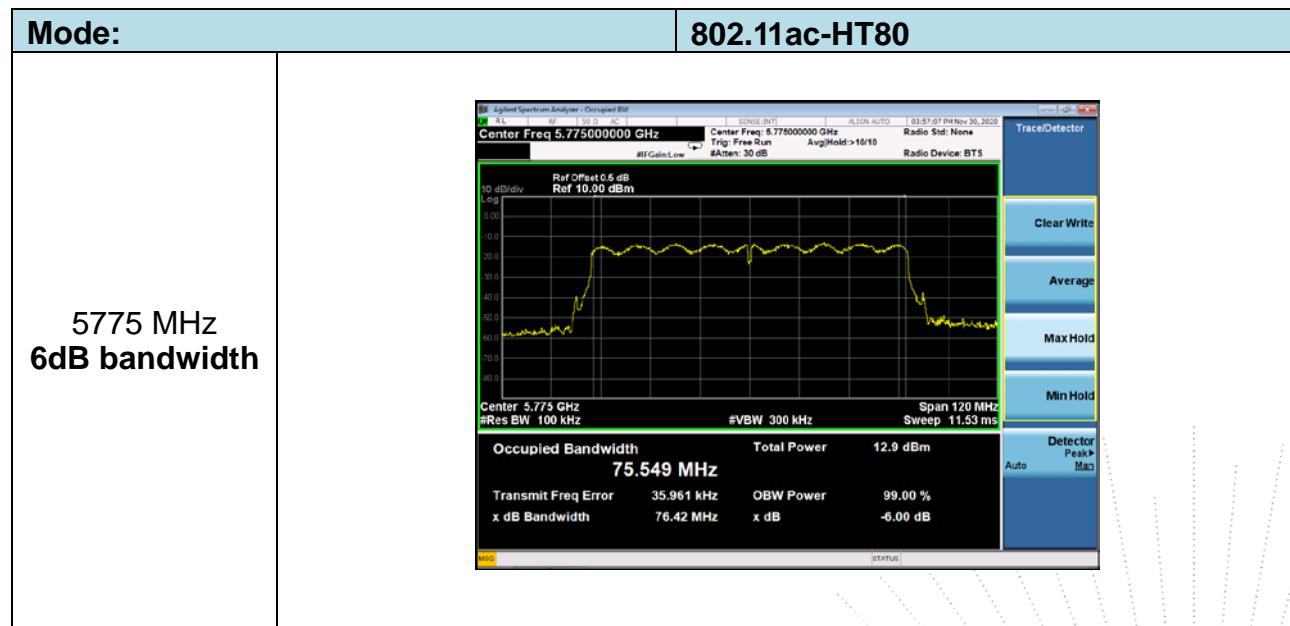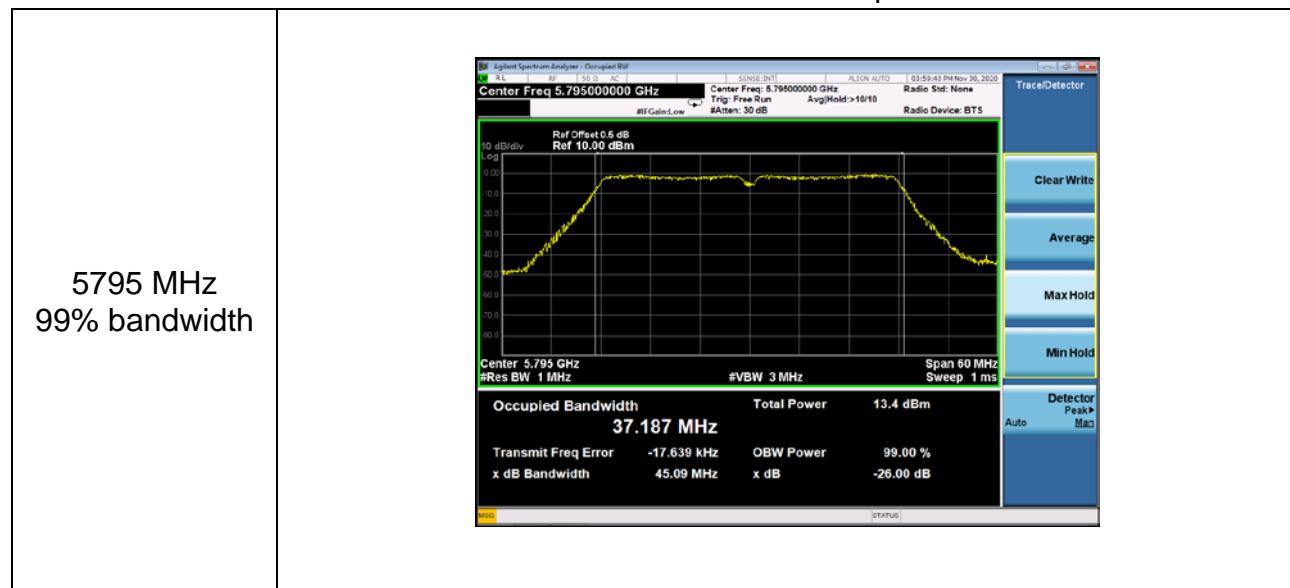

## 10. MAXIMUM CONDUCTED OUTPUT POWER

### 10.1 Block Diagram Of Test Setup



### 10.2 Limit

#### According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

### 10.3 Test procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

#### 1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

#### 2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.<sup>1</sup> However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle  $\geq$  98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be

averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration  $T$  of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2$  percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW  $\geq$  3 MHz.

(iv) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle  $<$  98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq$  98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

## 10.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 10.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Test Channel	Frequency (MHz)	Maximum output power. Antenna port (AV)	LIMIT	Result
		(dBm)		
<b>TX 802.11a Mode</b>				
CH36	5180	6.929	23.98	Pass
CH40	5200	6.508	23.98	Pass
CH48	5240	6.404	23.98	Pass
<b>TX 802.11 n20M Mode</b>				
CH36	5180	5.922	23.98	Pass
CH40	5200	5.516	23.98	Pass
CH48	5240	5.367	23.98	Pass
<b>TX 802.11 n40M Mode</b>				
CH38	5190	6.566	23.98	Pass
CH46	5230	5.680	23.98	Pass
<b>TX 802.11 AC20M Mode</b>				
CH36	5180	5.952	23.98	Pass
CH40	5200	5.837	23.98	Pass
CH48	5240	5.903	23.98	Pass
<b>TX 802.11 AC40M Mode</b>				
CH38	5190	6.514	23.98	Pass
CH46	5230	5.415	23.98	Pass
<b>TX 802.11 AC80M Mode</b>				
CH42	5210	5.427	23.98	Pass



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.8G) Mode Frequency U-NII-3 (5745-5825MHz)		

Test Channel	Frequency	Maximum output power. Antenna port (AV)	LIMIT	Result
	(MHz)	(dBm)		
<b>TX 802.11a Mode</b>				
CH 149	5745	5.777	30	Pass
CH 157	5785	5.339	30	Pass
CH 165	5825	5.547	30	Pass
<b>TX 802.11 n20M Mode</b>				
CH 149	5745	5.380	30	Pass
CH 157	5785	5.922	30	Pass
CH 165	5825	5.662	30	Pass
<b>TX 802.11 n40M Mode</b>				
CH 151	5755	5.496	30	Pass
CH 159	5795	5.675	30	Pass
<b>TX 802.11 AC20M Mode</b>				
CH 149	5745	5.531	30	Pass
CH 157	5785	4.078	30	Pass
CH 165	5825	4.645	30	Pass
<b>TX 802.11 AC40M Mode</b>				
CH 151	5755	4.203	30	Pass
CH 159	5795	4.667	30	Pass
<b>TX 802.11 AC80M Mode</b>				
CH 155	5775	4.179	30	Pass

## 11. OUT OF BAND EMISSIONS

### 11.1 Block Diagram Of Test Setup



### 11.2 Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

### 11.3 Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 11.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data




## 11.5 Test Result


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.8V

## 5.180~5.240 GHz


(802.11a) Band Edge, Left Side

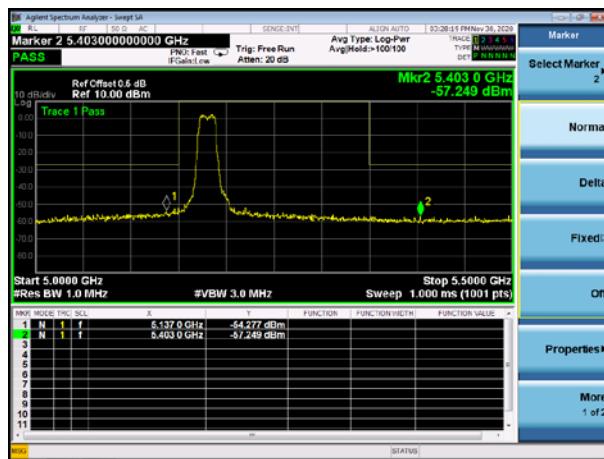


(802.11n20) Band Edge, Left Side

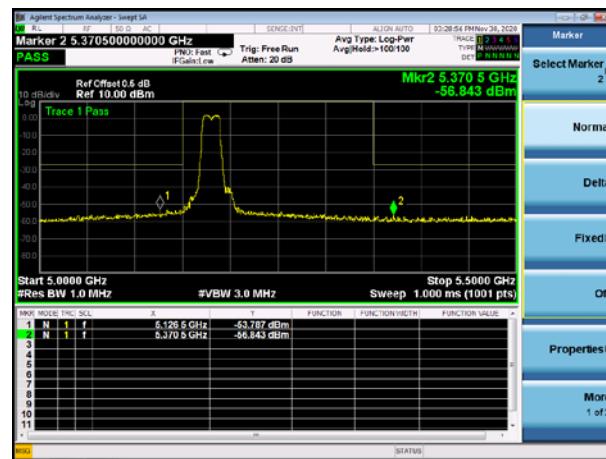

(802.11a) Band Edge, Right Side

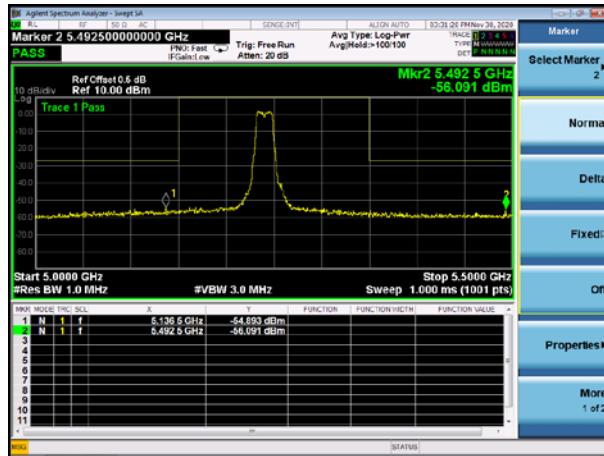


(802.11n20) Band Edge, Right Side

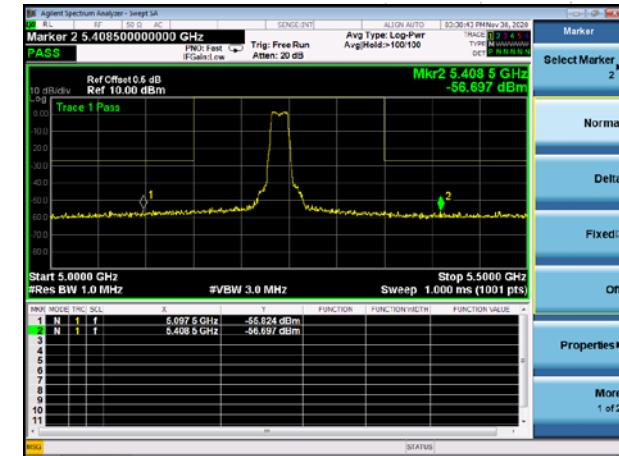




## 5.180~5.240 GHz


(802.11n40) Band Edge, Left Side

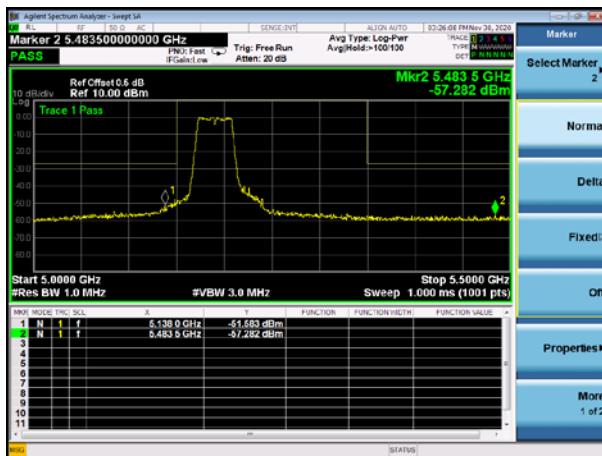


(802.11ac20) Band Edge, Left Side

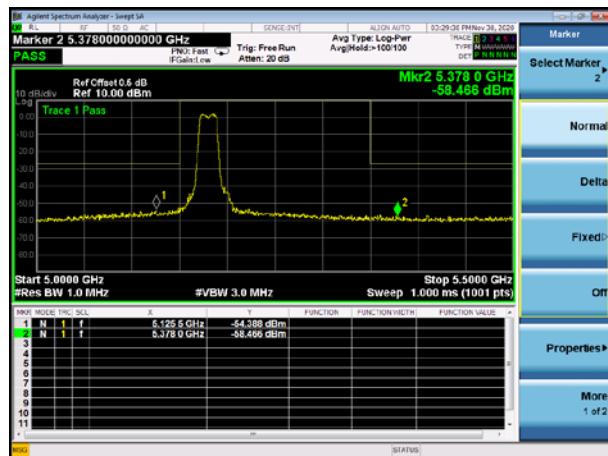

(802.11n40) Band Edge, Right Side

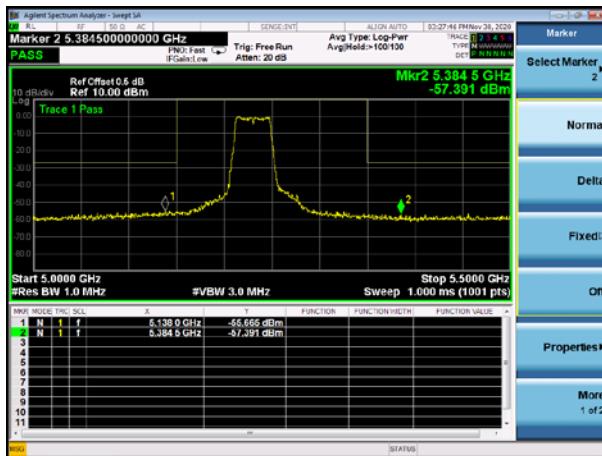



(802.11ac20) Band Edge, Right Side

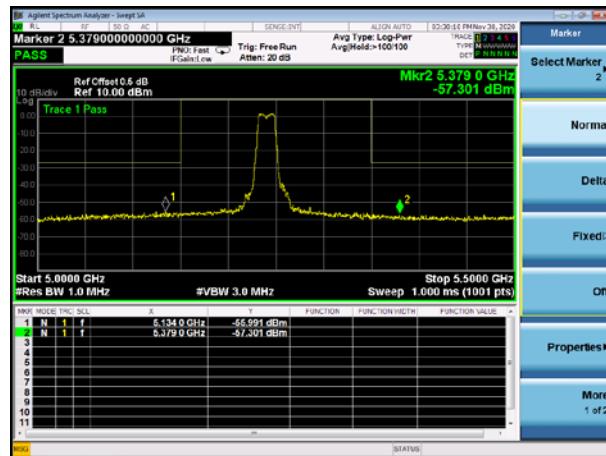





## 5.180~5.240 GHz

(802.11ac40) Band Edge, Left Side

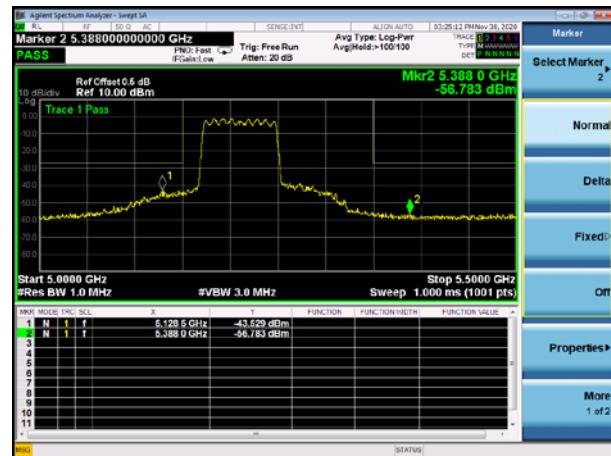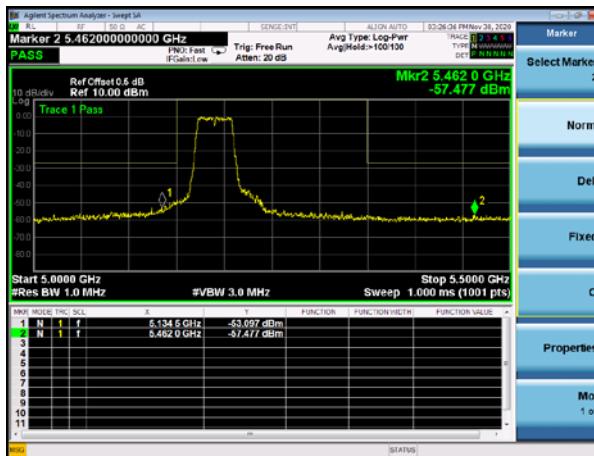



(802.11ac40) Band Edge, Right Side

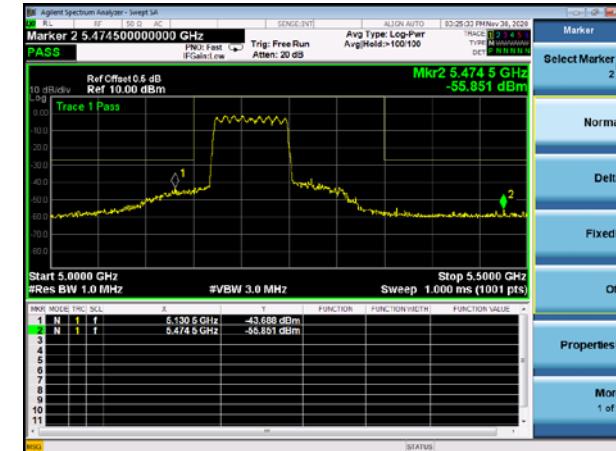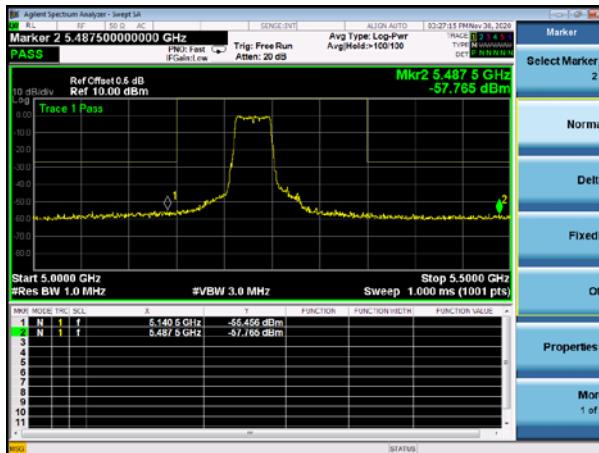





## 5.745~5.825 GHz

(802.11a) Band Edge, Left Side

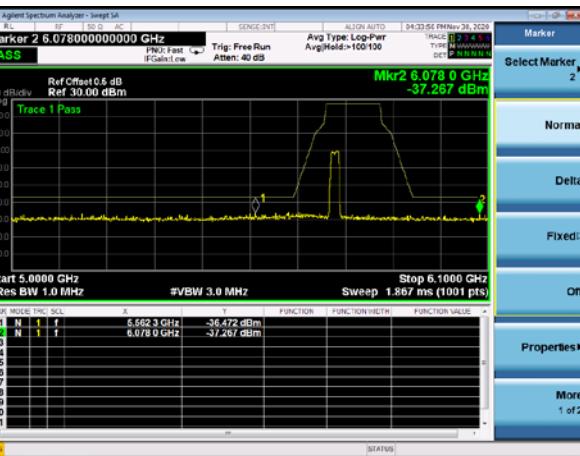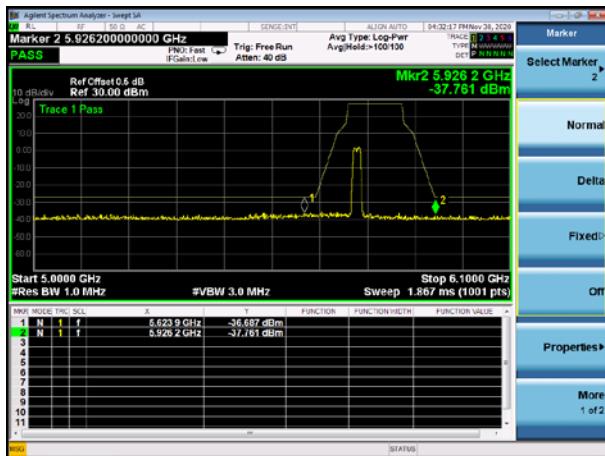



(802.11a) Band Edge, Right Side

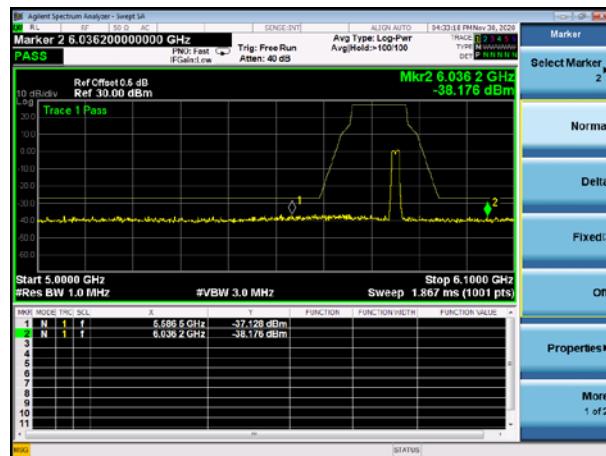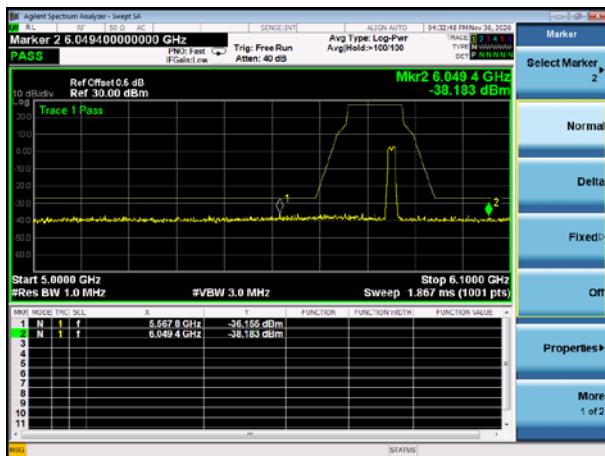





## 5.745~5.825 GHz

(802.11n40) Band Edge, Left Side

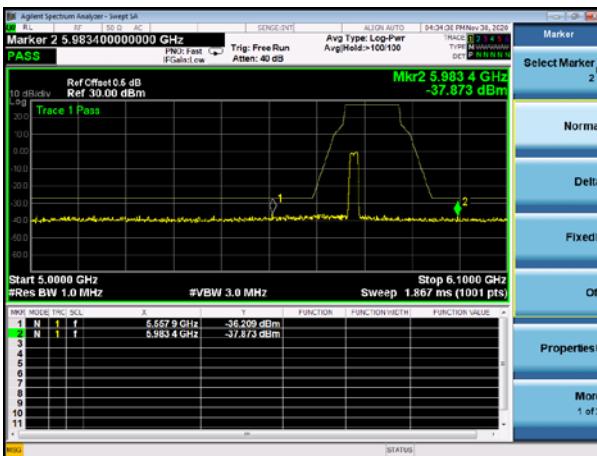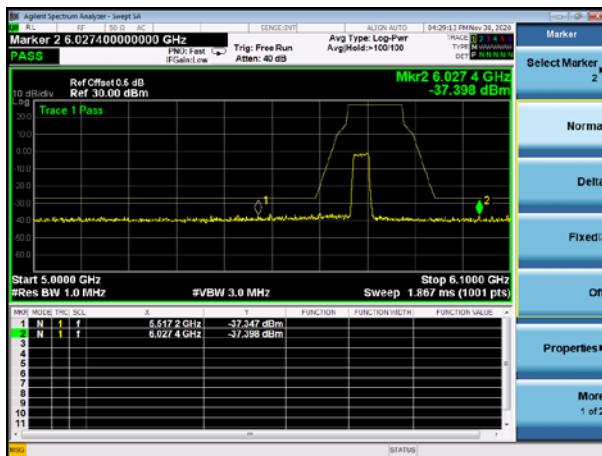


(802.11n40) Band Edge, Right Side

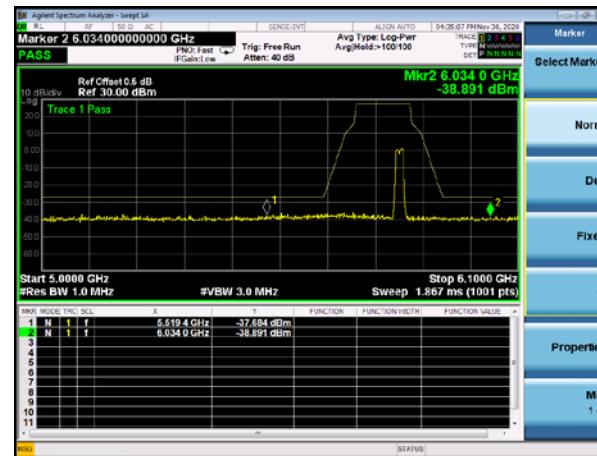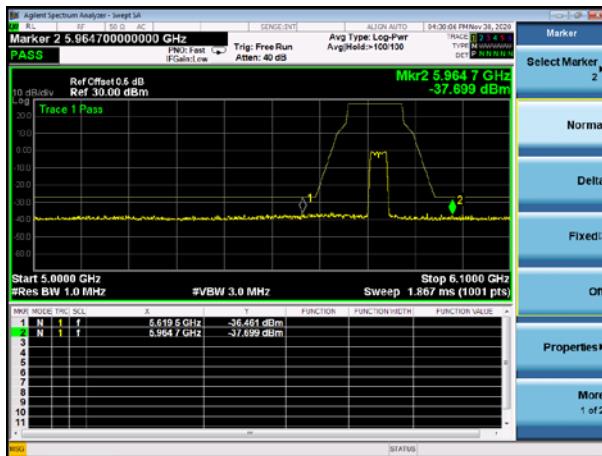




## 5.745~5.825 GHz


(802.11ac40) Band Edge, Left Side

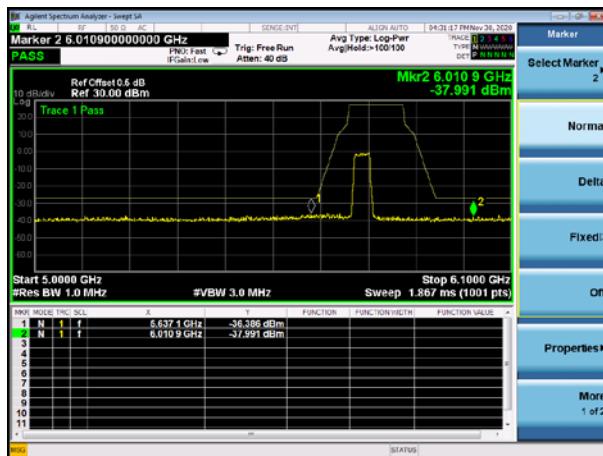


(802.11ac80) Band Edge, Left Side

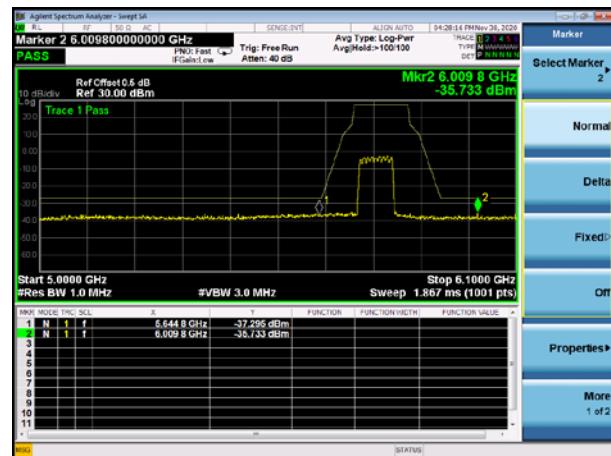

(802.11ac40) Band Edge, Right Side

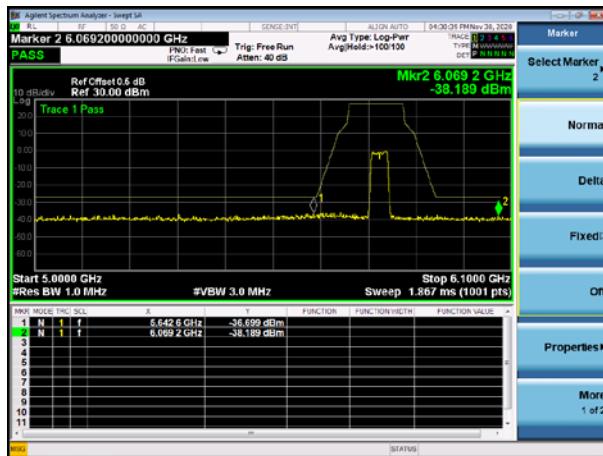

(802.11ac80) Band Edge, Right Side

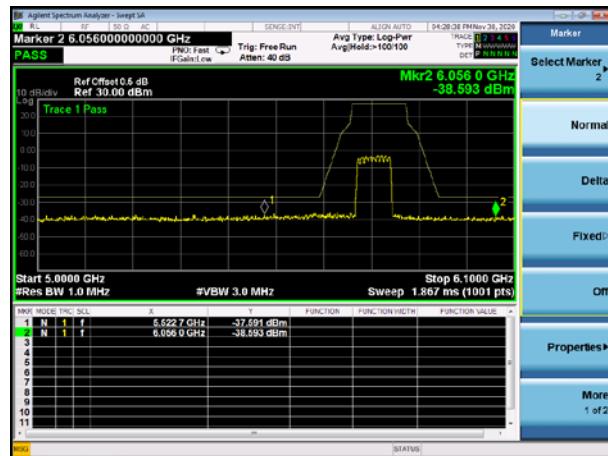

## 12. SPURIOUS RF CONDUCTED EMISSIONS

### 12.1 Block Diagram Of Test Setup



### 12.2 Limit

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge..


### 12.3 Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

## 12.4 Test Result

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

About:26.5GHz-40GHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

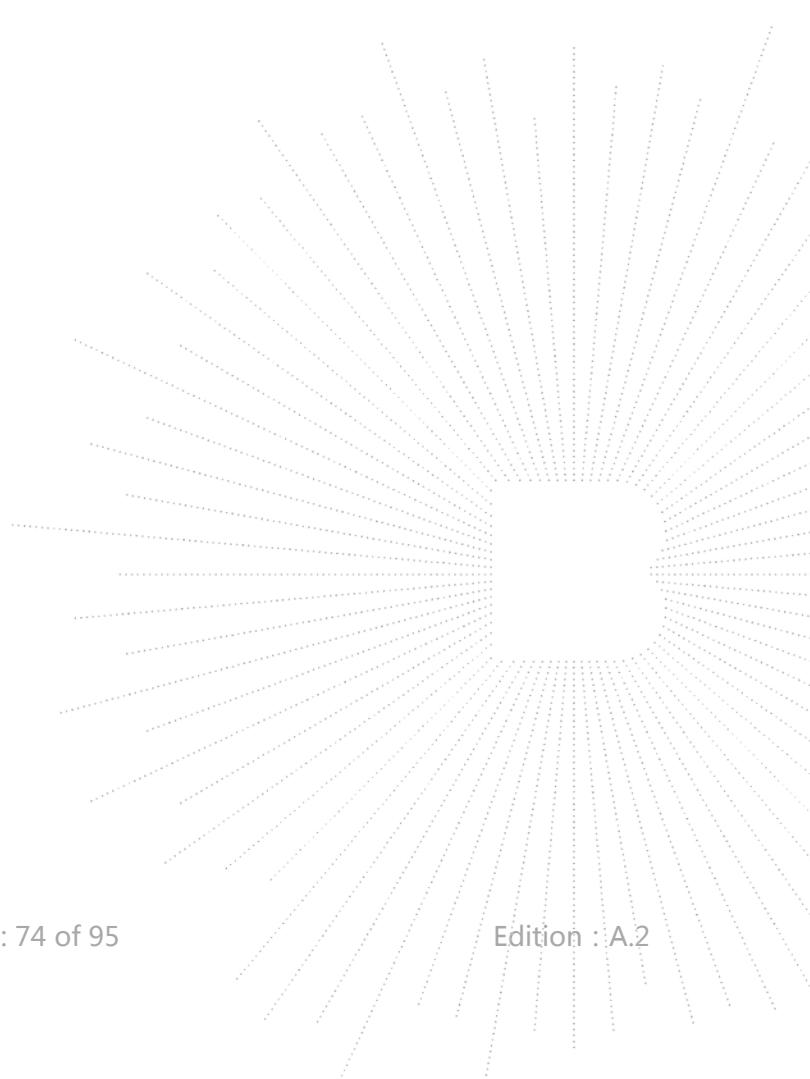




5.1G

## Test Plot


802.11a on channel 36




802.11a on channel 40

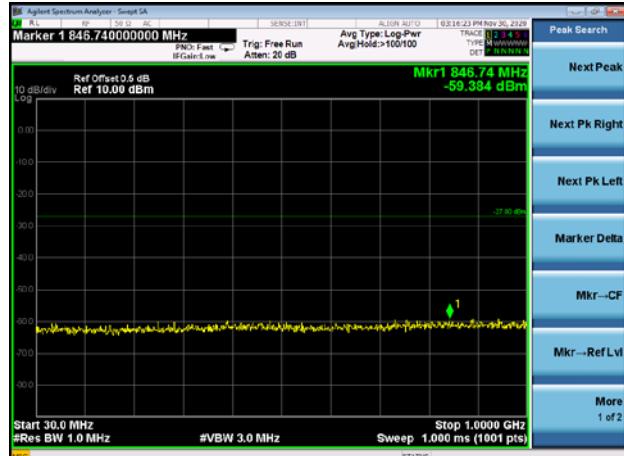


802.11a on channel 36

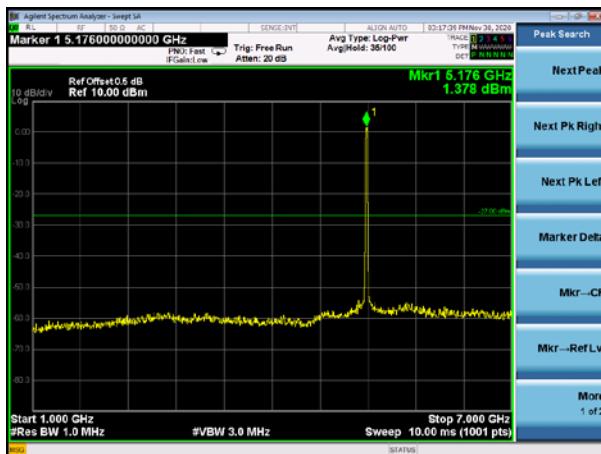


802.11a on channel 40

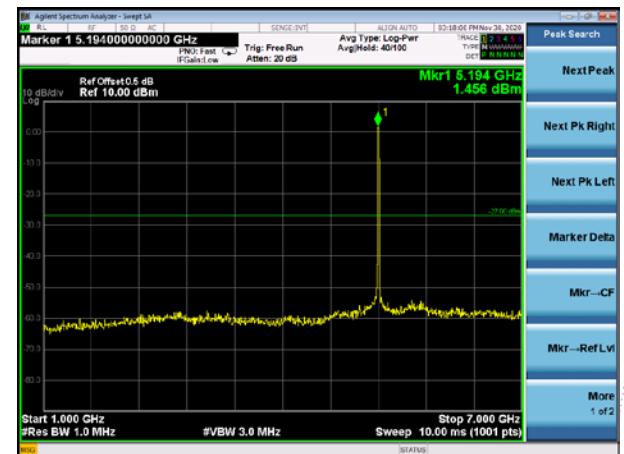

802.11a on channel 36

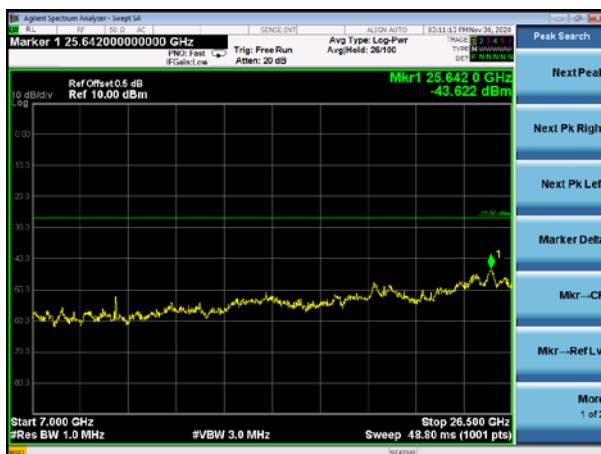


802.11a on channel 40

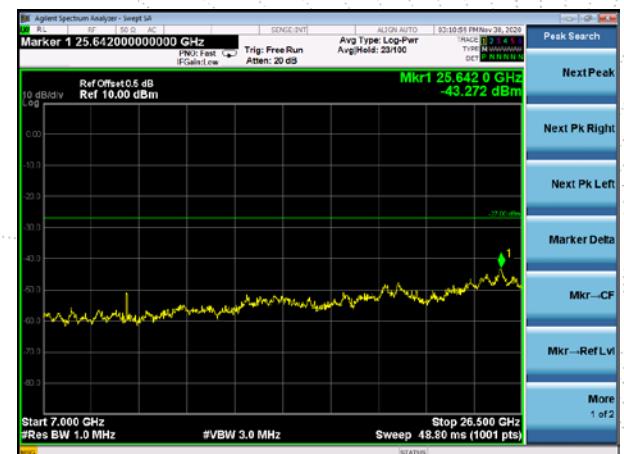




## Test Plot


802.11a on channel 48

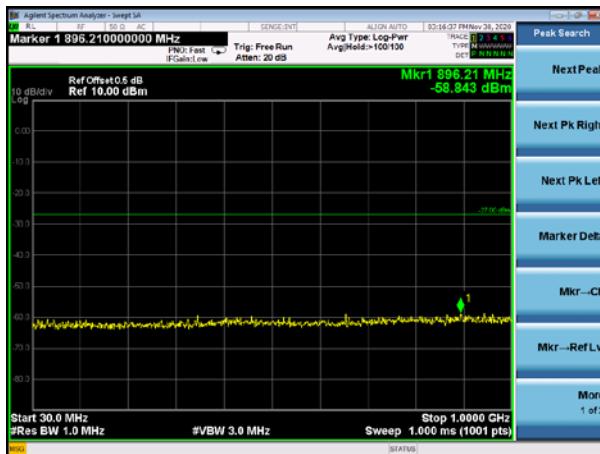


802.11n20 on channel 36

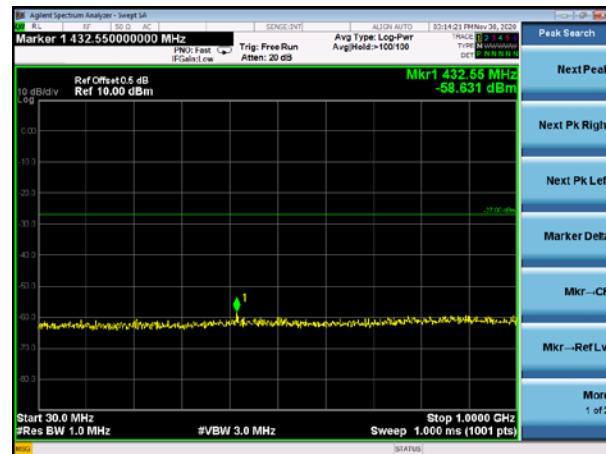


802.11a on channel 48

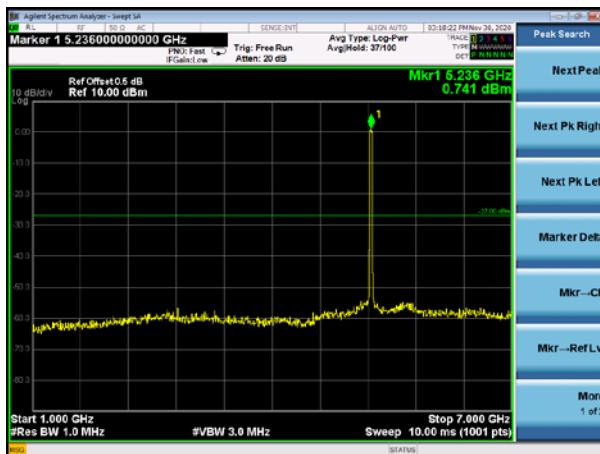

802.11n20 on channel 36

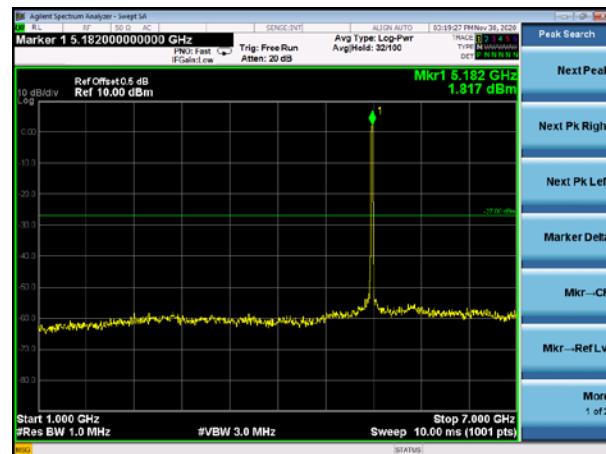

802.11a on channel 48

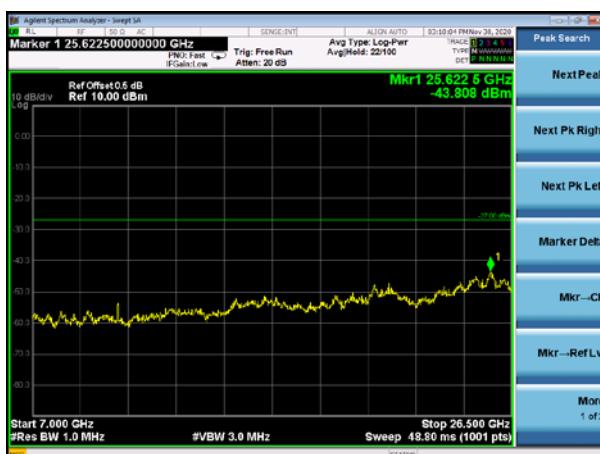

802.11n20 on channel 36

