



Project No:
Report No.:

TM-2112000317P
TMWK2112001513KR

FCC ID: 2A3F5PQS-RD-01

Page: 1 / 53
Rev.: 02

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

Test Standard	FCC Part 15.247
Product name	Wireless Temperature Reader
Brand Name	PQSENSE
Model No.	PQS-RD-01
Test Result	Pass
Statements of Conformity	Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc.(Wugu Laboratory)

Approved by:

Dally Hong
Sr. Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: TMWK2112001513KR

Page: 2 / 53

Rev.: 02

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	May 9, 2022	Initial Issue	ALL	Doris Chu
01	May 19, 2022	See the following Note Rev. (01)	P.5, P.20	Doris Chu
02	June 7, 2022	See the following Note Rev. (02)	P.6	Doris Chu

Rev. (01)

1. Modified modulation type (Pseudorandom FH sequence) in section 1.2.
2. Remove $\pm$ in section 4.3.4.

Rev. (02)

1. Revised remark and modified Antenna P/N in section 1.4.



Report No.: TMWK2112001513KR

Page: 3 / 53
Rev.: 02

Table of contents

1. GENERAL INFORMATION	4
1.1 EUT INFORMATION	4
1.2 INFORMATION ABOUT THE FHSS CHARACTERISTICS	5
1.3 EUT CHANNEL INFORMATION.....	6
1.4 ANTENNA INFORMATION.....	6
1.5 MEASUREMENT UNCERTAINTY	7
1.6 FACILITIES AND TEST LOCATION.....	8
1.7 INSTRUMENT CALIBRATION.....	8
1.8 SUPPORT AND EUT ACCESSORIES EQUIPMENT	10
1.9 TEST METHODOLOGY AND APPLIED STANDARDS	10
2. TEST SUMMARY	11
3. DESCRIPTION OF TEST MODES	12
3.1 THE WORST MODE OF OPERATING CONDITION.....	12
3.2 THE WORST MODE OF MEASUREMENT	13
4. TEST RESULT.....	14
4.1 AC POWER LINE CONDUCTED EMISSION	14
4.2 20DB BANDWIDTH.....	17
4.3 OUTPUT POWER MEASUREMENT	20
4.4 FREQUENCY SEPARATION.....	21
4.5 NUMBER OF HOPPING.....	24
4.6 CONDUCTED BANDEGE AND SPURIOUS EMISSION.....	26
4.7 TIME OF OCCUPANCY (DWELL TIME)	30
4.8 RADIATION BANDEGE AND SPURIOUS EMISSION	32
APPENDIX 1 - PHOTOGRAPHS OF EUT	



Report No.: TMWK2112001513KR

Page: 4 / 53

Rev.: 02

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	PQSense Technology Ltd. 8F, No.110, Keelung Rd. Section 2, Daan Dist. ,Taipei City ,106 ,Taiwan
Manufacturer	PQSense Technology Ltd. 8F, No.110, Keelung Rd. Section 2, Daan Dist. ,Taipei City ,106 ,Taiwan
Equipment	Wireless Temperature Reader
Model Name	PQS-RD-01
Model Discrepancy	N/A
Received Date	March 3, 2022
Date of Test	March 22 ~ 31, 2022
Power Operation	Power from power supply. (AC 85~265V)

Remark:

1. For more details, please refer to the User's manual of the EUT.
2. Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.



1.2 INFORMATION ABOUT THE FHSS CHARACTERISTICS

1.2.1 Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 50 channels. The hopping sequence is generated by random selecting from predefined RFID channels. The channel is dividing into time slots where each slot corresponds to a hop channel.

1.2.2 Equal Hopping Frequency Use

The channels of the system will be used equally over the long-term period, due to the nature of random selecting principle.

1.2.3 System Receiver Input Bandwidth

Each channel bandwidth is 500kHz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequency in synchronization with the transmitted signals.

1.2.4 Equipment Description

The system receiver get the channel frequency from transmitter when sending out signal, it then adjust the receiving shift frequency accordingly.

1.3 EUT CHANNEL INFORMATION

Frequency Range	902MHz ~ 928MHz
Modulation Type	Pseudorandom FH sequence of PR_ASK/Miller4.250
Number of channel	50 Channels

Remark:

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
☐ 1 MHz or less	1	Middle
☐ 1 MHz to 10 MHz	2	1 near top and 1 near bottom
☒ More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.4 ANTENNA INFORMATION

Antenna Type	☐ PIFA ☐ PCB ☐ Dipole ☒ UHF RFID Antenna
Antenna Gain	Gain: 4 dBi
Antenna Connector	SMA Male
Antenna P/N	PQS-AN-11

Remark:

- The Antenna of the EUT, applicant claimed, requires Professional Installation. The compliance 15.203 can be given through the evaluation fact under user manual.



Report No.: TMWK2112001513KR

Page: 7 / 53

Rev.: 02

1.5 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~1G (Horizontally)	+/- 3.91
3M Semi Anechoic Chamber / 30M~1G (Vertically)	+/- 4.57
3M Semi Anechoic Chamber / 1G~6G	+/- 5.20
3M Semi Anechoic Chamber / 6G~18G	+/- 5.18
3M Semi Anechoic Chamber / 18G~40G	+/- 3.68

Remark:

- 1.This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report



Report No.: TMWK2112001513KR

Page: 8 / 53

Rev.: 02

1.6 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan. (R.O.C.)

CAB identifier: TW1309

Test site	Test Engineer	Remark
AC Conduction Room	Jack Chen	-
Radiation	Ray Li	-
RF Conducted	Marco Chan	-

Remark: The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.7 INSTRUMENT CALIBRATION

Conduction (AC power line Conducted Test Site)					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
CABLE	EMCI	CFD300-NL	CERF	06/28/2021	06/27/2022
EMI Test Receiver	R&S	ESCI	100064	07/05/2021	07/04/2022
LISN	SCHAFFNER	NNB 41	03/10013	02/15/2022	02/14/2023
Software	EZ-EMC(CCS-3A1-CE-wugu)				

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
EXA Signal Analyzer	KEYSIGHT	N9010B	MY55460167	09/07/2021	09/06/2022
Software	N/A				

Report No.: TMWK2112001513KR

Page: 9 / 53

Rev.: 02

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Bilog Antenna	Sunol Sciences	JB3	A030105	07/19/2021	07/18/2022
Coaxial Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/23/2022	02/22/2023
Coaxial Cable	EMCI	EMC105	190914+1111	09/17/2021	09/16/2022
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	12/28/2021	12/27/2022
Horn Antenna	ETS LINDGREN	3117	00055165	07/29/2021	07/28/2022
Pre-Amplifier	EMEC	EM330	060609	02/23/2022	02/22/2023
Pre-Amplifier	HP	8449B	3008A00965	12/24/2021	12/23/2022
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	12/06/2021	12/05/2022
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180419c				

Remark: Each piece of equipment is scheduled for calibration once a year.



Report No.: TMWK2112001513KR

Page: 10 / 53
Rev.: 02

1.8 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB	TOSHIBA	PORTEGE R30-A	N/A	PD97260H
2	NB	Lenovo	TP0056A	N/A	N/A

1.9 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247.



Report No.: TMWK2112001513KR

Page: 11 / 53

Rev.: 02

2. TEST SUMMARY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207(a)	4.1	AC Conducted Emission	Pass
15.247(a)(1)	4.2	20 dB Bandwidth	Pass
-	4.2	Occupied Bandwidth (99%)	Pass
15.247(b)(2)	4.3	Output Power Measurement	Pass
15.247(a)(1)	4.4	Frequency Separation	Pass
15.247(a)(1)(i)	4.5	Number of Hopping	Pass
15.247(d)	4.6	Conducted Band Edge	Pass
15.247(d)	4.6	Conducted Spurious Emission	Pass
15.247(a)(1)(iii)	4.7	Time of Occupancy	Pass
15.247(d)	4.8	Radiation Band Edge	Pass
15.247(d)	4.8	Radiation Spurious Emission	Pass



Report No.: TMWK2112001513KR

Page: 12 / 53

Rev.: 02

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Test Channel Frequencies	902.75MHz, 914.75MHz, 927.25MHz			
Channel List	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
	1	902.75	26	915.25
	2	903.25	27	915.75
	3	903.75	28	916.25
	4	904.25	29	916.75
	5	904.75	30	917.25
	6	905.25	31	917.75
	7	905.75	32	918.25
	8	906.25	33	918.75
	9	906.75	34	919.25
	10	907.25	35	919.75
	11	907.75	36	920.25
	12	908.25	37	920.75
	13	908.75	38	921.25
	14	909.25	39	921.75
	15	909.75	40	922.25
	16	910.25	41	922.75
	17	910.75	42	923.25
	18	911.25	43	923.75
	19	911.75	44	924.25
	20	912.25	45	924.75
	21	912.75	46	925.25
	22	913.25	47	925.75
	23	913.75	48	926.25
	24	914.25	49	926.75
	25	914.75	50	927.25

3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1: EUT power by AC120V
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT power by AC(120V)
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☐ Placed in fixed position at X-Plane (E2-Plane) ☐ Placed in fixed position at Y-Plane (E1-Plane) ☒ Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by AC(120V)
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, for radiated measurement. The worst case(Z-Plane) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

4. TEST RESULT

4.1 AC POWER LINE CONDUCTED EMISSION

4.1.1 Test Limit

According to §15.207(a),

Frequency Range (MHz)	Limits(dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

4.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

4.1.3 Test Setup

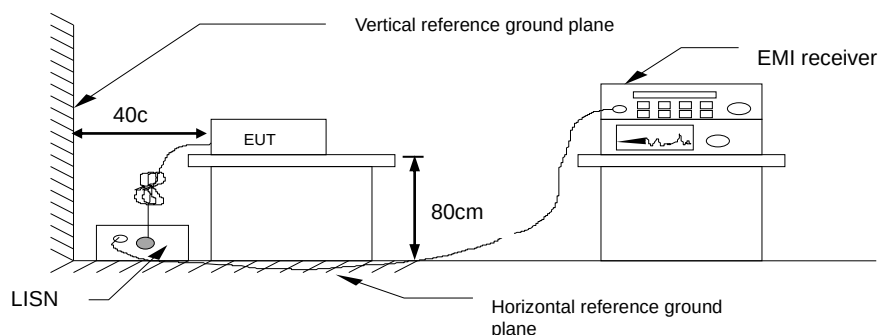


4.1.4 Test Result

PASS

Test Data


Test Mode:	Mode 1	Temp/Hum	23.1(°C)/ 55%RH
Phase:	Line	Test Date	March 22, 2022
		Test Engineer	Jack Chen

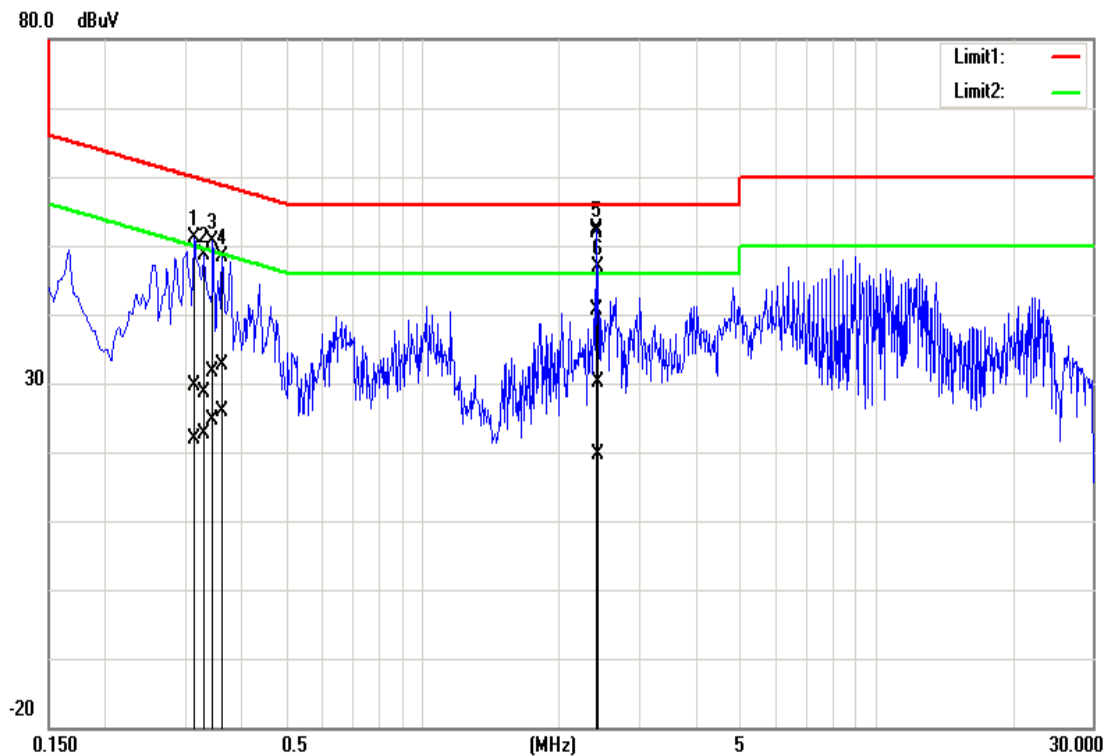

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.3140	19.41	11.65	10.19	29.60	21.84	59.86	49.86	-30.26	-28.02	Pass
0.3300	18.44	12.34	10.19	28.63	22.53	59.45	49.45	-30.82	-26.92	Pass
0.3460	21.45	14.35	10.19	31.64	24.54	59.06	49.06	-27.42	-24.52	Pass
0.3620	22.51	15.57	10.19	32.70	25.76	58.68	48.68	-25.98	-22.92	Pass
2.4140	41.61	30.44	10.25	51.86	40.69	56.00	46.00	-4.14	-5.31	Pass
2.4460	19.96	9.43	10.25	30.21	19.68	56.00	46.00	-25.79	-26.32	Pass

Note: Correction factor = LISN loss + Cable loss.

Test Mode:	Mode 1	Temp/Hum	23.1(°C)/ 55%RH
Phase:	Neutral	Test Date	March 22, 2022
		Test Engineer	Jack Chen

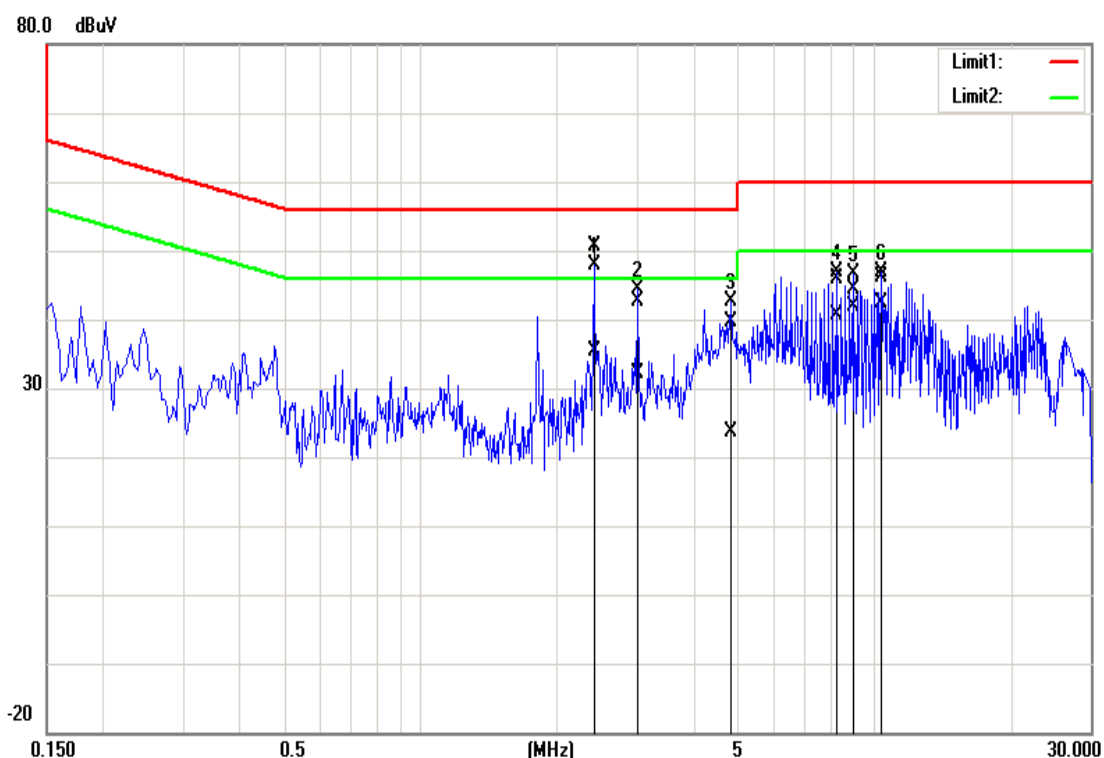

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
2.4180	40.31	25.07	10.23	50.54	35.30	56.00	46.00	-5.46	-10.70	Pass
3.0140	32.36	21.85	10.25	42.61	32.10	56.00	46.00	-13.39	-13.90	Pass
4.8380	29.40	13.34	10.29	39.69	23.63	56.00	46.00	-16.31	-22.37	Pass
8.3140	35.58	30.22	10.34	45.92	40.56	60.00	50.00	-14.08	-9.44	Pass
9.0020	34.09	31.44	10.34	44.43	41.78	60.00	50.00	-15.57	-8.22	Pass
10.3900	35.82	32.00	10.36	46.18	42.36	60.00	50.00	-13.82	-7.64	Pass

Note: Correction factor = LISN loss + Cable loss.

4.2 20dB BANDWIDTH

4.2.1 Test Limit

According to §15.247(a) (1),


20 dB Bandwidth : For reporting purposes only.

4.2.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.9.2, ANSI 63.10:2013 clause 6.9.3

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 1% ~5%, VBW $\geq 3 \times$ RBW and Detector = Peak, to measurement 20 dB Bandwidth and 99% Bandwidth.
4. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.

4.2.3 Test Setup

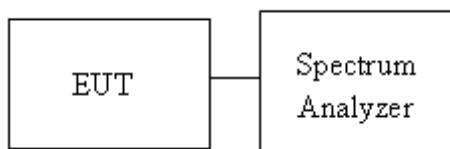

4.2.4 Test Result

Temperature: 20.2 ~ 22.2°C

Test Date: March 22 ~ 23, 2022


Humidity: 60% RH

Test by: Marco Chan


Channel	Frequency (MHz)	OBW (99%) (KHz)	20dB BW (KHz)
Low	902.75	48.240	48.88
Mid	914.75	45.509	47.05
High	927.25	47.285	47.58

Test Data


Low CH

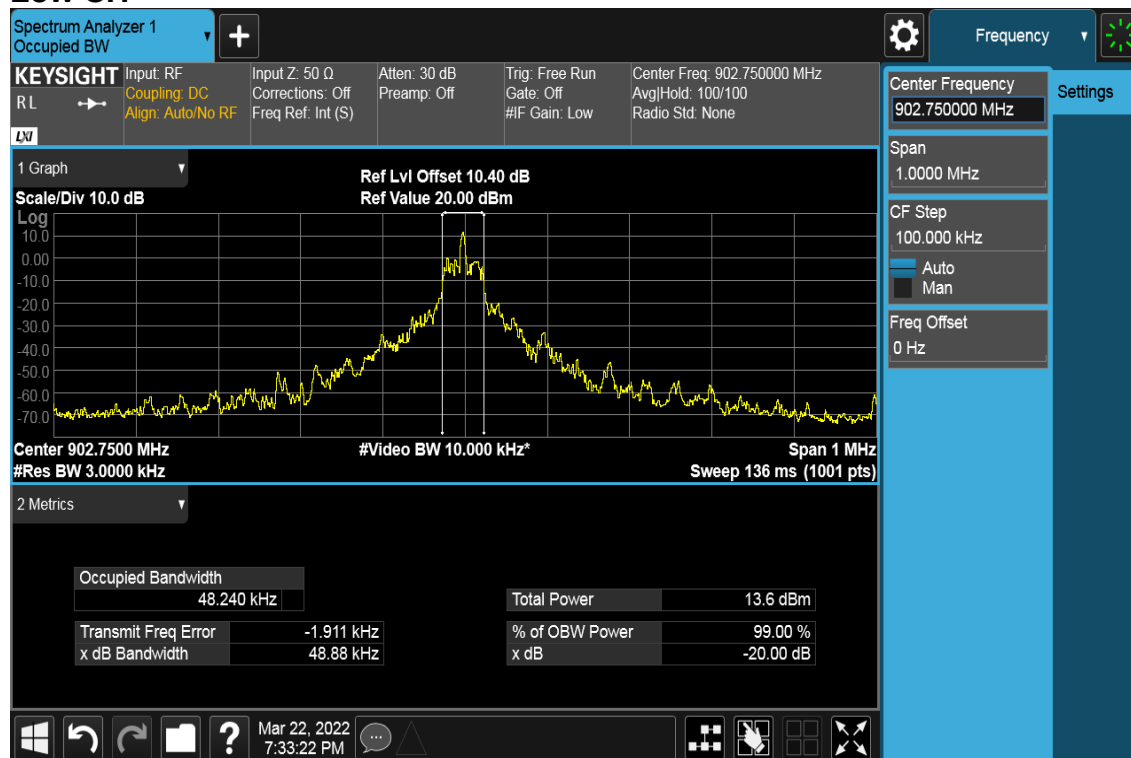

Mid CH

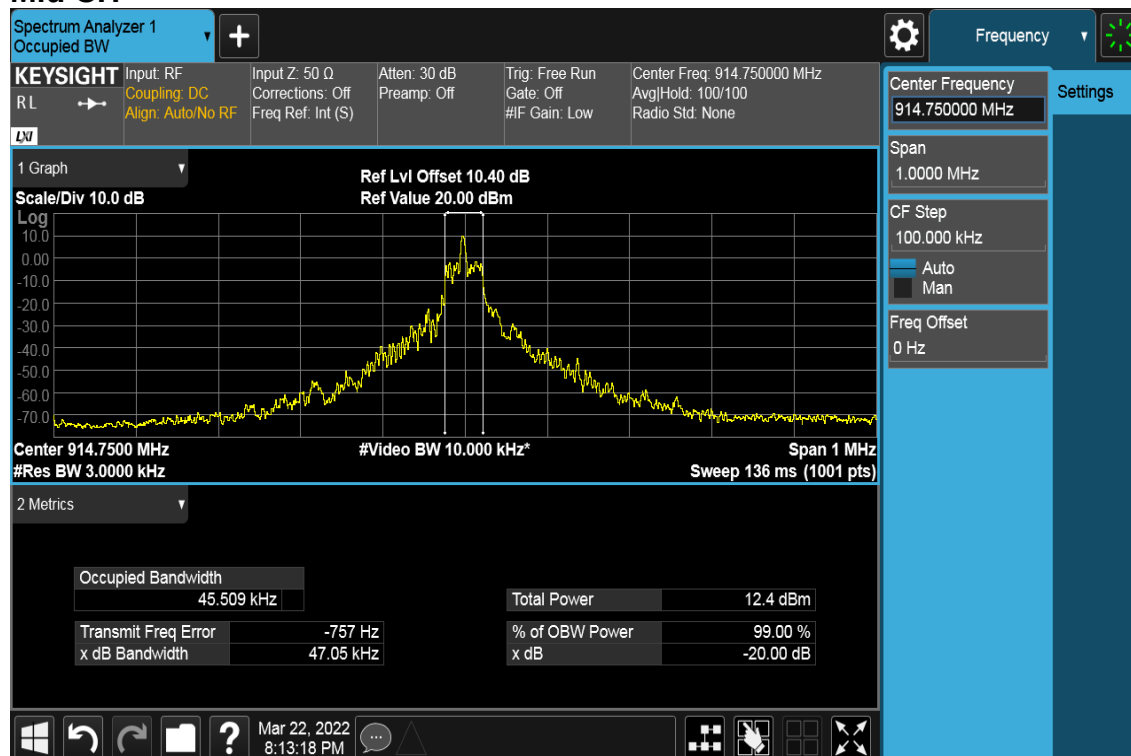

High CH

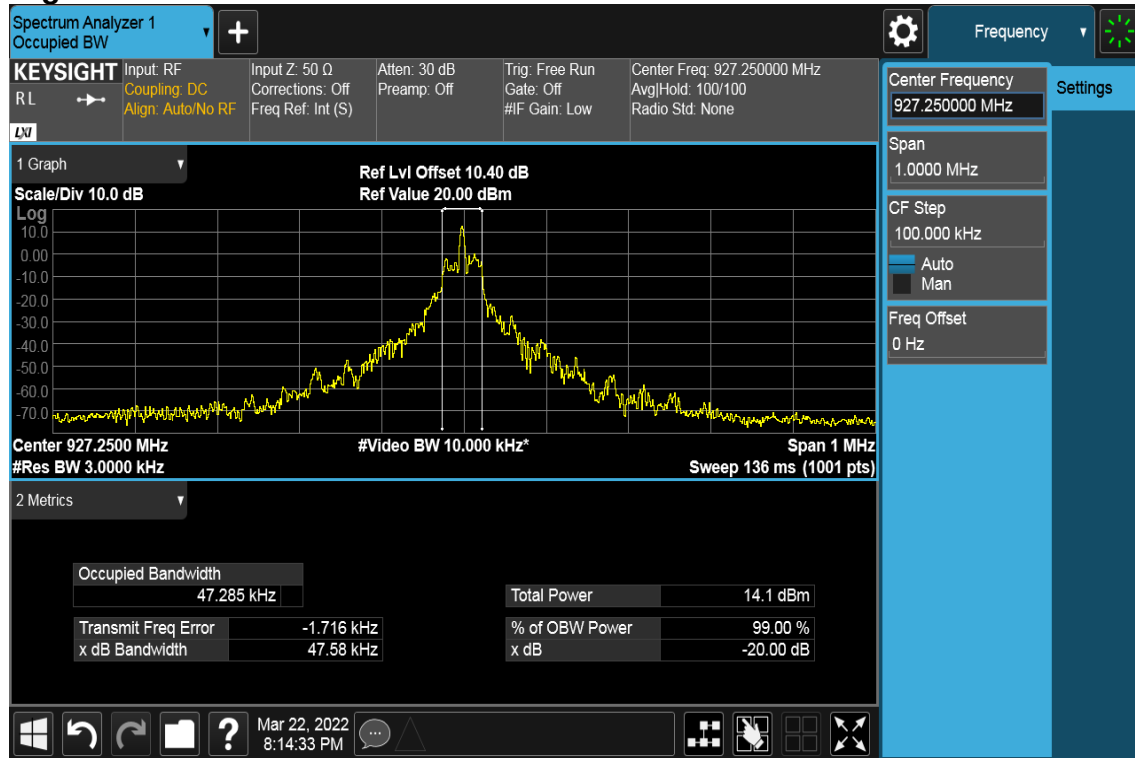

4.3 OUTPUT POWER MEASUREMENT

4.3.1 Test Limit

According to §15.247(b)(2)


Peak output power :

For frequency hopping systems operating in the 902~928 MHz band: 1 watt.

4.3.2 Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power. in the test report.

4.3.3 Test Setup

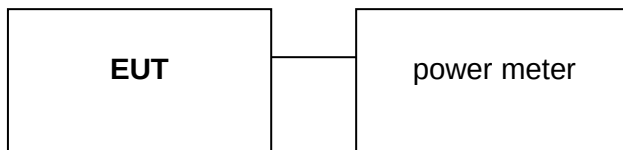

4.3.4 Test Result

Temperature: 20.2 ~ 22.2°C

Test Date: March 22 ~ 23, 2022

Humidity: 60% RH

Test by: Marco Chan

Channel	Frequency (MHz)	Setting	Peak Power (dBm)	AVG Power (dBm)	Output Power Limit (dBm)	Result
Low	902.75	26	29.38	28.66	30	Pass
Middle	914.75	25	29.22	28.51	30	Pass
High	927.25	25	29.84	29.11	30	Pass

4.4 FREQUENCY SEPARATION

4.4.1 Test Limit


According to §15.247(a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

4.4.2 Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Sweep = auto.
Max hold, mark 2 peaks of hopping channel and record channel separation.

4.4.3 Test Setup



4.4.4 Test Result

Temperature: 20.2 ~ 22.2°C

Test Date: March 22 ~ 23, 2022

Humidity: 60% RH

Test by: Marco Chan


Frequency Separation				
Channel	Frequency (MHz)	Channel Separation (kHz)	Channel Separation Limit (kHz)	Result
Low	902.75	500	48.88	PASS
Middle	914.75	500	47.05	PASS
High	927.25	500	47.58	PASS

Test Data

Low CH



Mid CH

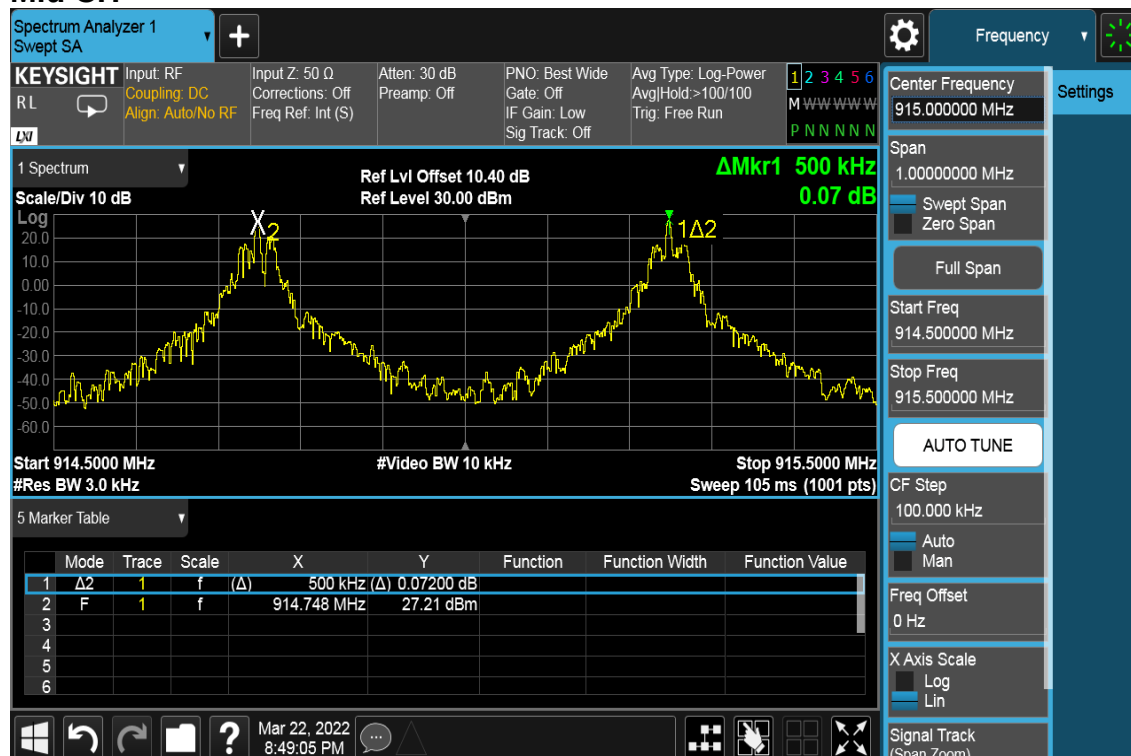

High CH



4.5 NUMBER OF HOPPING

4.5.1 Test Limit

According to 15.247(a)(1)(i),


For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

4.5.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Span: Wide enough to capture the peaks of two adjacent channels. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW $\geq$ RBW.
4. Max hold, view and count how many channel in the band.

4.5.3 Test Setup

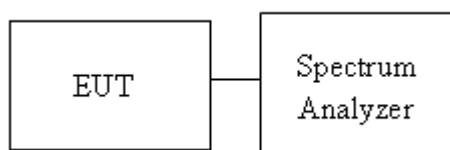

4.5.4 Test Result

Temperature: 20.2 ~ 22.2°C


Test Date: March 22 ~ 23, 2022

Humidity: 60% RH

Test by: Marco Chan

Number of Hopping			
Frequency (MHz)	Hopping Channel Number	Hopping Channel Number Limits	Result
Hopping	50	50	Pass

Test Data

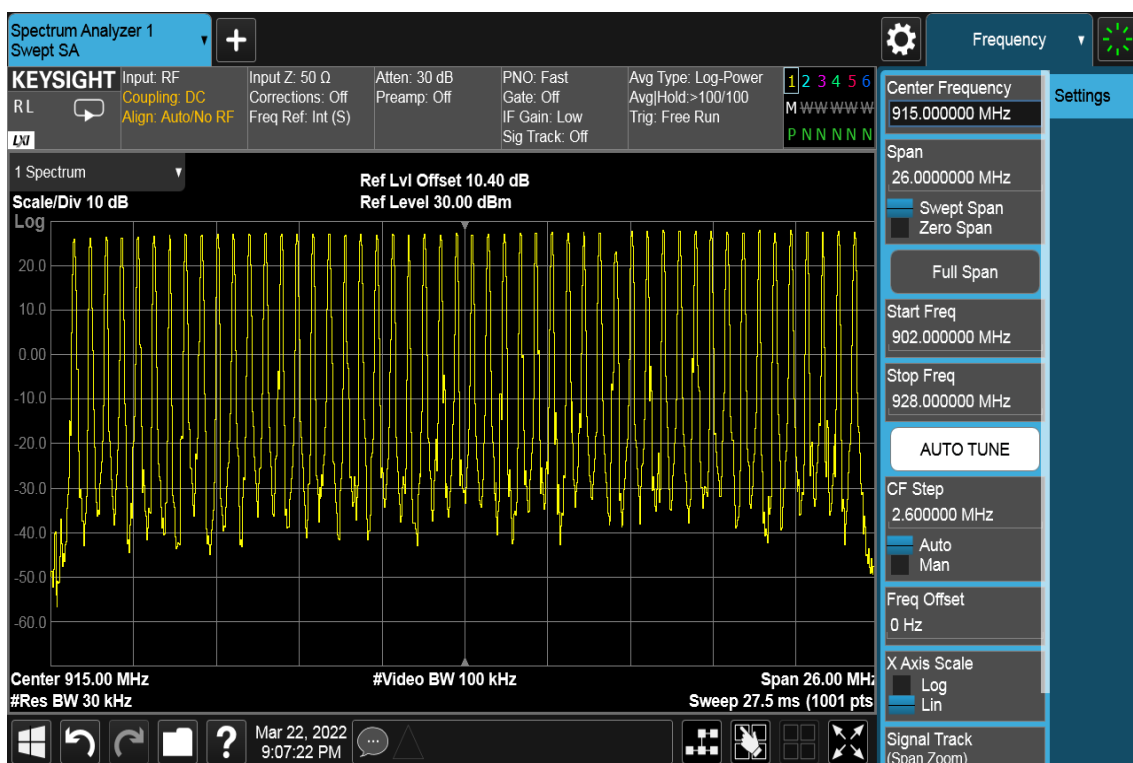

4.6 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit

According to §15.247(d)


Limit	-20 dBc
-------	---------

.

4.6.2 Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 922MHz and 928MHz are investigated with normal hopping mode.

4.6.3 Test Setup



Report No.: TMWK2112001513KR

4.6.4 Test Result

Temperature: 20.2 ~ 22.2°C


Test Date: March 22 ~ 23, 2022

Humidity: 60% RH

Test by: Marco Chan

Test Data Low CH


Spurious Emission 30MHz-12.5GHz

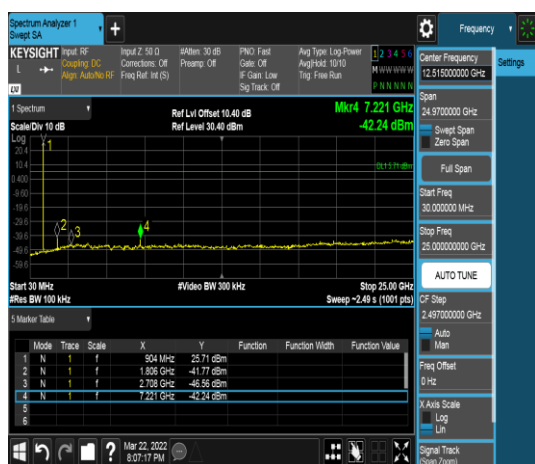

Band Edge




Hopping Bandedge

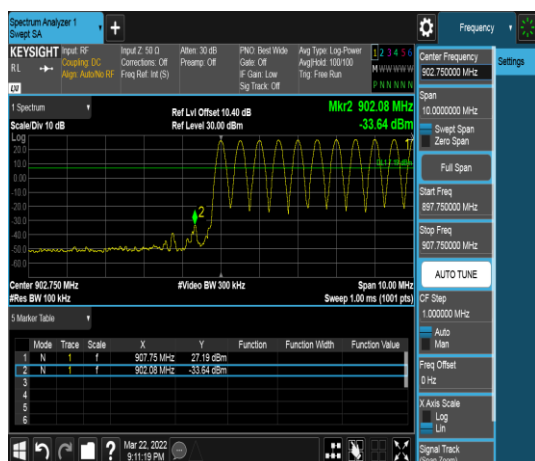


Mid CH

Spurious Emission 30MHz-12.5GHz

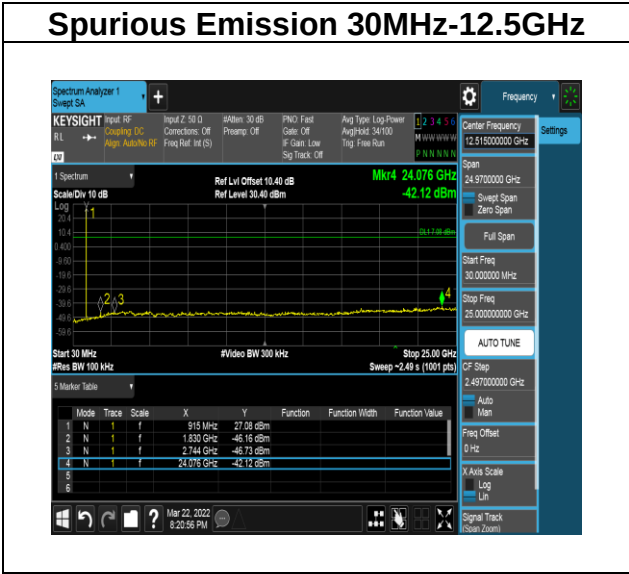


High CH


Spurious Emission 30MHz-12.5GHz

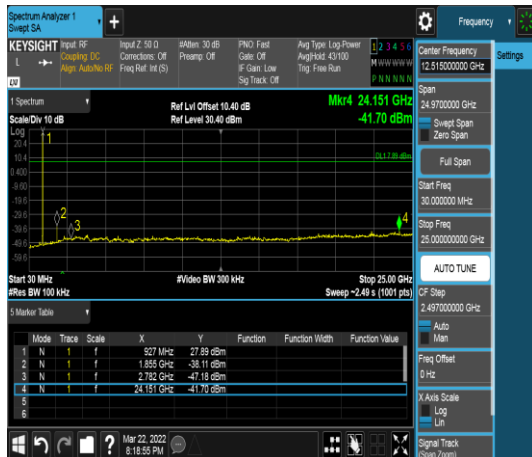

Band Edge

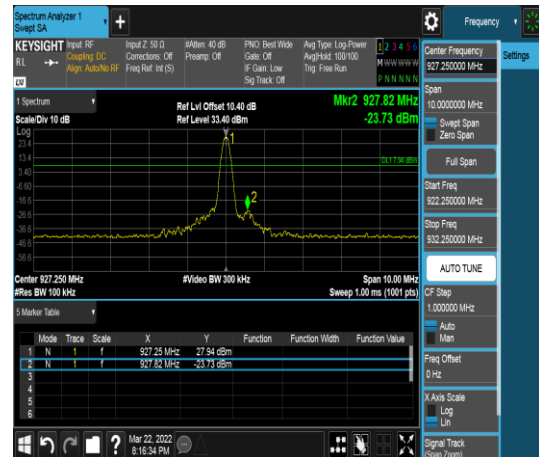

Hopping Bandedge

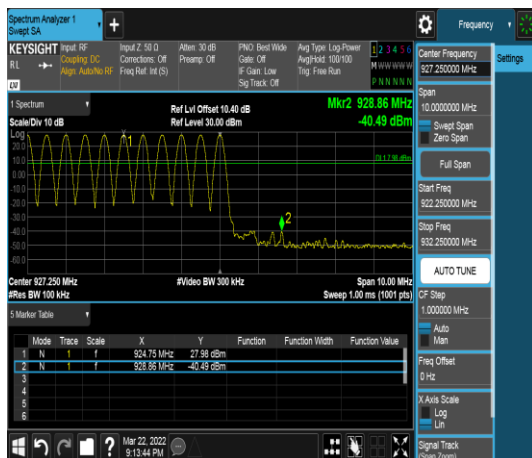

4.7 TIME OF OCCUPANCY (DWELL TIME)

4.7.1 Test Limit


According to §15.247(a)(1)(iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.7.2 Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
VBW > RBW

4.7.3 Test Setup



4.7.4 Test Result

Temperature: 20.2 ~ 22.2°C

Test Date: March 22 ~ 23, 2022

Humidity: 60% RH


Test by: Marco Chan

Time of Occupancy (Dwell Time)					
Mode	Frequency (MHz)	Number of Pulse	Dwell Time	Dwell Time Limits (s)	Result
			(ms)		
Hopping	902.8	288	192	0.4	Pass

Report No.: TMWK2112001513KR

Page: 31 / 53
Rev.: 02

Test Data

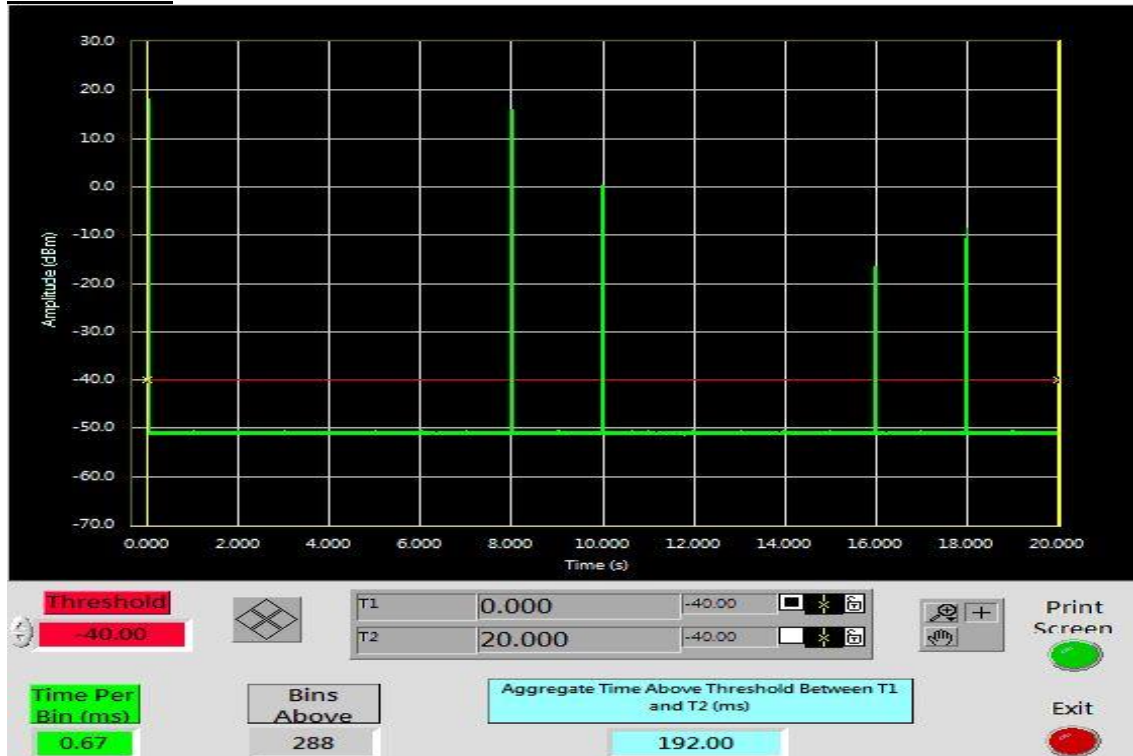

4.8 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.8.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

4.8.2 Test Procedure


Test method Refer as ANSI C63.10:2013.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 30MHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.
4. The SA setting following :
 - (1) Below 1G : RBW = 100kHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
If Duty Cycle $\geq$ 98%, VBW=10Hz.
If Duty Cycle <98%, VBW=1/T.


Note: No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz)

4.8.3 Test Setup

9kHz ~ 30MHz

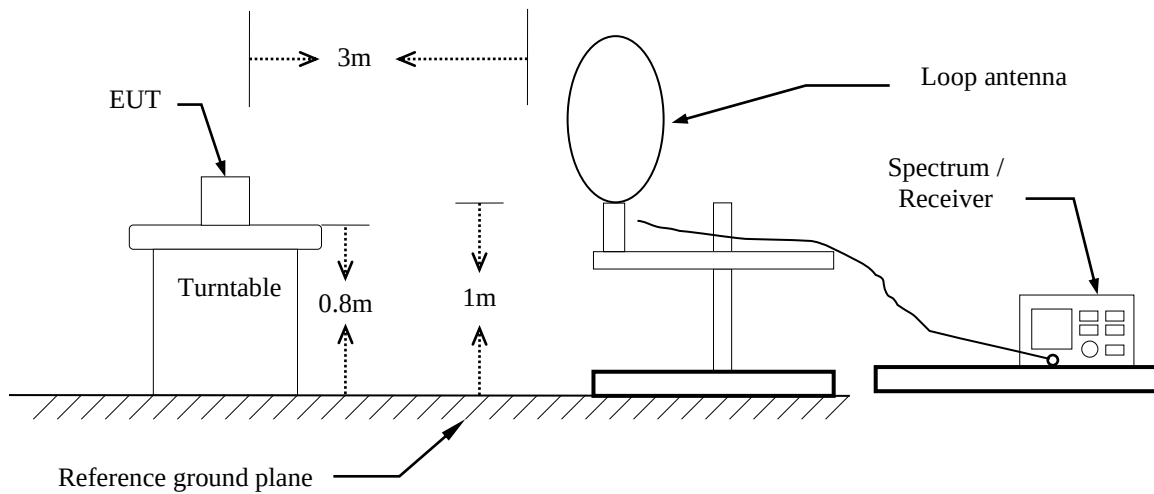


30MHz ~ 1GHz

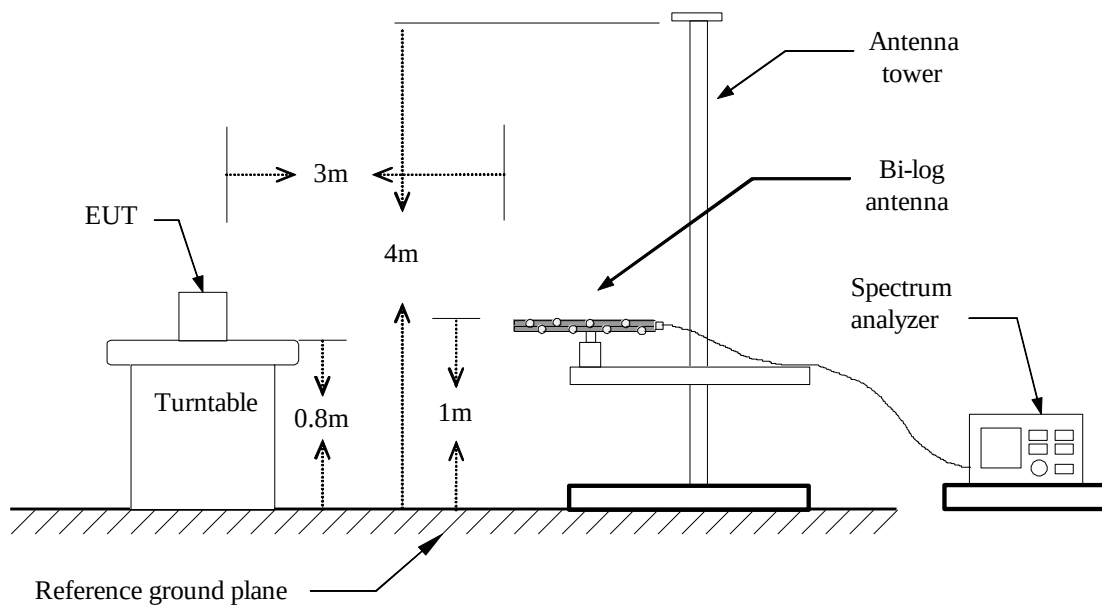

Report No.: TMWK2112001513KR

Page: 35 / 53


Rev.: 02

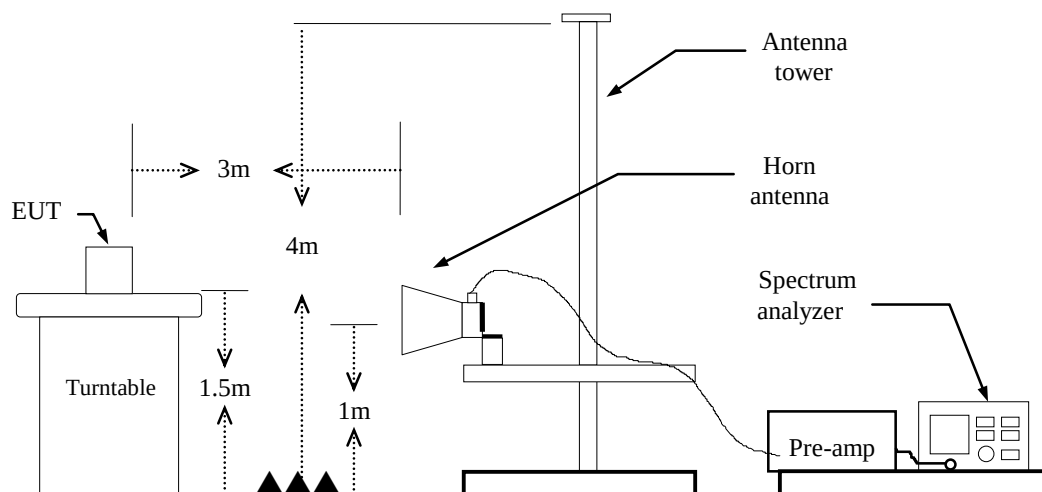Above 1 GHz

4.8.4 Test Result


Band Edge Test Data

Test Mode:	Low CH 902.75 MHz	Temp/Hum	23(°C)/ 62%RH
Test Item	Band Edge	Test Date	March 31, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	QP / Peak		

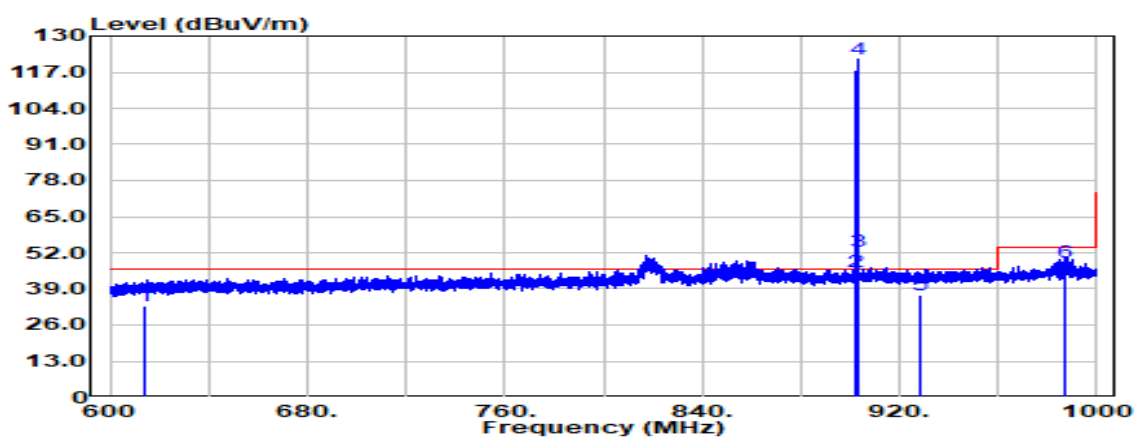


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
614.000	QP	34.66	-2.01	32.66	46.00	-13.34
902.000	QP	42.44	2.48	44.92	46.00	-1.08
902.750	QP	49.83	2.47	52.30	-	-
902.750	Peak	119.16	2.47	121.64	-	-
928.000	QP	34.14	2.68	36.82	46.00	-9.18
987.400	QP	44.91	3.59	48.51	54.00	-5.49

Test Mode:	Low CH 902.75 MHz	Temp/Hum	23(°C)/ 62%RH
Test Item	Band Edge	Test Date	March 31, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	QP / Peak		

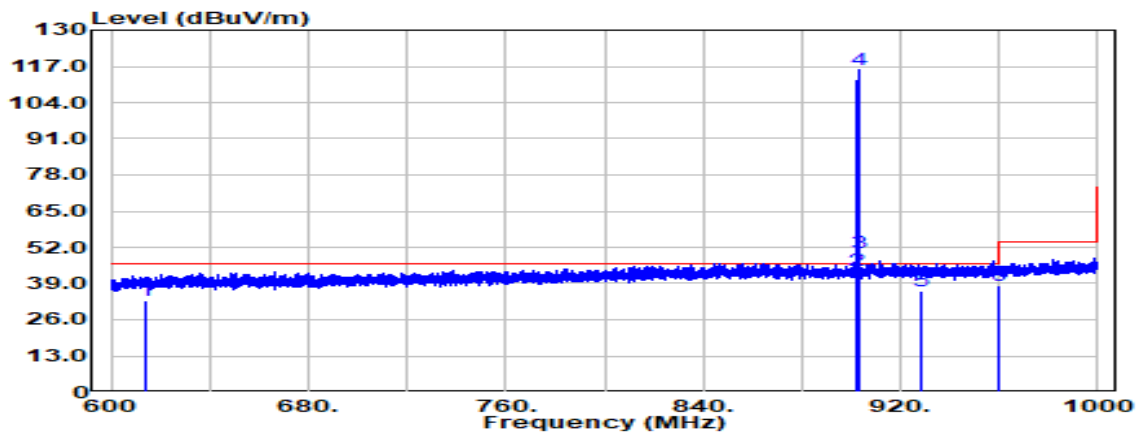


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBPV	Factor dB	Actual FS dBPV/m	Limit @3m dBPV/m	Margin dB
614.000	QP	34.66	-2.01	32.65	46.00	-13.35
902.000	QP	41.31	2.48	43.79	46.00	-2.21
902.750	QP	47.71	2.47	50.18	-	-
902.750	Peak	113.52	2.47	115.99	-	-
928.000	QP	33.50	2.68	36.18	46.00	-9.82
960.000	QP	35.08	3.15	38.23	46.00	-7.77

Test Mode:	High CH 927.25 MHz	Temp/Hum	23(°C)/ 62%RH
Test Item	Band Edge	Test Date	March 31, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	QP / Peak		

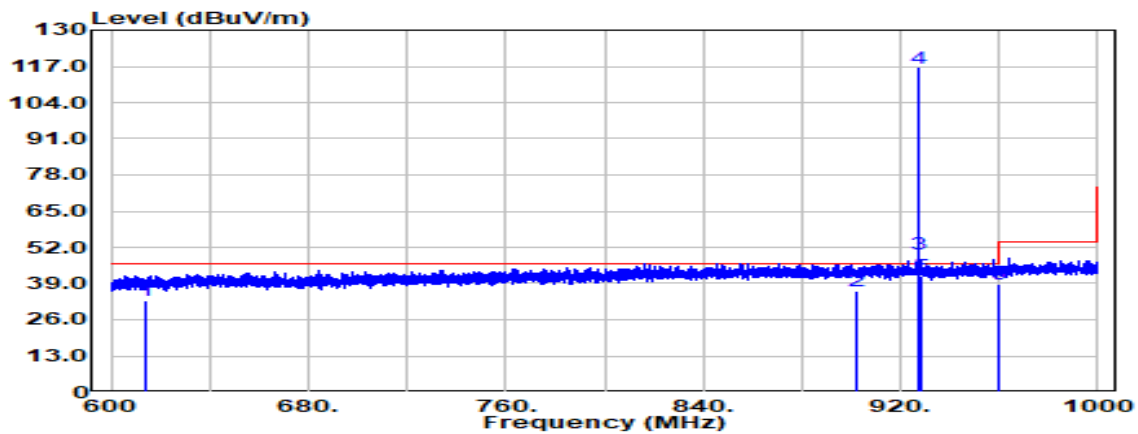


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBPV	Factor dB	Actual FS dBPV/m	Limit @3m dBPV/m	Margin dB
614.000	QP	34.78	-2.01	32.77	46.00	-13.23
902.000	QP	34.01	2.48	36.49	46.00	-9.51
927.250	QP	46.76	2.69	49.45	-	-
927.250	Peak	113.44	2.69	116.14	-	-
928.000	QP	38.99	2.68	41.67	46.00	-4.33
960.000	QP	35.66	3.15	38.81	46.00	-7.19

Test Mode:	High CH 927.25 MHz	Temp/Hum	23(°C)/ 62%RH
Test Item	Band Edge	Test Date	March 31, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	QP / Peak		

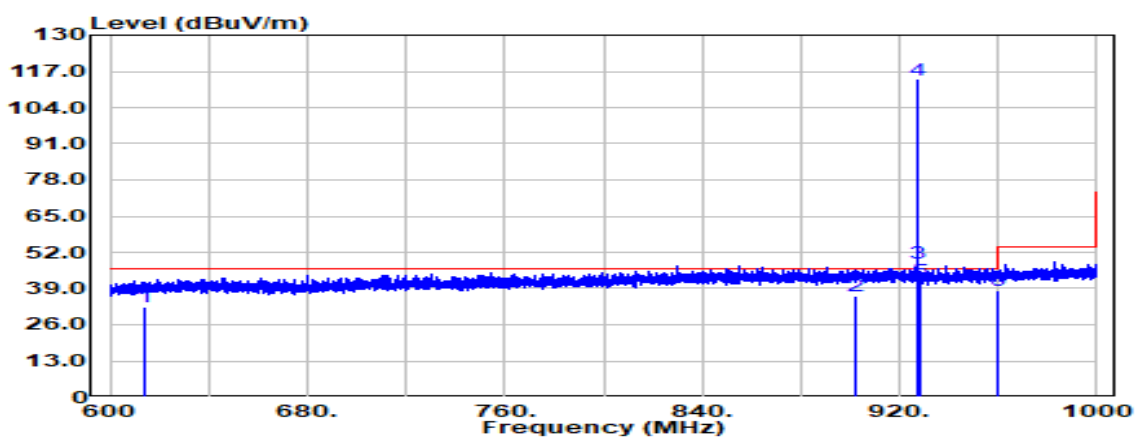


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
614.000	QP	34.48	-2.01	32.47	46.00	-13.53
902.000	QP	33.84	2.48	36.31	46.00	-9.69
927.250	QP	45.44	2.69	48.13	-	-
927.250	Peak	111.35	2.69	114.04	-	-
928.000	QP	38.80	2.68	41.48	46.00	-4.52
960.000	QP	35.13	3.15	38.28	46.00	-7.72

Test Mode:	902.75 ~ 927.25 MHz Hopping	Temp/Hum	23(°C)/ 62%RH
Test Item	Band Edge	Test Date	March 31, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	QP / Peak		

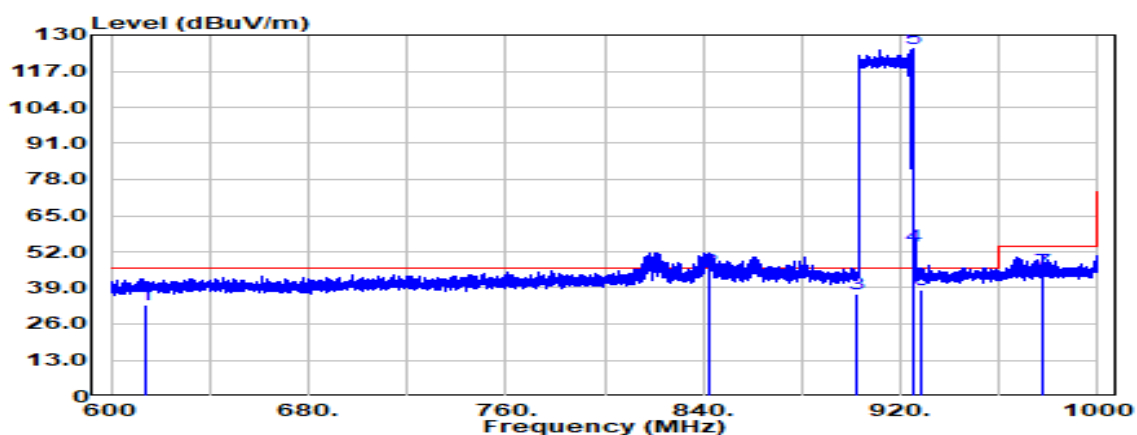

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
614.000	QP	34.64	-2.01	32.63	46.00	-13.37
842.050	QP	43.53	1.55	45.08	46.00	-0.92
902.000	QP	34.33	2.48	36.81	46.00	-9.19
925.250	QP	51.40	2.73	54.12	-	-
925.250	Peak	122.18	2.73	124.91	-	-
928.000	QP	35.38	2.68	38.06	46.00	-7.94
977.250	QP	41.91	3.43	45.34	54.00	-8.66


Test Mode:	902.75 ~ 927.25 MHz Hopping	Temp/Hum	23(°C)/ 62%RH
Test Item	Band Edge	Test Date	March 31, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	QP / Peak		

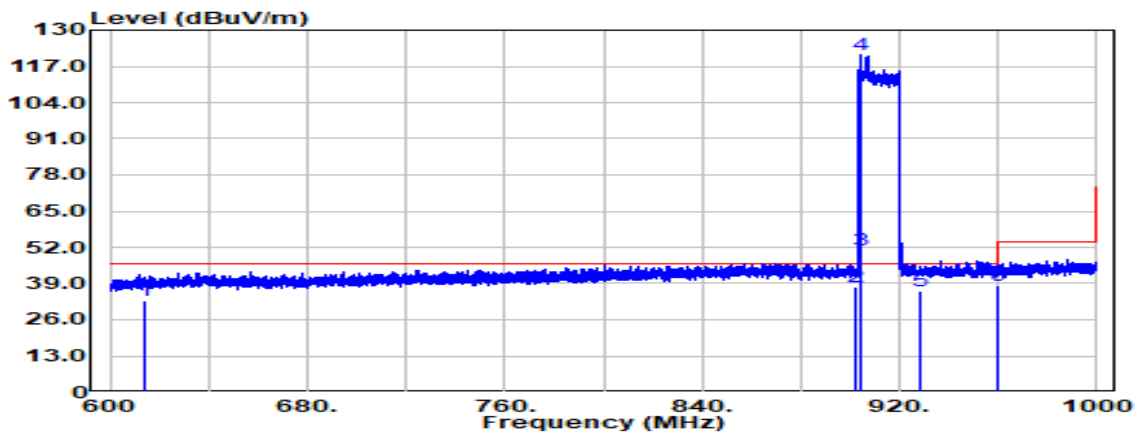

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
614.000	QP	34.98	-2.01	32.97	46.00	-13.03
902.000	QP	35.12	2.48	37.60	46.00	-8.40
904.200	QP	48.39	2.47	50.86	-	-
904.200	Peak	118.69	2.47	121.16	-	-
928.000	QP	33.73	2.68	36.41	46.00	-9.59
960.000	QP	35.32	3.15	38.47	46.00	-7.53


Below 1G Test Data

Test Mode:	CH Low	Temp/Hum	23(°C)/ 62%RH
Test Item	30MHz-1GHz	Test Date	March 31, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

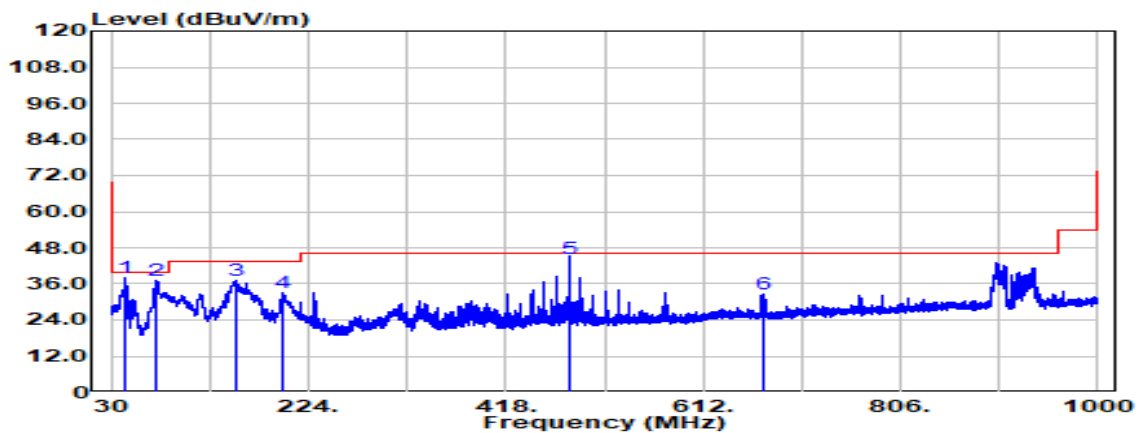


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
42.974	Peak	50.08	-11.94	38.14	40.00	-1.86
74.984	Peak	52.68	-15.52	37.16	40.00	-2.84
152.099	Peak	47.59	-10.63	36.95	43.50	-6.55
199.265	Peak	43.02	-9.99	33.03	43.50	-10.47
479.959	Peak	47.89	-3.60	44.28	46.00	-1.72
670.928	Peak	33.33	-0.77	32.55	46.00	-13.45

Test Mode:	CH Low	Temp/Hum	23(°C)/ 62%RH
Test Item	30MHz-1GHz	Test Date	March 31, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

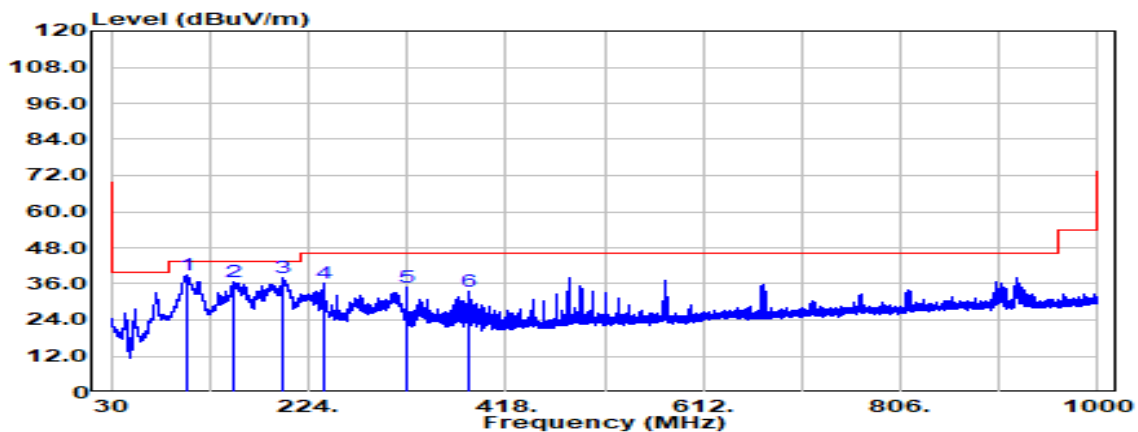


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
104.084	Peak	50.57	-11.73	38.84	43.50	-4.66
150.038	Peak	47.30	-10.63	36.67	43.50	-6.83
199.750	Peak	47.92	-9.93	37.99	43.50	-5.51
239.156	Peak	47.33	-10.91	36.42	46.00	-9.58
319.666	Peak	43.48	-8.49	34.98	46.00	-11.02
382.474	Peak	40.30	-6.86	33.44	46.00	-12.56

Test Mode:	CH Mid	Temp/Hum	23(°C)/ 62%RH
Test Item	30MHz-1GHz	Test Date	March 31, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

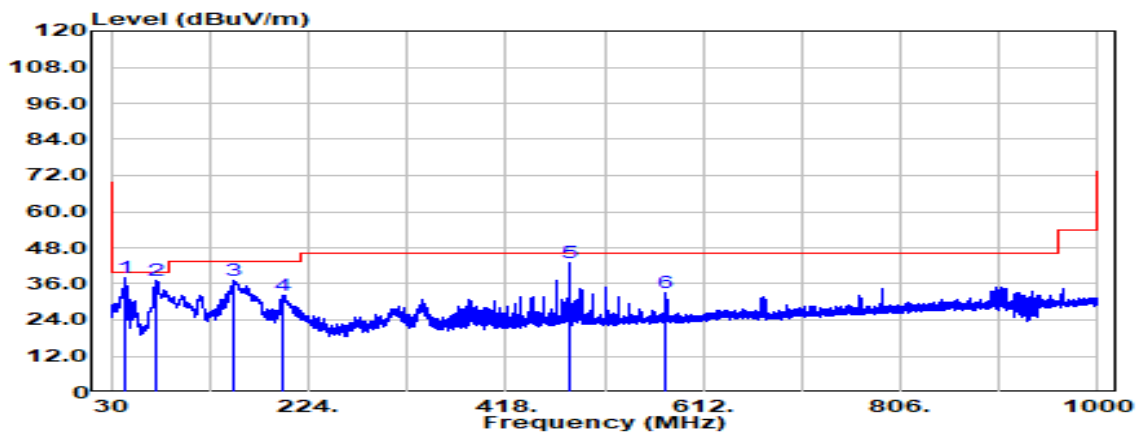

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
42.974	Peak	49.98	-11.94	38.04	40.00	-1.96
74.984	Peak	52.53	-15.52	37.01	40.00	-2.99
151.493	Peak	47.78	-10.62	37.16	43.50	-6.34
199.386	Peak	42.34	-9.98	32.37	43.50	-11.13
480.080	Peak	46.60	-3.60	43.00	46.00	-3.00
573.928	Peak	35.16	-2.30	32.85	46.00	-13.15

Test Mode:	CH Mid	Temp/Hum	23(°C)/ 62%RH
Test Item	30MHz-1GHz	Test Date	March 31, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

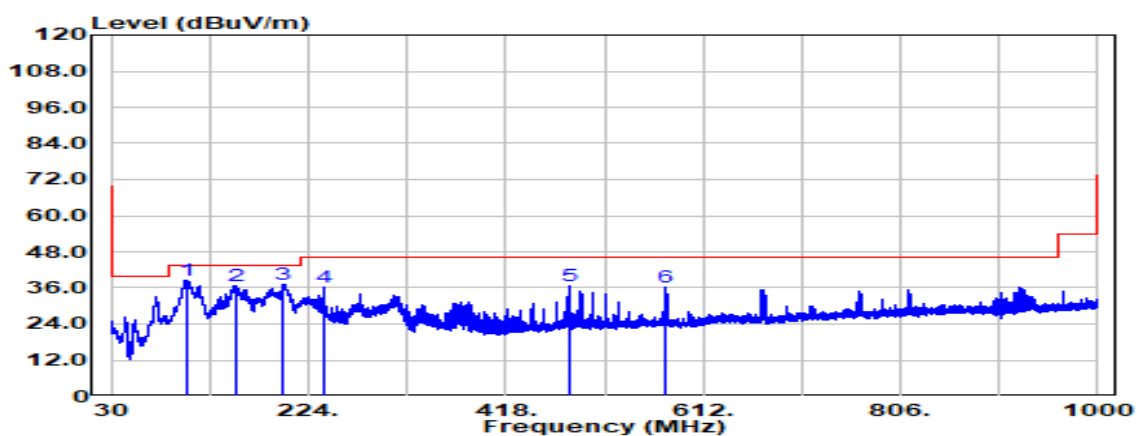


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
104.205	Peak	50.38	-11.70	38.68	43.50	-4.82
153.190	Peak	47.63	-10.78	36.85	43.50	-6.65
199.386	Peak	47.29	-9.98	37.32	43.50	-6.18
239.641	Peak	47.08	-10.88	36.19	46.00	-9.81
479.959	Peak	40.50	-3.60	36.89	46.00	-9.11
573.928	Peak	38.69	-2.30	36.39	46.00	-9.61

Report No.: TMWK2112001513KR


Page: 46 / 53
Rev.: 02

Test Mode:	CH High	Temp/Hum	23(°C)/ 62%RH
Test Item	30MHz-1GHz	Test Date	March 31, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

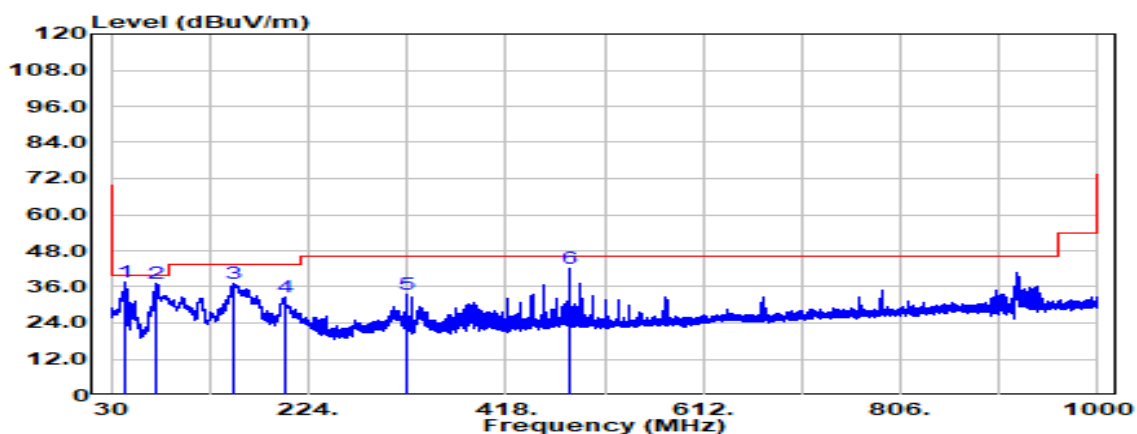

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
44.186	Peak	50.77	-13.03	37.74	40.00	-2.26
74.620	Peak	52.86	-15.59	37.27	40.00	-2.73
150.886	Peak	47.96	-10.63	37.33	43.50	-6.17
200.235	Peak	42.82	-10.00	32.82	43.50	-10.68
320.030	Peak	42.22	-8.49	33.73	46.00	-12.27
479.959	Peak	45.68	-3.60	42.07	46.00	-3.93


Test Mode:	CH High	Temp/Hum	23(°C)/ 62%RH
Test Item	30MHz-1GHz	Test Date	March 31, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

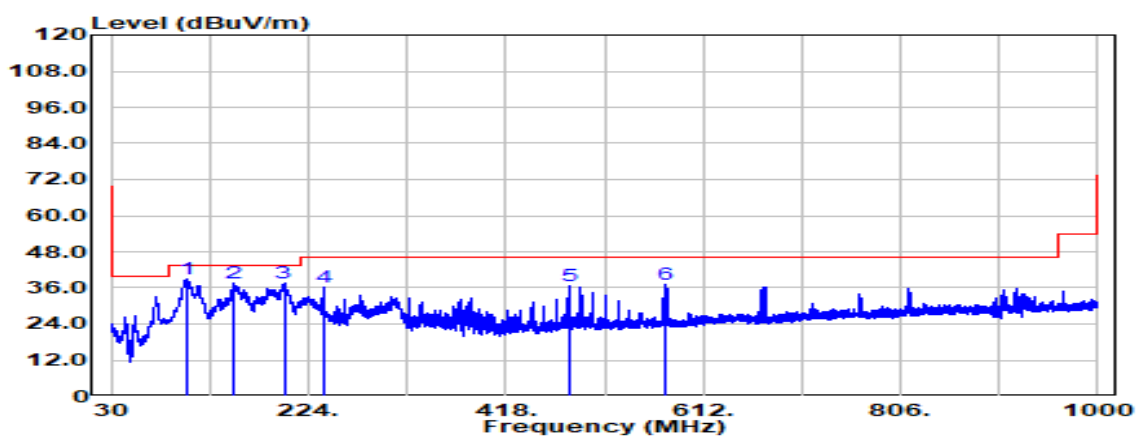

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
103.599	Peak	50.76	-11.97	38.79	43.50	-4.71
150.765	Peak	48.08	-10.63	37.46	43.50	-6.04
199.993	Peak	47.31	-9.91	37.40	43.50	-6.10
239.156	Peak	46.96	-10.91	36.05	46.00	-9.95
479.959	Peak	40.47	-3.60	36.87	46.00	-9.13
575.140	Peak	39.63	-2.28	37.35	46.00	-8.65

Above 1G Test Data

Test Mode:	Low CH	Temp/Hum	23(°C)/ 62%RH
Test Item	Harmonic	Test Date	March 31, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

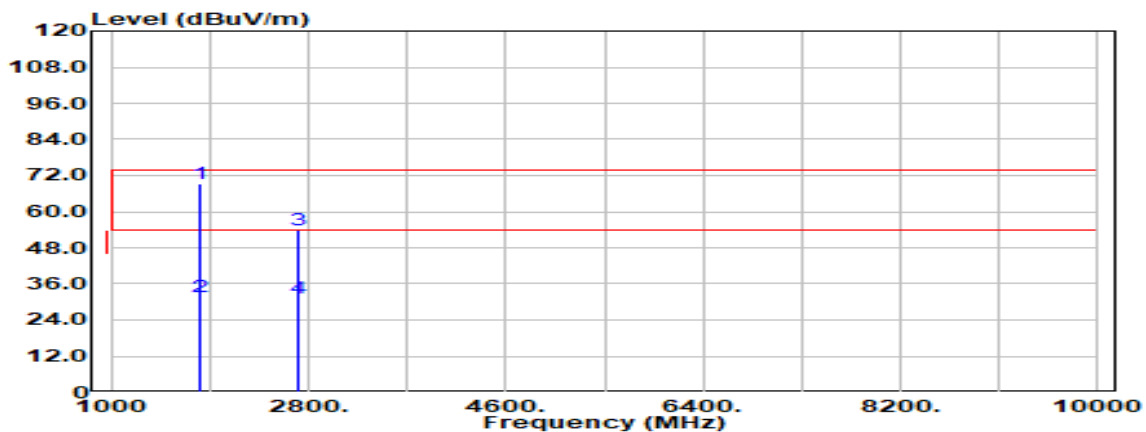


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
1805.500	Peak	68.34	0.89	69.23	74.00	-4.77
1805.500	Average	30.71	0.89	31.60	54.00	-22.40
2708.250	Peak	49.52	4.58	54.10	74.00	-19.90
2708.250	Average	26.61	4.58	31.19	54.00	-22.81
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	Low CH	Temp/Hum	23(°C)/ 62%RH
Test Item	Harmonic	Test Date	March 31, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

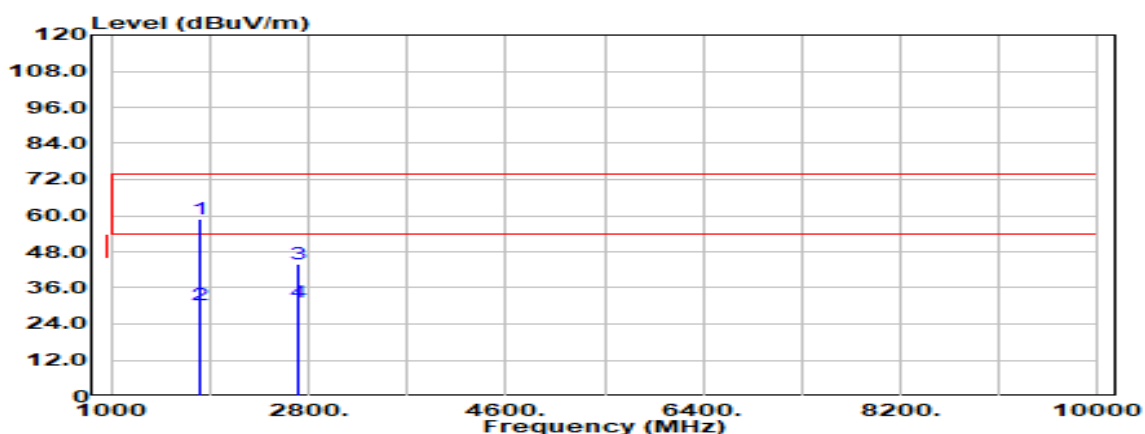


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
1805.500	Peak	58.13	0.89	59.02	74.00	-14.98
1805.500	Average	29.33	0.89	30.22	54.00	-23.78
2708.250	Peak	39.32	4.58	43.91	74.00	-30.09
2708.250	Average	26.50	4.58	31.08	54.00	-22.92
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	Mid CH	Temp/Hum	23(°C)/ 62%RH
Test Item	Harmonic	Test Date	March 31, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

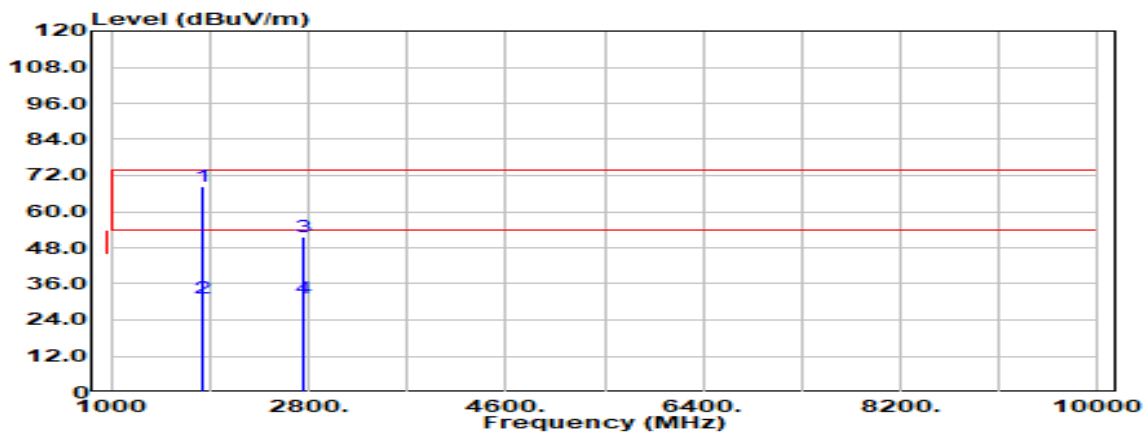


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
1829.500	Peak	67.12	1.20	68.32	74.00	-5.68
1829.500	Average	29.97	1.20	31.17	54.00	-22.83
2744.250	Peak	46.98	4.68	51.66	74.00	-22.34
2744.250	Average	26.55	4.68	31.22	54.00	-22.78
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	Mid CH	Temp/Hum	23(°C)/ 62%RH
Test Item	Harmonic	Test Date	March 31, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

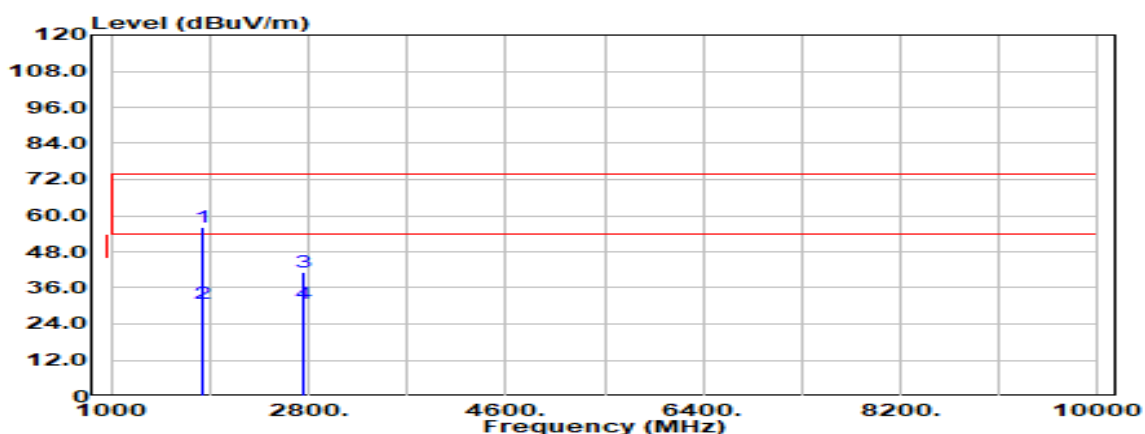


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
1829.500	Peak	54.92	1.20	56.12	74.00	-17.88
1829.500	Average	29.54	1.20	30.74	54.00	-23.26
2744.250	Peak	36.60	4.68	41.28	74.00	-32.72
2744.250	Average	26.10	4.68	30.77	54.00	-23.23
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	High CH	Temp/Hum	23(°C)/ 62%RH
Test Item	Harmonic	Test Date	March 31, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

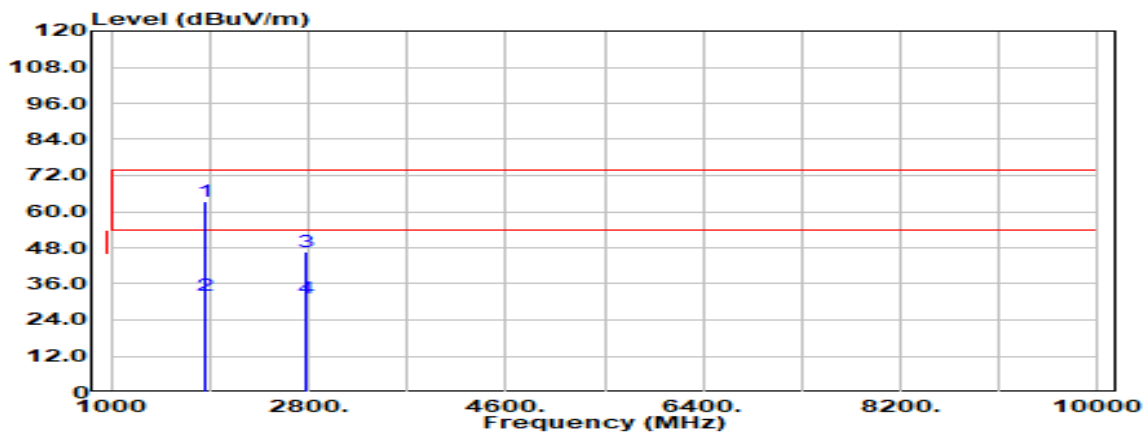


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
1854.500	Peak	61.71	1.52	63.22	74.00	-10.78
1854.500	Average	30.69	1.52	32.21	54.00	-21.79
2781.750	Peak	41.70	4.75	46.45	74.00	-27.55
2781.750	Average	26.60	4.75	31.34	54.00	-22.66
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	High CH	Temp/Hum	23(°C)/ 62%RH
Test Item	Harmonic	Test Date	March 31, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

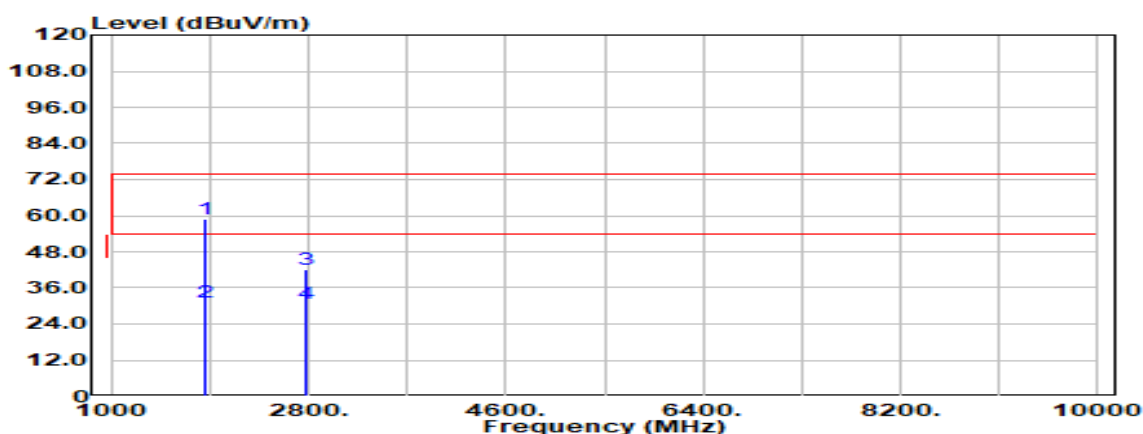

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
1854.500	Peak	57.19	1.52	58.70	74.00	-15.30
1854.500	Average	29.85	1.52	31.36	54.00	-22.64
2781.750	Peak	37.53	4.75	42.28	74.00	-31.72
2781.750	Average	26.12	4.75	30.87	54.00	-23.13
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

- End of Test Report -