




a) Channel center frequency (subset case 1)

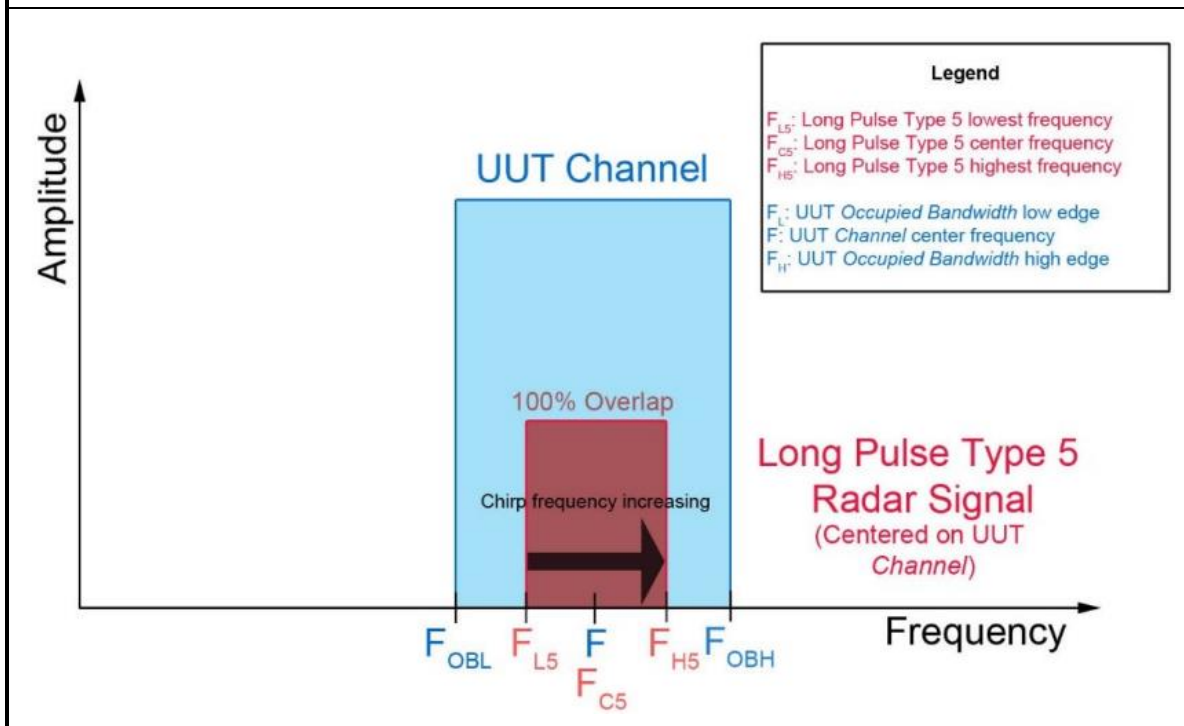

b) Tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth. (subset case 2)

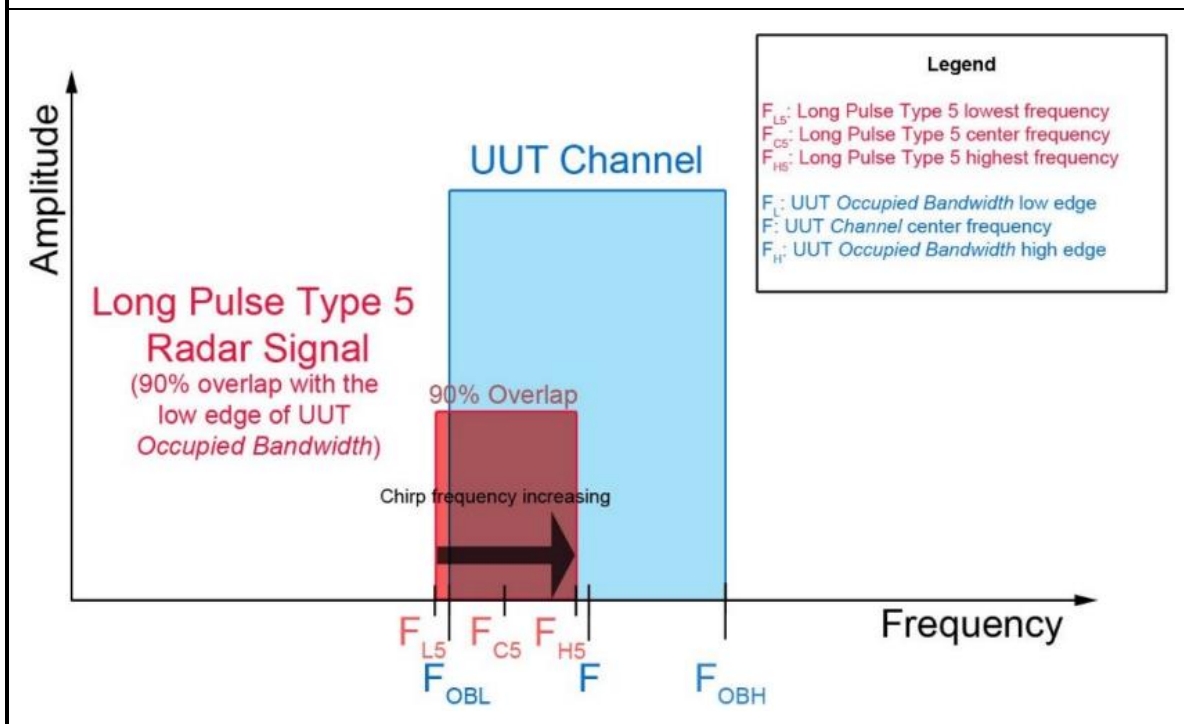

c) Tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth. (subset case 3)

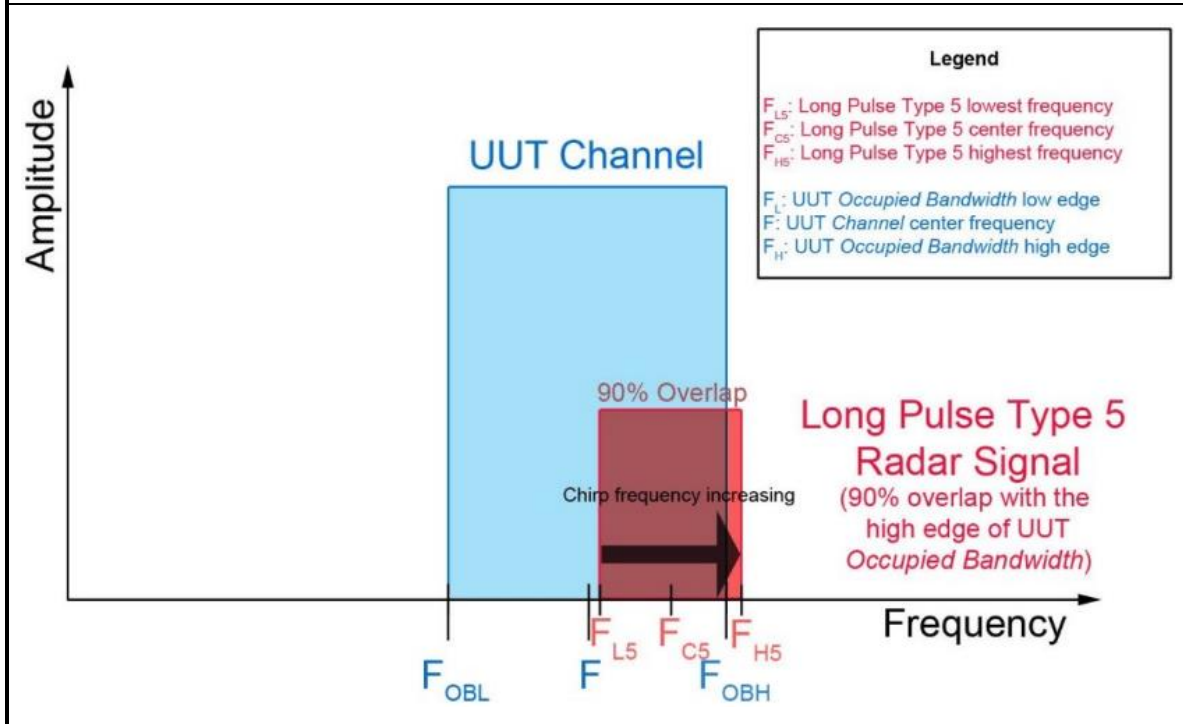

The percentage of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100$$

**Frequency Hopping Radar Test**

Statistical data will be gathered to determine the ability of the device to detect the Frequency Hopping radar test signal (radar type 6) found in **Table 7**. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The probability of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100$$

Table 7 – Frequency Hopping Radar Test Waveform


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.


4.5.2 Test Procedures

- (1) One frequency will be chosen from the Operating Channels of the EUT within the 5250-5350 MHz or 5470-5725 MHz bands.
- (2) In case the EUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will associate with the EUT (Master). If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- (3) The TCP protocol unicast data stream was generated by the iperf software command line with at least 17% activity ratio over any 100ms period.
- (4) At time T_0 the Radar Waveform generator sends a Burst of pulses for each of the Radar Types 1-6 at DFS Detection Threshold levels on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- (5) Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 1-4 and 6 to ensure detection occurs.
- (6) Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.

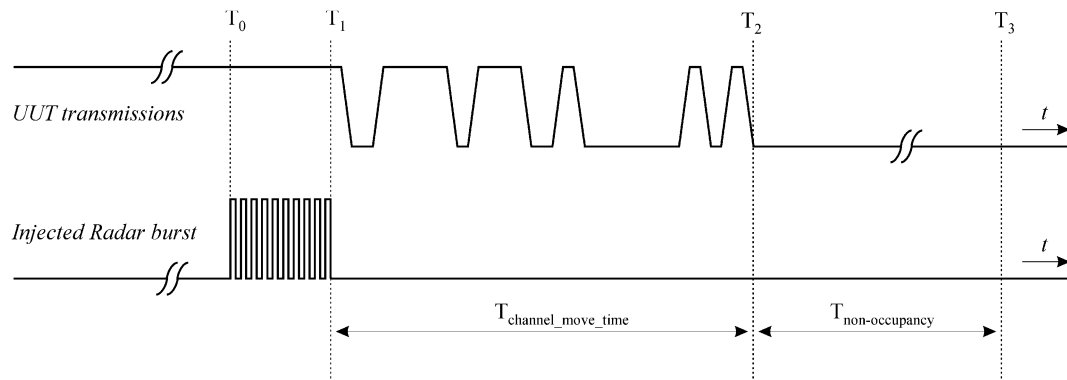


4.5.3 Test Setup

<AP Mode>

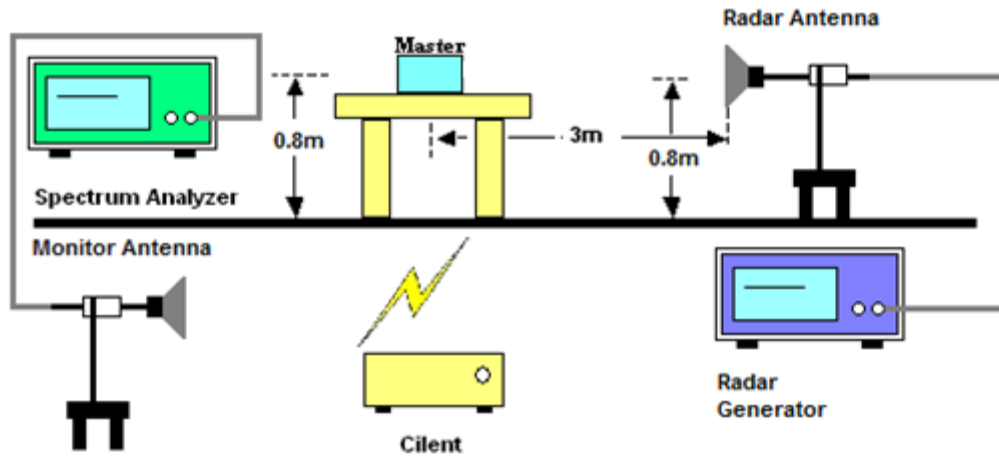

<Mesh Mode>

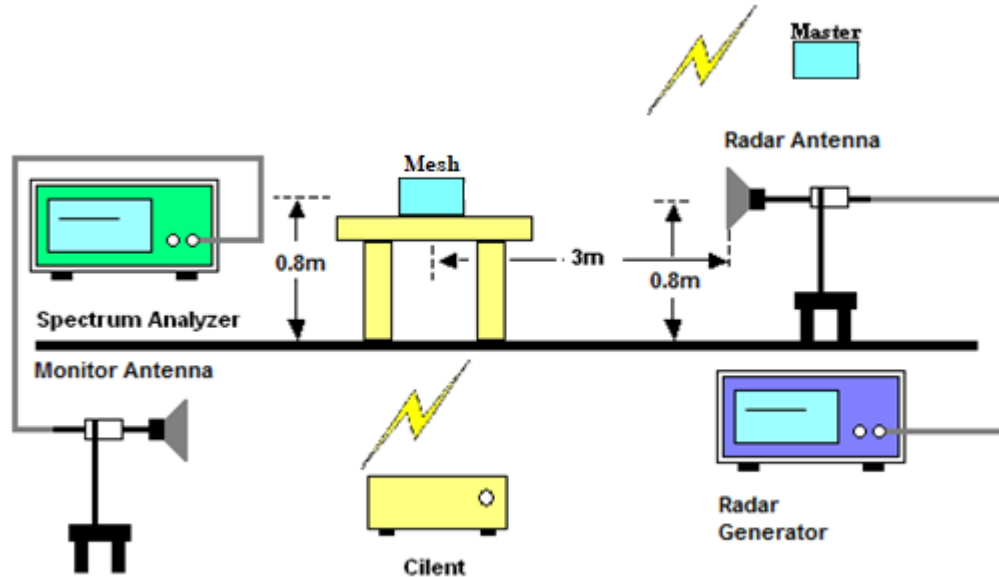

4.5.4 Test Deviation

There is no deviation with the original standard.

4.5.5 Result of Statistical Performance Check

<AP Mode>

<20MHz /5300MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
s17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	N
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	30/30	30/30	30/30	30/30	29/30
Probability (%)	100%	100%	100%	100%	100%	96.67%
Limit (%)	≥ 60%	≥ 60%	≥ 60%	≥ 60%	≥ 80%	≥ 70%
Average Probability of Radar Type 1~4 (%)			100% (≥ 80%)			



<40MHz /5310MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	30/30	30/30	30/30	30/30	30/30
Probability (%)	100%	100%	100%	100%	100%	100%
Limit (%)	≥ 60%	≥ 60%	≥ 60%	≥ 60%	≥ 80%	≥ 70%
Average Probability of Radar Type 1~4 (%)			100% (≥ 80%)			



<80MHz /5290MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	30/30	30/30	30/30	30/30	30/30
Probability (%)	100%	100%	100%	100%	100%	100%
Limit (%)	≥ 60%	≥ 60%	≥ 60%	≥ 60%	≥ 80%	≥ 70%
Average Probability of Radar Type 1~4 (%)			100% (≥ 80%)			



<160MHz /5250MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	N	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	N	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	N	N	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	30/30	30/30	28/30	28/30	30/30
Probability (%)	100%	100%	100%	93.33%	93.33%	100%
Limit (%)	≥ 60%	≥ 60%	≥ 60%	≥ 60%	≥ 80%	≥ 70%
Average Probability of Radar Type 1~4 (%)			98.33% (≥ 80%)			



<20MHz /5500MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	30/30	30/30	30/30	30/30	30/30
Probability (%)	100%	100%	100%	100%	100%	100%
Limit (%)	≥ 60%	≥ 60%	≥ 60%	≥ 60%	≥ 80%	≥ 70%
Average Probability of Radar Type 1~4 (%)			100% (≥ 80%)			



<40MHz /5510MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	30/30	30/30	30/30	30/30	30/30
Probability (%)	100%	100%	100%	100%	100%	100%
Limit (%)	≥ 60%	≥ 60%	≥ 60%	≥ 60%	≥ 80%	≥ 70%
Average Probability of Radar Type 1~4 (%)			100% (≥ 80%)			



<80MHz /5530MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	N	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	30/30	30/30	30/30	29/30	30/30
Probability (%)	100%	100%	100%	100%	96.67%	100%
Limit (%)	≥ 60%	≥ 60%	≥ 60%	≥ 60%	≥ 80%	≥ 70%
Average Probability of Radar Type 1~4 (%)			100% (≥ 80%)			



<160MHz /5570MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	30/30	30/30	30/30	30/30	30/30
Probability (%)	100%	100%	100%	100%	100%	100%
Limit (%)	≥ 60%	≥ 60%	≥ 60%	≥ 60%	≥ 80%	≥ 70%
Average Probability of Radar Type 1~4 (%)			100% (≥ 80%)			

<240MHz /5610MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	N	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	N	Y	Y	N	Y
21	Y	Y	Y	Y	N	Y
22	Y	Y	Y	Y	N	Y
23	Y	N	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	N	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	N	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	27/30	30/30	30/30	25/30	30/30
Probability (%)	100%	90%	100%	100%	83.33%	100%
Limit (%)	≥ 60%	≥ 60%	≥ 60%	≥ 60%	≥ 80%	≥ 70%
Average Probability of Radar Type 1~4 (%)		97.50% (≥ 80%)				



<Mesh Mode>

<160MHz/ 5250MHz>

(Detection = Y, No Detection = N)	
Trial Number	Type 4
1	Y
2	Y
3	Y
4	Y
5	Y
6	Y
7	Y
8	Y
9	Y
10	Y
11	Y
12	Y
13	Y
14	Y
15	Y
16	Y
17	Y
18	Y
19	N
20	Y
21	Y
22	Y
23	Y
24	Y
25	Y
26	Y
27	Y
28	Y
29	Y
30	Y
Trial of Detection	29/30
Probability (%)	96.67%
Limit (%)	>= 60%

5 Validate the progressive DFS

5.1 Test Mode


BW / Channel	Radar Injection frequency (MHz)	Test Item	Test Result	Limit	Pass/Fail
<EHT80 / 5290MHz>	5260	Channel Move Time	0.628821 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 8 ms	< 260ms	Pass
	5280	Channel Move Time	0.003193 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 0 ms	< 260ms	Pass
<EHT160 / 5250MHz>	5260	Channel Move Time	0.515611 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 10.4 ms	< 260ms	Pass
		Non-Occupancy Period	≥ 30	≥ 30 min	Pass
	5280	Channel Move Time	0.002 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 0 ms	< 260ms	Pass
<EHT80 / 5530MHz>	5500	Channel Move Time	0.425614 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 8.4 ms	< 260ms	Pass
	5520	Channel Move Time	0.0096 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 0 ms	< 260ms	Pass
	5560	Channel Move Time	0.578019 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 0.4 ms	< 260ms	Pass
<EHT160 / 5570MHz>	5500	Channel Move Time	0.60802 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 8.4 ms	< 260ms	Pass
	5520	Channel Move Time	0.008394 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 0 ms	< 260ms	Pass
	5640	Channel Move Time	0.0034 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 0 ms	< 260ms	Pass
<EHT240 / 5610MHz>	5500	Channel Move Time	0.50761 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 8.8 ms	< 260ms	Pass
		Non-Occupancy Period	≥ 30	≥ 30 min	Pass
	5520	Channel Move Time	0.0116 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 0 ms	< 260ms	Pass
	5580	Channel Move Time	0.0052 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 0 ms	< 260ms	Pass
	5720	Channel Move Time	0.011594 s	< 10s	Pass
		Channel Closing Transmission Time	200ms + 0 ms	< 260ms	Pass

5.1.1 Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Test Plots

<80MHz / 5290MHz >In-Service Monitoring


Radar is injected at 5260 MHz

Channel Move Time &
Channel Closing Transmission Time

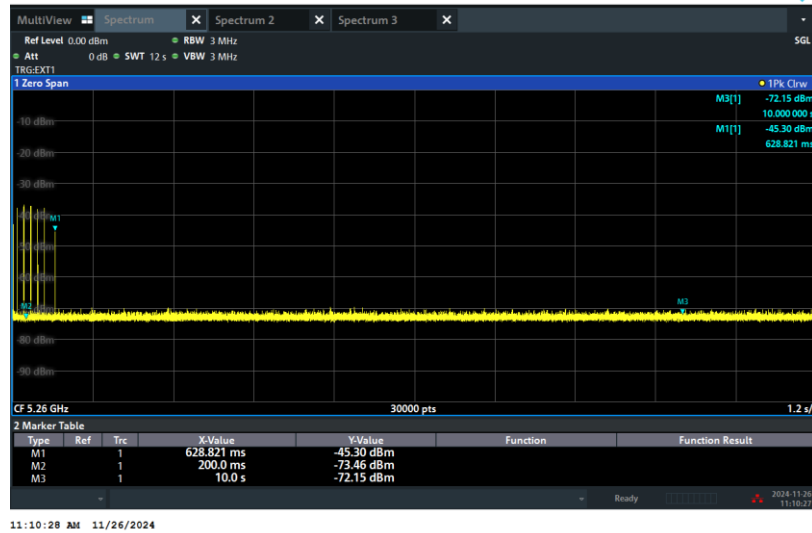

Note:


1. Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 + 8 ms) = 200 + Number (20) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.
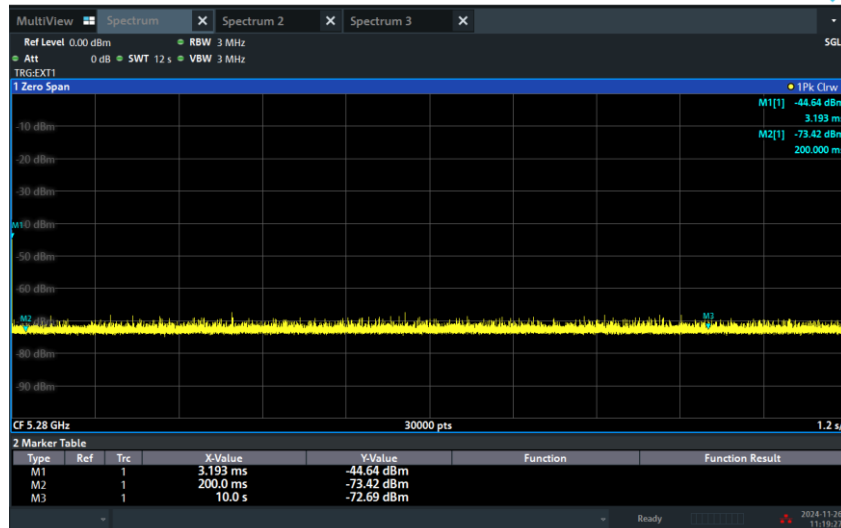
<80MHz / 5290MHz >In-Service Monitoring
Radar is injected at 5280 MHz
**Channel Move Time &
Channel Closing Transmission Time**


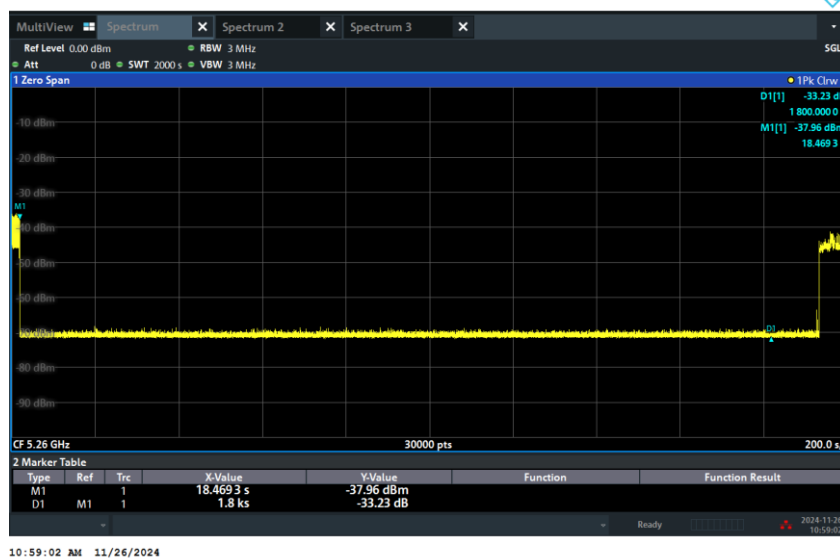
11:19:28 AM 11/26/2024


Note:

1. Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 + 0 ms) = 200 + Number (0) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.

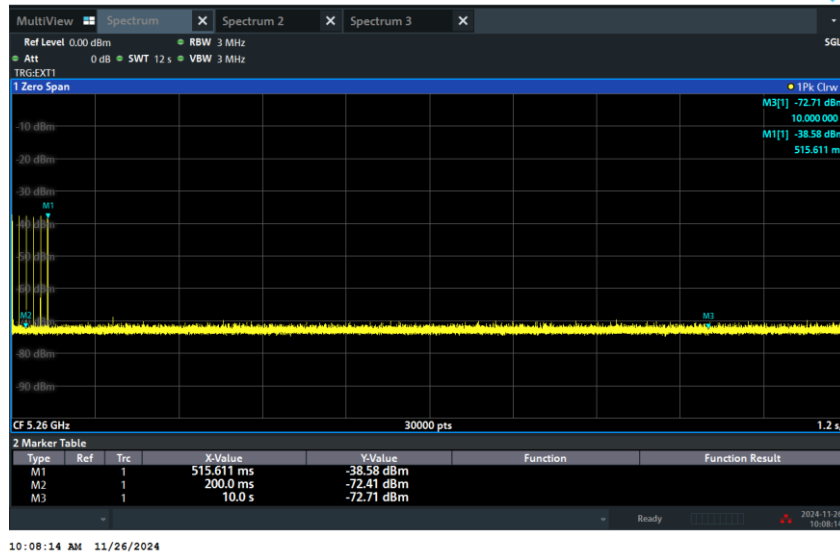
<160MHz / 5250MHz >In-Service Monitoring
Radar is injected at 5260 MHz
**Channel Move Time &
Channel Closing Transmission Time**

Note:

1. Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 + 10.4 ms) = 200 + Number (26) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.

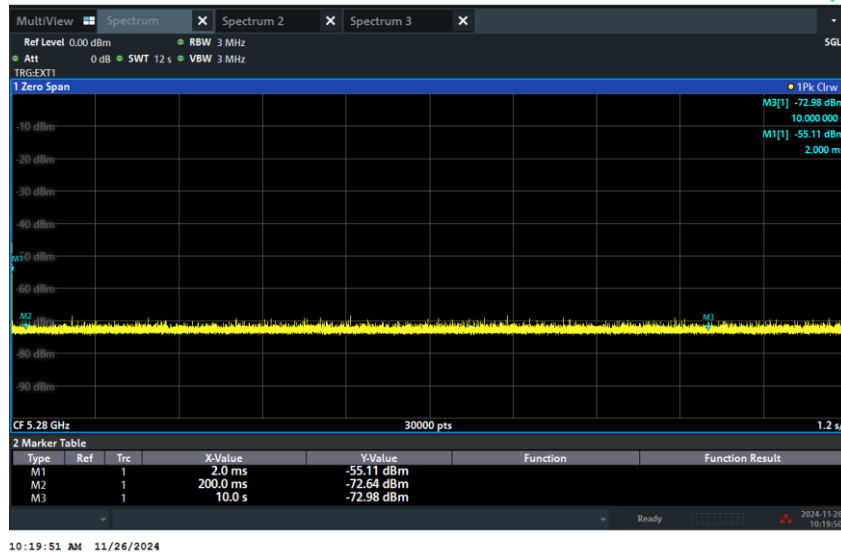Non-Occupancy Period


<160MHz / 5250MHz >In-Service Monitoring
Radar is injected at 5280 MHz
**Channel Move Time &
Channel Closing Transmission Time**

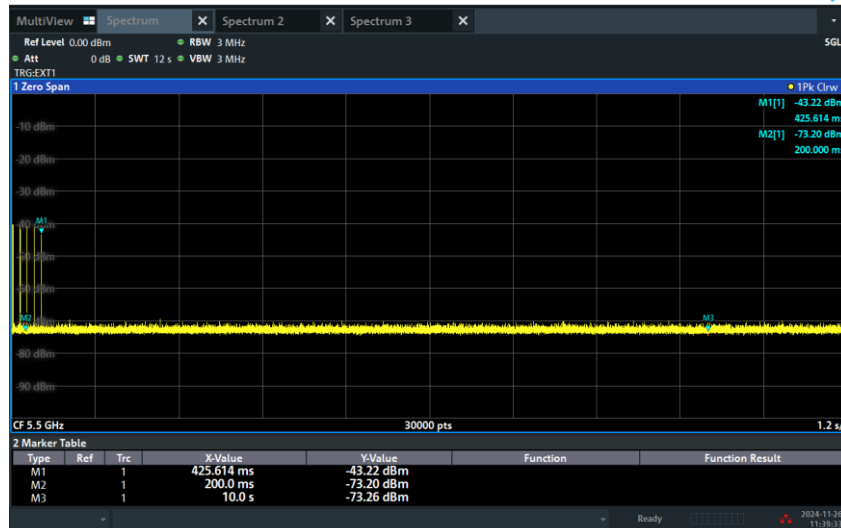Note:

1. Dwell (0.4 ms) = Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 + 0 ms) = 200 + Number (0) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.

<80MHz / 5530MHz >In-Service Monitoring
Radar is injected at 5500 MHz
**Channel Move Time &
Channel Closing Transmission Time**


11:39:33 AM 11/26/2024


Note:

1. Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 +8.4 ms) = 200 + Number (21) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.


<80MHz / 5530MHz >In-Service Monitoring
Radar is injected at 5520 MHz
**Channel Move Time &
Channel Closing Transmission Time**

Note:


1. Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 + 0 ms) = 200 + Number (0) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.
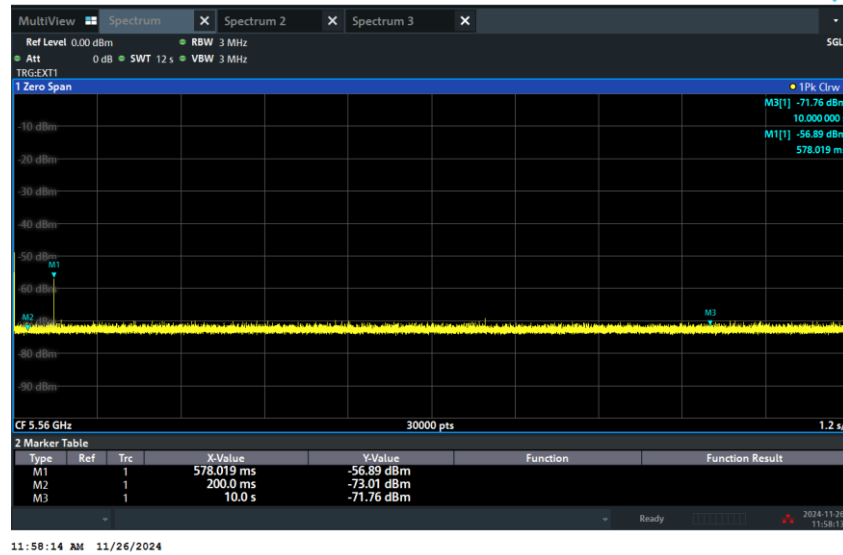
<80MHz / 5530MHz >In-Service Monitoring
Radar is injected at 5560 MHz
**Channel Move Time &
Channel Closing Transmission Time**

Note:

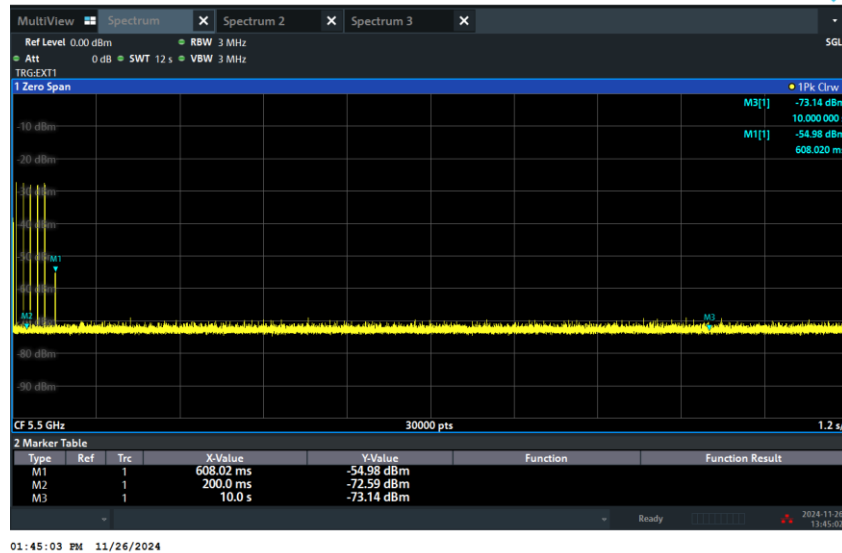1. Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 + 0.4 ms) = 200 + Number (1) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.

<160MHz / 5570MHz >In-Service Monitoring
Radar is injected at 5500 MHz
**Channel Move Time &
Channel Closing Transmission Time**

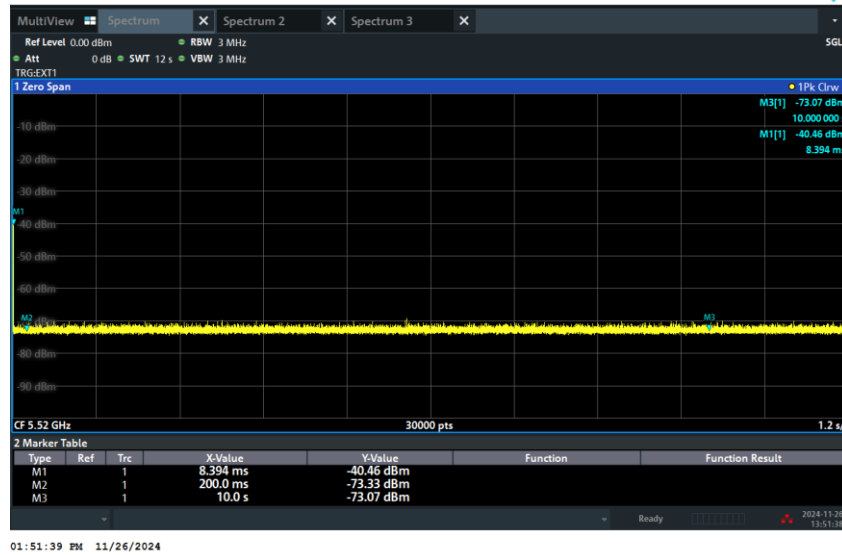Note:

1. Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 + 8.4 ms) = 200 + Number (21) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.

<160MHz / 5570MHz >In-Service Monitoring
Radar is injected at 5520 MHz
**Channel Move Time &
Channel Closing Transmission Time**

Note:

1. Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 + 0 ms) = 200 + Number (0) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.



<160MHz / 5570MHz >In-Service Monitoring

Radar is injected at 5640 MHz

Channel Move Time &
Channel Closing Transmission Time


Note:

1. Dwell (0.4 ms) = Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 + 0 ms) = 200 + Number (0) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.

<240MHz / 5610MHz >In-Service Monitoring

Radar is injected at 5500 MHz

Channel Move Time & Channel Closing Transmission Time

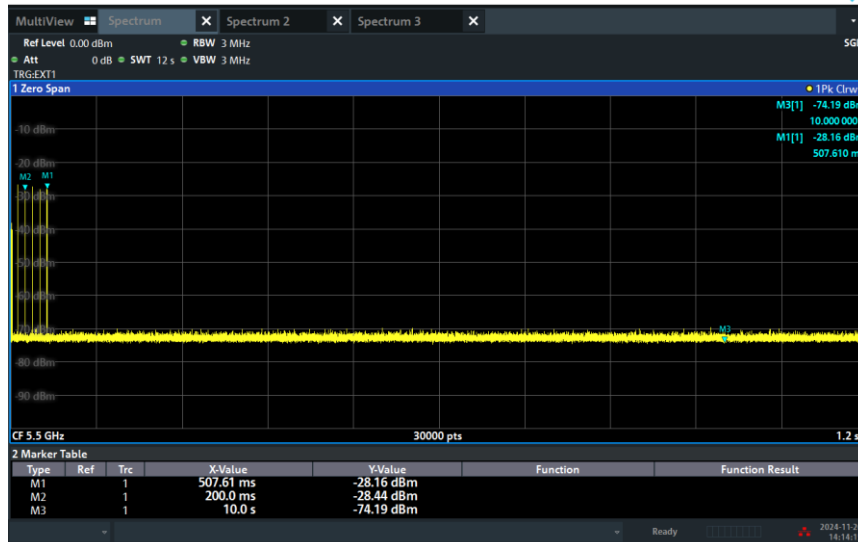


02:14:16 PM 11/26/2024


Note:

1. Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 + 8.8 ms) = 200 + Number (22) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.

Non-Occupancy Period

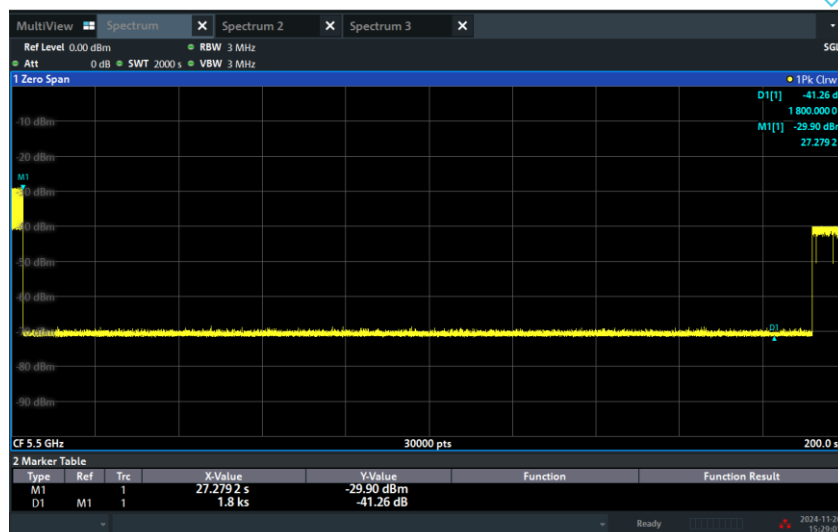


03:29:02 PM 11/26/2024
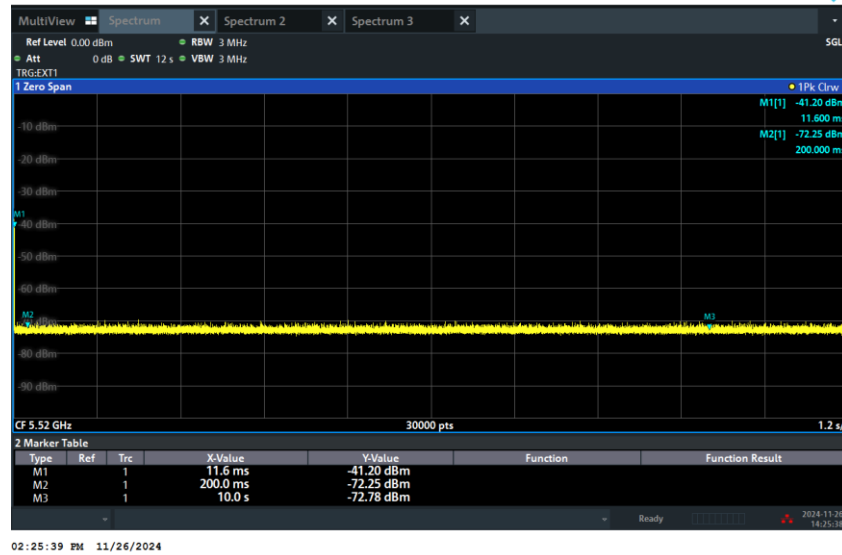
<240MHz / 5610MHz >In-Service Monitoring
Radar is injected at 5520 MHz
**Channel Move Time &
Channel Closing Transmission Time**


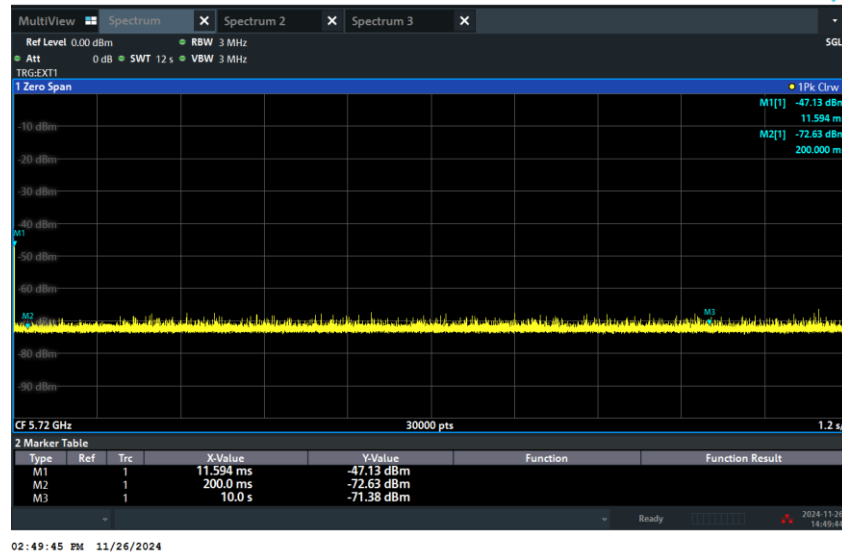
02:25:39 PM 11/26/2024

Note:

1. Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 + 0 ms) = 200 + Number (0) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.
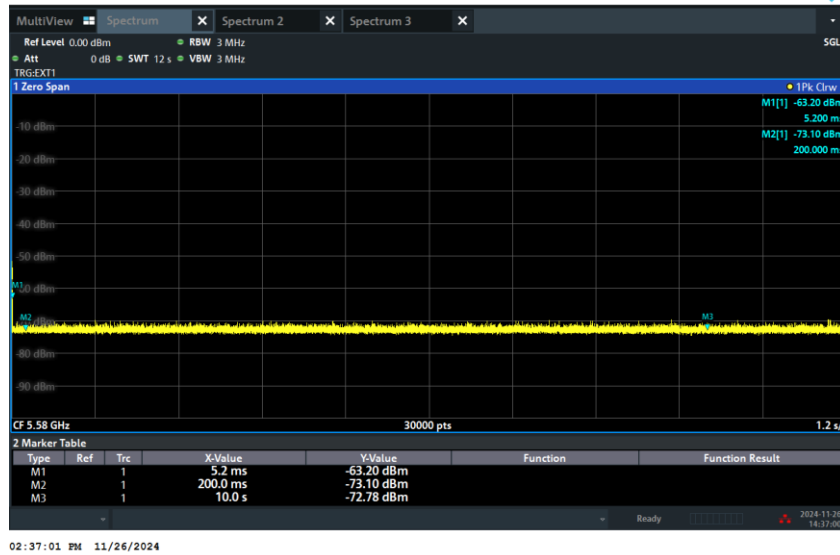
<240MHz / 5610MHz >In-Service Monitoring
Radar is injected at 5580 MHz
**Channel Move Time &
Channel Closing Transmission Time**

Note:

1. Dwell (0.4 ms) = Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 + 0 ms) = 200 + Number (0) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.

<240MHz / 5610MHz >In-Service Monitoring
Radar is injected at 5720 MHz
**Channel Move Time &
Channel Closing Transmission Time**

Note:

1. Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)
2. Channel Closing Transmission Time (200 + 0 ms) = 200 + Number (0) X Dwell (0.4 ms) < 260ms
3. The 99%OBW of Remaining Active Signal does not fall within the notched band.

5.2 26dB & 99% Occupied Bandwidth Measurement

5.2.1 Description of 26dB & 99% Occupied Bandwidth


This section is for reporting purpose only.

There is no restriction limits for bandwidth.

5.2.2 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth.
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

5.2.3 Test Setup

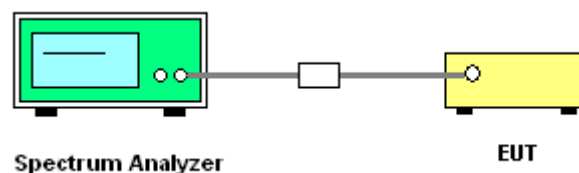

5.2.4 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix B.

5.3 Maximum Conducted Output Power Measurement

5.3.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.25–5.725 GHz bands:

- The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.


5.3.2 Test Procedures

The spectrum analyzer follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01

5.3.3 Test Setup

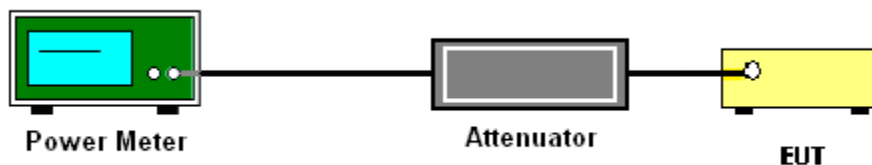

5.3.4 Test Result of Maximum Conducted Output Power

Please refer to Appendix B.

5.4 Power Spectral Density Measurement

5.4.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.25–5.725 GHz bands:

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.4.2 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules **v02r01**.

Section F) Maximum power spectral density.

Method SA-3


(power averaging (rms) detection with max hold):

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time $\leq$ (number of points in sweep) $\times$ T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Detector = power averaging (rms).
 - Trace mode = max hold.
 - Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output **v02r01**

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

5.4.3 Test Setup

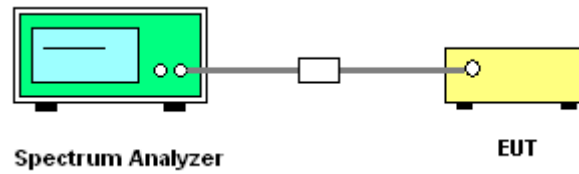

5.4.4 Test Result of Maximum Power Spectral Density

Please refer to Appendix B.



6 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Signal Generator	Keysight	N5182B	MY56200377	9kHz~6GHz	Apr. 18, 2024	Nov. 20, 2024~ Dec. 20, 2024	Apr. 17, 2025	DFS (03CH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV3013	101549	10Hz~13.6GHz	Jan. 30, 2024	Nov. 20, 2024~ Dec. 20, 2024	Jan. 29, 2025	DFS (03CH05-HY)
Double Ridged Guide Horn Antenna	COM-POWER	AH-118	071027	1GHz~18GHz	Dec. 20, 2023	Nov. 20, 2024~ Dec. 17, 2024	Dec. 19, 2024	DFS (03CH05-HY)
Double Ridged Guide Horn Antenna	COM-POWER	AH-118	071025	1GHz~18GHz	Nov. 27, 2023	Nov. 20, 2024~ Nov. 25, 2024	Nov. 26, 2024	DFS (03CH05-HY)
Double Ridged Guide Horn Antenna	COM-POWER	AH-118	071025	1GHz~18GHz	Nov. 28, 2024	Nov. 28, 2024~ Dec. 20, 2024	Nov. 27, 2025	DFS (03CH05-HY)
Software 1	Sporton	DFS & AdaptivityTest Tools	N/A	Ver 1.0	NCR	Nov. 20, 2024~ Dec. 20, 2024	NCR	DFS (03CH05-HY)
Software 2	Keysight	Keysight Signal Studio for DFS Radar Profiles	N/A	Ver 1.5.5.0	NCR	Nov. 20, 2024~ Dec. 20, 2024	NCR	DFS (03CH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV3013	101549	10Hz~13.6GHz	Jan. 30, 2024	Nov. 20, 2024~ Dec. 12, 2024	Jan. 29, 2025	Conducted (TH05-HY)
Power Divider	Woken	2Way Divider	DCMB1KW7 A2	0.5GHz~18GHz	Calibration from System	Nov. 20, 2024~ Dec. 12, 2024	Calibration from System	Conducted (TH05-HY)
Power Divider	Woken	3Way SMA Power Divider Rated to 20W	ST108-0010 (#2)	2GHz~8GHz	Calibration from System	Nov. 20, 2024~ Dec. 12, 2024	Calibration from System	Conducted (TH05-HY)
RF Cable	EC	SS405	SS405-100cm-05	30 kHz~18GHz	Calibration from System	Nov. 20, 2024~ Dec. 12, 2024	Calibration from System	Conducted (TH05-HY)
RF Cable	EC	SS405	SS405-100cm-06	30 kHz~18GHz	Calibration from System	Nov. 20, 2024~ Dec. 12, 2024	Calibration from System	Conducted (TH05-HY)
RF Cable	EC	SLF405	EC-SFL405-100cm-#8	30 kHz~18GHz	Calibration from System	Nov. 20, 2024~ Dec. 12, 2024	Calibration from System	Conducted (TH05-HY)
RF Cable	MVE	SPF141	SPF141-100cm-#12	30 kHz~18GHz	Calibration from System	Nov. 20, 2024~ Dec. 12, 2024	Calibration from System	Conducted (TH05-HY)
Software 1	Sporton	BTWiFiTools	N/A	Ver 1.0(240703)	NCR	Nov. 20, 2024~ Dec. 12, 2024	NCR	Conducted (TH05-HY)



Appendix A. Radar Parameters

Channel 60 Bandwidth 20MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 60 Bandwidth 20MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	21	1089.32	918	Yes
2	13	1319.26	758	Yes
3	8	1519.76	658	Yes
4	10	1432.66	698	Yes
5	3	1792.11	558	Yes
6	18	1165.50	858	Yes
7	6	1618.12	618	Yes
8	15	1253.13	798	Yes
9	14	1285.35	778	Yes
10	4	1730.10	578	Yes
11	5	1672.24	598	Yes
12	19	1138.95	878	Yes
13	12	1355.01	738	Yes
14	9	1474.93	678	Yes
15	1	1930.50	518	Yes
16		387.90	2578	Yes
17		960.61	1041	Yes
18		530.50	1885	Yes
19		389.26	2569	Yes
20		480.77	2080	Yes
21		338.87	2951	Yes
22		346.02	2890	Yes
23		330.03	3030	Yes
24		661.38	1512	Yes
25		1457.73	686	Yes
26		352.49	2837	Yes
27		1034.13	967	Yes
28		1650.17	606	Yes
29		399.52	2503	Yes
30		564.33	1772	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 60 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	26	2.70	214	Yes
2	27	3.60	150	Yes
3	28	4.40	212	Yes
4	28	4.00	224	Yes
5	24	1.90	209	Yes
6	28	4.10	164	Yes
7	28	4.10	208	Yes
8	24	1.80	226	Yes
9	23	1.20	205	Yes
10	24	1.70	162	Yes
11	26	2.80	174	Yes
12	27	3.40	227	Yes
13	25	2.20	192	Yes
14	26	2.90	160	Yes
15	23	1.50	185	Yes
16	28	4.20	207	Yes
17	29	4.80	177	Yes
18	23	1.20	215	Yes
19	28	4.40	157	Yes
20	29	4.50	182	Yes
21	28	4.10	210	Yes
22	25	2.60	155	Yes
23	28	4.40	180	Yes
24	24	1.70	159	Yes
25	26	2.90	225	Yes
26	26	2.70	219	Yes
27	26	3.00	167	Yes
28	24	1.80	152	Yes
29	29	4.50	190	Yes
30	23	1.40	166	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 60 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	17	7.70	328	Yes
2	17	8.60	332	Yes
3	18	9.40	364	Yes
4	18	9.00	237	Yes
5	16	6.90	213	Yes
6	18	9.10	488	Yes
7	18	9.10	341	Yes
8	16	6.80	223	Yes
9	16	6.20	435	Yes
10	16	6.70	450	Yes
11	17	7.80	499	Yes
12	17	8.40	314	Yes
13	16	7.20	261	Yes
14	17	7.90	495	Yes
15	16	6.50	230	Yes
16	18	9.20	440	Yes
17	18	9.80	362	Yes
18	16	6.20	243	Yes
19	18	9.40	395	Yes
20	18	9.50	308	Yes
21	18	9.10	497	Yes
22	17	7.60	297	Yes
23	18	9.40	253	Yes
24	16	6.70	367	Yes
25	17	7.90	346	Yes
26	17	7.70	458	Yes
27	17	8.00	309	Yes
28	16	6.80	288	Yes
29	18	9.50	464	Yes
30	16	6.40	377	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 60 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	14	14.90	328	Yes
2	15	16.80	332	Yes
3	16	18.60	364	Yes
4	15	17.80	237	Yes
5	13	12.90	213	Yes
6	15	17.80	488	Yes
7	15	17.90	341	Yes
8	13	12.80	223	Yes
9	12	11.60	435	Yes
10	12	12.70	450	Yes
11	14	15.00	499	Yes
12	14	16.30	314	Yes
13	13	13.70	261	Yes
14	14	15.20	495	Yes
15	12	12.20	230	Yes
16	16	18.20	440	Yes
17	16	19.40	362	Yes
18	12	11.50	243	Yes
19	16	18.70	395	Yes
20	16	18.80	308	Yes
21	15	18.00	497	Yes
22	14	14.70	297	Yes
23	16	18.60	253	Yes
24	12	12.70	367	Yes
25	14	15.20	346	Yes
26	14	14.90	458	Yes
27	14	15.40	309	Yes
28	12	12.70	288	Yes
29	16	18.80	464	Yes
30	12	11.90	377	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	71.5	11	1318	-	618504
2	2	82.3	11	1503	-	841409
3	3	92	11	1188	2000	144144
4	3	87.5	11	1181	1610	366867
5	1	61	11	-	-	591392
6	3	87.9	11	1657	1125	812710
7	3	88.1	11	1620	1424	116643
8	1	60.1	11	-	-	340697
9	1	53.4	11	-	-	564080
10	1	59.4	11	-	-	787482
11	2	72.3	11	1901	-	89393
12	2	79.4	11	1023	-	312599
13	1	65.1	11	-	-	536837
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.4	15	1792	-	615678
2	1	56.9	15	-	-	50397
3	3	90.1	15	1276	1342	231175
4	3	96.6	15	1273	1608	411845
5	1	53.2	15	-	-	595055
6	3	92.5	15	1439	1271	27915
7	3	93.1	15	1592	1363	208744
8	3	89	15	1266	1399	389638
9	2	70.5	15	1767	-	571186
10	3	91.9	15	1136	1644	5635
11	1	59.6	15	-	-	187268
12	2	73.6	15	1713	-	367807
13	2	71.5	15	1279	-	549604
14	2	74.6	15	1369	-	730242
15	1	59.8	15	-	-	164840
16	3	93.3	15	1398	1809	344710
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55.3	18	-	-	468866
2	1	50.9	18	-	-	630773
3	3	93.9	18	1626	1207	126111
4	1	66.5	18	-	-	288125
5	1	61.8	18	-	-	448924
6	2	75.5	18	1161	-	609235
7	3	96.7	18	1215	1127	106280
8	2	72.8	18	1917	-	267459
9	2	71.5	18	1589	-	428323
10	3	85.4	18	1452	1960	587339
11	2	71.4	18	1309	-	86692
12	1	63.2	18	-	-	248144
13	2	80	18	1949	-	408406
14	3	86.9	18	1672	1497	567853
15	1	61.2	18	-	-	67030
16	2	77.6	18	1343	-	227789
17	1	62.8	18	-	-	389349
18	1	51.9	18	-	-	550830
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	69.5	16	1036	-	49858
2	2	70.3	16	1698	-	220202
3	1	59.7	16	-	-	391290
4	3	99.2	16	1653	1971	559888
5	2	67.8	16	1337	-	28798
6	3	93	16	1199	1686	198805
7	1	60.1	16	-	-	370480
8	1	59.7	16	-	-	541141
9	1	50.9	16	-	-	7816
10	3	90.5	16	1129	1492	177860
11	2	82.4	16	1907	-	348290
12	1	63.9	16	-	-	520130
13	3	89.5	16	1815	1574	687822
14	1	63.3	16	-	-	157532
15	2	78.3	16	1554	-	327697
16	2	66.8	16	1994	-	497595
17	3	98.1	16	1288	1106	668209
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.4	8	-	-	232340
2	2	78.4	8	1052	-	522745
3	1	62.9	8	-	-	813881
4	1	53.3	8	-	-	1103943
5	3	97.9	8	1472	1140	196185
6	1	60.3	8	-	-	487308
7	2	67.3	8	1853	-	776494
8	2	75.1	8	1378	-	1067118
9	2	67.8	8	1246	-	160576
10	2	71	8	1205	-	450901
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	79.8	17	1417	-	435506
2	1	58.9	17	-	-	606601
3	3	83.6	17	1665	1483	73133
4	2	80.6	17	1779	-	243564
5	2	82	17	1793	-	414265
6	1	60.7	17	-	-	585820
7	2	69.6	17	1918	-	52269
8	1	55	17	-	-	223078
9	3	89.5	17	1416	1311	392377
10	3	83.5	17	1650	1506	562280
11	1	56.2	17	-	-	31336
12	2	83.2	17	1473	-	201744
13	1	50.9	17	-	-	373119
14	1	56.4	17	-	-	543481
15	1	52.1	17	-	-	10311
16	2	74.5	17	1223	-	180843
17	1	56.2	17	-	-	351767
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	90.5	17	1078	1507	521121
2	1	57.5	17	-	-	693399
3	3	96	17	1639	1991	159277
4	1	58.1	17	-	-	330862
5	3	84.9	17	1021	1212	499978
6	1	63.2	17	-	-	672991
7	3	88.8	17	1759	1722	138382
8	1	52.8	17	-	-	309834
9	3	99.3	17	1468	1164	478683
10	3	100	17	1929	1445	648717
11	3	98.7	17	1826	1758	117415
12	2	71.6	17	1881	-	288030
13	1	60	17	-	-	459522
14	3	92.5	17	1840	1708	627781
15	2	74	17	1157	-	96837
16	3	100	17	1674	1258	266696
17	2	71.9	17	1739	-	437410
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	80.3	8	1261	-	1035673
2	1	50.7	8	-	-	129136
3	2	67.3	8	1546	-	419208
4	1	59.8	8	-	-	710650
5	1	50.3	8	-	-	1001019
6	1	53.1	8	-	-	93404
7	2	69.8	8	1072	-	383770
8	1	58.2	8	-	-	674852
9	3	88.8	8	1486	1647	963226
10	3	83.4	8	1099	1395	57470
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	91.9	6	1253	1965	434541
2	2	75.3	6	1200	-	798349
3	2	77.5	6	1463	-	1161155
4	1	56.4	6	-	-	27220
5	1	51.1	6	-	-	390663
6	2	73.4	6	1531	-	753494
7	1	54	6	-	-	1117437
8	2	76.8	6	1754	-	1478780
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.5	8	1697	-	276178
2	2	71.9	8	1926	-	566503
3	1	62.9	8	-	-	858192
4	3	95	8	1613	1813	1145729
5	3	95.8	8	1389	1042	240318
6	3	94.9	8	1964	1852	529645
7	2	77.8	8	1088	-	821248
8	2	82.8	8	1513	-	1111360
9	1	60.8	8	-	-	205100
10	2	71	8	1457	-	495019
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5294			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	83.4	12	1146	1624	602834
2	2	79.5	12	1028	-	827662
3	3	91	12	1582	1820	129713
4	2	82.3	12	1585	-	353024
5	2	83.2	12	1365	-	576234
6	2	79	12	1073	-	799400
7	2	76.1	12	1646	-	102465
8	1	51.3	12	-	-	325963
9	1	57.1	12	-	-	549330
10	3	96.5	12	1738	1893	769902
11	3	90.1	12	1941	1548	74817
12	1	54.4	12	-	-	298561
13	2	76.2	12	1151	-	521688
14						
15						
16						
17						
18						
19						
20						

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5295			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	99.9	14	1442	1014	643759
2	3	96.1	14	1382	1694	41044
3	2	79.8	14	1700	-	234483
4	3	97	14	1810	1450	426995
5	2	77.5	14	1324	-	620814
6	2	71.7	14	1247	-	17309
7	3	93.5	14	1272	1225	210226
8	3	97.5	14	1951	1443	402908
9	3	98.3	14	1638	1688	595802
10	1	56	14	-	-	792044
11	1	65.6	14	-	-	187163
12	1	56.4	14	-	-	380663
13	2	78.1	14	1462	-	573392
14	1	59	14	-	-	767896
15	3	85.4	14	1831	1518	162572
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5293			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55	9	-	-	486940
2	2	72.5	9	1391	-	750174
3	2	82	9	1532	-	1013938
4	2	67.6	9	1874	-	189959
5	3	92.4	9	1544	1213	453187
6	3	98.8	9	1817	1421	716309
7	2	74.9	9	1153	-	981442
8	1	59.3	9	-	-	157641
9	3	92.4	9	1642	1704	420666
10	1	59.5	9	-	-	685980
11	3	92.1	9	1846	1191	947753
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5294			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	12	1065	1858	97900
2	2	80.4	12	1957	-	305207
3	3	99.8	12	1388	1338	511925
4	1	66.3	12	-	-	721131
5	1	57.5	12	-	-	72718
6	3	86.8	12	1797	1174	279132
7	1	63.1	12	-	-	487758
8	3	95.8	12	1031	1903	693036
9	1	63.1	12	-	-	47150
10	3	98.9	12	1053	1751	253729
11	1	65.9	12	-	-	462007
12	3	97.9	12	1667	1676	667428
13	1	50.3	12	-	-	21607
14	1	61	12	-	-	229219
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5292			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.3	7	1033	-	678869
2	2	73.6	7	1320	-	1001321
3	3	85.2	7	1625	1764	1322716
4	2	73.5	7	1530	-	316568
5	2	75.4	7	1160	-	639434
6	2	75.9	7	1239	-	962158
7	1	55.1	7	-	-	1286309
8	2	70	7	1074	-	276828
9	3	90.7	7	1919	1358	598555
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5296			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96.4	17	1652	1444	458879
2	3	84.6	17	1346	1906	619571
3	1	64.4	17	-	-	118529
4	2	72.4	17	1032	-	279226
5	1	62.1	17	-	-	441396
6	2	77.4	17	1336	-	600839
7	2	74.9	17	1923	-	98396
8	3	86.8	17	1706	1953	258560
9	3	87.5	17	1659	1562	419194
10	3	87.4	17	1124	1982	580057
11	3	85.4	17	1673	1721	78393
12	2	73.3	17	1193	-	239768
13	1	63	17	-	-	401351
14	3	97.8	17	1221	1848	560102
15	2	82	17	1280	-	58784
16	3	98.5	17	1509	1999	218927
17	2	78.9	17	1597	-	380497
18	3	93.3	17	1786	1123	540748
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5297			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.3	19	1290	-	35052
2	3	95.9	19	1478	1740	179435
3	3	86.6	19	1808	1955	323219
4	3	89.1	19	1693	1269	468545
5	2	74.7	19	1873	-	17160
6	2	81.7	19	1274	-	162128
7	1	56.6	19	-	-	307763
8	2	75	19	1166	-	451984
9	2	75.2	19	1794	-	596054
10	3	89.7	19	1864	1194	143792
11	3	85.8	19	1420	1456	288059
12	2	67	19	1327	-	434042
13	3	83.7	19	1366	1001	577658
14	3	87	19	1601	1474	125996
15	2	78.4	19	1992	-	270847
16	3	89.8	19	1904	1267	414680
17	1	53.3	19	-	-	561916
18	2	81.7	19	1692	-	108515
19	3	93.2	19	1861	1799	252217
20	1	64.3	19	-	-	398790

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5292			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	51	6	-	-	1362731
2	2	68.3	6	1013	-	227376
3	3	88.2	6	1570	1175	589884
4	1	62	6	-	-	954235
5	2	78.4	6	1412	-	1316828
6	1	60.4	6	-	-	182740
7	1	64.9	6	-	-	546134
8	3	87.7	6	1579	1948	907454
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5297			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	54.3	18	-	-	535574
2	2	75.9	18	1080	-	57901
3	1	53.2	18	-	-	210731
4	2	75.1	18	1934	-	362362
5	3	96.5	18	1262	1187	514214
6	2	82.6	18	1897	-	39077
7	2	72.8	18	1062	-	191702
8	2	74.1	18	1989	-	343459
9	1	54.1	18	-	-	497638
10	1	57.3	18	-	-	20359
11	1	59.9	18	-	-	173154
12	2	82.7	18	1008	-	325675
13	1	65.8	18	-	-	478914
14	3	87.1	18	1063	1668	1530
15	1	52.2	18	-	-	154365
16	3	85.3	18	1593	1577	305605
17	1	51	18	-	-	459949
18	2	70.5	18	1824	-	610916
19	1	53.7	18	-	-	135433
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5297			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	18	1089	1448	287133
2	3	94.9	18	1455	1937	438973
3	2	73.3	18	1419	-	592828
4	3	94.4	18	1076	1839	116148
5	1	50.2	18	-	-	269337
6	1	55.3	18	-	-	422663
7	1	64.6	18	-	-	574757
8	3	92.3	18	1120	1691	97375
9	1	64	18	-	-	250505
10	1	57.7	18	-	-	403627
11	2	74.5	18	1190	-	555389
12	1	60.6	18	-	-	79001
13	1	64.2	18	-	-	231999
14	2	66.8	18	1485	-	383531
15	2	68.9	18	1993	-	536127
16	2	70.7	18	1087	-	60108
17	3	99.4	18	1958	1576	211991
18	3	86.5	18	1623	1973	363541
19	1	60.7	18	-	-	518498
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5303			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	70.5	17	1163	-	43613
2	1	51.1	17	-	-	205055
3	1	64.1	17	-	-	366349
4	1	54.3	17	-	-	527788
5	3	85.7	17	1476	1895	23732
6	3	96.1	17	1243	1783	184401
7	2	71.8	17	1045	-	346087
8	1	60.4	17	-	-	508059
9	3	98.6	17	1185	1787	3956
10	1	63.9	17	-	-	165231
11	1	66.1	17	-	-	326541
12	1	52.9	17	-	-	487791
13	1	61	17	-	-	648828
14	1	57.9	17	-	-	145398
15	1	56.7	17	-	-	306925
16	1	66.4	17	-	-	467774
17	3	92.9	17	1118	1139	627090
18	2	81	17	1428	-	125373
19						
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5305			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	81.5	11	1284	-	396868
2	1	52.9	11	-	-	621215
3	2	69.8	11	1876	-	842958
4	2	81.9	11	1356	-	146157
5	3	90.3	11	1572	1039	369067
6	1	58.8	11	-	-	593700
7	1	66.4	11	-	-	816898
8	2	79.6	11	1198	-	118733
9	3	96.7	11	1795	1558	341250
10	3	95.7	11	1788	1869	563466
11	1	65.9	11	-	-	789727
12	3	96.9	11	1244	1394	91095
13	1	66.4	11	-	-	314757
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5302			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	52.9	18	-	-	388751
2	3	98.8	18	1587	1114	547579
3	3	90.4	18	1630	1083	45880
4	1	50	18	-	-	207326
5	1	52.5	18	-	-	368549
6	3	84.4	18	1108	1150	527980
7	3	90.6	18	1229	1997	26085
8	3	87.7	18	1598	1017	186767
9	3	98.3	18	1296	1515	347138
10	2	78.5	18	1822	-	508883
11	3	94.9	18	1202	1969	6294
12	1	66.1	18	-	-	167570
13	2	78.4	18	1633	-	328387
14	3	97.9	18	1177	1899	488262
15	1	54.8	18	-	-	651317
16	1	63.4	18	-	-	147765
17	1	52.7	18	-	-	308906
18	1	57.5	18	-	-	470724
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5306			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.4	8	-	-	1138082
2	2	76.1	8	1536	-	230256
3	3	89.7	8	1067	1590	519863
4	2	67.8	8	1385	-	810614
5	3	83.5	8	1401	1408	1099764
6	3	90.9	8	1508	1681	194169
7	3	88.6	8	1882	1097	483956
8	1	60.9	8	-	-	775710
9	1	55.2	8	-	-	1067046
10	3	88	8	1493	1680	158495
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5305			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	56	12	-	-	320776
2	3	99.5	12	1972	1333	526456
3	2	76.1	12	1519	-	734365
4	3	94.6	12	1281	1368	87603
5	1	51.6	12	-	-	295396
6	3	97.5	12	1732	1334	501013
7	1	63.1	12	-	-	710276
8	1	54.1	12	-	-	62297
9	2	70.7	12	1523	-	269209
10	1	57.8	12	-	-	477111
11	1	54.1	12	-	-	684853
12	2	82.1	12	1798	-	36645
13	1	52.3	12	-	-	244381
14	3	93.4	12	1635	1842	450010
15						
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5305			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	83.3	11	1018	-	708971
2	2	74.5	11	1894	-	11995
3	2	74.9	11	1724	-	235090
4	1	65.8	11	-	-	459030
5	1	61.8	11	-	-	682737
6	1	60.9	11	-	-	906245
7	1	61.5	11	-	-	208052
8	1	66.1	11	-	-	431427
9	3	94	11	1352	1182	653346
10	3	88.2	11	1447	1302	875528
11	1	65.5	11	-	-	180540
12	2	70.7	11	1757	-	403299
13	2	76.8	11	1844	-	626007
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5305			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	85.2	12	1357	1354	787746
2	1	65.2	12	-	-	142038
3	3	99.5	12	1860	1634	347955
4	1	61.4	12	-	-	556845
5	3	91.7	12	1990	1818	760893
6	2	79.1	12	1364	-	116301
7	1	52.5	12	-	-	323834
8	2	81.7	12	1379	-	530615
9	3	98.9	12	1778	1866	735634
10	1	52.4	12	-	-	90879
11	1	50.3	12	-	-	298498
12	1	64.4	12	-	-	505727
13	2	80.9	12	1616	-	712267
14	3	84.8	12	1789	1803	65014
15						
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5306			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	8	-	-	382215
2	3	92.8	8	1211	1466	671177
3	3	94.9	8	1747	1892	960581
4	1	53.3	8	-	-	55664
5	2	68.3	8	1371	-	345993
6	2	73.8	8	1348	-	636186
7	3	96.3	8	1627	1500	925310
8	3	84.6	8	1636	1772	19817
9	1	59	8	-	-	310575
10	1	66	8	-	-	601469
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5302			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.7	18	1084	-	467911
2	3	99.1	18	1086	1961	618658
3	3	94.3	18	1728	1669	143614
4	2	76.4	18	1300	-	296756
5	3	89.9	18	1654	1862	447691
6	1	55.5	18	-	-	603059
7	3	88	18	1573	1891	124928
8	2	79	18	1101	-	277965
9	2	80.9	18	1720	-	429993
10	2	70.7	18	1978	-	581941
11	2	78	18	1135	-	106682
12	3	88.9	18	1766	1240	258439
13	2	71.2	18	1643	-	411054
14	3	96.5	18	1020	1096	563199
15	1	62.5	18	-	-	87943
16	1	52.9	18	-	-	240934
17	3	99.8	18	1144	1058	392319
18	1	61.7	18	-	-	546709
19	3	84.4	18	1525	1238	68872
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5307			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.1	6	1216	-	468654
2	2	74.5	6	1481	-	791396
3	1	51.4	6	-	-	1115552
4	2	80.9	6	1316	-	106252
5	2	76.2	6	1749	-	428886
6	1	60.9	6	-	-	752462
7	2	73.4	6	1651	-	1074304
8	3	99.1	6	1173	1567	66455
9	3	84.8	6	1458	1771	388590
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Channel 62 Bandwidth 40MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 62 Bandwidth 40MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	21	1089.32	918	Yes
2	13	1319.26	758	Yes
3	8	1519.76	658	Yes
4	10	1432.66	698	Yes
5	3	1792.11	558	Yes
6	18	1165.50	858	Yes
7	6	1618.12	618	Yes
8	15	1253.13	798	Yes
9	14	1285.35	778	Yes
10	4	1730.10	578	Yes
11	5	1672.24	598	Yes
12	19	1138.95	878	Yes
13	12	1355.01	738	Yes
14	9	1474.93	678	Yes
15	1	1930.50	518	Yes
16		387.90	2578	Yes
17		960.61	1041	Yes
18		530.50	1885	Yes
19		389.26	2569	Yes
20		480.77	2080	Yes
21		338.87	2951	Yes
22		346.02	2890	Yes
23		330.03	3030	Yes
24		661.38	1512	Yes
25		1457.73	686	Yes
26		352.49	2837	Yes
27		1034.13	967	Yes
28		1650.17	606	Yes
29		399.52	2503	Yes
30		564.33	1772	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 62 Bandwidth 40MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	26	2.70	214	Yes
2	27	3.60	150	Yes
3	28	4.40	212	Yes
4	28	4.00	224	Yes
5	24	1.90	209	Yes
6	28	4.10	164	Yes
7	28	4.10	208	Yes
8	24	1.80	226	Yes
9	23	1.20	205	Yes
10	24	1.70	162	Yes
11	26	2.80	174	Yes
12	27	3.40	227	Yes
13	25	2.20	192	Yes
14	26	2.90	160	Yes
15	23	1.50	185	Yes
16	28	4.20	207	Yes
17	29	4.80	177	Yes
18	23	1.20	215	Yes
19	28	4.40	157	Yes
20	29	4.50	182	Yes
21	28	4.10	210	Yes
22	25	2.60	155	Yes
23	28	4.40	180	Yes
24	24	1.70	159	Yes
25	26	2.90	225	Yes
26	26	2.70	219	Yes
27	26	3.00	167	Yes
28	24	1.80	152	Yes
29	29	4.50	190	Yes
30	23	1.40	166	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 62 Bandwidth 40MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	17	7.70	328	Yes
2	17	8.60	332	Yes
3	18	9.40	364	Yes
4	18	9.00	237	Yes
5	16	6.90	213	Yes
6	18	9.10	488	Yes
7	18	9.10	341	Yes
8	16	6.80	223	Yes
9	16	6.20	435	Yes
10	16	6.70	450	Yes
11	17	7.80	499	Yes
12	17	8.40	314	Yes
13	16	7.20	261	Yes
14	17	7.90	495	Yes
15	16	6.50	230	Yes
16	18	9.20	440	Yes
17	18	9.80	362	Yes
18	16	6.20	243	Yes
19	18	9.40	395	Yes
20	18	9.50	308	Yes
21	18	9.10	497	Yes
22	17	7.60	297	Yes
23	18	9.40	253	Yes
24	16	6.70	367	Yes
25	17	7.90	346	Yes
26	17	7.70	458	Yes
27	17	8.00	309	Yes
28	16	6.80	288	Yes
29	18	9.50	464	Yes
30	16	6.40	377	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 62 Bandwidth 40MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	14	14.90	328	Yes
2	15	16.80	332	Yes
3	16	18.60	364	Yes
4	15	17.80	237	Yes
5	13	12.90	213	Yes
6	15	17.80	488	Yes
7	15	17.90	341	Yes
8	13	12.80	223	Yes
9	12	11.60	435	Yes
10	12	12.70	450	Yes
11	14	15.00	499	Yes
12	14	16.30	314	Yes
13	13	13.70	261	Yes
14	14	15.20	495	Yes
15	12	12.20	230	Yes
16	16	18.20	440	Yes
17	16	19.40	362	Yes
18	12	11.50	243	Yes
19	16	18.70	395	Yes
20	16	18.80	308	Yes
21	15	18.00	497	Yes
22	14	14.70	297	Yes
23	16	18.60	253	Yes
24	12	12.70	367	Yes
25	14	15.20	346	Yes
26	14	14.90	458	Yes
27	14	15.40	309	Yes
28	12	12.70	288	Yes
29	16	18.80	464	Yes
30	12	11.90	377	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	71.5	11	1318	-	618504
2	2	82.3	11	1503	-	841409
3	3	92	11	1188	2000	144144
4	3	87.5	11	1181	1610	366867
5	1	61	11	-	-	591392
6	3	87.9	11	1657	1125	812710
7	3	88.1	11	1620	1424	116643
8	1	60.1	11	-	-	340697
9	1	53.4	11	-	-	564080
10	1	59.4	11	-	-	787482
11	2	72.3	11	1901	-	89393
12	2	79.4	11	1023	-	312599
13	1	65.1	11	-	-	536837
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.4	15	1792	-	615678
2	1	56.9	15	-	-	50397
3	3	90.1	15	1276	1342	231175
4	3	96.6	15	1273	1608	411845
5	1	53.2	15	-	-	595055
6	3	92.5	15	1439	1271	27915
7	3	93.1	15	1592	1363	208744
8	3	89	15	1266	1399	389638
9	2	70.5	15	1767	-	571186
10	3	91.9	15	1136	1644	5635
11	1	59.6	15	-	-	187268
12	2	73.6	15	1713	-	367807
13	2	71.5	15	1279	-	549604
14	2	74.6	15	1369	-	730242
15	1	59.8	15	-	-	164840
16	3	93.3	15	1398	1809	344710
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55.3	18	-	-	468866
2	1	50.9	18	-	-	630773
3	3	93.9	18	1626	1207	126111
4	1	66.5	18	-	-	288125
5	1	61.8	18	-	-	448924
6	2	75.5	18	1161	-	609235
7	3	96.7	18	1215	1127	106280
8	2	72.8	18	1917	-	267459
9	2	71.5	18	1589	-	428323
10	3	85.4	18	1452	1960	587339
11	2	71.4	18	1309	-	86692
12	1	63.2	18	-	-	248144
13	2	80	18	1949	-	408406
14	3	86.9	18	1672	1497	567853
15	1	61.2	18	-	-	67030
16	2	77.6	18	1343	-	227789
17	1	62.8	18	-	-	389349
18	1	51.9	18	-	-	550830
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	69.5	16	1036	-	49858
2	2	70.3	16	1698	-	220202
3	1	59.7	16	-	-	391290
4	3	99.2	16	1653	1971	559888
5	2	67.8	16	1337	-	28798
6	3	93	16	1199	1686	198805
7	1	60.1	16	-	-	370480
8	1	59.7	16	-	-	541141
9	1	50.9	16	-	-	7816
10	3	90.5	16	1129	1492	177860
11	2	82.4	16	1907	-	348290
12	1	63.9	16	-	-	520130
13	3	89.5	16	1815	1574	687822
14	1	63.3	16	-	-	157532
15	2	78.3	16	1554	-	327697
16	2	66.8	16	1994	-	497595
17	3	98.1	16	1288	1106	668209
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.4	8	-	-	232340
2	2	78.4	8	1052	-	522745
3	1	62.9	8	-	-	813881
4	1	53.3	8	-	-	1103943
5	3	97.9	8	1472	1140	196185
6	1	60.3	8	-	-	487308
7	2	67.3	8	1853	-	776494
8	2	75.1	8	1378	-	1067118
9	2	67.8	8	1246	-	160576
10	2	71	8	1205	-	450901
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	79.8	17	1417	-	435506
2	1	58.9	17	-	-	606601
3	3	83.6	17	1665	1483	73133
4	2	80.6	17	1779	-	243564
5	2	82	17	1793	-	414265
6	1	60.7	17	-	-	585820
7	2	69.6	17	1918	-	52269
8	1	55	17	-	-	223078
9	3	89.5	17	1416	1311	392377
10	3	83.5	17	1650	1506	562280
11	1	56.2	17	-	-	31336
12	2	83.2	17	1473	-	201744
13	1	50.9	17	-	-	373119
14	1	56.4	17	-	-	543481
15	1	52.1	17	-	-	10311
16	2	74.5	17	1223	-	180843
17	1	56.2	17	-	-	351767
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	90.5	17	1078	1507	521121
2	1	57.5	17	-	-	693399
3	3	96	17	1639	1991	159277
4	1	58.1	17	-	-	330862
5	3	84.9	17	1021	1212	499978
6	1	63.2	17	-	-	672991
7	3	88.8	17	1759	1722	138382
8	1	52.8	17	-	-	309834
9	3	99.3	17	1468	1164	478683
10	3	100	17	1929	1445	648717
11	3	98.7	17	1826	1758	117415
12	2	71.6	17	1881	-	288030
13	1	60	17	-	-	459522
14	3	92.5	17	1840	1708	627781
15	2	74	17	1157	-	96837
16	3	100	17	1674	1258	266696
17	2	71.9	17	1739	-	437410
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	80.3	8	1261	-	1035673
2	1	50.7	8	-	-	129136
3	2	67.3	8	1546	-	419208
4	1	59.8	8	-	-	710650
5	1	50.3	8	-	-	1001019
6	1	53.1	8	-	-	93404
7	2	69.8	8	1072	-	383770
8	1	58.2	8	-	-	674852
9	3	88.8	8	1486	1647	963226
10	3	83.4	8	1099	1395	57470
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	91.9	6	1253	1965	434541
2	2	75.3	6	1200	-	798349
3	2	77.5	6	1463	-	1161155
4	1	56.4	6	-	-	27220
5	1	51.1	6	-	-	390663
6	2	73.4	6	1531	-	753494
7	1	54	6	-	-	1117437
8	2	76.8	6	1754	-	1478780
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.5	8	1697	-	276178
2	2	71.9	8	1926	-	566503
3	1	62.9	8	-	-	858192
4	3	95	8	1613	1813	1145729
5	3	95.8	8	1389	1042	240318
6	3	94.9	8	1964	1852	529645
7	2	77.8	8	1088	-	821248
8	2	82.8	8	1513	-	1111360
9	1	60.8	8	-	-	205100
10	2	71	8	1457	-	495019
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5295			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	83.4	12	1146	1624	602834
2	2	79.5	12	1028	-	827662
3	3	91	12	1582	1820	129713
4	2	82.3	12	1585	-	353024
5	2	83.2	12	1365	-	576234
6	2	79	12	1073	-	799400
7	2	76.1	12	1646	-	102465
8	1	51.3	12	-	-	325963
9	1	57.1	12	-	-	549330
10	3	96.5	12	1738	1893	769902
11	3	90.1	12	1941	1548	74817
12	1	54.4	12	-	-	298561
13	2	76.2	12	1151	-	521688
14						
15						
16						
17						
18						
19						
20						

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5295			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	99.9	14	1442	1014	643759
2	3	96.1	14	1382	1694	41044
3	2	79.8	14	1700	-	234483
4	3	97	14	1810	1450	426995
5	2	77.5	14	1324	-	620814
6	2	71.7	14	1247	-	17309
7	3	93.5	14	1272	1225	210226
8	3	97.5	14	1951	1443	402908
9	3	98.3	14	1638	1688	595802
10	1	56	14	-	-	792044
11	1	65.6	14	-	-	187163
12	1	56.4	14	-	-	380663
13	2	78.1	14	1462	-	573392
14	1	59	14	-	-	767896
15	3	85.4	14	1831	1518	162572
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5293			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55	9	-	-	486940
2	2	72.5	9	1391	-	750174
3	2	82	9	1532	-	1013938
4	2	67.6	9	1874	-	189959
5	3	92.4	9	1544	1213	453187
6	3	98.8	9	1817	1421	716309
7	2	74.9	9	1153	-	981442
8	1	59.3	9	-	-	157641
9	3	92.4	9	1642	1704	420666
10	1	59.5	9	-	-	685980
11	3	92.1	9	1846	1191	947753
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5295			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	12	1065	1858	97900
2	2	80.4	12	1957	-	305207
3	3	99.8	12	1388	1338	511925
4	1	66.3	12	-	-	721131
5	1	57.5	12	-	-	72718
6	3	86.8	12	1797	1174	279132
7	1	63.1	12	-	-	487758
8	3	95.8	12	1031	1903	693036
9	1	63.1	12	-	-	47150
10	3	98.9	12	1053	1751	253729
11	1	65.9	12	-	-	462007
12	3	97.9	12	1667	1676	667428
13	1	50.3	12	-	-	21607
14	1	61	12	-	-	229219
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5293			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.3	7	1033	-	678869
2	2	73.6	7	1320	-	1001321
3	3	85.2	7	1625	1764	1322716
4	2	73.5	7	1530	-	316568
5	2	75.4	7	1160	-	639434
6	2	75.9	7	1239	-	962158
7	1	55.1	7	-	-	1286309
8	2	70	7	1074	-	276828
9	3	90.7	7	1919	1358	598555
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5297			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96.4	17	1652	1444	458879
2	3	84.6	17	1346	1906	619571
3	1	64.4	17	-	-	118529
4	2	72.4	17	1032	-	279226
5	1	62.1	17	-	-	441396
6	2	77.4	17	1336	-	600839
7	2	74.9	17	1923	-	98396
8	3	86.8	17	1706	1953	258560
9	3	87.5	17	1659	1562	419194
10	3	87.4	17	1124	1982	580057
11	3	85.4	17	1673	1721	78393
12	2	73.3	17	1193	-	239768
13	1	63	17	-	-	401351
14	3	97.8	17	1221	1848	560102
15	2	82	17	1280	-	58784
16	3	98.5	17	1509	1999	218927
17	2	78.9	17	1597	-	380497
18	3	93.3	17	1786	1123	540748
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5297			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.3	19	1290	-	35052
2	3	95.9	19	1478	1740	179435
3	3	86.6	19	1808	1955	323219
4	3	89.1	19	1693	1269	468545
5	2	74.7	19	1873	-	17160
6	2	81.7	19	1274	-	162128
7	1	56.6	19	-	-	307763
8	2	75	19	1166	-	451984
9	2	75.2	19	1794	-	596054
10	3	89.7	19	1864	1194	143792
11	3	85.8	19	1420	1456	288059
12	2	67	19	1327	-	434042
13	3	83.7	19	1366	1001	577658
14	3	87	19	1601	1474	125996
15	2	78.4	19	1992	-	270847
16	3	89.8	19	1904	1267	414680
17	1	53.3	19	-	-	561916
18	2	81.7	19	1692	-	108515
19	3	93.2	19	1861	1799	252217
20	1	64.3	19	-	-	398790

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5292			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	51	6	-	-	1362731
2	2	68.3	6	1013	-	227376
3	3	88.2	6	1570	1175	589884
4	1	62	6	-	-	954235
5	2	78.4	6	1412	-	1316828
6	1	60.4	6	-	-	182740
7	1	64.9	6	-	-	546134
8	3	87.7	6	1579	1948	907454
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5297			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	54.3	18	-	-	535574
2	2	75.9	18	1080	-	57901
3	1	53.2	18	-	-	210731
4	2	75.1	18	1934	-	362362
5	3	96.5	18	1262	1187	514214
6	2	82.6	18	1897	-	39077
7	2	72.8	18	1062	-	191702
8	2	74.1	18	1989	-	343459
9	1	54.1	18	-	-	497638
10	1	57.3	18	-	-	20359
11	1	59.9	18	-	-	173154
12	2	82.7	18	1008	-	325675
13	1	65.8	18	-	-	478914
14	3	87.1	18	1063	1668	1530
15	1	52.2	18	-	-	154365
16	3	85.3	18	1593	1577	305605
17	1	51	18	-	-	459949
18	2	70.5	18	1824	-	610916
19	1	53.7	18	-	-	135433
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5297			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	18	1089	1448	287133
2	3	94.9	18	1455	1937	438973
3	2	73.3	18	1419	-	592828
4	3	94.4	18	1076	1839	116148
5	1	50.2	18	-	-	269337
6	1	55.3	18	-	-	422663
7	1	64.6	18	-	-	574757
8	3	92.3	18	1120	1691	97375
9	1	64	18	-	-	250505
10	1	57.7	18	-	-	403627
11	2	74.5	18	1190	-	555389
12	1	60.6	18	-	-	79001
13	1	64.2	18	-	-	231999
14	2	66.8	18	1485	-	383531
15	2	68.9	18	1993	-	536127
16	2	70.7	18	1087	-	60108
17	3	99.4	18	1958	1576	211991
18	3	86.5	18	1623	1973	363541
19	1	60.7	18	-	-	518498
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5322			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	70.5	17	1163	-	43613
2	1	51.1	17	-	-	205055
3	1	64.1	17	-	-	366349
4	1	54.3	17	-	-	527788
5	3	85.7	17	1476	1895	23732
6	3	96.1	17	1243	1783	184401
7	2	71.8	17	1045	-	346087
8	1	60.4	17	-	-	508059
9	3	98.6	17	1185	1787	3956
10	1	63.9	17	-	-	165231
11	1	66.1	17	-	-	326541
12	1	52.9	17	-	-	487791
13	1	61	17	-	-	648828
14	1	57.9	17	-	-	145398
15	1	56.7	17	-	-	306925
16	1	66.4	17	-	-	467774
17	3	92.9	17	1118	1139	627090
18	2	81	17	1428	-	125373
19						
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5325			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	81.5	11	1284	-	396868
2	1	52.9	11	-	-	621215
3	2	69.8	11	1876	-	842958
4	2	81.9	11	1356	-	146157
5	3	90.3	11	1572	1039	369067
6	1	58.8	11	-	-	593700
7	1	66.4	11	-	-	816898
8	2	79.6	11	1198	-	118733
9	3	96.7	11	1795	1558	341250
10	3	95.7	11	1788	1869	563466
11	1	65.9	11	-	-	789727
12	3	96.9	11	1244	1394	91095
13	1	66.4	11	-	-	314757
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5322			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	52.9	18	-	-	388751
2	3	98.8	18	1587	1114	547579
3	3	90.4	18	1630	1083	45880
4	1	50	18	-	-	207326
5	1	52.5	18	-	-	368549
6	3	84.4	18	1108	1150	527980
7	3	90.6	18	1229	1997	26085
8	3	87.7	18	1598	1017	186767
9	3	98.3	18	1296	1515	347138
10	2	78.5	18	1822	-	508883
11	3	94.9	18	1202	1969	6294
12	1	66.1	18	-	-	167570
13	2	78.4	18	1633	-	328387
14	3	97.9	18	1177	1899	488262
15	1	54.8	18	-	-	651317
16	1	63.4	18	-	-	147765
17	1	52.7	18	-	-	308906
18	1	57.5	18	-	-	470724
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5326			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.4	8	-	-	1138082
2	2	76.1	8	1536	-	230256
3	3	89.7	8	1067	1590	519863
4	2	67.8	8	1385	-	810614
5	3	83.5	8	1401	1408	1099764
6	3	90.9	8	1508	1681	194169
7	3	88.6	8	1882	1097	483956
8	1	60.9	8	-	-	775710
9	1	55.2	8	-	-	1067046
10	3	88	8	1493	1680	158495
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	56	12	-	-	320776
2	3	99.5	12	1972	1333	526456
3	2	76.1	12	1519	-	734365
4	3	94.6	12	1281	1368	87603
5	1	51.6	12	-	-	295396
6	3	97.5	12	1732	1334	501013
7	1	63.1	12	-	-	710276
8	1	54.1	12	-	-	62297
9	2	70.7	12	1523	-	269209
10	1	57.8	12	-	-	477111
11	1	54.1	12	-	-	684853
12	2	82.1	12	1798	-	36645
13	1	52.3	12	-	-	244381
14	3	93.4	12	1635	1842	450010
15						
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5325			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	83.3	11	1018	-	708971
2	2	74.5	11	1894	-	11995
3	2	74.9	11	1724	-	235090
4	1	65.8	11	-	-	459030
5	1	61.8	11	-	-	682737
6	1	60.9	11	-	-	906245
7	1	61.5	11	-	-	208052
8	1	66.1	11	-	-	431427
9	3	94	11	1352	1182	653346
10	3	88.2	11	1447	1302	875528
11	1	65.5	11	-	-	180540
12	2	70.7	11	1757	-	403299
13	2	76.8	11	1844	-	626007
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	85.2	12	1357	1354	787746
2	1	65.2	12	-	-	142038
3	3	99.5	12	1860	1634	347955
4	1	61.4	12	-	-	556845
5	3	91.7	12	1990	1818	760893
6	2	79.1	12	1364	-	116301
7	1	52.5	12	-	-	323834
8	2	81.7	12	1379	-	530615
9	3	98.9	12	1778	1866	735634
10	1	52.4	12	-	-	90879
11	1	50.3	12	-	-	298498
12	1	64.4	12	-	-	505727
13	2	80.9	12	1616	-	712267
14	3	84.8	12	1789	1803	65014
15						
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5326			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	8	-	-	382215
2	3	92.8	8	1211	1466	671177
3	3	94.9	8	1747	1892	960581
4	1	53.3	8	-	-	55664
5	2	68.3	8	1371	-	345993
6	2	73.8	8	1348	-	636186
7	3	96.3	8	1627	1500	925310
8	3	84.6	8	1636	1772	19817
9	1	59	8	-	-	310575
10	1	66	8	-	-	601469
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5322			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.7	18	1084	-	467911
2	3	99.1	18	1086	1961	618658
3	3	94.3	18	1728	1669	143614
4	2	76.4	18	1300	-	296756
5	3	89.9	18	1654	1862	447691
6	1	55.5	18	-	-	603059
7	3	88	18	1573	1891	124928
8	2	79	18	1101	-	277965
9	2	80.9	18	1720	-	429993
10	2	70.7	18	1978	-	581941
11	2	78	18	1135	-	106682
12	3	88.9	18	1766	1240	258439
13	2	71.2	18	1643	-	411054
14	3	96.5	18	1020	1096	563199
15	1	62.5	18	-	-	87943
16	1	52.9	18	-	-	240934
17	3	99.8	18	1144	1058	392319
18	1	61.7	18	-	-	546709
19	3	84.4	18	1525	1238	68872
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5327			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.1	6	1216	-	468654
2	2	74.5	6	1481	-	791396
3	1	51.4	6	-	-	1115552
4	2	80.9	6	1316	-	106252
5	2	76.2	6	1749	-	428886
6	1	60.9	6	-	-	752462
7	2	73.4	6	1651	-	1074304
8	3	99.1	6	1173	1567	66455
9	3	84.8	6	1458	1771	388590
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Channel 58 Bandwidth 80MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 58 Bandwidth 80MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	21	1089.32	918	Yes
2	13	1319.26	758	Yes
3	8	1519.76	658	Yes
4	10	1432.66	698	Yes
5	3	1792.11	558	Yes
6	18	1165.50	858	Yes
7	6	1618.12	618	Yes
8	15	1253.13	798	Yes
9	14	1285.35	778	Yes
10	4	1730.10	578	Yes
11	5	1672.24	598	Yes
12	19	1138.95	878	Yes
13	12	1355.01	738	Yes
14	9	1474.93	678	Yes
15	1	1930.50	518	Yes
16		387.90	2578	Yes
17		960.61	1041	Yes
18		530.50	1885	Yes
19		389.26	2569	Yes
20		480.77	2080	Yes
21		338.87	2951	Yes
22		346.02	2890	Yes
23		330.03	3030	Yes
24		661.38	1512	Yes
25		1457.73	686	Yes
26		352.49	2837	Yes
27		1034.13	967	Yes
28		1650.17	606	Yes
29		399.52	2503	Yes
30		564.33	1772	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 58 Bandwidth 80MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	26	2.70	214	Yes
2	27	3.60	150	Yes
3	28	4.40	212	Yes
4	28	4.00	224	Yes
5	24	1.90	209	Yes
6	28	4.10	164	Yes
7	28	4.10	208	Yes
8	24	1.80	226	Yes
9	23	1.20	205	Yes
10	24	1.70	162	Yes
11	26	2.80	174	Yes
12	27	3.40	227	Yes
13	25	2.20	192	Yes
14	26	2.90	160	Yes
15	23	1.50	185	Yes
16	28	4.20	207	Yes
17	29	4.80	177	Yes
18	23	1.20	215	Yes
19	28	4.40	157	Yes
20	29	4.50	182	Yes
21	28	4.10	210	Yes
22	25	2.60	155	Yes
23	28	4.40	180	Yes
24	24	1.70	159	Yes
25	26	2.90	225	Yes
26	26	2.70	219	Yes
27	26	3.00	167	Yes
28	24	1.80	152	Yes
29	29	4.50	190	Yes
30	23	1.40	166	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 58 Bandwidth 80MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	17	7.70	328	Yes
2	17	8.60	332	Yes
3	18	9.40	364	Yes
4	18	9.00	237	Yes
5	16	6.90	213	Yes
6	18	9.10	488	Yes
7	18	9.10	341	Yes
8	16	6.80	223	Yes
9	16	6.20	435	Yes
10	16	6.70	450	Yes
11	17	7.80	499	Yes
12	17	8.40	314	Yes
13	16	7.20	261	Yes
14	17	7.90	495	Yes
15	16	6.50	230	Yes
16	18	9.20	440	Yes
17	18	9.80	362	Yes
18	16	6.20	243	Yes
19	18	9.40	395	Yes
20	18	9.50	308	Yes
21	18	9.10	497	Yes
22	17	7.60	297	Yes
23	18	9.40	253	Yes
24	16	6.70	367	Yes
25	17	7.90	346	Yes
26	17	7.70	458	Yes
27	17	8.00	309	Yes
28	16	6.80	288	Yes
29	18	9.50	464	Yes
30	16	6.40	377	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 58 Bandwidth 80MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	14	14.90	328	Yes
2	15	16.80	332	Yes
3	16	18.60	364	Yes
4	15	17.80	237	Yes
5	13	12.90	213	Yes
6	15	17.80	488	Yes
7	15	17.90	341	Yes
8	13	12.80	223	Yes
9	12	11.60	435	Yes
10	12	12.70	450	Yes
11	14	15.00	499	Yes
12	14	16.30	314	Yes
13	13	13.70	261	Yes
14	14	15.20	495	Yes
15	12	12.20	230	Yes
16	16	18.20	440	Yes
17	16	19.40	362	Yes
18	12	11.50	243	Yes
19	16	18.70	395	Yes
20	16	18.80	308	Yes
21	15	18.00	497	Yes
22	14	14.70	297	Yes
23	16	18.60	253	Yes
24	12	12.70	367	Yes
25	14	15.20	346	Yes
26	14	14.90	458	Yes
27	14	15.40	309	Yes
28	12	12.70	288	Yes
29	16	18.80	464	Yes
30	12	11.90	377	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	71.5	11	1318	-	618504
2	2	82.3	11	1503	-	841409
3	3	92	11	1188	2000	144144
4	3	87.5	11	1181	1610	366867
5	1	61	11	-	-	591392
6	3	87.9	11	1657	1125	812710
7	3	88.1	11	1620	1424	116643
8	1	60.1	11	-	-	340697
9	1	53.4	11	-	-	564080
10	1	59.4	11	-	-	787482
11	2	72.3	11	1901	-	89393
12	2	79.4	11	1023	-	312599
13	1	65.1	11	-	-	536837
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.4	15	1792	-	615678
2	1	56.9	15	-	-	50397
3	3	90.1	15	1276	1342	231175
4	3	96.6	15	1273	1608	411845
5	1	53.2	15	-	-	595055
6	3	92.5	15	1439	1271	27915
7	3	93.1	15	1592	1363	208744
8	3	89	15	1266	1399	389638
9	2	70.5	15	1767	-	571186
10	3	91.9	15	1136	1644	5635
11	1	59.6	15	-	-	187268
12	2	73.6	15	1713	-	367807
13	2	71.5	15	1279	-	549604
14	2	74.6	15	1369	-	730242
15	1	59.8	15	-	-	164840
16	3	93.3	15	1398	1809	344710
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55.3	18	-	-	468866
2	1	50.9	18	-	-	630773
3	3	93.9	18	1626	1207	126111
4	1	66.5	18	-	-	288125
5	1	61.8	18	-	-	448924
6	2	75.5	18	1161	-	609235
7	3	96.7	18	1215	1127	106280
8	2	72.8	18	1917	-	267459
9	2	71.5	18	1589	-	428323
10	3	85.4	18	1452	1960	587339
11	2	71.4	18	1309	-	86692
12	1	63.2	18	-	-	248144
13	2	80	18	1949	-	408406
14	3	86.9	18	1672	1497	567853
15	1	61.2	18	-	-	67030
16	2	77.6	18	1343	-	227789
17	1	62.8	18	-	-	389349
18	1	51.9	18	-	-	550830
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	69.5	16	1036	-	49858
2	2	70.3	16	1698	-	220202
3	1	59.7	16	-	-	391290
4	3	99.2	16	1653	1971	559888
5	2	67.8	16	1337	-	28798
6	3	93	16	1199	1686	198805
7	1	60.1	16	-	-	370480
8	1	59.7	16	-	-	541141
9	1	50.9	16	-	-	7816
10	3	90.5	16	1129	1492	177860
11	2	82.4	16	1907	-	348290
12	1	63.9	16	-	-	520130
13	3	89.5	16	1815	1574	687822
14	1	63.3	16	-	-	157532
15	2	78.3	16	1554	-	327697
16	2	66.8	16	1994	-	497595
17	3	98.1	16	1288	1106	668209
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.4	8	-	-	232340
2	2	78.4	8	1052	-	522745
3	1	62.9	8	-	-	813881
4	1	53.3	8	-	-	1103943
5	3	97.9	8	1472	1140	196185
6	1	60.3	8	-	-	487308
7	2	67.3	8	1853	-	776494
8	2	75.1	8	1378	-	1067118
9	2	67.8	8	1246	-	160576
10	2	71	8	1205	-	450901
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	79.8	17	1417	-	435506
2	1	58.9	17	-	-	606601
3	3	83.6	17	1665	1483	73133
4	2	80.6	17	1779	-	243564
5	2	82	17	1793	-	414265
6	1	60.7	17	-	-	585820
7	2	69.6	17	1918	-	52269
8	1	55	17	-	-	223078
9	3	89.5	17	1416	1311	392377
10	3	83.5	17	1650	1506	562280
11	1	56.2	17	-	-	31336
12	2	83.2	17	1473	-	201744
13	1	50.9	17	-	-	373119
14	1	56.4	17	-	-	543481
15	1	52.1	17	-	-	10311
16	2	74.5	17	1223	-	180843
17	1	56.2	17	-	-	351767
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	90.5	17	1078	1507	521121
2	1	57.5	17	-	-	693399
3	3	96	17	1639	1991	159277
4	1	58.1	17	-	-	330862
5	3	84.9	17	1021	1212	499978
6	1	63.2	17	-	-	672991
7	3	88.8	17	1759	1722	138382
8	1	52.8	17	-	-	309834
9	3	99.3	17	1468	1164	478683
10	3	100	17	1929	1445	648717
11	3	98.7	17	1826	1758	117415
12	2	71.6	17	1881	-	288030
13	1	60	17	-	-	459522
14	3	92.5	17	1840	1708	627781
15	2	74	17	1157	-	96837
16	3	100	17	1674	1258	266696
17	2	71.9	17	1739	-	437410
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	80.3	8	1261	-	1035673
2	1	50.7	8	-	-	129136
3	2	67.3	8	1546	-	419208
4	1	59.8	8	-	-	710650
5	1	50.3	8	-	-	1001019
6	1	53.1	8	-	-	93404
7	2	69.8	8	1072	-	383770
8	1	58.2	8	-	-	674852
9	3	88.8	8	1486	1647	963226
10	3	83.4	8	1099	1395	57470
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	91.9	6	1253	1965	434541
2	2	75.3	6	1200	-	798349
3	2	77.5	6	1463	-	1161155
4	1	56.4	6	-	-	27220
5	1	51.1	6	-	-	390663
6	2	73.4	6	1531	-	753494
7	1	54	6	-	-	1117437
8	2	76.8	6	1754	-	1478780
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.5	8	1697	-	276178
2	2	71.9	8	1926	-	566503
3	1	62.9	8	-	-	858192
4	3	95	8	1613	1813	1145729
5	3	95.8	8	1389	1042	240318
6	3	94.9	8	1964	1852	529645
7	2	77.8	8	1088	-	821248
8	2	82.8	8	1513	-	1111360
9	1	60.8	8	-	-	205100
10	2	71	8	1457	-	495019
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5255			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	83.4	12	1146	1624	602834
2	2	79.5	12	1028	-	827662
3	3	91	12	1582	1820	129713
4	2	82.3	12	1585	-	353024
5	2	83.2	12	1365	-	576234
6	2	79	12	1073	-	799400
7	2	76.1	12	1646	-	102465
8	1	51.3	12	-	-	325963
9	1	57.1	12	-	-	549330
10	3	96.5	12	1738	1893	769902
11	3	90.1	12	1941	1548	74817
12	1	54.4	12	-	-	298561
13	2	76.2	12	1151	-	521688
14						
15						
16						
17						
18						
19						
20						

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5256			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	99.9	14	1442	1014	643759
2	3	96.1	14	1382	1694	41044
3	2	79.8	14	1700	-	234483
4	3	97	14	1810	1450	426995
5	2	77.5	14	1324	-	620814
6	2	71.7	14	1247	-	17309
7	3	93.5	14	1272	1225	210226
8	3	97.5	14	1951	1443	402908
9	3	98.3	14	1638	1688	595802
10	1	56	14	-	-	792044
11	1	65.6	14	-	-	187163
12	1	56.4	14	-	-	380663
13	2	78.1	14	1462	-	573392
14	1	59	14	-	-	767896
15	3	85.4	14	1831	1518	162572
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5254			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55	9	-	-	486940
2	2	72.5	9	1391	-	750174
3	2	82	9	1532	-	1013938
4	2	67.6	9	1874	-	189959
5	3	92.4	9	1544	1213	453187
6	3	98.8	9	1817	1421	716309
7	2	74.9	9	1153	-	981442
8	1	59.3	9	-	-	157641
9	3	92.4	9	1642	1704	420666
10	1	59.5	9	-	-	685980
11	3	92.1	9	1846	1191	947753
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5255			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	12	1065	1858	97900
2	2	80.4	12	1957	-	305207
3	3	99.8	12	1388	1338	511925
4	1	66.3	12	-	-	721131
5	1	57.5	12	-	-	72718
6	3	86.8	12	1797	1174	279132
7	1	63.1	12	-	-	487758
8	3	95.8	12	1031	1903	693036
9	1	63.1	12	-	-	47150
10	3	98.9	12	1053	1751	253729
11	1	65.9	12	-	-	462007
12	3	97.9	12	1667	1676	667428
13	1	50.3	12	-	-	21607
14	1	61	12	-	-	229219
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5253			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.3	7	1033	-	678869
2	2	73.6	7	1320	-	1001321
3	3	85.2	7	1625	1764	1322716
4	2	73.5	7	1530	-	316568
5	2	75.4	7	1160	-	639434
6	2	75.9	7	1239	-	962158
7	1	55.1	7	-	-	1286309
8	2	70	7	1074	-	276828
9	3	90.7	7	1919	1358	598555
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5257			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96.4	17	1652	1444	458879
2	3	84.6	17	1346	1906	619571
3	1	64.4	17	-	-	118529
4	2	72.4	17	1032	-	279226
5	1	62.1	17	-	-	441396
6	2	77.4	17	1336	-	600839
7	2	74.9	17	1923	-	98396
8	3	86.8	17	1706	1953	258560
9	3	87.5	17	1659	1562	419194
10	3	87.4	17	1124	1982	580057
11	3	85.4	17	1673	1721	78393
12	2	73.3	17	1193	-	239768
13	1	63	17	-	-	401351
14	3	97.8	17	1221	1848	560102
15	2	82	17	1280	-	58784
16	3	98.5	17	1509	1999	218927
17	2	78.9	17	1597	-	380497
18	3	93.3	17	1786	1123	540748
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5258			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.3	19	1290	-	35052
2	3	95.9	19	1478	1740	179435
3	3	86.6	19	1808	1955	323219
4	3	89.1	19	1693	1269	468545
5	2	74.7	19	1873	-	17160
6	2	81.7	19	1274	-	162128
7	1	56.6	19	-	-	307763
8	2	75	19	1166	-	451984
9	2	75.2	19	1794	-	596054
10	3	89.7	19	1864	1194	143792
11	3	85.8	19	1420	1456	288059
12	2	67	19	1327	-	434042
13	3	83.7	19	1366	1001	577658
14	3	87	19	1601	1474	125996
15	2	78.4	19	1992	-	270847
16	3	89.8	19	1904	1267	414680
17	1	53.3	19	-	-	561916
18	2	81.7	19	1692	-	108515
19	3	93.2	19	1861	1799	252217
20	1	64.3	19	-	-	398790

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5253			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	51	6	-	-	1362731
2	2	68.3	6	1013	-	227376
3	3	88.2	6	1570	1175	589884
4	1	62	6	-	-	954235
5	2	78.4	6	1412	-	1316828
6	1	60.4	6	-	-	182740
7	1	64.9	6	-	-	546134
8	3	87.7	6	1579	1948	907454
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5258			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	54.3	18	-	-	535574
2	2	75.9	18	1080	-	57901
3	1	53.2	18	-	-	210731
4	2	75.1	18	1934	-	362362
5	3	96.5	18	1262	1187	514214
6	2	82.6	18	1897	-	39077
7	2	72.8	18	1062	-	191702
8	2	74.1	18	1989	-	343459
9	1	54.1	18	-	-	497638
10	1	57.3	18	-	-	20359
11	1	59.9	18	-	-	173154
12	2	82.7	18	1008	-	325675
13	1	65.8	18	-	-	478914
14	3	87.1	18	1063	1668	1530
15	1	52.2	18	-	-	154365
16	3	85.3	18	1593	1577	305605
17	1	51	18	-	-	459949
18	2	70.5	18	1824	-	610916
19	1	53.7	18	-	-	135433
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5258			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	18	1089	1448	287133
2	3	94.9	18	1455	1937	438973
3	2	73.3	18	1419	-	592828
4	3	94.4	18	1076	1839	116148
5	1	50.2	18	-	-	269337
6	1	55.3	18	-	-	422663
7	1	64.6	18	-	-	574757
8	3	92.3	18	1120	1691	97375
9	1	64	18	-	-	250505
10	1	57.7	18	-	-	403627
11	2	74.5	18	1190	-	555389
12	1	60.6	18	-	-	79001
13	1	64.2	18	-	-	231999
14	2	66.8	18	1485	-	383531
15	2	68.9	18	1993	-	536127
16	2	70.7	18	1087	-	60108
17	3	99.4	18	1958	1576	211991
18	3	86.5	18	1623	1973	363541
19	1	60.7	18	-	-	518498
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5322			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	70.5	17	1163	-	43613
2	1	51.1	17	-	-	205055
3	1	64.1	17	-	-	366349
4	1	54.3	17	-	-	527788
5	3	85.7	17	1476	1895	23732
6	3	96.1	17	1243	1783	184401
7	2	71.8	17	1045	-	346087
8	1	60.4	17	-	-	508059
9	3	98.6	17	1185	1787	3956
10	1	63.9	17	-	-	165231
11	1	66.1	17	-	-	326541
12	1	52.9	17	-	-	487791
13	1	61	17	-	-	648828
14	1	57.9	17	-	-	145398
15	1	56.7	17	-	-	306925
16	1	66.4	17	-	-	467774
17	3	92.9	17	1118	1139	627090
18	2	81	17	1428	-	125373
19						
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	81.5	11	1284	-	396868
2	1	52.9	11	-	-	621215
3	2	69.8	11	1876	-	842958
4	2	81.9	11	1356	-	146157
5	3	90.3	11	1572	1039	369067
6	1	58.8	11	-	-	593700
7	1	66.4	11	-	-	816898
8	2	79.6	11	1198	-	118733
9	3	96.7	11	1795	1558	341250
10	3	95.7	11	1788	1869	563466
11	1	65.9	11	-	-	789727
12	3	96.9	11	1244	1394	91095
13	1	66.4	11	-	-	314757
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5321			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	52.9	18	-	-	388751
2	3	98.8	18	1587	1114	547579
3	3	90.4	18	1630	1083	45880
4	1	50	18	-	-	207326
5	1	52.5	18	-	-	368549
6	3	84.4	18	1108	1150	527980
7	3	90.6	18	1229	1997	26085
8	3	87.7	18	1598	1017	186767
9	3	98.3	18	1296	1515	347138
10	2	78.5	18	1822	-	508883
11	3	94.9	18	1202	1969	6294
12	1	66.1	18	-	-	167570
13	2	78.4	18	1633	-	328387
14	3	97.9	18	1177	1899	488262
15	1	54.8	18	-	-	651317
16	1	63.4	18	-	-	147765
17	1	52.7	18	-	-	308906
18	1	57.5	18	-	-	470724
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5325			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.4	8	-	-	1138082
2	2	76.1	8	1536	-	230256
3	3	89.7	8	1067	1590	519863
4	2	67.8	8	1385	-	810614
5	3	83.5	8	1401	1408	1099764
6	3	90.9	8	1508	1681	194169
7	3	88.6	8	1882	1097	483956
8	1	60.9	8	-	-	775710
9	1	55.2	8	-	-	1067046
10	3	88	8	1493	1680	158495
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	56	12	-	-	320776
2	3	99.5	12	1972	1333	526456
3	2	76.1	12	1519	-	734365
4	3	94.6	12	1281	1368	87603
5	1	51.6	12	-	-	295396
6	3	97.5	12	1732	1334	501013
7	1	63.1	12	-	-	710276
8	1	54.1	12	-	-	62297
9	2	70.7	12	1523	-	269209
10	1	57.8	12	-	-	477111
11	1	54.1	12	-	-	684853
12	2	82.1	12	1798	-	36645
13	1	52.3	12	-	-	244381
14	3	93.4	12	1635	1842	450010
15						
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	83.3	11	1018	-	708971
2	2	74.5	11	1894	-	11995
3	2	74.9	11	1724	-	235090
4	1	65.8	11	-	-	459030
5	1	61.8	11	-	-	682737
6	1	60.9	11	-	-	906245
7	1	61.5	11	-	-	208052
8	1	66.1	11	-	-	431427
9	3	94	11	1352	1182	653346
10	3	88.2	11	1447	1302	875528
11	1	65.5	11	-	-	180540
12	2	70.7	11	1757	-	403299
13	2	76.8	11	1844	-	626007
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	85.2	12	1357	1354	787746
2	1	65.2	12	-	-	142038
3	3	99.5	12	1860	1634	347955
4	1	61.4	12	-	-	556845
5	3	91.7	12	1990	1818	760893
6	2	79.1	12	1364	-	116301
7	1	52.5	12	-	-	323834
8	2	81.7	12	1379	-	530615
9	3	98.9	12	1778	1866	735634
10	1	52.4	12	-	-	90879
11	1	50.3	12	-	-	298498
12	1	64.4	12	-	-	505727
13	2	80.9	12	1616	-	712267
14	3	84.8	12	1789	1803	65014
15						
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5325			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	8	-	-	382215
2	3	92.8	8	1211	1466	671177
3	3	94.9	8	1747	1892	960581
4	1	53.3	8	-	-	55664
5	2	68.3	8	1371	-	345993
6	2	73.8	8	1348	-	636186
7	3	96.3	8	1627	1500	925310
8	3	84.6	8	1636	1772	19817
9	1	59	8	-	-	310575
10	1	66	8	-	-	601469
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5321			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.7	18	1084	-	467911
2	3	99.1	18	1086	1961	618658
3	3	94.3	18	1728	1669	143614
4	2	76.4	18	1300	-	296756
5	3	89.9	18	1654	1862	447691
6	1	55.5	18	-	-	603059
7	3	88	18	1573	1891	124928
8	2	79	18	1101	-	277965
9	2	80.9	18	1720	-	429993
10	2	70.7	18	1978	-	581941
11	2	78	18	1135	-	106682
12	3	88.9	18	1766	1240	258439
13	2	71.2	18	1643	-	411054
14	3	96.5	18	1020	1096	563199
15	1	62.5	18	-	-	87943
16	1	52.9	18	-	-	240934
17	3	99.8	18	1144	1058	392319
18	1	61.7	18	-	-	546709
19	3	84.4	18	1525	1238	68872
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5326			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.1	6	1216	-	468654
2	2	74.5	6	1481	-	791396
3	1	51.4	6	-	-	1115552
4	2	80.9	6	1316	-	106252
5	2	76.2	6	1749	-	428886
6	1	60.9	6	-	-	752462
7	2	73.4	6	1651	-	1074304
8	3	99.1	6	1173	1567	66455
9	3	84.8	6	1458	1771	388590
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Channel 50 Bandwidth 160MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 50 Bandwidth 160MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	21	1089.32	918	Yes
2	13	1319.26	758	Yes
3	8	1519.76	658	Yes
4	10	1432.66	698	Yes
5	3	1792.11	558	Yes
6	18	1165.50	858	Yes
7	6	1618.12	618	Yes
8	15	1253.13	798	Yes
9	14	1285.35	778	Yes
10	4	1730.10	578	Yes
11	5	1672.24	598	Yes
12	19	1138.95	878	Yes
13	12	1355.01	738	Yes
14	9	1474.93	678	Yes
15	1	1930.50	518	Yes
16		387.90	2578	Yes
17		960.61	1041	Yes
18		530.50	1885	Yes
19		389.26	2569	Yes
20		480.77	2080	Yes
21		338.87	2951	Yes
22		346.02	2890	Yes
23		330.03	3030	Yes
24		661.38	1512	Yes
25		1457.73	686	Yes
26		352.49	2837	Yes
27		1034.13	967	Yes
28		1650.17	606	Yes
29		399.52	2503	Yes
30		564.33	1772	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 50 Bandwidth 160MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	26	2.70	214	Yes
2	27	3.60	150	Yes
3	28	4.40	212	Yes
4	28	4.00	224	Yes
5	24	1.90	209	Yes
6	28	4.10	164	Yes
7	28	4.10	208	Yes
8	24	1.80	226	Yes
9	23	1.20	205	Yes
10	24	1.70	162	Yes
11	26	2.80	174	Yes
12	27	3.40	227	Yes
13	25	2.20	192	Yes
14	26	2.90	160	Yes
15	23	1.50	185	Yes
16	28	4.20	207	Yes
17	29	4.80	177	Yes
18	23	1.20	215	Yes
19	28	4.40	157	Yes
20	29	4.50	182	Yes
21	28	4.10	210	Yes
22	25	2.60	155	Yes
23	28	4.40	180	Yes
24	24	1.70	159	Yes
25	26	2.90	225	Yes
26	26	2.70	219	Yes
27	26	3.00	167	Yes
28	24	1.80	152	Yes
29	29	4.50	190	Yes
30	23	1.40	166	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 50 Bandwidth 160MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	17	7.70	328	Yes
2	17	8.60	332	Yes
3	18	9.40	364	Yes
4	18	9.00	237	Yes
5	16	6.90	213	Yes
6	18	9.10	488	Yes
7	18	9.10	341	Yes
8	16	6.80	223	Yes
9	16	6.20	435	Yes
10	16	6.70	450	Yes
11	17	7.80	499	Yes
12	17	8.40	314	Yes
13	16	7.20	261	Yes
14	17	7.90	495	Yes
15	16	6.50	230	Yes
16	18	9.20	440	Yes
17	18	9.80	362	Yes
18	16	6.20	243	Yes
19	18	9.40	395	Yes
20	18	9.50	308	Yes
21	18	9.10	497	Yes
22	17	7.60	297	Yes
23	18	9.40	253	Yes
24	16	6.70	367	Yes
25	17	7.90	346	Yes
26	17	7.70	458	Yes
27	17	8.00	309	Yes
28	16	6.80	288	Yes
29	18	9.50	464	Yes
30	16	6.40	377	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 50 Bandwidth 160MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	14	14.90	328	Yes
2	15	16.80	332	Yes
3	16	18.60	364	Yes
4	15	17.80	237	Yes
5	13	12.90	213	Yes
6	15	17.80	488	Yes
7	15	17.90	341	Yes
8	13	12.80	223	Yes
9	12	11.60	435	Yes
10	12	12.70	450	Yes
11	14	15.00	499	Yes
12	14	16.30	314	Yes
13	13	13.70	261	No
14	14	15.20	495	Yes
15	12	12.20	230	Yes
16	16	18.20	440	Yes
17	16	19.40	362	Yes
18	12	11.50	243	Yes
19	16	18.70	395	Yes
20	16	18.80	308	Yes
21	15	18.00	497	Yes
22	14	14.70	297	Yes
23	16	18.60	253	Yes
24	12	12.70	367	Yes
25	14	15.20	346	Yes
26	14	14.90	458	Yes
27	14	15.40	309	Yes
28	12	12.70	288	Yes
29	16	18.80	464	No
30	12	11.90	377	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	71.5	11	1318	-	618504
2	2	82.3	11	1503	-	841409
3	3	92	11	1188	2000	144144
4	3	87.5	11	1181	1610	366867
5	1	61	11	-	-	591392
6	3	87.9	11	1657	1125	812710
7	3	88.1	11	1620	1424	116643
8	1	60.1	11	-	-	340697
9	1	53.4	11	-	-	564080
10	1	59.4	11	-	-	787482
11	2	72.3	11	1901	-	89393
12	2	79.4	11	1023	-	312599
13	1	65.1	11	-	-	536837
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.4	15	1792	-	615678
2	1	56.9	15	-	-	50397
3	3	90.1	15	1276	1342	231175
4	3	96.6	15	1273	1608	411845
5	1	53.2	15	-	-	595055
6	3	92.5	15	1439	1271	27915
7	3	93.1	15	1592	1363	208744
8	3	89	15	1266	1399	389638
9	2	70.5	15	1767	-	571186
10	3	91.9	15	1136	1644	5635
11	1	59.6	15	-	-	187268
12	2	73.6	15	1713	-	367807
13	2	71.5	15	1279	-	549604
14	2	74.6	15	1369	-	730242
15	1	59.8	15	-	-	164840
16	3	93.3	15	1398	1809	344710
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55.3	18	-	-	468866
2	1	50.9	18	-	-	630773
3	3	93.9	18	1626	1207	126111
4	1	66.5	18	-	-	288125
5	1	61.8	18	-	-	448924
6	2	75.5	18	1161	-	609235
7	3	96.7	18	1215	1127	106280
8	2	72.8	18	1917	-	267459
9	2	71.5	18	1589	-	428323
10	3	85.4	18	1452	1960	587339
11	2	71.4	18	1309	-	86692
12	1	63.2	18	-	-	248144
13	2	80	18	1949	-	408406
14	3	86.9	18	1672	1497	567853
15	1	61.2	18	-	-	67030
16	2	77.6	18	1343	-	227789
17	1	62.8	18	-	-	389349
18	1	51.9	18	-	-	550830
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	69.5	16	1036	-	49858
2	2	70.3	16	1698	-	220202
3	1	59.7	16	-	-	391290
4	3	99.2	16	1653	1971	559888
5	2	67.8	16	1337	-	28798
6	3	93	16	1199	1686	198805
7	1	60.1	16	-	-	370480
8	1	59.7	16	-	-	541141
9	1	50.9	16	-	-	7816
10	3	90.5	16	1129	1492	177860
11	2	82.4	16	1907	-	348290
12	1	63.9	16	-	-	520130
13	3	89.5	16	1815	1574	687822
14	1	63.3	16	-	-	157532
15	2	78.3	16	1554	-	327697
16	2	66.8	16	1994	-	497595
17	3	98.1	16	1288	1106	668209
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.4	8	-	-	232340
2	2	78.4	8	1052	-	522745
3	1	62.9	8	-	-	813881
4	1	53.3	8	-	-	1103943
5	3	97.9	8	1472	1140	196185
6	1	60.3	8	-	-	487308
7	2	67.3	8	1853	-	776494
8	2	75.1	8	1378	-	1067118
9	2	67.8	8	1246	-	160576
10	2	71	8	1205	-	450901
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	79.8	17	1417	-	435506
2	1	58.9	17	-	-	606601
3	3	83.6	17	1665	1483	73133
4	2	80.6	17	1779	-	243564
5	2	82	17	1793	-	414265
6	1	60.7	17	-	-	585820
7	2	69.6	17	1918	-	52269
8	1	55	17	-	-	223078
9	3	89.5	17	1416	1311	392377
10	3	83.5	17	1650	1506	562280
11	1	56.2	17	-	-	31336
12	2	83.2	17	1473	-	201744
13	1	50.9	17	-	-	373119
14	1	56.4	17	-	-	543481
15	1	52.1	17	-	-	10311
16	2	74.5	17	1223	-	180843
17	1	56.2	17	-	-	351767
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	90.5	17	1078	1507	521121
2	1	57.5	17	-	-	693399
3	3	96	17	1639	1991	159277
4	1	58.1	17	-	-	330862
5	3	84.9	17	1021	1212	499978
6	1	63.2	17	-	-	672991
7	3	88.8	17	1759	1722	138382
8	1	52.8	17	-	-	309834
9	3	99.3	17	1468	1164	478683
10	3	100	17	1929	1445	648717
11	3	98.7	17	1826	1758	117415
12	2	71.6	17	1881	-	288030
13	1	60	17	-	-	459522
14	3	92.5	17	1840	1708	627781
15	2	74	17	1157	-	96837
16	3	100	17	1674	1258	266696
17	2	71.9	17	1739	-	437410
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	80.3	8	1261	-	1035673
2	1	50.7	8	-	-	129136
3	2	67.3	8	1546	-	419208
4	1	59.8	8	-	-	710650
5	1	50.3	8	-	-	1001019
6	1	53.1	8	-	-	93404
7	2	69.8	8	1072	-	383770
8	1	58.2	8	-	-	674852
9	3	88.8	8	1486	1647	963226
10	3	83.4	8	1099	1395	57470
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	91.9	6	1253	1965	434541
2	2	75.3	6	1200	-	798349
3	2	77.5	6	1463	-	1161155
4	1	56.4	6	-	-	27220
5	1	51.1	6	-	-	390663
6	2	73.4	6	1531	-	753494
7	1	54	6	-	-	1117437
8	2	76.8	6	1754	-	1478780
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.5	8	1697	-	276178
2	2	71.9	8	1926	-	566503
3	1	62.9	8	-	-	858192
4	3	95	8	1613	1813	1145729
5	3	95.8	8	1389	1042	240318
6	3	94.9	8	1964	1852	529645
7	2	77.8	8	1088	-	821248
8	2	82.8	8	1513	-	1111360
9	1	60.8	8	-	-	205100
10	2	71	8	1457	-	495019
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5255			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	83.4	12	1146	1624	602834
2	2	79.5	12	1028	-	827662
3	3	91	12	1582	1820	129713
4	2	82.3	12	1585	-	353024
5	2	83.2	12	1365	-	576234
6	2	79	12	1073	-	799400
7	2	76.1	12	1646	-	102465
8	1	51.3	12	-	-	325963
9	1	57.1	12	-	-	549330
10	3	96.5	12	1738	1893	769902
11	3	90.1	12	1941	1548	74817
12	1	54.4	12	-	-	298561
13	2	76.2	12	1151	-	521688
14						
15						
16						
17						
18						
19						
20						

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5256			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	99.9	14	1442	1014	643759
2	3	96.1	14	1382	1694	41044
3	2	79.8	14	1700	-	234483
4	3	97	14	1810	1450	426995
5	2	77.5	14	1324	-	620814
6	2	71.7	14	1247	-	17309
7	3	93.5	14	1272	1225	210226
8	3	97.5	14	1951	1443	402908
9	3	98.3	14	1638	1688	595802
10	1	56	14	-	-	792044
11	1	65.6	14	-	-	187163
12	1	56.4	14	-	-	380663
13	2	78.1	14	1462	-	573392
14	1	59	14	-	-	767896
15	3	85.4	14	1831	1518	162572
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5254			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55	9	-	-	486940
2	2	72.5	9	1391	-	750174
3	2	82	9	1532	-	1013938
4	2	67.6	9	1874	-	189959
5	3	92.4	9	1544	1213	453187
6	3	98.8	9	1817	1421	716309
7	2	74.9	9	1153	-	981442
8	1	59.3	9	-	-	157641
9	3	92.4	9	1642	1704	420666
10	1	59.5	9	-	-	685980
11	3	92.1	9	1846	1191	947753
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5255			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	12	1065	1858	97900
2	2	80.4	12	1957	-	305207
3	3	99.8	12	1388	1338	511925
4	1	66.3	12	-	-	721131
5	1	57.5	12	-	-	72718
6	3	86.8	12	1797	1174	279132
7	1	63.1	12	-	-	487758
8	3	95.8	12	1031	1903	693036
9	1	63.1	12	-	-	47150
10	3	98.9	12	1053	1751	253729
11	1	65.9	12	-	-	462007
12	3	97.9	12	1667	1676	667428
13	1	50.3	12	-	-	21607
14	1	61	12	-	-	229219
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5253			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.3	7	1033	-	678869
2	2	73.6	7	1320	-	1001321
3	3	85.2	7	1625	1764	1322716
4	2	73.5	7	1530	-	316568
5	2	75.4	7	1160	-	639434
6	2	75.9	7	1239	-	962158
7	1	55.1	7	-	-	1286309
8	2	70	7	1074	-	276828
9	3	90.7	7	1919	1358	598555
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5257			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96.4	17	1652	1444	458879
2	3	84.6	17	1346	1906	619571
3	1	64.4	17	-	-	118529
4	2	72.4	17	1032	-	279226
5	1	62.1	17	-	-	441396
6	2	77.4	17	1336	-	600839
7	2	74.9	17	1923	-	98396
8	3	86.8	17	1706	1953	258560
9	3	87.5	17	1659	1562	419194
10	3	87.4	17	1124	1982	580057
11	3	85.4	17	1673	1721	78393
12	2	73.3	17	1193	-	239768
13	1	63	17	-	-	401351
14	3	97.8	17	1221	1848	560102
15	2	82	17	1280	-	58784
16	3	98.5	17	1509	1999	218927
17	2	78.9	17	1597	-	380497
18	3	93.3	17	1786	1123	540748
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5258			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.3	19	1290	-	35052
2	3	95.9	19	1478	1740	179435
3	3	86.6	19	1808	1955	323219
4	3	89.1	19	1693	1269	468545
5	2	74.7	19	1873	-	17160
6	2	81.7	19	1274	-	162128
7	1	56.6	19	-	-	307763
8	2	75	19	1166	-	451984
9	2	75.2	19	1794	-	596054
10	3	89.7	19	1864	1194	143792
11	3	85.8	19	1420	1456	288059
12	2	67	19	1327	-	434042
13	3	83.7	19	1366	1001	577658
14	3	87	19	1601	1474	125996
15	2	78.4	19	1992	-	270847
16	3	89.8	19	1904	1267	414680
17	1	53.3	19	-	-	561916
18	2	81.7	19	1692	-	108515
19	3	93.2	19	1861	1799	252217
20	1	64.3	19	-	-	398790

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5253			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	51	6	-	-	1362731
2	2	68.3	6	1013	-	227376
3	3	88.2	6	1570	1175	589884
4	1	62	6	-	-	954235
5	2	78.4	6	1412	-	1316828
6	1	60.4	6	-	-	182740
7	1	64.9	6	-	-	546134
8	3	87.7	6	1579	1948	907454
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5258			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	54.3	18	-	-	535574
2	2	75.9	18	1080	-	57901
3	1	53.2	18	-	-	210731
4	2	75.1	18	1934	-	362362
5	3	96.5	18	1262	1187	514214
6	2	82.6	18	1897	-	39077
7	2	72.8	18	1062	-	191702
8	2	74.1	18	1989	-	343459
9	1	54.1	18	-	-	497638
10	1	57.3	18	-	-	20359
11	1	59.9	18	-	-	173154
12	2	82.7	18	1008	-	325675
13	1	65.8	18	-	-	478914
14	3	87.1	18	1063	1668	1530
15	1	52.2	18	-	-	154365
16	3	85.3	18	1593	1577	305605
17	1	51	18	-	-	459949
18	2	70.5	18	1824	-	610916
19	1	53.7	18	-	-	135433
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5258			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	18	1089	1448	287133
2	3	94.9	18	1455	1937	438973
3	2	73.3	18	1419	-	592828
4	3	94.4	18	1076	1839	116148
5	1	50.2	18	-	-	269337
6	1	55.3	18	-	-	422663
7	1	64.6	18	-	-	574757
8	3	92.3	18	1120	1691	97375
9	1	64	18	-	-	250505
10	1	57.7	18	-	-	403627
11	2	74.5	18	1190	-	555389
12	1	60.6	18	-	-	79001
13	1	64.2	18	-	-	231999
14	2	66.8	18	1485	-	383531
15	2	68.9	18	1993	-	536127
16	2	70.7	18	1087	-	60108
17	3	99.4	18	1958	1576	211991
18	3	86.5	18	1623	1973	363541
19	1	60.7	18	-	-	518498
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5323			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	70.5	17	1163	-	43613
2	1	51.1	17	-	-	205055
3	1	64.1	17	-	-	366349
4	1	54.3	17	-	-	527788
5	3	85.7	17	1476	1895	23732
6	3	96.1	17	1243	1783	184401
7	2	71.8	17	1045	-	346087
8	1	60.4	17	-	-	508059
9	3	98.6	17	1185	1787	3956
10	1	63.9	17	-	-	165231
11	1	66.1	17	-	-	326541
12	1	52.9	17	-	-	487791
13	1	61	17	-	-	648828
14	1	57.9	17	-	-	145398
15	1	56.7	17	-	-	306925
16	1	66.4	17	-	-	467774
17	3	92.9	17	1118	1139	627090
18	2	81	17	1428	-	125373
19						
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5325			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	81.5	11	1284	-	396868
2	1	52.9	11	-	-	621215
3	2	69.8	11	1876	-	842958
4	2	81.9	11	1356	-	146157
5	3	90.3	11	1572	1039	369067
6	1	58.8	11	-	-	593700
7	1	66.4	11	-	-	816898
8	2	79.6	11	1198	-	118733
9	3	96.7	11	1795	1558	341250
10	3	95.7	11	1788	1869	563466
11	1	65.9	11	-	-	789727
12	3	96.9	11	1244	1394	91095
13	1	66.4	11	-	-	314757
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5322			No
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	52.9	18	-	-	388751
2	3	98.8	18	1587	1114	547579
3	3	90.4	18	1630	1083	45880
4	1	50	18	-	-	207326
5	1	52.5	18	-	-	368549
6	3	84.4	18	1108	1150	527980
7	3	90.6	18	1229	1997	26085
8	3	87.7	18	1598	1017	186767
9	3	98.3	18	1296	1515	347138
10	2	78.5	18	1822	-	508883
11	3	94.9	18	1202	1969	6294
12	1	66.1	18	-	-	167570
13	2	78.4	18	1633	-	328387
14	3	97.9	18	1177	1899	488262
15	1	54.8	18	-	-	651317
16	1	63.4	18	-	-	147765
17	1	52.7	18	-	-	308906
18	1	57.5	18	-	-	470724
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5326			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.4	8	-	-	1138082
2	2	76.1	8	1536	-	230256
3	3	89.7	8	1067	1590	519863
4	2	67.8	8	1385	-	810614
5	3	83.5	8	1401	1408	1099764
6	3	90.9	8	1508	1681	194169
7	3	88.6	8	1882	1097	483956
8	1	60.9	8	-	-	775710
9	1	55.2	8	-	-	1067046
10	3	88	8	1493	1680	158495
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5325			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	56	12	-	-	320776
2	3	99.5	12	1972	1333	526456
3	2	76.1	12	1519	-	734365
4	3	94.6	12	1281	1368	87603
5	1	51.6	12	-	-	295396
6	3	97.5	12	1732	1334	501013
7	1	63.1	12	-	-	710276
8	1	54.1	12	-	-	62297
9	2	70.7	12	1523	-	269209
10	1	57.8	12	-	-	477111
11	1	54.1	12	-	-	684853
12	2	82.1	12	1798	-	36645
13	1	52.3	12	-	-	244381
14	3	93.4	12	1635	1842	450010
15						
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5325			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	83.3	11	1018	-	708971
2	2	74.5	11	1894	-	11995
3	2	74.9	11	1724	-	235090
4	1	65.8	11	-	-	459030
5	1	61.8	11	-	-	682737
6	1	60.9	11	-	-	906245
7	1	61.5	11	-	-	208052
8	1	66.1	11	-	-	431427
9	3	94	11	1352	1182	653346
10	3	88.2	11	1447	1302	875528
11	1	65.5	11	-	-	180540
12	2	70.7	11	1757	-	403299
13	2	76.8	11	1844	-	626007
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5325			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	85.2	12	1357	1354	787746
2	1	65.2	12	-	-	142038
3	3	99.5	12	1860	1634	347955
4	1	61.4	12	-	-	556845
5	3	91.7	12	1990	1818	760893
6	2	79.1	12	1364	-	116301
7	1	52.5	12	-	-	323834
8	2	81.7	12	1379	-	530615
9	3	98.9	12	1778	1866	735634
10	1	52.4	12	-	-	90879
11	1	50.3	12	-	-	298498
12	1	64.4	12	-	-	505727
13	2	80.9	12	1616	-	712267
14	3	84.8	12	1789	1803	65014
15						
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5326			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	8	-	-	382215
2	3	92.8	8	1211	1466	671177
3	3	94.9	8	1747	1892	960581
4	1	53.3	8	-	-	55664
5	2	68.3	8	1371	-	345993
6	2	73.8	8	1348	-	636186
7	3	96.3	8	1627	1500	925310
8	3	84.6	8	1636	1772	19817
9	1	59	8	-	-	310575
10	1	66	8	-	-	601469
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5322			No
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.7	18	1084	-	467911
2	3	99.1	18	1086	1961	618658
3	3	94.3	18	1728	1669	143614
4	2	76.4	18	1300	-	296756
5	3	89.9	18	1654	1862	447691
6	1	55.5	18	-	-	603059
7	3	88	18	1573	1891	124928
8	2	79	18	1101	-	277965
9	2	80.9	18	1720	-	429993
10	2	70.7	18	1978	-	581941
11	2	78	18	1135	-	106682
12	3	88.9	18	1766	1240	258439
13	2	71.2	18	1643	-	411054
14	3	96.5	18	1020	1096	563199
15	1	62.5	18	-	-	87943
16	1	52.9	18	-	-	240934
17	3	99.8	18	1144	1058	392319
18	1	61.7	18	-	-	546709
19	3	84.4	18	1525	1238	68872
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5327			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.1	6	1216	-	468654
2	2	74.5	6	1481	-	791396
3	1	51.4	6	-	-	1115552
4	2	80.9	6	1316	-	106252
5	2	76.2	6	1749	-	428886
6	1	60.9	6	-	-	752462
7	2	73.4	6	1651	-	1074304
8	3	99.1	6	1173	1567	66455
9	3	84.8	6	1458	1771	388590
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Channel 100 Bandwidth 20MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 100 Bandwidth 20MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	21	1089.32	918	Yes
2	13	1319.26	758	Yes
3	8	1519.76	658	Yes
4	10	1432.66	698	Yes
5	3	1792.11	558	Yes
6	18	1165.50	858	Yes
7	6	1618.12	618	Yes
8	15	1253.13	798	Yes
9	14	1285.35	778	Yes
10	4	1730.10	578	Yes
11	5	1672.24	598	Yes
12	19	1138.95	878	Yes
13	12	1355.01	738	Yes
14	9	1474.93	678	Yes
15	1	1930.50	518	Yes
16		387.90	2578	Yes
17		960.61	1041	Yes
18		530.50	1885	Yes
19		389.26	2569	Yes
20		480.77	2080	Yes
21		338.87	2951	Yes
22		346.02	2890	Yes
23		330.03	3030	Yes
24		661.38	1512	Yes
25		1457.73	686	Yes
26		352.49	2837	Yes
27		1034.13	967	Yes
28		1650.17	606	Yes
29		399.52	2503	Yes
30		564.33	1772	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 100 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	26	2.70	214	Yes
2	27	3.60	150	Yes
3	28	4.40	212	Yes
4	28	4.00	224	Yes
5	24	1.90	209	Yes
6	28	4.10	164	Yes
7	28	4.10	208	Yes
8	24	1.80	226	Yes
9	23	1.20	205	Yes
10	24	1.70	162	Yes
11	26	2.80	174	Yes
12	27	3.40	227	Yes
13	25	2.20	192	Yes
14	26	2.90	160	Yes
15	23	1.50	185	Yes
16	28	4.20	207	Yes
17	29	4.80	177	Yes
18	23	1.20	215	Yes
19	28	4.40	157	Yes
20	29	4.50	182	Yes
21	28	4.10	210	Yes
22	25	2.60	155	Yes
23	28	4.40	180	Yes
24	24	1.70	159	Yes
25	26	2.90	225	Yes
26	26	2.70	219	Yes
27	26	3.00	167	Yes
28	24	1.80	152	Yes
29	29	4.50	190	Yes
30	23	1.40	166	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 100 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	17	7.70	328	Yes
2	17	8.60	332	Yes
3	18	9.40	364	Yes
4	18	9.00	237	Yes
5	16	6.90	213	Yes
6	18	9.10	488	Yes
7	18	9.10	341	Yes
8	16	6.80	223	Yes
9	16	6.20	435	Yes
10	16	6.70	450	Yes
11	17	7.80	499	Yes
12	17	8.40	314	Yes
13	16	7.20	261	Yes
14	17	7.90	495	Yes
15	16	6.50	230	Yes
16	18	9.20	440	Yes
17	18	9.80	362	Yes
18	16	6.20	243	Yes
19	18	9.40	395	Yes
20	18	9.50	308	Yes
21	18	9.10	497	Yes
22	17	7.60	297	Yes
23	18	9.40	253	Yes
24	16	6.70	367	Yes
25	17	7.90	346	Yes
26	17	7.70	458	Yes
27	17	8.00	309	Yes
28	16	6.80	288	Yes
29	18	9.50	464	Yes
30	16	6.40	377	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 100 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	14	14.90	328	Yes
2	15	16.80	332	Yes
3	16	18.60	364	Yes
4	15	17.80	237	Yes
5	13	12.90	213	Yes
6	15	17.80	488	Yes
7	15	17.90	341	Yes
8	13	12.80	223	Yes
9	12	11.60	435	Yes
10	12	12.70	450	Yes
11	14	15.00	499	Yes
12	14	16.30	314	Yes
13	13	13.70	261	Yes
14	14	15.20	495	Yes
15	12	12.20	230	Yes
16	16	18.20	440	Yes
17	16	19.40	362	Yes
18	12	11.50	243	Yes
19	16	18.70	395	Yes
20	16	18.80	308	Yes
21	15	18.00	497	Yes
22	14	14.70	297	Yes
23	16	18.60	253	Yes
24	12	12.70	367	Yes
25	14	15.20	346	Yes
26	14	14.90	458	Yes
27	14	15.40	309	Yes
28	12	12.70	288	Yes
29	16	18.80	464	Yes
30	12	11.90	377	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	71.5	11	1318	-	618504
2	2	82.3	11	1503	-	841409
3	3	92	11	1188	2000	144144
4	3	87.5	11	1181	1610	366867
5	1	61	11	-	-	591392
6	3	87.9	11	1657	1125	812710
7	3	88.1	11	1620	1424	116643
8	1	60.1	11	-	-	340697
9	1	53.4	11	-	-	564080
10	1	59.4	11	-	-	787482
11	2	72.3	11	1901	-	89393
12	2	79.4	11	1023	-	312599
13	1	65.1	11	-	-	536837
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.4	15	1792	-	615678
2	1	56.9	15	-	-	50397
3	3	90.1	15	1276	1342	231175
4	3	96.6	15	1273	1608	411845
5	1	53.2	15	-	-	595055
6	3	92.5	15	1439	1271	27915
7	3	93.1	15	1592	1363	208744
8	3	89	15	1266	1399	389638
9	2	70.5	15	1767	-	571186
10	3	91.9	15	1136	1644	5635
11	1	59.6	15	-	-	187268
12	2	73.6	15	1713	-	367807
13	2	71.5	15	1279	-	549604
14	2	74.6	15	1369	-	730242
15	1	59.8	15	-	-	164840
16	3	93.3	15	1398	1809	344710
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55.3	18	-	-	468866
2	1	50.9	18	-	-	630773
3	3	93.9	18	1626	1207	126111
4	1	66.5	18	-	-	288125
5	1	61.8	18	-	-	448924
6	2	75.5	18	1161	-	609235
7	3	96.7	18	1215	1127	106280
8	2	72.8	18	1917	-	267459
9	2	71.5	18	1589	-	428323
10	3	85.4	18	1452	1960	587339
11	2	71.4	18	1309	-	86692
12	1	63.2	18	-	-	248144
13	2	80	18	1949	-	408406
14	3	86.9	18	1672	1497	567853
15	1	61.2	18	-	-	67030
16	2	77.6	18	1343	-	227789
17	1	62.8	18	-	-	389349
18	1	51.9	18	-	-	550830
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	69.5	16	1036	-	49858
2	2	70.3	16	1698	-	220202
3	1	59.7	16	-	-	391290
4	3	99.2	16	1653	1971	559888
5	2	67.8	16	1337	-	28798
6	3	93	16	1199	1686	198805
7	1	60.1	16	-	-	370480
8	1	59.7	16	-	-	541141
9	1	50.9	16	-	-	7816
10	3	90.5	16	1129	1492	177860
11	2	82.4	16	1907	-	348290
12	1	63.9	16	-	-	520130
13	3	89.5	16	1815	1574	687822
14	1	63.3	16	-	-	157532
15	2	78.3	16	1554	-	327697
16	2	66.8	16	1994	-	497595
17	3	98.1	16	1288	1106	668209
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.4	8	-	-	232340
2	2	78.4	8	1052	-	522745
3	1	62.9	8	-	-	813881
4	1	53.3	8	-	-	1103943
5	3	97.9	8	1472	1140	196185
6	1	60.3	8	-	-	487308
7	2	67.3	8	1853	-	776494
8	2	75.1	8	1378	-	1067118
9	2	67.8	8	1246	-	160576
10	2	71	8	1205	-	450901
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	79.8	17	1417	-	435506
2	1	58.9	17	-	-	606601
3	3	83.6	17	1665	1483	73133
4	2	80.6	17	1779	-	243564
5	2	82	17	1793	-	414265
6	1	60.7	17	-	-	585820
7	2	69.6	17	1918	-	52269
8	1	55	17	-	-	223078
9	3	89.5	17	1416	1311	392377
10	3	83.5	17	1650	1506	562280
11	1	56.2	17	-	-	31336
12	2	83.2	17	1473	-	201744
13	1	50.9	17	-	-	373119
14	1	56.4	17	-	-	543481
15	1	52.1	17	-	-	10311
16	2	74.5	17	1223	-	180843
17	1	56.2	17	-	-	351767
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	90.5	17	1078	1507	521121
2	1	57.5	17	-	-	693399
3	3	96	17	1639	1991	159277
4	1	58.1	17	-	-	330862
5	3	84.9	17	1021	1212	499978
6	1	63.2	17	-	-	672991
7	3	88.8	17	1759	1722	138382
8	1	52.8	17	-	-	309834
9	3	99.3	17	1468	1164	478683
10	3	100	17	1929	1445	648717
11	3	98.7	17	1826	1758	117415
12	2	71.6	17	1881	-	288030
13	1	60	17	-	-	459522
14	3	92.5	17	1840	1708	627781
15	2	74	17	1157	-	96837
16	3	100	17	1674	1258	266696
17	2	71.9	17	1739	-	437410
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	80.3	8	1261	-	1035673
2	1	50.7	8	-	-	129136
3	2	67.3	8	1546	-	419208
4	1	59.8	8	-	-	710650
5	1	50.3	8	-	-	1001019
6	1	53.1	8	-	-	93404
7	2	69.8	8	1072	-	383770
8	1	58.2	8	-	-	674852
9	3	88.8	8	1486	1647	963226
10	3	83.4	8	1099	1395	57470
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	91.9	6	1253	1965	434541
2	2	75.3	6	1200	-	798349
3	2	77.5	6	1463	-	1161155
4	1	56.4	6	-	-	27220
5	1	51.1	6	-	-	390663
6	2	73.4	6	1531	-	753494
7	1	54	6	-	-	1117437
8	2	76.8	6	1754	-	1478780
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.5	8	1697	-	276178
2	2	71.9	8	1926	-	566503
3	1	62.9	8	-	-	858192
4	3	95	8	1613	1813	1145729
5	3	95.8	8	1389	1042	240318
6	3	94.9	8	1964	1852	529645
7	2	77.8	8	1088	-	821248
8	2	82.8	8	1513	-	1111360
9	1	60.8	8	-	-	205100
10	2	71	8	1457	-	495019
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5495			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	83.4	12	1146	1624	602834
2	2	79.5	12	1028	-	827662
3	3	91	12	1582	1820	129713
4	2	82.3	12	1585	-	353024
5	2	83.2	12	1365	-	576234
6	2	79	12	1073	-	799400
7	2	76.1	12	1646	-	102465
8	1	51.3	12	-	-	325963
9	1	57.1	12	-	-	549330
10	3	96.5	12	1738	1893	769902
11	3	90.1	12	1941	1548	74817
12	1	54.4	12	-	-	298561
13	2	76.2	12	1151	-	521688
14						
15						
16						
17						
18						
19						
20						

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5496			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	99.9	14	1442	1014	643759
2	3	96.1	14	1382	1694	41044
3	2	79.8	14	1700	-	234483
4	3	97	14	1810	1450	426995
5	2	77.5	14	1324	-	620814
6	2	71.7	14	1247	-	17309
7	3	93.5	14	1272	1225	210226
8	3	97.5	14	1951	1443	402908
9	3	98.3	14	1638	1688	595802
10	1	56	14	-	-	792044
11	1	65.6	14	-	-	187163
12	1	56.4	14	-	-	380663
13	2	78.1	14	1462	-	573392
14	1	59	14	-	-	767896
15	3	85.4	14	1831	1518	162572
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5494			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55	9	-	-	486940
2	2	72.5	9	1391	-	750174
3	2	82	9	1532	-	1013938
4	2	67.6	9	1874	-	189959
5	3	92.4	9	1544	1213	453187
6	3	98.8	9	1817	1421	716309
7	2	74.9	9	1153	-	981442
8	1	59.3	9	-	-	157641
9	3	92.4	9	1642	1704	420666
10	1	59.5	9	-	-	685980
11	3	92.1	9	1846	1191	947753
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5495			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	12	1065	1858	97900
2	2	80.4	12	1957	-	305207
3	3	99.8	12	1388	1338	511925
4	1	66.3	12	-	-	721131
5	1	57.5	12	-	-	72718
6	3	86.8	12	1797	1174	279132
7	1	63.1	12	-	-	487758
8	3	95.8	12	1031	1903	693036
9	1	63.1	12	-	-	47150
10	3	98.9	12	1053	1751	253729
11	1	65.9	12	-	-	462007
12	3	97.9	12	1667	1676	667428
13	1	50.3	12	-	-	21607
14	1	61	12	-	-	229219
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5493			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.3	7	1033	-	678869
2	2	73.6	7	1320	-	1001321
3	3	85.2	7	1625	1764	1322716
4	2	73.5	7	1530	-	316568
5	2	75.4	7	1160	-	639434
6	2	75.9	7	1239	-	962158
7	1	55.1	7	-	-	1286309
8	2	70	7	1074	-	276828
9	3	90.7	7	1919	1358	598555
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5497			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96.4	17	1652	1444	458879
2	3	84.6	17	1346	1906	619571
3	1	64.4	17	-	-	118529
4	2	72.4	17	1032	-	279226
5	1	62.1	17	-	-	441396
6	2	77.4	17	1336	-	600839
7	2	74.9	17	1923	-	98396
8	3	86.8	17	1706	1953	258560
9	3	87.5	17	1659	1562	419194
10	3	87.4	17	1124	1982	580057
11	3	85.4	17	1673	1721	78393
12	2	73.3	17	1193	-	239768
13	1	63	17	-	-	401351
14	3	97.8	17	1221	1848	560102
15	2	82	17	1280	-	58784
16	3	98.5	17	1509	1999	218927
17	2	78.9	17	1597	-	380497
18	3	93.3	17	1786	1123	540748
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5498			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.3	19	1290	-	35052
2	3	95.9	19	1478	1740	179435
3	3	86.6	19	1808	1955	323219
4	3	89.1	19	1693	1269	468545
5	2	74.7	19	1873	-	17160
6	2	81.7	19	1274	-	162128
7	1	56.6	19	-	-	307763
8	2	75	19	1166	-	451984
9	2	75.2	19	1794	-	596054
10	3	89.7	19	1864	1194	143792
11	3	85.8	19	1420	1456	288059
12	2	67	19	1327	-	434042
13	3	83.7	19	1366	1001	577658
14	3	87	19	1601	1474	125996
15	2	78.4	19	1992	-	270847
16	3	89.8	19	1904	1267	414680
17	1	53.3	19	-	-	561916
18	2	81.7	19	1692	-	108515
19	3	93.2	19	1861	1799	252217
20	1	64.3	19	-	-	398790

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5492			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	51	6	-	-	1362731
2	2	68.3	6	1013	-	227376
3	3	88.2	6	1570	1175	589884
4	1	62	6	-	-	954235
5	2	78.4	6	1412	-	1316828
6	1	60.4	6	-	-	182740
7	1	64.9	6	-	-	546134
8	3	87.7	6	1579	1948	907454
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5497			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	54.3	18	-	-	535574
2	2	75.9	18	1080	-	57901
3	1	53.2	18	-	-	210731
4	2	75.1	18	1934	-	362362
5	3	96.5	18	1262	1187	514214
6	2	82.6	18	1897	-	39077
7	2	72.8	18	1062	-	191702
8	2	74.1	18	1989	-	343459
9	1	54.1	18	-	-	497638
10	1	57.3	18	-	-	20359
11	1	59.9	18	-	-	173154
12	2	82.7	18	1008	-	325675
13	1	65.8	18	-	-	478914
14	3	87.1	18	1063	1668	1530
15	1	52.2	18	-	-	154365
16	3	85.3	18	1593	1577	305605
17	1	51	18	-	-	459949
18	2	70.5	18	1824	-	610916
19	1	53.7	18	-	-	135433
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5497			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	18	1089	1448	287133
2	3	94.9	18	1455	1937	438973
3	2	73.3	18	1419	-	592828
4	3	94.4	18	1076	1839	116148
5	1	50.2	18	-	-	269337
6	1	55.3	18	-	-	422663
7	1	64.6	18	-	-	574757
8	3	92.3	18	1120	1691	97375
9	1	64	18	-	-	250505
10	1	57.7	18	-	-	403627
11	2	74.5	18	1190	-	555389
12	1	60.6	18	-	-	79001
13	1	64.2	18	-	-	231999
14	2	66.8	18	1485	-	383531
15	2	68.9	18	1993	-	536127
16	2	70.7	18	1087	-	60108
17	3	99.4	18	1958	1576	211991
18	3	86.5	18	1623	1973	363541
19	1	60.7	18	-	-	518498
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5503			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	70.5	17	1163	-	43613
2	1	51.1	17	-	-	205055
3	1	64.1	17	-	-	366349
4	1	54.3	17	-	-	527788
5	3	85.7	17	1476	1895	23732
6	3	96.1	17	1243	1783	184401
7	2	71.8	17	1045	-	346087
8	1	60.4	17	-	-	508059
9	3	98.6	17	1185	1787	3956
10	1	63.9	17	-	-	165231
11	1	66.1	17	-	-	326541
12	1	52.9	17	-	-	487791
13	1	61	17	-	-	648828
14	1	57.9	17	-	-	145398
15	1	56.7	17	-	-	306925
16	1	66.4	17	-	-	467774
17	3	92.9	17	1118	1139	627090
18	2	81	17	1428	-	125373
19						
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5506			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	81.5	11	1284	-	396868
2	1	52.9	11	-	-	621215
3	2	69.8	11	1876	-	842958
4	2	81.9	11	1356	-	146157
5	3	90.3	11	1572	1039	369067
6	1	58.8	11	-	-	593700
7	1	66.4	11	-	-	816898
8	2	79.6	11	1198	-	118733
9	3	96.7	11	1795	1558	341250
10	3	95.7	11	1788	1869	563466
11	1	65.9	11	-	-	789727
12	3	96.9	11	1244	1394	91095
13	1	66.4	11	-	-	314757
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5503			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	52.9	18	-	-	388751
2	3	98.8	18	1587	1114	547579
3	3	90.4	18	1630	1083	45880
4	1	50	18	-	-	207326
5	1	52.5	18	-	-	368549
6	3	84.4	18	1108	1150	527980
7	3	90.6	18	1229	1997	26085
8	3	87.7	18	1598	1017	186767
9	3	98.3	18	1296	1515	347138
10	2	78.5	18	1822	-	508883
11	3	94.9	18	1202	1969	6294
12	1	66.1	18	-	-	167570
13	2	78.4	18	1633	-	328387
14	3	97.9	18	1177	1899	488262
15	1	54.8	18	-	-	651317
16	1	63.4	18	-	-	147765
17	1	52.7	18	-	-	308906
18	1	57.5	18	-	-	470724
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5507			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.4	8	-	-	1138082
2	2	76.1	8	1536	-	230256
3	3	89.7	8	1067	1590	519863
4	2	67.8	8	1385	-	810614
5	3	83.5	8	1401	1408	1099764
6	3	90.9	8	1508	1681	194169
7	3	88.6	8	1882	1097	483956
8	1	60.9	8	-	-	775710
9	1	55.2	8	-	-	1067046
10	3	88	8	1493	1680	158495
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5505			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	56	12	-	-	320776
2	3	99.5	12	1972	1333	526456
3	2	76.1	12	1519	-	734365
4	3	94.6	12	1281	1368	87603
5	1	51.6	12	-	-	295396
6	3	97.5	12	1732	1334	501013
7	1	63.1	12	-	-	710276
8	1	54.1	12	-	-	62297
9	2	70.7	12	1523	-	269209
10	1	57.8	12	-	-	477111
11	1	54.1	12	-	-	684853
12	2	82.1	12	1798	-	36645
13	1	52.3	12	-	-	244381
14	3	93.4	12	1635	1842	450010
15						
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5506			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	83.3	11	1018	-	708971
2	2	74.5	11	1894	-	11995
3	2	74.9	11	1724	-	235090
4	1	65.8	11	-	-	459030
5	1	61.8	11	-	-	682737
6	1	60.9	11	-	-	906245
7	1	61.5	11	-	-	208052
8	1	66.1	11	-	-	431427
9	3	94	11	1352	1182	653346
10	3	88.2	11	1447	1302	875528
11	1	65.5	11	-	-	180540
12	2	70.7	11	1757	-	403299
13	2	76.8	11	1844	-	626007
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5505			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	85.2	12	1357	1354	787746
2	1	65.2	12	-	-	142038
3	3	99.5	12	1860	1634	347955
4	1	61.4	12	-	-	556845
5	3	91.7	12	1990	1818	760893
6	2	79.1	12	1364	-	116301
7	1	52.5	12	-	-	323834
8	2	81.7	12	1379	-	530615
9	3	98.9	12	1778	1866	735634
10	1	52.4	12	-	-	90879
11	1	50.3	12	-	-	298498
12	1	64.4	12	-	-	505727
13	2	80.9	12	1616	-	712267
14	3	84.8	12	1789	1803	65014
15						
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5507			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	8	-	-	382215
2	3	92.8	8	1211	1466	671177
3	3	94.9	8	1747	1892	960581
4	1	53.3	8	-	-	55664
5	2	68.3	8	1371	-	345993
6	2	73.8	8	1348	-	636186
7	3	96.3	8	1627	1500	925310
8	3	84.6	8	1636	1772	19817
9	1	59	8	-	-	310575
10	1	66	8	-	-	601469
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5503			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.7	18	1084	-	467911
2	3	99.1	18	1086	1961	618658
3	3	94.3	18	1728	1669	143614
4	2	76.4	18	1300	-	296756
5	3	89.9	18	1654	1862	447691
6	1	55.5	18	-	-	603059
7	3	88	18	1573	1891	124928
8	2	79	18	1101	-	277965
9	2	80.9	18	1720	-	429993
10	2	70.7	18	1978	-	581941
11	2	78	18	1135	-	106682
12	3	88.9	18	1766	1240	258439
13	2	71.2	18	1643	-	411054
14	3	96.5	18	1020	1096	563199
15	1	62.5	18	-	-	87943
16	1	52.9	18	-	-	240934
17	3	99.8	18	1144	1058	392319
18	1	61.7	18	-	-	546709
19	3	84.4	18	1525	1238	68872
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5508			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.1	6	1216	-	468654
2	2	74.5	6	1481	-	791396
3	1	51.4	6	-	-	1115552
4	2	80.9	6	1316	-	106252
5	2	76.2	6	1749	-	428886
6	1	60.9	6	-	-	752462
7	2	73.4	6	1651	-	1074304
8	3	99.1	6	1173	1567	66455
9	3	84.8	6	1458	1771	388590
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Channel 102 Bandwidth 40MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 102 Bandwidth 40MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	21	1089.32	918	Yes
2	13	1319.26	758	Yes
3	8	1519.76	658	Yes
4	10	1432.66	698	Yes
5	3	1792.11	558	Yes
6	18	1165.50	858	Yes
7	6	1618.12	618	Yes
8	15	1253.13	798	Yes
9	14	1285.35	778	Yes
10	4	1730.10	578	Yes
11	5	1672.24	598	Yes
12	19	1138.95	878	Yes
13	12	1355.01	738	Yes
14	9	1474.93	678	Yes
15	1	1930.50	518	Yes
16		387.90	2578	Yes
17		960.61	1041	Yes
18		530.50	1885	Yes
19		389.26	2569	Yes
20		480.77	2080	Yes
21		338.87	2951	Yes
22		346.02	2890	Yes
23		330.03	3030	Yes
24		661.38	1512	Yes
25		1457.73	686	Yes
26		352.49	2837	Yes
27		1034.13	967	Yes
28		1650.17	606	Yes
29		399.52	2503	Yes
30		564.33	1772	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 102 Bandwidth 40MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	26	2.70	214	Yes
2	27	3.60	150	Yes
3	28	4.40	212	Yes
4	28	4.00	224	Yes
5	24	1.90	209	Yes
6	28	4.10	164	Yes
7	28	4.10	208	Yes
8	24	1.80	226	Yes
9	23	1.20	205	Yes
10	24	1.70	162	Yes
11	26	2.80	174	Yes
12	27	3.40	227	Yes
13	25	2.20	192	Yes
14	26	2.90	160	Yes
15	23	1.50	185	Yes
16	28	4.20	207	Yes
17	29	4.80	177	Yes
18	23	1.20	215	Yes
19	28	4.40	157	Yes
20	29	4.50	182	Yes
21	28	4.10	210	Yes
22	25	2.60	155	Yes
23	28	4.40	180	Yes
24	24	1.70	159	Yes
25	26	2.90	225	Yes
26	26	2.70	219	Yes
27	26	3.00	167	Yes
28	24	1.80	152	Yes
29	29	4.50	190	Yes
30	23	1.40	166	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 102 Bandwidth 40MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	17	7.70	328	Yes
2	17	8.60	332	Yes
3	18	9.40	364	Yes
4	18	9.00	237	Yes
5	16	6.90	213	Yes
6	18	9.10	488	Yes
7	18	9.10	341	Yes
8	16	6.80	223	Yes
9	16	6.20	435	Yes
10	16	6.70	450	Yes
11	17	7.80	499	Yes
12	17	8.40	314	Yes
13	16	7.20	261	Yes
14	17	7.90	495	Yes
15	16	6.50	230	Yes
16	18	9.20	440	Yes
17	18	9.80	362	Yes
18	16	6.20	243	Yes
19	18	9.40	395	Yes
20	18	9.50	308	Yes
21	18	9.10	497	Yes
22	17	7.60	297	Yes
23	18	9.40	253	Yes
24	16	6.70	367	Yes
25	17	7.90	346	Yes
26	17	7.70	458	Yes
27	17	8.00	309	Yes
28	16	6.80	288	Yes
29	18	9.50	464	Yes
30	16	6.40	377	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 102 Bandwidth 40MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	14	14.90	328	Yes
2	15	16.80	332	Yes
3	16	18.60	364	Yes
4	15	17.80	237	Yes
5	13	12.90	213	Yes
6	15	17.80	488	Yes
7	15	17.90	341	Yes
8	13	12.80	223	Yes
9	12	11.60	435	Yes
10	12	12.70	450	Yes
11	14	15.00	499	Yes
12	14	16.30	314	Yes
13	13	13.70	261	Yes
14	14	15.20	495	Yes
15	12	12.20	230	Yes
16	16	18.20	440	Yes
17	16	19.40	362	Yes
18	12	11.50	243	Yes
19	16	18.70	395	Yes
20	16	18.80	308	Yes
21	15	18.00	497	Yes
22	14	14.70	297	Yes
23	16	18.60	253	Yes
24	12	12.70	367	Yes
25	14	15.20	346	Yes
26	14	14.90	458	Yes
27	14	15.40	309	Yes
28	12	12.70	288	Yes
29	16	18.80	464	Yes
30	12	11.90	377	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5510			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	71.5	11	1318	-	618504
2	2	82.3	11	1503	-	841409
3	3	92	11	1188	2000	144144
4	3	87.5	11	1181	1610	366867
5	1	61	11	-	-	591392
6	3	87.9	11	1657	1125	812710
7	3	88.1	11	1620	1424	116643
8	1	60.1	11	-	-	340697
9	1	53.4	11	-	-	564080
10	1	59.4	11	-	-	787482
11	2	72.3	11	1901	-	89393
12	2	79.4	11	1023	-	312599
13	1	65.1	11	-	-	536837
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5510			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.4	15	1792	-	615678
2	1	56.9	15	-	-	50397
3	3	90.1	15	1276	1342	231175
4	3	96.6	15	1273	1608	411845
5	1	53.2	15	-	-	595055
6	3	92.5	15	1439	1271	27915
7	3	93.1	15	1592	1363	208744
8	3	89	15	1266	1399	389638
9	2	70.5	15	1767	-	571186
10	3	91.9	15	1136	1644	5635
11	1	59.6	15	-	-	187268
12	2	73.6	15	1713	-	367807
13	2	71.5	15	1279	-	549604
14	2	74.6	15	1369	-	730242
15	1	59.8	15	-	-	164840
16	3	93.3	15	1398	1809	344710
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5510			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55.3	18	-	-	468866
2	1	50.9	18	-	-	630773
3	3	93.9	18	1626	1207	126111
4	1	66.5	18	-	-	288125
5	1	61.8	18	-	-	448924
6	2	75.5	18	1161	-	609235
7	3	96.7	18	1215	1127	106280
8	2	72.8	18	1917	-	267459
9	2	71.5	18	1589	-	428323
10	3	85.4	18	1452	1960	587339
11	2	71.4	18	1309	-	86692
12	1	63.2	18	-	-	248144
13	2	80	18	1949	-	408406
14	3	86.9	18	1672	1497	567853
15	1	61.2	18	-	-	67030
16	2	77.6	18	1343	-	227789
17	1	62.8	18	-	-	389349
18	1	51.9	18	-	-	550830
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5510			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	69.5	16	1036	-	49858
2	2	70.3	16	1698	-	220202
3	1	59.7	16	-	-	391290
4	3	99.2	16	1653	1971	559888
5	2	67.8	16	1337	-	28798
6	3	93	16	1199	1686	198805
7	1	60.1	16	-	-	370480
8	1	59.7	16	-	-	541141
9	1	50.9	16	-	-	7816
10	3	90.5	16	1129	1492	177860
11	2	82.4	16	1907	-	348290
12	1	63.9	16	-	-	520130
13	3	89.5	16	1815	1574	687822
14	1	63.3	16	-	-	157532
15	2	78.3	16	1554	-	327697
16	2	66.8	16	1994	-	497595
17	3	98.1	16	1288	1106	668209
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5510			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.4	8	-	-	232340
2	2	78.4	8	1052	-	522745
3	1	62.9	8	-	-	813881
4	1	53.3	8	-	-	1103943
5	3	97.9	8	1472	1140	196185
6	1	60.3	8	-	-	487308
7	2	67.3	8	1853	-	776494
8	2	75.1	8	1378	-	1067118
9	2	67.8	8	1246	-	160576
10	2	71	8	1205	-	450901
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5510			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	79.8	17	1417	-	435506
2	1	58.9	17	-	-	606601
3	3	83.6	17	1665	1483	73133
4	2	80.6	17	1779	-	243564
5	2	82	17	1793	-	414265
6	1	60.7	17	-	-	585820
7	2	69.6	17	1918	-	52269
8	1	55	17	-	-	223078
9	3	89.5	17	1416	1311	392377
10	3	83.5	17	1650	1506	562280
11	1	56.2	17	-	-	31336
12	2	83.2	17	1473	-	201744
13	1	50.9	17	-	-	373119
14	1	56.4	17	-	-	543481
15	1	52.1	17	-	-	10311
16	2	74.5	17	1223	-	180843
17	1	56.2	17	-	-	351767
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5510			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	90.5	17	1078	1507	521121
2	1	57.5	17	-	-	693399
3	3	96	17	1639	1991	159277
4	1	58.1	17	-	-	330862
5	3	84.9	17	1021	1212	499978
6	1	63.2	17	-	-	672991
7	3	88.8	17	1759	1722	138382
8	1	52.8	17	-	-	309834
9	3	99.3	17	1468	1164	478683
10	3	100	17	1929	1445	648717
11	3	98.7	17	1826	1758	117415
12	2	71.6	17	1881	-	288030
13	1	60	17	-	-	459522
14	3	92.5	17	1840	1708	627781
15	2	74	17	1157	-	96837
16	3	100	17	1674	1258	266696
17	2	71.9	17	1739	-	437410
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5510			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	80.3	8	1261	-	1035673
2	1	50.7	8	-	-	129136
3	2	67.3	8	1546	-	419208
4	1	59.8	8	-	-	710650
5	1	50.3	8	-	-	1001019
6	1	53.1	8	-	-	93404
7	2	69.8	8	1072	-	383770
8	1	58.2	8	-	-	674852
9	3	88.8	8	1486	1647	963226
10	3	83.4	8	1099	1395	57470
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5510			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	91.9	6	1253	1965	434541
2	2	75.3	6	1200	-	798349
3	2	77.5	6	1463	-	1161155
4	1	56.4	6	-	-	27220
5	1	51.1	6	-	-	390663
6	2	73.4	6	1531	-	753494
7	1	54	6	-	-	1117437
8	2	76.8	6	1754	-	1478780
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5510			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.5	8	1697	-	276178
2	2	71.9	8	1926	-	566503
3	1	62.9	8	-	-	858192
4	3	95	8	1613	1813	1145729
5	3	95.8	8	1389	1042	240318
6	3	94.9	8	1964	1852	529645
7	2	77.8	8	1088	-	821248
8	2	82.8	8	1513	-	1111360
9	1	60.8	8	-	-	205100
10	2	71	8	1457	-	495019
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5496			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	83.4	12	1146	1624	602834
2	2	79.5	12	1028	-	827662
3	3	91	12	1582	1820	129713
4	2	82.3	12	1585	-	353024
5	2	83.2	12	1365	-	576234
6	2	79	12	1073	-	799400
7	2	76.1	12	1646	-	102465
8	1	51.3	12	-	-	325963
9	1	57.1	12	-	-	549330
10	3	96.5	12	1738	1893	769902
11	3	90.1	12	1941	1548	74817
12	1	54.4	12	-	-	298561
13	2	76.2	12	1151	-	521688
14						
15						
16						
17						
18						
19						
20						

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5497			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	99.9	14	1442	1014	643759
2	3	96.1	14	1382	1694	41044
3	2	79.8	14	1700	-	234483
4	3	97	14	1810	1450	426995
5	2	77.5	14	1324	-	620814
6	2	71.7	14	1247	-	17309
7	3	93.5	14	1272	1225	210226
8	3	97.5	14	1951	1443	402908
9	3	98.3	14	1638	1688	595802
10	1	56	14	-	-	792044
11	1	65.6	14	-	-	187163
12	1	56.4	14	-	-	380663
13	2	78.1	14	1462	-	573392
14	1	59	14	-	-	767896
15	3	85.4	14	1831	1518	162572
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5495			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55	9	-	-	486940
2	2	72.5	9	1391	-	750174
3	2	82	9	1532	-	1013938
4	2	67.6	9	1874	-	189959
5	3	92.4	9	1544	1213	453187
6	3	98.8	9	1817	1421	716309
7	2	74.9	9	1153	-	981442
8	1	59.3	9	-	-	157641
9	3	92.4	9	1642	1704	420666
10	1	59.5	9	-	-	685980
11	3	92.1	9	1846	1191	947753
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5496			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	12	1065	1858	97900
2	2	80.4	12	1957	-	305207
3	3	99.8	12	1388	1338	511925
4	1	66.3	12	-	-	721131
5	1	57.5	12	-	-	72718
6	3	86.8	12	1797	1174	279132
7	1	63.1	12	-	-	487758
8	3	95.8	12	1031	1903	693036
9	1	63.1	12	-	-	47150
10	3	98.9	12	1053	1751	253729
11	1	65.9	12	-	-	462007
12	3	97.9	12	1667	1676	667428
13	1	50.3	12	-	-	21607
14	1	61	12	-	-	229219
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5494			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.3	7	1033	-	678869
2	2	73.6	7	1320	-	1001321
3	3	85.2	7	1625	1764	1322716
4	2	73.5	7	1530	-	316568
5	2	75.4	7	1160	-	639434
6	2	75.9	7	1239	-	962158
7	1	55.1	7	-	-	1286309
8	2	70	7	1074	-	276828
9	3	90.7	7	1919	1358	598555
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5498			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96.4	17	1652	1444	458879
2	3	84.6	17	1346	1906	619571
3	1	64.4	17	-	-	118529
4	2	72.4	17	1032	-	279226
5	1	62.1	17	-	-	441396
6	2	77.4	17	1336	-	600839
7	2	74.9	17	1923	-	98396
8	3	86.8	17	1706	1953	258560
9	3	87.5	17	1659	1562	419194
10	3	87.4	17	1124	1982	580057
11	3	85.4	17	1673	1721	78393
12	2	73.3	17	1193	-	239768
13	1	63	17	-	-	401351
14	3	97.8	17	1221	1848	560102
15	2	82	17	1280	-	58784
16	3	98.5	17	1509	1999	218927
17	2	78.9	17	1597	-	380497
18	3	93.3	17	1786	1123	540748
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5499			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.3	19	1290	-	35052
2	3	95.9	19	1478	1740	179435
3	3	86.6	19	1808	1955	323219
4	3	89.1	19	1693	1269	468545
5	2	74.7	19	1873	-	17160
6	2	81.7	19	1274	-	162128
7	1	56.6	19	-	-	307763
8	2	75	19	1166	-	451984
9	2	75.2	19	1794	-	596054
10	3	89.7	19	1864	1194	143792
11	3	85.8	19	1420	1456	288059
12	2	67	19	1327	-	434042
13	3	83.7	19	1366	1001	577658
14	3	87	19	1601	1474	125996
15	2	78.4	19	1992	-	270847
16	3	89.8	19	1904	1267	414680
17	1	53.3	19	-	-	561916
18	2	81.7	19	1692	-	108515
19	3	93.2	19	1861	1799	252217
20	1	64.3	19	-	-	398790

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5493			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	51	6	-	-	1362731
2	2	68.3	6	1013	-	227376
3	3	88.2	6	1570	1175	589884
4	1	62	6	-	-	954235
5	2	78.4	6	1412	-	1316828
6	1	60.4	6	-	-	182740
7	1	64.9	6	-	-	546134
8	3	87.7	6	1579	1948	907454
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5498			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	54.3	18	-	-	535574
2	2	75.9	18	1080	-	57901
3	1	53.2	18	-	-	210731
4	2	75.1	18	1934	-	362362
5	3	96.5	18	1262	1187	514214
6	2	82.6	18	1897	-	39077
7	2	72.8	18	1062	-	191702
8	2	74.1	18	1989	-	343459
9	1	54.1	18	-	-	497638
10	1	57.3	18	-	-	20359
11	1	59.9	18	-	-	173154
12	2	82.7	18	1008	-	325675
13	1	65.8	18	-	-	478914
14	3	87.1	18	1063	1668	1530
15	1	52.2	18	-	-	154365
16	3	85.3	18	1593	1577	305605
17	1	51	18	-	-	459949
18	2	70.5	18	1824	-	610916
19	1	53.7	18	-	-	135433
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5498			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	18	1089	1448	287133
2	3	94.9	18	1455	1937	438973
3	2	73.3	18	1419	-	592828
4	3	94.4	18	1076	1839	116148
5	1	50.2	18	-	-	269337
6	1	55.3	18	-	-	422663
7	1	64.6	18	-	-	574757
8	3	92.3	18	1120	1691	97375
9	1	64	18	-	-	250505
10	1	57.7	18	-	-	403627
11	2	74.5	18	1190	-	555389
12	1	60.6	18	-	-	79001
13	1	64.2	18	-	-	231999
14	2	66.8	18	1485	-	383531
15	2	68.9	18	1993	-	536127
16	2	70.7	18	1087	-	60108
17	3	99.4	18	1958	1576	211991
18	3	86.5	18	1623	1973	363541
19	1	60.7	18	-	-	518498
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5522			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	70.5	17	1163	-	43613
2	1	51.1	17	-	-	205055
3	1	64.1	17	-	-	366349
4	1	54.3	17	-	-	527788
5	3	85.7	17	1476	1895	23732
6	3	96.1	17	1243	1783	184401
7	2	71.8	17	1045	-	346087
8	1	60.4	17	-	-	508059
9	3	98.6	17	1185	1787	3956
10	1	63.9	17	-	-	165231
11	1	66.1	17	-	-	326541
12	1	52.9	17	-	-	487791
13	1	61	17	-	-	648828
14	1	57.9	17	-	-	145398
15	1	56.7	17	-	-	306925
16	1	66.4	17	-	-	467774
17	3	92.9	17	1118	1139	627090
18	2	81	17	1428	-	125373
19						
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5525			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	81.5	11	1284	-	396868
2	1	52.9	11	-	-	621215
3	2	69.8	11	1876	-	842958
4	2	81.9	11	1356	-	146157
5	3	90.3	11	1572	1039	369067
6	1	58.8	11	-	-	593700
7	1	66.4	11	-	-	816898
8	2	79.6	11	1198	-	118733
9	3	96.7	11	1795	1558	341250
10	3	95.7	11	1788	1869	563466
11	1	65.9	11	-	-	789727
12	3	96.9	11	1244	1394	91095
13	1	66.4	11	-	-	314757
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5522			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	52.9	18	-	-	388751
2	3	98.8	18	1587	1114	547579
3	3	90.4	18	1630	1083	45880
4	1	50	18	-	-	207326
5	1	52.5	18	-	-	368549
6	3	84.4	18	1108	1150	527980
7	3	90.6	18	1229	1997	26085
8	3	87.7	18	1598	1017	186767
9	3	98.3	18	1296	1515	347138
10	2	78.5	18	1822	-	508883
11	3	94.9	18	1202	1969	6294
12	1	66.1	18	-	-	167570
13	2	78.4	18	1633	-	328387
14	3	97.9	18	1177	1899	488262
15	1	54.8	18	-	-	651317
16	1	63.4	18	-	-	147765
17	1	52.7	18	-	-	308906
18	1	57.5	18	-	-	470724
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5526			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.4	8	-	-	1138082
2	2	76.1	8	1536	-	230256
3	3	89.7	8	1067	1590	519863
4	2	67.8	8	1385	-	810614
5	3	83.5	8	1401	1408	1099764
6	3	90.9	8	1508	1681	194169
7	3	88.6	8	1882	1097	483956
8	1	60.9	8	-	-	775710
9	1	55.2	8	-	-	1067046
10	3	88	8	1493	1680	158495
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5524			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	56	12	-	-	320776
2	3	99.5	12	1972	1333	526456
3	2	76.1	12	1519	-	734365
4	3	94.6	12	1281	1368	87603
5	1	51.6	12	-	-	295396
6	3	97.5	12	1732	1334	501013
7	1	63.1	12	-	-	710276
8	1	54.1	12	-	-	62297
9	2	70.7	12	1523	-	269209
10	1	57.8	12	-	-	477111
11	1	54.1	12	-	-	684853
12	2	82.1	12	1798	-	36645
13	1	52.3	12	-	-	244381
14	3	93.4	12	1635	1842	450010
15						
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5525			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	83.3	11	1018	-	708971
2	2	74.5	11	1894	-	11995
3	2	74.9	11	1724	-	235090
4	1	65.8	11	-	-	459030
5	1	61.8	11	-	-	682737
6	1	60.9	11	-	-	906245
7	1	61.5	11	-	-	208052
8	1	66.1	11	-	-	431427
9	3	94	11	1352	1182	653346
10	3	88.2	11	1447	1302	875528
11	1	65.5	11	-	-	180540
12	2	70.7	11	1757	-	403299
13	2	76.8	11	1844	-	626007
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5524			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	85.2	12	1357	1354	787746
2	1	65.2	12	-	-	142038
3	3	99.5	12	1860	1634	347955
4	1	61.4	12	-	-	556845
5	3	91.7	12	1990	1818	760893
6	2	79.1	12	1364	-	116301
7	1	52.5	12	-	-	323834
8	2	81.7	12	1379	-	530615
9	3	98.9	12	1778	1866	735634
10	1	52.4	12	-	-	90879
11	1	50.3	12	-	-	298498
12	1	64.4	12	-	-	505727
13	2	80.9	12	1616	-	712267
14	3	84.8	12	1789	1803	65014
15						
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5526			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	8	-	-	382215
2	3	92.8	8	1211	1466	671177
3	3	94.9	8	1747	1892	960581
4	1	53.3	8	-	-	55664
5	2	68.3	8	1371	-	345993
6	2	73.8	8	1348	-	636186
7	3	96.3	8	1627	1500	925310
8	3	84.6	8	1636	1772	19817
9	1	59	8	-	-	310575
10	1	66	8	-	-	601469
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5522			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.7	18	1084	-	467911
2	3	99.1	18	1086	1961	618658
3	3	94.3	18	1728	1669	143614
4	2	76.4	18	1300	-	296756
5	3	89.9	18	1654	1862	447691
6	1	55.5	18	-	-	603059
7	3	88	18	1573	1891	124928
8	2	79	18	1101	-	277965
9	2	80.9	18	1720	-	429993
10	2	70.7	18	1978	-	581941
11	2	78	18	1135	-	106682
12	3	88.9	18	1766	1240	258439
13	2	71.2	18	1643	-	411054
14	3	96.5	18	1020	1096	563199
15	1	62.5	18	-	-	87943
16	1	52.9	18	-	-	240934
17	3	99.8	18	1144	1058	392319
18	1	61.7	18	-	-	546709
19	3	84.4	18	1525	1238	68872
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5527			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.1	6	1216	-	468654
2	2	74.5	6	1481	-	791396
3	1	51.4	6	-	-	1115552
4	2	80.9	6	1316	-	106252
5	2	76.2	6	1749	-	428886
6	1	60.9	6	-	-	752462
7	2	73.4	6	1651	-	1074304
8	3	99.1	6	1173	1567	66455
9	3	84.8	6	1458	1771	388590
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Channel 106 Bandwidth 80MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 106 Bandwidth 80MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	21	1089.32	918	Yes
2	13	1319.26	758	Yes
3	8	1519.76	658	Yes
4	10	1432.66	698	Yes
5	3	1792.11	558	Yes
6	18	1165.50	858	Yes
7	6	1618.12	618	Yes
8	15	1253.13	798	Yes
9	14	1285.35	778	Yes
10	4	1730.10	578	Yes
11	5	1672.24	598	Yes
12	19	1138.95	878	Yes
13	12	1355.01	738	Yes
14	9	1474.93	678	Yes
15	1	1930.50	518	Yes
16		387.90	2578	Yes
17		960.61	1041	Yes
18		530.50	1885	Yes
19		389.26	2569	Yes
20		480.77	2080	Yes
21		338.87	2951	Yes
22		346.02	2890	Yes
23		330.03	3030	Yes
24		661.38	1512	Yes
25		1457.73	686	Yes
26		352.49	2837	Yes
27		1034.13	967	Yes
28		1650.17	606	Yes
29		399.52	2503	Yes
30		564.33	1772	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 106 Bandwidth 80MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	26	2.70	214	Yes
2	27	3.60	150	Yes
3	28	4.40	212	Yes
4	28	4.00	224	Yes
5	24	1.90	209	Yes
6	28	4.10	164	Yes
7	28	4.10	208	Yes
8	24	1.80	226	Yes
9	23	1.20	205	Yes
10	24	1.70	162	Yes
11	26	2.80	174	Yes
12	27	3.40	227	Yes
13	25	2.20	192	Yes
14	26	2.90	160	Yes
15	23	1.50	185	Yes
16	28	4.20	207	Yes
17	29	4.80	177	Yes
18	23	1.20	215	Yes
19	28	4.40	157	Yes
20	29	4.50	182	Yes
21	28	4.10	210	Yes
22	25	2.60	155	Yes
23	28	4.40	180	Yes
24	24	1.70	159	Yes
25	26	2.90	225	Yes
26	26	2.70	219	Yes
27	26	3.00	167	Yes
28	24	1.80	152	Yes
29	29	4.50	190	Yes
30	23	1.40	166	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 106 Bandwidth 80MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	17	7.70	328	Yes
2	17	8.60	332	Yes
3	18	9.40	364	Yes
4	18	9.00	237	Yes
5	16	6.90	213	Yes
6	18	9.10	488	Yes
7	18	9.10	341	Yes
8	16	6.80	223	Yes
9	16	6.20	435	Yes
10	16	6.70	450	Yes
11	17	7.80	499	Yes
12	17	8.40	314	Yes
13	16	7.20	261	Yes
14	17	7.90	495	Yes
15	16	6.50	230	Yes
16	18	9.20	440	Yes
17	18	9.80	362	Yes
18	16	6.20	243	Yes
19	18	9.40	395	Yes
20	18	9.50	308	Yes
21	18	9.10	497	Yes
22	17	7.60	297	Yes
23	18	9.40	253	Yes
24	16	6.70	367	Yes
25	17	7.90	346	Yes
26	17	7.70	458	Yes
27	17	8.00	309	Yes
28	16	6.80	288	Yes
29	18	9.50	464	Yes
30	16	6.40	377	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 106 Bandwidth 80MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	14	14.90	328	Yes
2	15	16.80	332	Yes
3	16	18.60	364	Yes
4	15	17.80	237	Yes
5	13	12.90	213	Yes
6	15	17.80	488	Yes
7	15	17.90	341	Yes
8	13	12.80	223	Yes
9	12	11.60	435	Yes
10	12	12.70	450	Yes
11	14	15.00	499	Yes
12	14	16.30	314	Yes
13	13	13.70	261	Yes
14	14	15.20	495	Yes
15	12	12.20	230	Yes
16	16	18.20	440	Yes
17	16	19.40	362	Yes
18	12	11.50	243	Yes
19	16	18.70	395	Yes
20	16	18.80	308	Yes
21	15	18.00	497	Yes
22	14	14.70	297	Yes
23	16	18.60	253	Yes
24	12	12.70	367	Yes
25	14	15.20	346	Yes
26	14	14.90	458	Yes
27	14	15.40	309	Yes
28	12	12.70	288	Yes
29	16	18.80	464	Yes
30	12	11.90	377	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5532			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	71.5	11	1318	-	618504
2	2	82.3	11	1503	-	841409
3	3	92	11	1188	2000	144144
4	3	87.5	11	1181	1610	366867
5	1	61	11	-	-	591392
6	3	87.9	11	1657	1125	812710
7	3	88.1	11	1620	1424	116643
8	1	60.1	11	-	-	340697
9	1	53.4	11	-	-	564080
10	1	59.4	11	-	-	787482
11	2	72.3	11	1901	-	89393
12	2	79.4	11	1023	-	312599
13	1	65.1	11	-	-	536837
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5532			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.4	15	1792	-	615678
2	1	56.9	15	-	-	50397
3	3	90.1	15	1276	1342	231175
4	3	96.6	15	1273	1608	411845
5	1	53.2	15	-	-	595055
6	3	92.5	15	1439	1271	27915
7	3	93.1	15	1592	1363	208744
8	3	89	15	1266	1399	389638
9	2	70.5	15	1767	-	571186
10	3	91.9	15	1136	1644	5635
11	1	59.6	15	-	-	187268
12	2	73.6	15	1713	-	367807
13	2	71.5	15	1279	-	549604
14	2	74.6	15	1369	-	730242
15	1	59.8	15	-	-	164840
16	3	93.3	15	1398	1809	344710
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5532			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55.3	18	-	-	468866
2	1	50.9	18	-	-	630773
3	3	93.9	18	1626	1207	126111
4	1	66.5	18	-	-	288125
5	1	61.8	18	-	-	448924
6	2	75.5	18	1161	-	609235
7	3	96.7	18	1215	1127	106280
8	2	72.8	18	1917	-	267459
9	2	71.5	18	1589	-	428323
10	3	85.4	18	1452	1960	587339
11	2	71.4	18	1309	-	86692
12	1	63.2	18	-	-	248144
13	2	80	18	1949	-	408406
14	3	86.9	18	1672	1497	567853
15	1	61.2	18	-	-	67030
16	2	77.6	18	1343	-	227789
17	1	62.8	18	-	-	389349
18	1	51.9	18	-	-	550830
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5532			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	69.5	16	1036	-	49858
2	2	70.3	16	1698	-	220202
3	1	59.7	16	-	-	391290
4	3	99.2	16	1653	1971	559888
5	2	67.8	16	1337	-	28798
6	3	93	16	1199	1686	198805
7	1	60.1	16	-	-	370480
8	1	59.7	16	-	-	541141
9	1	50.9	16	-	-	7816
10	3	90.5	16	1129	1492	177860
11	2	82.4	16	1907	-	348290
12	1	63.9	16	-	-	520130
13	3	89.5	16	1815	1574	687822
14	1	63.3	16	-	-	157532
15	2	78.3	16	1554	-	327697
16	2	66.8	16	1994	-	497595
17	3	98.1	16	1288	1106	668209
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5532			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.4	8	-	-	232340
2	2	78.4	8	1052	-	522745
3	1	62.9	8	-	-	813881
4	1	53.3	8	-	-	1103943
5	3	97.9	8	1472	1140	196185
6	1	60.3	8	-	-	487308
7	2	67.3	8	1853	-	776494
8	2	75.1	8	1378	-	1067118
9	2	67.8	8	1246	-	160576
10	2	71	8	1205	-	450901
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5532			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	79.8	17	1417	-	435506
2	1	58.9	17	-	-	606601
3	3	83.6	17	1665	1483	73133
4	2	80.6	17	1779	-	243564
5	2	82	17	1793	-	414265
6	1	60.7	17	-	-	585820
7	2	69.6	17	1918	-	52269
8	1	55	17	-	-	223078
9	3	89.5	17	1416	1311	392377
10	3	83.5	17	1650	1506	562280
11	1	56.2	17	-	-	31336
12	2	83.2	17	1473	-	201744
13	1	50.9	17	-	-	373119
14	1	56.4	17	-	-	543481
15	1	52.1	17	-	-	10311
16	2	74.5	17	1223	-	180843
17	1	56.2	17	-	-	351767
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5532			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	90.5	17	1078	1507	521121
2	1	57.5	17	-	-	693399
3	3	96	17	1639	1991	159277
4	1	58.1	17	-	-	330862
5	3	84.9	17	1021	1212	499978
6	1	63.2	17	-	-	672991
7	3	88.8	17	1759	1722	138382
8	1	52.8	17	-	-	309834
9	3	99.3	17	1468	1164	478683
10	3	100	17	1929	1445	648717
11	3	98.7	17	1826	1758	117415
12	2	71.6	17	1881	-	288030
13	1	60	17	-	-	459522
14	3	92.5	17	1840	1708	627781
15	2	74	17	1157	-	96837
16	3	100	17	1674	1258	266696
17	2	71.9	17	1739	-	437410
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5532			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	80.3	8	1261	-	1035673
2	1	50.7	8	-	-	129136
3	2	67.3	8	1546	-	419208
4	1	59.8	8	-	-	710650
5	1	50.3	8	-	-	1001019
6	1	53.1	8	-	-	93404
7	2	69.8	8	1072	-	383770
8	1	58.2	8	-	-	674852
9	3	88.8	8	1486	1647	963226
10	3	83.4	8	1099	1395	57470
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5532			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	91.9	6	1253	1965	434541
2	2	75.3	6	1200	-	798349
3	2	77.5	6	1463	-	1161155
4	1	56.4	6	-	-	27220
5	1	51.1	6	-	-	390663
6	2	73.4	6	1531	-	753494
7	1	54	6	-	-	1117437
8	2	76.8	6	1754	-	1478780
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5532			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.5	8	1697	-	276178
2	2	71.9	8	1926	-	566503
3	1	62.9	8	-	-	858192
4	3	95	8	1613	1813	1145729
5	3	95.8	8	1389	1042	240318
6	3	94.9	8	1964	1852	529645
7	2	77.8	8	1088	-	821248
8	2	82.8	8	1513	-	1111360
9	1	60.8	8	-	-	205100
10	2	71	8	1457	-	495019
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5498			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	83.4	12	1146	1624	602834
2	2	79.5	12	1028	-	827662
3	3	91	12	1582	1820	129713
4	2	82.3	12	1585	-	353024
5	2	83.2	12	1365	-	576234
6	2	79	12	1073	-	799400
7	2	76.1	12	1646	-	102465
8	1	51.3	12	-	-	325963
9	1	57.1	12	-	-	549330
10	3	96.5	12	1738	1893	769902
11	3	90.1	12	1941	1548	74817
12	1	54.4	12	-	-	298561
13	2	76.2	12	1151	-	521688
14						
15						
16						
17						
18						
19						
20						

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5499			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	99.9	14	1442	1014	643759
2	3	96.1	14	1382	1694	41044
3	2	79.8	14	1700	-	234483
4	3	97	14	1810	1450	426995
5	2	77.5	14	1324	-	620814
6	2	71.7	14	1247	-	17309
7	3	93.5	14	1272	1225	210226
8	3	97.5	14	1951	1443	402908
9	3	98.3	14	1638	1688	595802
10	1	56	14	-	-	792044
11	1	65.6	14	-	-	187163
12	1	56.4	14	-	-	380663
13	2	78.1	14	1462	-	573392
14	1	59	14	-	-	767896
15	3	85.4	14	1831	1518	162572
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5497			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55	9	-	-	486940
2	2	72.5	9	1391	-	750174
3	2	82	9	1532	-	1013938
4	2	67.6	9	1874	-	189959
5	3	92.4	9	1544	1213	453187
6	3	98.8	9	1817	1421	716309
7	2	74.9	9	1153	-	981442
8	1	59.3	9	-	-	157641
9	3	92.4	9	1642	1704	420666
10	1	59.5	9	-	-	685980
11	3	92.1	9	1846	1191	947753
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5498			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	12	1065	1858	97900
2	2	80.4	12	1957	-	305207
3	3	99.8	12	1388	1338	511925
4	1	66.3	12	-	-	721131
5	1	57.5	12	-	-	72718
6	3	86.8	12	1797	1174	279132
7	1	63.1	12	-	-	487758
8	3	95.8	12	1031	1903	693036
9	1	63.1	12	-	-	47150
10	3	98.9	12	1053	1751	253729
11	1	65.9	12	-	-	462007
12	3	97.9	12	1667	1676	667428
13	1	50.3	12	-	-	21607
14	1	61	12	-	-	229219
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5496			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.3	7	1033	-	678869
2	2	73.6	7	1320	-	1001321
3	3	85.2	7	1625	1764	1322716
4	2	73.5	7	1530	-	316568
5	2	75.4	7	1160	-	639434
6	2	75.9	7	1239	-	962158
7	1	55.1	7	-	-	1286309
8	2	70	7	1074	-	276828
9	3	90.7	7	1919	1358	598555
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96.4	17	1652	1444	458879
2	3	84.6	17	1346	1906	619571
3	1	64.4	17	-	-	118529
4	2	72.4	17	1032	-	279226
5	1	62.1	17	-	-	441396
6	2	77.4	17	1336	-	600839
7	2	74.9	17	1923	-	98396
8	3	86.8	17	1706	1953	258560
9	3	87.5	17	1659	1562	419194
10	3	87.4	17	1124	1982	580057
11	3	85.4	17	1673	1721	78393
12	2	73.3	17	1193	-	239768
13	1	63	17	-	-	401351
14	3	97.8	17	1221	1848	560102
15	2	82	17	1280	-	58784
16	3	98.5	17	1509	1999	218927
17	2	78.9	17	1597	-	380497
18	3	93.3	17	1786	1123	540748
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5501			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.3	19	1290	-	35052
2	3	95.9	19	1478	1740	179435
3	3	86.6	19	1808	1955	323219
4	3	89.1	19	1693	1269	468545
5	2	74.7	19	1873	-	17160
6	2	81.7	19	1274	-	162128
7	1	56.6	19	-	-	307763
8	2	75	19	1166	-	451984
9	2	75.2	19	1794	-	596054
10	3	89.7	19	1864	1194	143792
11	3	85.8	19	1420	1456	288059
12	2	67	19	1327	-	434042
13	3	83.7	19	1366	1001	577658
14	3	87	19	1601	1474	125996
15	2	78.4	19	1992	-	270847
16	3	89.8	19	1904	1267	414680
17	1	53.3	19	-	-	561916
18	2	81.7	19	1692	-	108515
19	3	93.2	19	1861	1799	252217
20	1	64.3	19	-	-	398790

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5495			No
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	51	6	-	-	1362731
2	2	68.3	6	1013	-	227376
3	3	88.2	6	1570	1175	589884
4	1	62	6	-	-	954235
5	2	78.4	6	1412	-	1316828
6	1	60.4	6	-	-	182740
7	1	64.9	6	-	-	546134
8	3	87.7	6	1579	1948	907454
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	54.3	18	-	-	535574
2	2	75.9	18	1080	-	57901
3	1	53.2	18	-	-	210731
4	2	75.1	18	1934	-	362362
5	3	96.5	18	1262	1187	514214
6	2	82.6	18	1897	-	39077
7	2	72.8	18	1062	-	191702
8	2	74.1	18	1989	-	343459
9	1	54.1	18	-	-	497638
10	1	57.3	18	-	-	20359
11	1	59.9	18	-	-	173154
12	2	82.7	18	1008	-	325675
13	1	65.8	18	-	-	478914
14	3	87.1	18	1063	1668	1530
15	1	52.2	18	-	-	154365
16	3	85.3	18	1593	1577	305605
17	1	51	18	-	-	459949
18	2	70.5	18	1824	-	610916
19	1	53.7	18	-	-	135433
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	18	1089	1448	287133
2	3	94.9	18	1455	1937	438973
3	2	73.3	18	1419	-	592828
4	3	94.4	18	1076	1839	116148
5	1	50.2	18	-	-	269337
6	1	55.3	18	-	-	422663
7	1	64.6	18	-	-	574757
8	3	92.3	18	1120	1691	97375
9	1	64	18	-	-	250505
10	1	57.7	18	-	-	403627
11	2	74.5	18	1190	-	555389
12	1	60.6	18	-	-	79001
13	1	64.2	18	-	-	231999
14	2	66.8	18	1485	-	383531
15	2	68.9	18	1993	-	536127
16	2	70.7	18	1087	-	60108
17	3	99.4	18	1958	1576	211991
18	3	86.5	18	1623	1973	363541
19	1	60.7	18	-	-	518498
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5564			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	70.5	17	1163	-	43613
2	1	51.1	17	-	-	205055
3	1	64.1	17	-	-	366349
4	1	54.3	17	-	-	527788
5	3	85.7	17	1476	1895	23732
6	3	96.1	17	1243	1783	184401
7	2	71.8	17	1045	-	346087
8	1	60.4	17	-	-	508059
9	3	98.6	17	1185	1787	3956
10	1	63.9	17	-	-	165231
11	1	66.1	17	-	-	326541
12	1	52.9	17	-	-	487791
13	1	61	17	-	-	648828
14	1	57.9	17	-	-	145398
15	1	56.7	17	-	-	306925
16	1	66.4	17	-	-	467774
17	3	92.9	17	1118	1139	627090
18	2	81	17	1428	-	125373
19						
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5567			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	81.5	11	1284	-	396868
2	1	52.9	11	-	-	621215
3	2	69.8	11	1876	-	842958
4	2	81.9	11	1356	-	146157
5	3	90.3	11	1572	1039	369067
6	1	58.8	11	-	-	593700
7	1	66.4	11	-	-	816898
8	2	79.6	11	1198	-	118733
9	3	96.7	11	1795	1558	341250
10	3	95.7	11	1788	1869	563466
11	1	65.9	11	-	-	789727
12	3	96.9	11	1244	1394	91095
13	1	66.4	11	-	-	314757
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5564			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	52.9	18	-	-	388751
2	3	98.8	18	1587	1114	547579
3	3	90.4	18	1630	1083	45880
4	1	50	18	-	-	207326
5	1	52.5	18	-	-	368549
6	3	84.4	18	1108	1150	527980
7	3	90.6	18	1229	1997	26085
8	3	87.7	18	1598	1017	186767
9	3	98.3	18	1296	1515	347138
10	2	78.5	18	1822	-	508883
11	3	94.9	18	1202	1969	6294
12	1	66.1	18	-	-	167570
13	2	78.4	18	1633	-	328387
14	3	97.9	18	1177	1899	488262
15	1	54.8	18	-	-	651317
16	1	63.4	18	-	-	147765
17	1	52.7	18	-	-	308906
18	1	57.5	18	-	-	470724
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5568			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.4	8	-	-	1138082
2	2	76.1	8	1536	-	230256
3	3	89.7	8	1067	1590	519863
4	2	67.8	8	1385	-	810614
5	3	83.5	8	1401	1408	1099764
6	3	90.9	8	1508	1681	194169
7	3	88.6	8	1882	1097	483956
8	1	60.9	8	-	-	775710
9	1	55.2	8	-	-	1067046
10	3	88	8	1493	1680	158495
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5566			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	56	12	-	-	320776
2	3	99.5	12	1972	1333	526456
3	2	76.1	12	1519	-	734365
4	3	94.6	12	1281	1368	87603
5	1	51.6	12	-	-	295396
6	3	97.5	12	1732	1334	501013
7	1	63.1	12	-	-	710276
8	1	54.1	12	-	-	62297
9	2	70.7	12	1523	-	269209
10	1	57.8	12	-	-	477111
11	1	54.1	12	-	-	684853
12	2	82.1	12	1798	-	36645
13	1	52.3	12	-	-	244381
14	3	93.4	12	1635	1842	450010
15						
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5567			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	83.3	11	1018	-	708971
2	2	74.5	11	1894	-	11995
3	2	74.9	11	1724	-	235090
4	1	65.8	11	-	-	459030
5	1	61.8	11	-	-	682737
6	1	60.9	11	-	-	906245
7	1	61.5	11	-	-	208052
8	1	66.1	11	-	-	431427
9	3	94	11	1352	1182	653346
10	3	88.2	11	1447	1302	875528
11	1	65.5	11	-	-	180540
12	2	70.7	11	1757	-	403299
13	2	76.8	11	1844	-	626007
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5566			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	85.2	12	1357	1354	787746
2	1	65.2	12	-	-	142038
3	3	99.5	12	1860	1634	347955
4	1	61.4	12	-	-	556845
5	3	91.7	12	1990	1818	760893
6	2	79.1	12	1364	-	116301
7	1	52.5	12	-	-	323834
8	2	81.7	12	1379	-	530615
9	3	98.9	12	1778	1866	735634
10	1	52.4	12	-	-	90879
11	1	50.3	12	-	-	298498
12	1	64.4	12	-	-	505727
13	2	80.9	12	1616	-	712267
14	3	84.8	12	1789	1803	65014
15						
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5568			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	8	-	-	382215
2	3	92.8	8	1211	1466	671177
3	3	94.9	8	1747	1892	960581
4	1	53.3	8	-	-	55664
5	2	68.3	8	1371	-	345993
6	2	73.8	8	1348	-	636186
7	3	96.3	8	1627	1500	925310
8	3	84.6	8	1636	1772	19817
9	1	59	8	-	-	310575
10	1	66	8	-	-	601469
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5564			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.7	18	1084	-	467911
2	3	99.1	18	1086	1961	618658
3	3	94.3	18	1728	1669	143614
4	2	76.4	18	1300	-	296756
5	3	89.9	18	1654	1862	447691
6	1	55.5	18	-	-	603059
7	3	88	18	1573	1891	124928
8	2	79	18	1101	-	277965
9	2	80.9	18	1720	-	429993
10	2	70.7	18	1978	-	581941
11	2	78	18	1135	-	106682
12	3	88.9	18	1766	1240	258439
13	2	71.2	18	1643	-	411054
14	3	96.5	18	1020	1096	563199
15	1	62.5	18	-	-	87943
16	1	52.9	18	-	-	240934
17	3	99.8	18	1144	1058	392319
18	1	61.7	18	-	-	546709
19	3	84.4	18	1525	1238	68872
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5569			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.1	6	1216	-	468654
2	2	74.5	6	1481	-	791396
3	1	51.4	6	-	-	1115552
4	2	80.9	6	1316	-	106252
5	2	76.2	6	1749	-	428886
6	1	60.9	6	-	-	752462
7	2	73.4	6	1651	-	1074304
8	3	99.1	6	1173	1567	66455
9	3	84.8	6	1458	1771	388590
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Channel 114 Bandwidth 160MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 114 Bandwidth 160MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	21	1089.32	918	Yes
2	13	1319.26	758	Yes
3	8	1519.76	658	Yes
4	10	1432.66	698	Yes
5	3	1792.11	558	Yes
6	18	1165.50	858	Yes
7	6	1618.12	618	Yes
8	15	1253.13	798	Yes
9	14	1285.35	778	Yes
10	4	1730.10	578	Yes
11	5	1672.24	598	Yes
12	19	1138.95	878	Yes
13	12	1355.01	738	Yes
14	9	1474.93	678	Yes
15	1	1930.50	518	Yes
16		387.90	2578	Yes
17		960.61	1041	Yes
18		530.50	1885	Yes
19		389.26	2569	Yes
20		480.77	2080	Yes
21		338.87	2951	Yes
22		346.02	2890	Yes
23		330.03	3030	Yes
24		661.38	1512	Yes
25		1457.73	686	Yes
26		352.49	2837	Yes
27		1034.13	967	Yes
28		1650.17	606	Yes
29		399.52	2503	Yes
30		564.33	1772	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 114 Bandwidth 160MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	26	2.70	214	Yes
2	27	3.60	150	Yes
3	28	4.40	212	Yes
4	28	4.00	224	Yes
5	24	1.90	209	Yes
6	28	4.10	164	Yes
7	28	4.10	208	Yes
8	24	1.80	226	Yes
9	23	1.20	205	Yes
10	24	1.70	162	Yes
11	26	2.80	174	Yes
12	27	3.40	227	Yes
13	25	2.20	192	Yes
14	26	2.90	160	Yes
15	23	1.50	185	Yes
16	28	4.20	207	Yes
17	29	4.80	177	Yes
18	23	1.20	215	Yes
19	28	4.40	157	Yes
20	29	4.50	182	Yes
21	28	4.10	210	Yes
22	25	2.60	155	Yes
23	28	4.40	180	Yes
24	24	1.70	159	Yes
25	26	2.90	225	Yes
26	26	2.70	219	Yes
27	26	3.00	167	Yes
28	24	1.80	152	Yes
29	29	4.50	190	Yes
30	23	1.40	166	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 114 Bandwidth 160MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	17	7.70	328	Yes
2	17	8.60	332	Yes
3	18	9.40	364	Yes
4	18	9.00	237	Yes
5	16	6.90	213	Yes
6	18	9.10	488	Yes
7	18	9.10	341	Yes
8	16	6.80	223	Yes
9	16	6.20	435	Yes
10	16	6.70	450	Yes
11	17	7.80	499	Yes
12	17	8.40	314	Yes
13	16	7.20	261	Yes
14	17	7.90	495	Yes
15	16	6.50	230	Yes
16	18	9.20	440	Yes
17	18	9.80	362	Yes
18	16	6.20	243	Yes
19	18	9.40	395	Yes
20	18	9.50	308	Yes
21	18	9.10	497	Yes
22	17	7.60	297	Yes
23	18	9.40	253	Yes
24	16	6.70	367	Yes
25	17	7.90	346	Yes
26	17	7.70	458	Yes
27	17	8.00	309	Yes
28	16	6.80	288	Yes
29	18	9.50	464	Yes
30	16	6.40	377	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 114 Bandwidth 160MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	14	14.90	328	Yes
2	15	16.80	332	Yes
3	16	18.60	364	Yes
4	15	17.80	237	Yes
5	13	12.90	213	Yes
6	15	17.80	488	Yes
7	15	17.90	341	Yes
8	13	12.80	223	Yes
9	12	11.60	435	Yes
10	12	12.70	450	Yes
11	14	15.00	499	Yes
12	14	16.30	314	Yes
13	13	13.70	261	Yes
14	14	15.20	495	Yes
15	12	12.20	230	Yes
16	16	18.20	440	Yes
17	16	19.40	362	Yes
18	12	11.50	243	Yes
19	16	18.70	395	Yes
20	16	18.80	308	Yes
21	15	18.00	497	Yes
22	14	14.70	297	Yes
23	16	18.60	253	Yes
24	12	12.70	367	Yes
25	14	15.20	346	Yes
26	14	14.90	458	Yes
27	14	15.40	309	Yes
28	12	12.70	288	Yes
29	16	18.80	464	Yes
30	12	11.90	377	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5570			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	71.5	11	1318	-	618504
2	2	82.3	11	1503	-	841409
3	3	92	11	1188	2000	144144
4	3	87.5	11	1181	1610	366867
5	1	61	11	-	-	591392
6	3	87.9	11	1657	1125	812710
7	3	88.1	11	1620	1424	116643
8	1	60.1	11	-	-	340697
9	1	53.4	11	-	-	564080
10	1	59.4	11	-	-	787482
11	2	72.3	11	1901	-	89393
12	2	79.4	11	1023	-	312599
13	1	65.1	11	-	-	536837
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5570			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.4	15	1792	-	615678
2	1	56.9	15	-	-	50397
3	3	90.1	15	1276	1342	231175
4	3	96.6	15	1273	1608	411845
5	1	53.2	15	-	-	595055
6	3	92.5	15	1439	1271	27915
7	3	93.1	15	1592	1363	208744
8	3	89	15	1266	1399	389638
9	2	70.5	15	1767	-	571186
10	3	91.9	15	1136	1644	5635
11	1	59.6	15	-	-	187268
12	2	73.6	15	1713	-	367807
13	2	71.5	15	1279	-	549604
14	2	74.6	15	1369	-	730242
15	1	59.8	15	-	-	164840
16	3	93.3	15	1398	1809	344710
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5570			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55.3	18	-	-	468866
2	1	50.9	18	-	-	630773
3	3	93.9	18	1626	1207	126111
4	1	66.5	18	-	-	288125
5	1	61.8	18	-	-	448924
6	2	75.5	18	1161	-	609235
7	3	96.7	18	1215	1127	106280
8	2	72.8	18	1917	-	267459
9	2	71.5	18	1589	-	428323
10	3	85.4	18	1452	1960	587339
11	2	71.4	18	1309	-	86692
12	1	63.2	18	-	-	248144
13	2	80	18	1949	-	408406
14	3	86.9	18	1672	1497	567853
15	1	61.2	18	-	-	67030
16	2	77.6	18	1343	-	227789
17	1	62.8	18	-	-	389349
18	1	51.9	18	-	-	550830
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5570			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	69.5	16	1036	-	49858
2	2	70.3	16	1698	-	220202
3	1	59.7	16	-	-	391290
4	3	99.2	16	1653	1971	559888
5	2	67.8	16	1337	-	28798
6	3	93	16	1199	1686	198805
7	1	60.1	16	-	-	370480
8	1	59.7	16	-	-	541141
9	1	50.9	16	-	-	7816
10	3	90.5	16	1129	1492	177860
11	2	82.4	16	1907	-	348290
12	1	63.9	16	-	-	520130
13	3	89.5	16	1815	1574	687822
14	1	63.3	16	-	-	157532
15	2	78.3	16	1554	-	327697
16	2	66.8	16	1994	-	497595
17	3	98.1	16	1288	1106	668209
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5570			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.4	8	-	-	232340
2	2	78.4	8	1052	-	522745
3	1	62.9	8	-	-	813881
4	1	53.3	8	-	-	1103943
5	3	97.9	8	1472	1140	196185
6	1	60.3	8	-	-	487308
7	2	67.3	8	1853	-	776494
8	2	75.1	8	1378	-	1067118
9	2	67.8	8	1246	-	160576
10	2	71	8	1205	-	450901
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5570			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	79.8	17	1417	-	435506
2	1	58.9	17	-	-	606601
3	3	83.6	17	1665	1483	73133
4	2	80.6	17	1779	-	243564
5	2	82	17	1793	-	414265
6	1	60.7	17	-	-	585820
7	2	69.6	17	1918	-	52269
8	1	55	17	-	-	223078
9	3	89.5	17	1416	1311	392377
10	3	83.5	17	1650	1506	562280
11	1	56.2	17	-	-	31336
12	2	83.2	17	1473	-	201744
13	1	50.9	17	-	-	373119
14	1	56.4	17	-	-	543481
15	1	52.1	17	-	-	10311
16	2	74.5	17	1223	-	180843
17	1	56.2	17	-	-	351767
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5570			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	90.5	17	1078	1507	521121
2	1	57.5	17	-	-	693399
3	3	96	17	1639	1991	159277
4	1	58.1	17	-	-	330862
5	3	84.9	17	1021	1212	499978
6	1	63.2	17	-	-	672991
7	3	88.8	17	1759	1722	138382
8	1	52.8	17	-	-	309834
9	3	99.3	17	1468	1164	478683
10	3	100	17	1929	1445	648717
11	3	98.7	17	1826	1758	117415
12	2	71.6	17	1881	-	288030
13	1	60	17	-	-	459522
14	3	92.5	17	1840	1708	627781
15	2	74	17	1157	-	96837
16	3	100	17	1674	1258	266696
17	2	71.9	17	1739	-	437410
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5570			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	80.3	8	1261	-	1035673
2	1	50.7	8	-	-	129136
3	2	67.3	8	1546	-	419208
4	1	59.8	8	-	-	710650
5	1	50.3	8	-	-	1001019
6	1	53.1	8	-	-	93404
7	2	69.8	8	1072	-	383770
8	1	58.2	8	-	-	674852
9	3	88.8	8	1486	1647	963226
10	3	83.4	8	1099	1395	57470
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5570			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	91.9	6	1253	1965	434541
2	2	75.3	6	1200	-	798349
3	2	77.5	6	1463	-	1161155
4	1	56.4	6	-	-	27220
5	1	51.1	6	-	-	390663
6	2	73.4	6	1531	-	753494
7	1	54	6	-	-	1117437
8	2	76.8	6	1754	-	1478780
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5570			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.5	8	1697	-	276178
2	2	71.9	8	1926	-	566503
3	1	62.9	8	-	-	858192
4	3	95	8	1613	1813	1145729
5	3	95.8	8	1389	1042	240318
6	3	94.9	8	1964	1852	529645
7	2	77.8	8	1088	-	821248
8	2	82.8	8	1513	-	1111360
9	1	60.8	8	-	-	205100
10	2	71	8	1457	-	495019
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5496			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	83.4	12	1146	1624	602834
2	2	79.5	12	1028	-	827662
3	3	91	12	1582	1820	129713
4	2	82.3	12	1585	-	353024
5	2	83.2	12	1365	-	576234
6	2	79	12	1073	-	799400
7	2	76.1	12	1646	-	102465
8	1	51.3	12	-	-	325963
9	1	57.1	12	-	-	549330
10	3	96.5	12	1738	1893	769902
11	3	90.1	12	1941	1548	74817
12	1	54.4	12	-	-	298561
13	2	76.2	12	1151	-	521688
14						
15						
16						
17						
18						
19						
20						

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5497			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	99.9	14	1442	1014	643759
2	3	96.1	14	1382	1694	41044
3	2	79.8	14	1700	-	234483
4	3	97	14	1810	1450	426995
5	2	77.5	14	1324	-	620814
6	2	71.7	14	1247	-	17309
7	3	93.5	14	1272	1225	210226
8	3	97.5	14	1951	1443	402908
9	3	98.3	14	1638	1688	595802
10	1	56	14	-	-	792044
11	1	65.6	14	-	-	187163
12	1	56.4	14	-	-	380663
13	2	78.1	14	1462	-	573392
14	1	59	14	-	-	767896
15	3	85.4	14	1831	1518	162572
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5495			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55	9	-	-	486940
2	2	72.5	9	1391	-	750174
3	2	82	9	1532	-	1013938
4	2	67.6	9	1874	-	189959
5	3	92.4	9	1544	1213	453187
6	3	98.8	9	1817	1421	716309
7	2	74.9	9	1153	-	981442
8	1	59.3	9	-	-	157641
9	3	92.4	9	1642	1704	420666
10	1	59.5	9	-	-	685980
11	3	92.1	9	1846	1191	947753
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5496			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	12	1065	1858	97900
2	2	80.4	12	1957	-	305207
3	3	99.8	12	1388	1338	511925
4	1	66.3	12	-	-	721131
5	1	57.5	12	-	-	72718
6	3	86.8	12	1797	1174	279132
7	1	63.1	12	-	-	487758
8	3	95.8	12	1031	1903	693036
9	1	63.1	12	-	-	47150
10	3	98.9	12	1053	1751	253729
11	1	65.9	12	-	-	462007
12	3	97.9	12	1667	1676	667428
13	1	50.3	12	-	-	21607
14	1	61	12	-	-	229219
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5494			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.3	7	1033	-	678869
2	2	73.6	7	1320	-	1001321
3	3	85.2	7	1625	1764	1322716
4	2	73.5	7	1530	-	316568
5	2	75.4	7	1160	-	639434
6	2	75.9	7	1239	-	962158
7	1	55.1	7	-	-	1286309
8	2	70	7	1074	-	276828
9	3	90.7	7	1919	1358	598555
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5498			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96.4	17	1652	1444	458879
2	3	84.6	17	1346	1906	619571
3	1	64.4	17	-	-	118529
4	2	72.4	17	1032	-	279226
5	1	62.1	17	-	-	441396
6	2	77.4	17	1336	-	600839
7	2	74.9	17	1923	-	98396
8	3	86.8	17	1706	1953	258560
9	3	87.5	17	1659	1562	419194
10	3	87.4	17	1124	1982	580057
11	3	85.4	17	1673	1721	78393
12	2	73.3	17	1193	-	239768
13	1	63	17	-	-	401351
14	3	97.8	17	1221	1848	560102
15	2	82	17	1280	-	58784
16	3	98.5	17	1509	1999	218927
17	2	78.9	17	1597	-	380497
18	3	93.3	17	1786	1123	540748
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5499			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.3	19	1290	-	35052
2	3	95.9	19	1478	1740	179435
3	3	86.6	19	1808	1955	323219
4	3	89.1	19	1693	1269	468545
5	2	74.7	19	1873	-	17160
6	2	81.7	19	1274	-	162128
7	1	56.6	19	-	-	307763
8	2	75	19	1166	-	451984
9	2	75.2	19	1794	-	596054
10	3	89.7	19	1864	1194	143792
11	3	85.8	19	1420	1456	288059
12	2	67	19	1327	-	434042
13	3	83.7	19	1366	1001	577658
14	3	87	19	1601	1474	125996
15	2	78.4	19	1992	-	270847
16	3	89.8	19	1904	1267	414680
17	1	53.3	19	-	-	561916
18	2	81.7	19	1692	-	108515
19	3	93.2	19	1861	1799	252217
20	1	64.3	19	-	-	398790

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5493			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	51	6	-	-	1362731
2	2	68.3	6	1013	-	227376
3	3	88.2	6	1570	1175	589884
4	1	62	6	-	-	954235
5	2	78.4	6	1412	-	1316828
6	1	60.4	6	-	-	182740
7	1	64.9	6	-	-	546134
8	3	87.7	6	1579	1948	907454
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5498			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	54.3	18	-	-	535574
2	2	75.9	18	1080	-	57901
3	1	53.2	18	-	-	210731
4	2	75.1	18	1934	-	362362
5	3	96.5	18	1262	1187	514214
6	2	82.6	18	1897	-	39077
7	2	72.8	18	1062	-	191702
8	2	74.1	18	1989	-	343459
9	1	54.1	18	-	-	497638
10	1	57.3	18	-	-	20359
11	1	59.9	18	-	-	173154
12	2	82.7	18	1008	-	325675
13	1	65.8	18	-	-	478914
14	3	87.1	18	1063	1668	1530
15	1	52.2	18	-	-	154365
16	3	85.3	18	1593	1577	305605
17	1	51	18	-	-	459949
18	2	70.5	18	1824	-	610916
19	1	53.7	18	-	-	135433
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5498			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	18	1089	1448	287133
2	3	94.9	18	1455	1937	438973
3	2	73.3	18	1419	-	592828
4	3	94.4	18	1076	1839	116148
5	1	50.2	18	-	-	269337
6	1	55.3	18	-	-	422663
7	1	64.6	18	-	-	574757
8	3	92.3	18	1120	1691	97375
9	1	64	18	-	-	250505
10	1	57.7	18	-	-	403627
11	2	74.5	18	1190	-	555389
12	1	60.6	18	-	-	79001
13	1	64.2	18	-	-	231999
14	2	66.8	18	1485	-	383531
15	2	68.9	18	1993	-	536127
16	2	70.7	18	1087	-	60108
17	3	99.4	18	1958	1576	211991
18	3	86.5	18	1623	1973	363541
19	1	60.7	18	-	-	518498
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5642			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	70.5	17	1163	-	43613
2	1	51.1	17	-	-	205055
3	1	64.1	17	-	-	366349
4	1	54.3	17	-	-	527788
5	3	85.7	17	1476	1895	23732
6	3	96.1	17	1243	1783	184401
7	2	71.8	17	1045	-	346087
8	1	60.4	17	-	-	508059
9	3	98.6	17	1185	1787	3956
10	1	63.9	17	-	-	165231
11	1	66.1	17	-	-	326541
12	1	52.9	17	-	-	487791
13	1	61	17	-	-	648828
14	1	57.9	17	-	-	145398
15	1	56.7	17	-	-	306925
16	1	66.4	17	-	-	467774
17	3	92.9	17	1118	1139	627090
18	2	81	17	1428	-	125373
19						
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5645			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	81.5	11	1284	-	396868
2	1	52.9	11	-	-	621215
3	2	69.8	11	1876	-	842958
4	2	81.9	11	1356	-	146157
5	3	90.3	11	1572	1039	369067
6	1	58.8	11	-	-	593700
7	1	66.4	11	-	-	816898
8	2	79.6	11	1198	-	118733
9	3	96.7	11	1795	1558	341250
10	3	95.7	11	1788	1869	563466
11	1	65.9	11	-	-	789727
12	3	96.9	11	1244	1394	91095
13	1	66.4	11	-	-	314757
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5642			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	52.9	18	-	-	388751
2	3	98.8	18	1587	1114	547579
3	3	90.4	18	1630	1083	45880
4	1	50	18	-	-	207326
5	1	52.5	18	-	-	368549
6	3	84.4	18	1108	1150	527980
7	3	90.6	18	1229	1997	26085
8	3	87.7	18	1598	1017	186767
9	3	98.3	18	1296	1515	347138
10	2	78.5	18	1822	-	508883
11	3	94.9	18	1202	1969	6294
12	1	66.1	18	-	-	167570
13	2	78.4	18	1633	-	328387
14	3	97.9	18	1177	1899	488262
15	1	54.8	18	-	-	651317
16	1	63.4	18	-	-	147765
17	1	52.7	18	-	-	308906
18	1	57.5	18	-	-	470724
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5646			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.4	8	-	-	1138082
2	2	76.1	8	1536	-	230256
3	3	89.7	8	1067	1590	519863
4	2	67.8	8	1385	-	810614
5	3	83.5	8	1401	1408	1099764
6	3	90.9	8	1508	1681	194169
7	3	88.6	8	1882	1097	483956
8	1	60.9	8	-	-	775710
9	1	55.2	8	-	-	1067046
10	3	88	8	1493	1680	158495
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5644			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	56	12	-	-	320776
2	3	99.5	12	1972	1333	526456
3	2	76.1	12	1519	-	734365
4	3	94.6	12	1281	1368	87603
5	1	51.6	12	-	-	295396
6	3	97.5	12	1732	1334	501013
7	1	63.1	12	-	-	710276
8	1	54.1	12	-	-	62297
9	2	70.7	12	1523	-	269209
10	1	57.8	12	-	-	477111
11	1	54.1	12	-	-	684853
12	2	82.1	12	1798	-	36645
13	1	52.3	12	-	-	244381
14	3	93.4	12	1635	1842	450010
15						
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5645			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	83.3	11	1018	-	708971
2	2	74.5	11	1894	-	11995
3	2	74.9	11	1724	-	235090
4	1	65.8	11	-	-	459030
5	1	61.8	11	-	-	682737
6	1	60.9	11	-	-	906245
7	1	61.5	11	-	-	208052
8	1	66.1	11	-	-	431427
9	3	94	11	1352	1182	653346
10	3	88.2	11	1447	1302	875528
11	1	65.5	11	-	-	180540
12	2	70.7	11	1757	-	403299
13	2	76.8	11	1844	-	626007
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5644			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	85.2	12	1357	1354	787746
2	1	65.2	12	-	-	142038
3	3	99.5	12	1860	1634	347955
4	1	61.4	12	-	-	556845
5	3	91.7	12	1990	1818	760893
6	2	79.1	12	1364	-	116301
7	1	52.5	12	-	-	323834
8	2	81.7	12	1379	-	530615
9	3	98.9	12	1778	1866	735634
10	1	52.4	12	-	-	90879
11	1	50.3	12	-	-	298498
12	1	64.4	12	-	-	505727
13	2	80.9	12	1616	-	712267
14	3	84.8	12	1789	1803	65014
15						
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5646			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	8	-	-	382215
2	3	92.8	8	1211	1466	671177
3	3	94.9	8	1747	1892	960581
4	1	53.3	8	-	-	55664
5	2	68.3	8	1371	-	345993
6	2	73.8	8	1348	-	636186
7	3	96.3	8	1627	1500	925310
8	3	84.6	8	1636	1772	19817
9	1	59	8	-	-	310575
10	1	66	8	-	-	601469
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5642			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.7	18	1084	-	467911
2	3	99.1	18	1086	1961	618658
3	3	94.3	18	1728	1669	143614
4	2	76.4	18	1300	-	296756
5	3	89.9	18	1654	1862	447691
6	1	55.5	18	-	-	603059
7	3	88	18	1573	1891	124928
8	2	79	18	1101	-	277965
9	2	80.9	18	1720	-	429993
10	2	70.7	18	1978	-	581941
11	2	78	18	1135	-	106682
12	3	88.9	18	1766	1240	258439
13	2	71.2	18	1643	-	411054
14	3	96.5	18	1020	1096	563199
15	1	62.5	18	-	-	87943
16	1	52.9	18	-	-	240934
17	3	99.8	18	1144	1058	392319
18	1	61.7	18	-	-	546709
19	3	84.4	18	1525	1238	68872
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5647			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72.1	6	1216	-	468654
2	2	74.5	6	1481	-	791396
3	1	51.4	6	-	-	1115552
4	2	80.9	6	1316	-	106252
5	2	76.2	6	1749	-	428886
6	1	60.9	6	-	-	752462
7	2	73.4	6	1651	-	1074304
8	3	99.1	6	1173	1567	66455
9	3	84.8	6	1458	1771	388590
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Channel 122 Bandwidth 240MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 122 Bandwidth 240MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	21	1089.32	918	Yes
2	13	1319.26	758	Yes
3	8	1519.76	658	Yes
4	10	1432.66	698	Yes
5	3	1792.11	558	Yes
6	18	1165.50	858	Yes
7	6	1618.12	618	Yes
8	15	1253.13	798	Yes
9	14	1285.35	778	Yes
10	4	1730.10	578	Yes
11	5	1672.24	598	Yes
12	19	1138.95	878	Yes
13	12	1355.01	738	Yes
14	9	1474.93	678	Yes
15	1	1930.50	518	Yes
16		387.90	2578	Yes
17		960.61	1041	Yes
18		530.50	1885	Yes
19		389.26	2569	Yes
20		480.77	2080	Yes
21		338.87	2951	Yes
22		346.02	2890	Yes
23		330.03	3030	Yes
24		661.38	1512	Yes
25		1457.73	686	Yes
26		352.49	2837	Yes
27		1034.13	967	Yes
28		1650.17	606	Yes
29		399.52	2503	Yes
30		564.33	1772	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 122 Bandwidth 240MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	26	2.70	214	Yes
2	27	3.60	150	Yes
3	28	4.40	212	Yes
4	28	4.00	224	Yes
5	24	1.90	209	Yes
6	28	4.10	164	Yes
7	28	4.10	208	Yes
8	24	1.80	226	Yes
9	23	1.20	205	Yes
10	24	1.70	162	Yes
11	26	2.80	174	Yes
12	27	3.40	227	Yes
13	25	2.20	192	Yes
14	26	2.90	160	Yes
15	23	1.50	185	No
16	28	4.20	207	Yes
17	29	4.80	177	Yes
18	23	1.20	215	Yes
19	28	4.40	157	Yes
20	29	4.50	182	No
21	28	4.10	210	Yes
22	25	2.60	155	Yes
23	28	4.40	180	No
24	24	1.70	159	Yes
25	26	2.90	225	Yes
26	26	2.70	219	Yes
27	26	3.00	167	Yes
28	24	1.80	152	Yes
29	29	4.50	190	Yes
30	23	1.40	166	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 122 Bandwidth 240MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	17	7.70	328	Yes
2	17	8.60	332	Yes
3	18	9.40	364	Yes
4	18	9.00	237	Yes
5	16	6.90	213	Yes
6	18	9.10	488	Yes
7	18	9.10	341	Yes
8	16	6.80	223	Yes
9	16	6.20	435	Yes
10	16	6.70	450	Yes
11	17	7.80	499	Yes
12	17	8.40	314	Yes
13	16	7.20	261	Yes
14	17	7.90	495	Yes
15	16	6.50	230	Yes
16	18	9.20	440	Yes
17	18	9.80	362	Yes
18	16	6.20	243	Yes
19	18	9.40	395	Yes
20	18	9.50	308	Yes
21	18	9.10	497	Yes
22	17	7.60	297	Yes
23	18	9.40	253	Yes
24	16	6.70	367	Yes
25	17	7.90	346	Yes
26	17	7.70	458	Yes
27	17	8.00	309	Yes
28	16	6.80	288	Yes
29	18	9.50	464	Yes
30	16	6.40	377	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 122 Bandwidth 240MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	14	14.90	328	Yes
2	15	16.80	332	Yes
3	16	18.60	364	Yes
4	15	17.80	237	Yes
5	13	12.90	213	Yes
6	15	17.80	488	Yes
7	15	17.90	341	Yes
8	13	12.80	223	Yes
9	12	11.60	435	Yes
10	12	12.70	450	Yes
11	14	15.00	499	Yes
12	14	16.30	314	Yes
13	13	13.70	261	Yes
14	14	15.20	495	Yes
15	12	12.20	230	Yes
16	16	18.20	440	Yes
17	16	19.40	362	Yes
18	12	11.50	243	Yes
19	16	18.70	395	Yes
20	16	18.80	308	Yes
21	15	18.00	497	Yes
22	14	14.70	297	Yes
23	16	18.60	253	Yes
24	12	12.70	367	Yes
25	14	15.20	346	Yes
26	14	14.90	458	Yes
27	14	15.40	309	Yes
28	12	12.70	288	Yes
29	16	18.80	464	Yes
30	12	11.90	377	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5610			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	71.5	11	1318	-	618504
2	2	82.3	11	1503	-	841409
3	3	92	11	1188	2000	144144
4	3	87.5	11	1181	1610	366867
5	1	61	11	-	-	591392
6	3	87.9	11	1657	1125	812710
7	3	88.1	11	1620	1424	116643
8	1	60.1	11	-	-	340697
9	1	53.4	11	-	-	564080
10	1	59.4	11	-	-	787482
11	2	72.3	11	1901	-	89393
12	2	79.4	11	1023	-	312599
13	1	65.1	11	-	-	536837
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5610			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.4	15	1792	-	615678
2	1	56.9	15	-	-	50397
3	3	90.1	15	1276	1342	231175
4	3	96.6	15	1273	1608	411845
5	1	53.2	15	-	-	595055
6	3	92.5	15	1439	1271	27915
7	3	93.1	15	1592	1363	208744
8	3	89	15	1266	1399	389638
9	2	70.5	15	1767	-	571186
10	3	91.9	15	1136	1644	5635
11	1	59.6	15	-	-	187268
12	2	73.6	15	1713	-	367807
13	2	71.5	15	1279	-	549604
14	2	74.6	15	1369	-	730242
15	1	59.8	15	-	-	164840
16	3	93.3	15	1398	1809	344710
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5610			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55.3	18	-	-	468866
2	1	50.9	18	-	-	630773
3	3	93.9	18	1626	1207	126111
4	1	66.5	18	-	-	288125
5	1	61.8	18	-	-	448924
6	2	75.5	18	1161	-	609235
7	3	96.7	18	1215	1127	106280
8	2	72.8	18	1917	-	267459
9	2	71.5	18	1589	-	428323
10	3	85.4	18	1452	1960	587339
11	2	71.4	18	1309	-	86692
12	1	63.2	18	-	-	248144
13	2	80	18	1949	-	408406
14	3	86.9	18	1672	1497	567853
15	1	61.2	18	-	-	67030
16	2	77.6	18	1343	-	227789
17	1	62.8	18	-	-	389349
18	1	51.9	18	-	-	550830
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5610			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	69.5	16	1036	-	49858
2	2	70.3	16	1698	-	220202
3	1	59.7	16	-	-	391290
4	3	99.2	16	1653	1971	559888
5	2	67.8	16	1337	-	28798
6	3	93	16	1199	1686	198805
7	1	60.1	16	-	-	370480
8	1	59.7	16	-	-	541141
9	1	50.9	16	-	-	7816
10	3	90.5	16	1129	1492	177860
11	2	82.4	16	1907	-	348290
12	1	63.9	16	-	-	520130
13	3	89.5	16	1815	1574	687822
14	1	63.3	16	-	-	157532
15	2	78.3	16	1554	-	327697
16	2	66.8	16	1994	-	497595
17	3	98.1	16	1288	1106	668209
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5610			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.4	8	-	-	232340
2	2	78.4	8	1052	-	522745
3	1	62.9	8	-	-	813881
4	1	53.3	8	-	-	1103943
5	3	97.9	8	1472	1140	196185
6	1	60.3	8	-	-	487308
7	2	67.3	8	1853	-	776494
8	2	75.1	8	1378	-	1067118
9	2	67.8	8	1246	-	160576
10	2	71	8	1205	-	450901
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5610			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	79.8	17	1417	-	435506
2	1	58.9	17	-	-	606601
3	3	83.6	17	1665	1483	73133
4	2	80.6	17	1779	-	243564
5	2	82	17	1793	-	414265
6	1	60.7	17	-	-	585820
7	2	69.6	17	1918	-	52269
8	1	55	17	-	-	223078
9	3	89.5	17	1416	1311	392377
10	3	83.5	17	1650	1506	562280
11	1	56.2	17	-	-	31336
12	2	83.2	17	1473	-	201744
13	1	50.9	17	-	-	373119
14	1	56.4	17	-	-	543481
15	1	52.1	17	-	-	10311
16	2	74.5	17	1223	-	180843
17	1	56.2	17	-	-	351767
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5610			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	90.5	17	1078	1507	521121
2	1	57.5	17	-	-	693399
3	3	96	17	1639	1991	159277
4	1	58.1	17	-	-	330862
5	3	84.9	17	1021	1212	499978
6	1	63.2	17	-	-	672991
7	3	88.8	17	1759	1722	138382
8	1	52.8	17	-	-	309834
9	3	99.3	17	1468	1164	478683
10	3	100	17	1929	1445	648717
11	3	98.7	17	1826	1758	117415
12	2	71.6	17	1881	-	288030
13	1	60	17	-	-	459522
14	3	92.5	17	1840	1708	627781
15	2	74	17	1157	-	96837
16	3	100	17	1674	1258	266696
17	2	71.9	17	1739	-	437410
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5610			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	80.3	8	1261	-	1035673
2	1	50.7	8	-	-	129136
3	2	67.3	8	1546	-	419208
4	1	59.8	8	-	-	710650
5	1	50.3	8	-	-	1001019
6	1	53.1	8	-	-	93404
7	2	69.8	8	1072	-	383770
8	1	58.2	8	-	-	674852
9	3	88.8	8	1486	1647	963226
10	3	83.4	8	1099	1395	57470
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5610			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	91.9	6	1253	1965	434541
2	2	75.3	6	1200	-	798349
3	2	77.5	6	1463	-	1161155
4	1	56.4	6	-	-	27220
5	1	51.1	6	-	-	390663
6	2	73.4	6	1531	-	753494
7	1	54	6	-	-	1117437
8	2	76.8	6	1754	-	1478780
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5610			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.5	8	1697	-	276178
2	2	71.9	8	1926	-	566503
3	1	62.9	8	-	-	858192
4	3	95	8	1613	1813	1145729
5	3	95.8	8	1389	1042	240318
6	3	94.9	8	1964	1852	529645
7	2	77.8	8	1088	-	821248
8	2	82.8	8	1513	-	1111360
9	1	60.8	8	-	-	205100
10	2	71	8	1457	-	495019
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5495			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	83.4	12	1146	1624	602834
2	2	79.5	12	1028	-	827662
3	3	91	12	1582	1820	129713
4	2	82.3	12	1585	-	353024
5	2	83.2	12	1365	-	576234
6	2	79	12	1073	-	799400
7	2	76.1	12	1646	-	102465
8	1	51.3	12	-	-	325963
9	1	57.1	12	-	-	549330
10	3	96.5	12	1738	1893	769902
11	3	90.1	12	1941	1548	74817
12	1	54.4	12	-	-	298561
13	2	76.2	12	1151	-	521688
14						
15						
16						
17						
18						
19						
20						

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5496			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	99.9	14	1442	1014	643759
2	3	96.1	14	1382	1694	41044
3	2	79.8	14	1700	-	234483
4	3	97	14	1810	1450	426995
5	2	77.5	14	1324	-	620814
6	2	71.7	14	1247	-	17309
7	3	93.5	14	1272	1225	210226
8	3	97.5	14	1951	1443	402908
9	3	98.3	14	1638	1688	595802
10	1	56	14	-	-	792044
11	1	65.6	14	-	-	187163
12	1	56.4	14	-	-	380663
13	2	78.1	14	1462	-	573392
14	1	59	14	-	-	767896
15	3	85.4	14	1831	1518	162572
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5494			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55	9	-	-	486940
2	2	72.5	9	1391	-	750174
3	2	82	9	1532	-	1013938
4	2	67.6	9	1874	-	189959
5	3	92.4	9	1544	1213	453187
6	3	98.8	9	1817	1421	716309
7	2	74.9	9	1153	-	981442
8	1	59.3	9	-	-	157641
9	3	92.4	9	1642	1704	420666
10	1	59.5	9	-	-	685980
11	3	92.1	9	1846	1191	947753
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5495			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	12	1065	1858	97900
2	2	80.4	12	1957	-	305207
3	3	99.8	12	1388	1338	511925
4	1	66.3	12	-	-	721131
5	1	57.5	12	-	-	72718
6	3	86.8	12	1797	1174	279132
7	1	63.1	12	-	-	487758
8	3	95.8	12	1031	1903	693036
9	1	63.1	12	-	-	47150
10	3	98.9	12	1053	1751	253729
11	1	65.9	12	-	-	462007
12	3	97.9	12	1667	1676	667428
13	1	50.3	12	-	-	21607
14	1	61	12	-	-	229219
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5493			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	67.3	7	1033	-	678869
2	2	73.6	7	1320	-	1001321
3	3	85.2	7	1625	1764	1322716
4	2	73.5	7	1530	-	316568
5	2	75.4	7	1160	-	639434
6	2	75.9	7	1239	-	962158
7	1	55.1	7	-	-	1286309
8	2	70	7	1074	-	276828
9	3	90.7	7	1919	1358	598555
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5497			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96.4	17	1652	1444	458879
2	3	84.6	17	1346	1906	619571
3	1	64.4	17	-	-	118529
4	2	72.4	17	1032	-	279226
5	1	62.1	17	-	-	441396
6	2	77.4	17	1336	-	600839
7	2	74.9	17	1923	-	98396
8	3	86.8	17	1706	1953	258560
9	3	87.5	17	1659	1562	419194
10	3	87.4	17	1124	1982	580057
11	3	85.4	17	1673	1721	78393
12	2	73.3	17	1193	-	239768
13	1	63	17	-	-	401351
14	3	97.8	17	1221	1848	560102
15	2	82	17	1280	-	58784
16	3	98.5	17	1509	1999	218927
17	2	78.9	17	1597	-	380497
18	3	93.3	17	1786	1123	540748
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5498			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.3	19	1290	-	35052
2	3	95.9	19	1478	1740	179435
3	3	86.6	19	1808	1955	323219
4	3	89.1	19	1693	1269	468545
5	2	74.7	19	1873	-	17160
6	2	81.7	19	1274	-	162128
7	1	56.6	19	-	-	307763
8	2	75	19	1166	-	451984
9	2	75.2	19	1794	-	596054
10	3	89.7	19	1864	1194	143792
11	3	85.8	19	1420	1456	288059
12	2	67	19	1327	-	434042
13	3	83.7	19	1366	1001	577658
14	3	87	19	1601	1474	125996
15	2	78.4	19	1992	-	270847
16	3	89.8	19	1904	1267	414680
17	1	53.3	19	-	-	561916
18	2	81.7	19	1692	-	108515
19	3	93.2	19	1861	1799	252217
20	1	64.3	19	-	-	398790

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5492			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	51	6	-	-	1362731
2	2	68.3	6	1013	-	227376
3	3	88.2	6	1570	1175	589884
4	1	62	6	-	-	954235
5	2	78.4	6	1412	-	1316828
6	1	60.4	6	-	-	182740
7	1	64.9	6	-	-	546134
8	3	87.7	6	1579	1948	907454
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5497			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	54.3	18	-	-	535574
2	2	75.9	18	1080	-	57901
3	1	53.2	18	-	-	210731
4	2	75.1	18	1934	-	362362
5	3	96.5	18	1262	1187	514214
6	2	82.6	18	1897	-	39077
7	2	72.8	18	1062	-	191702
8	2	74.1	18	1989	-	343459
9	1	54.1	18	-	-	497638
10	1	57.3	18	-	-	20359
11	1	59.9	18	-	-	173154
12	2	82.7	18	1008	-	325675
13	1	65.8	18	-	-	478914
14	3	87.1	18	1063	1668	1530
15	1	52.2	18	-	-	154365
16	3	85.3	18	1593	1577	305605
17	1	51	18	-	-	459949
18	2	70.5	18	1824	-	610916
19	1	53.7	18	-	-	135433
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5497			No
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.5	18	1089	1448	287133
2	3	94.9	18	1455	1937	438973
3	2	73.3	18	1419	-	592828
4	3	94.4	18	1076	1839	116148
5	1	50.2	18	-	-	269337
6	1	55.3	18	-	-	422663
7	1	64.6	18	-	-	574757
8	3	92.3	18	1120	1691	97375
9	1	64	18	-	-	250505
10	1	57.7	18	-	-	403627
11	2	74.5	18	1190	-	555389
12	1	60.6	18	-	-	79001
13	1	64.2	18	-	-	231999
14	2	66.8	18	1485	-	383531
15	2	68.9	18	1993	-	536127
16	2	70.7	18	1087	-	60108
17	3	99.4	18	1958	1576	211991
18	3	86.5	18	1623	1973	363541
19	1	60.7	18	-	-	518498
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5723			No
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	72	5	1231	-	418454
2	1	50.2	5	-	-	782464
3	1	53.3	5	-	-	1145809
4	2	74.8	5	1085	-	10572
5	1	63.6	5	-	-	373980
6	3	96.9	5	1615	1172	736120
7	1	57.1	5	-	-	1101024
8	2	81.2	5	1313	-	1463139
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5723			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	90.4	5	1950	1392	328600
2	2	67.8	5	1691	-	692095
3	1	59.2	5	-	-	1056264
4	2	75.4	5	1428	-	1418553
5	2	76.8	5	1419	-	284267
6	1	59.2	5	-	-	647757
7	2	78.6	5	1882	-	1010162
8	1	57.4	5	-	-	1375102
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5720			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	52.7	13	-	-	136813
2	1	63.5	13	-	-	344200
3	3	96.9	13	1225	1725	549739
4	1	50.7	13	-	-	759231
5	2	70.7	13	1093	-	111136
6	3	86.1	13	1259	1993	317446
7	3	83.8	13	1454	1375	524673
8	1	50	13	-	-	733452
9	2	82.6	13	1081	-	85605
10	1	63.7	13	-	-	293270
11	1	55.5	13	-	-	500882
12	3	86.3	13	1095	1763	706028
13	2	72.5	13	1595	-	60061
14	2	72.1	13	1946	-	267005
15						
16						
17						
18						
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5717			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	74.9	20	1469	-	331577
2	2	74.8	20	1854	-	476146
3	1	54.6	20	-	-	24220
4	3	99.4	20	1518	1515	168629
5	3	87.8	20	1214	1851	313103
6	1	59.2	20	-	-	459608
7	1	50.8	20	-	-	6345
8	2	67	20	1743	-	150961
9	3	91.5	20	1891	1678	295046
10	1	56.5	20	-	-	441952
11	2	69.6	20	1028	-	586294
12	2	69.3	20	1477	-	133295
13	3	96.8	20	1916	1084	277315
14	3	84.2	20	1445	1303	422284
15	3	84.2	20	1780	1868	565142
16	2	77.1	20	1342	-	115509
17	2	69.2	20	1284	-	260355
18	1	55.2	20	-	-	405860
19	1	62.4	20	-	-	551386
20	1	64.2	20	-	-	97924

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5718			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	69	18	1990	-	269279
2	3	84.5	18	1574	1425	429354
3	1	63.3	18	-	-	592508
4	3	84.7	18	1400	1247	88503
5	3	83.4	18	1328	1035	249416
6	3	86	18	1349	1928	409713
7	1	66.4	18	-	-	572453
8	1	53.3	18	-	-	68991
9	3	92.2	18	1452	1995	229115
10	3	100	18	1596	1582	389955
11	3	91.4	18	1643	1640	549843
12	2	70.9	18	1599	-	49001
13	1	58.7	18	-	-	210621
14	2	68.3	18	1409	-	370760
15	3	93	18	1943	1079	530619
16	3	84.4	18	1684	1672	29126
17	2	70.7	18	1212	-	190237
18	2	77.5	18	1693	-	351273
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5723			No
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	71.4	5	1848	-	1154870
2	2	69.3	5	1362	-	21155
3	1	56.5	5	-	-	384694
4	3	85.8	5	1924	1642	746138
5	2	72	5	1048	-	1111040
6	3	90.4	5	1440	1325	1472563
7	2	81.2	5	1051	-	339512
8	1	51.3	5	-	-	703506
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5719			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	89.3	15	1963	1047	530642
2	3	99.6	15	1914	1374	711330
3	1	65.8	15	-	-	147326
4	1	55.5	15	-	-	328717
5	3	94.6	15	1857	1535	508159
6	1	50.2	15	-	-	692016
7	2	73.8	15	1308	-	124863
8	1	58.3	15	-	-	306691
9	1	53	15	-	-	488420
10	3	90.4	15	1266	1186	667027
11	1	61.5	15	-	-	102700
12	2	70	15	1967	-	283562
13	1	65.9	15	-	-	465574
14	1	51.7	15	-	-	647206
15	3	92.8	15	1621	1476	79928
16	3	97.5	15	1386	1261	260873
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5720			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	74.8	13	1142	-	506390
2	3	91.6	13	1570	1803	711275
3	1	65.1	13	-	-	66238
4	3	98.8	13	1101	1841	272801
5	1	60.6	13	-	-	481229
6	2	78.5	13	1905	-	687148
7	3	91.3	13	1664	1512	40511
8	3	99.8	13	1294	1625	247320
9	1	56.3	13	-	-	455503
10	3	91.7	13	1772	1181	661085
11	3	83.9	13	1338	1565	15072
12	3	93.1	13	1263	1146	222105
13	1	57.6	13	-	-	430140
14	2	83.3	13	1112	-	637142
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 122 Bandwidth 240MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5721			No
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	62.4	11	-	-	986474
2	2	72.9	11	1388	-	229773
3	1	53.5	11	-	-	471917
4	2	82.1	11	1695	-	713201
5	3	96.8	11	1218	1420	953528
6	2	66.9	11	1723	-	199743
7	3	87.5	11	1548	1455	440895
8	3	86.7	11	1637	1795	682242
9	1	55.4	11	-	-	926950
10	3	91.2	11	1735	1577	169826
11	3	97.1	11	1188	1790	411397
12	1	50.4	11	-	-	654745
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5719			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	65.2	15	-	-	672728
2	1	52.6	15	-	-	105305
3	2	72.8	15	1507	-	286269
4	1	50.7	15	-	-	468547
5	1	61.6	15	-	-	649701
6	2	69.6	15	1864	-	82718
7	2	76.6	15	1603	-	263947
8	1	59	15	-	-	446246
9	1	60.9	15	-	-	627737
10	2	80.5	15	1179	-	60495
11	2	75.2	15	1242	-	241885
12	2	82.4	15	1457	-	423007
13	3	90.7	15	1681	1190	603155
14	1	60.8	15	-	-	38248
15	1	58.3	15	-	-	219700
16	1	66.1	15	-	-	401108
17						
18						
19						
20						

Appendix B. Test Result of Conducted Test Items

Test Engineer:	Rebecca Li	Temperature:	23~25	°C
Test Date:	2024/11/20-2024/12/12	Relative Humidity:	44~52	%


TEST RESULTS DATA

Test Channel			Radar	Bandwidth Shrinking											
Mod.	CH.	Freq. (MHz)	Freq. (MHz)	Mod.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Average Conducted Power (dBm)				Average Conducted PSD (dBm/MHz)	
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	SUM	Limit	SUM	Limit
EHT80	58	5290	5260	EHT40	5310	36.80	37.30	42.44	43.13	17.60	17.77	20.70	23.98	10.44	11.00
			5280	EHT40	5310	36.90	37.26	41.55	42.28	17.61	17.65	20.64	23.98	10.48	11.00
EHT160	50	5250	5260	EHT40	5310	37.38	37.19	41.80	43.05	17.61	17.66	20.65	23.98	10.28	11.00
			5280	EHT40	5310	37.22	37.26	42.67	42.46	17.60	17.68	20.65	23.98	10.12	11.00
EHT80	106	5530	5500	EHT40	5550	37.17	37.09	42.36	42..89	16.85	16.55	19.71	23.98	10.40	11.00
			5520	EHT40	5550	36.38	37.15	41.28	43.36	16.75	16.35	19.56	23.98	10.44	11.00
			5560	EHT40	5510	37.00	37.33	41.66	43.85	16.85	16.35	19.62	23.98	10.16	11.00
EHT160	114	5570	5500	EHT80	5610	76.21	76.16	82.27	82.33	17.45	17.25	20.36	23.98	10.01	11.00
			5520	EHT80	5610	76.31	75.88	81.02	84.38	17.45	17.15	20.31	23.98	9.89	11.00
			5640	EHT80	5530	76.37	76.09	83.23	82.97	17.45	16.85	20.17	23.98	9.68	11.00
EHT240	122	5610	5500	EHT80	5610	76.21	76.25	82.01	82.56	17.35	17.15	20.26	23.98	9.68	11.00
			5520	EHT80	5610	76.34	76.32	81.15	81.56	17.35	17.25	20.31	23.98	9.87	11.00
			5580	EHT80	5530	76.42	76.23	83.55	82.24	17.55	17.05	20.32	23.98	9.49	11.00
			5720	EHT160	5570	156.72	155.91	161.52	162.96	16.25	16.75	19.52	23.98	10.14	11.00

Remark:The directional gain of the transmit antenna is less than 6 dBi.


Test Result of 26dB & 99% Occupied Bandwidth

<802.11be EHT40>

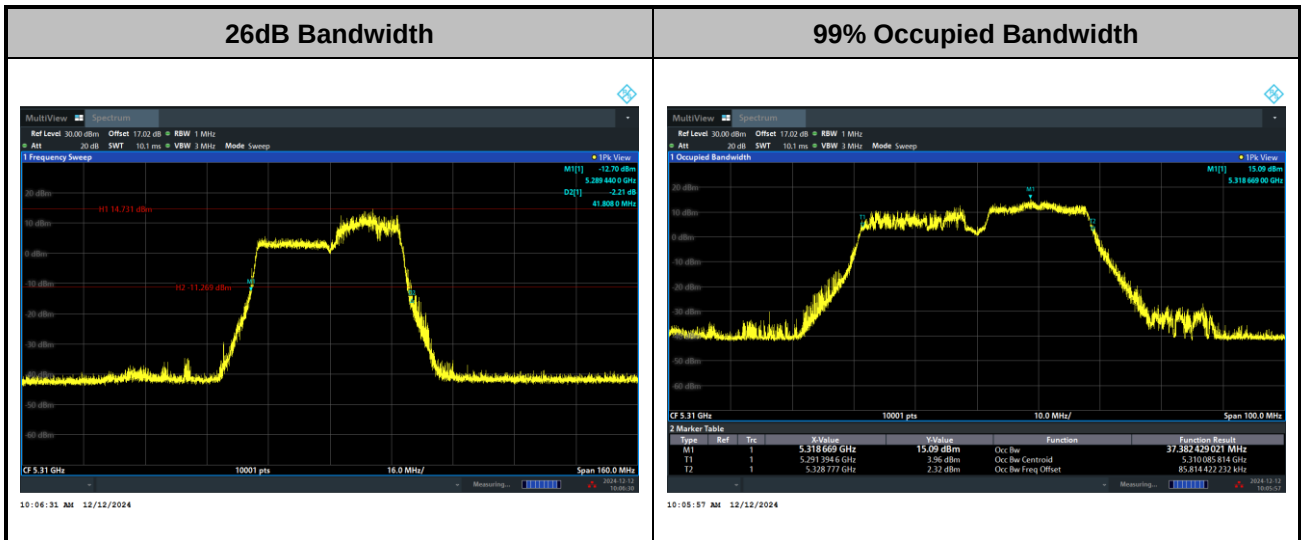


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11be EHT80>

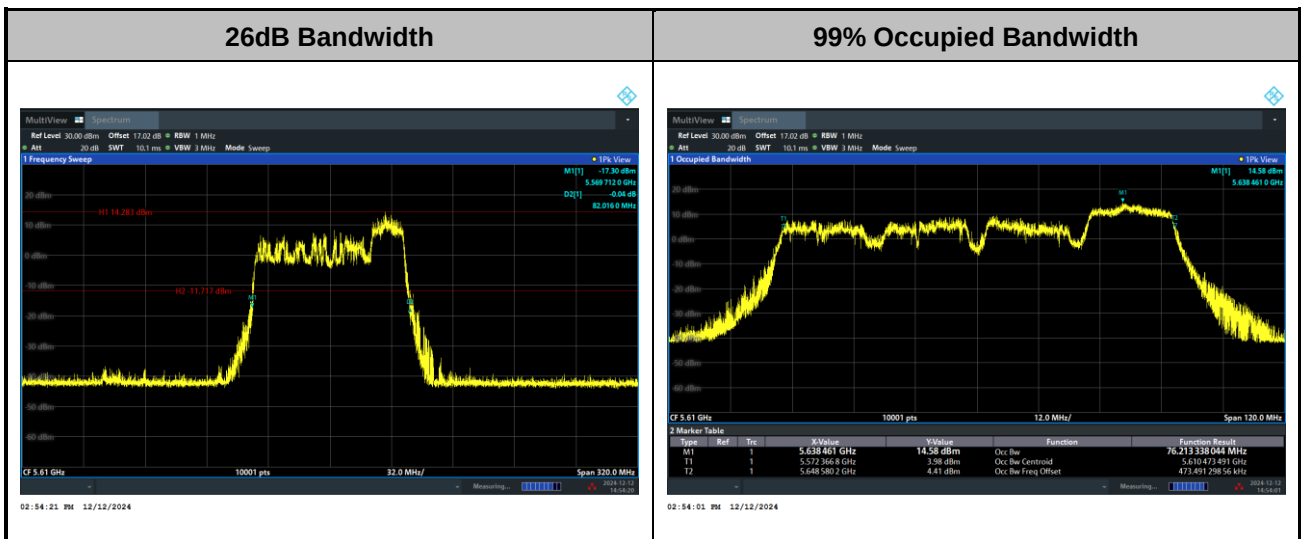

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11be EHT160>

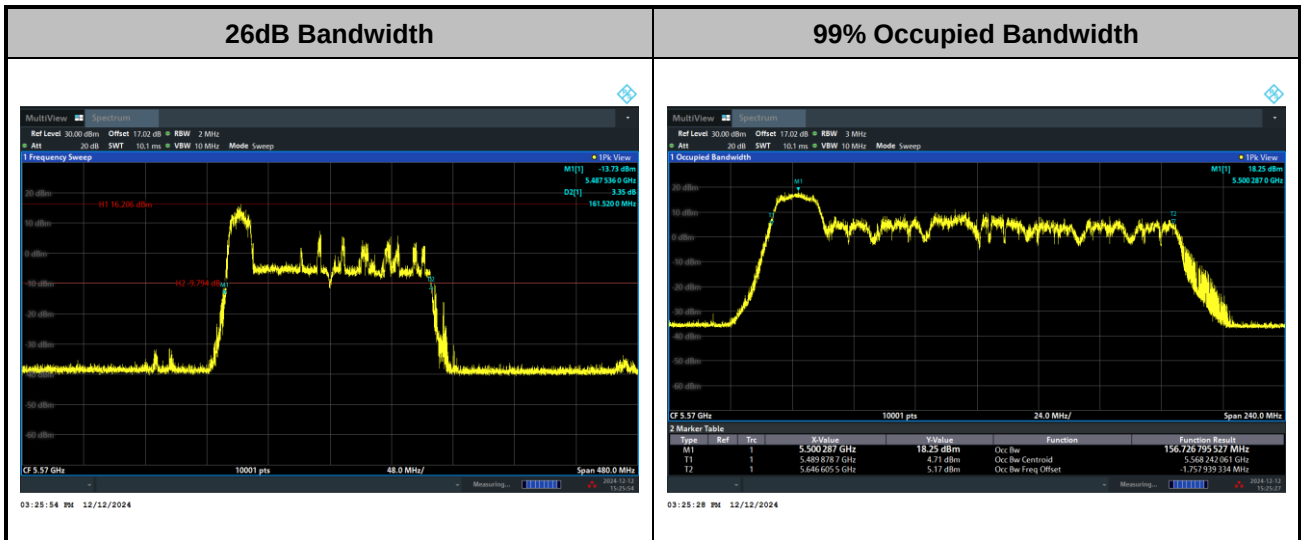


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**Test Result of Power Spectral Density**

<802.11be EHT40>

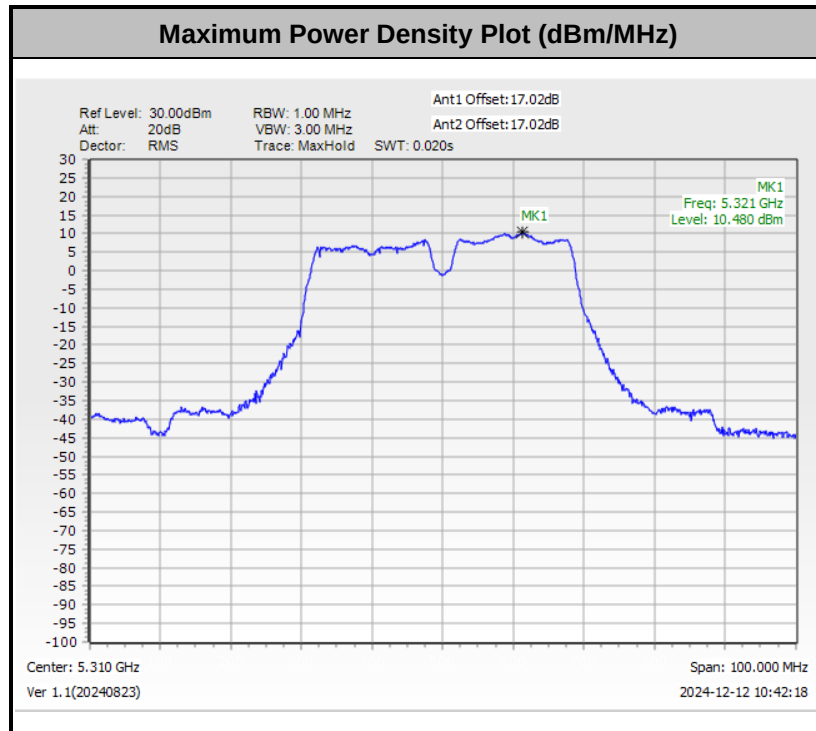


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

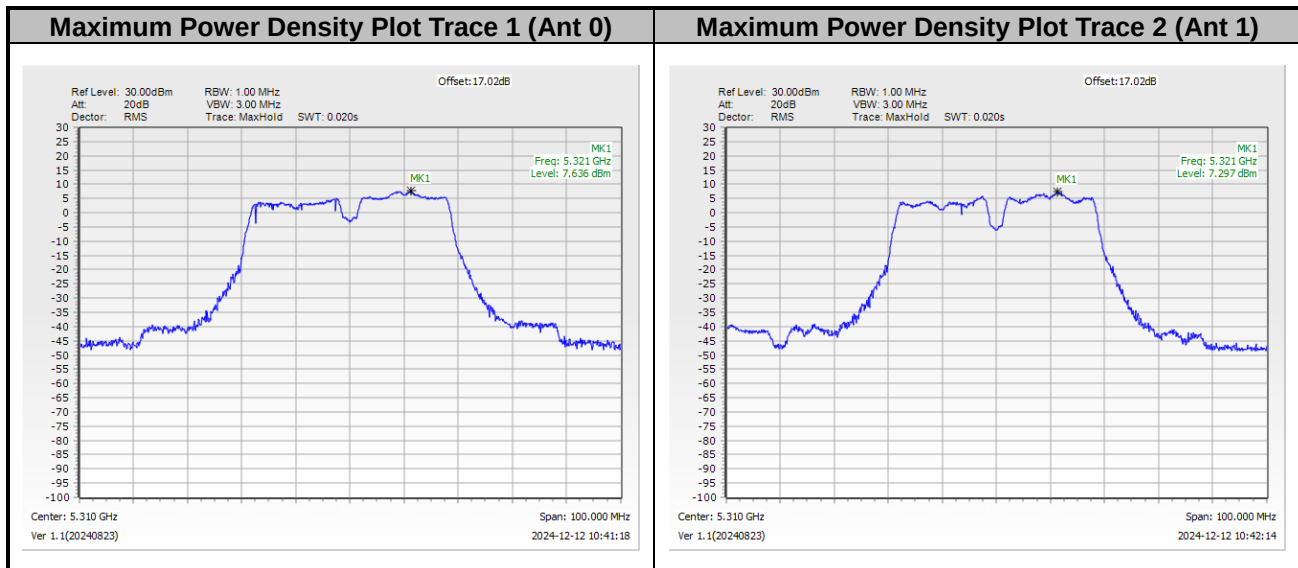




<802.11be EHT80>

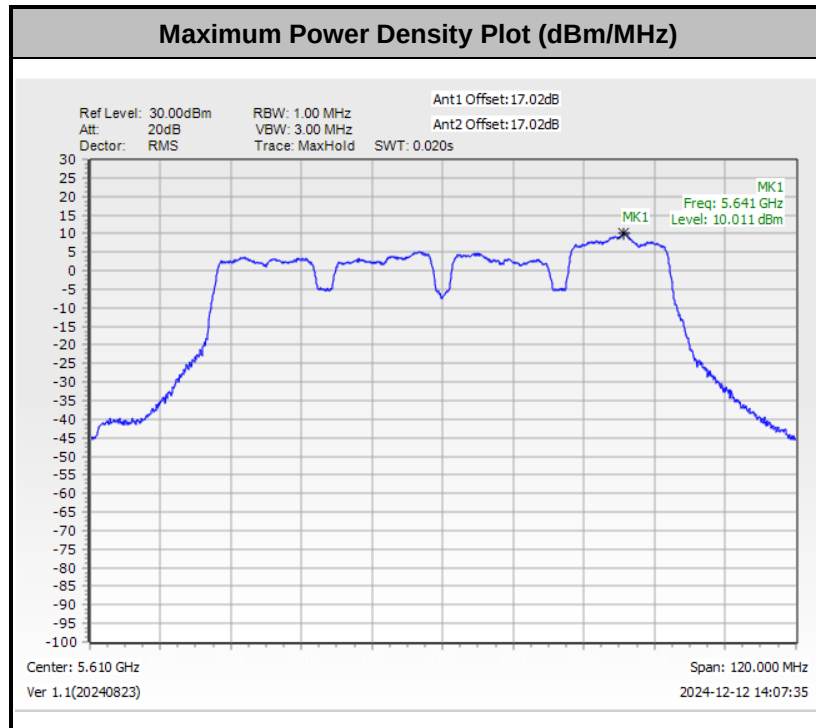


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

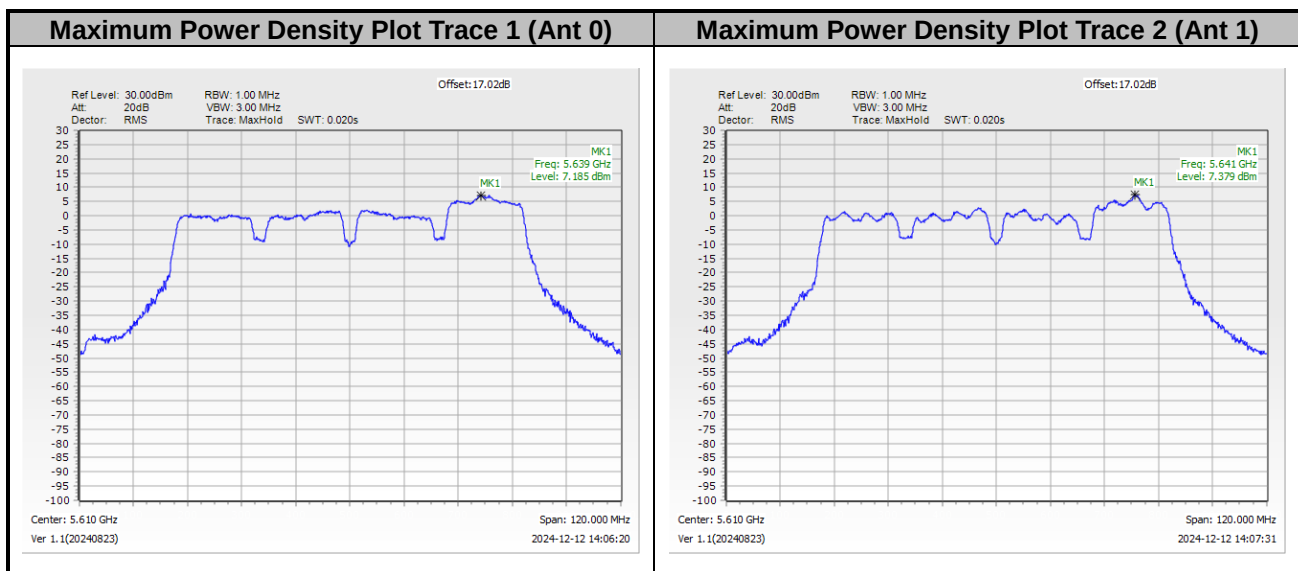




<802.11be EHT160>

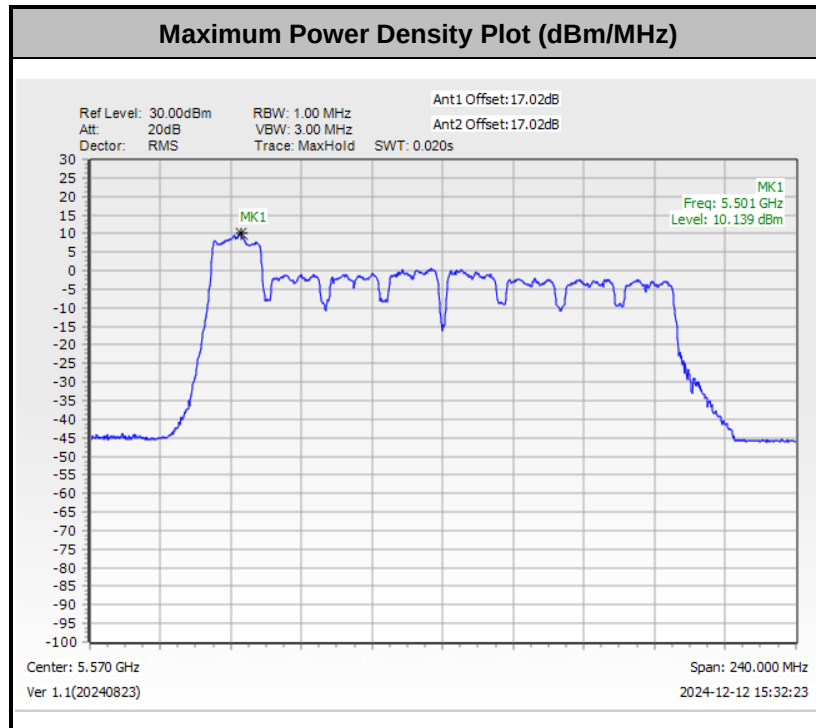

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

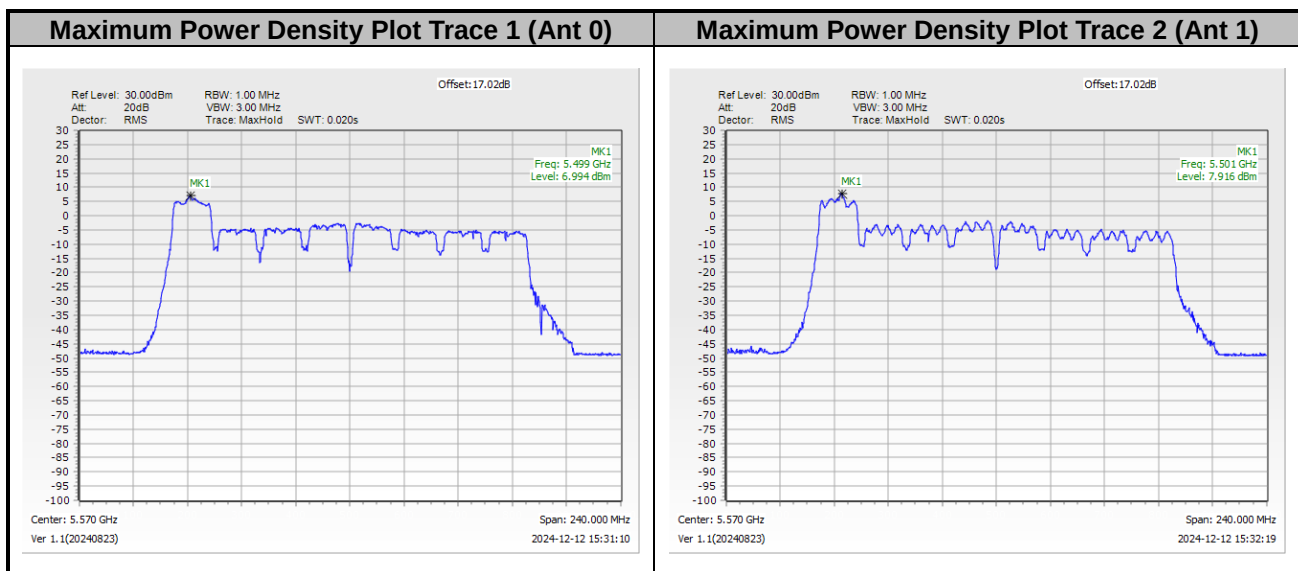

———THE END———