



TEST REPORT

FCC/ISED BT LE Test for L-RA1
Certification

APPLICANT
RACOS SYSTEM Co., Ltd

REPORT NO.
HCT-RF-2112-FI001-R1

DATE OF ISSUE
December 21, 2021

Tested by
Jin Gwan Lee

Technical Manager
Jong Seok Lee

Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO

HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si,
Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

**HCT Co., Ltd.**74, Seocheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

TEST REPORT

FCC / ISED BT LE
Test for L-RA1REPORT NO.
HCT-RF-2112-FI001-R1DATE OF ISSUE
December 21, 2021

Additional Model

Applicant	RACOS SYSTEM Co., Ltd Eden B/D 2F, 32, Cheonggu-ro 6-gil, Jung-gu, Seoul, Korea (04586)
Eut Type Model Name	BLE Automatic door control module L-RA1
FCC ID IC	2A3F7-L-RA1 27903-LRA1
Max. RF Output Power	2 MBit/s : -5.116 dBm (0.31 mW)
Modulation type	GFSK
FCC Classification	Digital Transmission System(DTS)
FCC Rule Part(s)	Part 15.247
ISED Rule Part(s)	RSS-247 Issue 2 (February 2017) RSS-Gen Issue 5_Amendment 2 (February 2021)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	December 09, 2021	Initial Release
1	December 21, 2021	Page 28, Reviesed note

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

KOLAS Statement:

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (KOLAS Accreditation No. KT197)

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY TEST OF RESULTS	29
9. TEST RESULT	31
9.1 DUTY CYCLE	31
9.2 6 dB BANDWIDTH & 99 % BANDWIDTH	34
9.3 OUTPUT POWER	52
9.4 POWER SPECTRAL DENSITY	54
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	57
9.7 RADIATED SPURIOUS EMISSIONS	69
9.8 RADIATED RESTRICTED BAND EDGES	75
9.9 RECEIVER SPURIOUS EMISSIONS	77
9.10 POWERLINE CONDUCTED EMISSIONS	78
10. LIST OF TEST EQUIPMENT	82
11. ANNEX A_ TEST SETUP PHOTO	84

1. EUT DESCRIPTION

Model	L-RA1	
Additional Model	-	
EUT Type	BLE Automatic door control module	
Power Supply	DC 12 V	
Frequency Range	2 402 MHz – 2 480 MHz	
Factory	RACOS SYSTEM Co., Ltd Eden B/D 2F, 32, Cheonggu-ro 6-gil, Jung-gu, Seoul, Korea (04586)	
Manufacturer	RACOS SYSTEM Co., Ltd Eden B/D 2F, 32, Cheonggu-ro 6-gil, Jung-gu, Seoul, Korea (04586)	
Max. RF Output Power	Peak	1 MBit/s : -5.244 dBm (0.30 mW) 2 MBit/s : -5.116 dBm (0.31 mW)
	Average	1 MBit/s : -5.44 dBm (0.29 mW) 2 MBit/s : -5.40 dBm (0.29 mW)
Modulation Type	GFSK	
Bluetooth Version	5.0	
Number of Channels	40 Channels	
Antenna Specification	Multilayer Chip Antenna Peak Gain : 2.3 dBi	
Date(s) of Tests	November 09, 2021 ~ December 08, 2021	
PMN (Product Marketing Number)	BLE Automatic door control module	
HVIN (Hardware Version Identification Number)	L-RA1	
FVIN (Firmware Version Identification Number)	LGRobotEntranceV1.04	
HMN (Host Marketing Name)	N/A	
EUT serial numbers	Radiated: L-RA1-002 Conducted : L-RA1-001	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated January 26, 2021 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203 / RSS-Gen(Issue 5) Section 8:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, k=2)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, k=2)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, k=2)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, k=2)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, k=2)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

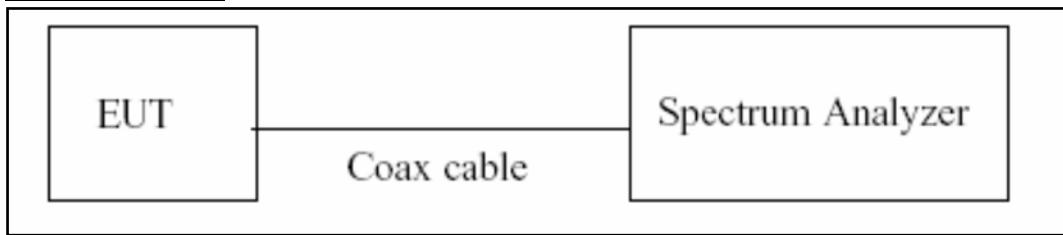

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth & 99 % Bandwidth(ISED)

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r02, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Detector = Peak
- 4) Trace mode = Max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1 % ~ 5 % of the occupied bandwidth

VBW \approx 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration

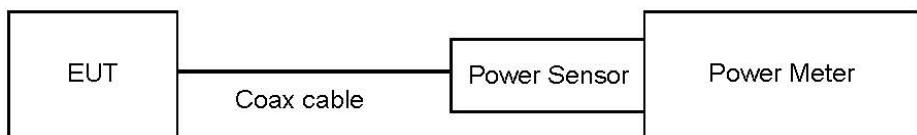

Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
 - : Measure the peak power of the transmitter.

- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Level + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Level + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration

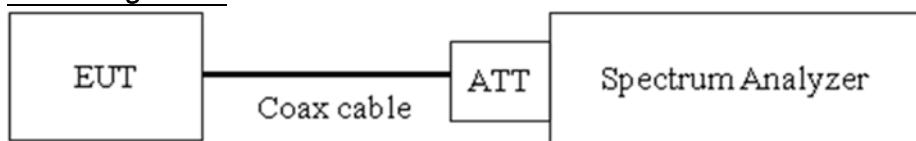

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = Peak
- 7) Trace mode = Max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Measured Level + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration

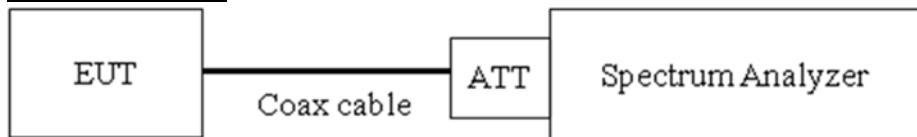

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = Max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	10.39
100	10.43
200	10.48
300	10.52
400	10.58
500	10.58
600	10.58
700	10.61
800	10.62
900	10.63
1 000	10.68
2 000	10.83
2 400	10.89
2 412	10.89
2 437	10.89
2 462	10.89
2 500	10.87
3 000	10.99
4 000	11.05
5 000	11.14
5 700	11.21
5 800	11.21
6 000	11.42
7 000	11.54
8 000	11.53
9 000	11.62
10 000	11.72
11 000	11.81
12 000	11.90
13 000	11.91
14 000	11.95
15 000	12.04
16 000	12.13
17 000	12.32
18 000	12.46
19 000	12.38
20 000	12.05
21 000	12.18
22 000	12.17
23 000	12.14
24 000	12.19
25 000	12.30

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(20 dB) + Cable loss

7.6. Radiated Test**FCC**

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(kHz)$	300
0.490 – 1.705	$24000/F(kHz)$	30
1.705 – 30	30	30

ISED


Frequency (MHz)	Field Strength (μ A/m)	Measurement Distance (m)
0.009 – 0.490	$6.37/F(kHz)$	300
0.490 – 1.705	$63.7/F(kHz)$	30
1.705 – 30	0.08	30

FCC&ISED


Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

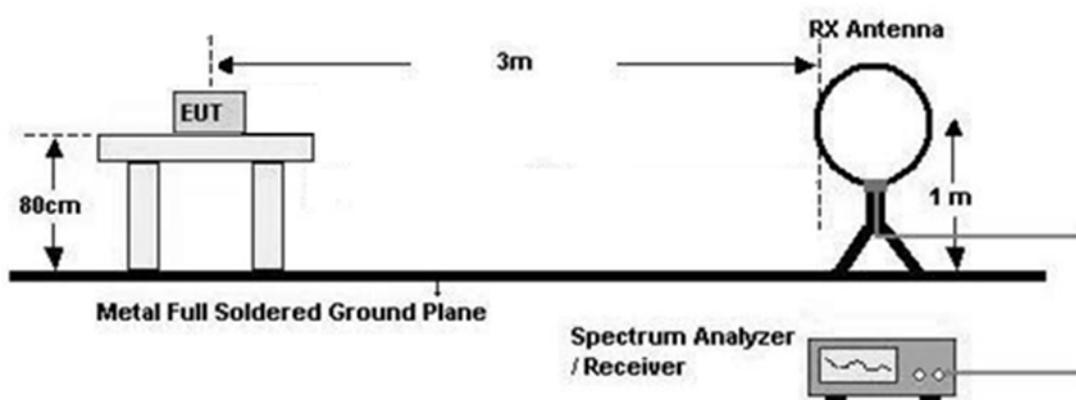

30 MHz - 1 GHz

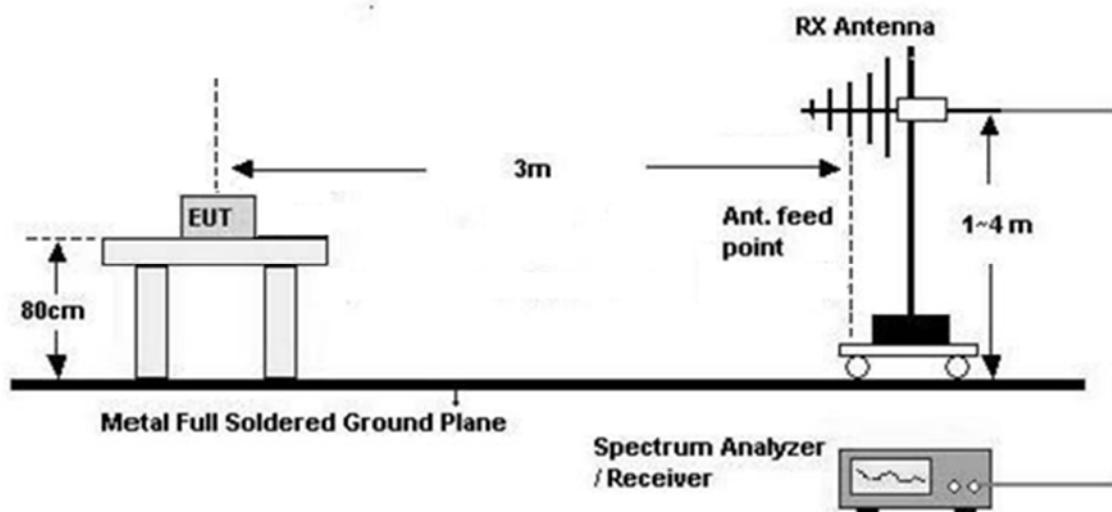

Above 1 GHz

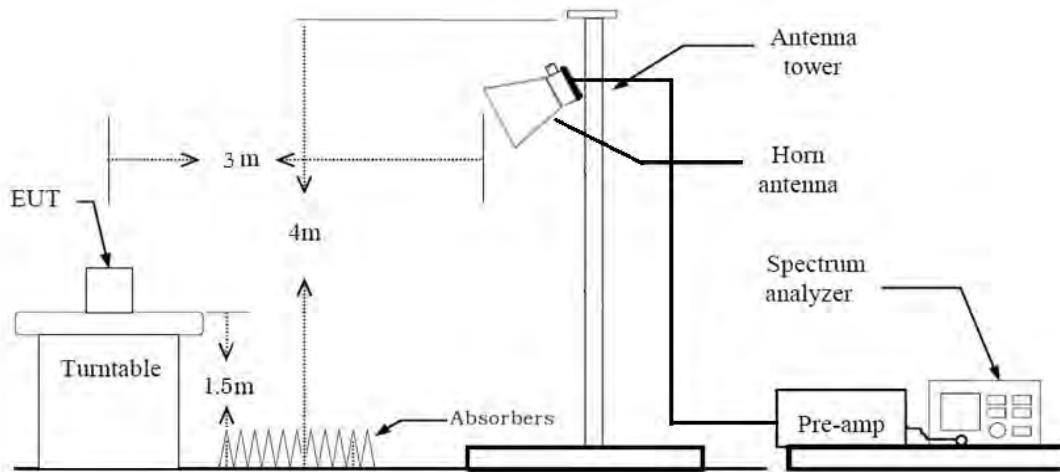

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor($0.009 \text{ MHz} - 0.490 \text{ MHz}$) = $40\log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor($0.490 \text{ MHz} - 30 \text{ MHz}$) = $40\log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 9 kHz
 - VBW $\geq 3 \times \text{RBW}$
9. Total = Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
7. Total = Measured Level + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98 %, duty cycle variations are less than ± 2 %
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total (Measurement Type : Peak)

= Peak Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total (Measurement Type : Average)

= Average Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F) + Duty Cycle Factor + Duty Cycle Correction Factor(DCCF)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

7. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average):

- Duty cycle < 98 %, duty cycle variations are less than ± 2 %
- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
- 8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 9. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
- 10. Total(Measurement Type : Peak)
= Peak Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
- Total(Measurement Type : Average)
= Average Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
+ Duty Cycle Factor + Duty Cycle Correction Factor(DCCF)

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Level + Correction Factor

7.8. Receiver Spurious EmissionsLimit


Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

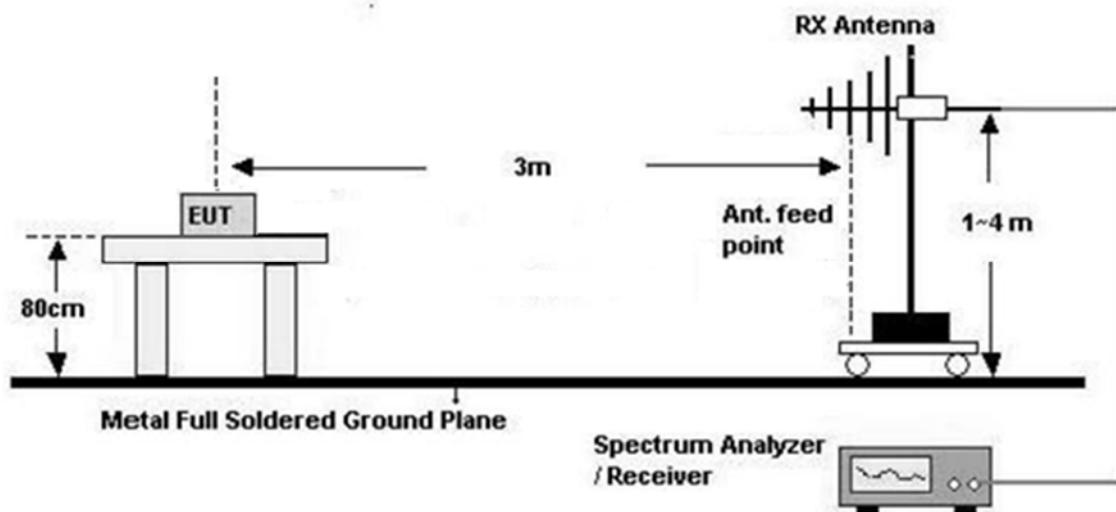

Test Procedure of Receiver Spurious Emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
7. Total = Measured Level + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

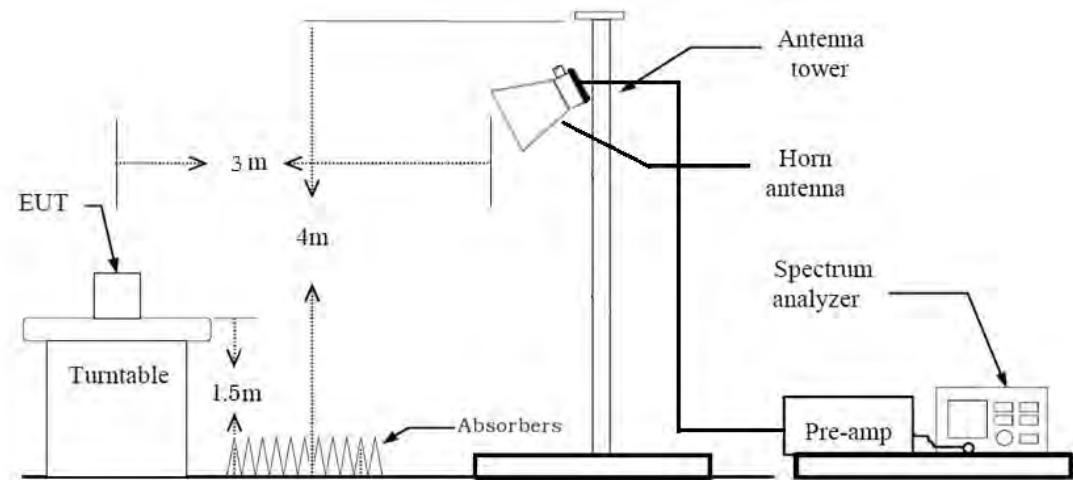

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- $VBW \geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

9. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

10. Total = Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

7.9. Worst case configuration and mode

Note :

Among all interval modes, the worst case configuration results are reported.

- Mode : 500 msec, 400 msec, 300 msec, 200 msec, 100 msec, 40 msec, 0 msec
- Worstcase : 0 msec

Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone
- Worstcase : Stand alone

2. EUT Axis:

- Radiated Spurious Emissions : Z
- Radiated Restricted Band Edge : Z

3. All packet length of operation were investigated and the test results are worst case in lowest packet length.

(Worst case : 1 M 255 Bytes, 2 M 37 Bytes))

4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.

- Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone + External accessories (Notebook)

Conducted test

1. The EUT was configured with packet length of highest power.

(Worst case : 2 M 37 Bytes)

8. SUMMARY TEST OF RESULTS**FCC Part**

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz		PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band	Conducted	PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS

ISED Part

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz		PASS
99% Bandwidth	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.b	< 1 Watt <4 Watt(e.i.r.p.)	Conducted	PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	RSS-GEN section 8.8 table 4		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	RSS-GEN section 8.9 table 5, 6		PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	RSS-GEN section 7.3 table 3	Radiated	PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	RSS-GEN section 8.10 table 7		PASS

9. TEST RESULT

9.1 DUTY CYCLE

Data rate (Bit/s)	Packet length (Byte)	T_{on} (ms)	T_{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
1M	37	0.393	0.624	0.6288	2.01
	255	2.140	2.500	0.8560	0.68
2M	37	0.208	0.624	0.3327	4.78
	255	1.082	1.877	0.5762	2.39

#Duty Cycle Correction Factor

1M 255 Byte


- T_{total} [ms] = 0.393 ms
- Number of hits = $100 / T_{total} + 1 = 161$
- Worst case 100ms operation = 63.21 ms
- Duty Cycle Correction Factor (DCCF)
 $= 20 \log (\text{number of hits} * (\text{worst case 100ms operation} / 100\text{ms})) = -3.98 \text{ dB}$

2M 37 Byte

- T_{total} [ms] = 0.208 ms
- Number of hits = $100 / T_{total} + 1 = 161$
- Worst case 100ms operation = 33.45 ms
- Duty Cycle Correction Factor (DCCF)
 $= 20 \log (\text{number of hits} * (\text{worst case 100ms operation} / 100\text{ms})) = -9.51 \text{ dB}$

▣ 1 MBit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

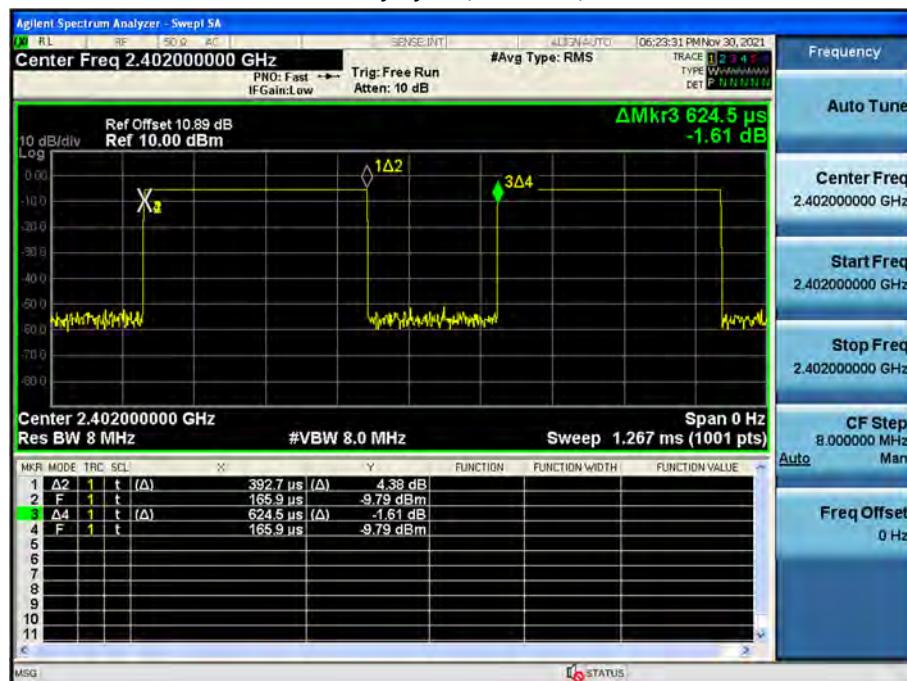
**▣ 1 MBit/s (255 Byte) Test Plots**

Duty Cycle (Low-CH 0)




▣ 2 MBit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

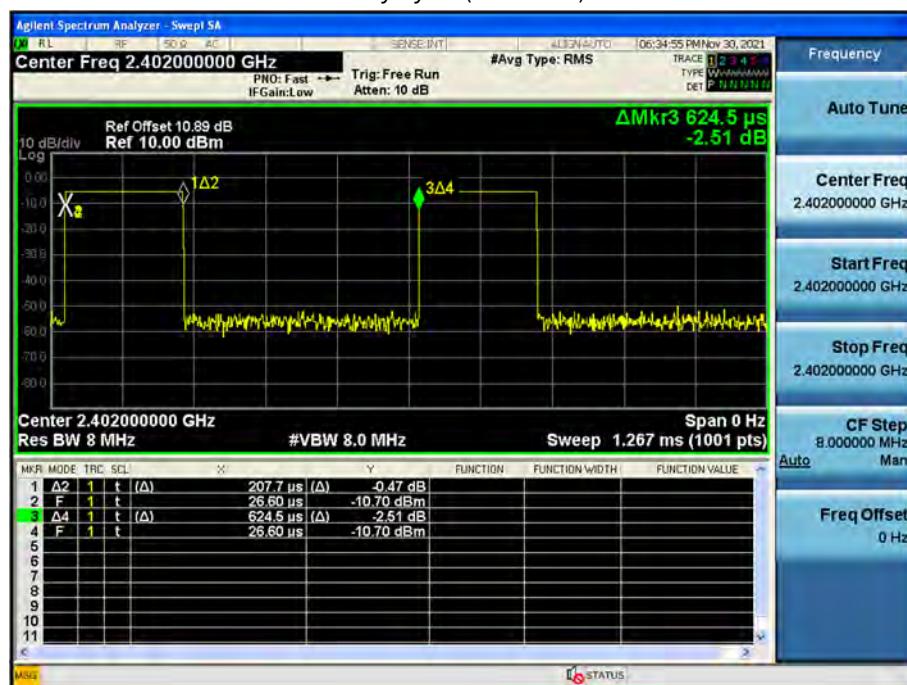**▣ 2 MBit/s (255 Byte) Test Plots**

Duty Cycle (Low-CH 0)

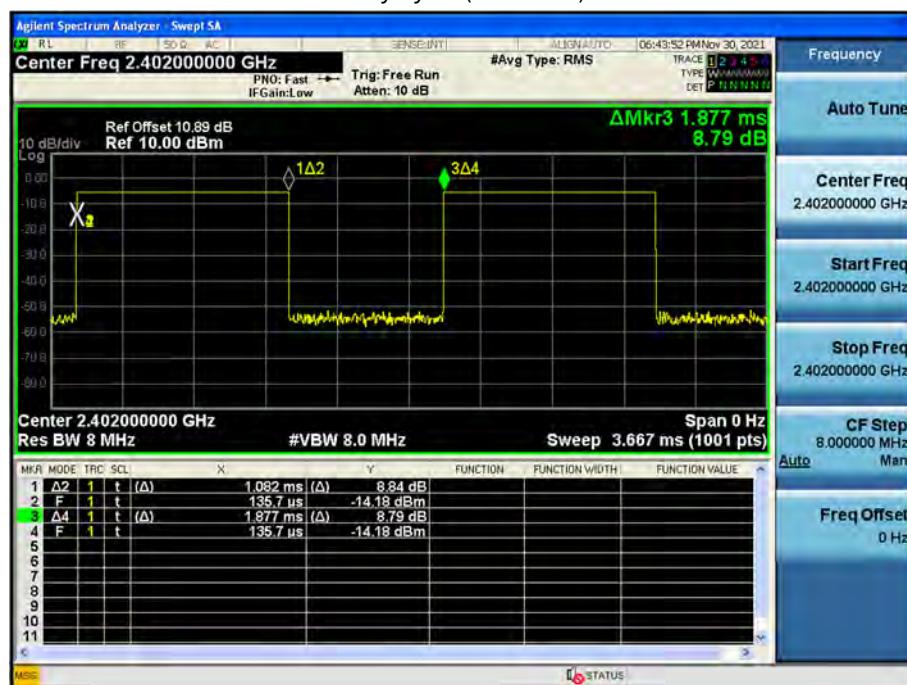

9.2 6 dB BANDWIDTH & 99 % BANDWIDTH**FCC**

Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
1M 37 Byte	0	698.6	> 500
	19	704.9	
	39	704.8	
1M 255 Byte	0	710.1	> 500
	19	708.9	
	39	715.2	
2M 37 Byte	0	1149.0	> 500
	19	1152.3	
	39	1156.3	
2M 255 Byte	0	1150.5	> 500
	19	1170.1	
	39	1147.0	

▣ 1 MBit/s (37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



▣ 1 MBit/s (255 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



▣ 2 MBit/s (37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



▣ 2 MBit/s (255 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



99 % Bandwidth(ISED)

Mode (Bit/s)	Packet length (Byte)	Channel	99 % Bandwidth (MHz)
1M	37 Byte	0	1.0517
		19	1.0562
		39	1.0554
	255 Byte	0	1.0466
		19	1.0510
		39	1.0526
2M	37 Byte	0	2.0801
		19	2.0822
		39	2.0857
	255 Byte	0	2.0589
		19	2.0732
		39	2.0753

▣ 1 MBit/s (37 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)



99 % Bandwidth plot (High-CH 39)




▣ 1 MBit/s (255 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)

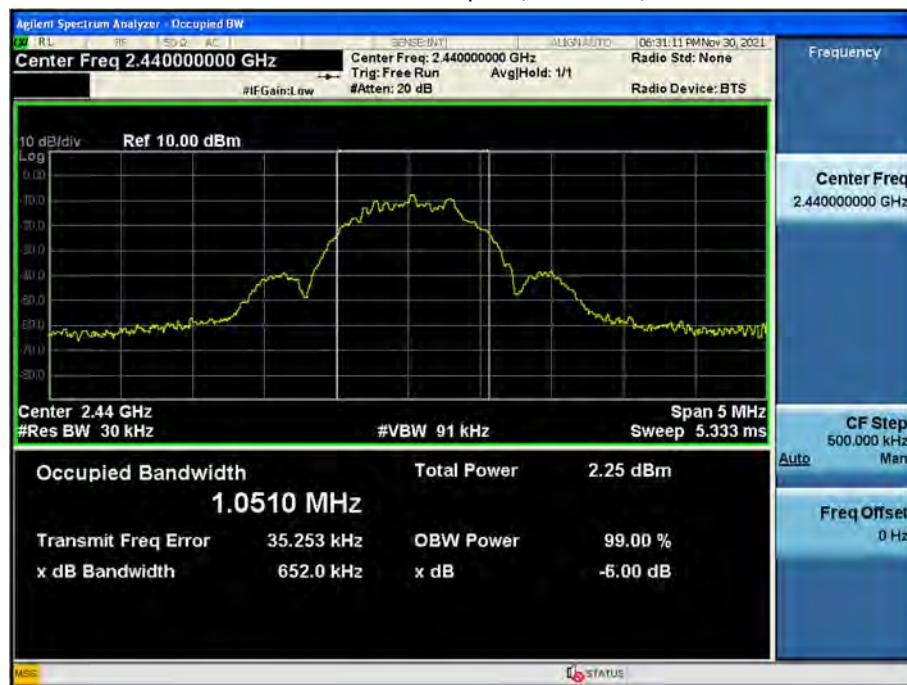

99 % Bandwidth plot (High-CH 39)



▣ 2 MBit/s (37 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)



99 % Bandwidth plot (High-CH 39)



▣ 2 MBit/s (255 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)



99 % Bandwidth plot (High-CH 39)



9.3 OUTPUT POWER**Peak Power**

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm)	Limit (dBm)
		Frequency [MHz]	Channel		
1M	37	2402	0	-5.413	30
		2440	19	-5.244	
		2480	39	-5.601	
	255	2402	0	-5.416	
		2440	19	-5.258	
		2480	39	-5.622	
2M	37	2402	0	-5.354	
		2440	19	-5.116	
		2480	39	-5.542	
	255	2402	0	-5.356	
		2440	19	-5.248	
		2480	39	-5.552	

Average Power

Data rate	Packet length	LE Mode		Measured Power (dBm)	Duty Cycle Factor	Result	Limit (dBm)
		(Bit/s)	(Byte)				
1M	37	2402	0	-7.52	2.01	-5.51	30
		2440	19	-7.47	2.01	-5.46	
		2480	39	-7.72	2.01	-5.71	
	255	2402	0	-6.23	0.68	-5.55	
		2440	19	-6.12	0.68	-5.44	
		2480	39	-6.37	0.68	-5.69	
2M	37	2402	0	-10.31	4.78	-5.53	
		2440	19	-10.18	4.78	-5.40	
		2480	39	-10.46	4.78	-5.68	
	255	2402	0	-7.91	2.39	-5.52	
		2440	19	-7.91	2.39	-5.52	
		2480	39	-7.97	2.39	-5.58	

Note :

1. Power meter offset = Attenuator loss + Cable loss

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 10.89 dB is offset for 2.4 GHz Band.

9.4 POWER SPECTRAL DENSITY

Frequency (MHz)	Channel No.	Mode (Bit/s)	Test Result	
			Measured Power(dBm)	Limit (dBm/3kHz)
2402	0	1 MBit/s 37 Byte	-20.695	8
2440	19		-20.626	
2480	39		-20.914	
2402	0	1 MBit/s 225 Byte	-20.995	
2440	19		-21.235	
2480	39		-21.766	
2402	0	2 MBit/s 37 Byte	-23.274	
2440	19		-23.225	
2480	39		-23.483	
2402	0	2 MBit/s 225 Byte	-23.092	
2440	19		-22.896	
2480	39		-23.222	

Note :


1. The PSD measured results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 10.89 dB is offset for 2.4 GHz Band.
4. Worst case test Plot Only : 1 MBit/s (37 Byte)

▣ 1 MBit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)

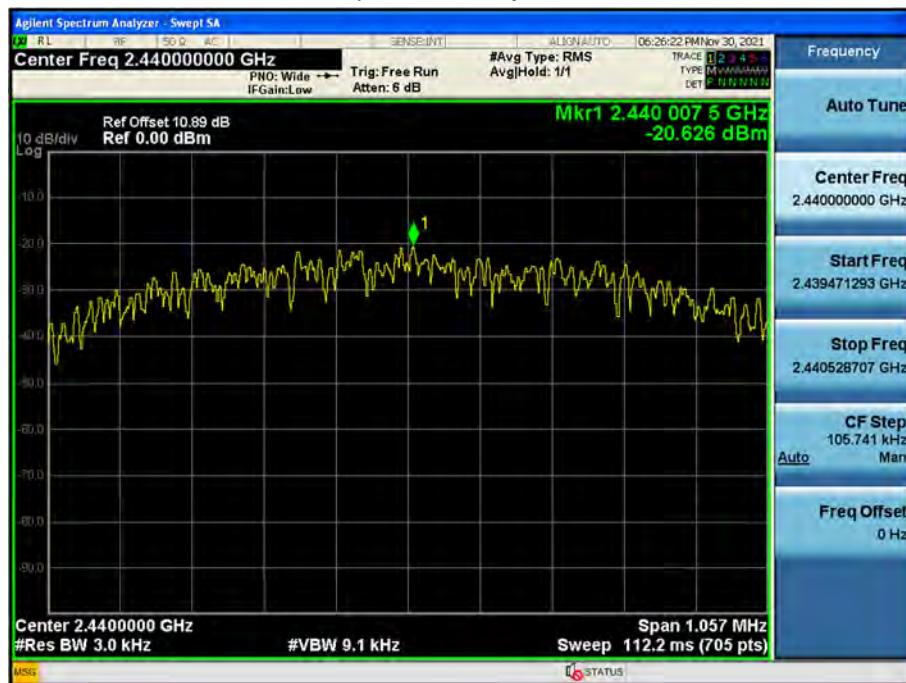

Power Spectral Density (High-CH 39)



9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

▣ 1 MBit/s (37 Byte) Test Plots -BandEdge

Low-CH 0



High-CH 39



▣ 1 MBit/s (255 Byte) Test Plots -BandEdge

Low-CH 0



High-CH 39



▣ 2 MBit/s (37 Byte) Test Plots -BandEdge

Low-CH 0



High-CH 39



▣ 2 MBit/s (255 Byte) Test Plots -BandEdge

Low-CH 0




High-CH 39



▣ 1 MBit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (Mid-CH 19)

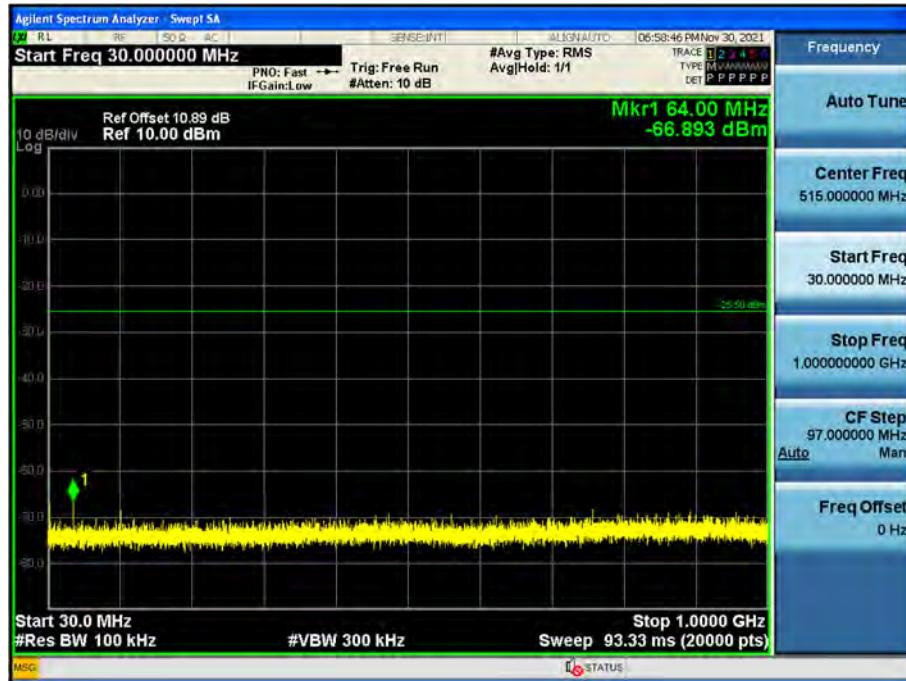


1 GHz ~ 3 GHz

Conducted Spurious Emission (Mid-CH 19)

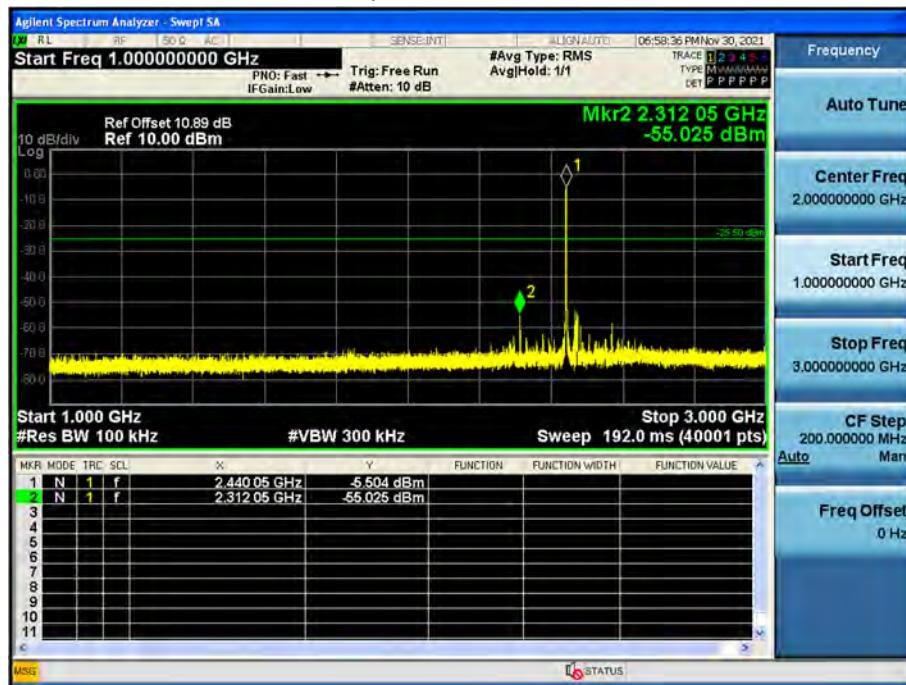


3 GHz ~ 5 GHz

Conducted Spurious Emission (Mid-CH 19)

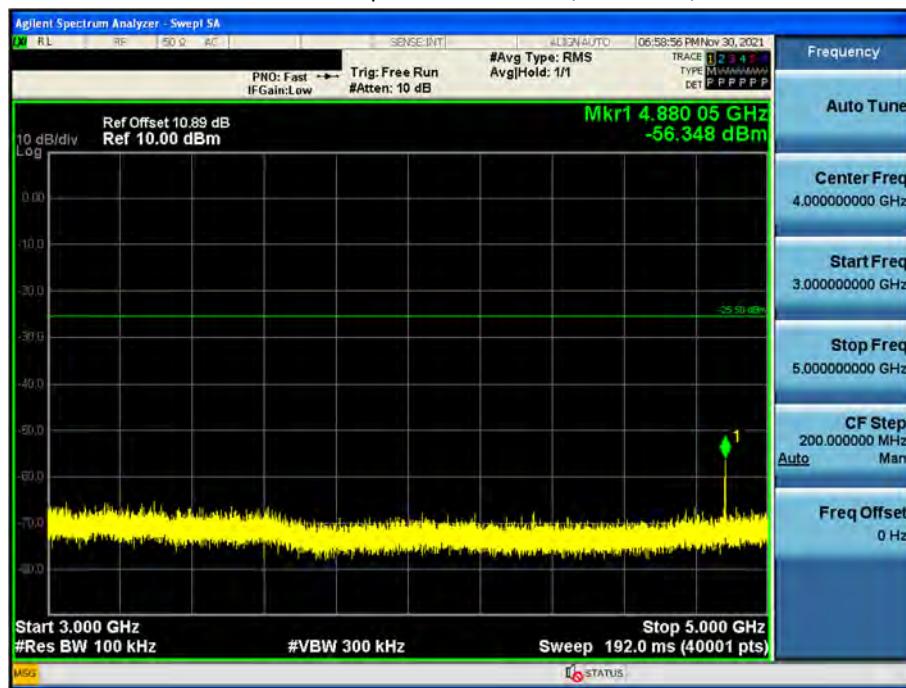


5 GHz ~ 7 GHz

Conducted Spurious Emission (Mid-CH 19)

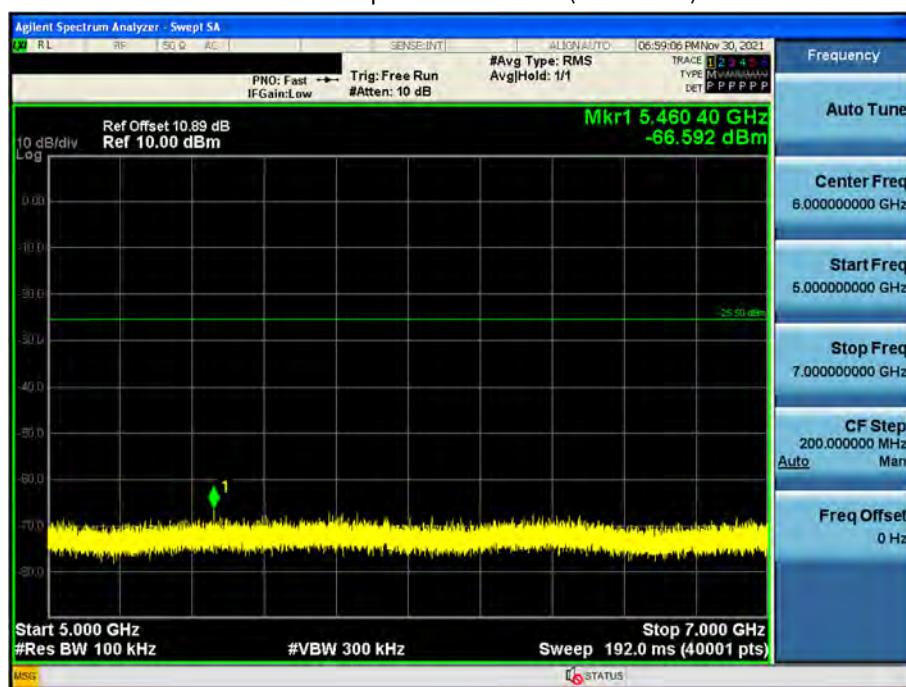


7 GHz ~ 9 GHz

Conducted Spurious Emission (Mid-CH 19)

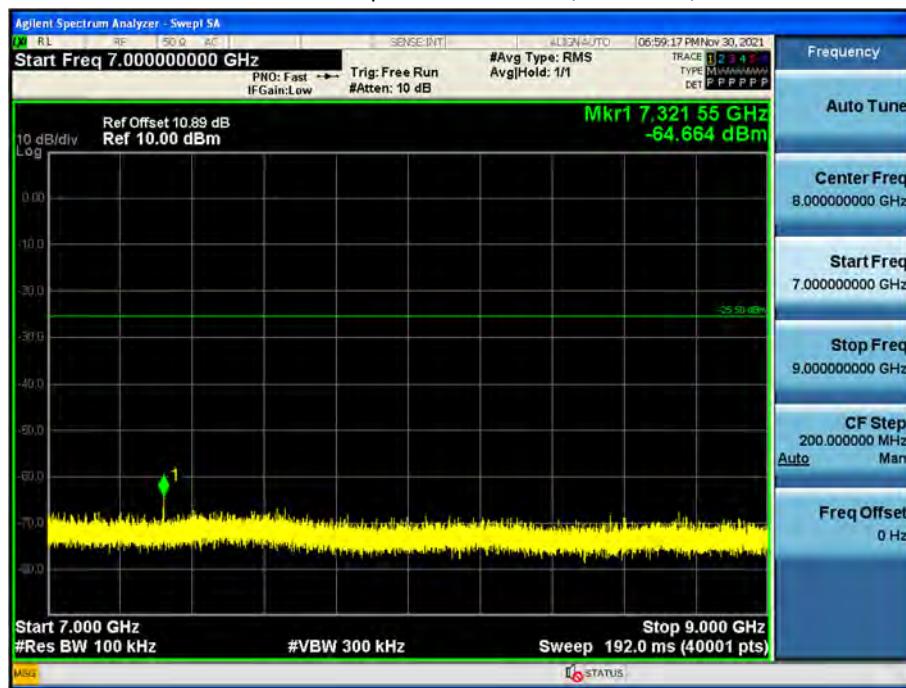


9 GHz ~ 11 GHz

Conducted Spurious Emission (Mid-CH 19)

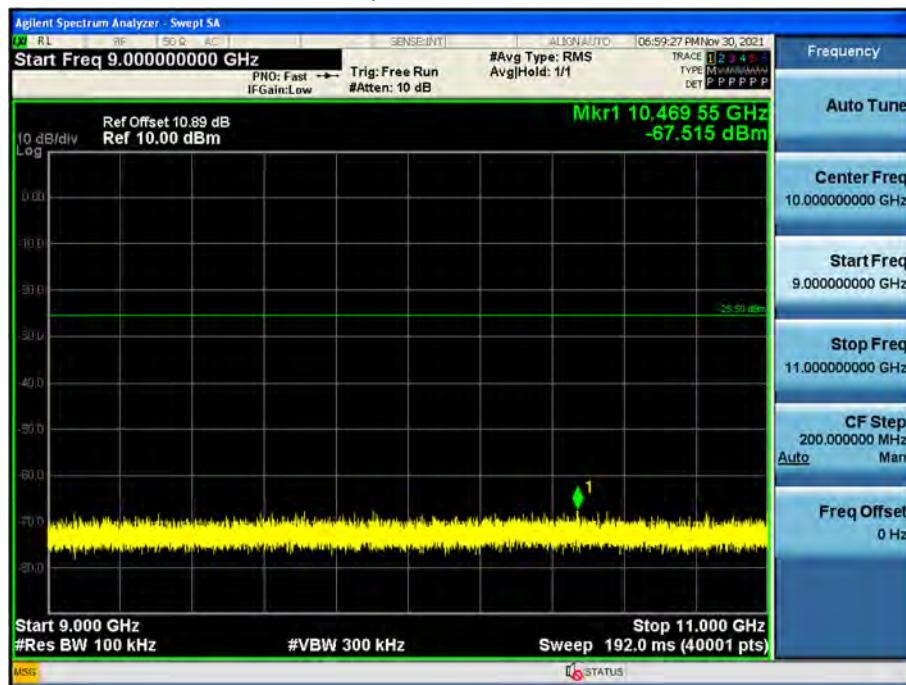


11 GHz ~ 13 GHz

Conducted Spurious Emission (Mid-CH 19)

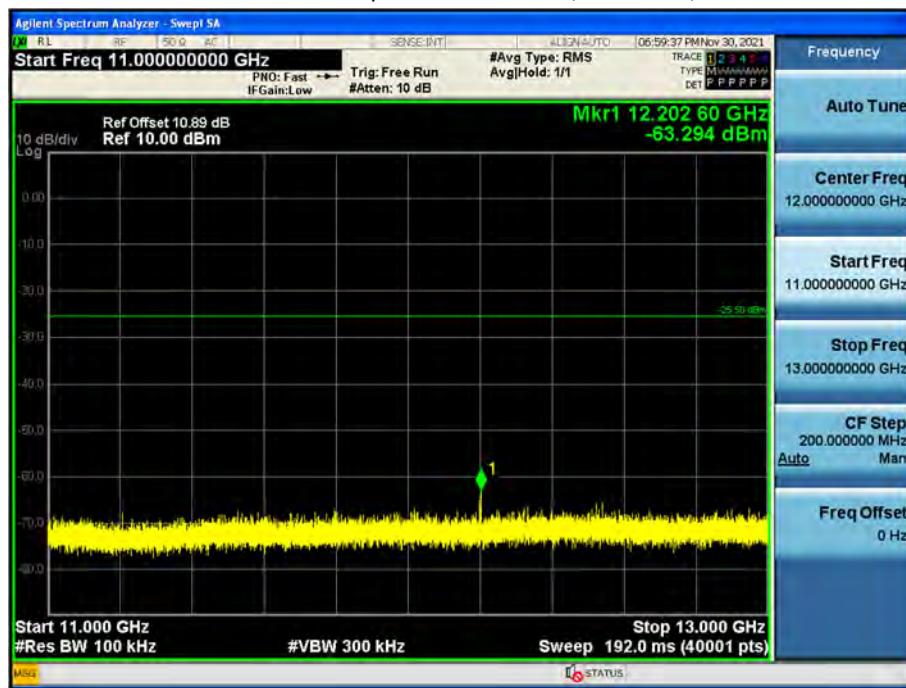


13 GHz ~ 15 GHz

Conducted Spurious Emission (Mid-CH 19)

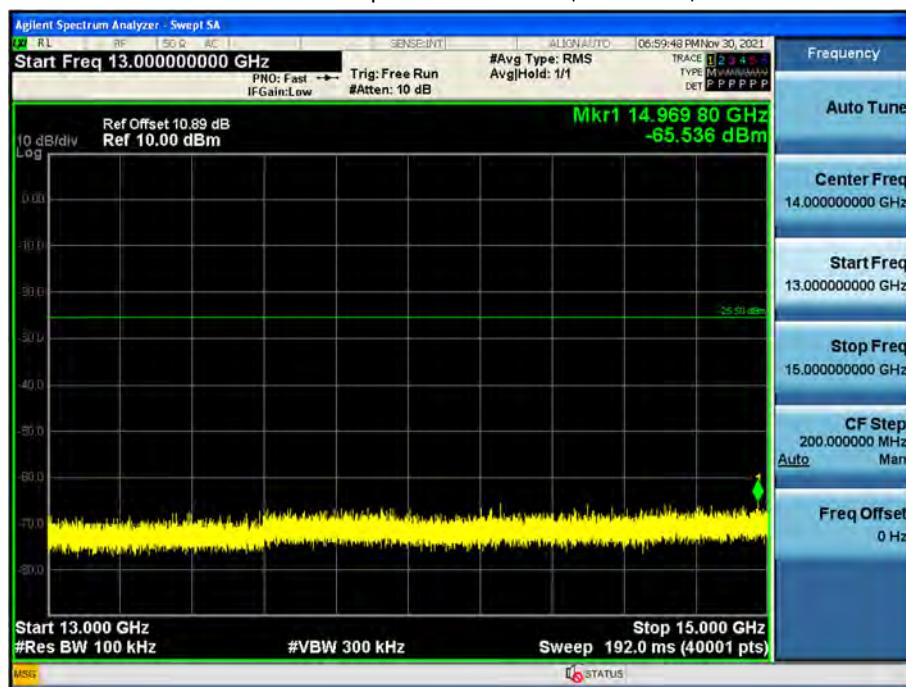


15 GHz ~ 17 GHz

Conducted Spurious Emission (Mid-CH 19)

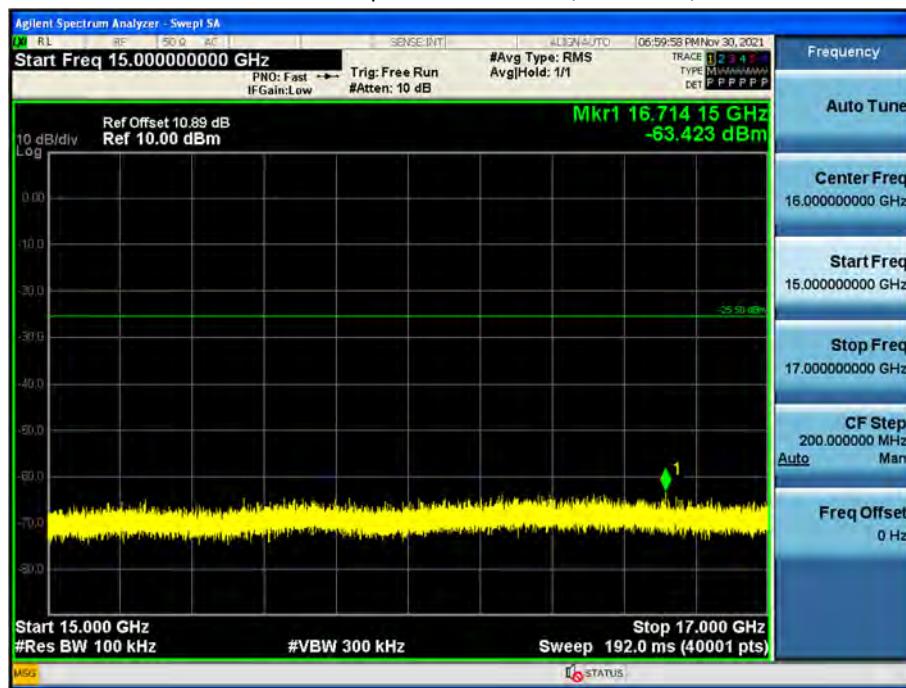


17 GHz ~ 19 GHz

Conducted Spurious Emission (Mid-CH 19)

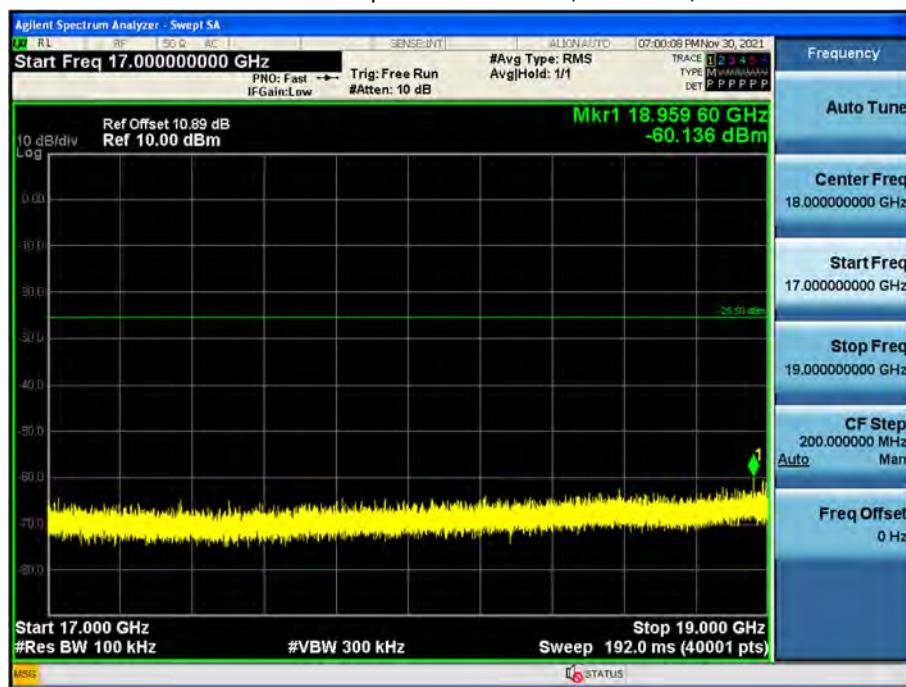


19 GHz ~ 21 GHz

Conducted Spurious Emission (Mid-CH 19)

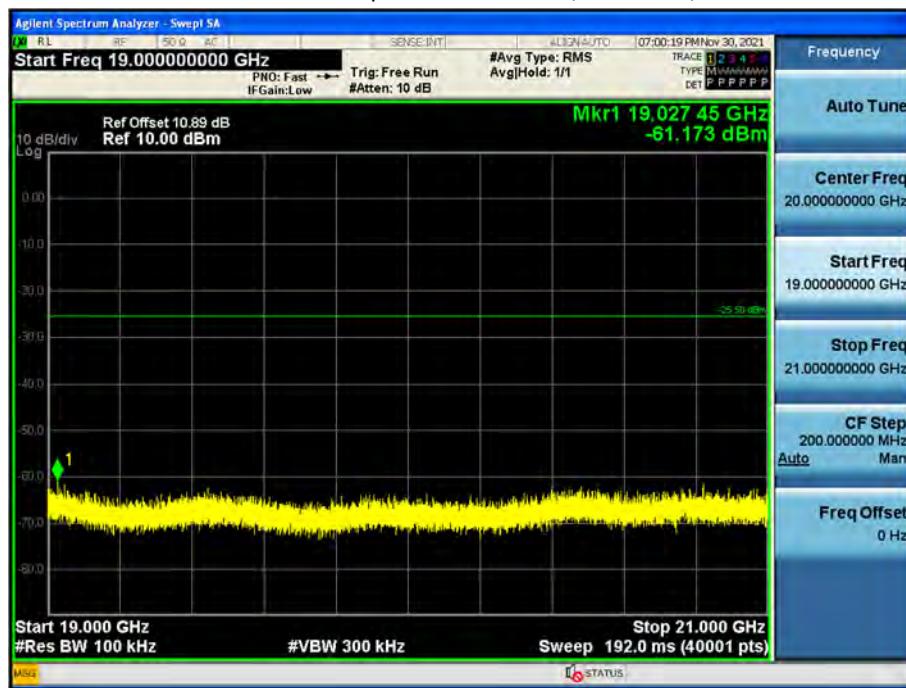


21 GHz ~ 23 GHz

Conducted Spurious Emission (Mid-CH 19)

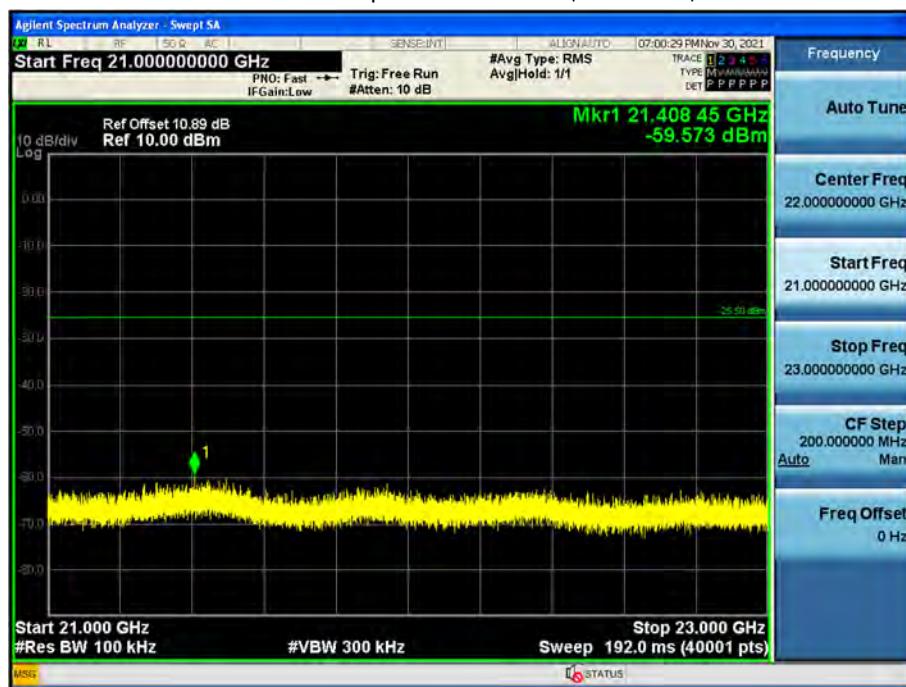

23 GHz ~ 25 GHz

Conducted Spurious Emission (Mid-CH 19)

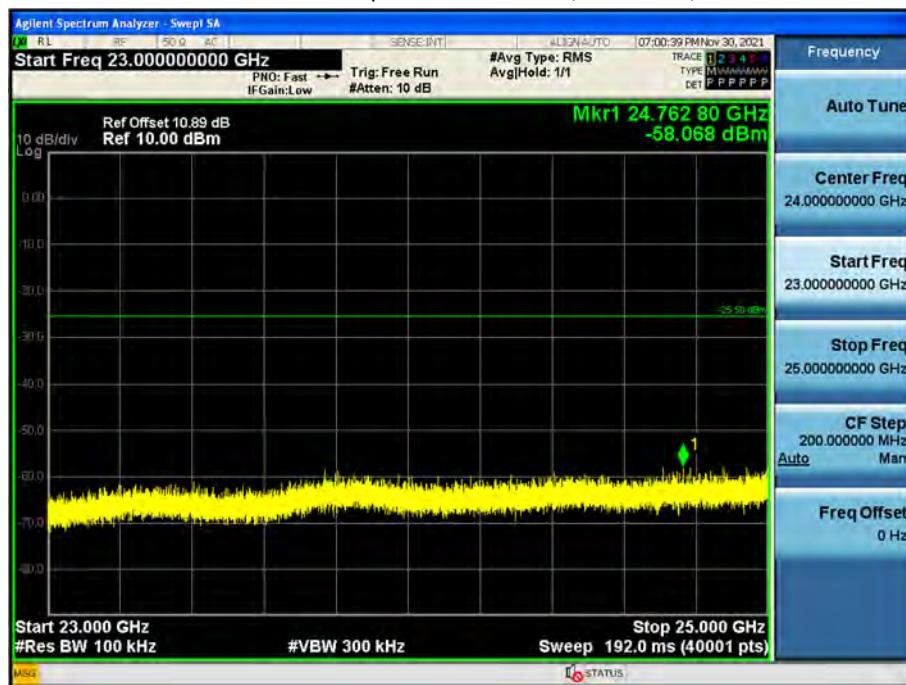Note :

Limit : -25.50 dBm

9.7 RADIATED SPURIOUS EMISSIONS**Frequency Range : 9 kHz – 30MHz**

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dB/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Note:

1. The Measured Level of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dB/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Mode : 1 MBit/s (37 Byte)

Operation Mode: CH Low

Frequency	Measured Level	Duty Cycle Correction	DCCF Factor	A.F+C.L-A.G+D.F	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4804	48.26	0.00	0.00	2.76	V	51.02	73.98	22.96	PK
4804	38.21	2.01	-3.98	2.76	V	39.00	53.98	14.98	AV
7206	48.41	0.00	0.00	8.96	V	57.37	73.98	16.61	PK
7206	39.71	0.00	-3.98	8.96	V	44.68	53.98	9.30	AV
4804	49.08	0.00	0.00	2.76	H	51.84	73.98	22.14	PK
4804	38.37	2.01	-3.98	2.76	H	39.16	53.98	14.82	AV
7206	48.09	0.00	0.00	8.96	H	57.05	73.98	16.93	PK
7206	39.29	2.01	-3.98	8.96	H	46.28	53.98	7.70	AV

Operation Mode: CH Mid

Frequency	Measured Level	Duty Cycle Correction	DCCF Factor	A.F+C.L-A.G+D.F	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4880	49.22	0.00	0.00	3.15	V	52.37	73.98	21.61	PK
4880	38.16	2.01	-3.98	3.15	V	39.34	53.98	14.64	AV
7320	48.54	0.00	0.00	9.45	V	57.99	73.98	15.99	PK
7320	39.44	2.01	-3.98	10.20	V	47.67	53.98	6.31	AV
4880	48.76	0.00	0.00	3.15	H	51.91	73.98	22.07	PK
4880	37.86	2.01	-3.98	3.15	H	39.04	53.98	14.94	AV
7320	47.93	0.00	0.00	9.45	H	57.38	73.98	16.60	PK
7320	38.56	2.01	-3.98	10.20	H	46.79	53.98	7.19	AV

Operation Mode: CH High

Frequency	Measured Level	Duty Cycle Correction	DCCF Factor	A.F+C.L-A.G+D.F	Ant. Pol.	Total	Limit	Margin	Measurement	
									[MHz]	[dB μ V]
4960	49.20	0.00	0.00	2.23	V	51.43	73.98	22.55		PK
4960	36.28	2.01	-3.98	2.23	V	36.54	53.98	17.44		AV
7440	47.47	0.00	0.00	10.35	V	57.82	73.98	16.16		PK
7440	38.19	2.01	-3.98	10.35	V	46.57	53.98	7.41		AV
4960	48.25	0.00	0.00	2.23	H	50.48	73.98	23.50		PK
4960	35.70	2.01	-3.98	2.23	H	35.96	53.98	18.02		AV
7440	47.20	0.00	0.00	10.35	H	57.55	73.98	16.43		PK
7440	37.39	2.01	-3.98	10.35	H	45.77	53.98	8.21		AV

Mode : 2 MBit/s (37 Byte)

Operation Mode: CH Low

Frequency	Measured Level	Duty Cycle Correction	DCCF Factor	A.F+C.L-A.G+D.F	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4804	49.17	0.00	0.00	2.76	V	51.93	73.98	22.05	PK
4804	35.04	4.78	-9.51	2.76	V	33.06	53.98	20.92	AV
7206	48.14	0.00	0.00	8.96	V	57.10	73.98	16.88	PK
7206	35.05	4.78	-9.51	8.96	V	39.27	53.98	14.71	AV
4804	49.09	0.00	0.00	2.76	H	51.85	73.98	22.13	PK
4804	35.04	4.78	-9.51	2.76	H	33.06	53.98	20.92	AV
7206	47.88	0.00	0.00	8.96	H	56.84	73.98	17.14	PK
7206	34.87	4.78	-9.51	8.96	H	39.09	53.98	14.89	AV

Operation Mode: CH Mid


Frequency	Measured Level	Duty Cycle Correction	DCCF Factor	A.F+C.L-A.G+D.F	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4880	48.86	0.00	0.00	3.15	V	52.01	73.98	21.97	PK
4880	34.64	4.78	-9.51	3.15	V	33.05	53.98	20.93	AV
7320	48.33	0.00	0.00	9.45	V	57.78	73.98	16.20	PK
7320	35.34	4.78	-9.51	10.20	V	40.80	53.98	13.18	AV
4880	48.39	0.00	0.00	3.15	H	51.54	73.98	22.44	PK
4880	34.51	4.78	-9.51	3.15	H	32.92	53.98	21.06	AV
7320	47.65	0.00	0.00	9.45	H	57.10	73.98	16.88	PK
7320	34.68	4.78	-9.51	10.20	H	40.14	53.98	13.84	AV

Operation Mode: CH High

Frequency	Measured Level	Duty Cycle Correction	DCCF Factor	A.F+C.L-A.G+D.F	Ant. Pol.	Total	Limit	Margin	Measurement
									[MHz]
4960	49.64	0.00	0.00	2.23	V	51.87	73.98	22.11	PK
4960	33.42	4.78	-9.51	2.23	V	30.91	53.98	23.07	AV
7440	47.55	0.00	0.00	10.35	V	57.90	73.98	16.08	PK
7440	34.22	4.78	-9.51	10.35	V	39.84	53.98	14.14	AV
4960	48.77	0.00	0.00	2.23	H	51.00	73.98	22.98	PK
4960	32.68	4.78	-9.51	2.23	H	30.17	53.98	23.81	AV
7440	46.87	0.00	0.00	10.35	H	57.22	73.98	16.76	PK
7440	33.71	4.78	-9.51	10.35	H	39.33	53.98	14.65	AV


▣ 1 MBit/s (37 Byte) Test Plots (Worst case : V)

Radiated Spurious Emissions plot – Average Measured Level (Ch.19 3rd Harmonic)

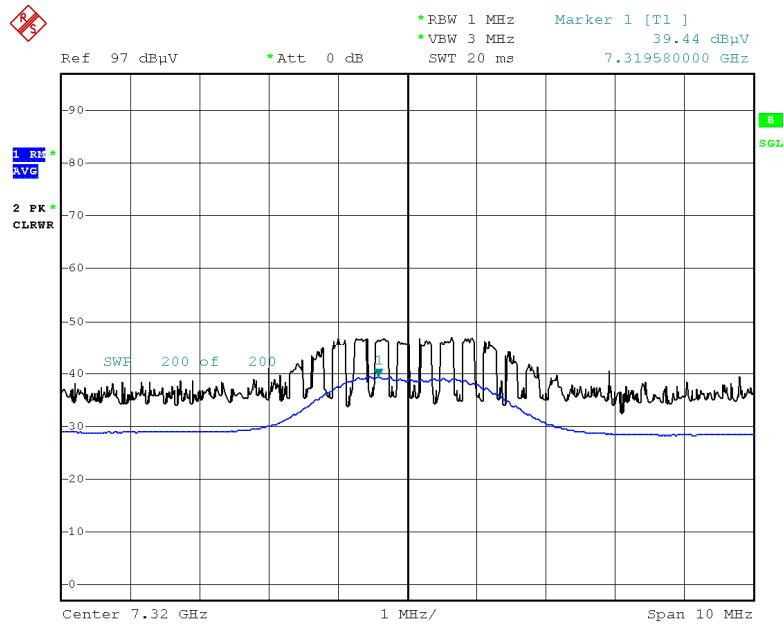

Date: 1.DEC.2021 19:30:08

Radiated Spurious Emissions plot – Peak Measured Level (Ch.19 3rd Harmonic)

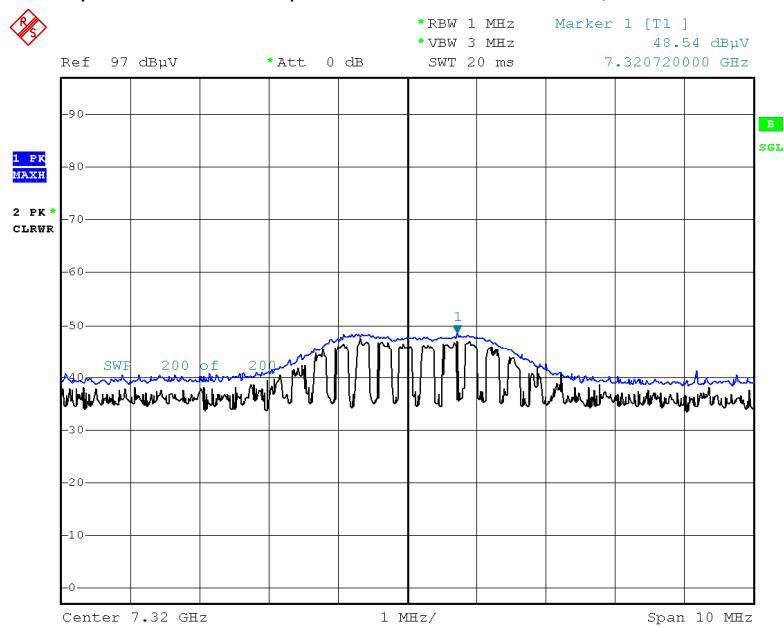

Date: 1.DEC.2021 19:30:28

Note:

Plot of worst case are only reported.

9.8 RADIATED RESTRICTED BAND EDGES**Mode : 1 MBit/s (37 Byte)**

Operating Frequency	2402 MHz & 2480 MHz						
Channel No.	0 & 39						

Frequency	Measured Level	AF+CL+DF-AG	Duty Cycle Factor	Ant. Pol.	Total	Limit	Margin	Measurement
								Type
[MHz]	[dB μ V]	[dB/m]	[dB]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2390.0	47.61	0.75	0.00	H	48.36	73.98	25.62	PK
2390.0	36.37	0.75	2.01	H	39.13	53.98	14.85	AV
2390.0	47.58	0.75	0.00	V	48.33	73.98	25.65	PK
2390.0	36.29	0.75	2.01	V	39.05	53.98	14.93	AV
2483.5	52.92	1.34	0.00	H	54.26	73.98	19.72	PK
2483.5	41.47	1.34	2.01	H	44.82	53.98	9.16	AV
2483.5	52.16	1.34	0.00	V	53.50	73.98	20.48	PK
2483.5	40.41	1.34	2.01	V	43.76	53.98	10.22	AV


Mode : 2 MBit/s (37 Byte)

Operating Frequency	2402 MHz & 2480 MHz						
Channel No.	0 & 39						

Frequency	Measured Level	AF+CL+DF-AG	Duty Cycle Factor	Ant. Pol.	Total	Limit	Margin	Measurement
								Type
[MHz]	[dB μ V]	[dB/m]	[dB]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2390.0	48.11	0.75	0.00	H	48.86	73.98	25.12	PK
2390.0	36.35	0.75	4.78	H	41.88	53.98	12.10	AV
2390.0	48.09	0.75	0.00	V	48.84	73.98	25.14	PK
2390.0	36.27	0.75	4.78	V	41.80	53.98	12.18	AV
2483.5	52.08	1.34	0.00	H	53.42	73.98	20.56	PK
2483.5	40.02	1.34	4.78	H	46.14	53.98	7.84	AV
2483.5	51.56	1.34	0.00	V	52.90	73.98	21.08	PK
2483.5	39.98	1.34	4.78	V	46.10	53.98	7.88	AV


▣ Mode : 2 MBit/s (37 Byte) Test Plots

Radiated Restricted Band Edges plot – Average Measured Level (Ch.39, Z-H)

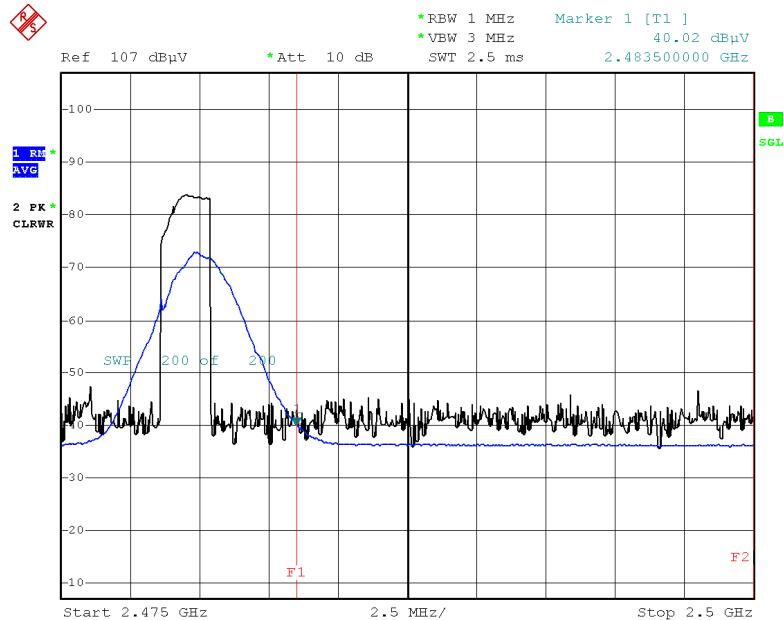

Date: 1.DEC.2021 18:43:58

Radiated Restricted Band Edges plot – Peak Measured Level (Ch.39, Z-H)

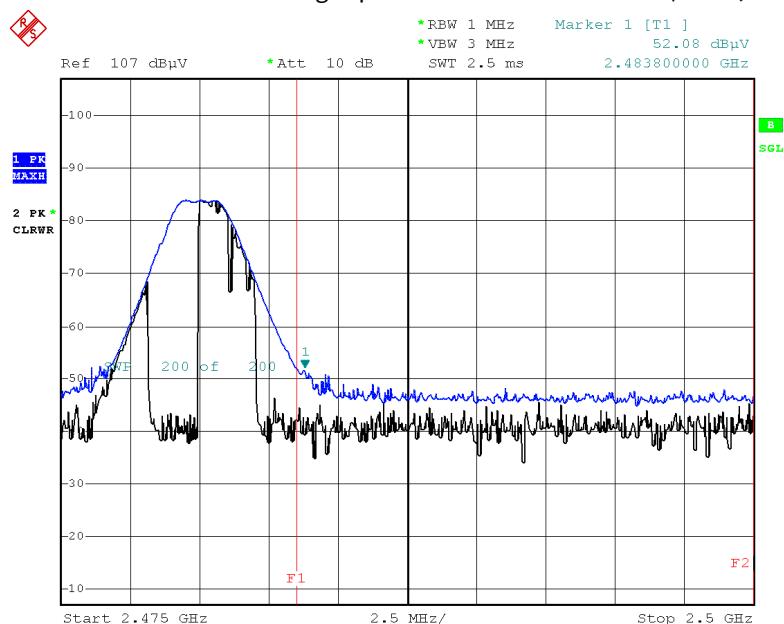

Date: 1.DEC.2021 18:44:17

Note:

Plot of worst case are only reported.

9.9 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB

No Critical peaks found

9.10 POWERLINE CONDUCTED EMISSIONS**Conducted Emissions (Line 1)**


Test

1 / 2

Test Report**Common Information**

EUT : L-RA1
 Manufacturer : LACOS SYSTEM
 Test Site: SHIELD ROOM
 Operating Conditions : BLE_L1
 Operator Name:
 Comment:

Full Spectrum

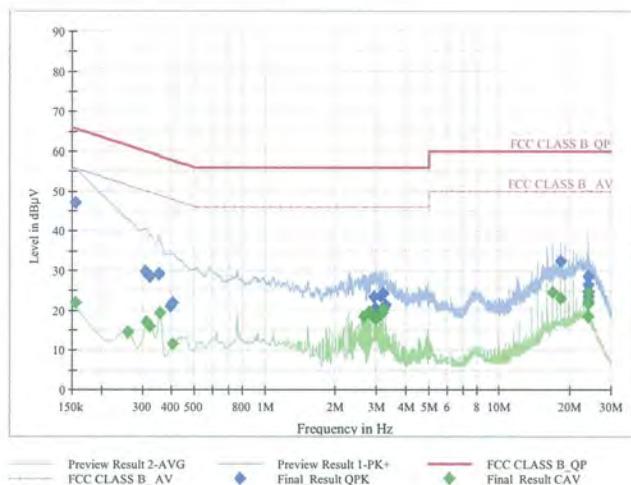**Final Result QPK**

Frequency (MHz)	QuasiPeak (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	46.91	65.75	18.85	9.000	L1	OFF	9.6
0.3098	29.85	59.98	30.12	9.000	L1	OFF	9.6
0.3233	28.66	59.62	30.96	9.000	L1	OFF	9.6
0.3525	29.05	58.90	29.85	9.000	L1	OFF	9.6
0.3930	21.20	58.00	36.80	9.000	L1	OFF	9.6
0.4043	21.96	57.77	35.81	9.000	L1	OFF	9.6
2.9210	23.29	56.00	32.71	9.000	L1	OFF	9.7
2.9503	20.55	56.00	35.45	9.000	L1	OFF	9.7
3.1438	23.65	56.00	32.35	9.000	L1	OFF	9.7
3.2068	24.31	56.00	31.69	9.000	L1	OFF	9.7
3.2135	20.09	56.00	35.91	9.000	L1	OFF	9.7
3.2765	21.30	56.00	34.70	9.000	L1	OFF	9.7
18.3560	32.45	60.00	27.55	9.000	L1	OFF	9.9
23.9765	26.52	60.00	33.48	9.000	L1	OFF	9.9
23.9878	24.93	60.00	35.07	9.000	L1	OFF	9.9
23.9923	24.51	60.00	35.49	9.000	L1	OFF	9.9
24.0328	28.59	60.00	31.41	9.000	L1	OFF	9.9
24.0373	23.41	60.00	36.59	9.000	L1	OFF	9.9

2021-12-08

오후 6:41:40

Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	22.07	55.75	33.69	9.000	L1	OFF	9.6
0.2603	14.38	51.42	37.04	9.000	L1	OFF	9.6
0.3120	16.94	49.92	32.97	9.000	L1	OFF	9.6
0.3233	15.93	49.62	33.70	9.000	L1	OFF	9.6
0.3570	19.45	48.80	29.34	9.000	L1	OFF	9.6
0.4020	11.52	47.81	36.30	9.000	L1	OFF	9.6
2.6308	18.56	46.00	27.44	9.000	L1	OFF	9.7
2.8040	19.76	46.00	26.24	9.000	L1	OFF	9.7
2.9210	18.16	46.00	27.84	9.000	L1	OFF	9.7
2.9773	17.97	46.00	28.03	9.000	L1	OFF	9.7
3.1460	19.23	46.00	26.77	9.000	L1	OFF	9.7
3.2045	20.22	46.00	25.78	9.000	L1	OFF	9.7
16.8260	24.44	50.00	25.56	9.000	L1	OFF	9.9
18.3560	23.17	50.00	26.83	9.000	L1	OFF	9.9
23.9743	18.34	50.00	31.66	9.000	L1	OFF	9.9
23.9945	22.14	50.00	27.86	9.000	L1	OFF	9.9
24.0328	24.59	50.00	25.41	9.000	L1	OFF	9.9
24.0508	21.59	50.00	28.41	9.000	L1	OFF	9.9

2021-12-08

오후 6:41:40


Conducted Emissions (Line 2)

Test

1 / 2

Test Report**Common Information**

EUT : L-RA1
 Manufacturer : LACOS SYSTEM
 Test Site: SHIELD ROOM
 Operating Conditions : BLE_N
 Operator Name:
 Comment:

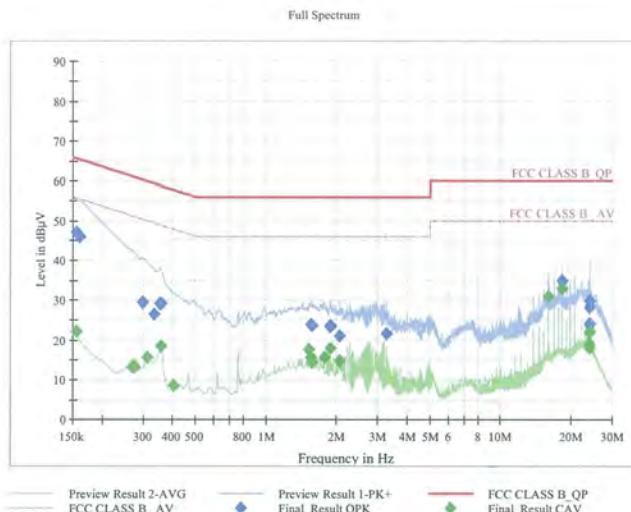**Final_Result_QPK**

Frequency (MHz)	QuasiPeak (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	47.14	65.75	18.62	9.000	N	OFF	9.6
0.1613	45.76	65.40	19.64	9.000	N	OFF	9.6
0.2985	29.36	60.28	30.93	9.000	N	OFF	9.6
0.3323	26.40	59.40	33.00	9.000	N	OFF	9.6
0.3525	29.17	58.90	29.73	9.000	N	OFF	9.6
0.3570	29.23	58.80	29.56	9.000	N	OFF	9.6
1.5553	23.98	56.00	32.02	9.000	N	OFF	9.6
1.5733	23.59	56.00	32.41	9.000	N	OFF	9.6
1.8860	23.29	56.00	32.71	9.000	N	OFF	9.6
1.8905	23.71	56.00	32.29	9.000	N	OFF	9.6
2.0638	21.06	56.00	34.94	9.000	N	OFF	9.6
3.2788	21.75	56.00	34.25	9.000	N	OFF	9.7
18.3515	32.98	60.00	27.02	9.000	N	OFF	9.9
18.3560	35.03	60.00	24.97	9.000	N	OFF	9.9
23.9653	24.11	60.00	35.89	9.000	N	OFF	9.9
23.9698	29.67	60.00	30.33	9.000	N	OFF	9.9
23.9945	28.39	60.00	31.61	9.000	N	OFF	9.9
24.0260	24.00	60.00	36.00	9.000	N	OFF	9.9

2021-12-08

오후 6:27:20

Test

2 / 2

Final Result_CAV

Frequency (MHz)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	22.33	55.75	33.42	9.000	N	OFF	9.6
0.2693	13.33	51.14	37.81	9.000	N	OFF	9.6
0.2760	13.16	50.94	37.78	9.000	N	OFF	9.6
0.3120	15.72	49.92	34.20	9.000	N	OFF	9.6
0.3570	18.39	48.80	30.41	9.000	N	OFF	9.6
0.4020	8.66	47.81	39.16	9.000	N	OFF	9.6
1.5305	17.50	46.00	28.50	9.000	N	OFF	9.6
1.5553	15.67	46.00	30.33	9.000	N	OFF	9.6
1.5755	14.33	46.00	31.67	9.000	N	OFF	9.6
1.7735	15.49	46.00	30.51	9.000	N	OFF	9.6
1.8905	17.93	46.00	28.07	9.000	N	OFF	9.6
2.0638	14.77	46.00	31.23	9.000	N	OFF	9.6
16.0610	30.74	50.00	19.26	9.000	N	OFF	9.9
18.3560	32.94	50.00	17.06	9.000	N	OFF	9.9
23.9653	18.00	50.00	32.00	9.000	N	OFF	9.9
23.9900	18.91	50.00	31.09	9.000	N	OFF	9.9
24.0283	22.26	50.00	27.74	9.000	N	OFF	9.9
24.0418	22.00	50.00	28.00	9.000	N	OFF	9.9

2021-12-08

오후 6:27:20

10. LIST OF TEST EQUIPMENT**Conducted Test**

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/23/2022	Annual
Test Receiver	ESCI	Rohde & Schwarz	100033	06/15/2022	Annual
Temperature Chamber	SU-642	ESPAC	0093008124	03/15/2022	Annual
Signal Analyzer	N9020A	Agilent	MY47380318	01/28/2022	Annual
Signal Analyzer	N9030A	Agilent	MY49431210	01/11/2022	Annual
Power Meter	N1911A	Agilent	MY45100523	04/08/2022	Annual
Power Sensor	N1921A	Agilent	MY57820067	04/08/2022	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2022	Annual
Power Splitter	11667B	Hewlett Packard	05001	05/20/2022	Annual
DC Power Supply	E3632A	Hewlett Packard	KR75303960	06/10/2022	Annual
Attenuator (10 dB)	5910-N-50-010	H+S	00801	10/29/2022	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	FCC WLAN&BT&BLE Conducted Test Software v3.0	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100422	05/04/2022	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller (Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	2090	Emco	060520	N/A	N/A
Turn Table	Turn Table	Ets	N/A	N/A	N/A
Loop Antenna	Loop Antenna	Rohde & Schwarz	1513-333	03/19/2022	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	09/04/2022	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/18/2023	Biennial
Horn Antenna (15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170541	11/16/2023	Biennial
Spectrum Analyzer	FSP (9 kHz ~ 30 GHz)	Rohde & Schwarz	836650/016	09/13/2022	Annual
Spectrum Analyzer	FSV40-N	Rohde & Schwarz	101068-SZ	09/15/2022	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/06/2022	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	02/08/2022	Annual
Attenuator (10 dB)	CBLU1183540B-01	CERNEX	N/A	12/23/2021	Annual
56-10	56-10	WEINSCHEL			
Broadband Low Noise Amplifier	CBL06185030	CERNEX	N/A	12/23/2021	Annual
Attenuator (3 dB)	18B-03	Api tech.			
High Pass Filter	WHKX10-2700-3000-18000-40SS	Wainwright Instruments	N/A	12/23/2021	Annual
High Pass Filter	WHKX8-6090-7000-18000-40SS	Wainwright Instruments	N/A	12/23/2021	Annual
Thru	COAXIAL ATTENUATOR	T&M SYSTEM	N/A	12/23/2021	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/23/2022	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000276	03/09/2022	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2112-FI001-P