





## Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/3kHz) | Duty Factor (dB) | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|-----------|------|-----------------|---------|--------------------------|------------------|----------------------|------------------|---------|
| NVNT      | b    | 2412            | Ant1    | -9.31                    | 0                | -9.31                | 8                | Pass    |
| NVNT      | b    | 2437            | Ant1    | -8.38                    | 0                | -8.38                | 8                | Pass    |
| NVNT      | b    | 2462            | Ant1    | -6.81                    | 0                | -6.81                | 8                | Pass    |
| NVNT      | g    | 2412            | Ant1    | -22.79                   | 0                | -22.79               | 8                | Pass    |
| NVNT      | g    | 2437            | Ant1    | -24.24                   | 0                | -24.24               | 8                | Pass    |
| NVNT      | g    | 2462            | Ant1    | -23.82                   | 0                | -23.82               | 8                | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -24.31                   | 0                | -24.31               | 8                | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -25.35                   | 0                | -25.35               | 8                | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -24.82                   | 0                | -24.82               | 8                | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -27.74                   | 0                | -27.74               | 8                | Pass    |
| NVNT      | n40  | 2437            | Ant1    | -29.05                   | 0                | -29.05               | 8                | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -29.29                   | 0                | -29.29               | 8                | Pass    |

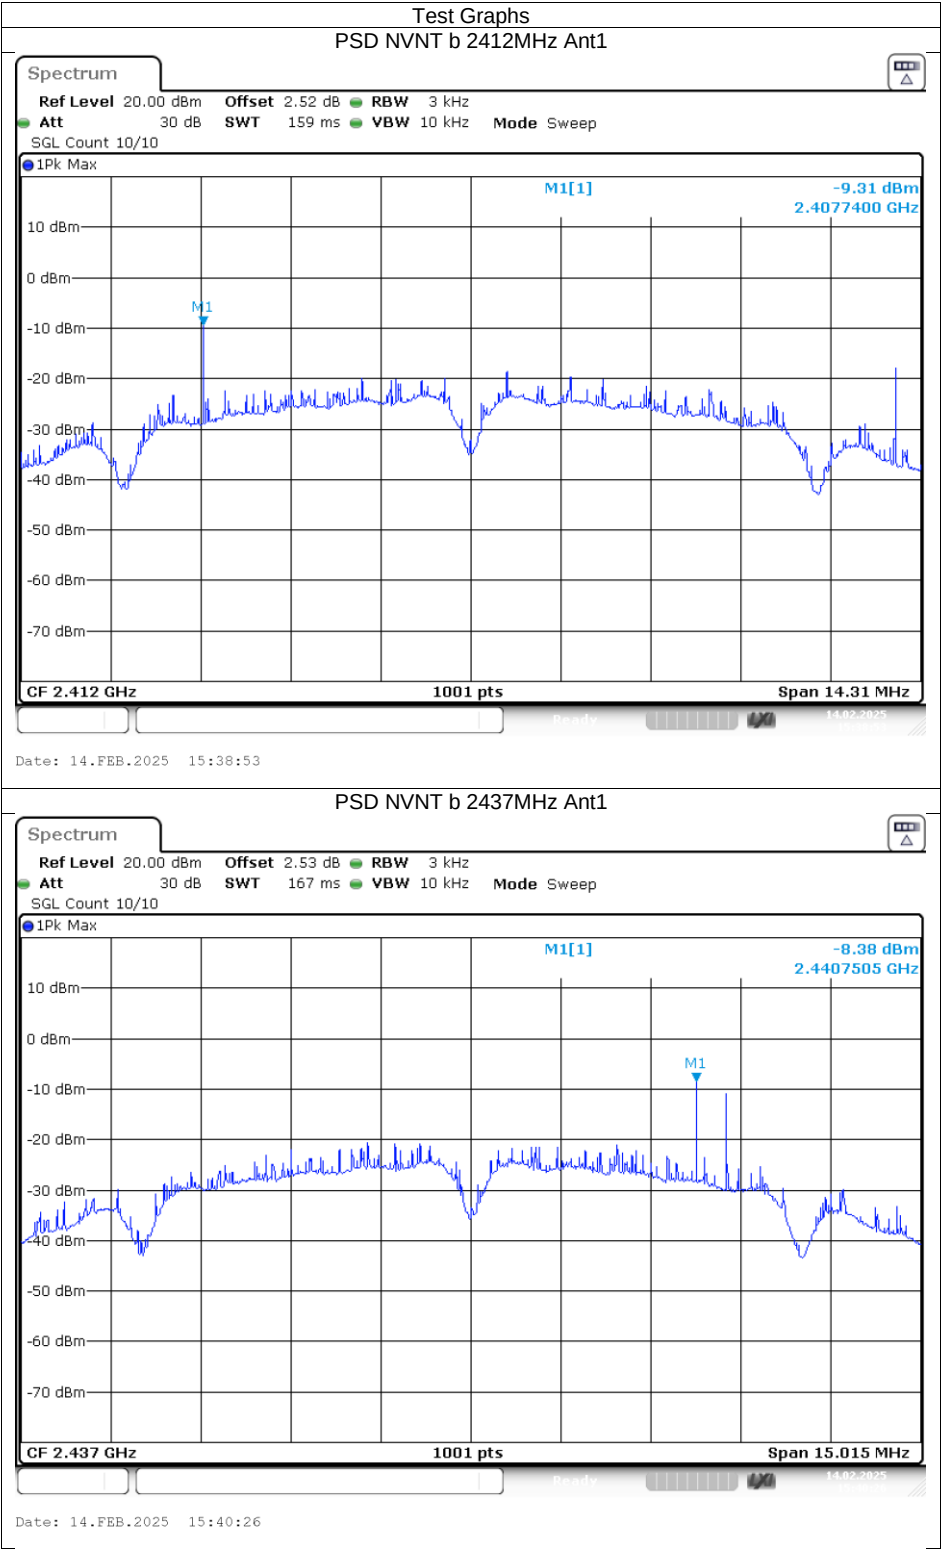


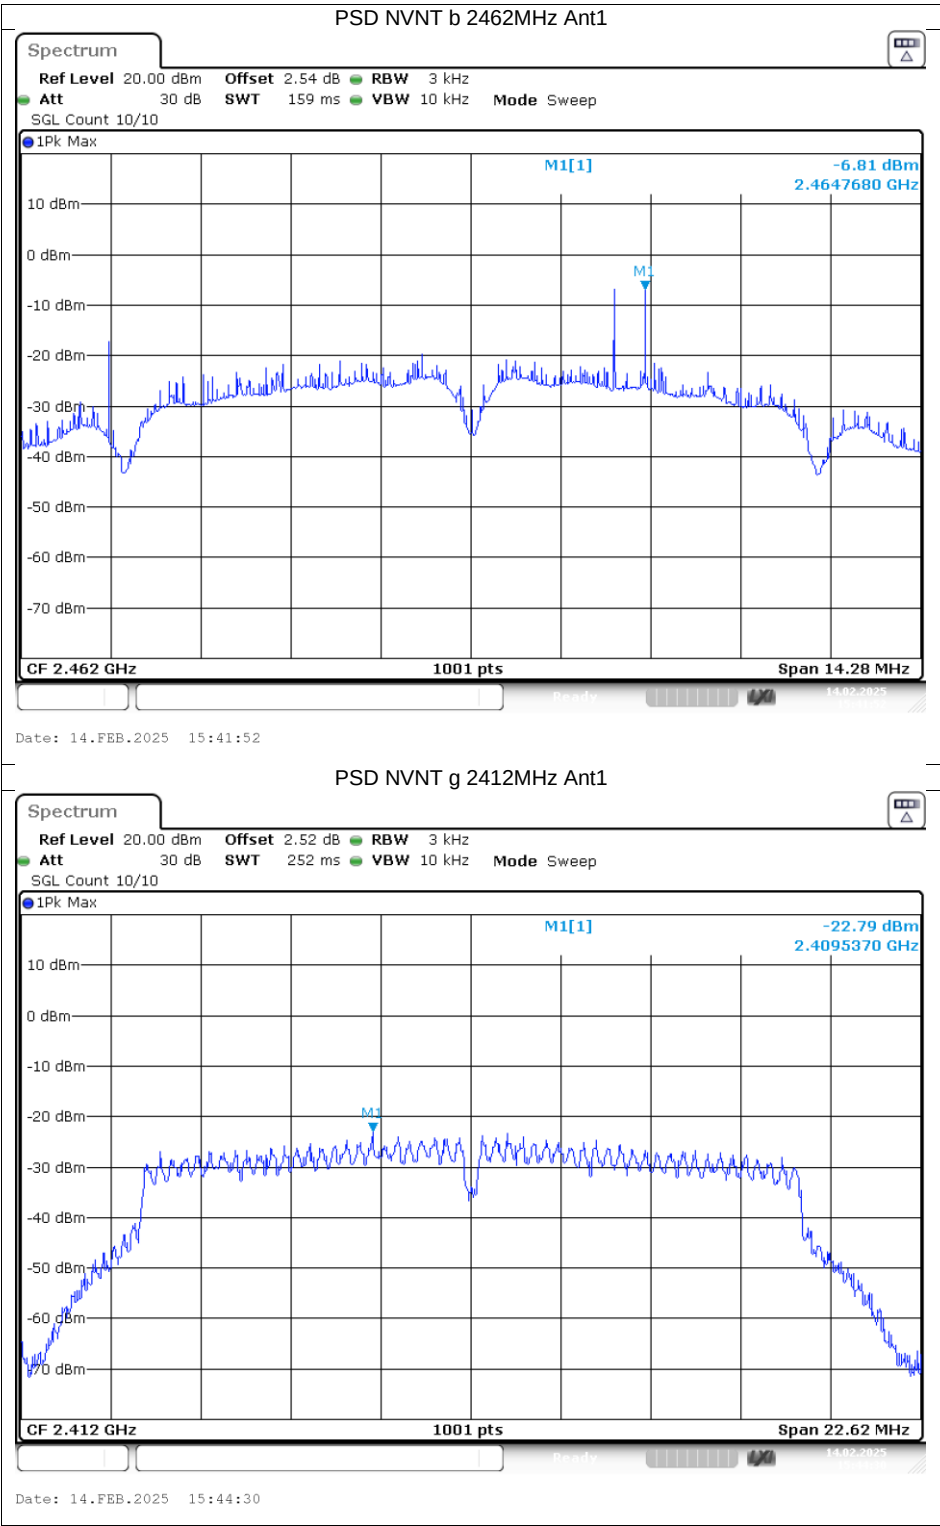

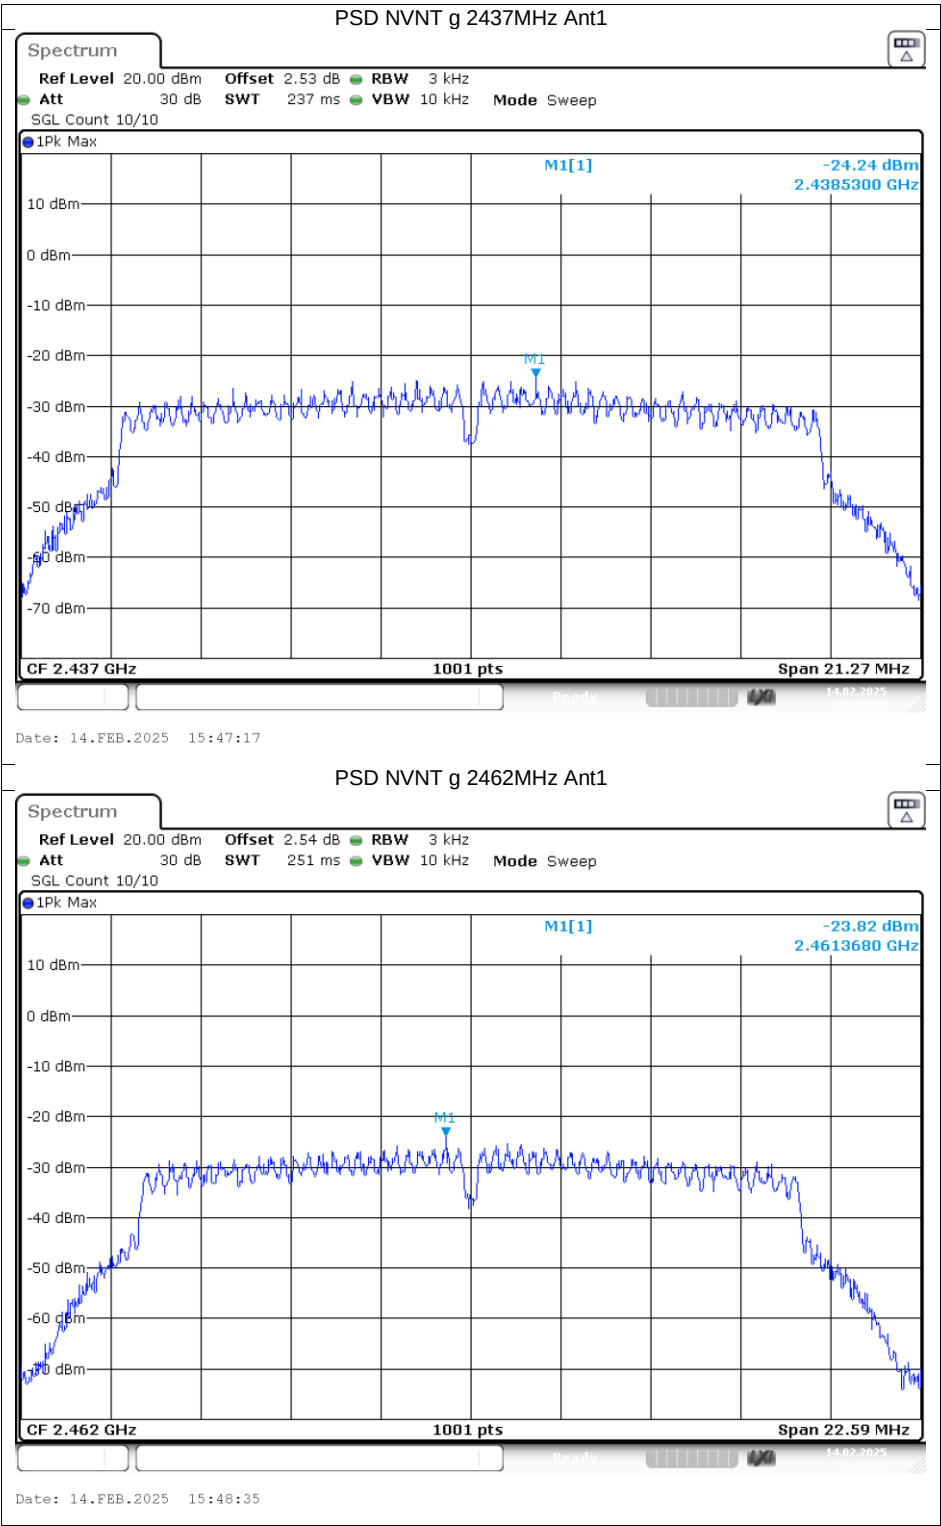

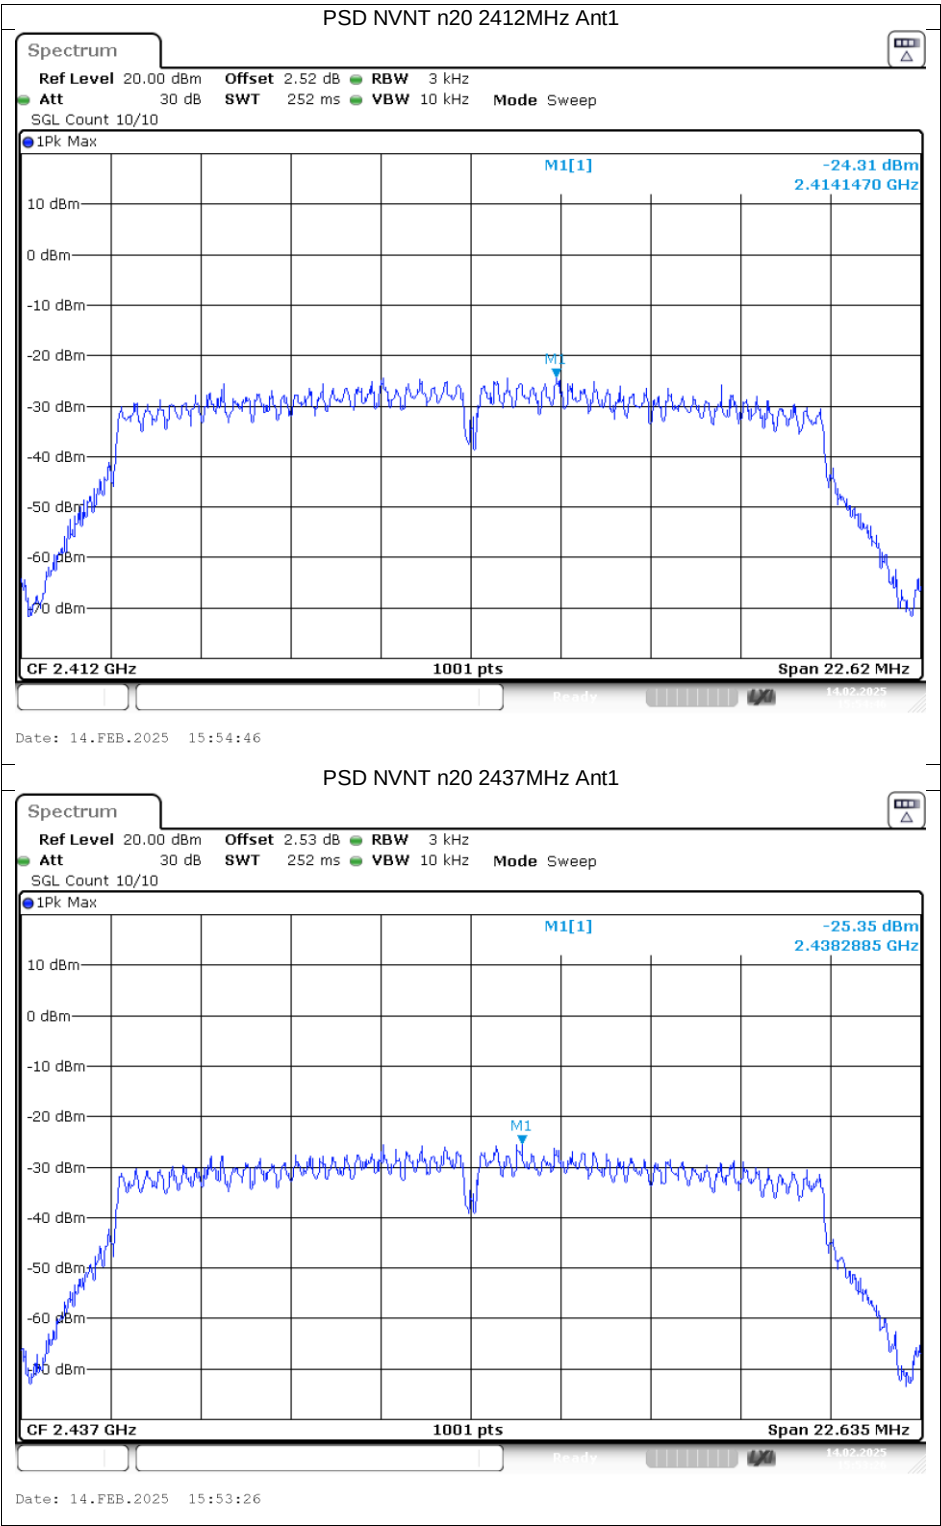

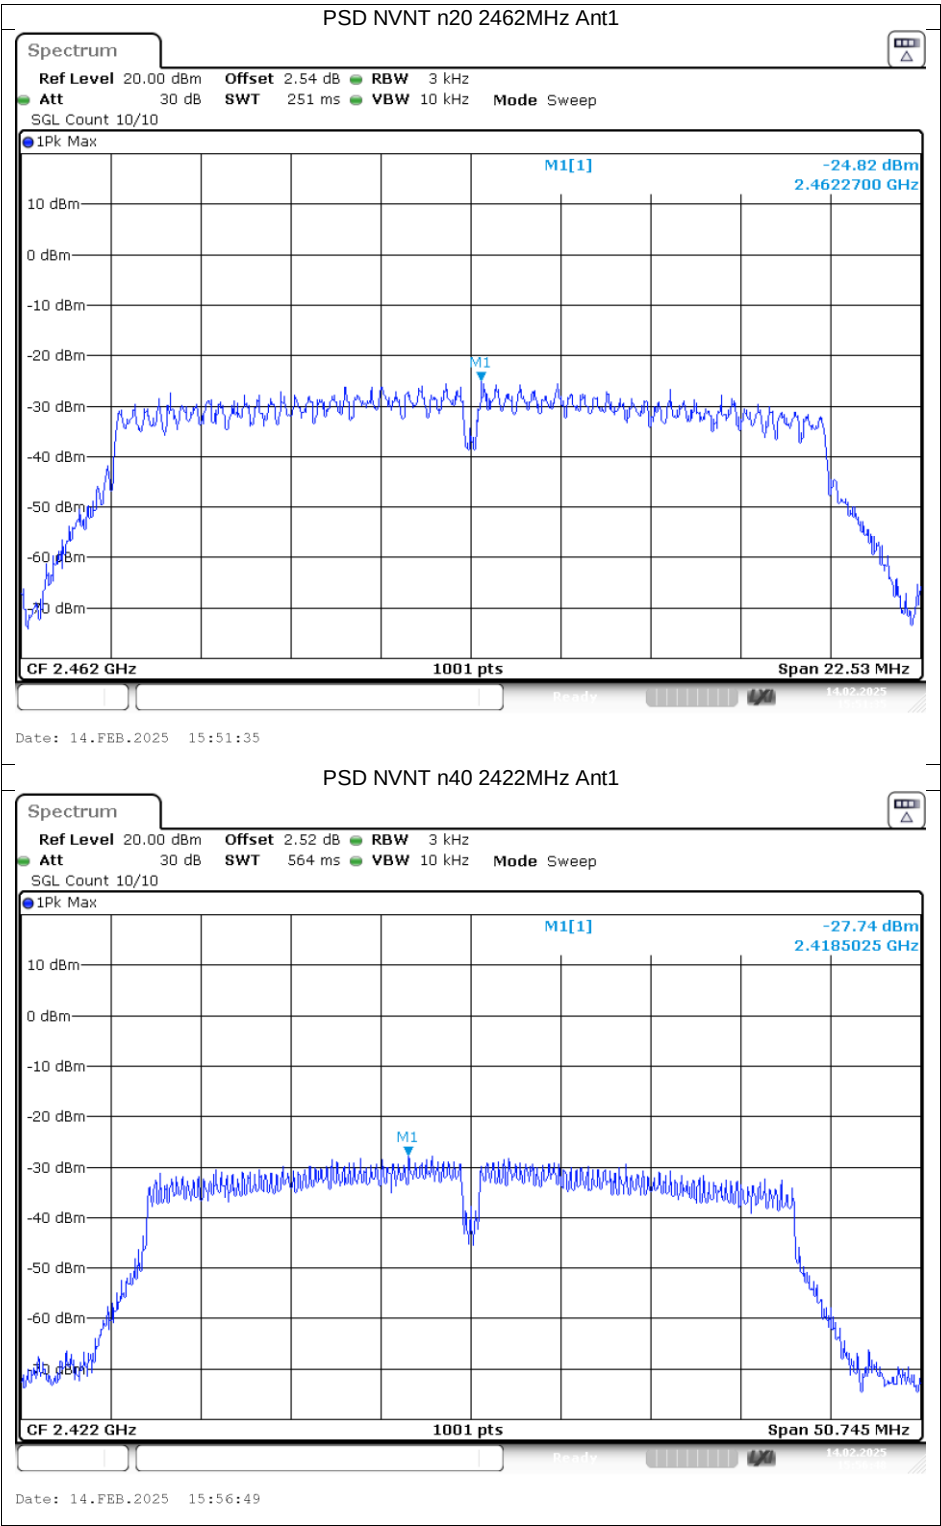


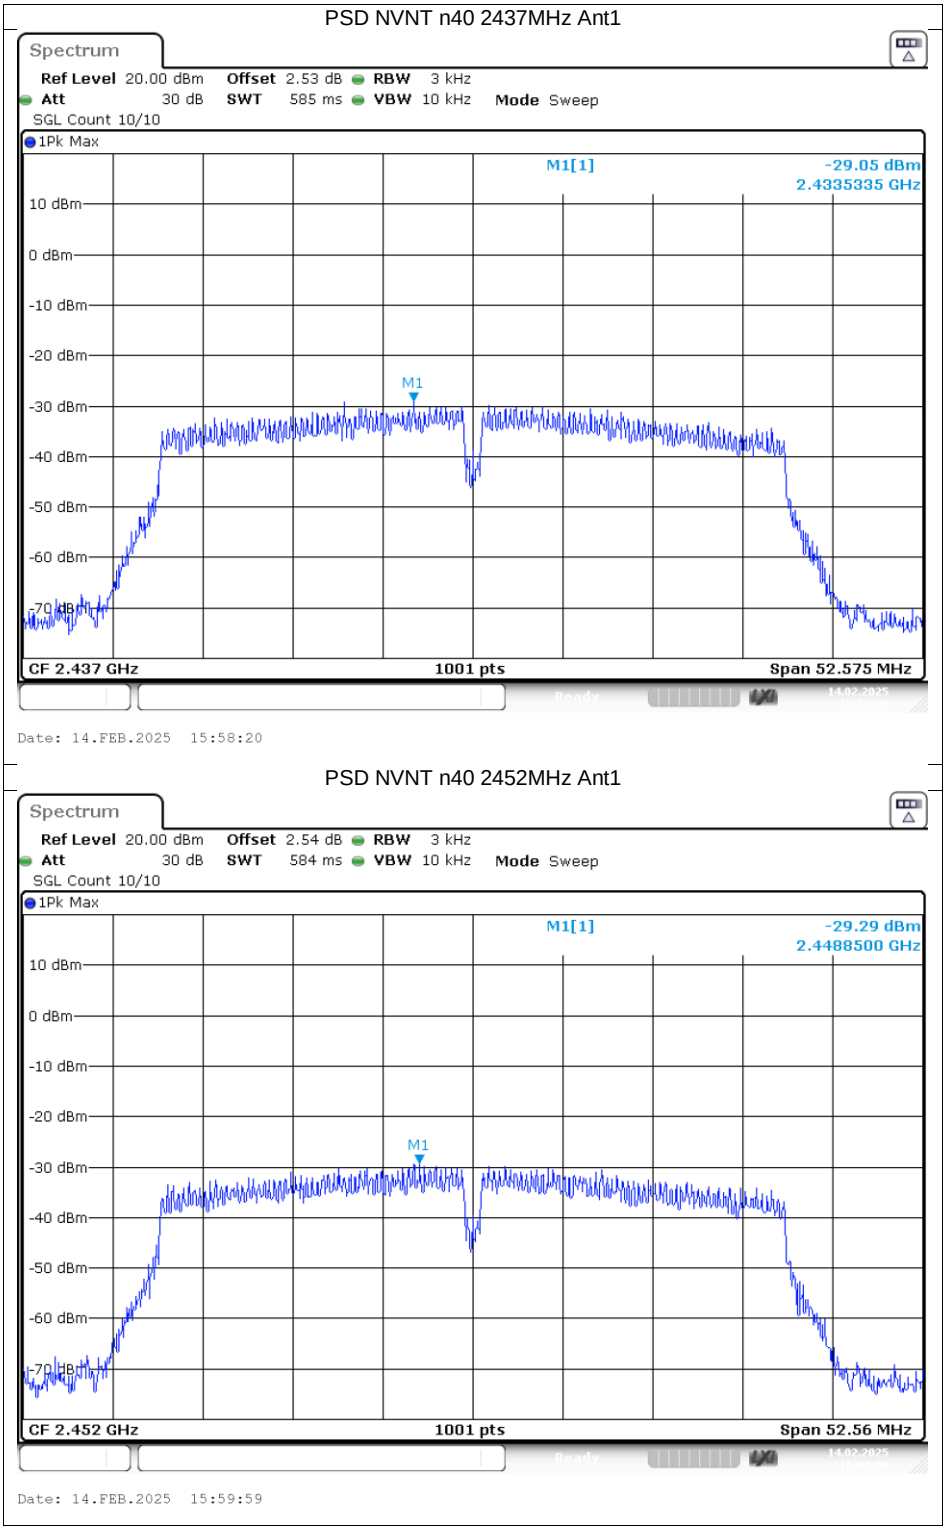



## Band Edge


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -46.97          | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -52.62          | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -39.42          | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -45.93          | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -42.6           | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -47.63          | -20         | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -39.65          | -20         | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -44.19          | -20         | Pass    |




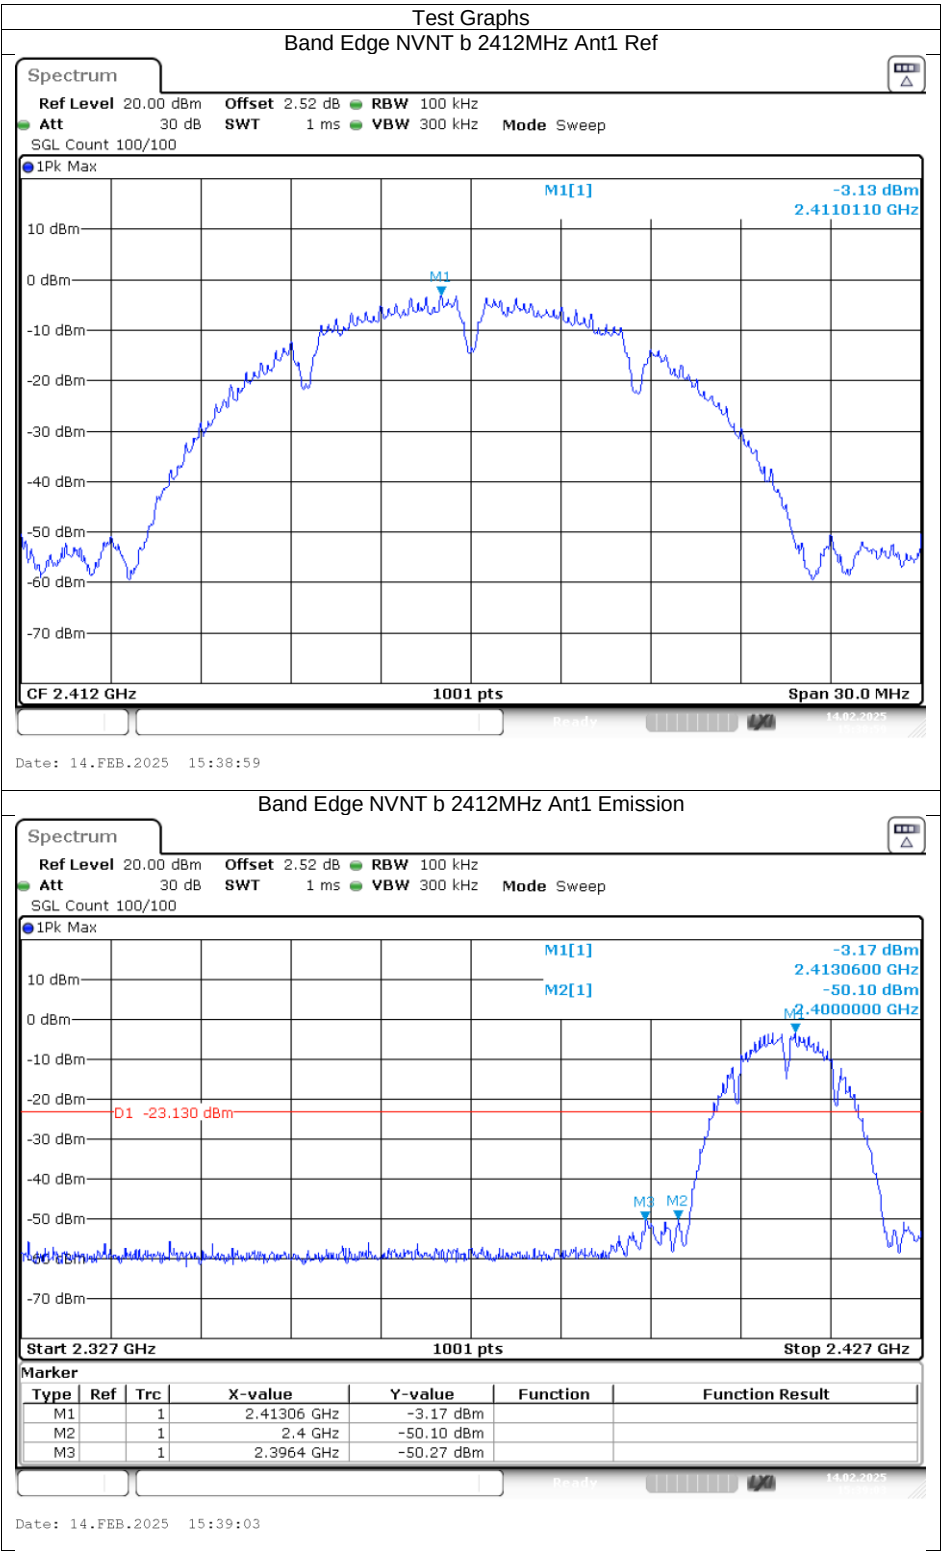


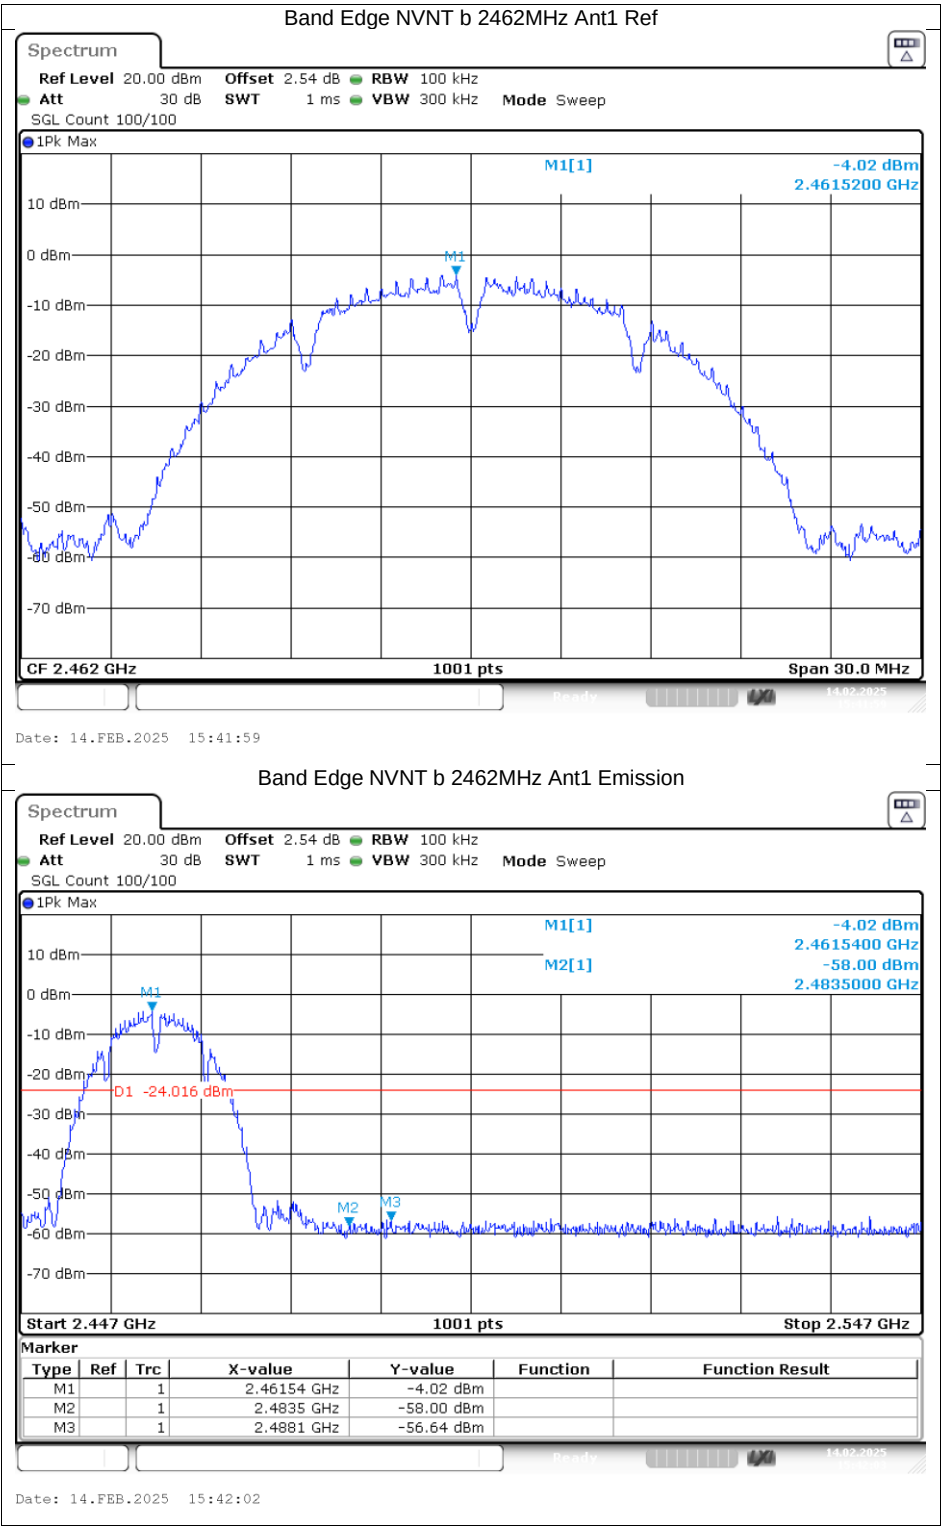


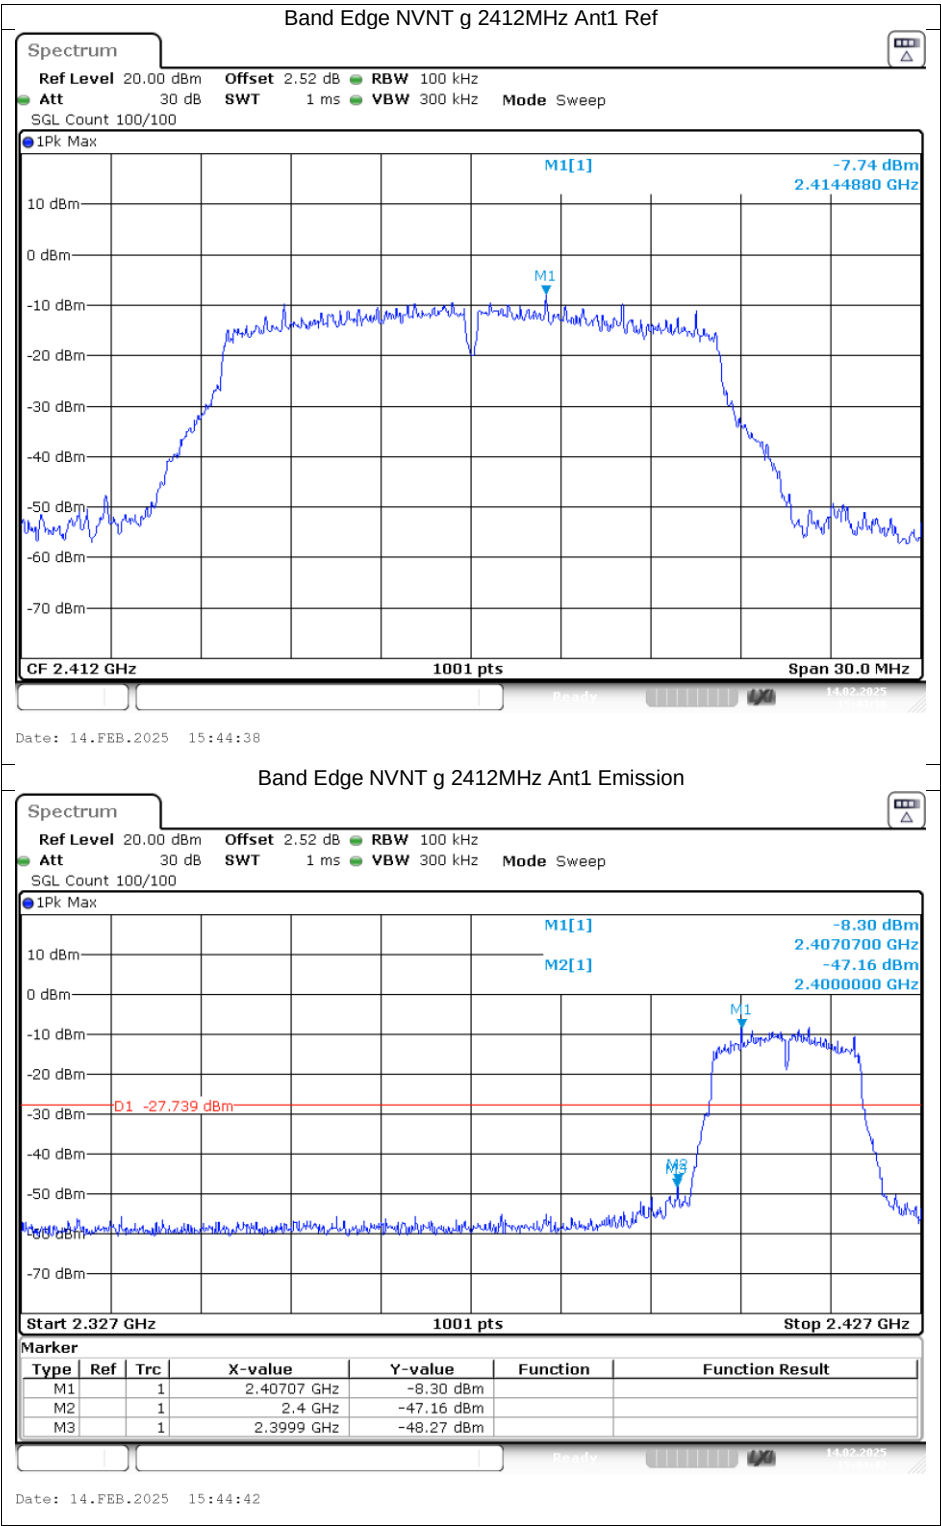


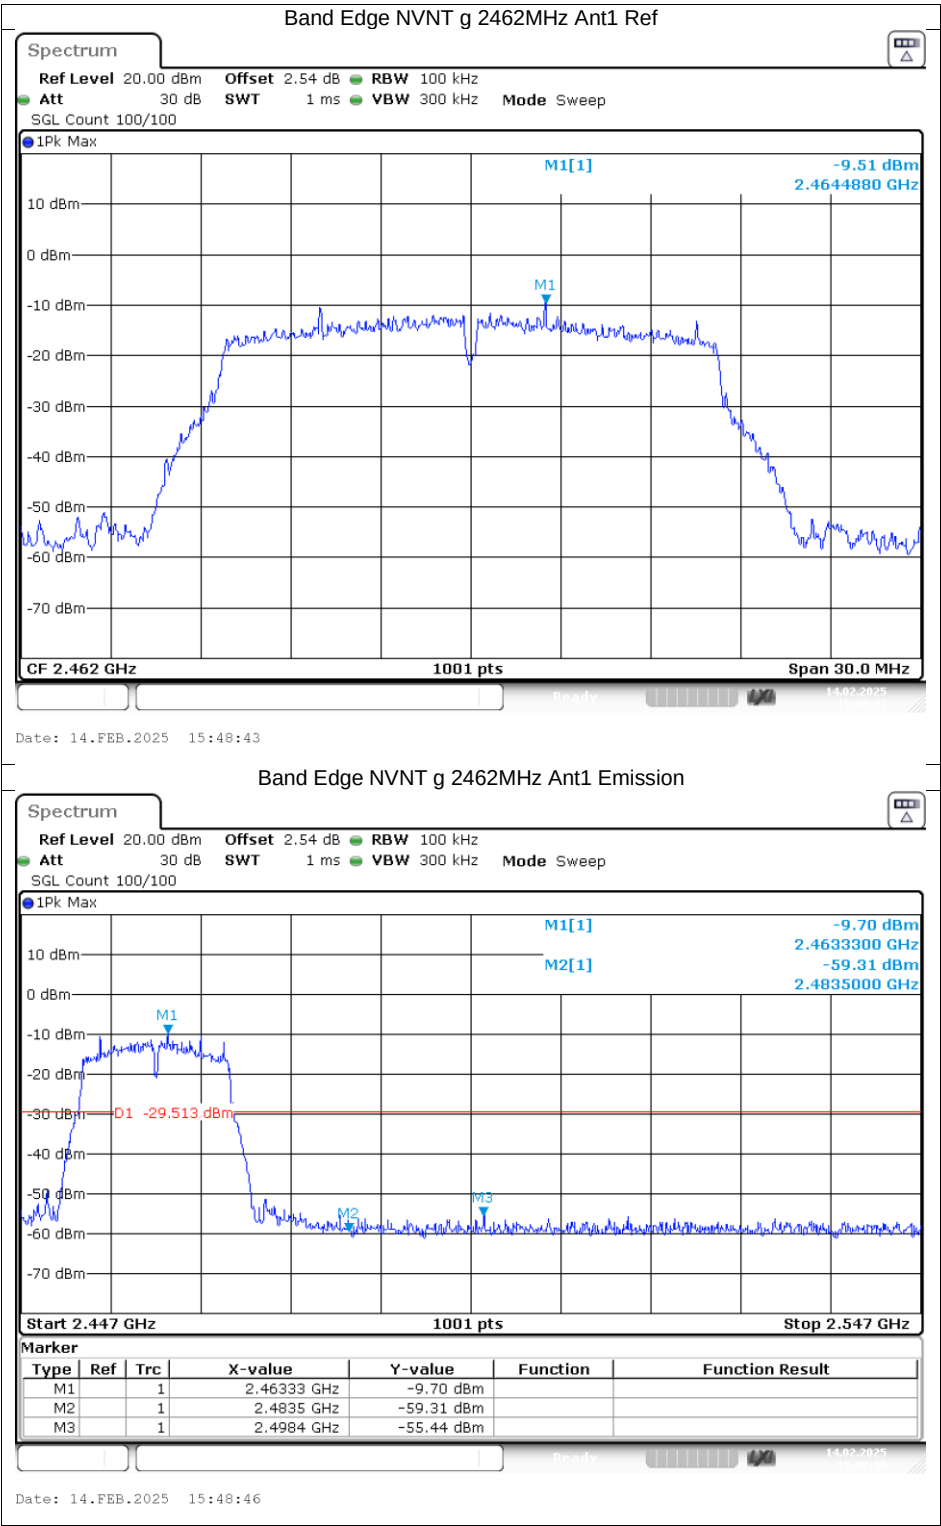

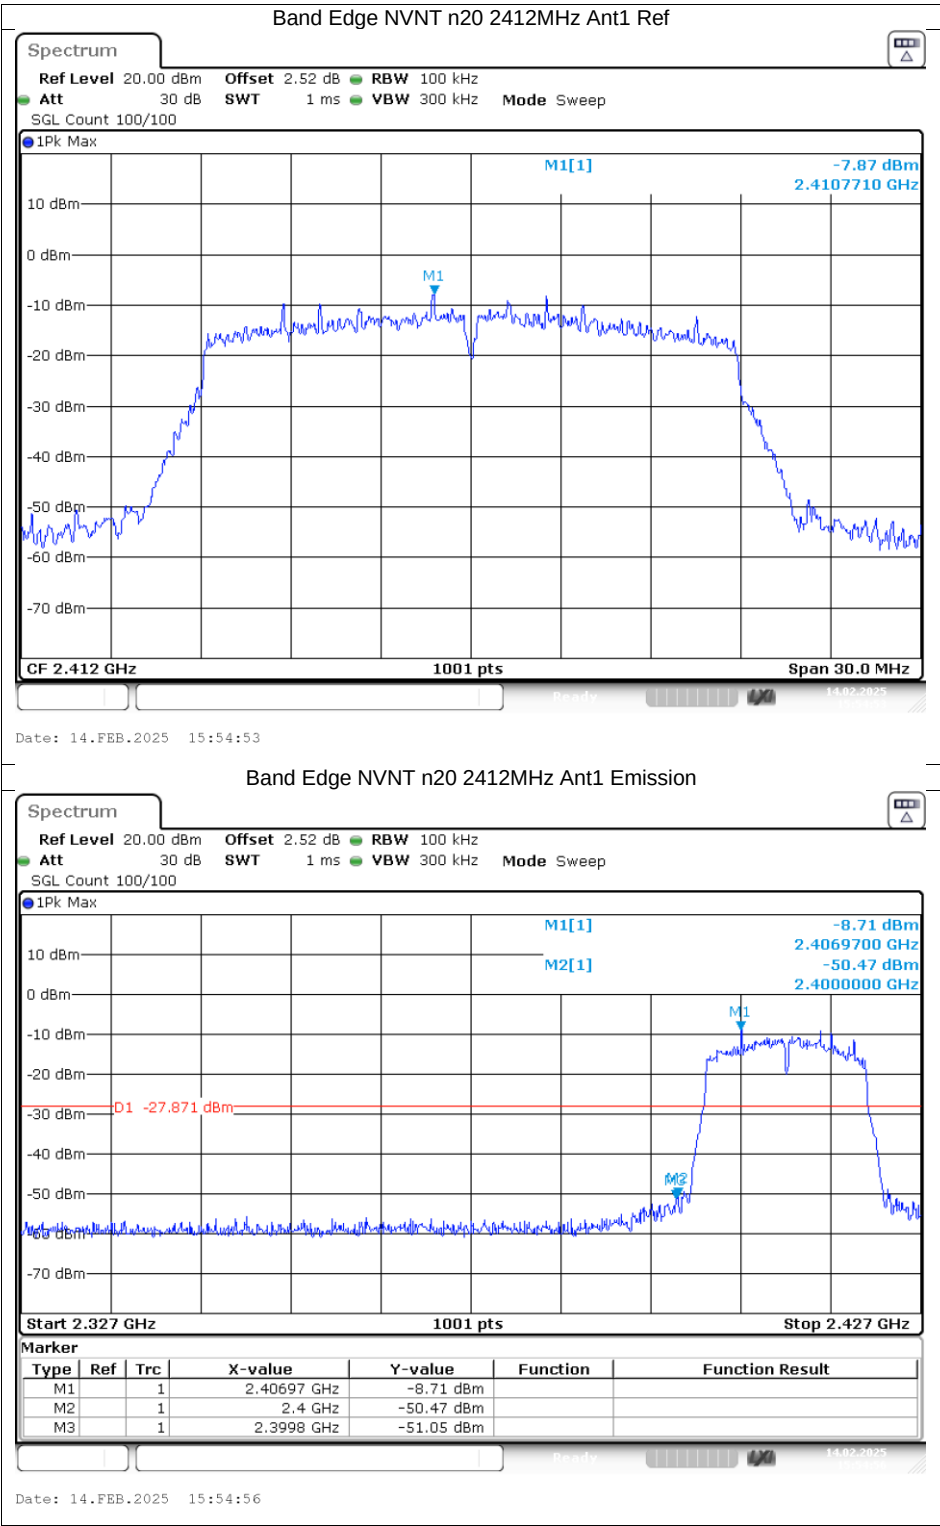

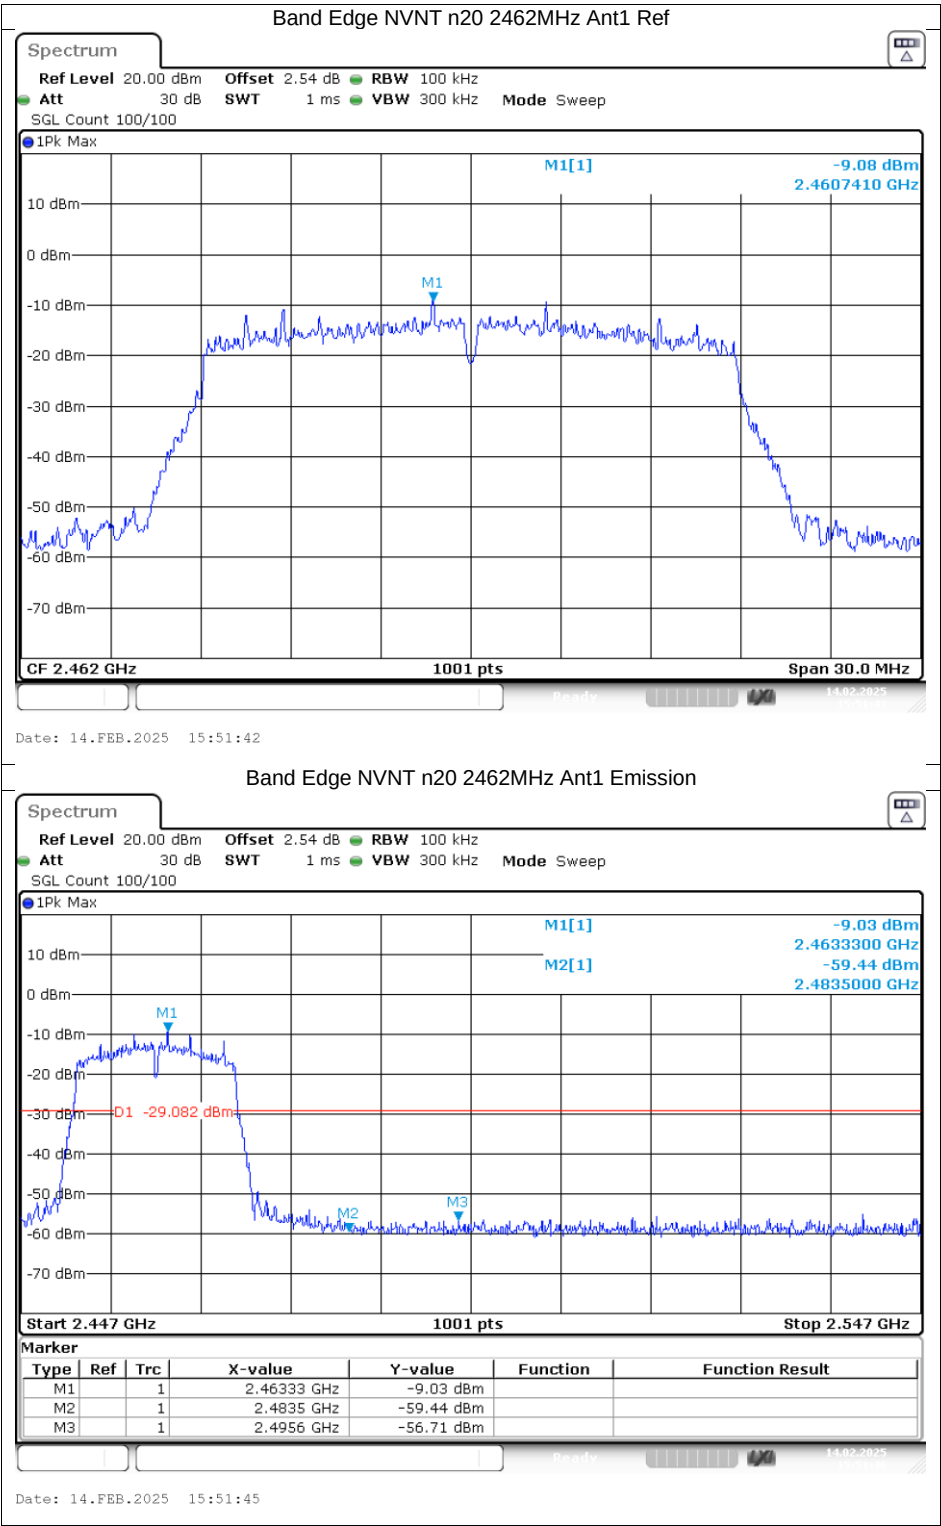

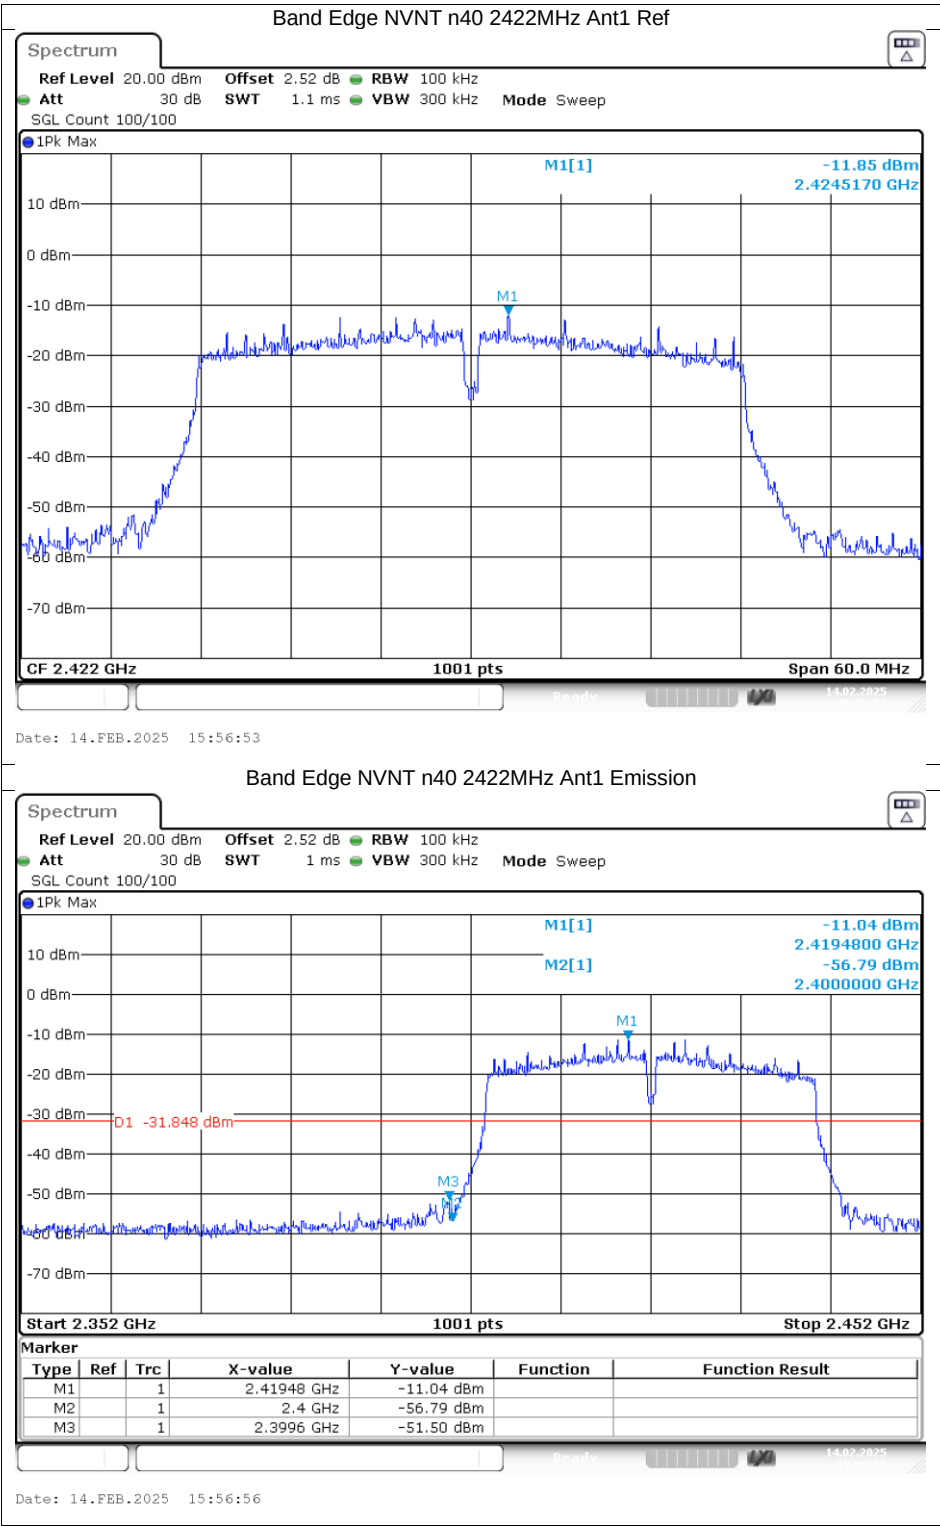


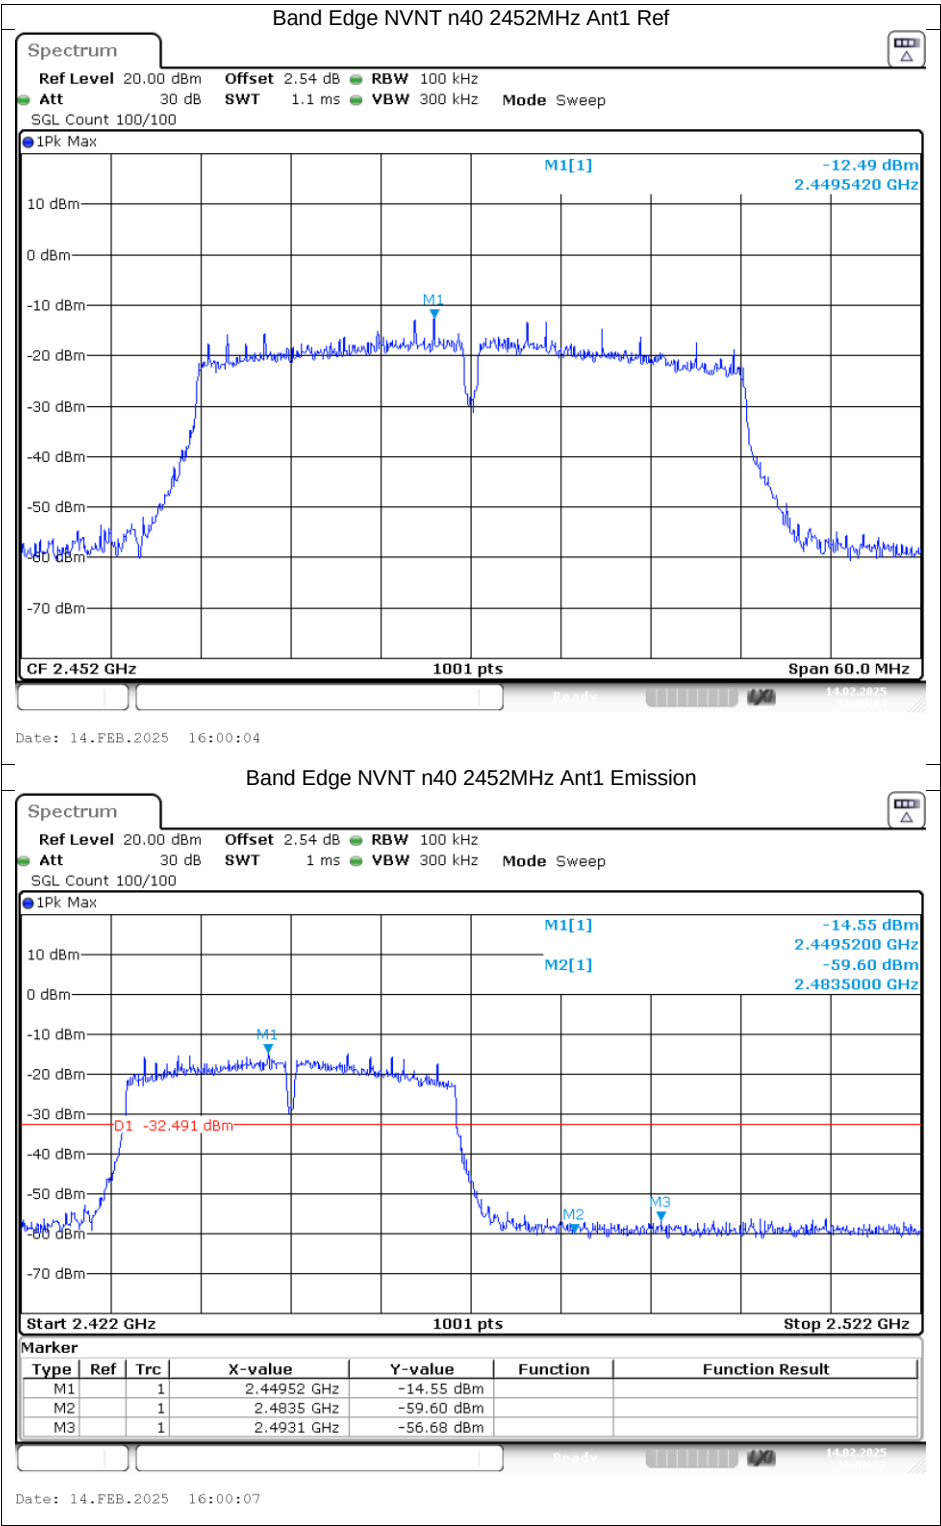






## Conducted RF Spurious Emission


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -40.67          | -20         | Pass    |
| NVNT      | b    | 2437            | Ant1    | -39.97          | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -41.18          | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -42.23          | -20         | Pass    |
| NVNT      | g    | 2437            | Ant1    | -40.4           | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -40.82          | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -41.87          | -20         | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -40.57          | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -38.39          | -20         | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -37.47          | -20         | Pass    |
| NVNT      | n40  | 2437            | Ant1    | -38.23          | -20         | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -36.79          | -20         | Pass    |

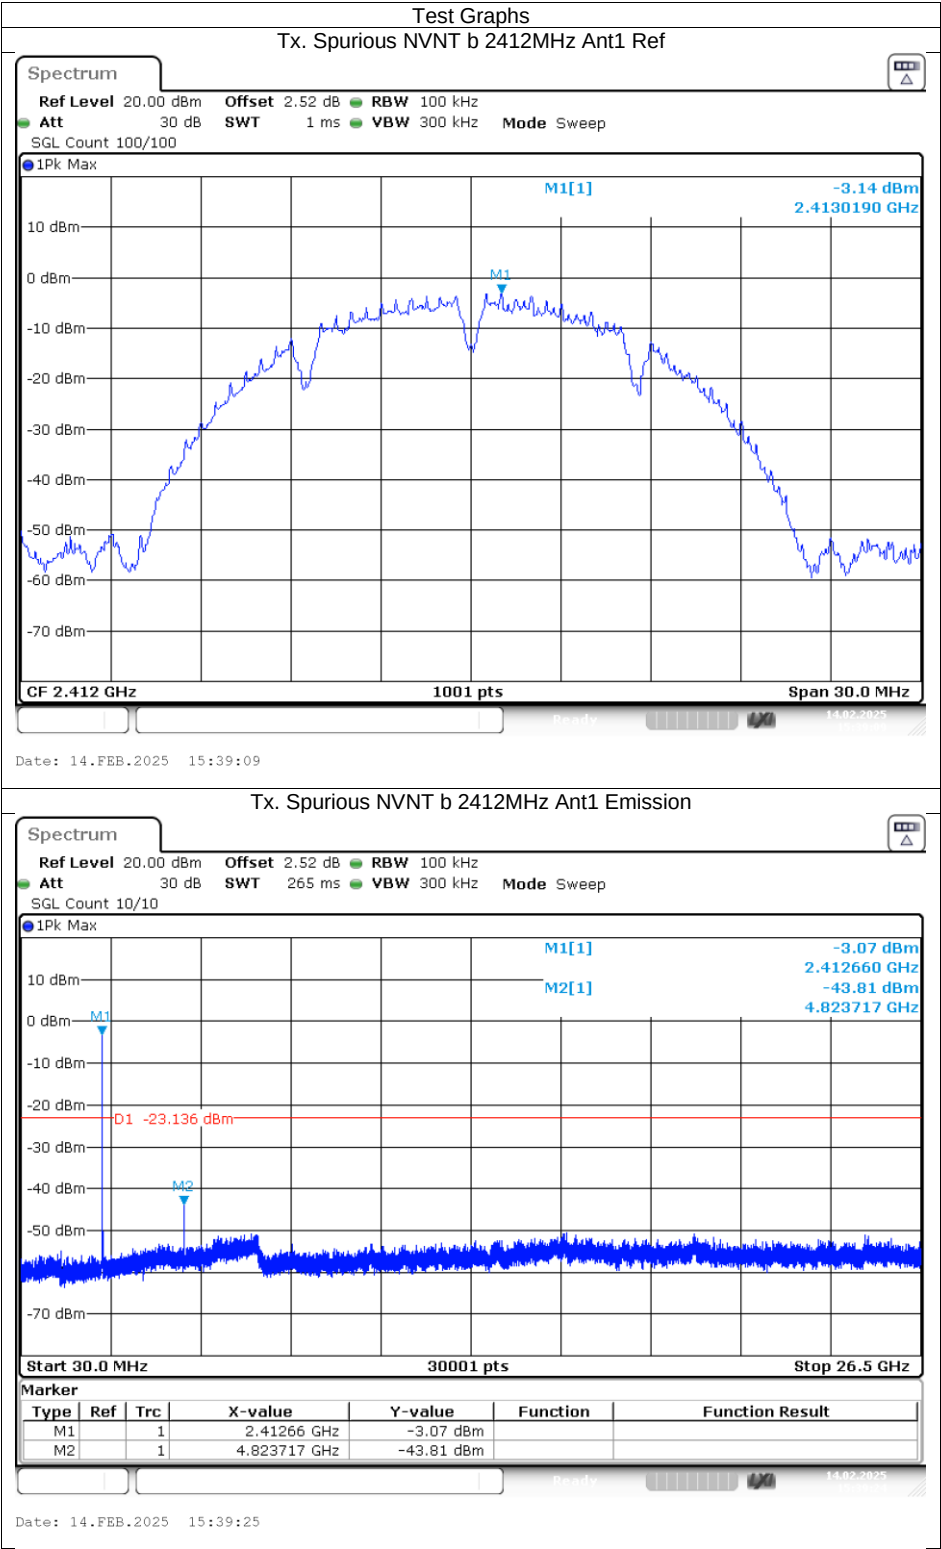


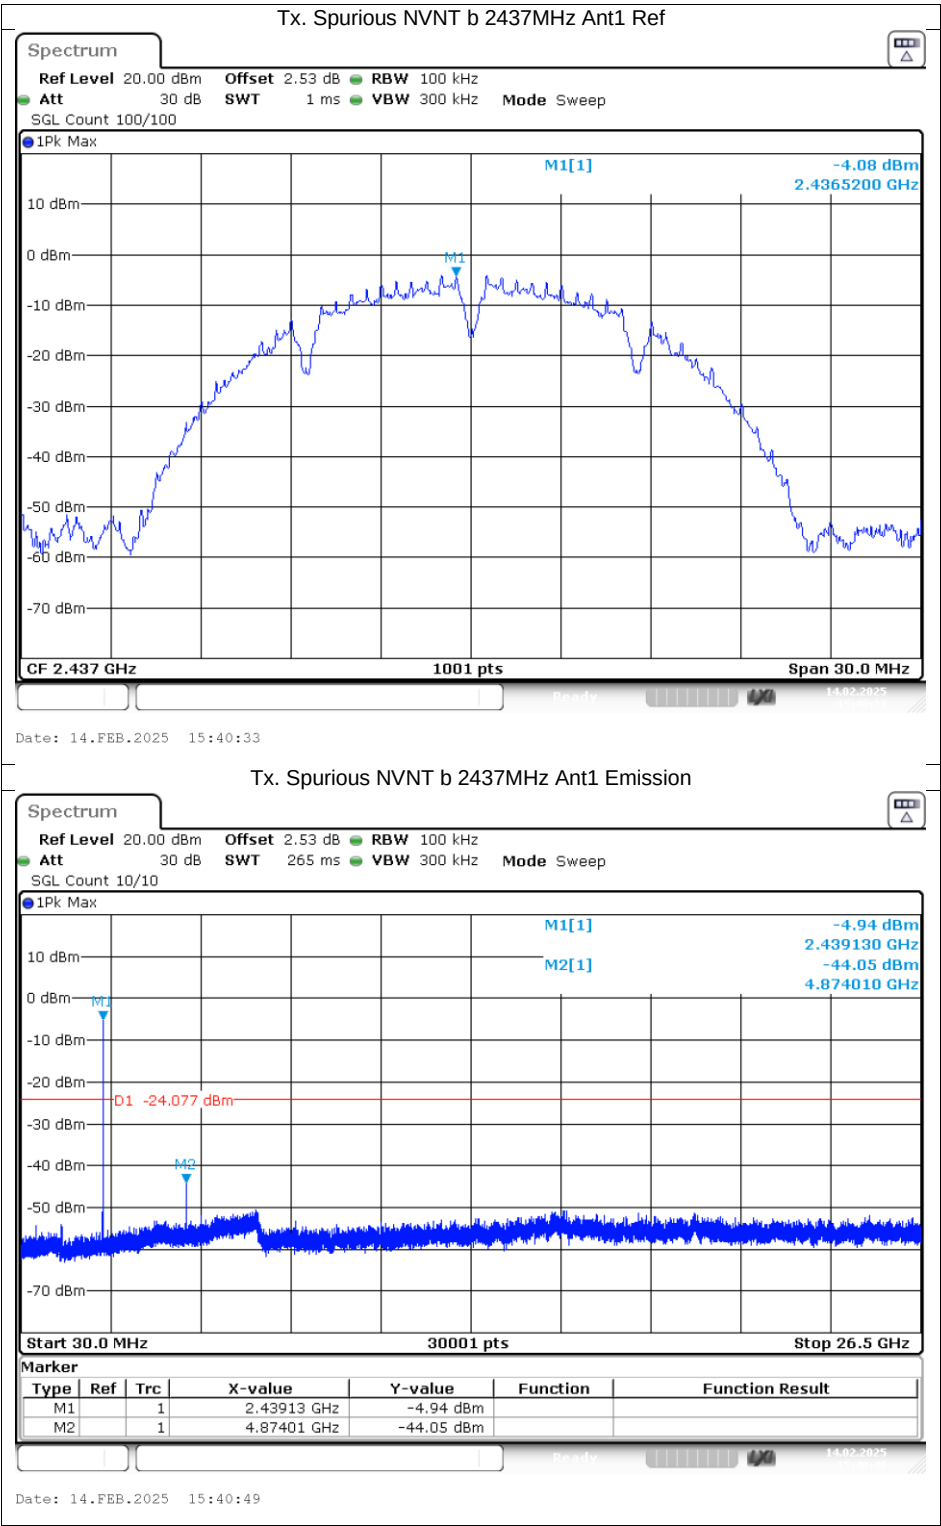


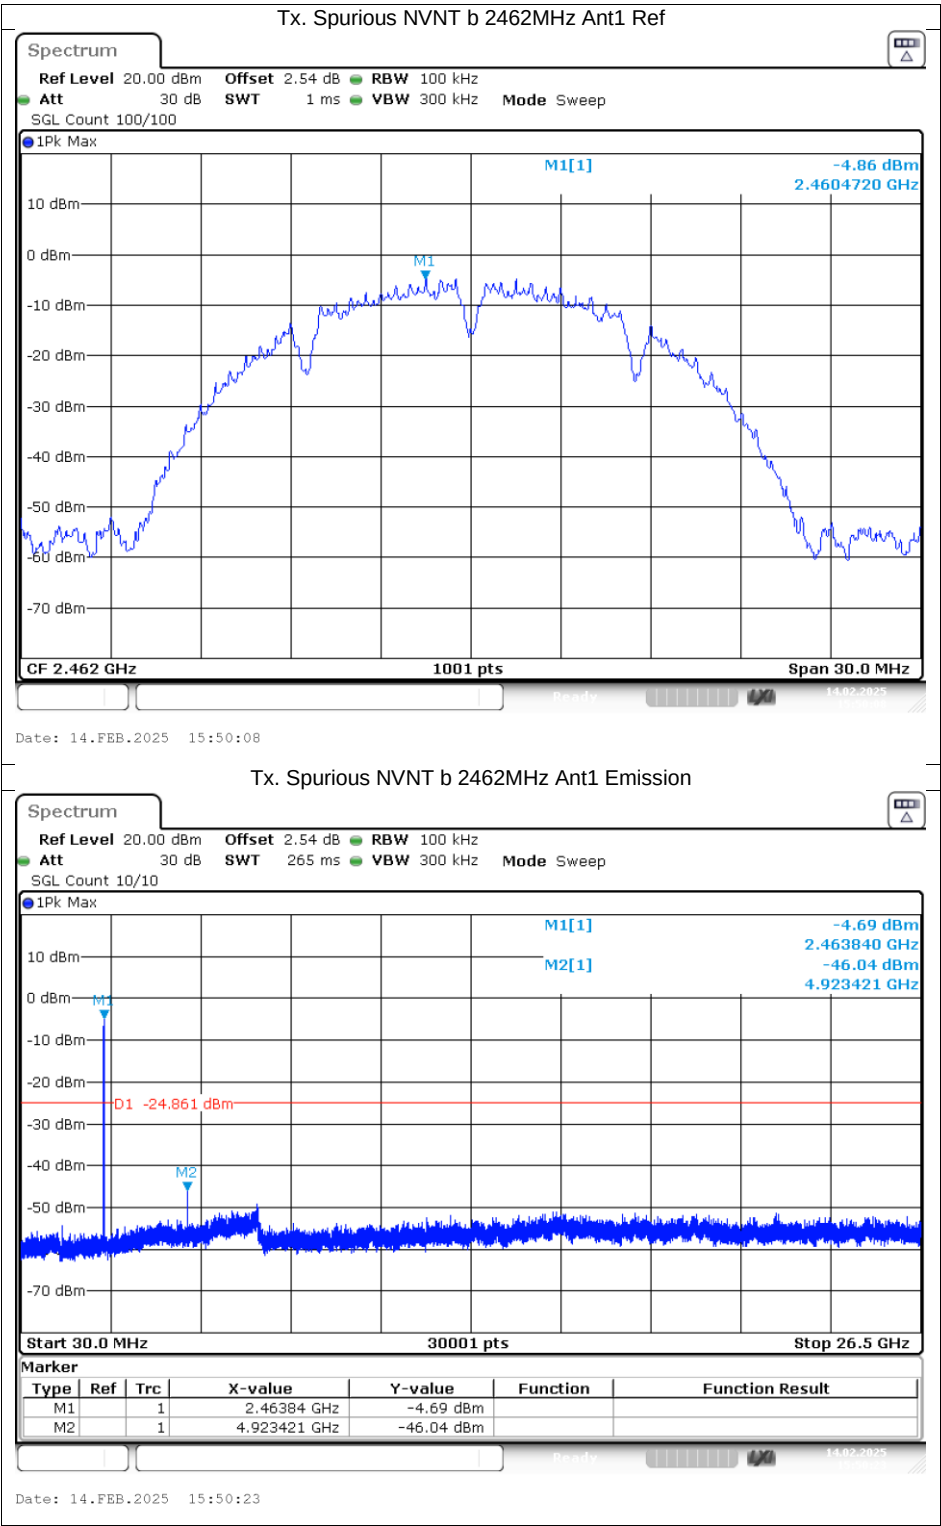

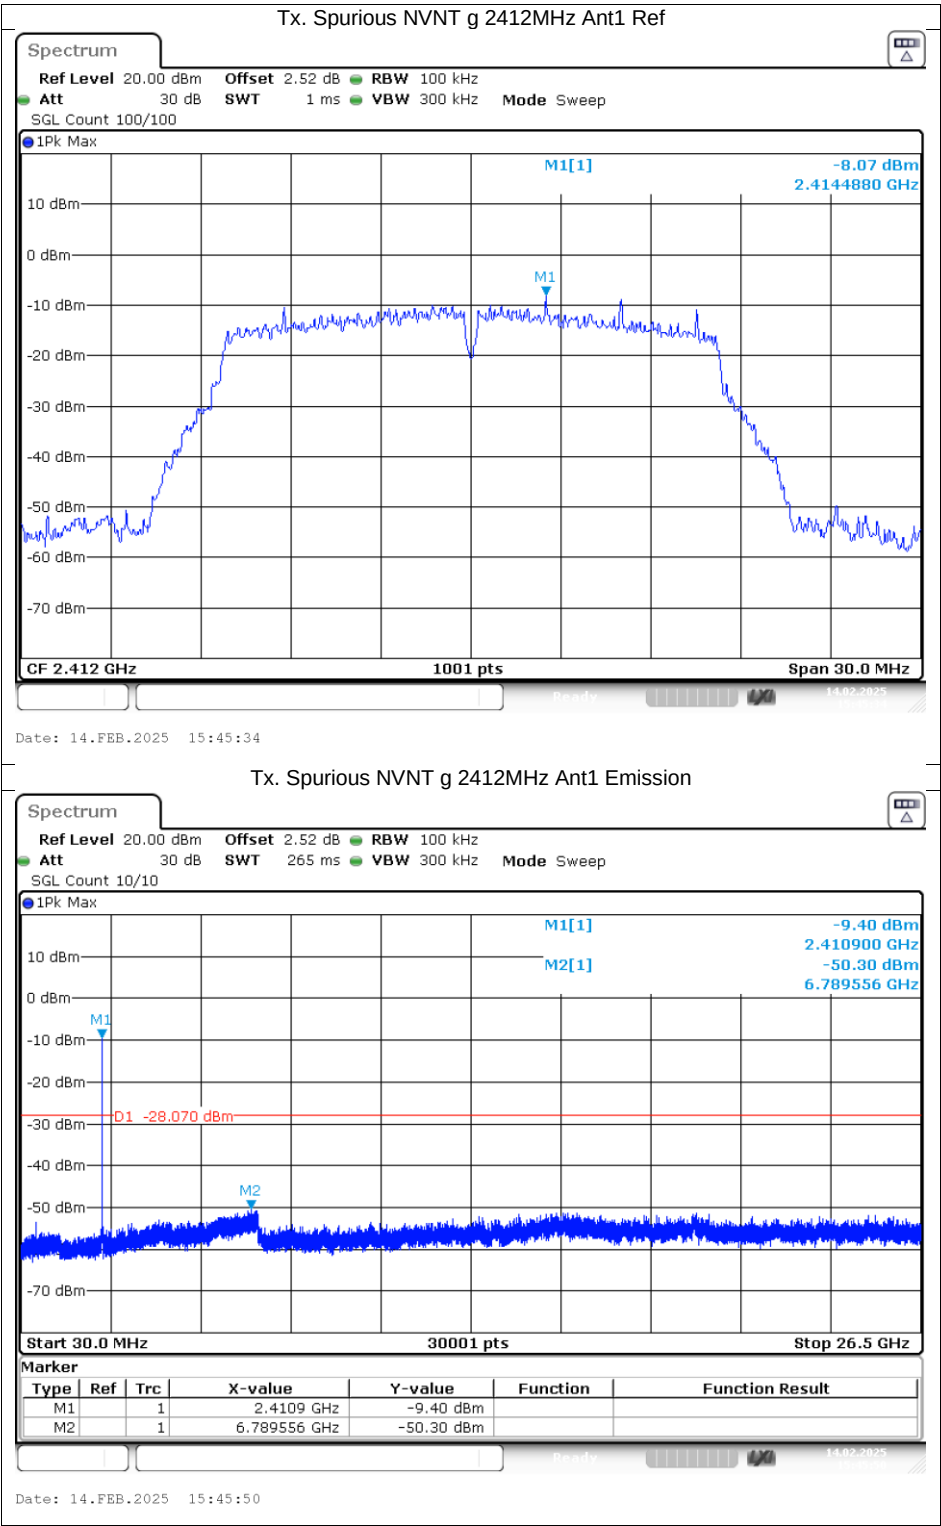


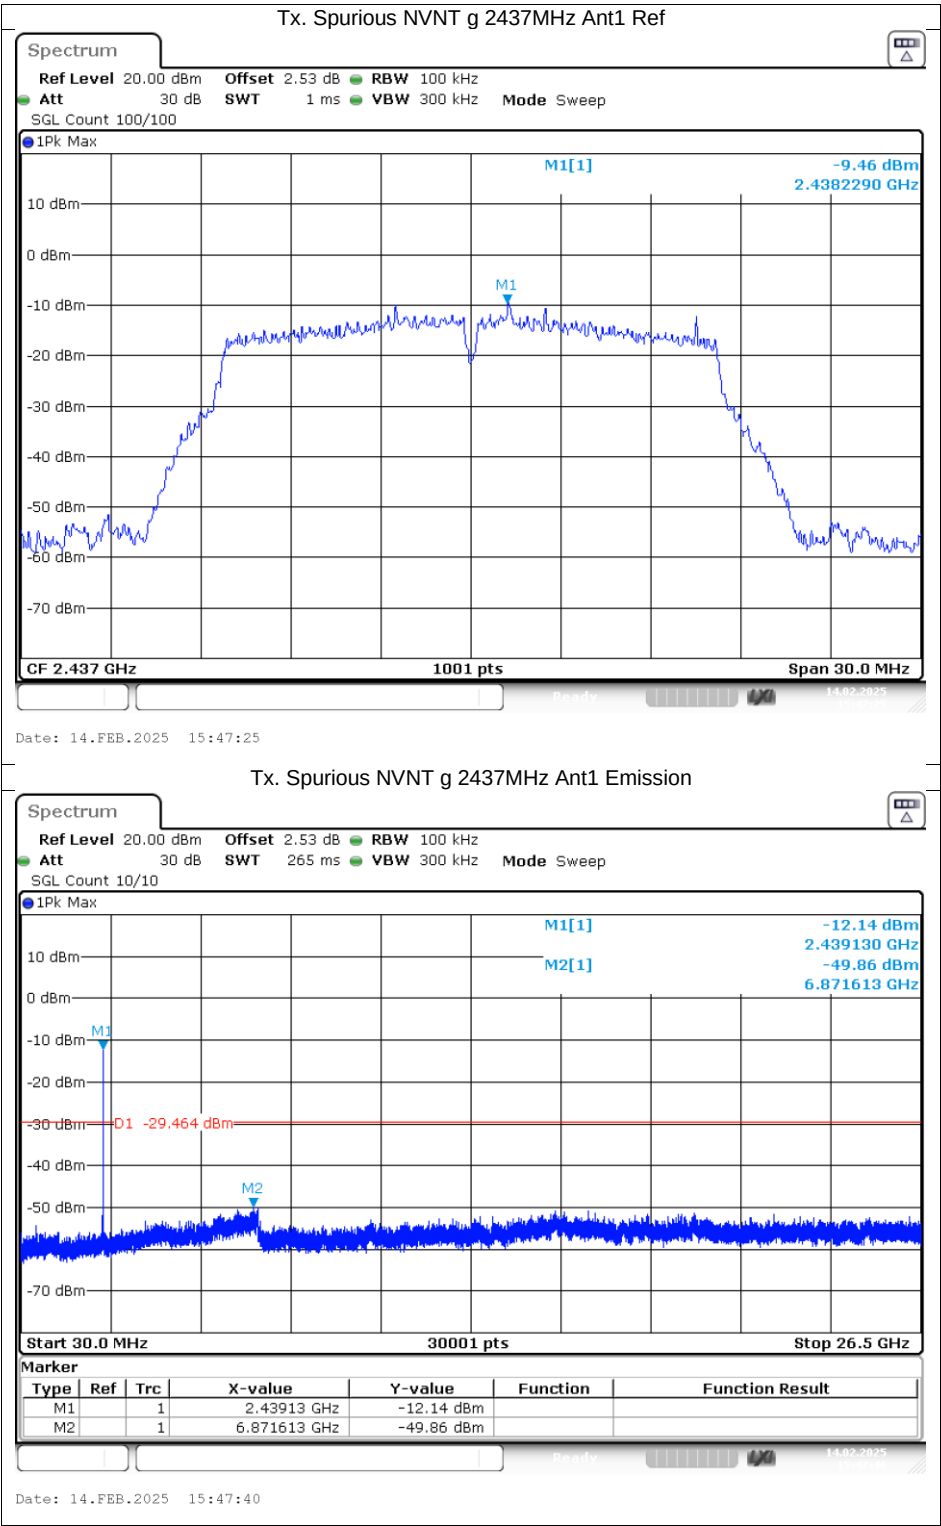


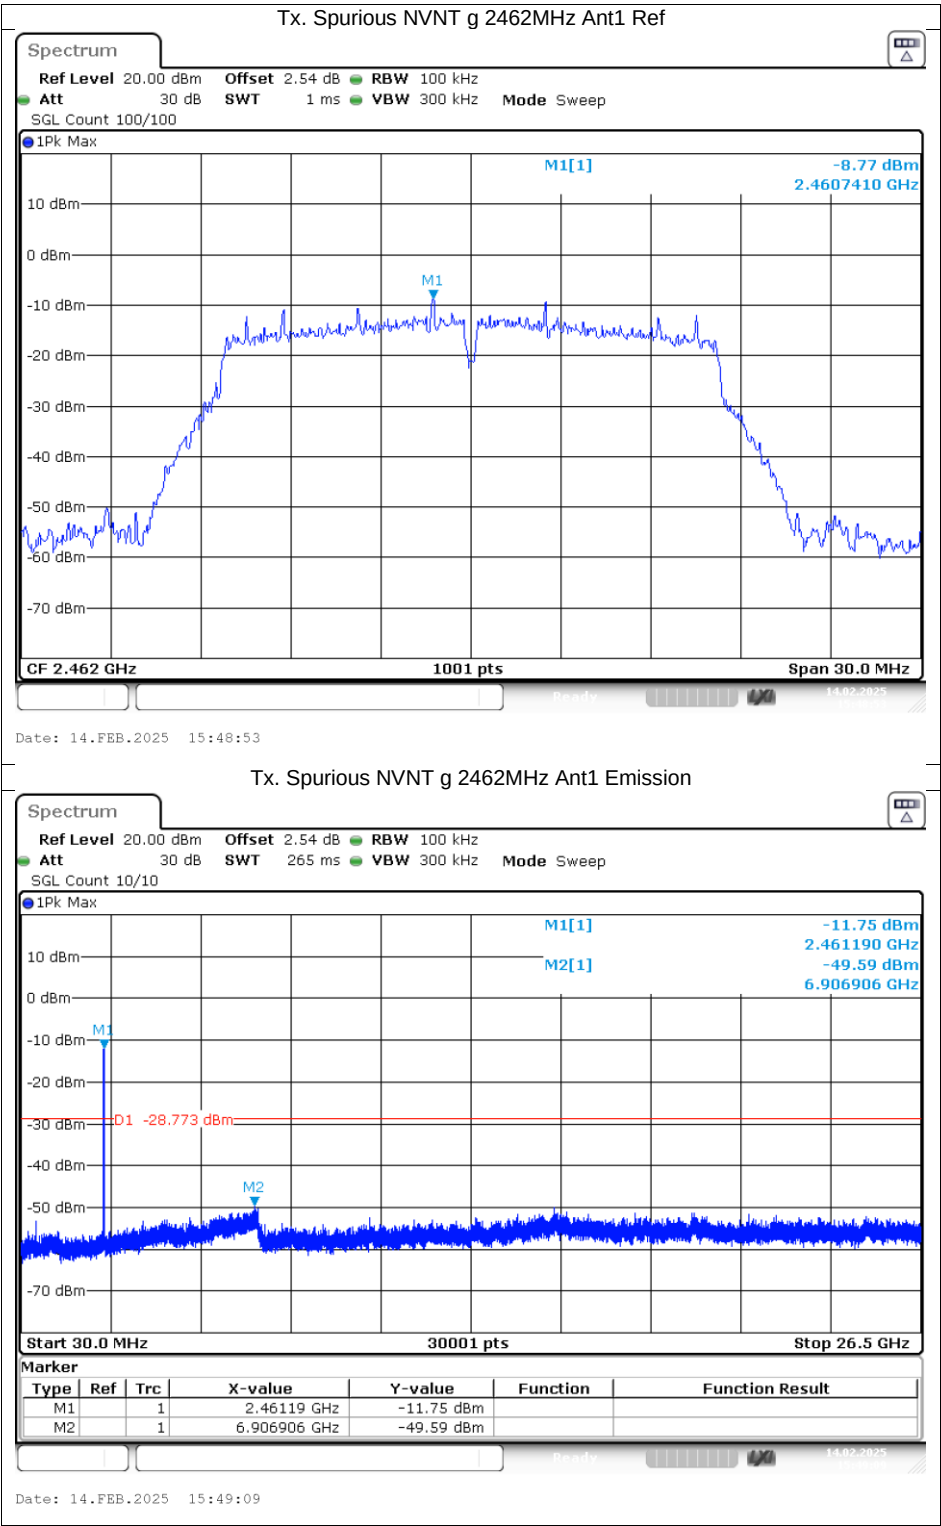


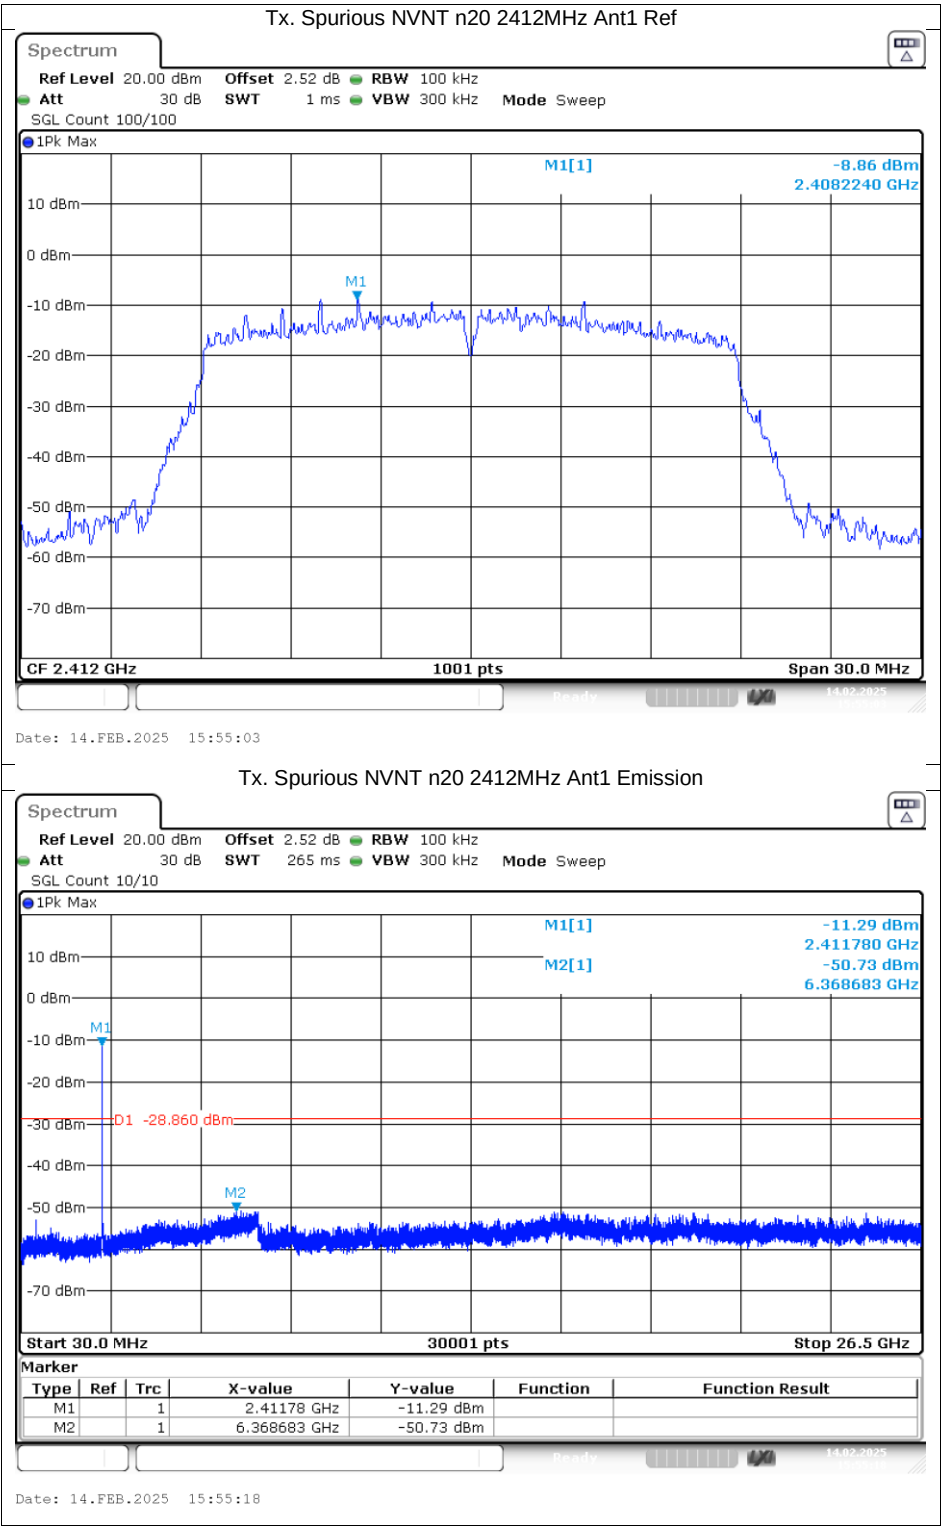





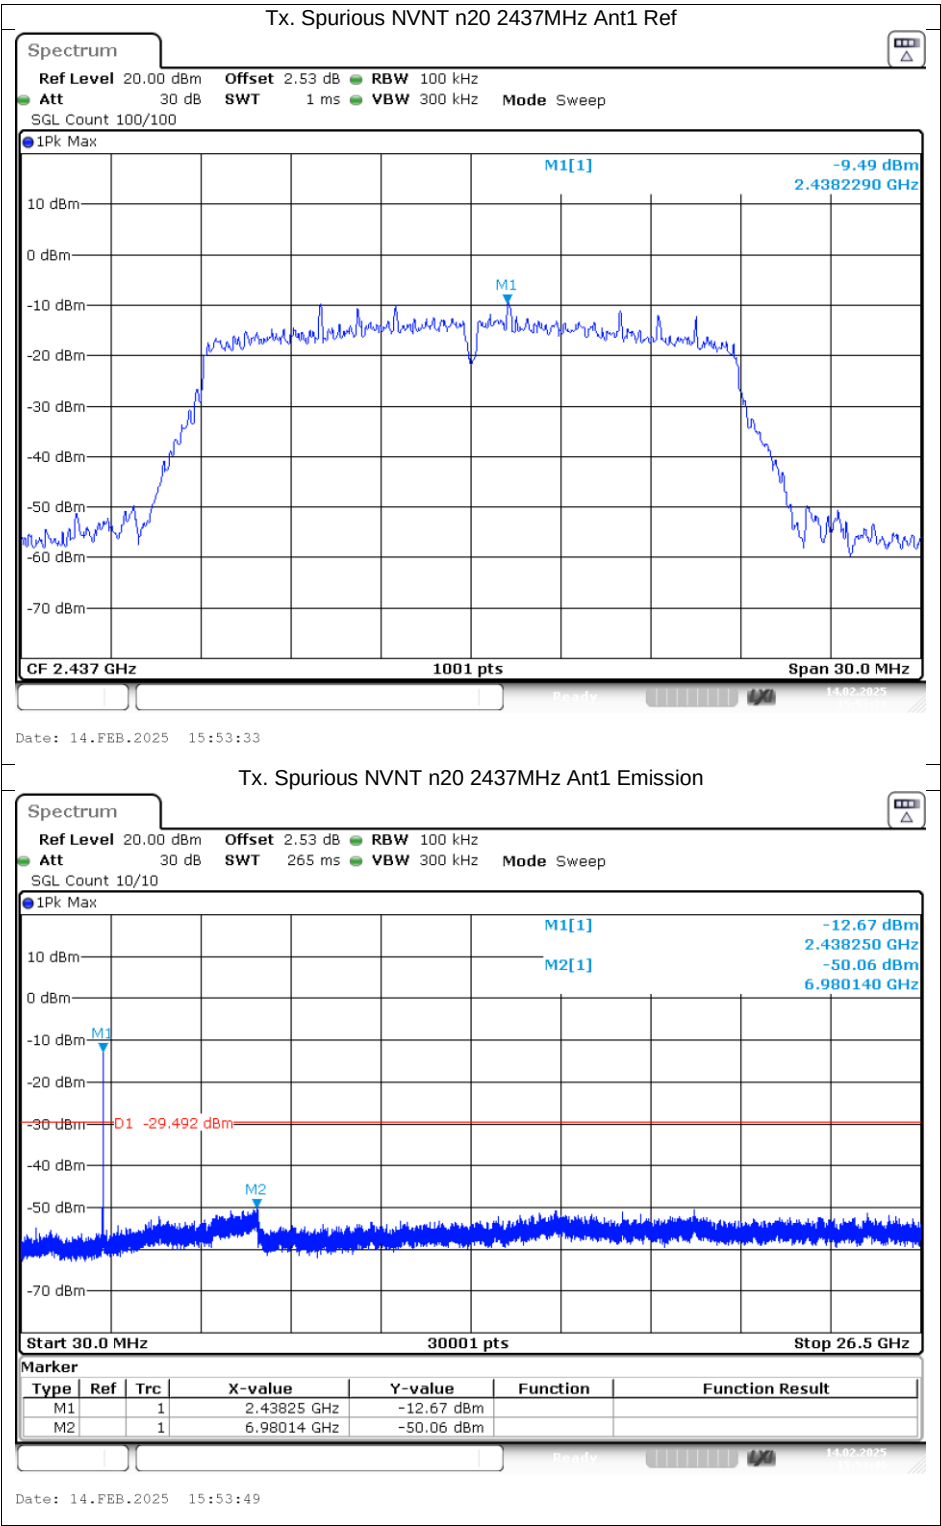


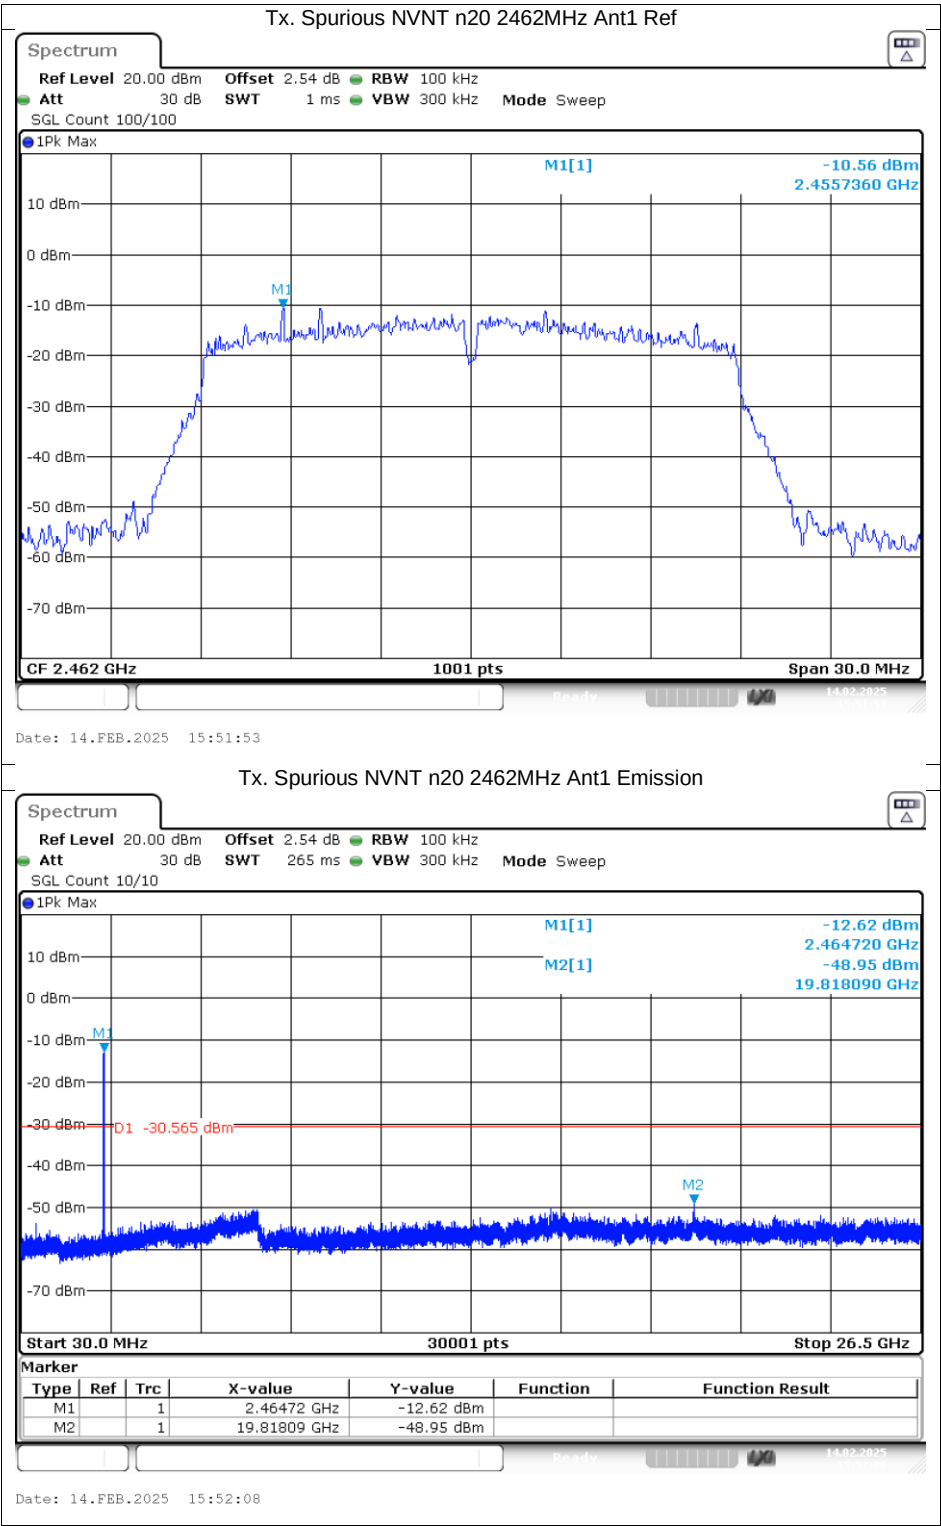


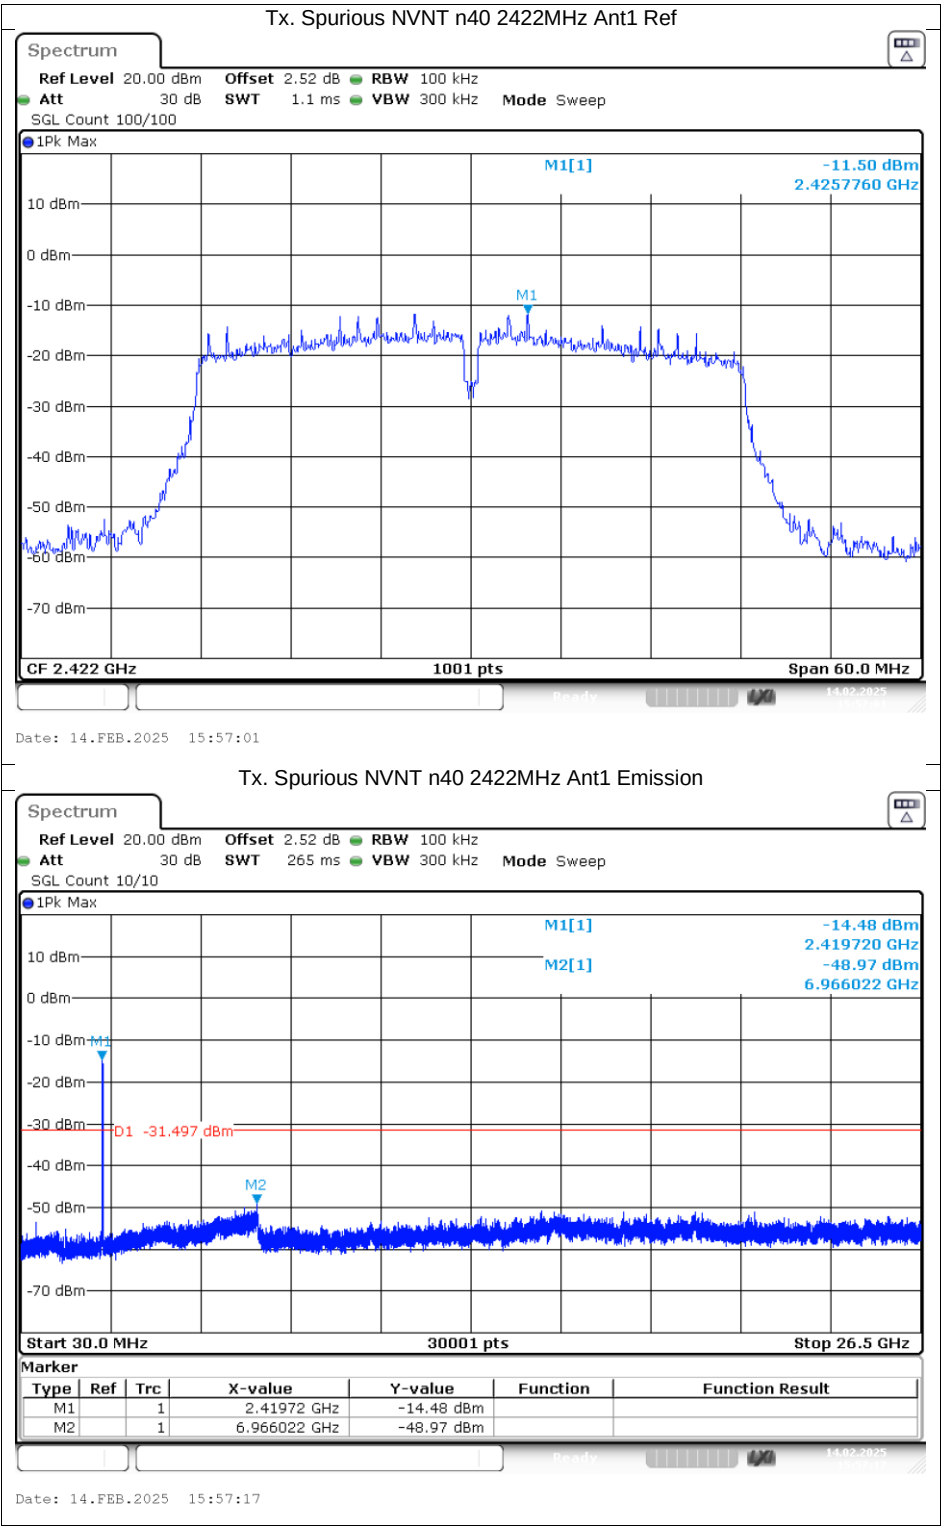


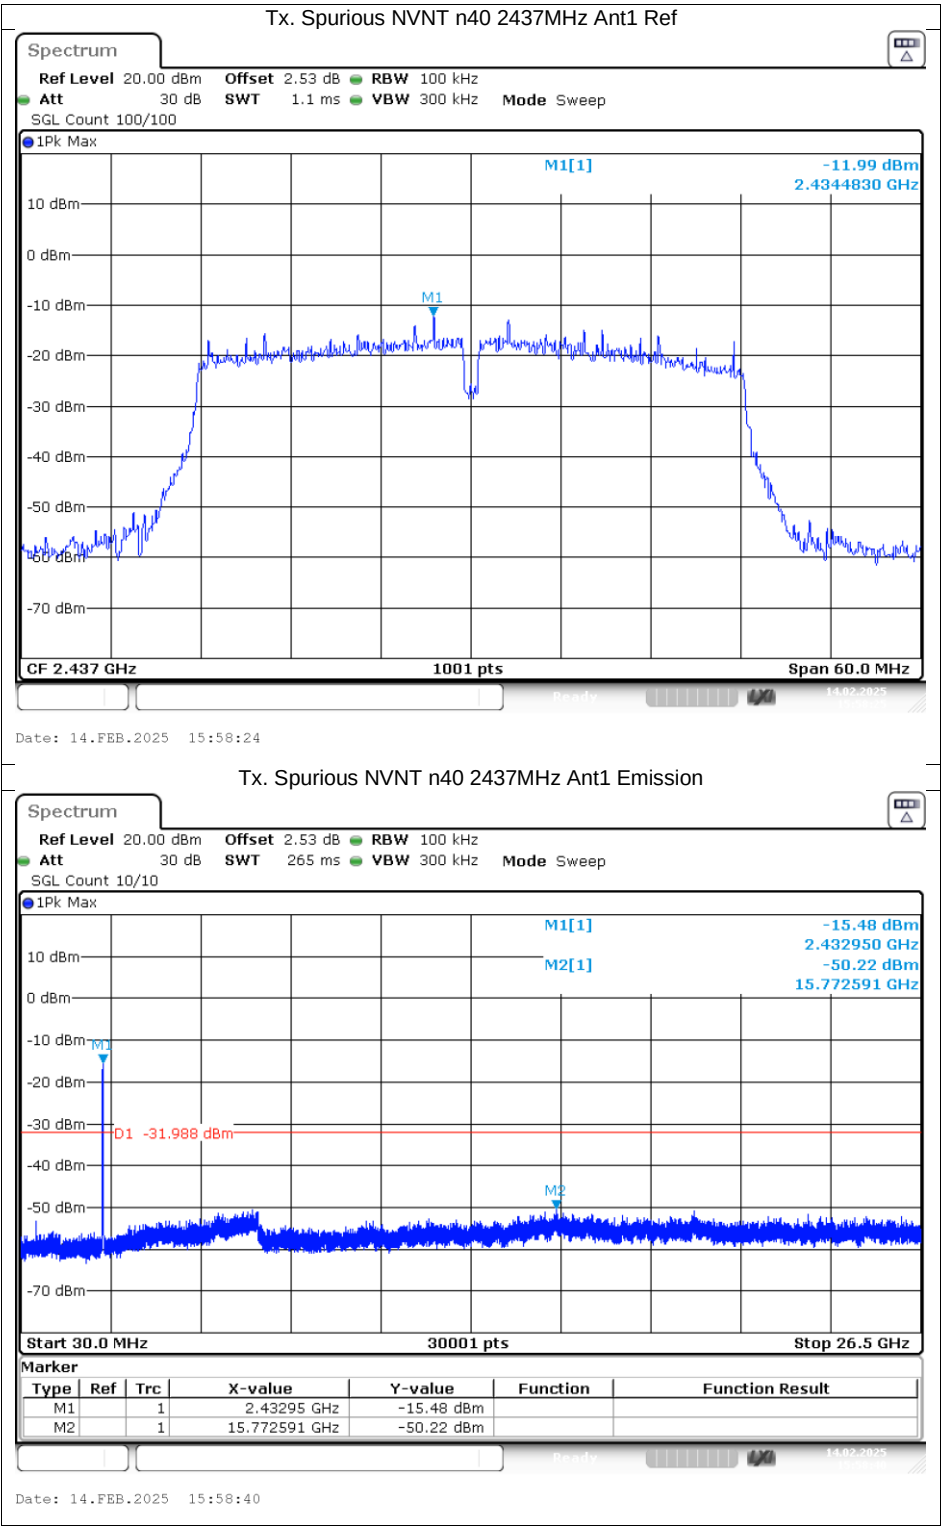


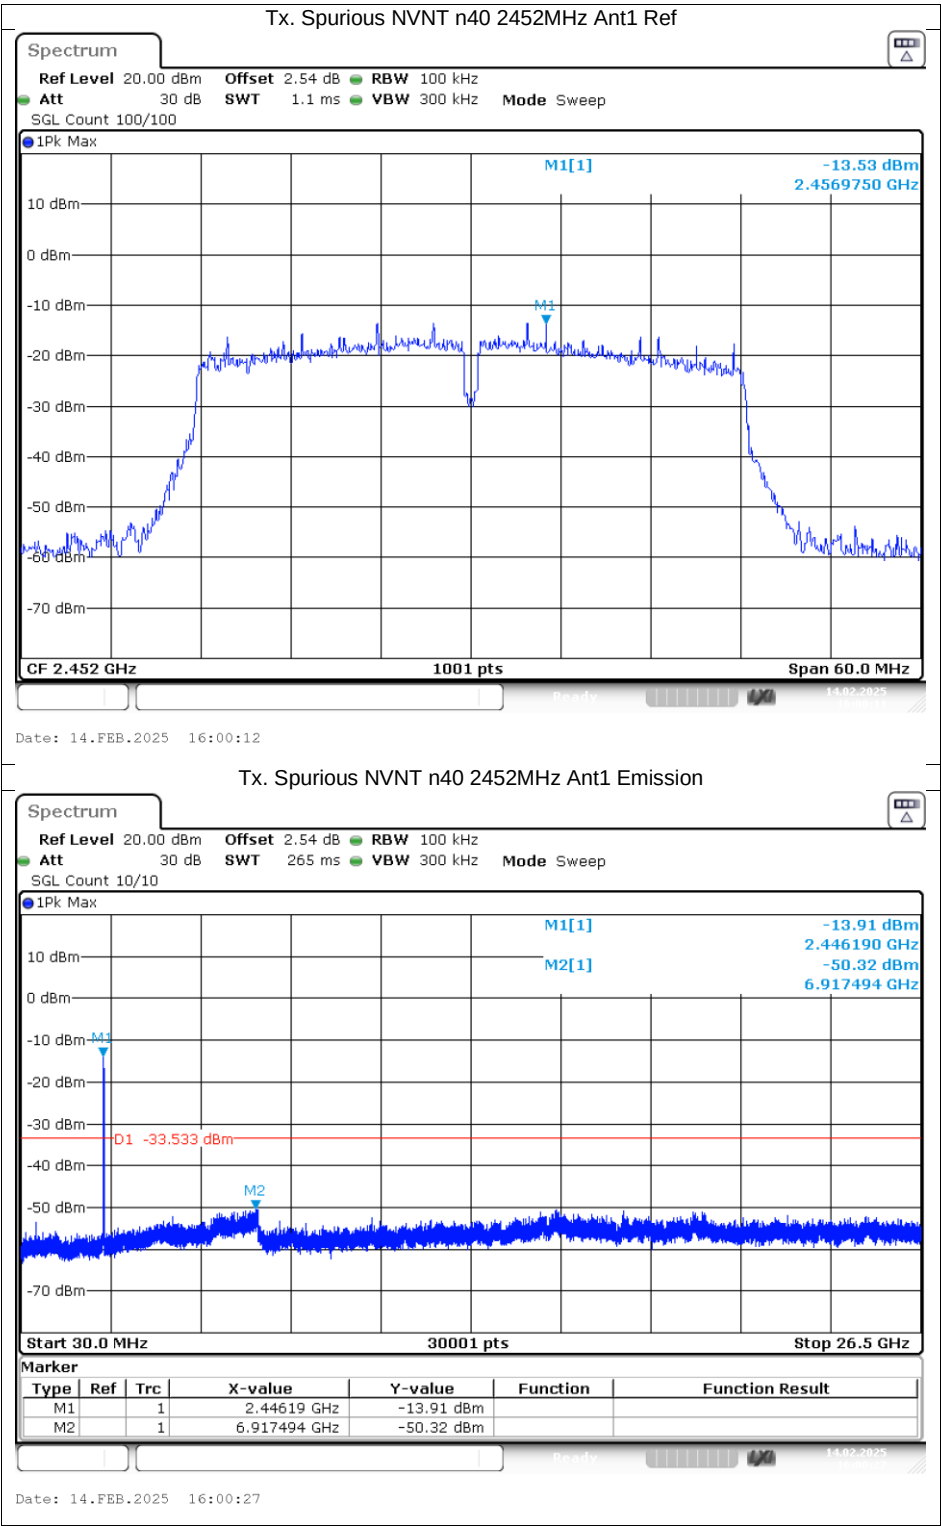

## APPENDIX: PHOTOGRAPHS OF TEST CONFIGURATION

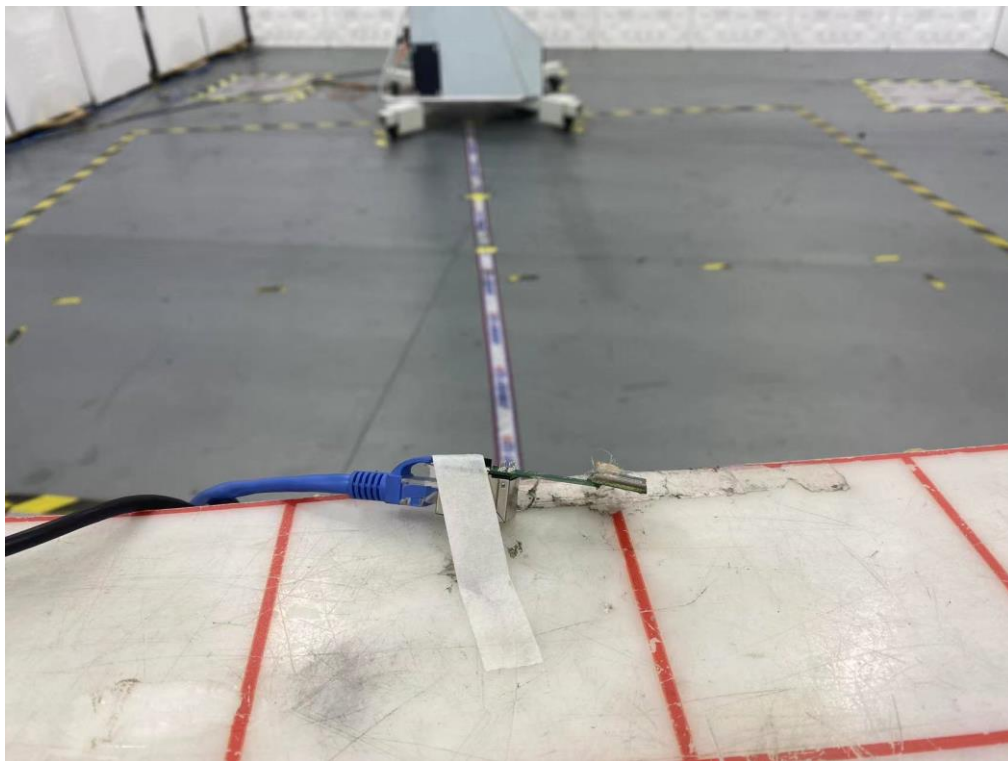
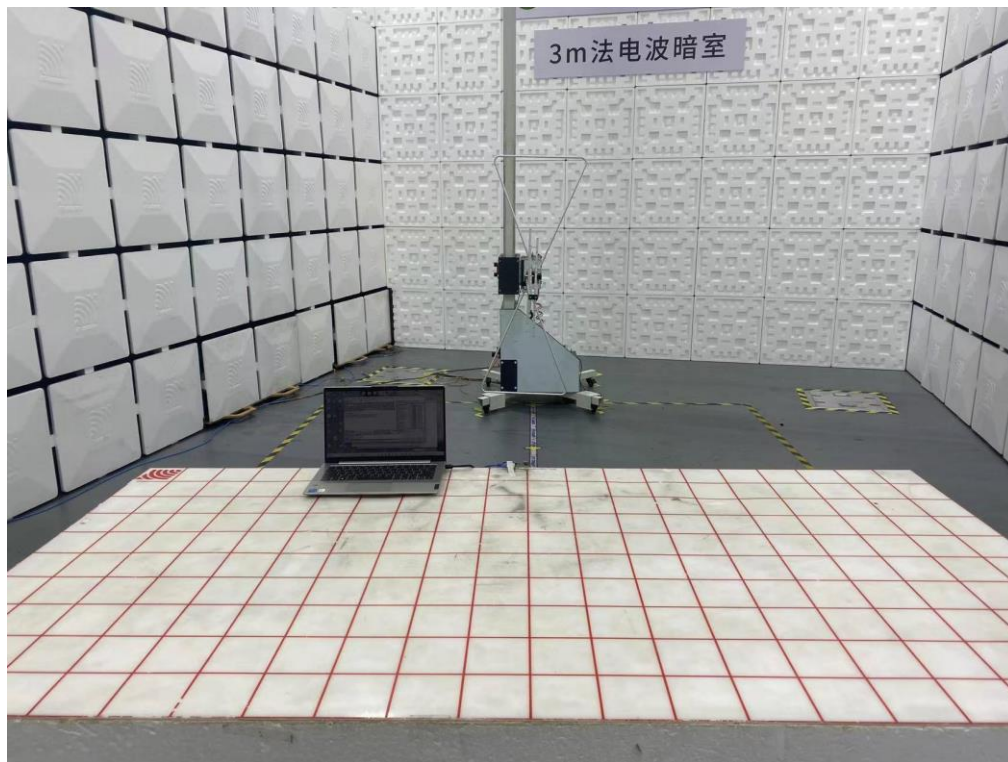




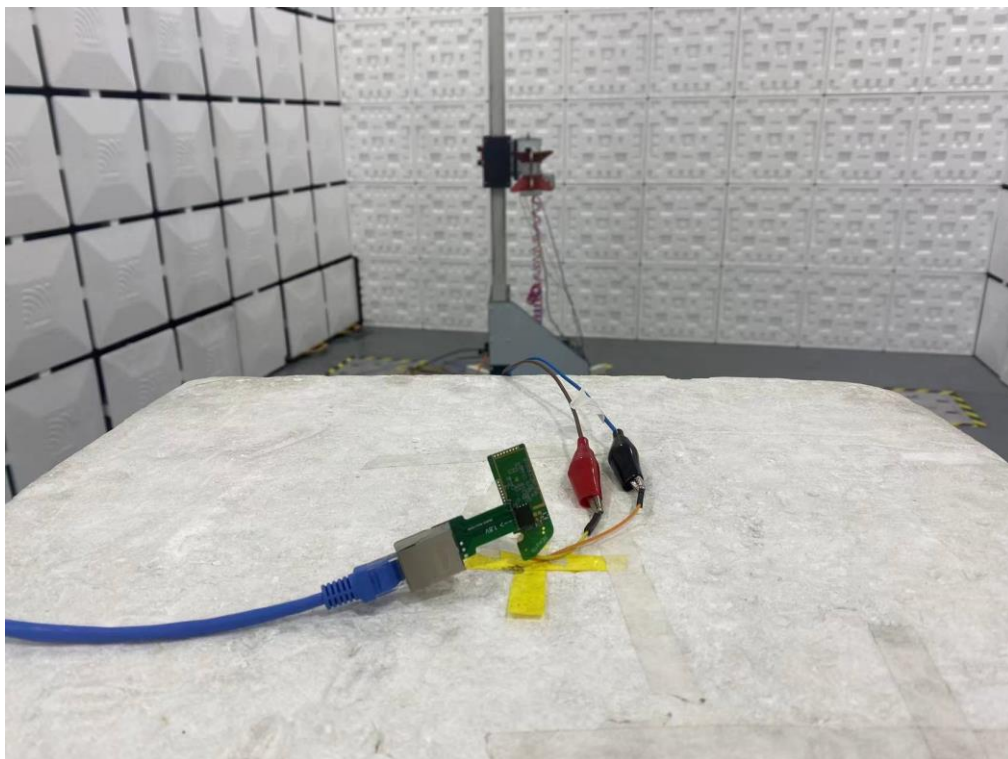
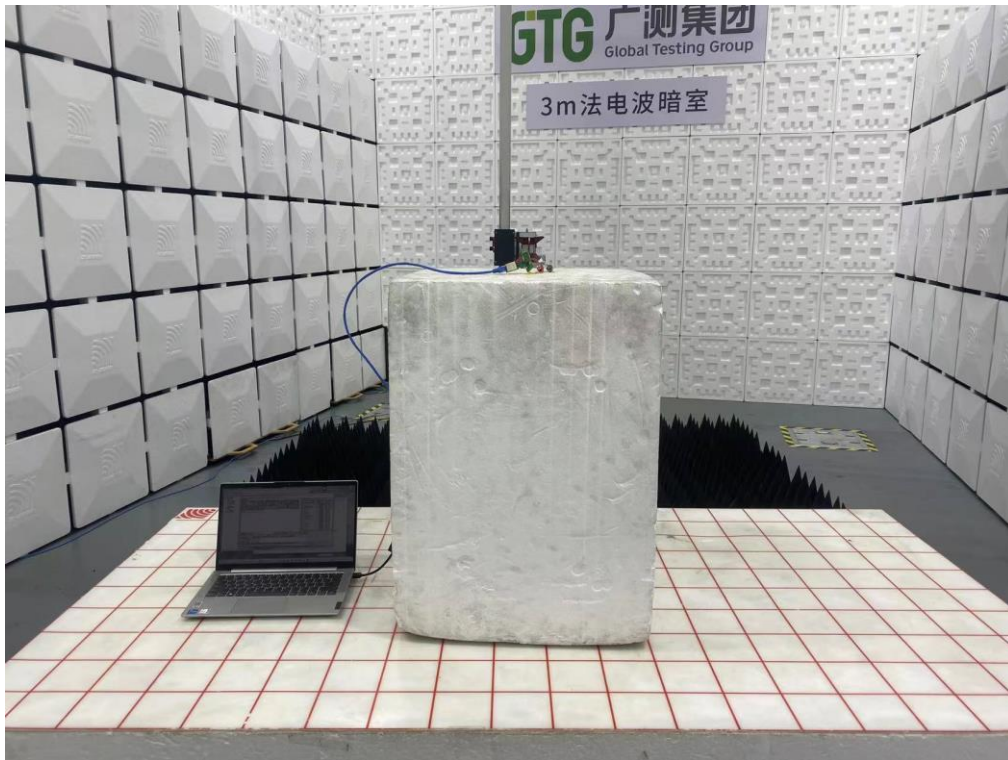





## APPENDIX: PHOTOGRAPHS OF THE EUT

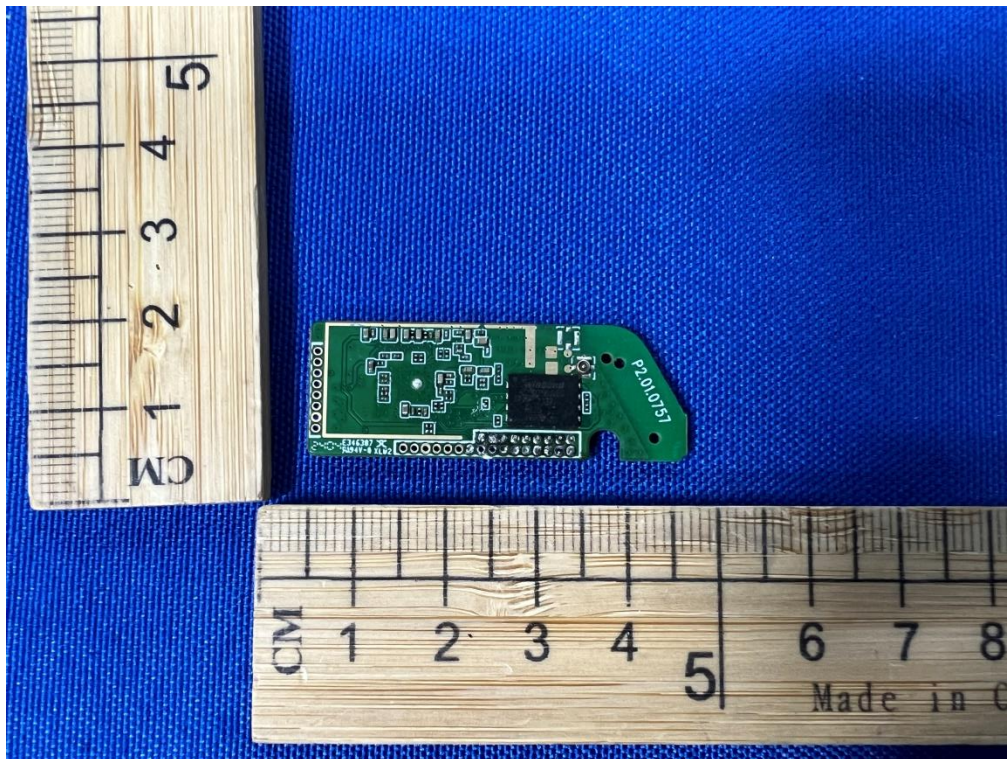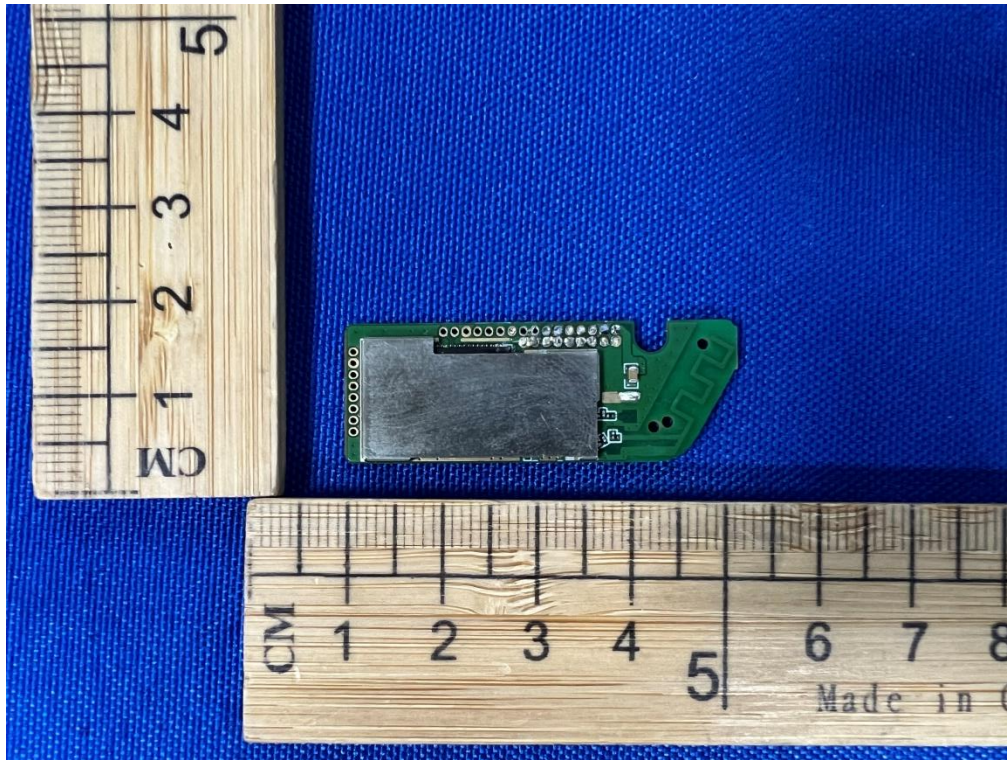



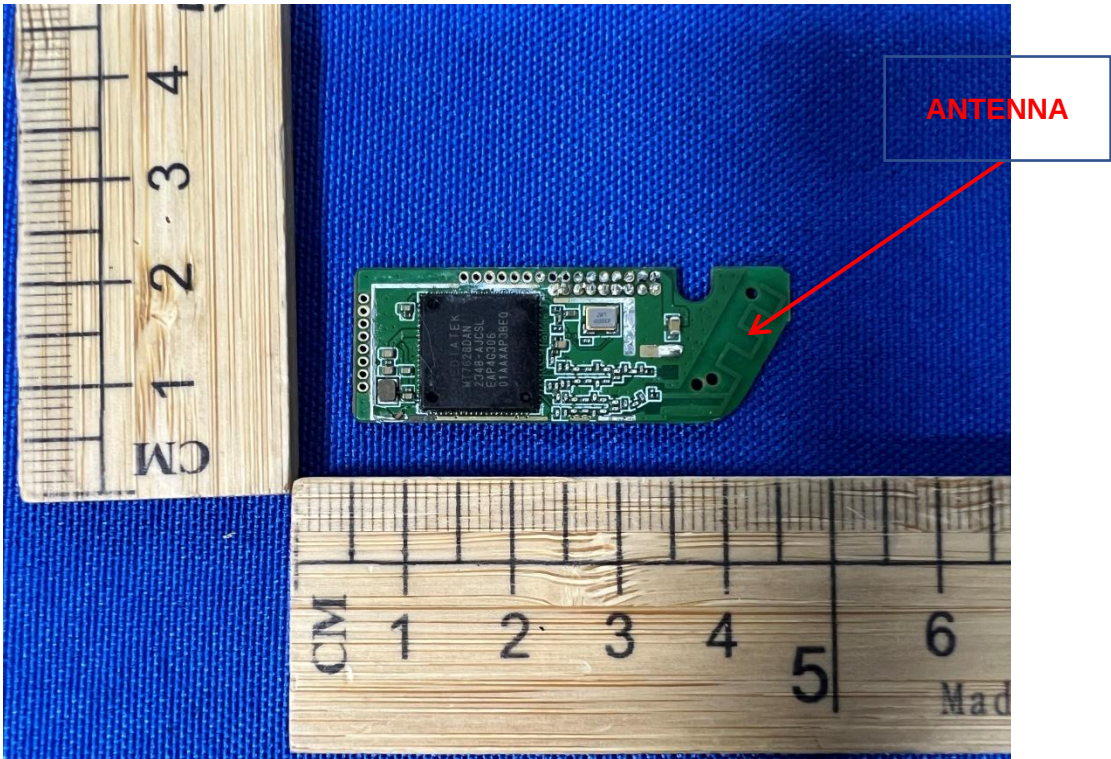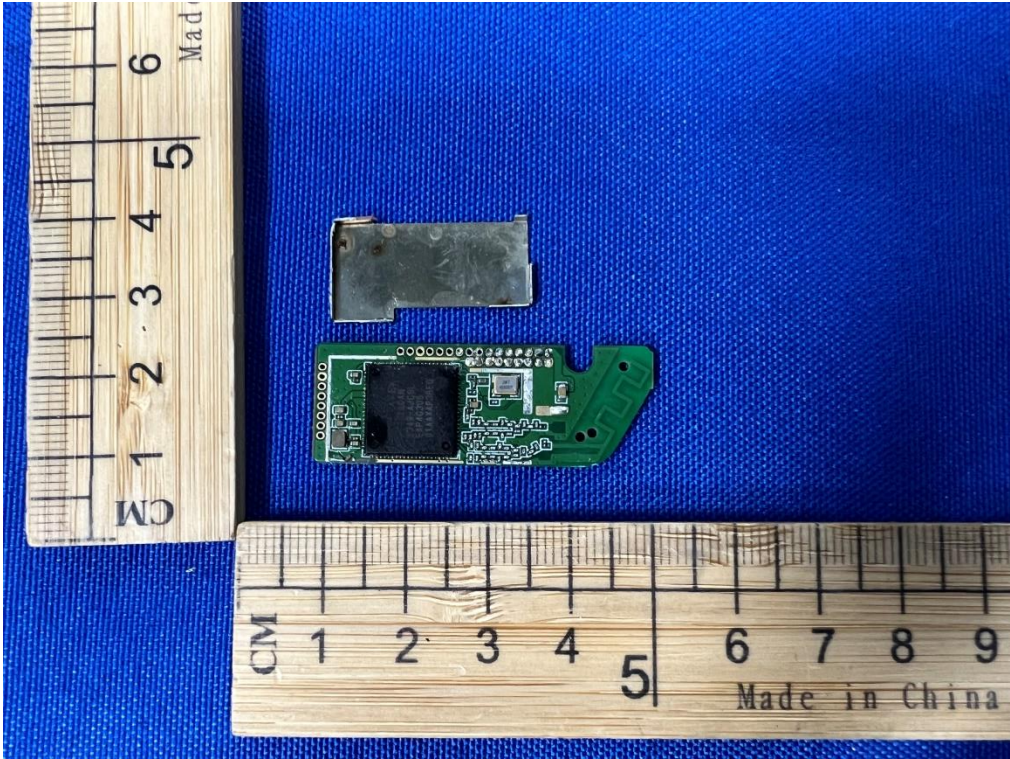

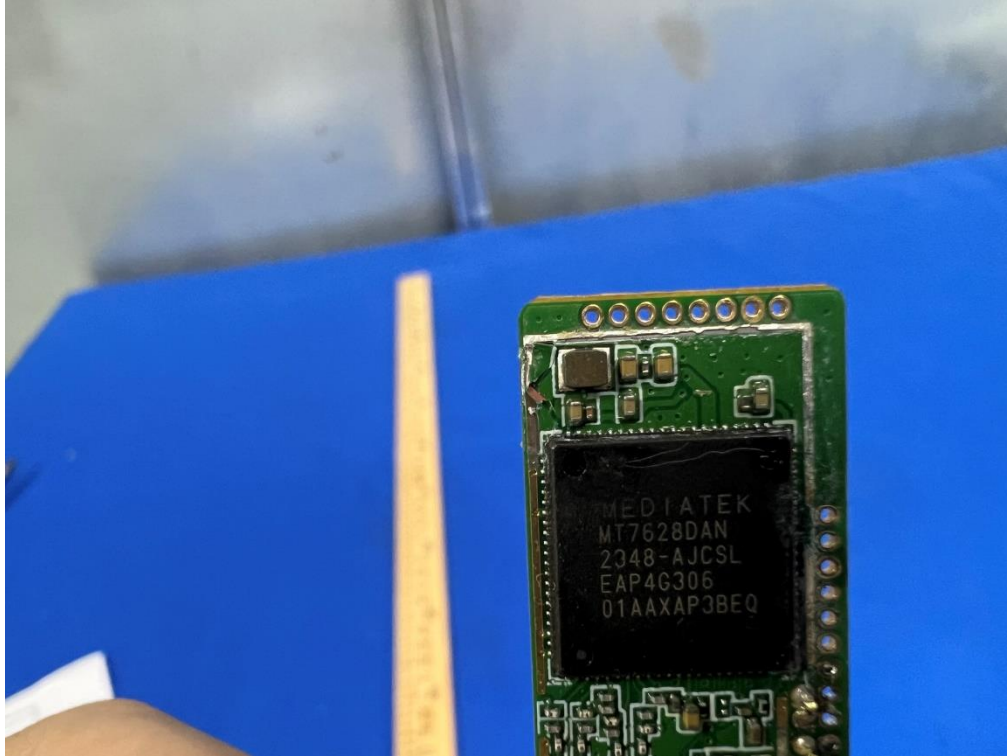

**END OF REPORT**