

8. Transmitter AC Power Line Conducted Emission

8.1 Test Setup

Refer to test setup photo.

8.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohms line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

8.3 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m x 3.5 m x 3.5 m (L x W x H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) x 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4 Test Results

AC Line Conducted Emissions (Graph) = Modulation : GFSK


Results of Conducted Emission

DTNC

Date : 2015-09-18

Order No.	:	Referrence No.	:
Model No.	:	Power Supply	: 120 V / 60Hz
Serial No.	:	Temp/Humi.	: 23°C / 43%
Test Condition	:	Operator	: H.P LEE

Memo :

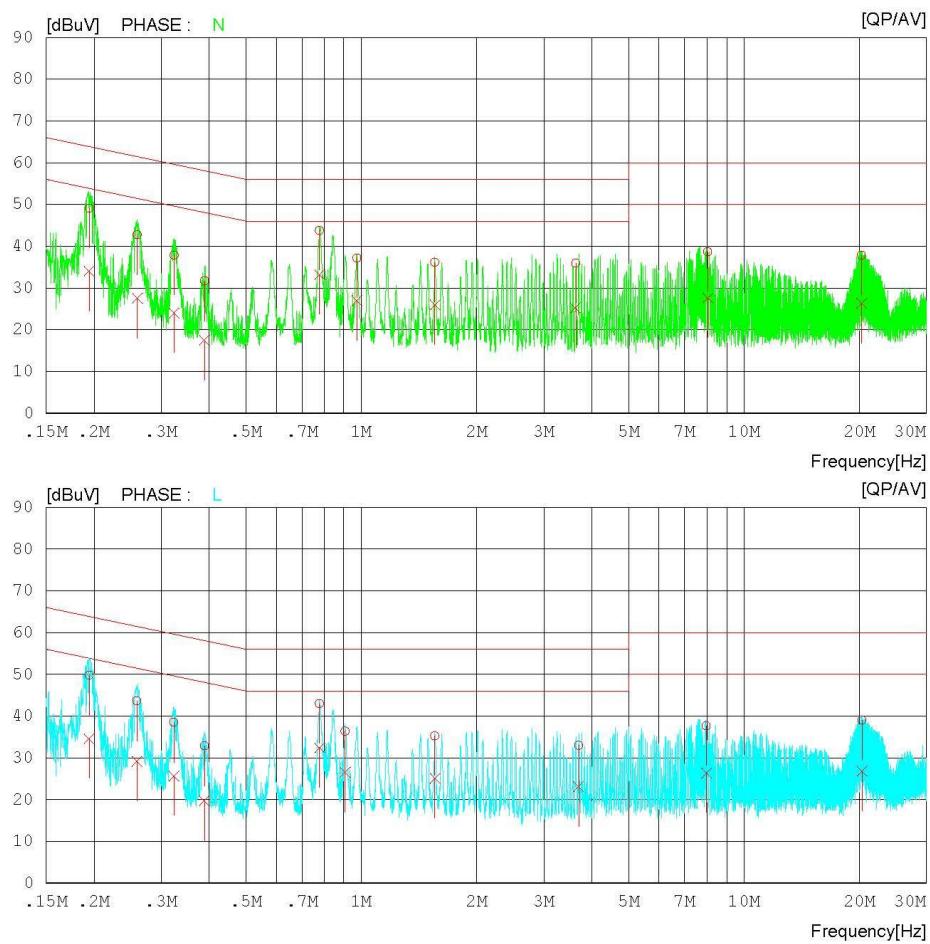 LIMIT : FCC P15.207 QP
 FCC P15.207 AV


AC Line Conducted Emissions (List) = Modulation : GFSK

Results of Conducted Emission

DTNC

Date : 2015-09-18

Order No.	:	KEASMOV1	Reference No.	:
Model No.	:		Power Supply	: 120 V / 60Hz
Serial No.	:		Temp/Humi.	: 23°C / 43%
Test Condition	:	BlueTooth	Operator	: H.P LEE

Memo	:	
------	---	--

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		[dB]	QP [dBuV]	AV [dBuV]	[dBuV]	QP [dBuV]	AV [dBuV]	
1	0.19441	39.0	23.9	10.1	49.1	34.0	63.0	53.0	14.7	19.0	N
2	0.25982	32.6	17.5	10.1	42.7	27.6	61.4	51.4	18.7	23.8	N
3	0.32428	27.7	13.9	10.1	37.8	24.0	59.6	49.6	21.8	25.6	N
4	0.38895	21.6	7.3	10.1	31.7	17.4	58.1	48.1	26.4	30.7	N
5	0.77788	33.7	23.1	10.1	43.8	33.2	56.0	46.0	12.2	12.8	N
6	0.97300	27.1	16.9	10.1	37.2	27.0	56.0	46.0	18.8	19.0	N
7	1.55660	26.0	15.7	10.2	36.2	25.9	56.0	46.0	19.8	20.1	N
8	3.63080	25.7	15.1	10.2	35.9	25.3	56.0	46.0	20.1	20.7	N
9	8.04340	28.2	17.1	10.5	38.7	27.6	60.0	50.0	21.3	22.4	N
10	20.30080	27.1	15.6	10.7	37.8	26.3	60.0	50.0	22.2	23.7	N
11	0.19440	39.6	24.5	10.1	49.7	34.6	63.8	53.8	14.1	19.2	L
12	0.25896	33.5	19.0	10.1	43.6	29.1	61.5	51.5	17.9	22.4	L
13	0.32379	28.4	15.5	10.1	38.5	25.6	59.6	49.6	21.1	24.0	L
14	0.38912	22.7	9.5	10.1	32.8	19.6	58.1	48.1	25.3	29.5	L
15	0.77023	32.0	22.3	10.1	42.9	32.4	56.0	46.0	13.1	13.6	L
16	0.90711	26.2	16.4	10.1	36.3	26.5	56.0	46.0	19.7	19.5	L
17	1.55720	25.0	14.8	10.2	35.2	25.0	56.0	46.0	20.8	21.0	L
18	3.69360	22.7	12.8	10.2	32.9	23.0	56.0	46.0	23.1	23.0	L
19	7.97700	27.0	15.8	10.6	37.6	26.4	60.0	50.0	22.4	23.6	L
20	20.36480	28.2	16.1	10.8	39.0	26.9	60.0	50.0	21.0	23.1	L

9. Antenna Requirement

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

Conclusion: Comply

The antenna is permanently attached. (Refer to Internal photo file.)

- Minimum Standard :

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

10. Occupied Bandwidth (99 %)

10.1 Test Setup

Refer to the APPENDIX I.

10.2 Limit

Limit : Not Applicable

10.3 Test Procedure

The 99 % power bandwidth was measured with a calibrated spectrum analyzer.

The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video

bandwidth (VBW) shall be approximately $3 \times \text{RBW}$.

Spectrum analyzer plots are included on the following pages.


10.4 Test Results

Not Applicable


APPENDIX I

Test set up diagrams

▪ Radiated Measurement

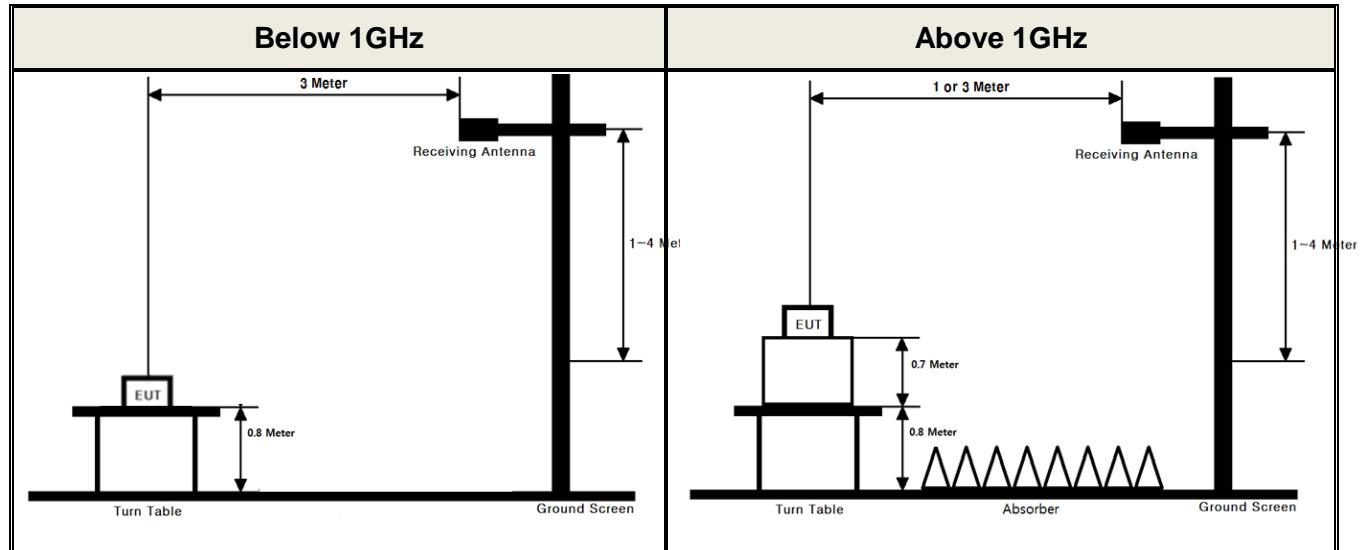

▪ Conducted Measurement

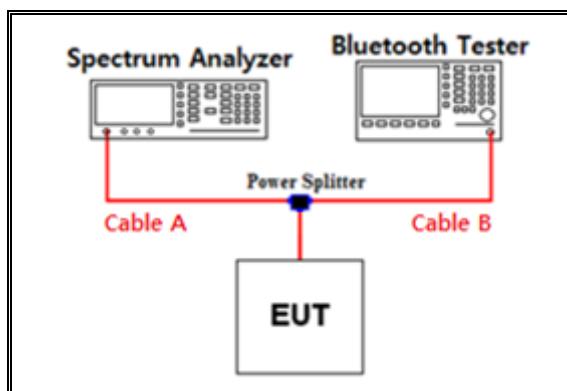

Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	6.13	15	7.34
1	6.46	20	7.99
2402 & 2440 & 2480	6.94	25	8.36
5	7.20	-	-
10	7.26	-	-

Note 1 : The path loss from EUT to Spectrum analyzer were measured and used for test.


Path loss (S/A's Correction factor) = Cable A + Power splitter

APPENDIX II

Unwanted Emissions (Radiated) Test Plot


GFSK & Lowest & Fundamental

Detector Mode : PK

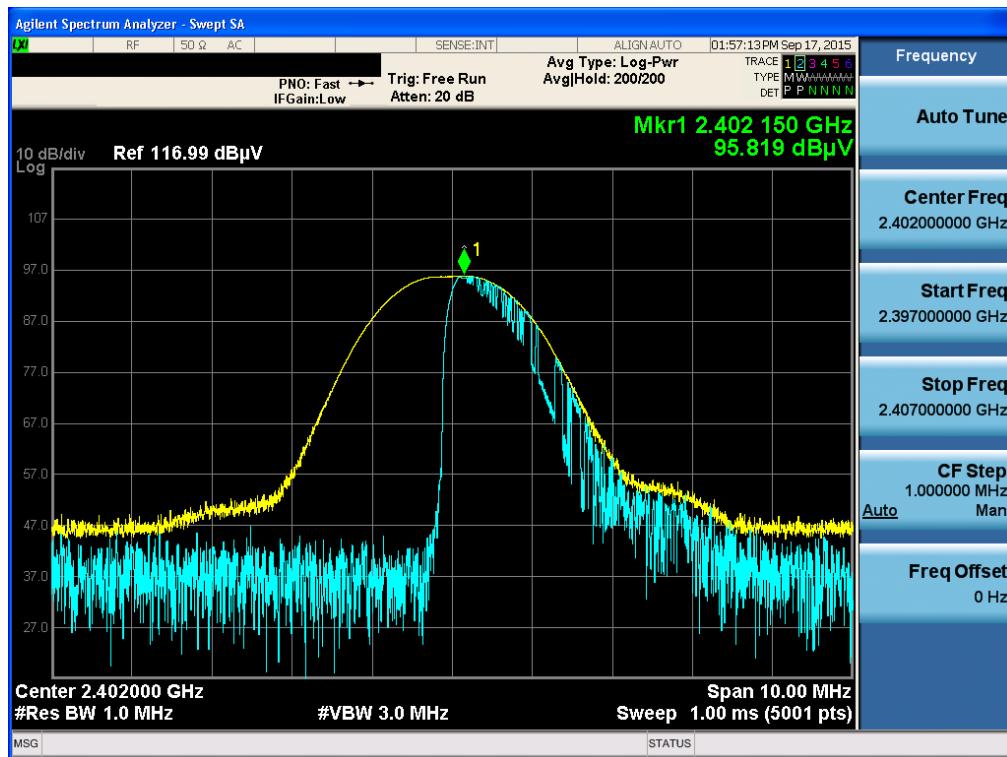


GFSK & Lowest & X axis & Ver

Detector Mode : PK

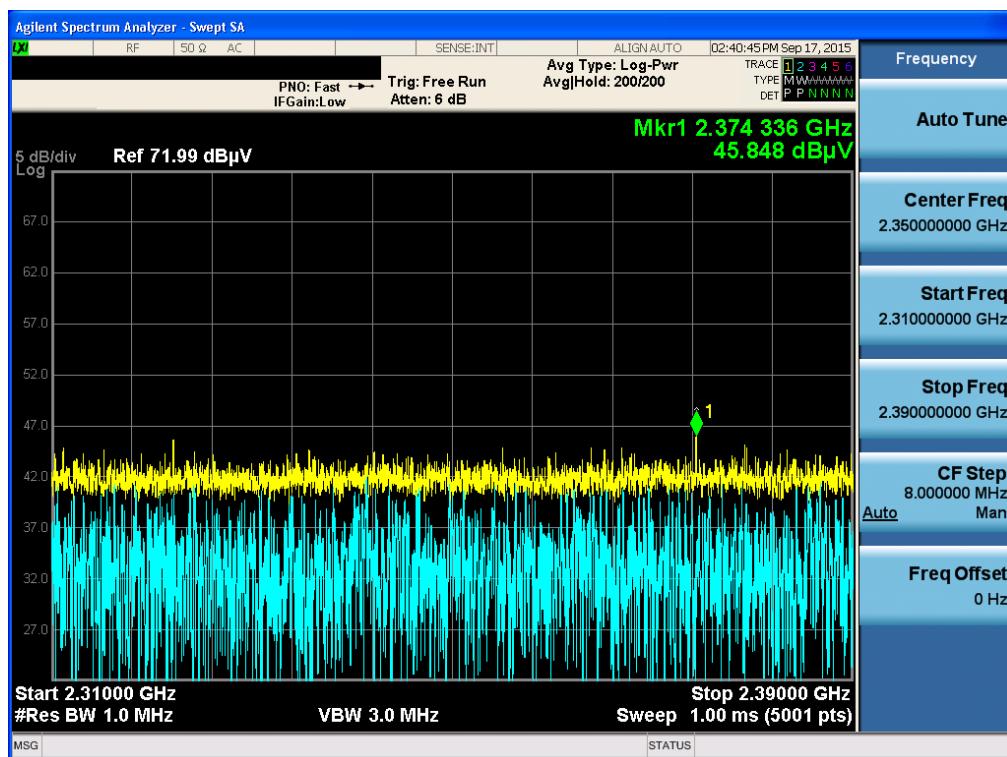


GFSK & Lowest & X axis & Ver

Detector Mode : AV

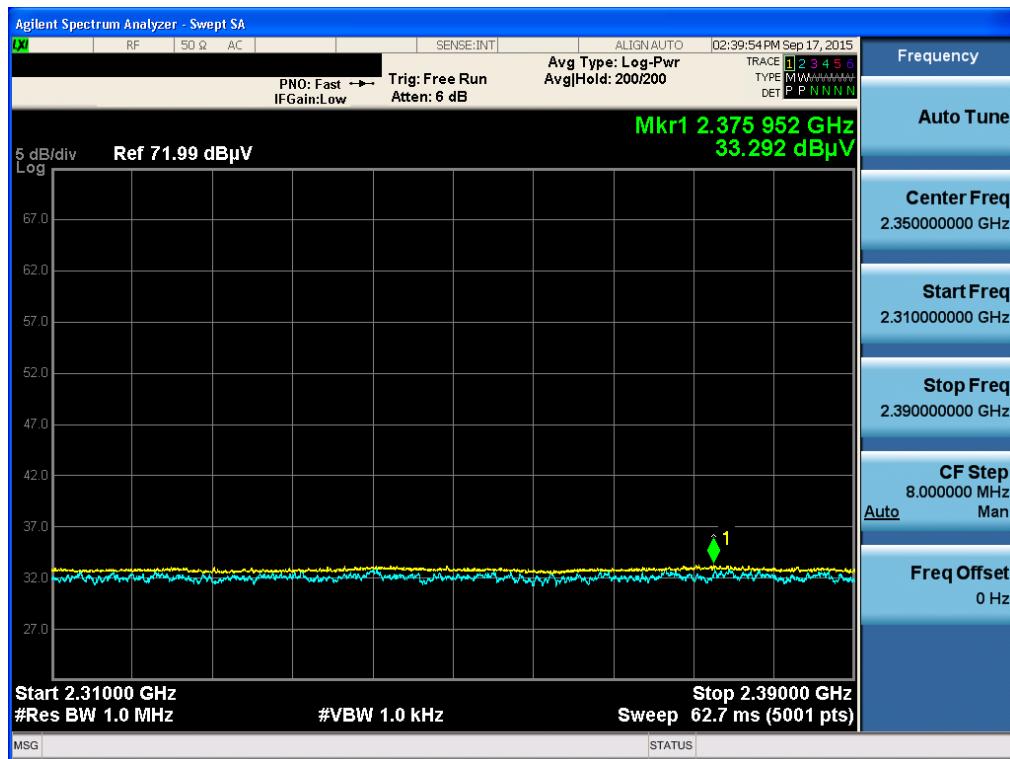


GFSK & Lowest & X axis & Ver

Detector Mode : PK

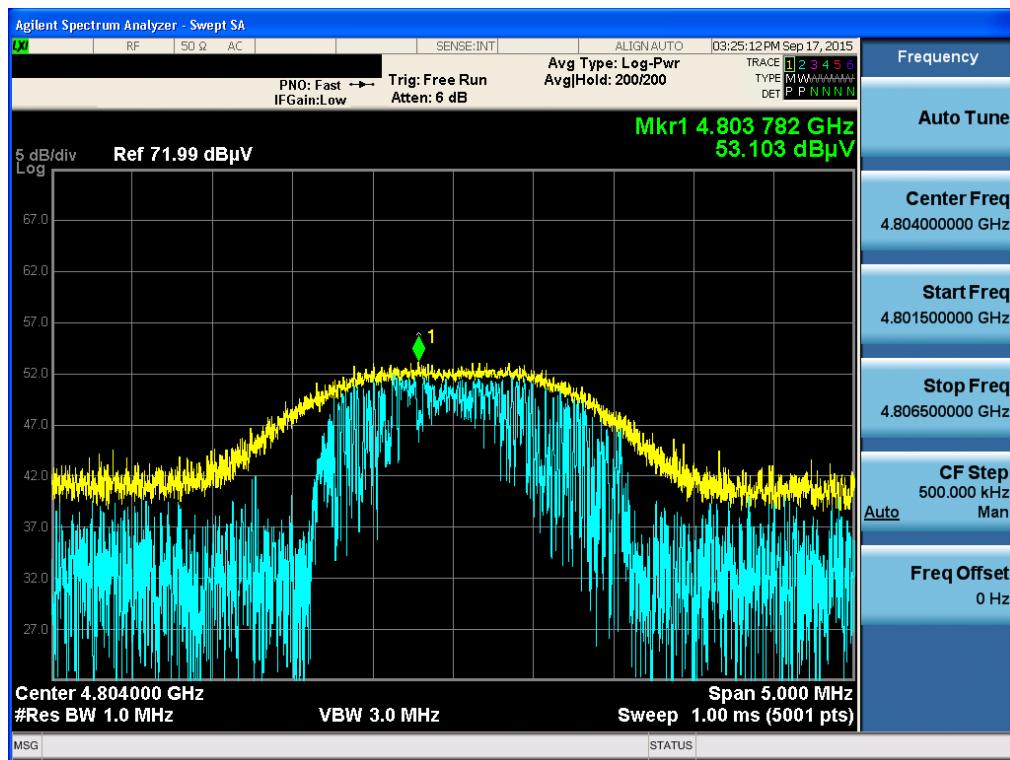


GFSK & Lowest & X axis & Ver

Detector Mode : AV

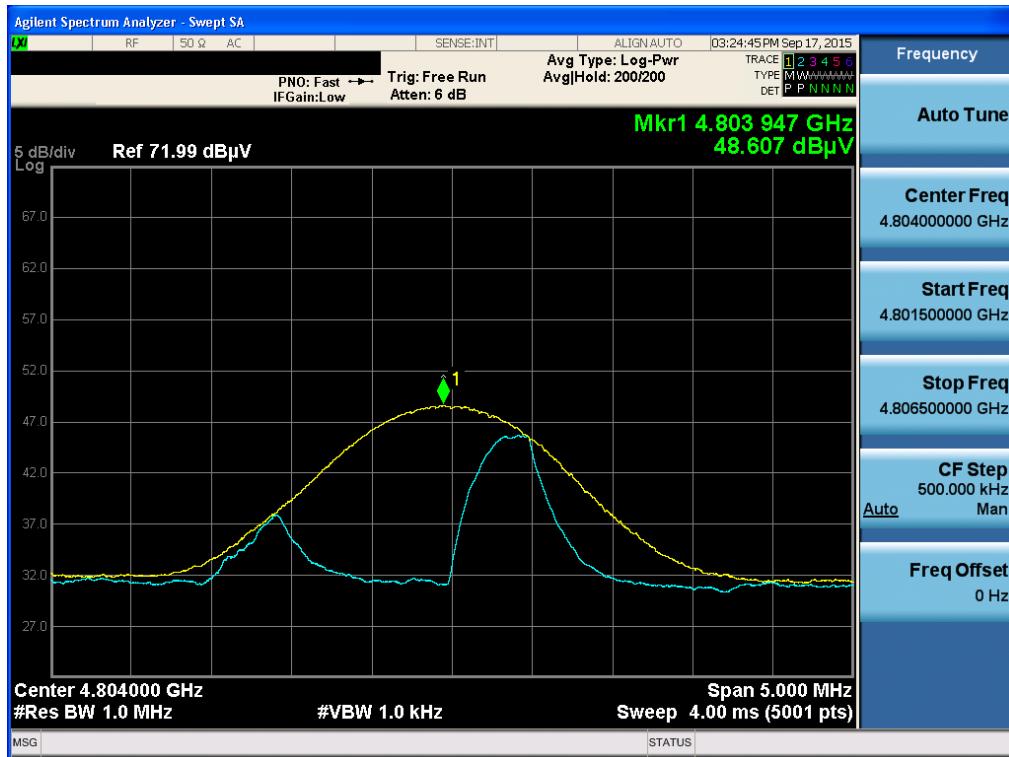


GFSK & Lowest & X axis & Ver

Detector Mode : PK

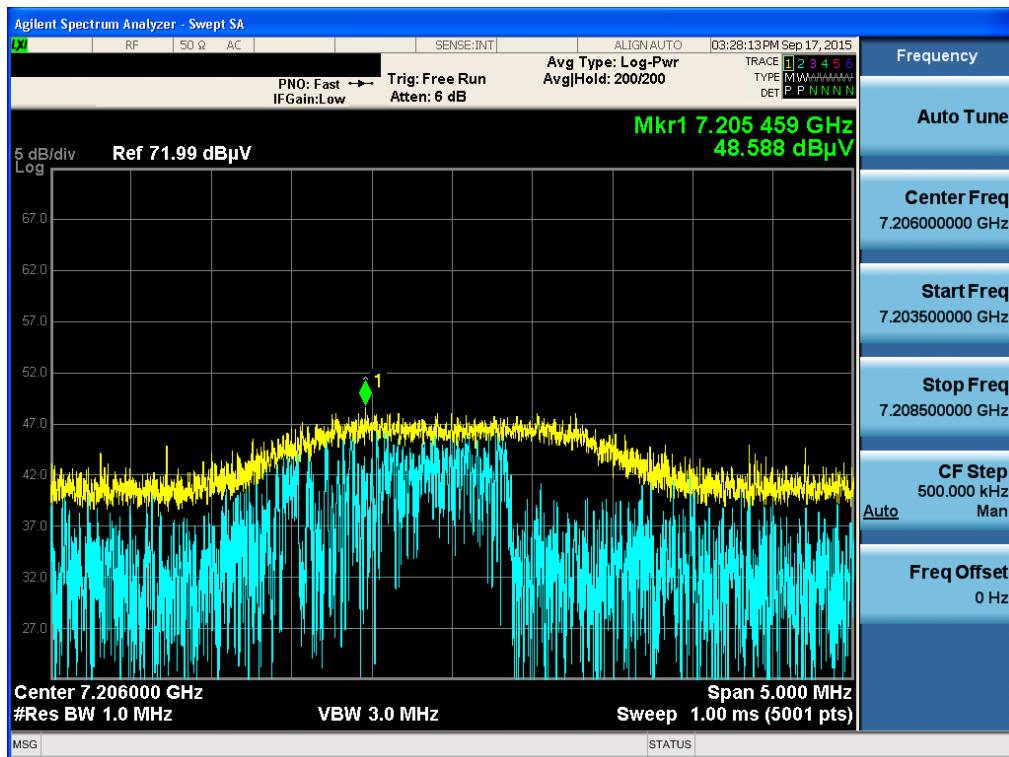


GFSK & Middle & Fundamental

Detector Mode : PK

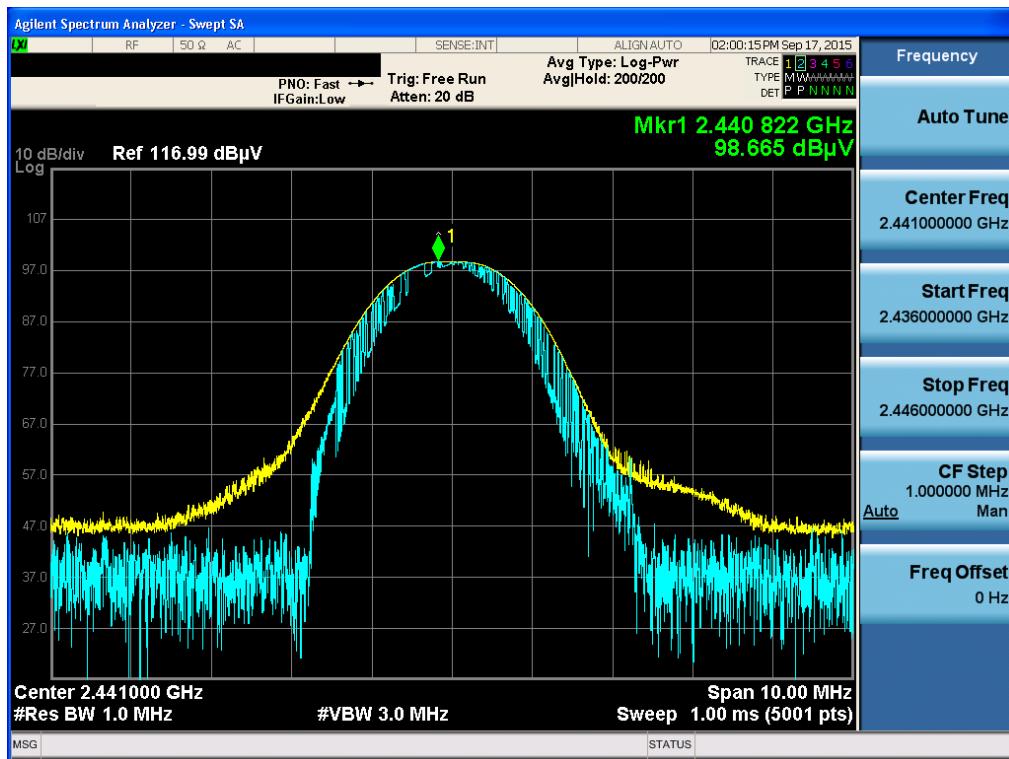


GFSK & Middle & X axis & Ver

Detector Mode : PK

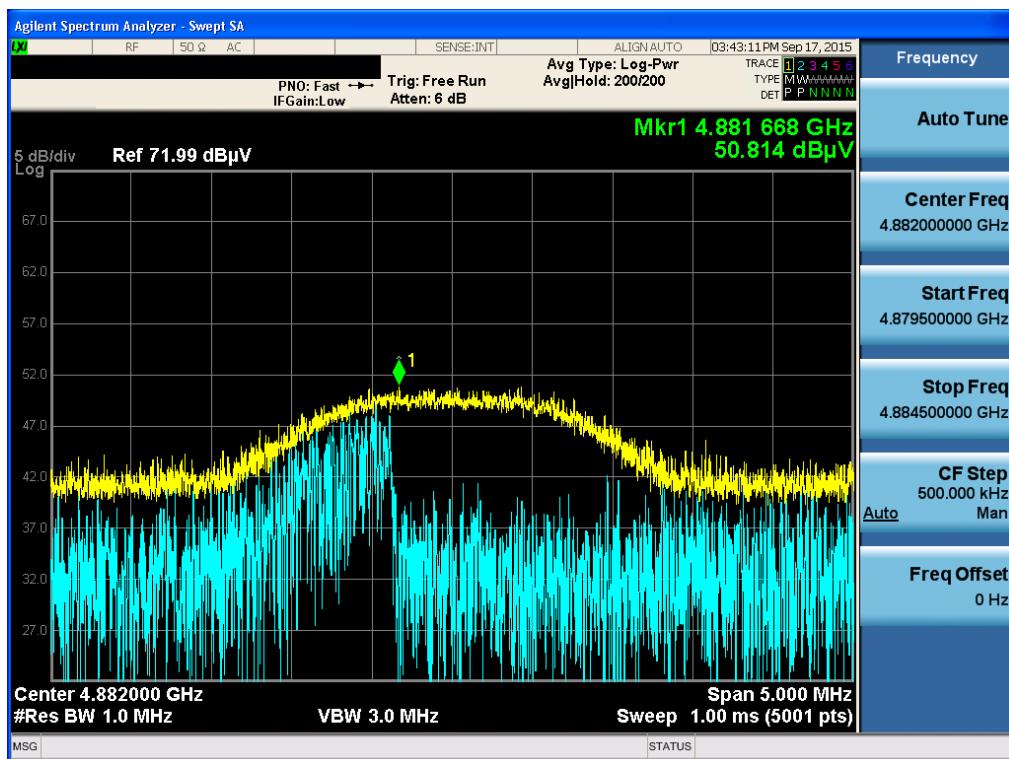


GFSK & Middle & X axis & Ver

Detector Mode : AV

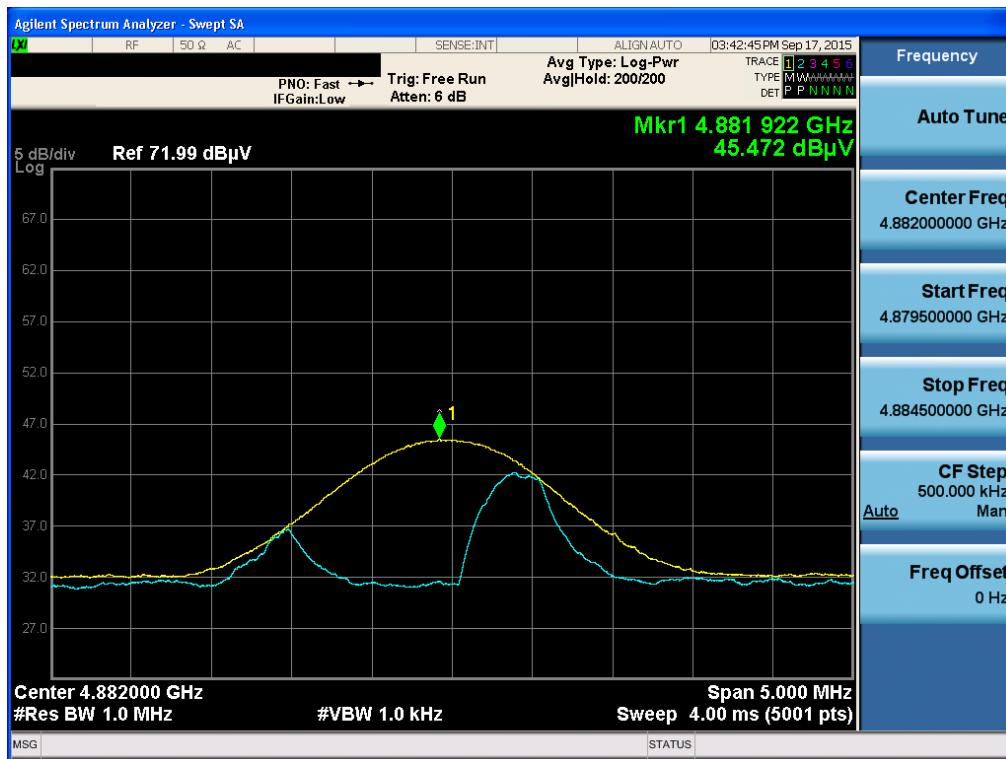


GFSK & Middle & X axis & Ver

Detector Mode : PK

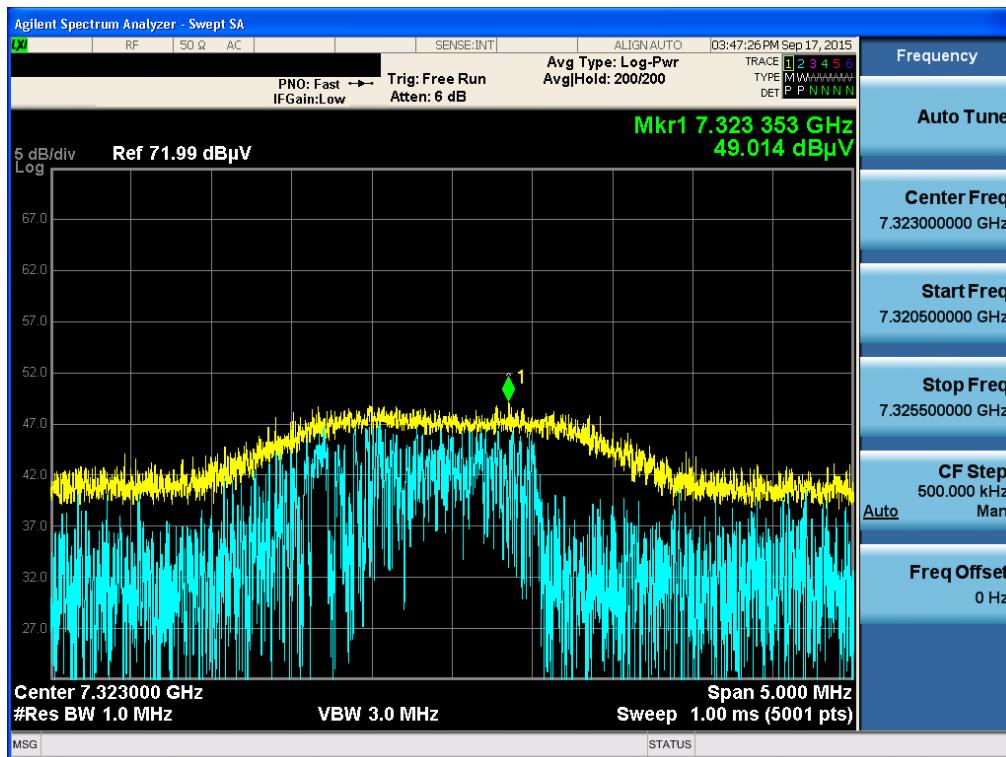


GFSK & Middle & X axis & Ver

Detector Mode : AV

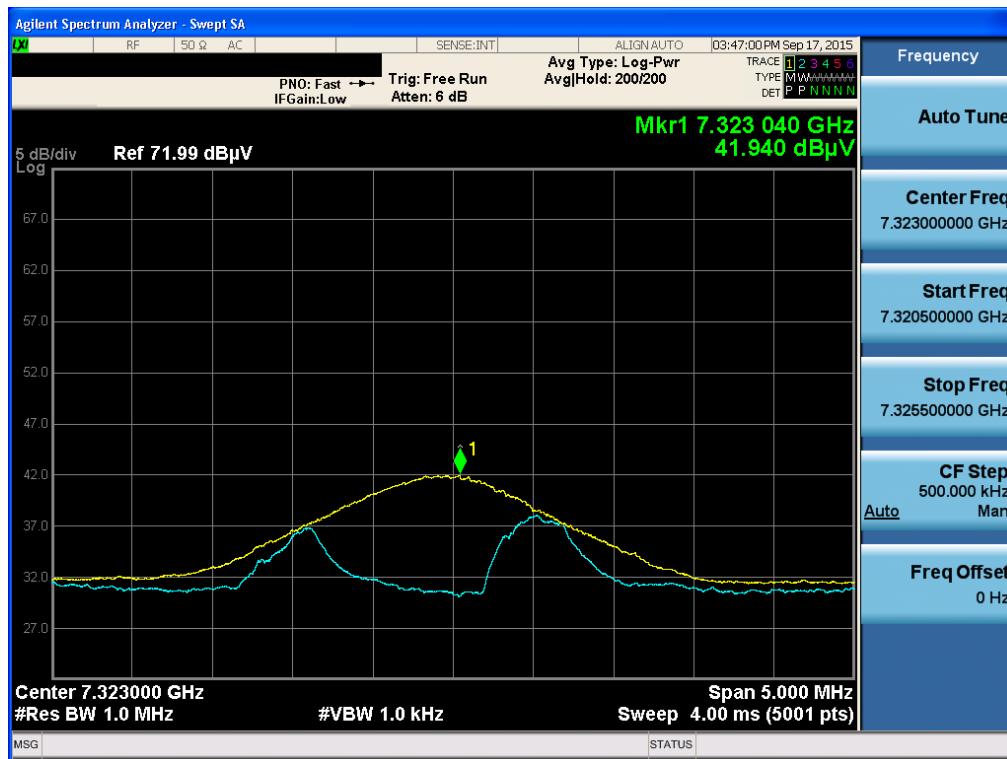


GFSK & Highest & Fundamental

Detector Mode : PK

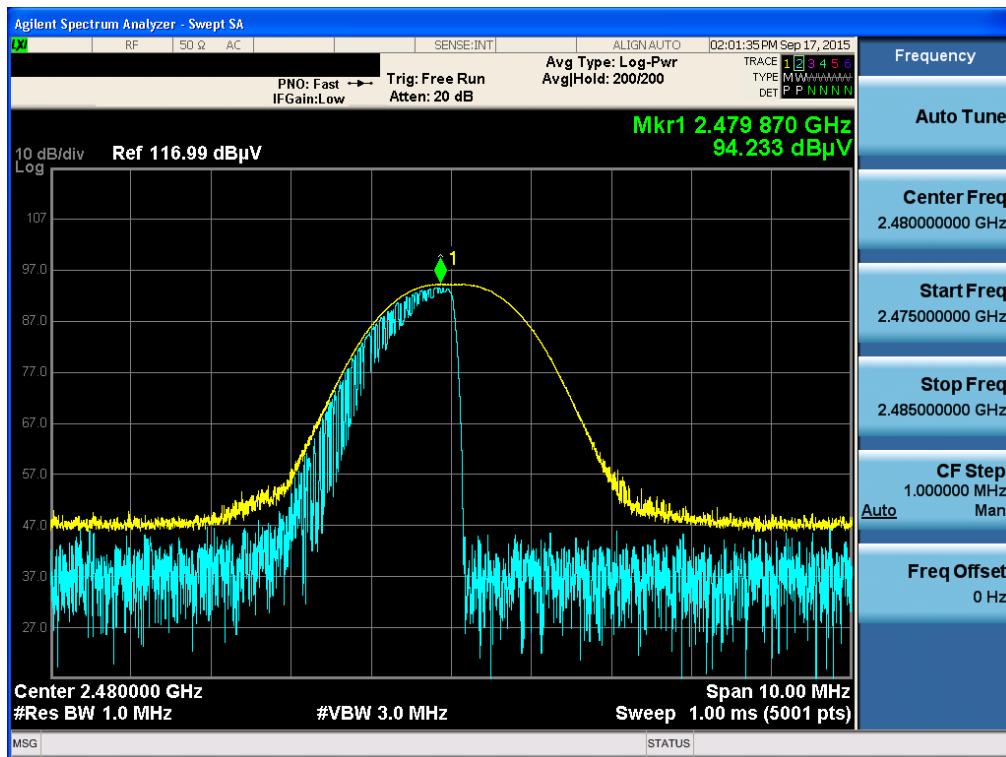


GFSK & Highest & X axis & Ver

Detector Mode : PK

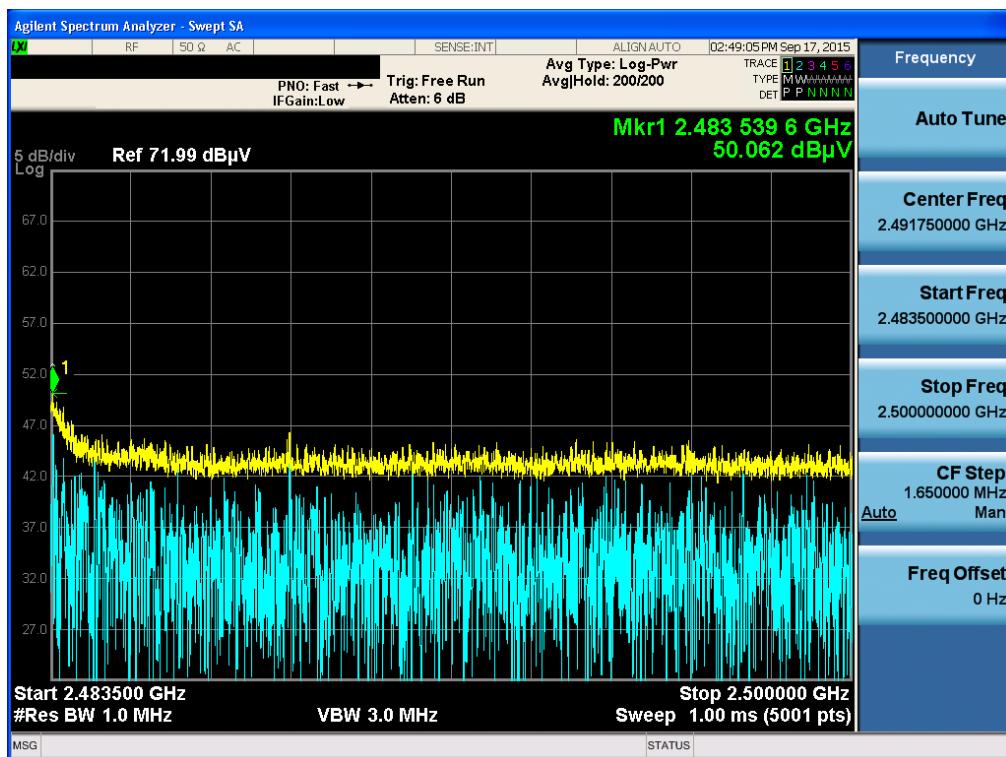


GFSK & Highest & X axis & Ver

Detector Mode : AV

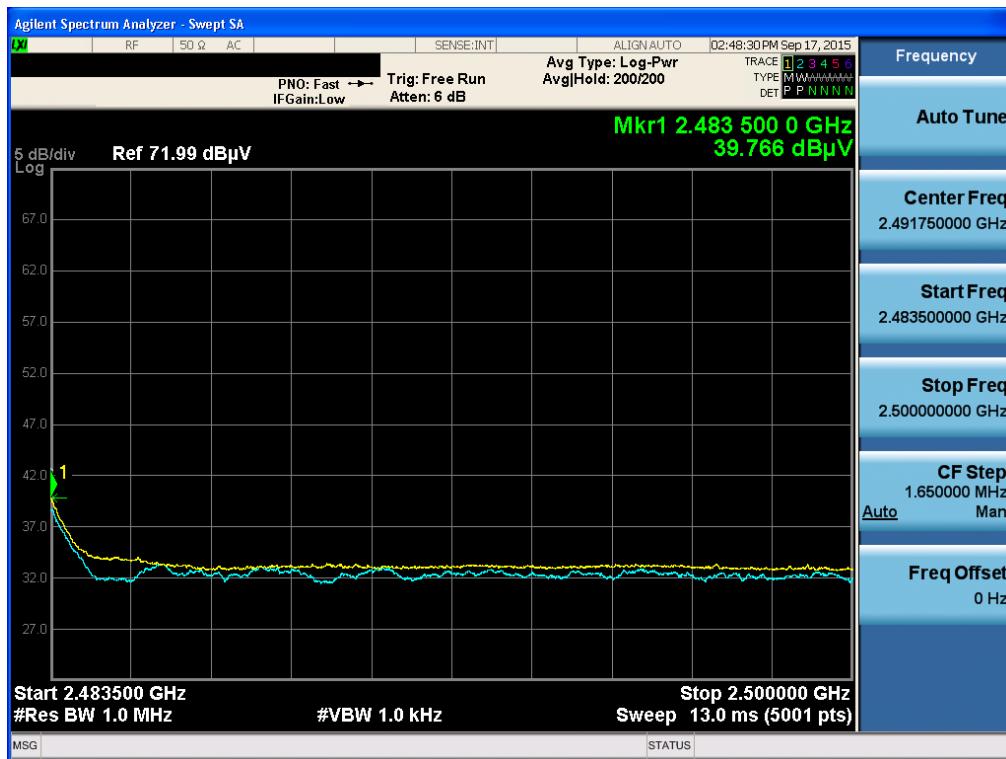


GFSK & Highest & X axis & Ver

Detector Mode : PK

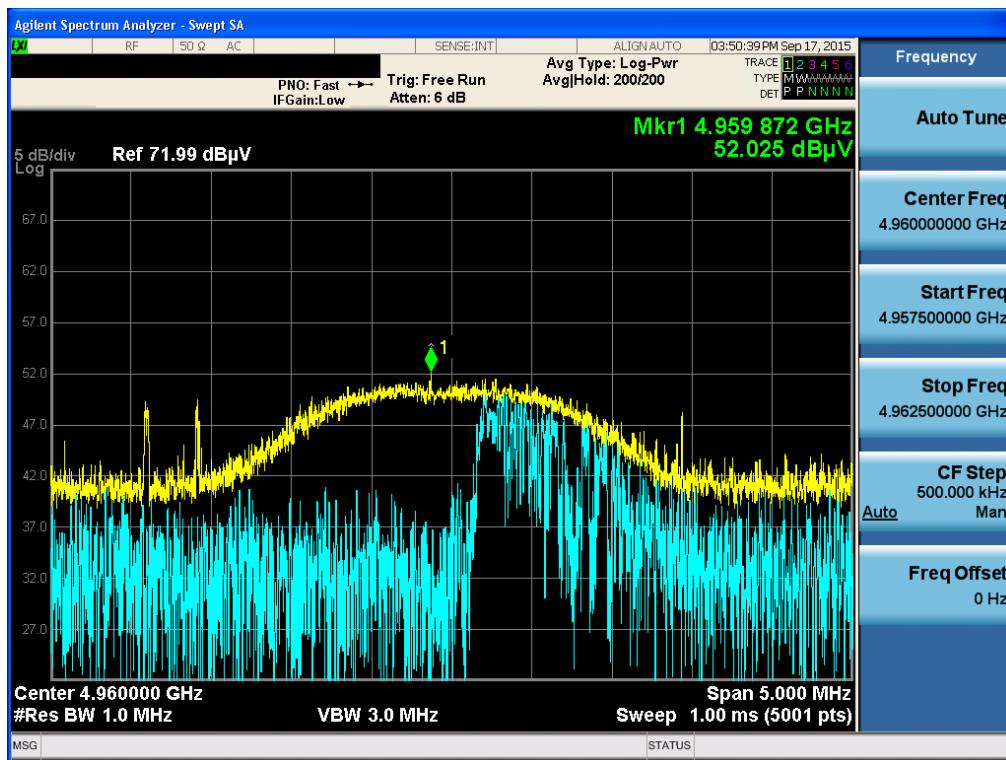


GFSK & Highest & X axis & Ver

Detector Mode : AV

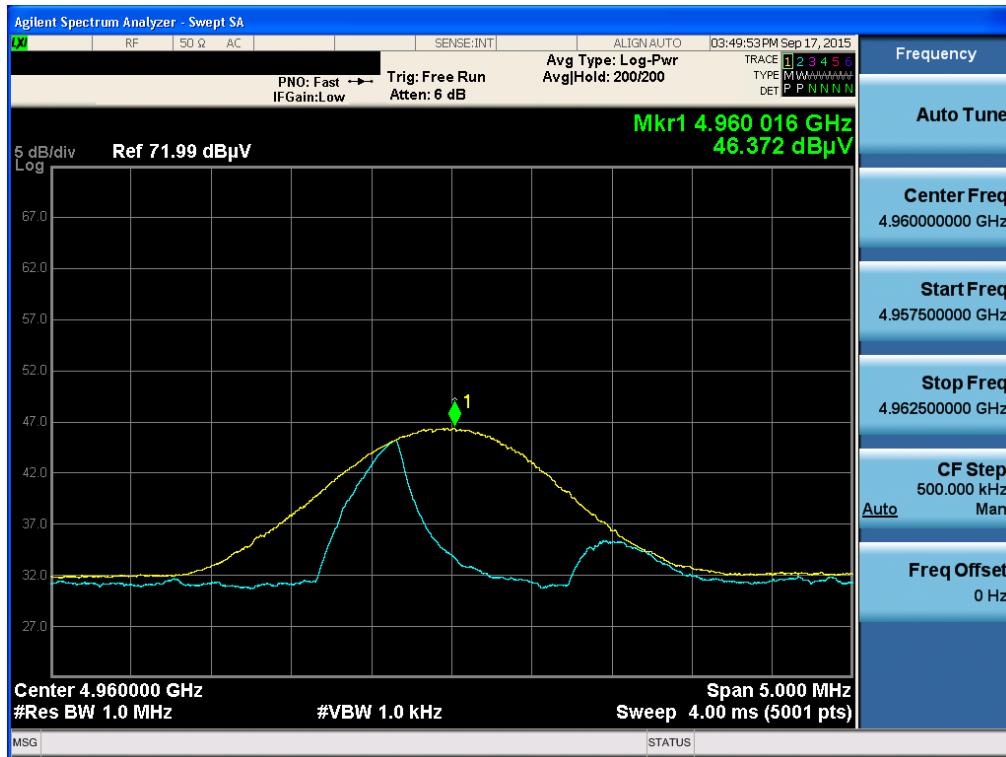

GFSK & Highest & X axis & Ver



Detector Mode : PK


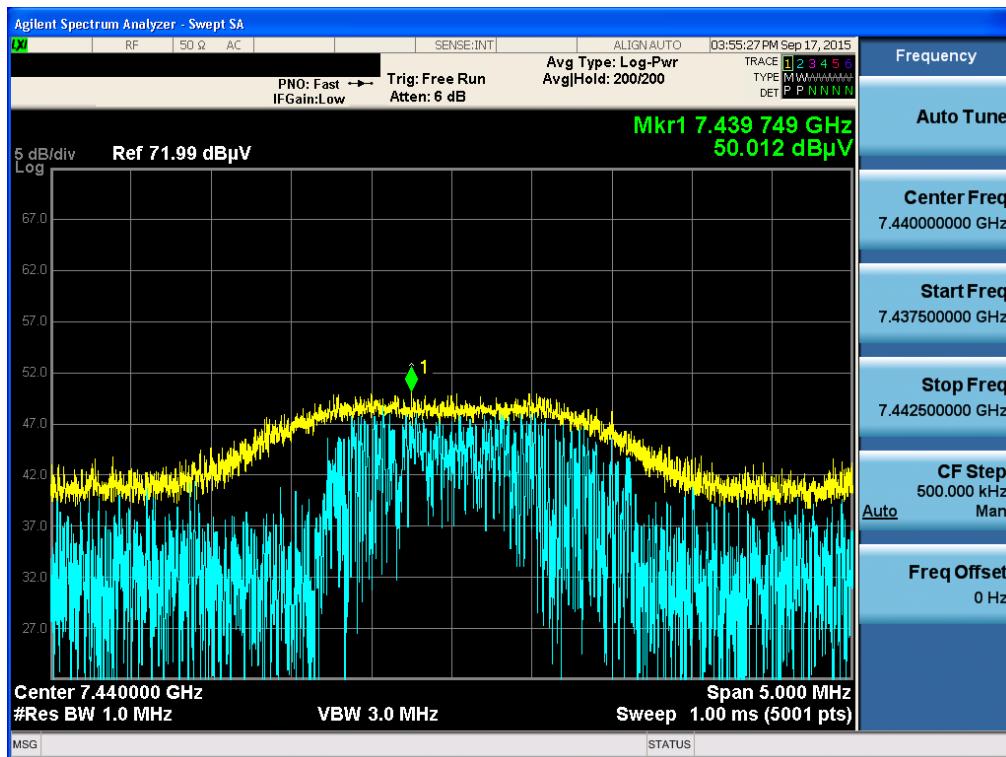




GFSK & Highest & X axis & Ver



Detector Mode : AV

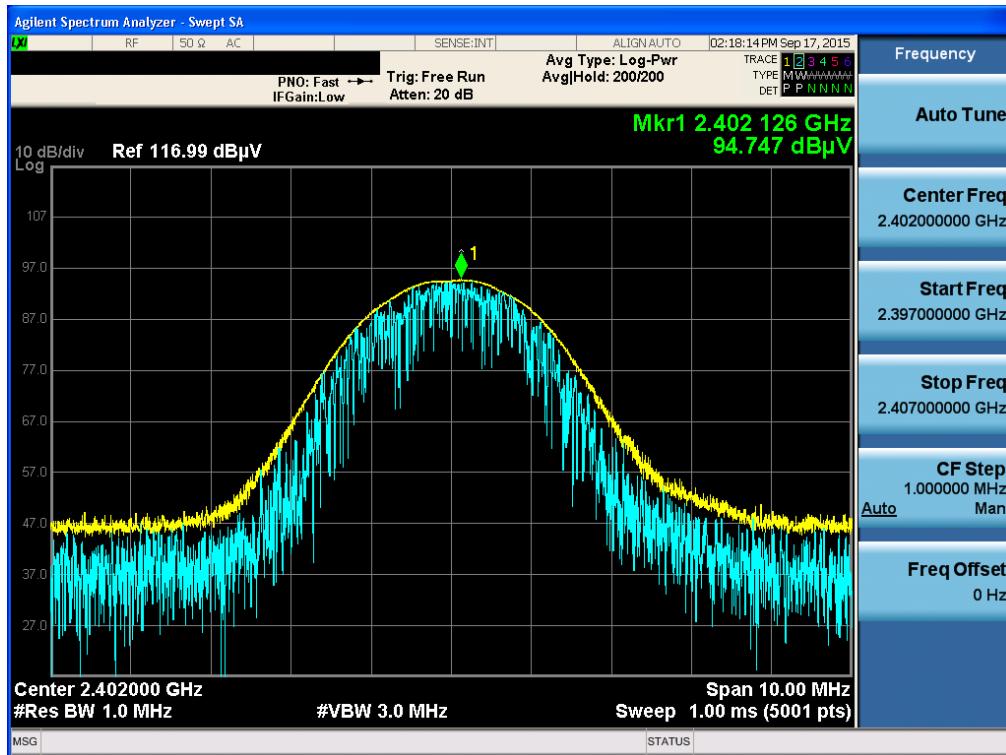
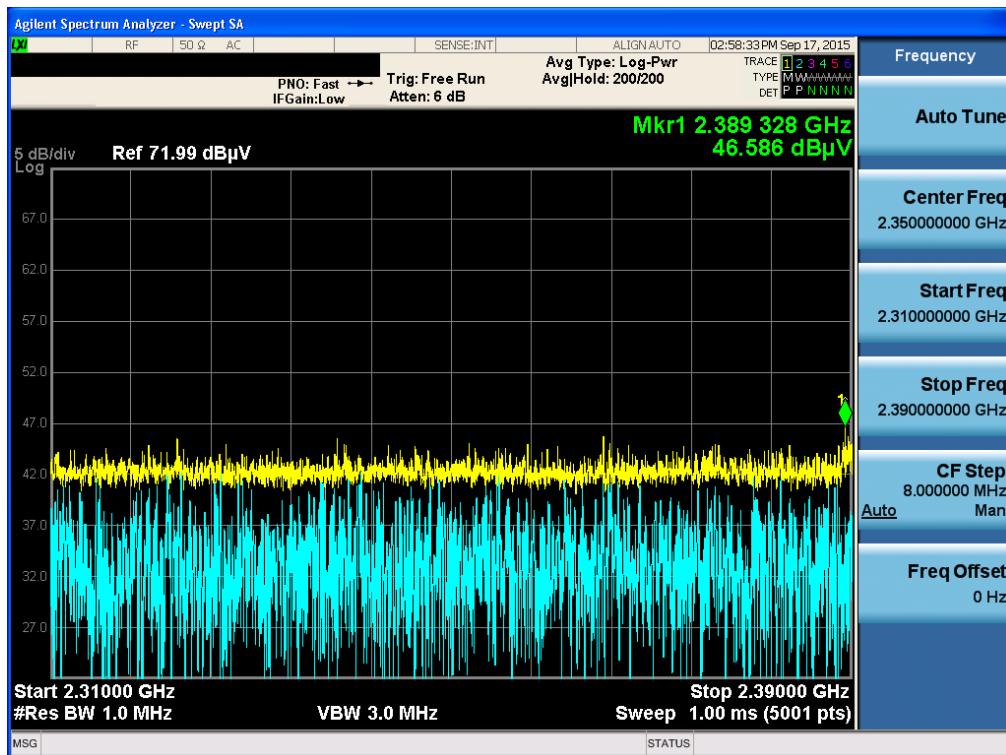



π/4-DQPSK & Lowest & Fundamental**Detector Mode : PK****π/4-DQPSK & Lowest & X axis & Ver****Detector Mode : PK**

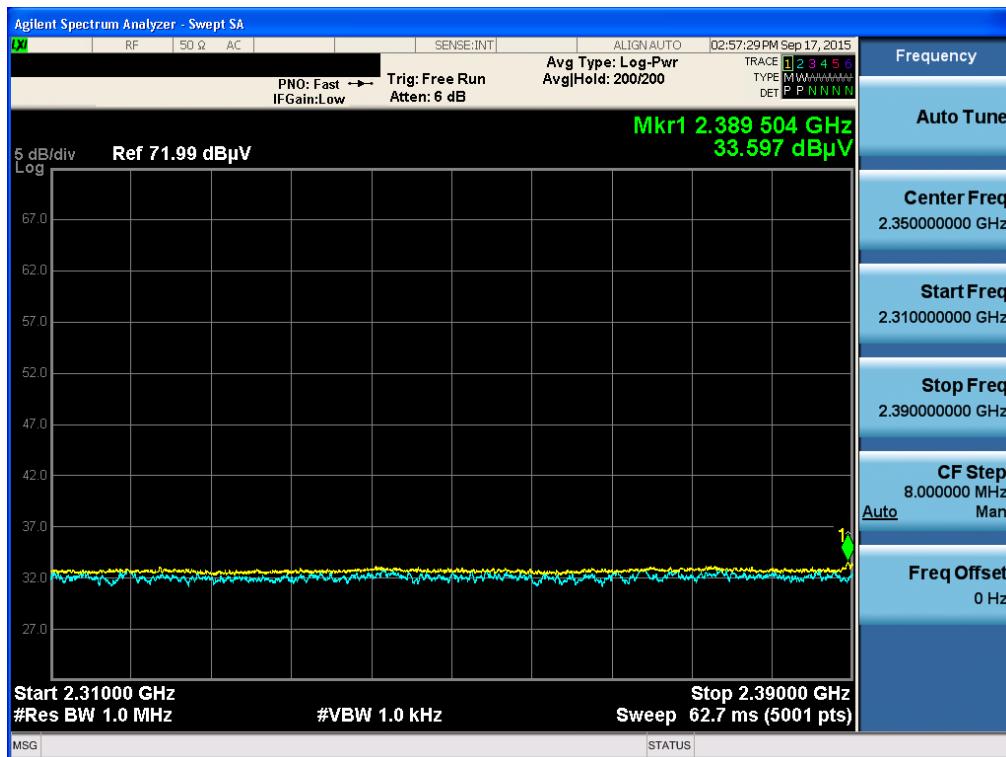
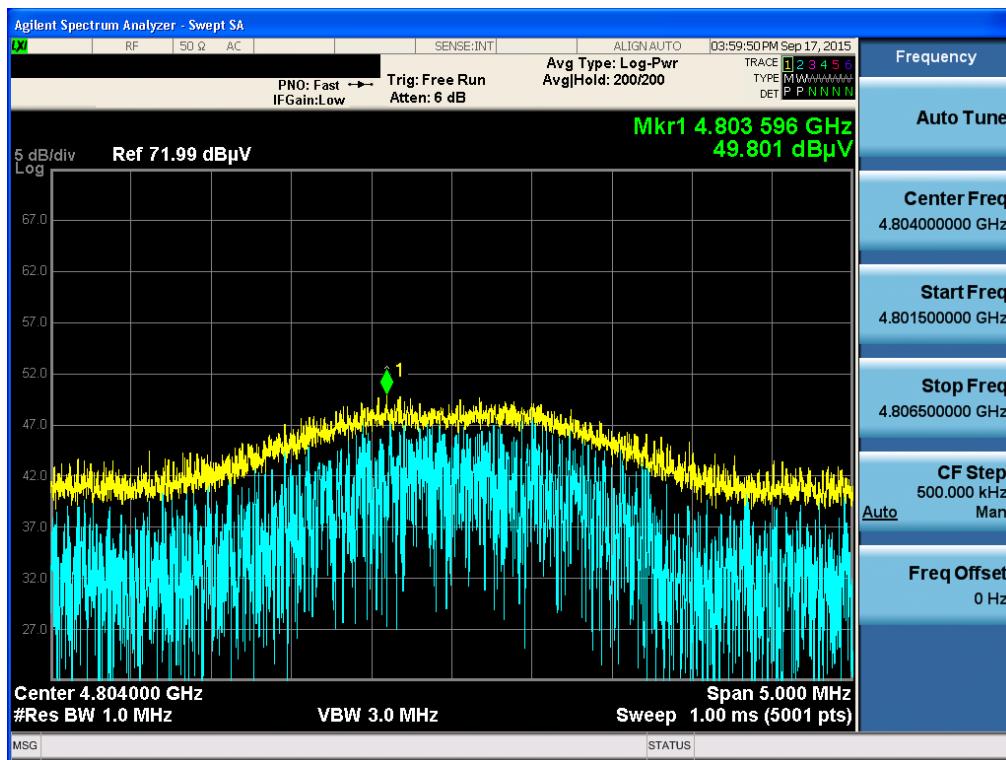
π/4-DQPSK & Lowest & X axis & Ver**Detector Mode : AV****π/4-DQPSK & Lowest & X axis & Ver****Detector Mode : PK**

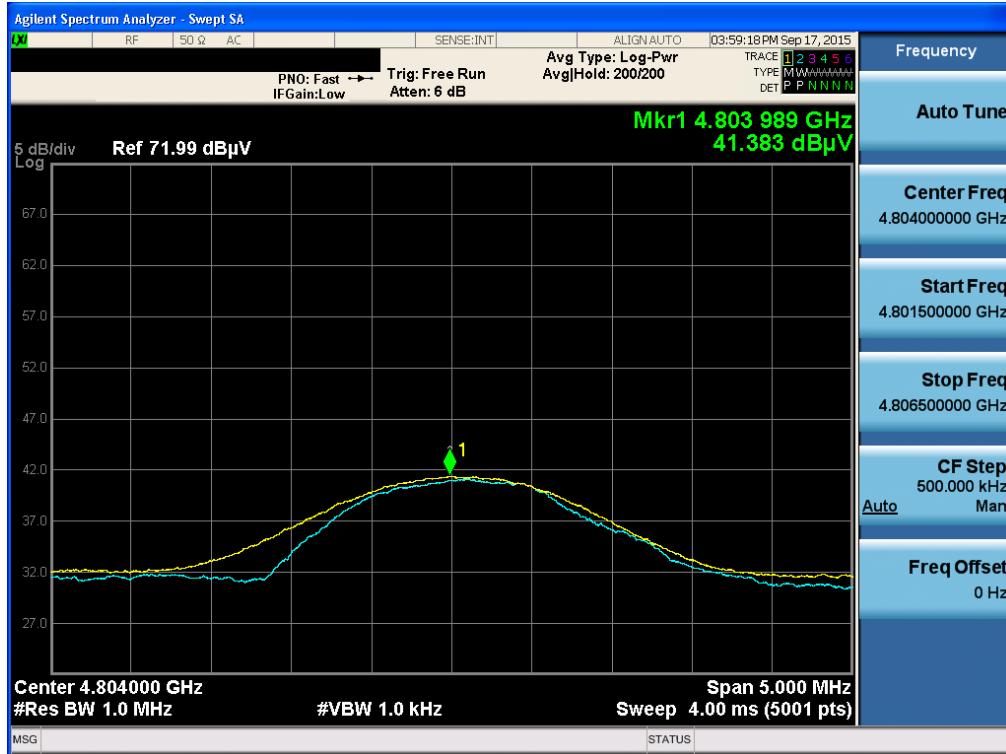
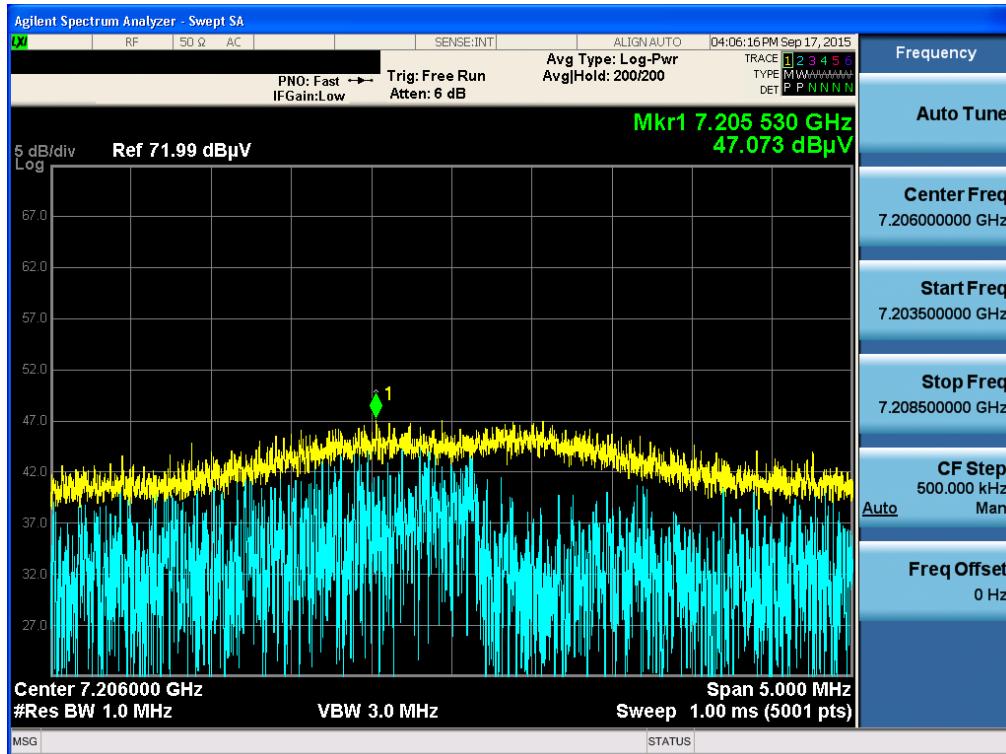
π/4-DQPSK & Lowest & X axis & Ver**Detector Mode : AV****π/4-DQPSK & Lowest & X axis & Ver****Detector Mode : PK**

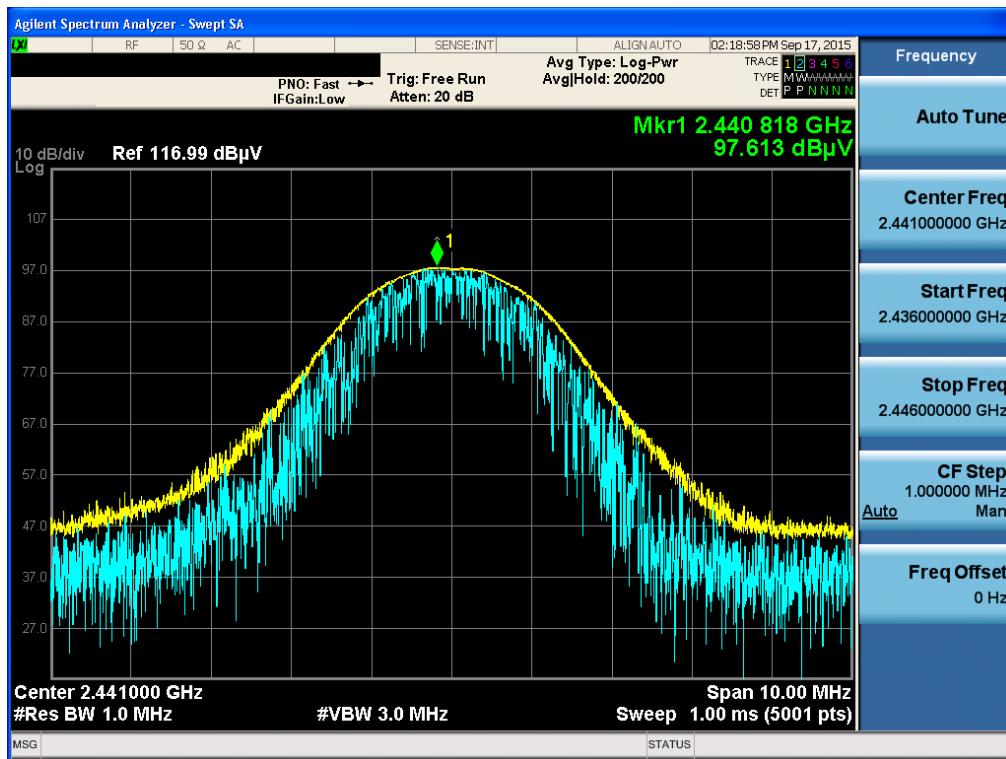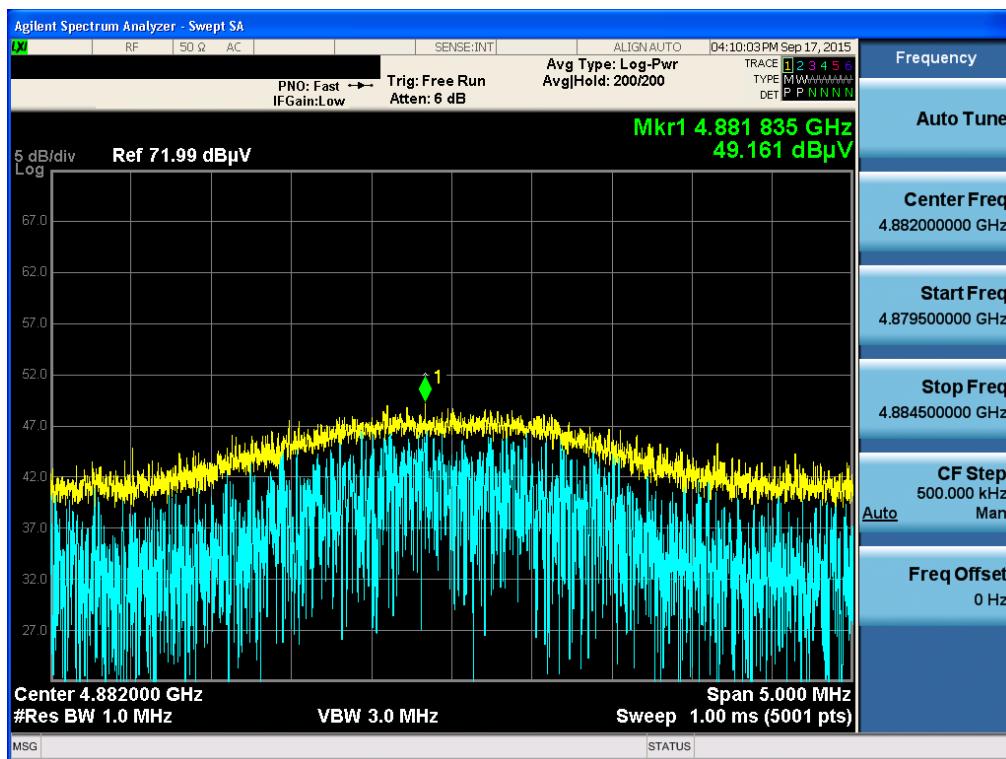
π/4-DQPSK & Middle & Fundamental**Detector Mode : PK****π/4-DQPSK & Middle & X axis & Ver****Detector Mode : PK**

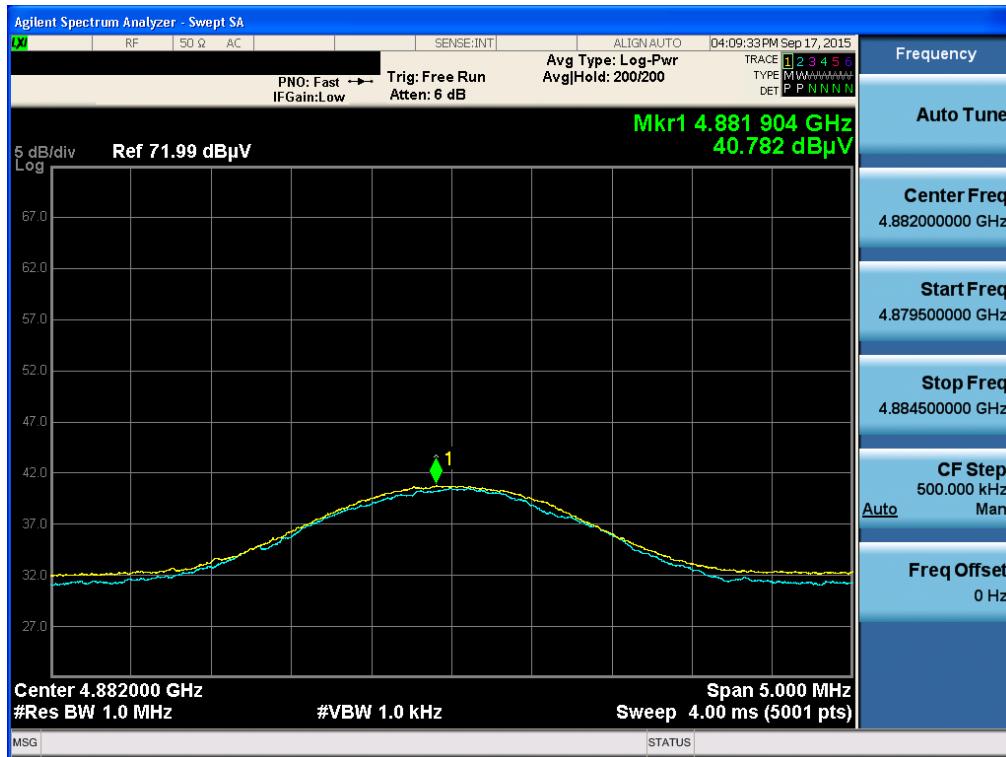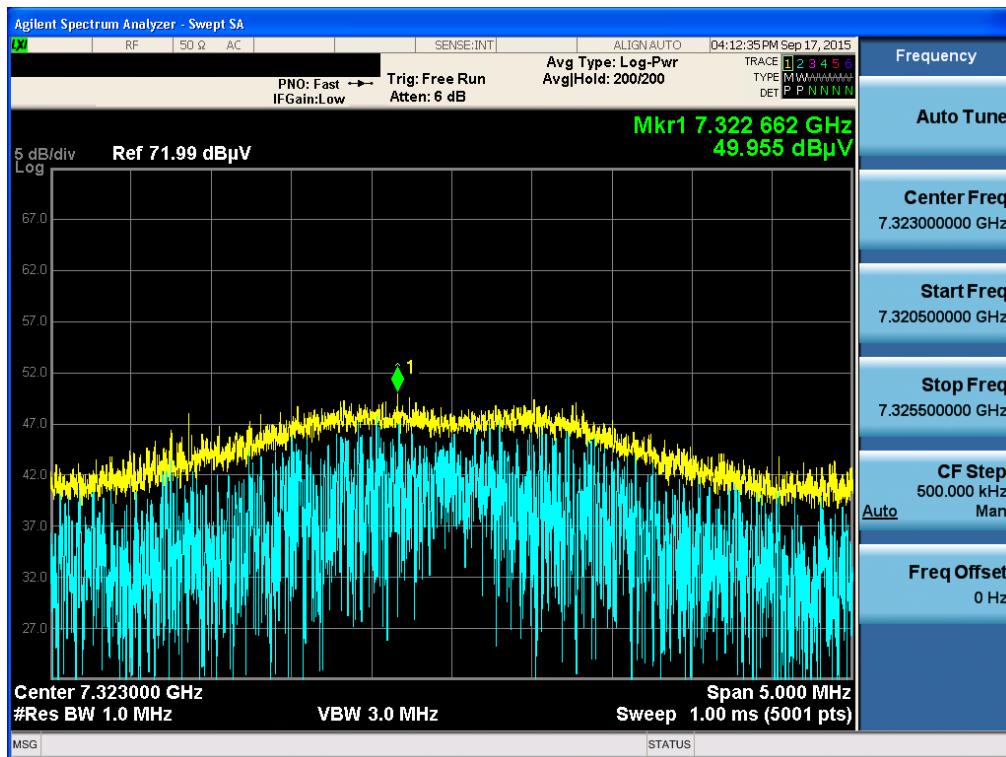π/4-DQPSK & Middle & X axis & Ver**Detector Mode : AV****π/4-DQPSK & Middle & X axis & Ver****Detector Mode : PK**

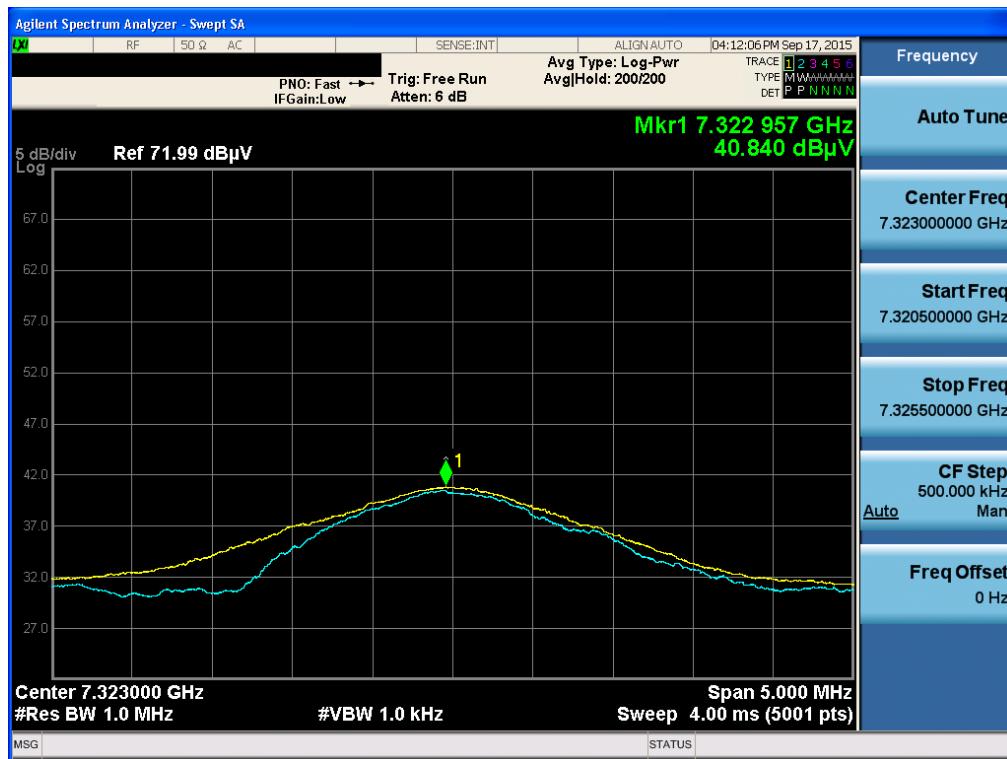π/4-DQPSK & Middle & X axis & Ver**Detector Mode : AV**

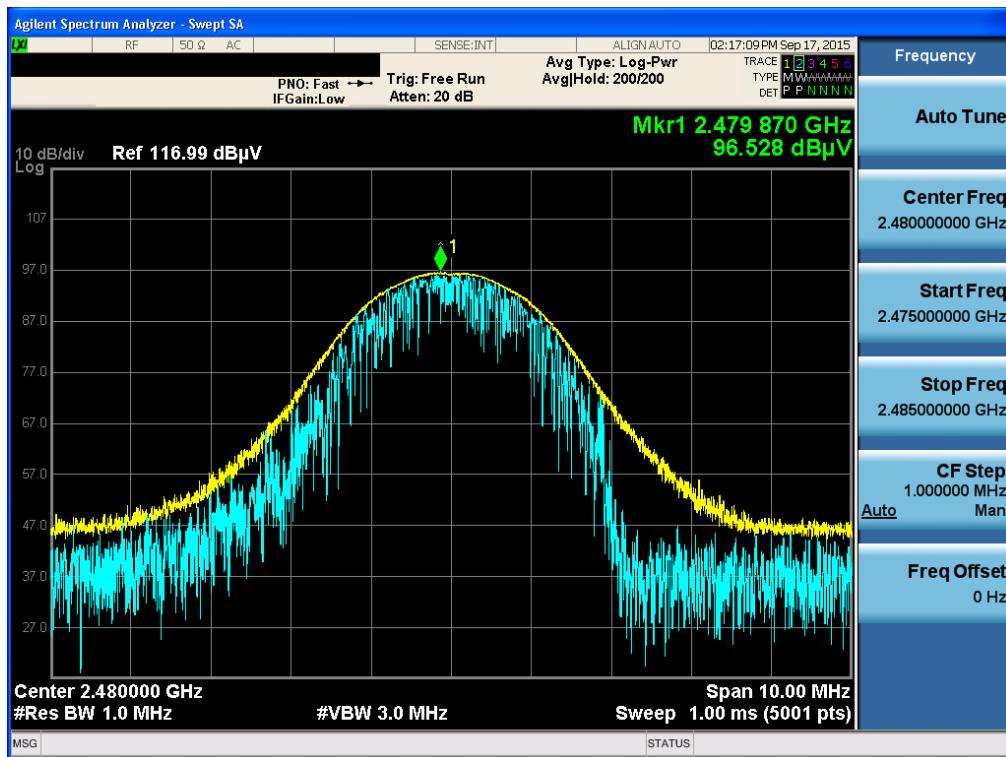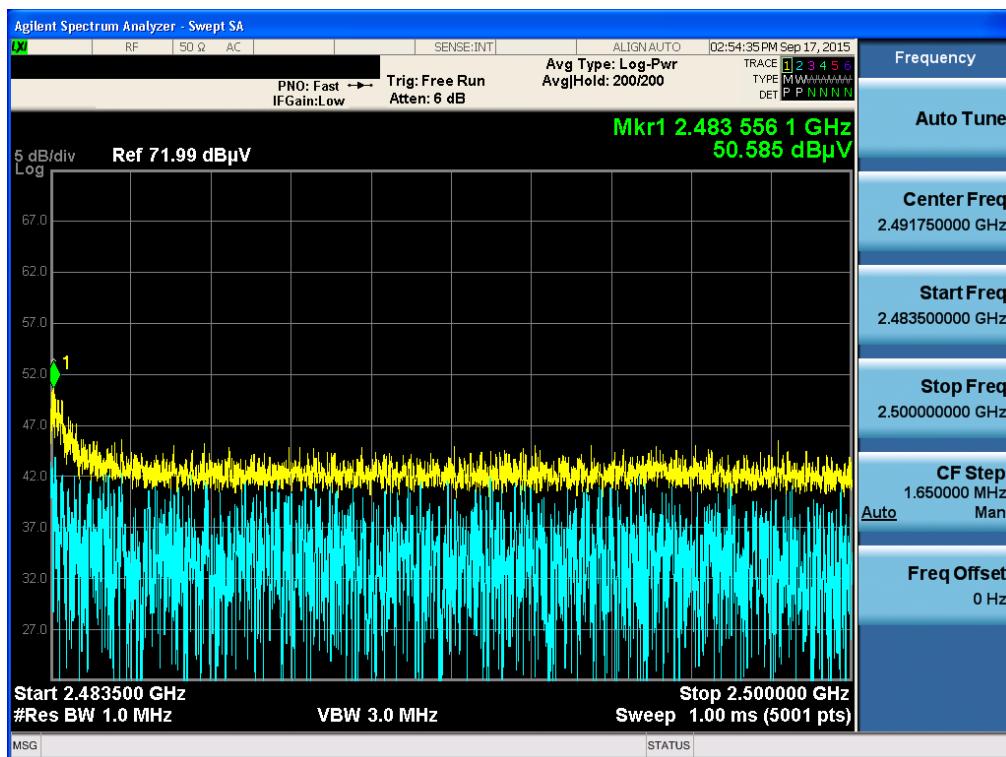π/4-DQPSK & Highest & Fundamental
Detector Mode : PK

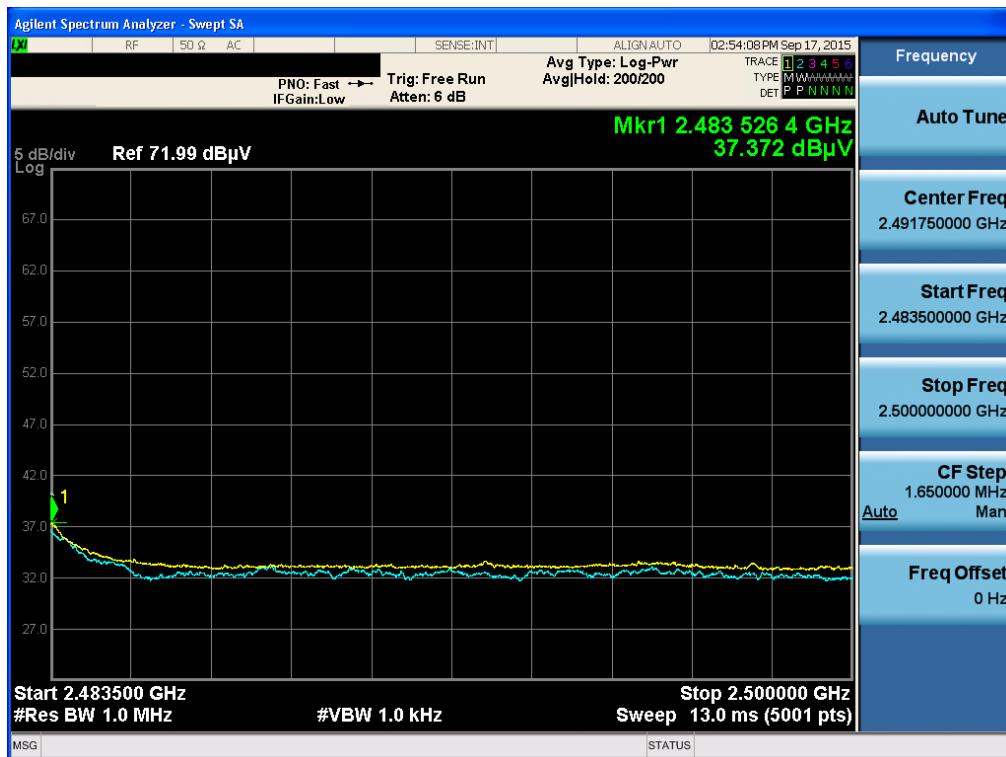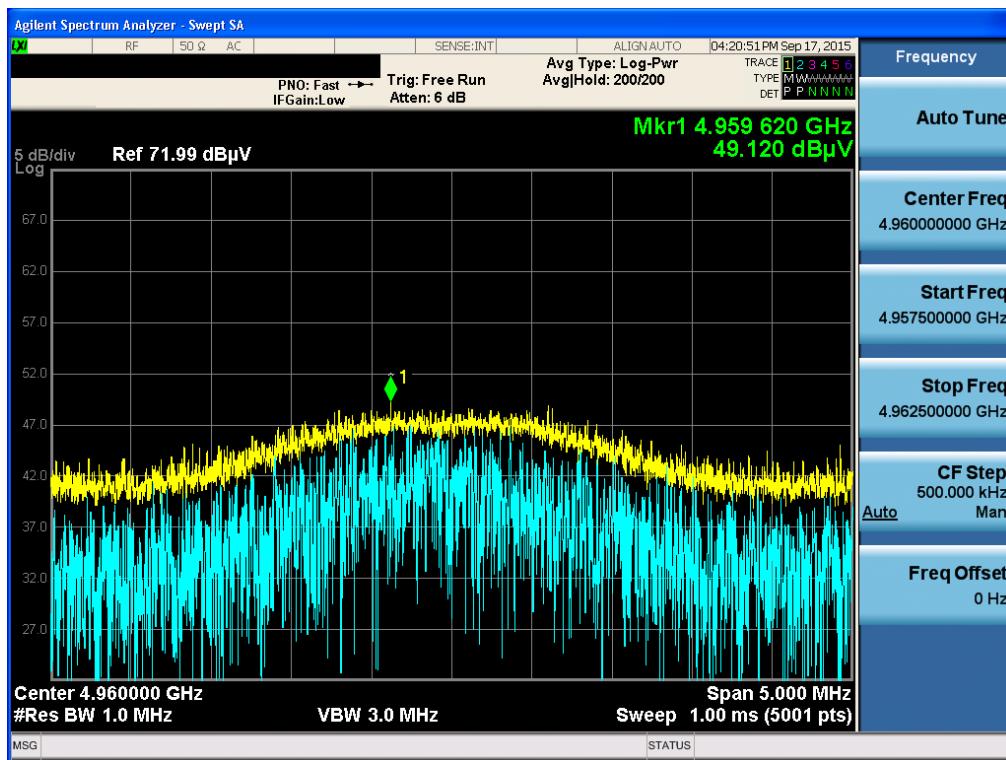π/4-DQPSK & Highest & X axis & Ver
Detector Mode : PK

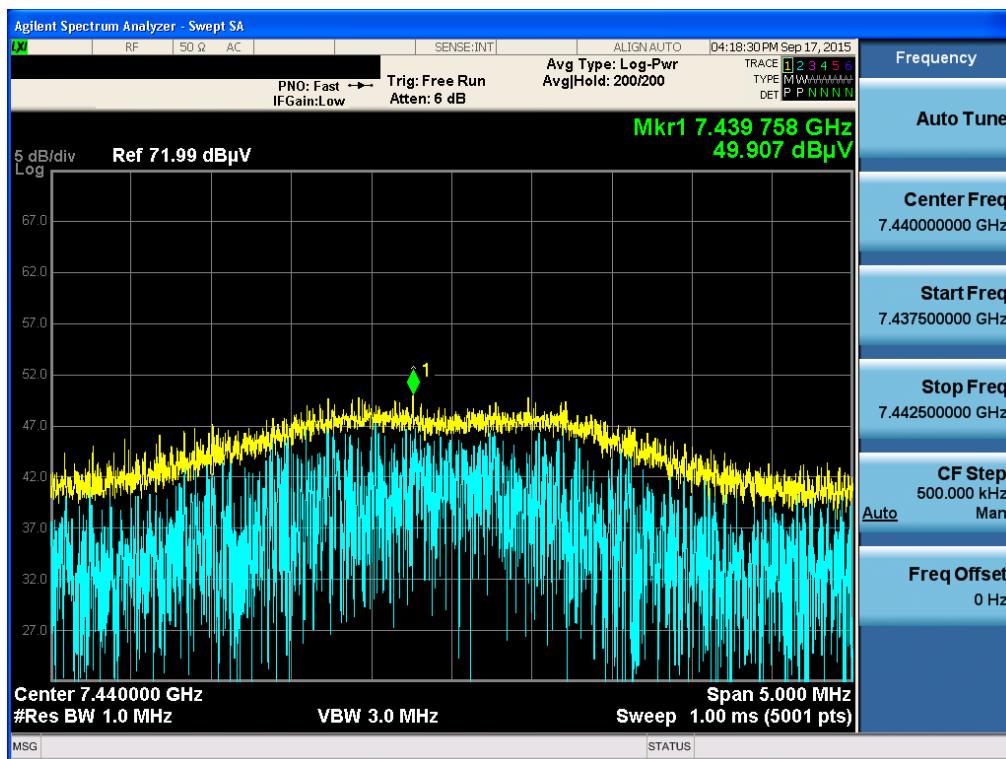
π/4-DQPSK & Highest & X axis & Ver**Detector Mode : AV****π/4-DQPSK & Highest & X axis & Ver****Detector Mode : PK**

π/4-DQPSK & Highest & X axis & Ver**Detector Mode : AV****π/4-DQPSK & Highest & X axis & Hor****Detector Mode : PK**


$\pi/4$ -DQPSK & Highest & X axis & Hor

Detector Mode : AV




8DPSK & Lowest & Fundamental

Detector Mode : PK

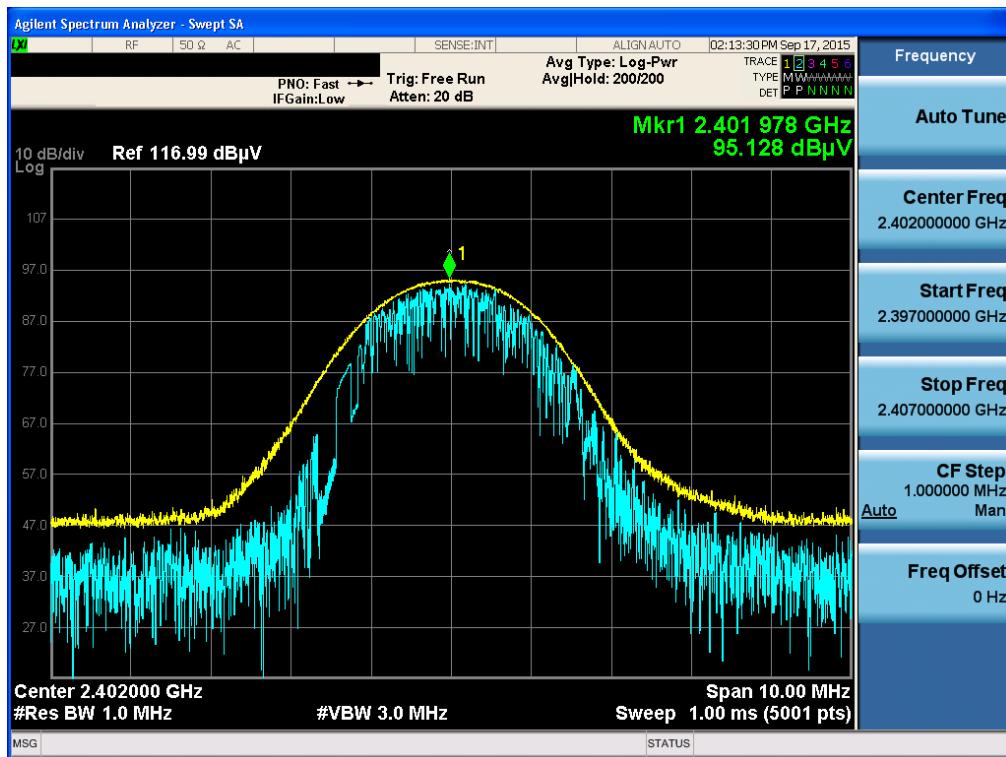


8DPSK & Lowest & X axis & Ver

Detector Mode : PK

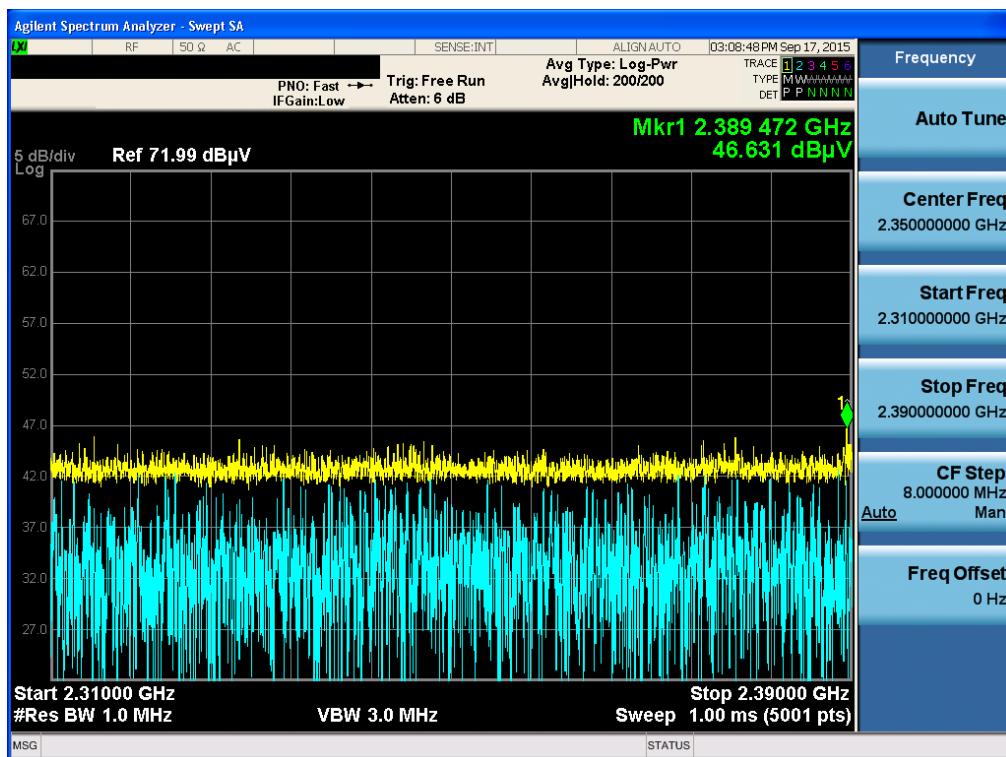


8DPSK & Lowest & X axis & Ver

Detector Mode : AV

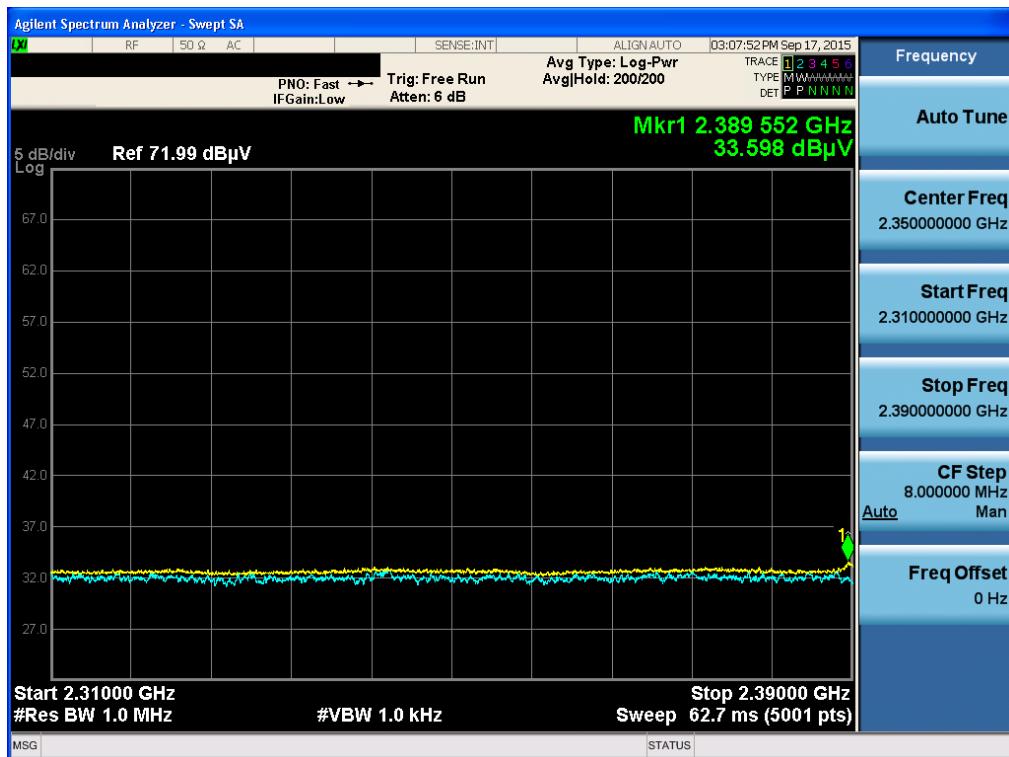

8DPSK & Lowest & X axis & Ver

Detector Mode : PK

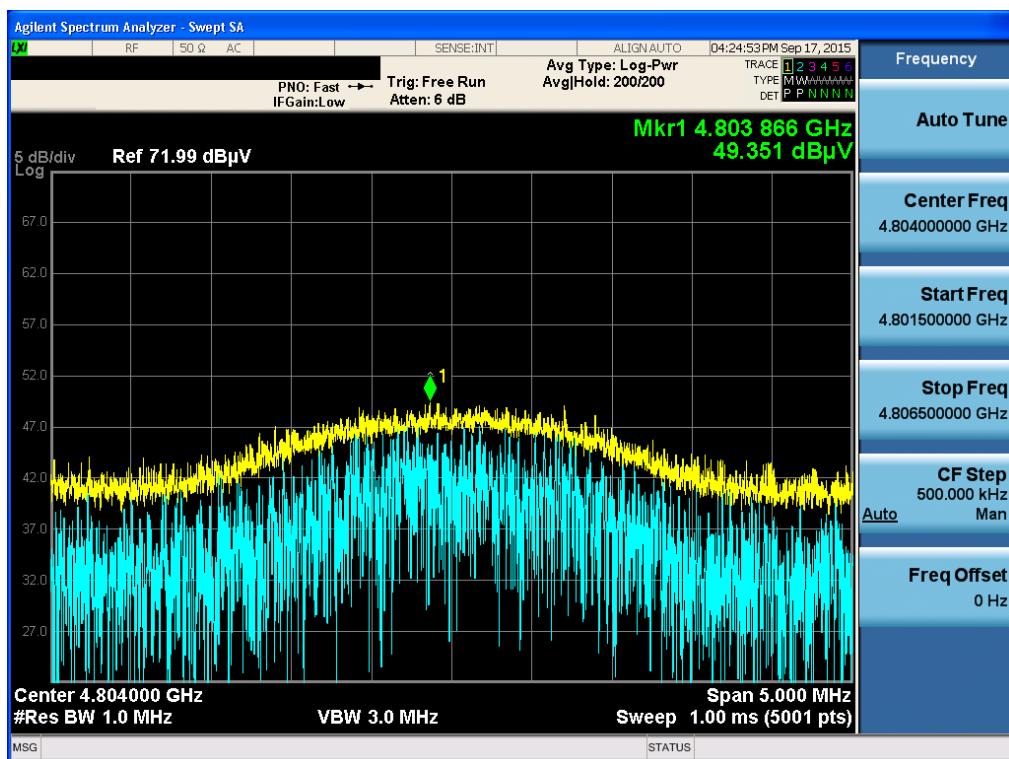


8DPSK & Lowest & X axis & Ver

Detector Mode : AV




8DPSK & Lowest & X axis & Ver

Detector Mode : PK

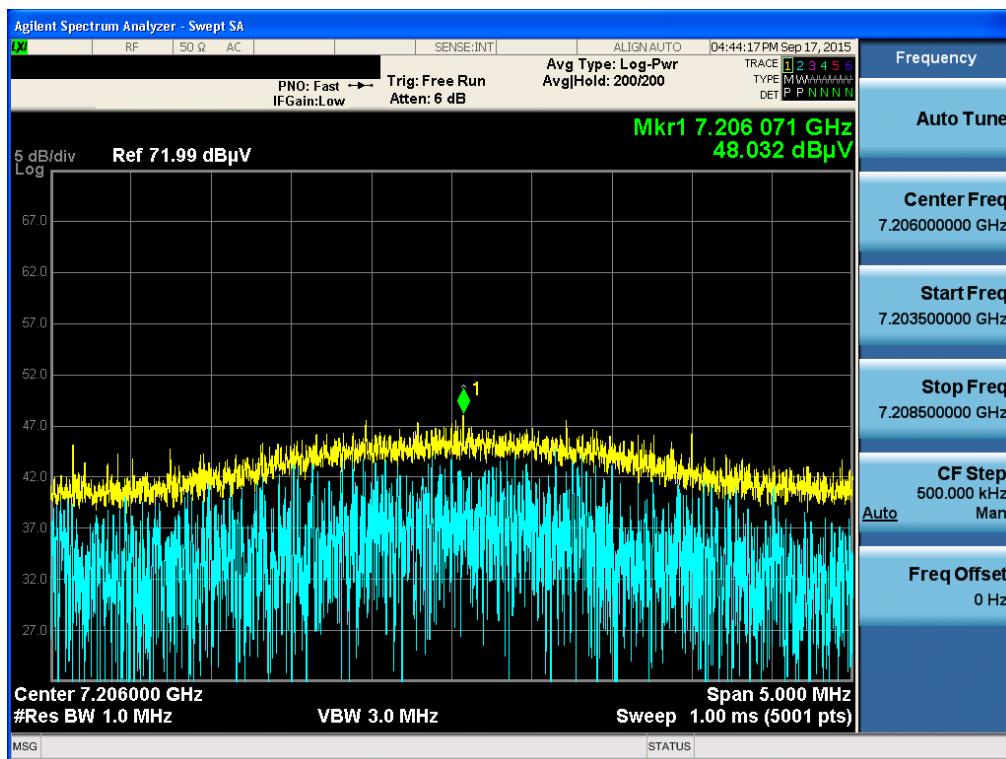


8DPSK & Middle & Fundamental

Detector Mode : PK

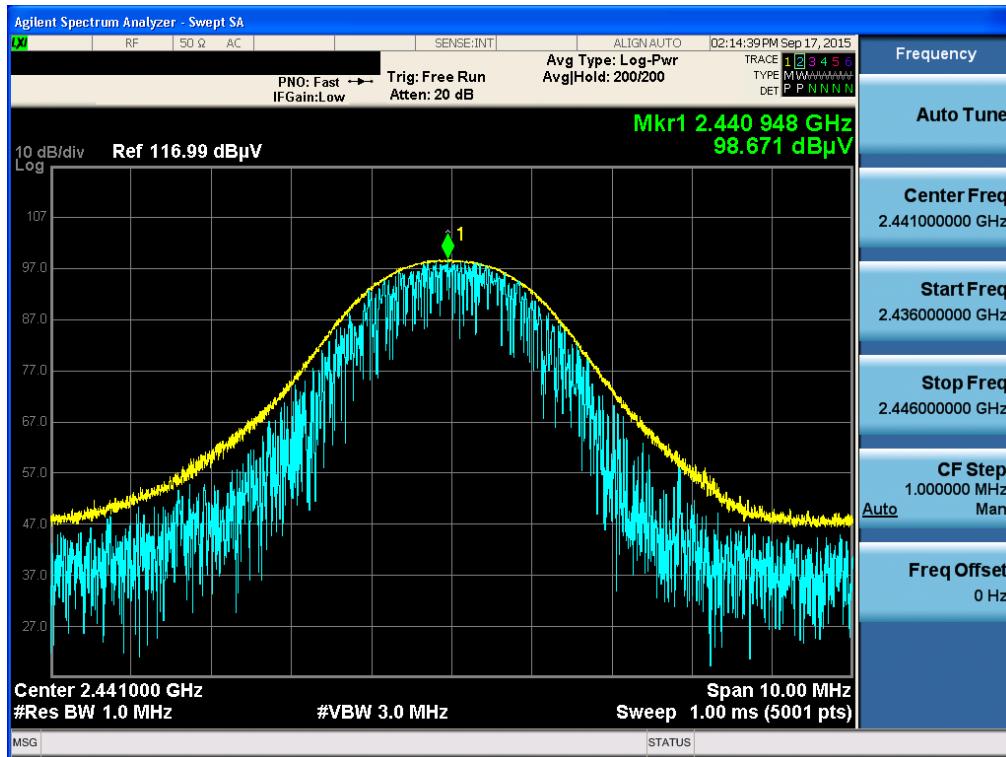


8DPSK & Middle & X axis & Ver

Detector Mode : PK

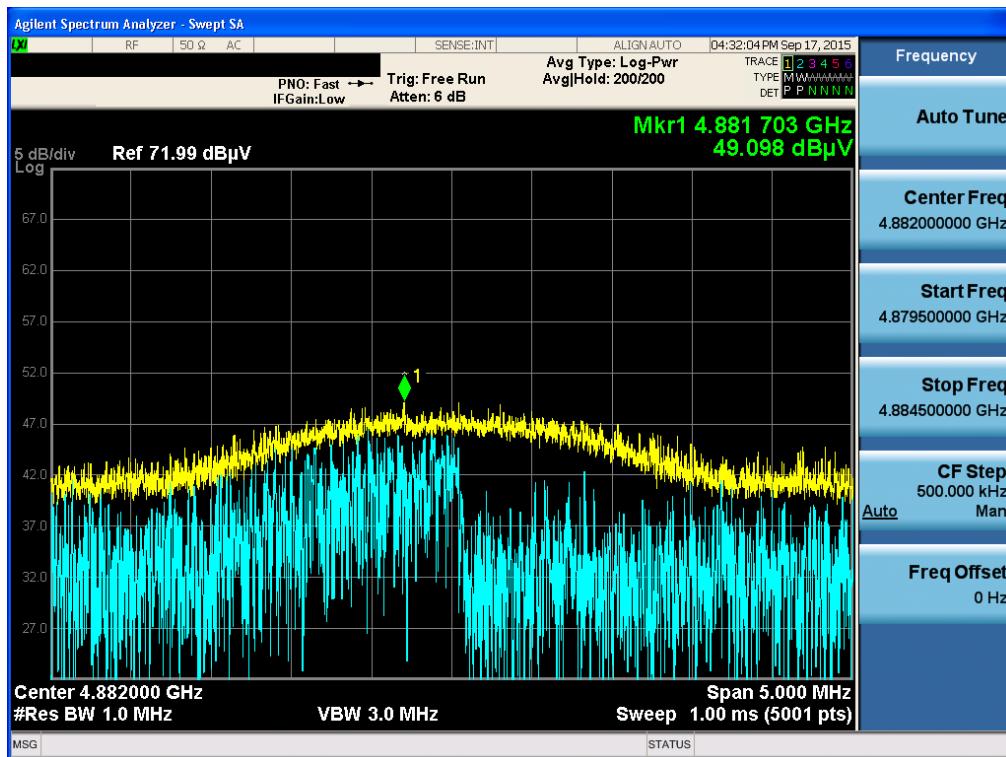


8DPSK & Middle & X axis & Ver

Detector Mode : AV

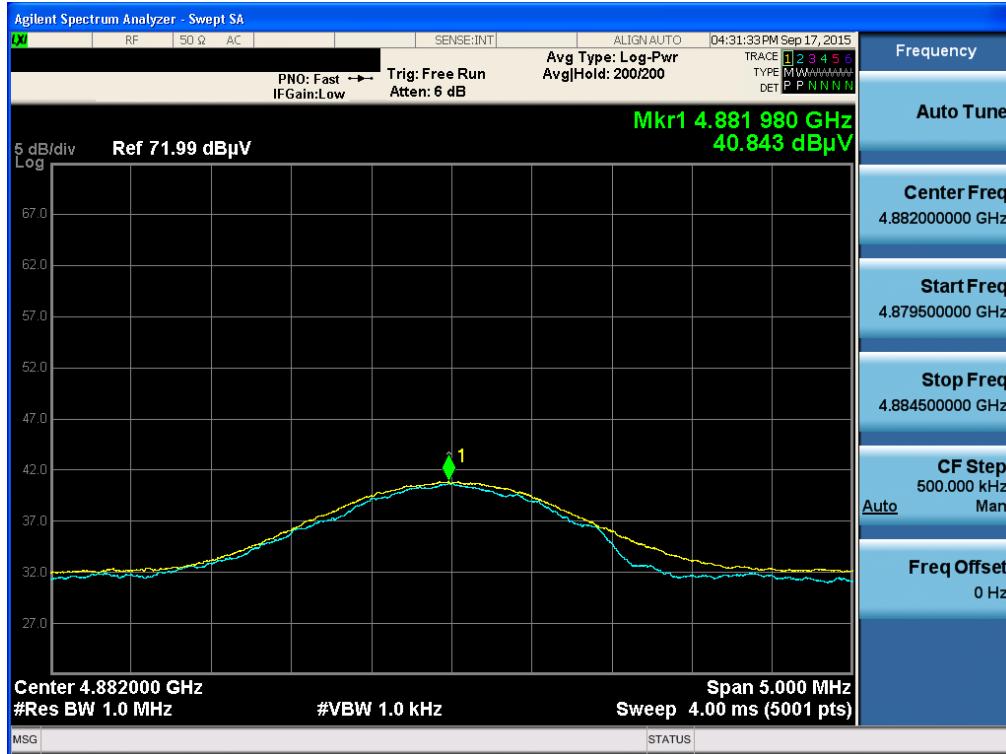

8DPSK & Middle & X axis & Hor

Detector Mode : PK

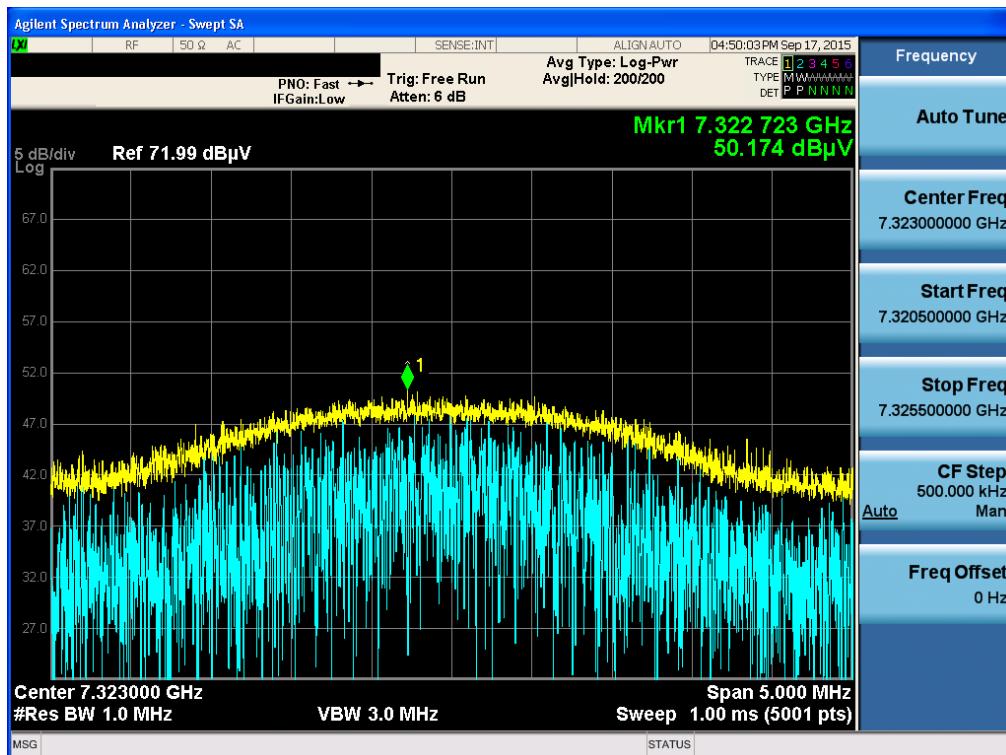


8DPSK & Middle & X axis & Hor

Detector Mode : AV




8DPSK & Highest & Fundamental

Detector Mode : PK

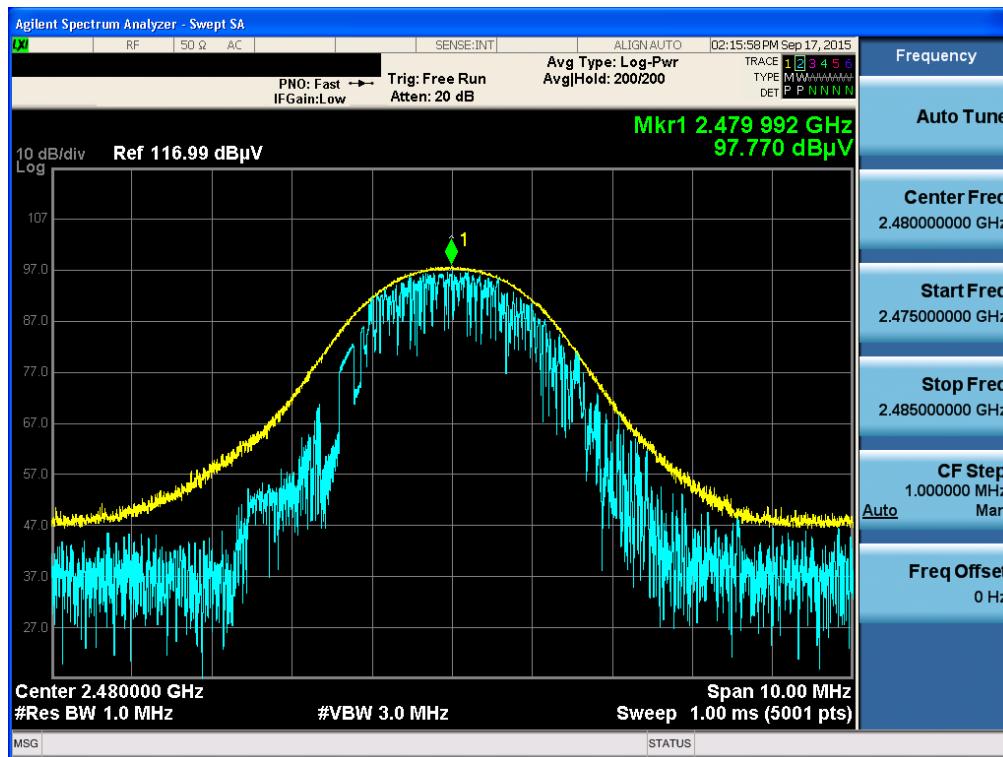


8DPSK & Highest & X axis & Ver

Detector Mode : PK

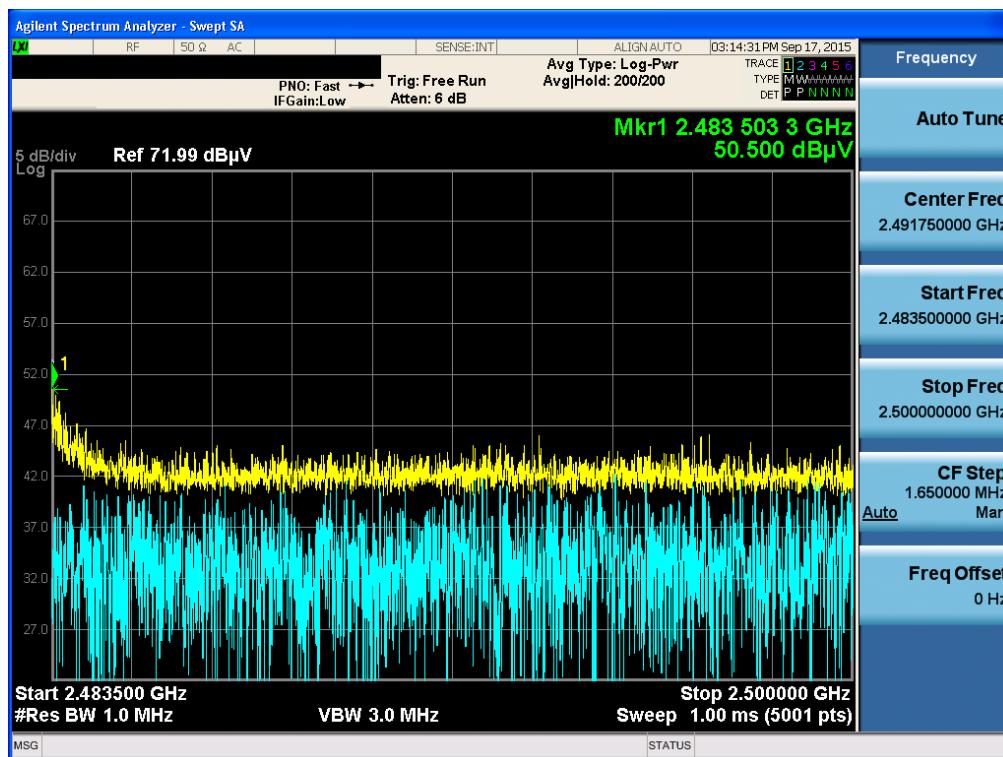


8DPSK & Highest & X axis & Ver

Detector Mode : AV

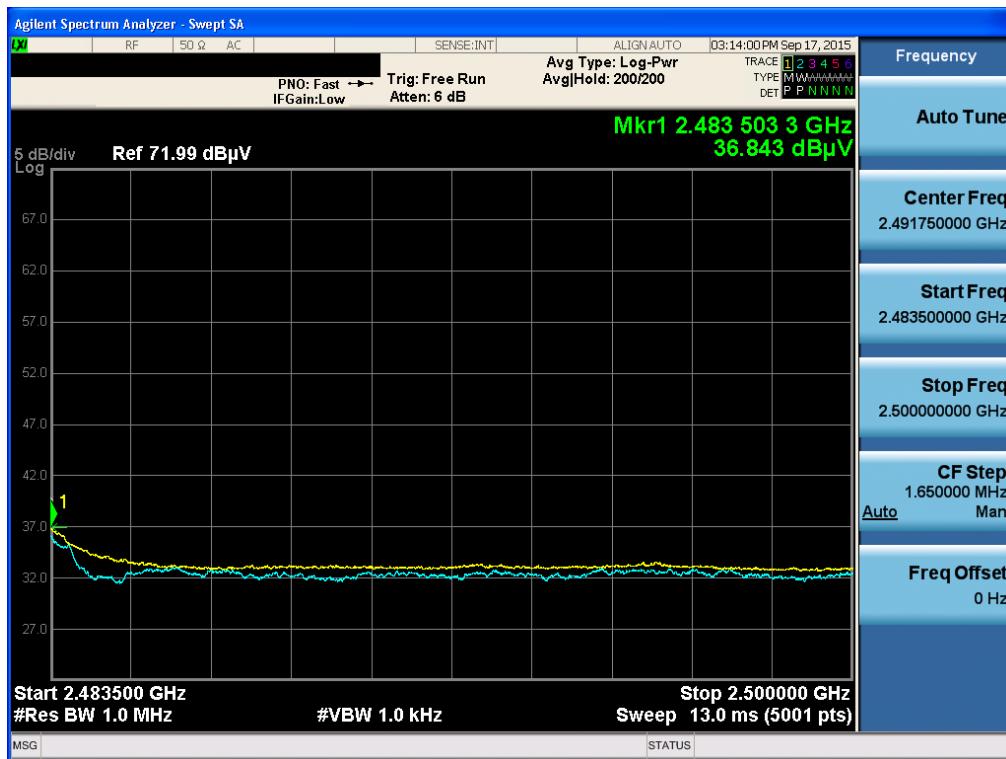


8DPSK & Highest & X axis & Ver

Detector Mode : PK

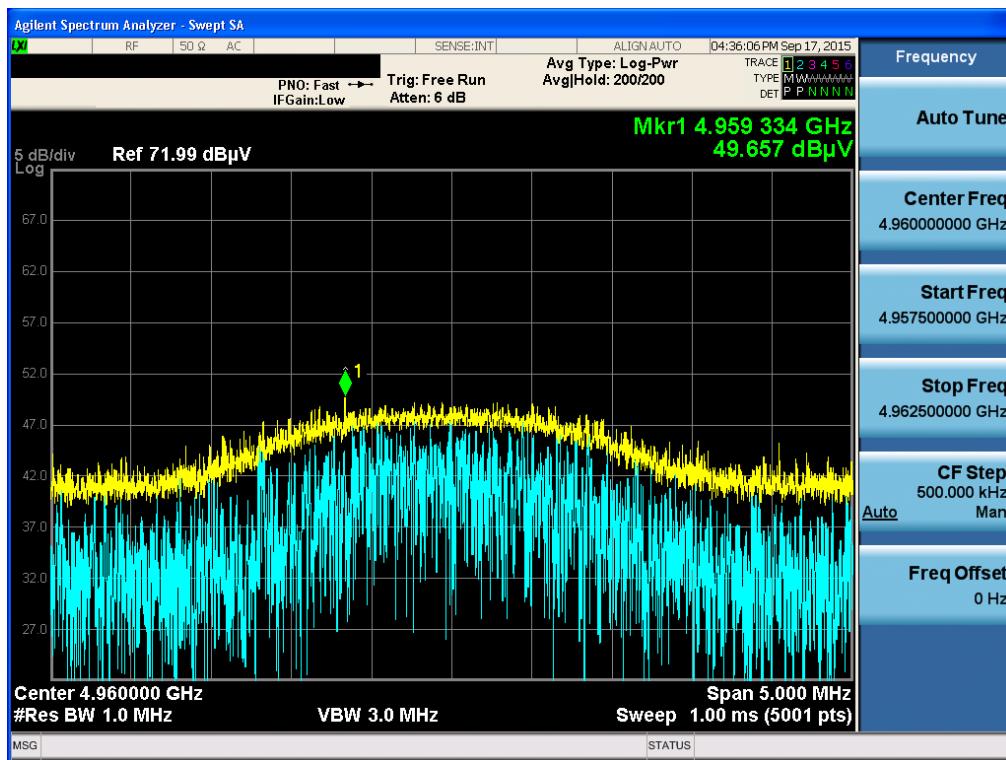


8DPSK & Highest & X axis & Ver

Detector Mode : AV

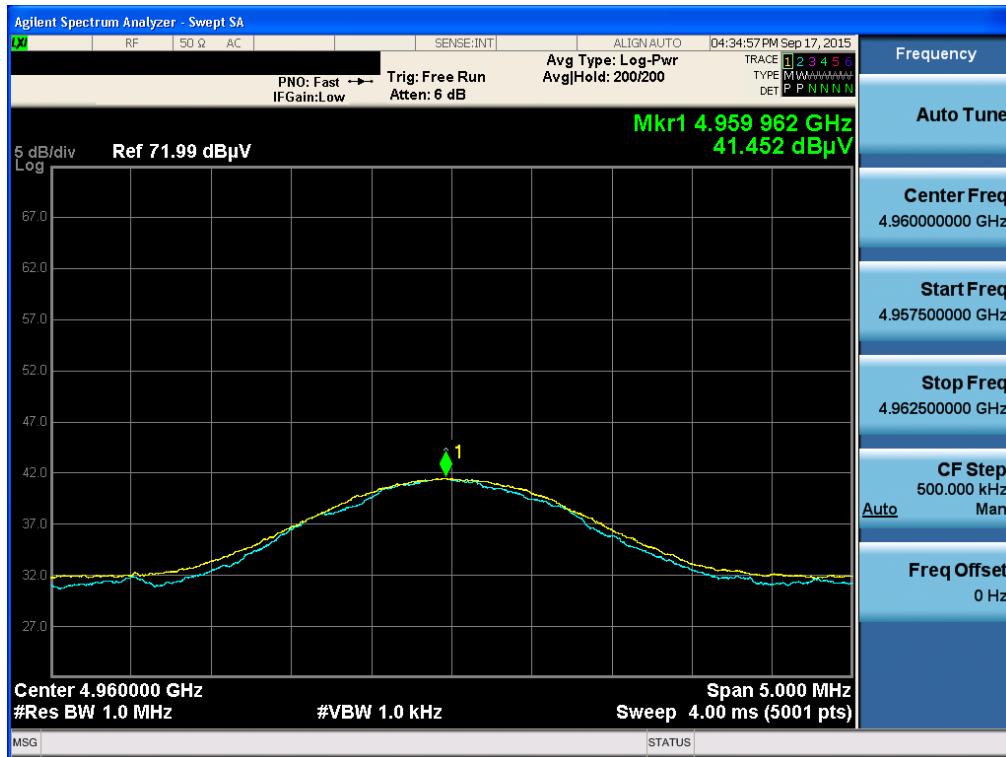

8DPSK & Highest & X axis & Ver

Detector Mode : PK

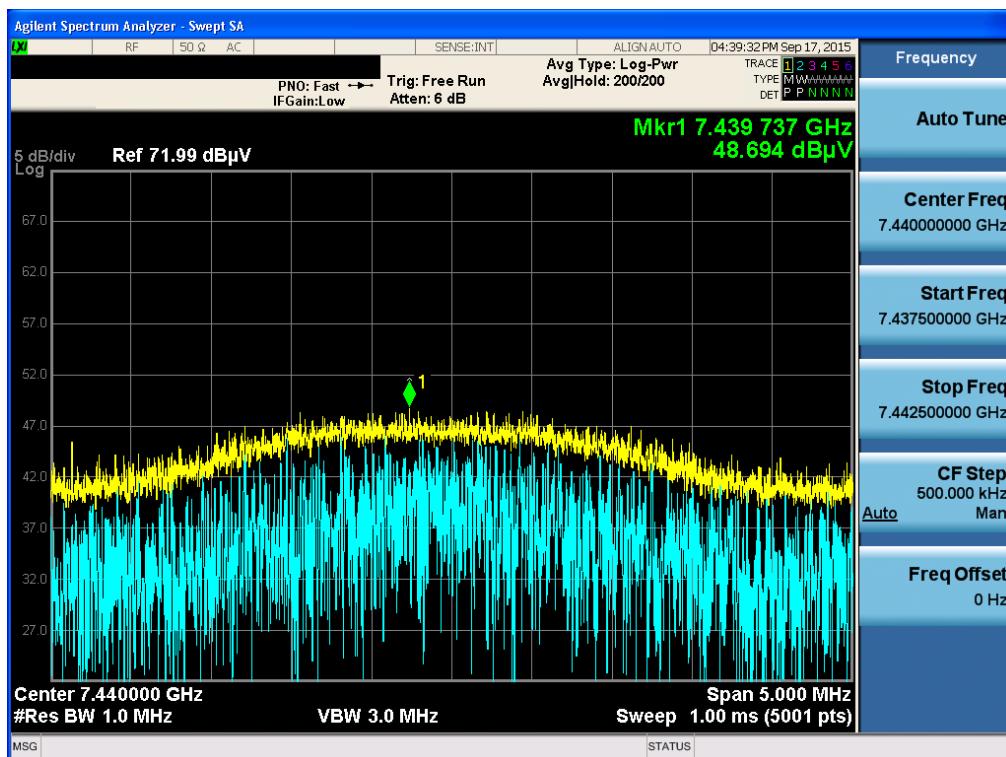

8DPSK & Highest & X axis & Ver

Detector Mode : AV

