

## Bluetooth lock instructions

BL-A02

## Bluetooth lock installed

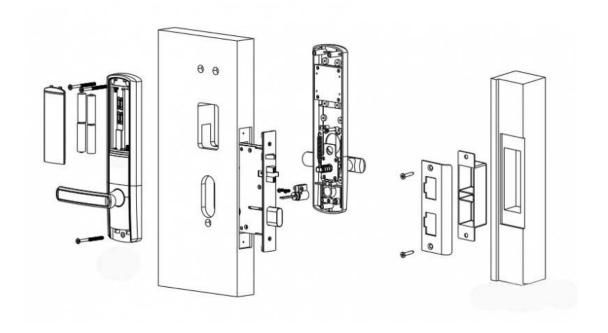

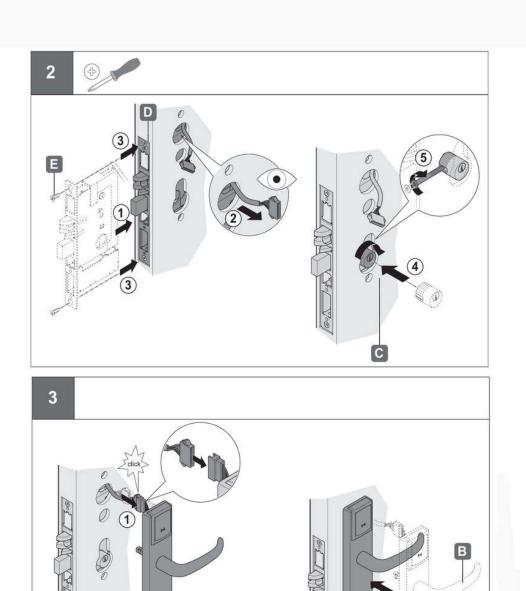

Lock the bluetooth as shown in the above installed to the door, and all the cables to can good. After the installation is complete, qr code on the scan package download and install the App (focus on shield cloud

6

WeChat or login website to download)

Shield cloud technology website: www.dunyun.net

Shield cloud intelligent lock the android/IOS APP to download:

Please click on the download center - download the APP to download and install **Software installation is registered** 

Download the App after the installation is complete, click on the App icon, enter the login screen. Old user directly enter a phone number and password to log in

Click on the registration to the registration interface - - enter a phone number - to get verification code (captcha for automatic entry, part of the phone does not support automatic entry, please manually enter) - a password - complete registration. < personnel please select personnel options add tube tube >. Login the App.

### Add user

To start for the users to add long press set button, door lock in setting state.

Click on the "+" key new APP right corner - choose corresponding to the bluetooth key icon - for the bluetooth pairing (pairing code 1234) and add users

New lock first registered users for the administrator user, (warm prompt: the administrator password is very important, please keep in mind)

### Mobile phone unlocked

Key is added after the success, the main interface will be key icon, wake up in the light lock button, and click the lock key, enter unlock code (open the door for convenient, can check the remember password), can unlock the success

Password lock (to make the security is higher, the default password lock does not open)

Long press set button to enter setting state, and then click on the keyboard input password lock slider (pictured) to "on" state, enter the unlock password. Can open the keyboard password lock function.

Unlock the password for the phone unlock password, end with # # key, there is the function of disordered input peeping prevention

Can be in a valid password before and after combined with an invalid password, to prevent others peeping password.

# The remote authorization (to make safer, if not necessary, it is suggested that does not open)

- **1.** Long press set button to enter setting state, and then click the remote authorization function block (pictured) to "on" state, enter the unlock password. You can use the remote authorization function
- **2.** Click the remote authorization, access authorization interface: click a password, enter the administrator password, the system will automatically generate a random group of encrypted password authorization (not see),

can be set up three groups, and each group of password can be used only once. Password is made valid by means of the status display is not used, it can be For the remote authorization.

**3.** Click the remote authorization, enter the authorized mobile phone number and authorization of the time, can successful authorization. Authorized user registration after the APP, click received authorization information, press the button on the door, and locks matching, matching success, can open the lock.

#### User management

Administrator user can at any time to stop using and remove the user on the lock (the only administrators use function, general users can only view),

The lock record query

Every time the lock information uploaded to the background, and through the push to each user on the phone.

### Low battery alarm

Mobile phones can at any time to check the door lock power state, green for the battery is normal, yellow for low power, red for low battery, the battery needs to be replaced.

Remote alarm

The property management

For shield cloud access management system of the village, owners can end community announcements, and property dialog, property pay cost and so on.

## Common problems ruled out

Common problems	Cause analysis and troubleshooting
Normal after installation, door button is not bright, mobile phone unable to open the lock	1 check whether the battery is installed 2 the power cord out or break 3 mobile phone whether successful pairing with lock
M-1:1 A	1 check whether mobile phone memory is full
Mobile phone App can't download	2 check the network is available 3 restart phone try to download
Mobile phones can't paired with lock	1 check whether the App is installed correctly 2 check whether the mobile phone bluetooth is normally open 3 check the matching password is correct 4 restart the phone to try to reconnect 5 to download the App to try pairing 6 replacement phone try pairing
The password lock can't open the door	1 check to see if the password lock unlock function open (in mobile phone Settings) 2 check the input password is correct

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any

interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -- Reorient or relocate the receiving antenna.
- -- Increase the separation between the equipment and receiver.
- -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -- Consult the dealer or an experienced radio/TV technician for help.

### Warm prompt:

If you have questions, please visit our company website to contact online customer service or call: 400-016-7706; We will provide you with more high-quality professional services.