



Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-2.361	30	Pass
NVNT	BLE	2440	Ant1	-2.431	30	Pass
NVNT	BLE	2480	Ant1	-2.414	30	Pass

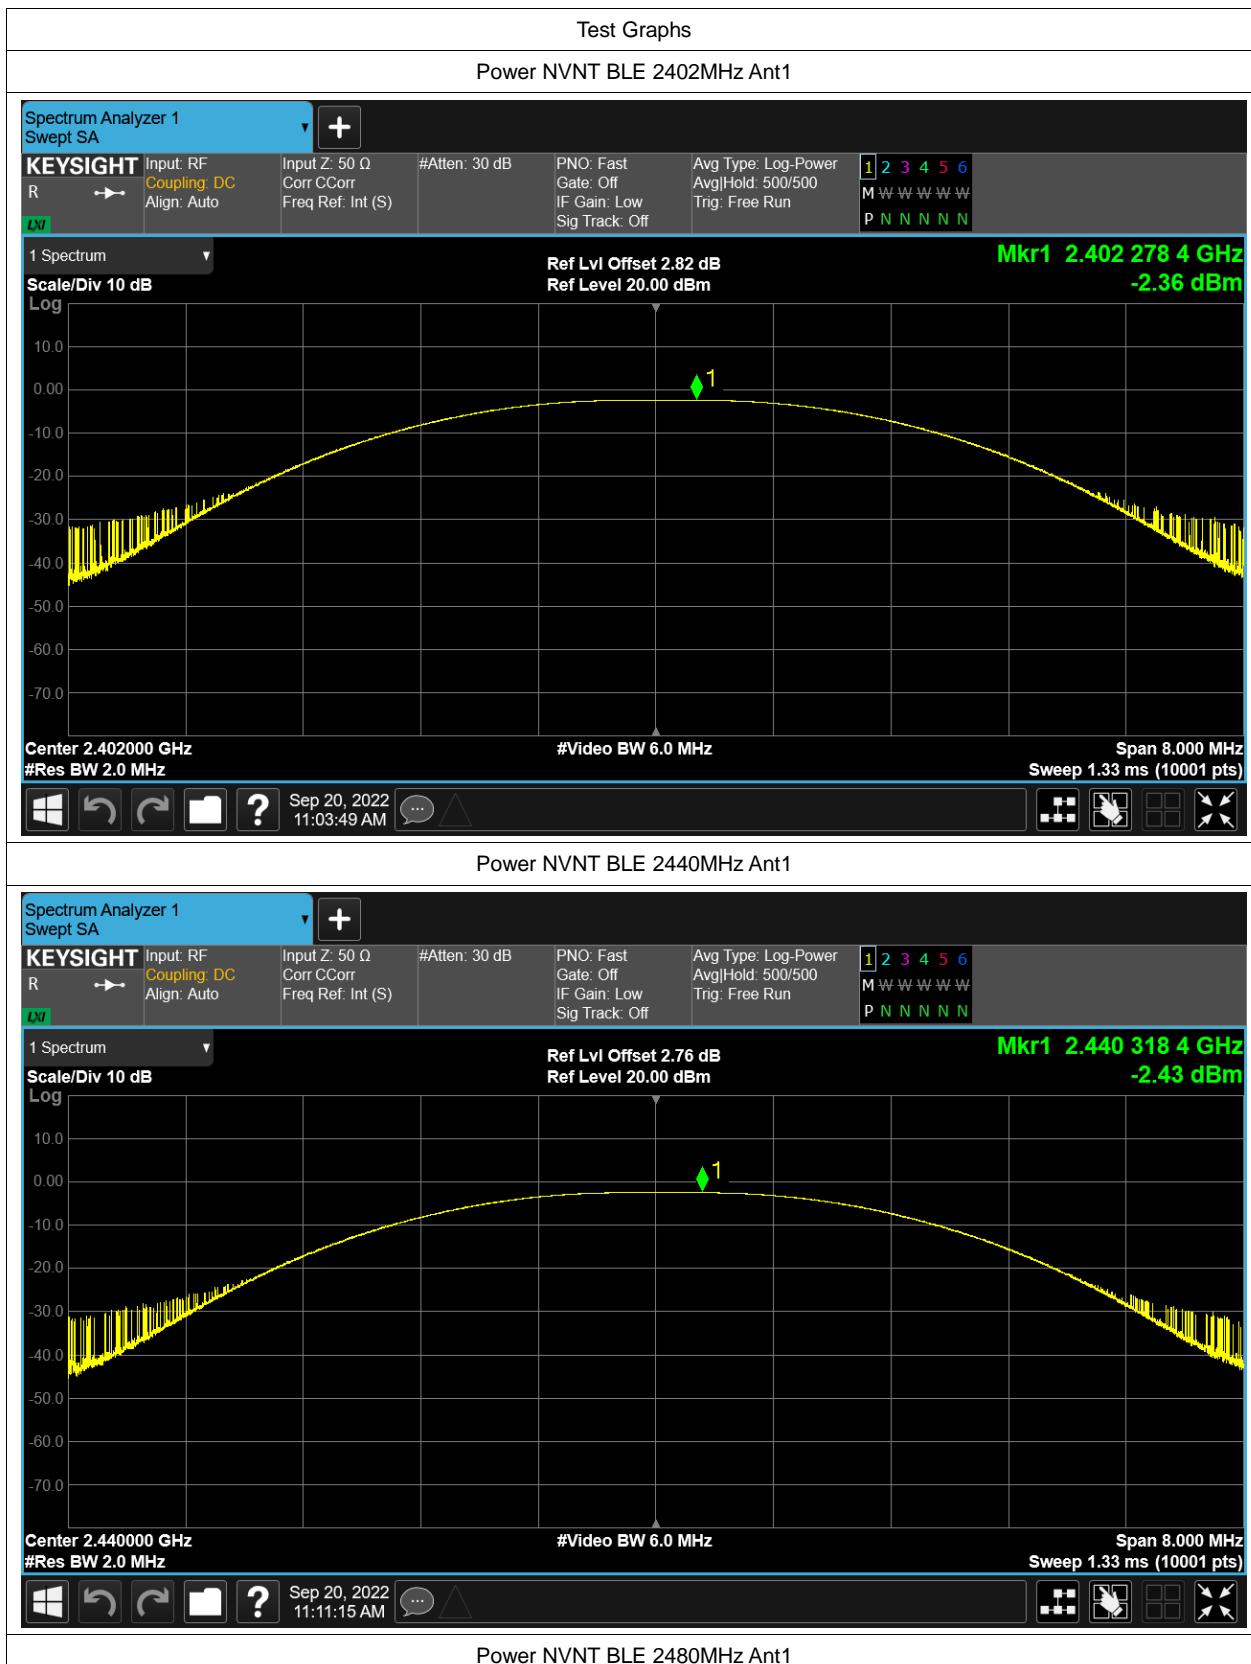

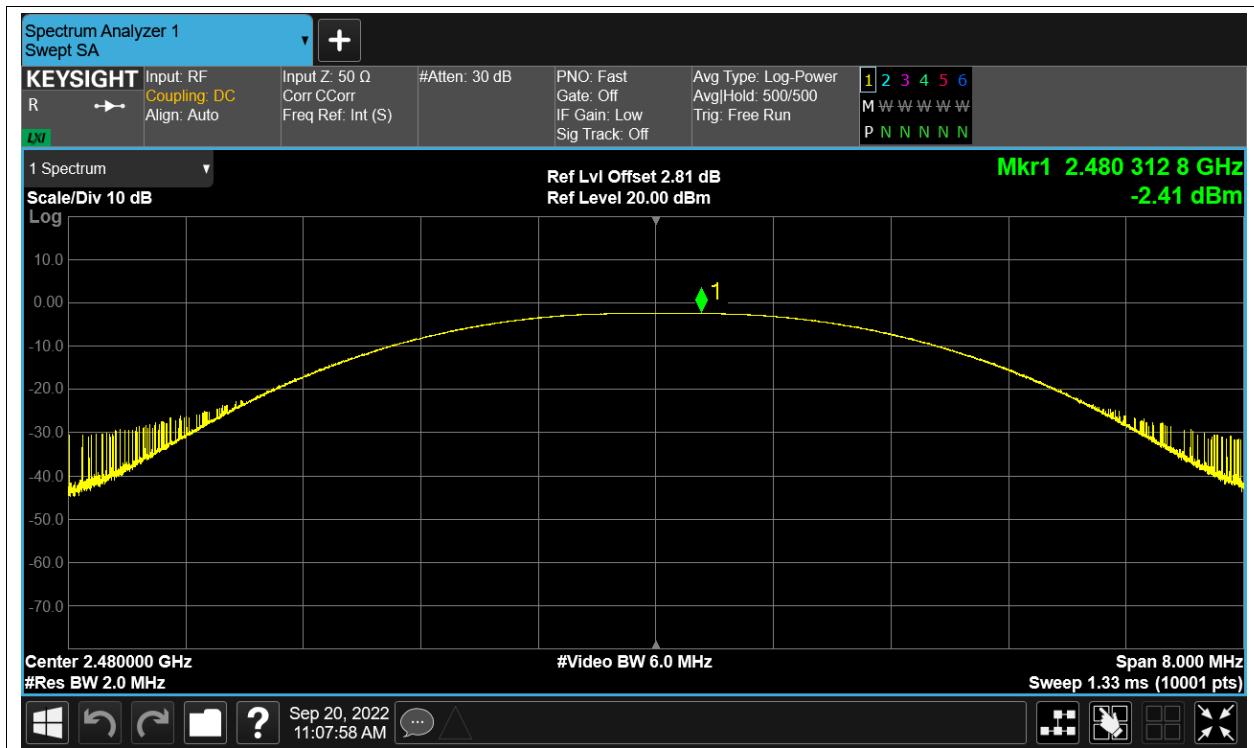

-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.687	0.5	Pass
NVNT	BLE	2440	Ant1	0.693	0.5	Pass
NVNT	BLE	2480	Ant1	0.701	0.5	Pass





Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	1.054583417
NVNT	BLE	2440	Ant1	1.054417887
NVNT	BLE	2480	Ant1	1.055588385

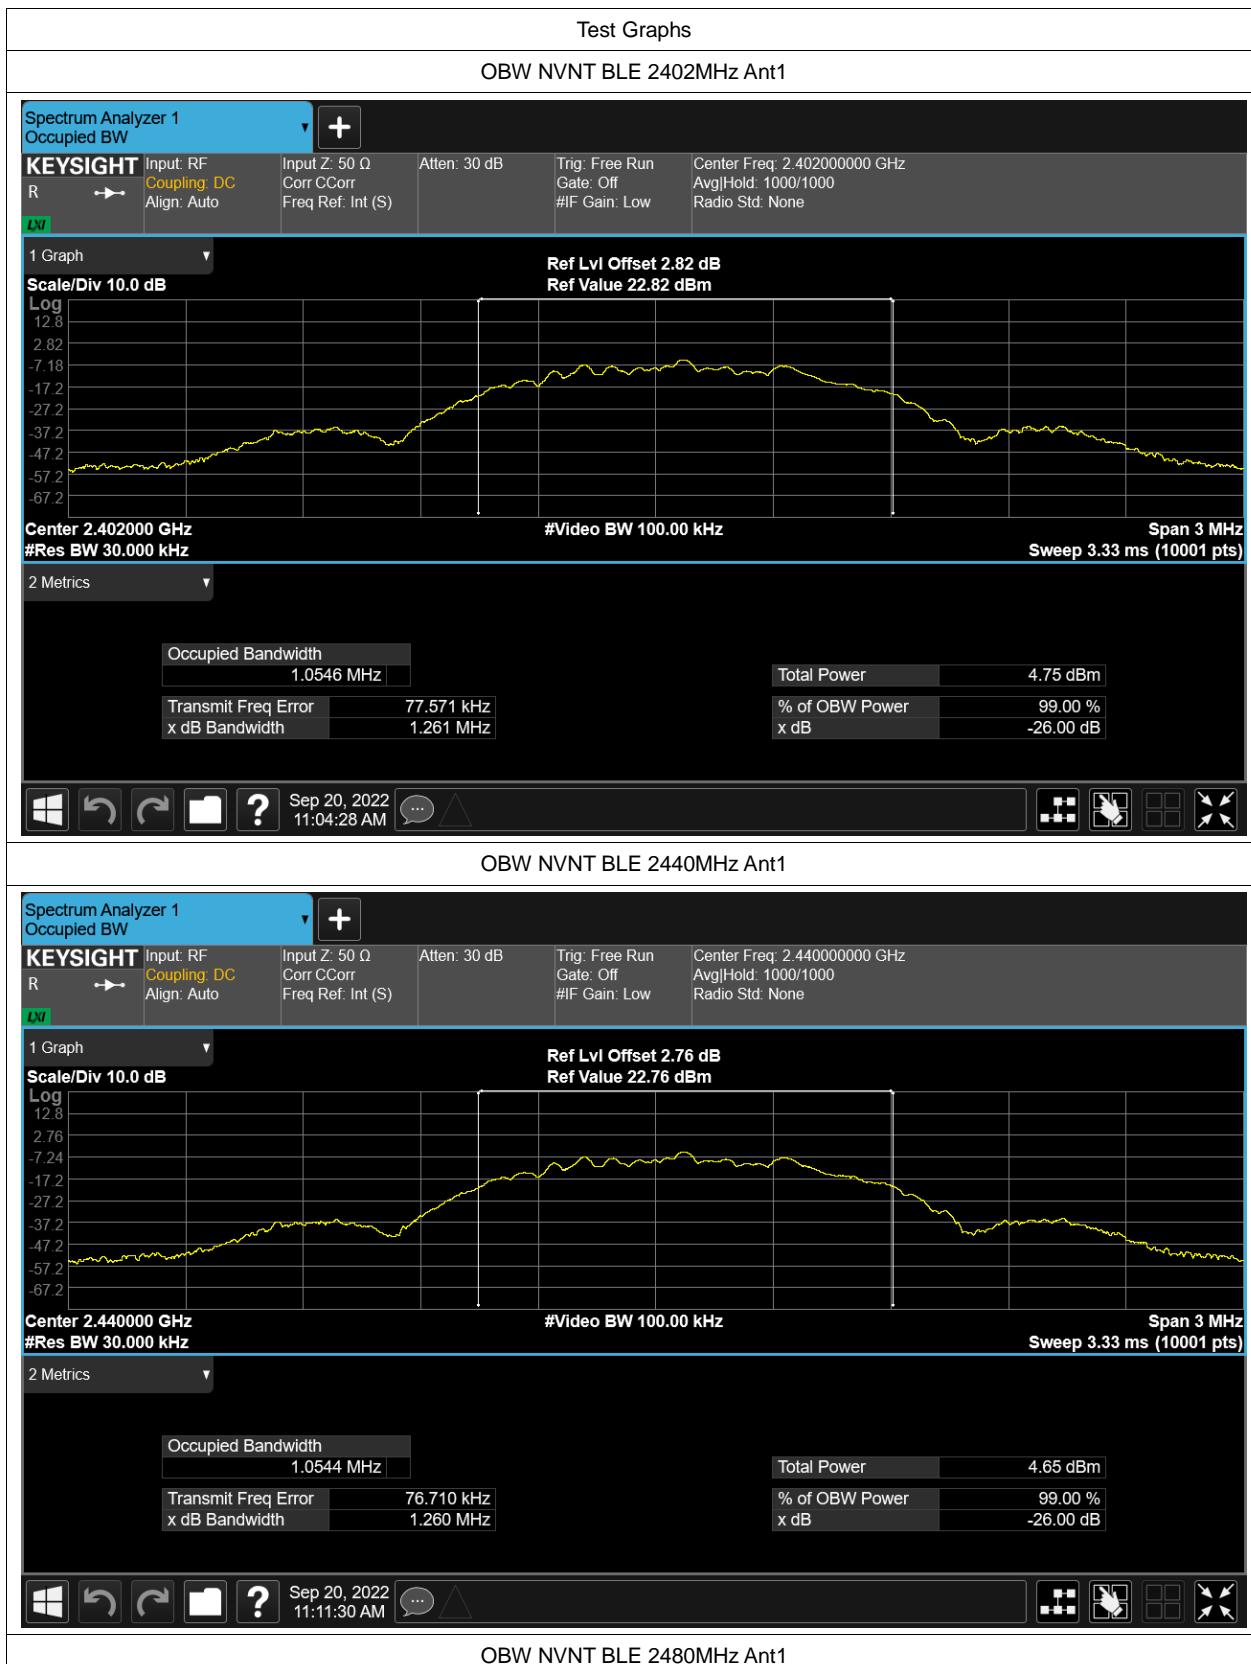




Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-17.54	8	Pass
NVNT	BLE	2440	Ant1	-17.557	8	Pass
NVNT	BLE	2480	Ant1	-17.602	8	Pass

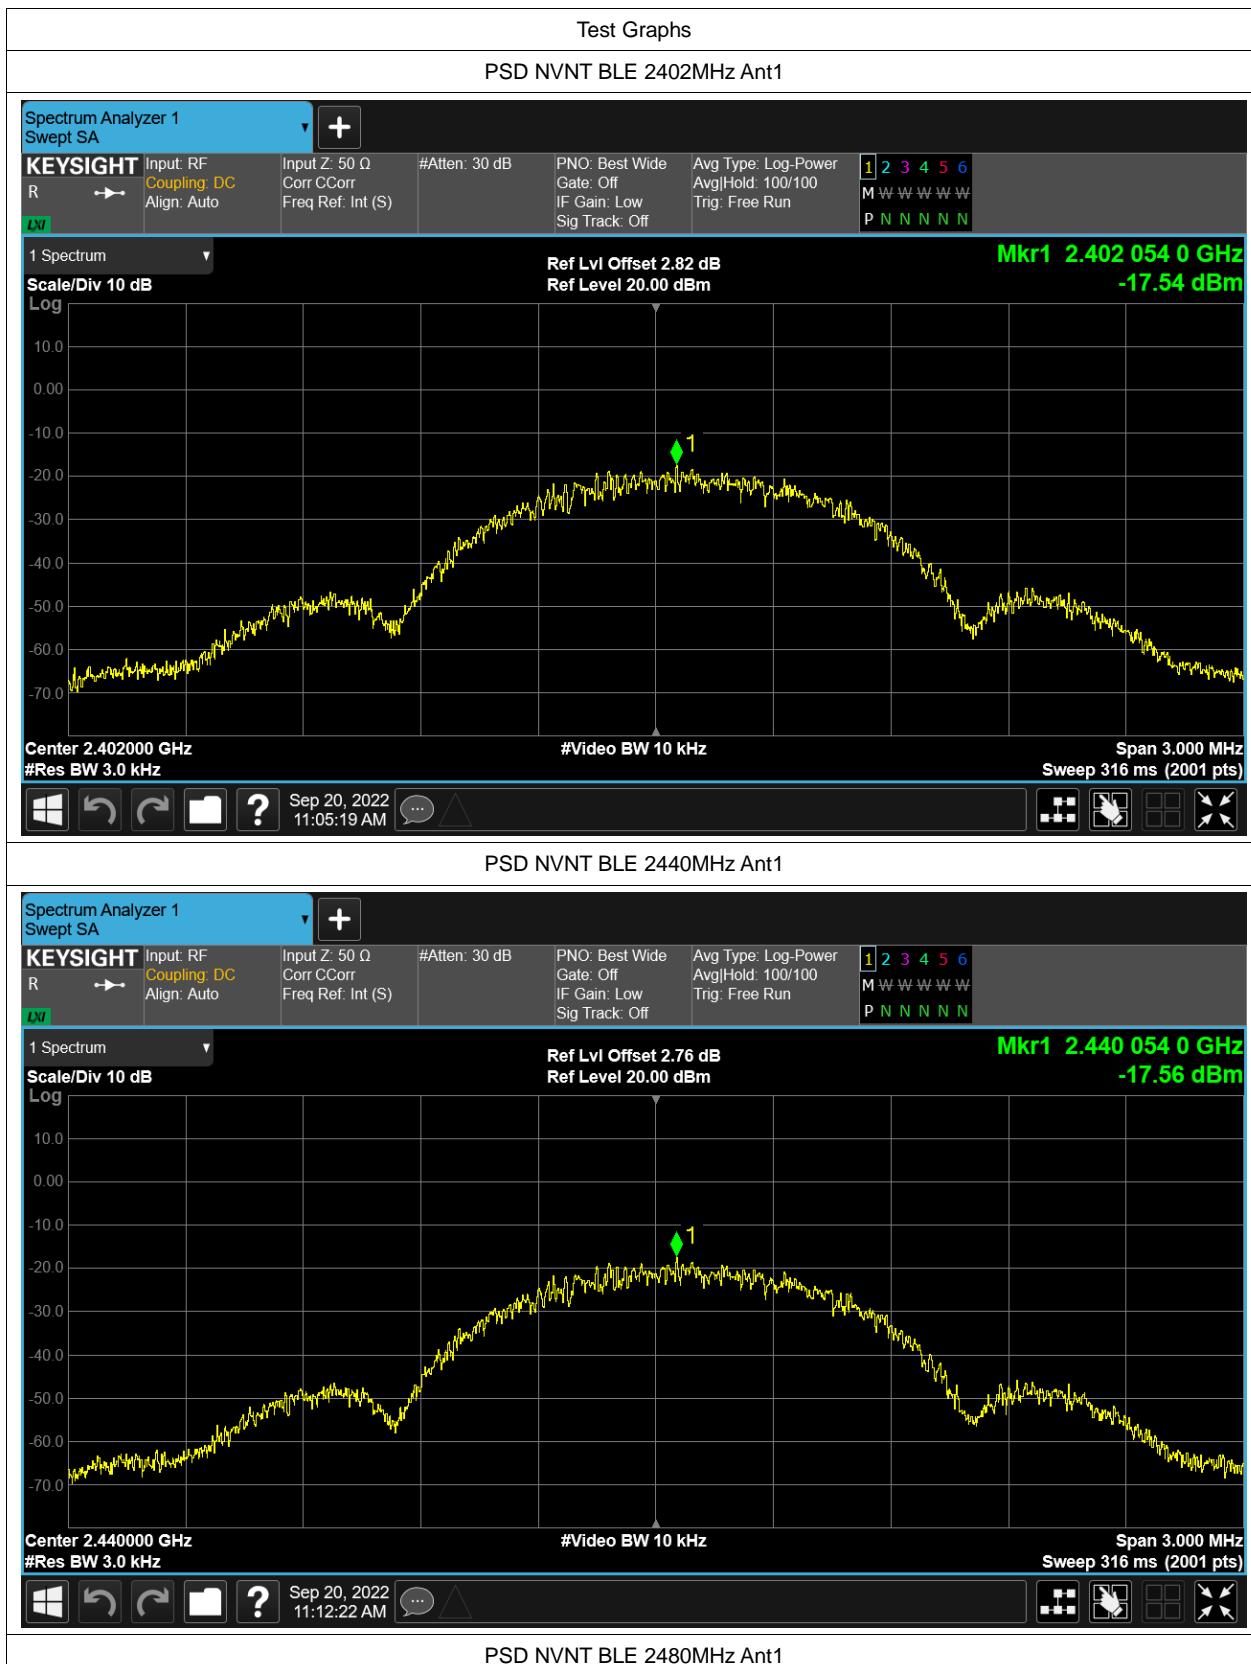

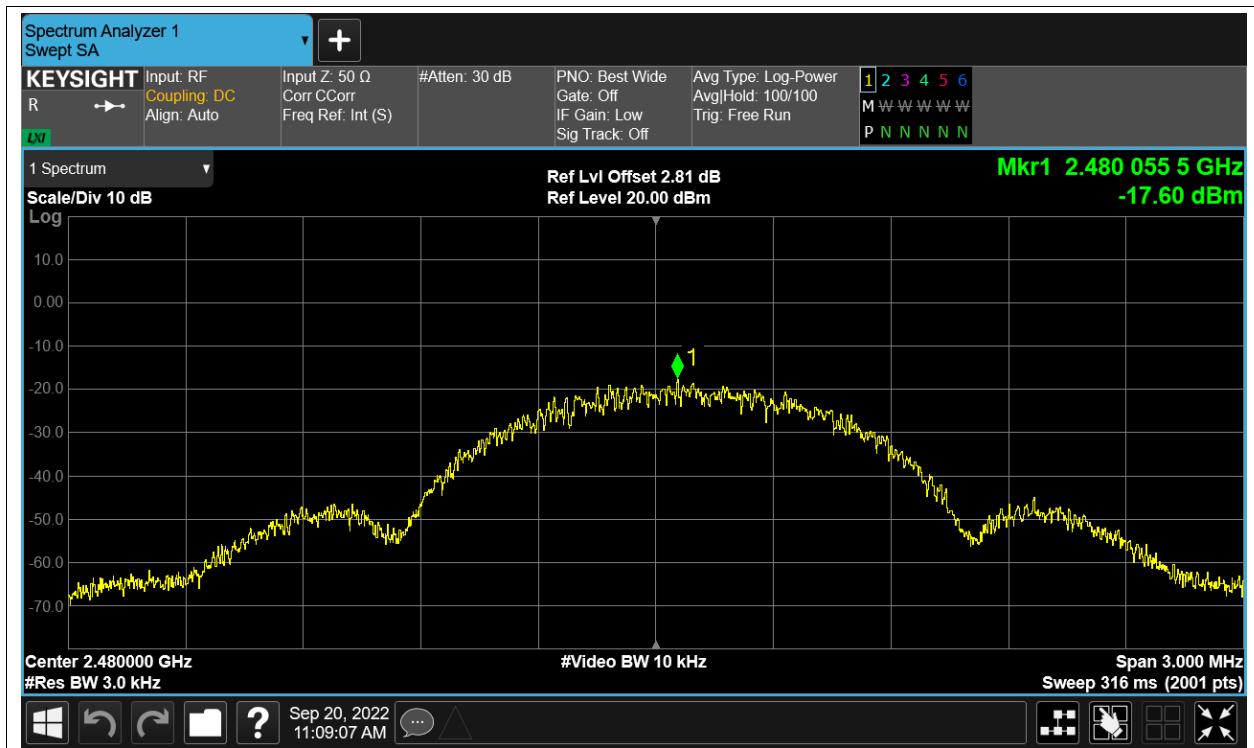


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-49.62	-20	Pass
NVNT	BLE	2480	Ant1	-51.89	-20	Pass





Band Edge NVNT BLE 2480MHz Ant1 Emission

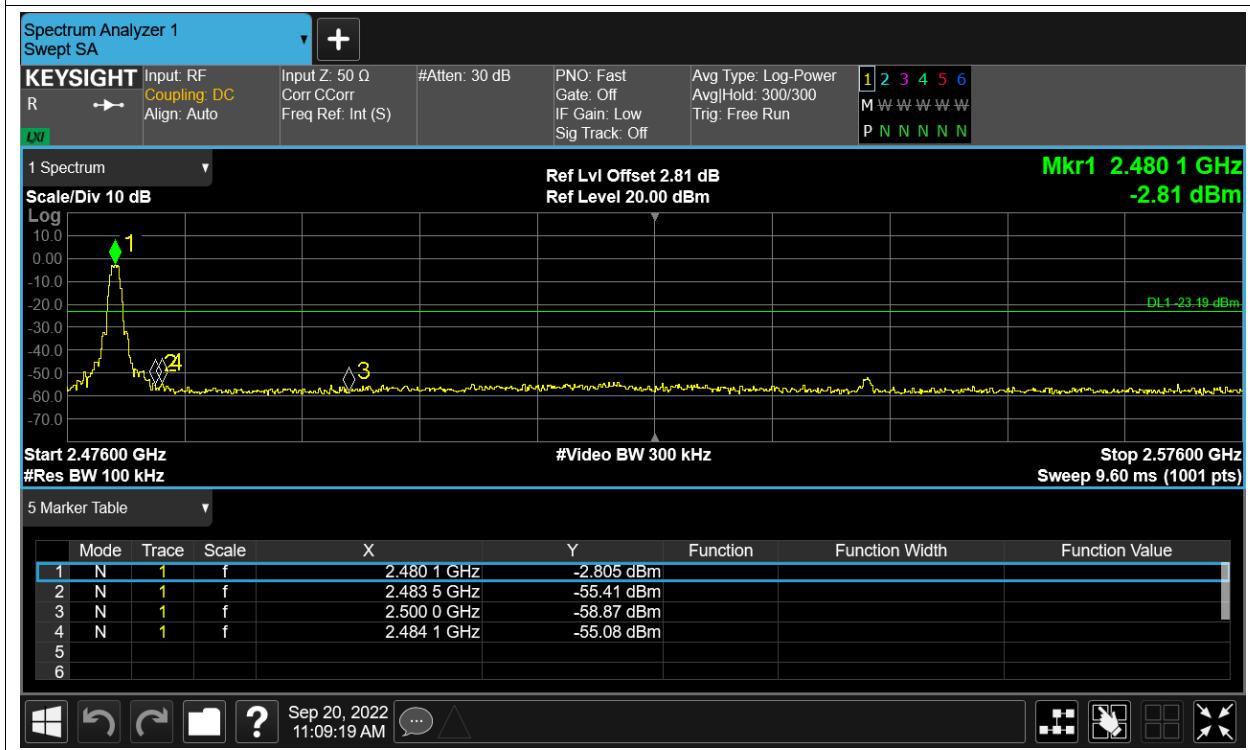


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-35.31	-20	Pass
NVNT	BLE	2440	Ant1	-38.19	-20	Pass
NVNT	BLE	2480	Ant1	-38.49	-20	Pass





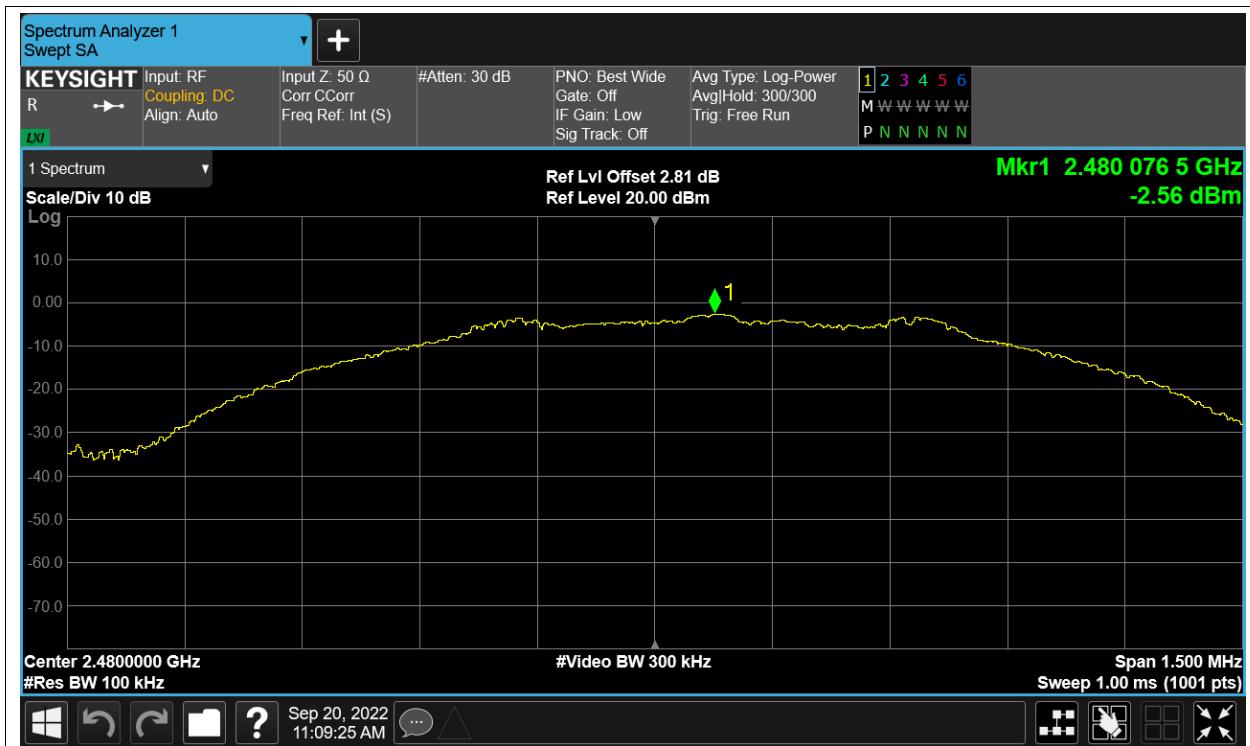

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

