Equipment : IP Camera

Model No. : ALLie Home

FCC ID : 2AFCRAH720

Standard : 47 CFR FCC Part 15.407

Applicant : IC Real Tech

3050 North Andrews Avenue Extension, Pompano Beach,

Florida, United States 33064.

Manufacturer : Hi-P Electronics Pte Ltd

12 Ang Mo Kio Street 64, #03=02, UE BizHub Central Blk A,

Singapore 569088.

Operate Mode : Client without radar detection

The product sample received on Aug. 18, 2015 and completely tested on Sep. 17, 2015. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in FCC 06-96 Appendix and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full

Reviewed by:

Testing Laboratory
1190

Report No.: FZ572330

Kevin Liang / Assistant Manager

SPORTON INTERNATIONAL INC. Page No. : 1 of 23
TEL: 886-3-3273456 Report Version : Rev. 01



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Accessories and Support Equipment	6
1.3	Testing Applied Standards	
1.4	Testing Location Information	6
1.5	Measurement Uncertainty	7
2	TEST CONFIGURATION OF EUT	8
2.1	DFS and TPC Information	8
2.2	The Worst Case Measurement Configuration	8
3	DYNAMIC FREQUENCY SELECTION (DFS) TEST RESULT	9
3.1	General DFS Information	9
3.2	Radar Test Waveform Calibration	11
3.3	In-service Monitoring	18
4	TEST EQUIPMENT AND CALIBRATION DATA	19
APPI	ENDIX A. TEST PHOTOS	22

Report No.: FZ572330

# **Summary of Test Result**

	Conformance Test Specifications (FCC 06-96 Appendix)						
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result		
-	7.8.1	DFS: UNII Detection Bandwidth Measurement	N/A (Client w/o test)	80% of the 99% BW	N/A		
-	7.8.2.1	DFS: Initial Channel Availability Check Time	N/A (Client w/o test)	CAC ≥ 60 sec	N/A		
-	7.8.2.2	DFS: Radar Burst at the Beginning of the Channel Availability Check Time	N/A (Client w/o test)	Detection Threshold: -64 dBm	N/A		
-	7.8.2.3	DFS: Radar Burst at the End of the Channel Availability Check Time	N/A (Client w/o test)	Detection Threshold: -64 dBm	N/A		
3.3	7.8.3	DFS: In-Service Monitoring for Channel Move Time (CMT)	CMT < 10sec	CMT ≤ 10sec	Complied		
3.3	7.8.3	DFS: In-Service Monitoring for Channel Closing Transmission Time (CCTT)	CCTT < 60 ms	CCTT ≤ 60 ms starting at CMT 200ms	Complied		
3.3	7.8.3	DFS: In-Service Monitoring for Non-Occupancy Period (NOP)	NOP > 30 min	NOP ≥ 30 min	Complied		
-	7.8.4	DFS: Statistical Performance Check	N/A (Client w/o test)	Table 5 - 7 (KDB 905462)	N/A		
-	5.8.1	DFS: Uniform Spreading	N/A (Client w/o this function)	Uniform Spreading for DFS Band	N/A		
3.1.4	8.1	User Access Restrictions	Manufacturer attestation NOT accessible to user	DFS controls	Complied		

Report No.: FZ572330

SPORTON INTERNATIONAL INC. Page No. : 3 of 23
TEL: 886-3-3273456 Report Version : Rev. 01



# **Revision History**

Report No.: FZ572330

Report No.	Version	Description	Issued Date
FZ572330	Rev. 01	Initial issue of report	Oct. 01, 2015

SPORTON INTERNATIONAL INC. Page No. : 4 of 23
TEL: 886-3-3273456 Report Version : Rev. 01

# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

IEEE Std. 802.11	Channel Bandwidth (MHz)		
a / n (HT20) / ac (VHT20)	20		
n (HT40) / ac (VHT40)	40		
ac (VHT80)	80		
802 11a/n uses a combination of OEDM-RPSK_OPSK_16OAM_64OAM modulation			

Report No.: FZ572330

802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation. 802.11ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

#### 1.1.2 Antenna Information

	Antenna Category
$\boxtimes$	Integral antenna (antenna permanently attached)
	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

	Antenna General Information					
No.	Ant. Cat.	Ant. Type	Gain <sub>(dBi)</sub>			
1	Integral	PIFA	1.5			
	For radiated tests, the DFS test should be performed with lowest antenna gain (regardless of antenna type).					

SPORTON INTERNATIONAL INC. Page No. : 5 of 23
TEL: 886-3-3273456 Report Version : Rev. 01

## 1.2 Accessories and Support Equipment

	Accessories Information						
	Brand Name	Ten Pao	Model Name	S012BEU0900100			
AC Adapter	Power Rating	I/P: 100 - 240 Vac, 500 mA, O/P: 9 Vdc, 1000 mA					
	Power Cord	3 meter, non-shielded cable, w/o ferrite core					
USB Cable	Brand Name	YuanLing Technology (HK) Limited	Model Name	YL008-065			
	Signal Line	0.9 meter, with braid s	hielded cable, w/o	o ferrite core			

Report No.: FZ572330

	Support Equipment						
No.	Equipment	Brand Name	Model Name	FCC ID			
1	AP (Master)	SOPHOS	AP-55	2ACTO-AP55			
2	NoteBook	DELL	Latitude E5510	DoC			
3	Adapter	DELL	DA65NM111-00	DoC			
4	NoteBook	HP	EliteBook 8440p	DoC			
5	Adapter	HP	Series PPP009H	DoC			
6	NoteBook	ASUS	A53S	DoC			
7	Adapter	ASUS	EXA0904YH	DoC			

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 06-96 Appendix
- FCC KDB 905462 5 GHz UNII DFS Compliance Procedures
- FCC KDB 443999 Approval of DFS UNII Devices
- 47 CFR FCC Part 15.407

## 1.4 Testing Location Information

	Testing Location						
$\boxtimes$	HWA YA	ADD	) :	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C <b>.</b>			
		TEL	:	886-3-327-345	6 FAX : 886	6-3-327-0973	
	JHUBEI	ADD	) :	: No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.			2, Taiwan, R.O.C.
		TEL	:	886-3-656-906	5 FAX : 886	6-3-656-9085	
Test Condition Test Site No. Test Engineer Test Environment Test Da			Test Date				
DFS Site				DF01-HY	Ben Tseng	26°C / 60%	Sep. 15, 2015~ Sep. 17, 2015

SPORTON INTERNATIONAL INC. Page No. : 6 of 23
TEL: 886-3-3273456 Report Version : Rev. 01

## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Report No.: FZ572330

Measurement Unce	ertainty
Test Item	Uncertainty
Radio frequency	± 8.7 X 10 <sup>-7</sup>
RF output power, conducted	±0.6 dB
All emissions, conducted	±0.8 dB
All emissions, radiated	±2.8 dB
Temperature	±0.8 °C
Humidity	±3 %
DC and low frequency voltages	±3 %
Time	±1.4 %

SPORTON INTERNATIONAL INC. Page No. : 7 of 23
TEL: 886-3-3273456 Report Version : Rev. 01

# 2 Test Configuration of EUT

## 2.1 DFS and TPC Information

	The DFS Related Operating Mode(s) of the Equipment					
☐ Master	Master					
☐ Cilent with radar	detection					
	lar detection					
Software / Firmware	Version	Msm8974-userdebug 4.4.2 KVT49L ALLIE-F0.0.04 test-keys				
Communication Mod	de		☐ Frame Based			
IEEE Std. 802.11 Frequency Range (MHz)		TPC (Transmit Power Control)	Passive Scan			
a/n/ac		No	Yes			
(HT20/VHT20) / n/ac (HT40/VHT40) /		No	Yes			
ac(VHT80)	☐ 5600-5650	-	-			

Report No.: FZ572330

## 2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests				
Tests Item Dynamic Frequency Selection (DFS)				
Test Condition	Test Condition Radiated measurement (Vertical Polarization)			
	Modulation Mode			
	VHT80			

SPORTON INTERNATIONAL INC. Page No. : 8 of 23
TEL: 886-3-3273456 Report Version : Rev. 01



## 3 Dynamic Frequency Selection (DFS) Test Result

#### 3.1 General DFS Information

#### 3.1.1 DFS Parameters

Table D.1: DFS requirement values					
Parameter	Value				
Non-occupancy period	Minimum 30 minutes				
Channel Availability Check Time	60 seconds				
Channel Move Time	10 seconds See Note 1.				
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. See Notes 1 and 2.				
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.				

Report No.: FZ572330

- Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.
- Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
- Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Table D.2: Interference threshold values					
Maximum Transmit Power	Value (See Notes 1, 2, and 3)				
EIRP ≥ 200 milliwatt	-64 dBm				
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm				
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm				

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

SPORTON INTERNATIONAL INC. : 9 of 23
TEL: 886-3-3273456 : Report Version : Rev. 01

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

## 3.1.2 Applicability of DFS Requirements Prior to Use of a Channel

	DFS Operational mode					
Requirement	Master	Client without radar detection	Client with radar detection			
Non-Occupancy Period	Yes	Not required	Yes			
DFS Detection Threshold	Yes	Not required	Yes			
Channel Availability Check Time	Yes	Not required	Not required			
U-NII Detection Bandwidth	Yes	Not required	Yes			

Report No.: FZ572330

### 3.1.3 Applicability of DFS Requirements during Normal Operation

	DFS Operational mode					
Requirement	Master	Client without radar detection	Client with radar detection			
DFS Detection Threshold	Yes	Not required	Yes			
Channel Closing Transmission Time	Yes	Yes	Yes			
Channel Move Time	Yes	Yes	Yes			
U-NII Detection Bandwidth	Yes	Not required	Yes			

#### 3.1.4 User Access Restrictions

	User Access Restrictions							
$\boxtimes$	DFS controls (hardware or software) related to radar detection are NOT accessible to the user. Manufacturer statement confirming that information regarding the parameters of the detected Radar							
	Waveforms is not available to the end user.							

## 3.1.5 Channel Loading/Data Streaming

$\boxtimes$	IP Based (Load Based) - stream the test file from the Master to the Client.
	Performed NTIA approved WAV file. (EUT w/o video function application)
	Performed NTIA approved MPEG2 file. (EUT with video function application)
	Alternative streaming e.g., FTP with about 17 to 20% loading and submit proposal to FCC.
	Frame Based - stream the test file from the Master to the Client.
	fixed talk/listen ratio, set the ratio to 45%/55%
NTI	A test file refer as: http://ntiacsd.ntia.doc.gov/dfs/

SPORTON INTERNATIONAL INC. Page No. : 10 of 23
TEL: 886-3-3273456 Report Version : Rev. 01



### 3.2 Radar Test Waveform Calibration

#### 3.2.1 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $ \begin{bmatrix} \left(\frac{1}{360}\right), \\ \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu \text{sec}}}\right) \end{bmatrix} $		
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A		60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggrega	te (Radar Types 1-4	1)		80%	120

**Report No.: FZ572330** 

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

SPORTON INTERNATIONAL INC. Page No. : 11 of 23 TEL: 886-3-3273456 Report Version : Rev. 01



#### 3.2.2 Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per <i>Burst</i>	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

**Report No.: FZ572330** 

Each waveform is defined as follows:

- The transmission period for the Long Pulse Radar test signal is 12 seconds.
- There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst\_Count.
- Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst\_Count. Each interval is of length (12,000,000 / Burst\_Count) microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and [(12,000,000 / Burst\_Count) (Total Burst Length) + (One Random PRI Interval)] microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

SPORTON INTERNATIONAL INC. Page No. : 12 of 23
TEL: 886-3-3273456 Report Version : Rev. 01

### 3.2.3 Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30


Report No.: FZ572330

The FCC Type 6 waveform uses a static waveform with 100 bursts in the instruments ARB. In addition, the RF list mode is operated with a list containing 100 frequencies from a randomly generated list and it had be ensured that at least one of the random frequencies falls into the UNII Detection Bandwidth of the DUT. Each burst from the waveform file initiates a trigger pulse at the beginning that switches the RF list from one item to the next one.

#### 3.2.4 Master DFS Threshold Level

Master DFS Threshold Level							
DFS Threshold level:	-63	dBm	at the antenna connector (-63 dBm conducted)				
			in front of the antenna (-63 dBm e.i.r.p.)				
The Interference Radar Detection Threshold Level is (-64dBm) + {1 dB}= -63 dBm. That had been taken into account the master output power range and antenna gain.							


#### 3.2.5 Calibration Setup

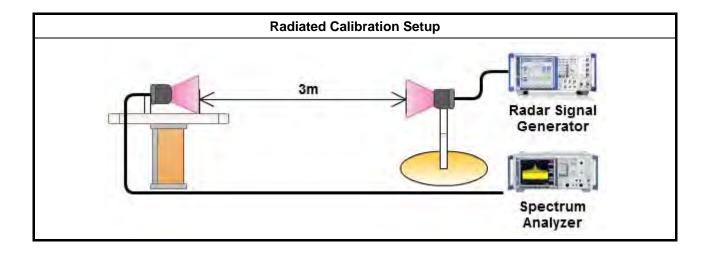

SPORTON INTERNATIONAL INC. Page No. : 13 of 23
TEL: 886-3-3273456 Report Version : Rev. 01



Report No.: FZ572330

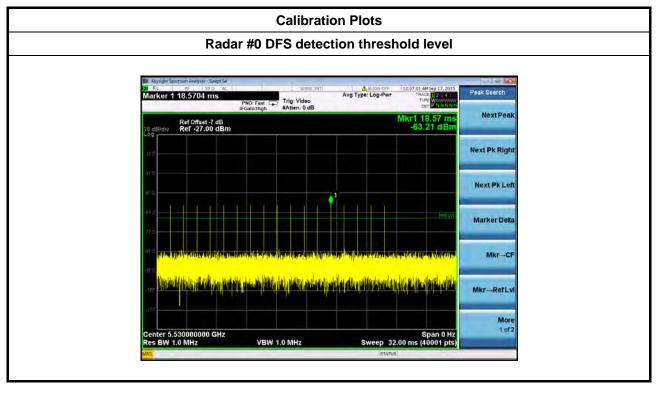

SPORTON INTERNATIONAL INC.


TEL: 886-3-3273456 FAX: 886-3-3270973 Page No. : 14 of 23
Report Version : Rev. 01



3.2.6 Test Setup

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move.

Report No.: FZ572330

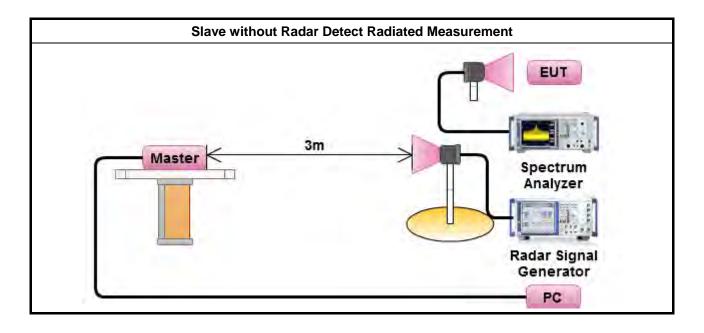


SPORTON INTERNATIONAL INC. Page No. : 15 of 23
TEL: 886-3-3273456 Report Version : Rev. 01




Verification that when the EUT is "off" that the RF energy emitted Plots

Report No.: FZ572330

Without Data Traffic Plot (Noise Plot)

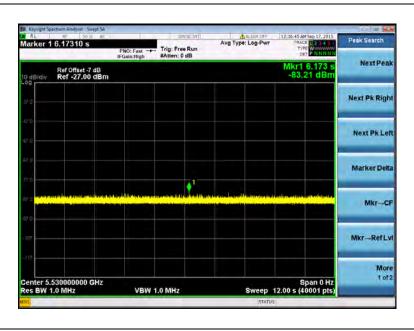

#### **EUT Client Data Traffic Plot**

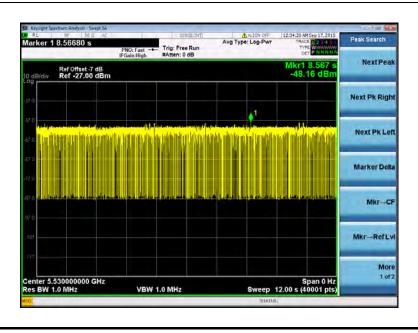

SPORTON INTERNATIONAL INC. Page No. : 16 of 23
TEL: 886-3-3273456 Report Version : Rev. 01



# Verification that when the EUT is "off" that the RF energy emitted Plots **Master Data Traffic Plot** Avg Type: Log-Pwr TRA arker 1 7.62120 s Peak Search PNO: Fest --- Trig: Free Run IFGain:High #Atten: 0 dB Ref Offset -7 dB Ref -27.00 dBm Next Pk Right Next Pk Left Marker Delta Mkr→CF Mkr-RefLvi Center 5.530000000 GHz Res BW 1.0 MHz Span 0 Hz Sweep 12.00 s (40001 pts)

VBW 1.0 MHz

Report No.: FZ572330

: 17 of 23

: Rev. 01

SPORTON INTERNATIONAL INC. Page No. Report Version TEL: 886-3-3273456

## 3.3 In-service Monitoring

#### 3.3.1 In-service Monitoring Limit

In-service Monitoring Limit					
Channel Move Time	10 sec				
Channel Closing Transmission Time	200 ms + an aggregate of 60 ms over remaining 10 sec periods.				
Non-occupancy period	Minimum 30 minutes				

**Report No.: FZ572330** 

#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures


#### **Test Method**

- Refer as FCC 06-96 Appendix, clause 7.8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time limits.
- Refer as FCC 06-96 Appendix, clause 8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. One 10 sec plot needs to be reported for the Short Pulse Radar Types 0 and one for the Long Pulse Radar Type in a 22 sec plot. And zoom-in a 600 ms plot verified channel closing time for the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move.
- Refer as FCC 06-96 Appendix, clause 7.8.3 verified during In-Service Monitoring; Non-Occupancy Period. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Non-Occupancy Period). Compare the Non-Occupancy Period limits.

SPORTON INTERNATIONAL INC. Page No. : 18 of 23
TEL: 886-3-3273456 Report Version : Rev. 01



### **Test Result of In-service Monitoring**

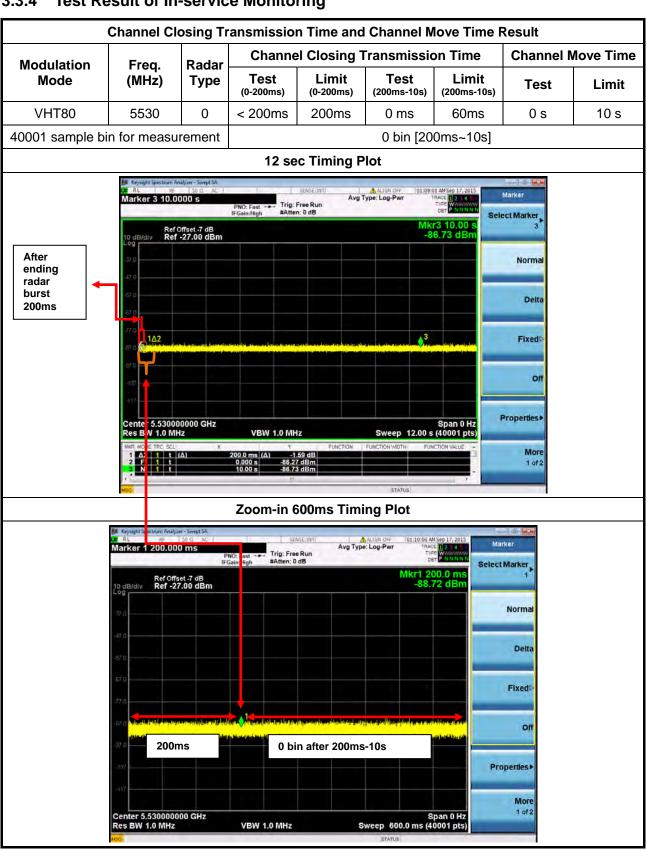


SPORTON INTERNATIONAL INC. TEL: 886-3-3273456

FAX: 886-3-3270973

Page No. : 19 of 23

**Report No.: FZ572330** 

Report Version : Rev. 01

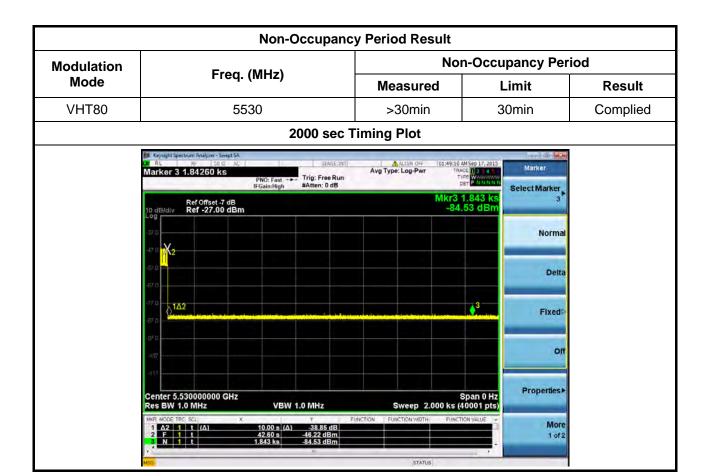

Report No.: FZ572330

: 20 of 23

: Rev. 01



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY55150165	9KHz~7GHz	Jun. 22, 2015	DFS01-HY
Signal generat	Agilent	E4438C	MY49072778	250kHz-6GHz	Oct. 03, 2014	DFS01-HY
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	302338	1GHz ~ 26.5GHz	Oct. 13, 2014	DFS01-HY
RF Cable-8m	HUBER+SUHNER	SUCOFLEX_104	MY17172/4	0.05GHz ~ 26.5GHz	Oct. 13, 2014	DFS01-HY
Horn Antenna	COM-POWER	AH-118	10091	1GHz ~ 18GHz	Apr. 15, 2015	DFS01-HY
Horn Antenna	COM-POWER	AH-118	711064	1GHz ~ 18GHz	Nov. 13, 2014	DFS01-HY

Report No.: FZ572330

Note: Calibration Interval of instruments listed above is one year.

SPORTON INTERNATIONAL INC. Page No. : 21 of 23
TEL: 886-3-3273456 Report Version : Rev. 01