



FCC Radio Test Report

FCC ID: 2AFENXK10T

This report concerns: Original Grant


Project No. : 2503C105
Equipment : Projector
Brand Name : XGIMI
Test Model : XK10T
Series Model : N/A
Applicant : XGIMI Technology Co., Ltd.
Address : No. 4, Zone A, No. 1129, Shijicheng Road, Chengdu Hi-tech Zone, Sichuan Pilot Free Trade Zone, 610041 China
Manufacturer : XGIMI Technology Co., Ltd.
Address : No. 4, Zone A, No. 1129, Shijicheng Road, Chengdu Hi-tech Zone, Sichuan Pilot Free Trade Zone, 610041 China
Factory Address : Please refer to page 2.
Date of Receipt : Mar. 11, 2025
Date of Test : Mar. 13, 2025 ~ Apr. 24, 2025
Issued Date : May 28, 2025
Report Version : R01
Test Sample : Engineering Sample No.: DG20250311145 for radiated and ac power line conducted emissions, DG20250311146 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by

: 
Sheldon Ou

Approved by

: 
Chay Cai

Factory1 Address	: XGIMI VIETNAM TECHNOLOGY COMPANY LIMITED
	: Lot CN 4-1, My Thuan Industria I Zone, My Thuan Commune, Nam Dinh City, Nam Dinh Province, Vietnam
Factory2 Address	: Yibin XGIMI Optoelectronic Co., Ltd.
	: No. 2, West Section 4, Changjiang North Road, Lingang Economic Development Zone, Yibin City, Sichuan P.R. China

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	7
1 . APPLICABLE STANDARDS	8
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
2.3 TEST ENVIRONMENT CONDITIONS	10
3 . GENERAL INFORMATION	11
3.1 GENERAL DESCRIPTION OF EUT	11
3.2 TEST MODES	14
3.3 PARAMETERS OF TEST SOFTWARE	17
3.4 DUTY CYCLE	18
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	20
3.6 SUPPORT UNITS	20
3.7 CUSTOMER INFORMATION DESCRIPTION	20
4 . AC POWER LINE CONDUCTED EMISSIONS	21
4.1 LIMIT	21
4.2 TEST PROCEDURE	21
4.3 DEVIATION FROM TEST STANDARD	21
4.4 TEST SETUP	22
4.5 EUT OPERATION CONDITIONS	22
4.6 TEST RESULTS	22
5 . RADIATED EMISSIONS	23
5.1 LIMIT	23
5.2 TEST PROCEDURE	24
5.3 DEVIATION FROM TEST STANDARD	25
5.4 TEST SETUP	25
5.5 EUT OPERATION CONDITIONS	27
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	27
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	27
5.8 TEST RESULTS - ABOVE 1000 MHZ	27
6 . BANDWIDTH	28
6.1 LIMIT	28
6.2 TEST PROCEDURE	28

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	28
6.4 TEST SETUP	29
6.5 EUT OPERATION CONDITIONS	29
6.6 TEST RESULTS	29
7 . MAXIMUM OUTPUT POWER	30
7.1 LIMIT	30
7.2 TEST PROCEDURE	30
7.3 DEVIATION FROM STANDARD	30
7.4 TEST SETUP	30
7.5 EUT OPERATION CONDITIONS	30
7.6 TEST RESULTS	30
8 . POWER SPECTRAL DENSITY	31
8.1 LIMIT	31
8.2 TEST PROCEDURE	31
8.3 DEVIATION FROM STANDARD	31
8.4 TEST SETUP	32
8.5 EUT OPERATION CONDITIONS	32
8.6 TEST RESULTS	32
9 . FREQUENCY STABILITY	33
9.1 LIMIT	33
9.2 TEST PROCEDURE	33
9.3 DEVIATION FROM STANDARD	33
9.4 TEST SETUP	33
9.5 EUT OPERATION CONDITIONS	33
9.6 TEST RESULTS	33
10 . MEASUREMENT INSTRUMENTS LIST	34
11 . EUT TEST PHOTOS	37
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	43
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	46
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	51
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	54
APPENDIX E - BANDWIDTH	124
APPENDIX F - MAXIMUM OUTPUT POWER	141

Table of Contents

	Page
APPENDIX G - POWER SPECTRAL DENSITY	158
APPENDIX H - FREQUENCY STABILITY	175

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-4-2503C105	R00	Original Report.	May 15, 2025	Invalid
BTL-FCCP-4-2503C105	R01	Removed the series model.	May 28, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - Outdoor access point device
 - Indoor access point device
 - Fixed point-to-point access points device
 - Client device

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

For **Radiated emissions-Above 30MHz** items: Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

For **other** items: No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	<i>U</i> ,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	<i>U</i> ,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	<i>U</i> ,(dB)
DG-CB18 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.10
		200MHz ~ 1,000MHz	V	5.20
		200MHz ~ 1,000MHz	H	4.68

Test Site	Method	Measurement Frequency Range	<i>U</i> ,(dB)
DG-CB18 (3m)	CISPR	1GHz ~ 6GHz	4.48
		6GHz ~ 18GHz	3.88

Test Site	Method	Measurement Frequency Range	<i>U</i> ,(dB)
DG-CB18 (1m)	CISPR	18 ~ 26.5 GHz	3.56
		26.5 ~ 40 GHz	3.54

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Power Spectral Density	1.4 dB
Frequency Stability	2.7 ppm
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	23°C	55%	AC 120V/60Hz	Hayden Chen	Mar. 28, 2025
Radiated Emissions-9kHz to 30MHz	20°C	50%	AC 120V/60Hz	Hayden Chen	Apr. 23, 2025
Radiated Emissions-30MHz to 1000MHz	23°C	50%	AC 120V/60Hz	Allen Tong	Apr. 15, 2025
Radiated Emissions-Above 1000 MHz	23°C	50%	AC 120V/60Hz	Allen Tong	Mar. 24, 2025-Apr. 11, 2025
Bandwidth	23-25°C	45-51%	AC 120V/60Hz	Steve Zhou	Apr. 04, 2025-Apr. 14, 2025
Maximum Output Power	24-25°C	56-60%	AC 120V/60Hz	Alex Yin	Mar. 27, 2025-Apr. 14, 2025
Power Spectral Density	23-25°C	45-51%	AC 120V/60Hz	Steve Zhou	Apr. 04, 2025-Apr. 14, 2025
Frequency Stability	Normal & Extreme	45-51%	Normal & Extreme	Steve Zhou	Apr. 04, 2025-Apr. 14, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Projector
Brand Name	XGIMI
Test Model	XK10T
Series Model	N/A
Model Difference(s)	N/A
Software Version	V1.0.37
Hardware Version	251-02280-114
Power Source	DC voltage supplied from AC adapter. Model: S065ARU000325
Power Rating	I/P:100-240V ~ 50/60Hz 1.8A Max O/P:5V---3A/9V---3A/12V---3A/15V---3A/20V---3.25A
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ac: up to 866.7 Mbps
Maximum Output Power UNII-1	IEEE 802.11ac(VHT40): 19.23 dBm (0.0838 W)
Maximum Output Power UNII-2A	IEEE 802.11ac(VHT40): 18.84 dBm (0.0766 W)
Maximum Output Power UNII-2C	IEEE 802.11ac(VHT80): 21.75 dBm (0.1496 W)
Maximum Output Power UNII-3	IEEE 802.11ac(VHT20): 24.99 dBm (0.3155 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	XGIMI	409-00236-001	Dipole	I-pex	8.03
2	XGIMI	409-00237-001	Dipole	I-pex	7.17

Note:

1) This EUT supports CDD, and all antenna gains are not equal, Directional gain = $G_{ANT} + \text{Array Gain}$.For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=8.03.So, the UNII-1, UNII-2A and UNII-2C output power limit is $23.98 - (8.03 - 6) = 21.95$, the UNII-3 output power limit is $30 - (8.03 - 6) = 27.97$.For power spectral density measurements, $N_{ANT}=2$, $N_{SS} = 1$.So the Directional gain = $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})$ dB = $8.03 + 10\log(2/1)$ dB = 11.04.Then, The UNII-1, UNII-2A and UNII-2C power spectral density limit is $11 - (11.04 - 6) = 5.96$, the UNII-3 power spectral density limit is $30 - (11.04 - 6) = 24.96$.

4. Table for Antenna Configuration:

Operating Mode TX Mode	2TX
IEEE 802.11a	V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT20)	V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)	V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT20)	V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT40)	V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT80)	V (Ant. 1 + Ant. 2)

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 6	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 7	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 8	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 9	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 10	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 11	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 12	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 13	TX A Mode Channel 149/157/165 (UNII-3)
Mode 14	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 15	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 16	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 17	TX AC(VHT20) Mode Channel 149 (UNII-3)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 17	TX AC(VHT20) Mode Channel 149 (UNII-3)

Radiated Emissions Test - Below 1GHz	
Final Test Mode	Description
Mode 17	TX AC(VHT20) Mode Channel 149 (UNII-3)

Radiated Emissions Test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 6	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 7	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 8	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 9	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 10	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 11	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 12	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 13	TX A Mode Channel 149/157/165 (UNII-3)
Mode 14	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 15	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 16	TX AC(VHT80) Mode Channel 155 (UNII-3)

Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 6	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 7	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 8	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 9	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 10	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 11	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 12	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 13	TX A Mode Channel 149/157/165 (UNII-3)
Mode 14	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 15	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 16	TX AC(VHT80) Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX AC(VHT20) Mode Channel 149 (UNII-3) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.
- (6) For radiated emission above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Horizontal for Band edge, Vertical for Harmonic. In this report only recorded the worst case.

3.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software Version	QA-Tool_MT7668		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	1D	1C	1B
IEEE 802.11ac(VHT20)	1F	1E	1D
Frequency (MHz)	5190	5230	
IEEE 802.11ac(VHT40)	23	24	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	20		

UNII-2A			
Test Software Version	QA-Tool_MT7668		
Frequency (MHz)	5260	5300	5320
IEEE 802.11a	1B	1B	1B
IEEE 802.11ac(VHT20)	1D	1E	1E
Frequency (MHz)	5270	5310	
IEEE 802.11ac(VHT40)	23	23	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	20		

UNII-2C			
Test Software Version	QA-Tool_MT7668		
Frequency (MHz)	5500	5580	5700
IEEE 802.11a	1D	1B	1C
IEEE 802.11ac(VHT20)	1F	1E	1E
Frequency (MHz)	5510	5550	5670
IEEE 802.11ac(VHT40)	25	24	23
Frequency (MHz)	5530	5610	
IEEE 802.11ac(VHT80)	1F	28	

UNII-3			
Test Software Version	QA-Tool_MT7668		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	2D	31	31
IEEE 802.11ac(VHT20)	32	32	34
Frequency (MHz)	5755	5795	
IEEE 802.11ac(VHT40)	30	34	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	29		

3.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.


IEEE 802.11a

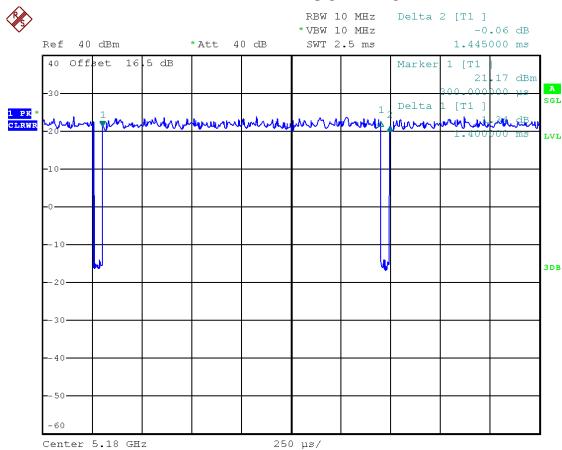

Date: 4.APR.2025 06:33:47

Duty cycle = $1.400 \text{ ms} / 1.445 \text{ ms} = 96.89\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.14$


IEEE 802.11ac(VHT20)

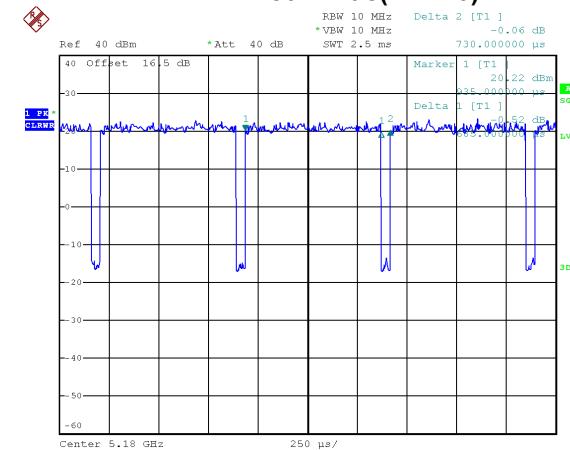

Date: 4.APR.2025 06:35:12

Duty cycle = $0.685 \text{ ms} / 0.730 \text{ ms} = 93.84\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.28$


IEEE 802.11ac(VHT40)

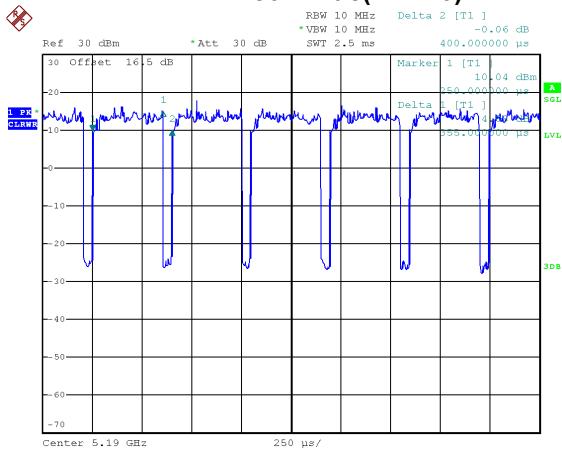

Date: 4.APR.2025 19:05:58

Duty cycle = $0.355 \text{ ms} / 0.400 \text{ ms} = 88.75\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.52$

IEEE 802.11ac(VHT80)

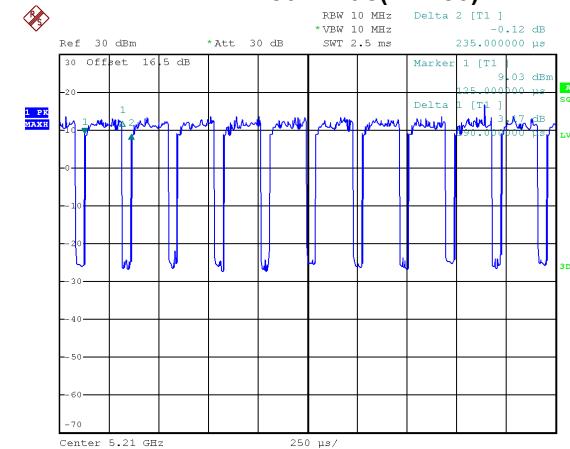

Date: 4.APR.2025 19:11:51

Duty cycle = $0.190 \text{ ms} / 0.235 \text{ ms} = 80.85\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.92$

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 714 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1460 Hz (Duty cycle < 98%).


For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2817 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 5263 Hz (Duty cycle < 98%).

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

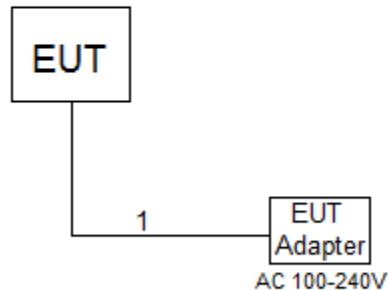

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. Part of the cable losses (0.5dB) are provided by the manufacturer, while the other parts of the cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

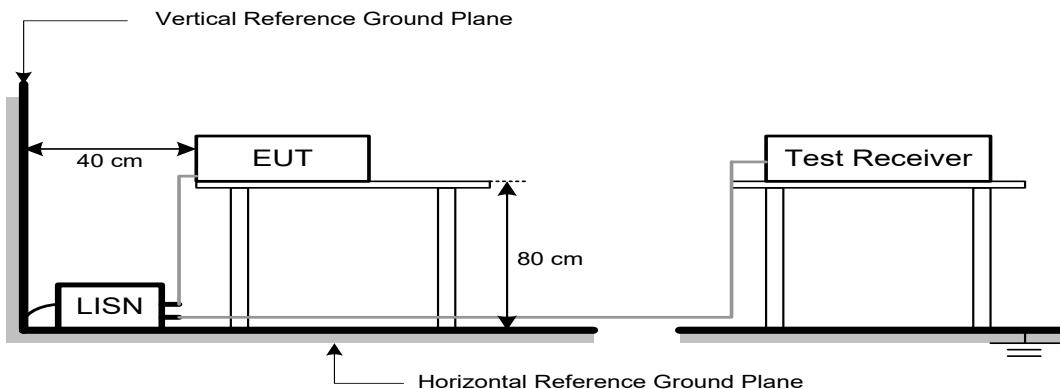

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dB μ V/m)	Harmonic at 1m (dB μ V/m)
5150-5250	-27	68.2	77.7 (Note 3)
5250-5350	-27	68.2	77.7 (Note 3)
5470-5725	-27	68.2	77.7 (Note 3)
	-27	68.2	77.7 (Note 3)
5725-5850	10	105.2	114.7 (Note 3)
NOTE (2)	15.6	110.8	120.3 (Note 3)
	27	122.2	131.7 (Note 3)

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \text{ where } P \text{ is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$20 \log (d_{\text{limit}}/d_{\text{measure}}) = 20 \log (3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

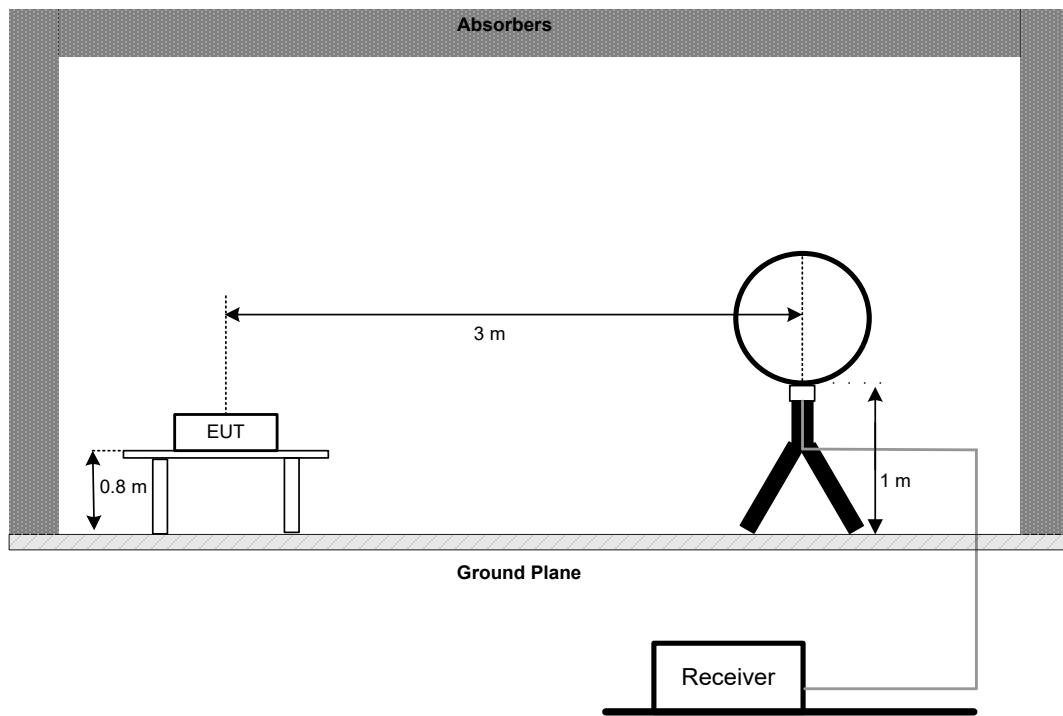


30 MHz to 1 GHz

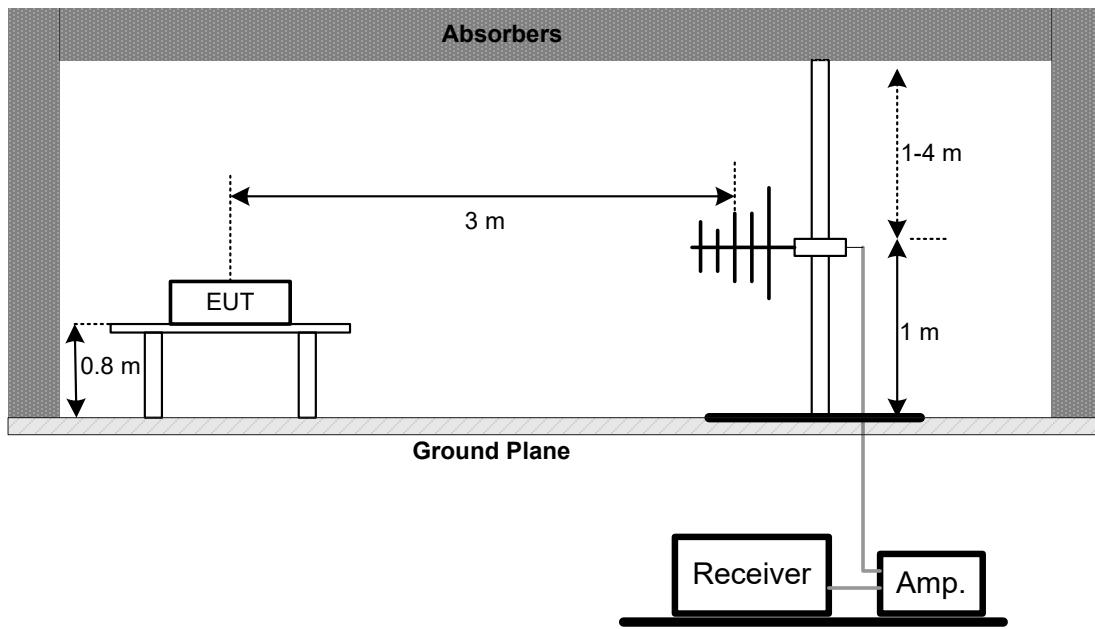

**Above 1 GHz
Band edge & Harmonic (1 GHz to 18 GHz)**

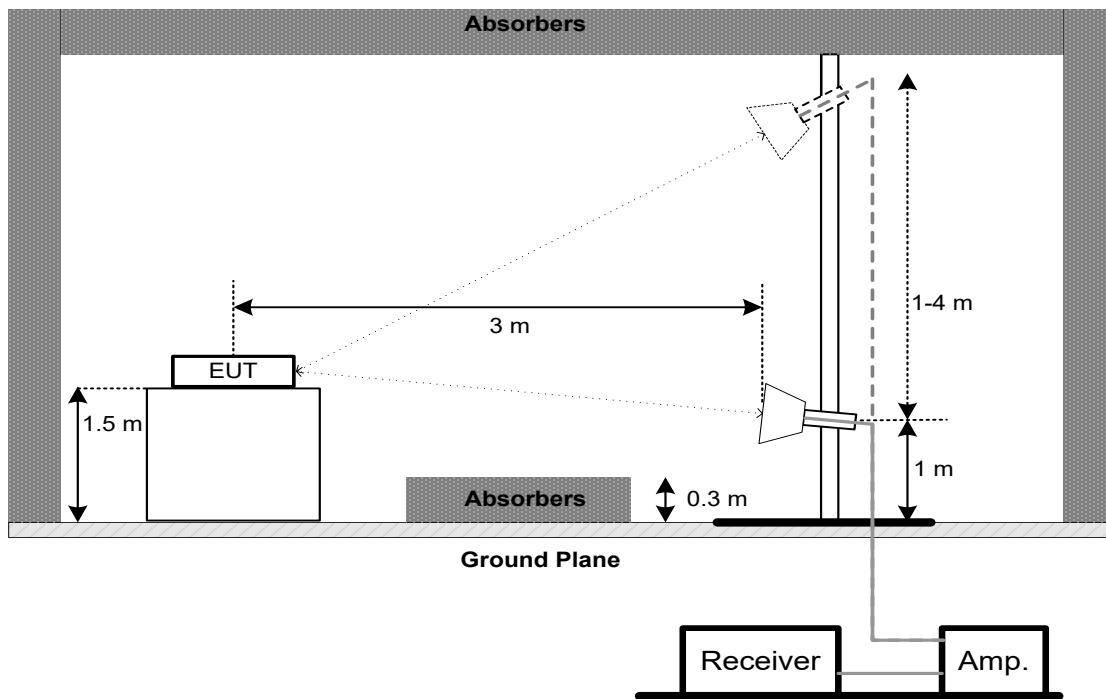

Harmonic (18 GHz to 40 GHz)

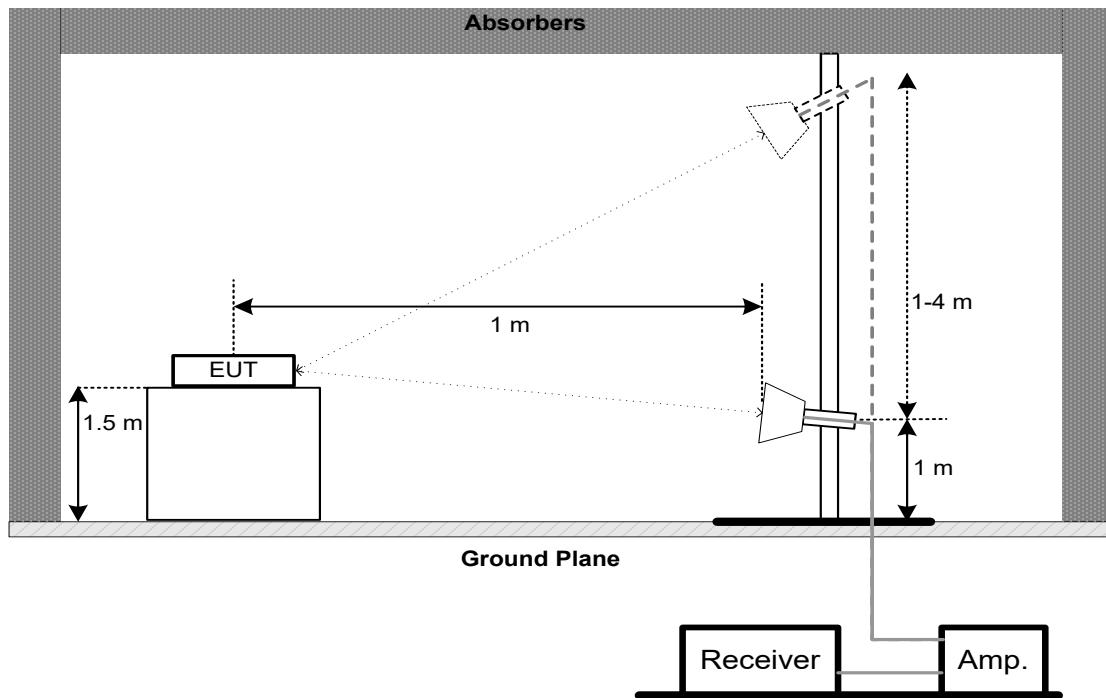

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- Spectrum Setting:

For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Appromixately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span Frequency	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm)	5150-5250
		Client device: 250 mW (23.98 dBm)	
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- a. For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- b. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10\log B$, where B is the 26dB Bandwidth in megahertz.


7.2 TEST PROCEDURE

- a. The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- b. The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

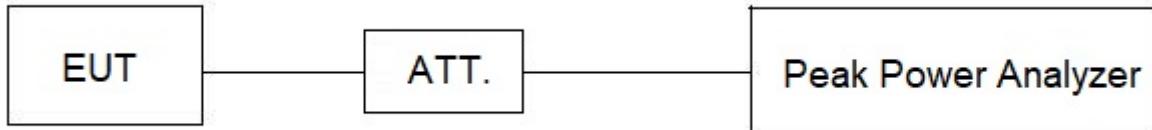

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz	5150-5250
		Client device: 11 dBm/MHz	
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz.
VBW	3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz.
VBW	300 kHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 7 dB.
- During the test of U-NII 3 PSD, the measurement result with RBW=100kHz has been added 7 dB by compensating offset. For example, the cable loss is 16.5 dB, and the final offset is $16.5 + 7 = 23.5$ dB when RBW=100kHz is used.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. FREQUENCY STABILITY

9.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is 0°C~40°C.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

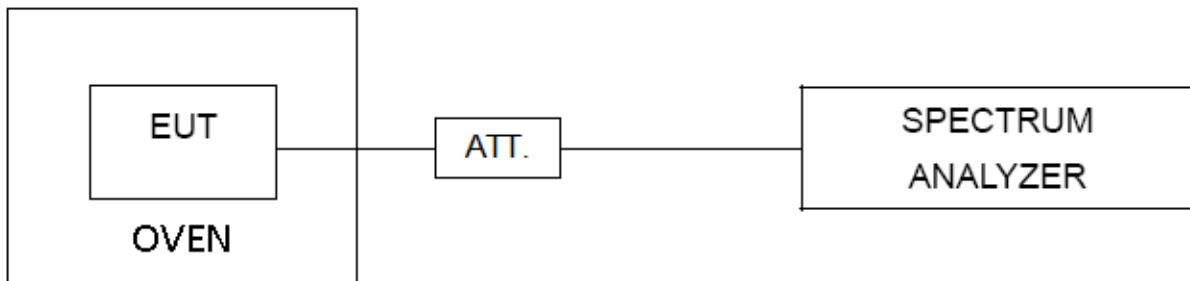

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 06, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 06, 2025
3	Cable	N/A	RW4950-3.8A-NMS M-1.5	N/A	Nov. 12, 2025
4	Cable	N/A	LMR400-NMNM-8 M	N/A	Nov. 12, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	ETS	9*6*6	N/A	May 16, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1702	May 21, 2025
2	Attenuator	EMC INSTRUMENT	6806_N-50-1	/	May 21, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980863	Sep. 05, 2025
4	Cable	RegalWay	LMR400-NMNM -2.5m	N/A	Jan. 07, 2026
5	Cable	RegalWay	LMR400-NMNM -7m	N/A	Jan. 07, 2026
6	Cable	RegalWay	LMR400-NMNM -3m	N/A	Jan. 07, 2026
7	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
9	MXE EMI Receiver	KEYSIGHT	N9038B	MY62210123	Oct. 29, 2025
10	966 Chamber room	ETS	RFD-100 (NSA)	Q2179	Jan. 06, 2026

Radiated Emissions - 1 GHz to 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Oct. 29, 2025
4	Cable	RegalWay	RWLP50-4.0A-SMS M-1.3M	N/A	Apr. 06, 2026
5	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MRA-3M	N/A	Apr. 06, 2026
6	Cable	RegalWay	RWLP50-4.0A-SMS M-9M	N/A	Apr. 06, 2026
7	966 Chamber room	ETS	RFD-100 (SVSWR)	Q2179	Jan. 07, 2026
8	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210509A18ES	Aug. 28, 2025
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 31, 2025
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Oct. 29, 2025
4	966 Chamber room	ETS	RFD-100 (SVSWR)	Q2179	Jan. 07, 2026
5	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-2M	N/A	Jan. 07, 2026
6	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MMRA-6M	N/A	Jan. 07, 2026
7	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1227	Oct. 20, 2025
8	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025

Bandwidth & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 31, 2025
2	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A



Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 31, 2025
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 31, 2025
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A



Frequency Stability					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 31, 2025
2	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
4	AC power source	Preen	AFC-S-1250	F123080107	Dec. 06, 2025
5	Cable	RegalWay	20210802 014	RWP50-402-SMSM-1M	N/A
6	Desktop Constant Temperature Chamber	BELL	BTH-50C	20170306001	Jan. 10, 2026


Remark: "N/A" denotes no model name, serial no. or calibration specified.



All calibration period of equipment list is one year.



11. EUT TEST PHOTOS**AC Power Line Conducted Emissions Test Photos**

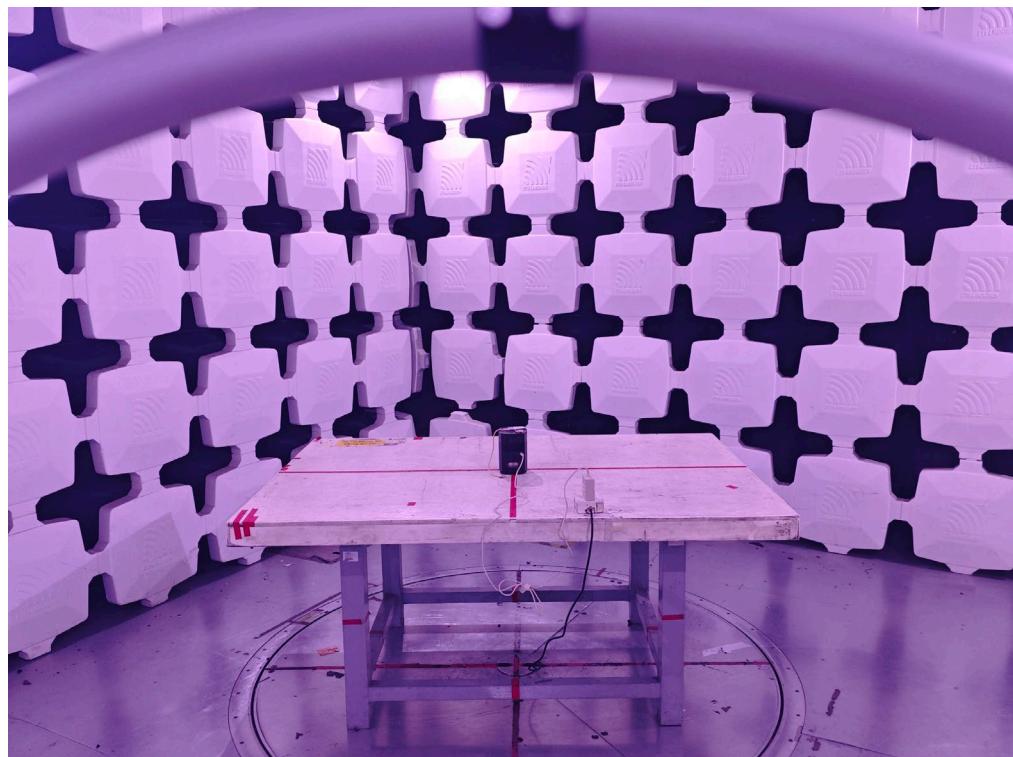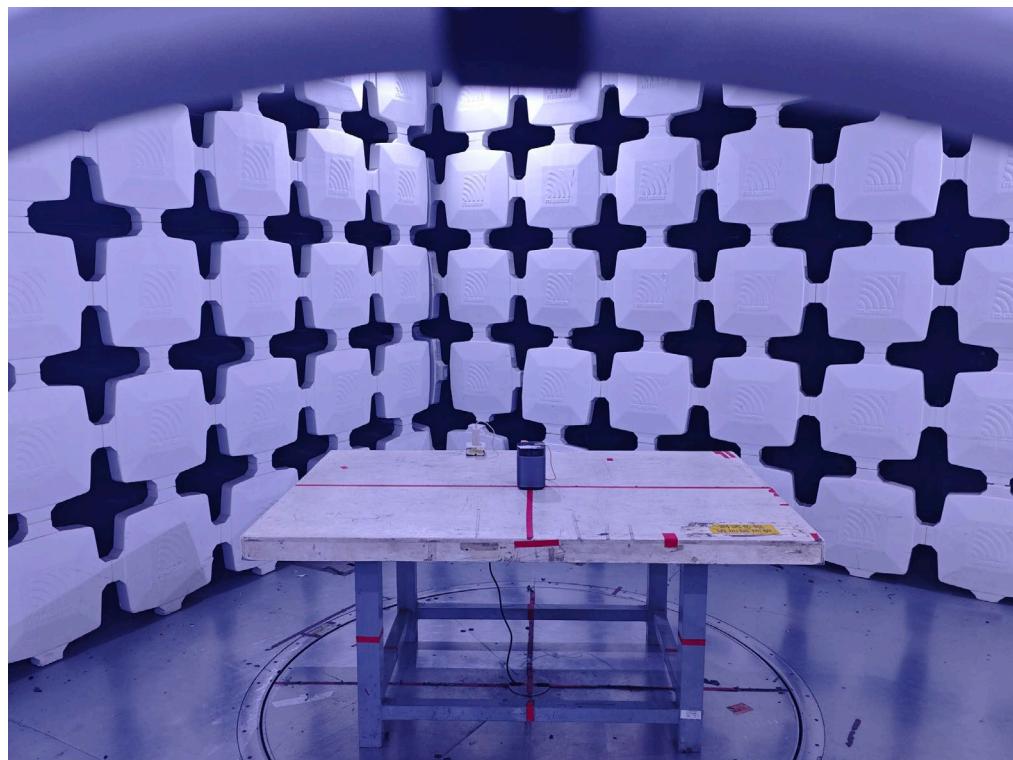Radiated Emissions Test Photos**9 kHz to 30 MHz**

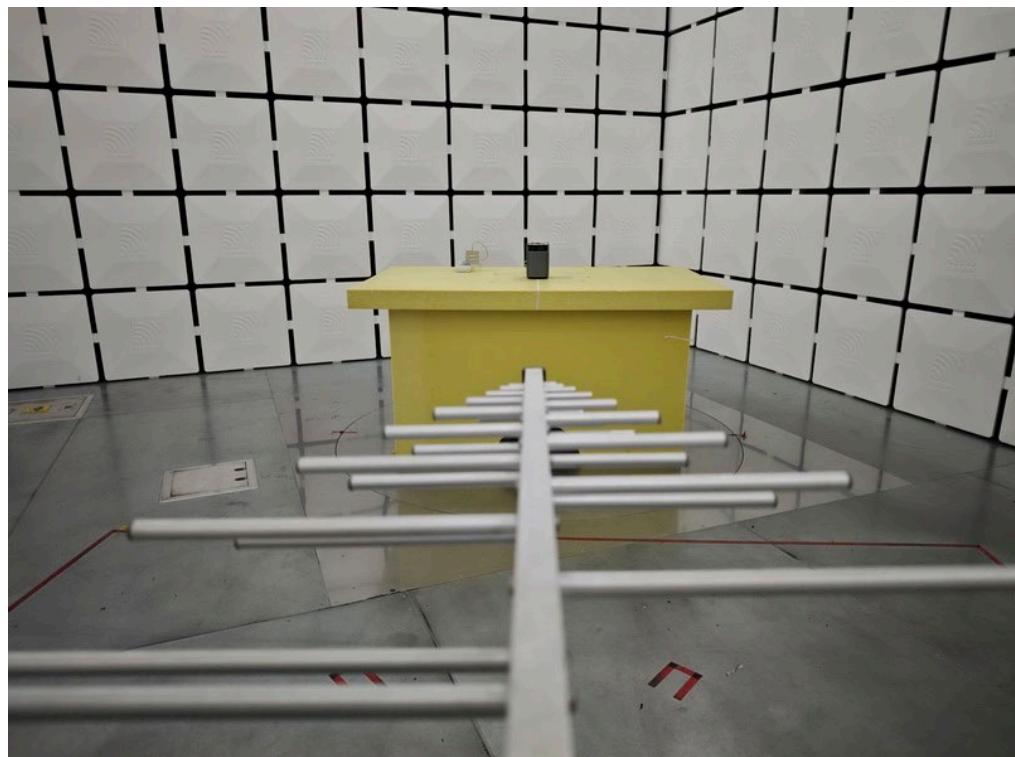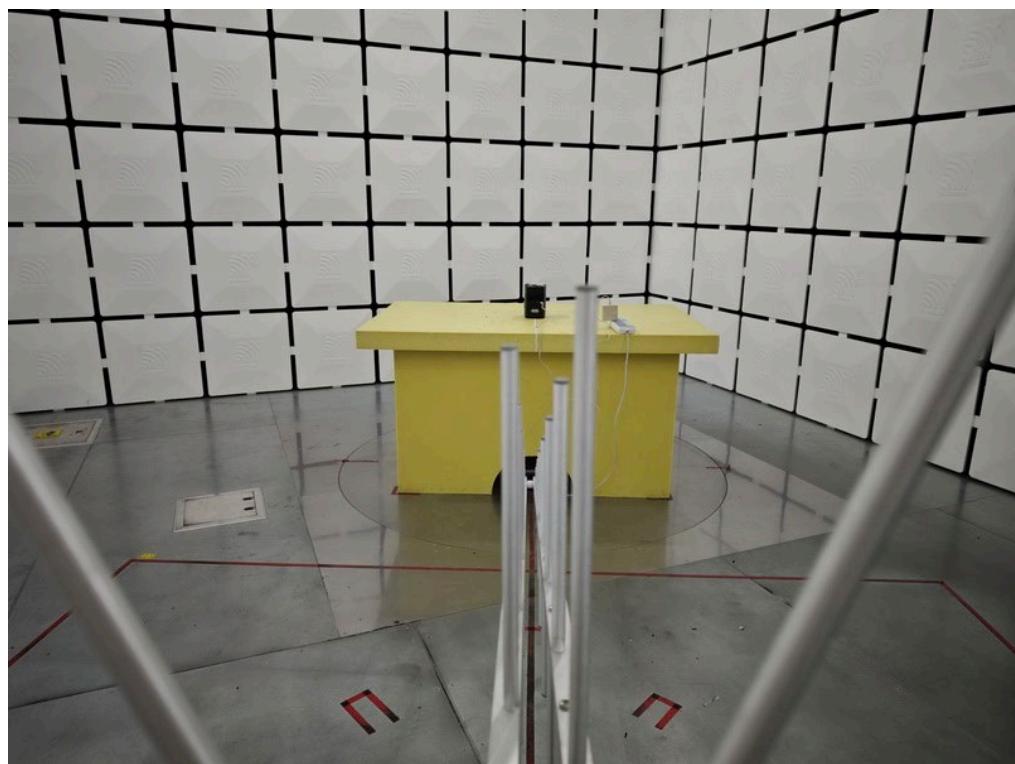Radiated Emissions Test Photos**30 MHz to 1 GHz**

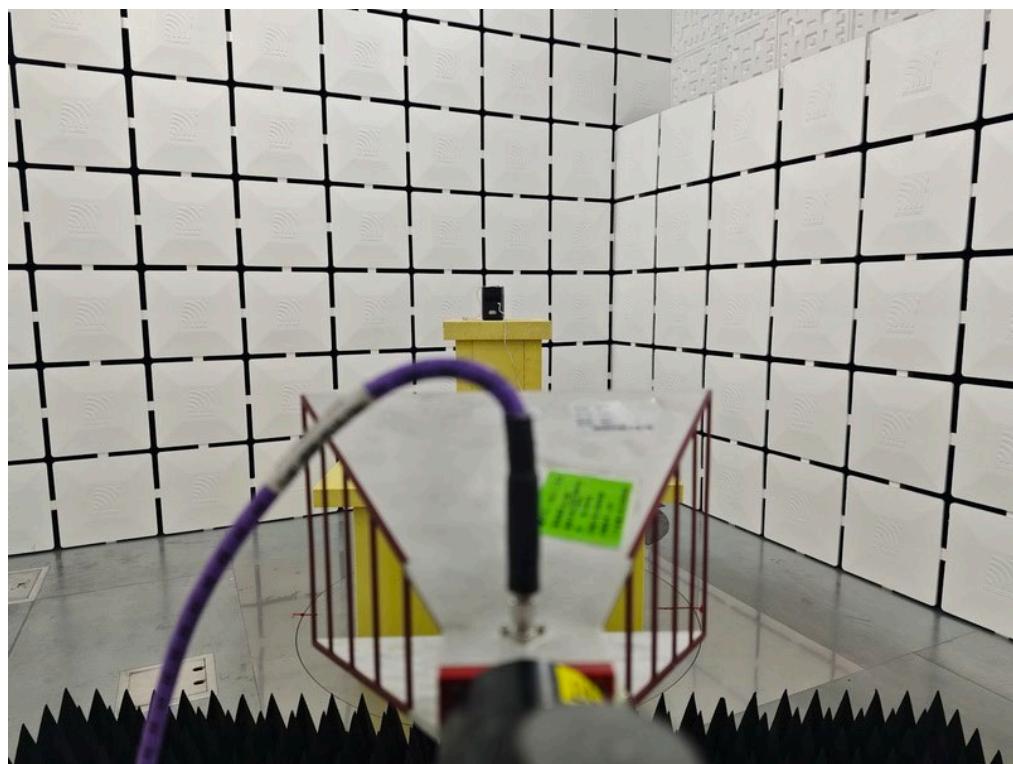
Radiated Emissions Test Photos**Band edge & Harmonic(1 GHz to 18 GHz)**

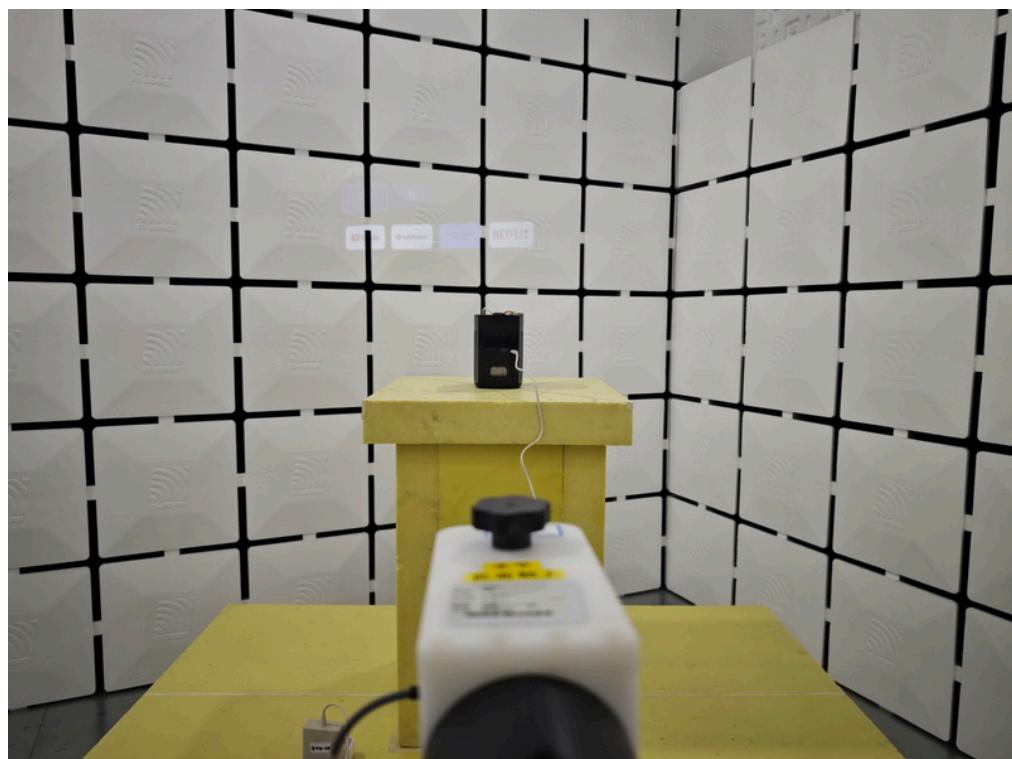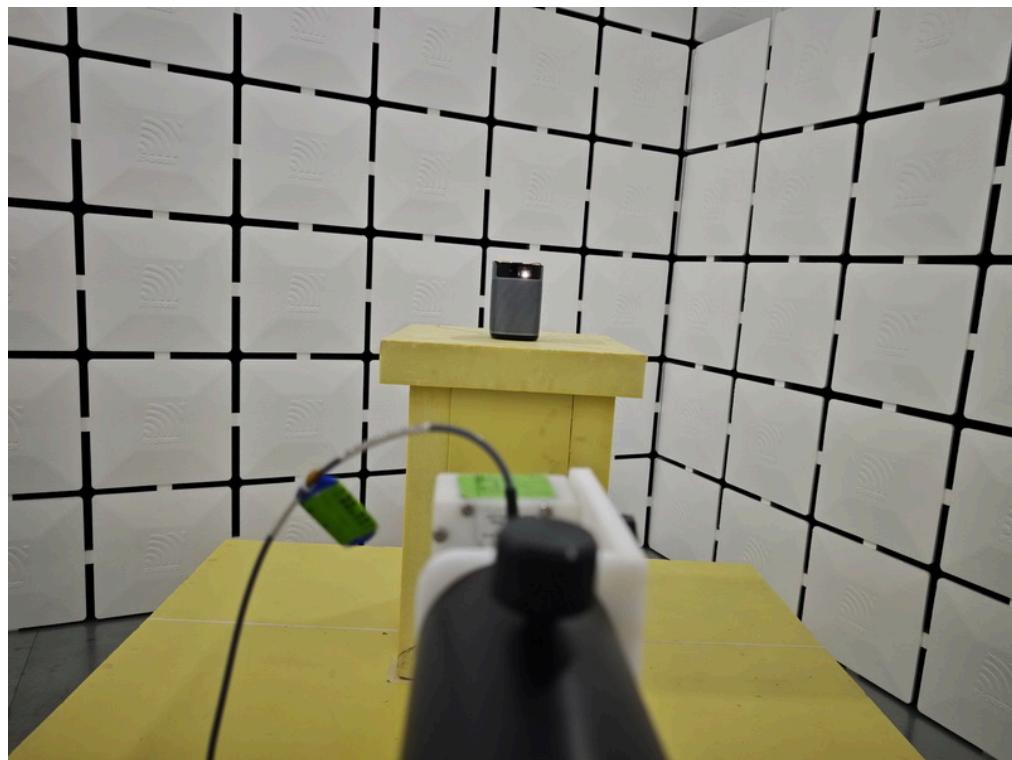Radiated Emissions Test Photos**Harmonic(18 GHz to 40 GHz)**

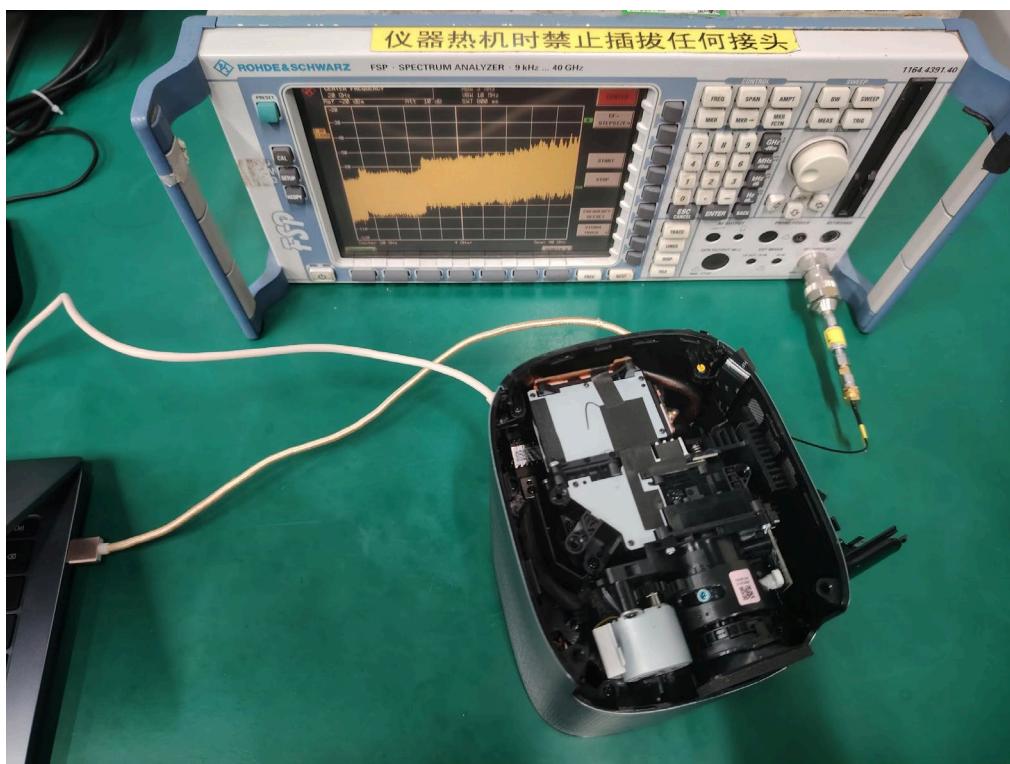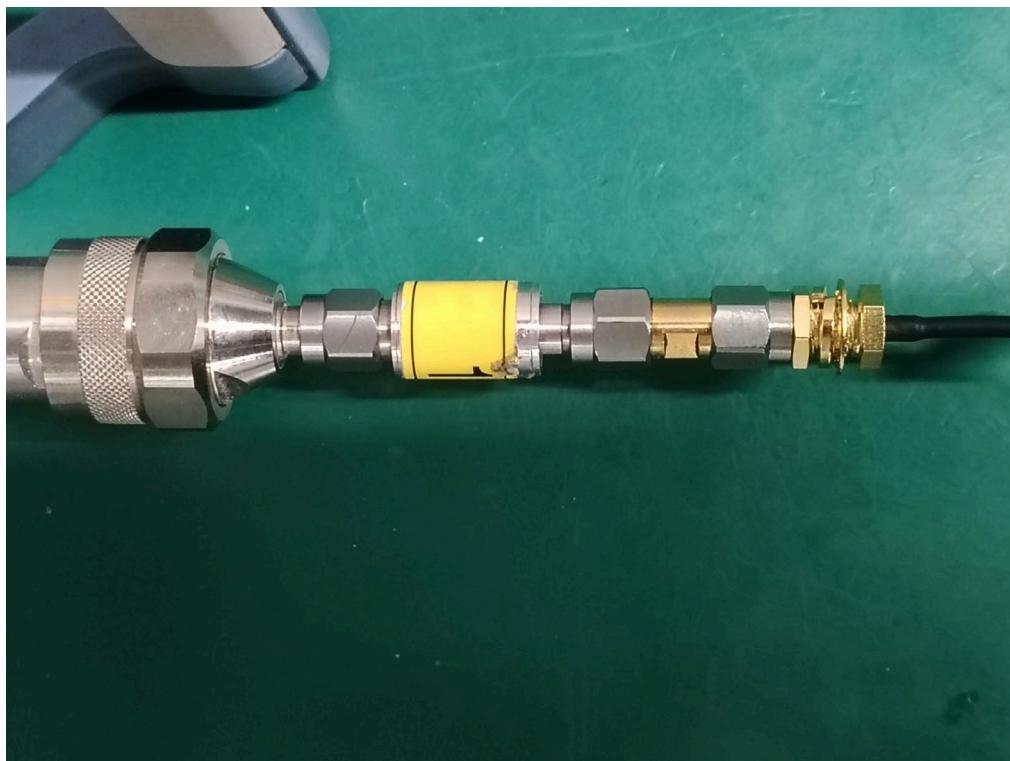Conducted Test Photos

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Phase	Line
-----------	--	-------	------

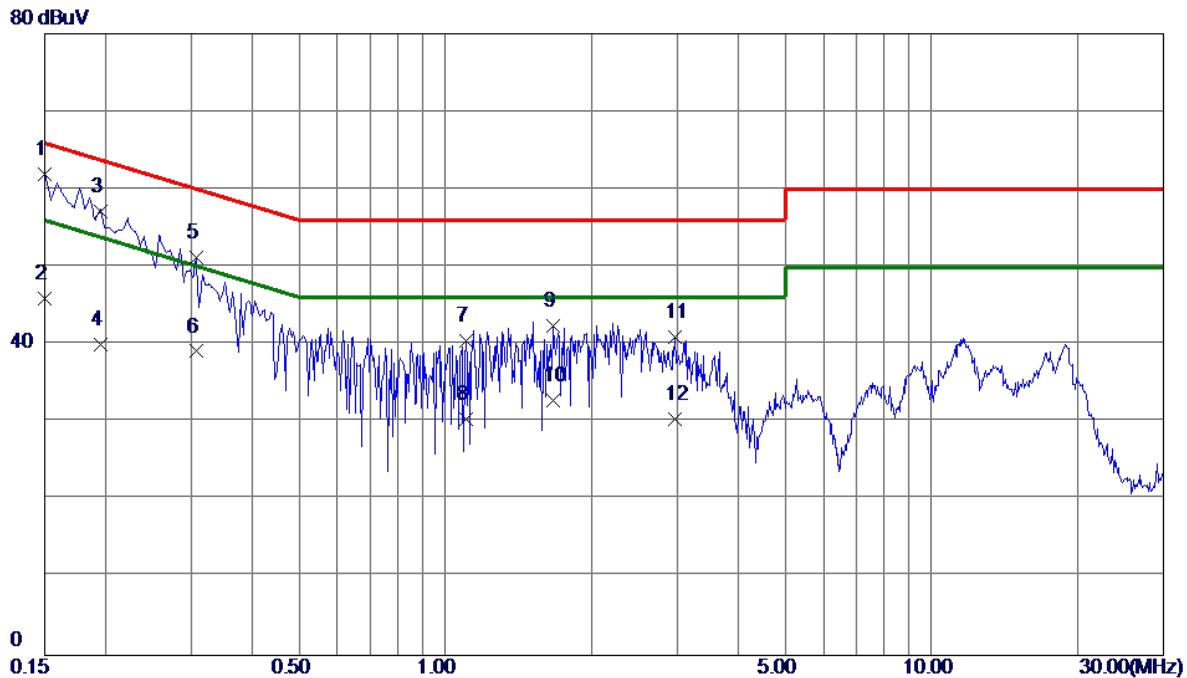


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0. 1500	52. 08	9. 90	61. 98	66. 00	-4. 02	QP	
2	0. 1500	36. 09	9. 90	45. 99	56. 00	-10. 01	AVG	
3	0. 1955	47. 21	9. 90	57. 11	63. 80	-6. 69	QP	
4	0. 1955	30. 10	9. 90	40. 00	53. 80	-13. 80	AVG	
5	0. 3075	41. 33	9. 92	51. 25	60. 04	-8. 79	QP	
6	0. 3075	29. 20	9. 92	39. 12	50. 04	-10. 92	AVG	
7	1. 1040	30. 35	10. 06	40. 41	56. 00	-15. 59	QP	
8	1. 1040	20. 41	10. 06	30. 47	46. 00	-15. 53	AVG	
9	1. 6665	32. 18	10. 15	42. 33	56. 00	-13. 67	QP	
10	1. 6665	22. 60	10. 15	32. 75	46. 00	-13. 25	AVG	
11	2. 9670	30. 60	10. 35	40. 95	56. 00	-15. 05	QP	
12	2. 9670	20. 10	10. 35	30. 45	46. 00	-15. 55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Phase	Neutral
-----------	--	-------	---------

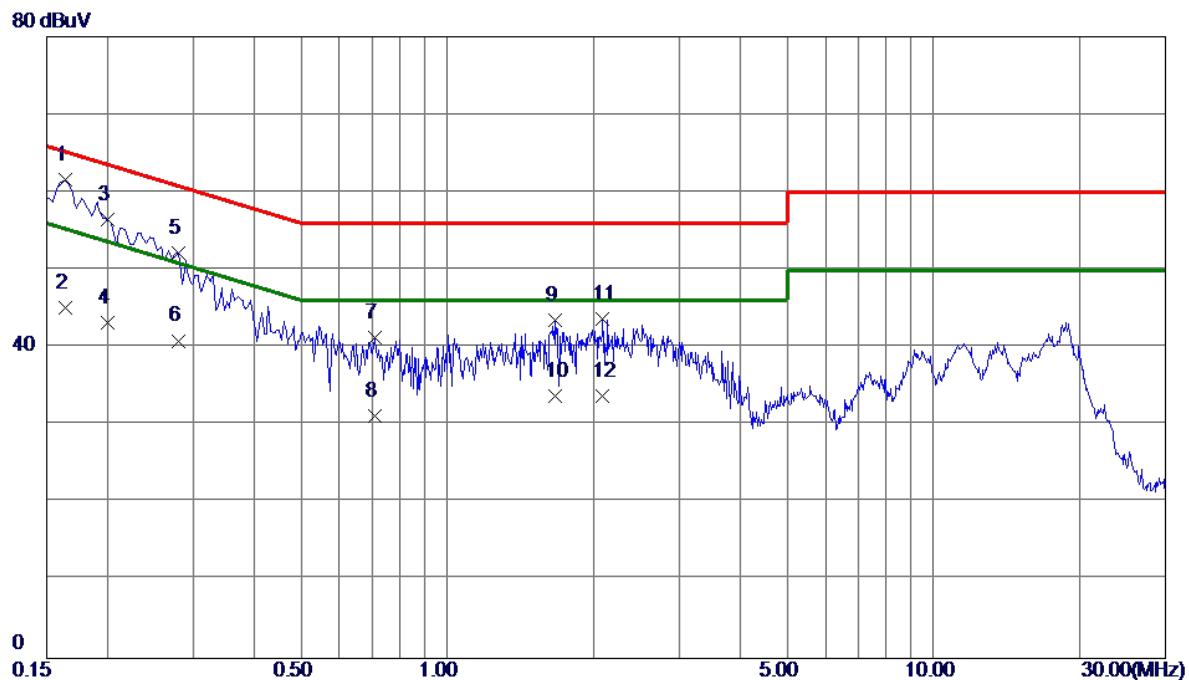


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV	dB	dBuV	dB			
1 *	0.1635	51.57	9.97	61.54	65.28	-3.74	QP	
2	0.1635	35.20	9.97	45.17	55.28	-10.11	AVG	
3	0.1997	46.57	9.97	56.54	63.62	-7.08	QP	
4	0.1997	33.20	9.97	43.17	53.62	-10.45	AVG	
5	0.2805	42.22	9.98	52.20	60.80	-8.60	QP	
6	0.2805	30.90	9.98	40.88	50.80	-9.92	AVG	
7	0.7080	31.24	10.05	41.29	56.00	-14.71	QP	
8	0.7080	21.10	10.05	31.15	46.00	-14.85	AVG	
9	1.6710	33.26	10.20	43.46	56.00	-12.54	QP	
10	1.6710	23.50	10.20	33.70	46.00	-12.30	AVG	
11	2.0895	33.42	10.26	43.68	56.00	-12.32	QP	
12	2.0895	23.50	10.26	33.76	46.00	-12.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Ant 0°
-----------	--	--------------	--------

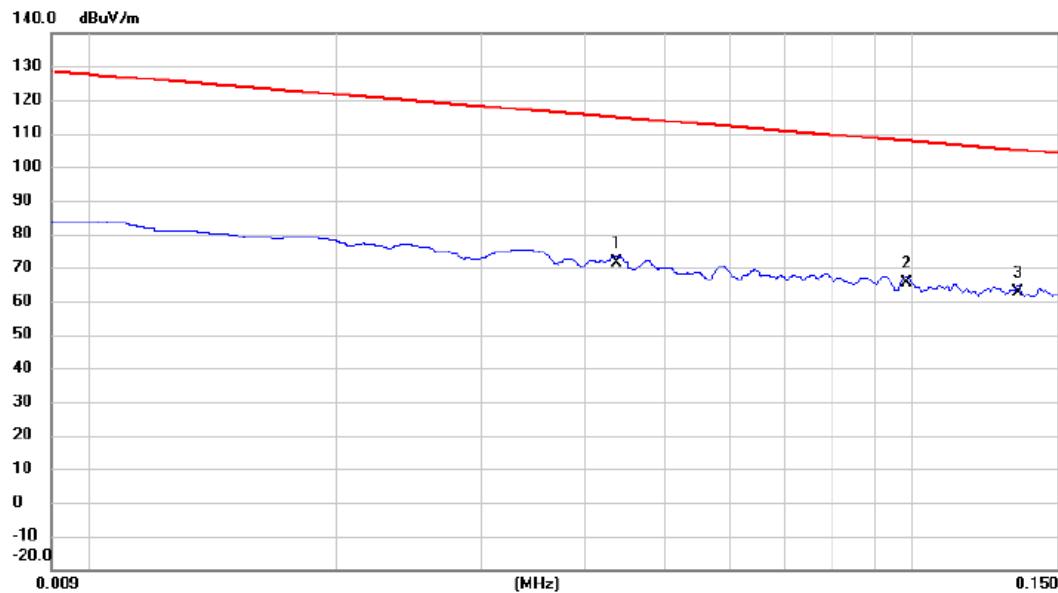


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		0.0437	50.21	21.31	71.52	114.80	-43.28	AVG
2	*	0.0984	44.15	21.34	65.49	107.75	-42.26	QP
3		0.1343	41.23	21.29	62.52	105.05	-42.53	QP

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Ant 0°
-----------	--	--------------	--------

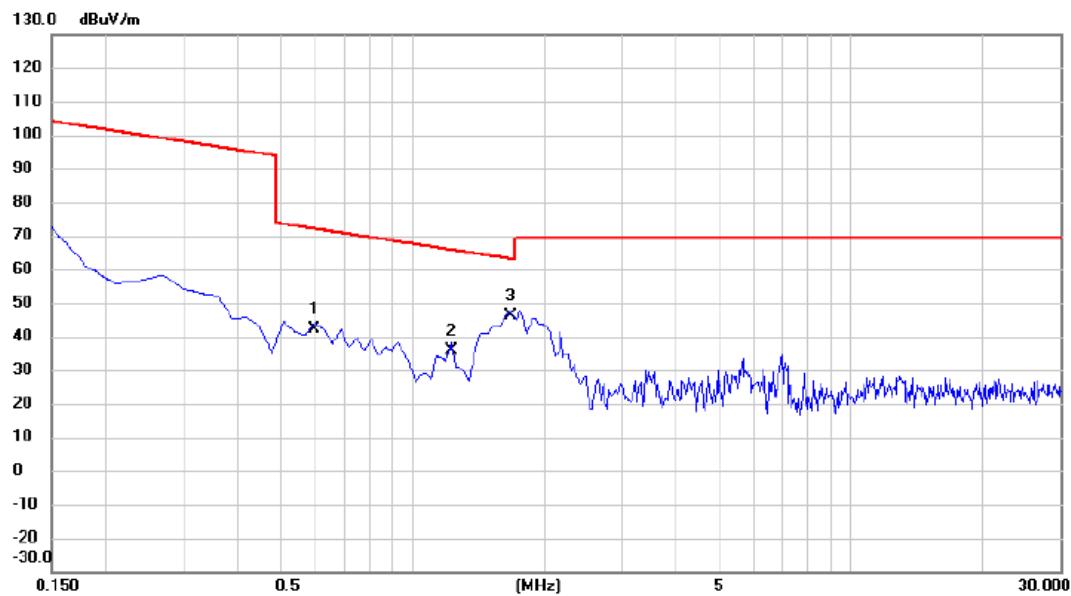


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.5978	21.15	21.16	42.31	72.07	-29.76	QP	
2		1.2245	14.65	21.20	35.85	65.85	-30.00	QP	
3	*	1.6724	24.95	21.21	46.16	63.14	-16.98	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Ant 90°
-----------	--	--------------	---------

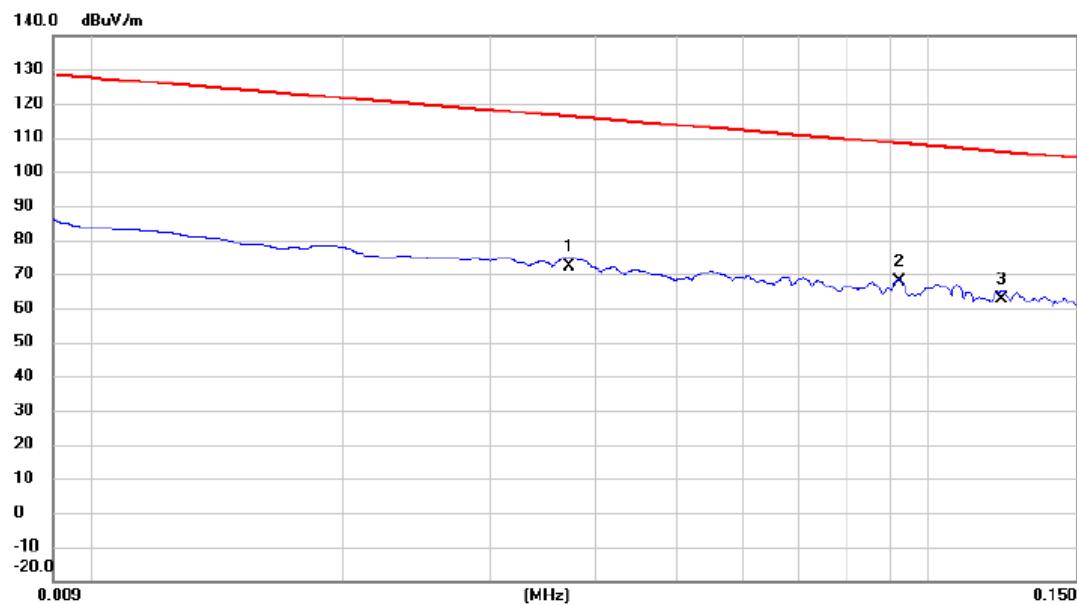

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		0.0372	51.00	21.28	72.28	116.19	-43.91	AVG
2	*	0.0922	46.52	21.34	67.86	108.31	-40.45	QP
3		0.1224	41.24	21.31	62.55	105.85	-43.30	QP

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode

TX AC(VHT20) Mode Channel 149 (UNII-3)

Polarization

Ant 90°



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		0.7470	21.23	21.16	42.39	70.14	-27.75	QP	
2	*	1.3141	18.12	21.20	39.32	65.23	-25.91	QP	
3		1.6724	15.38	21.21	36.59	63.14	-26.55	QP	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Vertical
-----------	--	--------------	----------

100 dBuV/m

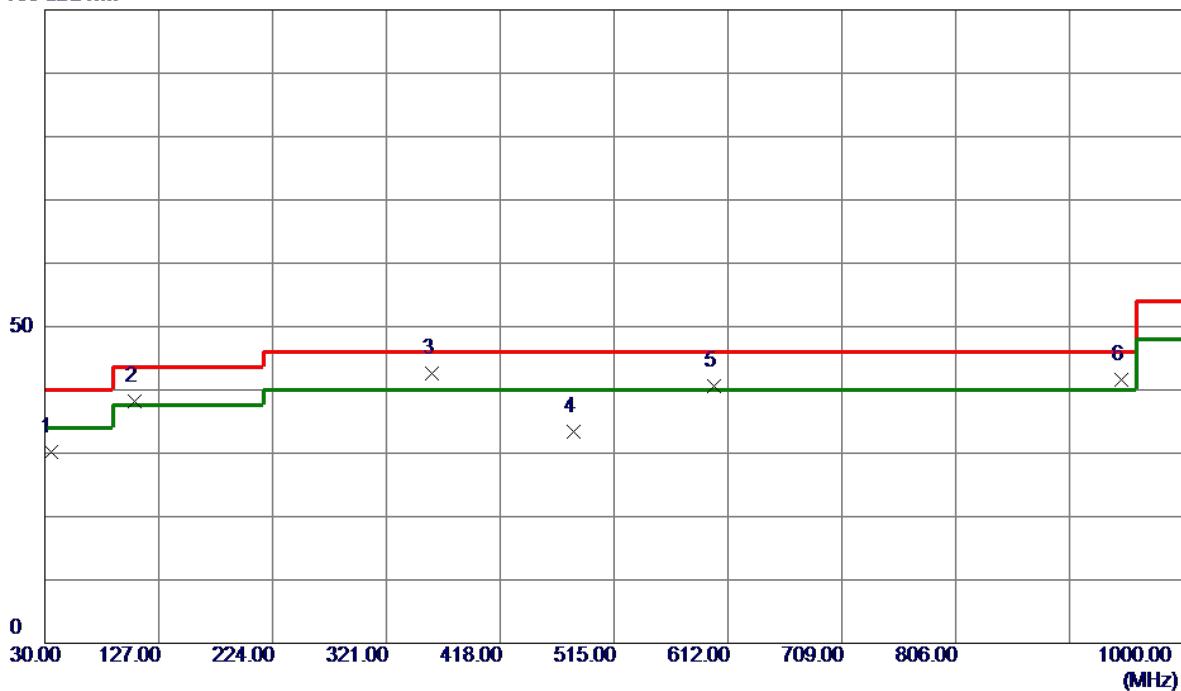


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	34.8500	45.67	-15.56	30.11	40.00	-9.89	Peak	
2	106.6300	56.95	-18.74	38.21	43.50	-5.29	Peak	
3 *	359.8000	55.50	-12.97	42.53	46.00	-3.47	QP	
4	480.0800	43.08	-9.69	33.39	46.00	-12.61	Peak	
5	600.3600	47.32	-6.78	40.54	46.00	-5.46	Peak	
6	947.6200	43.35	-1.71	41.64	46.00	-4.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Horizontal
-----------	--	--------------	------------

100 dBuV/m

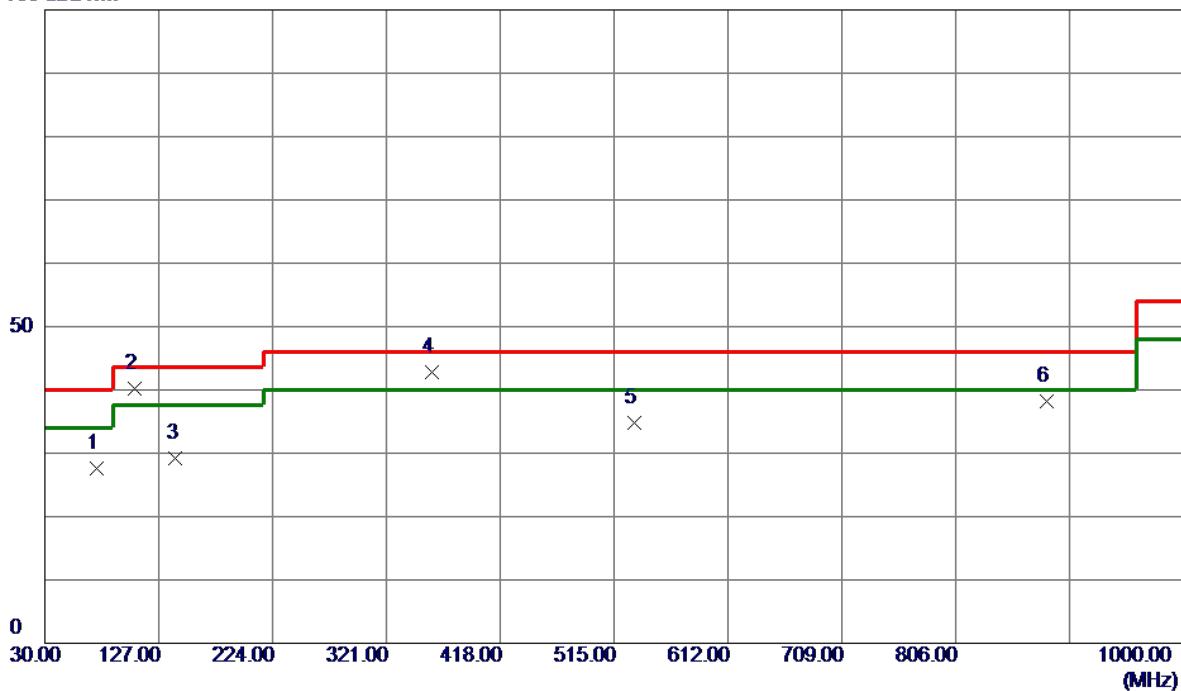


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	46.07	-18.38	27.69	40.00	-12.31	Peak	
2	106.6300	58.90	-18.74	40.16	43.50	-3.34	Peak	
3	141.5500	44.61	-15.43	29.18	43.50	-14.32	Peak	
4 *	359.8000	55.83	-12.97	42.86	46.00	-3.14	QP	
5	532.4600	43.60	-8.71	34.89	46.00	-11.11	Peak	
6	883.6000	40.82	-2.65	38.17	46.00	-7.83	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

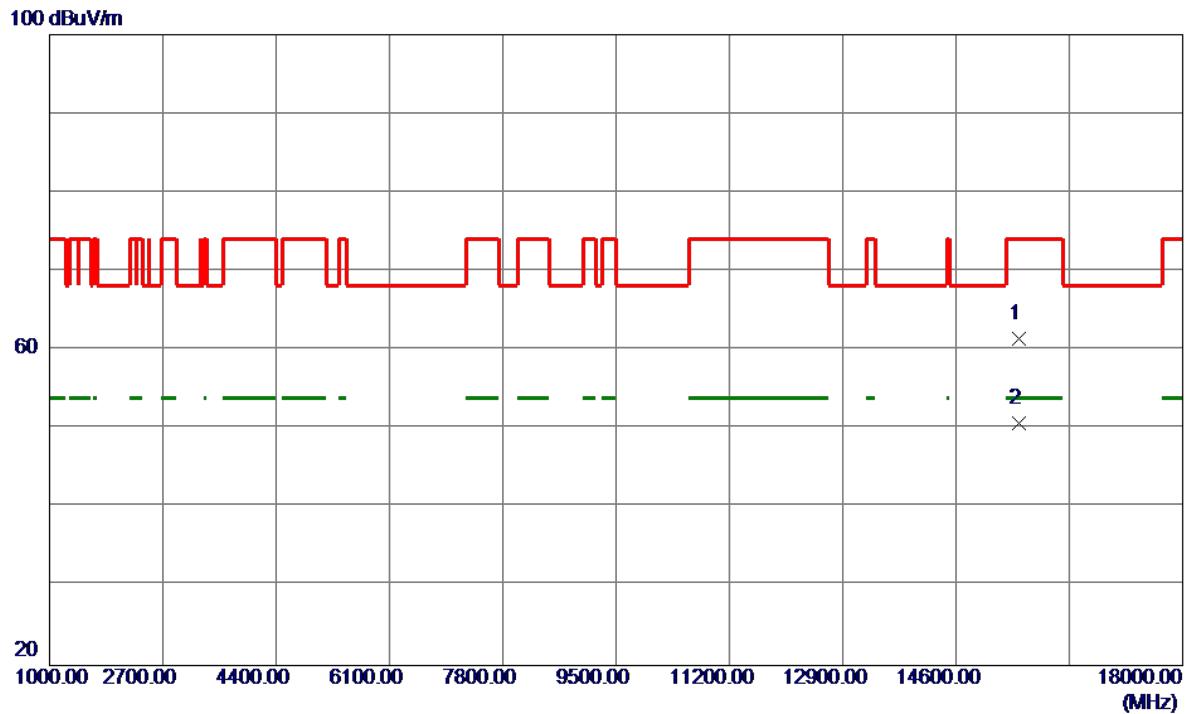


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	15542.0000	50.04	11.43	61.47	74.00	-12.53	Peak
2 *	15543.0000	39.24	11.43	50.67	54.00	-3.33	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

130 dBuV/m

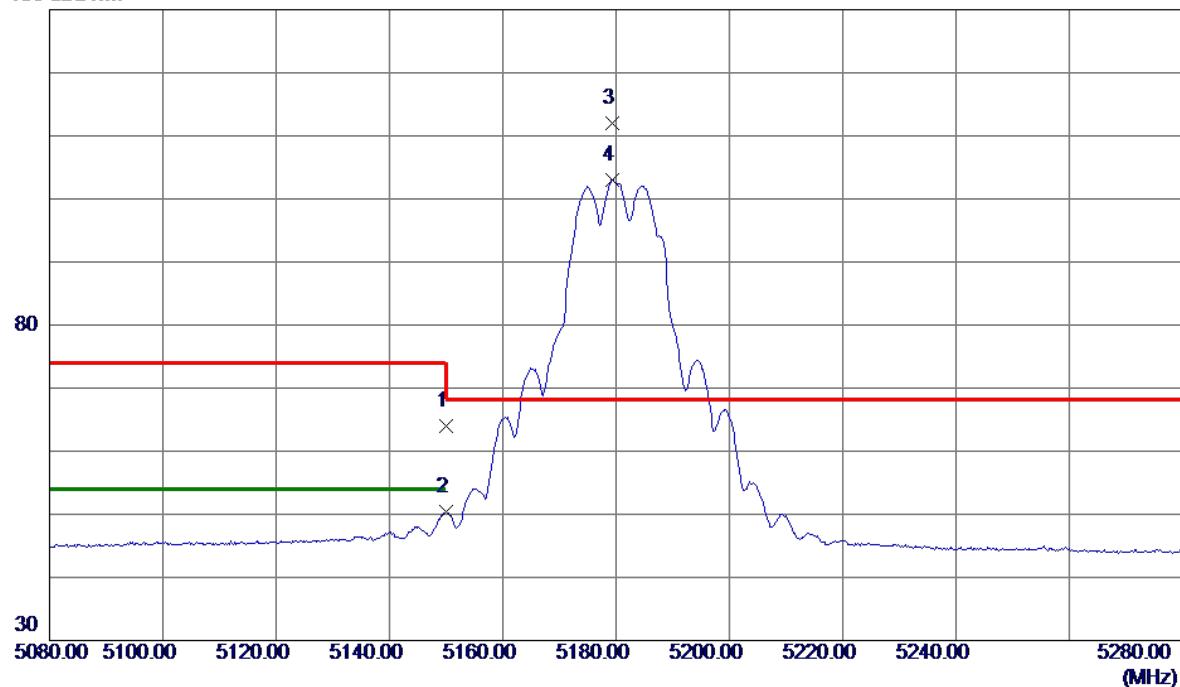


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5150.0000	49.75	14.33	64.08	74.00	-9.92	Peak	
2	5150.0000	36.10	14.33	50.43	54.00	-3.57	AVG	
3 *	5179.4000	97.73	14.33	112.06	68.20	43.86	Peak	No Limit
4	5179.4000	88.66	14.33	102.99	999.00	-896.01	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

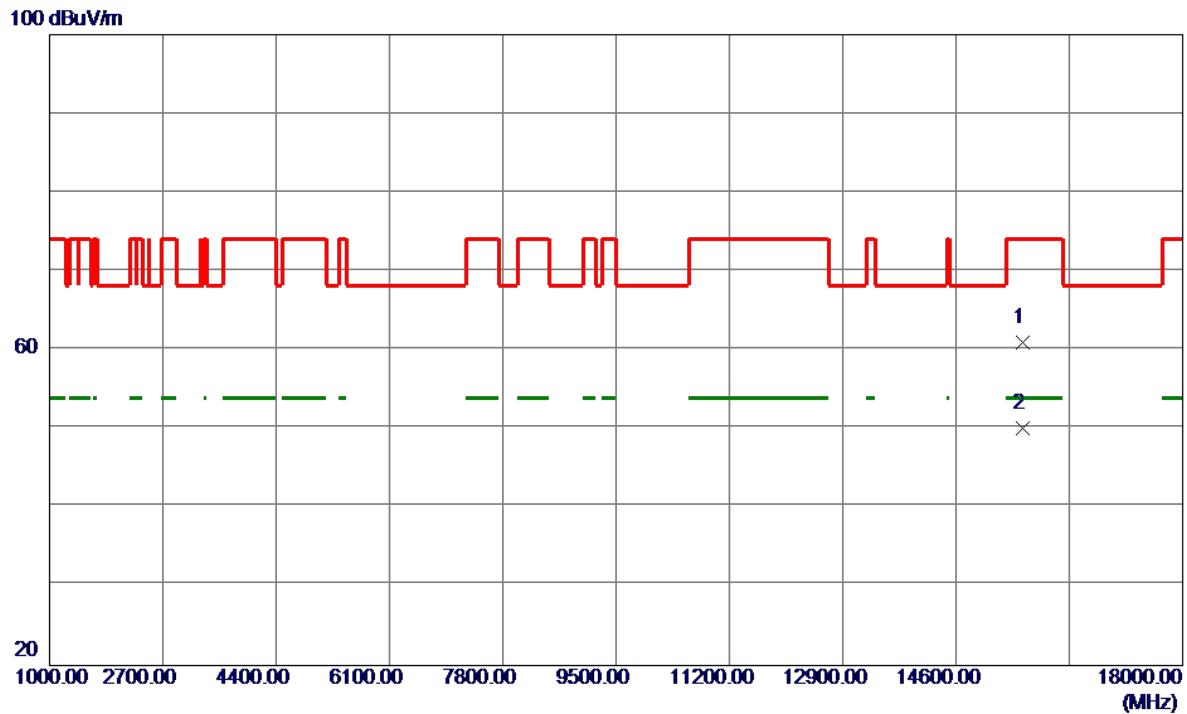


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	15600.2000	49.46	11.47	60.93	74.00	-13.07	Peak
2 *	15603.0000	38.57	11.47	50.04	54.00	-3.96	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

130 dBuV/m

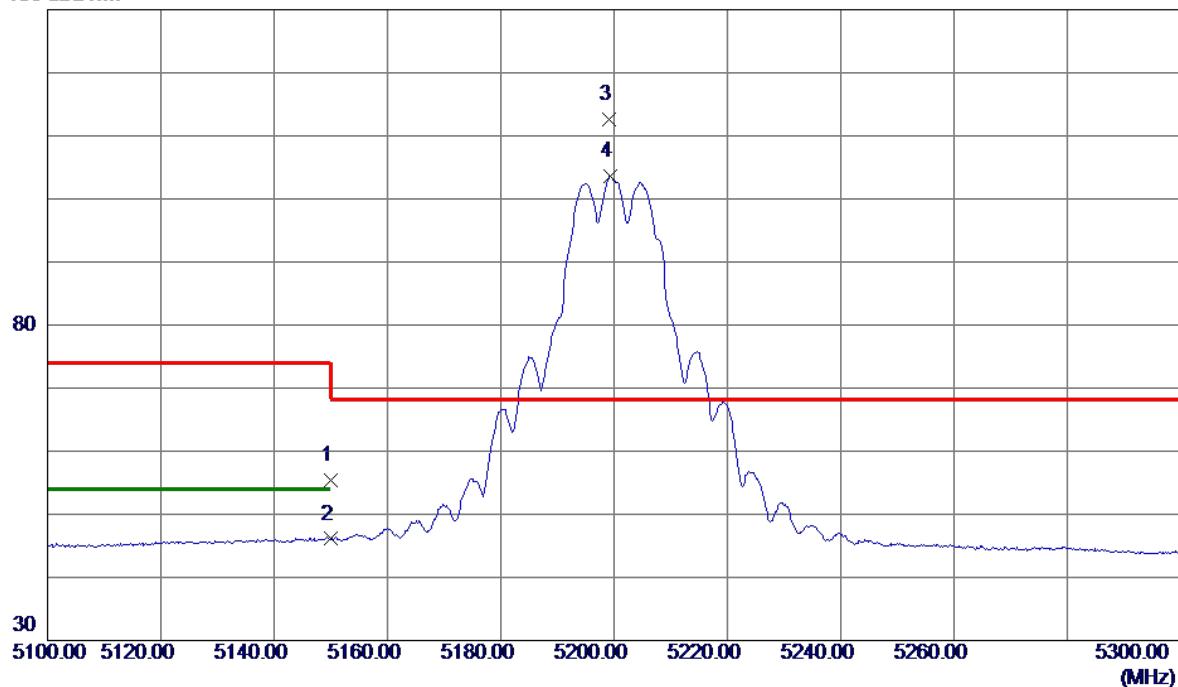


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	5150.0000	41.16	14.33	55.49	74.00	-18.51	Peak	
2	5150.0000	31.77	14.33	46.10	54.00	-7.90	AVG	
3 *	5199.2000	98.20	14.33	112.53	68.20	44.33	Peak	No Limit
4	5199.4000	89.27	14.33	103.60	999.00	-895.40	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

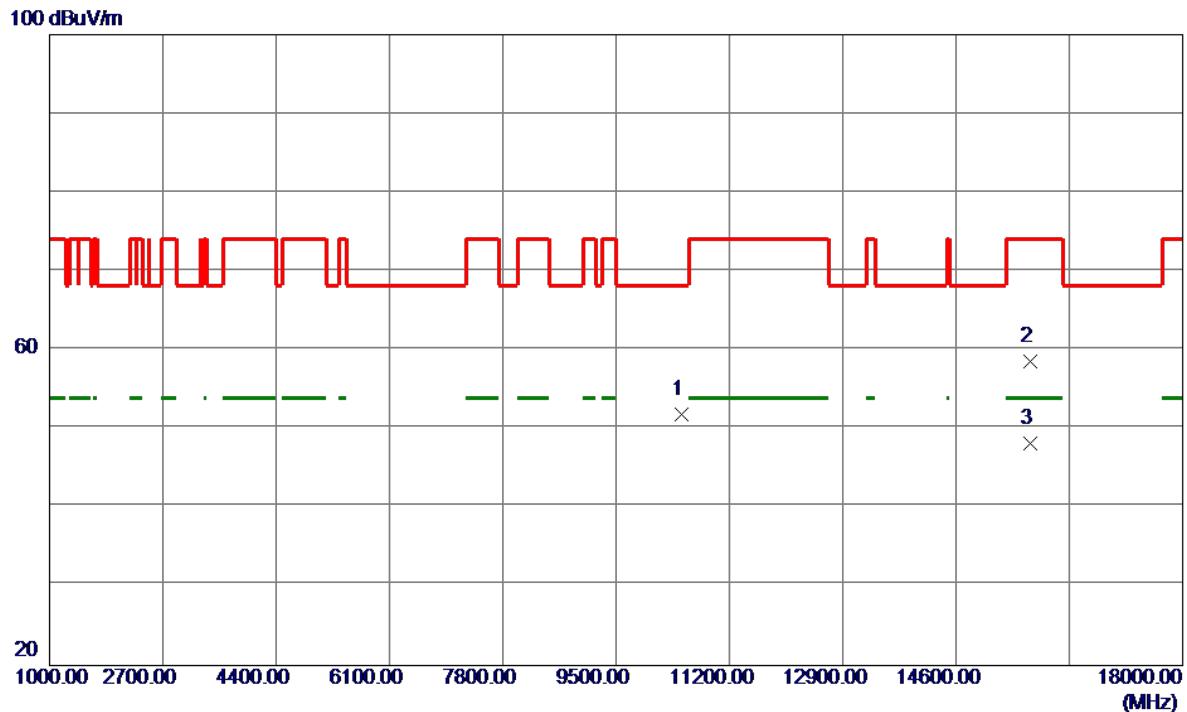


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	10481.6000	41.05	10.82	51.87	68.20	-16.33	Peak	
2	15712.1000	47.09	11.54	58.63	74.00	-15.37	Peak	
3 *	15718.4000	36.57	11.54	48.11	54.00	-5.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

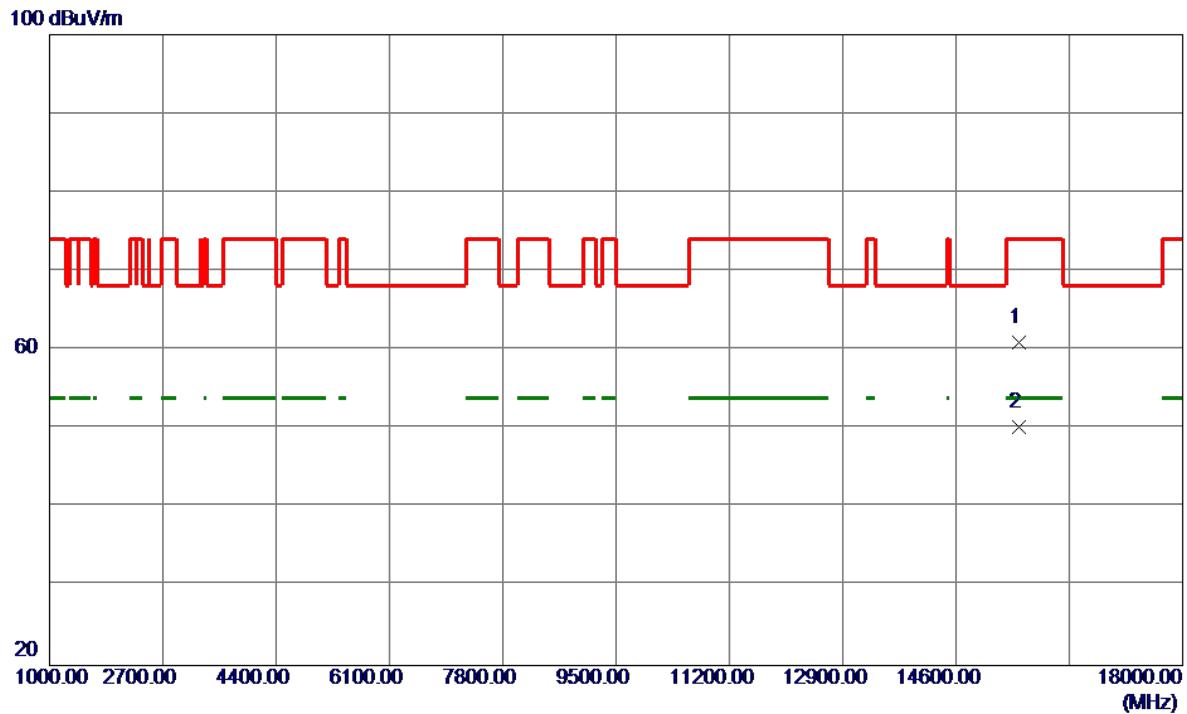


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	15537.6000	49.55	11.42	60.97	74.00	-13.03	Peak
2 *	15542.2000	38.78	11.43	50.21	54.00	-3.79	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

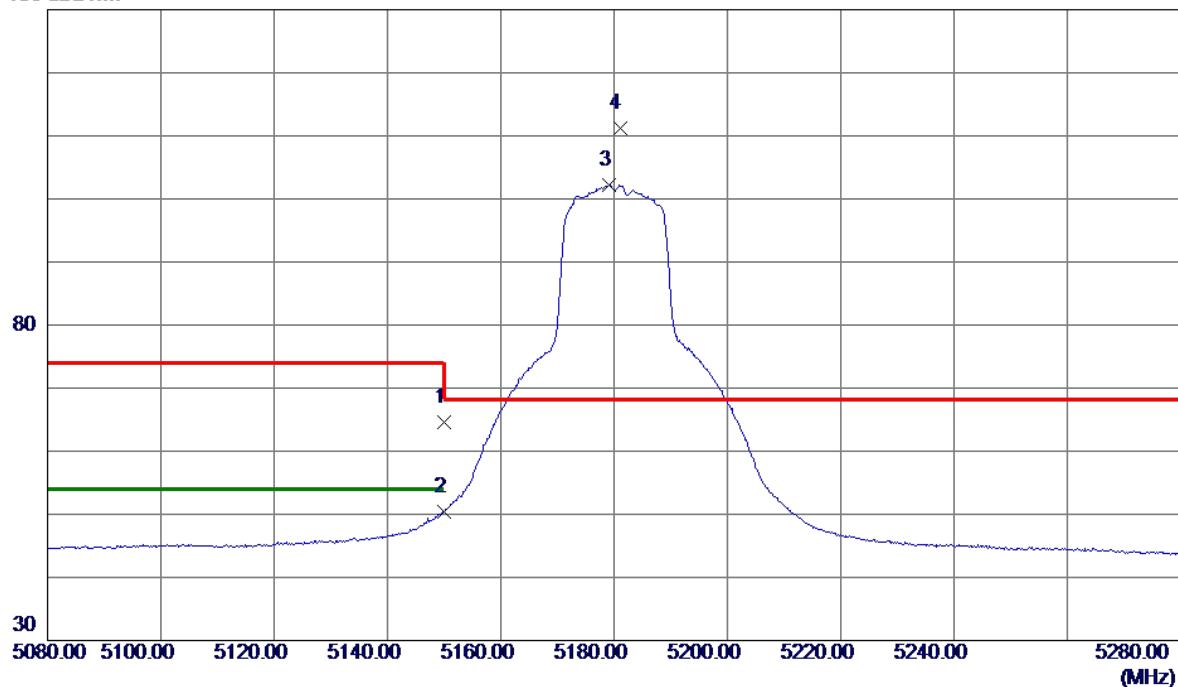


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	5150.0000	50.30	14.33	64.63	74.00	-9.37	Peak	
2	5150.0000	36.13	14.33	50.46	54.00	-3.54	AVG	
3	5179.2000	87.89	14.33	102.22	999.00	-896.78	AVG	No Limit
4 *	5181.0000	96.93	14.33	111.26	68.20	43.06	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

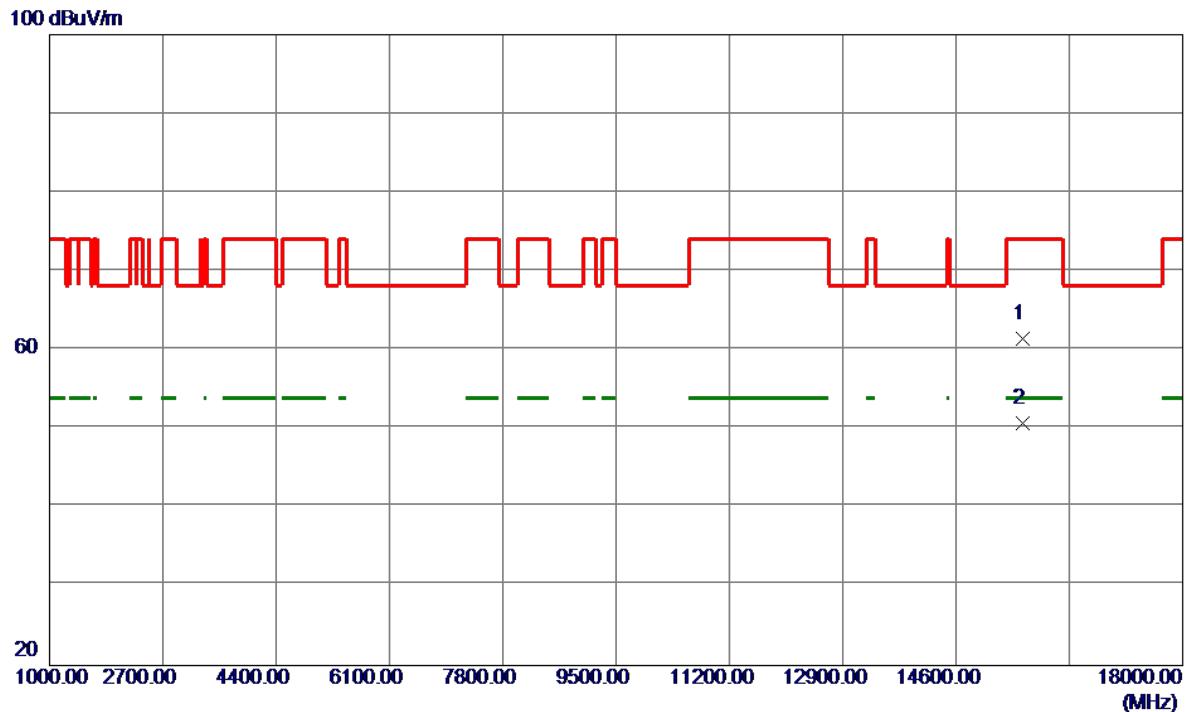


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	15596.2000	50.00	11.46	61.46	74.00	-12.54	Peak
2 *	15601.4000	39.25	11.47	50.72	54.00	-3.28	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

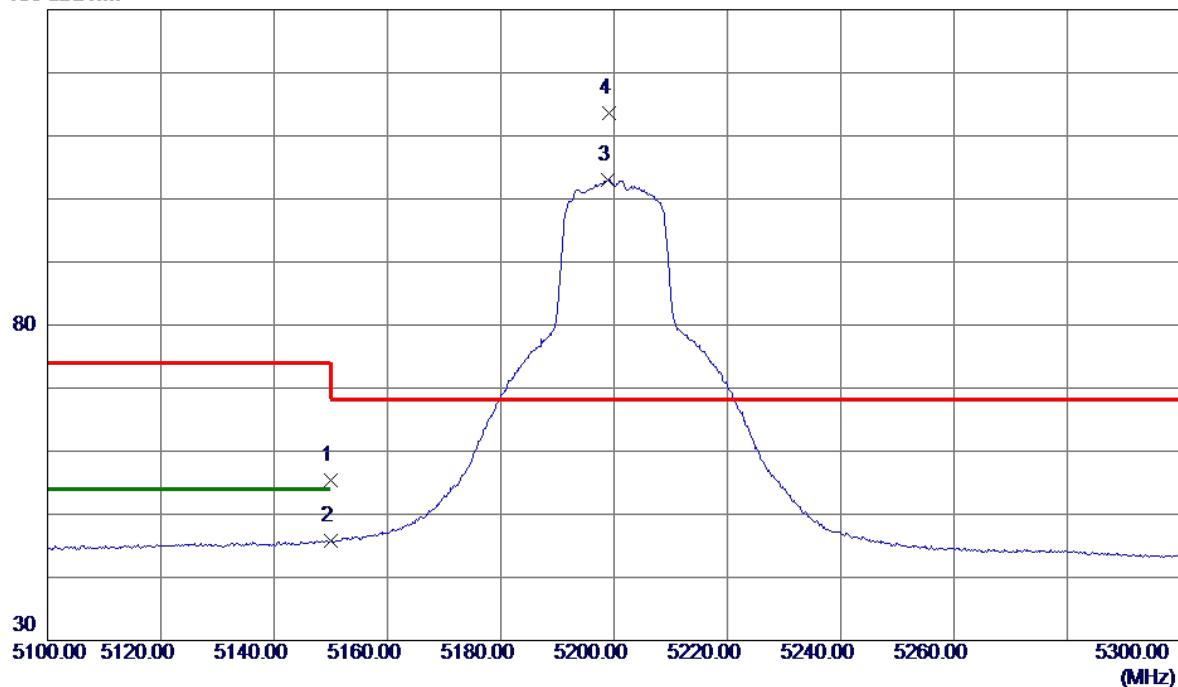


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	5150.0000	41.13	14.33	55.46	74.00	-18.54	Peak	
2	5150.0000	31.46	14.33	45.79	54.00	-8.21	AVG	
3	5198.8000	88.69	14.33	103.02	999.00	-895.98	AVG	No Limit
4 *	5199.2000	99.35	14.33	113.68	68.20	45.48	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

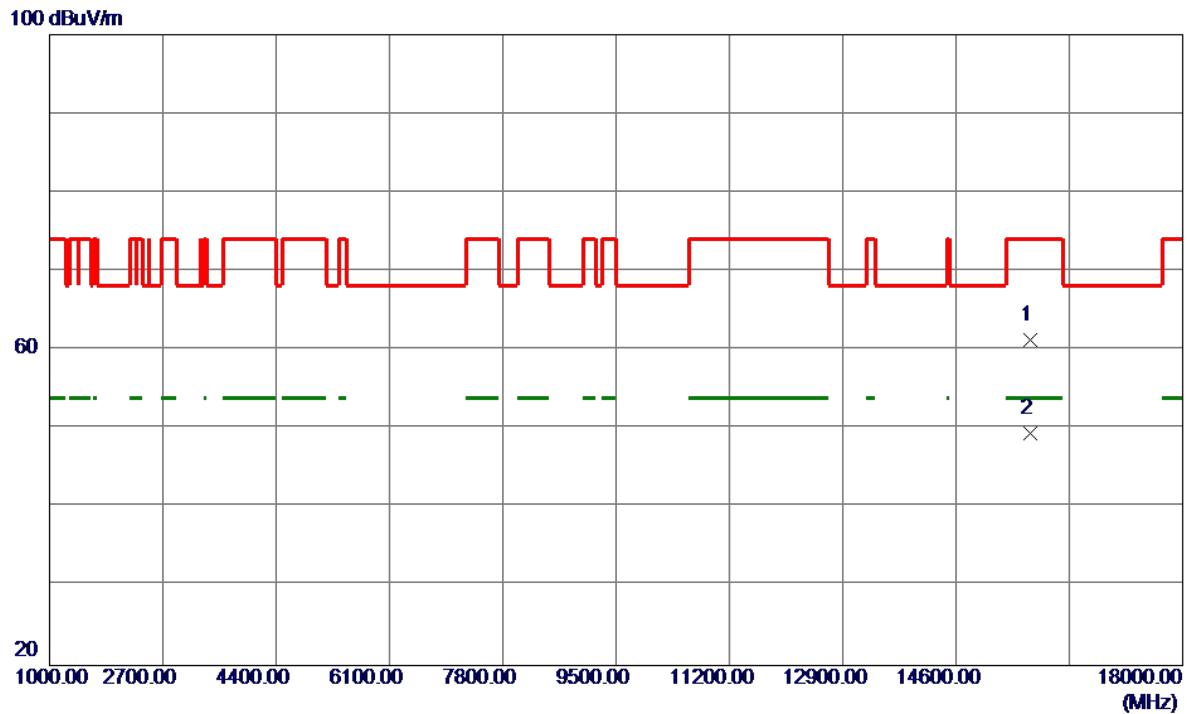


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15719.6000	49.77	11.54	61.31	74.00	-12.69	Peak	
2 *	15721.4000	37.91	11.55	49.46	54.00	-4.54	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

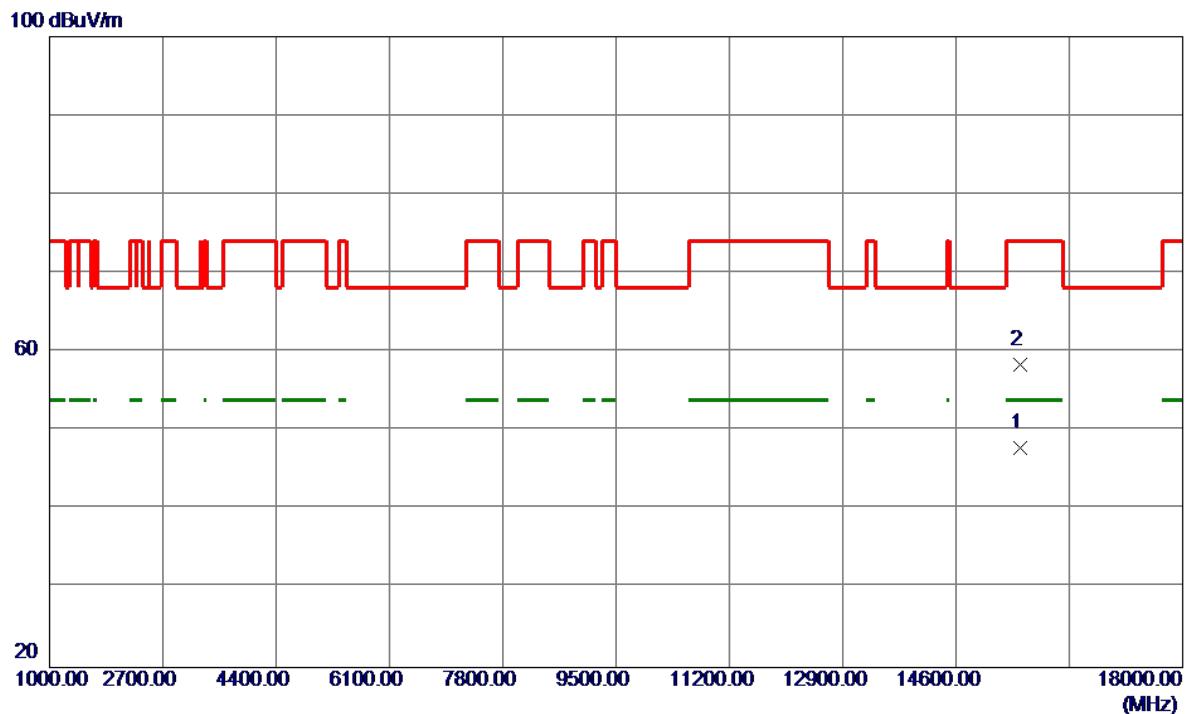


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	15564.7000	36.34	11.44	47.78	54.00	-6.22	AVG	
2	15564.9000	47.00	11.44	58.44	74.00	-15.56	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

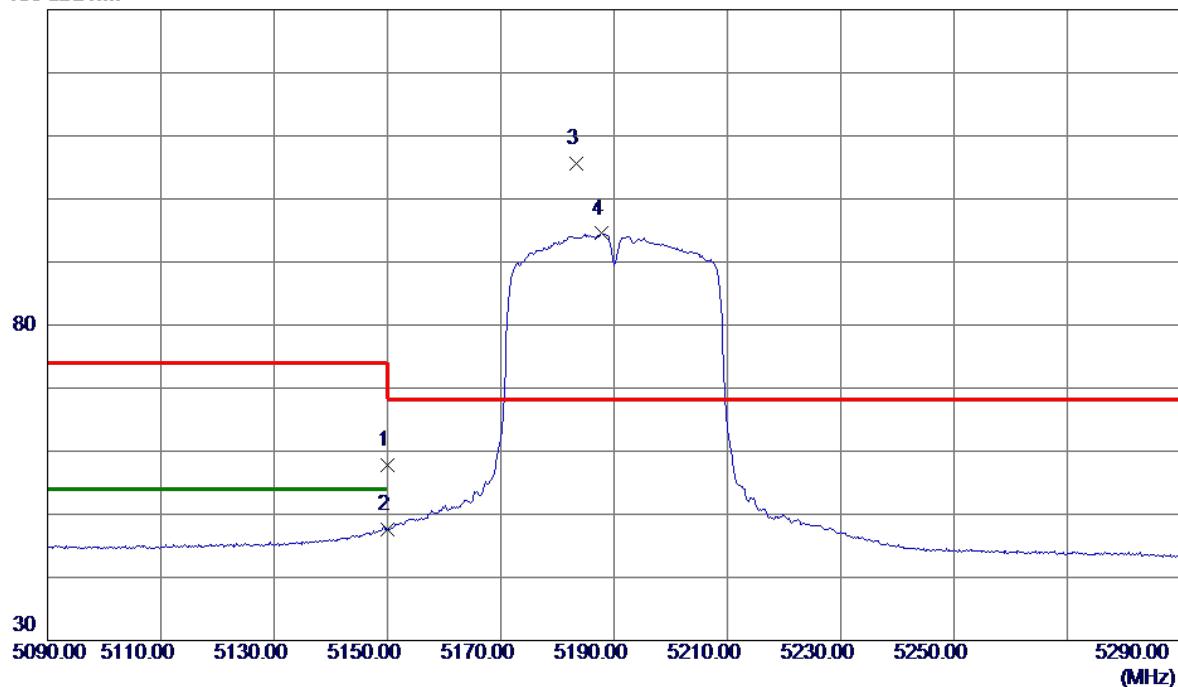


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5150.0000	43.38	14.33	57.71	74.00	-16.29	Peak	
2	5150.0000	33.34	14.33	47.67	54.00	-6.33	AVG	
3 *	5183.4000	91.25	14.33	105.58	68.20	37.38	Peak	No Limit
4	5187.8000	80.17	14.33	94.50	999.00	-904.50	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

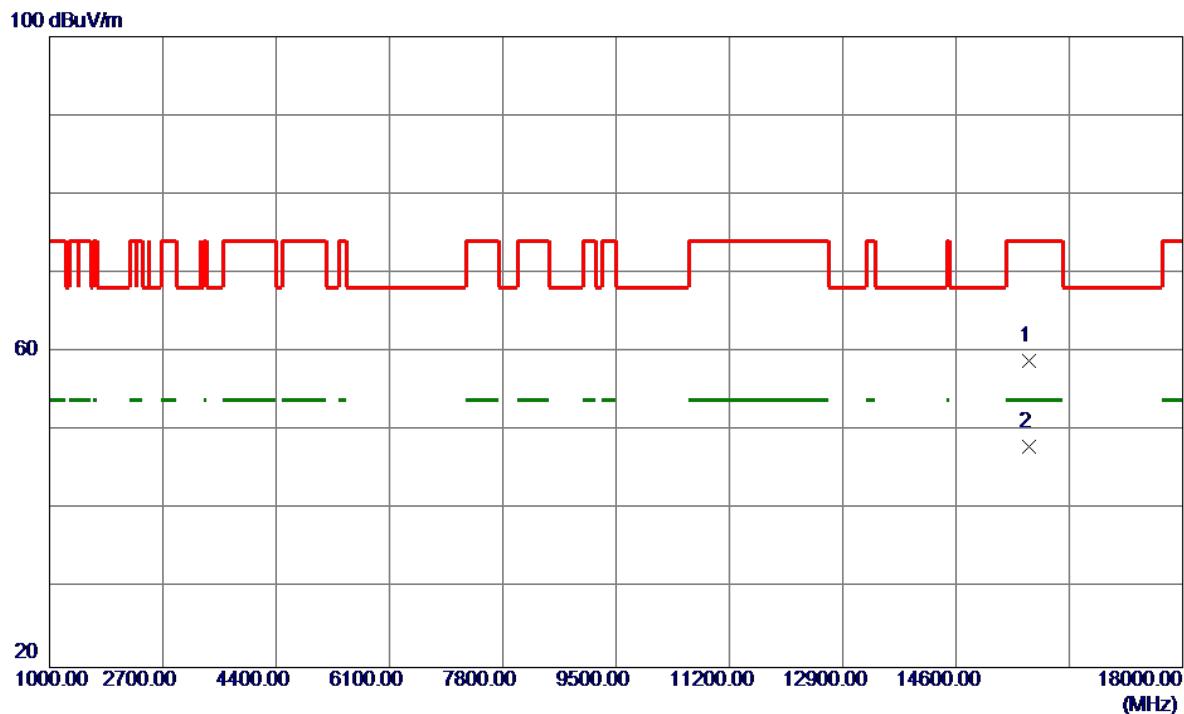


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	15689.3000	47.39	11.52	58.91	74.00	-15.09	Peak
2 *	15692.7000	36.48	11.53	48.01	54.00	-5.99	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

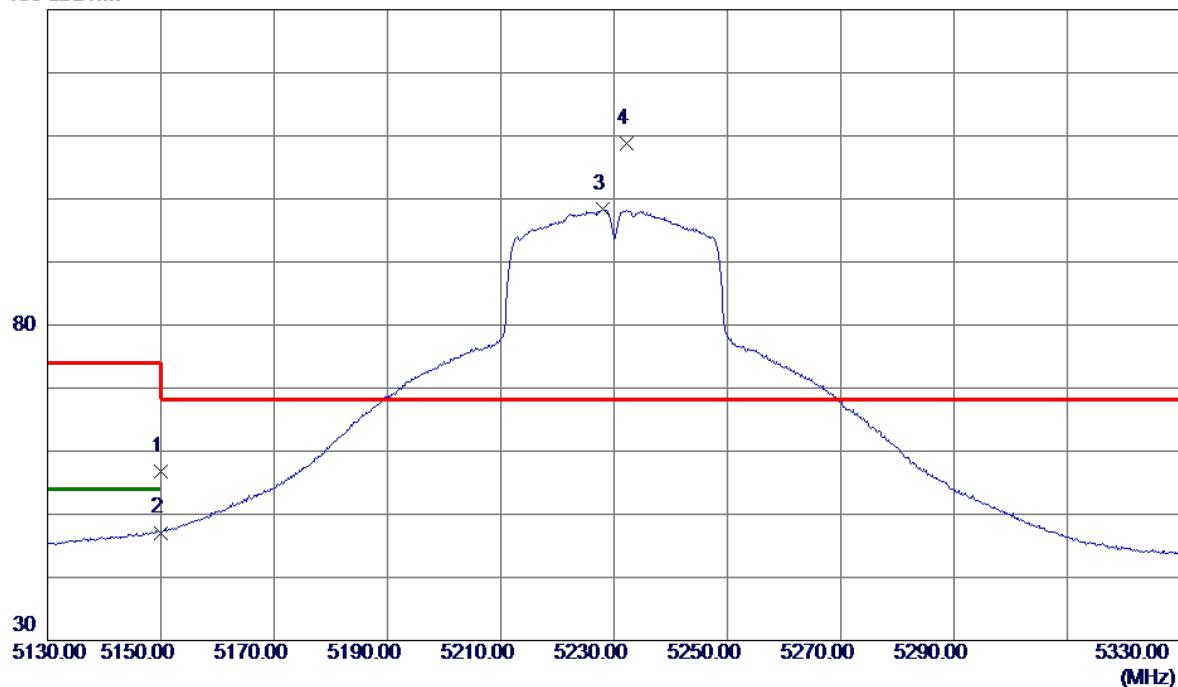


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	5150.0000	42.49	14.33	56.82	74.00	-17.18	Peak	
2	5150.0000	32.77	14.33	47.10	54.00	-6.90	AVG	
3	5228.0000	83.98	14.33	98.31	999.00	-900.69	AVG	No Limit
4 *	5232.2000	94.48	14.33	108.81	68.20	40.61	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

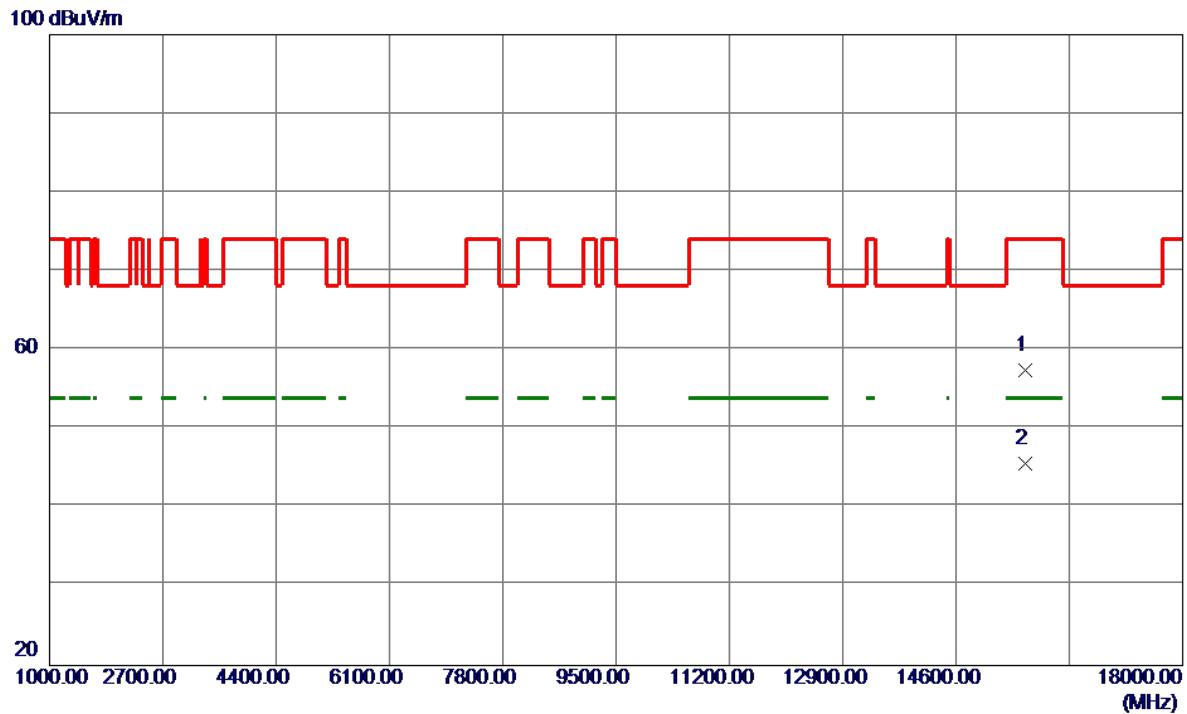


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	15633.0000	45.90	11.49	57.39	74.00	-16.61	Peak
2 *	15634.5000	34.10	11.49	45.59	54.00	-8.41	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

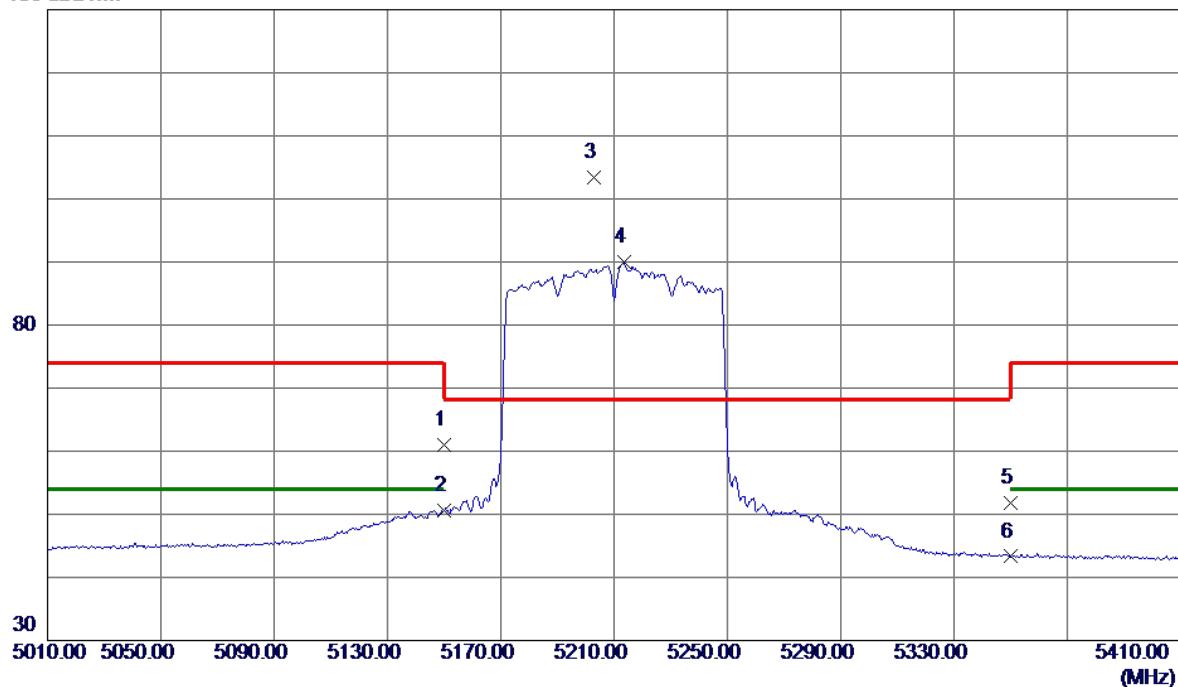


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	5150.0000	46.59	14.33	60.92	74.00	-13.08	Peak	
2	5150.0000	36.33	14.33	50.66	54.00	-3.34	AVG	
3 *	5202.8000	89.11	14.33	103.44	68.20	35.24	Peak	No Limit
4	5213.6000	75.65	14.33	89.98	999.00	-909.02	AVG	No Limit
5	5350.0000	37.55	14.33	51.88	74.00	-22.12	Peak	
6	5350.0000	28.97	14.33	43.30	54.00	-10.70	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

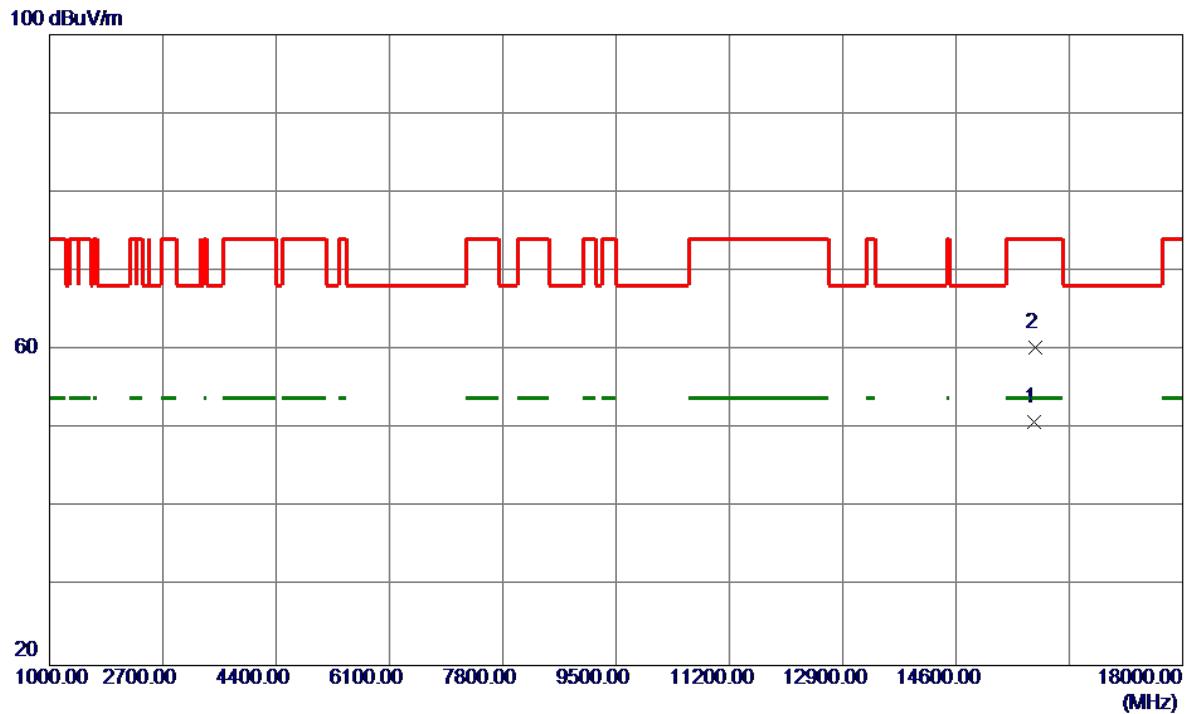


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	15777.4000	39.27	11.58	50.85	54.00	-3.15	AVG	
2	15780.9000	48.66	11.59	60.25	74.00	-13.75	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

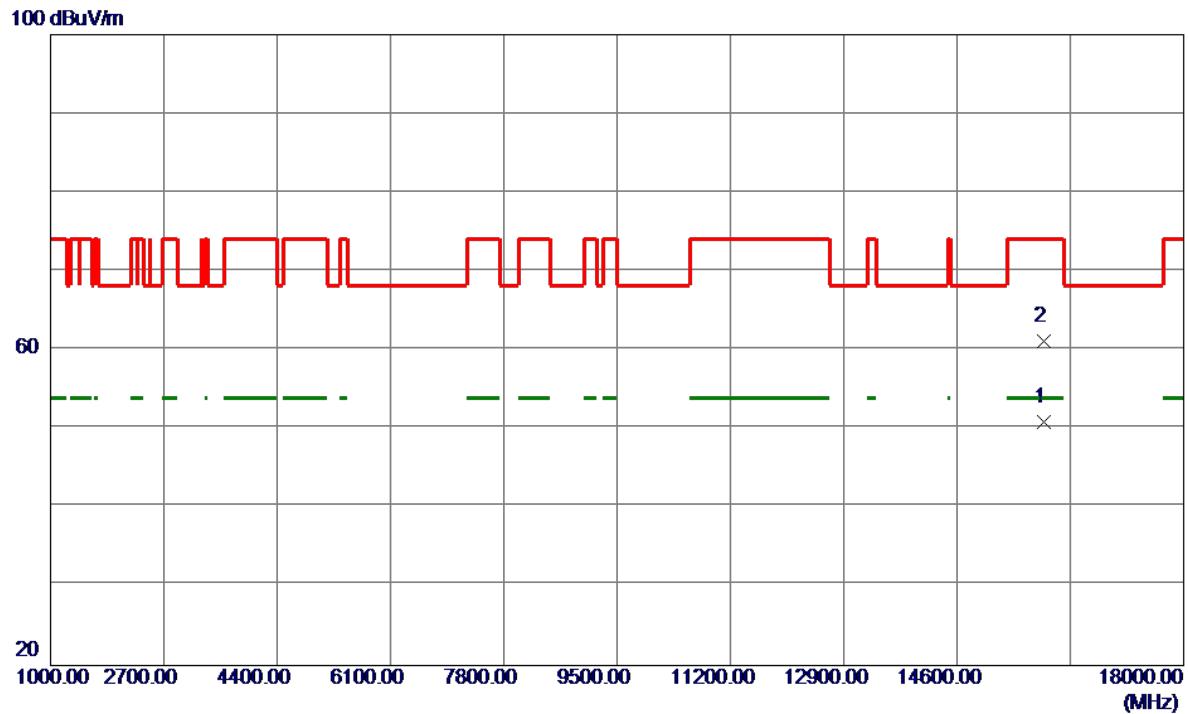


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	15901.9000	39.28	11.67	50.95	54.00	-3.05	AVG	
2	15903.0000	49.44	11.67	61.11	74.00	-12.89	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

130 dBuV/m

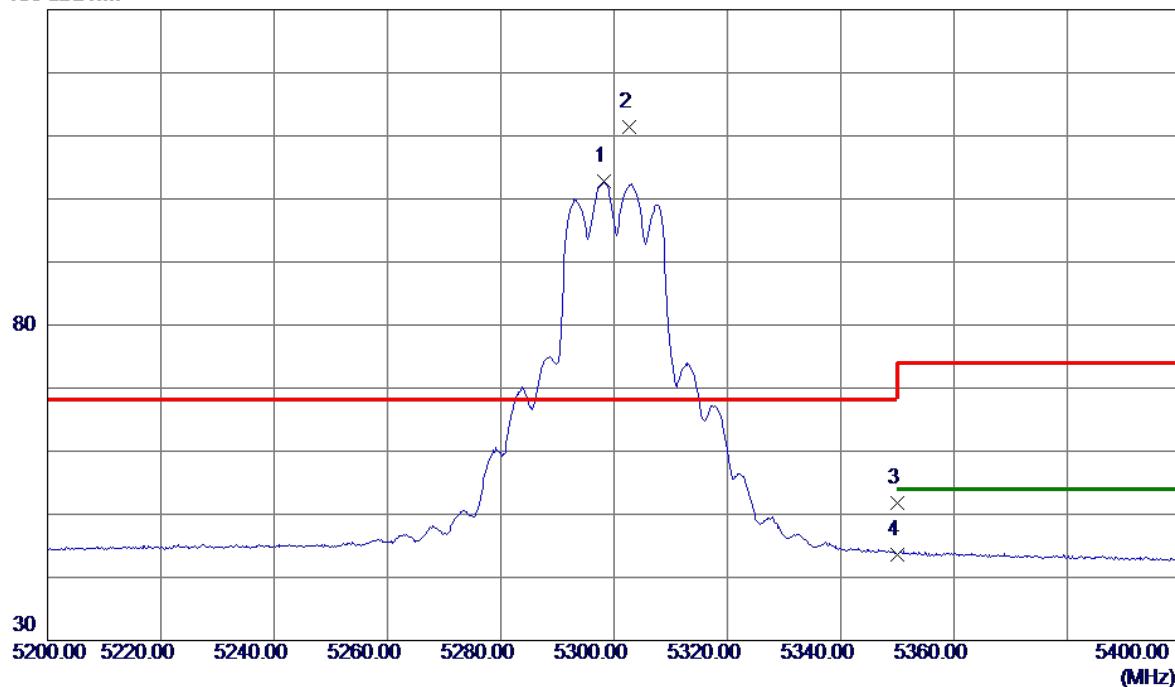


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	5298.2000	88.43	14.33	102.76	999.00	-896.24	AVG	No Limit
2 *	5302.6000	97.14	14.33	111.47	68.20	43.27	Peak	No Limit
3	5350.0000	37.40	14.33	51.73	74.00	-22.27	Peak	
4	5350.0000	29.29	14.33	43.62	54.00	-10.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

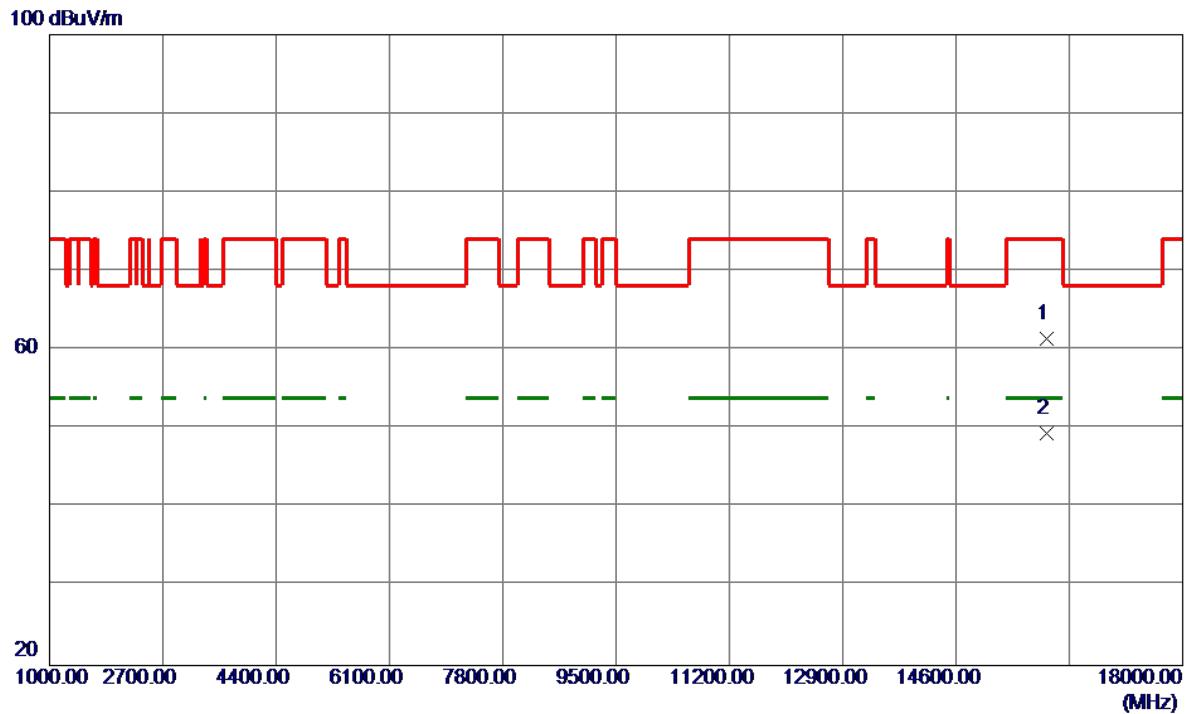


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	15958.1000	49.67	11.70	61.37	74.00	-12.63	Peak
2 *	15962.1000	37.80	11.70	49.50	54.00	-4.50	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

130 dBuV/m

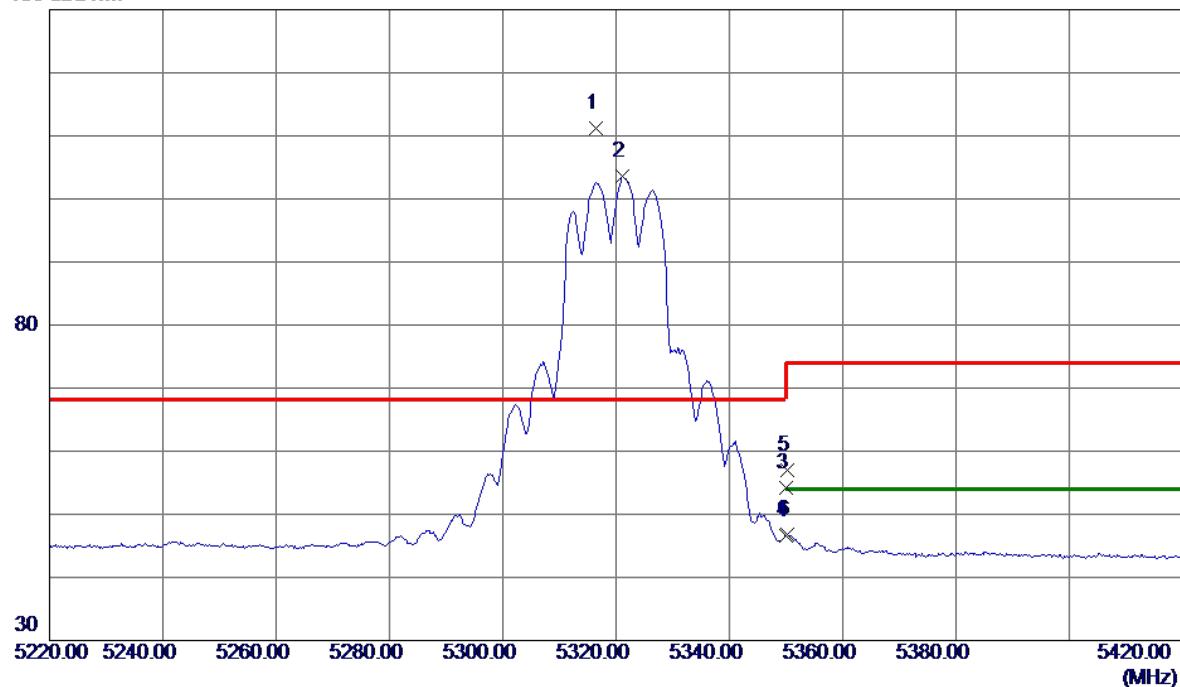


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	5316.4000	96.82	14.33	111.15	68.20	42.95	Peak	No Limit
2	5321.2000	89.18	14.33	103.51	999.00	-895.49	AVG	No Limit
3	5350.0000	39.78	14.33	54.11	74.00	-19.89	Peak	
4	5350.0000	32.32	14.33	46.65	54.00	-7.35	AVG	
5	5350.2000	42.73	14.33	57.06	74.00	-16.94	Peak	
6	5350.2000	32.41	14.33	46.74	54.00	-7.26	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5260 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

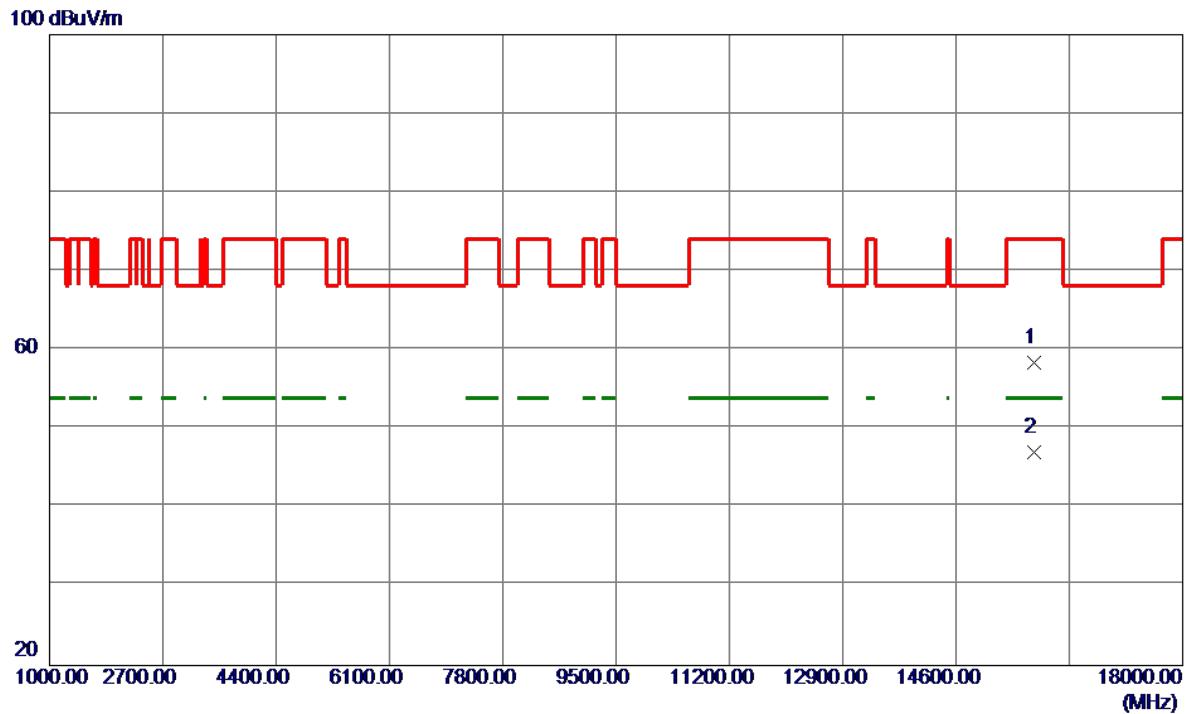


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	15779.6000	46.84	11.58	58.42	74.00	-15.58	Peak
2 *	15780.1000	35.42	11.58	47.00	54.00	-7.00	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

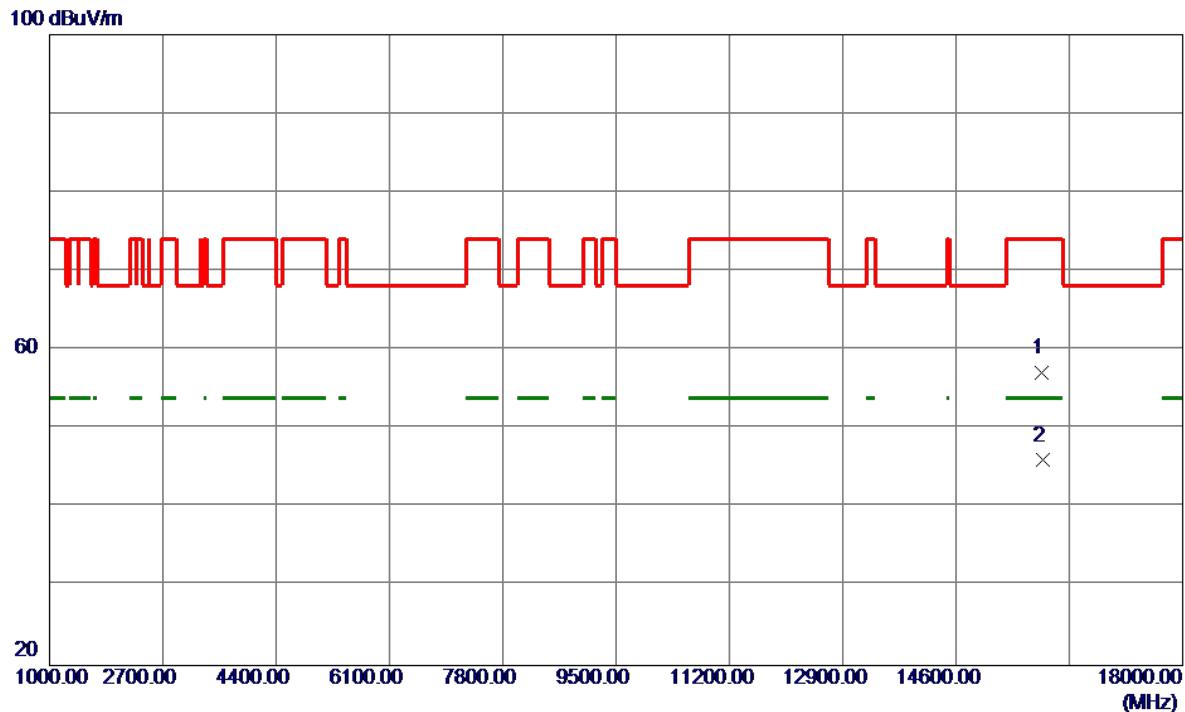


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	15891.6000	45.43	11.66	57.09	74.00	-16.91	Peak
2 *	15900.1000	34.34	11.66	46.00	54.00	-8.00	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

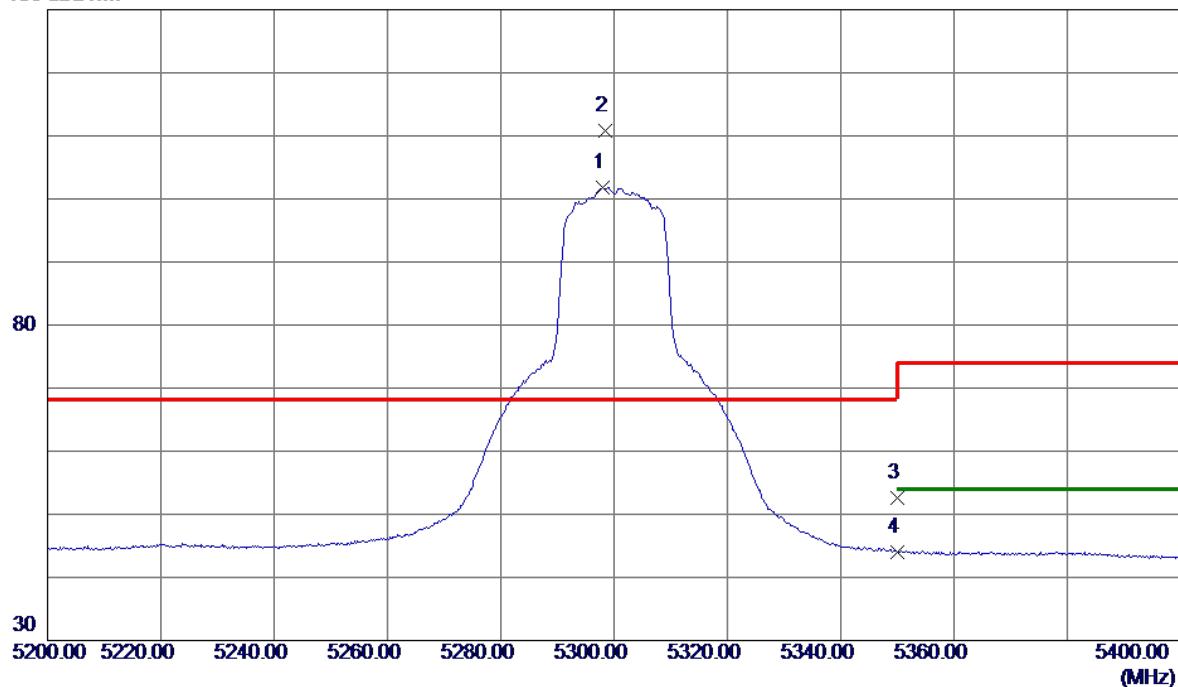


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5298.0000	87.56	14.33	101.89	999.00	-897.11	AVG	No Limit
2 *	5298.4000	96.42	14.33	110.75	68.20	42.55	Peak	No Limit
3	5350.0000	38.35	14.33	52.68	74.00	-21.32	Peak	
4	5350.0000	29.62	14.33	43.95	54.00	-10.05	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

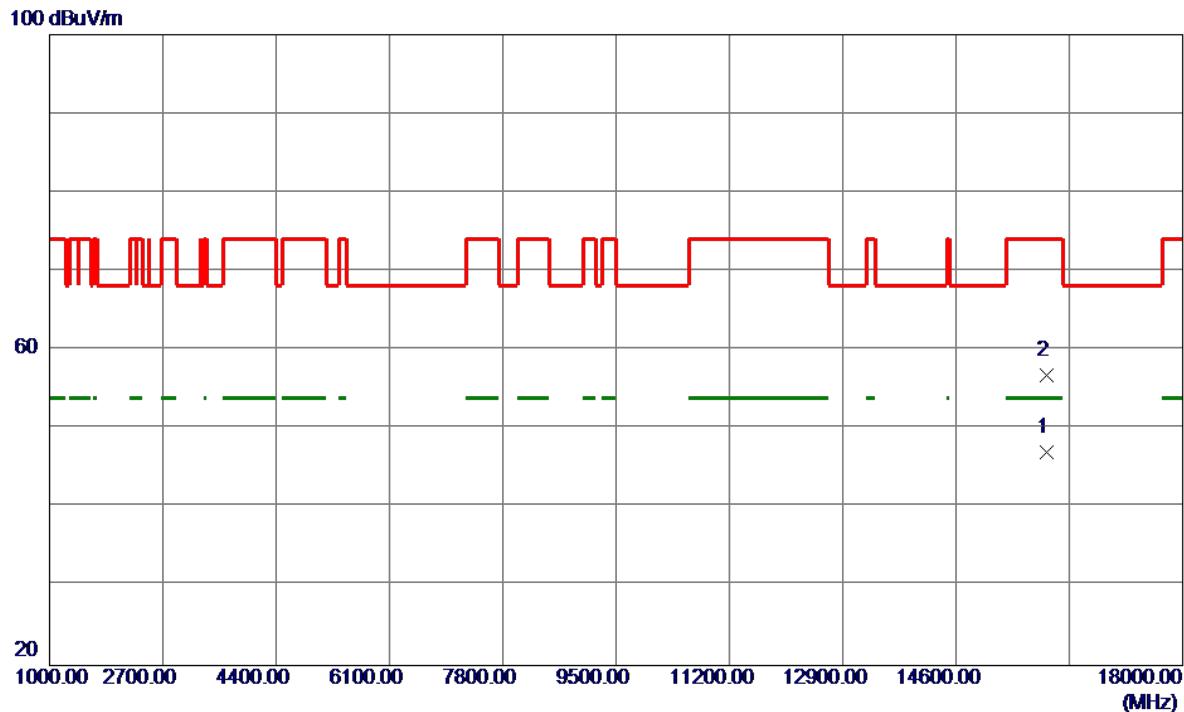


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	15960.2000	35.28	11.70	46.98	54.00	-7.02	AVG	
2	15961.9000	45.07	11.70	56.77	74.00	-17.23	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

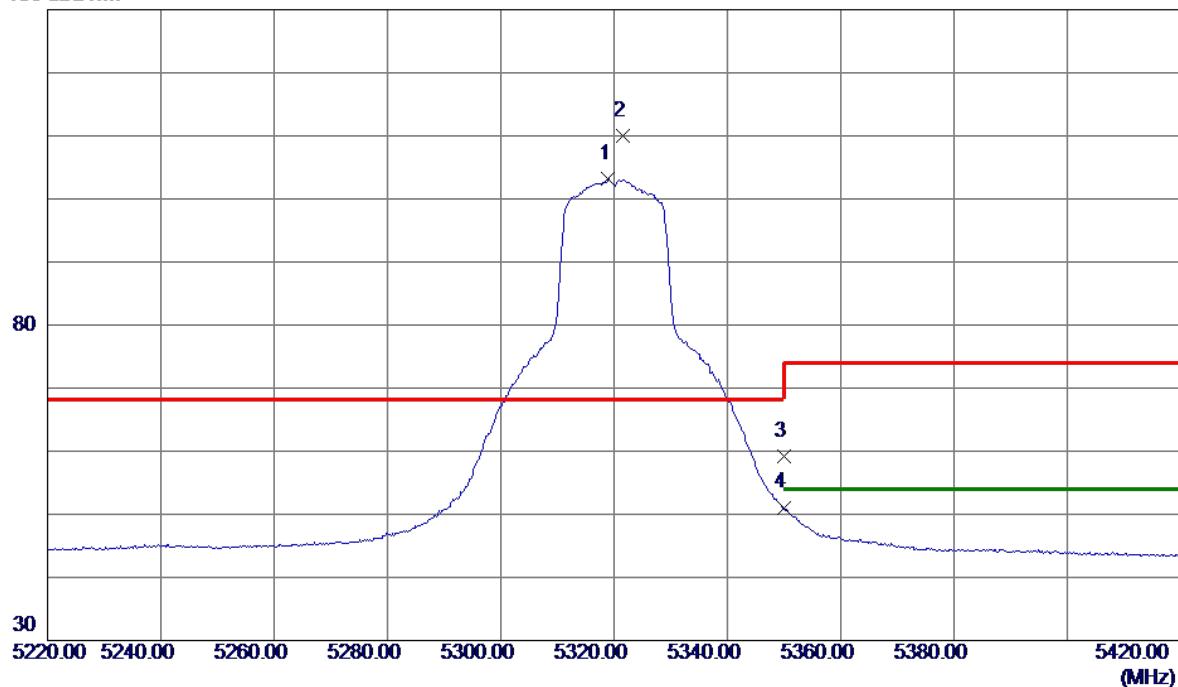


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5319.0000	88.87	14.33	103.20	999.00	-895.80	AVG	No Limit
2 *	5321.6000	95.64	14.33	109.97	68.20	41.77	Peak	No Limit
3	5350.0000	44.83	14.33	59.16	74.00	-14.84	Peak	
4	5350.0000	36.77	14.33	51.10	54.00	-2.90	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

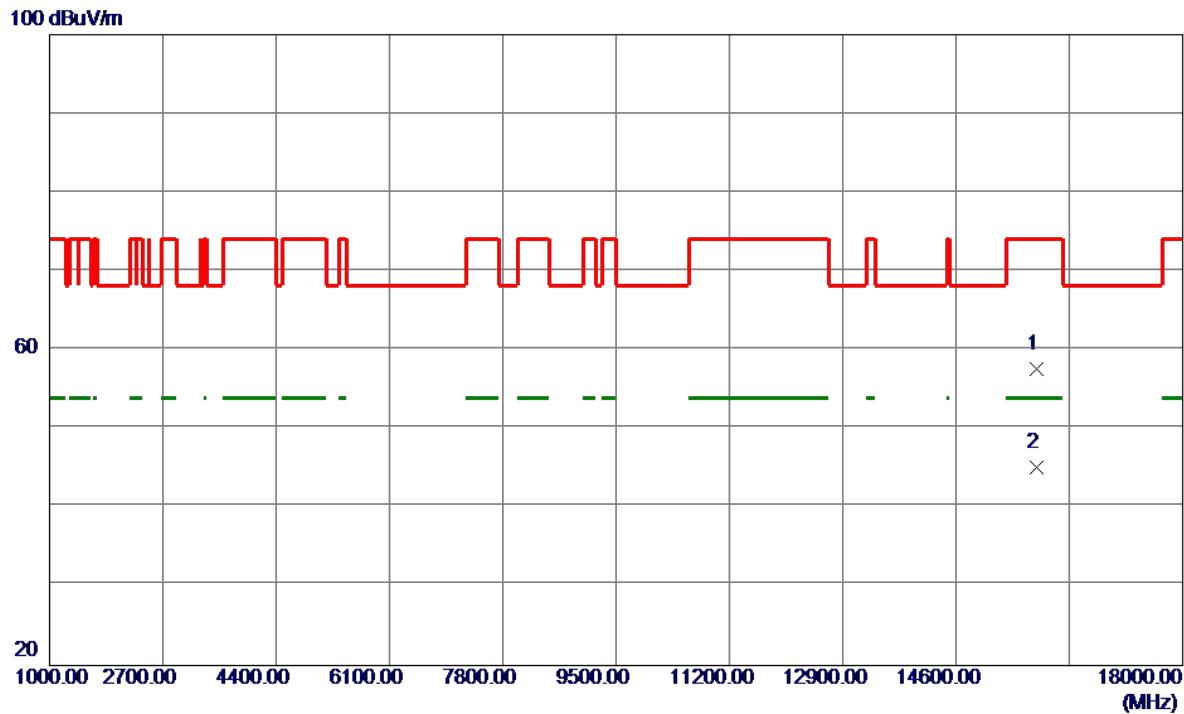


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	15804.7000	46.04	11.60	57.64	74.00	-16.36	Peak
2 *	15812.8000	33.44	11.61	45.05	54.00	-8.95	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

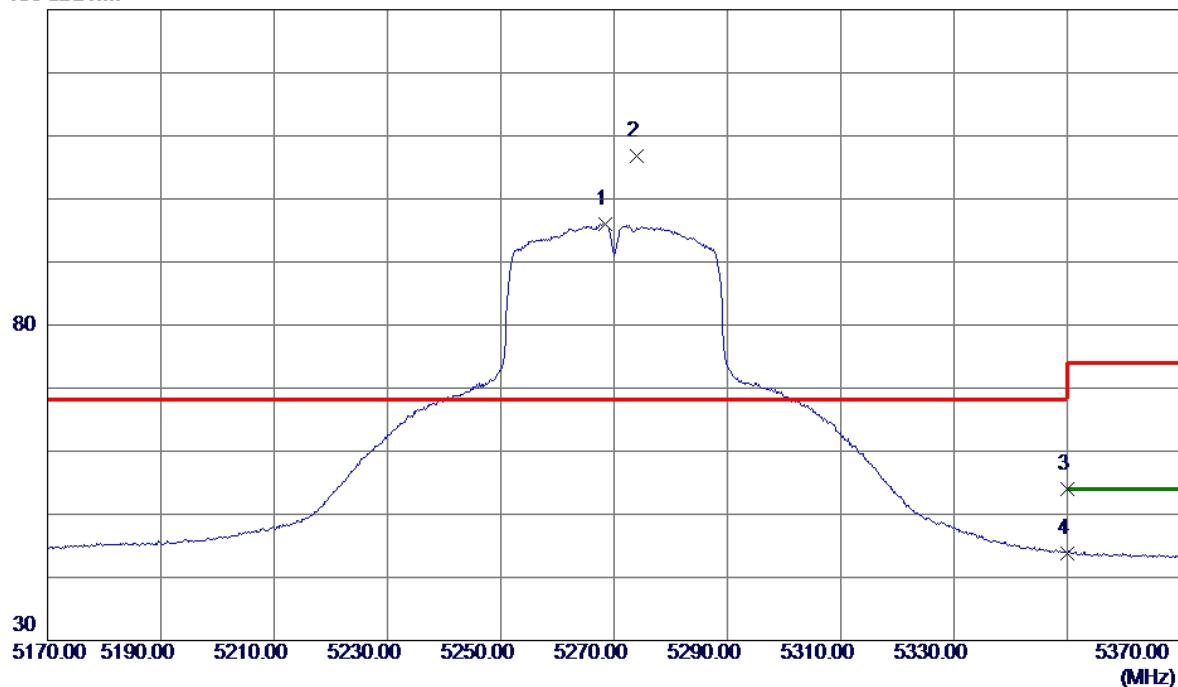


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	5268.4000	81.72	14.33	96.05	999.00	-902.95	AVG	No Limit
2 *	5274.0000	92.56	14.33	106.89	68.20	38.69	Peak	No Limit
3	5350.0000	39.70	14.33	54.03	74.00	-19.97	Peak	
4	5350.0000	29.50	14.33	43.83	54.00	-10.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

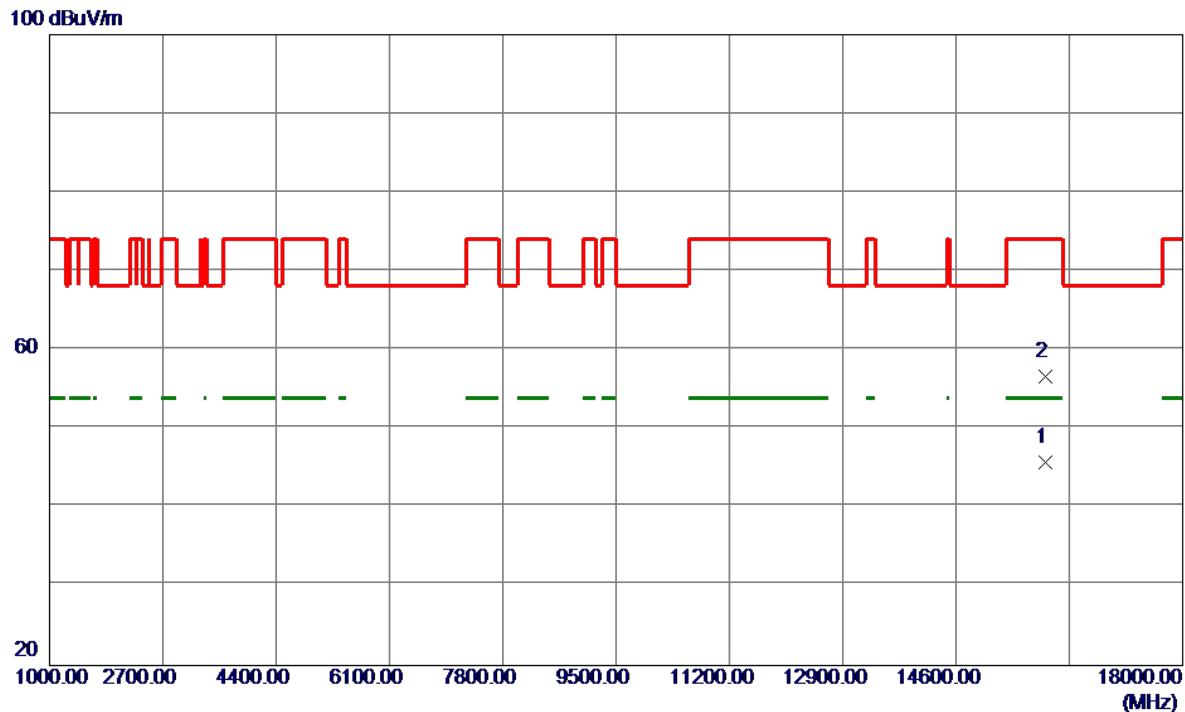


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	15933.0000	34.10	11.69	45.79	54.00	-8.21	AVG	
2	15935.6000	44.95	11.69	56.64	74.00	-17.36	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

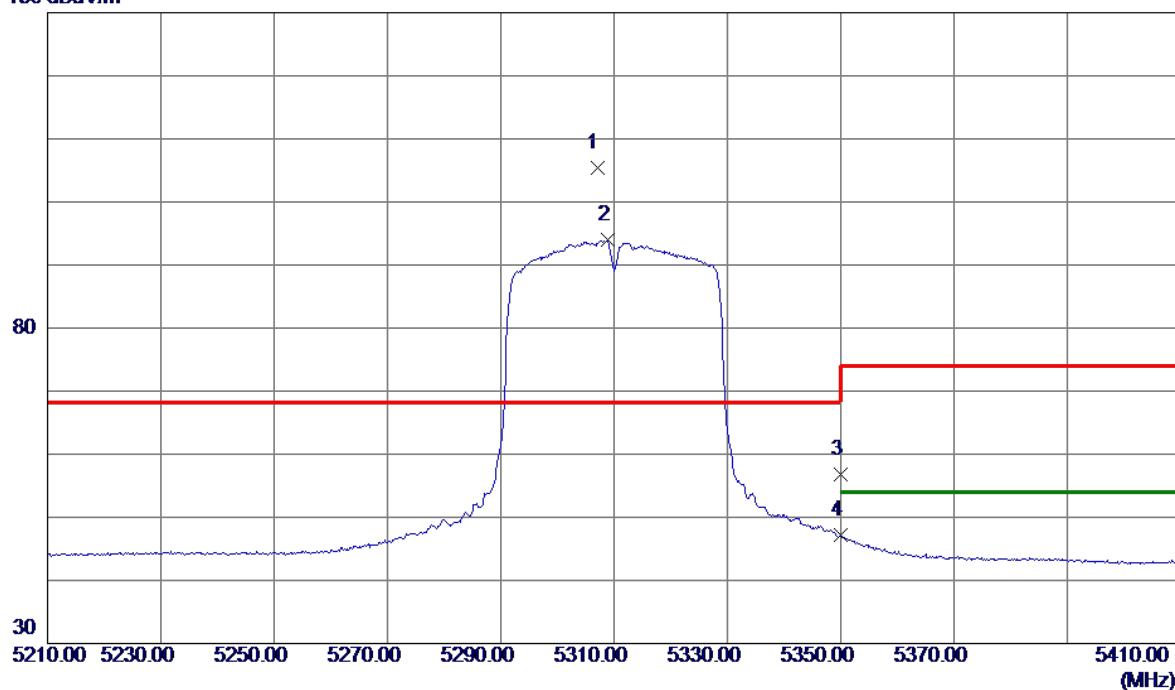


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	5307.0000	91.05	14.33	105.38	68.20	37.18	Peak	No Limit
2	5308.8000	79.63	14.33	93.96	999.00	-905.04	AVG	No Limit
3	5350.0000	42.44	14.33	56.77	74.00	-17.23	Peak	
4	5350.0000	32.84	14.33	47.17	54.00	-6.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

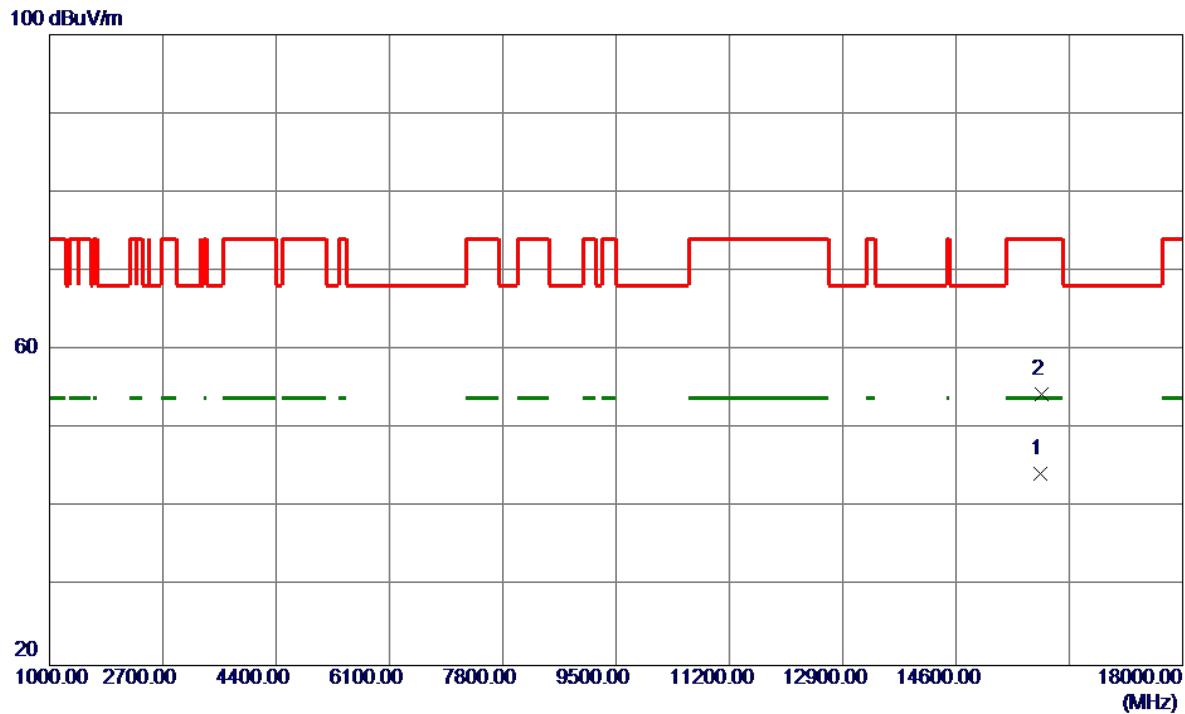


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment				
1 *	15873.3000	32.66	11.65	44.31	54.00	-9.69	AVG	
2	15879.9000	42.70	11.65	54.35	74.00	-19.65	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

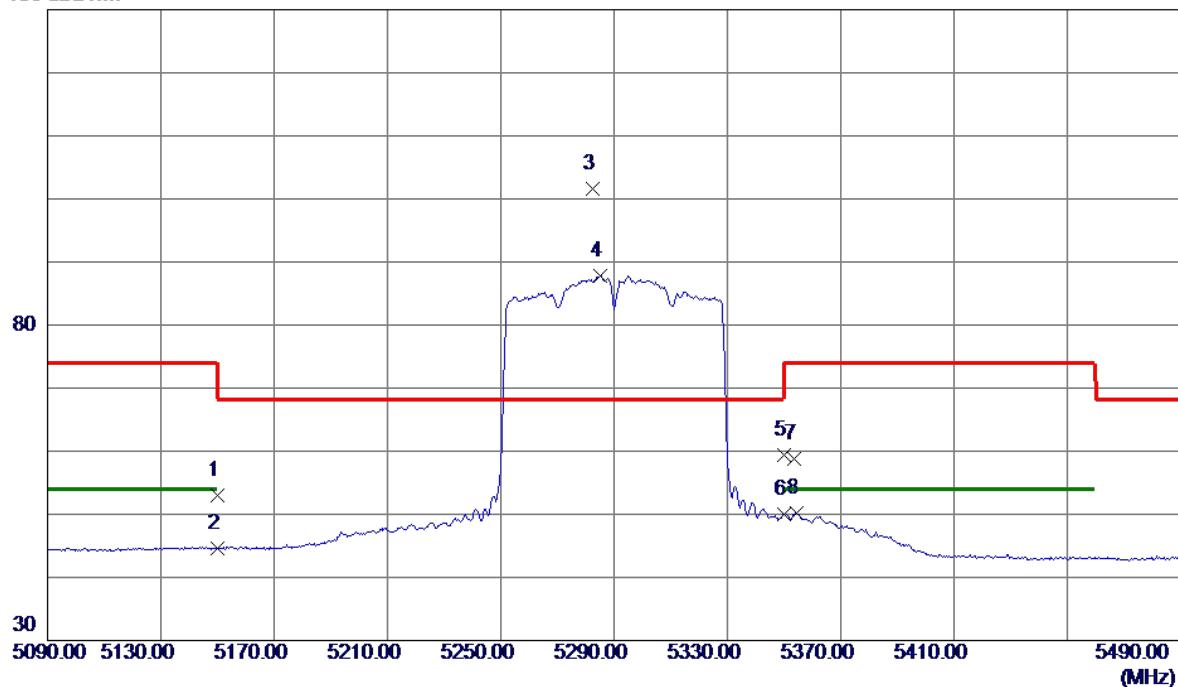


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector		
1	5150.0000	38.72	14.33	53.05	74.00	-20.95	Peak		
2	5150.0000	30.28	14.33	44.61	54.00	-9.39	AVG		
3 *	5282.4000	87.33	14.33	101.66	68.20	33.46	Peak	No Limit	
4	5285.2000	73.47	14.33	87.80	999.00	-911.20	AVG	No Limit	
5	5350.0000	45.15	14.33	59.48	74.00	-14.52	Peak		
6	5350.0000	35.76	14.33	50.09	54.00	-3.91	AVG		
7	5353.4000	44.46	14.33	58.79	74.00	-15.21	Peak		
8	5354.4000	35.84	14.33	50.17	54.00	-3.83	AVG		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

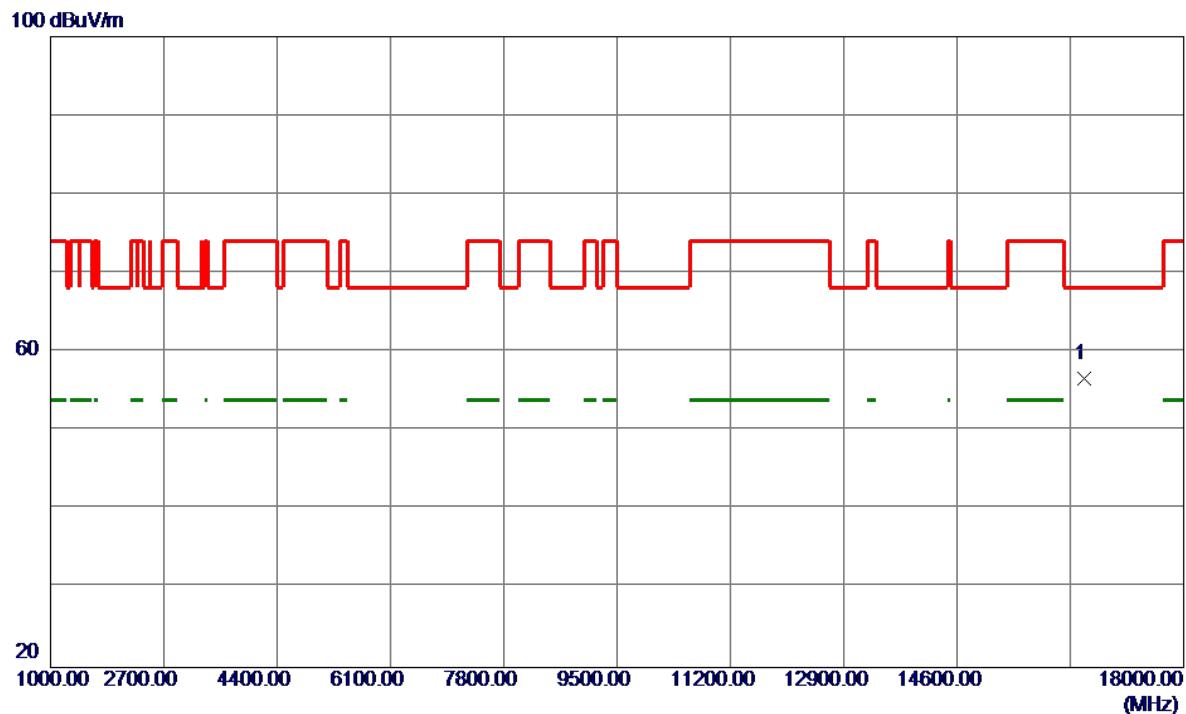


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	16509.0000	45.07	11.54	56.61	68.20	-11.59	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

130 dBuV/m

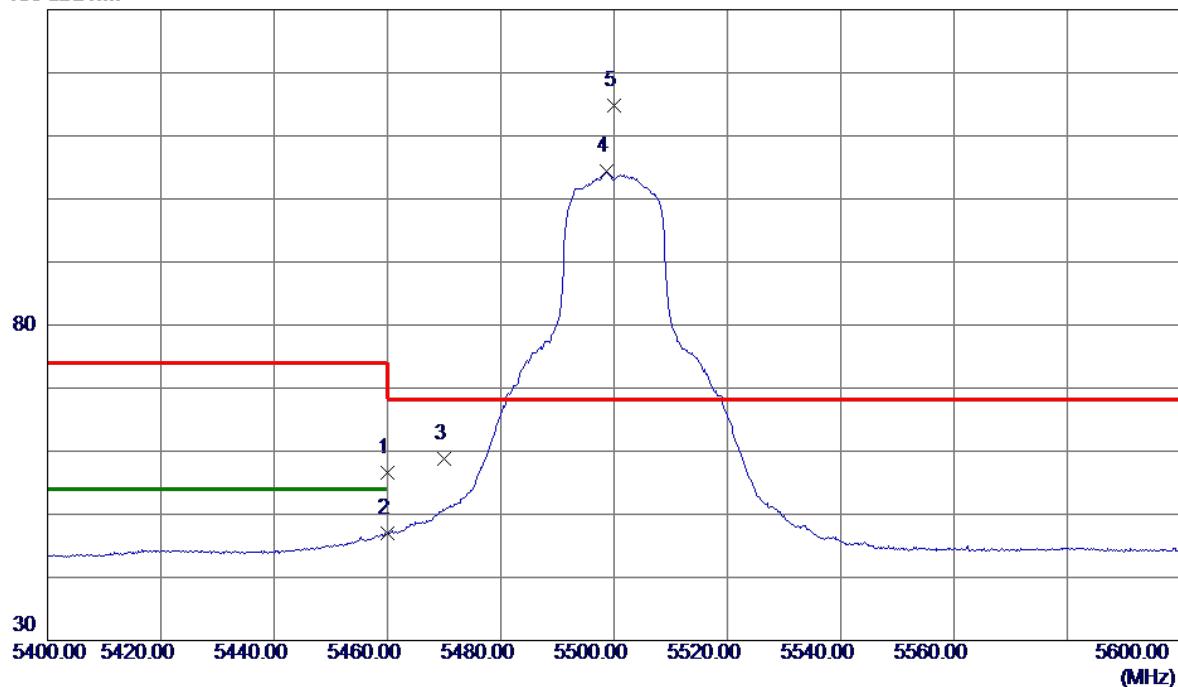


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	5460.0000	42.21	14.34	56.55	74.00	-17.45	Peak	
2	5460.0000	32.68	14.34	47.02	54.00	-6.98	AVG	
3	5470.0000	44.38	14.34	58.72	68.20	-9.48	Peak	
4	5498.6000	90.01	14.34	104.35	999.00	-894.65	AVG	No Limit
5 *	5500.0000	100.53	14.34	114.87	68.20	46.67	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

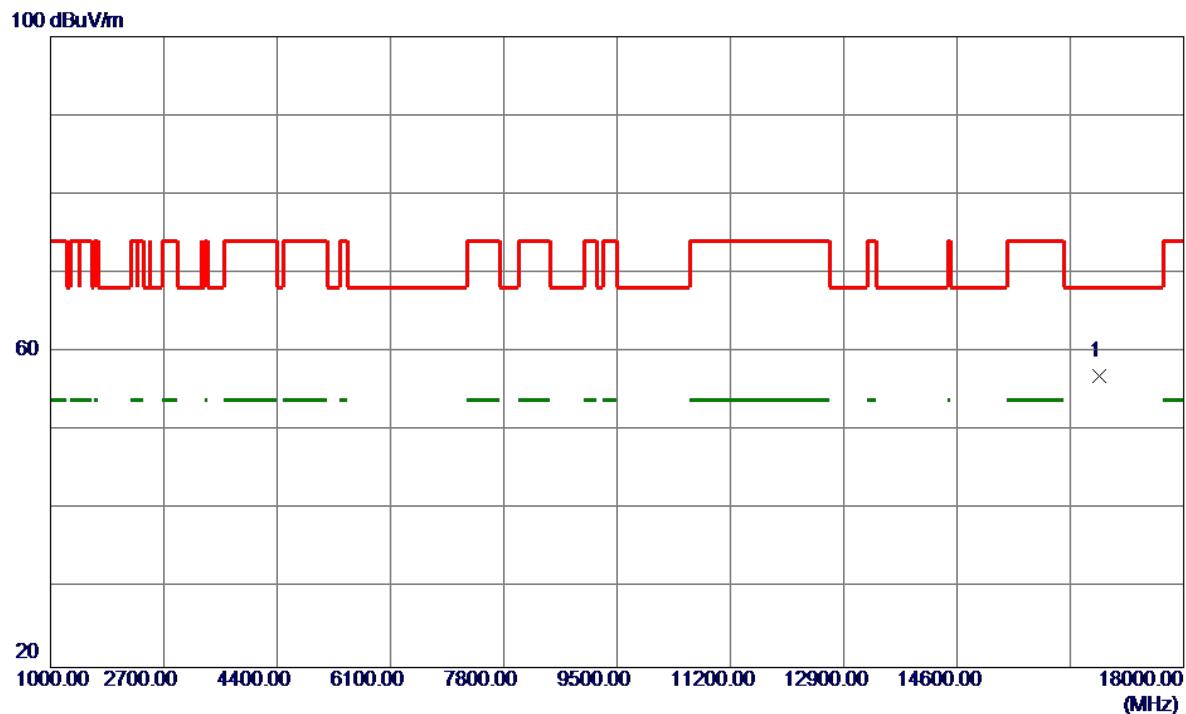


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	16739.8000	45.49	11.42	56.91	68.20	-11.29	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

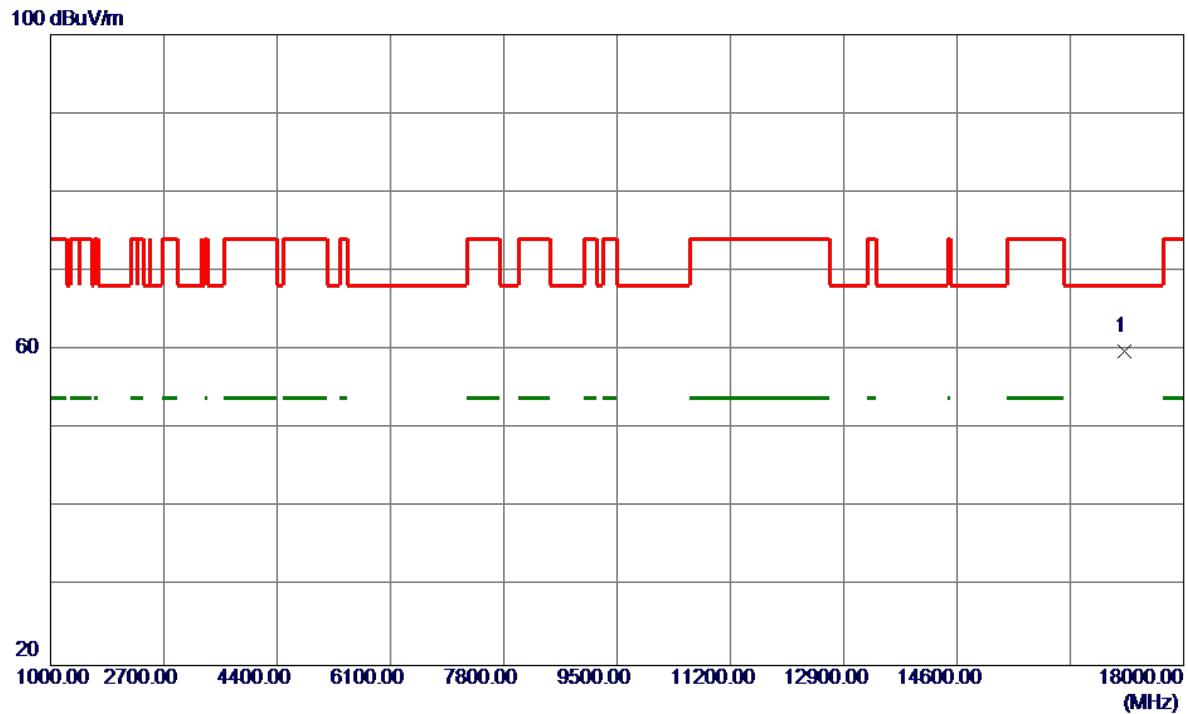


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	17104.3000	48.84	11.07	59.91	68.20	-8.29	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

130 dBuV/m

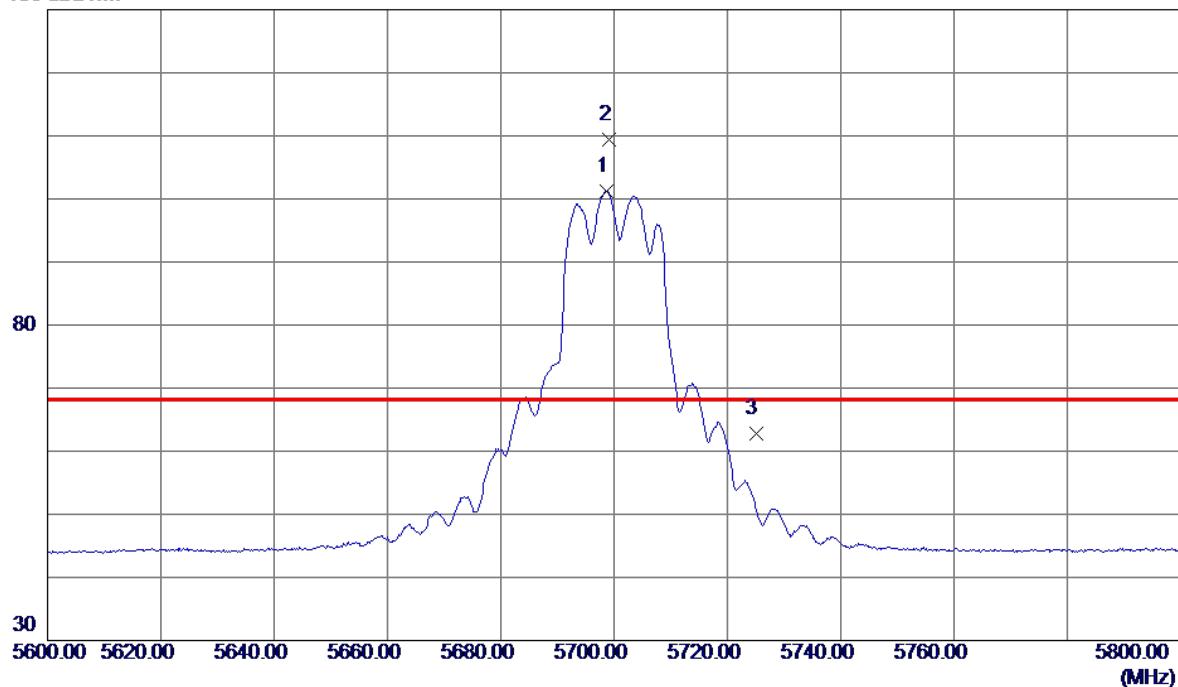


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	5698.6000	86.39	14.80	101.19	999.00	-897.81	AVG	No Limit
2 *	5699.2000	94.68	14.80	109.48	68.20	41.28	Peak	No Limit
3	5725.0000	47.94	14.86	62.80	68.20	-5.40	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

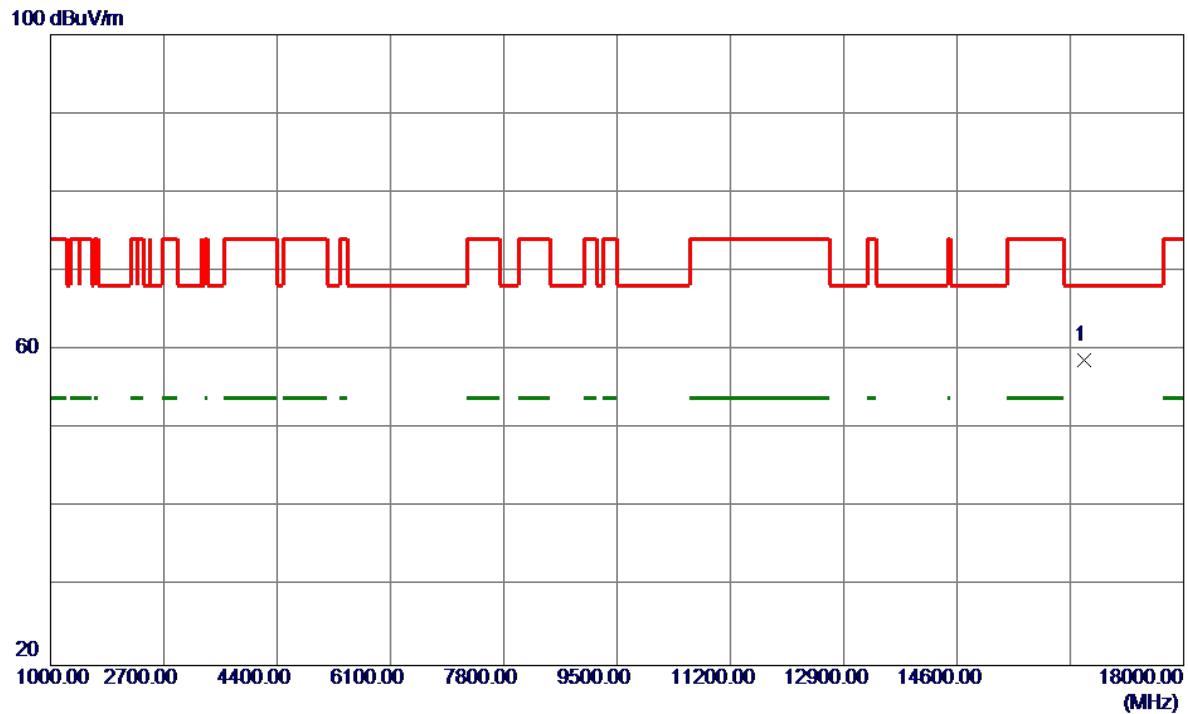


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	16499.8000	47.24	11.54	58.78	68.20	-9.42	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

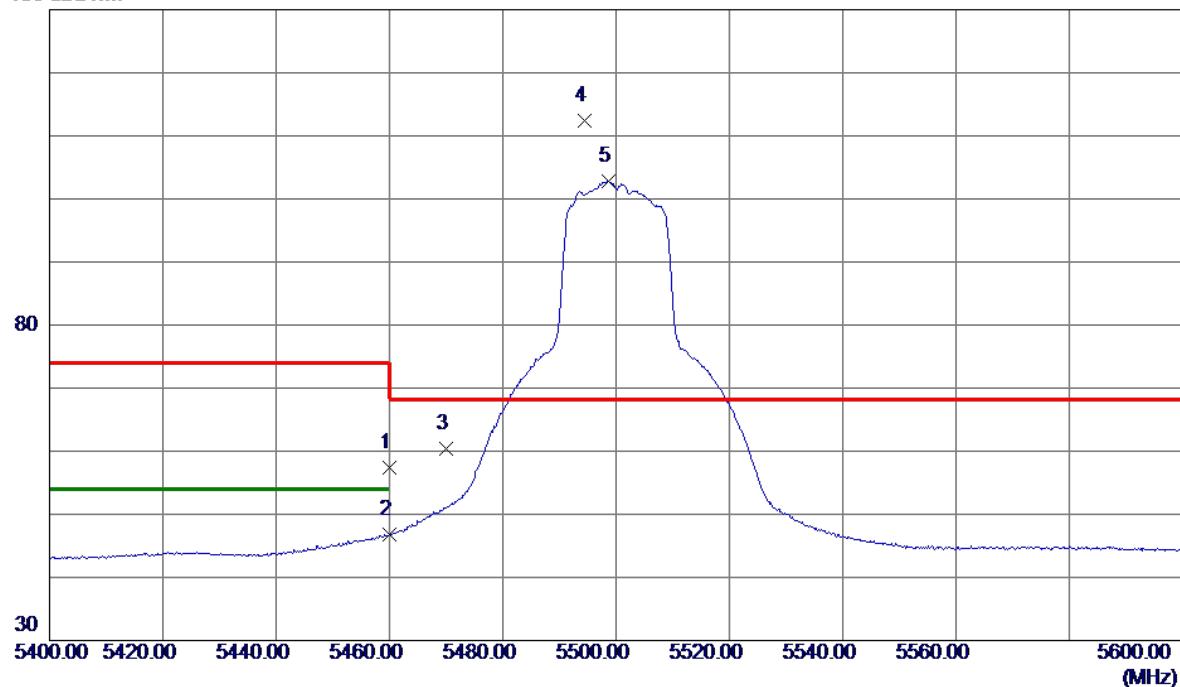


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	5460.0000	43.06	14.34	57.40	74.00	-16.60	Peak	
2	5460.0000	32.38	14.34	46.72	54.00	-7.28	AVG	
3	5470.0000	45.98	14.34	60.32	68.20	-7.88	Peak	
4 *	5494.4000	98.05	14.34	112.39	68.20	44.19	Peak	No Limit
5	5498.6000	88.55	14.34	102.89	999.00	-896.11	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

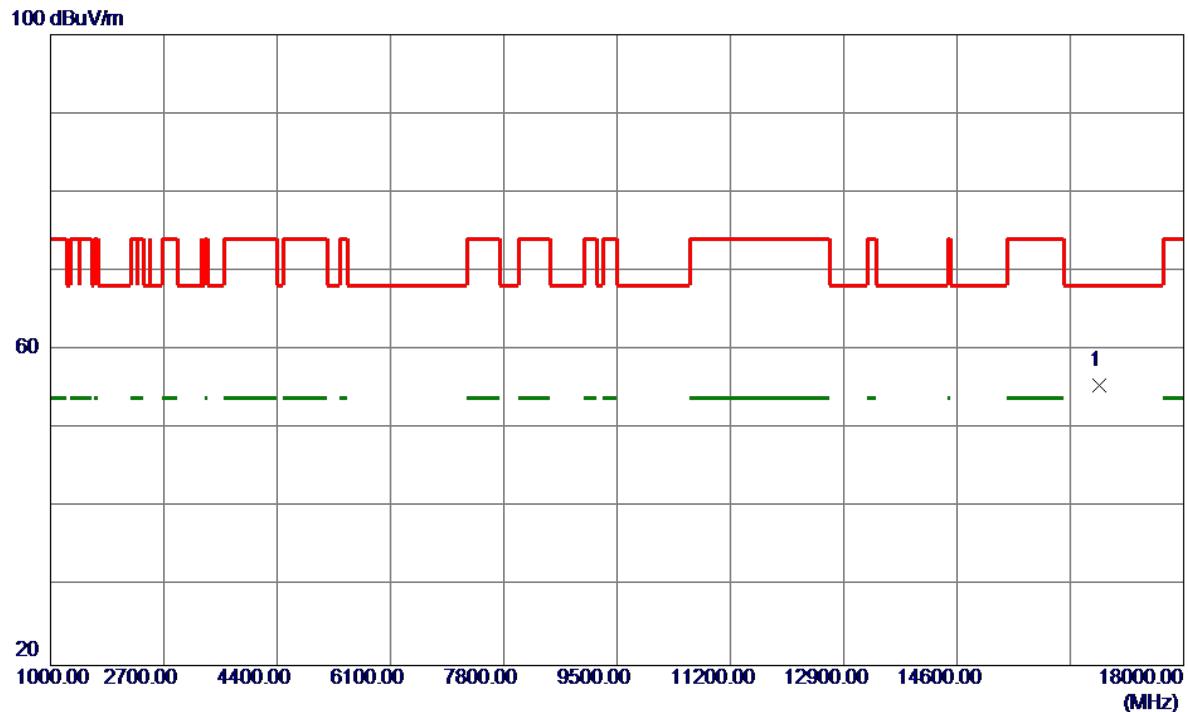


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	16743.2000	44.05	11.42	55.47	68.20	-12.73	Peak

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

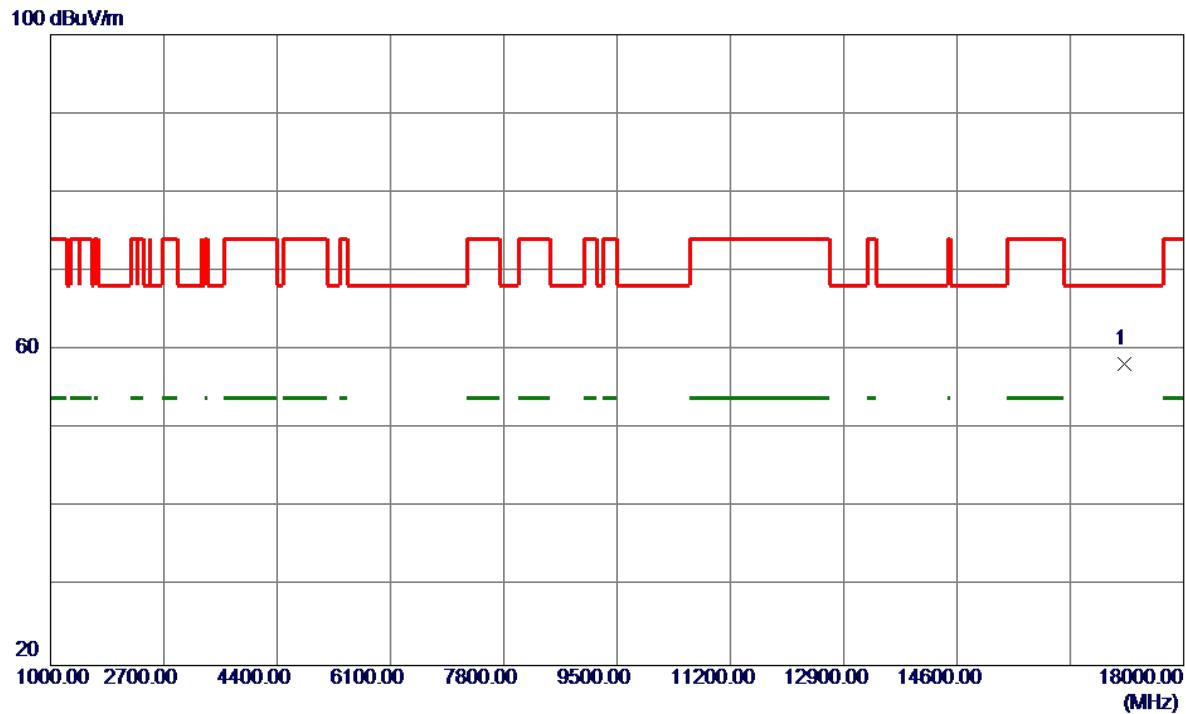


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	17105.0000	47.24	11.07	58.31	68.20	-9.89	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

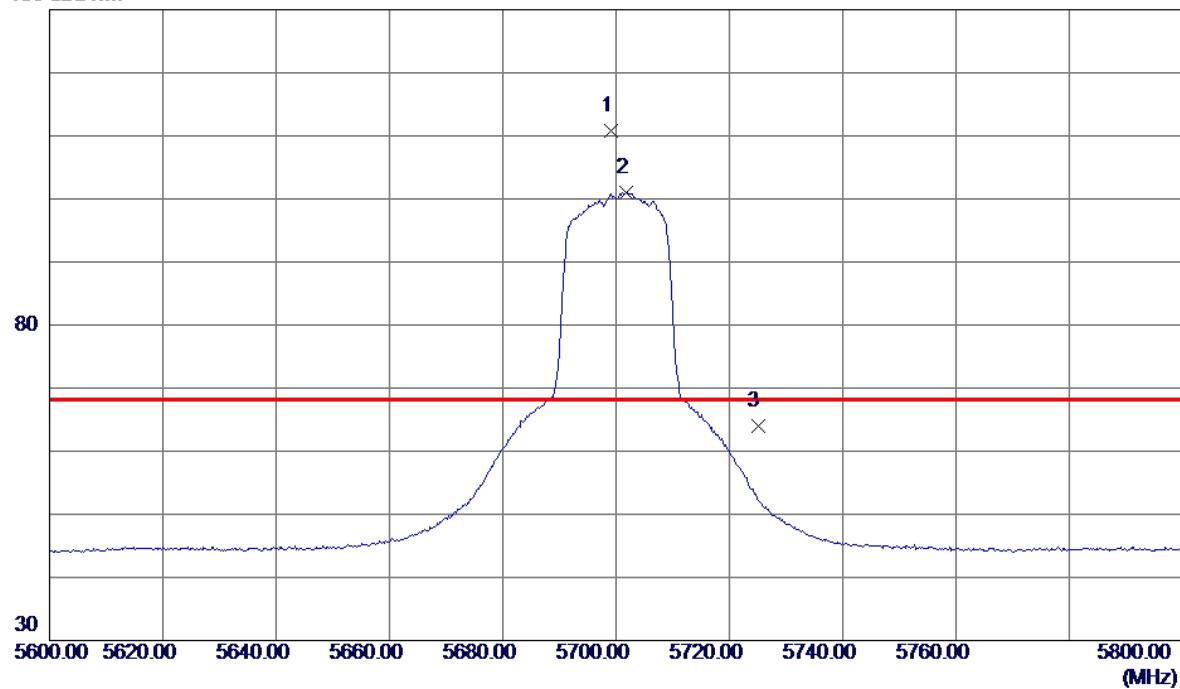


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	5699.2000	95.95	14.80	110.75	68.20	42.55	Peak	No Limit
2	5701.8000	86.17	14.81	100.98	999.00	-898.02	AVG	No Limit
3	5725.0000	49.18	14.86	64.04	68.20	-4.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

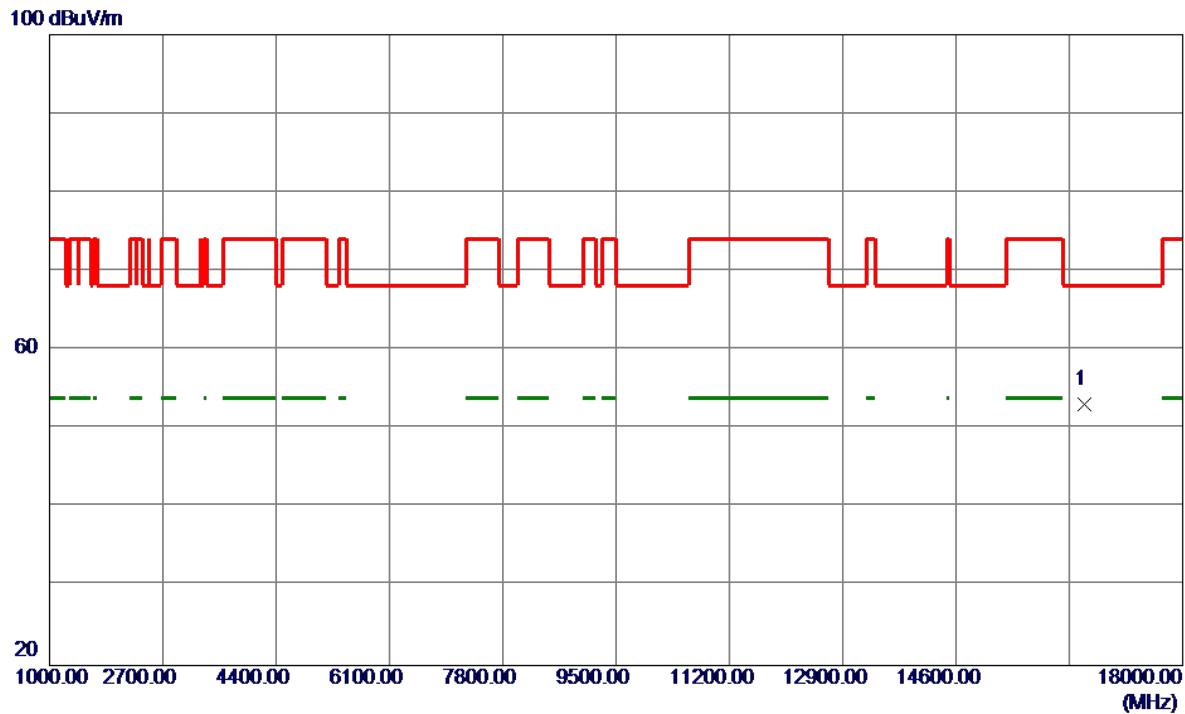


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	16531.3000	41.58	11.52	53.10	68.20	-15.10	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

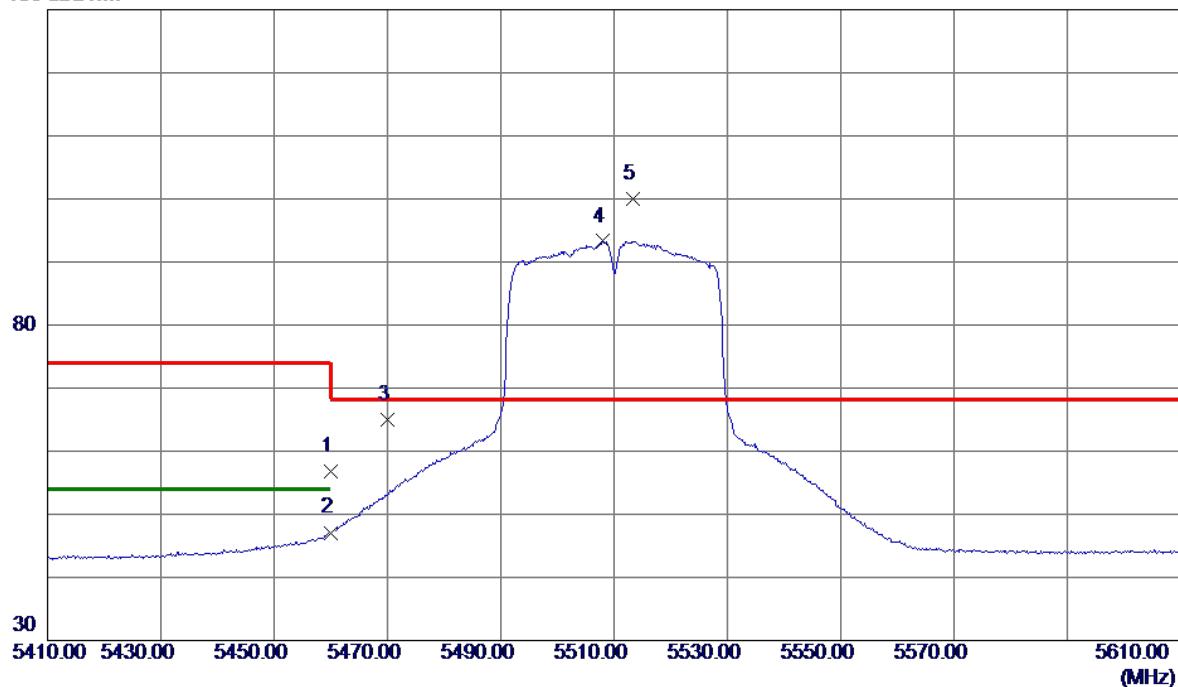


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	5460.0000	42.39	14.34	56.73	74.00	-17.27	Peak	
2	5460.0000	32.76	14.34	47.10	54.00	-6.90	AVG	
3	5470.0000	50.74	14.34	65.08	68.20	-3.12	Peak	
4	5508.0000	78.94	14.36	93.30	999.00	-905.70	AVG	No Limit
5 *	5513.4000	85.63	14.37	100.00	68.20	31.80	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

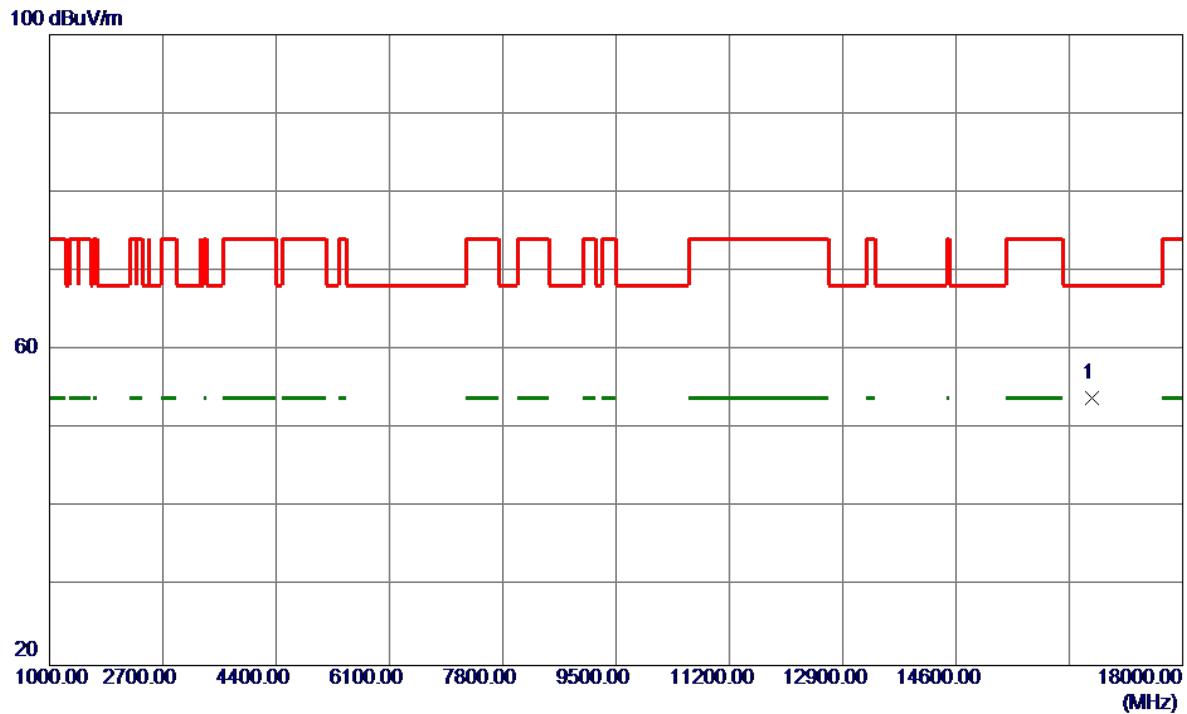


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	16643.8000	42.39	11.47	53.86	68.20	-14.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

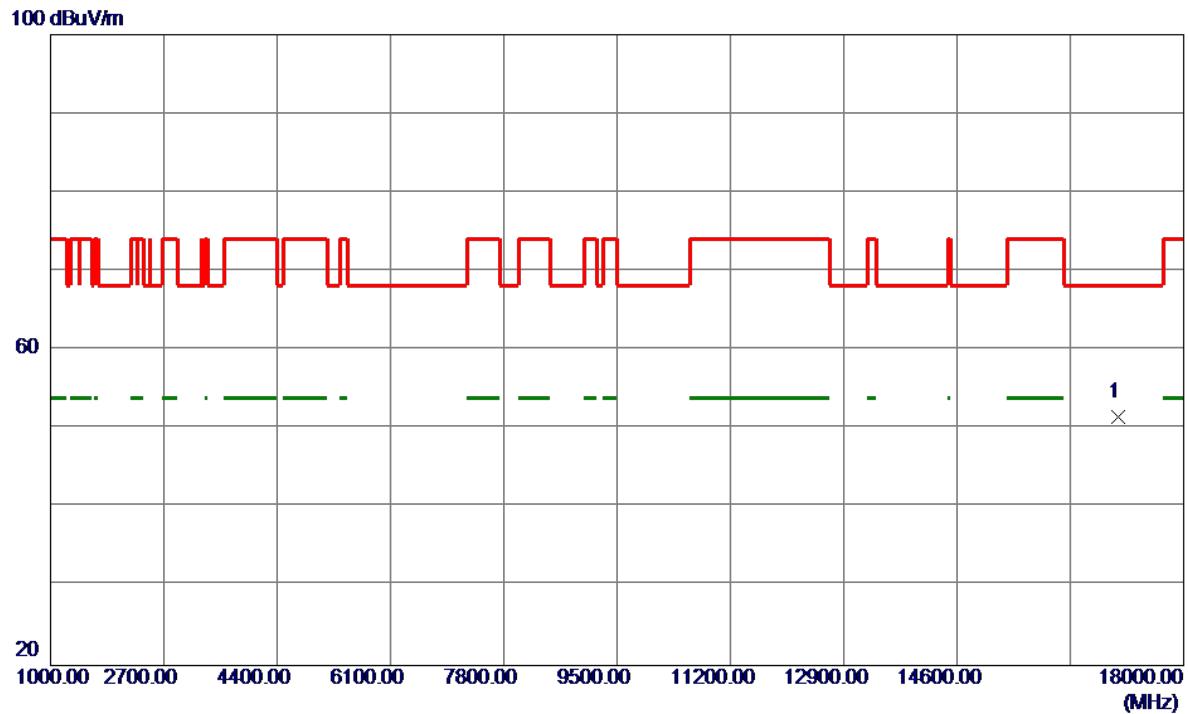


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	17017.8000	40.31	11.25	51.56	68.20	-16.64	Peak

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

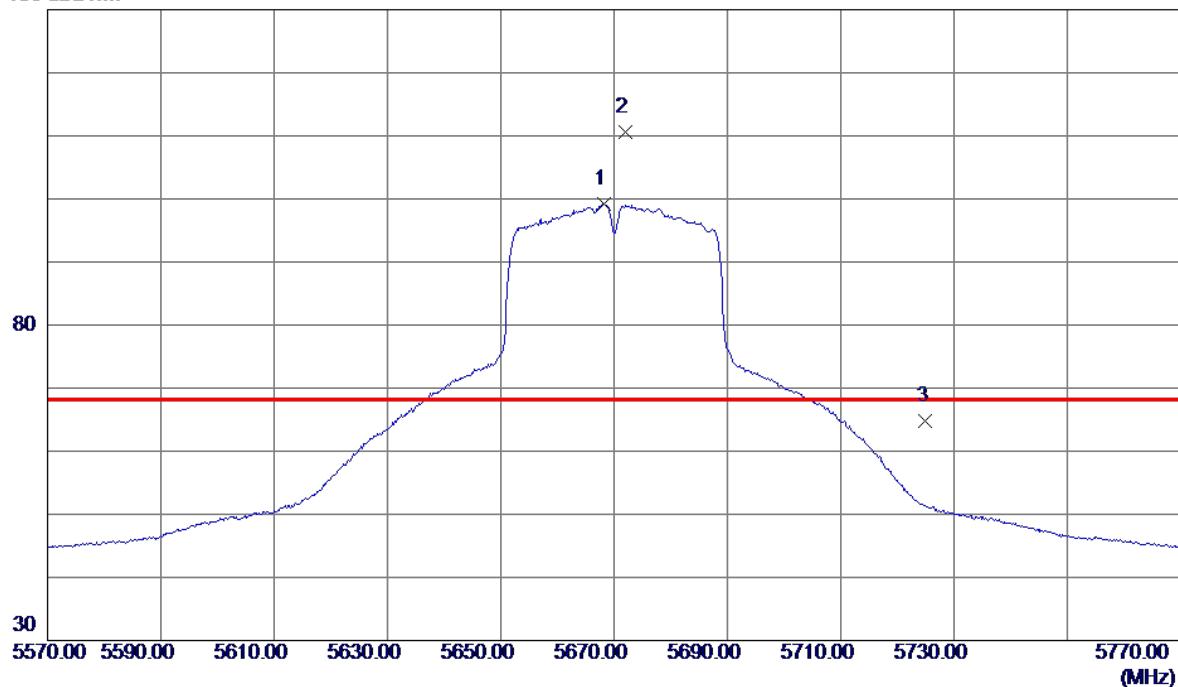


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5668.2000	84.43	14.73	99.16	999.00	-899.84	AVG	No Limit
2 *	5672.0000	95.84	14.74	110.58	68.20	42.38	Peak	No Limit
3	5725.0000	50.01	14.86	64.87	68.20	-3.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

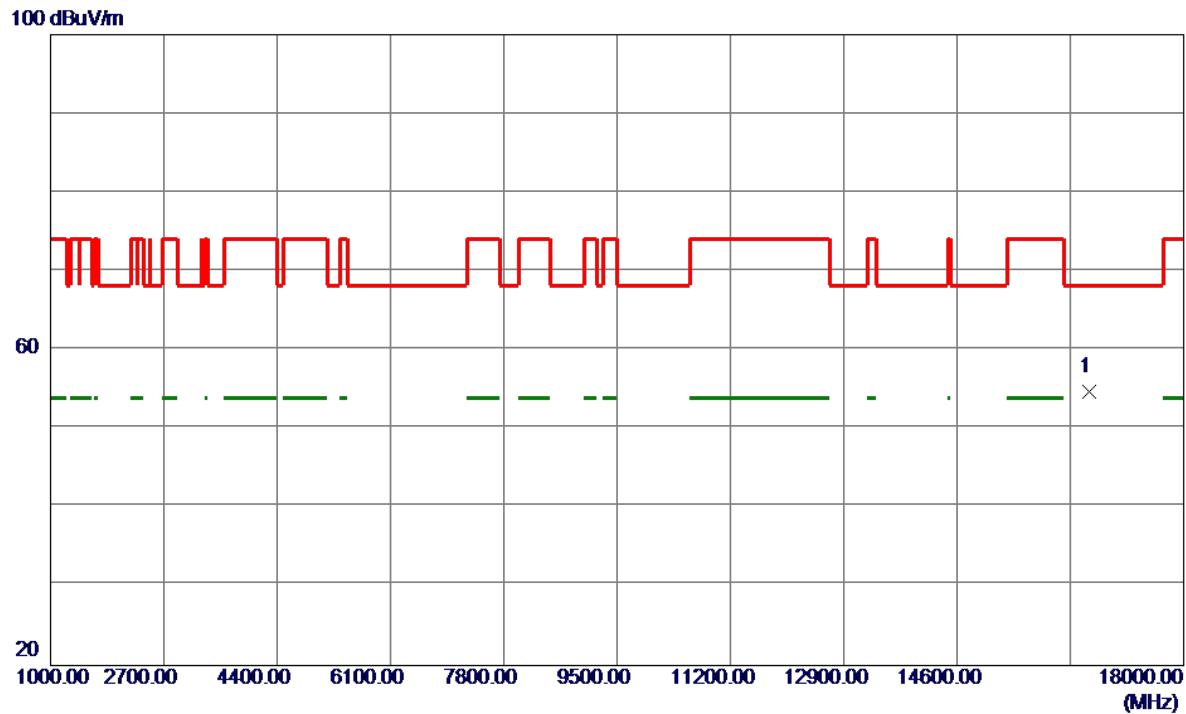


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	16585.2000	43.19	11.50	54.69	68.20	-13.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

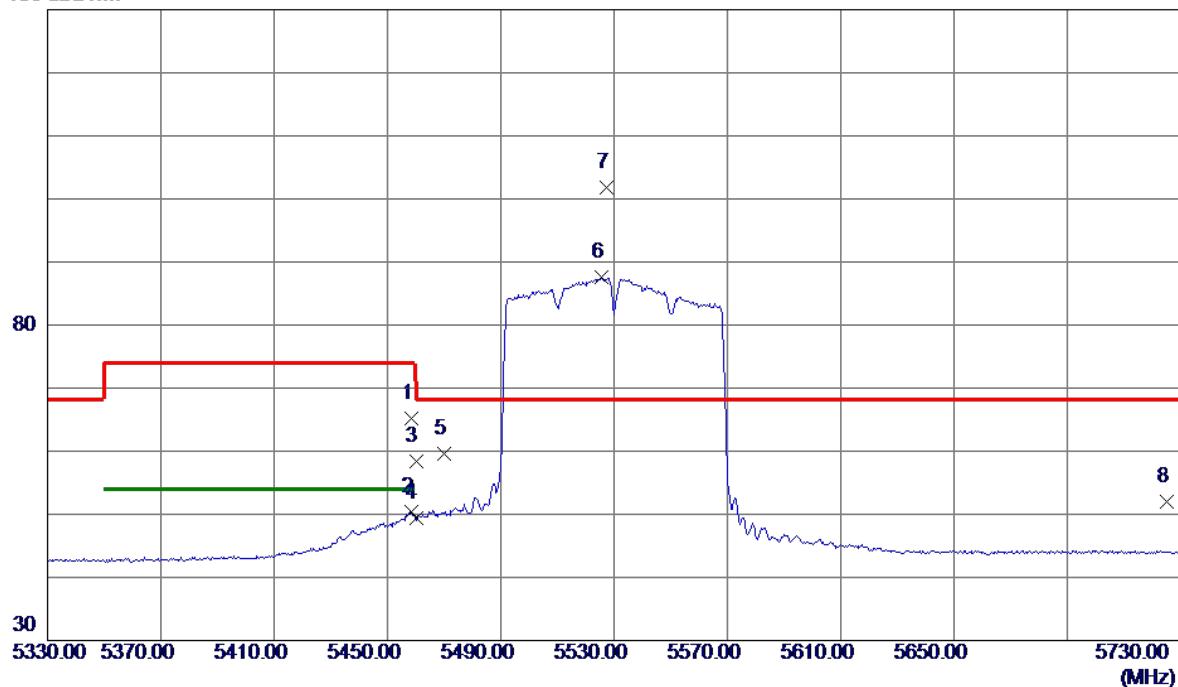


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	5458.4000	50.94	14.34	65.28	74.00	-8.72	Peak	
2	5458.4000	36.05	14.34	50.39	54.00	-3.61	AVG	
3	5460.0000	44.14	14.34	58.48	74.00	-15.52	Peak	
4	5460.0000	34.98	14.34	49.32	54.00	-4.68	AVG	
5	5470.0000	45.18	14.34	59.52	68.20	-8.68	Peak	
6	5525.6000	73.15	14.40	87.55	999.00	-911.45	AVG	No Limit
7 *	5527.2000	87.48	14.40	101.88	68.20	33.68	Peak	No Limit
8	5725.0000	37.13	14.86	51.99	68.20	-16.21	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

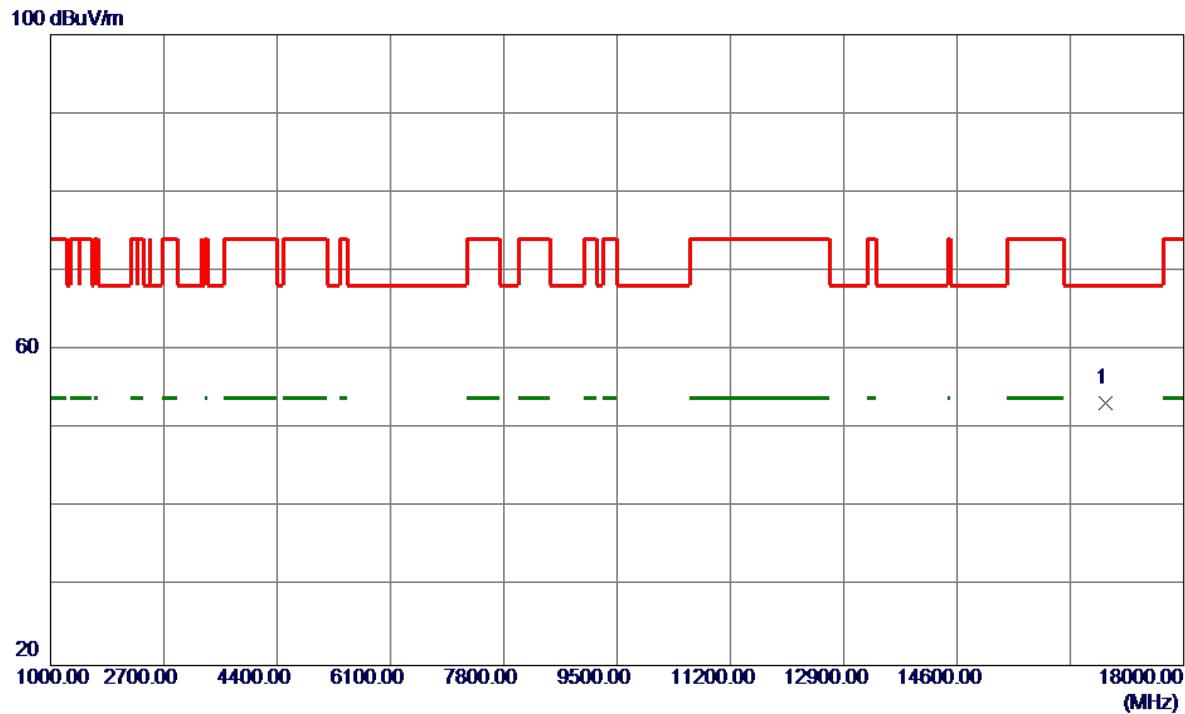


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	16829.4000	41.87	11.38	53.25	68.20	-14.95	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

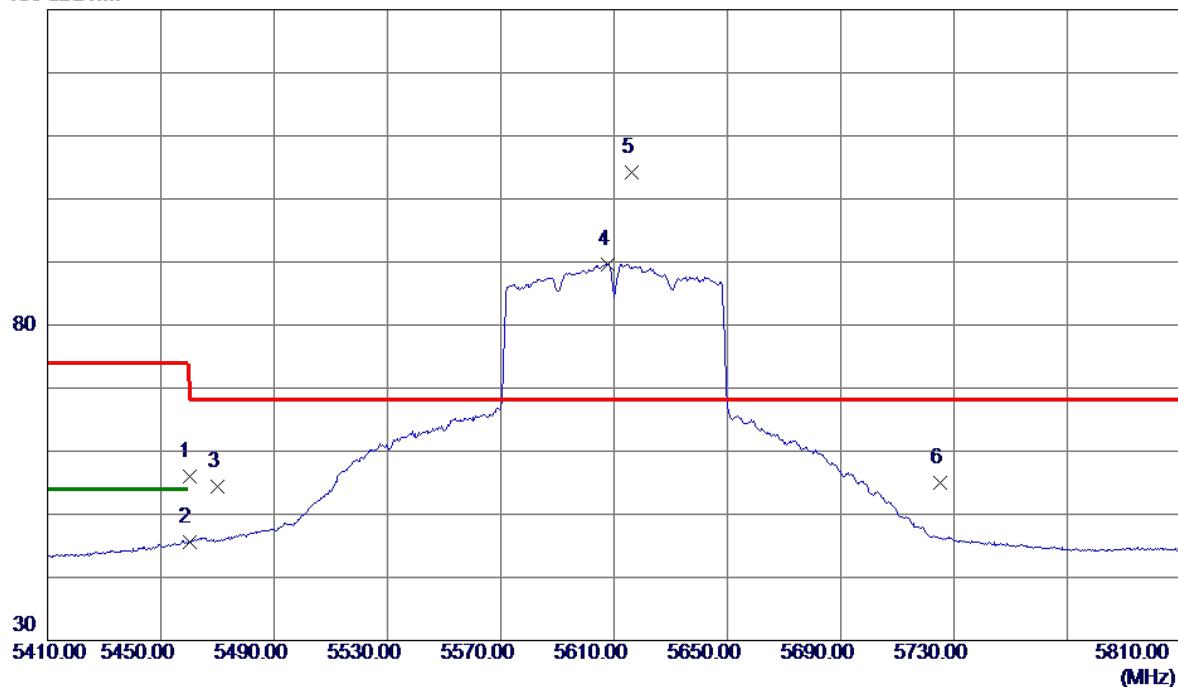


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	5460.0000	41.61	14.34	55.95	74.00	-18.05	Peak	
2	5460.0000	31.27	14.34	45.61	54.00	-8.39	AVG	
3	5470.0000	40.10	14.34	54.44	68.20	-13.76	Peak	
4	5607.6000	75.08	14.59	89.67	999.00	-909.33	AVG	No Limit
5 *	5616.4000	89.61	14.61	104.22	68.20	36.02	Peak	No Limit
6	5725.0000	40.12	14.86	54.98	68.20	-13.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

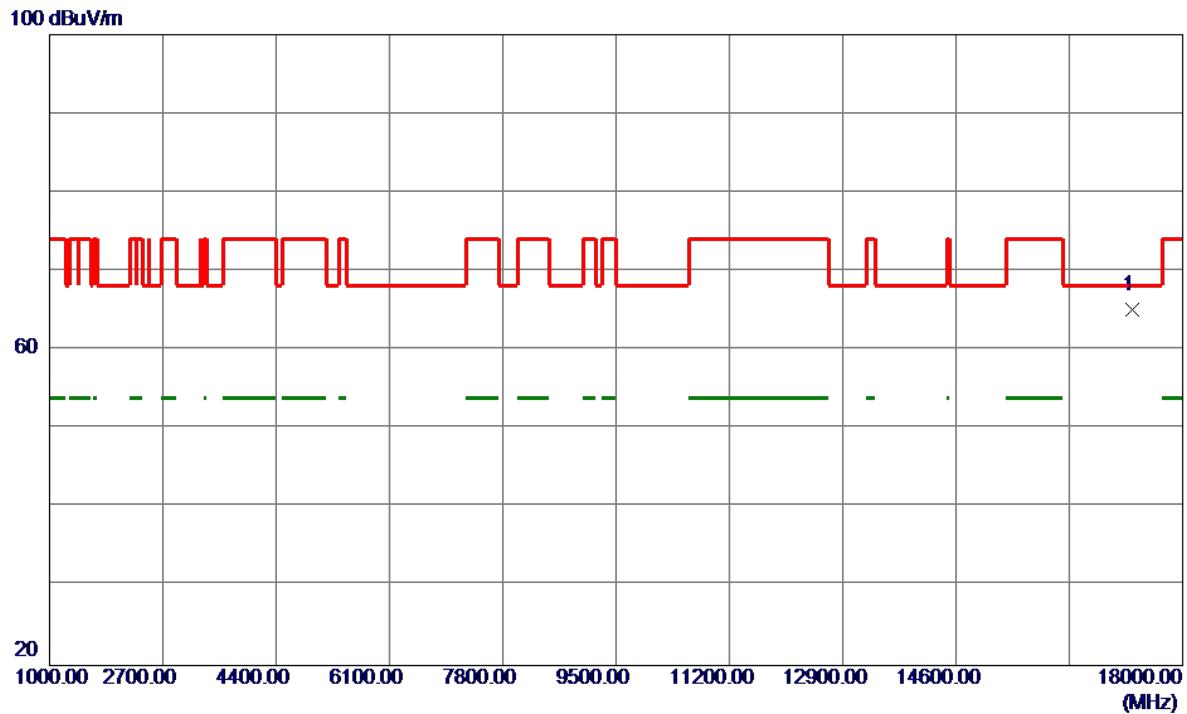


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	17236.1000	54.27	10.79	65.06	68.20	-3.14	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

130 dBuV/m

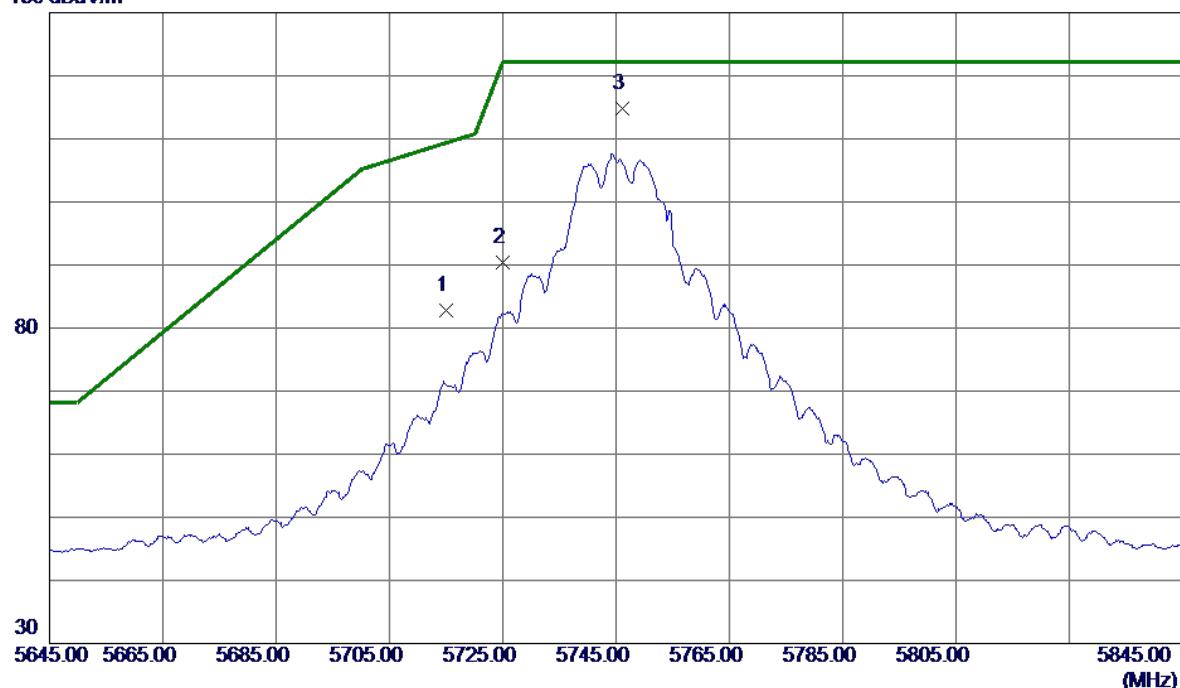


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	68.05	14.84	82.89	109.40	-26.51	Peak	
2	5725.0000	75.51	14.86	90.37	122.20	-31.83	Peak	
3 *	5746.2000	99.96	14.91	114.87	122.20	-7.33	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

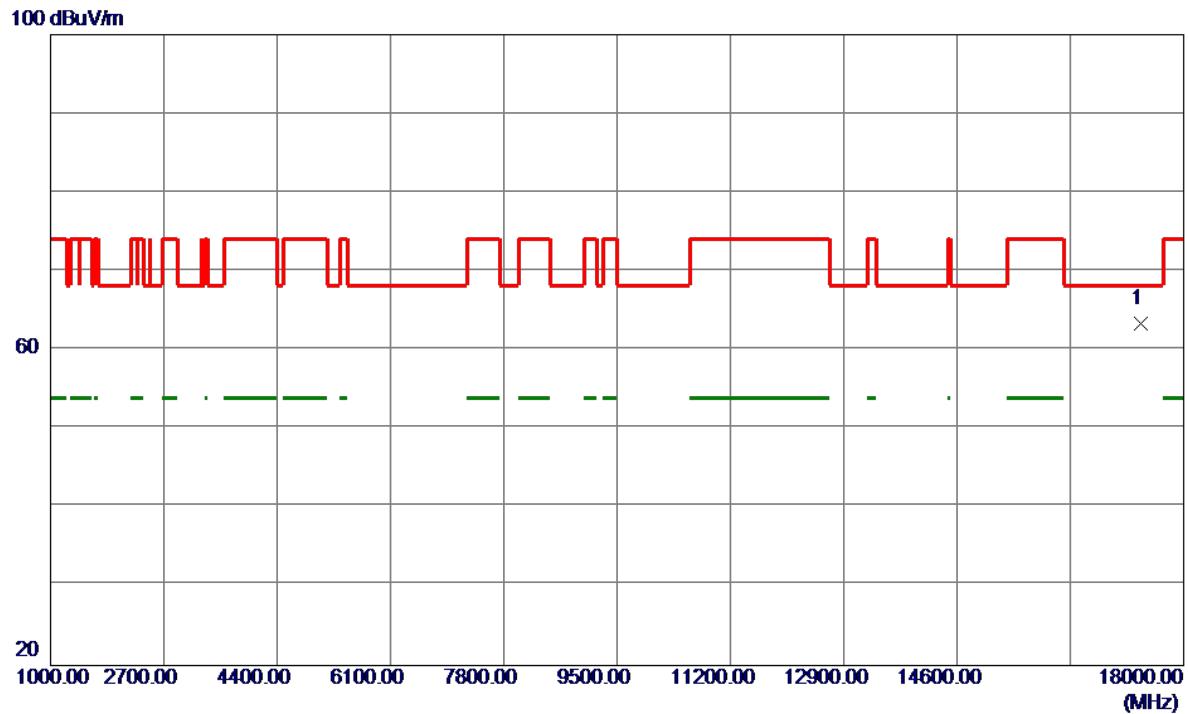


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	17356.6000	52.88	10.53	63.41	68.20	-4.79	Peak

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

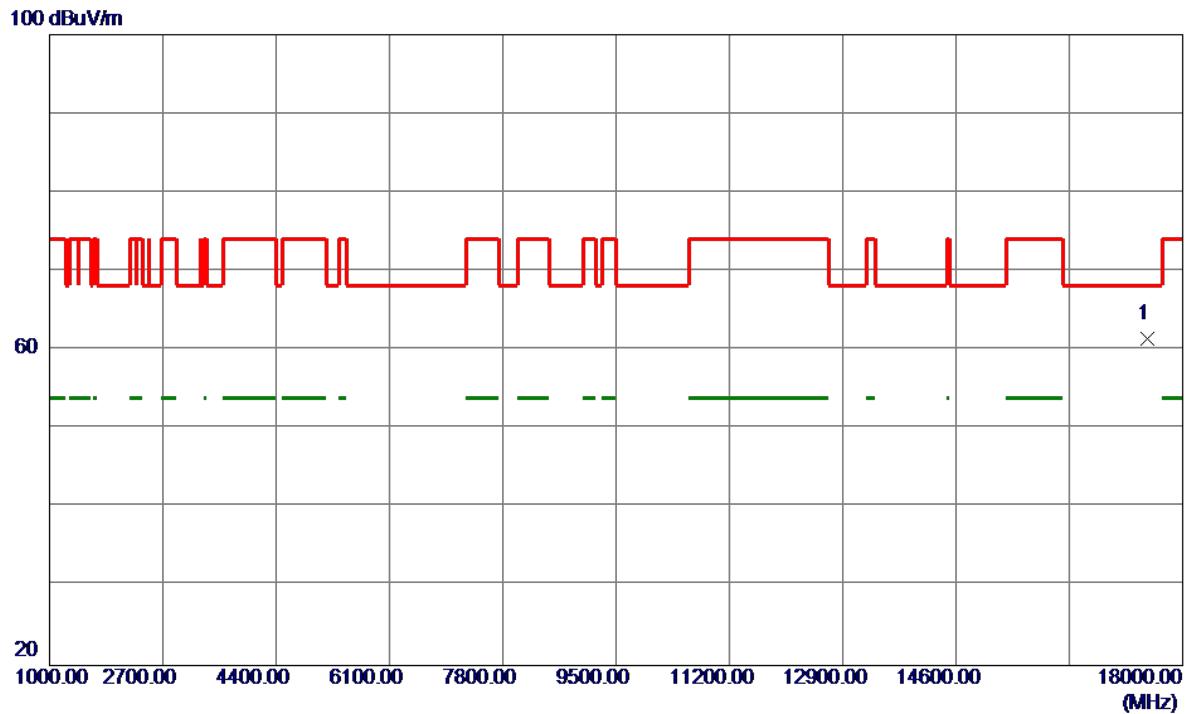


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	17470.5000	51.17	10.29	61.46	68.20	-6.74	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

130 dBuV/m

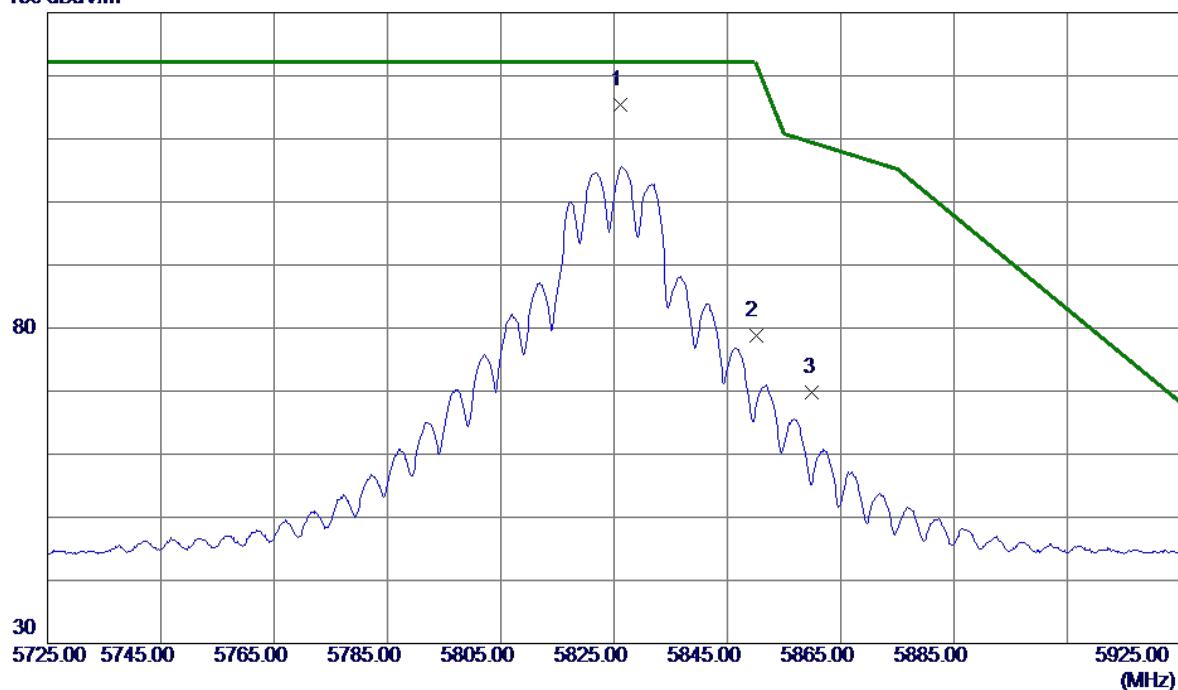


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.2000	100.47	14.99	115.46	122.20	-6.74	Peak	No Limit
2	5850.0000	63.82	15.04	78.86	122.20	-43.34	Peak	
3	5860.0000	54.66	15.06	69.72	109.40	-39.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

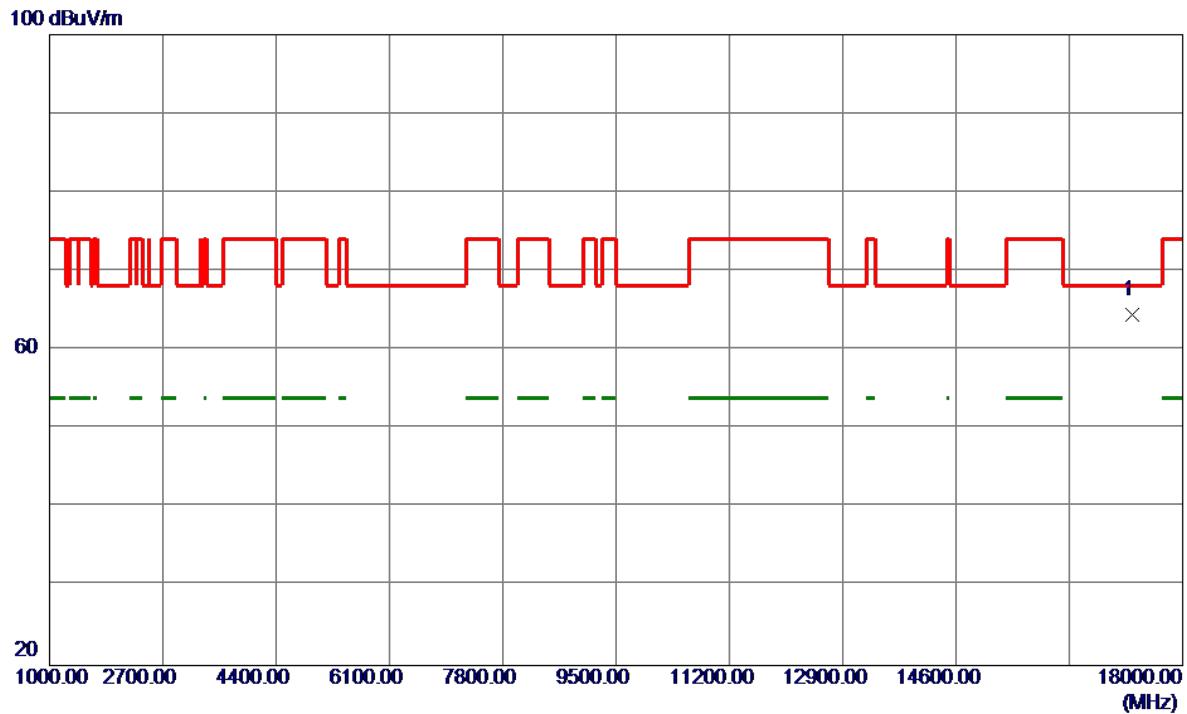


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	17235.9000	53.70	10.79	64.49	68.20	-3.71	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

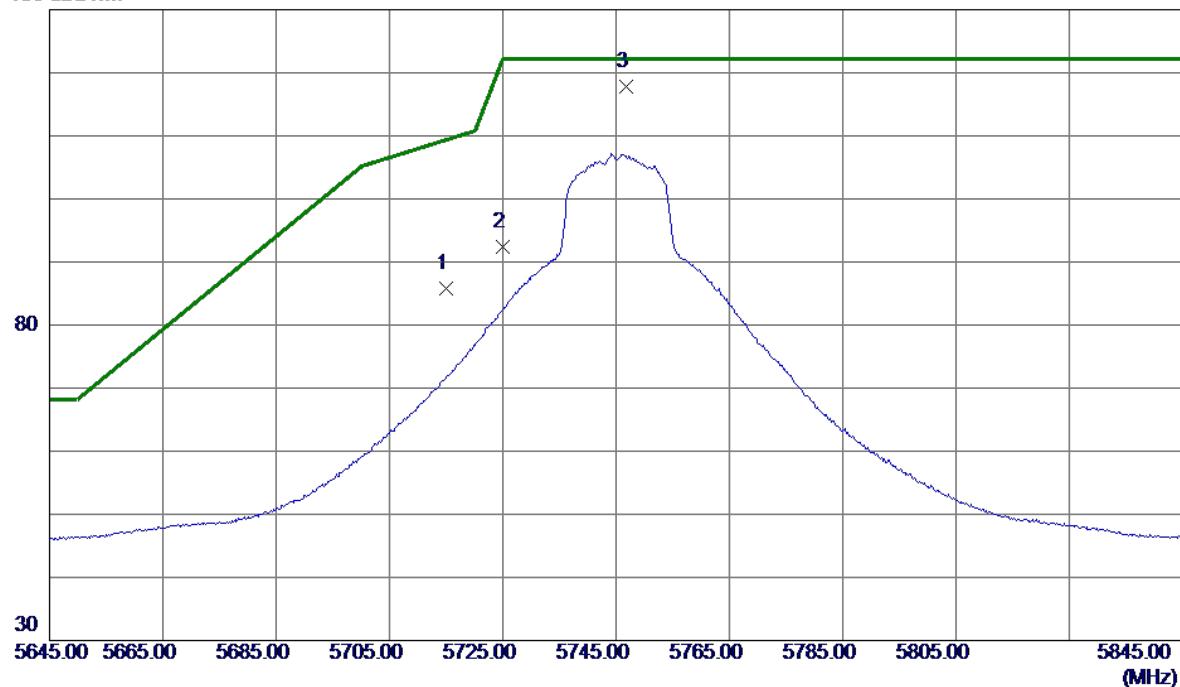


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5715.0000	70.94	14.84	85.78	109.40	-23.62	Peak	
2	5725.0000	77.61	14.86	92.47	122.20	-29.73	Peak	
3 *	5746.8000	102.98	14.91	117.89	122.20	-4.31	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

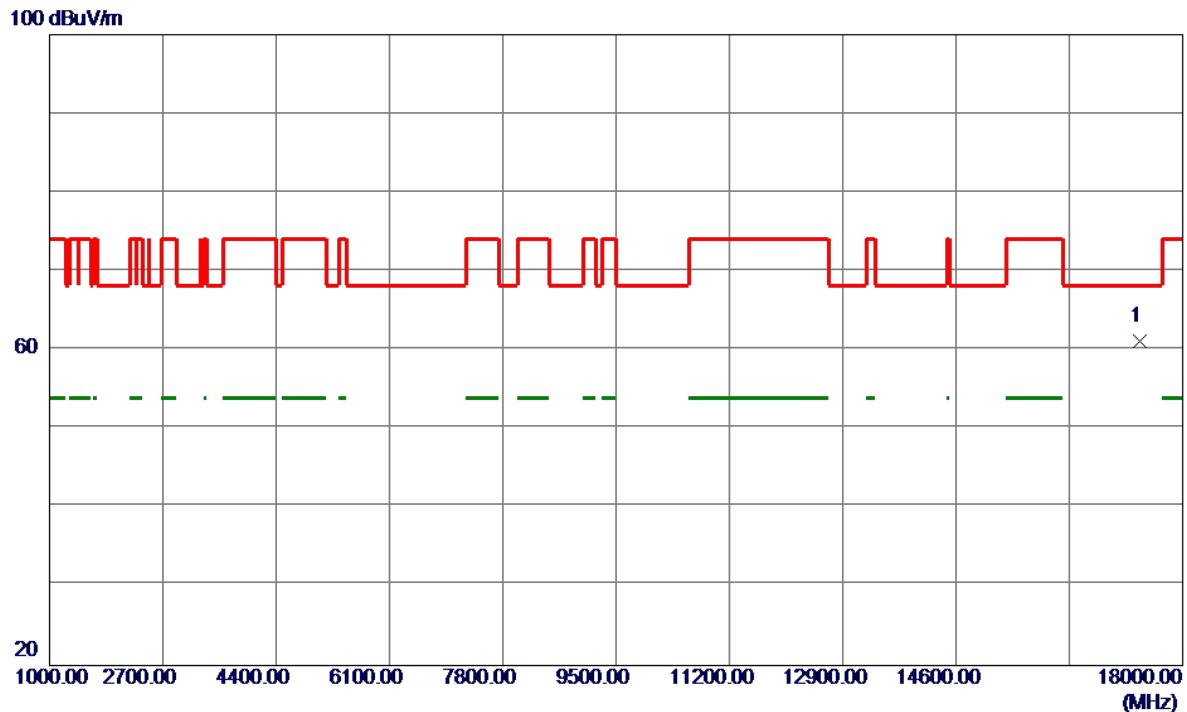


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	17357.4000	50.55	10.53	61.08	68.20	-7.12	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

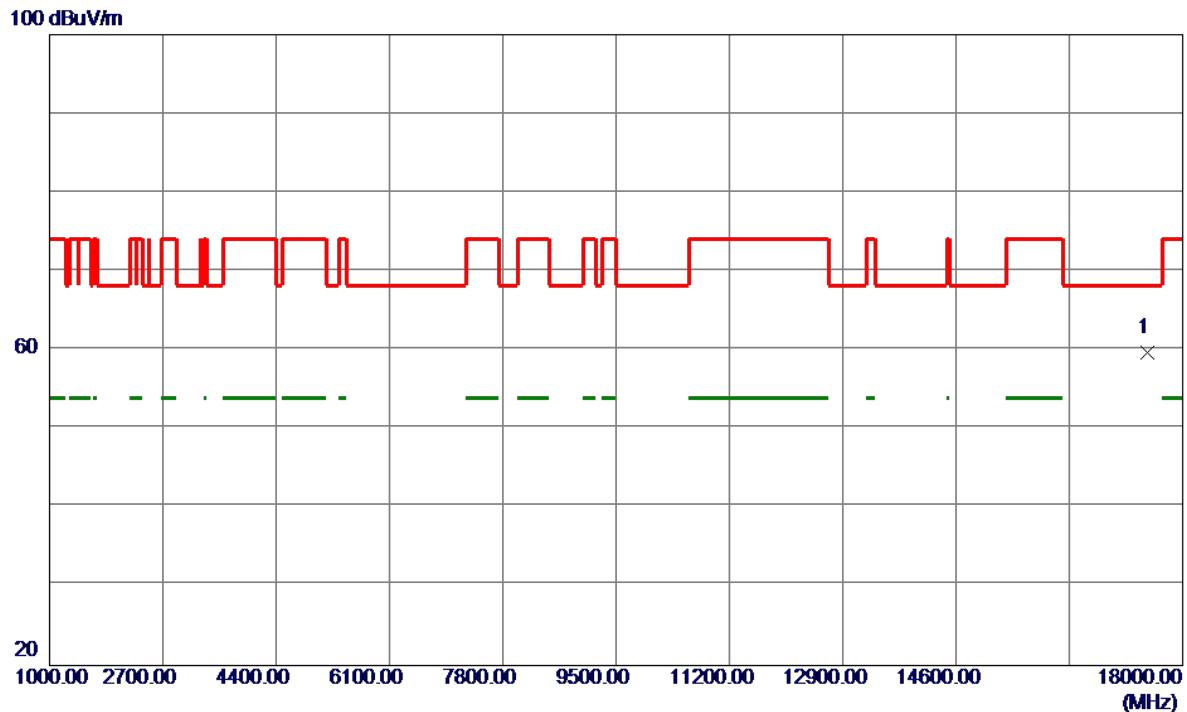


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	17470.4000	49.37	10.29	59.66	68.20	-8.54	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

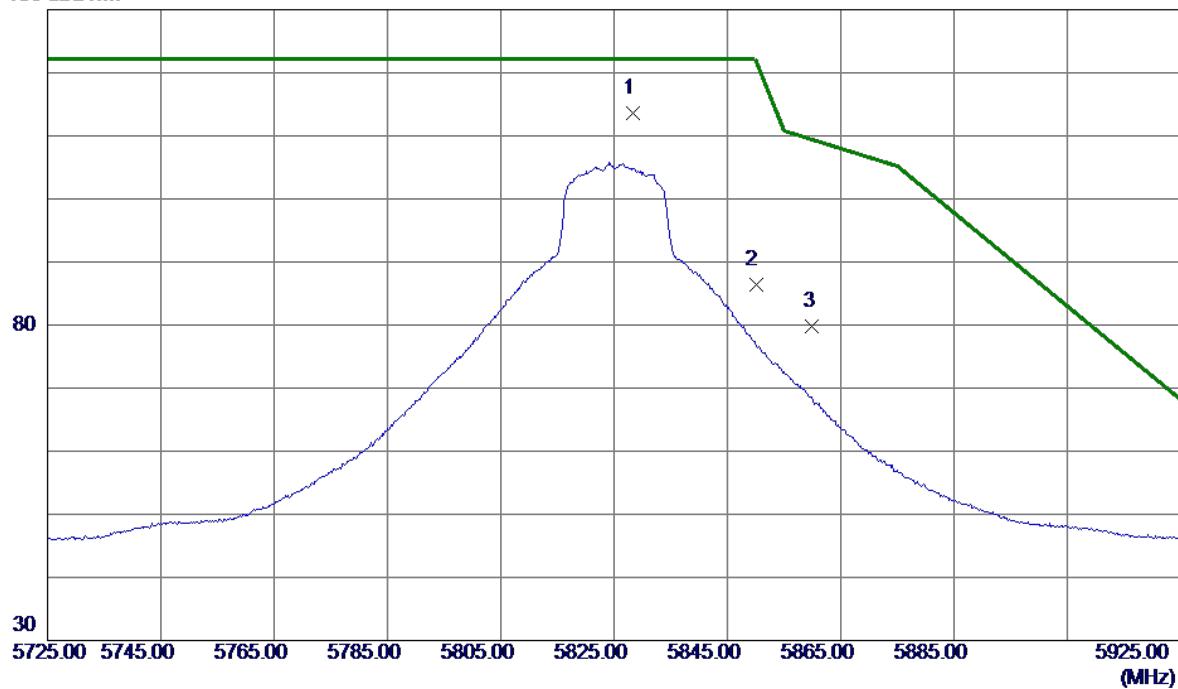


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	5828.4000	98.42	15.10	113.52	122.20	-8.68	Peak	No Limit
2	5850.0000	71.24	15.15	86.39	122.20	-35.81	Peak	
3	5860.0000	64.57	15.18	79.75	109.40	-29.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

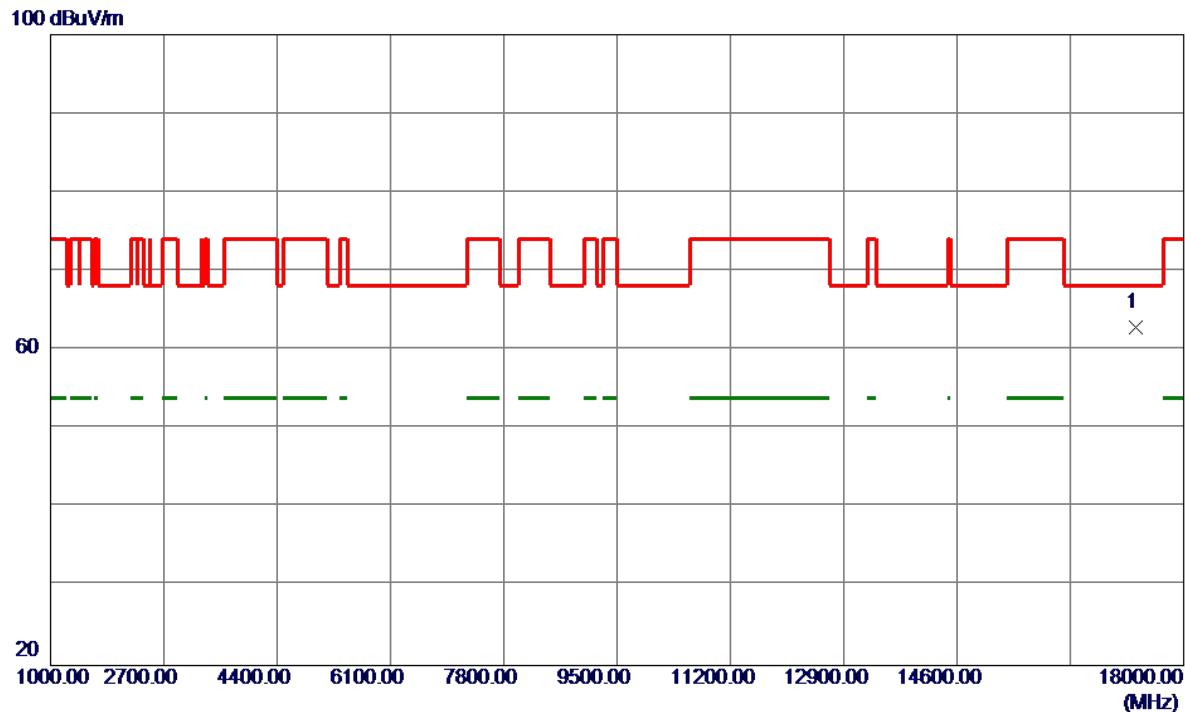


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	17275.5000	52.23	10.71	62.94	68.20	-5.26	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

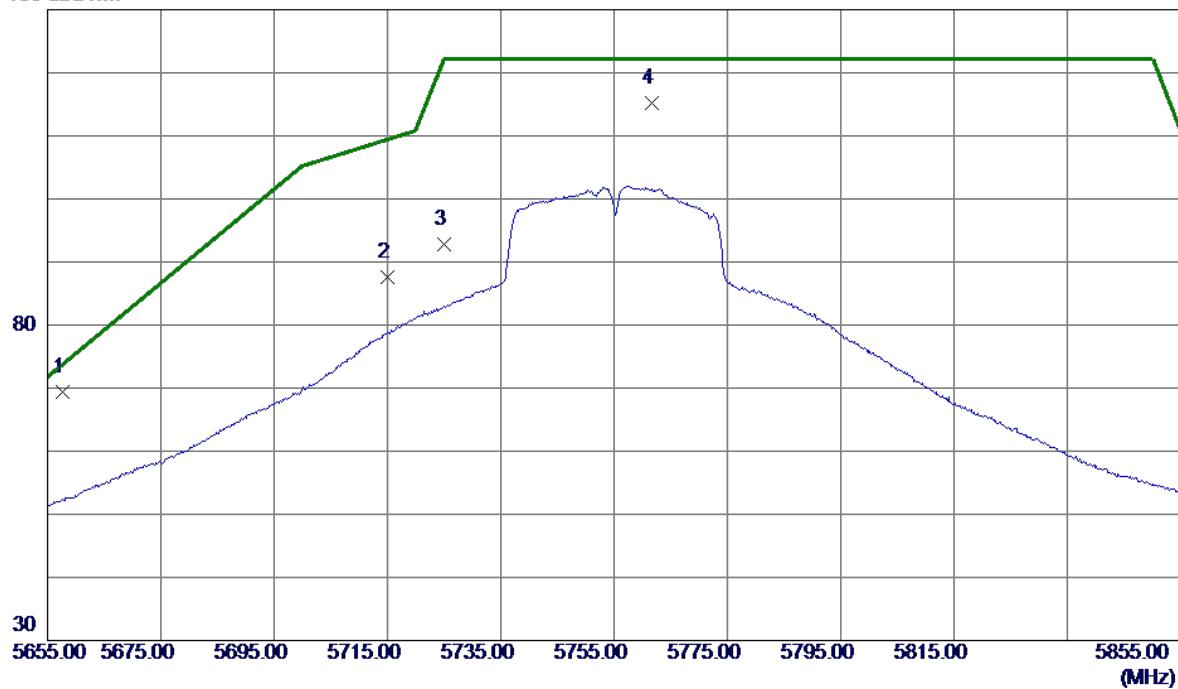


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	5657.6000	54.60	14.71	69.31	73.82	-4.51	Peak	No Limit
2	5715.0000	72.84	14.84	87.68	109.40	-21.72	Peak	
3	5725.0000	78.03	14.86	92.89	122.20	-29.31	Peak	
4	5761.6000	100.26	14.95	115.21	122.20	-6.99	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

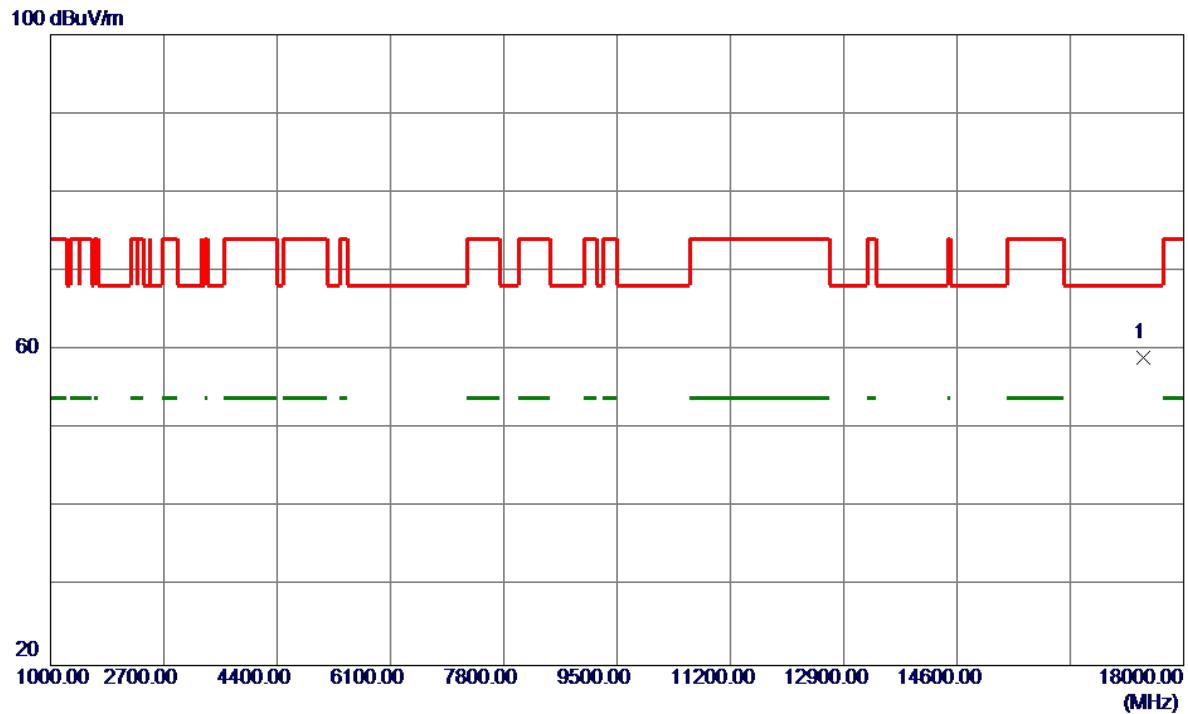


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	17393.2000	48.63	10.46	59.09	68.20	-9.11	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

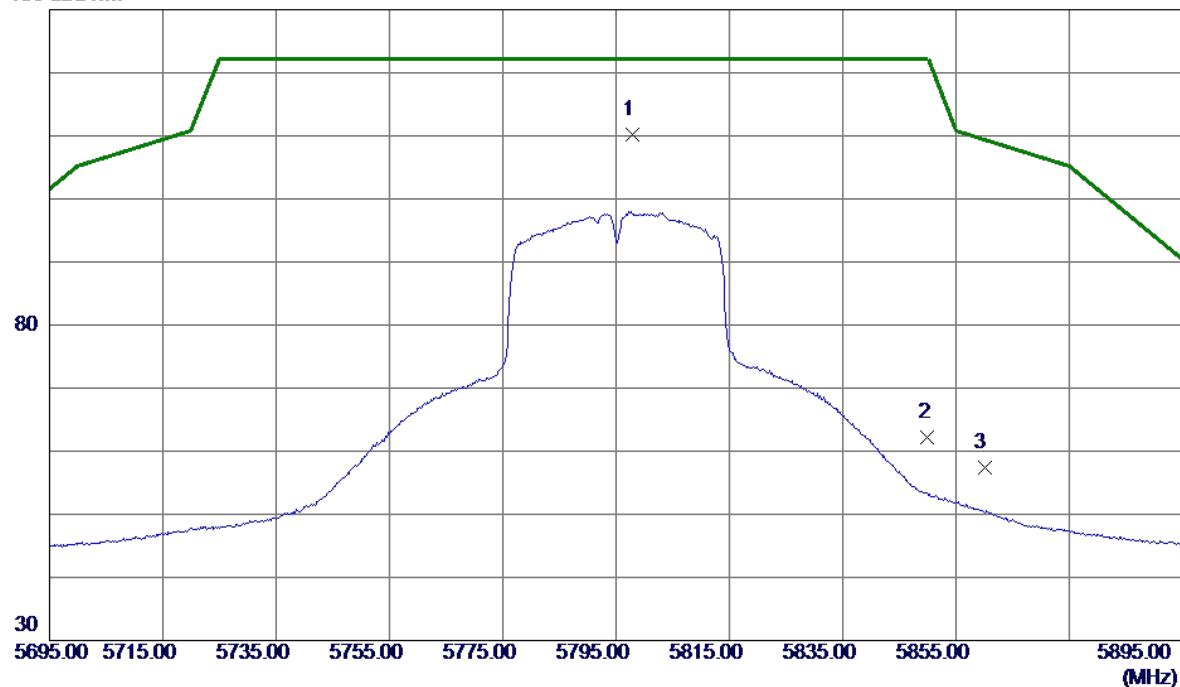


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5797.8000	95.09	15.03	110.12	122.20	-12.08	Peak	No Limit
2	5850.0000	47.08	15.15	62.23	122.20	-59.97	Peak	
3	5860.0000	42.18	15.18	57.36	109.40	-52.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

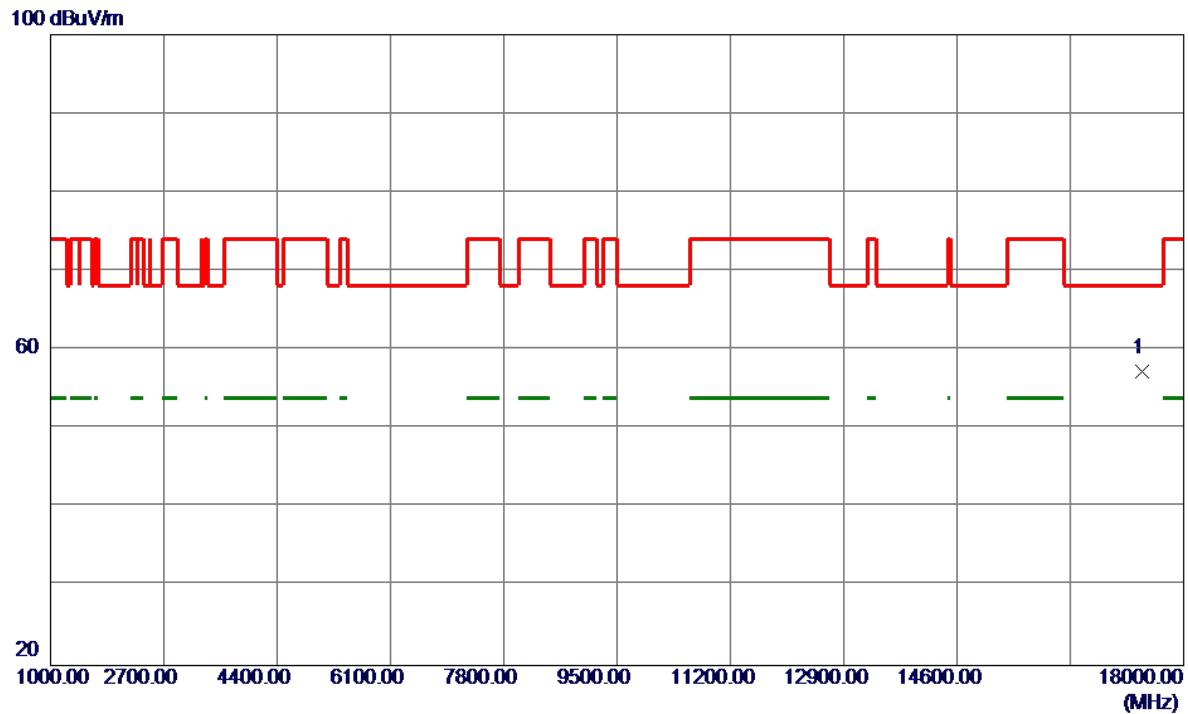


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	17378.1000	46.71	10.49	57.20	68.20	-11.00	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

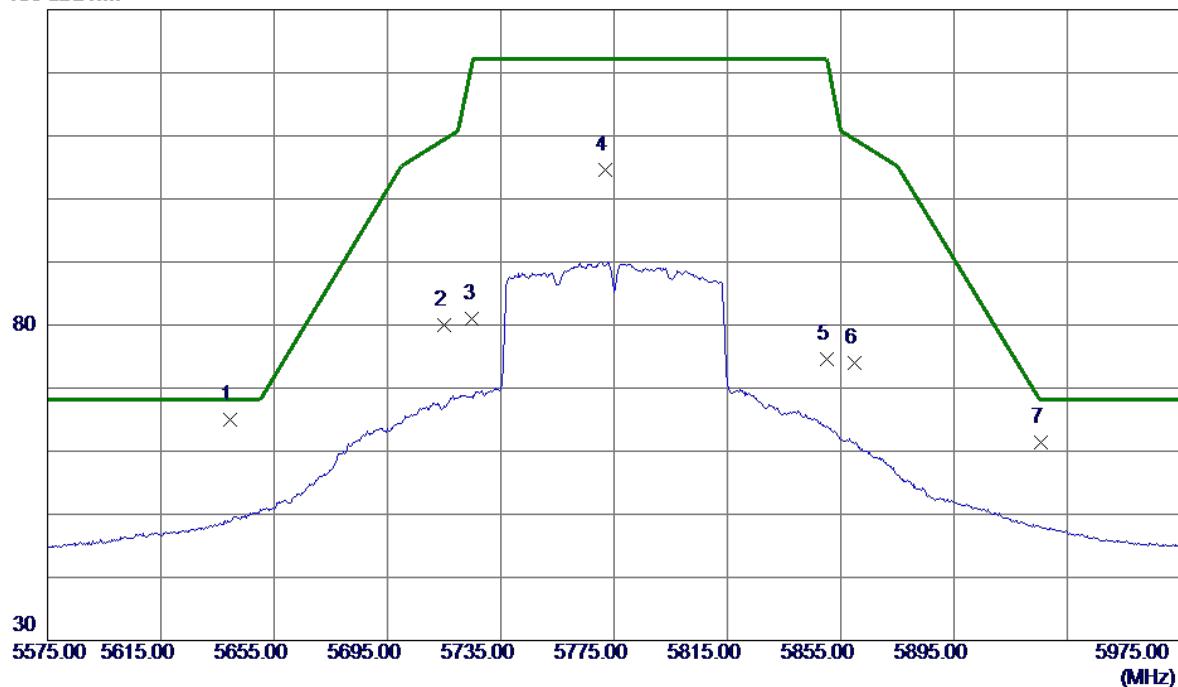


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	5639.4000	50.27	14.66	64.93	68.20	-3.27	Peak	
2	5715.0000	65.14	14.84	79.98	109.40	-29.42	Peak	
3	5725.0000	66.10	14.86	80.96	122.20	-41.24	Peak	
4	5771.8000	89.61	14.97	104.58	122.20	-17.62	Peak	No Limit
5	5850.0000	59.46	15.15	74.61	122.20	-47.59	Peak	
6	5860.0000	58.81	15.18	73.99	109.40	-35.41	Peak	
7	5925.8000	45.98	15.33	61.31	68.20	-6.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Vertical
-----------	--	--------------	----------

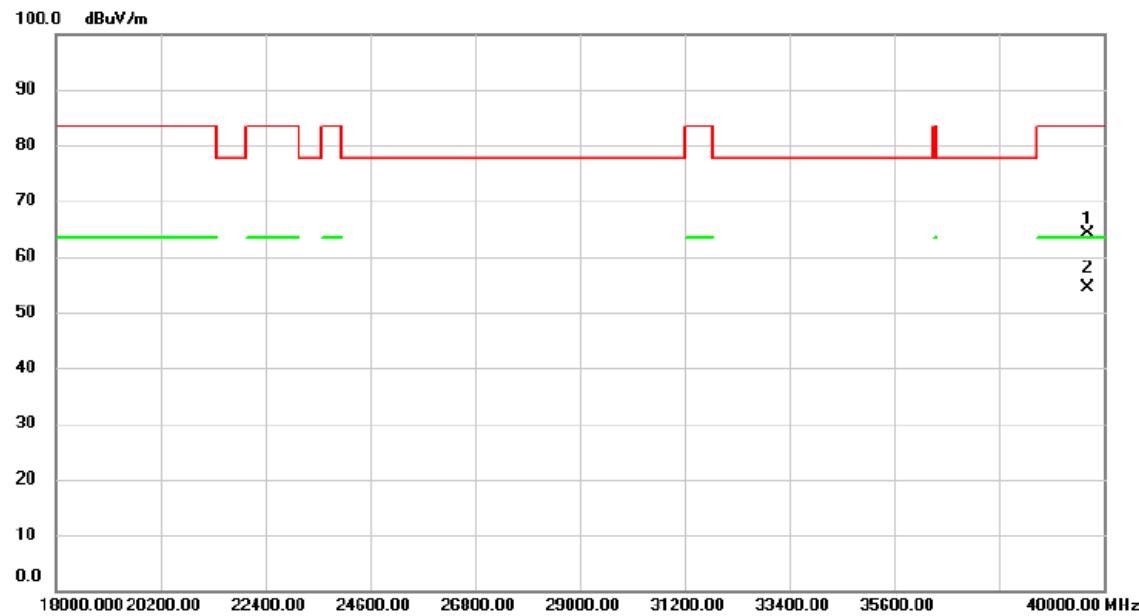


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39670.000	49.36	14.80	64.16	83.50	-19.34	peak	
2	*	39670.000	39.50	14.80	54.30	63.50	-9.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Horizontal
-----------	--	--------------	------------

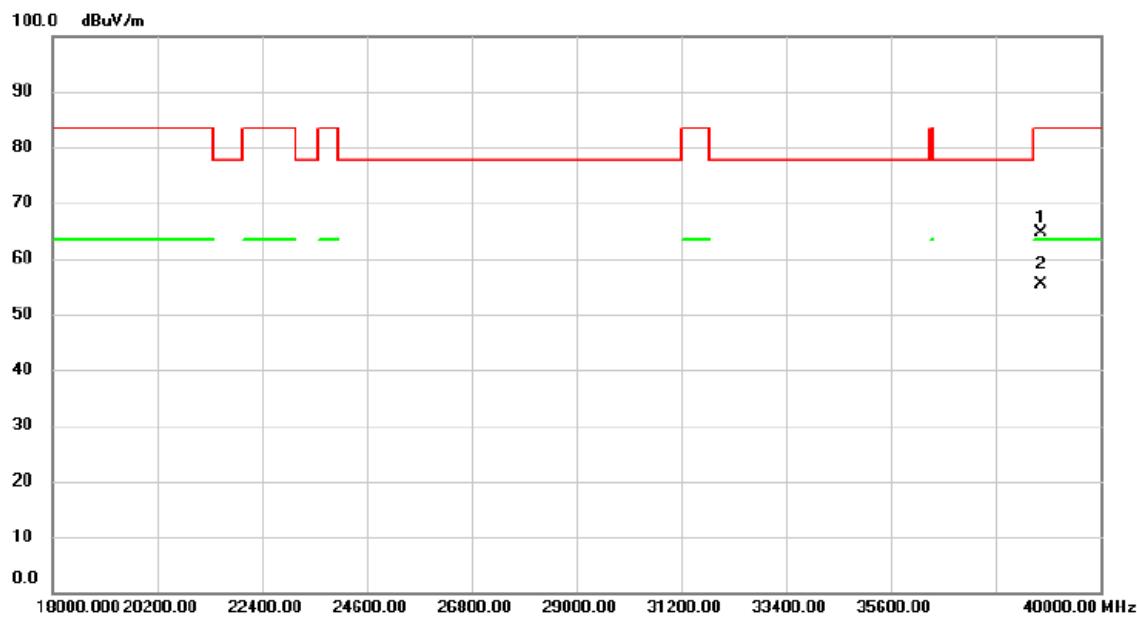

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		38746.000	50.13	14.43	64.56	83.50	-18.94	peak	
2	*	38746.000	41.07	14.43	55.50	63.50	-8.00	AVG	

REMARKS:



- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH


Test Mode UNII-1_TX A Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	20.200	16.700
40	5200	20.450	16.600
48	5240	20.350	16.700




CH36

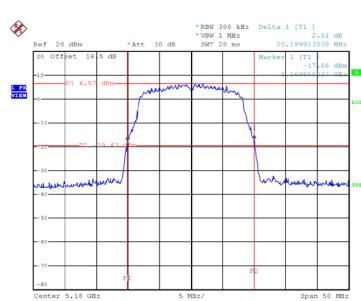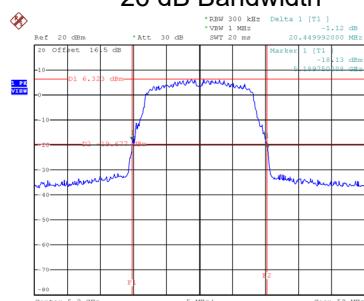CH40
26 dB Bandwidth

CH48






99 % Occupied Bandwidth

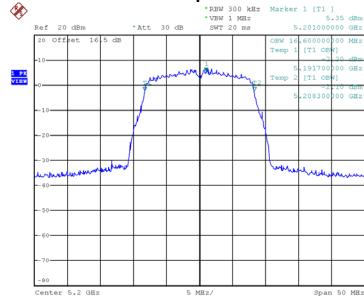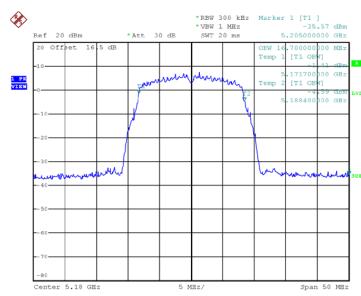

Test Mode UNII-1_TX AC(VHT20) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	20.349	17.700
40	5200	20.350	17.700
48	5240	20.450	17.700


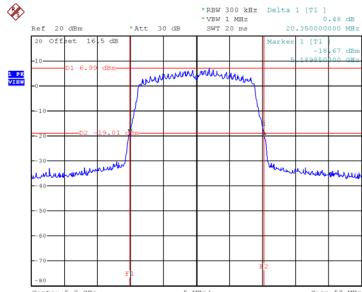
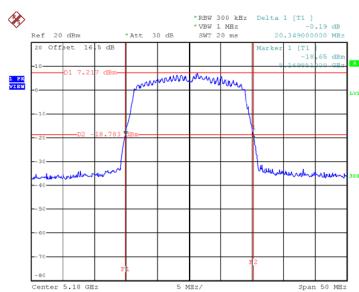


Date: 5.APR.2025 02:00:25

Patent & Trademark Office

Dated: 6 APR 2026 02:02:11

99 % Occupied Bandwidth

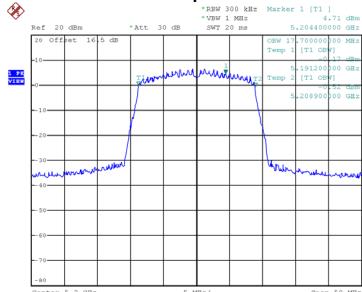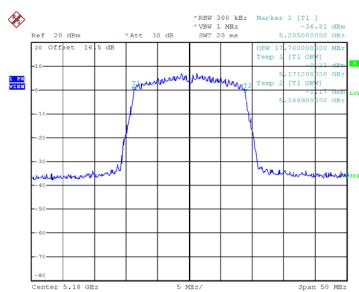

Date: 5.APR.2025 01:59:52



Dato: 5 APR 2025 03:00:28

Dated: 5 APR 2025 02:01:41

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	40.790	36.800
46	5230	40.700	36.800



CH38

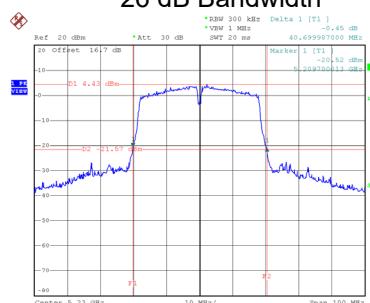CH46
26 dB Bandwidth

Date: 5.APR.2025 13:21:20

Date: 5.APR.2025 13:22:29

99 % Occupied Bandwidth

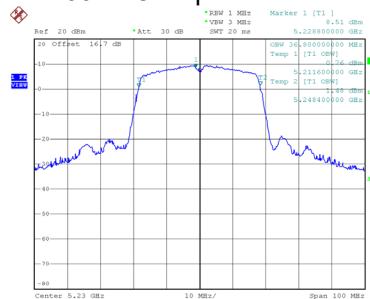



Date: 5.APR.2025 13:20:41

Date: 5.APR.2025 13:21:53

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------



Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	81.800	75.600

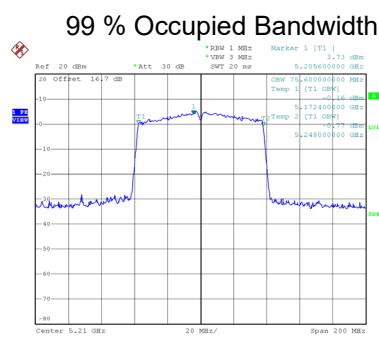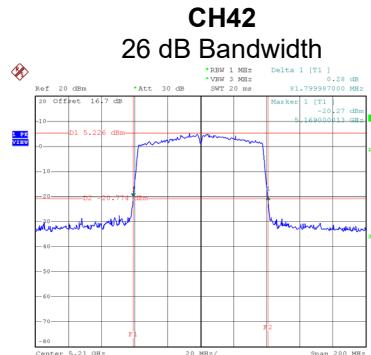


Test Mode UNII-2A_TX A Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	20.550	16.700
60	5300	20.200	16.700
64	5320	20.300	16.600

CH52

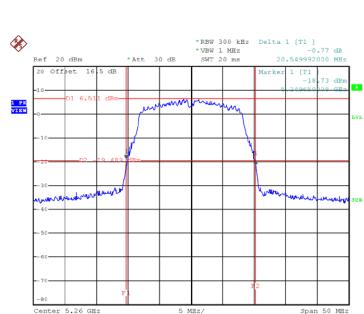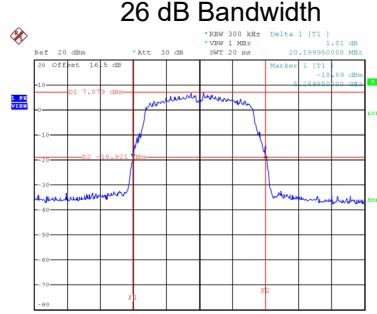CH60
26 dB Bandwidth

CH64





Date: 5.APR.2025 01:07:44

Date: 5.APR.2025 01:08:30

Date: 5.APR.2025 01:09:12

99 % Occupied Bandwidth

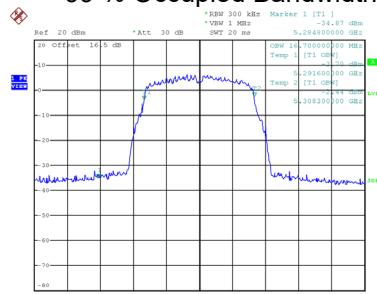




Date: 5.APR.2025 01:07:10

Date: 5.APR.2025 01:07:57

Date: 5.APR.2025 01:08:30

Test Mode UNII-2A_TX AC(VHT20) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	20.450	17.800
60	5300	20.350	17.700
64	5320	20.450	17.700

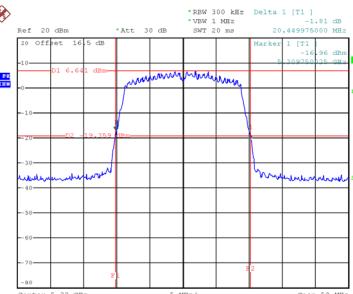
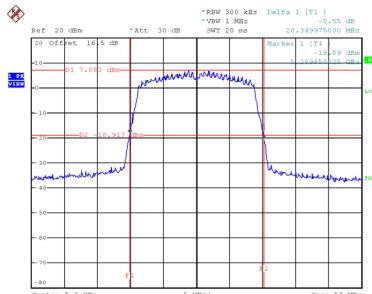
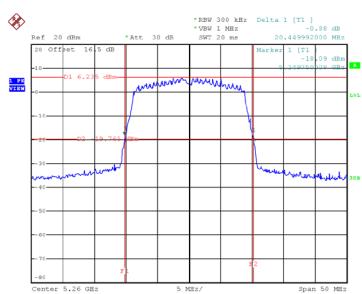


Date: 5.APR.2025 02:09:32

Patent # 100-2026 02:10:26

Patent & Trademark Office

99 % Occupied Bandwidth

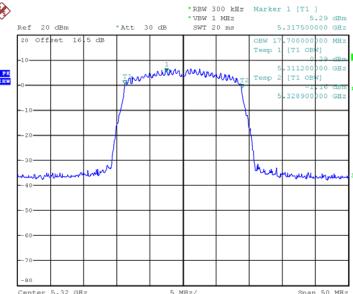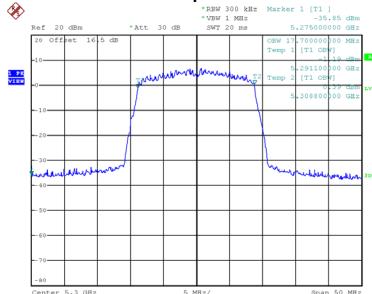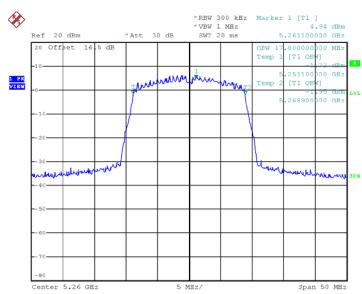

Date: 5.APR.2025 02:08:59



Dato: 5 APR 2025 03:10:02

Dated: 5 APR 2025 02:12:11

Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	41.000	36.800
62	5310	40.800	36.800


CH54

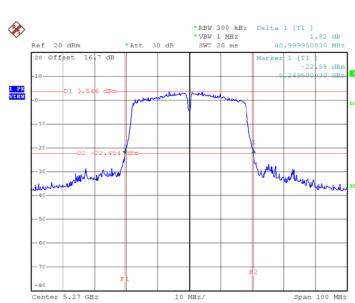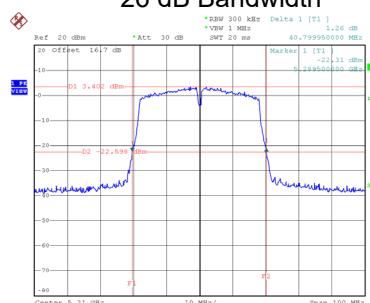CH62
26 dB Bandwidth

Date: 5.APR.2025 13:23:26

Date: 5.APR.2025 13:30:57

99 % Occupied Bandwidth

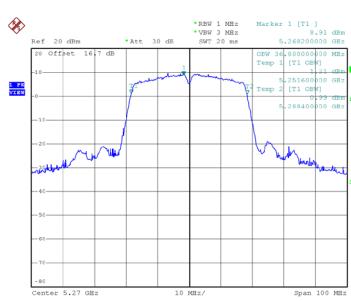


Date: 5.APR.2025 13:22:50


Date: 5.APR.2025 13:30:21

Test Mode UNII-2A_TX AC(VHT80) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	81.400	76.000

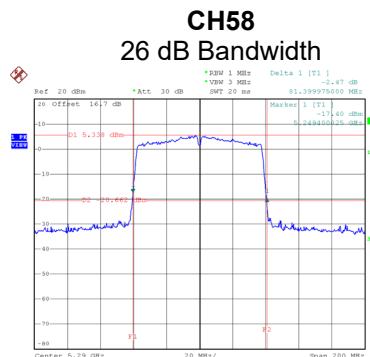

Date: 5.APR.2025 14:47:41

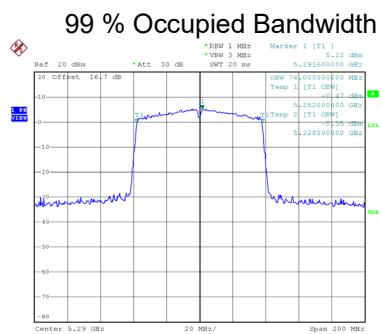

Date: 5.APR.2025 14:46:53