MediaSwitch; SmartPanel

MediaSwitch 6S; SmartPanel 62

1 Applications

1 On/Off/Dimmer Wall Switch with WIFI/Bluetooth/RF315 remote control

- Replaces an existing On/Off/Dimmer wall switch
- Works like conventional On/Off/Dimmer switch: tap button to turn things wired to it on/off. Press and hold for brighten/dim.
- Also works as a remote controlled On/Off/Dimmer switch: turn on/off and brighten/dim with smartphone by WIFI and bluetooth.
- All standard bulbs, fluorescent lights, fans, heaters, LED bulbs, etc.


2 Wireless Smarthome Controller/Gateway with WIFI, Bluetooth,RF315 wireless networking support.


- Works as controller in WIFI/Bluetooth/RF315 wireless smarthome network.
- Works as gateway in WIFI/Bluetooth/RF315 wireless smarthome network.
- 2 USB ports connecting up to 2 USB-Cameras for video monitoring/alarming applications

2 Open Package

TBD.

3 Your Device

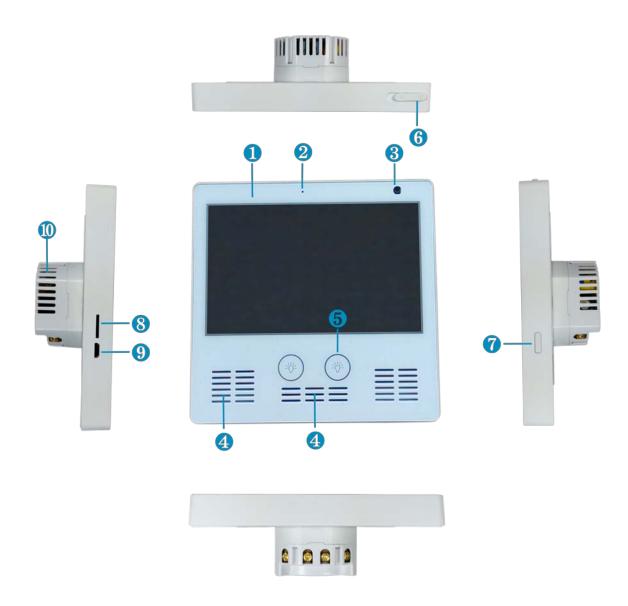


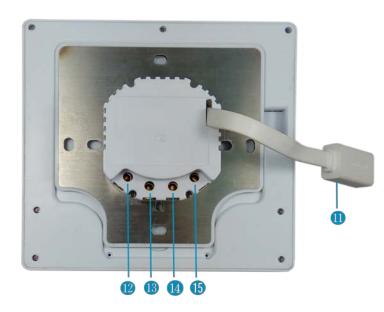

- 1 LCD and TouchScreen
- 2 Microphone
- 3 Camera
- 4 Left/Right Speakers
- **5** Shortcut/Switch Touch
- **6** Camera Mask
- **7** LCD Dim Button
- **8** TF/Micro-SD Holder
- **9** USB-1(OTG)
- **10** Cooling Holes
- **11** USB-2(HOST)
- 12 AC Input: Neutral Wire
- AC Input: Live Wire
- M Load/Light Wire #1
- **15** Load/Light Wire #2


4 Installation

1) Base and Panel





- 1 Holes for NA Wall Junction Box (Pitch of Holes = 83mm)
- 2 Holes for EU Wall Junction Box (Pitch of Holes = 60mm)
- **3** Holes for Other Wall Junction Box (Pitch of Holes = 83mm)
- **45** Power/Signal Connector
- 6 USB-2 (HOST)

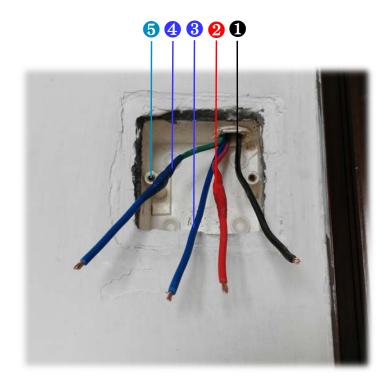


- Neutral Wire
- **2** Live Wire
- **3 4** Load/Light Wires
- **5** Screw Holes for Fixing the Base

3) Switch Off All AC Power Supply before Wiring




1 Switch Off all AC Power Supply before Wiring

4) Wiring

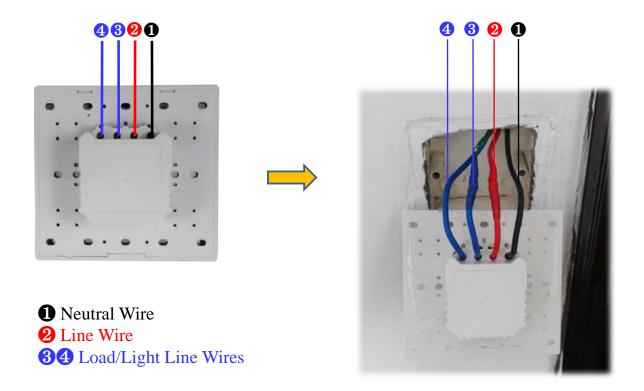


5) Put the Base into Wall Junction Box



1 Put the base into the wall junction box

6) Fix the Base with the Wall Junction Box with 2 Screws

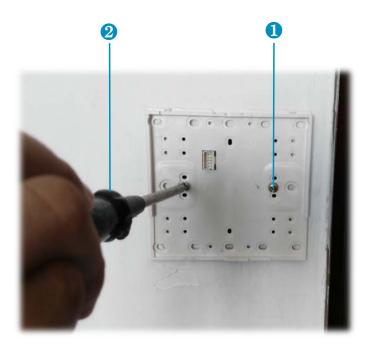


- 1 2 Screws Fixed with Wall Junction Box
- 2 Screwdriver

7) Lock the Lower Part of the Panel onto the Base



1 Tilt a certain angle, push the panel forward and up to lock the lower part of the panel by dead-locks first

8) Lock the Upper Part of the Panel onto the Base

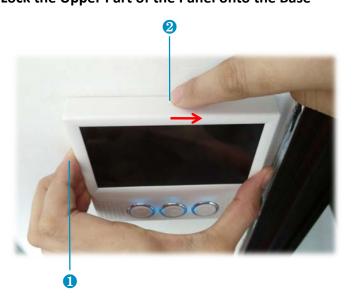

- 1 Push the whole panel forward against the wall
- 2 Move the Slide-Lock to the right with finger to lock the panel with the base

9) Check the Installation



123 When the Blue Led lights are on, the installation is done

10) Power on the Device



1 Press the Power-On/Off button to power on device

5 Wireless Control

1) Setup WIFI and Bluetooth



1 Open WIFI, input the password of your WIFI access point and join your WLAN

2) Mutual Control

Any device can control others which are in the same WLAN by

- A. Installing third-party App.
- B. Installing KINGFEI App with free.

3) Controlled by SmartPhone

All devices can be controlled by either Android SmartPhone or APPLE IOS Smartphone by

- A. Installing third-party App from App Store.
- B. Installing KINGFEI App with free.

6 Trouble Shooting

TBD.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the followingneasures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equi pment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information

To comply with FCC RF exposure compliance requirements, this grant is applicable to only mobile configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.