

ART SIGNAL

ANTENNA TOTAL SOLUTION



| **2.4G Antenna Test Data**

Solu-M 레일컨트롤러 #1 ANT Test Data **- Network & 3D gain & 3D Radiation Pattern**

2024-06-11

Test by : Dong-Kyu Hwang

ART SIGNAL CO., LTD.

A-1008, Woolim Lion's Vally 2nd, 14, Sagimakgol-ro 45beon-gil,
Jungwon-gu, Seongnam-si, Gyeonggi-do, KOREA

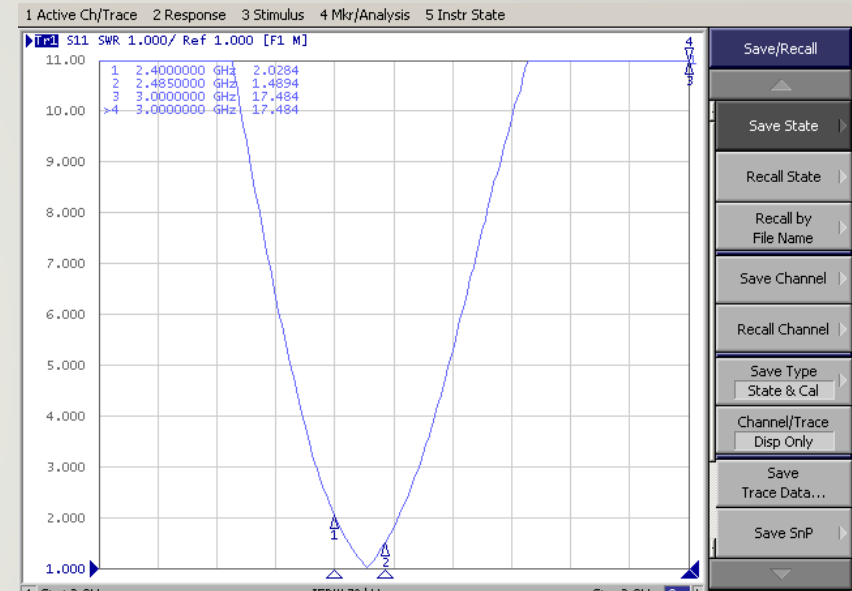
A N T E N N A T O T A L S O L U T I O N

Solu-M 레일컨트롤러#1 TEST DATA

Picture



VSWR

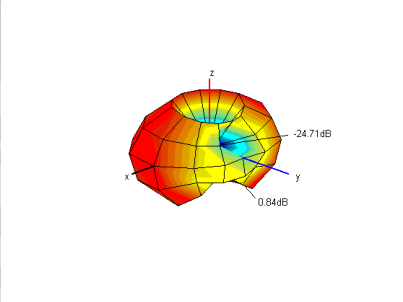
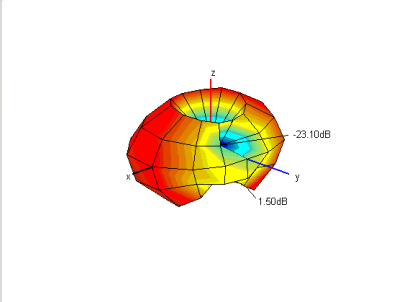
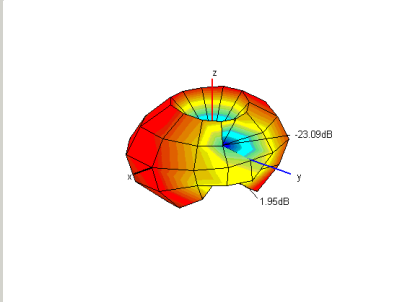
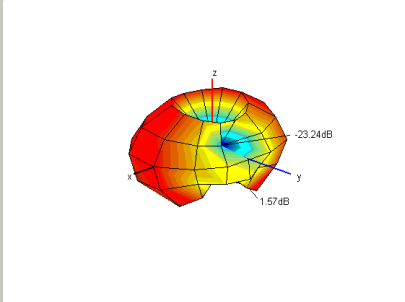
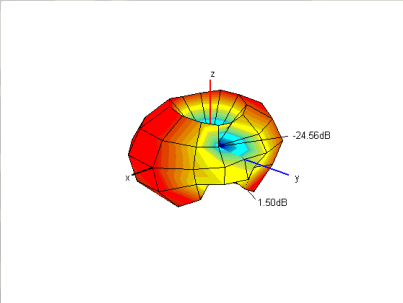


3D gain

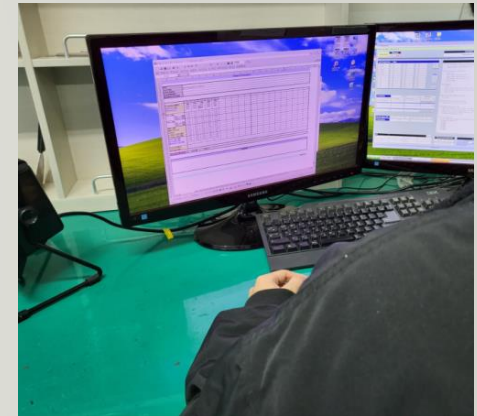
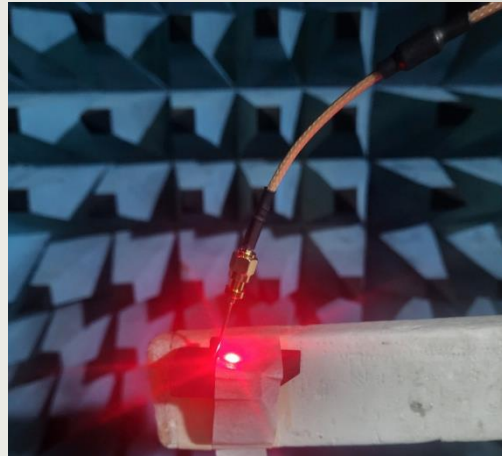
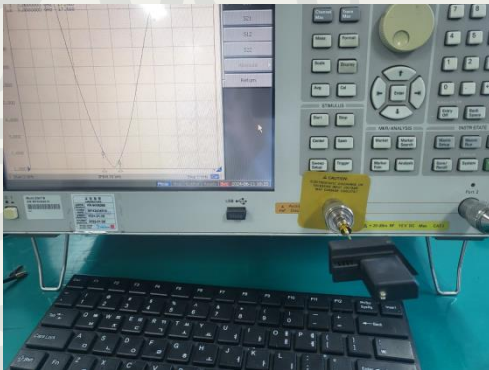
	1	2	3	4	5
Frequency [MHz]	2400	2420	2440	2460	2485
Efficiency [dB]	-3.80	-3.12	-2.78	-3.09	-3.37
Efficiency [%]	41.7	48.7	52.8	49.1	46.0
Peak Gain [dB]	0.84	1.50	1.95	1.57	1.50
Directivity [dB]	4.64	4.62	4.72	4.67	4.87
Minimum Gain [dB]	-24.71	-23.10	-23.09	-23.24	-24.56

2.4G ANT DATA – 3D Radiation Pattern

3D Radiation Pattern

2400	2420	2440	2460
			
2485			
			

Measurement Procedure



Network Analyzer을
이용하여 VSWR 측정

3D Chamber에 Set 거치

Program을 이용하여
Gain 측정

Measurement Equipment

Network Analyzer



E5071B (Agilent)



8753ES (Agilent)



**CTIA 3D OTA
Chamber(A+Tech)**

We make the world 's best companies.
A leader in ANTENNA.

ART SIGNAL
ANTENNA TOTAL SOLUTION

