


FCC SAR Test Report


APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : M1903C3EH
FCC ID : 2AFZZ-RMSC3EH
STANDARD : FCC 47 CFR PART 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Mar. 12, 2019 and testing was started from May 04, 2019 and completed on May 06, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Reviewed by: Rose Wang / Supervisor



Approved by: Kat Yin / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied.....	5
4. Equipment Under Test (EUT) Information.....	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations	7
5. Proximity Sensor Triggering Test.....	9
5.1 Proximity sensor triggering distances(Per KDB616217§6.2)	9
5.2 Tilt angle influences to proximity sensor triggering(Per KDB616217 §6.4).....	12
6. RF Exposure Limits.....	13
6.1 Uncontrolled Environment.....	13
6.2 Controlled Environment.....	13
7. Specific Absorption Rate (SAR).....	14
7.1 Introduction	14
7.2 SAR Definition.....	14
8. System Description and Setup	15
8.1 E-Field Probe	16
8.2 Data Acquisition Electronics (DAE)	16
8.3 Phantom.....	17
8.4 Device Holder.....	18
9. Measurement Procedures	19
9.1 Spatial Peak SAR Evaluation	19
9.2 Power Reference Measurement.....	20
9.3 Area Scan	20
9.4 Zoom Scan.....	21
9.5 Volume Scan Procedures.....	21
9.6 Power Drift Monitoring.....	21
10. Test Equipment List.....	22
11. System Verification	23
11.1 Tissue Simulating Liquids	23
11.2 Tissue Verification	24
11.3 System Performance Check Results	25
12. RF Exposure Positions	26
12.1 Ear and handset reference point.....	26
12.2 Definition of the cheek position	27
12.3 Definition of the tilt position	28
12.4 Body Worn Accessory	29
12.5 Wireless Router.....	29
13. Conducted RF Output Power (Unit: dBm).....	30
14. Bluetooth Exclusions Applied	78
15. Antenna Location	79
16. SAR Test Results	80
16.1 Head SAR	82
16.2 Hotspot SAR	85
16.3 Body Worn Accessory SAR.....	90
16.4 Repeated SAR Measurement	94
17. Simultaneous Transmission Analysis	95
17.1 Head Exposure Conditions	96
17.2 Hotspot Exposure Conditions.....	97
17.3 Body-Worn Accessory Exposure Conditions	99
18. Uncertainty Assessment	100
19. References	101
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

[illegible]

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Xiaomi Communications Co., Ltd., Mobile Phone, M1903C3EH**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 10mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.35	0.64	0.64	1.52
		GSM1900	0.02	1.00	1.00	
	WCDMA	Band V	0.33	0.55	0.55	
		Band IV	0.25	1.12	1.06	
		Band II	0.15	1.12	1.12	
	LTE	Band 5	0.36	0.55	0.55	
		Band 4	0.20	1.13	1.00	
		Band 2	0.16	1.06	1.06	
		Band 7	0.23	0.84	0.82	
		Band 38	0.16	0.70	0.70	
DTS	WLAN	2.4GHz WLAN	1.16	0.21	0.21	1.52
Date of Testing:			2019/5/4~2019/5/6			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR 01	CN1257	314309

Applicant	
Company Name	Xiaomi Communications Co., Ltd.
Address	The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	Redmi
Model Name	M1903C3EH
FCC ID	2AFZZ-RMSC3EH
IMEI Code	SIM1: 860503040058881 SIM2: 860503040058899
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz : 802.11b/g/n HT20 Bluetooth BR/EDR/LE
HW Version	V2
SW Version	MIUI10
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: 802.11n-HT40 is not supported in 2.4GHz WLAN. - This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. - This device does not support DTM operation and support GRPS/EGPRS mode up to multi-slot class 33. - This device WLAN 2.4GHz supports hotspot operation and Bluetooth support tethering applications. - The device employs proximity sensors that detect the presence of the user's body at the back or bottom faces of the device. When back or Bottom Side faces of the device, GSM1900, WCDMA B2/B4, LTE B2 / B4 / B7 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.) - There are two types of EUT sample 1 and sample 2, the differences between two samples is memory capacity, For RAM capacity has no effect on SAR distribution, so sample 1 is chose to perform SAR testing. - For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.	

4.2 General LTE SAR Test and Reporting Considerations


Summarized necessary items addressed in KDB 941225 D05 v02r05								
FCC ID	2AFZZ-RMSC3EH							
Equipment Name	Mobile Phone							
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz							
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz							
Uplink Modulations used	QPSK / 16QAM / 64QAM							
LTE Voice / Data requirements	Voice and Data							
LTE Release Version	R8, Cat 4							
CA Support	Not Supported							
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
	256 QAM	≥ 1						≤ 5
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Power reduction applied to satisfy SAR compliance	Yes, The device employs proximity sensors that detect the presence of the user's body at the back or bottom faces of the device. When back or Bottom Side faces of the device, LTE B2 / B4 / B7 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)							

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				



5. Proximity Sensor Triggering Test



5.1 Proximity sensor triggering distances(Per KDB616217§6.2)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (1750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the back or bottom side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, GSM1900, WCDMA B2/ B4, and LTE B2 / B4 / B7 reduced power will be active.
4. The sensors used to detect the proximity of the user's body at the back or bottom side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).

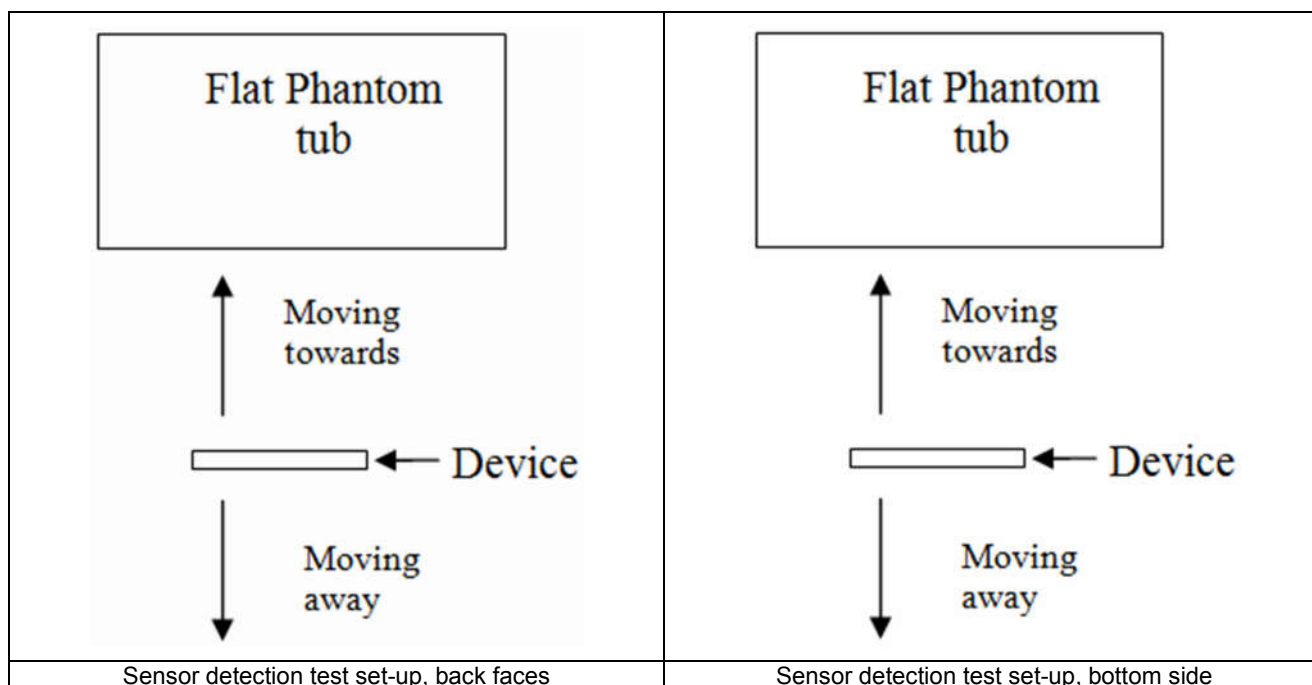

Proximity Sensor Triggering Distance (mm)				
Position	Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	16	16	16	16

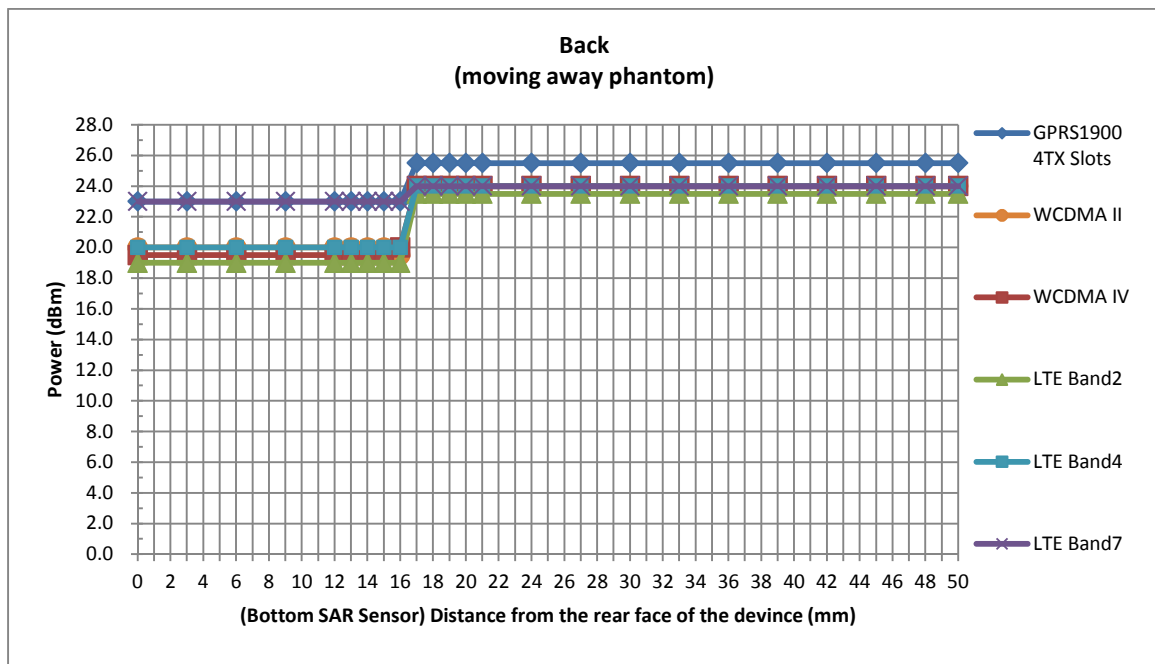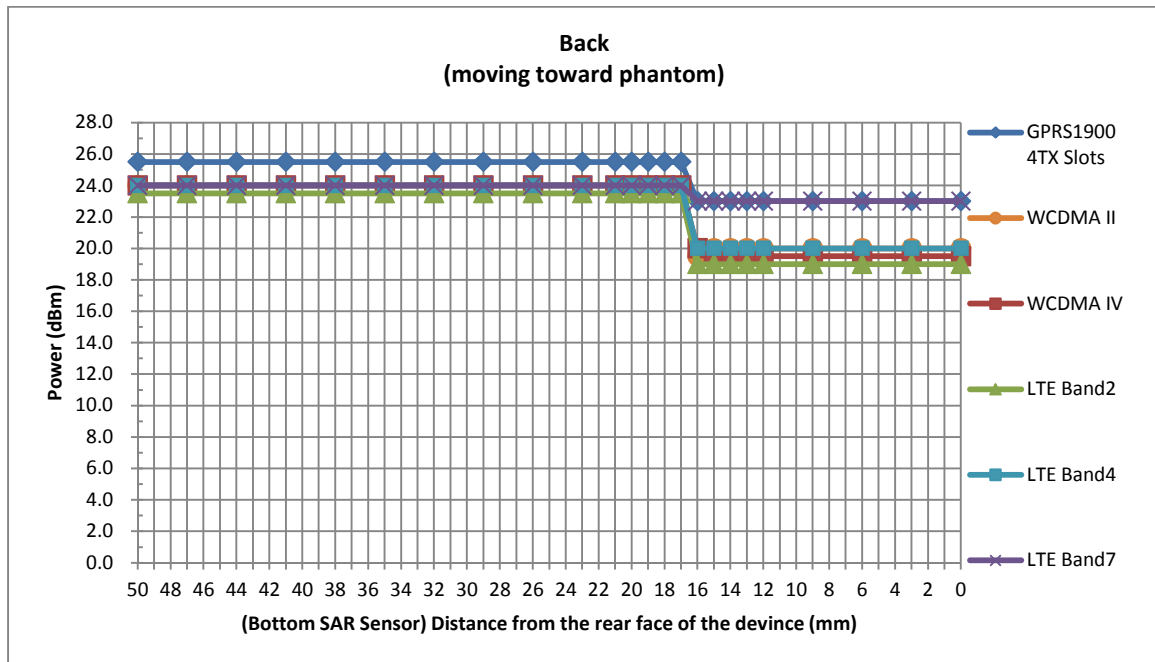


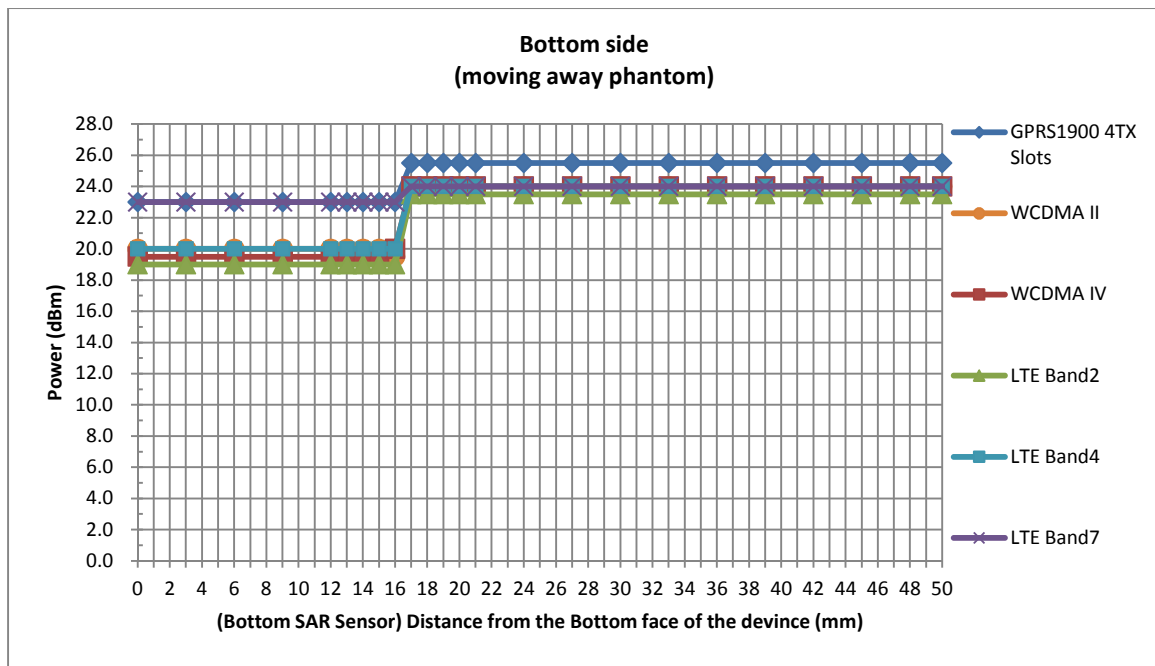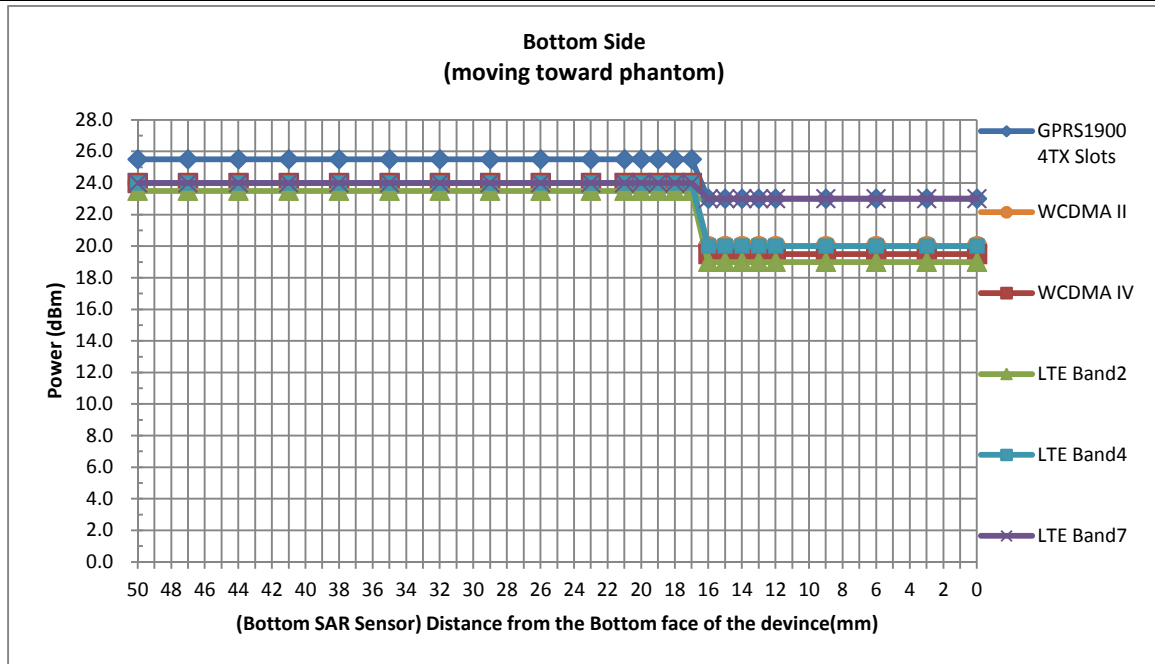

5.2 Tilt angle influences to proximity sensor triggering(Per KDB616217 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with bottom side parallel to the base of the flat phantom for each band.

The EUT was rotated about bottom side for angles up to $\pm 45^\circ$. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to $\pm 45^\circ$.

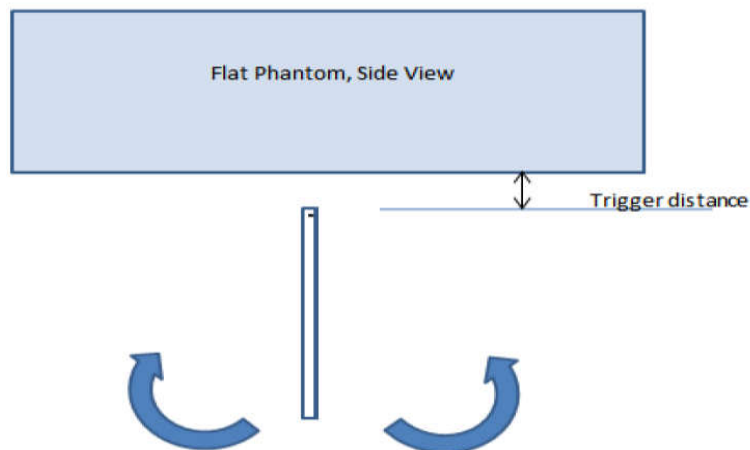

Proximity Sensor Coverage Assessment(Bottom Side)

Table: Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering (Bottom Side)

Main ant Band(MHz)	Minimum trigger distance at which power reduction was maintained over ±45°	Power Reduction Status											
		-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°	
GSM 1900	16mm	on	on	on	on	on	on	on	on	on	on	on	
WCDMA Band II	16mm	on	on	on	on	on	on	on	on	on	on	on	
WCDMA Band IV	16mm	on	on	on	on	on	on	on	on	on	on	on	
LTE Band 2	16mm	on	on	on	on	on	on	on	on	on	on	on	
LTE Band 4	16mm	on	on	on	on	on	on	on	on	on	on	on	
LTE Band 7	16mm	on	on	on	on	on	on	on	on	on	on	on	

Conclusion: As is shown from the validation data, it can be ensured that the proximity sensor can be valid triggered for the DUT tilt coverage exposure condition.

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

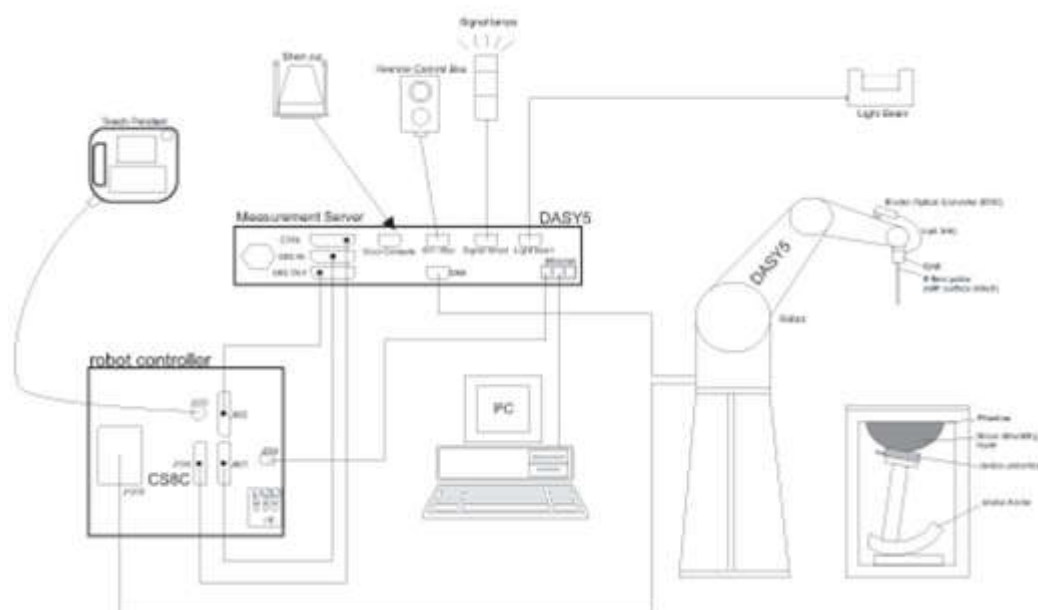

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm



The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.


8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters

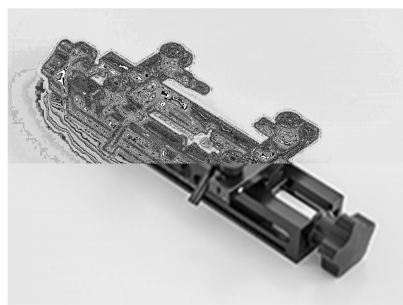

Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2020/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2020/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2020/3/25
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2020/3/24
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2018/12/7	2019/12/6
SPEAG	Data Acquisition Electronics	DAE4	1279	2018/10/22	2019/10/21
SPEAG	Dosimetric E-Field Probe	ES3DV3	3279	2019/3/4	2020/3/3
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1842	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1542	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2019/4/17	2020/4/16
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2019/4/16	2020/4/15
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2019/4/16	2020/4/15
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2018/11/20	2019/11/19
Anritsu	Vector Signal Generator	MG3710A	6201682672	2019/1/14	2020/1/13
Rohde & Schwarz	Power Meter	NRVD	102081	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2018/8/20	2019/8/19
R&S	CBT BLUETOOTH TESTER	CBT	101641	2019/1/14	2020/1/13
EXA	Spectrum Analyzer	FSV7	101631	2019/1/14	2020/1/13
Agilent	Dual Directional Coupler	778D	20500	2018/8/3	2019/8/2
Agilent	Dual Directional Coupler	11691D	MY48151020	2018/8/3	2019/8/2
Testo	Hygrometer	608-H1	1241332126	2018/8/21	2019/8/20
FLUKE	DIGITAC THERMOMETER	51II	97240029	2018/8/8	2019/8/7
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	

Note:

Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

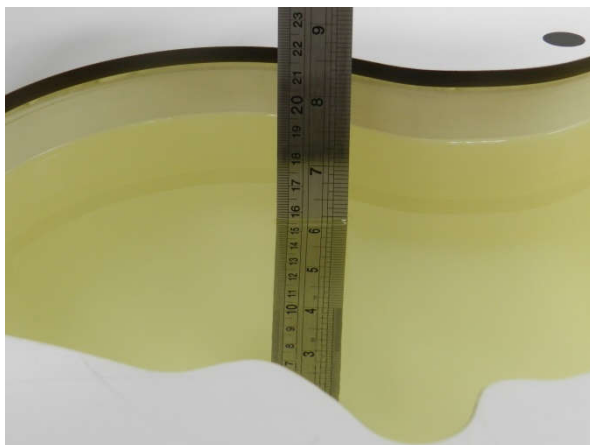


Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. ($^{\circ}\text{C}$)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	HSL	22.6	0.915	41.269	0.90	41.50	1.67	-0.56	± 5	2019/5/4
1750	HSL	22.6	1.346	40.242	1.37	40.10	-1.75	0.35	± 5	2019/5/4
1900	HSL	22.7	1.373	39.730	1.40	40.00	-1.93	-0.68	± 5	2019/5/5
2450	HSL	22.7	1.845	38.195	1.80	39.20	2.50	-2.56	± 5	2019/5/6
2600	HSL	22.9	2.029	37.509	1.96	39.00	3.52	-3.82	± 5	2019/5/6

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/5/4	835	HSL	250	4d151	3279	1279	2.42	9.30	9.68	4.09
2019/5/4	1750	HSL	250	1090	3279	1279	9.66	36.40	38.64	6.15
2019/5/5	1900	HSL	250	5d170	3279	1279	9.32	39.00	37.28	-4.41
2019/5/6	2450	HSL	250	908	3279	1279	13.10	52.80	52.4	-0.76
2019/5/6	2600	HSL	250	1061	3279	1279	13.80	57.70	55.2	-4.33

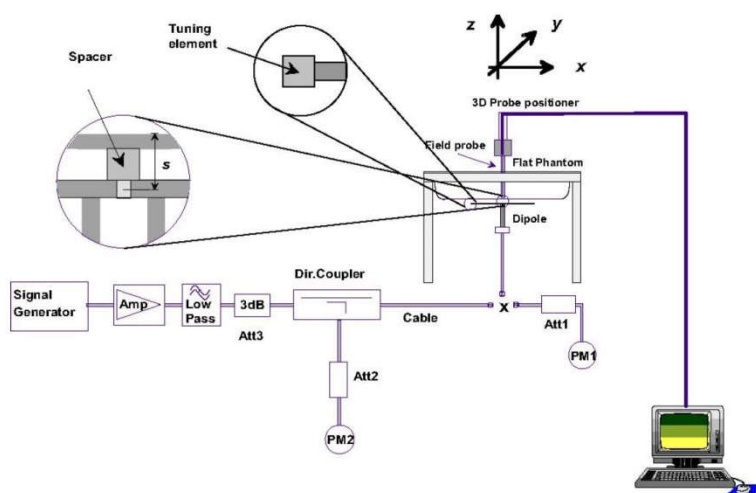


Fig 10.3.1 System Performance Check Setup



Fig 10.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 11.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 11.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 11.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 11.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

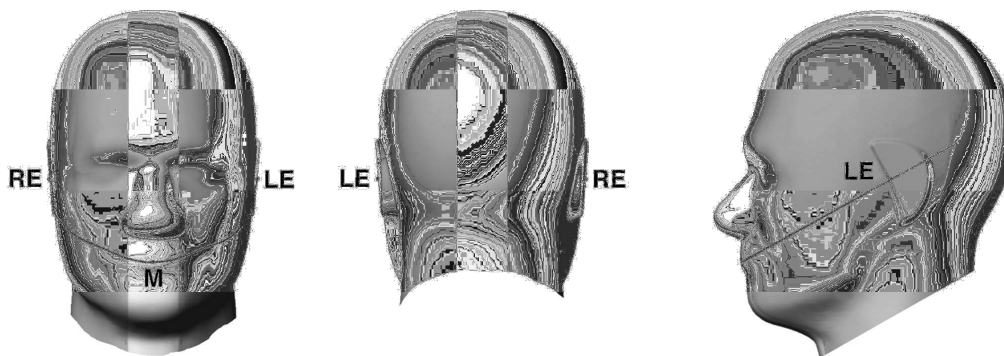


Fig 11.1.1 Front, back, and side views of SAM twin phantom

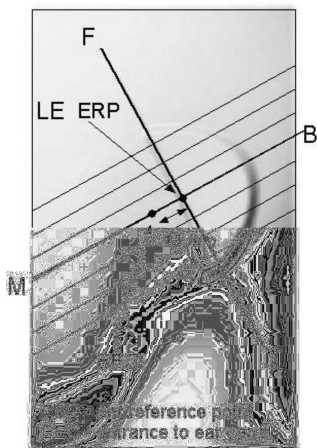


Fig 11.1.2 Close-up side view of phantom showing the ear region.

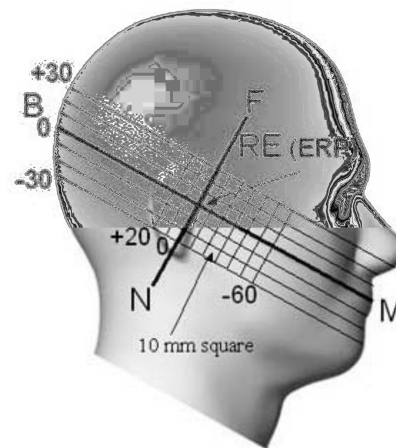


Fig 11.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 11.2.1 and Figure 11.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 11.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 11.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 11.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 11.2.3. The actual rotation angles should be documented in the test report.

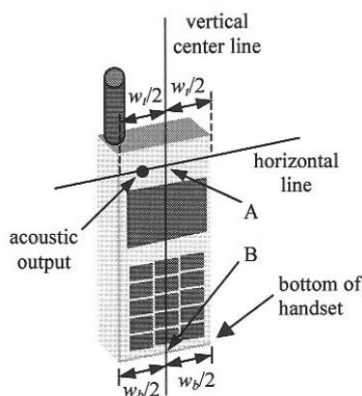


Fig 11.2.1 Handset vertical and horizontal reference lines—"fixed case"

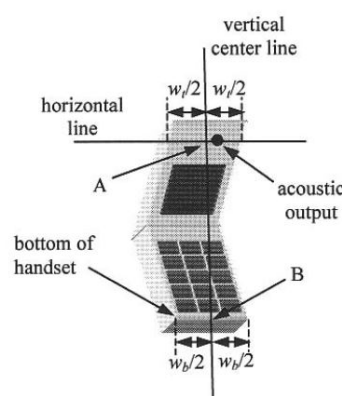


Fig 11.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

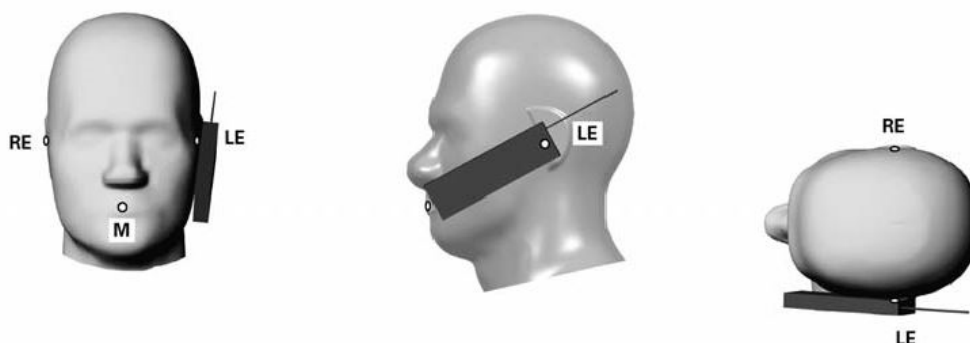


Fig 11.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 11.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

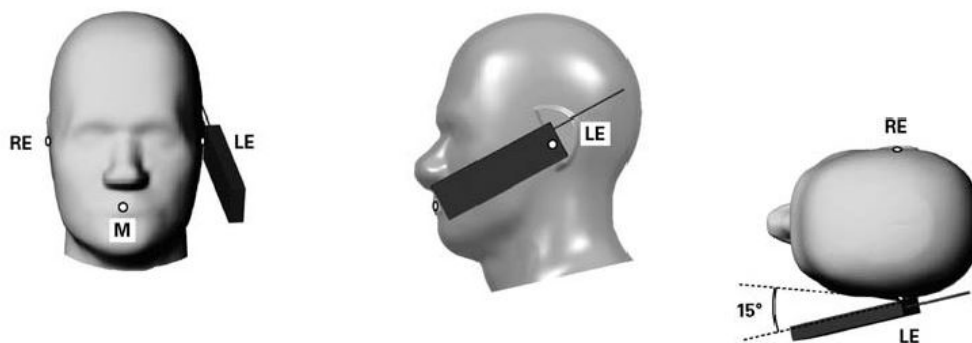


Fig 11.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

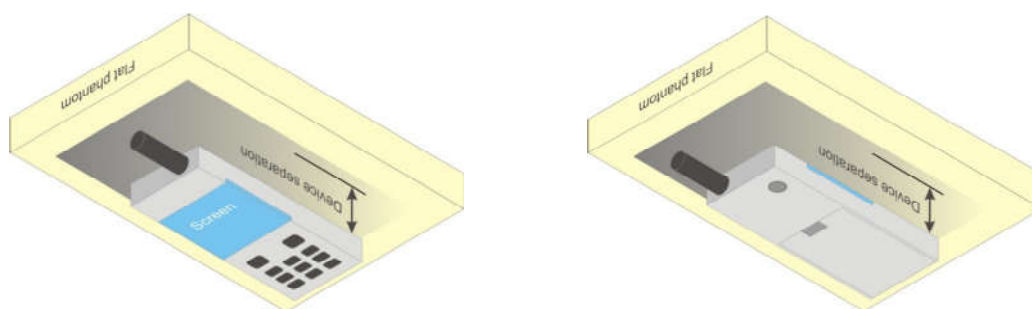


Fig 11.4 Body Worn Position

12.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (3Tx slots) for GSM850 and GPRS (4Tx slots) for GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<Full Power for Head>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.81	32.92	32.95	34.00	23.81	23.92	23.95	25.00
GPRS 1 Tx slot	32.80	32.90	32.92	34.00	23.80	23.90	23.92	25.00
GPRS 2 Tx slots	31.40	31.33	31.43	31.50	25.40	25.33	25.43	25.50
GPRS 3 Tx slots	29.45	29.64	29.83	30.50	25.19	25.38	25.57	26.24
GPRS 4 Tx slots	27.22	27.54	27.61	28.50	24.22	24.54	24.61	25.50
EDGE 1 Tx slot	27.56	27.60	27.58	28.50	18.56	18.60	18.58	19.50
EDGE 2 Tx slots	26.05	26.42	26.23	26.50	20.05	20.42	20.23	20.50
EDGE 3 Tx slots	24.53	24.62	24.63	25.00	20.27	20.36	20.37	20.74
EDGE 4 Tx slots	23.37	23.40	23.49	24.00	20.37	20.40	20.49	21.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Full Power for Body>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.81	32.92	32.95	33.00	23.81	23.92	23.95	24.00
GPRS 1 Tx slot	32.80	32.90	32.92	33.00	23.80	23.90	23.92	24.00
GPRS 2 Tx slots	31.18	31.39	31.45	31.50	25.18	25.39	25.45	25.50
GPRS 3 Tx slots	29.61	29.84	29.90	30.50	25.35	25.58	25.64	26.24
GPRS 4 Tx slots	27.42	27.74	27.84	28.50	24.42	24.74	24.84	25.50
EDGE 1 Tx slot	27.80	27.96	28.01	28.50	18.80	18.96	19.01	19.50
EDGE 2 Tx slots	26.38	26.47	26.45	26.50	20.38	20.47	20.45	20.50
EDGE 3 Tx slots	24.71	24.83	24.83	25.00	20.45	20.57	20.57	20.74
EDGE 4 Tx slots	23.61	23.71	23.76	24.00	20.61	20.71	20.76	21.00

<Full Power for Head /Body >

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.67	29.73	29.87	31.00	20.67	20.73	20.87	22.00
GPRS 1 Tx slot	29.65	29.71	29.81	31.00	20.65	20.71	20.81	22.00
GPRS 2 Tx slots	27.31	27.35	27.45	27.50	21.31	21.35	21.45	21.50
GPRS 3 Tx slots	25.86	25.90	25.99	26.00	21.60	21.64	21.73	21.74
GPRS 4 Tx slots	25.10	25.18	25.36	25.50	22.10	22.18	22.36	22.50
EDGE 1 Tx slot	26.49	26.41	26.49	26.50	17.49	17.41	17.49	17.50
EDGE 2 Tx slots	23.90	23.84	23.80	24.00	17.90	17.84	17.80	18.00
EDGE 3 Tx slots	22.30	22.30	22.49	22.50	18.04	18.04	18.23	18.24
EDGE 4 Tx slots	21.26	21.17	21.40	21.50	18.26	18.17	18.40	18.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Reduced Power for P-Sensor On>

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	28.98	28.85	28.99	29.00	19.98	19.85	19.99	20.00
GPRS 1 Tx slot	28.97	28.84	28.99	29.00	19.97	19.84	19.99	20.00
GPRS 2 Tx slots	25.90	25.84	25.92	26.00	19.90	19.84	19.92	20.00
GPRS 3 Tx slots	23.71	23.65	23.85	24.00	19.45	19.39	19.59	19.74
GPRS 4 Tx slots	22.08	22.26	22.33	23.00	19.08	19.26	19.33	20.00
EDGE 1 Tx slot	25.89	26.06	26.23	26.50	16.89	17.06	17.23	17.50
EDGE 2 Tx slots	23.52	23.79	23.84	24.00	17.52	17.79	17.84	18.00
EDGE 3 Tx slots	21.94	22.20	22.24	22.50	17.68	17.94	17.98	18.24
EDGE 4 Tx slots	20.78	21.10	21.15	21.50	17.78	18.10	18.15	18.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{tx} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{tx} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{tx}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

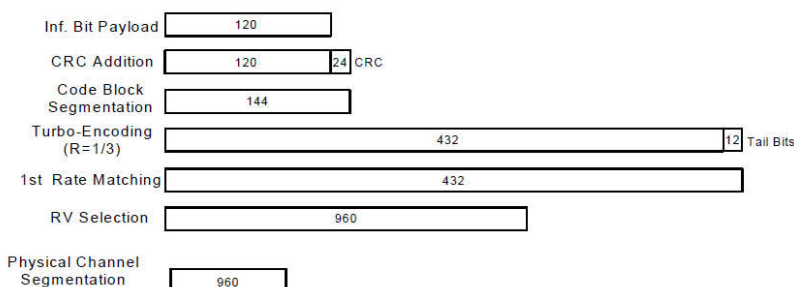


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

<Full Power for Head>

Band		WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.83	23.80	23.83	24.50
3GPP Rel 99	RMC 12.2Kbps	23.84	23.71	23.85	24.50
3GPP Rel 6	HSDPA Subtest-1	22.61	22.53	22.38	23.50
3GPP Rel 6	HSDPA Subtest-2	22.56	22.51	22.37	23.50
3GPP Rel 6	HSDPA Subtest-3	22.03	22.00	21.87	23.00
3GPP Rel 6	HSDPA Subtest-4	22.01	22.00	21.86	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	22.61	22.62	22.45	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.38	22.58	22.38	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	22.03	22.01	21.88	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	22.05	22.05	21.78	23.00
3GPP Rel 6	HSUPA Subtest-1	21.93	22.00	21.87	23.50
3GPP Rel 6	HSUPA Subtest-2	21.41	21.46	21.41	21.50
3GPP Rel 6	HSUPA Subtest-3	21.01	21.07	21.04	22.50
3GPP Rel 6	HSUPA Subtest-4	21.42	21.47	21.40	21.50
3GPP Rel 6	HSUPA Subtest-5	22.50	22.60	22.50	23.50

<Full Power for Body >

Band		WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	22.70	22.68	22.74	24.00
3GPP Rel 99	RMC 12.2Kbps	22.75	22.70	22.84	24.00
3GPP Rel 6	HSDPA Subtest-1	21.96	21.92	22.04	23.00
3GPP Rel 6	HSDPA Subtest-2	22.07	21.93	22.08	23.00
3GPP Rel 6	HSDPA Subtest-3	21.57	21.43	21.58	22.50
3GPP Rel 6	HSDPA Subtest-4	21.47	21.43	21.58	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.00	21.98	21.98	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.01	21.88	21.89	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.48	21.38	21.48	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.58	21.42	21.63	22.50
3GPP Rel 6	HSUPA Subtest-1	22.06	22.26	22.20	23.00
3GPP Rel 6	HSUPA Subtest-2	20.19	20.17	20.16	21.00
3GPP Rel 6	HSUPA Subtest-3	20.72	20.89	20.87	22.00
3GPP Rel 6	HSUPA Subtest-4	19.83	19.91	19.98	21.00
3GPP Rel 6	HSUPA Subtest-5	22.20	22.10	22.30	23.00

<Full Power for Head / Body >

Band		WCDMA Band II			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538	
Rx Channel		9662	9800	9938	
Frequency (MHz)		1852.4	1880	1907.6	
3GPP Rel 99	AMR 12.2Kbps	22.97	22.91	22.88	24.00
3GPP Rel 99	RMC 12.2Kbps	22.98	22.94	22.89	24.00
3GPP Rel 6	HSDPA Subtest-1	21.95	22.04	22.03	23.00
3GPP Rel 6	HSDPA Subtest-2	21.99	22.16	22.11	23.00
3GPP Rel 6	HSDPA Subtest-3	21.47	21.66	21.60	22.50
3GPP Rel 6	HSDPA Subtest-4	21.46	21.65	21.60	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	21.87	22.01	22.01	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	21.91	22.15	22.12	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.38	21.62	21.58	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.41	21.70	21.63	22.50
3GPP Rel 6	HSUPA Subtest-1	21.56	21.69	21.54	23.00
3GPP Rel 6	HSUPA Subtest-2	20.52	20.56	20.50	21.00
3GPP Rel 6	HSUPA Subtest-3	20.62	20.79	20.62	22.00
3GPP Rel 6	HSUPA Subtest-4	20.70	20.47	20.70	21.00
3GPP Rel 6	HSUPA Subtest-5	22.10	22.10	22.10	23.00

Band		WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		1312	1413	1513	
Rx Channel		1537	1638	1738	
Frequency (MHz)		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	22.87	22.88	23.02	24.00
3GPP Rel 99	RMC 12.2Kbps	22.89	22.89	23.03	24.00
3GPP Rel 6	HSDPA Subtest-1	21.93	22.06	21.90	23.00
3GPP Rel 6	HSDPA Subtest-2	21.94	22.02	21.91	23.00
3GPP Rel 6	HSDPA Subtest-3	21.44	21.54	21.43	22.50
3GPP Rel 6	HSDPA Subtest-4	21.44	21.54	21.42	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	21.92	22.01	21.92	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	21.85	22.08	21.88	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.42	21.48	21.38	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.38	21.36	21.45	22.50
3GPP Rel 6	HSUPA Subtest-1	21.44	21.88	21.42	23.00
3GPP Rel 6	HSUPA Subtest-2	20.95	20.52	20.84	21.00
3GPP Rel 6	HSUPA Subtest-3	20.63	20.53	20.57	22.00
3GPP Rel 6	HSUPA Subtest-4	20.85	20.88	20.87	21.00
3GPP Rel 6	HSUPA Subtest-5	22.00	21.90	21.90	23.00


<Reduced Power for P-Sensor On>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	18.65	18.63	18.60	19.50	19.73	19.63	19.65	20.00
3GPP Rel 99	RMC 12.2Kbps	18.61	18.66	18.61	19.50	19.74	19.75	19.67	20.00
3GPP Rel 6	HSDPA Subtest-1	17.89	18.12	18.21	18.50	18.42	18.40	18.39	19.00
3GPP Rel 6	HSDPA Subtest-2	17.86	18.05	18.21	18.50	18.54	18.44	18.48	19.00
3GPP Rel 6	HSDPA Subtest-3	17.56	17.56	17.72	18.00	18.03	17.93	17.98	18.50
3GPP Rel 6	HSDPA Subtest-4	17.45	17.56	17.71	18.00	18.03	17.94	17.98	18.50
3GPP Rel 8	DC-HSDPA Subtest-1	17.82	18.08	18.15	18.50	18.38	18.42	18.61	19.00
3GPP Rel 8	DC-HSDPA Subtest-2	17.89	18.00	18.23	18.50	18.41	18.36	18.35	19.00
3GPP Rel 8	DC-HSDPA Subtest-3	17.45	17.62	17.68	18.00	18.05	18.41	18.01	18.50
3GPP Rel 8	DC-HSDPA Subtest-4	17.45	17.58	17.85	18.00	18.12	18.45	18.02	18.50
3GPP Rel 6	HSUPA Subtest-1	17.65	17.83	17.79	18.50	18.19	18.45	18.28	19.00
3GPP Rel 6	HSUPA Subtest-2	16.48	16.38	16.36	16.50	16.57	16.22	16.16	17.00
3GPP Rel 6	HSUPA Subtest-3	17.00	17.11	17.07	17.50	17.17	17.02	17.06	18.00
3GPP Rel 6	HSUPA Subtest-4	16.48	16.41	16.46	16.50	16.78	16.63	16.36	17.00
3GPP Rel 6	HSUPA Subtest-5	17.70	18.00	18.20	18.50	18.50	18.50	18.50	19.00


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE 4 / B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

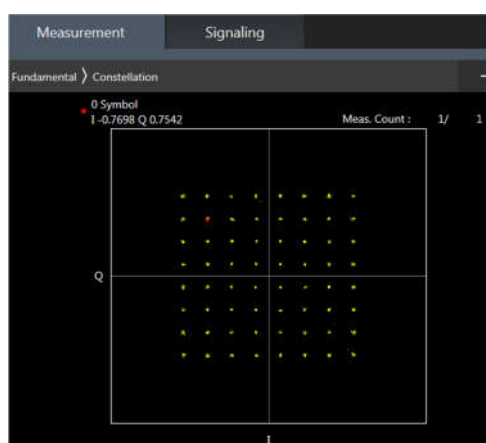

64QAM

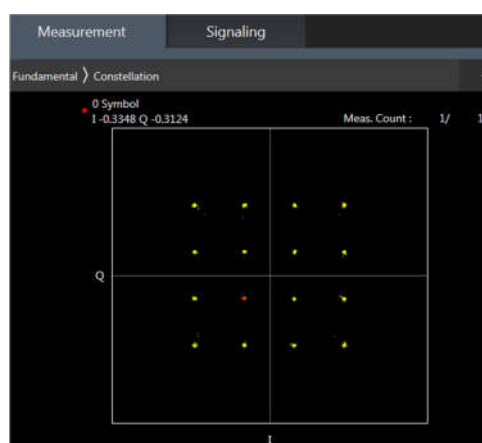

16QAM

<Full Power for Head>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.20	23.26	23.34	24	0
20	QPSK	1	49	23.09	23.28	23.26		
20	QPSK	1	99	23.15	23.13	23.01		
20	QPSK	50	0	22.29	22.30	22.36	23	1
20	QPSK	50	24	22.03	22.18	22.15		
20	QPSK	50	50	22.21	22.27	22.29		
20	QPSK	100	0	22.20	22.36	22.37		
20	16QAM	1	0	22.18	22.14	22.18	23	1
20	16QAM	1	49	22.02	22.18	22.01		
20	16QAM	1	99	22.26	22.30	22.01		
20	16QAM	50	0	21.17	21.23	21.38	22	2
20	16QAM	50	24	21.11	21.18	21.18		
20	16QAM	50	50	21.09	21.13	21.27		
20	16QAM	100	0	21.10	21.46	21.32		
20	64QAM	1	0	21.32	21.03	21.14	22	2
20	64QAM	1	49	20.96	21.02	21.12		
20	64QAM	1	99	21.02	21.10	21.08		
20	64QAM	50	0	20.22	20.17	20.22	21	3
20	64QAM	50	24	20.16	20.12	20.19		
20	64QAM	50	50	20.10	20.09	20.13		
20	64QAM	100	0	20.16	20.11	20.17		

Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.15	23.32	23.26	24	0
15	QPSK	1	37	22.94	23.28	23.15		
15	QPSK	1	74	23.10	23.26	22.94		
15	QPSK	36	0	22.34	22.24	22.45	23	1
15	QPSK	36	20	21.98	22.32	22.24		
15	QPSK	36	39	22.19	22.23	22.38		
15	QPSK	75	0	22.23	22.33	22.39		
15	16QAM	1	0	21.22	21.26	21.39	23	1
15	16QAM	1	37	21.39	21.14	21.40		
15	16QAM	1	74	21.32	21.39	21.22		
15	16QAM	36	0	21.40	21.13	21.32	22	2
15	16QAM	36	20	21.32	21.14	21.19		
15	16QAM	36	39	21.13	21.19	21.22		
15	16QAM	75	0	21.26	21.32	21.29		
15	64QAM	1	0	20.99	21.06	21.08	22	2
15	64QAM	1	37	21.26	21.25	21.30		
15	64QAM	1	74	20.93	20.97	21.15		
15	64QAM	36	0	19.89	20.12	20.20	21	3
15	64QAM	36	20	20.04	20.26	20.08		
15	64QAM	36	39	19.82	19.90	20.27		
15	64QAM	75	0	19.87	19.85	20.12		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.97	23.14	23.08	24	0
10	QPSK	1	25	22.97	23.11	23.06		
10	QPSK	1	49	23.07	23.26	23.11		
10	QPSK	25	0	22.13	22.31	22.33	23	1
10	QPSK	25	12	22.04	22.30	22.28		
10	QPSK	25	25	22.19	22.34	22.31		
10	QPSK	50	0	22.31	22.00	22.34		
10	16QAM	1	0	21.64	21.31	21.36	23	1
10	16QAM	1	25	21.41	21.64	21.78		
10	16QAM	1	49	21.78	21.31	21.64		
10	16QAM	25	0	21.31	21.01	21.27	22	2
10	16QAM	25	12	21.27	21.36	21.31		
10	16QAM	25	25	21.36	21.08	21.41		
10	16QAM	50	0	21.36	21.07	21.25		
10	64QAM	1	0	21.07	20.88	20.79	22	2
10	64QAM	1	25	20.75	20.94	21.01		
10	64QAM	1	49	20.72	20.77	20.38		
10	64QAM	25	0	19.71	19.91	20.35	21	3
10	64QAM	25	12	20.19	20.33	20.21		
10	64QAM	25	25	20.12	19.92	20.35		
10	64QAM	50	0	19.94	20.34	20.28		

Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.24	23.06	23.20	24	0
5	QPSK	1	12	23.06	23.12	23.05		
5	QPSK	1	24	23.05	23.32	22.96		
5	QPSK	12	0	22.15	22.22	22.34	23	1
5	QPSK	12	7	22.18	22.37	22.30		
5	QPSK	12	13	22.22	22.15	22.32		
5	QPSK	25	0	21.85	22.24	22.35	23	1
5	16QAM	1	0	21.58	21.31	21.36		
5	16QAM	1	12	21.36	21.41	21.36		
5	16QAM	1	24	21.31	21.27	21.58	22	2
5	16QAM	12	0	21.27	21.36	21.16		
5	16QAM	12	7	21.31	21.24	21.27		
5	16QAM	12	13	21.27	21.16	21.34	22	2
5	16QAM	25	0	20.95	21.18	21.28		
5	64QAM	1	0	20.69	21.02	21.00		
5	64QAM	1	12	21.04	21.15	20.54	22	2
5	64QAM	1	24	20.54	20.89	20.70		
5	64QAM	12	0	19.80	19.88	20.23		
5	64QAM	12	7	20.09	20.25	20.03	21	3
5	64QAM	12	13	20.06	20.24	20.16		
5	64QAM	25	0	19.72	19.87	19.92		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.09	23.10	23.16	24	0
3	QPSK	1	8	22.93	23.20	23.26		
3	QPSK	1	14	23.20	23.26	22.97		
3	QPSK	8	0	22.21	22.48	22.21	23	1
3	QPSK	8	4	22.21	22.31	22.18		
3	QPSK	8	7	22.13	22.39	22.21		
3	QPSK	15	0	22.23	22.38	22.17	23	1
3	16QAM	1	0	21.39	21.69	21.67		
3	16QAM	1	8	21.32	21.67	21.32		
3	16QAM	1	14	21.48	21.23	21.39	22	2
3	16QAM	8	0	21.15	21.26	21.14		
3	16QAM	8	4	21.16	21.26	21.08		
3	16QAM	8	7	21.11	21.16	21.11	22	2
3	16QAM	15	0	21.34	21.21	21.15		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.09	23.10	23.16	24	0
1.4	QPSK	1	3	22.93	23.20	23.26		
1.4	QPSK	1	5	23.20	23.16	22.97		
1.4	QPSK	3	0	22.21	22.48	22.21		
1.4	QPSK	3	1	22.21	22.31	22.18		
1.4	QPSK	3	3	22.13	22.39	22.21		
1.4	QPSK	6	0	22.04	22.33	22.06	23	1
1.4	16QAM	1	0	22.21	22.31	22.18	23	1
1.4	16QAM	1	3	22.13	22.39	22.21		
1.4	16QAM	1	5	22.04	22.33	22.06		
1.4	16QAM	3	0	21.39	21.69	21.67		
1.4	16QAM	3	1	21.32	21.67	21.32		
1.4	16QAM	3	3	21.48	21.23	21.39		
1.4	16QAM	6	0	20.90	20.97	21.24	22	2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.42	23.42	23.40	24.5	0
10	QPSK	1	25	23.41	23.40	23.80		
10	QPSK	1	49	23.42	23.31	23.32		
10	QPSK	25	0	22.46	22.42	22.53	24	0.5
10	QPSK	25	12	22.44	22.42	22.38		
10	QPSK	25	25	22.48	22.44	22.39		
10	QPSK	50	0	22.40	22.42	22.43	24	0.5
10	16QAM	1	0	22.14	22.06	22.50		
10	16QAM	1	25	22.13	22.14	22.01		
10	16QAM	1	49	22.27	22.25	22.26	23	1.5
10	16QAM	25	0	21.46	21.45	21.39		
10	16QAM	25	12	21.48	21.47	21.40		
10	16QAM	25	25	21.53	21.58	21.30	23	1.5
10	16QAM	50	0	21.51	21.34	21.43		
10	64QAM	1	0	21.70	21.75	21.62		
10	64QAM	1	25	21.88	22.06	22.02	23	1.5
10	64QAM	1	49	21.38	21.39	21.86		
10	64QAM	25	0	20.82	20.87	20.92	22	2.5
10	64QAM	25	12	21.02	20.89	20.84		
10	64QAM	25	25	20.97	20.92	20.84		
10	64QAM	50	0	20.86	20.77	20.86		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5	Tune-up limit (dBm)	MPR (dB)
5	QPSK	1	0	23.67	23.50	23.53	24.5	0
5	QPSK	1	12	23.73	23.61	23.53		
5	QPSK	1	24	23.79	23.40	23.47		
5	QPSK	12	0	22.53	22.32	22.44	24	0.5
5	QPSK	12	7	22.59	22.39	22.36		
5	QPSK	12	13	22.47	22.40	22.33		
5	QPSK	25	0	22.58	22.43	22.45	24	0.5
5	16QAM	1	0	22.01	22.16	22.03		
5	16QAM	1	12	22.00	22.00	22.08		
5	16QAM	1	24	22.00	22.05	22.12	23	1.5
5	16QAM	12	0	21.53	21.22	21.48		
5	16QAM	12	7	21.41	21.21	21.19		
5	16QAM	12	13	21.42	21.23	21.14	23	1.5
5	16QAM	25	0	21.61	21.48	21.37		
5	64QAM	1	0	21.59	21.42	21.72		
5	64QAM	1	12	22.09	21.84	21.94	22	2.5
5	64QAM	1	24	21.45	21.75	21.69		
5	64QAM	12	0	20.77	20.88	20.57		
5	64QAM	12	7	20.95	20.94	20.92		
5	64QAM	12	13	21.04	20.86	20.88		
5	64QAM	25	0	20.80	20.67	20.65		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.71	23.73	23.71	24.5	0
3	QPSK	1	8	23.70	23.57	23.55		
3	QPSK	1	14	23.70	23.77	23.63		
3	QPSK	8	0	22.55	22.46	22.39	24	0.5
3	QPSK	8	4	22.58	22.61	22.36		
3	QPSK	8	7	22.57	22.61	22.45		
3	QPSK	15	0	22.72	22.48	22.42	24	0.5
3	16QAM	1	0	22.20	22.30	22.32		
3	16QAM	1	8	22.14	22.31	22.20		
3	16QAM	1	14	22.20	22.58	22.24	23	1.5
3	16QAM	8	0	21.43	21.43	21.30		
3	16QAM	8	4	21.76	21.59	21.41		
3	16QAM	8	7	21.74	21.58	21.51	23	1.5
3	16QAM	15	0	21.75	21.62	21.67		
3	64QAM	1	0	21.65	21.57	21.85		
3	64QAM	1	8	21.68	21.44	21.77	23	1.5
3	64QAM	1	14	21.69	21.90	21.80		
3	64QAM	8	0	20.99	20.67	20.70		
3	64QAM	8	4	20.92	20.72	20.79	22	2.5
3	64QAM	8	7	20.80	20.74	20.65		
3	64QAM	15	0	20.91	20.69	20.70		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.40	23.20	23.05	24.5	0
1.4	QPSK	1	3	23.50	23.15	23.09		
1.4	QPSK	1	5	23.50	23.07	23.01		
1.4	QPSK	3	0	23.70	23.38	23.22		
1.4	QPSK	3	1	23.70	23.42	23.23		
1.4	QPSK	3	3	23.44	23.51	23.28		
1.4	QPSK	6	0	22.37	22.19	22.17	24	0.5
1.4	16QAM	1	0	22.05	22.05	22.09	24	0.5
1.4	16QAM	1	3	22.06	22.04	22.00		
1.4	16QAM	1	5	22.00	22.05	22.00		
1.4	16QAM	3	0	22.26	22.04	22.07		
1.4	16QAM	3	1	22.29	22.12	22.04		
1.4	16QAM	3	3	22.30	22.14	22.09		
1.4	16QAM	6	0	21.44	21.30	21.01	23	1.5
1.4	64QAM	1	0	21.54	21.96	22.75	23	1.5
1.4	64QAM	1	3	21.87	21.97	22.04		
1.4	64QAM	1	5	21.65	21.87	22.21		
1.4	64QAM	3	0	21.64	21.56	21.45		
1.4	64QAM	3	1	21.90	21.44	21.38		
1.4	64QAM	3	3	21.52	21.58	21.43		
1.4	64QAM	6	0	20.68	20.69	20.69	22	2.5



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350	24.5	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.72	23.83	23.70		
20	QPSK	1	49	24.15	23.73	23.88	24	0.5
20	QPSK	1	99	23.81	23.70	23.73		
20	QPSK	50	0	23.10	23.08	23.12		
20	QPSK	50	24	23.13	23.14	23.11	24	0.5
20	QPSK	50	50	23.15	23.09	23.10		
20	QPSK	100	0	23.14	23.09	23.13		
20	16QAM	1	0	22.83	22.67	22.64	24	0.5
20	16QAM	1	49	22.96	22.76	22.62		
20	16QAM	1	99	22.63	22.71	22.69		
20	16QAM	50	0	22.16	22.15	22.01	23	1.5
20	16QAM	50	24	22.22	22.24	22.15		
20	16QAM	50	50	22.38	21.97	22.23		
20	16QAM	100	0	22.24	22.05	22.00	23	1.5
20	64QAM	1	0	22.33	22.29	22.65		
20	64QAM	1	49	22.55	22.08	22.52		
20	64QAM	1	99	22.64	22.85	22.53	22	2.5
20	64QAM	50	0	21.65	21.61	21.41		
20	64QAM	50	24	21.35	21.52	21.48		
20	64QAM	50	50	21.45	21.35	21.45	22	2.5
20	64QAM	100	0	21.58	21.43	21.38		
Channel				20825	21100	21375	24.5	0
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.93	23.85	23.78		
15	QPSK	1	37	24.14	23.92	23.90	24	0.5
15	QPSK	1	74	23.77	23.77	23.88		
15	QPSK	36	0	23.39	23.11	23.20		
15	QPSK	36	20	23.39	23.19	23.41	24	0.5
15	QPSK	36	39	23.41	23.05	23.33		
15	QPSK	75	0	23.32	23.07	23.27		
15	16QAM	1	0	22.95	23.34	23.32	24	0.5
15	16QAM	1	37	23.23	23.22	23.20		
15	16QAM	1	74	23.24	23.10	22.97		
15	16QAM	36	0	22.36	22.01	22.08	23	1.5
15	16QAM	36	20	22.35	22.05	22.27		
15	16QAM	36	39	22.41	22.03	22.29		
15	16QAM	75	0	22.31	22.05	22.19	23	1.5
15	64QAM	1	0	22.51	22.91	22.16		
15	64QAM	1	37	22.89	22.86	22.54		
15	64QAM	1	74	22.41	22.16	22.24	22	2.5
15	64QAM	36	0	21.76	21.56	21.42		
15	64QAM	36	20	21.79	21.62	21.62		
15	64QAM	36	39	21.55	21.48	21.41	22	2.5
15	64QAM	75	0	21.60	21.47	21.58		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.78	23.70	23.75	24.5	0
10	QPSK	1	25	23.96	23.90	24.13		
10	QPSK	1	49	23.90	23.77	23.64		
10	QPSK	25	0	23.43	23.15	23.35	24	0.5
10	QPSK	25	12	23.47	23.23	23.38		
10	QPSK	25	25	23.24	23.13	23.22		
10	QPSK	50	0	23.40	23.19	23.39	24	0.5
10	16QAM	1	0	22.90	22.91	22.90		
10	16QAM	1	25	23.20	22.99	23.36		
10	16QAM	1	49	22.88	23.06	23.00	23	1.5
10	16QAM	25	0	22.40	21.97	22.32		
10	16QAM	25	12	22.36	21.94	22.24		
10	16QAM	25	25	22.32	22.13	22.26	23	1.5
10	16QAM	50	0	22.23	22.11	22.42		
10	64QAM	1	0	22.43	22.29	22.27		
10	64QAM	1	25	22.18	22.65	22.66	23	1.5
10	64QAM	1	49	22.59	22.40	22.20		
10	64QAM	25	0	21.80	21.62	21.43		
10	64QAM	25	12	21.73	21.53	21.43	22	2.5
10	64QAM	25	25	21.80	21.47	21.30		
10	64QAM	50	0	21.69	21.50	21.55		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.77	24.00	23.82	24.5	0
5	QPSK	1	12	24.13	23.77	24.00		
5	QPSK	1	24	23.98	23.70	23.63		
5	QPSK	12	0	23.25	23.15	23.38	24	0.5
5	QPSK	12	7	23.34	23.26	23.24		
5	QPSK	12	13	23.39	23.23	23.24		
5	QPSK	25	0	23.40	23.10	23.32	24	0.5
5	16QAM	1	0	23.46	23.33	23.20		
5	16QAM	1	12	23.18	23.02	23.11		
5	16QAM	1	24	23.00	23.00	23.10	23	1.5
5	16QAM	12	0	22.14	22.23	22.07		
5	16QAM	12	7	22.20	21.94	22.32		
5	16QAM	12	13	22.44	22.28	21.94	23	1.5
5	16QAM	25	0	22.49	22.11	22.24		
5	64QAM	1	0	22.28	22.51	22.45		
5	64QAM	1	12	22.84	22.60	22.58	22	2.5
5	64QAM	1	24	22.29	22.47	22.07		
5	64QAM	12	0	21.49	21.74	21.38		
5	64QAM	12	7	21.77	21.62	21.22	22	2.5
5	64QAM	12	13	21.67	21.55	21.04		
5	64QAM	25	0	21.58	21.52	21.19		

<Full Power for Body >

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.20	23.26	23.34	23.5	0
20	QPSK	1	49	23.09	23.28	23.26		
20	QPSK	1	99	23.15	23.13	23.01		
20	QPSK	50	0	22.29	22.30	22.36	22.5	1
20	QPSK	50	24	22.03	22.18	22.15		
20	QPSK	50	50	22.21	22.27	22.29		
20	QPSK	100	0	22.20	22.36	22.37	22.5	1
20	16QAM	1	0	22.18	22.14	22.18		
20	16QAM	1	49	22.02	22.18	22.01		
20	16QAM	1	99	22.26	22.30	22.01	21.5	2
20	16QAM	50	0	21.17	21.23	21.38		
20	16QAM	50	24	21.11	21.18	21.18		
20	16QAM	50	50	21.09	21.13	21.27	21.5	2
20	16QAM	100	0	21.10	21.46	21.32		
20	64QAM	1	0	21.32	21.03	21.14		
20	64QAM	1	49	20.96	21.02	21.12	21.5	2
20	64QAM	1	99	21.02	21.10	21.08		
20	64QAM	50	0	20.22	20.17	20.22	20.5	3
20	64QAM	50	24	20.16	20.12	20.19		
20	64QAM	50	50	20.10	20.09	20.13		
20	64QAM	100	0	20.16	20.11	20.17		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.15	23.32	23.26	23.5	0
15	QPSK	1	37	22.94	23.28	23.15		
15	QPSK	1	74	23.10	23.26	22.94		
15	QPSK	36	0	22.34	22.24	22.45	22.5	1
15	QPSK	36	20	21.98	22.32	22.24		
15	QPSK	36	39	22.19	22.23	22.38		
15	QPSK	75	0	22.23	22.33	22.39	22.5	1
15	16QAM	1	0	21.22	21.26	21.39		
15	16QAM	1	37	21.39	21.14	21.40		
15	16QAM	1	74	21.32	21.39	21.22	21.5	2
15	16QAM	36	0	21.40	21.13	21.32		
15	16QAM	36	20	21.32	21.14	21.19		
15	16QAM	36	39	21.13	21.19	21.22	21.5	2
15	16QAM	75	0	21.26	21.32	21.29		
15	64QAM	1	0	20.99	21.06	21.08		
15	64QAM	1	37	21.26	21.25	21.30	21.5	2
15	64QAM	1	74	20.93	20.97	21.15		
15	64QAM	36	0	19.89	20.12	20.20		
15	64QAM	36	20	20.04	20.26	20.08	20.5	3
15	64QAM	36	39	19.82	19.90	20.27		
15	64QAM	75	0	19.87	19.85	20.12		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.97	23.14	23.08	23.5	0
10	QPSK	1	25	22.97	23.11	23.06		
10	QPSK	1	49	23.07	23.26	23.11		
10	QPSK	25	0	22.13	22.31	22.33	22.5	1
10	QPSK	25	12	22.04	22.30	22.28		
10	QPSK	25	25	22.19	22.34	22.31		
10	QPSK	50	0	22.31	22.00	22.34	22.5	1
10	16QAM	1	0	21.64	21.31	21.36		
10	16QAM	1	25	21.41	21.64	21.78		
10	16QAM	1	49	21.78	21.31	21.64	21.5	2
10	16QAM	25	0	21.31	21.01	21.27		
10	16QAM	25	12	21.27	21.36	21.31		
10	16QAM	25	25	21.36	21.08	21.41	21.5	2
10	16QAM	50	0	21.36	21.07	21.25		
10	64QAM	1	0	21.07	20.88	20.79		
10	64QAM	1	25	20.75	20.94	21.01	21.5	2
10	64QAM	1	49	20.72	20.77	20.38		
10	64QAM	25	0	19.71	19.91	20.35		
10	64QAM	25	12	20.19	20.33	20.21	20.5	3
10	64QAM	25	25	20.12	19.92	20.35		
10	64QAM	50	0	19.94	20.34	20.28		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.24	23.06	23.20	23.5	0
5	QPSK	1	12	23.06	23.12	23.05		
5	QPSK	1	24	23.05	23.32	22.96		
5	QPSK	12	0	22.15	22.22	22.34	22.5	1
5	QPSK	12	7	22.18	22.37	22.30		
5	QPSK	12	13	22.22	22.15	22.32		
5	QPSK	25	0	21.85	22.24	22.35	22.5	1
5	16QAM	1	0	21.58	21.31	21.36		
5	16QAM	1	12	21.36	21.41	21.36		
5	16QAM	1	24	21.31	21.27	21.58	21.5	2
5	16QAM	12	0	21.27	21.36	21.16		
5	16QAM	12	7	21.31	21.24	21.27		
5	16QAM	12	13	21.27	21.16	21.34	21.5	2
5	16QAM	25	0	20.95	21.18	21.28		
5	64QAM	1	0	20.69	21.02	21.00		
5	64QAM	1	12	21.04	21.15	20.54	21.5	2
5	64QAM	1	24	20.54	20.89	20.70		
5	64QAM	12	0	19.80	19.88	20.23		
5	64QAM	12	7	20.09	20.25	20.03	20.5	3
5	64QAM	12	13	20.06	20.24	20.16		
5	64QAM	25	0	19.72	19.87	19.92		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.09	23.10	23.16	23.5	0
3	QPSK	1	8	22.93	23.20	23.26		
3	QPSK	1	14	23.20	23.26	22.97		
3	QPSK	8	0	22.21	22.48	22.21	22.5	1
3	QPSK	8	4	22.21	22.31	22.18		
3	QPSK	8	7	22.13	22.39	22.21		
3	QPSK	15	0	22.23	22.38	22.17	22.5	1
3	16QAM	1	0	21.39	21.69	21.67		
3	16QAM	1	8	21.32	21.67	21.32		
3	16QAM	1	14	21.48	21.23	21.39	21.5	2
3	16QAM	8	0	21.15	21.26	21.14		
3	16QAM	8	4	21.16	21.26	21.08		
3	16QAM	8	7	21.11	21.16	21.11	21.5	2
3	16QAM	15	0	21.34	21.21	21.15		
3	64QAM	1	0	21.05	21.14	20.69		
3	64QAM	1	8	20.83	20.86	20.55	21.5	2
3	64QAM	1	14	21.07	20.63	21.08		
3	64QAM	8	0	20.00	20.08	19.92		
3	64QAM	8	4	19.93	20.13	20.04	20.5	3
3	64QAM	8	7	19.94	20.14	19.88		
3	64QAM	15	0	19.94	20.08	19.95		

Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.09	23.10	23.16	23.5	0
1.4	QPSK	1	3	22.93	23.20	23.26		
1.4	QPSK	1	5	23.20	23.16	22.97		
1.4	QPSK	3	0	22.21	22.48	22.21		
1.4	QPSK	3	1	22.21	22.31	22.18		
1.4	QPSK	3	3	22.13	22.39	22.21		
1.4	QPSK	6	0	22.04	22.33	22.06	22.5	1
1.4	16QAM	1	0	22.21	22.31	22.18	22.5	1
1.4	16QAM	1	3	22.13	22.39	22.21		
1.4	16QAM	1	5	22.04	22.33	22.06		
1.4	16QAM	3	0	21.39	21.69	21.67		
1.4	16QAM	3	1	21.32	21.67	21.32		
1.4	16QAM	3	3	21.48	21.23	21.39		
1.4	16QAM	6	0	20.90	20.97	21.24	21.5	2
1.4	64QAM	1	0	20.75	20.65	21.17	21.5	2
1.4	64QAM	1	3	20.81	21.01	21.39		
1.4	64QAM	1	5	20.64	20.65	21.26		
1.4	64QAM	3	0	21.11	20.61	20.53		
1.4	64QAM	3	1	20.58	21.29	21.29		
1.4	64QAM	3	3	21.00	20.61	21.14		
1.4	64QAM	6	0	20.32	20.31	20.35	20.5	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600	24	0
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.64	22.65	22.57		
10	QPSK	1	25	23.07	22.68	22.61	24	0
10	QPSK	1	49	22.78	22.74	22.74		
10	QPSK	25	0	22.90	22.74	22.74		
10	QPSK	25	12	22.80	22.74	22.66	24	0
10	QPSK	25	25	22.83	22.74	22.76		
10	QPSK	50	0	22.85	22.72	22.77		
10	16QAM	1	0	22.71	22.40	22.40	24	0
10	16QAM	1	25	22.78	22.65	22.58		
10	16QAM	1	49	22.42	22.40	22.30		
10	16QAM	25	0	21.90	21.66	21.84	23	1
10	16QAM	25	12	21.82	21.77	21.77		
10	16QAM	25	25	21.86	21.67	21.86		
10	16QAM	50	0	21.86	21.85	21.78	23	1
10	64QAM	1	0	22.33	22.06	21.86		
10	64QAM	1	25	21.91	21.83	22.04		
10	64QAM	1	49	21.75	21.62	21.81	22	2
10	64QAM	25	0	20.90	20.68	20.91		
10	64QAM	25	12	21.10	20.59	20.60		
10	64QAM	25	25	21.13	20.92	20.82	22	2
10	64QAM	50	0	20.90	20.67	20.83		
Channel				20425	20525	20625	24	0
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.81	22.62	22.50		
5	QPSK	1	12	22.72	22.87	22.86	24	0
5	QPSK	1	24	22.66	22.78	22.71		
5	QPSK	12	0	22.82	22.68	22.79	24	0
5	QPSK	12	7	22.87	22.73	22.69		
5	QPSK	12	13	22.86	22.65	22.64		
5	QPSK	25	0	22.97	22.80	22.67	24	0
5	16QAM	1	0	22.22	22.25	22.20		
5	16QAM	1	12	22.54	22.36	22.42		
5	16QAM	1	24	22.45	22.26	22.13	23	1
5	16QAM	12	0	21.84	21.58	21.60		
5	16QAM	12	7	21.80	21.55	21.62		
5	16QAM	12	13	21.66	21.70	21.58	23	1
5	16QAM	25	0	22.00	21.73	21.80		
5	64QAM	1	0	21.93	22.88	21.90		
5	64QAM	1	12	22.10	21.90	22.01	22	2
5	64QAM	1	24	21.42	21.91	21.24		
5	64QAM	12	0	21.05	20.74	20.69		
5	64QAM	12	7	20.92	20.79	20.62	22	2
5	64QAM	12	13	20.78	20.81	20.58		
5	64QAM	25	0	20.87	20.89	20.55		



FCC SAR Test Report

Report No. : FA931208-01

Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.01	22.60	22.64	24	0
3	QPSK	1	8	23.01	22.87	22.87		
3	QPSK	1	14	23.02	22.86	22.65		
3	QPSK	8	0	22.93	22.72	22.71	24	0
3	QPSK	8	4	22.90	22.76	22.76		
3	QPSK	8	7	22.74	22.75	22.76		
3	QPSK	15	0	22.87	22.73	22.72	24	0
3	16QAM	1	0	22.43	22.40	22.61		
3	16QAM	1	8	22.41	22.45	22.54		
3	16QAM	1	14	22.81	22.87	22.66	23	1
3	16QAM	8	0	21.95	21.79	21.85		
3	16QAM	8	4	21.98	21.91	21.91		
3	16QAM	8	7	21.93	21.79	21.80	23	1
3	16QAM	15	0	21.91	21.84	21.85		
3	64QAM	1	0	22.11	21.90	21.45		
3	64QAM	1	8	21.81	21.67	21.33	22	2
3	64QAM	1	14	21.91	21.45	21.44		
3	64QAM	8	0	20.96	20.78	20.80		
3	64QAM	8	4	20.97	20.83	20.74	22	2
3	64QAM	8	7	20.98	20.59	20.74		
3	64QAM	15	0	20.97	20.78	20.69		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.97	22.77	22.66	24	0
1.4	QPSK	1	3	23.00	22.83	22.75		
1.4	QPSK	1	5	23.03	22.76	22.69		
1.4	QPSK	3	0	23.02	22.67	22.84		
1.4	QPSK	3	1	23.02	22.81	22.96		
1.4	QPSK	3	3	23.01	22.87	22.70		
1.4	QPSK	6	0	22.93	22.67	22.73	24	0
1.4	16QAM	1	0	22.37	22.31	22.30	24	0
1.4	16QAM	1	3	22.61	22.59	22.21		
1.4	16QAM	1	5	22.39	22.61	22.12		
1.4	16QAM	3	0	22.77	22.68	22.40		
1.4	16QAM	3	1	22.87	22.77	22.66		
1.4	16QAM	3	3	22.87	22.62	22.63		
1.4	16QAM	6	0	21.77	21.69	21.53	23	1
1.4	64QAM	1	0	21.76	21.51	21.43	23	1
1.4	64QAM	1	3	21.89	21.66	21.69		
1.4	64QAM	1	5	21.67	21.45	22.13		
1.4	64QAM	3	0	21.66	21.91	21.79		
1.4	64QAM	3	1	21.78	21.93	21.82		
1.4	64QAM	3	3	21.61	21.39	21.81		
1.4	64QAM	6	0	20.88	20.69	20.73	22	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.65	23.74	23.66	24	0
20	QPSK	1	49	23.95	23.72	23.70		
20	QPSK	1	99	23.76	23.56	23.61		
20	QPSK	50	0	23.66	23.48	23.28	24	0
20	QPSK	50	24	23.61	23.52	23.43		
20	QPSK	50	50	23.73	23.37	23.66		
20	QPSK	100	0	23.73	23.37	23.59		
20	16QAM	1	0	23.23	23.02	23.06	24	0
20	16QAM	1	49	23.31	23.08	23.41		
20	16QAM	1	99	23.06	22.93	23.06		
20	16QAM	50	0	22.72	22.44	22.34	23	1
20	16QAM	50	24	22.54	22.49	22.36		
20	16QAM	50	50	22.72	22.33	22.59		
20	16QAM	100	0	22.73	22.41	22.57		
20	64QAM	1	0	22.47	22.69	22.58	23	1
20	64QAM	1	49	22.01	22.13	22.41		
20	64QAM	1	99	22.75	22.53	22.67		
20	64QAM	50	0	21.48	21.38	21.38	22	2
20	64QAM	50	24	21.61	21.45	21.45		
20	64QAM	50	50	21.69	21.72	21.62		
20	64QAM	100	0	21.68	21.63	21.63		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.84	23.64	23.40	24	0
15	QPSK	1	37	23.88	23.71	23.67		
15	QPSK	1	74	23.87	23.87	23.46		
15	QPSK	36	0	23.80	23.54	23.65	24	0
15	QPSK	36	20	23.80	23.58	23.58		
15	QPSK	36	39	23.71	23.45	23.65		
15	QPSK	75	0	23.65	23.47	23.56		
15	16QAM	1	0	23.50	23.31	23.27	24	0
15	16QAM	1	37	23.58	23.14	23.21		
15	16QAM	1	74	23.19	23.15	23.19		
15	16QAM	36	0	22.76	22.41	22.36	23	1
15	16QAM	36	20	22.68	22.45	22.59		
15	16QAM	36	39	22.60	22.32	22.56		
15	16QAM	75	0	22.63	22.35	22.58		
15	64QAM	1	0	22.48	22.68	22.08	23	1
15	64QAM	1	37	22.07	22.22	22.47		
15	64QAM	1	74	22.77	22.54	22.25		
15	64QAM	36	0	21.51	21.45	21.40	22	2
15	64QAM	36	20	21.75	21.35	21.63		
15	64QAM	36	39	21.68	21.35	21.47		
15	64QAM	75	0	21.59	21.54	21.28		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.54	23.50	23.42	24	0
10	QPSK	1	25	23.89	23.77	23.70		
10	QPSK	1	49	23.51	23.61	23.52		
10	QPSK	25	0	23.80	23.48	23.67	24	0
10	QPSK	25	12	23.70	23.60	23.70		
10	QPSK	25	25	23.77	23.44	23.56		
10	QPSK	50	0	23.75	23.47	23.70	24	0
10	16QAM	1	0	23.35	23.45	23.46		
10	16QAM	1	25	23.83	23.43	23.45		
10	16QAM	1	49	23.84	23.35	23.41	23	1
10	16QAM	25	0	22.73	22.48	22.48		
10	16QAM	25	12	22.82	22.50	22.64		
10	16QAM	25	25	22.67	22.40	22.54	23	1
10	16QAM	50	0	22.80	22.36	22.60		
10	64QAM	1	0	22.87	22.58	22.47		
10	64QAM	1	25	22.63	22.50	22.81	22	2
10	64QAM	1	49	22.73	22.36	22.20		
10	64QAM	25	0	21.90	21.21	21.35		
10	64QAM	25	12	21.60	21.54	21.50	22	2
10	64QAM	25	25	21.80	21.16	21.54		
10	64QAM	50	0	21.57	21.30	21.52		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.53	23.42	23.58	24	0
5	QPSK	1	12	23.86	23.86	23.64		
5	QPSK	1	24	23.71	23.40	23.42		
5	QPSK	12	0	23.66	23.53	23.69	24	0
5	QPSK	12	7	23.79	23.53	23.58		
5	QPSK	12	13	23.79	23.56	23.56		
5	QPSK	25	0	23.83	23.43	23.56	24	0
5	16QAM	1	0	23.74	23.48	23.46		
5	16QAM	1	12	23.94	23.65	23.48		
5	16QAM	1	24	23.78	23.52	23.45	23	1
5	16QAM	12	0	22.79	22.45	22.67		
5	16QAM	12	7	22.74	22.52	22.47		
5	16QAM	12	13	22.87	22.56	22.40	23	1
5	16QAM	25	0	22.72	22.43	22.49		
5	64QAM	1	0	22.57	22.17	22.39		
5	64QAM	1	12	22.90	22.56	22.06	22	2
5	64QAM	1	24	22.34	22.63	22.00		
5	64QAM	12	0	21.82	21.50	21.60		
5	64QAM	12	7	21.73	21.39	21.35	22	2
5	64QAM	12	13	21.76	21.53	21.28		
5	64QAM	25	0	21.92	21.49	21.51		

<Full Power for Head / Body >

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.82	22.85	22.76	24	0
20	QPSK	1	49	22.90	22.75	23.00		
20	QPSK	1	99	22.58	22.54	22.53		
20	QPSK	50	0	21.96	21.75	22.03	23	1
20	QPSK	50	24	21.90	21.65	21.86		
20	QPSK	50	50	21.87	21.64	21.97		
20	QPSK	100	0	21.92	21.77	21.96	23	1
20	16QAM	1	0	21.30	21.38	21.53		
20	16QAM	1	49	21.55	21.50	21.62		
20	16QAM	1	99	21.34	21.15	21.29	22	2
20	16QAM	50	0	20.81	20.90	21.04		
20	16QAM	50	24	20.72	20.65	20.92		
20	16QAM	50	50	20.77	20.69	21.01	22	2
20	16QAM	100	0	20.82	20.76	21.00		
20	64QAM	1	0	20.77	20.78	20.53		
20	64QAM	1	49	20.34	20.69	20.57	21	3
20	64QAM	1	99	20.58	20.58	20.58		
20	64QAM	50	0	19.64	19.60	19.64		
20	64QAM	50	24	19.53	19.52	19.57	21	3
20	64QAM	50	50	19.59	19.63	19.66		
20	64QAM	100	0	19.53	19.54	19.60		



Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.74	22.56	22.89	24	0
15	QPSK	1	37	22.87	22.66	22.89		
15	QPSK	1	74	22.74	22.59	22.86		
15	QPSK	36	0	21.89	21.77	22.09	23	1
15	QPSK	36	20	21.68	21.64	21.86		
15	QPSK	36	39	21.81	21.69	22.00		
15	QPSK	75	0	21.78	21.81	21.96	23	1
15	16QAM	1	0	21.55	21.35	21.42		
15	16QAM	1	37	21.28	21.64	21.57		
15	16QAM	1	74	21.73	21.24	21.67	22	2
15	16QAM	36	0	20.79	20.81	21.11		
15	16QAM	36	20	20.67	20.68	20.88		
15	16QAM	36	39	20.84	20.61	21.07	22	2
15	16QAM	75	0	20.91	20.76	21.10		
15	64QAM	1	0	20.33	20.77	20.59		
15	64QAM	1	37	21.16	20.88	20.92	22	2
15	64QAM	1	74	20.45	20.84	20.58		
15	64QAM	36	0	19.79	19.61	19.94		
15	64QAM	36	20	19.60	19.41	19.75	21	3
15	64QAM	36	39	19.75	19.65	19.91		
15	64QAM	75	0	19.67	19.54	19.74		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.53	22.44	22.75	24	0
10	QPSK	1	25	22.94	22.53	22.48		
10	QPSK	1	49	22.48	22.50	22.76		
10	QPSK	25	0	21.72	21.76	22.07	23	1
10	QPSK	25	12	21.79	21.61	21.92		
10	QPSK	25	25	21.84	21.65	22.00		
10	QPSK	50	0	21.83	21.74	22.04	23	1
10	16QAM	1	0	21.35	21.70	21.52		
10	16QAM	1	25	21.26	21.42	21.70		
10	16QAM	1	49	21.49	21.46	21.55	22	2
10	16QAM	25	0	20.60	20.80	20.89		
10	16QAM	25	12	20.66	20.54	20.92		
10	16QAM	25	25	20.73	20.66	20.91	22	2
10	16QAM	50	0	20.87	20.72	21.08		
10	64QAM	1	0	20.26	20.30	20.53		
10	64QAM	1	25	20.78	20.80	21.27	22	2
10	64QAM	1	49	20.69	20.55	20.93		
10	64QAM	25	0	19.53	19.81	20.07		
10	64QAM	25	12	19.51	19.31	19.83	21	3
10	64QAM	25	25	19.90	19.80	19.91		
10	64QAM	50	0	19.66	19.56	19.88		

Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.58	22.75	22.95	24	0
5	QPSK	1	12	22.77	22.64	22.87		
5	QPSK	1	24	22.89	22.51	22.77		
5	QPSK	12	0	21.61	21.45	21.65	23	1
5	QPSK	12	7	21.55	21.71	21.79		
5	QPSK	12	13	21.65	21.89	21.48		
5	QPSK	25	0	21.57	21.65	21.92	23	1
5	16QAM	1	0	21.56	21.32	21.81		
5	16QAM	1	12	21.62	21.64	21.68		
5	16QAM	1	24	21.68	21.75	21.74	22	2
5	16QAM	12	0	20.80	20.60	20.85		
5	16QAM	12	7	20.48	20.79	20.69		
5	16QAM	12	13	20.69	20.61	20.91	22	2
5	16QAM	25	0	20.74	20.74	21.02		
5	64QAM	1	0	20.64	20.03	20.42		
5	64QAM	1	12	20.18	20.59	20.44	22	2
5	64QAM	1	24	20.67	20.58	20.86		
5	64QAM	12	0	19.55	19.32	19.80		
5	64QAM	12	7	19.40	19.76	19.57	21	3
5	64QAM	12	13	19.34	19.61	19.57		
5	64QAM	25	0	19.50	19.83	19.66		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.75	22.67	22.73	24	0
3	QPSK	1	8	22.26	22.38	22.41		
3	QPSK	1	14	22.76	22.45	22.72		
3	QPSK	8	0	21.52	21.79	21.69	23	1
3	QPSK	8	4	21.57	21.73	21.72		
3	QPSK	8	7	21.46	21.69	21.74		
3	QPSK	15	0	21.62	21.69	21.76	23	1
3	16QAM	1	0	21.23	21.49	21.21		
3	16QAM	1	8	21.50	21.24	21.25		
3	16QAM	1	14	21.49	21.24	21.60	22	2
3	16QAM	8	0	20.65	20.47	20.76		
3	16QAM	8	4	20.54	20.81	20.77		
3	16QAM	8	7	20.67	20.77	20.62	22	2
3	16QAM	15	0	20.59	20.75	20.73		
3	64QAM	1	0	20.66	20.68	20.34		
3	64QAM	1	8	20.67	20.60	20.61	22	2
3	64QAM	1	14	20.57	20.61	20.29		
3	64QAM	8	0	19.27	19.37	19.55		
3	64QAM	8	4	19.37	19.44	19.39	21	3
3	64QAM	8	7	19.34	19.51	19.57		
3	64QAM	15	0	19.38	19.47	19.52		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.75	22.49	22.90	24	0
1.4	QPSK	1	3	22.45	22.65	22.87		
1.4	QPSK	1	5	22.71	22.45	22.45		
1.4	QPSK	3	0	22.75	22.65	22.32		
1.4	QPSK	3	1	22.79	22.72	22.42		
1.4	QPSK	3	3	22.78	22.69	22.45		
1.4	QPSK	6	0	21.65	21.69	21.70	23	1
1.4	16QAM	1	0	21.34	21.34	21.48	23	1
1.4	16QAM	1	3	21.59	21.45	21.49		
1.4	16QAM	1	5	21.45	21.46	21.65		
1.4	16QAM	3	0	21.63	21.80	21.46		
1.4	16QAM	3	1	21.83	21.71	21.65		
1.4	16QAM	3	3	21.46	21.65	21.65		
1.4	16QAM	6	0	20.54	20.66	20.62	22	2
1.4	64QAM	1	0	20.21	20.59	20.28	22	2
1.4	64QAM	1	3	20.41	20.70	20.42		
1.4	64QAM	1	5	20.15	20.63	20.19		
1.4	64QAM	3	0	20.29	20.11	20.22		
1.4	64QAM	3	1	20.17	20.21	20.27		
1.4	64QAM	3	3	20.09	20.34	20.23		
1.4	64QAM	6	0	19.20	19.29	19.32	21	3

<Reduced Power for P-Sensor On>
<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	18.29	18.25	18.40	19	0
20	QPSK	1	49	18.32	18.21	18.39		
20	QPSK	1	99	18.09	18.00	18.11		
20	QPSK	50	0	18.14	18.26	18.31	19	0
20	QPSK	50	24	18.00	18.26	18.13		
20	QPSK	50	50	18.04	18.27	18.25		
20	QPSK	100	0	18.15	18.27	18.27		
20	16QAM	1	0	17.76	18.09	18.12	19	0
20	16QAM	1	49	18.11	18.16	18.09		
20	16QAM	1	99	18.09	18.21	18.10		
20	16QAM	50	0	18.10	18.22	18.30	19	0
20	16QAM	50	24	18.07	18.14	18.30		
20	16QAM	50	50	18.12	18.23	18.23		
20	16QAM	100	0	17.98	18.20	18.24		
20	64QAM	1	0	17.87	17.80	17.64	19	0
20	64QAM	1	49	17.79	17.93	17.50		
20	64QAM	1	99	17.81	17.90	17.55		
20	64QAM	50	0	17.82	17.95	17.81	19	0
20	64QAM	50	24	18.01	18.03	18.05		
20	64QAM	50	50	17.91	17.98	18.01		
20	64QAM	100	0	18.05	18.03	18.05		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	18.24	18.14	18.17	19	0
15	QPSK	1	37	17.97	18.31	18.37		
15	QPSK	1	74	18.06	18.24	18.02		
15	QPSK	36	0	17.86	18.30	18.29	19	0
15	QPSK	36	20	18.01	18.26	18.14		
15	QPSK	36	39	18.06	18.00	18.20		
15	QPSK	75	0	17.98	18.12	18.20		
15	16QAM	1	0	18.20	18.18	18.02	19	0
15	16QAM	1	37	18.23	18.36	18.34		
15	16QAM	1	74	18.06	18.18	18.31		
15	16QAM	36	0	18.04	18.21	18.14	19	0
15	16QAM	36	20	18.07	18.20	18.30		
15	16QAM	36	39	18.23	18.28	18.29		
15	16QAM	75	0	18.02	18.36	18.20		
15	64QAM	1	0	17.82	17.94	17.99	19	0
15	64QAM	1	37	18.13	17.94	17.85		
15	64QAM	1	74	17.77	18.10	17.63		
15	64QAM	36	0	17.75	17.97	17.64	19	0
15	64QAM	36	20	18.06	18.06	18.02		
15	64QAM	36	39	18.03	18.12	18.10		
15	64QAM	75	0	17.98	18.18	18.14		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	18.19	18.30	18.08	19	0
10	QPSK	1	25	17.88	18.38	18.06		
10	QPSK	1	49	17.92	18.37	17.99		
10	QPSK	25	0	18.34	18.18	18.32	19	0
10	QPSK	25	12	17.97	18.26	18.18		
10	QPSK	25	25	17.86	18.11	18.15		
10	QPSK	50	0	18.05	18.08	18.24	19	0
10	16QAM	1	0	17.65	17.69	17.81		
10	16QAM	1	25	17.66	17.81	17.71		
10	16QAM	1	49	17.69	17.65	17.86	19	0
10	16QAM	25	0	17.98	18.11	18.07		
10	16QAM	25	12	18.04	18.23	18.25		
10	16QAM	25	25	18.03	18.05	18.11	19	0
10	16QAM	50	0	18.00	18.23	18.22		
10	64QAM	1	0	17.54	17.63	17.55		
10	64QAM	1	25	17.67	17.75	17.79	19	0
10	64QAM	1	49	17.54	17.94	17.88		
10	64QAM	25	0	17.72	18.06	17.78		
10	64QAM	25	12	17.97	18.16	18.07	19	0
10	64QAM	25	25	17.84	18.17	17.93		
10	64QAM	50	0	17.75	17.89	17.74		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	17.86	18.21	18.28	19	0
5	QPSK	1	12	17.92	18.26	18.27		
5	QPSK	1	24	17.84	18.11	17.91		
5	QPSK	12	0	17.94	18.03	18.17	19	0
5	QPSK	12	7	18.04	18.36	17.95		
5	QPSK	12	13	17.96	18.22	18.11		
5	QPSK	25	0	18.00	18.21	18.20	19	0
5	16QAM	1	0	18.02	17.63	17.58		
5	16QAM	1	12	17.87	17.88	17.96		
5	16QAM	1	24	17.58	17.59	17.65	19	0
5	16QAM	12	0	18.01	18.28	18.01		
5	16QAM	12	7	17.90	18.04	17.98		
5	16QAM	12	13	18.00	18.20	17.90	19	0
5	16QAM	25	0	18.04	18.27	18.03		
5	64QAM	1	0	18.03	18.22	18.13		
5	64QAM	1	12	18.01	18.20	18.05	19	0
5	64QAM	1	24	18.01	18.15	18.01		
5	64QAM	12	0	17.98	18.01	18.05		
5	64QAM	12	7	17.88	18.09	17.98	19	0
5	64QAM	12	13	18.05	18.20	17.91		
5	64QAM	25	0	18.04	18.20	17.89		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	18.00	18.19	18.29	19	0
3	QPSK	1	8	18.17	18.07	18.14		
3	QPSK	1	14	17.91	18.04	18.02		
3	QPSK	8	0	18.07	18.32	18.29	19	0
3	QPSK	8	4	18.08	18.17	18.20		
3	QPSK	8	7	18.02	18.35	18.16		
3	QPSK	15	0	18.05	18.33	18.16	19	0
3	16QAM	1	0	18.02	18.05	17.76		
3	16QAM	1	8	17.78	17.99	17.72		
3	16QAM	1	14	17.82	17.91	17.78	19	0
3	16QAM	8	0	17.76	17.72	18.18		
3	16QAM	8	4	17.88	18.05	18.21		
3	16QAM	8	7	17.72	17.78	18.12	19	0
3	16QAM	15	0	17.88	18.08	18.24		
3	64QAM	1	0	17.80	17.95	17.54		
3	64QAM	1	8	17.65	17.74	17.59	19	0
3	64QAM	1	14	17.75	17.82	17.55		
3	64QAM	8	0	17.69	17.82	17.69		
3	64QAM	8	4	17.68	17.86	17.66	19	0
3	64QAM	8	7	17.65	17.84	17.70		
3	64QAM	15	0	17.72	17.92	17.79		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	18.03	18.17	18.19	19	0
1.4	QPSK	1	3	18.19	18.36	18.19		
1.4	QPSK	1	5	17.98	18.19	18.04		
1.4	QPSK	3	0	18.21	18.32	18.32		
1.4	QPSK	3	1	18.15	18.34	18.22		
1.4	QPSK	3	3	18.08	18.32	18.21		
1.4	QPSK	6	0	17.97	17.96	18.31	19	0
1.4	16QAM	1	0	17.61	17.59	17.98	19	0
1.4	16QAM	1	3	17.95	18.08	18.08		
1.4	16QAM	1	5	17.84	17.94	18.06		
1.4	16QAM	3	0	17.72	17.97	18.18		
1.4	16QAM	3	1	17.93	18.02	18.22		
1.4	16QAM	3	3	18.22	17.93	18.10		
1.4	16QAM	6	0	17.87	17.92	18.14	19	0
1.4	64QAM	1	0	18.26	18.21	17.86	19	0
1.4	64QAM	1	3	18.33	18.04	17.99		
1.4	64QAM	1	5	18.20	18.21	17.86		
1.4	64QAM	3	0	17.85	17.81	17.89		
1.4	64QAM	3	1	17.86	18.21	17.97		
1.4	64QAM	3	3	17.82	17.92	17.87		
1.4	64QAM	6	0	17.84	17.91	17.86	19	0

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	19.38	19.41	19.46	20	0
20	QPSK	1	49	19.51	19.58	19.68		
20	QPSK	1	99	19.41	19.40	19.54		
20	QPSK	50	0	19.50	19.53	19.57	20	0
20	QPSK	50	24	19.55	19.58	19.50		
20	QPSK	50	50	19.54	19.54	19.56		
20	QPSK	100	0	19.53	19.55	19.57	20	0
20	16QAM	1	0	19.28	19.50	19.31		
20	16QAM	1	49	19.31	19.53	19.52		
20	16QAM	1	99	19.22	19.58	19.50	20	0
20	16QAM	50	0	19.39	19.57	19.29		
20	16QAM	50	24	19.31	19.50	19.62		
20	16QAM	50	50	19.28	19.42	19.62	20	0
20	16QAM	100	0	19.39	19.40	19.31		
20	64QAM	1	0	19.19	19.26	19.66		
20	64QAM	1	49	19.35	19.67	19.65	20	0
20	64QAM	1	99	19.46	19.51	19.65		
20	64QAM	50	0	19.56	19.40	19.61		
20	64QAM	50	24	19.53	19.58	19.50	20	0
20	64QAM	50	50	19.39	19.58	19.52		
20	64QAM	100	0	19.39	19.40	19.62		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	19.35	19.52	19.62	20	0
15	QPSK	1	37	19.38	19.59	19.53		
15	QPSK	1	74	19.37	19.45	19.44		
15	QPSK	36	0	19.49	19.58	19.61	20	0
15	QPSK	36	20	19.48	19.61	19.63		
15	QPSK	36	39	19.57	19.56	19.59		
15	QPSK	75	0	19.52	19.57	19.57	20	0
15	16QAM	1	0	19.45	19.63	19.21		
15	16QAM	1	37	19.57	19.53	19.63		
15	16QAM	1	74	19.61	19.44	19.20	20	0
15	16QAM	36	0	19.30	19.32	19.42		
15	16QAM	36	20	19.57	19.56	19.65		
15	16QAM	36	39	19.37	19.50	19.57	20	0
15	16QAM	75	0	19.29	19.64	19.67		
15	64QAM	1	0	19.40	19.74	19.63		
15	64QAM	1	37	19.41	19.76	19.71	20	0
15	64QAM	1	74	19.44	19.48	19.63		
15	64QAM	36	0	19.35	19.28	19.52		
15	64QAM	36	20	19.26	19.27	19.52	20	0
15	64QAM	36	39	19.53	19.17	19.60		
15	64QAM	75	0	19.33	19.18	19.50		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	19.41	19.38	19.66	20	0
10	QPSK	1	25	19.30	19.34	19.65		
10	QPSK	1	49	19.48	19.47	19.67		
10	QPSK	25	0	19.45	19.47	19.65	20	0
10	QPSK	25	12	19.55	19.56	19.48		
10	QPSK	25	25	19.49	19.43	19.49		
10	QPSK	50	0	19.41	19.45	19.48	20	0
10	16QAM	1	0	19.43	19.48	19.49		
10	16QAM	1	25	19.65	19.54	19.49		
10	16QAM	1	49	19.34	19.52	19.58	20	0
10	16QAM	25	0	19.41	19.43	19.47		
10	16QAM	25	12	19.43	19.42	19.26		
10	16QAM	25	25	19.35	19.36	19.55	20	0
10	16QAM	50	0	19.42	19.38	19.58		
10	64QAM	1	0	19.04	19.10	19.36		
10	64QAM	1	25	19.48	19.29	19.17	20	0
10	64QAM	1	49	19.25	19.47	19.41		
10	64QAM	25	0	19.18	19.42	19.43		
10	64QAM	25	12	19.28	19.18	19.49	20	0
10	64QAM	25	25	19.23	19.31	19.67		
10	64QAM	50	0	19.29	19.16	19.54		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	19.43	19.58	19.67	20	0
5	QPSK	1	12	19.53	19.50	19.62		
5	QPSK	1	24	19.53	19.62	19.64		
5	QPSK	12	0	19.50	19.56	19.63	20	0
5	QPSK	12	7	19.67	19.53	19.62		
5	QPSK	12	13	19.63	19.41	19.67		
5	QPSK	25	0	19.62	19.49	19.53	20	0
5	16QAM	1	0	19.53	19.32	19.31		
5	16QAM	1	12	19.41	19.56	19.65		
5	16QAM	1	24	19.35	19.53	19.24	20	0
5	16QAM	12	0	19.59	19.57	19.62		
5	16QAM	12	7	19.65	19.61	19.67		
5	16QAM	12	13	19.56	19.38	19.63	20	0
5	16QAM	25	0	19.54	19.45	19.67		
5	64QAM	1	0	19.36	19.28	19.07		
5	64QAM	1	12	19.13	19.48	19.45	20	0
5	64QAM	1	24	19.15	19.17	19.43		
5	64QAM	12	0	19.13	19.09	19.54		
5	64QAM	12	7	19.18	19.42	19.24	20	0
5	64QAM	12	13	19.13	19.47	19.40		
5	64QAM	25	0	19.36	19.14	19.43		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	19.49	19.55	19.59	20	0
3	QPSK	1	8	19.35	19.49	19.56		
3	QPSK	1	14	19.62	19.35	19.53		
3	QPSK	8	0	19.56	19.65	19.56	20	0
3	QPSK	8	4	19.35	19.63	19.64		
3	QPSK	8	7	19.56	19.41	19.50		
3	QPSK	15	0	19.64	19.56	19.56	20	0
3	16QAM	1	0	19.63	19.29	19.66		
3	16QAM	1	8	19.24	19.62	19.66		
3	16QAM	1	14	19.53	19.28	19.52	20	0
3	16QAM	8	0	19.47	19.50	19.49		
3	16QAM	8	4	19.63	19.53	19.55		
3	16QAM	8	7	19.65	19.45	19.58	20	0
3	16QAM	15	0	19.57	19.48	19.62		
3	64QAM	1	0	18.97	19.35	18.98		
3	64QAM	1	8	18.96	18.97	19.32	20	0
3	64QAM	1	14	18.96	19.03	19.46		
3	64QAM	8	0	19.05	19.28	19.20		
3	64QAM	8	4	19.12	19.29	19.24	20	0
3	64QAM	8	7	18.97	19.19	19.30		
3	64QAM	15	0	19.34	19.23	19.37		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	19.35	19.49	19.56	20	0
1.4	QPSK	1	3	19.62	19.35	19.53		
1.4	QPSK	1	5	19.56	19.65	19.56		
1.4	QPSK	3	0	19.35	19.63	19.64		
1.4	QPSK	3	1	19.41	19.56	19.65		
1.4	QPSK	3	3	19.35	19.53	19.24		
1.4	QPSK	6	0	19.59	19.57	19.62	20	0
1.4	16QAM	1	0	19.65	19.61	19.67	20	0
1.4	16QAM	1	3	19.53	19.62	19.64		
1.4	16QAM	1	5	19.48	19.65	19.18		
1.4	16QAM	3	0	19.56	19.41	19.50		
1.4	16QAM	3	1	19.64	19.56	19.56		
1.4	16QAM	3	3	19.63	19.29	19.66		
1.4	16QAM	6	0	19.24	19.62	19.66	20	0
1.4	64QAM	1	0	19.30	19.56	19.60	20	0
1.4	64QAM	1	3	19.38	19.70	19.47		
1.4	64QAM	1	5	19.27	19.65	19.29		
1.4	64QAM	3	0	19.21	19.39	19.63		
1.4	64QAM	3	1	19.19	19.20	19.56		
1.4	64QAM	3	3	19.28	19.22	19.27		
1.4	64QAM	6	0	19.33	19.27	19.43	20	0

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.35	22.38	22.28		
20	QPSK	1	49	22.73	22.34	22.38	23	0
20	QPSK	1	99	22.53	22.26	22.68		
20	QPSK	50	0	22.66	22.62	22.42		
20	QPSK	50	24	22.57	22.46	22.35	23	0
20	QPSK	50	50	22.67	22.58	22.58		
20	QPSK	100	0	22.42	22.34	22.33		
20	16QAM	1	0	21.99	22.28	22.01	23	0
20	16QAM	1	49	22.30	22.35	22.02		
20	16QAM	1	99	22.22	22.17	22.03		
20	16QAM	50	0	22.58	22.49	22.28	23	0
20	16QAM	50	24	22.69	22.59	22.47		
20	16QAM	50	50	22.28	22.46	22.69		
20	16QAM	100	0	22.64	22.41	22.48	23	0
20	64QAM	1	0	22.28	22.65	22.54		
20	64QAM	1	49	22.18	22.18	22.16		
20	64QAM	1	99	22.59	22.49	22.65	22	1
20	64QAM	50	0	21.44	21.18	21.50		
20	64QAM	50	24	21.28	21.58	21.58		
20	64QAM	50	50	21.59	21.63	21.23	22	1
20	64QAM	100	0	21.08	21.28	21.47		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.46	22.57	22.48		
15	QPSK	1	37	22.52	22.48	22.58	23	0
15	QPSK	1	74	22.50	22.64	22.52		
15	QPSK	36	0	22.58	22.55	22.52	23	0
15	QPSK	36	20	22.56	22.46	22.50		
15	QPSK	36	39	22.64	22.62	22.66		
15	QPSK	75	0	22.66	22.71	22.58	23	0
15	16QAM	1	0	22.49	22.32	22.46		
15	16QAM	1	37	22.46	22.66	22.64		
15	16QAM	1	74	22.48	22.52	22.38	23	0
15	16QAM	36	0	22.52	22.42	22.44		
15	16QAM	36	20	22.66	22.69	22.68		
15	16QAM	36	39	22.44	22.48	22.64	23	0
15	16QAM	75	0	22.69	22.48	22.72		
15	64QAM	1	0	22.49	22.29	22.16		
15	64QAM	1	37	22.46	22.35	22.35	23	0
15	64QAM	1	74	22.38	21.99	22.25		
15	64QAM	36	0	21.58	21.52	21.38	22	1
15	64QAM	36	20	21.71	21.41	21.51		
15	64QAM	36	39	21.75	21.33	21.39		
15	64QAM	75	0	21.55	21.42	21.24		

Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.67	22.38	22.39	23	0
10	QPSK	1	25	22.53	22.47	22.67		
10	QPSK	1	49	22.53	22.62	22.53		
10	QPSK	25	0	22.66	22.64	22.62	23	0
10	QPSK	25	12	22.60	22.50	22.51		
10	QPSK	25	25	22.66	22.58	22.54		
10	QPSK	50	0	22.64	22.62	22.60	23	0
10	16QAM	1	0	22.21	22.30	22.64		
10	16QAM	1	25	22.60	22.53	22.20		
10	16QAM	1	49	22.54	22.38	22.19	23	0
10	16QAM	25	0	22.30	22.48	22.69		
10	16QAM	25	12	22.63	22.56	22.58		
10	16QAM	25	25	22.67	22.55	22.58	23	0
10	16QAM	50	0	22.70	22.41	22.64		
10	64QAM	1	0	22.62	22.26	22.31		
10	64QAM	1	25	22.65	22.67	22.45	23	0
10	64QAM	1	49	22.28	22.43	22.25		
10	64QAM	25	0	21.80	21.39	21.39		
10	64QAM	25	12	21.70	21.61	21.62	22	1
10	64QAM	25	25	21.78	21.53	21.45		
10	64QAM	50	0	21.56	21.35	21.38		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.35	22.53	22.66	23	0
5	QPSK	1	12	22.56	22.64	22.67		
5	QPSK	1	24	22.65	22.46	22.38		
5	QPSK	12	0	22.59	22.56	22.56	23	0
5	QPSK	12	7	22.40	22.46	22.65		
5	QPSK	12	13	22.64	22.52	22.49		
5	QPSK	25	0	22.61	22.54	22.57	23	0
5	16QAM	1	0	22.03	22.08	22.28		
5	16QAM	1	12	22.45	22.25	22.37		
5	16QAM	1	24	22.28	22.03	22.13	23	0
5	16QAM	12	0	22.49	22.43	22.40		
5	16QAM	12	7	22.57	22.63	22.28		
5	16QAM	12	13	22.68	22.32	22.44	23	0
5	16QAM	25	0	22.52	22.43	22.51		
5	64QAM	1	0	22.29	22.58	22.15		
5	64QAM	1	12	22.59	22.61	22.58	23	0
5	64QAM	1	24	22.31	22.17	22.19		
5	64QAM	12	0	21.72	21.39	21.52		
5	64QAM	12	7	21.70	21.41	21.28	22	1
5	64QAM	12	13	21.73	21.25	21.28		
5	64QAM	25	0	21.82	21.47	21.33		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

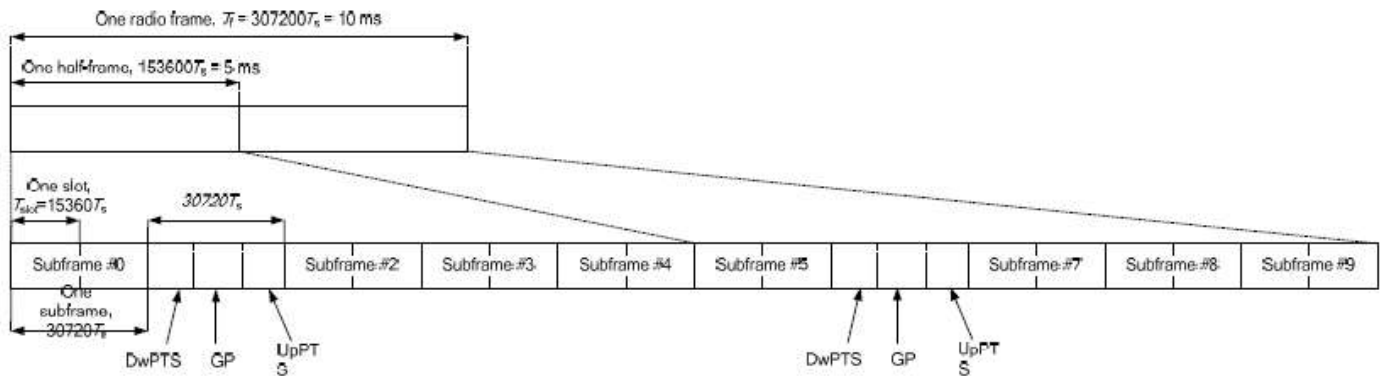


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<Full Power for Head>
<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	24.09	24.10	24.00	24.5	0
20	QPSK	1	49	24.20	24.13	24.04		
20	QPSK	1	99	24.09	23.94	24.08		
20	QPSK	50	0	23.01	22.88	22.86	24	0.5
20	QPSK	50	24	22.82	22.78	22.88		
20	QPSK	50	50	22.96	22.91	22.73		
20	QPSK	100	0	22.99	22.89	22.87	24	0.5
20	16QAM	1	0	22.63	22.61	22.41		
20	16QAM	1	49	22.72	22.52	22.56		
20	16QAM	1	99	22.61	22.37	22.55	23	1.5
20	16QAM	50	0	22.08	21.91	21.87		
20	16QAM	50	24	22.02	21.72	21.89		
20	16QAM	50	50	22.02	22.02	21.94	23	1.5
20	16QAM	100	0	22.07	21.93	21.87		
20	64QAM	1	0	21.40	21.30	21.26	23	1.5
20	64QAM	1	49	21.10	21.05	21.08		
20	64QAM	1	99	21.94	21.92	21.95		
20	64QAM	50	0	20.89	20.91	20.95	22	2.5
20	64QAM	50	24	20.79	20.89	20.89		
20	64QAM	50	50	20.88	20.81	20.87		
20	64QAM	100	0	20.96	20.63	20.91		

Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	24.10	23.88	24.05	24.5	0
15	QPSK	1	37	24.18	24.11	24.00		
15	QPSK	1	74	23.95	24.18	24.02		
15	QPSK	36	0	22.98	22.90	22.88	24	0.5
15	QPSK	36	20	22.83	22.77	23.04		
15	QPSK	36	39	23.01	22.93	22.82		
15	QPSK	75	0	22.88	22.91	22.81		
15	16QAM	1	0	22.77	22.72	22.43	24	0.5
15	16QAM	1	37	22.78	22.71	22.60		
15	16QAM	1	74	22.72	22.59	22.40		
15	16QAM	36	0	22.06	21.94	21.94	23	1.5
15	16QAM	36	20	21.99	21.75	21.72		
15	16QAM	36	39	22.03	21.93	21.95		
15	16QAM	75	0	22.08	21.94	21.90		
15	64QAM	1	0	21.34	21.38	21.36	23	1.5
15	64QAM	1	37	22.05	21.61	21.80		
15	64QAM	1	74	21.31	21.23	21.29		
15	64QAM	36	0	21.08	20.96	20.97	22	2.5
15	64QAM	36	20	21.03	21.02	20.84		
15	64QAM	36	39	20.98	20.80	20.88		
15	64QAM	75	0	20.94	20.92	20.97		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	24.06	24.13	23.87	24.5	0
10	QPSK	1	25	24.12	24.10	24.10		
10	QPSK	1	49	24.10	23.98	24.04		
10	QPSK	25	0	22.98	22.90	22.85	24	0.5
10	QPSK	25	12	22.83	22.74	22.85		
10	QPSK	25	25	22.94	22.84	22.89		
10	QPSK	50	0	22.98	22.90	22.83		
10	16QAM	1	0	22.57	22.49	22.34	24	0.5
10	16QAM	1	25	22.73	22.70	22.64		
10	16QAM	1	49	22.55	22.38	22.50		
10	16QAM	25	0	22.11	22.20	21.94	23	1.5
10	16QAM	25	12	21.94	22.04	22.06		
10	16QAM	25	25	22.06	22.03	21.88		
10	16QAM	50	0	22.02	21.92	21.80		
10	64QAM	1	0	21.38	21.34	21.18	23	1.5
10	64QAM	1	25	21.59	21.48	21.56		
10	64QAM	1	49	21.32	21.17	21.22		
10	64QAM	25	0	20.83	21.07	21.08	22	2.5
10	64QAM	25	12	21.15	21.14	21.06		
10	64QAM	25	25	21.06	21.01	21.11		
10	64QAM	50	0	20.92	20.82	20.96		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	23.82	23.89	24.04	24.5	0
5	QPSK	1	12	24.03	24.08	23.85		
5	QPSK	1	24	23.85	23.79	23.95		
5	QPSK	12	0	22.85	22.84	22.93	24	0.5
5	QPSK	12	7	22.84	22.72	22.81		
5	QPSK	12	13	22.97	22.81	22.84		
5	QPSK	25	0	22.92	22.81	22.89		
5	16QAM	1	0	22.55	22.54	22.51	24	0.5
5	16QAM	1	12	22.57	22.87	22.74		
5	16QAM	1	24	22.51	22.49	22.40		
5	16QAM	12	0	21.90	21.81	21.82	23	1.5
5	16QAM	12	7	21.89	21.75	21.45		
5	16QAM	12	13	21.93	21.77	21.90		
5	16QAM	25	0	22.21	22.11	22.00		
5	64QAM	1	0	21.45	21.39	21.27	23	1.5
5	64QAM	1	12	21.75	21.62	21.85		
5	64QAM	1	24	21.32	21.32	21.25		
5	64QAM	12	0	20.92	20.87	20.97	22	2.5
5	64QAM	12	7	20.94	20.93	21.32		
5	64QAM	12	13	20.89	20.86	21.07		
5	64QAM	25	0	20.95	20.87	21.09		



<Full Power for Body>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.60	22.83	22.93	24	0
20	QPSK	1	49	22.74	22.70	23.06		
20	QPSK	1	99	22.68	22.62	22.85		
20	QPSK	50	0	22.84	22.89	22.98	24	0
20	QPSK	50	24	22.79	22.78	22.87		
20	QPSK	50	50	22.99	22.92	22.79		
20	QPSK	100	0	22.96	22.90	22.99	24	0
20	16QAM	1	0	22.52	22.53	22.50		
20	16QAM	1	49	22.90	22.82	22.67		
20	16QAM	1	99	22.48	22.45	22.79	23	1
20	16QAM	50	0	21.98	21.98	21.90		
20	16QAM	50	24	21.84	21.87	21.62		
20	16QAM	50	50	22.06	21.83	21.99		
20	16QAM	100	0	22.04	21.92	22.00	23	1
20	64QAM	1	0	21.34	21.32	21.27		
20	64QAM	1	49	21.29	21.35	21.18		
20	64QAM	1	99	21.82	21.83	21.70	22	2
20	64QAM	50	0	20.94	20.89	20.81		
20	64QAM	50	24	21.25	21.12	21.25		
20	64QAM	50	50	20.98	20.96	20.85		
20	64QAM	100	0	21.01	21.05	21.15		



Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.78	22.93	22.70	24	0
15	QPSK	1	37	23.02	22.98	22.58		
15	QPSK	1	74	23.02	22.98	23.04		
15	QPSK	36	0	23.05	23.03	22.96	24	0
15	QPSK	36	20	22.89	22.82	22.65		
15	QPSK	36	39	23.01	23.01	22.97		
15	QPSK	75	0	23.02	23.04	22.98		
15	16QAM	1	0	22.75	22.83	22.89	24	0
15	16QAM	1	37	23.01	23.05	22.83		
15	16QAM	1	74	22.84	22.84	23.05		
15	16QAM	36	0	22.12	21.91	21.91	23	1
15	16QAM	36	20	22.04	21.87	22.00		
15	16QAM	36	39	22.14	22.05	21.95		
15	16QAM	75	0	22.13	22.06	21.97		
15	64QAM	1	0	21.54	21.51	21.39	23	1
15	64QAM	1	37	21.86	21.61	21.81		
15	64QAM	1	74	21.41	21.27	21.30		
15	64QAM	36	0	21.12	21.11	21.02	22	2
15	64QAM	36	20	21.03	20.85	20.87		
15	64QAM	36	39	20.93	20.85	20.96		
15	64QAM	75	0	20.81	20.97	20.94		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.83	22.86	22.79	24	0
10	QPSK	1	25	22.79	22.75	22.84		
10	QPSK	1	49	22.92	22.99	22.81		
10	QPSK	25	0	23.01	23.05	22.87	24	0
10	QPSK	25	12	22.84	22.80	22.84		
10	QPSK	25	25	23.04	22.99	23.00		
10	QPSK	50	0	23.05	23.04	23.00		
10	16QAM	1	0	22.66	22.61	22.65	24	0
10	16QAM	1	25	22.65	22.95	23.02		
10	16QAM	1	49	22.63	22.52	22.81		
10	16QAM	25	0	22.19	22.16	21.95	23	1
10	16QAM	25	12	22.02	21.97	22.00		
10	16QAM	25	25	22.13	22.08	21.99		
10	16QAM	50	0	22.17	22.14	22.00		
10	64QAM	1	0	21.43	21.41	21.38	23	1
10	64QAM	1	25	21.64	21.50	21.53		
10	64QAM	1	49	21.41	21.22	21.25		
10	64QAM	25	0	21.25	21.29	21.16	22	2
10	64QAM	25	12	20.91	20.90	21.26		
10	64QAM	25	25	21.29	21.14	21.19		
10	64QAM	50	0	20.98	20.95	20.97		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.99	22.92	23.00	24	0
5	QPSK	1	12	22.94	22.82	22.90		
5	QPSK	1	24	22.87	22.90	22.85		
5	QPSK	12	0	22.87	22.92	22.90	24	0
5	QPSK	12	7	22.86	22.80	22.90		
5	QPSK	12	13	23.01	22.98	23.01		
5	QPSK	25	0	23.03	22.88	22.93		
5	16QAM	1	0	22.72	22.69	22.70	24	0
5	16QAM	1	12	22.96	22.94	22.80		
5	16QAM	1	24	22.74	22.60	23.01		
5	16QAM	12	0	21.99	21.96	21.92	23	1
5	16QAM	12	7	21.99	21.92	22.31		
5	16QAM	12	13	22.03	21.92	21.93		
5	16QAM	25	0	22.16	22.09	21.94		
5	64QAM	1	0	21.30	21.29	21.26	23	1
5	64QAM	1	12	21.88	21.72	21.71		
5	64QAM	1	24	21.70	21.66	21.22		
5	64QAM	12	0	21.00	20.91	20.95	22	2
5	64QAM	12	7	20.79	20.78	21.12		
5	64QAM	12	13	20.92	20.81	20.95		
5	64QAM	25	0	21.06	21.06	21.00		

<WLAN Conducted Power>
General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	16.27	17.00	97.94
		6	2437	16.60	17.00	
		11	2462	16.48	17.00	
	802.11g 6Mbps	1	2412	13.57	15.00	87.32
		6	2437	13.67	15.00	
		11	2462	13.54	15.00	
	802.11n-HT20 MCS0	1	2412	12.60	14.00	86.57
		6	2437	12.70	14.00	
		11	2462	12.55	14.00	

14. Bluetooth Exclusions Applied

Mode Band	Max Average power(dBm)	
	BR/EDR	LE
2.4GHz Bluetooth	8.00	4.00

Note:

- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison


Head SAR			
Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	Exclusion thresholds
8.00	< 5	2.48	2.0

Note: Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm for head SAR is applied to determine SAR test exclusion. The test exclusion threshold is 2.0 which is ≤ 3 , head SAR testing is not required.

Hotspot / Body Worn SAR			
Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	Exclusion thresholds
8.00	10	2.48	1.0

Note: Per KDB 447498 D01v06, a distance of 10 mm is applied to determine SAR test exclusion. The test exclusion threshold is 1.0 which is ≤ 3 , hotspot /body worn SAR testing is not required.

15. Antenna Location

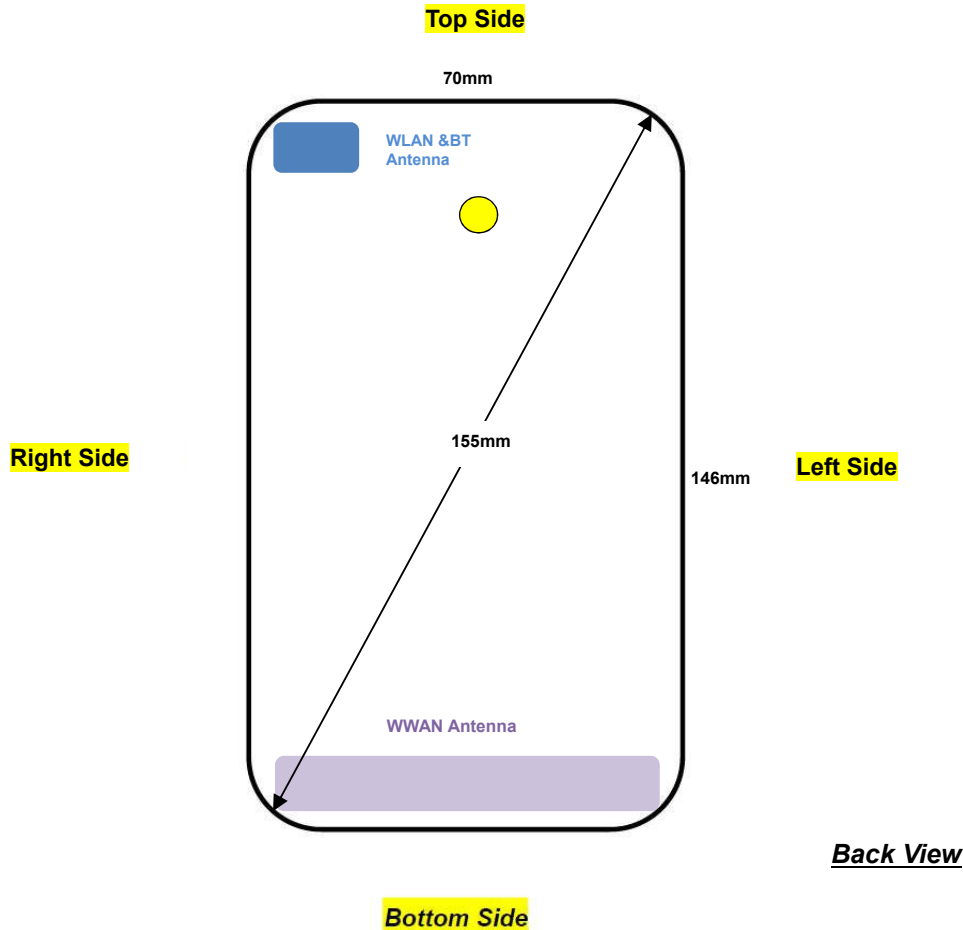

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WLAN/BT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
WLAN/BT	Yes	Yes	Yes	No	Yes	No

General Note:

Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

16. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. The device employs proximity sensors that detect the presence of the user's body at the back or bottom faces of the device. When back or Bottom Side faces of the device, GSM1900, WCDMA B2/ WCDMA B4, LTE B2 / B4 / B7 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)

GSM Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
3. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
4. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

16.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS (3Tx slot)	Right Cheek	Full	251	848.8	29.83	30.50	1.167	0.03	0.300	0.350
	GSM850	GPRS (3Tx slot)	Right Tilted	Full	251	848.8	29.83	30.50	1.167	-0.01	0.161	0.188
	GSM850	GPRS (3Tx slot)	Left Cheek	Full	251	848.8	29.83	30.50	1.167	-0.06	0.269	0.314
	GSM850	GPRS (3Tx slot)	Left Tilted	Full	251	848.8	29.83	30.50	1.167	0.03	0.145	0.169
02	GSM1900	GPRS (4 Tx slot)	Right Cheek	Full	810	1909.8	25.36	25.50	1.033	0.01	0.022	0.023
	GSM1900	GPRS (4 Tx slot)	Right Tilted	Full	810	1909.8	25.36	25.50	1.033	0.01	0.011	0.011
	GSM1900	GPRS (4 Tx slot)	Left Cheek	Full	810	1909.8	25.36	25.50	1.033	0.01	0.009	0.010
	GSM1900	GPRS (4 Tx slot)	Left Tilted	Full	810	1909.8	25.36	25.50	1.033	0.02	0.011	0.011

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA V	RMC12.2Kbps	Right Cheek	Full	4233	846.6	23.85	24.50	1.161	0.01	0.288	0.334
	WCDMA V	RMC12.2Kbps	Right Tilted	Full	4233	846.6	23.85	24.50	1.161	-0.02	0.161	0.187
	WCDMA V	RMC12.2Kbps	Left Cheek	Full	4233	846.6	23.85	24.50	1.161	0.06	0.285	0.331
	WCDMA V	RMC12.2Kbps	Left Tilted	Full	4233	846.6	23.85	24.50	1.161	0.03	0.117	0.136
04	WCDMA IV	RMC12.2Kbps	Right Cheek	Full	1513	1752.6	23.03	24.00	1.250	0.08	0.198	0.248
	WCDMA IV	RMC12.2Kbps	Right Tilted	Full	1513	1752.6	23.03	24.00	1.250	0.01	0.048	0.060
	WCDMA IV	RMC12.2Kbps	Left Cheek	Full	1513	1752.6	23.03	24.00	1.250	-0.02	0.097	0.121
	WCDMA IV	RMC12.2Kbps	Left Tilted	Full	1513	1752.6	23.03	24.00	1.250	0.01	0.065	0.081
05	WCDMA II	RMC12.2Kbps	Right Cheek	Full	9262	1852.4	22.98	24.00	1.265	0.01	0.115	0.145
	WCDMA II	RMC12.2Kbps	Right Tilted	Full	9262	1852.4	22.98	24.00	1.265	0.01	0.036	0.045
	WCDMA II	RMC12.2Kbps	Left Cheek	Full	9262	1852.4	22.98	24.00	1.265	0.05	0.067	0.085
	WCDMA II	RMC12.2Kbps	Left Tilted	Full	9262	1852.4	22.98	24.00	1.265	0.01	0.052	0.066



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 5	10	QPSK	1	25	Right Cheek	Full	20525	836.5	23.40	24.50	1.288	0.1	0.243	0.313
	LTE Band 5	10	QPSK	25	0	Right Cheek	Full	20525	836.5	22.42	24.00	1.439	-0.05	0.251	0.361
	LTE Band 5	10	QPSK	1	25	Right Tilted	Full	20525	836.5	23.40	24.50	1.288	0.07	0.129	0.166
	LTE Band 5	10	QPSK	25	0	Right Tilted	Full	20525	836.5	22.42	24.00	1.439	-0.01	0.127	0.183
	LTE Band 5	10	QPSK	1	25	Left Cheek	Full	20525	836.5	23.40	24.50	1.288	-0.02	0.232	0.299
	LTE Band 5	10	QPSK	25	0	Left Cheek	Full	20525	836.5	22.42	24.00	1.439	0.07	0.243	0.350
	LTE Band 5	10	QPSK	1	25	Left Tilted	Full	20525	836.5	23.40	24.50	1.288	0.19	0.139	0.179
	LTE Band 5	10	QPSK	25	0	Left Tilted	Full	20525	836.5	22.42	24.00	1.439	-0.08	0.140	0.201
07	LTE Band 4	20	QPSK	1	49	Right Cheek	Full	20175	1732.5	22.75	24.00	1.334	0.09	0.151	0.201
	LTE Band 4	20	QPSK	50	0	Right Cheek	Full	20175	1732.5	21.75	23.00	1.334	0.02	0.115	0.153
	LTE Band 4	20	QPSK	1	49	Right Tilted	Full	20175	1732.5	22.75	24.00	1.334	0.03	0.032	0.043
	LTE Band 4	20	QPSK	50	0	Right Tilted	Full	20175	1732.5	21.75	23.00	1.334	0.03	0.029	0.038
	LTE Band 4	20	QPSK	1	49	Left Cheek	Full	20175	1732.5	22.75	24.00	1.334	-0.01	0.068	0.090
	LTE Band 4	20	QPSK	50	0	Left Cheek	Full	20175	1732.5	21.75	23.00	1.334	0.01	0.051	0.069
	LTE Band 4	20	QPSK	1	49	Left Tilted	Full	20175	1732.5	22.75	24.00	1.334	0.06	0.048	0.064
	LTE Band 4	20	QPSK	50	0	Left Tilted	Full	20175	1732.5	21.75	23.00	1.334	0.01	0.036	0.047
08	LTE Band 2	20	QPSK	1	0	Right Cheek	Full	19100	1900	23.34	24.00	1.164	0.06	0.140	0.163
	LTE Band 2	20	QPSK	50	0	Right Cheek	Full	19100	1900	22.36	23.00	1.159	0.03	0.108	0.125
	LTE Band 2	20	QPSK	1	0	Right Tilted	Full	19100	1900	23.34	24.00	1.164	0.04	0.047	0.055
	LTE Band 2	20	QPSK	50	0	Right Tilted	Full	19100	1900	22.36	23.00	1.159	0.03	0.036	0.042
	LTE Band 2	20	QPSK	1	0	Left Cheek	Full	19100	1900	23.34	24.00	1.164	0.01	0.062	0.073
	LTE Band 2	20	QPSK	50	0	Left Cheek	Full	19100	1900	22.36	23.00	1.159	-0.01	0.049	0.057
	LTE Band 2	20	QPSK	1	0	Left Tilted	Full	19100	1900	23.34	24.00	1.164	-0.02	0.049	0.057
	LTE Band 2	20	QPSK	50	0	Left Tilted	Full	19100	1900	22.36	23.00	1.159	0.03	0.042	0.049
09	LTE Band 7	20	QPSK	1	49	Right Cheek	Full	20850	2510	24.15	24.50	1.084	0.06	0.216	0.234
	LTE Band 7	20	QPSK	50	50	Right Cheek	Full	20850	2510	23.15	24.00	1.216	0.03	0.159	0.193
	LTE Band 7	20	QPSK	1	49	Right Tilted	Full	20850	2510	24.15	24.50	1.084	0.04	0.059	0.064
	LTE Band 7	20	QPSK	50	50	Right Tilted	Full	20850	2510	23.15	24.00	1.216	0.03	0.059	0.072
	LTE Band 7	20	QPSK	1	49	Left Cheek	Full	20850	2510	24.15	24.50	1.084	0.01	0.084	0.091
	LTE Band 7	20	QPSK	50	50	Left Cheek	Full	20850	2510	23.15	24.00	1.216	-0.01	0.079	0.096
	LTE Band 7	20	QPSK	1	49	Left Tilted	Full	20850	2510	24.15	24.50	1.084	-0.02	0.047	0.051
	LTE Band 7	20	QPSK	50	50	Left Tilted	Full	20850	2510	23.15	24.00	1.216	0.03	0.042	0.051



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
10	LTE Band 38	20	QPSK	1	49	Right Cheek	Full	38000	2595	24.13	24.50	1.089	62.9	1.006	0.06	0.147	0.161
	LTE Band 38	20	QPSK	50	0	Right Cheek	Full	38000	2595	22.88	24.00	1.294	62.9	1.006	0.03	0.091	0.118
	LTE Band 38	20	QPSK	1	49	Right Tilted	Full	38000	2595	24.13	24.50	1.089	62.9	1.006	0.04	0.055	0.060
	LTE Band 38	20	QPSK	50	0	Right Tilted	Full	38000	2595	22.88	24.00	1.294	62.9	1.006	0.03	0.040	0.053
	LTE Band 38	20	QPSK	1	49	Left Cheek	Full	38000	2595	24.13	24.50	1.089	62.9	1.006	0.01	0.053	0.058
	LTE Band 38	20	QPSK	50	0	Left Cheek	Full	38000	2595	22.88	24.00	1.294	62.9	1.006	-0.01	0.042	0.055
	LTE Band 38	20	QPSK	1	49	Left Tilted	Full	38000	2595	24.13	24.50	1.089	62.9	1.006	-0.02	0.036	0.039
	LTE Band 38	20	QPSK	50	0	Left Tilted	Full	38000	2595	22.88	24.00	1.294	62.9	1.006	0.03	0.025	0.033

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Full	6	2437	16.60	17.00	1.096	97.94	1.021	0.380			
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Full	6	2437	16.60	17.00	1.096	97.94	1.021	0.094			
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Full	6	2437	16.60	17.00	1.096	97.94	1.021	1.129	0.01	0.798	0.893
11	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Full	11	2462	16.48	17.00	1.127	97.94	1.021		0.09	1.010	1.162
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Full	6	2437	16.60	17.00	1.096	97.94	1.021	0.842	0.1	0.532	0.596

**16.2 Hotspot SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
12	GSM850	GPRS (3Tx slot)	Front	10	Full	251	848.8	29.90	30.50	1.148	-0.06	0.385	0.442
	GSM850	GPRS (3Tx slot)	Back	10	Full	251	848.8	29.90	30.50	1.148	-0.03	0.554	0.636
	GSM850	GPRS (3Tx slot)	Left Side	10	Full	251	848.8	29.90	30.50	1.148	0.01	0.411	0.472
	GSM850	GPRS (3Tx slot)	Right Side	10	Full	251	848.8	29.90	30.50	1.148	0.05	0.377	0.433
	GSM850	GPRS (3Tx slot)	Bottom Side	10	Full	251	848.8	29.90	30.50	1.148	0.01	0.065	0.075
13	GSM1900	GPRS (4 Tx slot)	Front	10	Full	810	1909.8	25.36	25.50	1.033	0.03	0.481	0.497
	GSM1900	GPRS (4 Tx slot)	Back	10	Reduced	810	1909.8	22.33	23.00	1.167	0.01	0.854	0.996
	GSM1900	GPRS (4 Tx slot)	Back	10	Reduced	512	1850.2	22.08	23.00	1.236	0.01	0.702	0.868
	GSM1900	GPRS (4 Tx slot)	Back	10	Reduced	661	1880	22.26	23.00	1.186	0.01	0.814	0.965
	GSM1900	GPRS (4 Tx slot)	Left Side	10	Full	810	1909.8	25.36	25.50	1.033	0.02	0.055	0.057
	GSM1900	GPRS (4 Tx slot)	Right Side	10	Full	810	1909.8	25.36	25.50	1.033	0.09	0.080	0.082
	GSM1900	GPRS (4 Tx slot)	Bottom Side	10	Reduced	810	1909.8	22.33	23.00	1.167	0.08	0.592	0.691



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
14	WCDMA V	RMC12.2Kbps	Front	10	Full	4233	846.6	22.84	24.00	1.306	0.02	0.243	0.317
	WCDMA V	RMC12.2Kbps	Back	10	Full	4233	846.6	22.84	24.00	1.306	-0.02	0.418	0.546
	WCDMA V	RMC12.2Kbps	Left Side	10	Full	4233	846.6	22.84	24.00	1.306	0.01	0.280	0.366
	WCDMA V	RMC12.2Kbps	Right Side	10	Full	4233	846.6	22.84	24.00	1.306	0.02	0.279	0.364
	WCDMA V	RMC12.2Kbps	Bottom Side	10	Full	4233	846.6	22.84	24.00	1.306	0.15	0.063	0.082
	WCDMA IV	RMC12.2Kbps	Front	10	Full	1413	1732.6	22.89	24.00	1.291	0.01	0.812	1.048
	WCDMA IV	RMC12.2Kbps	Front	10	Full	1312	1712.4	22.89	24.00	1.291	0.02	0.804	1.038
	WCDMA IV	RMC12.2Kbps	Front	10	Full	1513	1752.6	23.03	24.00	1.250	-0.02	0.845	1.056
	WCDMA IV	RMC12.2Kbps	Back	10	Reduced	1413	1732.6	19.75	20.00	1.059	-0.02	0.928	0.983
	WCDMA IV	RMC12.2Kbps	Back	10	Reduced	1312	1712.4	19.74	20.00	1.062	0.03	0.815	0.865
	WCDMA IV	RMC12.2Kbps	Back	10	Reduced	1513	1752.6	19.67	20.00	1.079	0.01	0.895	0.966
	WCDMA IV	RMC12.2Kbps	Left Side	10	Full	1513	1752.6	23.03	24.00	1.250	0.02	0.115	0.144
	WCDMA IV	RMC12.2Kbps	Right Side	10	Full	1513	1752.6	23.03	24.00	1.250	0.09	0.127	0.159
	WCDMA IV	RMC12.2Kbps	Bottom Side	10	Reduced	1413	1732.6	19.75	20.00	1.059	0.04	1.030	1.091
	WCDMA IV	RMC12.2Kbps	Bottom Side	10	Reduced	1312	1712.4	19.74	20.00	1.062	0.07	1.010	1.072
15	WCDMA IV	RMC12.2Kbps	Bottom Side	10	Reduced	1513	1752.6	19.67	20.00	1.079	0.08	1.040	1.122
16	WCDMA II	RMC12.2Kbps	Front	10	Full	9262	1852.4	22.98	24.00	1.265	-0.06	0.885	1.119
	WCDMA II	RMC12.2Kbps	Front	10	Full	9400	1880	22.94	24.00	1.276	-0.1	0.725	0.925
	WCDMA II	RMC12.2Kbps	Front	10	Full	9538	1907.6	22.89	24.00	1.291	-0.1	0.767	0.990
	WCDMA II	RMC12.2Kbps	Back	10	Reduced	9400	1880	18.66	19.50	1.213	-0.03	0.840	1.019
	WCDMA II	RMC12.2Kbps	Back	10	Reduced	9262	1852.4	18.61	19.50	1.227	0.01	0.815	1.000
	WCDMA II	RMC12.2Kbps	Back	10	Reduced	9538	1907.6	18.61	19.50	1.227	0.01	0.818	1.004
	WCDMA II	RMC12.2Kbps	Left Side	10	Full	9262	1852.4	22.98	24.00	1.265	0.04	0.106	0.134
	WCDMA II	RMC12.2Kbps	Right Side	10	Full	9262	1852.4	22.98	24.00	1.265	0.05	0.178	0.225
	WCDMA II	RMC12.2Kbps	Bottom Side	10	Reduced	9400	1880	18.66	19.50	1.213	0.02	0.847	1.028
	WCDMA II	RMC12.2Kbps	Bottom Side	10	Reduced	9262	1852.4	18.61	19.50	1.227	0.03	0.727	0.892
	WCDMA II	RMC12.2Kbps	Bottom Side	10	Reduced	9538	1907.6	18.61	19.50	1.227	0.09	0.891	1.094



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10	QPSK	1	25	Front	10	Full	20525	836.5	22.68	24.00	1.355	-0.06	0.245	0.332
	LTE Band 5	10	QPSK	25	0	Front	10	Full	20525	836.5	22.74	24.00	1.337	0.02	0.244	0.326
17	LTE Band 5	10	QPSK	1	25	Back	10	Full	20525	836.5	22.68	24.00	1.355	0.01	0.403	0.546
	LTE Band 5	10	QPSK	25	0	Back	10	Full	20525	836.5	22.74	24.00	1.337	0.01	0.397	0.531
	LTE Band 5	10	QPSK	1	25	Left Side	10	Full	20525	836.5	22.68	24.00	1.355	0.02	0.325	0.440
	LTE Band 5	10	QPSK	25	0	Left Side	10	Full	20525	836.5	22.74	24.00	1.337	-0.03	0.328	0.438
	LTE Band 5	10	QPSK	1	25	Right Side	10	Full	20525	836.5	22.68	24.00	1.355	0.01	0.304	0.412
	LTE Band 5	10	QPSK	25	0	Right Side	10	Full	20525	836.5	22.74	24.00	1.337	0.02	0.303	0.405
	LTE Band 5	10	QPSK	1	25	Bottom Side	10	Full	20525	836.5	22.68	24.00	1.355	0.01	0.062	0.084
	LTE Band 5	10	QPSK	25	0	Bottom Side	10	Full	20525	836.5	22.74	24.00	1.337	0.01	0.059	0.079
	LTE Band 4	20	QPSK	1	49	Front	10	Full	20175	1732.5	22.75	24.00	1.334	-0.1	0.753	1.004
	LTE Band 4	20	QPSK	50	0	Front	10	Full	20175	1732.5	21.75	23.00	1.334	0.02	0.670	0.893
	LTE Band 4	20	QPSK	100	0	Front	10	Full	20175	1732.5	21.77	23.00	1.327	-0.06	0.692	0.919
	LTE Band 4	20	QPSK	1	49	Back	10	Reduced	20175	1732.5	19.58	20.00	1.102	0.04	0.870	0.958
	LTE Band 4	20	QPSK	50	24	Back	10	Reduced	20175	1732.5	19.58	20.00	1.102	0.1	0.876	0.965
	LTE Band 4	20	QPSK	100	0	Back	10	Reduced	20175	1732.5	19.55	20.00	1.109	0.02	0.903	1.002
	LTE Band 4	20	QPSK	1	49	Left Side	10	Full	20175	1732.5	22.75	24.00	1.334	0.01	0.081	0.108
	LTE Band 4	20	QPSK	50	0	Left Side	10	Full	20175	1732.5	21.75	23.00	1.334	0.03	0.063	0.084
	LTE Band 4	20	QPSK	1	49	Right Side	10	Full	20175	1732.5	22.75	24.00	1.334	0.06	0.124	0.165
	LTE Band 4	20	QPSK	50	0	Right Side	10	Full	20175	1732.5	21.75	23.00	1.334	0.01	0.160	0.213
	LTE Band 4	20	QPSK	1	49	Bottom Side	10	Reduced	20175	1732.5	19.58	20.00	1.102	0.08	1.020	1.124
	LTE Band 4	20	QPSK	50	0	Bottom Side	10	Reduced	20175	1732.5	19.58	20.00	1.102	0.01	0.969	1.067
18	LTE Band 4	20	QPSK	100	0	Bottom Side	10	Reduced	20175	1732.5	19.55	20.00	1.109	0.06	1.020	1.131
19	LTE Band 2	20	QPSK	1	49	Front	10	Full	19100	1900	23.34	23.50	1.038	-0.01	1.020	1.058
	LTE Band 2	20	QPSK	1	49	Front	10	Full	18700	1860	23.20	23.50	1.072	0.02	0.935	1.002
	LTE Band 2	20	QPSK	1	49	Front	10	Full	18900	1880	23.26	23.50	1.057	0.01	0.973	1.028
	LTE Band 2	20	QPSK	50	0	Front	10	Full	19100	1900	22.36	22.50	1.033	-0.01	0.811	0.838
	LTE Band 2	20	QPSK	50	0	Front	10	Full	18700	1860	22.29	22.50	1.050	0.02	0.733	0.769
	LTE Band 2	20	QPSK	50	0	Front	10	Full	18900	1880	22.30	22.50	1.047	0.01	0.792	0.829
	LTE Band 2	20	QPSK	100	0	Front	10	Full	19100	1900	22.37	22.50	1.030	-0.04	0.802	0.826
	LTE Band 2	20	QPSK	1	0	Back	10	Reduced	19100	1900	18.40	19.00	1.148	0.02	0.711	0.816
	LTE Band 2	20	QPSK	1	0	Back	10	Reduced	18700	1860	18.29	19.00	1.178	0.02	0.707	0.833
	LTE Band 2	20	QPSK	1	0	Back	10	Reduced	18900	1880	18.25	19.00	1.189	0.08	0.760	0.903
	LTE Band 2	20	QPSK	50	0	Back	10	Reduced	19100	1900	18.31	19.00	1.172	0.01	0.761	0.892
	LTE Band 2	20	QPSK	50	0	Back	10	Reduced	18700	1860	18.14	19.00	1.219	0.07	0.700	0.853
	LTE Band 2	20	QPSK	50	0	Back	10	Reduced	18900	1880	18.26	19.00	1.186	0.07	0.735	0.872
	LTE Band 2	20	QPSK	100	0	Back	10	Reduced	18900	1880	18.27	19.00	1.183	0.01	0.725	0.858
	LTE Band 2	20	QPSK	1	49	Left Side	10	Full	19100	1900	23.34	23.50	1.038	0.05	0.116	0.120
	LTE Band 2	20	QPSK	50	0	Left Side	10	Full	19100	1900	22.36	22.50	1.033	-0.01	0.090	0.093
	LTE Band 2	20	QPSK	1	49	Right Side	10	Full	19100	1900	23.34	23.50	1.038	0.08	0.204	0.212
	LTE Band 2	20	QPSK	50	0	Right Side	10	Full	19100	1900	22.36	22.50	1.033	-0.06	0.151	0.156
	LTE Band 2	20	QPSK	1	49	Bottom Side	10	Reduced	19100	1900	18.40	19.00	1.148	0.05	0.828	0.951
	LTE Band 2	20	QPSK	1	49	Bottom Side	10	Reduced	18700	1860	18.29	19.00	1.178	0.03	0.769	0.906
	LTE Band 2	20	QPSK	1	49	Bottom Side	10	Reduced	18900	1880	18.25	19.00	1.189	0.04	0.789	0.938
	LTE Band 2	20	QPSK	50	0	Bottom Side	10	Reduced	19100	1900	18.31	19.00	1.172	0.02	0.853	1.000
	LTE Band 2	20	QPSK	50	0	Bottom Side	10	Reduced	18700	1860	18.14	19.00	1.219	0.01	0.737	0.898
	LTE Band 2	20	QPSK	50	0	Bottom Side	10	Reduced	18900	1880	18.26	19.00	1.186	0.05	0.785	0.931
	LTE Band 2	20	QPSK	100	0	Bottom Side	10	Reduced	19100	1900	18.27	19.00	1.183	0.02	0.790	0.935



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20	QPSK	1	49	Front	10	Full	20850	2510	23.95	24.00	1.012	-0.02	0.521	0.527
	LTE Band 7	20	QPSK	50	50	Front	10	Full	20850	2510	23.73	24.00	1.064	0.01	0.522	0.555
	LTE Band 7	20	QPSK	1	49	Back	10	Reduced	20850	2510	22.73	23.00	1.064	0.05	0.705	0.750
	LTE Band 7	20	QPSK	1	49	Back	10	Reduced	21100	2535	22.34	23.00	1.164	0.02	0.645	0.751
	LTE Band 7	20	QPSK	1	49	Back	10	Reduced	21350	2560	22.38	23.00	1.153	0.02	0.660	0.761
	LTE Band 7	20	QPSK	50	50	Back	10	Reduced	20850	2510	22.67	23.00	1.079	0.14	0.738	0.796
	LTE Band 7	20	QPSK	50	50	Back	10	Reduced	21100	2535	22.58	23.00	1.102	0.04	0.629	0.693
	LTE Band 7	20	QPSK	50	50	Back	10	Reduced	21350	2560	22.58	23.00	1.102	0.06	0.734	0.809
	LTE Band 7	20	QPSK	100	0	Back	10	Reduced	20850	2510	22.42	23.00	1.143	0.07	0.719	0.822
	LTE Band 7	20	QPSK	1	49	Left Side	10	Full	20850	2510	23.95	24.00	1.012	0.02	0.104	0.105
	LTE Band 7	20	QPSK	50	50	Left Side	10	Full	20850	2510	23.73	24.00	1.064	0.05	0.113	0.120
	LTE Band 7	20	QPSK	1	49	Right Side	10	Full	20850	2510	23.95	24.00	1.012	0.03	0.220	0.223
	LTE Band 7	20	QPSK	50	50	Right Side	10	Full	20850	2510	23.73	24.00	1.064	0.09	0.216	0.230
	LTE Band 7	20	QPSK	1	49	Bottom Side	10	Reduced	20850	2510	22.73	23.00	1.064	0.02	0.680	0.724
	LTE Band 7	20	QPSK	1	49	Bottom Side	10	Reduced	21100	2535	22.34	23.00	1.164	0.04	0.676	0.787
	LTE Band 7	20	QPSK	1	49	Bottom Side	10	Reduced	21350	2560	22.38	23.00	1.153	0.01	0.670	0.773
20	LTE Band 7	20	QPSK	50	50	Bottom Side	10	Reduced	20850	2510	22.67	23.00	1.079	0.01	0.774	0.835
	LTE Band 7	20	QPSK	50	50	Bottom Side	10	Reduced	21100	2535	22.58	23.00	1.102	0.02	0.686	0.756
	LTE Band 7	20	QPSK	50	50	Bottom Side	10	Reduced	21350	2560	22.58	23.00	1.102	0.08	0.731	0.805
	LTE Band 7	20	QPSK	100	0	Bottom Side	10	Reduced	20850	2510	22.42	23.00	1.143	0.06	0.672	0.768



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20	QPSK	1	49	Front	10	Full	38000	2595	22.70	24.00	1.349	62.9	1.006	0.01	0.415	0.563
	LTE Band 38	20	QPSK	50	50	Front	10	Full	38000	2595	22.92	24.00	1.282	62.9	1.006	-0.04	0.371	0.479
	LTE Band 38	20	QPSK	1	49	Back	10	Full	38000	2595	22.70	24.00	1.349	62.9	1.006	0.03	0.512	0.695
21	LTE Band 38	20	QPSK	50	50	Back	10	Full	38000	2595	22.92	24.00	1.282	62.9	1.006	0.09	0.544	0.702
	LTE Band 38	20	QPSK	100	0	Back	10	Full	38000	2595	22.90	24.00	1.288	62.9	1.006	0.04	0.510	0.661
	LTE Band 38	20	QPSK	1	49	Left Side	10	Full	38000	2595	22.70	24.00	1.349	62.9	1.006	0.02	0.081	0.110
	LTE Band 38	20	QPSK	50	50	Left Side	10	Full	38000	2595	22.92	24.00	1.282	62.9	1.006	0.08	0.073	0.094
	LTE Band 38	20	QPSK	1	49	Right Side	10	Full	38000	2595	22.70	24.00	1.349	62.9	1.006	-0.02	0.157	0.213
	LTE Band 38	20	QPSK	50	50	Right Side	10	Full	38000	2595	22.92	24.00	1.282	62.9	1.006	0.01	0.129	0.166
	LTE Band 38	20	QPSK	1	49	Bottom Side	10	Full	38000	2595	22.70	24.00	1.349	62.9	1.006	0.03	0.498	0.676
	LTE Band 38	20	QPSK	50	50	Bottom Side	10	Full	38000	2595	22.92	24.00	1.282	62.9	1.006	0.02	0.499	0.644

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10	Full	6	2437	16.60	17.00	1.096	97.94	1.021	0.216			
22	WLAN2.4GHz	802.11b 1Mbps	Back	10	Full	6	2437	16.60	17.00	1.096	97.94	1.021	0.227	0.07	0.184	0.206
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10	Full	6	2437	16.60	17.00	1.096	97.94	1.021	0.016			
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10	Full	6	2437	16.60	17.00	1.096	97.94	1.021	0.058			

**16.3 Body Worn Accessory SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (3Tx slot)	Front	10	Full	251	848.8	29.90	30.50	1.148	-0.06	0.385	0.442
23	GSM850	GPRS (3Tx slot)	Back	10	Full	251	848.8	29.90	30.50	1.148	-0.03	0.554	0.636
	GSM1900	GPRS (4 Tx slot)	Front	10	Full	810	1909.8	25.36	25.50	1.033	0.03	0.481	0.497
24	GSM1900	GPRS (4 Tx slot)	Back	10	Reduced	810	1909.8	22.33	23.00	1.167	0.01	0.854	0.996
	GSM1900	GPRS (4 Tx slot)	Back	10	Reduced	512	1850.2	22.08	23.00	1.236	0.01	0.702	0.868
	GSM1900	GPRS (4 Tx slot)	Back	10	Reduced	661	1880	22.26	23.00	1.186	0.01	0.814	0.965

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
25	WCDMA V	RMC12.2Kbps	Front	10	Full	4233	846.6	22.84	24.00	1.306	0.02	0.243	0.317
	WCDMA V	RMC12.2Kbps	Back	10	Full	4233	846.6	22.84	24.00	1.306	-0.02	0.418	0.546
26	WCDMA IV	RMC12.2Kbps	Front	10	Full	1413	1732.6	22.89	24.00	1.291	0.01	0.812	1.048
	WCDMA IV	RMC12.2Kbps	Front	10	Full	1312	1712.4	22.89	24.00	1.291	0.02	0.804	1.038
	WCDMA IV	RMC12.2Kbps	Front	10	Full	1513	1752.6	23.03	24.00	1.250	-0.02	0.845	1.056
	WCDMA IV	RMC12.2Kbps	Back	10	Reduced	1413	1732.6	19.75	20.00	1.059	-0.02	0.928	0.983
	WCDMA IV	RMC12.2Kbps	Back	10	Reduced	1312	1712.4	19.74	20.00	1.062	0.03	0.815	0.865
	WCDMA IV	RMC12.2Kbps	Back	10	Reduced	1513	1752.6	19.67	20.00	1.079	0.01	0.895	0.966
27	WCDMA II	RMC12.2Kbps	Front	10	Full	9262	1852.4	22.98	24.00	1.265	-0.06	0.885	1.119
	WCDMA II	RMC12.2Kbps	Front	10	Full	9400	1880	22.94	24.00	1.276	-0.1	0.725	0.925
	WCDMA II	RMC12.2Kbps	Front	10	Full	9538	1907.6	22.89	24.00	1.291	-0.1	0.767	0.990
	WCDMA II	RMC12.2Kbps	Back	10	Reduced	9400	1880	18.66	19.50	1.213	-0.03	0.840	1.019
	WCDMA II	RMC12.2Kbps	Back	10	Reduced	9262	1852.4	18.61	19.50	1.227	0.01	0.815	1.000
	WCDMA II	RMC12.2Kbps	Back	10	Reduced	9538	1907.6	18.61	19.50	1.227	0.01	0.818	1.004



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10	QPSK	1	25	Front	10	Full	20525	836.5	22.68	24.00	1.355	-0.06	0.245	0.332
	LTE Band 5	10	QPSK	25	0	Front	10	Full	20525	836.5	22.74	24.00	1.337	0.02	0.244	0.326
28	LTE Band 5	10	QPSK	1	25	Back	10	Full	20525	836.5	22.68	24.00	1.355	0.01	0.403	0.546
	LTE Band 5	10	QPSK	25	0	Back	10	Full	20525	836.5	22.74	24.00	1.337	0.01	0.397	0.531
29	LTE Band 4	20	QPSK	1	49	Front	10	Full	20175	1732.5	22.75	24.00	1.334	-0.1	0.753	1.004
	LTE Band 4	20	QPSK	50	0	Front	10	Full	20175	1732.5	21.75	23.00	1.334	0.02	0.670	0.893
	LTE Band 4	20	QPSK	100	0	Front	10	Full	20175	1732.5	21.77	23.00	1.327	-0.06	0.692	0.919
	LTE Band 4	20	QPSK	1	49	Back	10	Reduced	20175	1732.5	19.58	20.00	1.102	0.04	0.870	0.958
	LTE Band 4	20	QPSK	50	24	Back	10	Reduced	20175	1732.5	19.58	20.00	1.102	0.1	0.876	0.965
	LTE Band 4	20	QPSK	100	0	Back	10	Reduced	20175	1732.5	19.55	20.00	1.109	0.02	0.903	1.002
30	LTE Band 2	20	QPSK	1	49	Front	10	Full	19100	1900	23.34	23.50	1.038	-0.01	1.020	1.058
	LTE Band 2	20	QPSK	1	49	Front	10	Full	18700	1860	23.20	23.50	1.072	0.02	0.935	1.002
	LTE Band 2	20	QPSK	1	49	Front	10	Full	18900	1880	23.26	23.50	1.057	0.01	0.973	1.028
	LTE Band 2	20	QPSK	50	0	Front	10	Full	19100	1900	22.36	22.50	1.033	-0.01	0.811	0.838
	LTE Band 2	20	QPSK	50	0	Front	10	Full	18700	1860	22.29	22.50	1.050	0.02	0.733	0.769
	LTE Band 2	20	QPSK	50	0	Front	10	Full	18900	1880	22.30	22.50	1.047	0.01	0.792	0.829
	LTE Band 2	20	QPSK	100	0	Front	10	Full	19100	1900	22.37	22.50	1.030	-0.04	0.802	0.826
	LTE Band 2	20	QPSK	1	0	Back	10	Reduced	19100	1900	18.40	19.00	1.148	0.02	0.711	0.816
	LTE Band 2	20	QPSK	1	0	Back	10	Reduced	18700	1860	18.29	19.00	1.178	0.02	0.707	0.833
	LTE Band 2	20	QPSK	1	0	Back	10	Reduced	18900	1880	18.25	19.00	1.189	0.08	0.760	0.903
	LTE Band 2	20	QPSK	50	0	Back	10	Reduced	19100	1900	18.31	19.00	1.172	0.01	0.761	0.892
	LTE Band 2	20	QPSK	50	0	Back	10	Reduced	18700	1860	18.14	19.00	1.219	0.07	0.700	0.853
	LTE Band 2	20	QPSK	50	0	Back	10	Reduced	18900	1880	18.26	19.00	1.186	0.07	0.735	0.872
	LTE Band 2	20	QPSK	100	0	Back	10	Reduced	18900	1880	18.27	19.00	1.183	0.01	0.725	0.858
	LTE Band 7	20	QPSK	1	49	Front	10	Full	20850	2510	23.95	24.00	1.012	-0.02	0.521	0.527
	LTE Band 7	20	QPSK	50	50	Front	10	Full	20850	2510	23.73	24.00	1.064	0.01	0.522	0.555
	LTE Band 7	20	QPSK	1	49	Back	10	Reduced	20850	2510	22.73	23.00	1.064	0.05	0.705	0.750
	LTE Band 7	20	QPSK	1	49	Back	10	Reduced	21100	2535	22.34	23.00	1.164	0.02	0.645	0.751
	LTE Band 7	20	QPSK	1	49	Back	10	Reduced	21350	2560	22.38	23.00	1.153	0.02	0.660	0.761
	LTE Band 7	20	QPSK	50	50	Back	10	Reduced	20850	2510	22.67	23.00	1.079	0.14	0.738	0.796
	LTE Band 7	20	QPSK	50	50	Back	10	Reduced	21100	2535	22.58	23.00	1.102	0.04	0.629	0.693
	LTE Band 7	20	QPSK	50	50	Back	10	Reduced	21350	2560	22.58	23.00	1.102	0.06	0.734	0.809
31	LTE Band 7	20	QPSK	100	0	Back	10	Reduced	20850	2510	22.42	23.00	1.143	0.07	0.719	0.822



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20	QPSK	1	49	Front	10	Full	38000	2595	22.70	24.00	1.349	62.9	1.006	0.01	0.415	0.563
	LTE Band 38	20	QPSK	50	50	Front	10	Full	38000	2595	22.92	24.00	1.282	62.9	1.006	-0.04	0.371	0.479
	LTE Band 38	20	QPSK	1	49	Back	10	Full	38000	2595	22.70	24.00	1.349	62.9	1.006	0.03	0.512	0.695
32	LTE Band 38	20	QPSK	50	50	Back	10	Full	38000	2595	22.92	24.00	1.282	62.9	1.006	0.09	0.544	0.702
	LTE Band 38	20	QPSK	100	0	Back	10	Full	38000	2595	22.90	24.00	1.288	62.9	1.006	0.04	0.510	0.661

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10	Full	6	2437	16.60	17.00	1.096	97.94	1.021	0.216			
33	WLAN2.4GHz	802.11b 1Mbps	Back	10	Full	6	2437	16.60	17.00	1.096	97.94	1.021	0.227	0.07	0.184	0.206