

# FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.  
EQUIPMENT : Mobile Phone  
BRAND NAME : Redmi  
MODEL NAME : 21091116UG  
FCC ID : 2AFZZ16UG  
STANDARD : 47 CFR Part 2, Part 27 Subpart Q  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)  
TEST DATE(S) : Sep. 24, 2021 ~ Oct. 11, 2021

We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International (Kunshan) Inc.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.



Reviewed by: Derreck Chen / Supervisor



Approved by: Eric Shih / Manager



**Sporton International (ShenZhen) Inc.**

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT ..... 4
1 GENERAL DESCRIPTION ..... 5
1.1 Applicant ..... 5
1.2 Manufacturer ..... 5
1.3 Product Feature of Equipment Under Test ..... 5
1.4 Product Specification of Equipment Under Test ..... 6
1.5 Modification of EUT ..... 6
1.6 Maximum EIRP Power and Emission Designator ..... 7
1.7 Testing Site ..... 8
1.8 Test Software ..... 8
1.9 Applied Standards ..... 9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10
2.1 Test Mode ..... 10
2.2 Connection Diagram of Test System ..... 11
2.3 Support Unit used in test configuration and system ..... 11
2.4 Measurement Results Explanation Example ..... 11
2.5 Frequency List of Low/Middle/High Channels ..... 12
3 CONDUCTED TEST ITEMS ..... 14
3.1 Measuring Instruments ..... 14
3.2 Test Setup ..... 14
3.3 Test Result of Conducted Test ..... 14
3.4 Conducted Output Power Measurement ..... 15
3.5 Peak-to-Average Ratio ..... 16
3.6 EIRP ..... 17
3.7 Occupied Bandwidth ..... 18
3.8 Conducted Band Edge Measurement ..... 19
3.9 Conducted Spurious Emission Measurement ..... 20
3.10 Frequency Stability Measurement ..... 21
4 RADIATED TEST ITEMS ..... 22
4.1 Measuring Instruments ..... 22
4.2 Test Setup ..... 22
4.3 Test Result of Radiated Test ..... 23
4.4 Radiated Spurious Emission Measurement ..... 24
5 LIST OF MEASURING EQUIPMENT ..... 25
6 UNCERTAINTY OF EVALUATION ..... 26
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 24.08 dB at 6900.000 MHz

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

**Xiaomi Communications Co., Ltd.**

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

## 1.2 Manufacturer

**Xiaomi Communications Co., Ltd.**

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Redmi
Model Name	21091116UG
FCC ID	2AFZZ16UG
IMEI Code	Conducted: 861239050029141/861239050029158 Radiation: 861239050030347/861239050030354
HW Version	P2
SW Version	MIUI 12.5
EUT Stage	Identical Prototype

### 1.4 Product Specification of Equipment Under Test

Product Feature	
<b>Tx/Rx Frequency</b>	5G NR n77/n78: 3450 MHz ~ 3550 MHz
<b>Bandwidth</b>	5G NR n77 : 20MHz / 40MHz / 50MHz / 60MHz / 80MHz / 90MHz / 100MHz 5G NR n78 : 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
<b>SCS</b>	30kHz
<b>Maximum Output Power to Antenna</b>	<b>Ant 2:</b> 5G NR n77 : 23.88 dBm 5G NR n78 : 23.33 dBm <b>Ant 4:</b> 5G NR n77 : 23.80 dBm 5G NR n78 : 23.31 dBm <b>Ant 6:</b> 5G NR n77 : 25.20 dBm 5G NR n78 : 25.12 dBm <b>Ant 11:</b> 5G NR n77 : 23.47 dBm 5G NR n78 : 23.01 dBm
<b>Antenna Gain</b>	<b>Ant 2:</b> 5G NR n77 : -1.8 dBi 5G NR n78 : -1.8 dBi <b>Ant 4:</b> 5G NR n77 : -3.50 dBi 5G NR n78 : -3.50 dBi <b>Ant 6:</b> 5G NR n77 : -2.57 dBi 5G NR n78 : -2.57 dBi <b>Ant 11:</b> 5G NR n77 : -2.65 dBi 5G NR n78 : -2.65 dBi
<b>Type of Modulation</b>	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

**Remark:**

1. 5G NR n77/n78 supports SA and NSA mode. According to the maximum power between SA and NSA mode for n78 and n77, SA covers NSA mode and 5G NR n77 covers 5G NR n78.
2. The EIRP is calculated from Output power and antenna gain, so the maximum EIRP is shown in the report, 5G NR n77/n78 for Antenna 6..
3. The EN-DC mode combination could be referred to the product spec.
4. The device supports HPUE mode for 5G NR n78, but Power Level for 5G NR n77 the same as 5G NR n78 in accordance with Manufacturer declaration.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Maximum EIRP Power and Emission Designator

5G NR n77 (SCS=30 kHz)		BPSK/QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3460.02 ~ 3540.00	0.1778	18M2G7D	0.1409	18M2W7D
40	3470.01 ~ 3529.98	0.1159	37M8G7D	0.1422	37M8W7D
50	3475.02 ~ 3525.00	0.1824	47M4G7D	0.1445	47M4W7D
60	3480.00 ~ 3519.99	0.1816	57M9G7D	0.1459	57M8W7D
80	3490.02 ~ 3510.00	0.1832	77M4G7D	0.1462	77M5W7D
90	3495.00 ~ 3504.99	0.1811	87M4G7D	0.1449	87M5W7D
100	3500.01 ~ 3500.01	0.1811	97M2G7D	0.1442	97M3W7D

5G NR n78 (SCS=30 kHz)		BPSK/QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3460.02 ~ 3540.00	0.1750	18M2G7D	0.1406	18M2W7D
30	3465.00 ~ 3534.99	0.1774	27M8G7D	0.1406	27M8W7D
40	3470.01 ~ 3529.98	0.1786	37M8G7D	0.1413	37M8W7D
50	3475.02 ~ 3525.00	0.1795	47M4G7D	0.1435	47M4W7D
60	3480.00 ~ 3519.99	0.1791	57M9G7D	0.1416	57M8W7D
70	3485.01 ~ 3514.98	0.1795	67M3G7D	0.1422	67M5W7D
80	3490.02 ~ 3510.00	0.1799	77M4G7D	0.1426	77M5W7D
90	3495.00 ~ 3504.99	0.1786	87M4G7D	0.1416	87M5W7D
100	3500.01 ~ 3500.01	0.1799	97M2G7D	0.1409	97M3W7D

**Note:**

- 5G NR Band n77 overlaps the entire frequency range of Band n78. Therefore, the test results of conducted test items provided in this report covers Band n77 as well as Band n78, and add Occupied Bandwidth test of bandwidth 30/70 MHz for Band n78
- All modulations have been evaluation, only the worst test results of PSK & QAM are shown in the report .

## 1.7 Testing Site

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ	CN1256	421272

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH04-KS	CN1257	314309

Test data subcontracted: RSE test case in section 4 of this report

## 1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a



## 1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 5M, 10M, 15M, 20M	eg. QPSK, 16QAM, 64QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	5G n77	20M, 40M, 50M, 60M, 80M, 90M, 100M	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L, M, H
	5G n78	20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L, M, H
Peak-to-Average Ratio	5G n77	20M	PI/2 BPSK, QPSK	1RB, Full RB	L, M, H
E.I.R.P	5G n77	20M, 40M, 50M, 60M, 80M, 90M, 100M	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L, M, H
	5G n78	20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L, M, H
26dB and 99% Bandwidth	5G n77	20M, 40M, 50M, 60M, 80M, 90M, 100M	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Full RB	M
	5G n78	30M, 70M,	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Full RB	M
Conducted Band Edge	5G n77	20M, 60M, 100M	PI/2 BPSK, QPSK	1RB, Full RB	L, H
Conducted Spurious Emission	5G n77	20M, 60M, 100M	PI/2 BPSK, QPSK	1RB	L, M, H
Frequency Stability	5G n77	20M	QPSK	Full RB	M
Radiated Spurious Emission	5G n77	Worst case from maximum power			M
	5G n78	Worst case from maximum power			M

**Note:**

1. The mark "v" means that this configuration is chosen for testing
2. The mark "-" means that this bandwidth is not supported.
3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
4. Based on engineering evaluation, only the worst modulations test results are shown in the report.

## 2.2 Connection Diagram of Test System

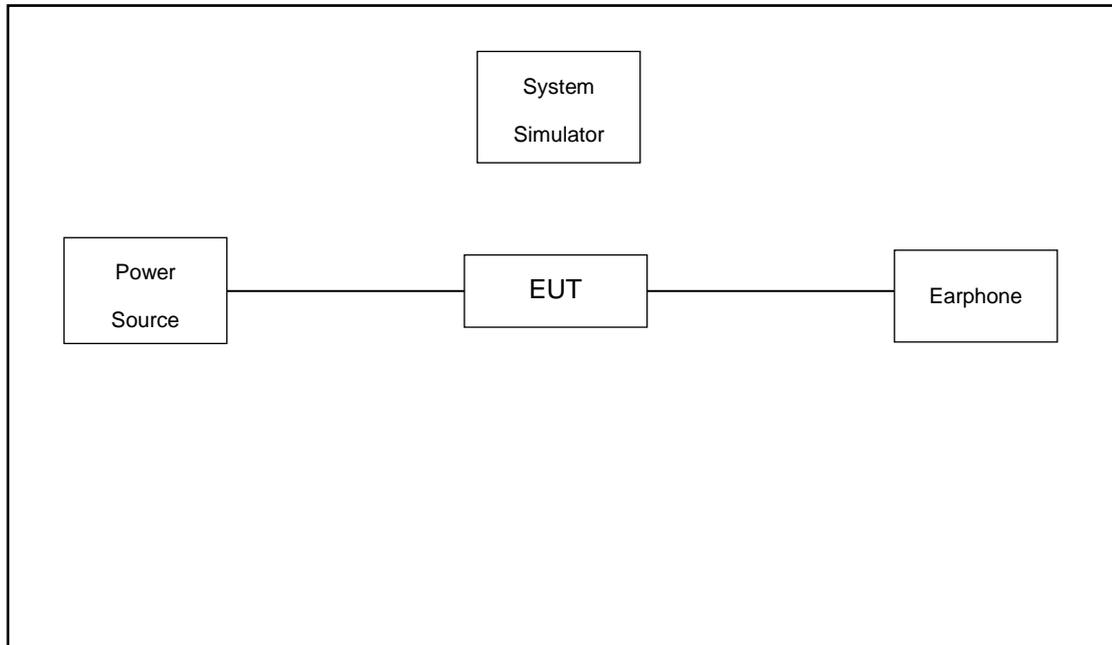

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	LTE Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 4.8 dB.

Example :

*Offset(dB) = RF cable loss(dB).*

*= 4.8 (dB)*



### 2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495.00	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510.00
60	Channel	632000	633334	634666
	Frequency	3480.00	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525.00
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540.00



5G n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495.00	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510.00
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480.00	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525.00
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465.00	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540.00


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

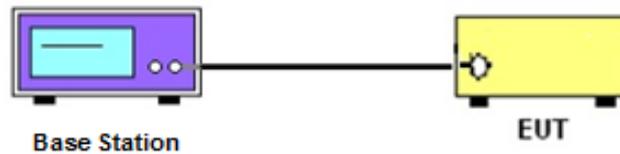

##### 3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

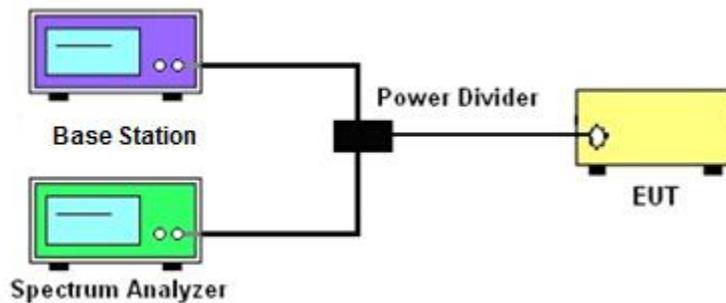

##### 3.2.3 Frequency Stability

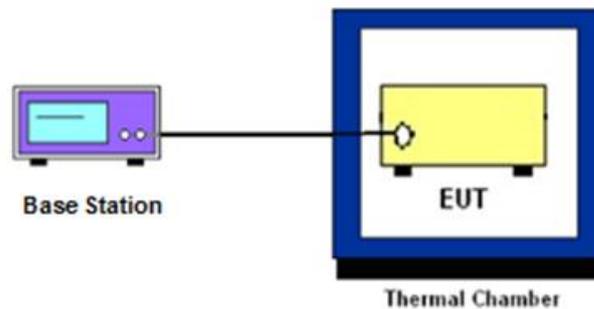

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



## **3.4 Conducted Output Power Measurement**

### **3.4.1 Description of the Conducted Output Power Measurement**

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### **3.4.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

## 3.5 Peak-to-Average Ratio

### 3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

## 3.6 EIRP

### 3.6.1 Description of EIRP Limit

#### § 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

### 3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2.  $EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where  
 $P_T$  = transmitter output power in dBm  
 $G_T$  = gain of the transmitting antenna in dBi  
 $L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

## 3.7 Occupied Bandwidth

### 3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

## 3.8 Conducted Band Edge Measurement

### 3.8.1 Description of Conducted Band Edge Measurement

#### § 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed  $-13$  dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq 1\%$  EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW  $\geq 500$ KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

## 3.9 Conducted Spurious Emission Measurement

### 3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

## 3.10 Frequency Stability Measurement

### 3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

### 3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz

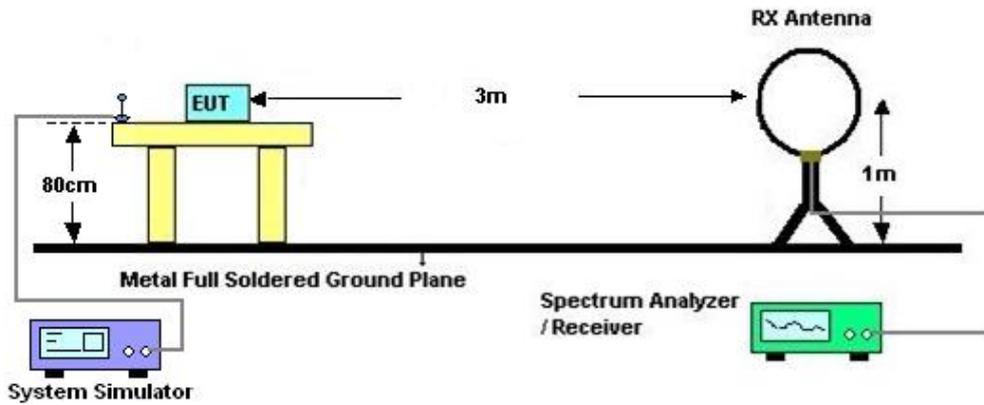

#### 4.2.2 For radiated test from 30MHz to 1GHz

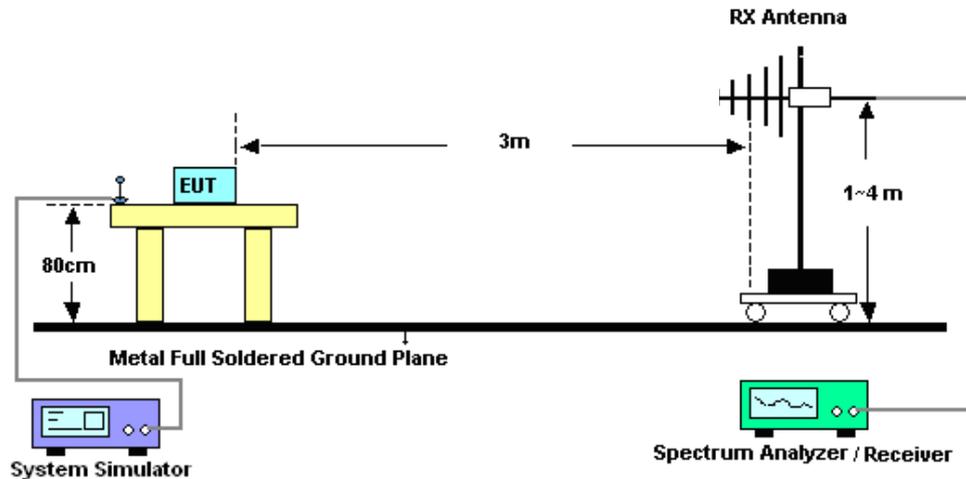

### 4.2.3 For radiated test above 1GHz

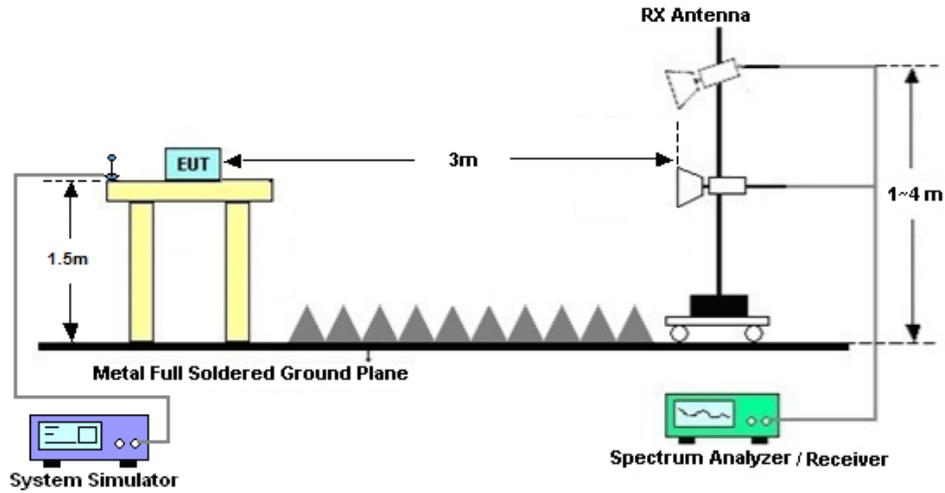

### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

## 4.4 Radiated Spurious Emission Measurement

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.  
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Signal Analyzer	KEYSIGHT	N9010B	MY60240803	10Hz~44GHz	Apr. 03, 2021	Sep. 24, 2021~ Oct. 11, 2021	Apr. 02, 2022	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 26, 2020	Sep. 24, 2021~ Oct. 11, 2021	Dec. 25, 2021	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 14, 2021	Sep. 24, 2021~ Oct. 11, 2021	Jul. 13, 2022	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr. 13, 2021	Oct. 11, 2021	Apr. 12, 2022	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	Oct. 11, 2021	Oct. 31, 2021	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Jun. 07, 2021	Oct. 11, 2021	Jun. 06, 2022	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 01, 2020	Oct. 11, 2021	Oct. 31, 2021	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Jan. 06, 2021	Oct. 11, 2021	Jan. 05, 2022	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 06, 2021	Oct. 11, 2021	Jan. 05, 2022	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 07, 2021	Oct. 11, 2021	Jan. 06, 2022	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2025788	1Ghz-18Ghz	Jan. 06, 2021	Oct. 11, 2021	Jan. 05, 2022	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 14, 2020	Oct. 11, 2021	Oct. 13, 2021	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 11, 2021	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 11, 2021	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 11, 2021	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

## 6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage  $K=2$  to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.8dB
---	-------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.8dB
---	-------

----- THE END -----



## Appendix A. Test Results of Conducted Test

# FR1 N77

## Transmitter Conducted Output Power and EIRP

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	25@12	24.91	22.34	0.1714
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@1	24.7	22.13	0.1633
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@49	24.72	22.15	0.1641
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	25@12	24.97	22.4	0.1738
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	24.77	22.2	0.1660
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@49	24.77	22.2	0.1660
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	25@12	23.99	21.42	0.1387
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	23.87	21.3	0.1349
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@49	23.78	21.21	0.1321
77	30	20	630668	3460.02	DFT-s-OFDM 64 QAM	25@12	22.46	19.89	0.0975
77	30	20	630668	3460.02	DFT-s-OFDM 64 QAM	1@1	22.32	19.75	0.0944
77	30	20	630668	3460.02	DFT-s-OFDM 64 QAM	1@49	22.33	19.76	0.0946
77	30	20	630668	3460.02	DFT-s-OFDM 256 QAM	25@12	20.5	17.93	0.0621
77	30	20	630668	3460.02	DFT-s-OFDM 256 QAM	1@1	20.28	17.71	0.0590
77	30	20	630668	3460.02	DFT-s-OFDM 256 QAM	1@49	20.29	17.72	0.0592
77	30	20	630668	3460.02	CP-OFDM QPSK	25@12	23.42	20.85	0.1216
77	30	20	630668	3460.02	CP-OFDM QPSK	1@1	23.48	20.91	0.1233
77	30	20	630668	3460.02	CP-OFDM QPSK	1@49	23.53	20.96	0.1247
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	25@12	25.03	22.46	0.1762

77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.87	22.3	0.1698
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@49	24.77	22.2	0.1660
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	25@12	25.07	22.5	0.1778
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.8	22.23	0.1671
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@49	24.72	22.15	0.1641
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	25@12	24.06	21.49	0.1409
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.92	21.35	0.1365
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@49	23.86	21.29	0.1346
77	30	20	633334	3500.01	DFT-s-OFDM 64 QAM	25@12	22.55	19.98	0.0995
77	30	20	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	22.57	20	0.1000
77	30	20	633334	3500.01	DFT-s-OFDM 64 QAM	1@49	22.32	19.75	0.0944
77	30	20	633334	3500.01	DFT-s-OFDM 256 QAM	25@12	20.6	18.03	0.0635
77	30	20	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	20.35	17.78	0.0600
77	30	20	633334	3500.01	DFT-s-OFDM 256 QAM	1@49	20.33	17.76	0.0597
77	30	20	633334	3500.01	CP-OFDM QPSK	25@12	23.53	20.96	0.1247
77	30	20	633334	3500.01	CP-OFDM QPSK	1@1	23.92	21.35	0.1365
77	30	20	633334	3500.01	CP-OFDM QPSK	1@49	23.82	21.25	0.1334
77	30	20	636000	3540	DFT-s-OFDM PI/2 BPSK	25@12	25.01	22.44	0.1754
77	30	20	636000	3540	DFT-s-OFDM PI/2 BPSK	1@1	24.84	22.27	0.1687
77	30	20	636000	3540	DFT-s-OFDM PI/2 BPSK	1@49	24.76	22.19	0.1656
77	30	20	636000	3540	DFT-s-OFDM QPSK	25@12	25.02	22.45	0.1758
77	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	24.82	22.25	0.1679
77	30	20	636000	3540	DFT-s-OFDM QPSK	1@49	24.76	22.19	0.1656
77	30	20	636000	3540	DFT-s-OFDM 16	25@12	24.05	21.48	0.1406

QAM									
77	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	23.79	21.22	0.1324
77	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@49	23.71	21.14	0.1300
77	30	20	636000	3540	DFT-s-OFDM 64 QAM	25@12	22.55	19.98	0.0995
77	30	20	636000	3540	DFT-s-OFDM 64 QAM	1@1	22.45	19.88	0.0973
77	30	20	636000	3540	DFT-s-OFDM 64 QAM	1@49	22.38	19.81	0.0957
77	30	20	636000	3540	DFT-s-OFDM 256 QAM	25@12	20.53	17.96	0.0625
77	30	20	636000	3540	DFT-s-OFDM 256 QAM	1@1	20.42	17.85	0.0610
77	30	20	636000	3540	DFT-s-OFDM 256 QAM	1@49	20.36	17.79	0.0601
77	30	20	636000	3540	CP-OFDM QPSK	25@12	23.52	20.95	0.1245
77	30	20	636000	3540	CP-OFDM QPSK	1@1	23.68	21.11	0.1291
77	30	20	636000	3540	CP-OFDM QPSK	1@49	23.53	20.96	0.1247
77	30	40	631334	3470.01	DFT-s-OFDM PI/2 BPSK	50@25	25.03	22.46	0.1762
77	30	40	631334	3470.01	DFT-s-OFDM PI/2 BPSK	1@1	24.49	21.92	0.1556
77	30	40	631334	3470.01	DFT-s-OFDM PI/2 BPSK	1@104	24.48	21.91	0.1552
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	50@25	25.01	22.44	0.1754
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	24.47	21.9	0.1549
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@104	24.46	21.89	0.1545
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	50@25	24.03	21.46	0.1400
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	23.5	20.93	0.1239
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@104	23.47	20.9	0.1230
77	30	40	631334	3470.01	DFT-s-OFDM 64 QAM	50@25	22.5	19.93	0.0984
77	30	40	631334	3470.01	DFT-s-OFDM 64 QAM	1@1	22.25	19.68	0.0929
77	30	40	631334	3470.01	DFT-s-OFDM 64 QAM	1@104	22.11	19.54	0.0899

77	30	40	631334	3470.01	DFT-s-OFDM 256 QAM	50@25	20.49	17.92	0.0619
77	30	40	631334	3470.01	DFT-s-OFDM 256 QAM	1@1	19.99	17.42	0.0552
77	30	40	631334	3470.01	DFT-s-OFDM 256 QAM	1@104	20.03	17.46	0.0557
77	30	40	631334	3470.01	CP-OFDM QPSK	53@26	23.52	20.95	0.1245
77	30	40	631334	3470.01	CP-OFDM QPSK	1@1	23.22	20.65	0.1161
77	30	40	631334	3470.01	CP-OFDM QPSK	1@104	23.21	20.64	0.1159
77	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@25	25.05	22.48	0.1770
77	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.6	22.03	0.1596
77	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@104	24.49	21.92	0.1556
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	50@25	25.09	22.52	0.1786
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.6	22.03	0.1596
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@104	24.48	21.91	0.1552
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	50@25	24.06	21.49	0.1409
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.62	21.05	0.1274
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@104	23.5	20.93	0.1239
77	30	40	633334	3500.01	DFT-s-OFDM 64 QAM	50@25	22.59	20.02	0.1005
77	30	40	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	22.23	19.66	0.0925
77	30	40	633334	3500.01	DFT-s-OFDM 64 QAM	1@104	22.13	19.56	0.0904
77	30	40	633334	3500.01	DFT-s-OFDM 256 QAM	50@25	20.55	17.98	0.0628
77	30	40	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	20.12	17.55	0.0569
77	30	40	633334	3500.01	DFT-s-OFDM 256 QAM	1@104	19.94	17.37	0.0546
77	30	40	633334	3500.01	CP-OFDM QPSK	53@26	23.59	21.02	0.1265
77	30	40	633334	3500.01	CP-OFDM QPSK	1@1	23.35	20.78	0.1197
77	30	40	633334	3500.01	CP-OFDM QPSK	1@104	23.21	20.64	0.1159

77	30	40	635332	3529.98	DFT-s-OFDM PI/2 BPSK	50@25	25.08	22.51	0.1782
77	30	40	635332	3529.98	DFT-s-OFDM PI/2 BPSK	1@1	24.63	22.06	0.1607
77	30	40	635332	3529.98	DFT-s-OFDM PI/2 BPSK	1@104	24.52	21.95	0.1567
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	50@25	25.12	22.55	0.1799
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	24.61	22.04	0.1600
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@104	24.43	21.86	0.1535
77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	50@25	24.1	21.53	0.1422
77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	23.75	21.18	0.1312
77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@104	23.48	20.91	0.1233
77	30	40	635332	3529.98	DFT-s-OFDM 64 QAM	50@25	22.62	20.05	0.1012
77	30	40	635332	3529.98	DFT-s-OFDM 64 QAM	1@1	22.41	19.84	0.0964
77	30	40	635332	3529.98	DFT-s-OFDM 64 QAM	1@104	22.11	19.54	0.0899
77	30	40	635332	3529.98	DFT-s-OFDM 256 QAM	50@25	20.58	18.01	0.0632
77	30	40	635332	3529.98	DFT-s-OFDM 256 QAM	1@1	20.16	17.59	0.0574
77	30	40	635332	3529.98	DFT-s-OFDM 256 QAM	1@104	20.02	17.45	0.0556
77	30	40	635332	3529.98	CP-OFDM QPSK	53@26	23.59	21.02	0.1265
77	30	40	635332	3529.98	CP-OFDM QPSK	1@1	23.35	20.78	0.1197
77	30	40	635332	3529.98	CP-OFDM QPSK	1@104	23.49	20.92	0.1236
77	30	50	631668	3475.02	DFT-s-OFDM PI/2 BPSK	64@32	25.05	22.48	0.1770
77	30	50	631668	3475.02	DFT-s-OFDM PI/2 BPSK	1@1	24.79	22.22	0.1667
77	30	50	631668	3475.02	DFT-s-OFDM PI/2 BPSK	1@131	24.8	22.23	0.1671
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	64@32	25.09	22.52	0.1786
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	24.77	22.2	0.1660
77	30	50	631668	3475.02	DFT-s-OFDM	1@131	24.75	22.18	0.1652

QPSK									
77	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	64@32	24.1	21.53	0.1422
77	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	23.92	21.35	0.1365
77	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@131	23.87	21.3	0.1349
77	30	50	631668	3475.02	DFT-s-OFDM 64 QAM	64@32	22.57	20	0.1000
77	30	50	631668	3475.02	DFT-s-OFDM 64 QAM	1@1	22.44	19.87	0.0971
77	30	50	631668	3475.02	DFT-s-OFDM 64 QAM	1@131	22.56	19.99	0.0998
77	30	50	631668	3475.02	DFT-s-OFDM 256 QAM	64@32	20.66	18.09	0.0644
77	30	50	631668	3475.02	DFT-s-OFDM 256 QAM	1@1	20.34	17.77	0.0598
77	30	50	631668	3475.02	DFT-s-OFDM 256 QAM	1@131	20.34	17.77	0.0598
77	30	50	631668	3475.02	CP-OFDM QPSK	67@33	23.56	20.99	0.1256
77	30	50	631668	3475.02	CP-OFDM QPSK	1@1	23.65	21.08	0.1282
77	30	50	631668	3475.02	CP-OFDM QPSK	1@131	23.58	21.01	0.1262
77	30	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	64@32	25.14	22.57	0.1807
77	30	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.89	22.32	0.1706
77	30	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@131	24.78	22.21	0.1663
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	64@32	25.15	22.58	0.1811
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.92	22.35	0.1718
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@131	24.76	22.19	0.1656
77	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	64@32	24.17	21.6	0.1445
77	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.82	21.25	0.1334
77	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@131	23.86	21.29	0.1346
77	30	50	633334	3500.01	DFT-s-OFDM 64 QAM	64@32	22.65	20.08	0.1019
77	30	50	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	22.53	19.96	0.0991

77	30	50	633334	3500.01	DFT-s-OFDM 64 QAM	1@131	22.58	20.01	0.1002
77	30	50	633334	3500.01	DFT-s-OFDM 256 QAM	64@32	20.67	18.1	0.0646
77	30	50	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	20.47	17.9	0.0617
77	30	50	633334	3500.01	DFT-s-OFDM 256 QAM	1@131	20.4	17.83	0.0607
77	30	50	633334	3500.01	CP-OFDM QPSK	67@33	23.64	21.07	0.1279
77	30	50	633334	3500.01	CP-OFDM QPSK	1@1	23.94	21.37	0.1371
77	30	50	633334	3500.01	CP-OFDM QPSK	1@131	23.87	21.3	0.1349
77	30	50	635000	3525	DFT-s-OFDM PI/2 BPSK	64@32	25.18	22.61	0.1824
77	30	50	635000	3525	DFT-s-OFDM PI/2 BPSK	1@1	24.96	22.39	0.1734
77	30	50	635000	3525	DFT-s-OFDM PI/2 BPSK	1@131	24.77	22.2	0.1660
77	30	50	635000	3525	DFT-s-OFDM QPSK	64@32	25.16	22.59	0.1816
77	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	24.93	22.36	0.1722
77	30	50	635000	3525	DFT-s-OFDM QPSK	1@131	24.74	22.17	0.1648
77	30	50	635000	3525	DFT-s-OFDM 16 QAM	64@32	24.16	21.59	0.1442
77	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	23.87	21.3	0.1349
77	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@131	23.68	21.11	0.1291
77	30	50	635000	3525	DFT-s-OFDM 64 QAM	64@32	22.66	20.09	0.1021
77	30	50	635000	3525	DFT-s-OFDM 64 QAM	1@1	22.61	20.04	0.1009
77	30	50	635000	3525	DFT-s-OFDM 64 QAM	1@131	22.53	19.96	0.0991
77	30	50	635000	3525	DFT-s-OFDM 256 QAM	64@32	20.7	18.13	0.0650
77	30	50	635000	3525	DFT-s-OFDM 256 QAM	1@1	20.55	17.98	0.0628
77	30	50	635000	3525	DFT-s-OFDM 256 QAM	1@131	20.3	17.73	0.0593
77	30	50	635000	3525	CP-OFDM QPSK	67@33	23.68	21.11	0.1291
77	30	50	635000	3525	CP-OFDM QPSK	1@1	23.74	21.17	0.1309

77	30	50	635000	3525	CP-OFDM QPSK	1@131	23.56	20.99	0.1256
77	30	60	632000	3480	DFT-s- OFDM PI/2 BPSK	81@40	25.16	22.59	0.1816
77	30	60	632000	3480	DFT-s- OFDM PI/2 BPSK	1@1	24.76	22.19	0.1656
77	30	60	632000	3480	DFT-s- OFDM PI/2 BPSK	1@160	24.74	22.17	0.1648
77	30	60	632000	3480	DFT-s- OFDM QPSK	81@40	25.15	22.58	0.1811
77	30	60	632000	3480	DFT-s- OFDM QPSK	1@1	24.77	22.2	0.1660
77	30	60	632000	3480	DFT-s- OFDM QPSK	1@160	24.69	22.12	0.1629
77	30	60	632000	3480	DFT-s- OFDM 16 QAM	81@40	24.17	21.6	0.1445
77	30	60	632000	3480	DFT-s- OFDM 16 QAM	1@1	23.87	21.3	0.1349
77	30	60	632000	3480	DFT-s- OFDM 16 QAM	1@160	23.7	21.13	0.1297
77	30	60	632000	3480	DFT-s- OFDM 64 QAM	81@40	22.63	20.06	0.1014
77	30	60	632000	3480	DFT-s- OFDM 64 QAM	1@1	22.45	19.88	0.0973
77	30	60	632000	3480	DFT-s- OFDM 64 QAM	1@160	22.22	19.65	0.0923
77	30	60	632000	3480	DFT-s- OFDM 256 QAM	81@40	20.58	18.01	0.0632
77	30	60	632000	3480	DFT-s- OFDM 256 QAM	1@1	20.3	17.73	0.0593
77	30	60	632000	3480	DFT-s- OFDM 256 QAM	1@160	20.25	17.68	0.0586
77	30	60	632000	3480	CP-OFDM QPSK	81@40	23.66	21.09	0.1285
77	30	60	632000	3480	CP-OFDM QPSK	1@1	23.62	21.05	0.1274
77	30	60	632000	3480	CP-OFDM QPSK	1@160	23.49	20.92	0.1236
77	30	60	633334	3500.01	DFT-s- OFDM PI/2 BPSK	81@40	25.16	22.59	0.1816
77	30	60	633334	3500.01	DFT-s- OFDM PI/2 BPSK	1@1	24.87	22.3	0.1698
77	30	60	633334	3500.01	DFT-s- OFDM PI/2 BPSK	1@160	24.7	22.13	0.1633
77	30	60	633334	3500.01	DFT-s- OFDM QPSK	81@40	25.15	22.58	0.1811
77	30	60	633334	3500.01	DFT-s- OFDM QPSK	1@1	24.83	22.26	0.1683

77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@160	24.72	22.15	0.1641
77	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	81@40	24.14	21.57	0.1435
77	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.97	21.4	0.1380
77	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@160	23.71	21.14	0.1300
77	30	60	633334	3500.01	DFT-s-OFDM 64 QAM	81@40	22.62	20.05	0.1012
77	30	60	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	22.63	20.06	0.1014
77	30	60	633334	3500.01	DFT-s-OFDM 64 QAM	1@160	22.46	19.89	0.0975
77	30	60	633334	3500.01	DFT-s-OFDM 256 QAM	81@40	20.66	18.09	0.0644
77	30	60	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	20.31	17.74	0.0594
77	30	60	633334	3500.01	DFT-s-OFDM 256 QAM	1@160	20.22	17.65	0.0582
77	30	60	633334	3500.01	CP-OFDM QPSK	81@40	23.67	21.1	0.1288
77	30	60	633334	3500.01	CP-OFDM QPSK	1@1	23.53	20.96	0.1247
77	30	60	633334	3500.01	CP-OFDM QPSK	1@160	23.64	21.07	0.1279
77	30	60	634666	3519.99	DFT-s-OFDM PI/2 BPSK	81@40	25.14	22.57	0.1807
77	30	60	634666	3519.99	DFT-s-OFDM PI/2 BPSK	1@1	24.91	22.34	0.1714
77	30	60	634666	3519.99	DFT-s-OFDM PI/2 BPSK	1@160	24.71	22.14	0.1637
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	81@40	25.14	22.57	0.1807
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	24.92	22.35	0.1718
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@160	24.7	22.13	0.1633
77	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	81@40	24.21	21.64	0.1459
77	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	24.03	21.46	0.1400
77	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@160	23.73	21.16	0.1306
77	30	60	634666	3519.99	DFT-s-OFDM 64 QAM	81@40	22.64	20.07	0.1016
77	30	60	634666	3519.99	DFT-s-OFDM 64 QAM	1@1	22.67	20.1	0.1023

QAM									
77	30	60	634666	3519.99	DFT-s-OFDM 64 QAM	1@160	22.44	19.87	0.0971
77	30	60	634666	3519.99	DFT-s-OFDM 256 QAM	81@40	20.64	18.07	0.0641
77	30	60	634666	3519.99	DFT-s-OFDM 256 QAM	1@1	20.46	17.89	0.0615
77	30	60	634666	3519.99	DFT-s-OFDM 256 QAM	1@160	20.24	17.67	0.0585
77	30	60	634666	3519.99	CP-OFDM QPSK	81@40	23.71	21.14	0.1300
77	30	60	634666	3519.99	CP-OFDM QPSK	1@1	23.73	21.16	0.1306
77	30	60	634666	3519.99	CP-OFDM QPSK	1@160	23.68	21.11	0.1291
77	30	80	632668	3490.02	DFT-s-OFDM PI/2 BPSK	108@54	25.19	22.62	0.1828
77	30	80	632668	3490.02	DFT-s-OFDM PI/2 BPSK	1@1	24.61	22.04	0.1600
77	30	80	632668	3490.02	DFT-s-OFDM PI/2 BPSK	1@215	24.53	21.96	0.1570
77	30	80	632668	3490.02	DFT-s-OFDM QPSK	108@54	25.17	22.6	0.1820
77	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	24.6	22.03	0.1596
77	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@215	24.49	21.92	0.1556
77	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	108@54	24.2	21.63	0.1455
77	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	23.77	21.2	0.1318
77	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@215	23.5	20.93	0.1239
77	30	80	632668	3490.02	DFT-s-OFDM 64 QAM	108@54	22.66	20.09	0.1021
77	30	80	632668	3490.02	DFT-s-OFDM 64 QAM	1@1	22.53	19.96	0.0991
77	30	80	632668	3490.02	DFT-s-OFDM 64 QAM	1@215	22.44	19.87	0.0971
77	30	80	632668	3490.02	DFT-s-OFDM 256 QAM	108@54	20.65	18.08	0.0643
77	30	80	632668	3490.02	DFT-s-OFDM 256 QAM	1@1	20.16	17.59	0.0574
77	30	80	632668	3490.02	DFT-s-OFDM 256 QAM	1@215	20.13	17.56	0.0570
77	30	80	632668	3490.02	CP-OFDM QPSK	109@54	23.66	21.09	0.1285

77	30	80	632668	3490.02	CP-OFDM QPSK	1@1	23.25	20.68	0.1169
77	30	80	632668	3490.02	CP-OFDM QPSK	1@215	23.15	20.58	0.1143
77	30	80	633334	3500.01	DFT-s- OFDM PI/2 BPSK	108@54	25.19	22.62	0.1828
77	30	80	633334	3500.01	DFT-s- OFDM PI/2 BPSK	1@1	24.63	22.06	0.1607
77	30	80	633334	3500.01	DFT-s- OFDM PI/2 BPSK	1@215	24.49	21.92	0.1556
77	30	80	633334	3500.01	DFT-s- OFDM QPSK	108@54	25.16	22.59	0.1816
77	30	80	633334	3500.01	DFT-s- OFDM QPSK	1@1	24.63	22.06	0.1607
77	30	80	633334	3500.01	DFT-s- OFDM QPSK	1@215	24.51	21.94	0.1563
77	30	80	633334	3500.01	DFT-s- OFDM 16 QAM	108@54	24.2	21.63	0.1455
77	30	80	633334	3500.01	DFT-s- OFDM 16 QAM	1@1	23.81	21.24	0.1330
77	30	80	633334	3500.01	DFT-s- OFDM 16 QAM	1@215	23.5	20.93	0.1239
77	30	80	633334	3500.01	DFT-s- OFDM 64 QAM	108@54	22.64	20.07	0.1016
77	30	80	633334	3500.01	DFT-s- OFDM 64 QAM	1@1	22.57	20	0.1000
77	30	80	633334	3500.01	DFT-s- OFDM 64 QAM	1@215	22.45	19.88	0.0973
77	30	80	633334	3500.01	DFT-s- OFDM 256 QAM	108@54	20.65	18.08	0.0643
77	30	80	633334	3500.01	DFT-s- OFDM 256 QAM	1@1	20.24	17.67	0.0585
77	30	80	633334	3500.01	DFT-s- OFDM 256 QAM	1@215	20.1	17.53	0.0566
77	30	80	633334	3500.01	CP-OFDM QPSK	109@54	23.67	21.1	0.1288
77	30	80	633334	3500.01	CP-OFDM QPSK	1@1	23.27	20.7	0.1175
77	30	80	633334	3500.01	CP-OFDM QPSK	1@215	23.16	20.59	0.1146
77	30	80	634000	3510	DFT-s- OFDM PI/2 BPSK	108@54	25.2	22.63	0.1832
77	30	80	634000	3510	DFT-s- OFDM PI/2 BPSK	1@1	24.65	22.08	0.1614
77	30	80	634000	3510	DFT-s- OFDM PI/2 BPSK	1@215	24.54	21.97	0.1574
77	30	80	634000	3510	DFT-s- OFDM QPSK	108@54	25.17	22.6	0.1820

77	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	24.74	22.17	0.1648
77	30	80	634000	3510	DFT-s-OFDM QPSK	1@215	24.55	21.98	0.1578
77	30	80	634000	3510	DFT-s-OFDM 16 QAM	108@54	24.22	21.65	0.1462
77	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	23.78	21.21	0.1321
77	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@215	23.5	20.93	0.1239
77	30	80	634000	3510	DFT-s-OFDM 64 QAM	108@54	22.67	20.1	0.1023
77	30	80	634000	3510	DFT-s-OFDM 64 QAM	1@1	22.41	19.84	0.0964
77	30	80	634000	3510	DFT-s-OFDM 64 QAM	1@215	22.49	19.92	0.0982
77	30	80	634000	3510	DFT-s-OFDM 256 QAM	108@54	20.67	18.1	0.0646
77	30	80	634000	3510	DFT-s-OFDM 256 QAM	1@1	20.27	17.7	0.0589
77	30	80	634000	3510	DFT-s-OFDM 256 QAM	1@215	20.13	17.56	0.0570
77	30	80	634000	3510	CP-OFDM QPSK	109@54	23.68	21.11	0.1291
77	30	80	634000	3510	CP-OFDM QPSK	1@1	23.35	20.78	0.1197
77	30	80	634000	3510	CP-OFDM QPSK	1@215	23.17	20.6	0.1148
77	30	90	633000	3495	DFT-s-OFDM PI/2 BPSK	120@60	25.13	22.56	0.1803
77	30	90	633000	3495	DFT-s-OFDM PI/2 BPSK	1@1	24.5	21.93	0.1560
77	30	90	633000	3495	DFT-s-OFDM PI/2 BPSK	1@243	24.37	21.8	0.1514
77	30	90	633000	3495	DFT-s-OFDM QPSK	120@60	25.11	22.54	0.1795
77	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	24.49	21.92	0.1556
77	30	90	633000	3495	DFT-s-OFDM QPSK	1@243	24.35	21.78	0.1507
77	30	90	633000	3495	DFT-s-OFDM 16 QAM	120@60	24.15	21.58	0.1439
77	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	23.58	21.01	0.1262
77	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@243	23.24	20.67	0.1167
77	30	90	633000	3495	DFT-s-OFDM 64	120@60	22.64	20.07	0.1016

QAM									
77	30	90	633000	3495	DFT-s-OFDM 64 QAM	1@1	22.18	19.61	0.0914
77	30	90	633000	3495	DFT-s-OFDM 64 QAM	1@243	22.16	19.59	0.0910
77	30	90	633000	3495	DFT-s-OFDM 256 QAM	120@60	20.63	18.06	0.0640
77	30	90	633000	3495	DFT-s-OFDM 256 QAM	1@1	20.09	17.52	0.0565
77	30	90	633000	3495	DFT-s-OFDM 256 QAM	1@243	19.91	17.34	0.0542
77	30	90	633000	3495	CP-OFDM QPSK	123@61	23.63	21.06	0.1276
77	30	90	633000	3495	CP-OFDM QPSK	1@1	23.49	20.92	0.1236
77	30	90	633000	3495	CP-OFDM QPSK	1@243	23.33	20.76	0.1191
77	30	90	633334	3500.01	DFT-s-OFDM PI/2 BPSK	120@60	25.14	22.57	0.1807
77	30	90	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.52	21.95	0.1567
77	30	90	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@243	24.38	21.81	0.1517
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	120@60	25.13	22.56	0.1803
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.48	21.91	0.1552
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@243	24.34	21.77	0.1503
77	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	120@60	24.13	21.56	0.1432
77	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.62	21.05	0.1274
77	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@243	23.5	20.93	0.1239
77	30	90	633334	3500.01	DFT-s-OFDM 64 QAM	120@60	22.65	20.08	0.1019
77	30	90	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	22.36	19.79	0.0953
77	30	90	633334	3500.01	DFT-s-OFDM 64 QAM	1@243	22.09	19.52	0.0895
77	30	90	633334	3500.01	DFT-s-OFDM 256 QAM	120@60	20.63	18.06	0.0640
77	30	90	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	20.06	17.49	0.0561
77	30	90	633334	3500.01	DFT-s-OFDM 256 QAM	1@243	19.95	17.38	0.0547

77	30	90	633334	3500.01	CP-OFDM QPSK	123@61	23.66	21.09	0.1285
77	30	90	633334	3500.01	CP-OFDM QPSK	1@1	23.21	20.64	0.1159
77	30	90	633334	3500.01	CP-OFDM QPSK	1@243	23.12	20.55	0.1135
77	30	90	633666	3504.99	DFT-s- OFDM PI/2 BPSK	120@60	25.14	22.57	0.1807
77	30	90	633666	3504.99	DFT-s- OFDM PI/2 BPSK	1@1	24.56	21.99	0.1581
77	30	90	633666	3504.99	DFT-s- OFDM PI/2 BPSK	1@243	24.35	21.78	0.1507
77	30	90	633666	3504.99	DFT-s- OFDM QPSK	120@60	25.15	22.58	0.1811
77	30	90	633666	3504.99	DFT-s- OFDM QPSK	1@1	24.57	22	0.1585
77	30	90	633666	3504.99	DFT-s- OFDM QPSK	1@243	24.39	21.82	0.1521
77	30	90	633666	3504.99	DFT-s- OFDM 16 QAM	120@60	24.18	21.61	0.1449
77	30	90	633666	3504.99	DFT-s- OFDM 16 QAM	1@1	23.57	21	0.1259
77	30	90	633666	3504.99	DFT-s- OFDM 16 QAM	1@243	23.18	20.61	0.1151
77	30	90	633666	3504.99	DFT-s- OFDM 64 QAM	120@60	22.68	20.11	0.1026
77	30	90	633666	3504.99	DFT-s- OFDM 64 QAM	1@1	22.47	19.9	0.0977
77	30	90	633666	3504.99	DFT-s- OFDM 64 QAM	1@243	22.09	19.52	0.0895
77	30	90	633666	3504.99	DFT-s- OFDM 256 QAM	120@60	20.66	18.09	0.0644
77	30	90	633666	3504.99	DFT-s- OFDM 256 QAM	1@1	20.17	17.6	0.0575
77	30	90	633666	3504.99	DFT-s- OFDM 256 QAM	1@243	19.94	17.37	0.0546
77	30	90	633666	3504.99	CP-OFDM QPSK	123@61	23.67	21.1	0.1288
77	30	90	633666	3504.99	CP-OFDM QPSK	1@1	23.27	20.7	0.1175
77	30	90	633666	3504.99	CP-OFDM QPSK	1@243	23.2	20.63	0.1156
77	30	100	633334	3500.01	DFT-s- OFDM PI/2 BPSK	135@67	25.15	22.58	0.1811
77	30	100	633334	3500.01	DFT-s- OFDM PI/2 BPSK	1@1	24.42	21.85	0.1531
77	30	100	633334	3500.01	DFT-s- OFDM PI/2 BPSK	1@271	24.26	21.69	0.1476

77	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	25.14	22.57	0.1807
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.41	21.84	0.1528
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	24.22	21.65	0.1462
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	24.16	21.59	0.1442
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.47	20.9	0.1230
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	23.14	20.57	0.1140
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	22.68	20.11	0.1026
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	22.21	19.64	0.0920
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	22.02	19.45	0.0881
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	20.66	18.09	0.0644
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	19.99	17.42	0.0552
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	19.85	17.28	0.0535
77	30	100	633334	3500.01	CP-OFDM QPSK	137@68	23.69	21.12	0.1294
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	23.19	20.62	0.1153
77	30	100	633334	3500.01	CP-OFDM QPSK	1@271	23.16	20.59	0.1146

## Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.00146	PASS	NV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.00154	PASS	LV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.00556	PASS	HV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.00328	PASS	-30°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.00483	PASS	-20°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.00114	PASS	-10°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.00386	PASS	0°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.00482	PASS	10°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.00147	PASS	20°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.00568	PASS	30°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.00865	PASS	40°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.00475	PASS	50°C

## Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	50@0	7.22	13	PASS
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@0	6.96	13	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	50@0	8.49	13	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	7.67	13	PASS
77	30	20	633334	3460.02	DFT-s-OFDM PI/2 BPSK	50@0	7.2	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@0	6.88	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	8.48	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	7.77	13	PASS
77	30	20	636000	3540.0	DFT-s-OFDM PI/2 BPSK	50@0	7.24	13	PASS
77	30	20	636000	3540.0	DFT-s-OFDM PI/2 BPSK	1@0	6.95	13	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	50@0	8.48	13	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	7.71	13	PASS

N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Low\_CH




N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Low\_CH



N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH




N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

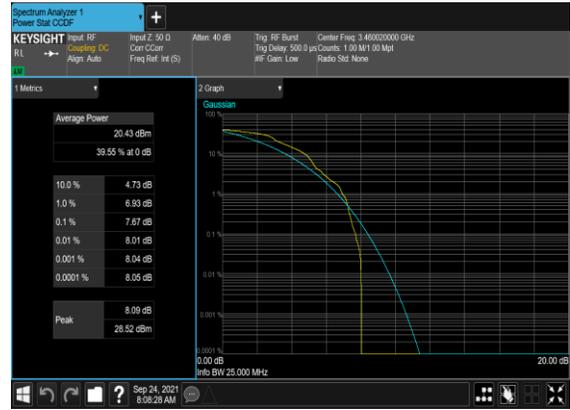


N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH




N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Mid\_CH

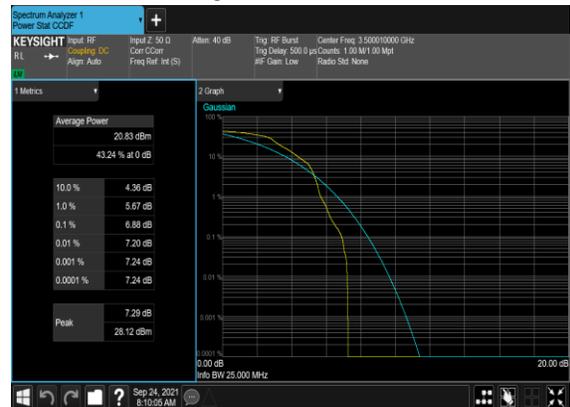

N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

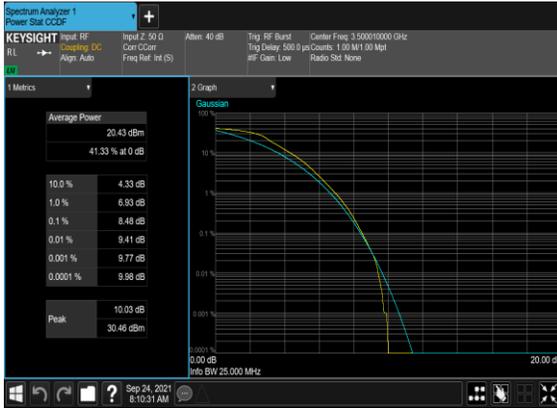


N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

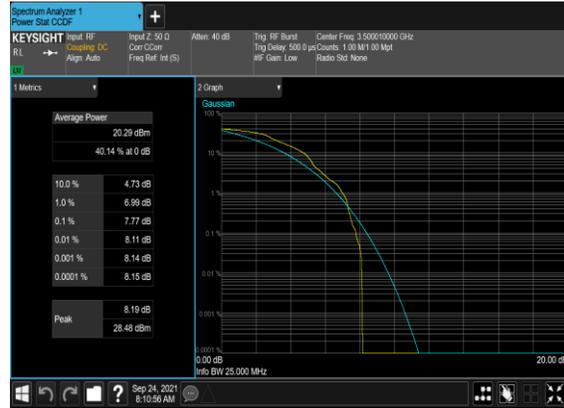

N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_High\_CH



N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_High\_CH

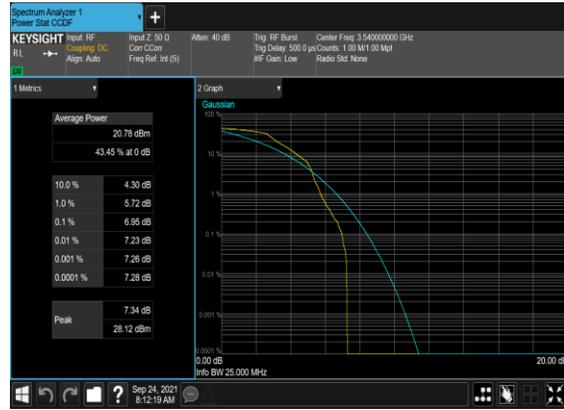

N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH



N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH




## Occupied Bandwidth


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	17.811	19.08
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	17.782	18.88
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	18.185	19.37
77	30	20	633334	3500.01	CP-OFDM 16 QAM	51@0	18.204	19.14
77	30	20	633334	3500.01	CP-OFDM 64 QAM	51@0	18.161	19.44
77	30	20	633334	3500.01	CP-OFDM 256 QAM	51@0	18.17	19.25
77	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	100@0	35.696	37.44
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	100@0	35.647	37.5
77	30	40	633334	3500.01	CP-OFDM QPSK	106@0	37.837	39.35
77	30	40	633334	3500.01	CP-OFDM 16 QAM	106@0	37.766	39.58
77	30	40	633334	3500.01	CP-OFDM 64 QAM	106@0	37.812	39.44
77	30	40	633334	3500.01	CP-OFDM 256 QAM	106@0	37.747	39.21
77	30	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	128@0	45.761	48.1
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	128@0	45.713	47.86
77	30	50	633334	3500.01	CP-OFDM QPSK	133@0	47.403	49.36
77	30	50	633334	3500.01	CP-OFDM 16 QAM	133@0	47.429	49.48
77	30	50	633334	3500.01	CP-OFDM 64 QAM	133@0	47.412	49.55
77	30	50	633334	3500.01	CP-OFDM 256 QAM	133@0	47.414	49.44
77	30	60	633334	3500.01	DFT-s-OFDM PI/2 BPSK	162@0	57.904	59.78
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	162@0	57.809	59.91
77	30	60	633334	3500.01	CP-OFDM QPSK	162@0	57.73	59.8
77	30	60	633334	3500.01	CP-OFDM 16 QAM	162@0	57.745	59.9
77	30	60	633334	3500.01	CP-OFDM 64 QAM	162@0	57.775	59.83
77	30	60	633334	3500.01	CP-OFDM 256 QAM	162@0	57.812	59.93

77	30	80	633334	3500.01	DFT-s-OFDM PI/2 BPSK	216@0	77.192	79.91
77	30	80	633334	3500.01	DFT-s-OFDM QPSK	216@0	77.308	79.71
77	30	80	633334	3500.01	CP-OFDM QPSK	217@0	77.353	80.08
77	30	80	633334	3500.01	CP-OFDM 16 QAM	217@0	77.362	80.04
77	30	80	633334	3500.01	CP-OFDM 64 QAM	217@0	77.468	79.99
77	30	80	633334	3500.01	CP-OFDM 256 QAM	217@0	77.326	79.94
77	30	90	633334	3500.01	DFT-s-OFDM PI/2 BPSK	240@0	85.57	88.6
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	240@0	85.627	88.6
77	30	90	633334	3500.01	CP-OFDM QPSK	245@0	87.42	90.24
77	30	90	633334	3500.01	CP-OFDM 16 QAM	245@0	87.504	90.41
77	30	90	633334	3500.01	CP-OFDM 64 QAM	245@0	87.377	90.41
77	30	90	633334	3500.01	CP-OFDM 256 QAM	245@0	87.354	90.35
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	270@0	96.447	99.51
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	270@0	96.351	99.44
77	30	100	633334	3500.01	CP-OFDM QPSK	273@0	97.191	100.5
77	30	100	633334	3500.01	CP-OFDM 16 QAM	273@0	97.258	100.5
77	30	100	633334	3500.01	CP-OFDM 64 QAM	273@0	97.198	100.5
77	30	100	633334	3500.01	CP-OFDM 256 QAM	273@0	97.244	100.6


### N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH

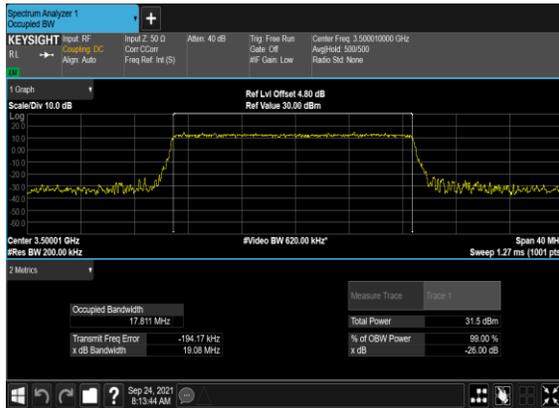


### N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

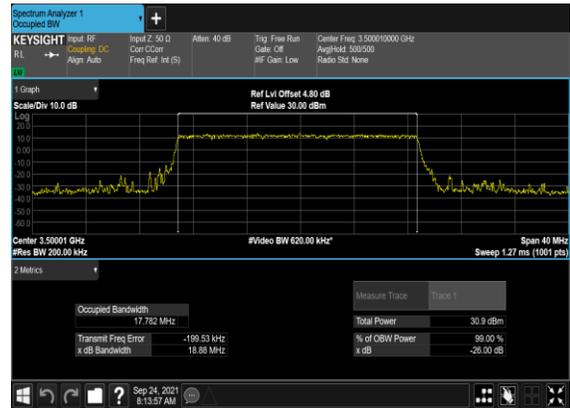


### N77(20M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

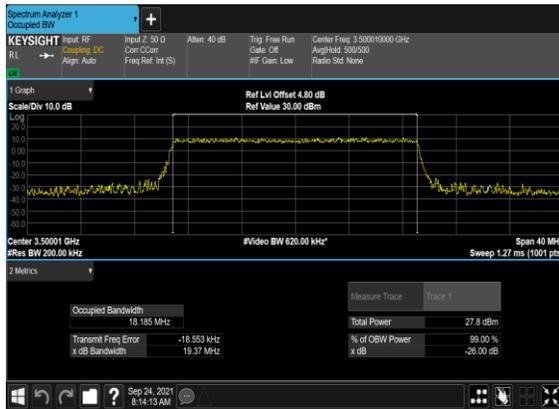


### N77(20M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

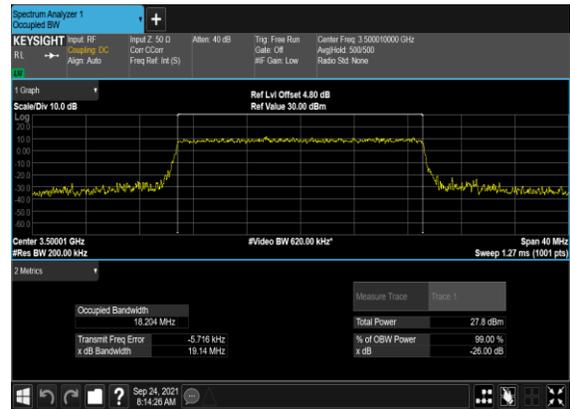


### N77(20M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

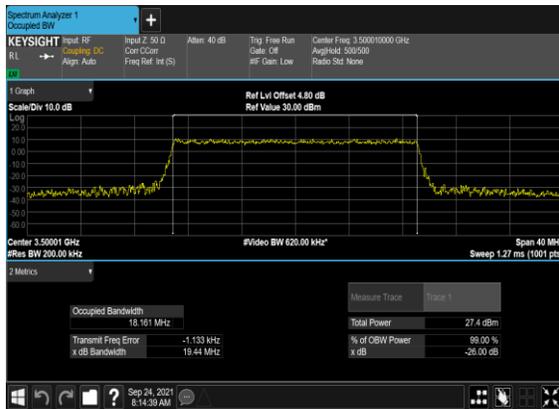


### N77(20M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

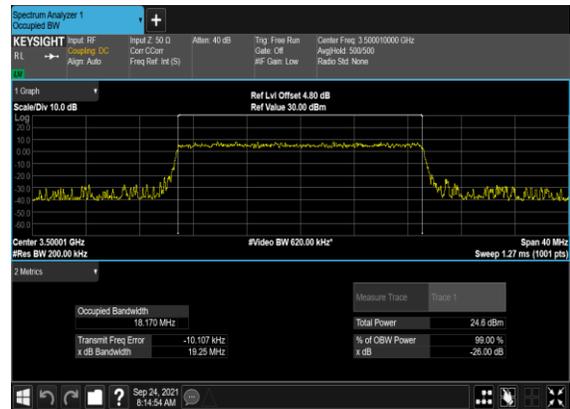


### N77(40M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH

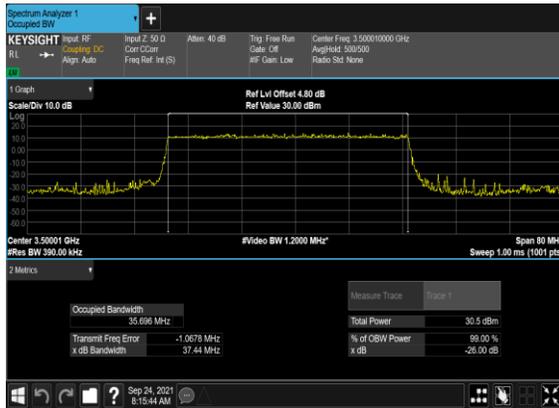


### N77(40M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

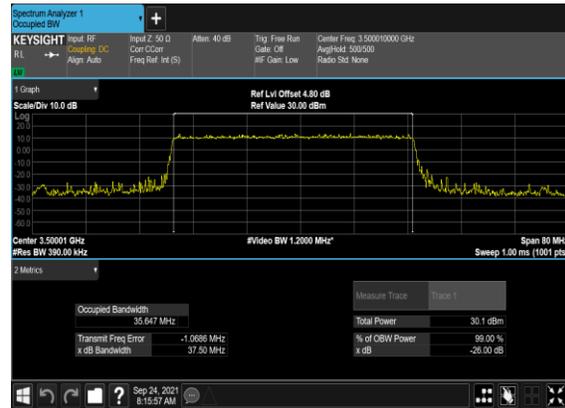


### N77(40M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

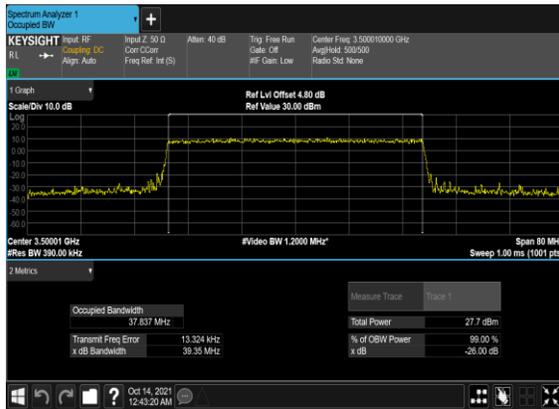


### N77(40M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

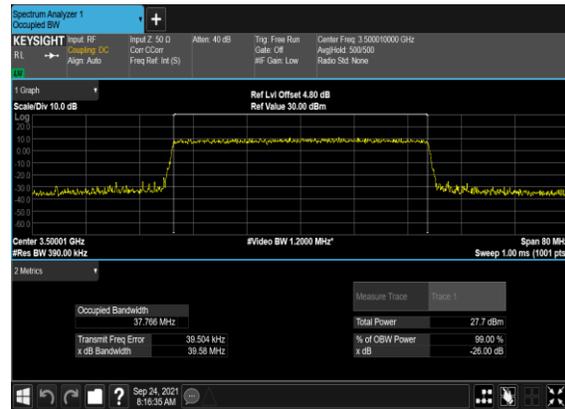


### N77(40M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

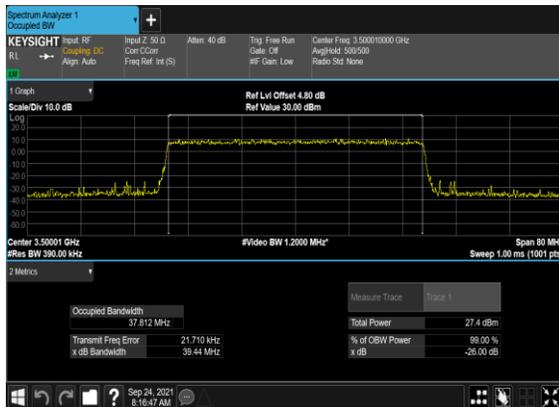

### N77(40M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

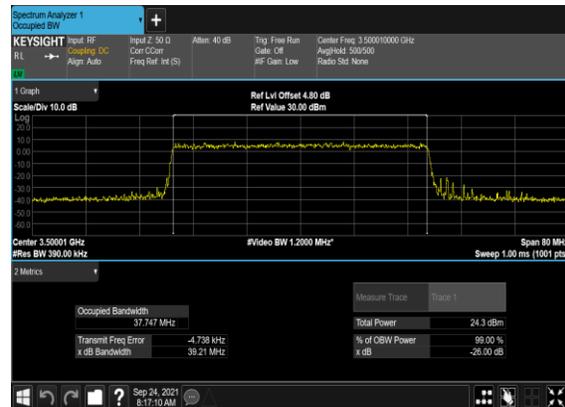

### N77(50M)\_DFT-s-OFDM\_PI\_2- BPSK\_Outer\_Full\_Mid\_CH

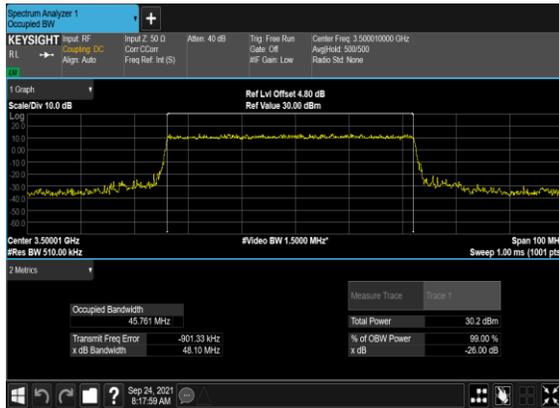

### N77(50M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_Mid\_CH




### N77(50M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH




### N77(50M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH



### N77(50M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

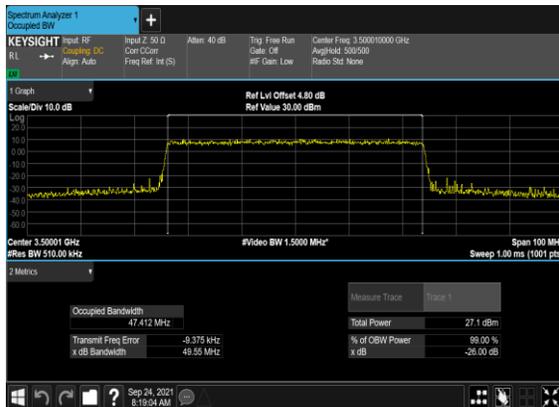


### N77(50M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

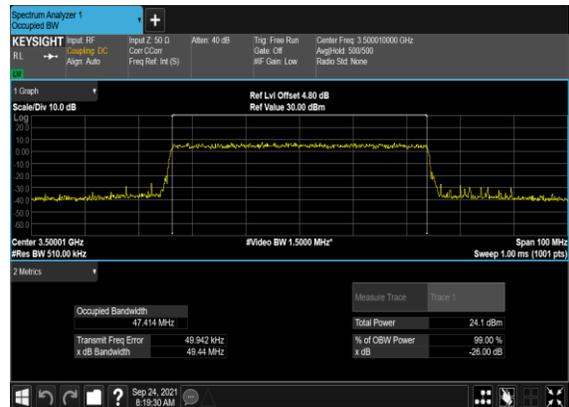


### N77(60M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH




### N77(60M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

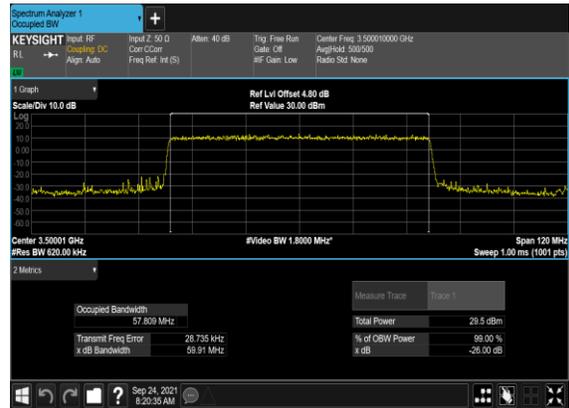


### N77(60M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

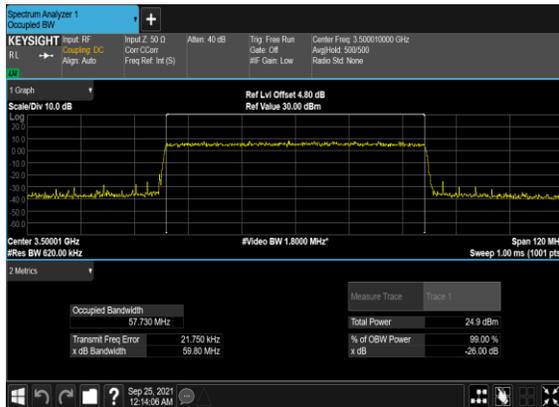


### N77(60M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

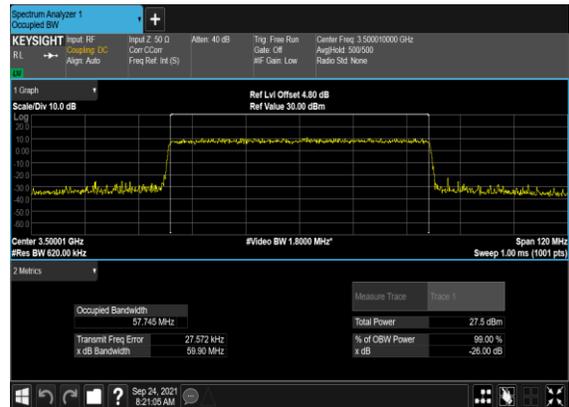


### N77(60M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

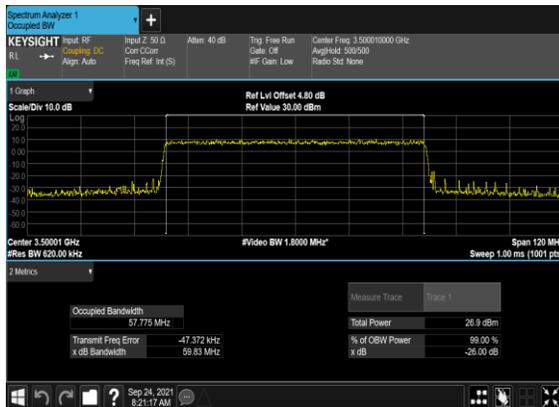


### N77(60M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

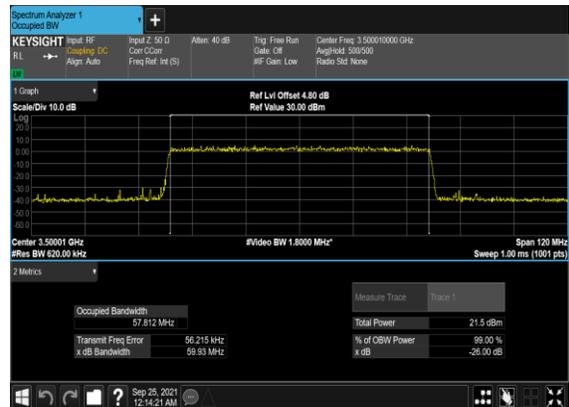


### N77(80M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH

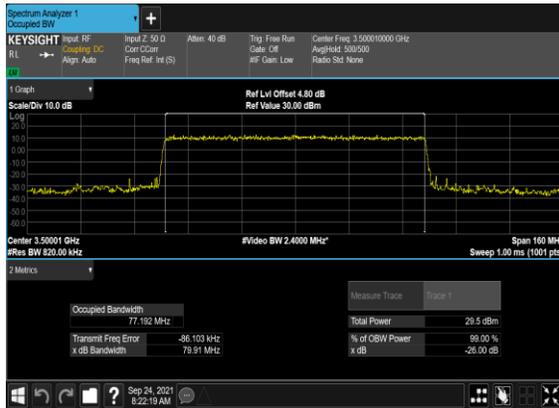

### N77(80M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

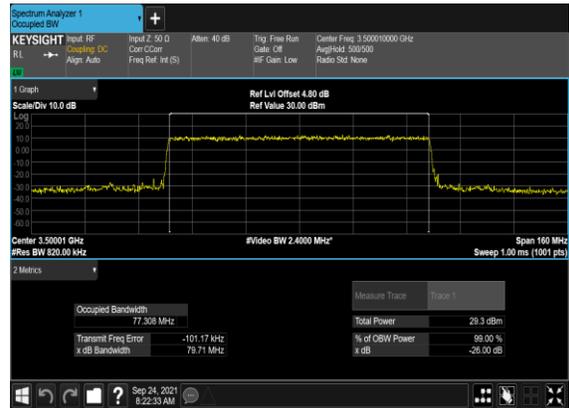


### N77(80M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

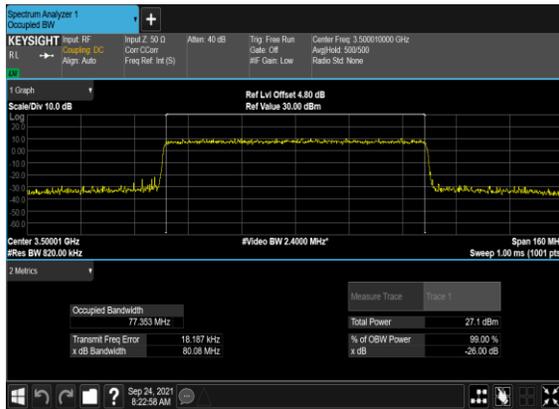

### N77(80M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH



### N77(80M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

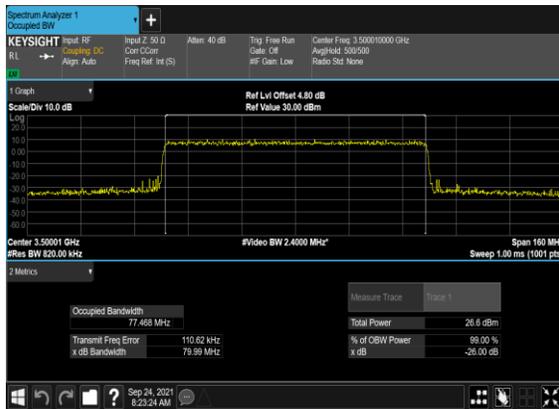

### N77(80M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH



### N77(90M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH



### N77(90M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




### N77(90M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




### N77(90M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH




### N77(90M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

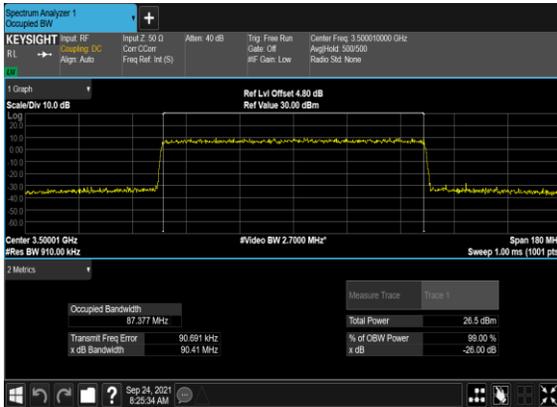


### N77(90M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

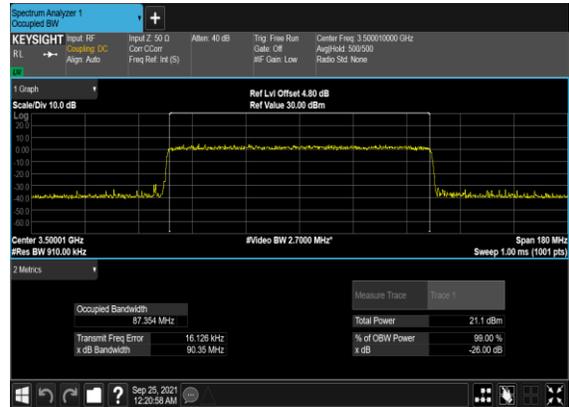


### N77(100M)\_DFT-s-OFDM\_PI\_2- BPSK\_Outer\_Full\_Mid\_CH

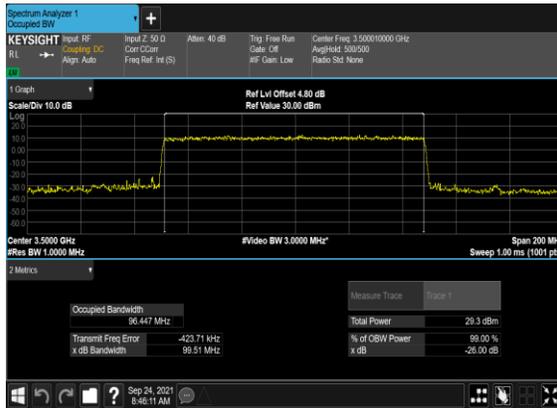


### N77(100M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

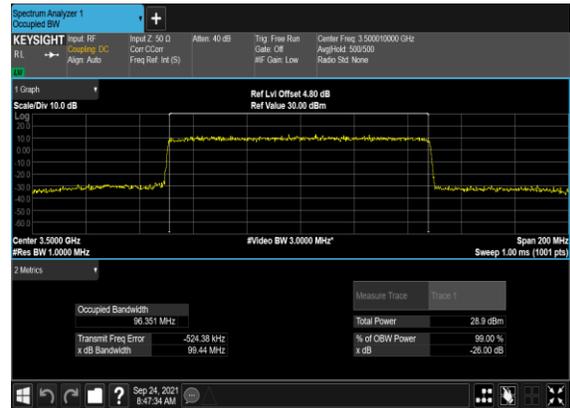


### N77(100M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

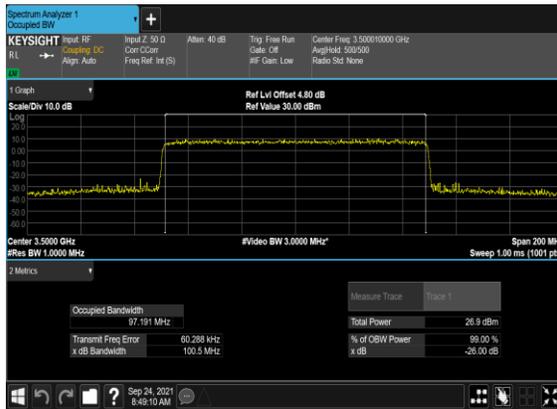


### N77(100M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

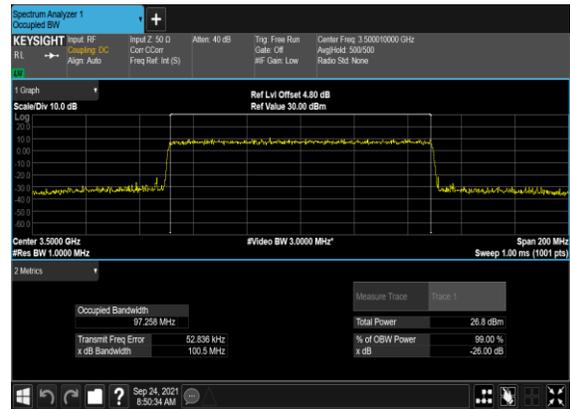

### N77(100M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

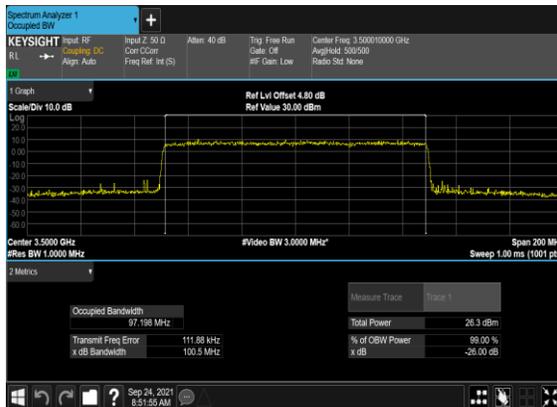

### N77(100M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

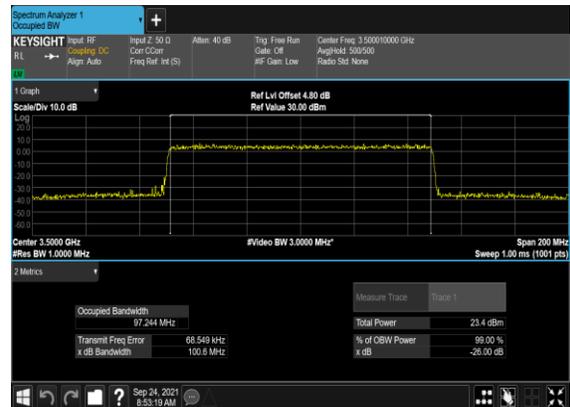


## Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	---

77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS


### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

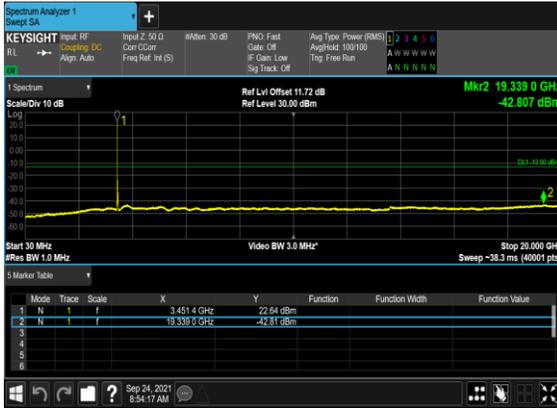


### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

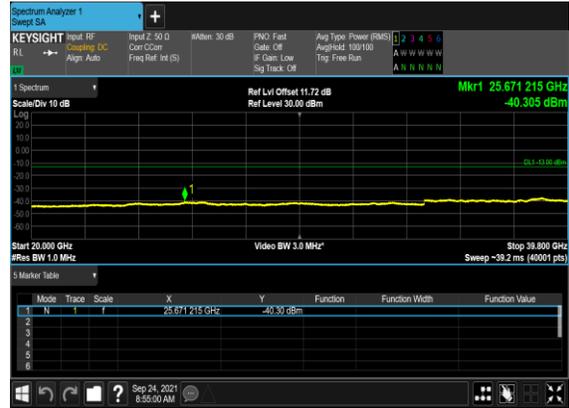

### N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

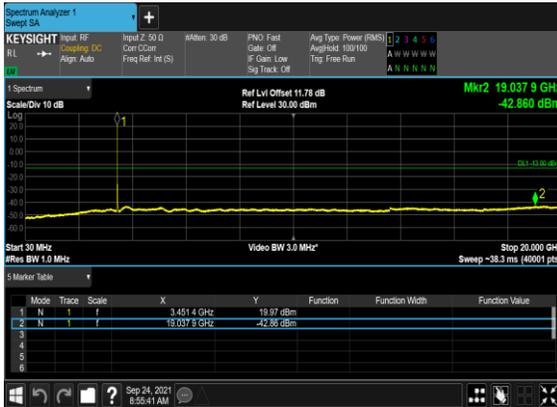


### N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

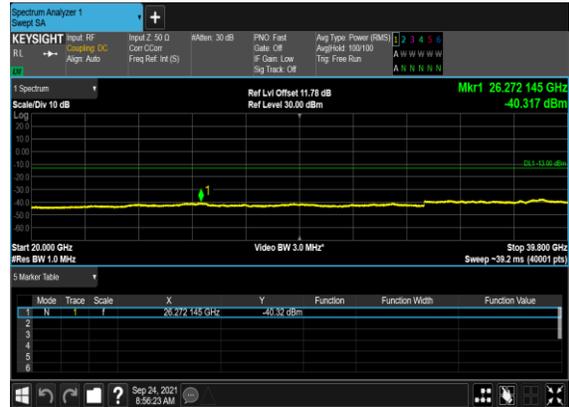


### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH




### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

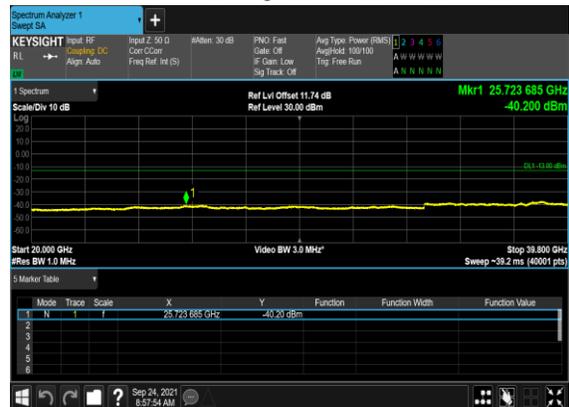

### N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

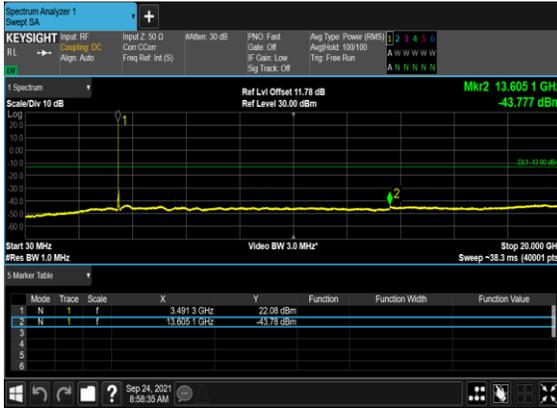


### N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

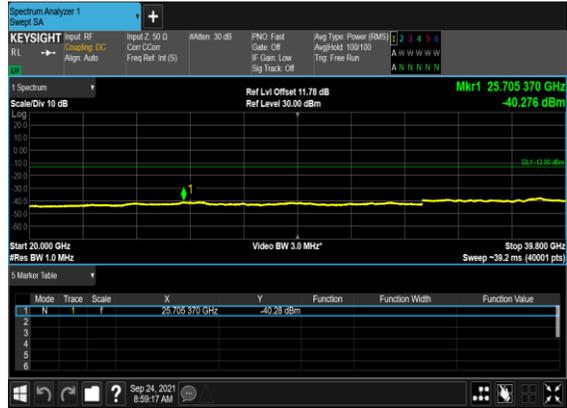


### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH




### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

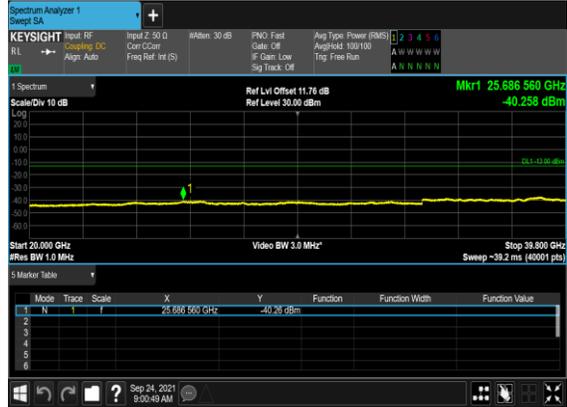

### N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

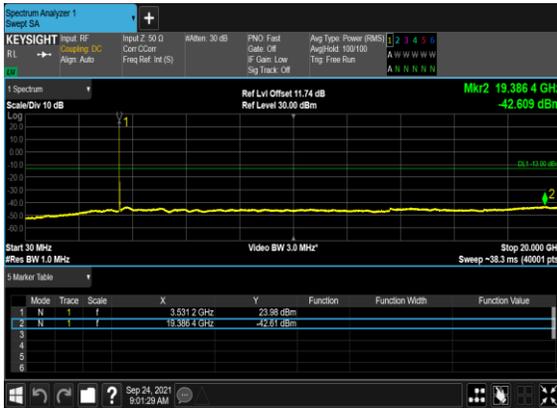


### N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

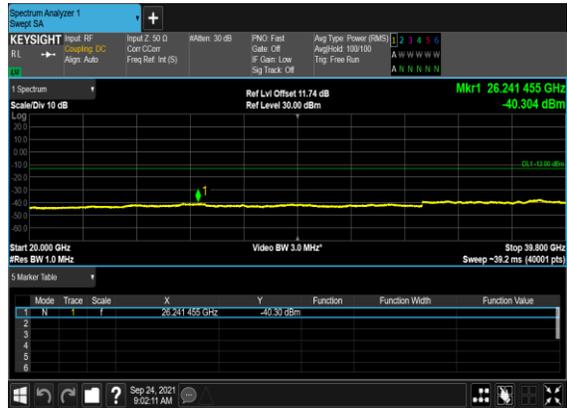


### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH




### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

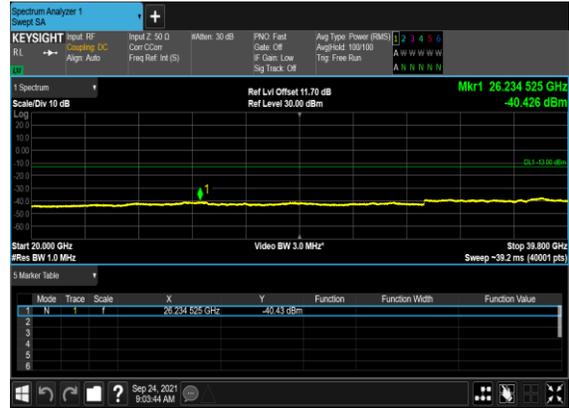


### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

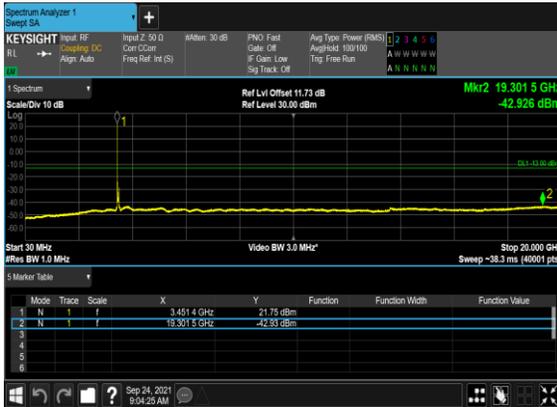


### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

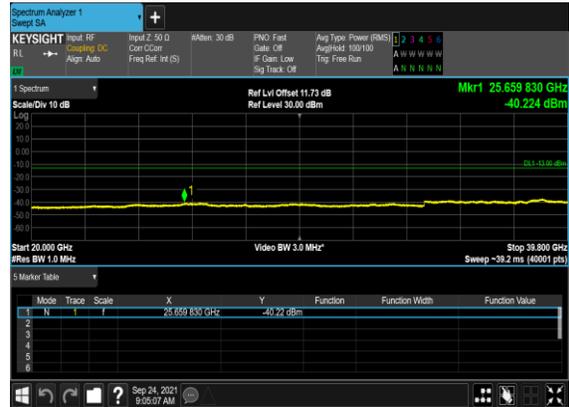

### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

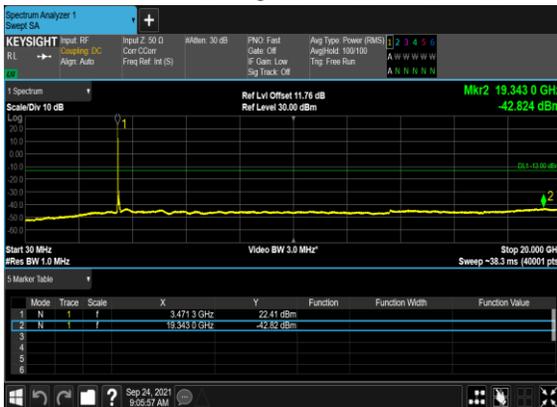


### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

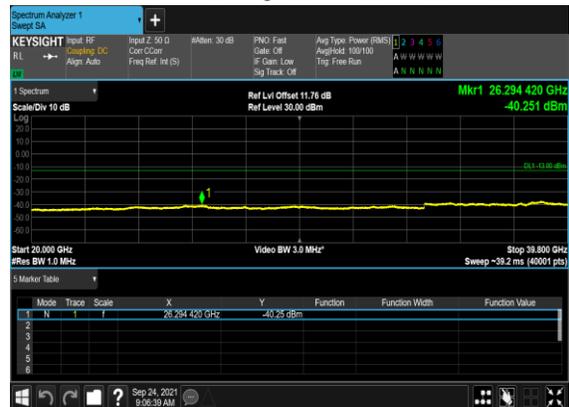

### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH



### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

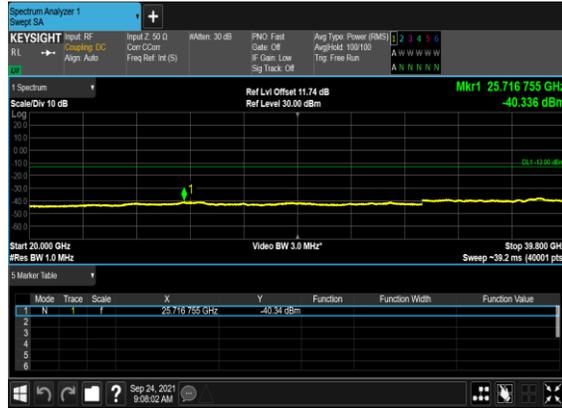


### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH




### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH




### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

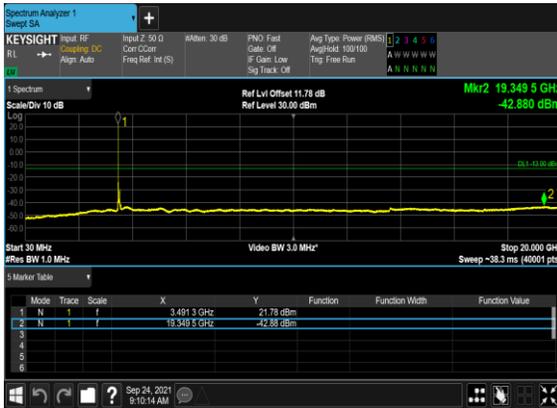


### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

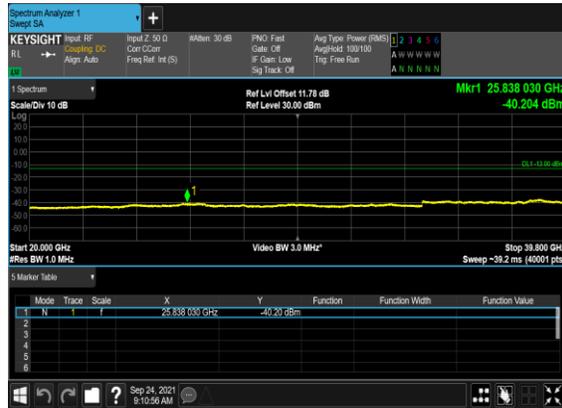


### N77(100M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

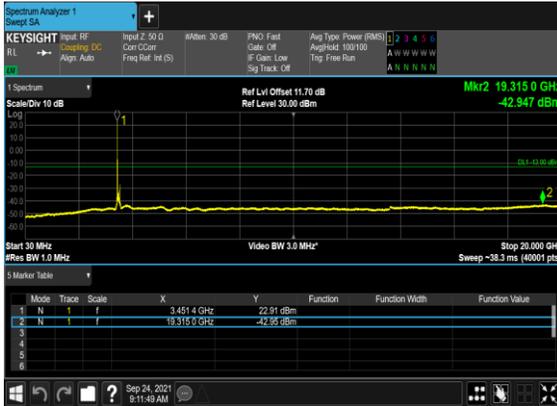


### N77(100M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

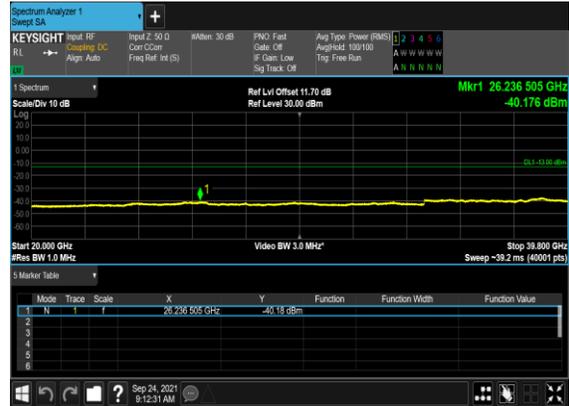

### N77(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

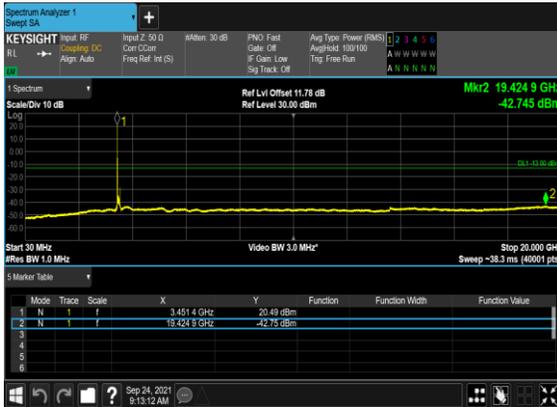


### N77(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

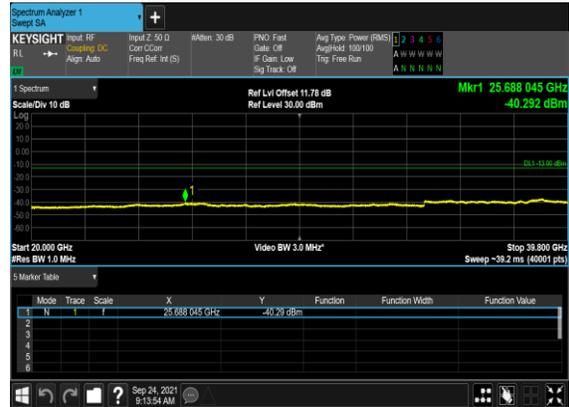


## Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM BPSK	50@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	50@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@50	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@50	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	162@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	162@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@161	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@161	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	162@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	162@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@272	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@272	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	270@0	see graph	PASS

N77(20M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

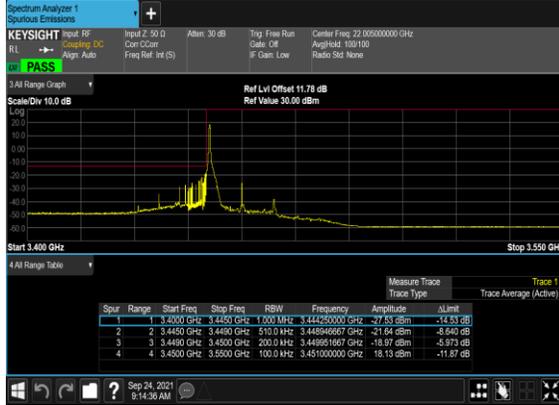

N77(20M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

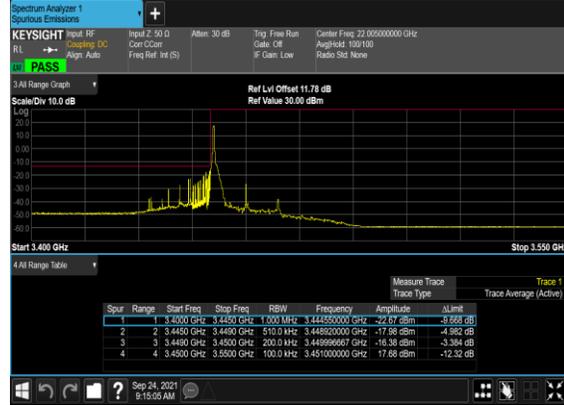


N77(20M)\_DFT-s-  
OFDM\_BPSK\_Outer\_Full\_Low\_CH




N77(20M)\_DFT-s-  
OFDM\_QPSK\_Outer\_Full\_Low\_CH




N77(20M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

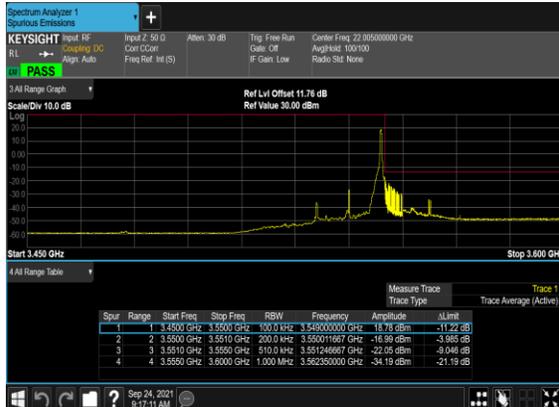

N77(20M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

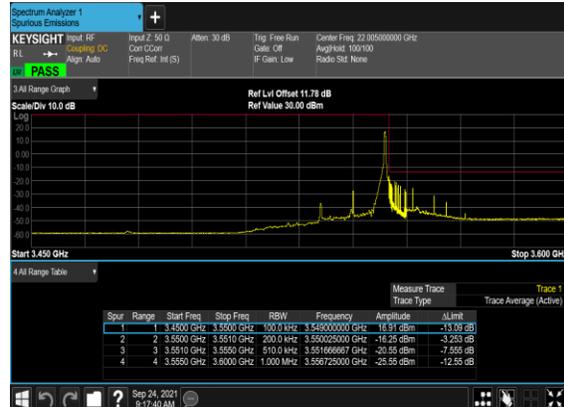


### N77(20M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_High\_CH

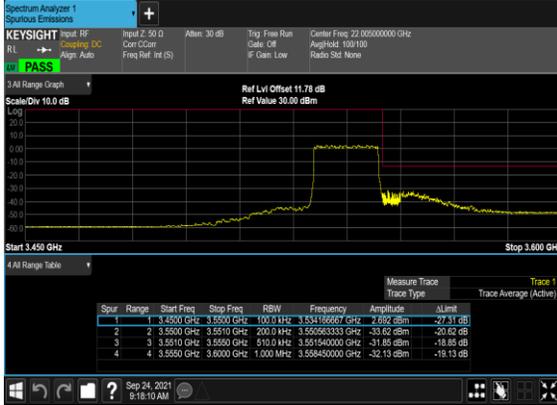

### N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH




### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

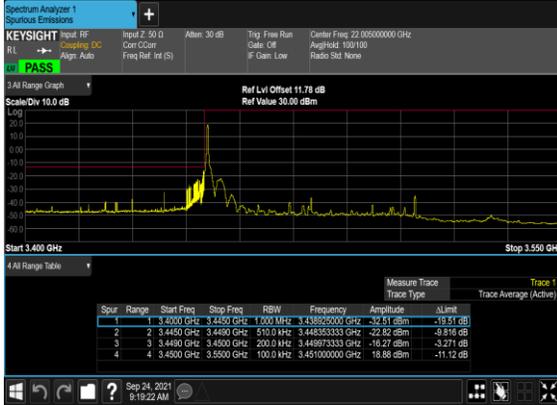

### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH



### N77(60M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH

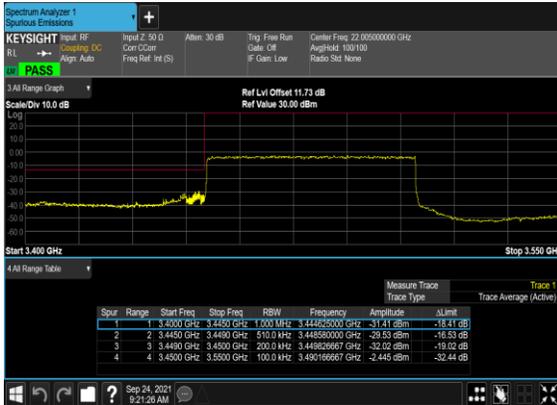

### N77(60M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

